

Logitech

Antenna Under Test (AUT)

Report

Model Name: MR0108

Equipment Type: Mouse

Manufacturer: Logitech Technology (Suzhou) Co., Ltd.

Test Location: Suzhou, China No.3 Song Shan Road, New District

Tested by: Jin Wang

Report Date: 2023.05.25

Report Release History

| Report version | Description | Date Issued |
|-------------------|------------------|-------------|
| MR0108 AUT Report | Original release | 2023/05/25 |

Table of Contents

| | |
|--|----------|
| 1. EUT Antenna Information | 2 |
| 2. Measured Values and Calculation of Antenna Gains | 2 |
| 3. Conducted Power Measurement | 3 |
| 3.1 Test Setup | 3 |
| 3.2 Test Instruments | 3 |
| 3.3 Test Procedure | 3 |
| 3.4 Test Result of RF conducted Power | 1 |
| 4. 2D Radiation Pattern Measurement | 4 |
| 4.1 Test Location | 4 |
| 4.2 Description of the anechoic chamber | 4 |
| 4.3 Test Instruments | 4 |
| 4.4 Test Procedure | 5 |
| 4.5 Test Setup photos | 6 |
| 4.6 2D Pattern Test Plot | 7 |

1. EUT Antenna Information

- 1) Antenna Material: PCB on board
- 2) Antenna Type: inverted-F antenna
- 3) Antenna Dimension: 11 x 19 mm
- 4) Operating Frequency: 2.4 GHz - 2.4835 GHz
- 5) Input Impedance: 50 Ω
- 6) Standing-Wave Ratio: 2:1

2. Measured Values and Calculation of Antenna Gains

Measure peak horizontal/vertical EIRP on each x-y, y-z, x-z plane. The highest measured values will be used to calculate the antenna peak gain.


$$\text{Antenna Peak Gain (dBi)} = \text{Max EIRP(dBm)} - \text{Conducted Power (dBm)}$$

| Frequency | X-Y Plane $\phi=0\sim360^\circ, \theta=90^\circ$ | | X-Z Plane $\phi=0^\circ, \theta=0\sim360^\circ$ | | Y-Z Plane $\phi=90^\circ, \theta=0\sim360^\circ$ | | Max Peak EIRP (dBm) | Conducted Power (dBm) | Antenna Peak Gain (dBi) |
|-----------|---|-----------------------|--|-----------------------|---|-----------------------|---------------------|-----------------------|-------------------------|
| | Ver. Peak EIRP (dBm) | Hori. Peak EIRP (dBm) | Ver. Peak EIRP (dBm) | Hori. Peak EIRP (dBm) | Ver. Peak EIRP (dBm) | Hori. Peak EIRP (dBm) | | | |
| 2405 | -9.07 | 3.24 | 1.61 | 1.10 | 3.78 | -3.04 | 3.78 | 0.47 | 3.31 |
| 2445 | -7.45 | 2.87 | 0.81 | 1.69 | 3.17 | -3.32 | 3.17 | 0.39 | 2.78 |
| 2474 | -6.74 | 2.58 | 0.45 | 2.87 | 2.86 | -3.56 | 2.87 | 0.07 | -1.66 |

Test Date: 2023.5.25

3. Conducted Power Measurement

3.1 Test Setup

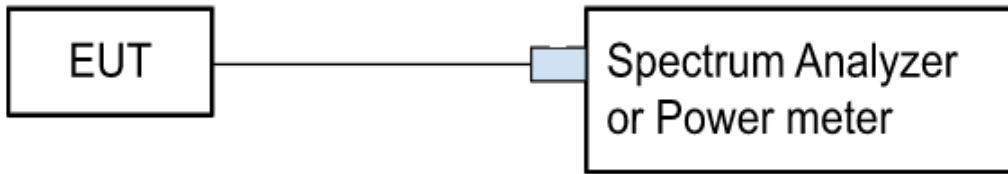

3.2 Test Instruments

| Description | Model No. | Serial No. | Last Calibration |
|-------------------------------|--------------------------|------------|------------------|
| Spectrum Analyzer Keysight | N9020B | MY60110508 | 2022.7.14 |
| RF signal cable Woken | Huber+suhner 10844497 | 276 | 2023.04.28 |

Note: The calibration interval of the above test instruments is 12 months

3.3 Test Procedure

A spectrum analyzer or Power meter was used to perform output power measurement, setting the detector to average and configuring EUT continuously transmitting power(100% duty cycle).

3.4 Test Result of RF conducted Power

| Frequency | Conducted Power (dBm) |
|-----------|-----------------------|
| 2405 | 0.47 |
| 2444 | 0.39 |
| 2474 | 0.07 |

Test Date: 2023.5.25

4. 2D Radiation Pattern Measurement

4.1 Test Location

Song shan Rd. 3, New district, Logi company Ltd. Suzhou, China

4.2 Description of the anechoic chamber


Length: 5.0m

Width: 2.8m

Height: 2.8m

Receiving antenna height: 1.4m

Turning table Height: 1.4m

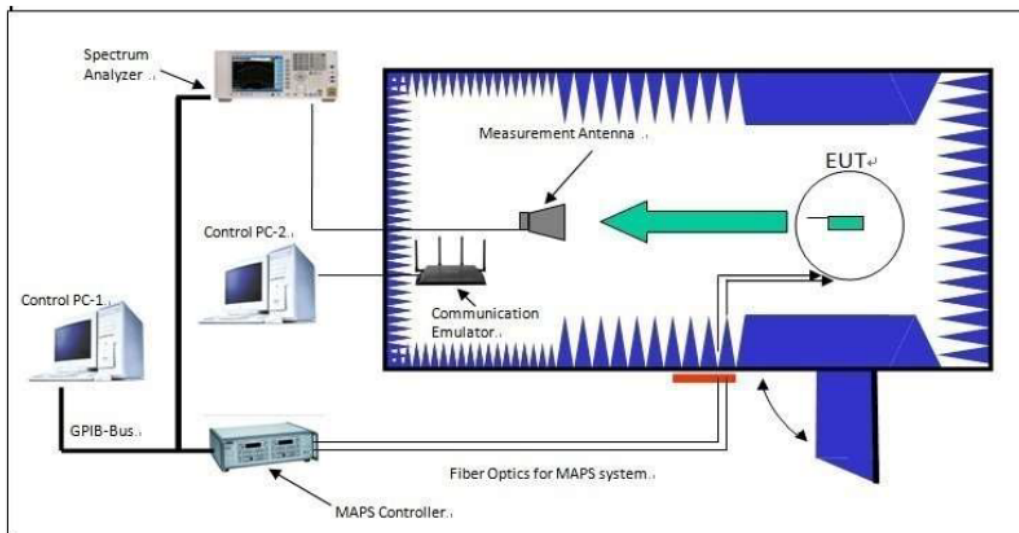

4.3 Test Instruments

| Description | Model No. | Serial No. | Last Calibration |
|-------------------------------|----------------------|------------|------------------|
| Spectrum Analyzer Keysight | N9010A | MY49061163 | 2022.7.14 |
| Horn Antenna ETS | BBHA 9120 D(1201) | D69250 | 2023.04.28 |

| | | | |
|----------------------|------------------------------|-----------------|------------|
| RF signal cable | SUCOFLEX104 | SN293270/4 | 2023.04.28 |
| Software | FAC-Radio Measurement System | Version 1.1.0.7 | N/A |
| Turntable controller | BJ3AC-100 | N/A | N/A |
| LNA | LN1G11 | 321282 | 2023.04.28 |

Note: The calibration interval of the above test instruments is 12 months

4.4 Test Procedure

- i. Connect the EUT to Spectrum Analyzer and record the power setting of EUT and the measured conducted power.
- ii. Fasten the EUT in the center of the turntable, record the coordinates and take pictures.
- iii. Configuring EUT continuously transmitting power(100% duty cycle).
- iv. Make sure the transmit signal is stable and at the maximum RF power level.
- v. Setup the channel power function by spectrum analyzer.
- vi. Read the channel power level on the spectrum analyzer and record in the following positions.
 1. The turntable is then stepped between 0 to 360 degrees along the horizontal plane in 15-degree increments.
 2. Data is recorded using the spectrum analyzer for both theta and phi polarizations at each position.
- vii. Rotate the EUT with 90 degrees and repeat step f.1 and step f.2 until all 3 planes(X-Y,X-Z,Y-Z) were measured.
- viii. According to substitution techniques, a substitution horn antenna is substituted for EUT at the same position and the signal generator exports the CW signal to the substitution antenna via a TX cable. Rotated the turntable and moved the receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a value of spectrum reading equal to "Raw Value" gotten from step vii. Record the power level of S.G.

$$EIRP = P_{SigGen} + G_T - L_C$$

where:

P_{SigGen} = power setting of the signal generator that produces the same received power reading as the DUT, in dBm;

G_T = gain of the substitute antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal loss in the cable connecting the signal generator to the substitute antenna, in dB

ix. Antenna Peak Gain (dBi) = Max EIRP(dBm) - Conducted Power (dBm)


4.5 Test Setup photos

Please post at least three photos to show the test setup for each plane.

see another confidential test setup photo

4.6 2D Pattern Test Plot

X-Y Plane: Horizontal and Vertical

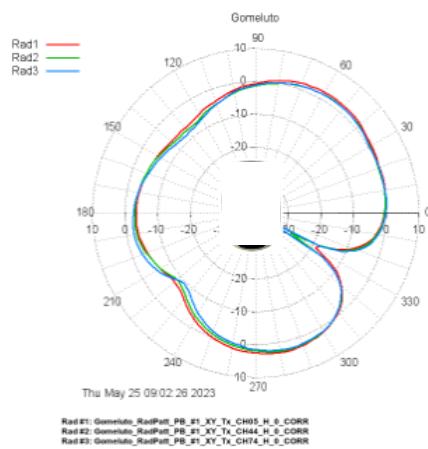

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-ajo1xv-0.png]

Radiation pattern #1:

Gomeluto_RadPatt_PB_#1_XY_Tx_CH05_H_0_CORR

Average power = **-2.35 dBm**
Front average power = **-1.69 dBm** (From 0 deg to 180 deg)

Min power = **-18.53 dBm** @ -30.00 deg
Max power = **3.24 dBm** @ -75.00 deg

Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_XY_Tx_CH44_H_0_CORR

Average power = **-2.83 dBm**
Front average power = **-2.21 dBm** (From 0 deg to 180 deg)

Min power = **-27.56 dBm** @ -30.00 deg
Max power = **2.87 dBm** @ -75.00 deg

Delta max power = **-0.37 dBm**
Delta average power = **-0.48 dBm**
Delta front average power = **-0.52 dBm**


Radiation pattern #3:

Gomeluto_RadPatt_PB_#1_XY_Tx_CH74_H_0_CORR

Average power = **-3.01 dBm**
Front average power = **-2.38 dBm** (From 0 deg to 180 deg)

Min power = **-37.18 dBm** @ -30.00 deg
Max power = **2.58 dBm** @ -75.00 deg

Delta max power = **-0.67 dBm**
Delta average power = **-0.66 dBm**
Delta front average power = **-0.69 dBm**

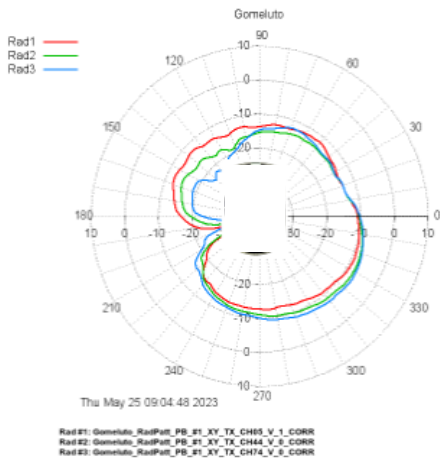

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-joeqb3-0.png]

Radiation pattern #1:

Gomeluto_RadPatt_PB_#1_XY_TX_CH05_V_1_CORR
 Average power = -14.08 dBm
 Front average power = -13.20 dBm (From 0 deg to 180 deg)
 Min power = -39.47 dBm @ -159.00 deg
 Max power = -9.07 dBm @ -24.00 deg


Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_XY_TX_CH44_V_0_CORR
 Average power = -14.64 dBm
 Front average power = -15.37 dBm (From 0 deg to 180 deg)
 Min power = -39.52 dBm @ -162.00 deg
 Max power = -7.45 dBm @ -33.00 deg
 Delta max power = 1.62 dBm
 Delta average power = -0.56 dBm
 Delta front average power = -2.17 dBm

Radiation pattern #3:

Gomeluto_RadPatt_PB_#1_XY_TX_CH74_V_0_CORR
 Average power = -14.82 dBm
 Front average power = -16.66 dBm (From 0 deg to 180 deg)
 Min power = -33.21 dBm @ -165.00 deg
 Max power = -6.74 dBm @ -36.00 deg
 Delta max power = 2.32 dBm
 Delta average power = -0.74 dBm
 Delta front average power = -3.46 dBm

X-Z Plane: Horizontal and Vertical

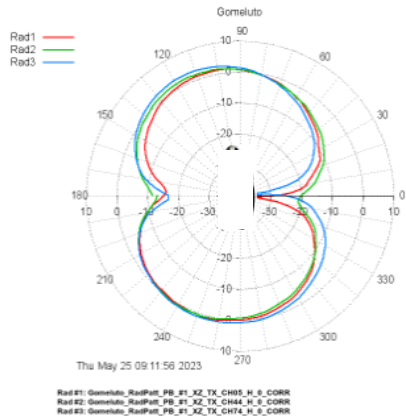

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-q4ufr-0.png]

Radiation pattern #1:


Gomeluto_RadPatt_PB_#1_XZ_TX_CH05_H_0_CORR
 Average power = -6.28 dBm
 Front average power = -5.61 dBm (From 0 deg to 180 deg)
 Min power = -34.37 dBm @ -6.00 deg
 Max power = 1.10 dBm @ 99.00 deg

Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_XZ_TX_CH44_H_0_CORR
 Average power = -5.01 dBm
 Front average power = -3.99 dBm (From 0 deg to 180 deg)
 Min power = -20.92 dBm @ -3.00 deg
 Max power = 1.69 dBm @ 114.00 deg
 Delta max power = 0.60 dBm
 Delta average power = 1.26 dBm
 Delta front average power = 1.62 dBm

Radiation pattern #3:

Gomeluto_RadPatt_PB_#1_XZ_TX_CH74_H_0_CORR
 Average power = -5.31 dBm
 Front average power = -5.63 dBm (From 0 deg to 180 deg)
 Min power = -40.01 dBm @ 6.00 deg
 Max power = 2.87 dBm @ 117.00 deg
 Delta max power = 1.78 dBm
 Delta average power = 0.97 dBm
 Delta front average power = -0.02 dBm

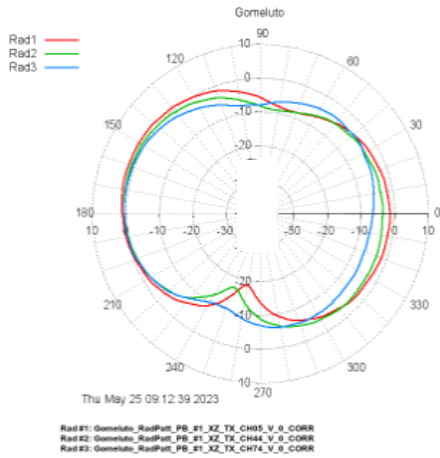

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-8xvbm4-0.png]

Radiation pattern #1:

Gomeluto_RadPatt_PB_#1_XZ_TX_CH05_V_0_CORR

Average power = **-3.85 dBm**
Front average power = **-2.48 dBm** (From 0 deg to 180 deg)

Min power = **-18.36 dBm @ -99.00 deg**
Max power = **1.61 dBm @ 162.00 deg**

Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_XZ_TX_CH44_V_0_CORR

Average power = **-4.54 dBm**
Front average power = **-3.71 dBm** (From 0 deg to 180 deg)

Min power = **-16.80 dBm @ -108.00 deg**
Max power = **0.81 dBm @ 165.00 deg**

Delta max power = **-0.79 dBm**
Delta average power = **-0.69 dBm**
Delta front average power = **-1.24 dBm**

Radiation pattern #3:


Gomeluto_RadPatt_PB_#1_XZ_TX_CH74_V_0_CORR

Average power = **-4.80 dBm**
Front average power = **-3.94 dBm** (From 0 deg to 180 deg)

Min power = **-10.40 dBm @ -114.00 deg**
Max power = **0.45 dBm @ 168.00 deg**

Delta max power = **-1.15 dBm**
Delta average power = **-0.95 dBm**
Delta front average power = **-1.47 dBm**

Y-Z Plane: Horizontal and Vertical

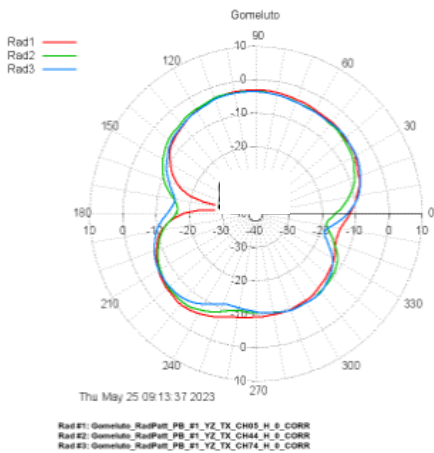

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-hepah4-0.png]

Radiation pattern #1:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH05_H_0_CORR

Average power = **-8.79 dBm**
Front average power = **-7.70 dBm** (From 0 deg to 180 deg)

Min power = **-35.27 dBm @ 171.00 deg**
Max power = **-3.04 dBm @ 90.00 deg**

Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH44_H_0_CORR

Average power = **-8.64 dBm**
Front average power = **-6.77 dBm** (From 0 deg to 180 deg)

Min power = **-18.47 dBm @ -9.00 deg**
Max power = **-3.32 dBm @ 105.00 deg**

Delta max power = **-0.28 dBm**
Delta average power = **0.15 dBm**
Delta front average power = **0.93 dBm**


Radiation pattern #3:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH74_H_0_CORR

Average power = **-8.63 dBm**
Front average power = **-6.62 dBm** (From 0 deg to 180 deg)

Min power = **-18.54 dBm @ -15.00 deg**
Max power = **-3.56 dBm @ 96.00 deg**

Delta max power = **-0.52 dBm**
Delta average power = **0.16 dBm**
Delta front average power = **1.08 dBm**

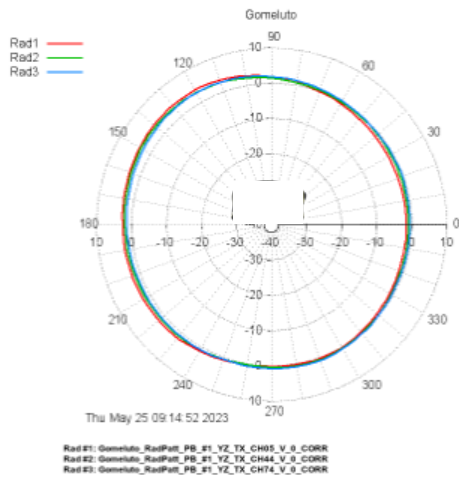

[imgfile: tmp/ Gomeluto_gnuplot20230525-15004-1v4apbx-0.png]

Radiation pattern #1:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH05_V_0_CORR

Average power = 0.93 dBm

Front average power = 1.24 dBm (From 0 deg to 180 deg)

Min power = -1.52 dBm @ 18.00 deg

Max power = 3.78 dBm @ 129.00 deg

Radiation pattern #2:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH44_V_0_CORR

Average power = 0.89 dBm

Front average power = 1.20 dBm (From 0 deg to 180 deg)

Min power = -0.80 dBm @ 9.00 deg

Max power = 3.17 dBm @ 135.00 deg

Delta max power = -0.61 dBm

Delta average power = -0.04 dBm

Delta front average power = -0.04 dBm

Radiation pattern #3:

Gomeluto_RadPatt_PB_#1_YZ_TX_CH74_V_0_CORR

Average power = 0.93 dBm

Front average power = 1.26 dBm (From 0 deg to 180 deg)

Min power = -0.45 dBm @ -12.00 deg

Max power = 2.86 dBm @ 120.00 deg

Delta max power = -0.92 dBm

Delta average power = -0.00 dBm

Delta front average power = 0.02 dBm