

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: DB62
FCC ID: JOYDB62

In accordance with FCC Part 24 Subpart E

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19169-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	28 OCT 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 24 Subpart E.



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report.....	3
1.2	Standards.....	3
1.3	Test methods.....	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period.....	3
2	Equipment Under Test	4
2.1	EUT information.....	4
2.2	Modification to the EUT.....	6
2.3	Variation of family model(s).....	6
2.4	Description of test mode.....	6
3	Configuration of Equipment	7
3.1	Equipment used.....	7
3.2	System configuration.....	7
4	Test Result	8
4.1	Equivalent Isotropic Radiated Power.....	8
4.2	Peak to Average Ratio.....	15
4.3	Occupied Bandwidth.....	23
4.4	Band Edge Spurious and Harmonic at Antenna Terminals.....	33
4.5	Radiated Emissions and Harmonic Emissions.....	71
4.6	Frequency Stability.....	84
5	Measurement Uncertainty	87
6	Laboratory Information	88
	Appendix A. Test Equipment	89

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-19169-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 24 Subpart E

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	Radiated	PASS	-
24.232(d)	Peak to Average Ratio	Conducted	PASS	-
24.238(a) 2.1049	Occupied Bandwidth	Conducted	PASS	-
24.238(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
24.238(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
24.235 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

2-August-2019 - 8-October-2019

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	DB62
Serial number	N/A
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.8 V
Size	(W) 51.3 × (D) 17.9 × (H) 112.3 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1
Software version	V0.030AN.0015.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link GSM1900: 1850.2-1909.8 MHz WCDMA Band II: 1852.4-1907.6MHz LTE Band II: 1850.0-1910.0MHz Down Link GSM1900: 1930.2-1989.8 MHz WCDMA Band II: 1932.4-1987.6MHz LTE Band II: 1930.0-1990.0MHz
Modulation type	GSM1900: GMSK WCDMA Band II: QPSK, 16QAM LTE Band II: QPSK, 16QAM
Emission designator	GSM1900: 245KGXW WCDMA Band II: 4M16F9W LTE Band II: BW 1.4M QPSK: 1M10G7D, 16QAM: 1M11W7D BW 3M QPSK: 2M71G7D, 16QAM: 2M71W7D BW 5M QPSK: 4M57G7D, 16QAM: 4M53W7D BW 10M QPSK: 8M99G7D, 16QAM: 8M98W7D BW 15M QPSK: 13M5G7D, 16QAM: 13M4W7D BW 20M QPSK: 17M9G7D, 16QAM: 17M9W7D



Japan

Equivalent Isotropic Radiated Power (E.I.R.P)	GSM1900: 1.230 W (30.9dBm) WCDMA Band II: 0.324W (25.1dBm) LTE Band II: 0.832W (29.2dBm)
Antenna type	Internal antenna
Antenna gain	GSM1900: 1.02dBi WCDMA Band II: 1.02dBi LTE Band II: 1.02dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: DB62, Serial Number: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

DB62 has model with camera and without camera.

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
GSM1900	GMSK	-	512, 661, 810	1850.2, 1880.0, 1909.8
WCDMA Band II	QPSK	-	9262, 9400, 9538	1852.4, 1880.0, 1907.6
	16QAM	-	9262, 9400, 9538	1852.4, 1880.0, 1907.6
LTE Band II	QPSK, 16QAM	1.4	18607, 18900, 19193	1850.7, 1880.0, 1909.3
		3	18615, 18900, 19185	1851.5, 1880.0, 1908.5
		5	18625, 18900, 19175	1852.5, 1880.0, 1907.5
		10	18650, 18900, 19150	1855.0, 1880.0, 1905.0
		15	18675, 18900, 19125	1857.5, 1880.0, 1902.5
		20	18700, 18900, 19100	1860.0, 1880.0, 1900.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis, Open (All Bands) and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	DB62	N/A	JOYDB62	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Equivalent Isotropic Radiated Power

4.1.1 Measurement procedure

[FCC 24.232(c)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

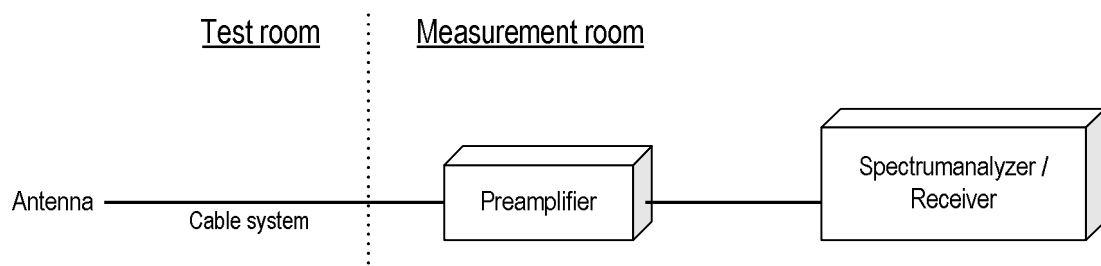

4.1.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain
 Margin = Limit – Result (EIRP)

Example:

Limit @ 1880 MHz : 33.0 dBm
 Ant. Input = 19.3 dBm Cable loss = 1.1dB Ant. Gain = 8.3 dBi
 Result = 19.3 - 1.1 + 8.3 = 26.5 dBm
 Margin = 33.0 - 26.5 = 6.5 dB

4.1.3 Limit

2 W (33 dBm)

4.1.4 Test data

Date	: 2-August-2019		
Temperature	: 23.1 [°C]		
Humidity	: 56.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 5-August-2019		
Temperature	: 22.9 [°C]		
Humidity	: 53.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 13~14-September		
Temperature	: 22.2 [°C]		
Humidity	: 51.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 17~18-September		
Temperature	: 22.8 [°C]		
Humidity	: 55.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 18~19-September		
Temperature	: 22.8 [°C]		
Humidity	: 56.7 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 19~20-September		
Temperature	: 22.0 [°C]		
Humidity	: 47.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 20~21-September		
Temperature	: 22.3 [°C]		
Humidity	: 50.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

Date : 24~25-September
 Temperature : 22.9 [°C]
 Humidity : 56.0 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : 30-September
 Temperature : 20.3 [°C]
 Humidity : 57.9 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

[GSM1900 - With camera]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.2	-30.2	22.7	1.1	8.4	30.0	33.0	3.0
H	1880.0	-30.8	23.0	1.1	8.4	30.2	33.0	2.8
H	1909.8	-30.6	21.9	1.2	8.4	29.1	33.0	3.9

[GSM1900 - Without camera]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.2	-30.0	22.4	1.1	8.4	29.7	33.0	3.3
H	1880.0	-29.9	23.7	1.1	8.4	30.9	33.0	2.1
H	1909.8	-29.7	22.1	1.2	8.4	29.3	33.0	3.7

[WCDMA Band II - With camera]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.4	-26.7	16.2	1.1	8.4	23.5	33.0	9.5
H	1880.0	-26.8	17.6	1.1	8.4	24.8	33.0	8.2
H	1907.6	-26.5	16.1	1.2	8.3	23.3	33.0	9.7

[WCDMA Band II - Without camera]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.4	-26.4	16.8	1.1	8.4	24.1	33.0	8.9
H	1880.0	-26.5	17.9	1.1	8.4	25.1	33.0	7.9
H	1907.6	-26.3	16.3	1.2	8.3	23.5	33.0	9.5

[LTE Band II - With camera]**QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-24.2	19.0	1.1	8.4	26.3	33.0	6.7
H	1880.0	-24.5	20.1	1.1	8.4	27.3	33.0	5.7
H	1909.3	-24.6	18.3	1.2	8.3	25.5	33.0	7.5

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-25.4	17.9	1.1	8.4	25.2	33.0	7.8
H	1880.0	-25.3	19.1	1.1	8.4	26.3	33.0	6.7
H	1909.3	-25.5	17.4	1.2	8.3	24.6	33.0	8.4

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-24.7	18.4	1.1	8.4	25.7	33.0	7.3
H	1880.0	-23.7	20.7	1.1	8.4	27.9	33.0	5.1
H	1908.5	-24.2	18.6	1.2	8.3	25.8	33.0	7.2

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-24.2	19.0	1.1	8.4	26.3	33.0	6.7
H	1880.0	-23.7	20.7	1.1	8.4	27.9	33.0	5.1
H	1908.5	-24.3	18.5	1.2	8.3	25.7	33.0	7.3

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-23.3	19.7	1.1	8.4	27.0	33.0	6.0
H	1880.0	-22.5	21.9	1.1	8.4	29.1	33.0	3.9
H	1907.5	-23.7	19.1	1.2	8.3	26.3	33.0	6.7

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-23.8	19.2	1.1	8.4	26.5	33.0	6.5
H	1880.0	-23.5	20.9	1.1	8.4	28.1	33.0	4.9
H	1907.5	-25.4	17.4	1.2	8.3	24.6	33.0	8.4

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-23.3	19.4	1.1	8.4	26.7	33.0	6.3
H	1880.0	-22.9	21.5	1.1	8.4	28.7	33.0	4.3
H	1905.0	-23.1	19.6	1.2	8.3	26.8	33.0	6.2

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-24.8	17.9	1.1	8.4	25.2	33.0	7.8
H	1880.0	-24.6	19.8	1.1	8.4	27.0	33.0	6.0
H	1905.0	-24.1	18.6	1.2	8.3	25.8	33.0	7.2

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-23.5	18.8	1.1	8.4	26.1	33.0	6.9
H	1880.0	-22.8	21.5	1.1	8.4	28.7	33.0	4.3
H	1902.5	-23.2	19.8	1.2	8.3	27.0	33.0	6.0

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-23.2	19.1	1.1	8.4	26.4	33.0	6.6
H	1880.0	-23.7	20.6	1.1	8.4	27.8	33.0	5.2
H	1902.5	-23.6	19.4	1.2	8.3	26.6	33.0	6.4

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-22.3	20.0	1.1	8.4	27.3	33.0	5.7
H	1880.0	-22.4	22.0	1.1	8.4	29.2	33.0	3.8
H	1900.0	-22.7	20.5	1.2	8.3	27.6	33.0	5.4

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-23.5	18.9	1.1	8.4	26.2	33.0	6.8
H	1880.0	-22.8	21.5	1.1	8.4	28.7	33.0	4.3
H	1900.0	-23.9	19.3	1.2	8.3	26.4	33.0	6.6

[LTE Band II - Without camera]**QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-24.6	18.9	1.1	8.4	26.2	33.0	6.8
H	1880.0	-23.8	20.6	1.1	8.4	27.8	33.0	5.2
H	1909.3	-23.4	19.6	1.2	8.3	26.8	33.0	6.2

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-24.2	19.0	1.1	8.4	26.3	33.0	6.7
H	1880.0	-24.2	20.2	1.1	8.4	27.4	33.0	5.6
H	1909.3	-24.0	18.9	1.2	8.3	26.1	33.0	6.9

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-23.7	19.5	1.1	8.4	26.8	33.0	6.2
H	1880.0	-23.2	21.2	1.1	8.4	28.4	33.0	4.6
H	1908.5	-24.6	18.2	1.2	8.3	25.4	33.0	7.6

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-24.2	19.0	1.1	8.4	26.3	33.0	6.7
H	1880.0	-24.1	20.3	1.1	8.4	27.5	33.0	5.5
H	1908.5	-25.2	17.6	1.2	8.3	24.8	33.0	8.2

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-23.2	19.8	1.1	8.4	27.1	33.0	5.9
H	1880.0	-23.1	21.3	1.1	8.4	28.5	33.0	4.5
H	1907.5	-24.3	18.5	1.2	8.3	25.7	33.0	7.3

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-24.7	18.3	1.1	8.4	25.6	33.0	7.4
H	1880.0	-24.7	19.7	1.1	8.4	26.9	33.0	6.1
H	1907.5	-24.8	18.0	1.2	8.3	25.2	33.0	7.8

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-23.1	19.5	1.1	8.4	26.8	33.0	6.2
H	1880.0	-24.0	20.4	1.1	8.4	27.6	33.0	5.4
H	1905.0	-22.8	19.9	1.2	8.3	27.1	33.0	5.9

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-25.5	17.1	1.1	8.4	24.4	33.0	8.6
H	1880.0	-24.2	20.1	1.1	8.4	27.3	33.0	5.7
H	1905.0	-25.5	17.2	1.2	8.3	24.4	33.0	8.6

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-24.2	18.3	1.1	8.4	25.6	33.0	7.4
H	1880.0	-23.8	20.6	1.1	8.4	27.8	33.0	5.2
H	1902.5	-24.2	18.7	1.2	8.3	25.9	33.0	7.1

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-24.9	17.6	1.1	8.4	24.9	33.0	8.1
H	1880.0	-25.4	19.0	1.1	8.4	26.2	33.0	6.8
H	1902.5	-25.3	17.6	1.2	8.3	24.8	33.0	8.2

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-23.6	18.8	1.1	8.4	26.1	33.0	6.9
H	1880.0	-23.7	20.6	1.1	8.4	27.8	33.0	5.2
H	1900.0	-23.3	20.0	1.2	8.3	27.1	33.0	5.9

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-23.5	18.9	1.1	8.4	26.2	33.0	6.8
H	1880.0	-24.5	19.9	1.1	8.4	27.1	33.0	5.9
H	1900.0	-24.1	19.2	1.2	8.3	26.3	33.0	6.7

4.2 Peak to Average Ratio

4.2.1 Measurement procedure

[FCC 24.232(d)]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


[GSM1900]

- a) Span = 5 MHz
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Detector = Peak / Average
- e) Sweep time = auto-couple
- f) Trace mode=Max hold

[WCDMA Band II, LTE Band II]

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth \geq signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

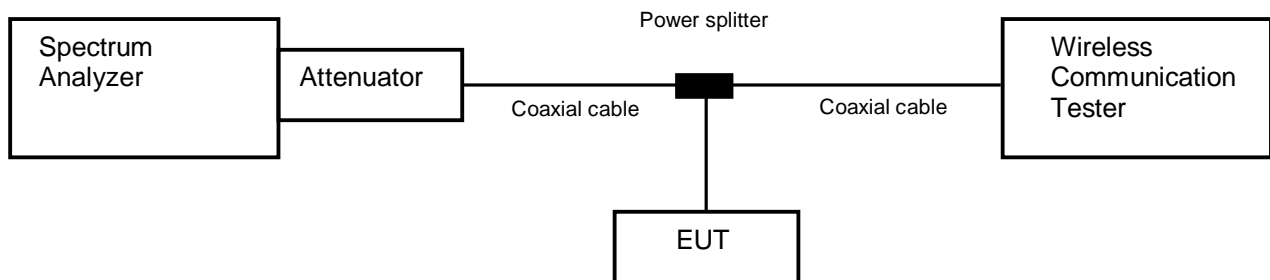

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 4-September-2019
 Temperature : 22.8 [°C]
 Humidity : 64.8 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino


Band	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
GSM1900	512	1850.2	0.03	13.0
	661	1880.0	0.02	
	810	1909.8	0.04	
WCDMA Band II	9262	1852.4	2.93	13.0
	9400	1880.0	3.23	
	9538	1907.6	2.97	

Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band II	18900	1880.0	QPSK	1.4	6-0	4.65	13.0
				3	15-0	4.88	
				5	25-0	4.90	
				10	50-0	4.60	
				15	75-0	5.79	
				20	100-0	6.54	
			16QAM	1.4	6-0	5.54	
				3	15-0	5.76	
				5	25-0	5.75	
				10	50-0	6.18	
				15	75-0	6.85	
				20	100-0	7.25	


4.2.4 Trace data

[GSM1900]


Channel: 512

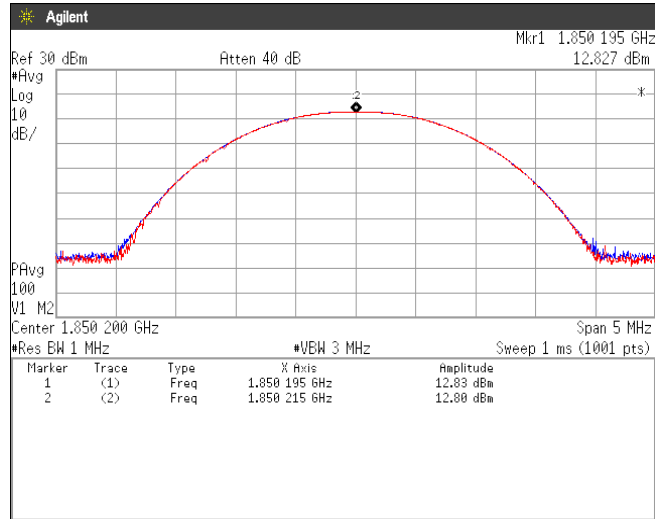


Channel: 661

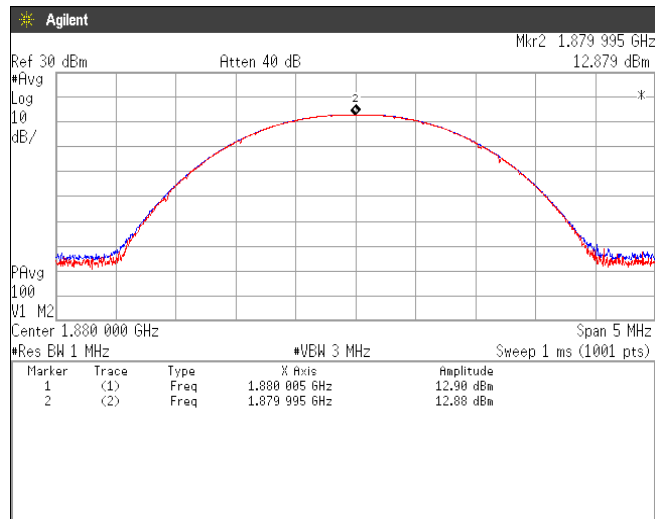


Channel: 810

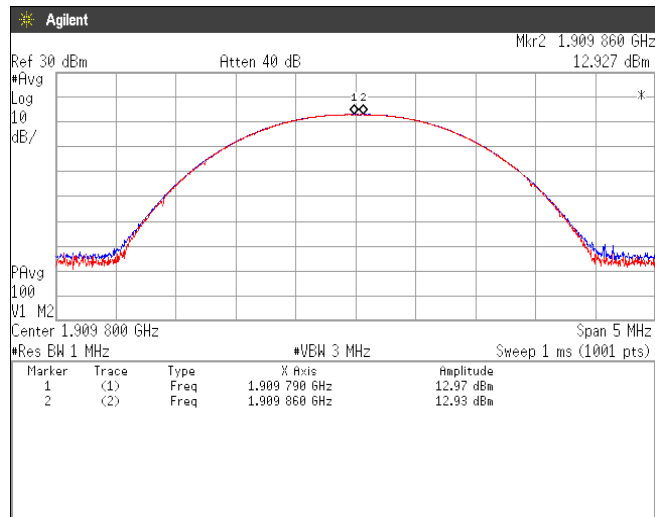


**[WCDMA Band II]
Channel: 9262**

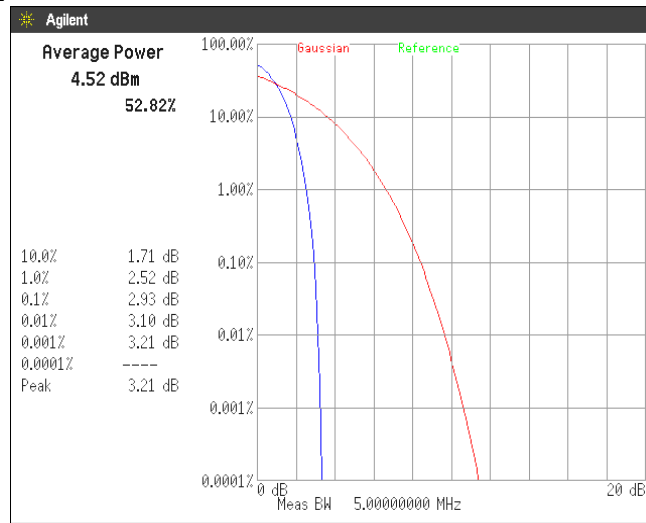

Channel: 9400

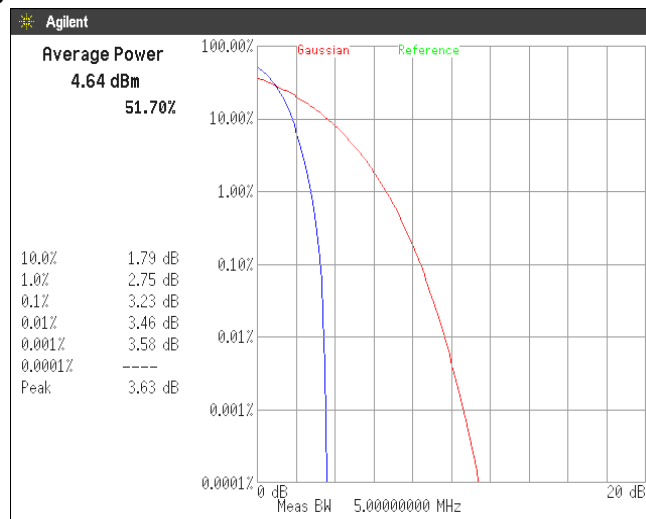


Channel: 9538

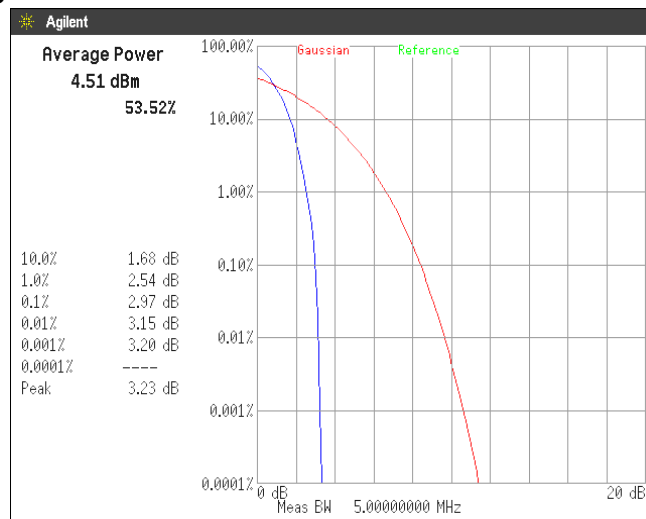


[LTE Band II]


Channel: 18900
 QPSK, BW 1.4MHz, RB6-0

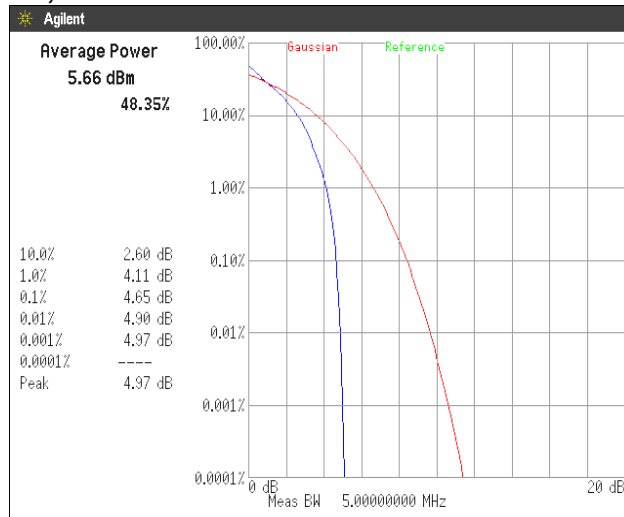


QPSK, BW 3MHz, RB15-0

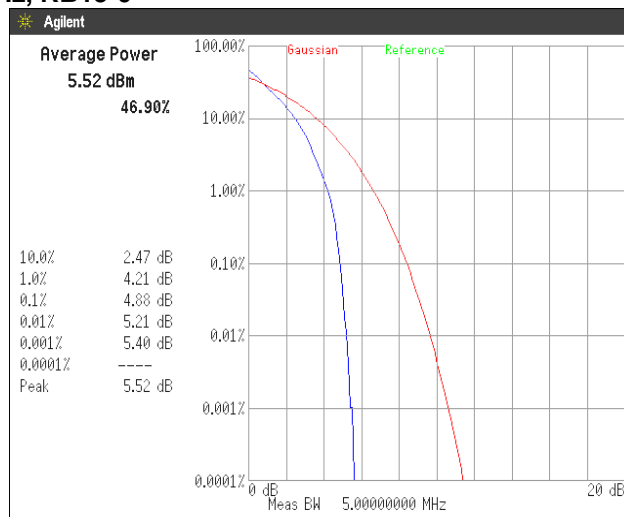


QPSK, BW 5MHz, RB25-0

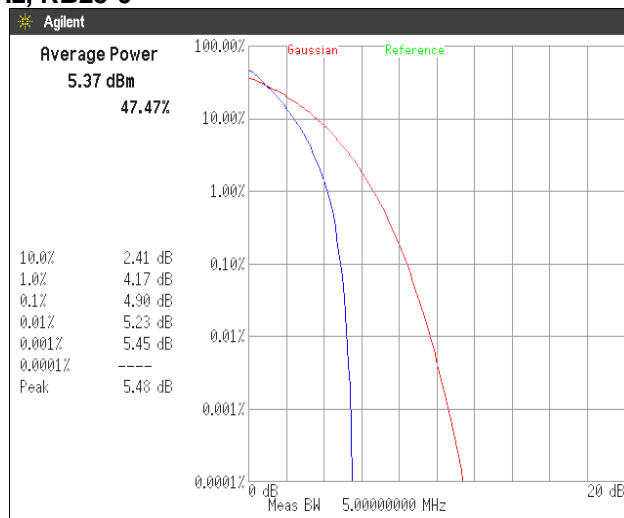


Channel: 18900
QPSK, BW 10MHz, RB50-0

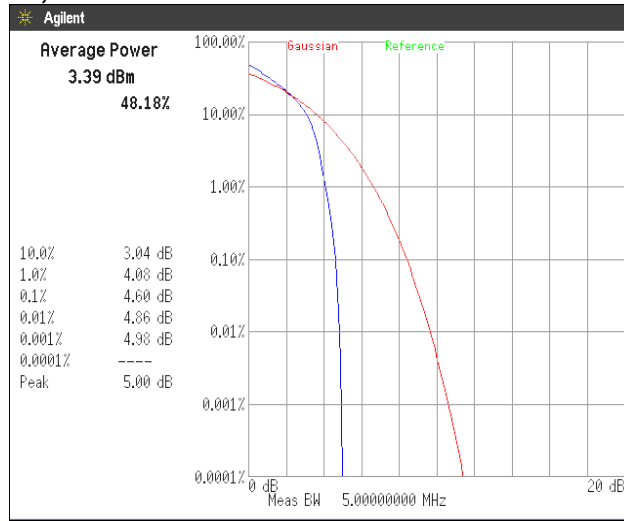


QPSK, BW 15MHz, RB75-0

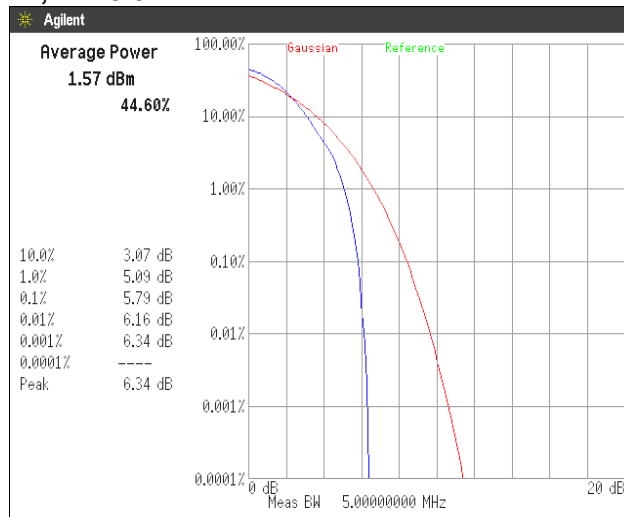


QPSK, BW 20MHz, RB100-0

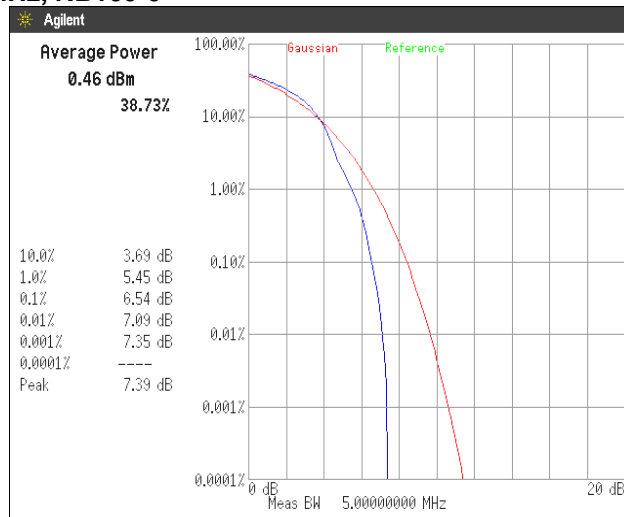


Channel: 18900
16QAM, BW 1.4MHz, RB6-0

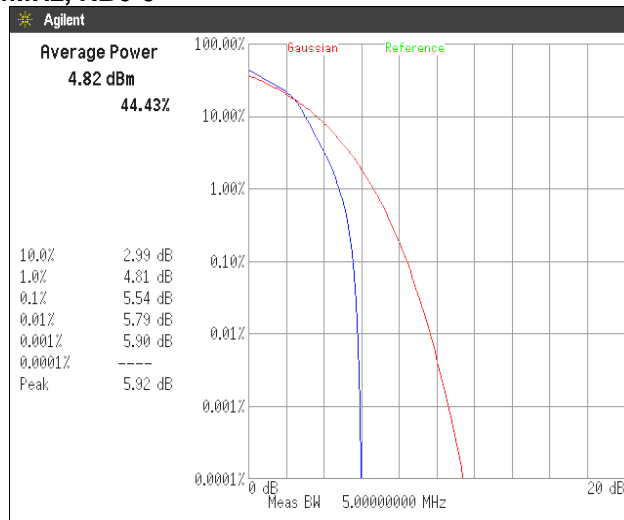


16QAM, BW 3MHz, RB15-0

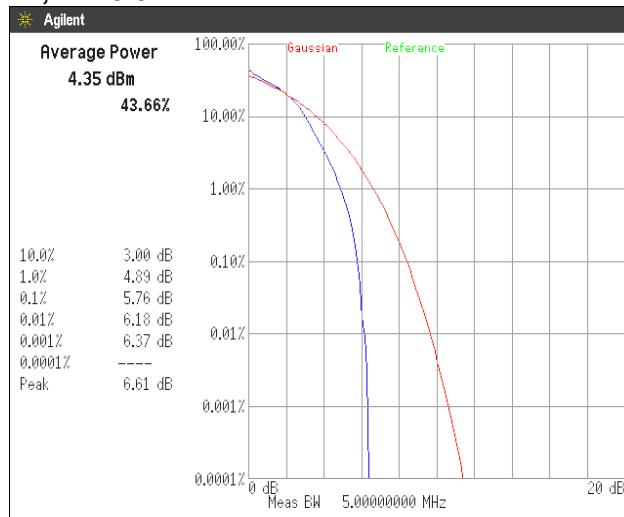


16QAM, BW 5MHz, RB25-0

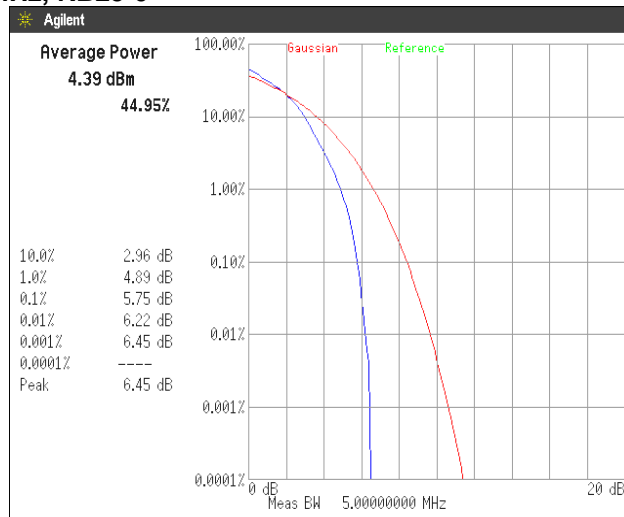


Channel: 18900
16QAM, BW 10MHz, RB50-0

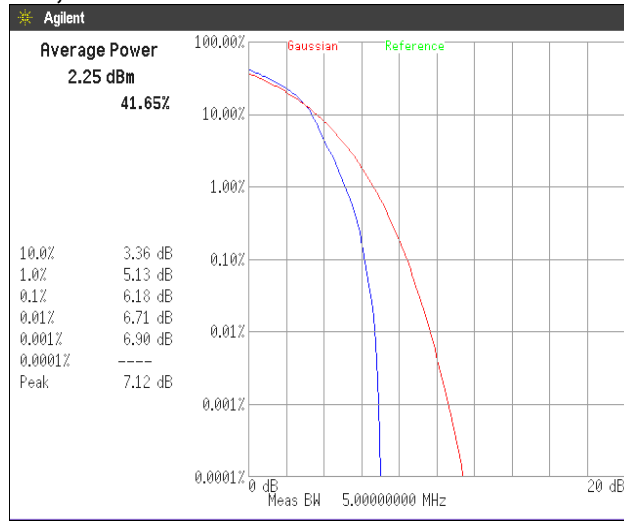

16QAM, BW 15MHz, RB75-0

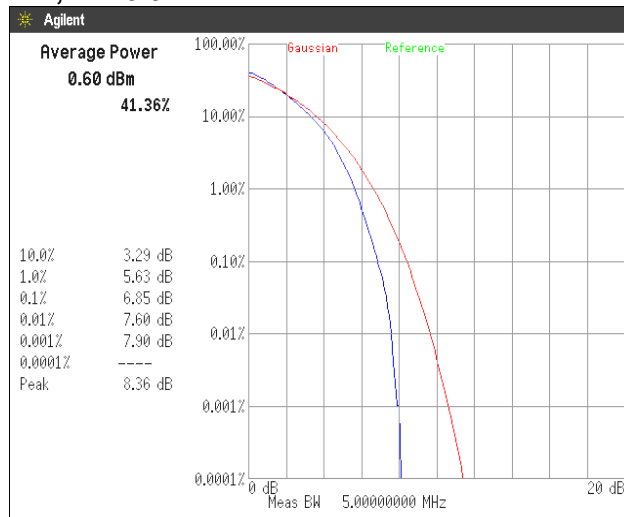

16QAM, BW 20MHz, RB100-0

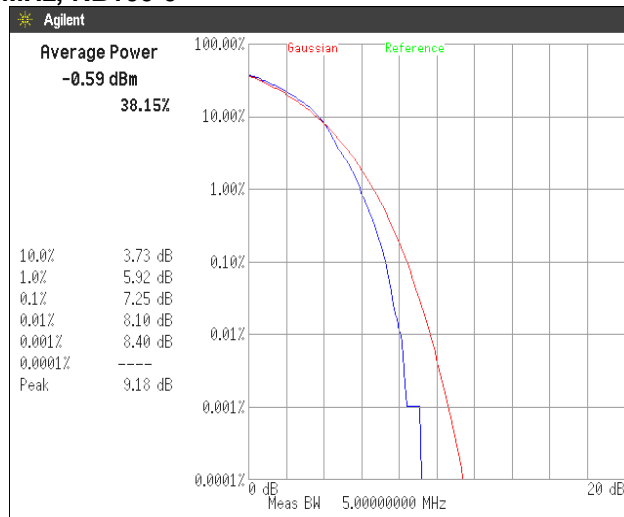

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

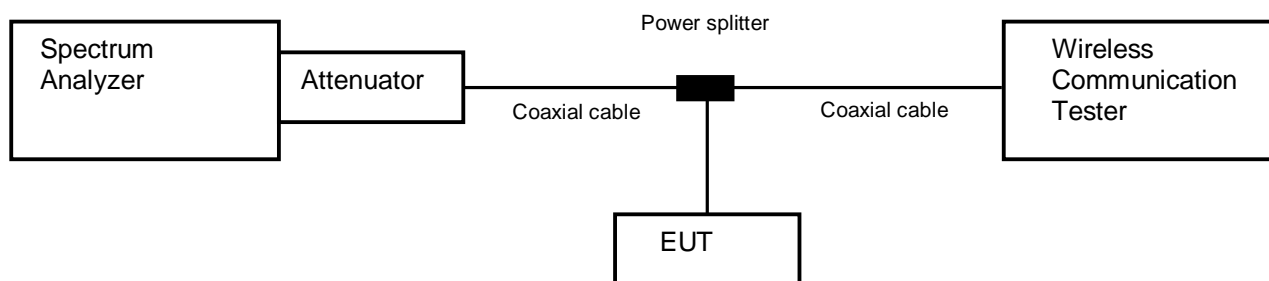

4.3.2 Limit

None

4.3.3 Measurement result

Date : 4-September-2019
 Temperature : 22.8 [°C]
 Humidity : 64.8 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

Band	Channel	Frequency [MHz]	Test Result [kHz]
GSM1900	512	1850.2	244.5036
	661	1880.0	244.3837
	810	1909.8	244.5724


Band	Channel	Frequency [MHz]	Test Result [kHz]
WCDMA Band II	9262	1852.4	4160.4
	9400	1880.0	4158.9
	9538	1907.6	4139.5

Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]	
LTE Band II	18900	1880.0	1.4	QPSK	3-1	0.6339	
					6-0	1.1023	
				16QAM	3-1	0.6355	
					6-0	1.1078	
				3	QPSK	8-4	1.5305
						15-0	2.7136
			16QAM		8-4	1.5412	
					15-0	2.7134	
			5	QPSK	12-7	2.3536	
					25-0	4.5669	
				16QAM	12-7	2.3429	
					25-0	4.5324	
				10	QPSK	25-12	4.7043
						50-0	8.9889
			16QAM		25-12	4.6966	
					50-0	8.9810	
			15		QPSK	36-20	6.8241
						75-0	13.4553
				16QAM	36-20	6.9011	
					75-0	13.4434	
				20	QPSK	50-24	9.2551
						100-0	17.8825
			16QAM		50-24	9.3853	
					100-0	17.8910	


4.3.4 Trace data

[GSM1900]


Channel: 512

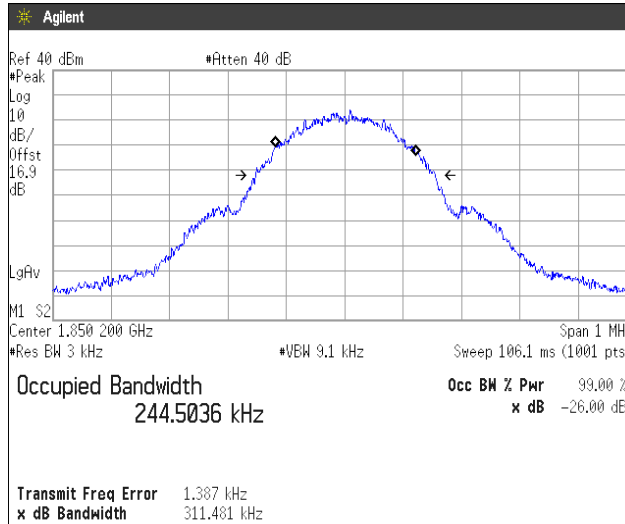

Channel: 661

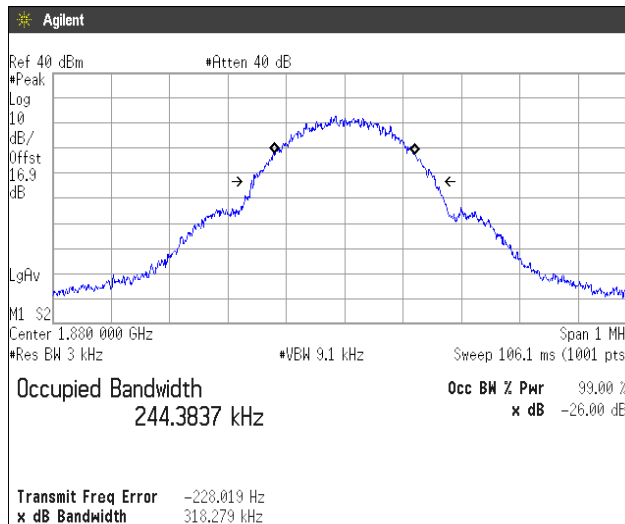


Channel: 810

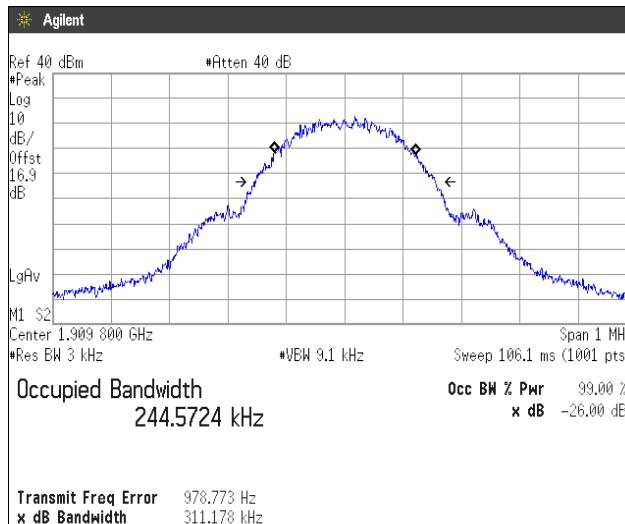





**[WCDMA Band II]
Channel: 9262**

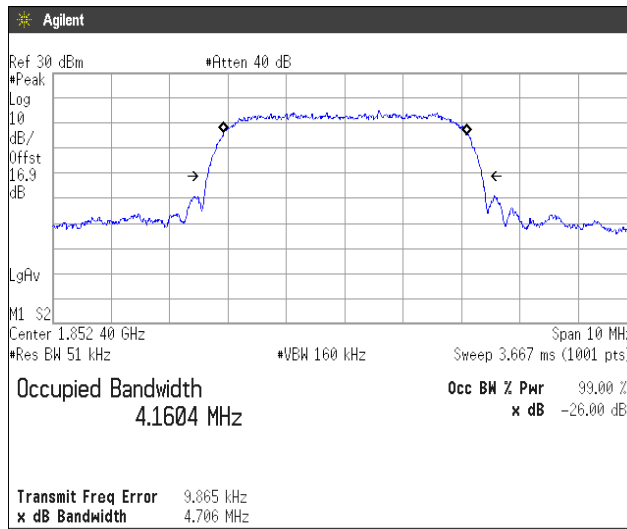

Channel: 9400

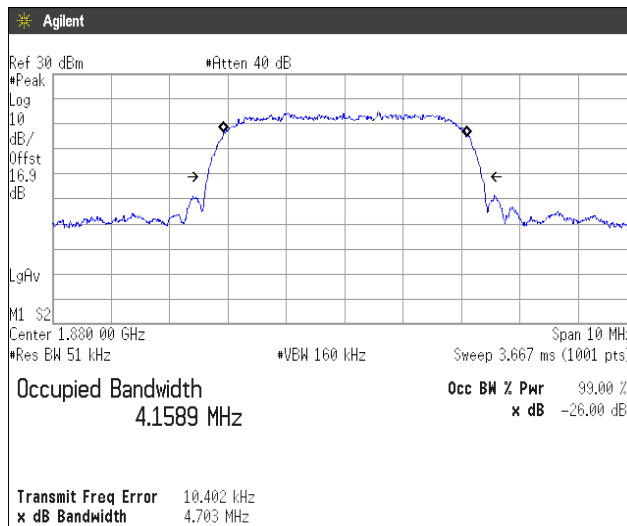

Channel: 9538

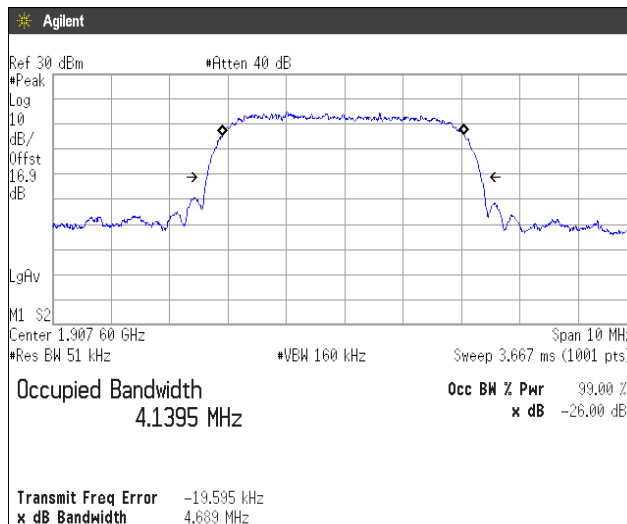





[LTE Band II]
Channel: 18900

QPSK, BW 1.4MHz

RB3-1

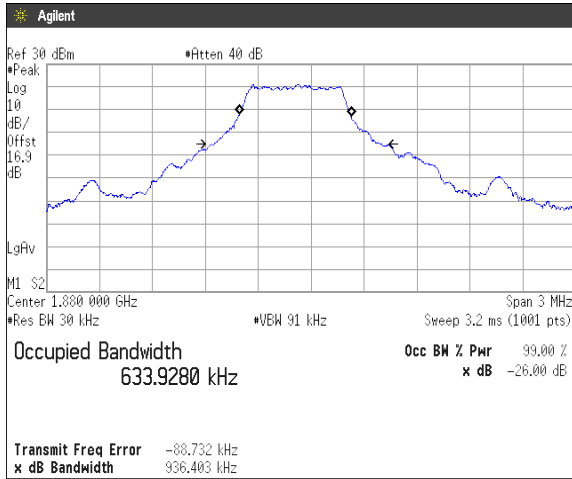


RB6-0

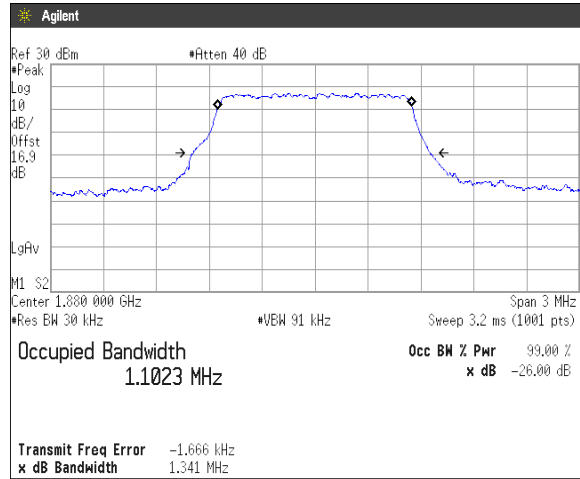


16QAM, BW 1.4MHz

RB3-1

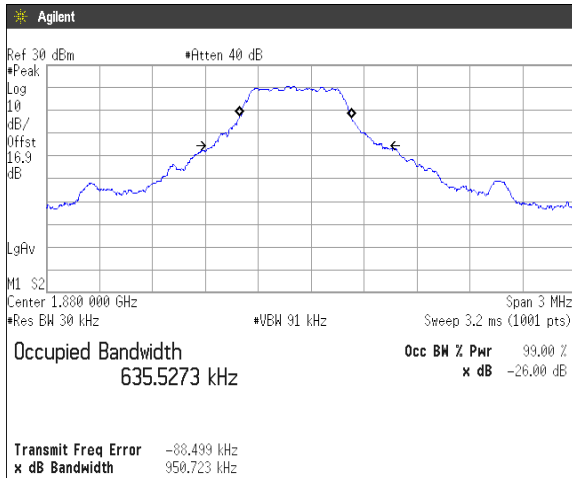


RB6-0

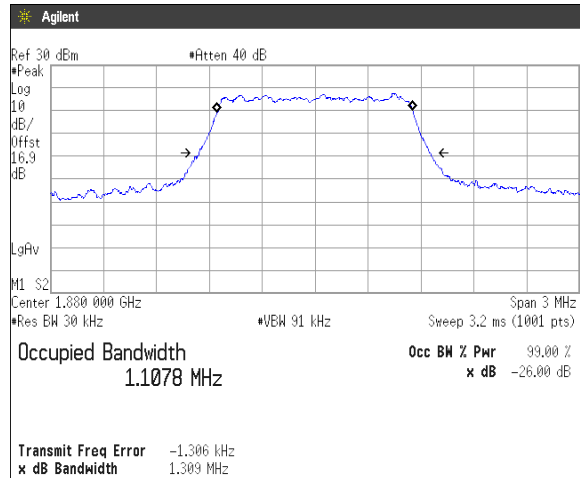




QPSK, BW 3MHz

RB8-4

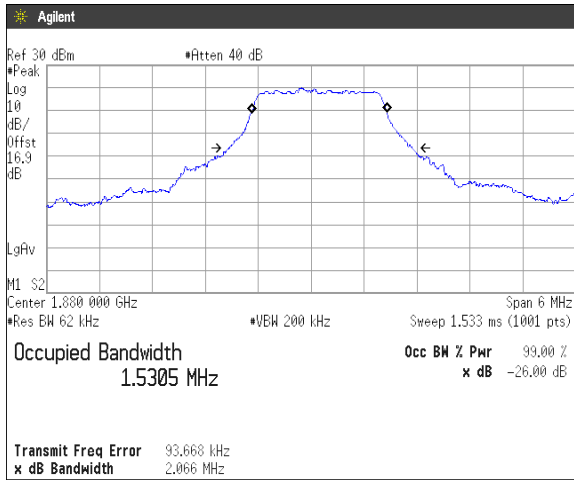


RB15-0

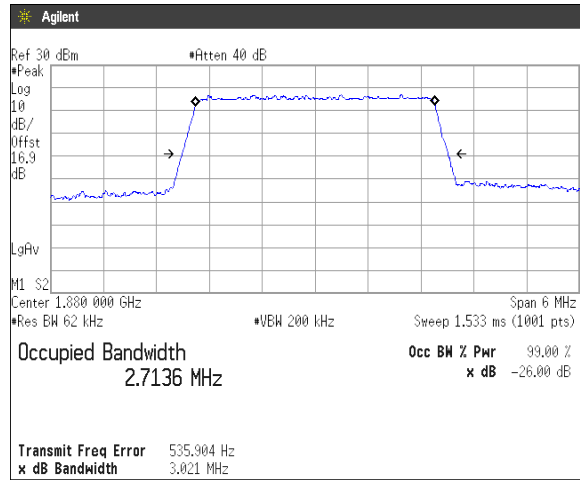


16QAM, BW 3MHz

RB8-4

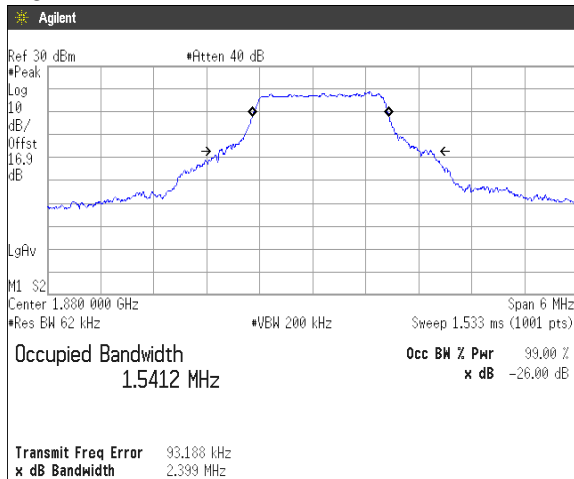


RB15-0

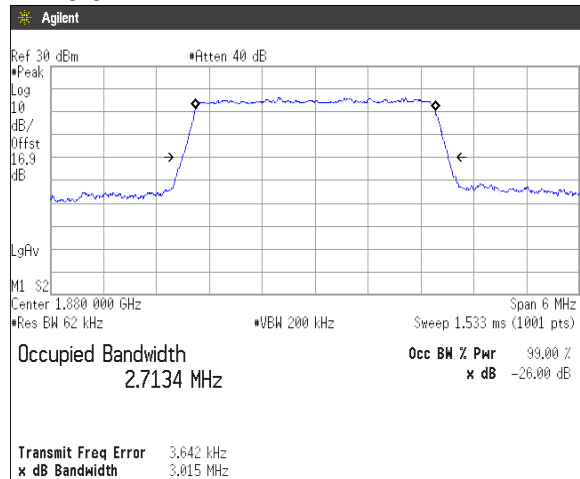





QPSK, BW 5MHz
RB12-7

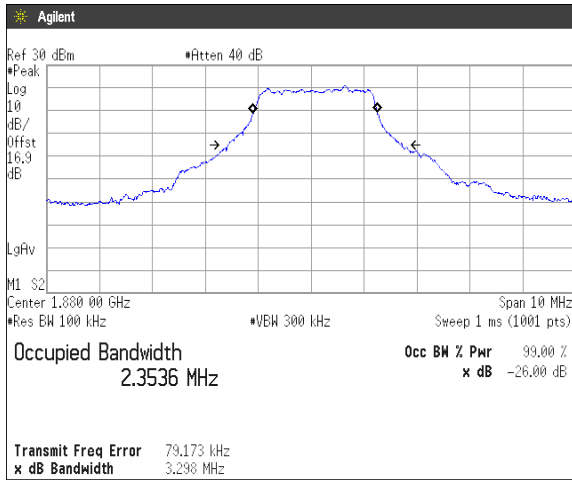


RB25-0

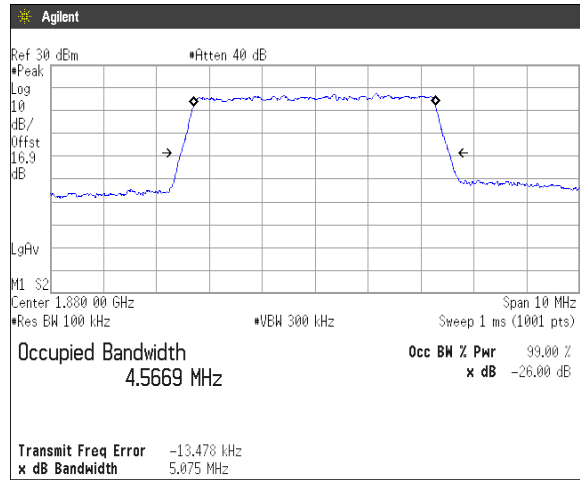

16QAM, BW 5MHz
RB12-7

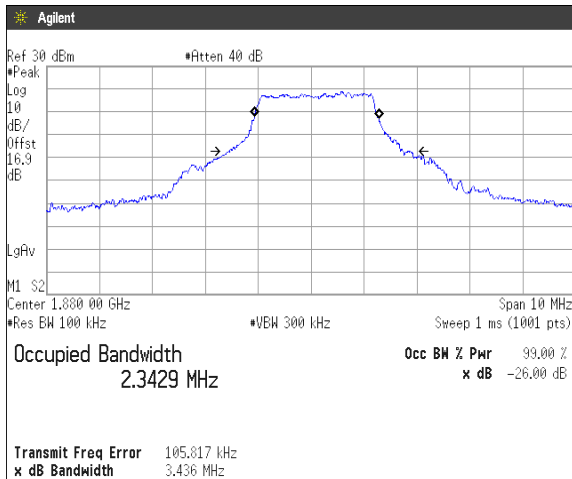


RB25-0

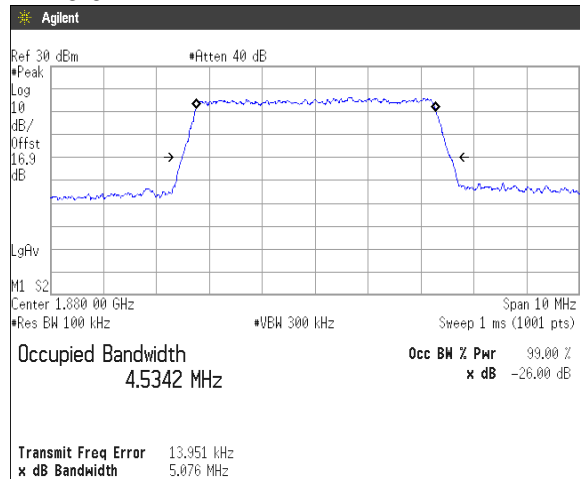





QPSK, BW 10MHz
RB25-12

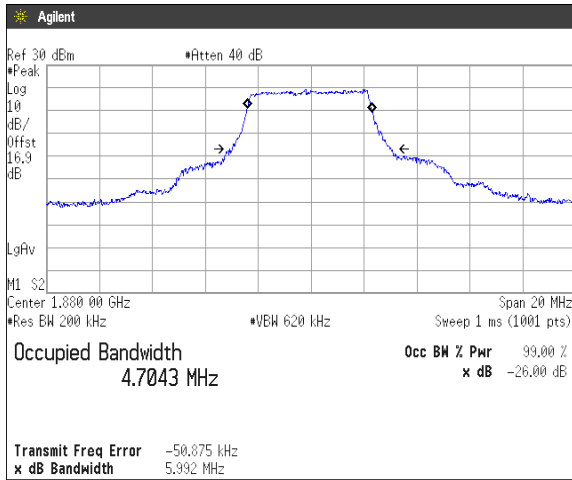


RB50-0

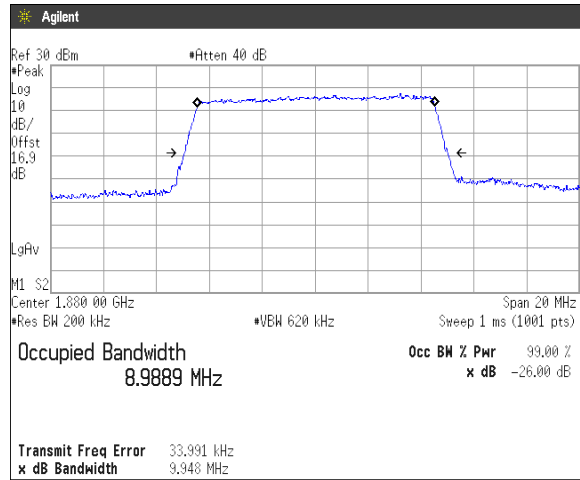

16QAM, BW 10MHz
RB25-12

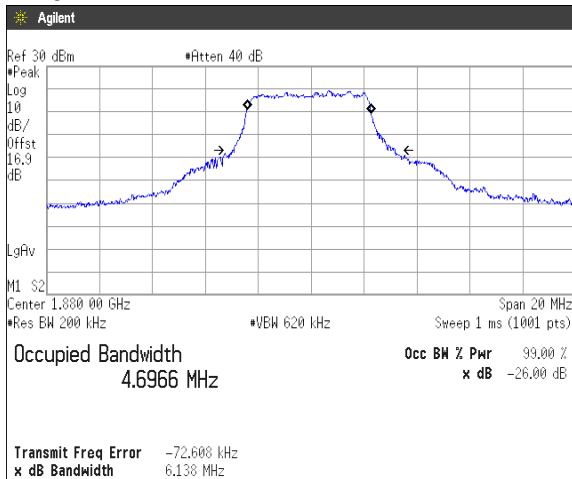


RB50-0

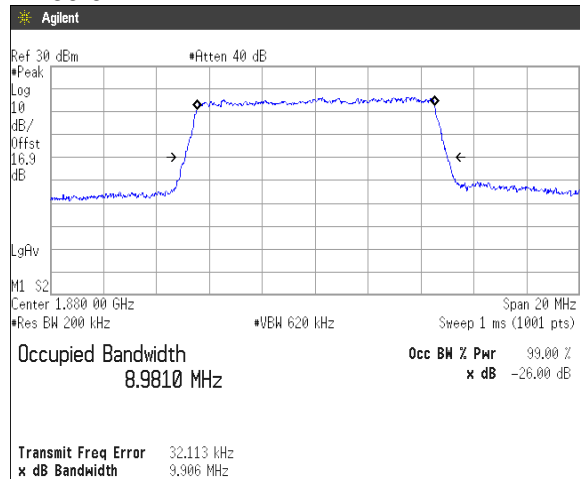





QPSK, BW 15MHz
RB36-20

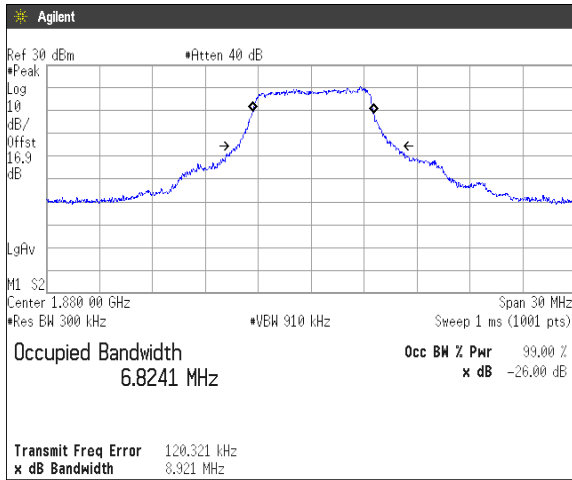


RB75-0

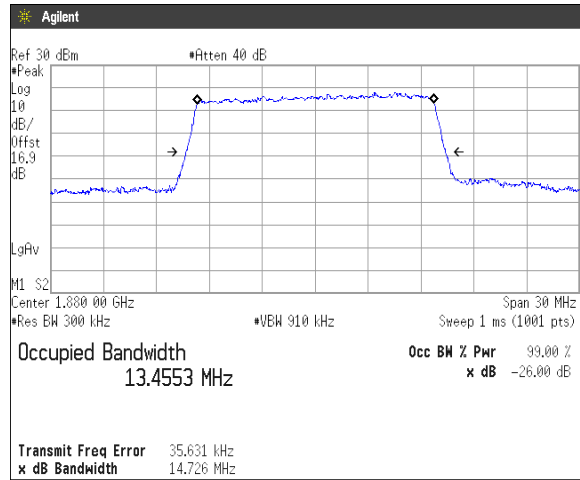

16QAM, BW 15MHz
RB36-20

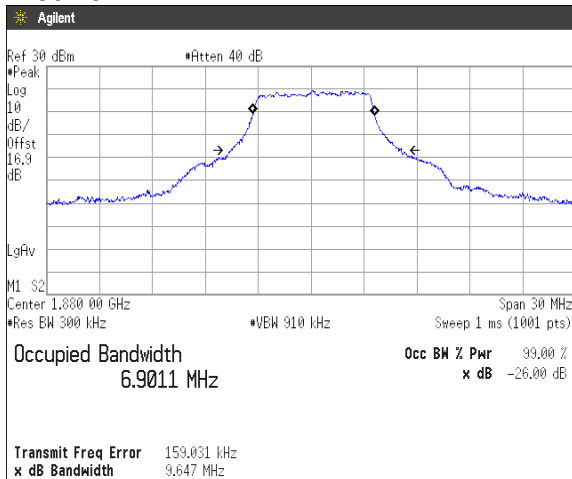


RB75-0

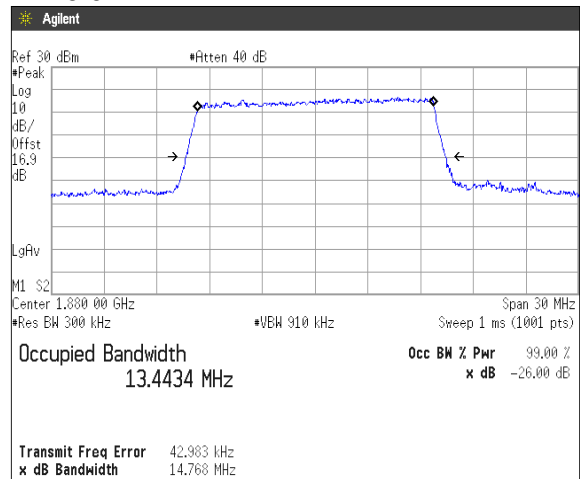





QPSK, BW 20MHz
RB50-24

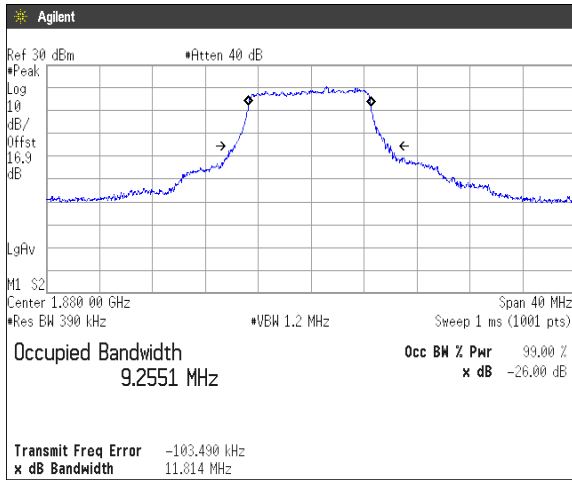


RB100-0

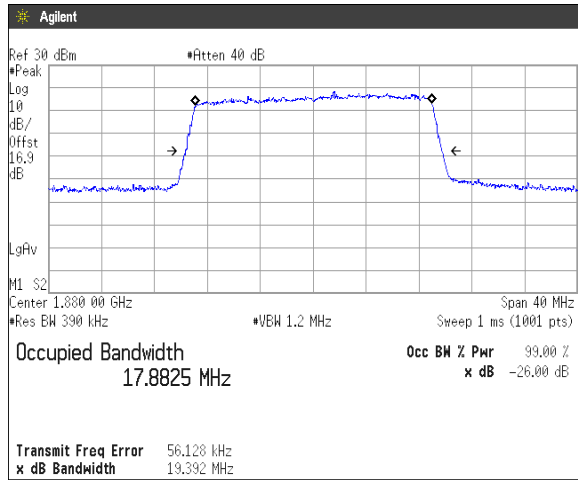

16QAM, BW 20MHz
RB50-24

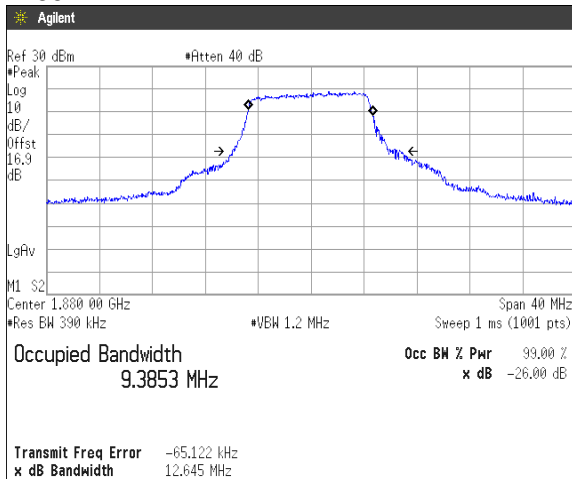

RB100-0

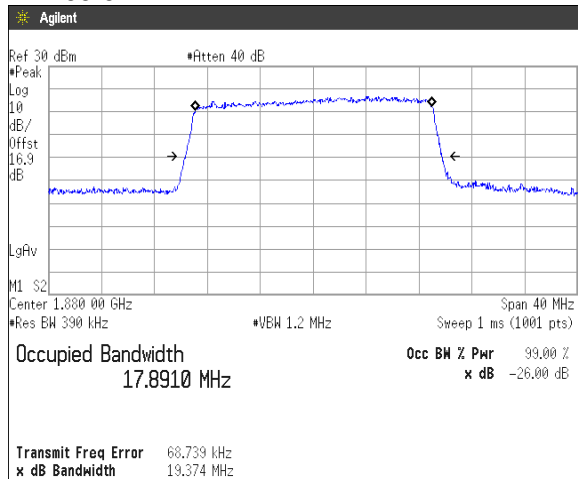

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 24.238(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- Span was set large enough so as to capture all out of band emissions near the band edge
- RBW \geq 1% of the emission bandwidth or 2% of the emission bandwidth
- VBW \geq 3 x RBW
- Detector = RMS
- Trace mode = Max hold
- Sweep time = auto-couple
- Number of sweep point \geq 2 x span / RBW

<Spurious Emissions>

- RBW = 1MHz & VBW \geq 3 x RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep time = auto-couple
- Number of sweep point \geq 2 x span / RBW

- Test configuration

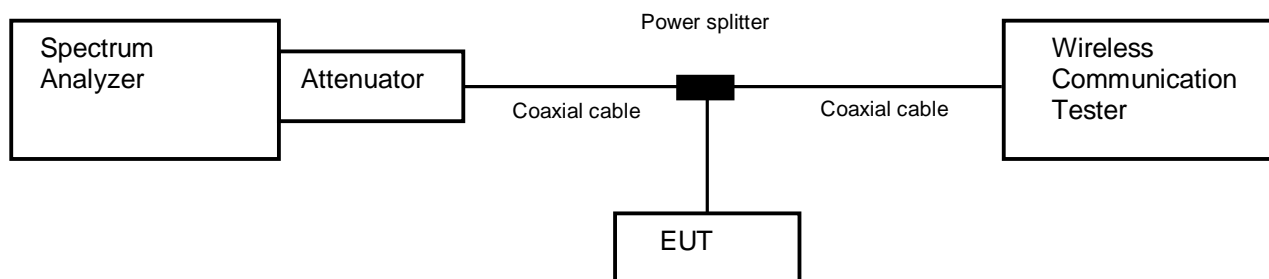

4.4.2 Limit

-13 dBm or less

4.4.3 Measurement result

Date : 5-September-2019
 Temperature : 23.2 [°C]
 Humidity : 44.4 [%]
 Test place : Shielded room No.4
 Test engineer : Tadahiro Seino

Date : 2-October-2019
 Temperature : 22.4 [°C]
 Humidity : 53.4 [%]
 Test place : Shielded room No.4
 Test engineer : Tadahiro Seino

Band	Channel	Frequency [MHz]	Limit [dB]	Results	
GSM1900	512	1850.2	-13.0	See the trace data	PASS
	810	1909.8	-13.0	See the trace data	PASS
WCDMA Band II	9262	1852.4	-13.0	See the trace data	PASS
	9538	1907.6	-13.0	See the trace data	PASS


Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Limit [dB]	Results	
LTE Band II	QPSK, 16QAM	1.4	18607	1850.7	-13.0	See the trace data	PASS
			19193	1909.3	-13.0	See the trace data	PASS
		3	18615	1851.5	-13.0	See the trace data	PASS
			19185	1908.5	-13.0	See the trace data	PASS
		5	18625	1852.5	-13.0	See the trace data	PASS
			19175	1907.5	-13.0	See the trace data	PASS
		10	18650	1855.0	-13.0	See the trace data	PASS
			19150	1905.0	-13.0	See the trace data	PASS
		15	18675	1857.5	-13.0	See the trace data	PASS
			19125	1902.5	-13.0	See the trace data	PASS
		20	18700	1860.0	-13.0	See the trace data	PASS
			19100	1900.0	-13.0	See the trace data	PASS




4.4.4 Trace data

[GSM1900]
(Band Edge)

Channel: 512

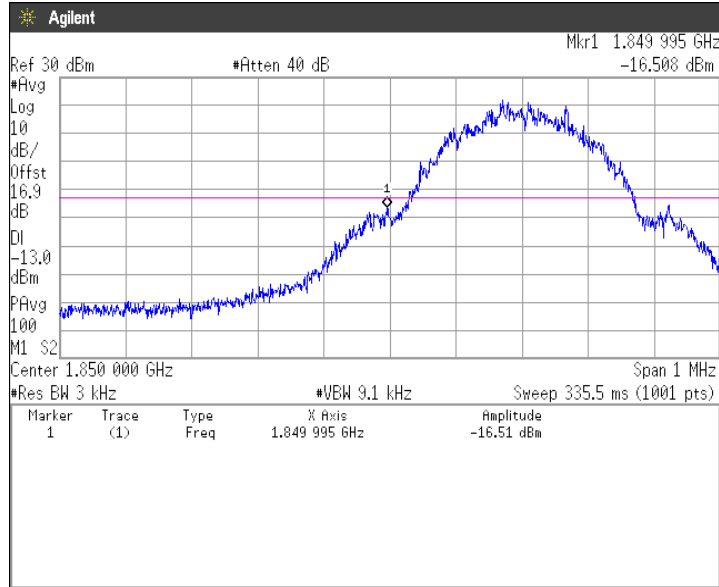

Channel: 810

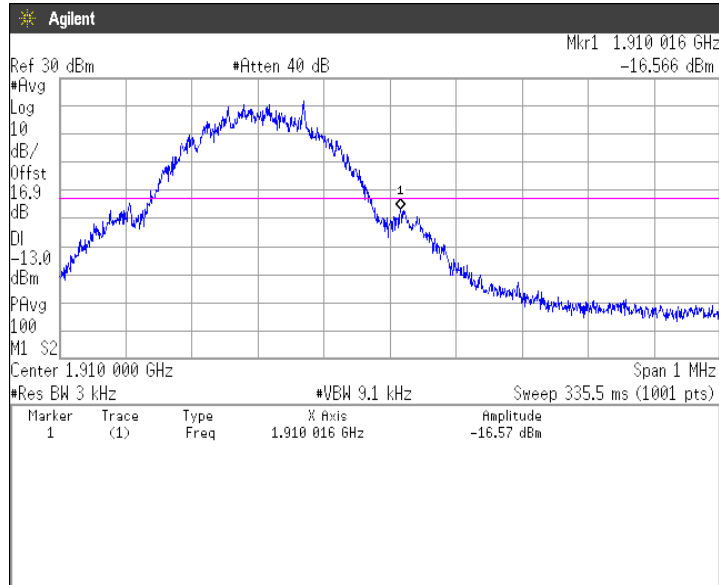





(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


**Channel: 512
30MHz-5GHz**

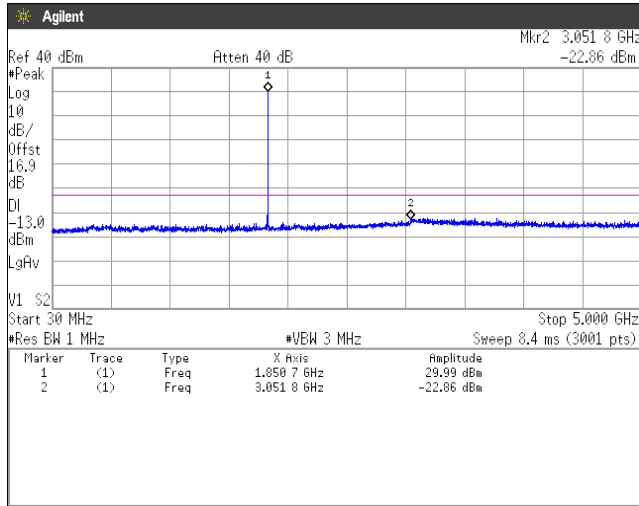


5GHz-10GHz

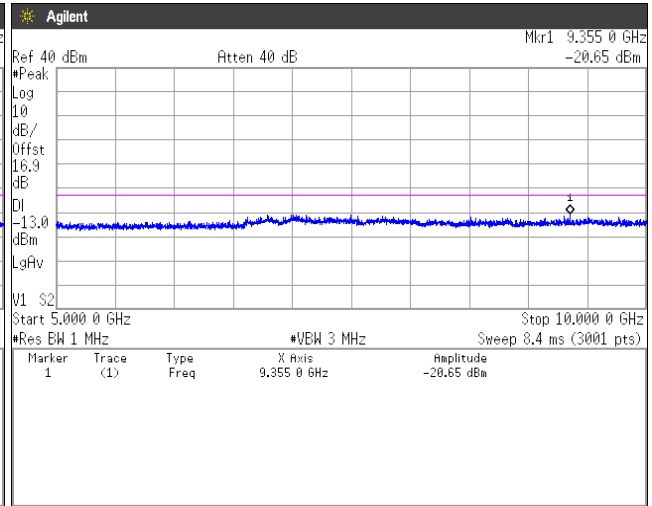

10GHz-15GHz

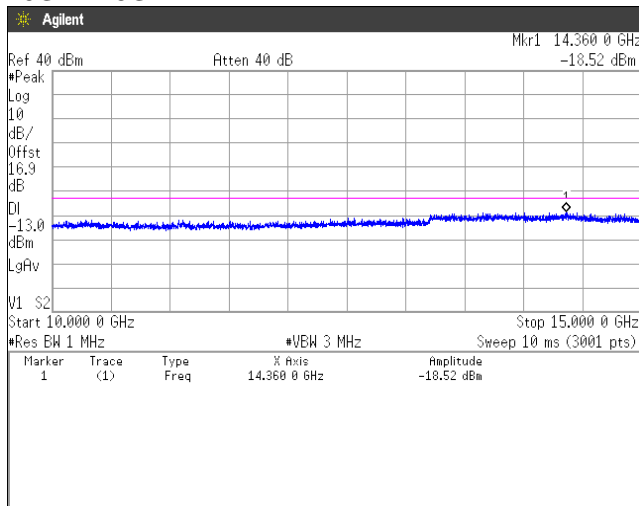


15GHz-20GHz

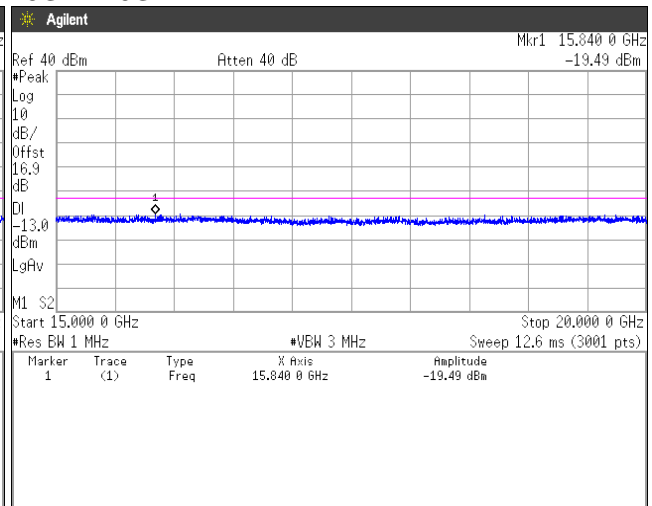





Channel: 661
30MHz-5GHz

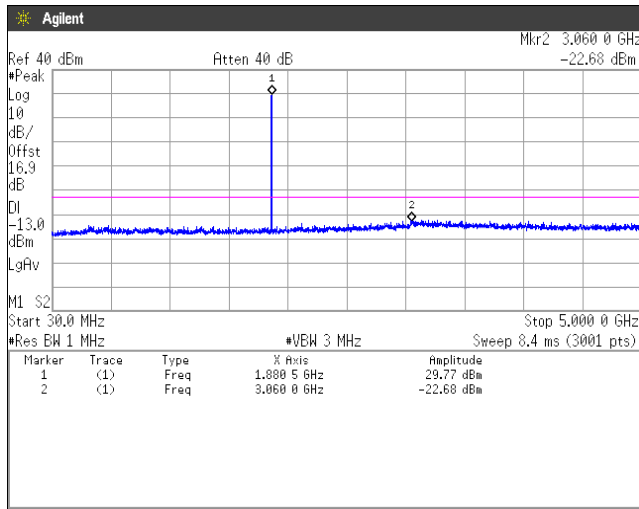


5GHz-10GHz

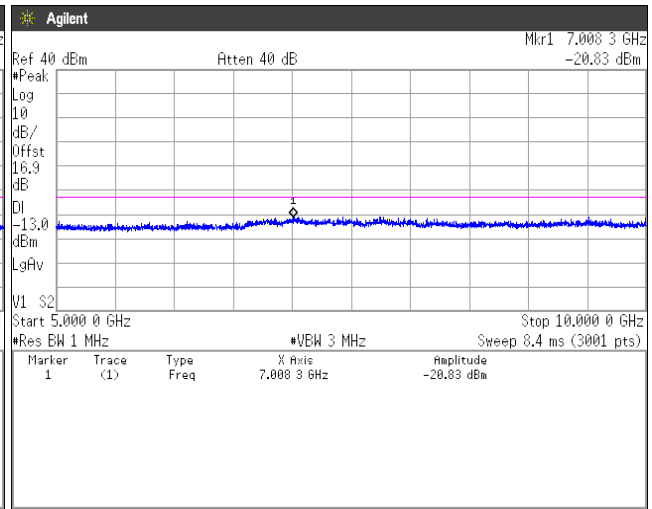

10GHz-15GHz

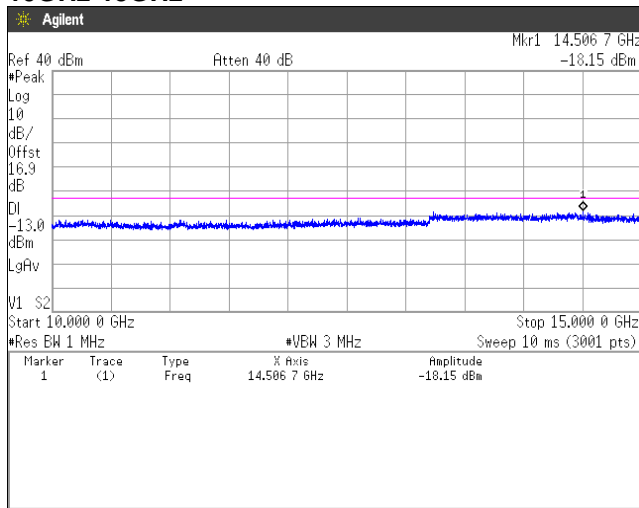


15GHz-20GHz

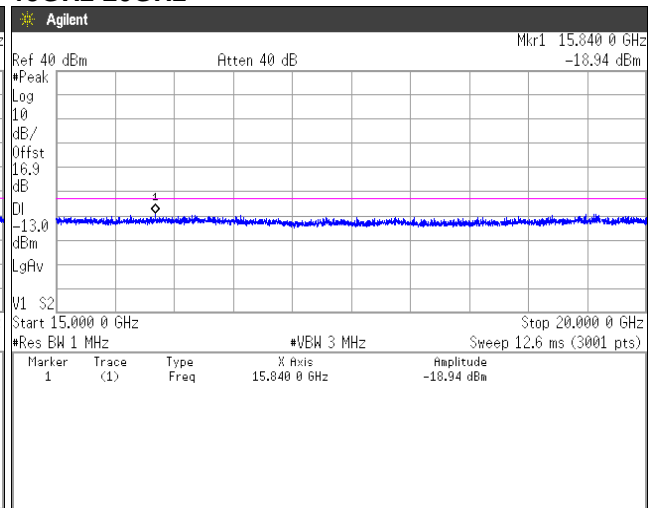





Channel: 810
30MHz-5GHz

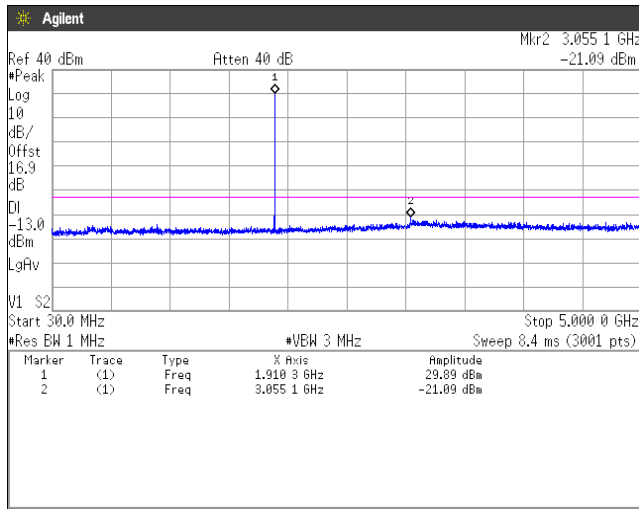


5GHz-10GHz

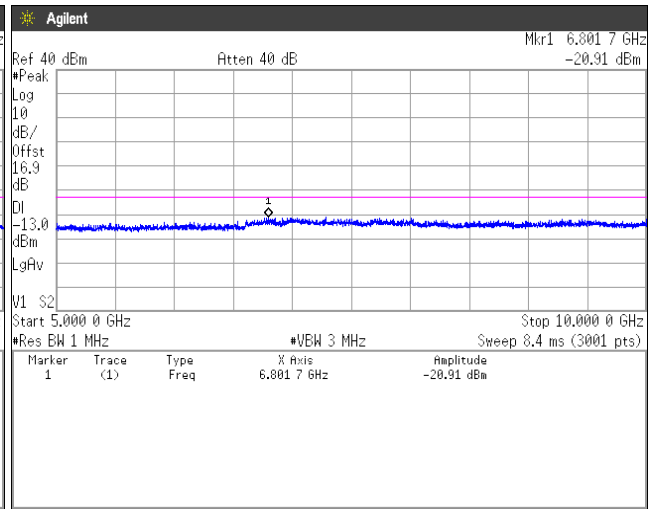

10GHz-15GHz


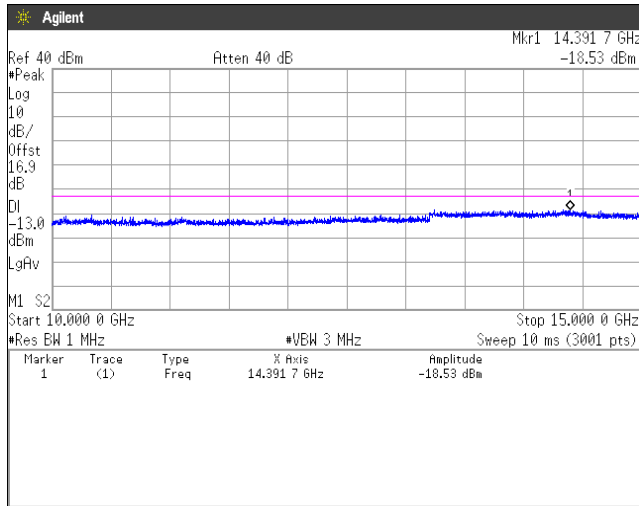


15GHz-20GHz

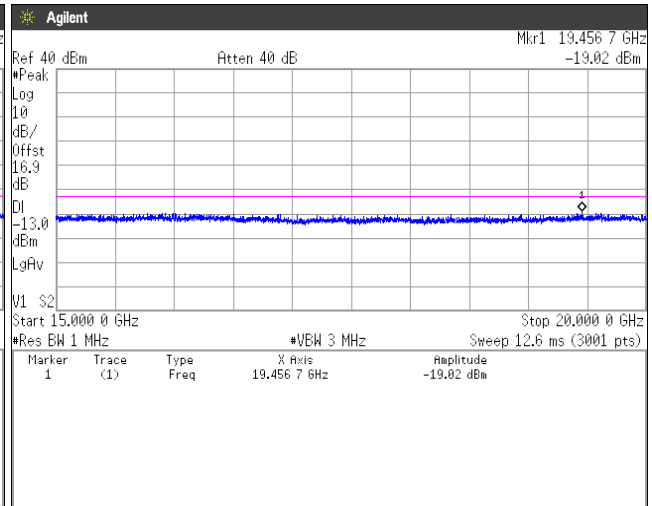





**[WCDMA Band II]
(Band Edge)
Channel: 9262**

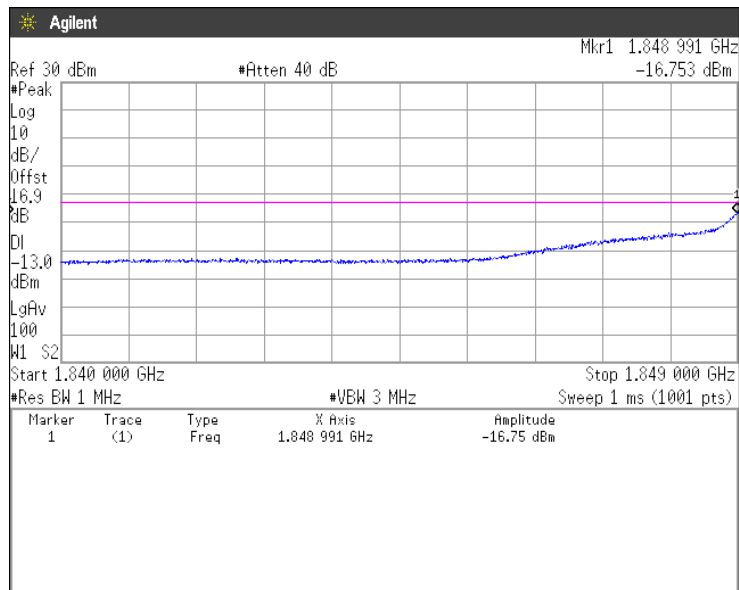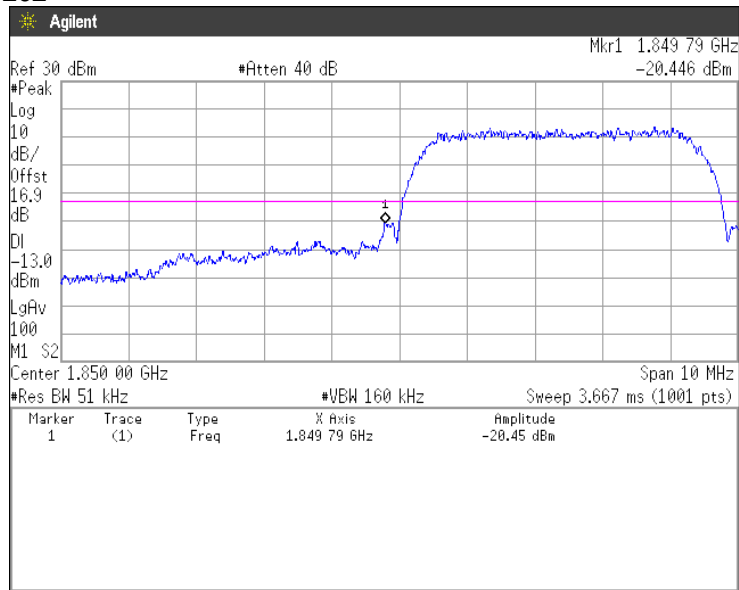




Channel: 9538

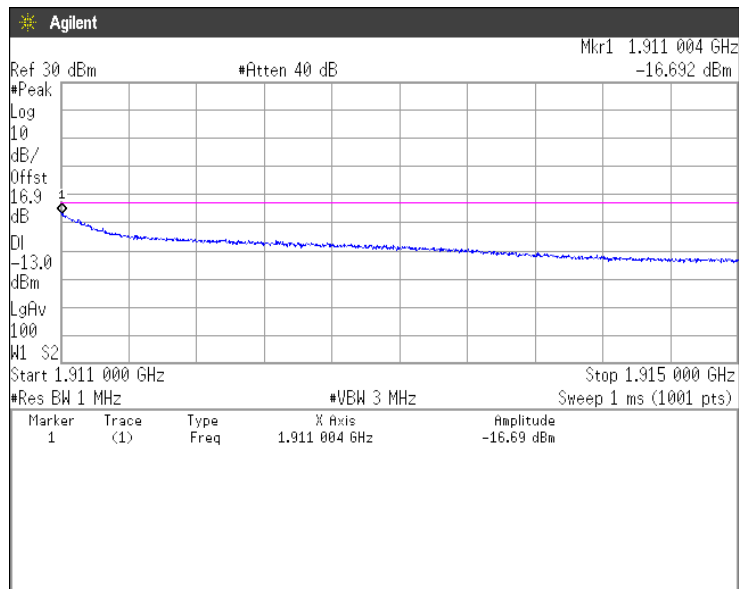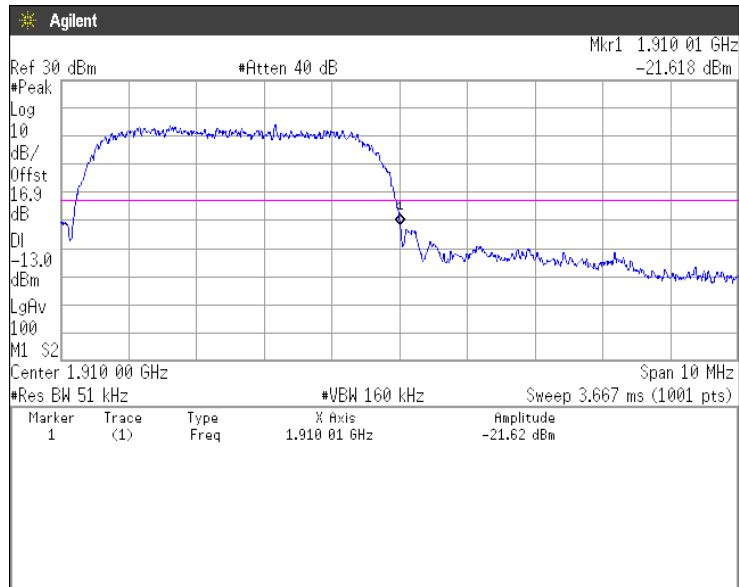


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


**Channel: 9262
30MHz-5GHz**

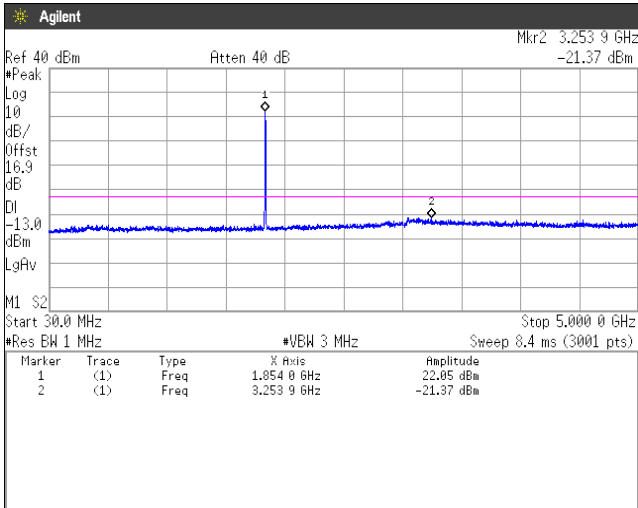


5GHz-10GHz

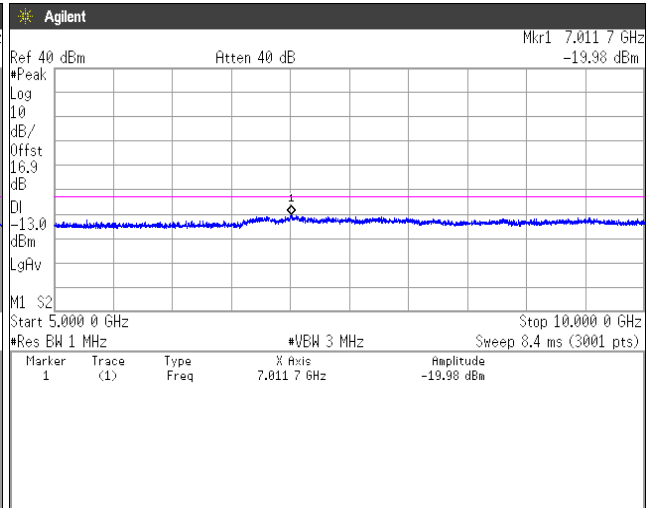

10GHz-15GHz

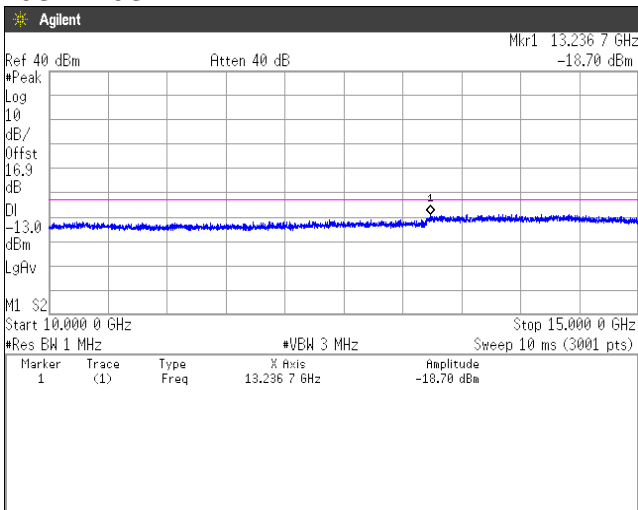


15GHz-20GHz

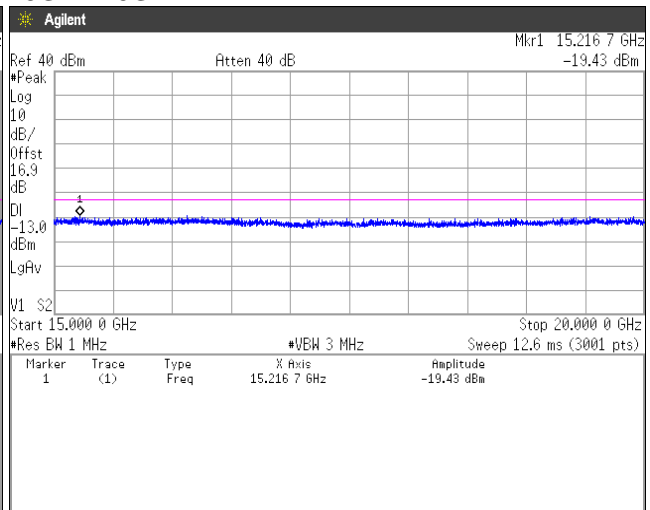





Channel: 9400
30MHz-5GHz

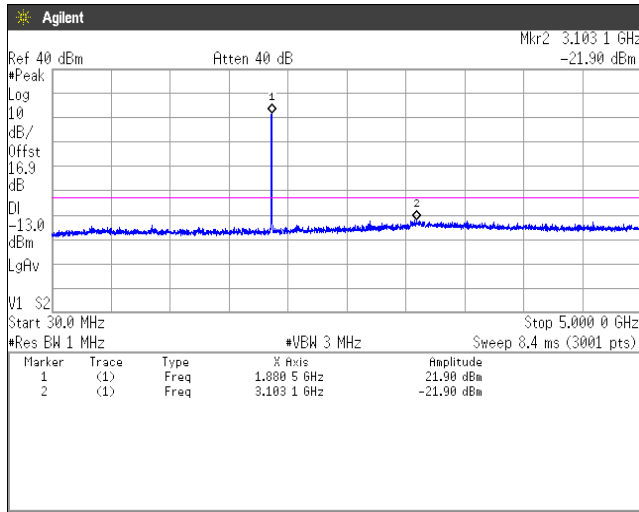


5GHz-10GHz

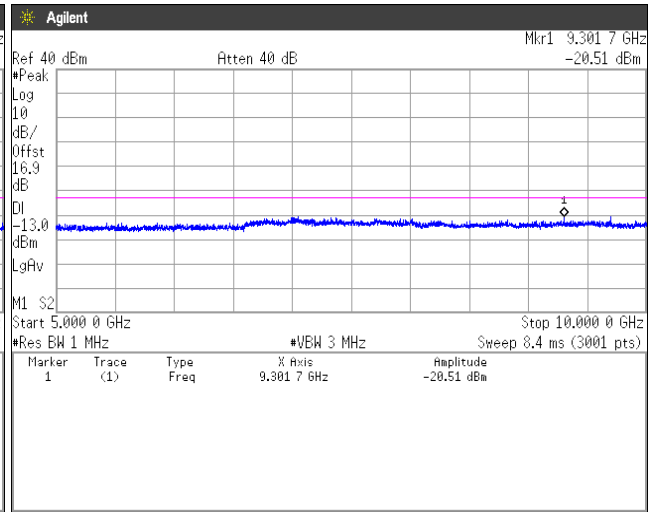

10GHz-15GHz

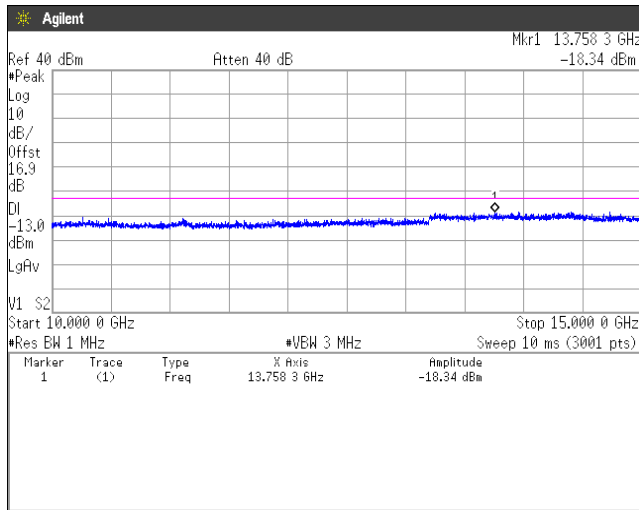


15GHz-20GHz

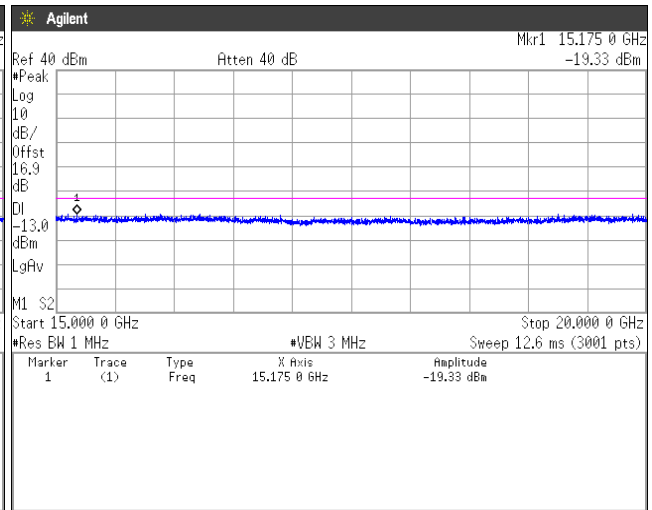





Channel: 9538
30MHz-5GHz

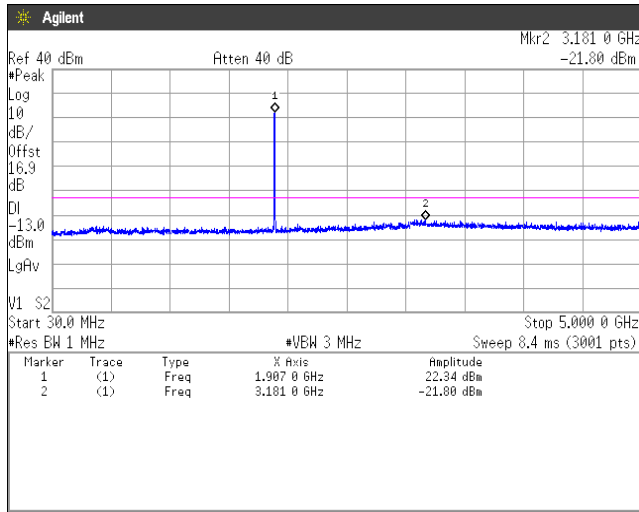


5GHz-10GHz

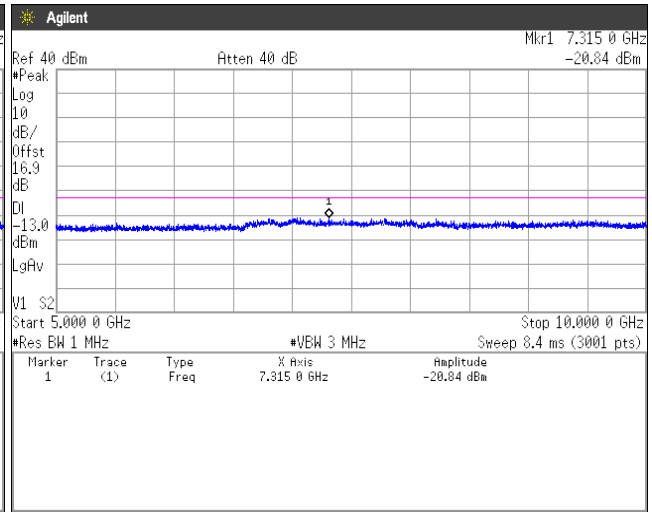

10GHz-15GHz

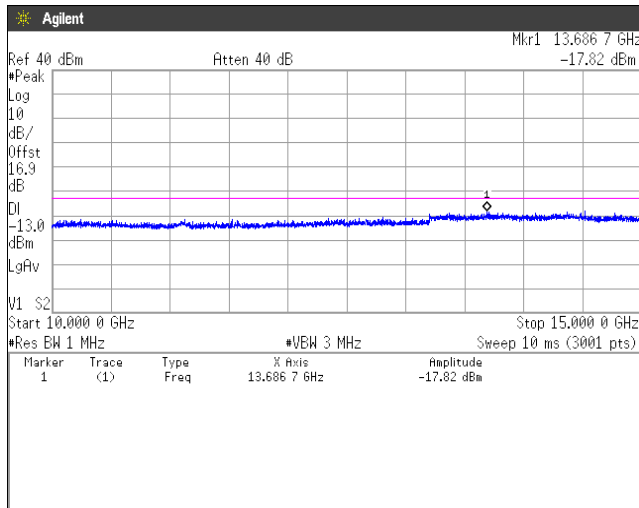


15GHz-20GHz

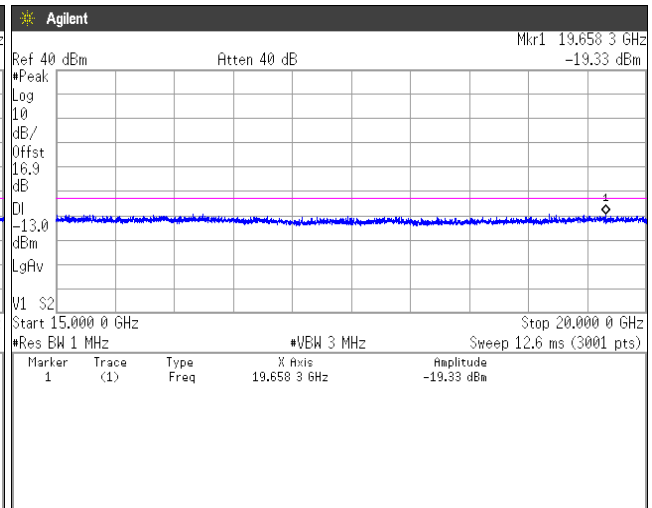




**[LTE Band II]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low**

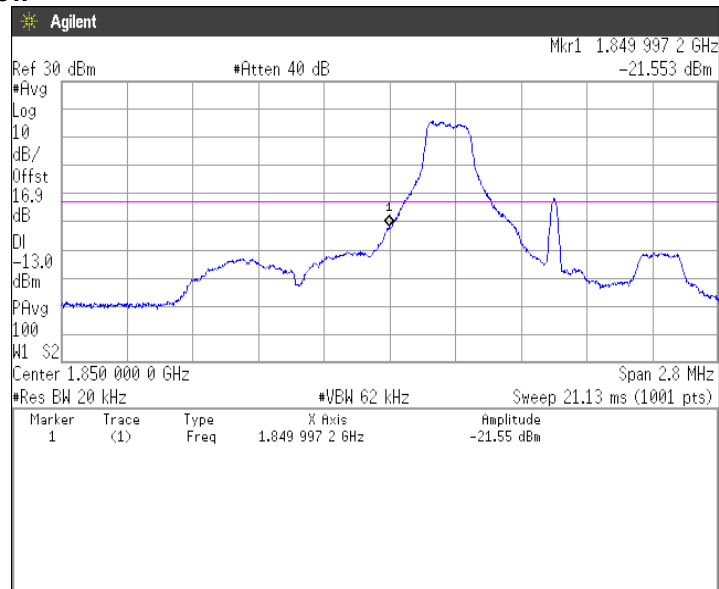


**QPSK, BW 1.4MHz, RB1-5
Channel: High**

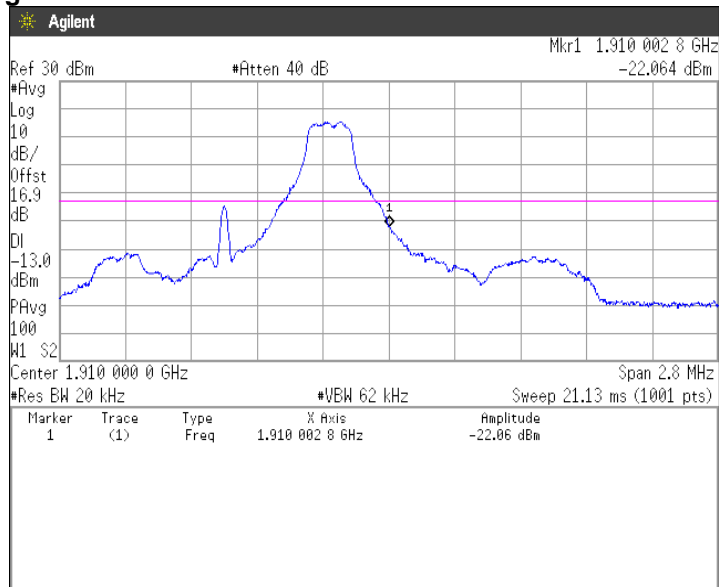





QPSK, BW 1.4MHz, RB6-0
Channel: Low

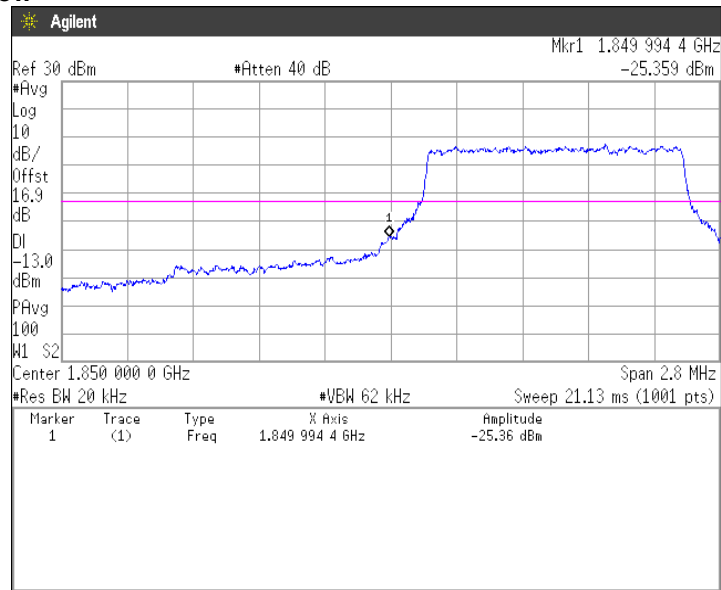


QPSK, BW 1.4MHz, RB6-0
Channel: High

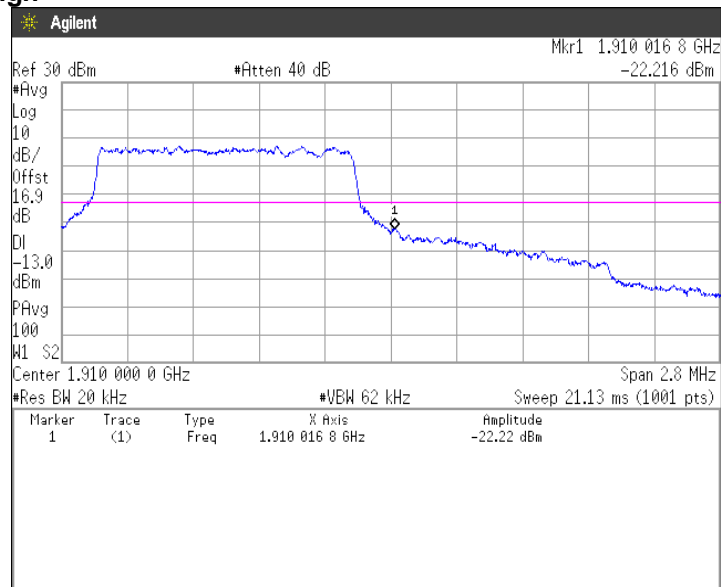


QPSK, BW 3MHz, RB1-0
Channel: Low

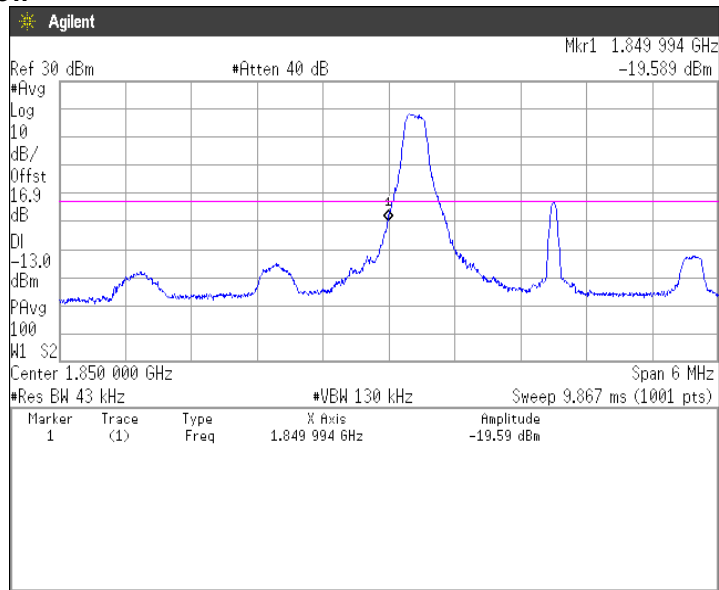


QPSK, BW 3MHz, RB1-14
Channel: High

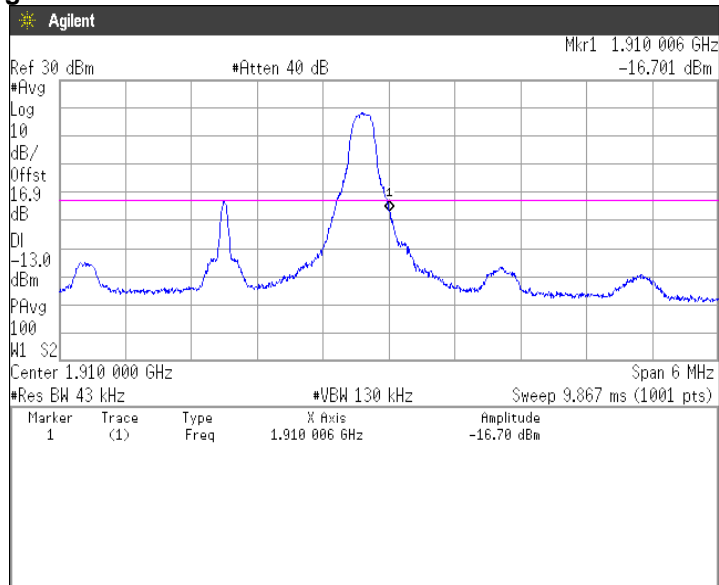


QPSK, BW 3MHz, RB15-0
Channel: Low

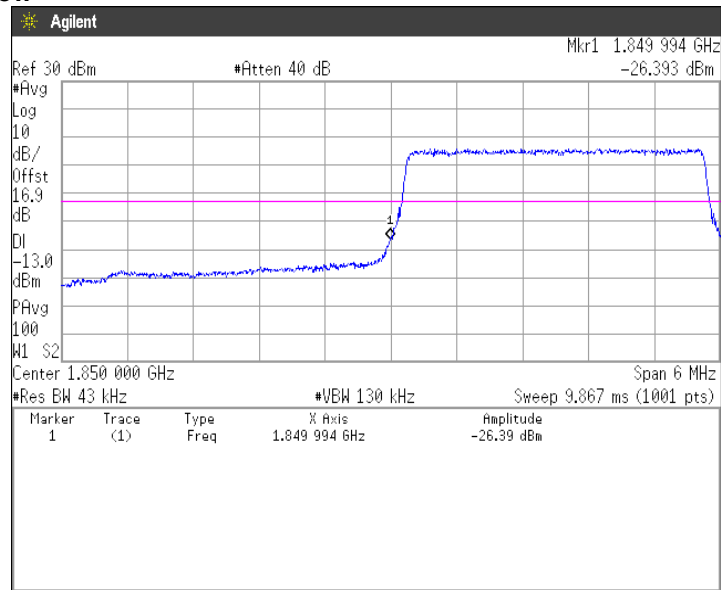


QPSK, BW 3MHz, RB15-0
Channel: High

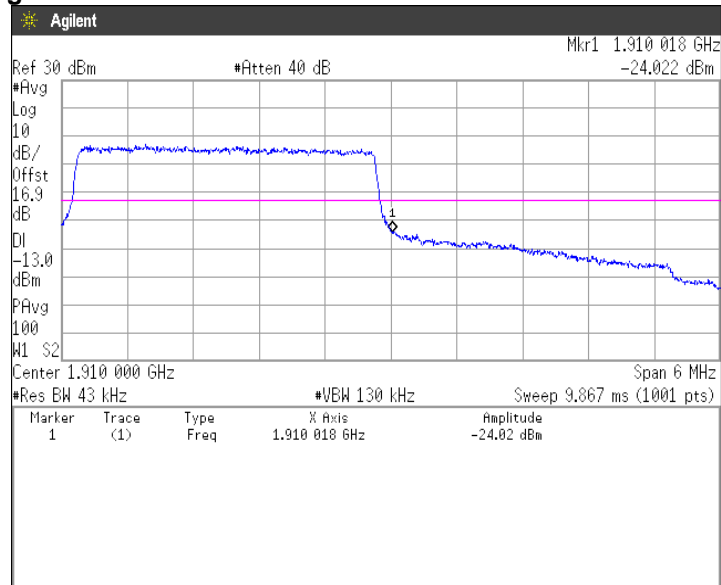

QPSK, BW 5MHz, RB1-0
Channel: Low

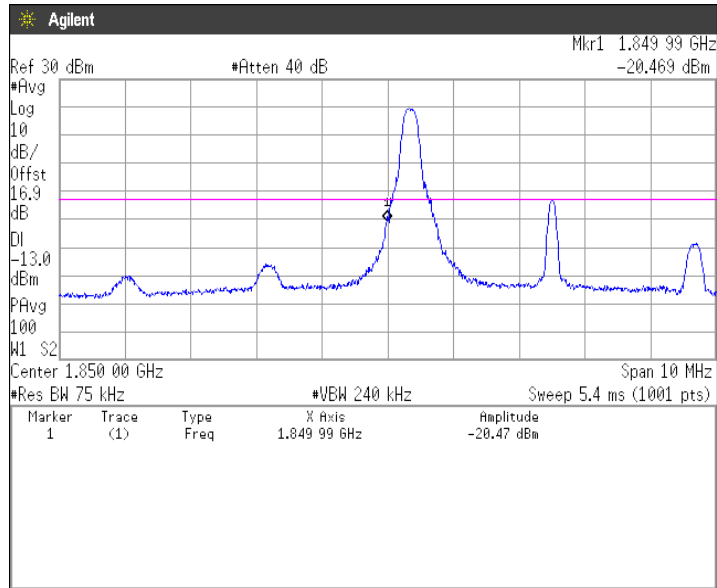


QPSK, BW 5MHz, RB1-24
Channel: High

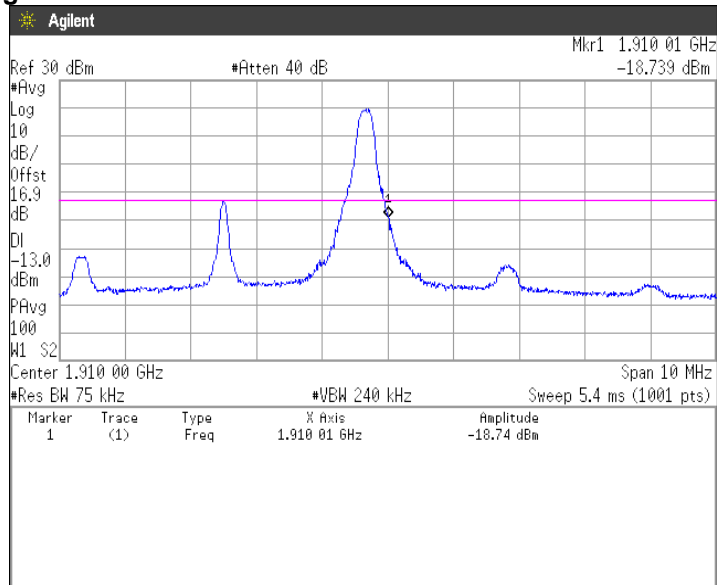





QPSK, BW 5MHz, RB25-0
Channel: Low

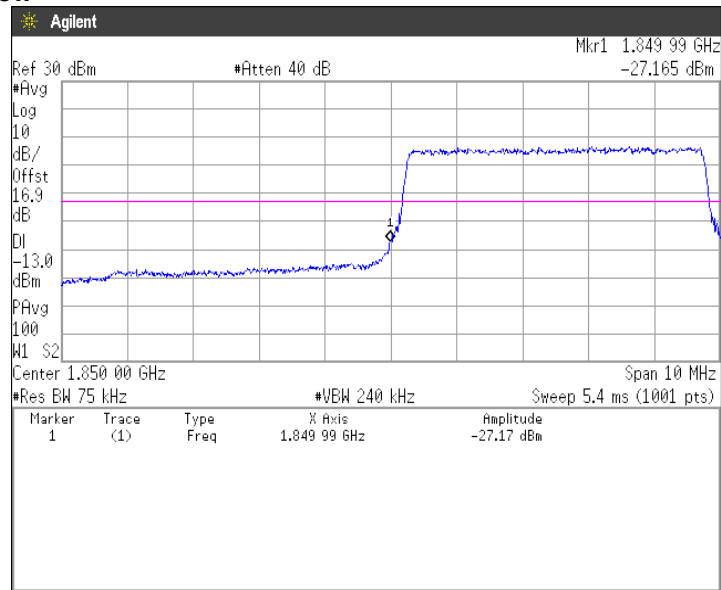


QPSK, BW 5MHz, RB25-0
Channel: High

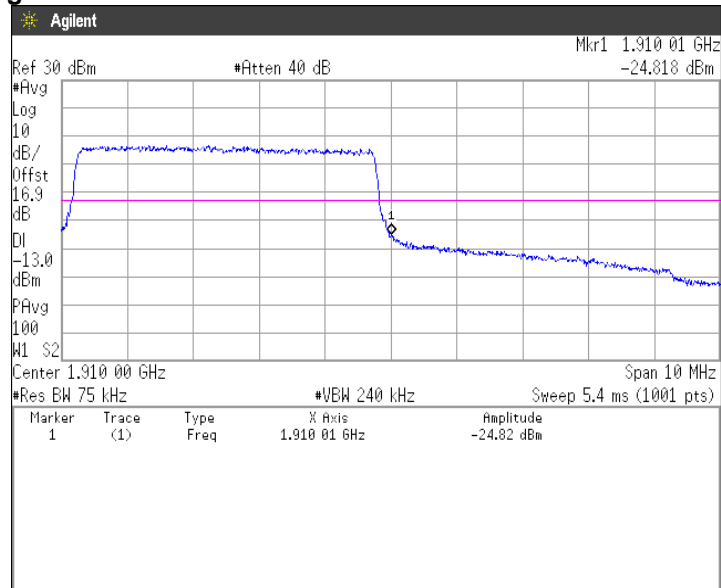


QPSK, BW 10MHz, RB1-0
Channel: Low

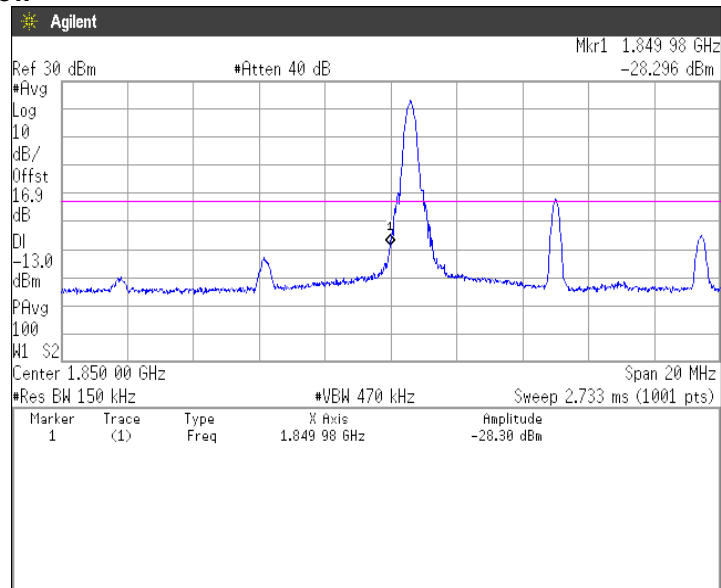


QPSK, BW 10MHz, RB1-49
Channel: High

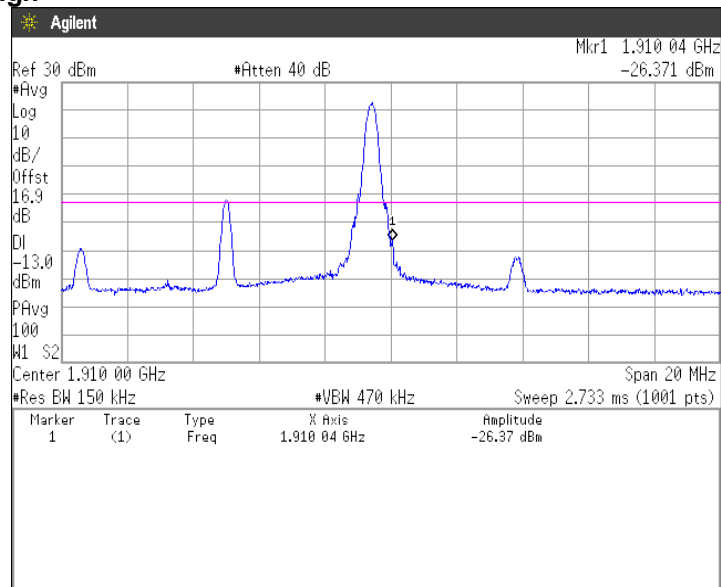


QPSK, BW 10MHz, RB50-0
Channel: Low

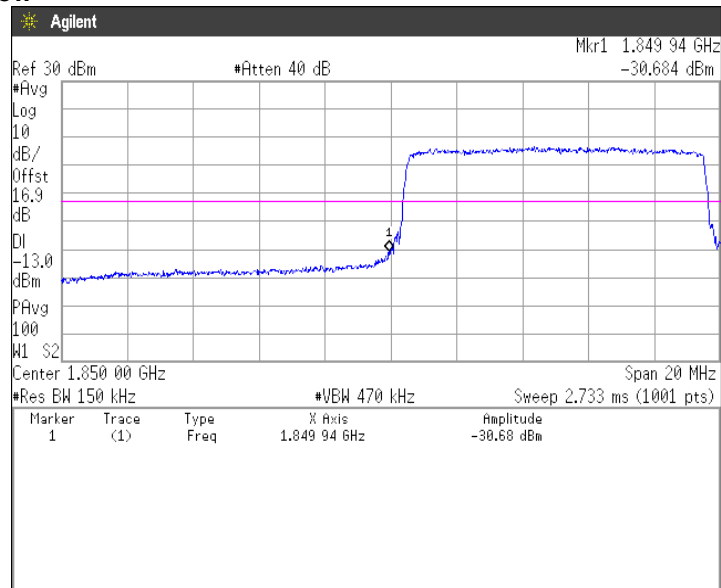


QPSK, BW 10MHz, RB50-0
Channel: High

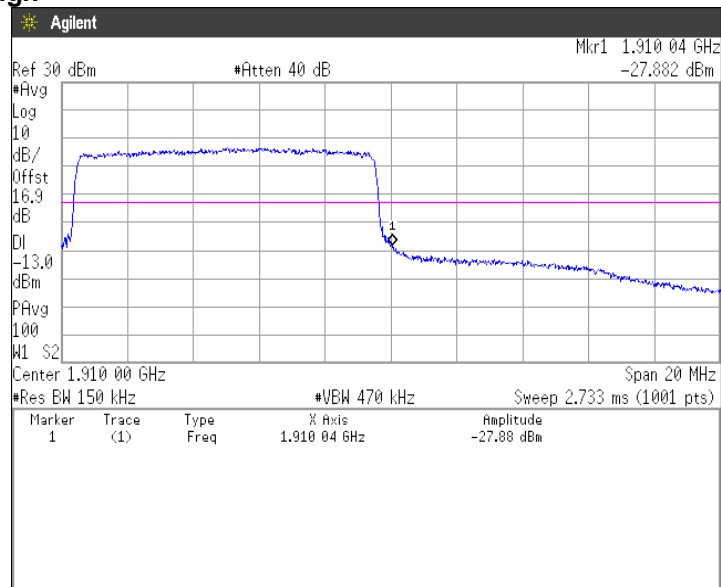

QPSK, BW 15MHz, RB1-0
Channel: Low

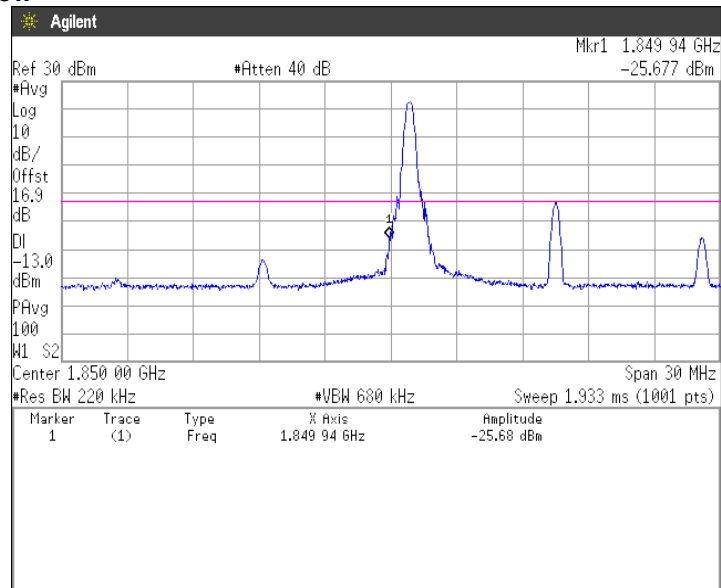


QPSK, BW 15MHz, RB1-74
Channel: High

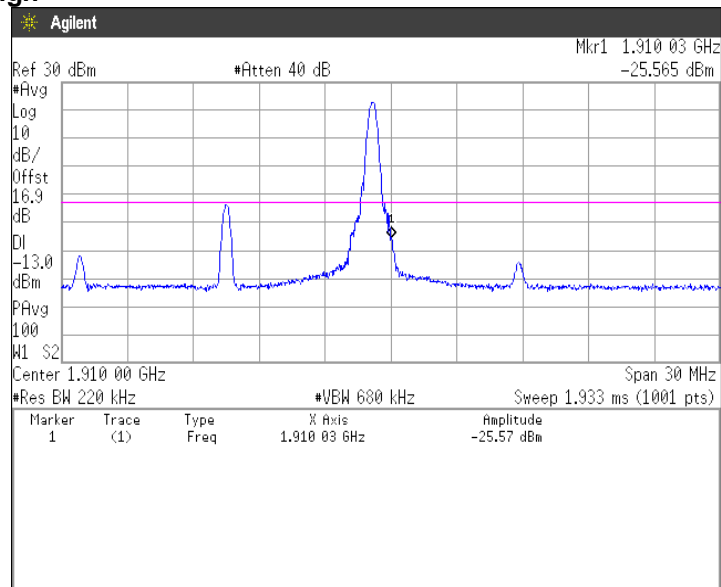





QPSK, BW 15MHz, RB75-0
Channel: Low

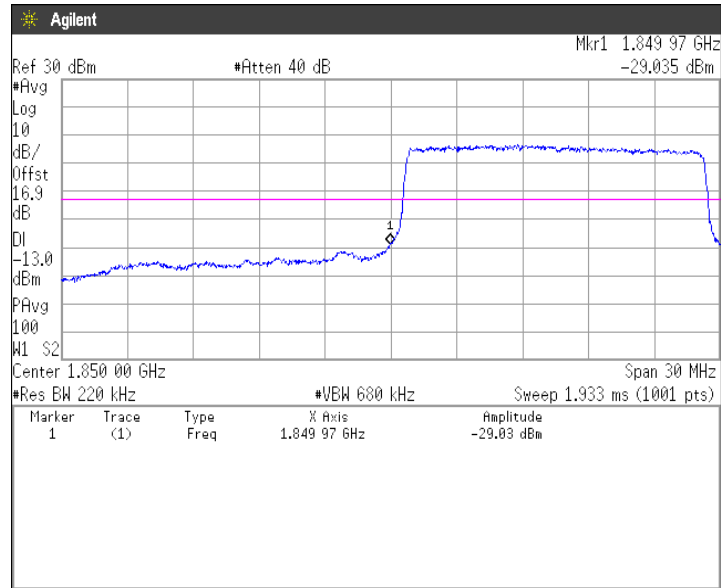


QPSK, BW 15MHz, RB75-0
Channel: High

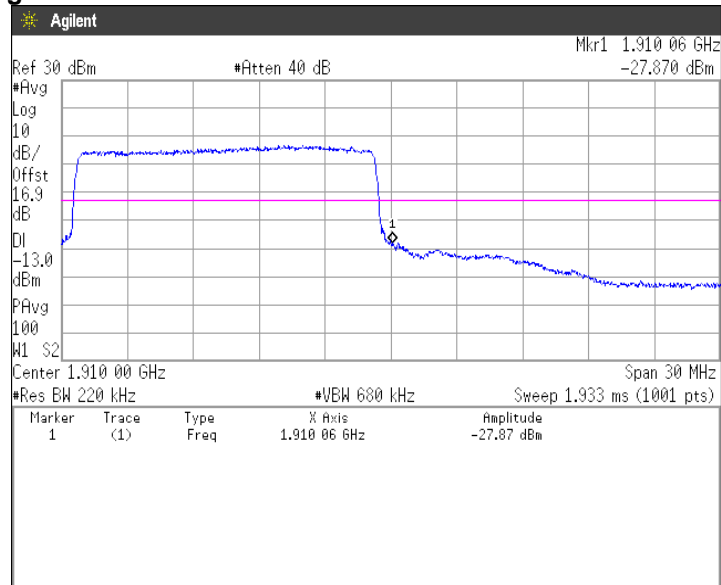

QPSK, BW 20MHz, RB1-0
Channel: Low

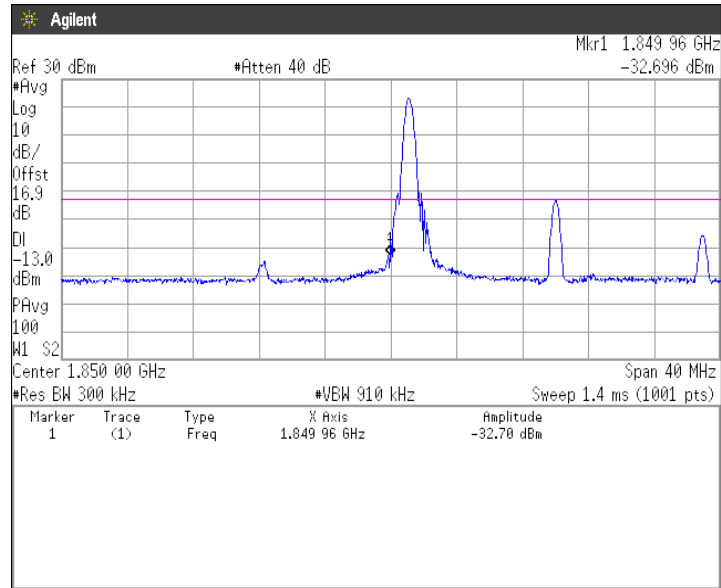


QPSK, BW 20MHz, RB1-99
Channel: High

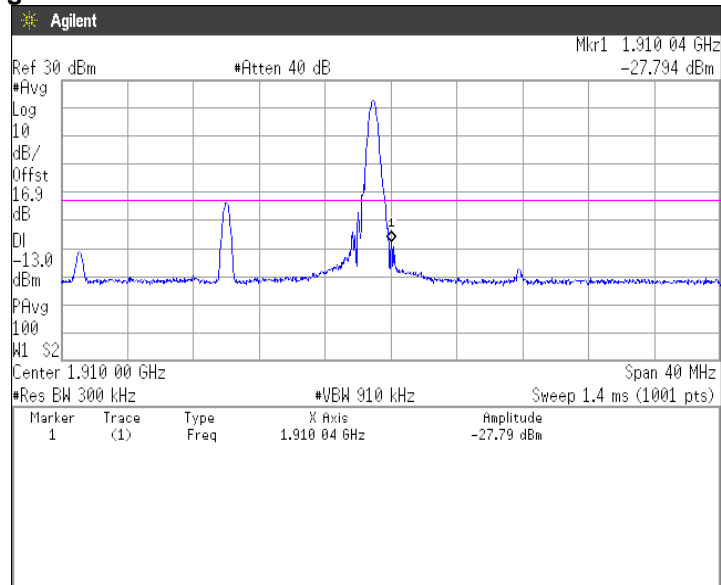




QPSK, BW 20MHz, RB100-0
Channel: Low

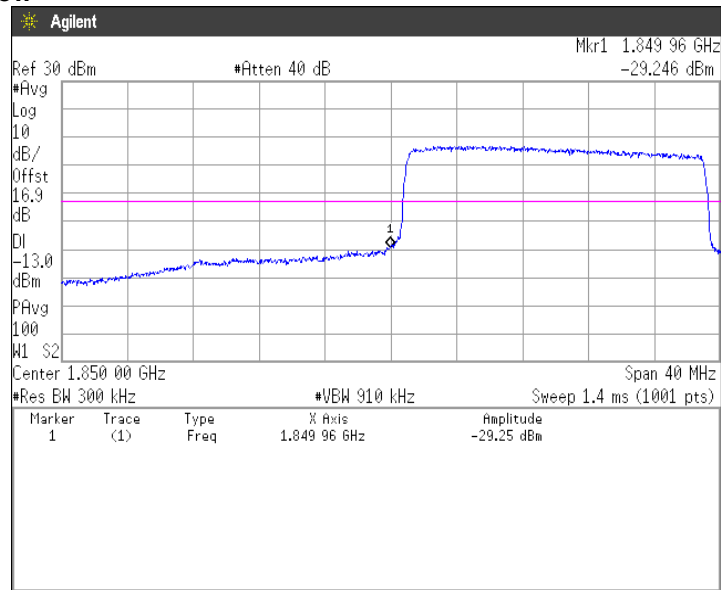


QPSK, BW 20MHz, RB100-0
Channel: High

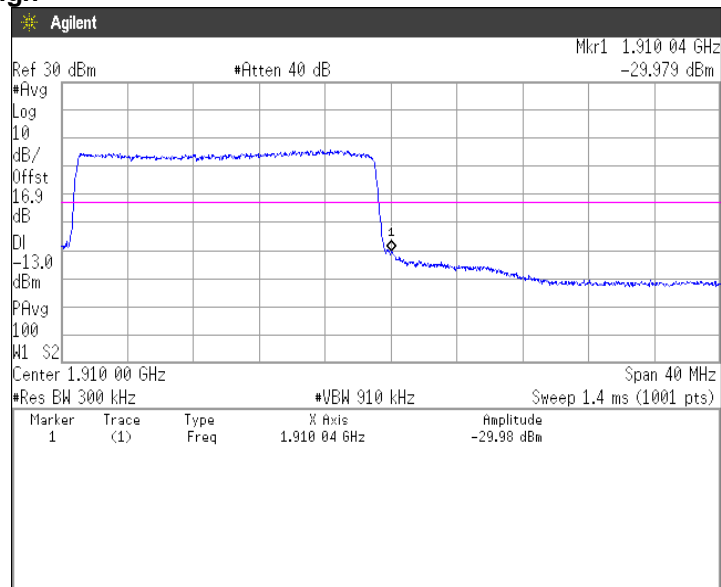





16QAM, BW 1.4MHz, RB1-0
Channel: Low

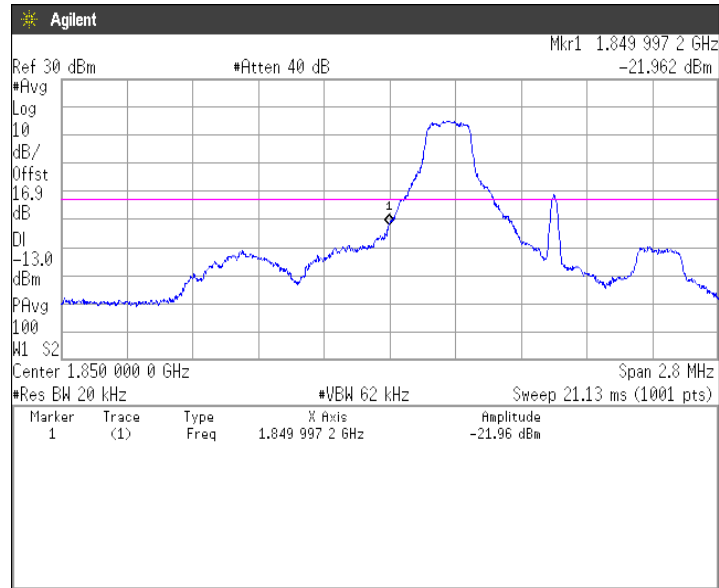


16QAM, BW 1.4MHz, RB1-5
Channel: High

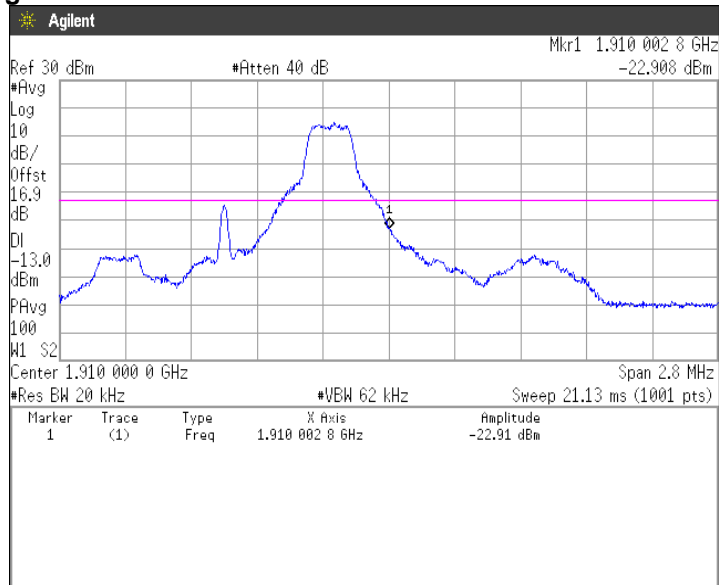

16QAM, BW 1.4MHz, RB6-0
Channel: Low

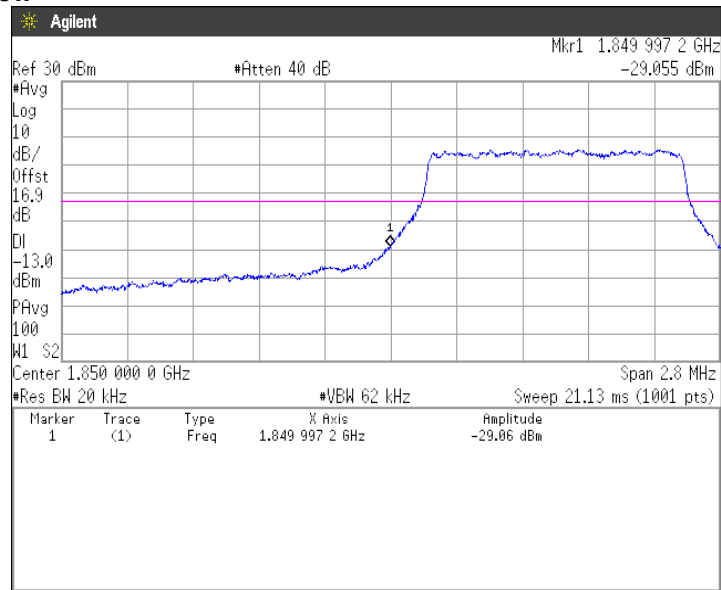


16QAM, BW 1.4MHz, RB6-0
Channel: High

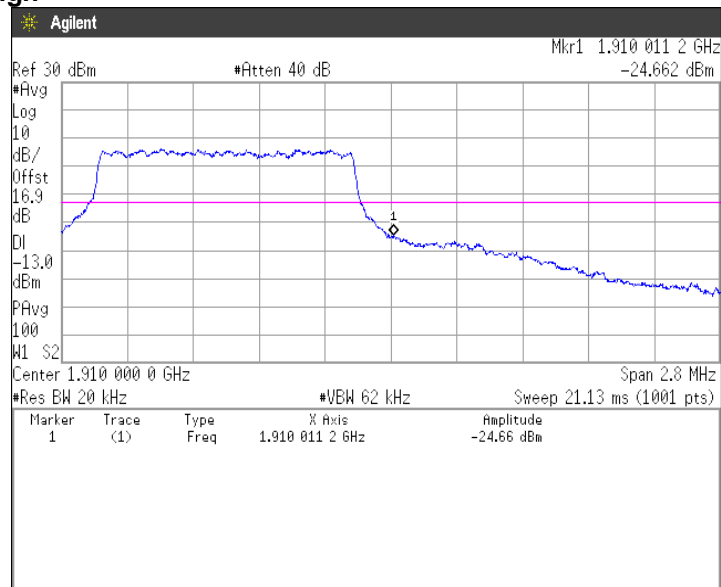




16QAM, BW 3MHz, RB1-0
Channel: Low

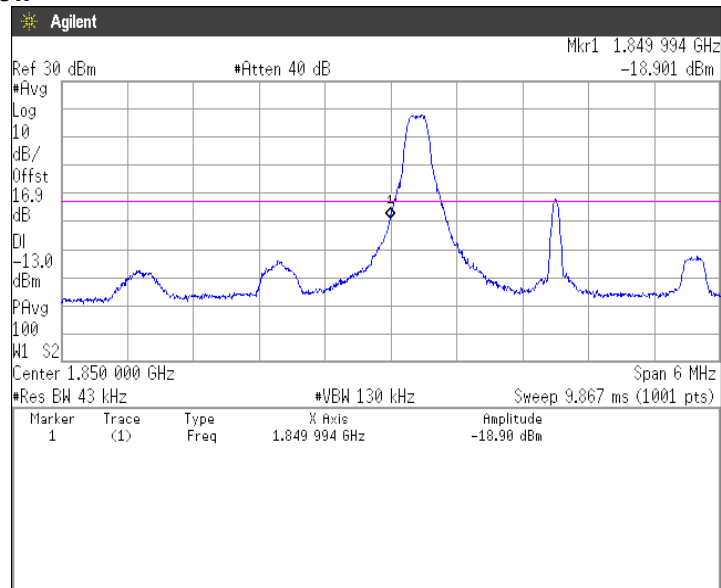


16QAM, BW 3MHz, RB1-14
Channel: High

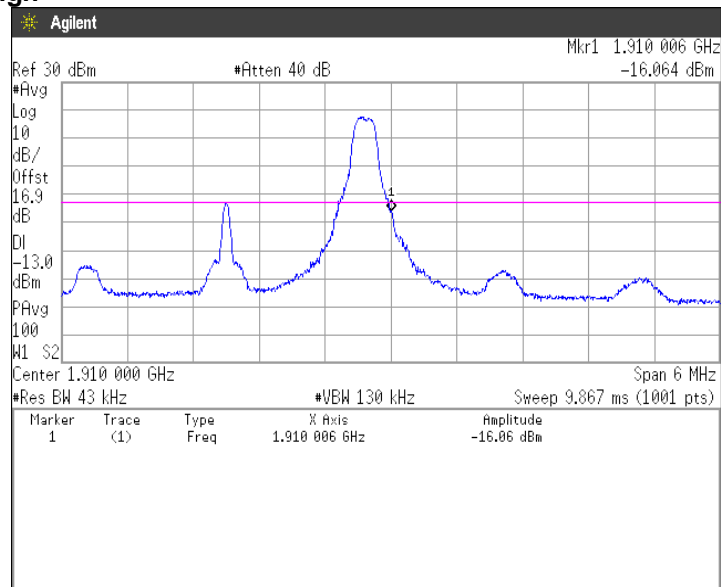




16QAM, BW 3MHz, RB15-0
Channel: Low

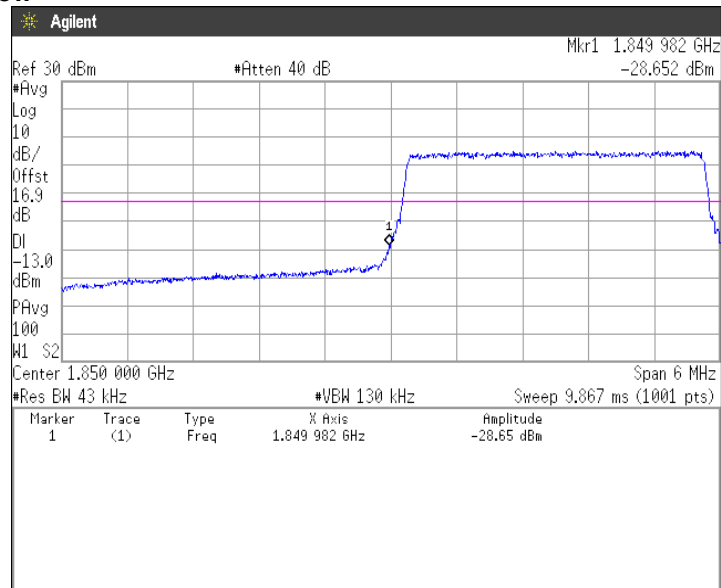


16QAM, BW 3MHz, RB15-0
Channel: High

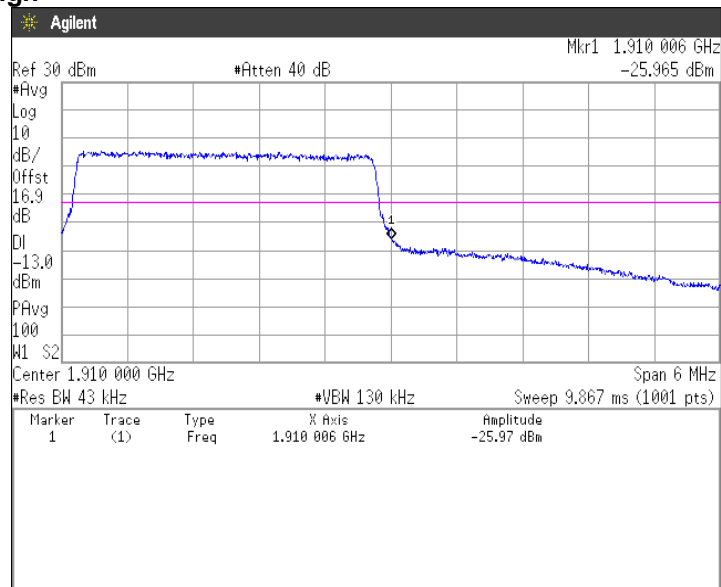





16QAM, BW 5MHz, RB1-0
Channel: Low

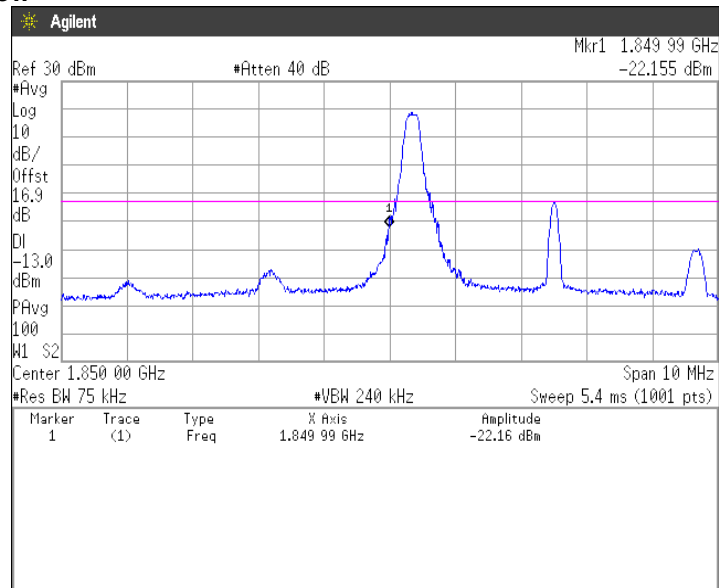


16QAM, BW 5MHz, RB1-24
Channel: High

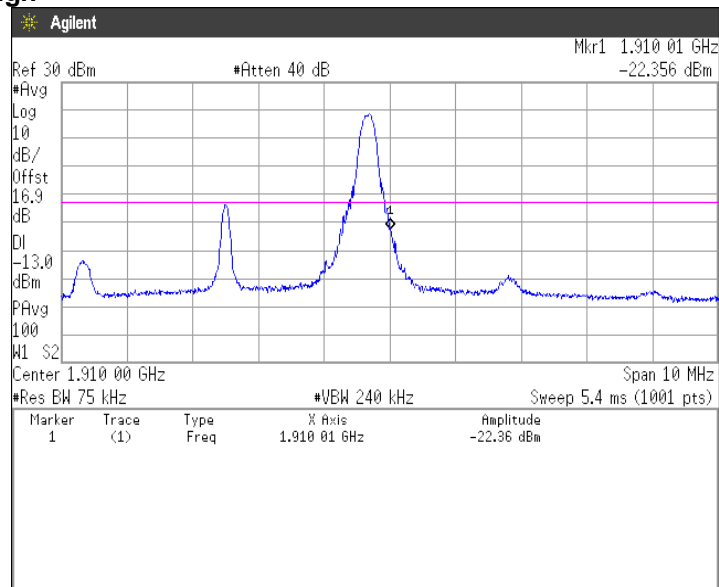


16QAM, BW 5MHz, RB25-0
Channel: Low

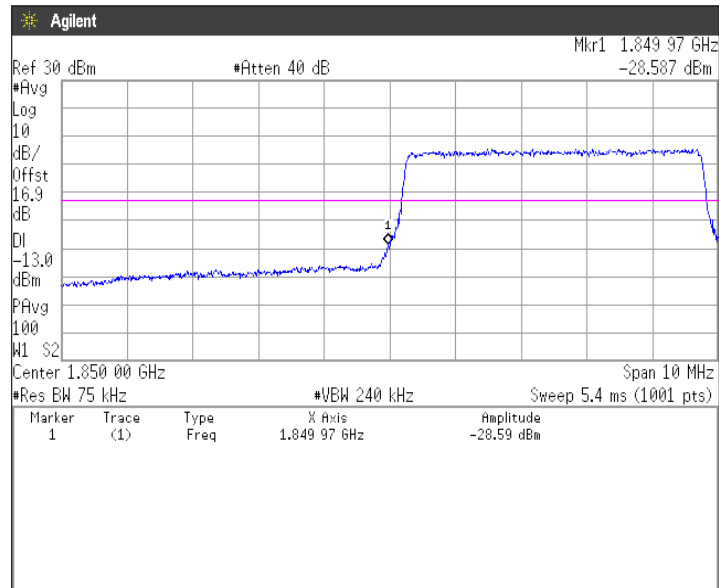


16QAM, BW 5MHz, RB25-0
Channel: High

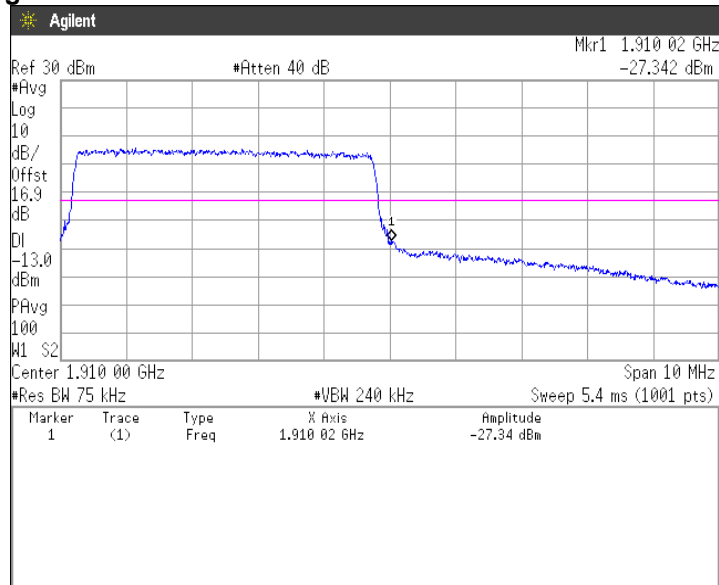

16QAM, BW 10MHz, RB1-0
Channel: Low

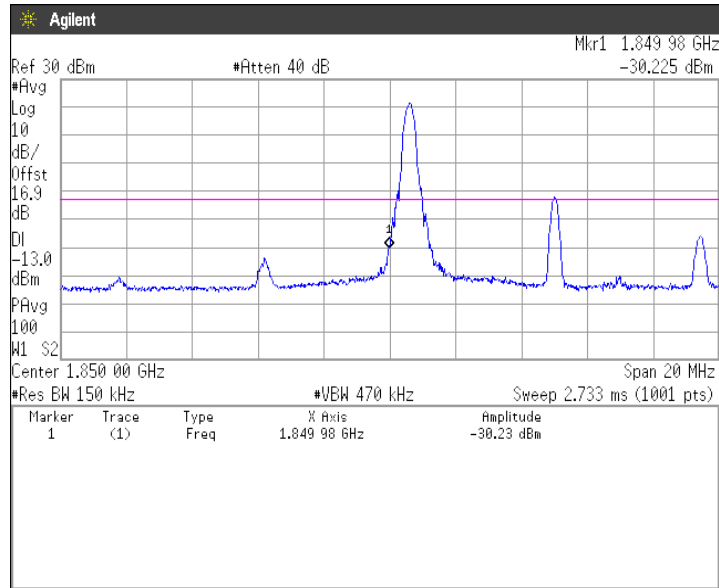


16QAM, BW 10MHz, RB1-49
Channel: High

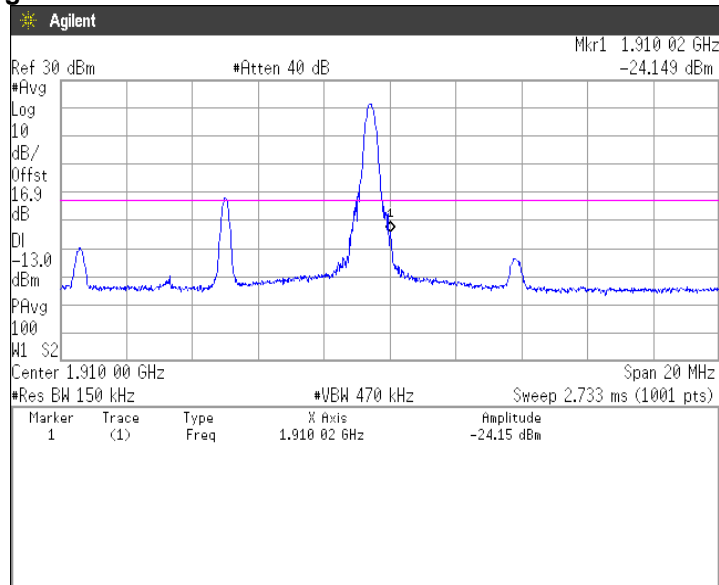





16QAM, BW 10MHz, RB50-0
Channel: Low

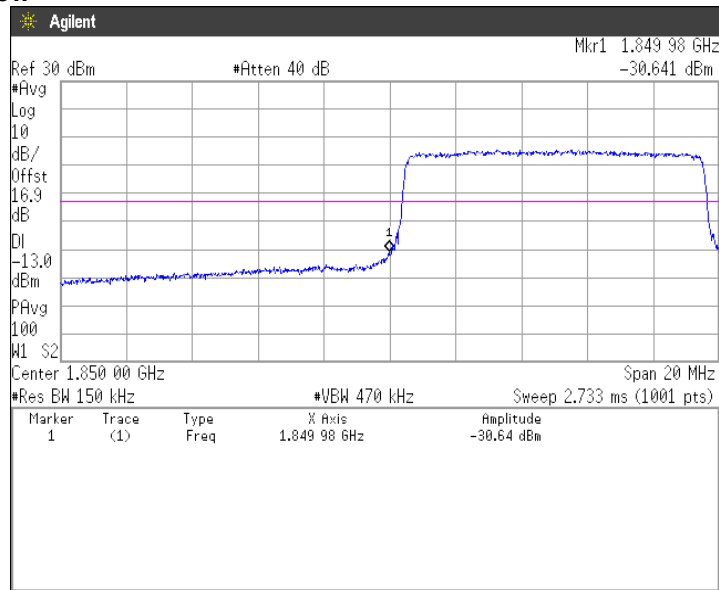


16QAM, BW 10MHz, RB50-0
Channel: High

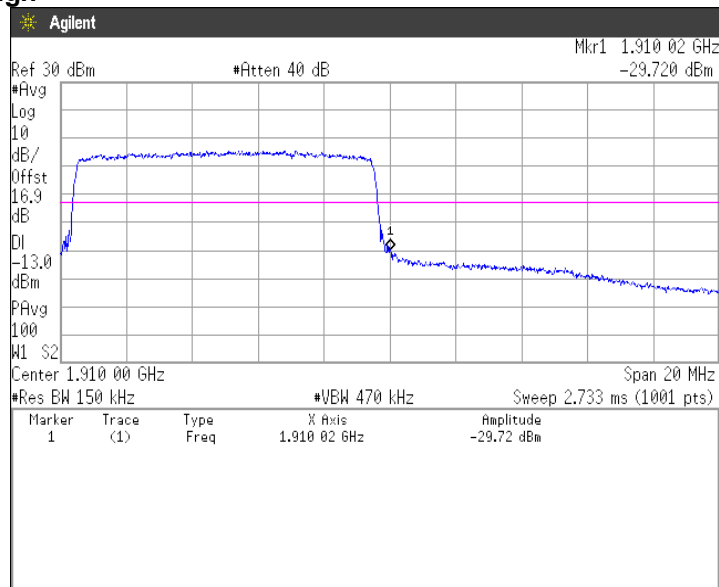

16QAM, BW 15MHz, RB1-0
Channel: Low

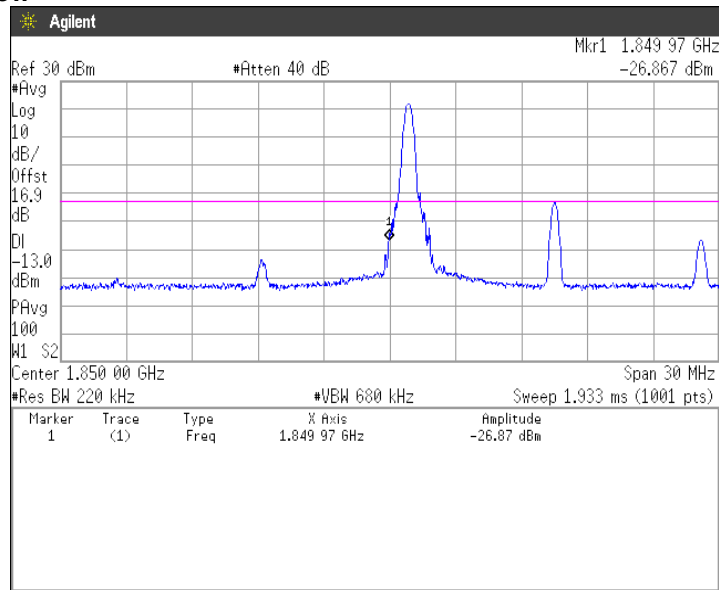


16QAM, BW 15MHz, RB1-74
Channel: High

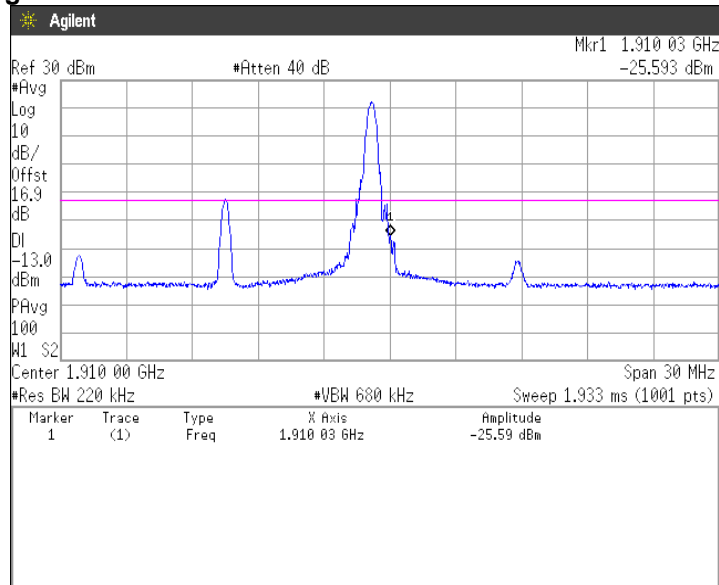





16QAM, BW 15MHz, RB75-0
Channel: Low

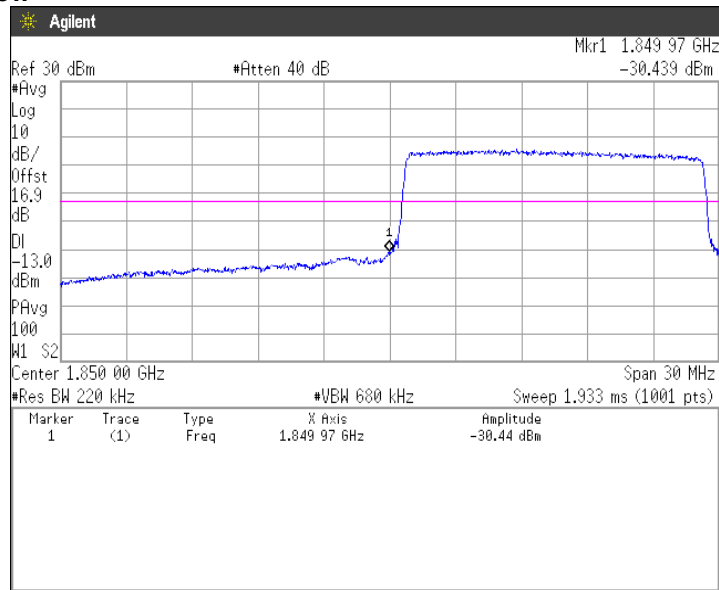


16QAM, BW 15MHz, RB75-0
Channel: High

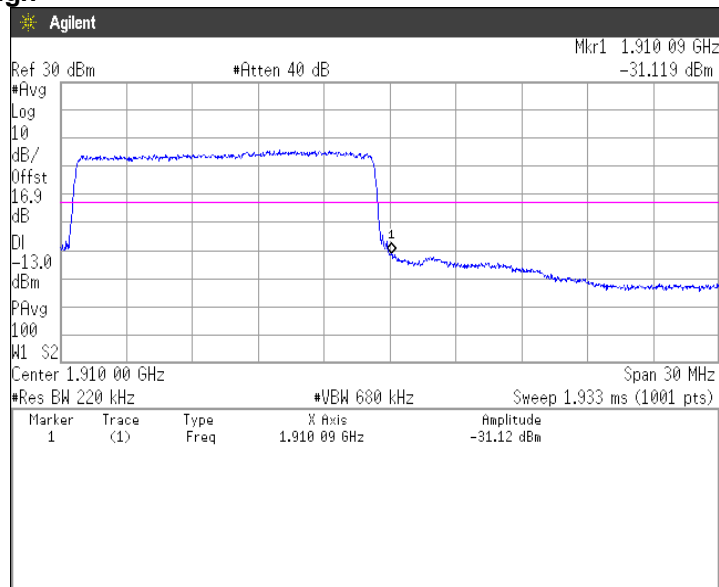

16QAM, BW 20MHz, RB1-0
Channel: Low

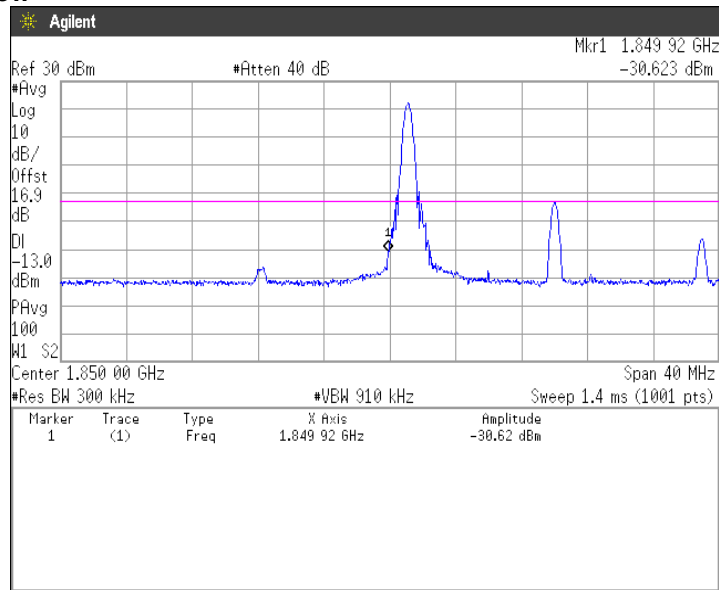


16QAM, BW 20MHz, RB1-99
Channel: High

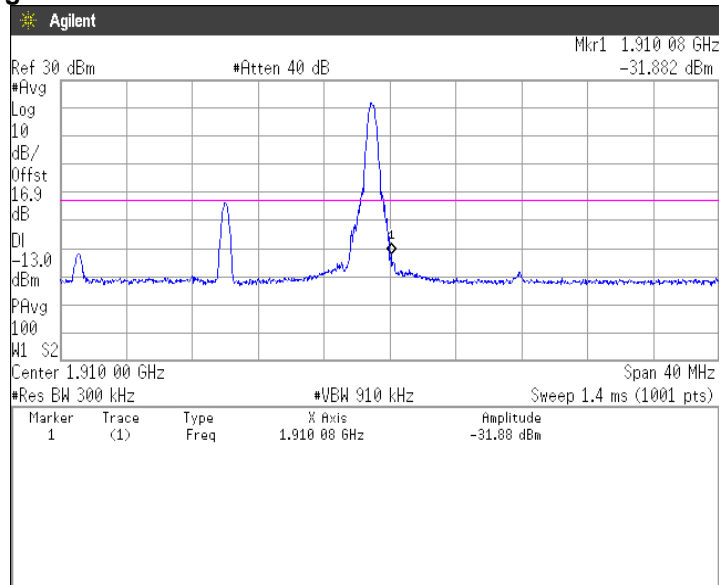




16QAM, BW 20MHz, RB100-0
Channel: Low

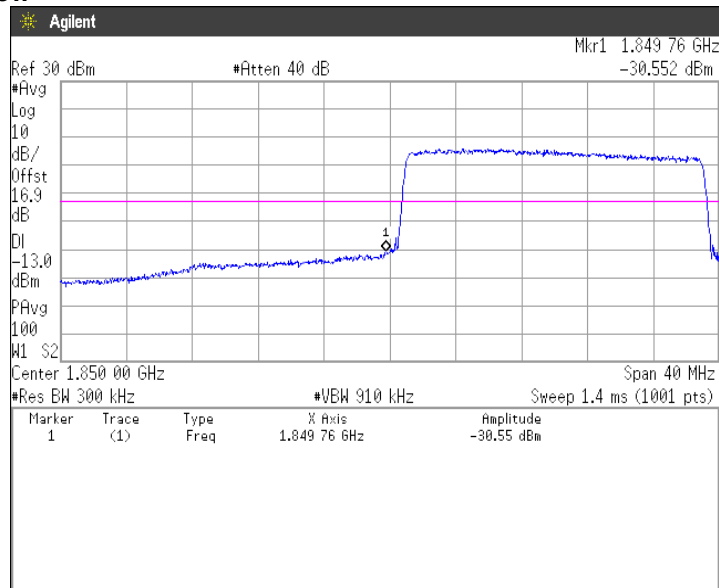

16QAM, BW 20MHz, RB100-0
Channel: High


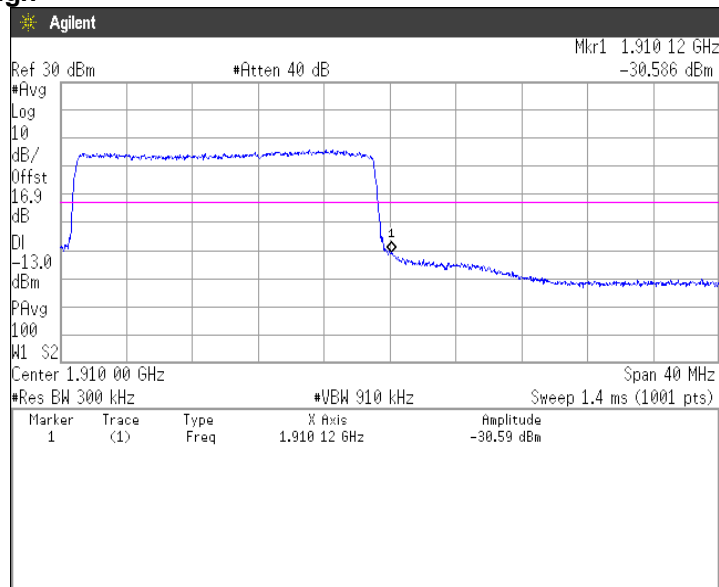


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.



**QPSK, BW 20MHz
Channel: 18700
30MHz-5GHz**

5GHz-10GHz

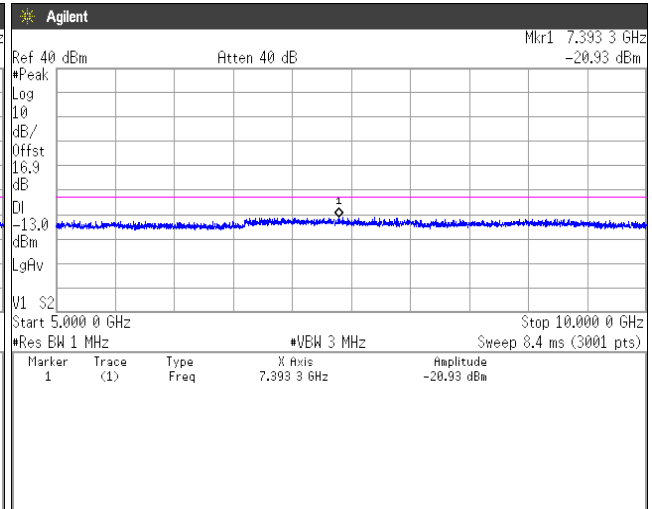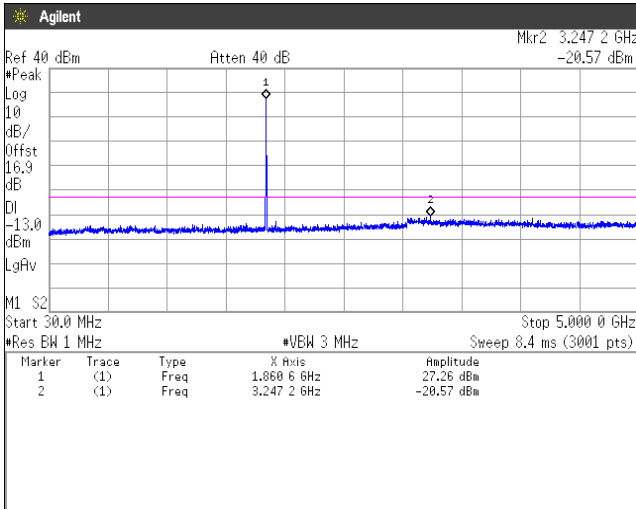


10GHz-15GHz

15GHz-20GHz

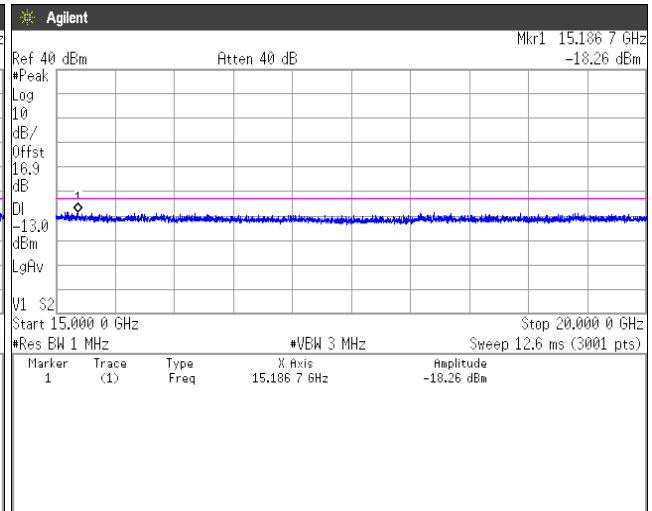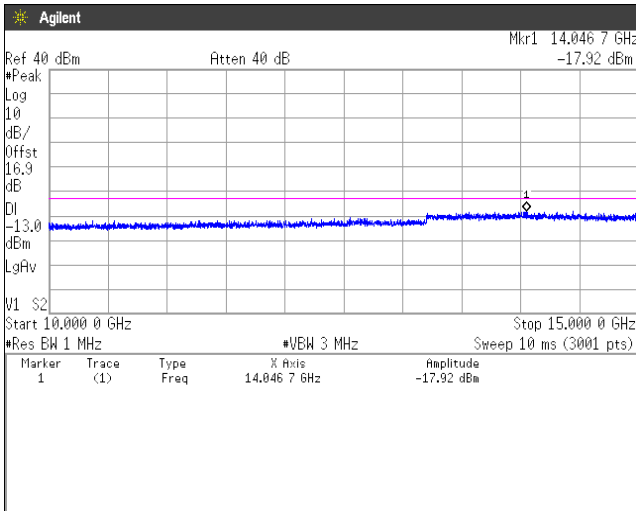





Channel: 18900
30MHz-5GHz

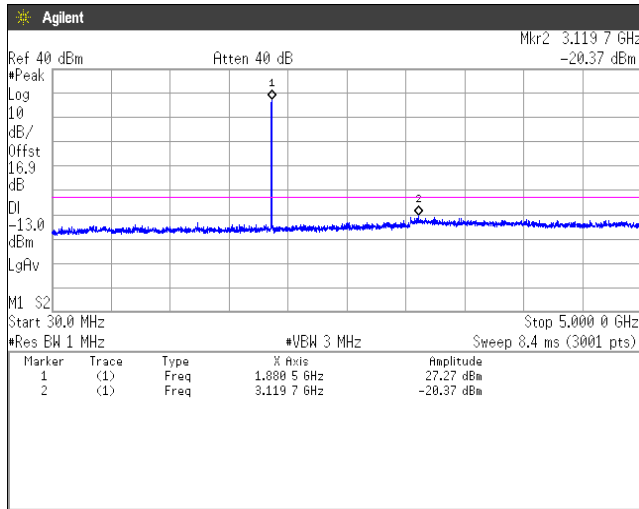


5GHz-10GHz

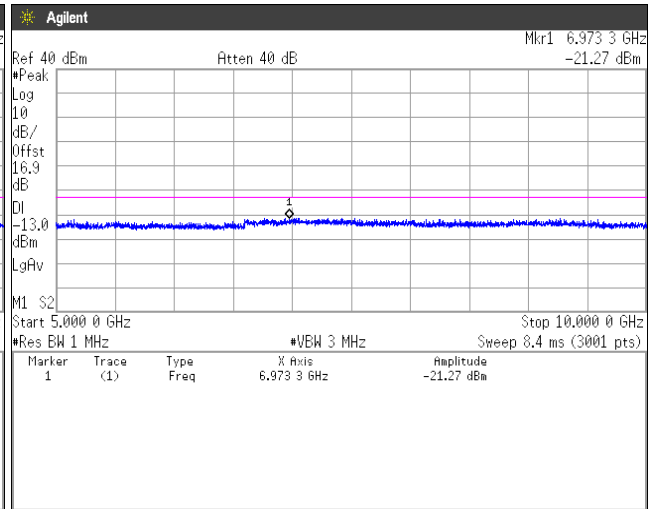

10GHz-15GHz

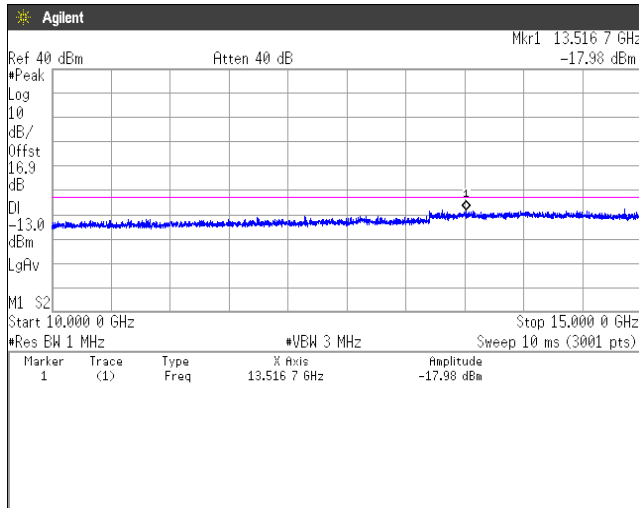


15GHz-20GHz

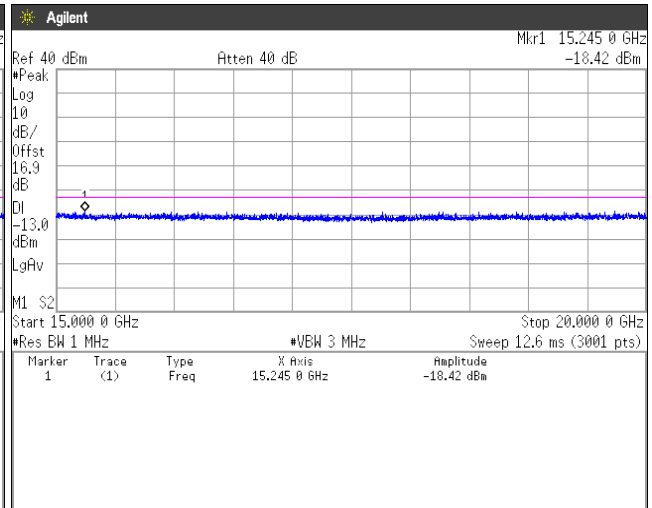





Channel: 19100
30MHz-5GHz

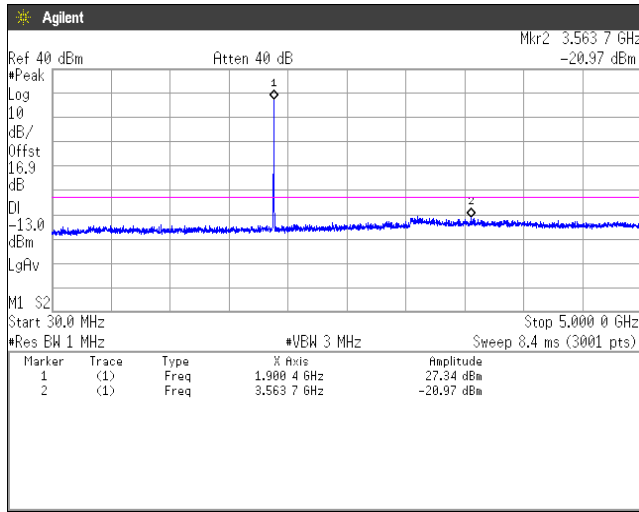


5GHz-10GHz

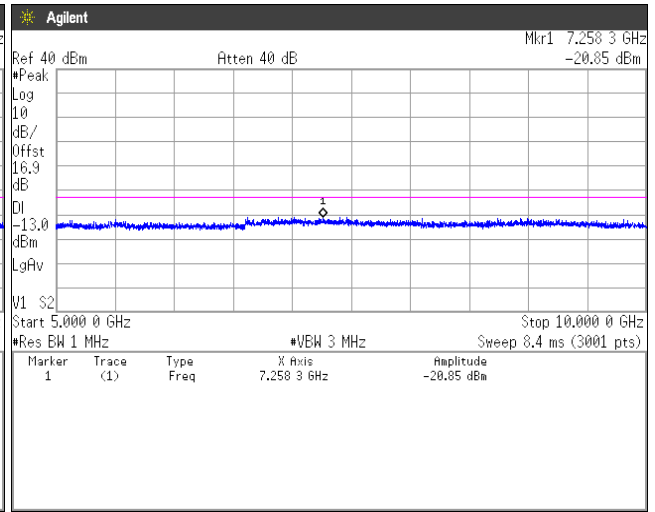

10GHz-15GHz

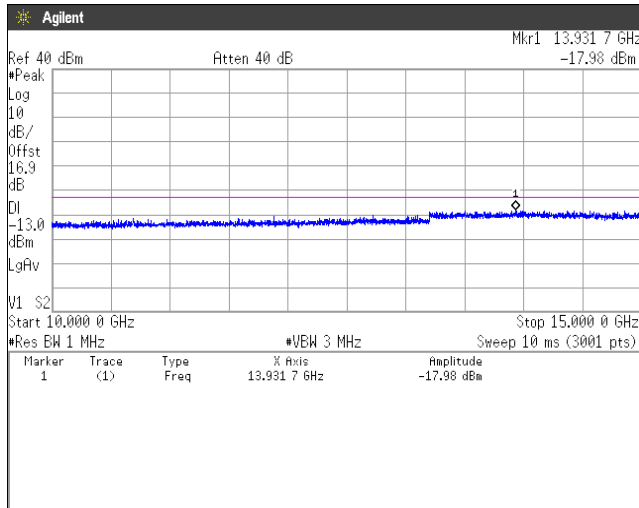

15GHz-20GHz

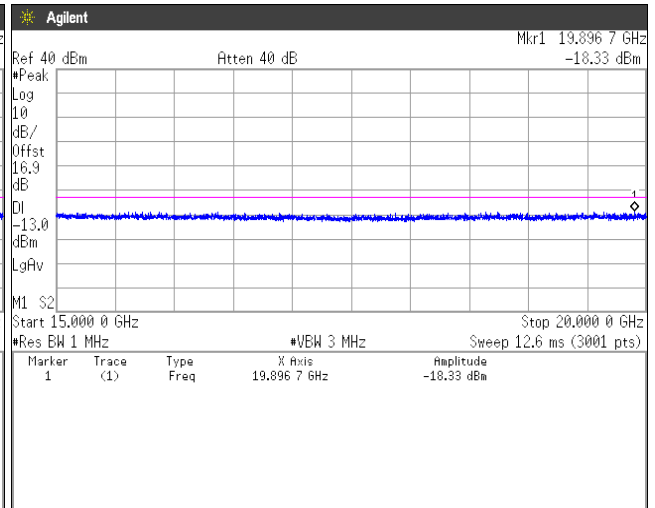

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 24.238(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20 GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW \geq 3 x RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep time = auto-couple

- Test configuration

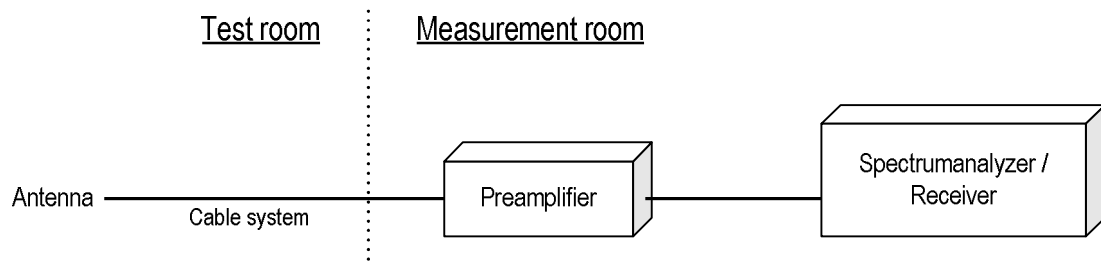



Japan

4.5.2 Calculation method

Result = Ant. Input - Cable loss + Antenna Gain

Margin = Limit - Result (EIRP)

Example:

Limit @ 3700.4 MHz : -13.0 dBm

Ant. Input = -55.6 dBm Cable loss = 1.6 dB Ant. Gain = 9.2 dBi

Result = $-55.6 - 1.6 + 9.2 = -49.3$ dBm

Margin = $-13.0 - (-49.3) = 36.3$ dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date	: 12-September-2019		
Temperature	: 21.5 [°C]		
Humidity	: 57.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 12~13-September-2019		
Temperature	: 23.1 [°C]		
Humidity	: 66.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 13~14-September-2019		
Temperature	: 22.2 [°C]		
Humidity	: 51.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 24~25-September-2019		
Temperature	: 22.9 [°C]		
Humidity	: 56.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 25~26-September-2019		
Temperature	: 21.9 [°C]		
Humidity	: 50.4 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 26~27-September-2019		
Temperature	: 22.4 [°C]		
Humidity	: 44.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 27~28-September-2019		
Temperature	: 22.8 [°C]		
Humidity	: 44.8 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 30-September-2019		
Temperature	: 20.3 [°C]		
Humidity	: 57.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

[GSM1900 - With camera]**Channel: 512**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-54.5	-55.0	1.6	9.5	-47.1	-13.0	34.1

Channel: 661

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.6	-55.1	1.6	9.4	-47.3	-13.0	34.3

Channel: 810

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-54.5	-54.7	1.7	9.3	-47.0	-13.0	34.0

[GSM1900 - Without camera]**Channel: 512**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-54.7	-55.2	1.6	9.5	-47.3	-13.0	34.3

Channel: 661

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.6	-55.1	1.6	9.4	-47.3	-13.0	34.3

Channel: 810

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-54.4	-54.3	1.7	9.3	-46.6	-13.0	33.6

[WCDMA Band II - With camera]**Channel: 9262**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3704.8	-55.9	-59.1	1.6	9.5	-51.2	-13.0	38.2

Channel: 9400

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.7	-57.4	1.6	9.4	-49.6	-13.0	36.6

Channel: 9538

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.2	-55.8	-57.7	1.6	9.3	-50.0	-13.0	37.0

[WCDMA Band II - Without camera]**Channel: 9262**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3704.8	-55.3	-57.6	1.6	9.5	-49.7	-13.0	36.7

Channel: 9400

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.4	-56.8	1.6	9.4	-49.0	-13.0	36.0

Channel: 9538

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.2	-55.5	-56.9	1.6	9.3	-49.2	-13.0	36.2

[LTE Band II - With camera]**QPSK, BW 1.4MHz****Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-55.1	-54.4	1.6	9.5	-46.5	-13.0	33.5

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.6	-54.4	1.6	9.4	-46.6	-13.0	33.6

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.7	-55.3	1.7	9.3	-47.6	-13.0	34.6

16QAM, BW 1.4MHz**Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-55.2	-54.5	1.6	9.5	-46.6	-13.0	33.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.0	-55.1	1.6	9.4	-47.3	-13.0	34.3

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.8	-55.7	1.7	9.3	-48.0	-13.0	35.0

QPSK, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-54.8	-57.1	1.6	9.5	-49.2	-13.0	36.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-55.0	1.6	9.4	-47.2	-13.0	34.2

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-55.4	-57.9	1.7	9.3	-50.2	-13.0	37.2

16QAM, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-55.2	-57.9	1.6	9.5	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.8	-55.2	1.6	9.4	-47.4	-13.0	34.4

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-55.7	-58.9	1.7	9.3	-51.2	-13.0	38.2

QPSK, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-55.1	-57.1	1.6	9.5	-49.2	-13.0	36.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.9	-55.6	1.6	9.4	-47.8	-13.0	34.8

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-55.0	-57.9	1.6	9.3	-50.2	-13.0	37.2

16QAM, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-55.2	-57.2	1.6	9.5	-49.3	-13.0	36.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.1	-55.8	1.6	9.4	-48.0	-13.0	35.0

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-55.1	-57.2	1.6	9.3	-49.5	-13.0	36.5

QPSK, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-54.6	-55.5	1.6	9.5	-47.6	-13.0	34.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.4	-54.7	1.6	9.4	-46.9	-13.0	33.9

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-55.2	-60.2	1.6	9.4	-52.5	-13.0	39.5

16QAM, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-55.1	-56.8	1.6	9.5	-48.9	-13.0	35.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.5	-54.8	1.6	9.4	-47.0	-13.0	34.0

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-55.5	-58.5	1.6	9.4	-50.8	-13.0	37.8

QPSK, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-54.3	-54.8	1.6	9.5	-46.9	-13.0	33.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.0	-55.8	1.6	9.4	-48.0	-13.0	35.0

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-55.2	-58.7	1.6	9.4	-51.0	-13.0	38.0

16QAM, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-54.7	-55.7	1.6	9.5	-47.8	-13.0	34.8

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.1	-56.0	1.6	9.4	-48.2	-13.0	35.2

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-55.3	-59.1	1.6	9.4	-51.4	-13.0	38.4

QPSK, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-55.3	-58.3	1.6	9.5	-50.4	-13.0	37.4

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-54.7	-55.7	1.6	9.4	-47.9	-13.0	34.9

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-54.6	-54.2	1.6	9.4	-46.5	-13.0	33.5

16QAM, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-55.4	-59.8	1.6	11.7	-49.7	-13.0	36.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.0	-56.0	1.6	11.6	-46.0	-13.0	33.0

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-54.8	-55.0	1.6	11.6	-45.1	-13.0	32.1

[LTE Band II - Without camera]**QPSK, BW 1.4MHz****Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-55.8	-55.0	1.6	9.5	-47.1	-13.0	34.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.8	-58.1	1.6	9.4	-50.3	-13.0	37.3

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.7	-55.1	1.7	9.3	-47.4	-13.0	34.4

16QAM, BW 1.4MHz**Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-55.9	-55.1	1.6	9.5	-47.2	-13.0	34.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.9	-58.3	1.6	9.4	-50.5	-13.0	37.5

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-54.8	-55.0	1.7	9.3	-47.3	-13.0	34.3

QPSK, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-55.9	-58.4	1.6	9.5	-50.5	-13.0	37.5

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.2	-57.6	1.6	9.4	-49.8	-13.0	36.8

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-55.5	-59.1	1.7	9.3	-51.4	-13.0	38.4

16QAM, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-56.2	-59.2	1.6	9.5	-51.3	-13.0	38.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.3	-58.4	1.6	9.4	-50.6	-13.0	37.6

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-55.6	-59.3	1.7	9.3	-51.6	-13.0	38.6

QPSK, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-55.8	-59.2	1.6	9.5	-51.3	-13.0	38.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.7	-59.0	1.6	9.4	-51.2	-13.0	38.2

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-55.8	-59.0	1.6	9.3	-51.3	-13.0	38.3

16QAM, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-55.9	-59.6	1.6	9.5	-51.7	-13.0	38.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.9	-59.1	1.6	9.4	-51.3	-13.0	38.3

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-56.1	-60.0	1.6	9.3	-52.3	-13.0	39.3

QPSK, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-55.9	-60.0	1.6	9.5	-52.1	-13.0	39.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.7	-58.9	1.6	9.4	-51.1	-13.0	38.1

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-56.3	-60.5	1.6	9.4	-52.8	-13.0	39.8

16QAM, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-56.0	-60.5	1.6	9.5	-52.6	-13.0	39.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.8	-59.0	1.6	9.4	-51.2	-13.0	38.2

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-56.4	-60.6	1.6	9.4	-52.9	-13.0	39.9

QPSK, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-55.3	-56.5	1.6	9.5	-48.6	-13.0	35.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.8	-59.0	1.6	9.4	-51.2	-13.0	38.2

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-55.9	-60.4	1.6	9.4	-52.7	-13.0	39.7

16QAM, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-55.5	-57.4	1.6	9.5	-49.5	-13.0	36.5

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.9	-59.1	1.6	9.4	-51.3	-13.0	38.3

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-56.2	-60.6	1.6	9.4	-52.9	-13.0	39.9

QPSK, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-55.4	-59.8	1.6	9.5	-51.9	-13.0	38.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.7	-58.6	1.6	9.4	-50.8	-13.0	37.8

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-56.0	-60.0	1.6	9.4	-52.3	-13.0	39.3

16QAM, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-55.7	-60.1	1.6	11.7	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.0	-59.6	1.6	11.6	-49.6	-13.0	36.6

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-56.1	-60.2	1.6	11.6	-50.3	-13.0	37.3


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 24.235, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and $+50^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

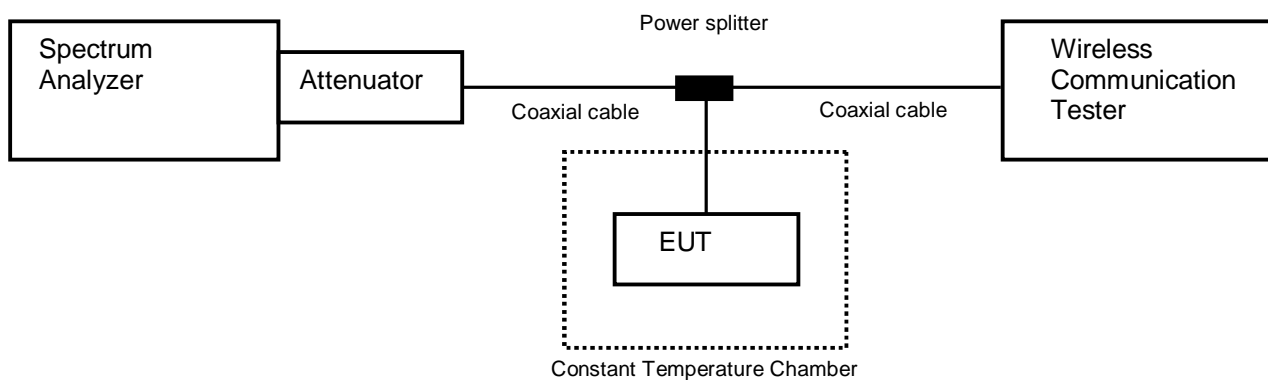

4.6.2 Limit

± 2.5 ppm



4.6.3 Measurement result

Date : 8-October-2019
 Temperature : 21.7 [°C]
 Humidity : 54.0 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

**[GSM1900]
 Channel: 661**

Limit: ±0.00025% = ±2.5 ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	1,880,000,023	0.00000	±2.5	Pass
	50	1,880,000,027	0.00206	±2.5	Pass
	40	1,880,000,012	-0.00613	±2.5	Pass
	30	1,879,999,979	-0.02341	±2.5	Pass
	20	1,880,000,018	-0.00268	±2.5	Pass
	10	1,880,000,024	0.00015	±2.5	Pass
	0	1,880,000,016	-0.00390	±2.5	Pass
	-10	1,880,000,006	-0.00918	±2.5	Pass
	-20	1,880,000,008	-0.00794	±2.5	Pass
	-30	1,880,000,021	-0.00115	±2.5	Pass
3.42	25	1,880,000,017	-0.00354	±2.5	Pass
4.18	25	1,880,000,018	-0.00261	±2.5	Pass

Calculation;
 Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

**[WCDMA Band II]
Channel: 9400**

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	1,879,999,995	0.00000	± 2.5	Pass
	50	1,879,999,996	0.00084	± 2.5	Pass
	40	1,879,999,994	-0.00026	± 2.5	Pass
	30	1,879,999,995	0.00007	± 2.5	Pass
	20	1,879,999,997	0.00114	± 2.5	Pass
	10	1,879,999,997	0.00130	± 2.5	Pass
	0	1,880,000,023	0.01516	± 2.5	Pass
	-10	1,880,000,018	0.01271	± 2.5	Pass
	-20	1,880,000,053	0.03090	± 2.5	Pass
	-30	1,880,000,009	0.00756	± 2.5	Pass
3.42	25	1,879,999,997	0.00115	± 2.5	Pass
4.18	25	1,880,000,016	0.01115	± 2.5	Pass

**[LTE Band II]
QPSK, BW 20MHz
Channel: 18900**

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	1,879,999,992	0.00000	± 2.5	Pass
	50	1,879,999,992	-0.00026	± 2.5	Pass
	40	1,879,999,987	-0.00273	± 2.5	Pass
	30	1,879,999,993	0.00031	± 2.5	Pass
	20	1,879,999,991	-0.00103	± 2.5	Pass
	10	1,879,999,996	0.00165	± 2.5	Pass
	0	1,880,000,005	0.00647	± 2.5	Pass
	-10	1,879,999,995	0.00116	± 2.5	Pass
	-20	1,879,999,997	0.00235	± 2.5	Pass
	-30	1,879,999,991	-0.00059	± 2.5	Pass
3.42	25	1,879,999,991	-0.00105	± 2.5	Pass
4.18	25	1,879,999,991	-0.00097	± 2.5	Pass





Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor k=2.
 Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	±3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	±3.3 dB
Radiated emission (9kHz – 30 MHz)	±3.1 dB
Radiated emission (30 MHz – 1000 MHz)	±4.9 dB
Radiated emission (1 GHz – 6 GHz)	±4.8 dB
Radiated emission (6 GHz – 18 GHz)	±5.1 dB
Radiated emission (18 GHz – 40 GHz)	±5.8 dB
Radio Frequency	±1.4 * 10 ⁻⁸
RF power, conducted	±0.6 dB
Temperature	±0.6 °C
Humidity	±1.2 %
Voltage (DC)	±0.4 %
Voltage (AC, <10kHz)	±0.2 %

Judge	Measured value and standard limit value
PASS	<p>Case1</p>  <p>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</p>
	<p>Case2</p>  <p>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</p>
FAIL	<p>Case3</p>  <p>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</p>
	<p>Case4</p>  <p>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</p>



6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Fax: +81-238-28-2888

Accreditation and Registration

NVLAP

LAB CODE: 200306-0

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

Site number	Facility	Expiration date
4224A-4	3 m Semi-anechoic chamber	27-November-2020
4224A-5	10 m Semi-anechoic chamber No. 1	27-November-2020
4224A-6	10 m Semi-anechoic chamber No. 2	14-December-2019

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Jul-2019	02-Jul-2018
				31-Aug-2020	05-Aug-2019
Attenuator	Weinschel	56-10	J4180	31-Jul-2020	18-Jul-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX 104/1m	199120/4	31-Dec-2019	18-Dec-2018
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	MY3385/2	31-Mar-2020	08-Mar-2019
Power divider	ANRITSU	K240B	020205	31-Jul-2020	19-Jul-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Oct-2019	12-Oct-2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2019	13-Aug-2018
				31-Aug-2020	27-Aug-2019
Temperature and humidity chamber	ESPEC	PL1KP	14007261	31-Dec-2019	07-Dec-2018
				30-Sep-2020	03-Sep-2019

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2019	20-Sep-2018
				30-Sep-2020	26-Sep-2019
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	30-Apr-2020	16-Apr-2019
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Oct-2019	12-Oct-2018
Preamplifier	SONOMA	310	372170	30-Sep-2019	20-Sep-2018
				30-Sep-2020	26-Sep-2019
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91031308	31-May-2020	16-May-2019
Log periodic antenna	Schwarzbeck	UHALP9108A	0728	31-May-2020	16-May-2019
Attenuator	TAMAGAWA.ELEC	CFA-01/6dB	N/A(S465)	31-May-2020	17-May-2019
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2020	17-Jul-2019
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Jan-2020	17-Jan-2019
Attenuator	AEROFLEX	26A-10	081217-08	31-Jan-2020	17-Jan-2019
Double ridged guide antenna	ETS LINDGREN	3117	00224193	31-Jan-2020	23-Jan-2019
Attenuator	Agilent Technologies	8491B	MY39268633	31-Mar-2020	08-Mar-2019
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2019	24-Aug-2018
				31-Aug-2020	28-Aug-2019
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2019	24-Aug-2018
				31-Aug-2020	28-Aug-2019
High Pass Filter	Wainwright	WHKX2.8/18G-6SS	1	31-Jul-2020	18-Jul-2019
Band rejection filter	Micro-Tronics	BRC50720	014	31-Dec-2019	20-Dec-2018
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Jul-2020	18-Jul-2019
RF power amplifier	R&K	CGA020M602-2633R	B40240	31-May-2020	16-May-2019
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	31-Mar-2020	08-Mar-2019
Dipole antenna	Schwarzbeck	VHAP	1020	31-Aug-2019	03-Aug-2018
Dipole antenna	Schwarzbeck	VHAP	1021	31-Aug-2020	15-Aug-2019
Dipole antenna	Schwarzbeck	UHAP	994	31-Aug-2019	03-Aug-2018
Dipole antenna	Schwarzbeck	UHAP	993	31-Aug-2020	15-Aug-2019
Double ridged guide antenna	EMCO	3115	00058532	29-Feb-2020	12-Feb-2019
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2019	27-Dec-2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Oct-2019	12-Oct-2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2019	13-Aug-2018
				31-Aug-2020	27-Aug-2019

Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1m	my24610/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/8m	SN MY30031/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104	MY32976/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1.5m	MY19309/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/7m	41625/6	31-Jan-2020	16-Jan-2019
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PPF30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2020	14-May-2019
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2020	13-May-2019

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.