

## 4.6 Restricted Band of Operation

### 4.6.1 Measurement procedure

#### [FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v05r02, Section 8.6]

Test was applied by following conditions.

Test method	: ANSI C63.10
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W) 1.0 × (D) 1.0 × (H) 0.8 m (below 1 GHz) Styrofoam table / (W) 0.6 × (D) 0.6 × (H) 1.5 m (above 1 GHz)
Antenna distance	: 3m
Spectrum analyzer setting	
- Peak	: RBW=1 MHz, VBW=3 MHz, Span=Arbitrary setting, Sweep=auto
- Average	: RBW=1 MHz, VBW=10 Hz, Span=Arbitrary setting, Sweep=auto Display mode=Linear

#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	Determined VBW Setting
IEEE802.11b	99.22	1023	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11g	99.42	1363	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11n(HT20)	99.38	1276	8	10Hz (Duty Cycle ≥ 98%)

Although these tests were performed other than open area test site, adequate comparison measurements


were confirmed against 30 m open area test site.

Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### - Test configuration

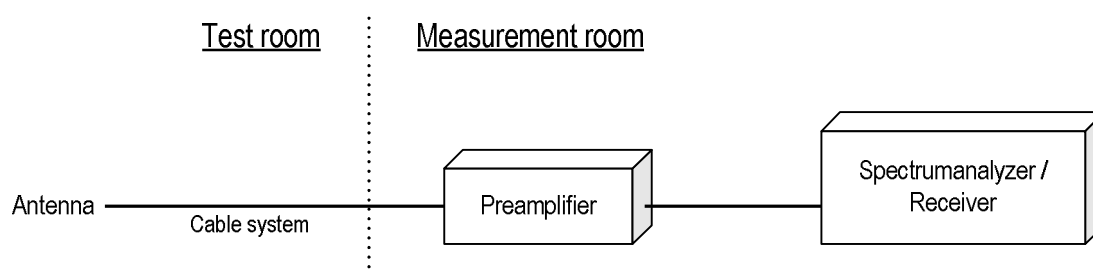

#### 4.6.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

#### 4.6.3 Measurement Result

##### [IEEE802.11b、IEEE802.11g、IEEE802.11n (HT20)]

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

#### 4.6.4 Test data

Date : 27-July-2021

Temperature : 24.5 [°C]


Humidity : 69.3 [%]

Test place : 3m Semi-anechoic chamber


Test engineer :

Chiaki Kanno


**[IEEE802.11b]  
CLOSE  
Channel Low  
Horizontal  
Peak**

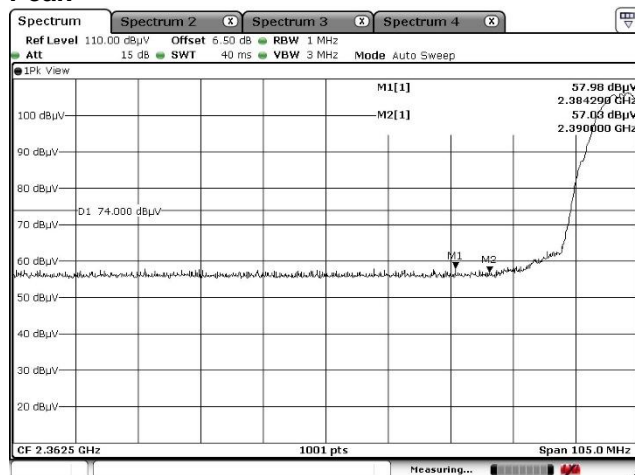


**Average**

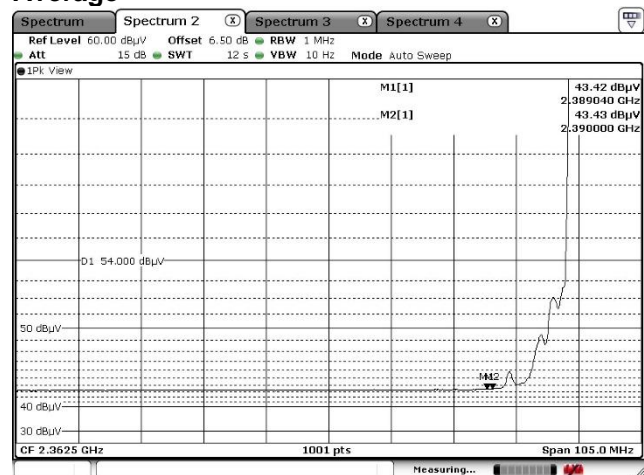


**Vertical  
Peak**

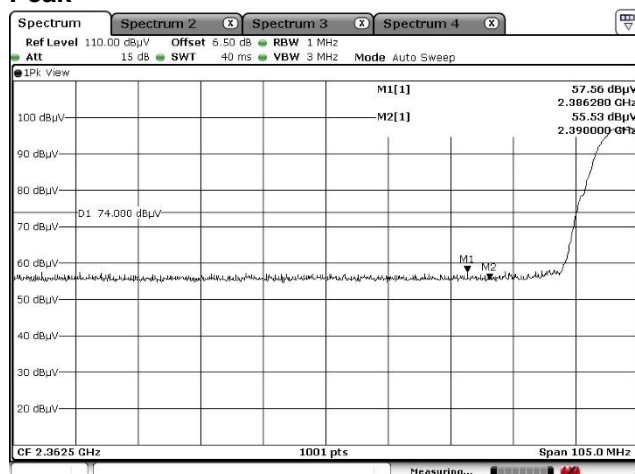


**Average**

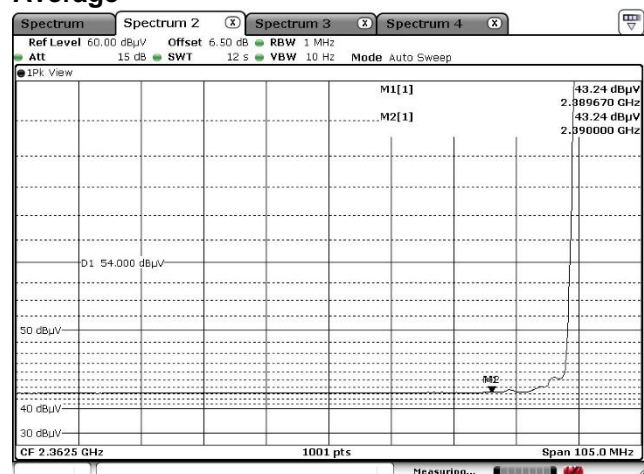


### Channel High Horizontal Peak

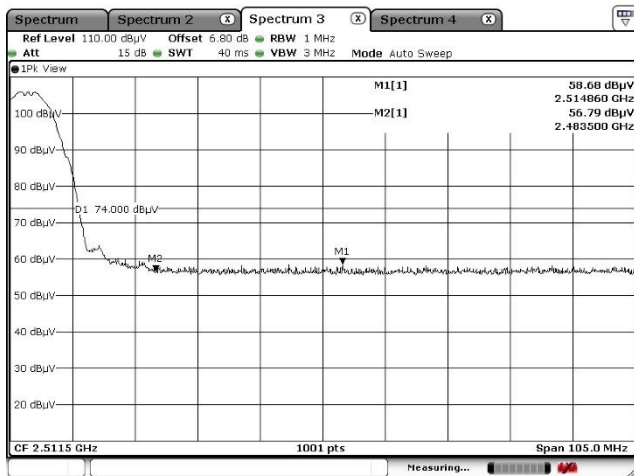


### Average

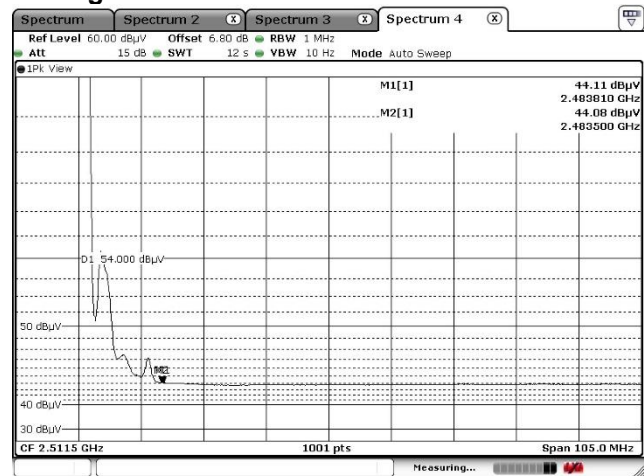

### Vertical Peak

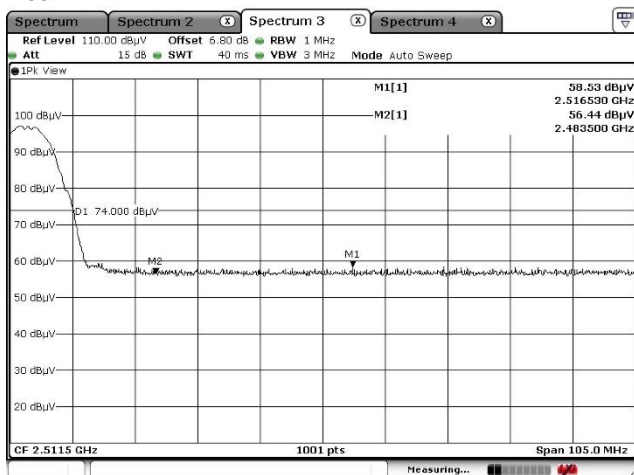

### Average

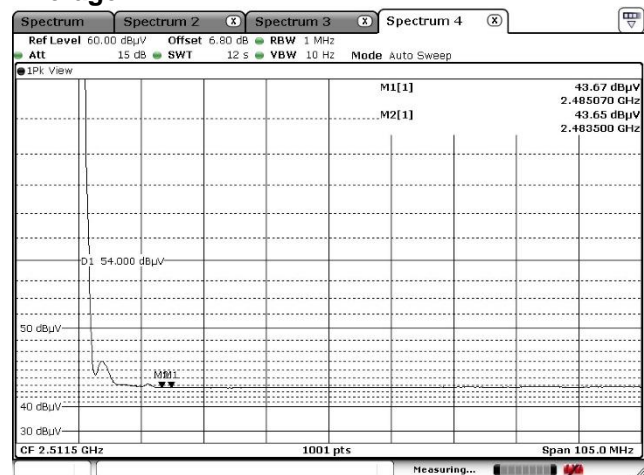


[IEEE802.11b]

OPEN



Channel Low

Horizontal


Peak

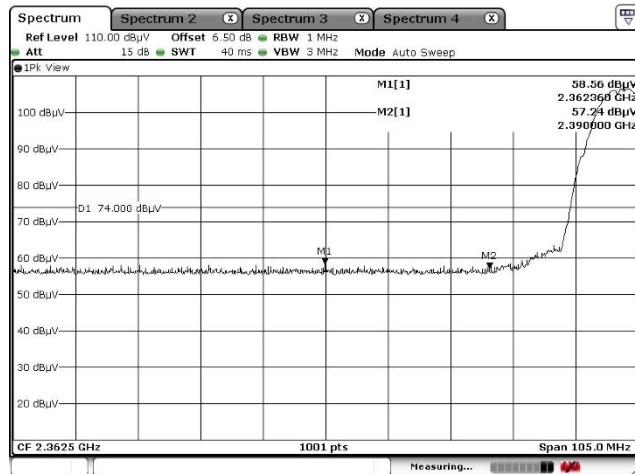


Average

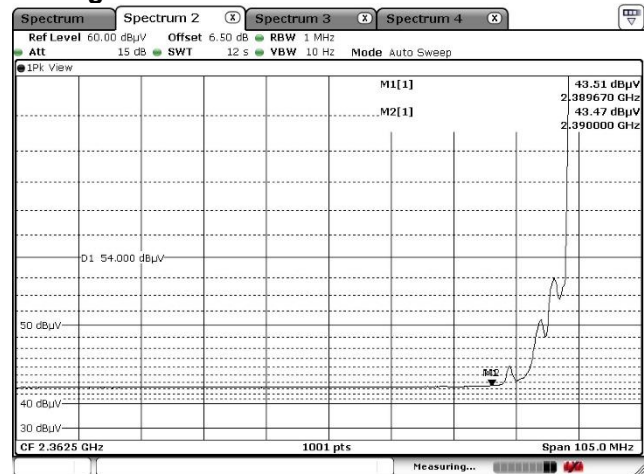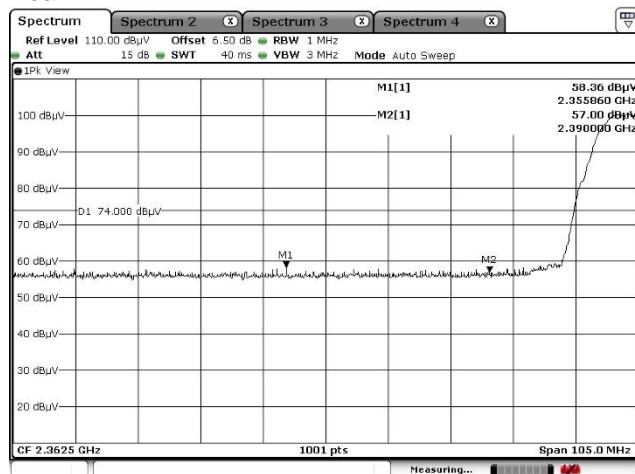Vertical  
Peak


Average

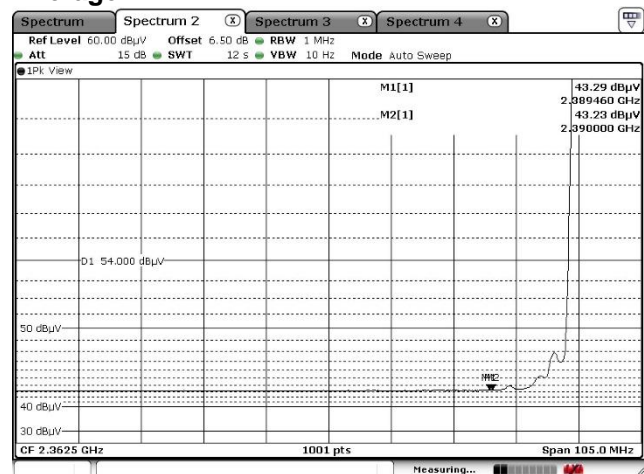


### Channel High Horizontal Peak

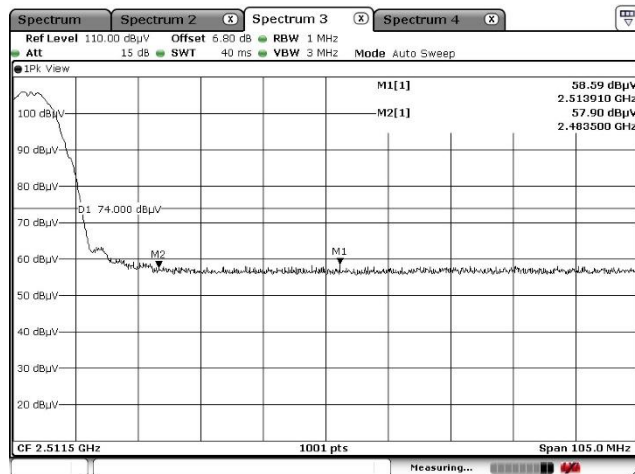


### Average

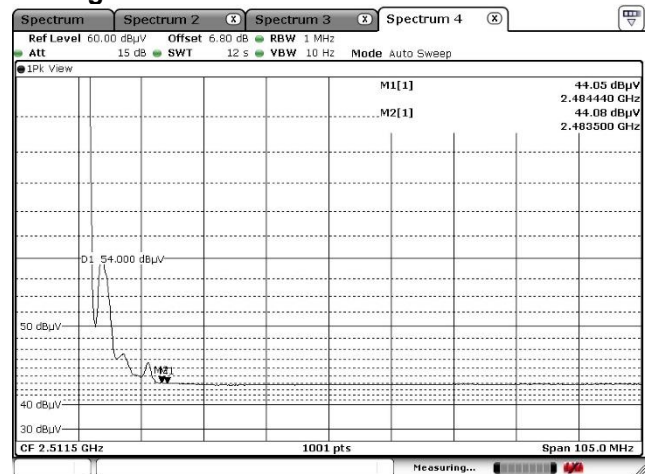

### Vertical Peak

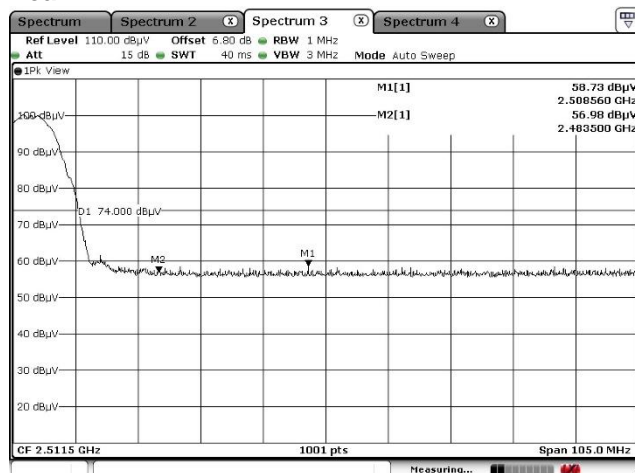

### Average

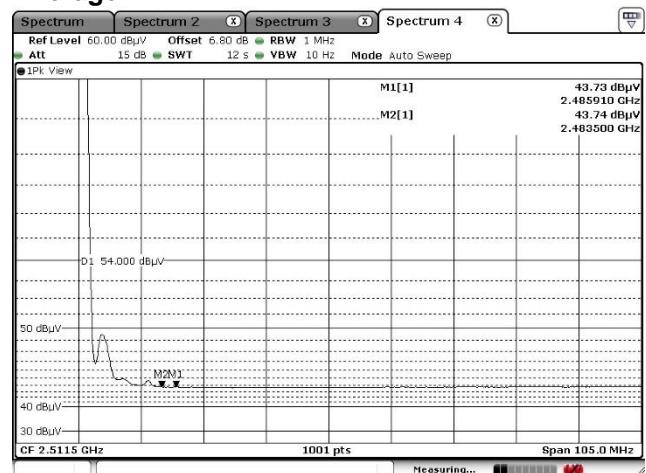


[IEEE802.11g]

CLOSE



Channel Low

Horizontal


Peak

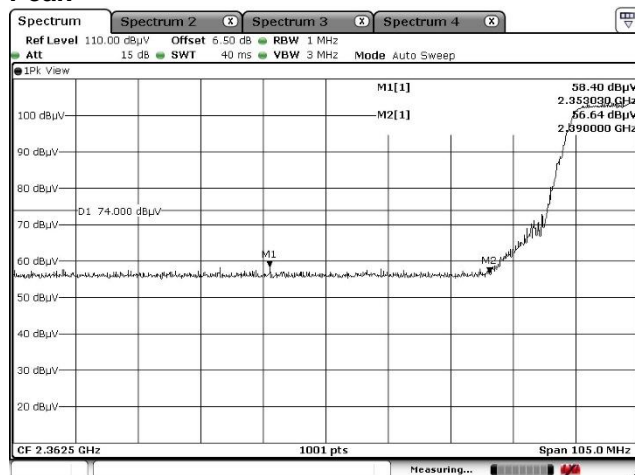

Average

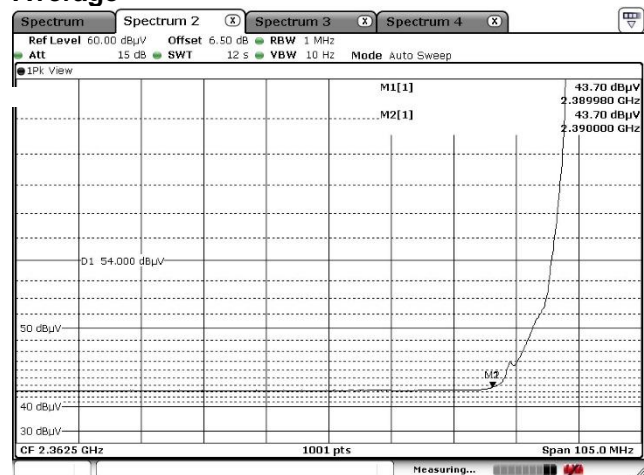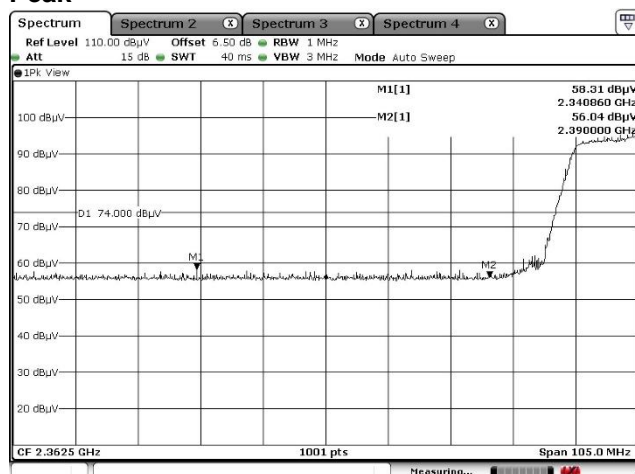
Vertical  
Peak

Average

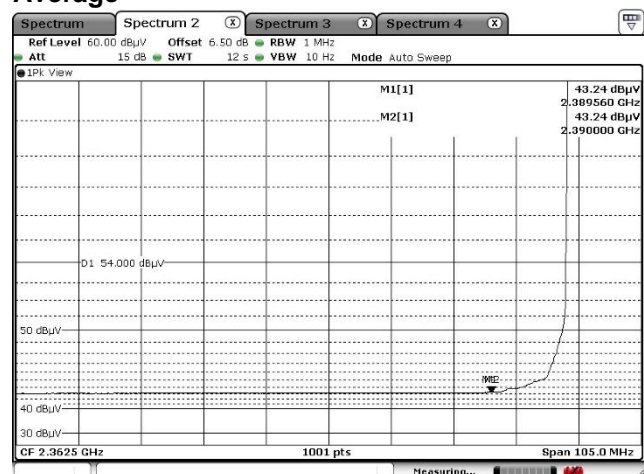





### Channel High Horizontal Peak

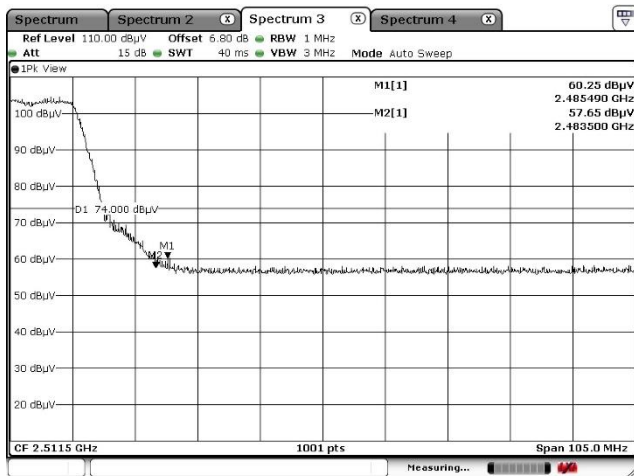


### Average

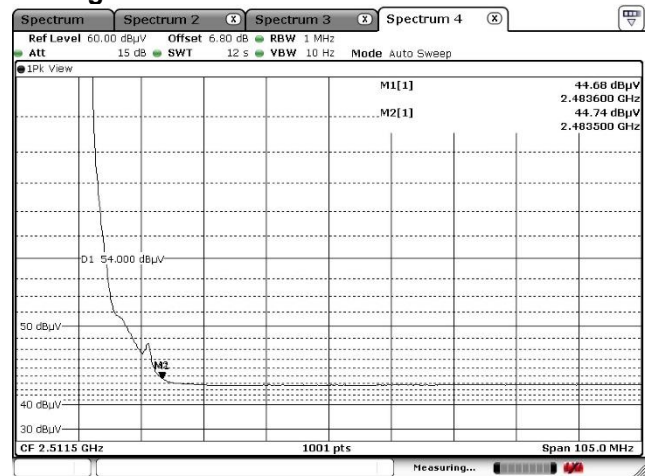

### Vertical Peak

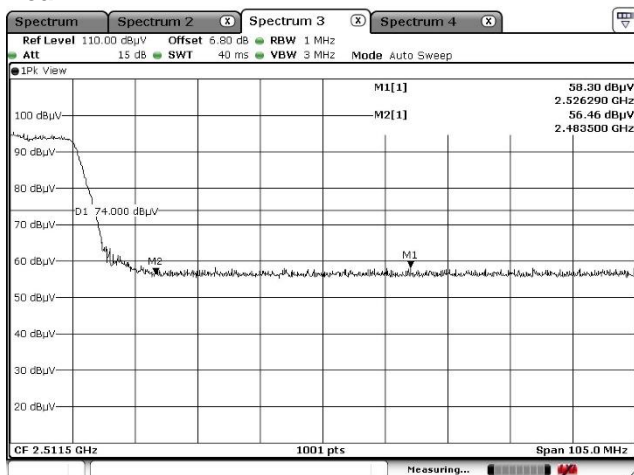

### Average

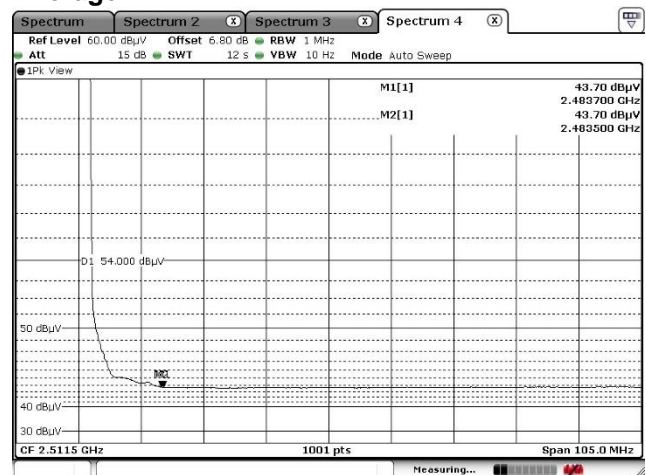




[IEEE802.11g]

OPEN



Channel Low

Horizontal


Peak

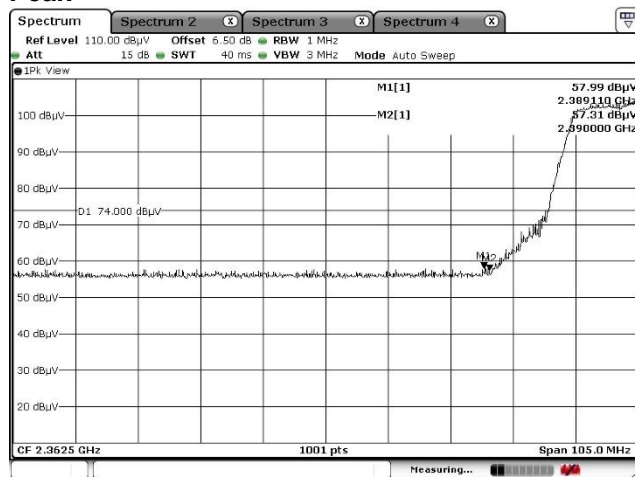


Average

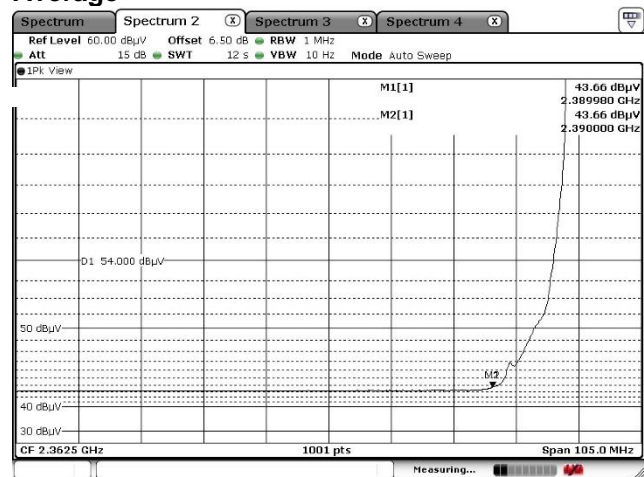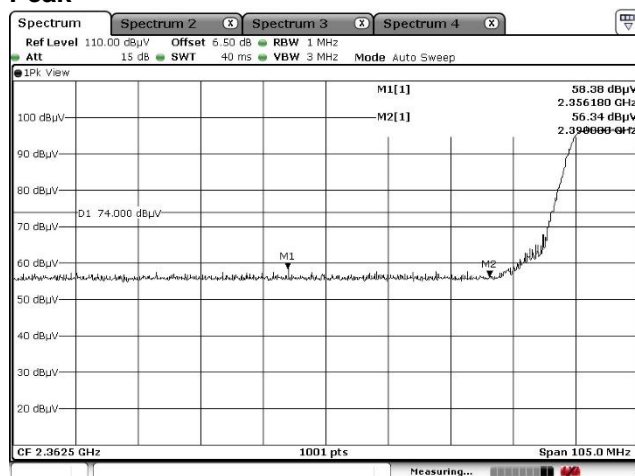Vertical  
Peak


Average

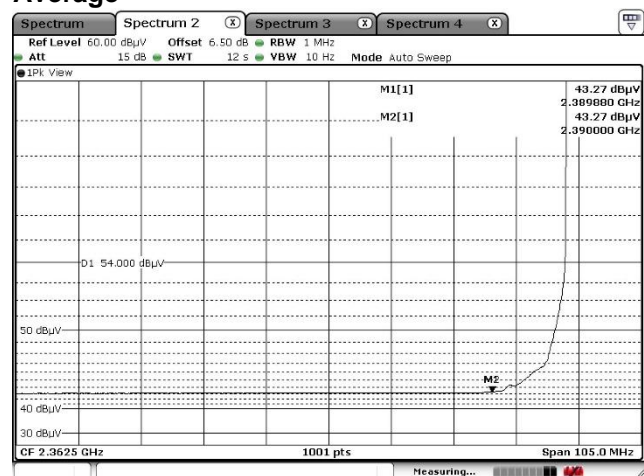


## Channel High Horizontal Peak

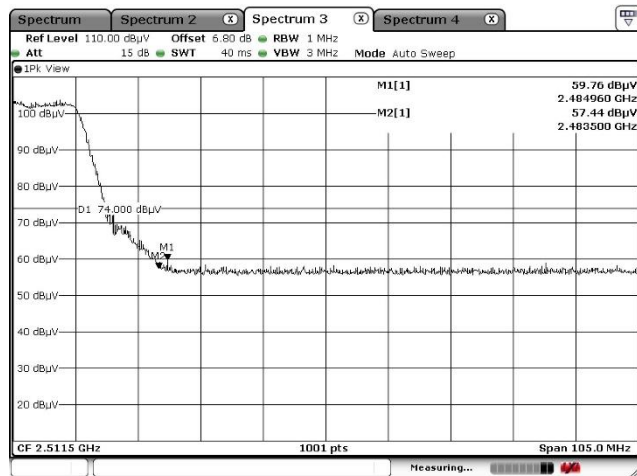


## Average

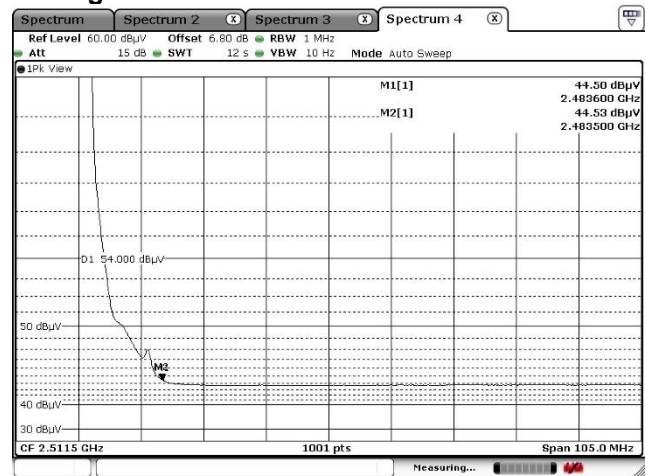

## Vertical Peak

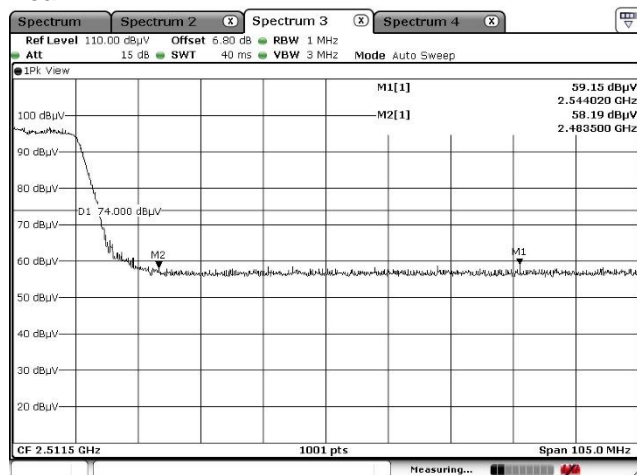

## Average

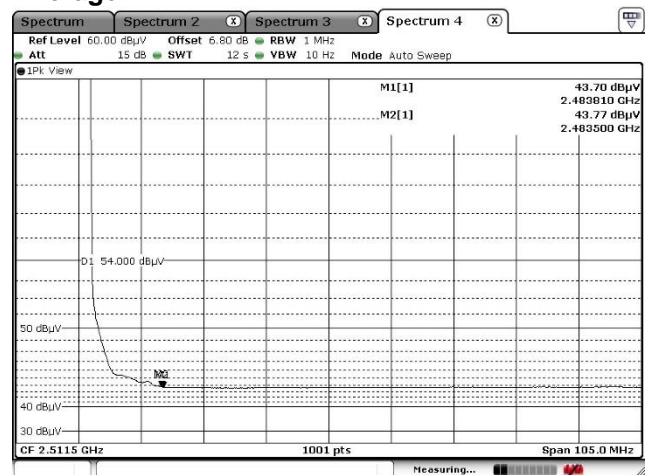


## [IEEE802.11n (HT20)]

## CLOSE



## Channel Low

## Horizontal


## Peak

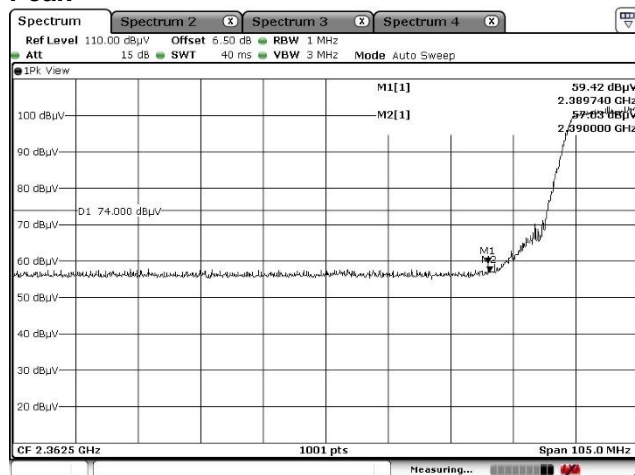


## Average

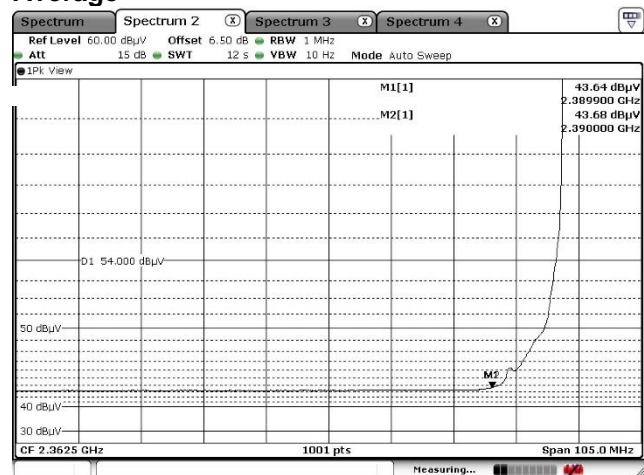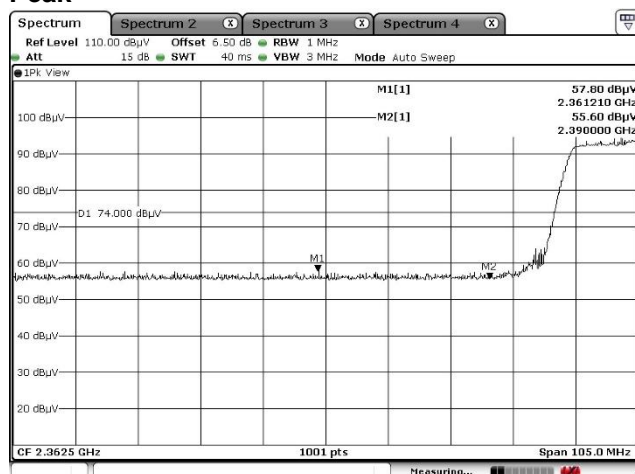Vertical  
Peak


## Average

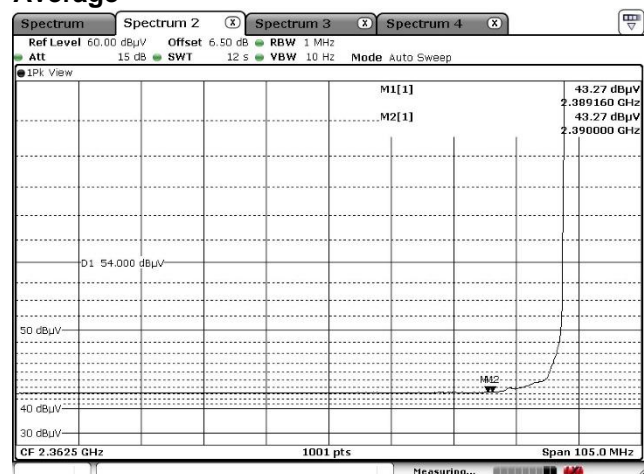


### Channel High Horizontal Peak

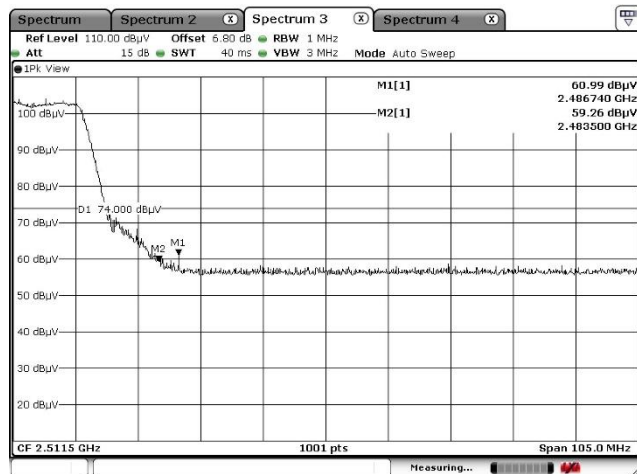


### Average

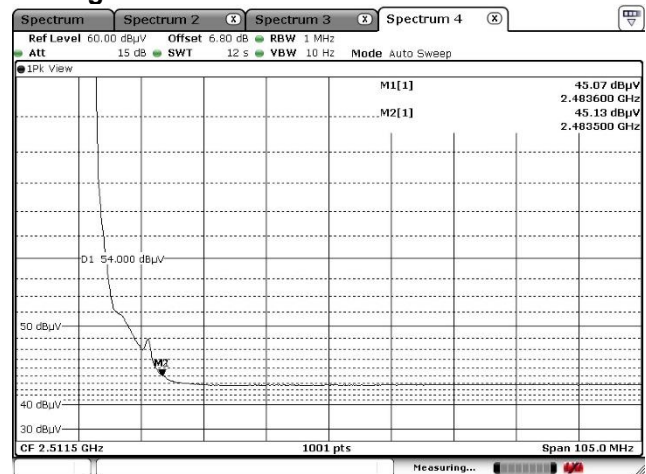

### Vertical Peak

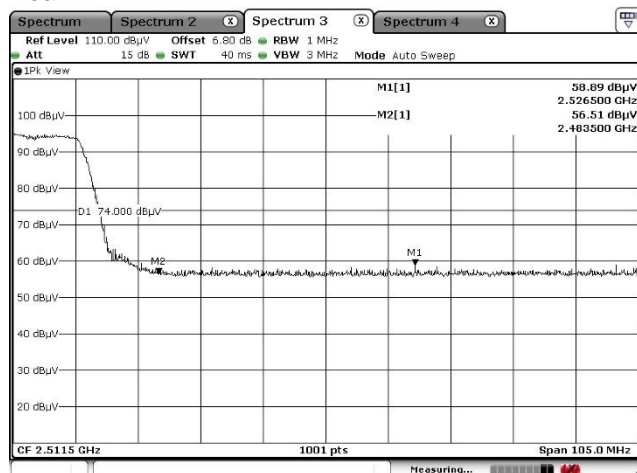

### Average

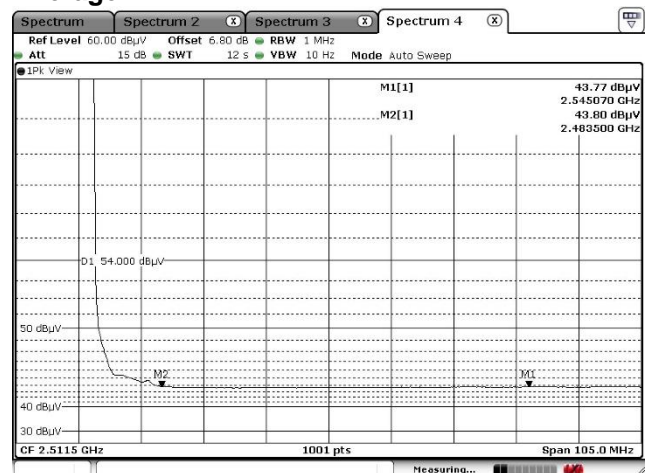


[IEEE802.11n (HT20)]

OPEN


Channel Low

Horizontal


Peak

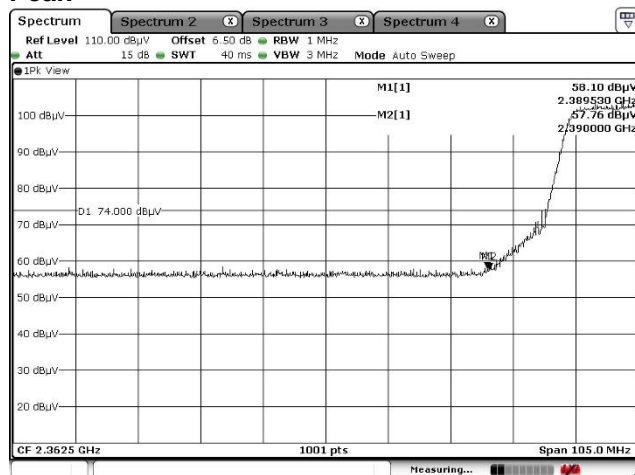


Average

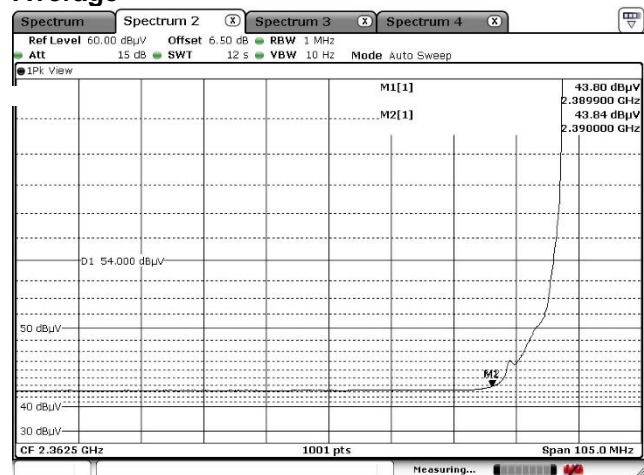Vertical  
Peak


Average

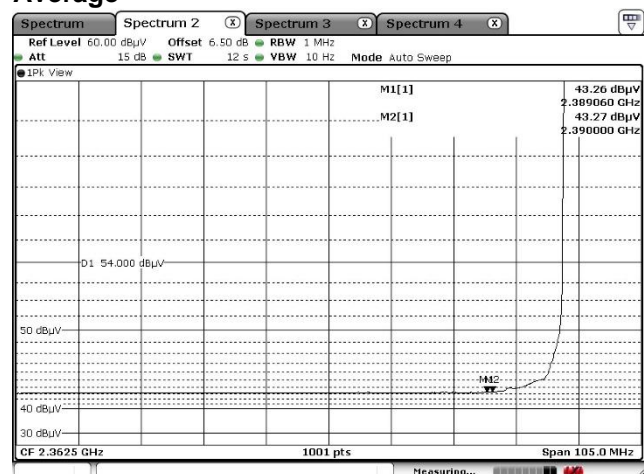


### Channel High Horizontal Peak

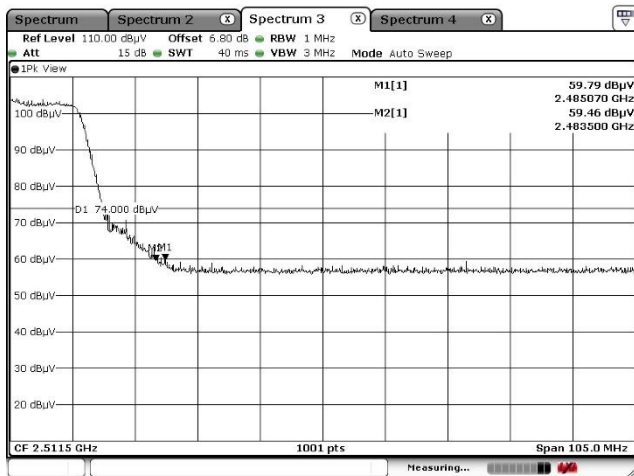


### Average

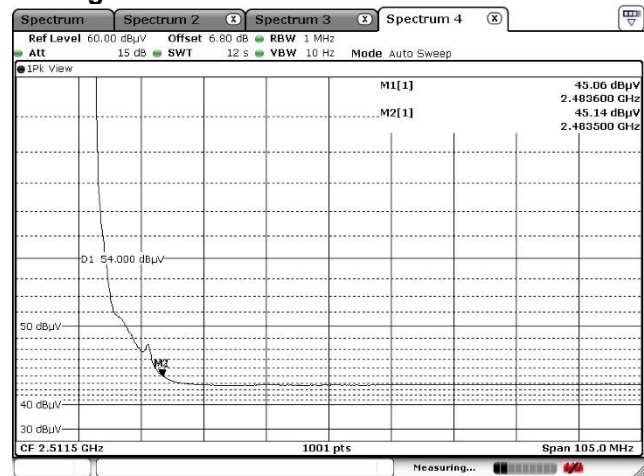

### Vertical Peak

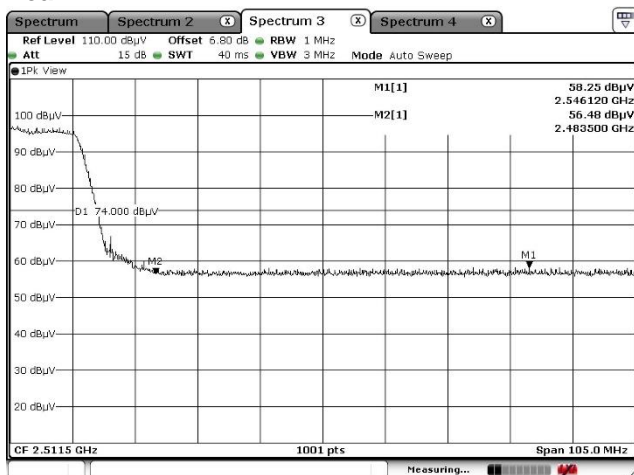

### Average

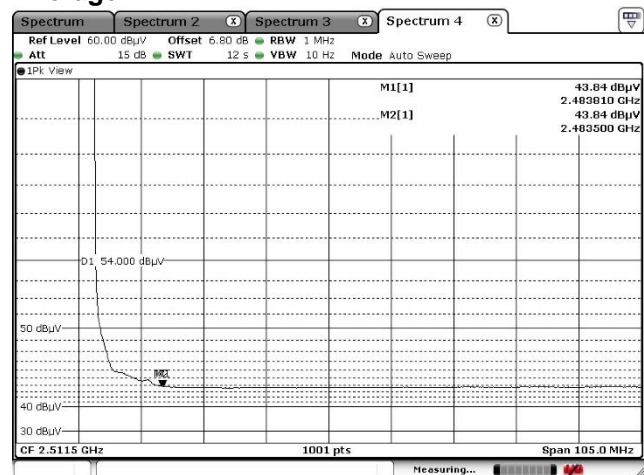



#### 4.7 Transmitter Power Spectral Density

##### 4.7.1 Measurement procedure


###### [FCC 15.247(e), KDB 558074 D01 v05r02, Section 8.4]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW  $\geq 3 \times$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

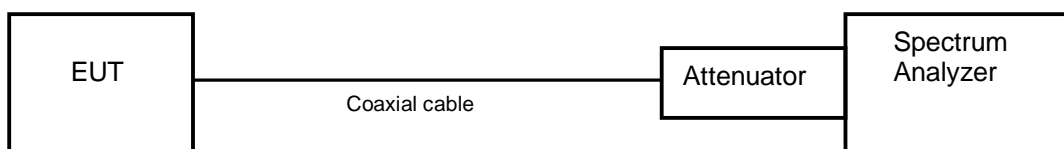

##### 4.7.2 Limit

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band.

##### 4.7.3 Measurement result

Date : 30-July-2021  
Temperature : 24.6 [°C]  
Humidity : 60.8 [%]  
Test place : Shielded room No.4

Test engineer : Chiaki Kanno



**[IEEE802.11b]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-19.52	10.49	-9.03	8.00	17.03	PASS
Middle	2437	-19.84	10.49	-9.35	8.00	17.35	PASS
High	2462	-18.65	10.49	-8.16	8.00	16.16	PASS

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

**[IEEE802.11g]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-26.39	10.49	-15.90	8.00	23.90	PASS
Middle	2437	-26.33	10.49	-15.84	8.00	23.84	PASS
High	2462	-26.18	10.49	-15.69	8.00	23.69	PASS

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

**[IEEE802.11n (HT20)]**

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-26.29	10.49	-15.80	8.00	23.80	PASS
Middle	2437	-25.86	10.49	-15.37	8.00	23.37	PASS
High	2462	-26.60	10.49	-16.11	8.00	24.11	PASS


Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)


#### 4.7.4 Trace data

[IEEE802.11b]


##### Channel Low

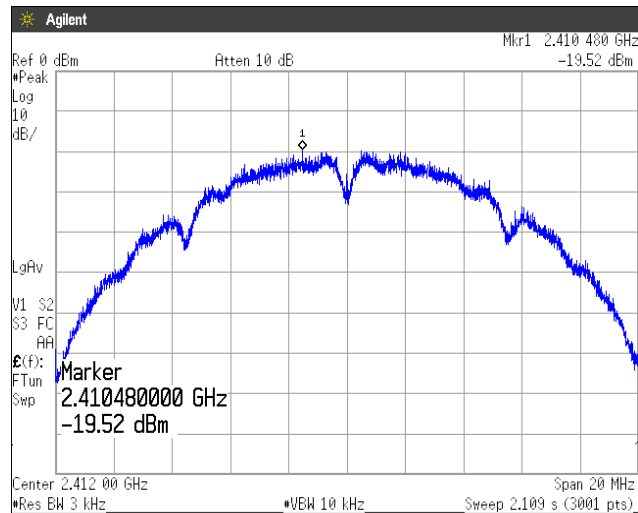

##### Channel Middle

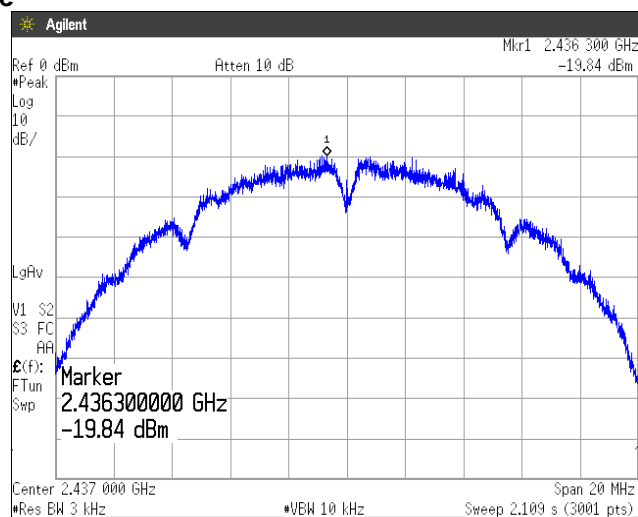


##### Channel High

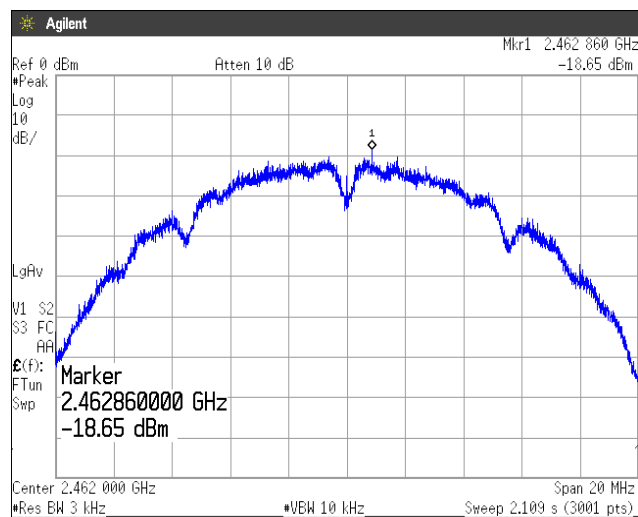


## [IEEE802.11g]


## Channel Low

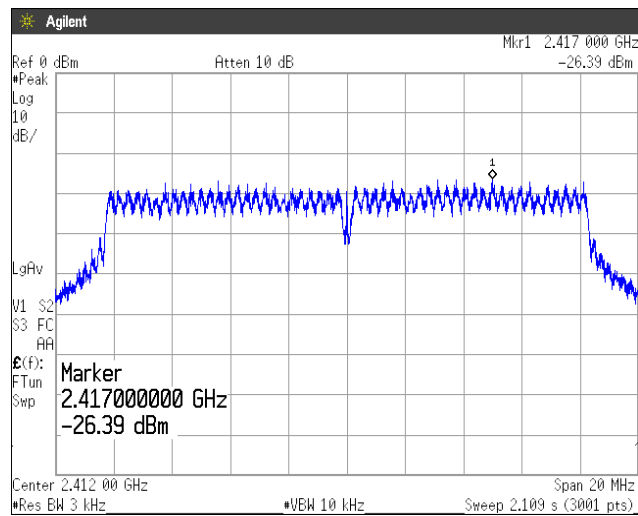

## Channel Middle

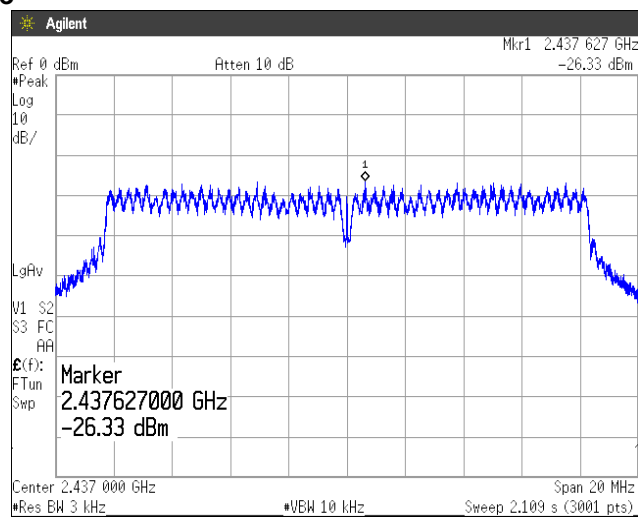


## Channel High

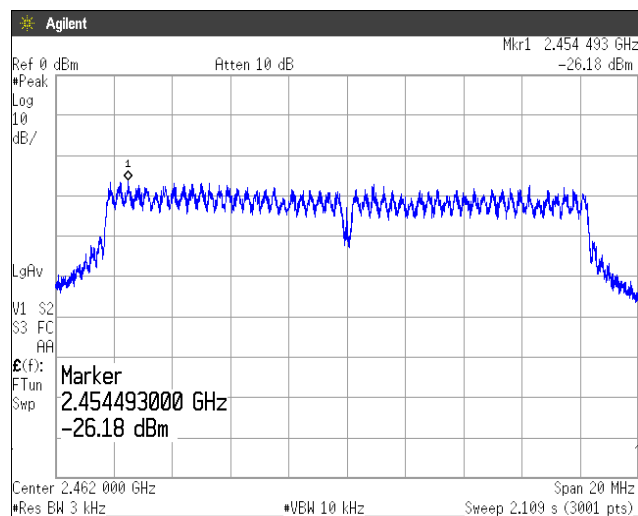


[IEEE802.11n (HT20)]


Channel Low

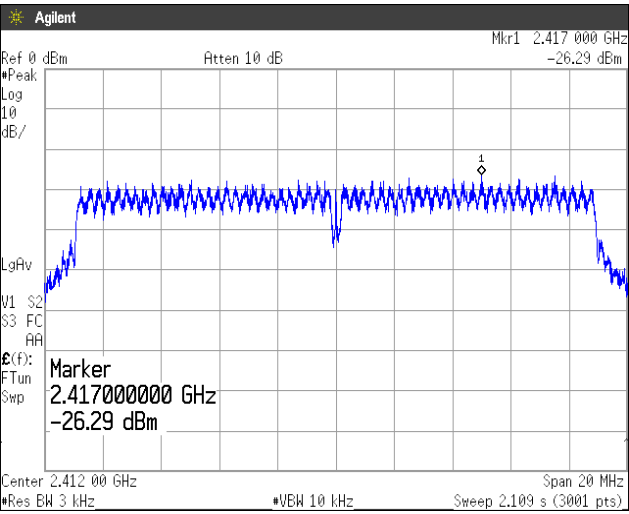

Channel Middle

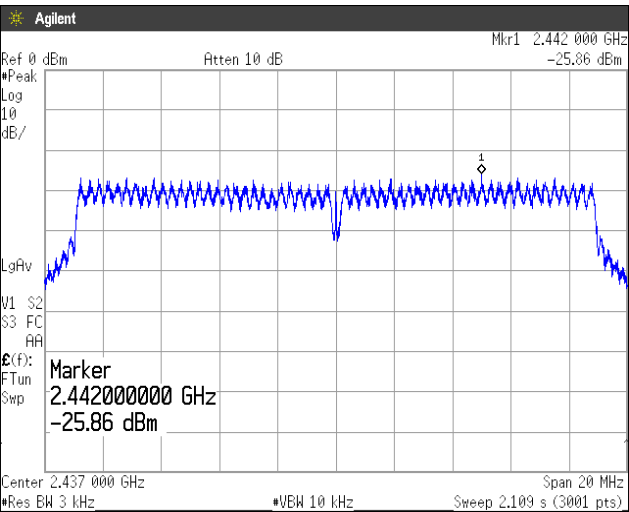

Channel High

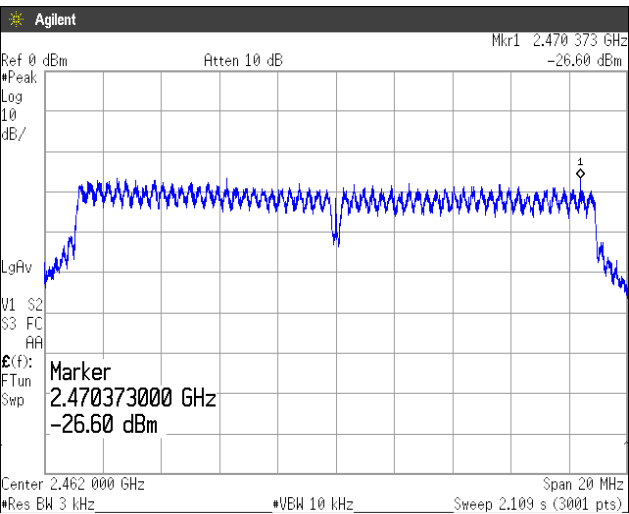

## 4.8 AC Power Line Conducted Emissions

### 4.8.1 Measurement procedure

#### [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15 MHz to 30 MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W) 2.0 × (D) 1.0 × (H) 0.8 m
Vertical Metal Reference Plane	: (W) 2.0 × (H) 2.0 m, 0.4 m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9 kHz

EUT and peripherals are connected to 50Ω/50 μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

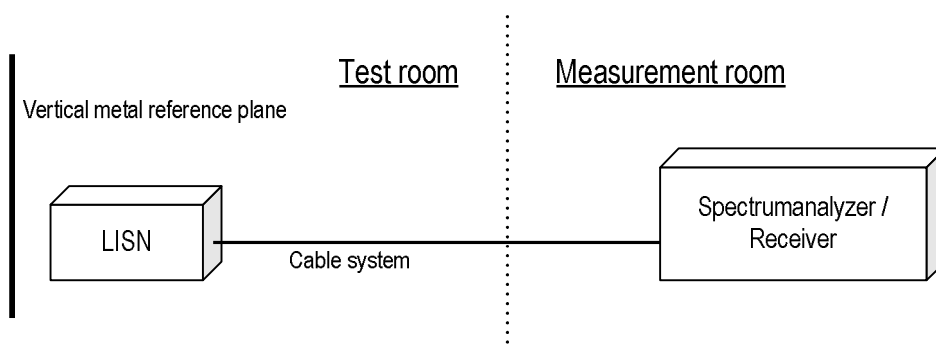

### 4.8.2 Calculation method

Emission level = Reading + (LISN. Factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 0.403 MHz: 57.8 dBμV(Quasi-peak)  
: 47.8 dBμV(Average)

(Quasi peak) Reading = 22.7 dBμV c.f. = 10.4 dB

Emission level = 22.7 + 10.4 = 33.1 dBμV

Margin = 57.8 – 33.1 = 24.7 dB

(Average) Reading = 6.5 dBμV c.f. = 10.4 dB

Emission level = 6.5 + 10.4 = 16.9 dBμV

Margin = 47.8 – 16.9 = 30.9 dB

#### 4.8.3 Limit


Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

#### 4.8.4 Test data

Date : 30-July-2021  
 Temperature : 22.5 [°C]  
 Humidity : 67.0 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

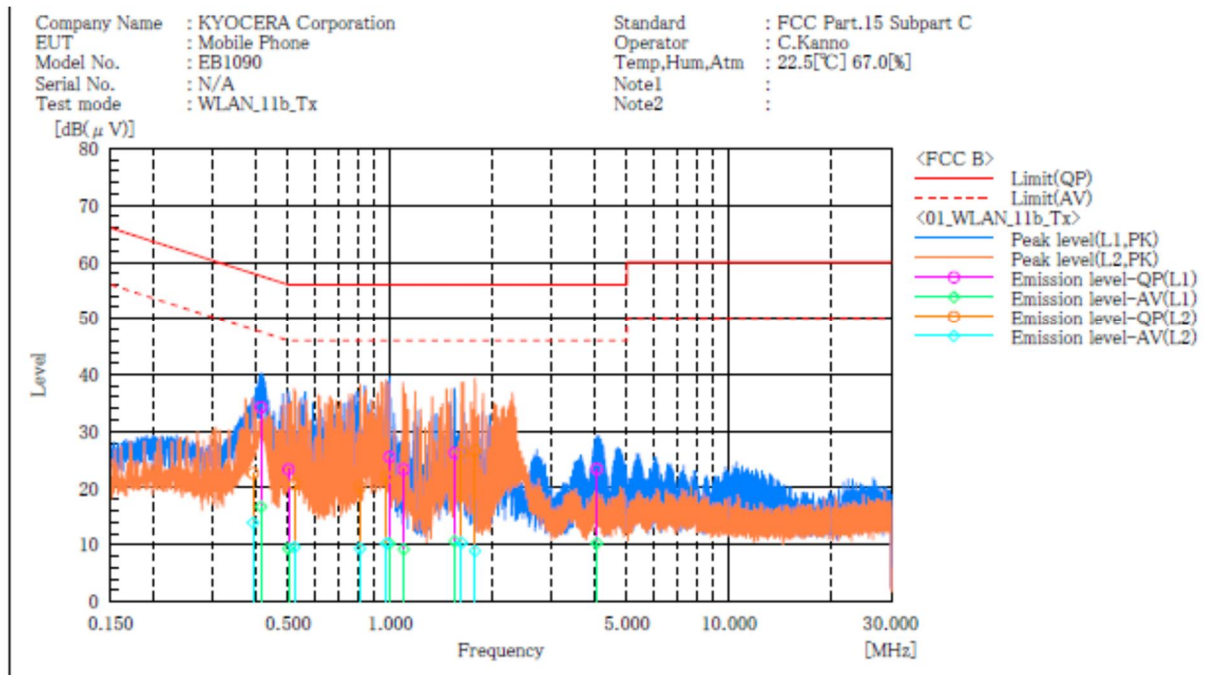

#### Final Result

L1 Phase										
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.416	23.9	6.4	10.3	34.2	16.7	57.5	47.5	23.3	30.8
2	0.501	13.0	-1.0	10.3	23.3	9.3	56.0	46.0	32.7	36.7
3	0.995	15.2	-0.1	10.3	25.5	10.2	56.0	46.0	30.5	35.8
4	1.096	13.0	-1.1	10.3	23.3	9.2	56.0	46.0	32.7	36.8
5	1.550	15.8	0.2	10.4	26.2	10.6	56.0	46.0	29.8	35.4
6	4.070	12.9	-0.2	10.5	23.4	10.3	56.0	46.0	32.6	35.7

L2 Phase										
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.394	12.3	3.6	10.3	22.6	13.9	58.0	48.0	35.4	34.1
2	0.522	10.4	-0.7	10.3	20.7	9.6	56.0	46.0	35.3	36.4
3	0.815	9.9	-1.0	10.3	20.2	9.3	56.0	46.0	35.8	36.7
4	0.975	11.6	-0.1	10.3	21.9	10.2	56.0	46.0	34.1	35.8
5	1.624	16.1	0.1	10.3	26.4	10.4	56.0	46.0	29.6	35.6
6	1.780	16.3	-1.4	10.3	26.6	8.9	56.0	46.0	29.4	37.1





Japan





## **5 Antenna requirement**

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

## 6 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .  
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	$\pm 3.7$ dB
Conducted emission, AMN (150 kHz – 30 MHz)	$\pm 3.3$ dB
Radiated emission ( 9kHz – 30 MHz)	$\pm 3.2$ dB
Radiated emission (30 MHz – 1000 MHz)	$\pm 5.3$ dB
Radiated emission (1 GHz – 6 GHz)	$\pm 4.8$ dB
Radiated emission (6 GHz – 18 GHz)	$\pm 4.5$ dB
Radiated emission (18 GHz – 40 GHz)	$\pm 6.4$ dB
Radio Frequency	$\pm 1.4 \cdot 10^{-8}$
RF power, conducted	$\pm 0.8$ dB
Adjacent channel power	$\pm 2.4$ dB
Temperature	$\pm 0.6$ °C
Humidity	$\pm 1.2$ %
Voltage (DC)	$\pm 0.4$ %
Voltage (AC, <10kHz)	$\pm 0.2$ %

Judge	Measured value and standard limit value	
PASS	<div> <div> <div>Standard limit value</div> <div> <div>+Uncertainty</div> <div>-Uncertainty</div> </div> <div>Measured value</div> </div> <div> <p>Case1</p>  <p>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</p> </div> </div>	
	<div> <div> <div>Standard limit value</div> <div> <div>+Uncertainty</div> <div>-Uncertainty</div> </div> <div>Measured value</div> </div> <div> <p>Case2</p>  <p>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</p> </div> </div>	
FAIL	<div> <div> <div>Standard limit value</div> <div> <div>+Uncertainty</div> <div>-Uncertainty</div> </div> <div>Measured value</div> </div> <div> <p>Case3</p>  <p>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</p> </div> </div>	
	<div> <div> <div>Standard limit value</div> <div> <div>+Uncertainty</div> <div>-Uncertainty</div> </div> <div>Measured value</div> </div> <div> <p>Case4</p>  <p>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</p> </div> </div>	



Japan

## 7 Laboratory Information

Testing was performed and the report was issued at:

**TÜV SÜD Japan Ltd. Yonezawa Testing Center**

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881  
Fax: +81-238-28-2888

**Accreditation and Registration**

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

## Appendix A. Test Equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Aug-2021	20-Aug-2020
Attenuator	Weinschel	56-10	J4993	31-Dec-2021	14-Dec-2020
Power meter	ROHDE&SCHWARZ	NRP2	103269	31-Mar-2022	10-Mar-2021
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102467	31-Mar-2022	10-Mar-2021

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2021	28-Sep-2020
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	31-Mar-2022	11-Mar-2021
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Dec-2021	11-Dec-2020
Spectrum analyzer	ROHDE&SCHWARZ	FSV40	101731	30-Jun-2022	08-Jun-2021
Preamplifier	SONOMA	310	372170	30-Sep-2021	29-Sep-2020
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	30-Apr-2022	27-Apr-2021
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2021	15-Dec-2020
Log periodic antenna	Schwarzbeck	VUSLP9111B	345	31-Oct-2021	19-Oct-2020
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2021	29-Sep-2020
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2022	20-Jul-2021
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2021	15-Dec-2020
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2021	14-Dec-2020
Double ridged guide antenna	ETS LINDGREN	3117	00052315	31-Mar-2022	30-Mar-2021
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2021	15-Dec-2020
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	30-Sep-2021	02-Sep-2020
Preamplifier	TSJ	MLA-1840-B03-35	1240332	30-Sep-2021	02-Sep-2020
Band rejection filter	Micro-Tronics	BRC50702	G433	30-Sep-2021	29-Sep-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1m	my24610/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104	MY32976/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/1.5m	SN MY28404/4	31-Dec-2021	15-Dec-2020
		SUCOFLEX104/7m	41625/6	31-Dec-2021	15-Dec-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2022	20-May-2021
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2022	20-May-2021

### Conducted emission at mains port


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2021	28-Sep-2020
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	31-Dec-2021	15-Dec-2020
Line impedance stabilization network	Kyoritsu Electrical Works, Ltd.	TNW-407F2	12-17-110-2	30-Jun-2022	17-Jun-2021
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	31-Dec-2021	15-Dec-2020
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	31-Dec-2021	15-Dec-2020
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A (S194)	31-Dec-2021	15-Dec-2020
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

## Appendix B. Duty Cycle


### [Plot & Calculation]

11b

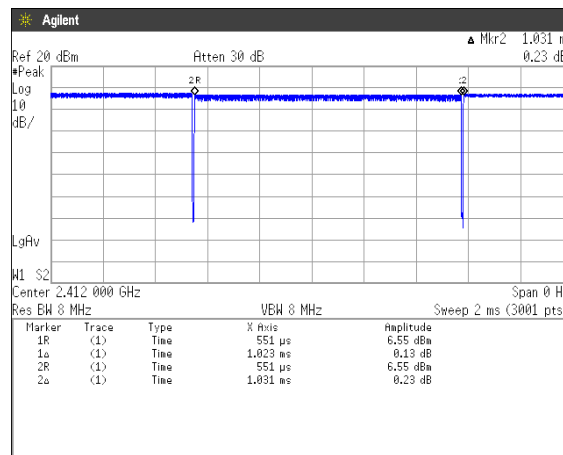


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1023[\mu\text{s}] / (1023[\mu\text{s}] + 8[\mu\text{s}]) = 99.22\%$$

11g

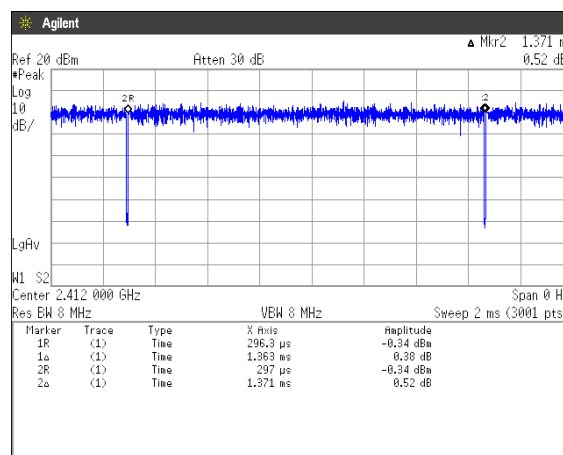

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1363[\mu\text{s}] / (1363[\mu\text{s}] + 8[\mu\text{s}]) = 99.42\%$$

11n (HT20)

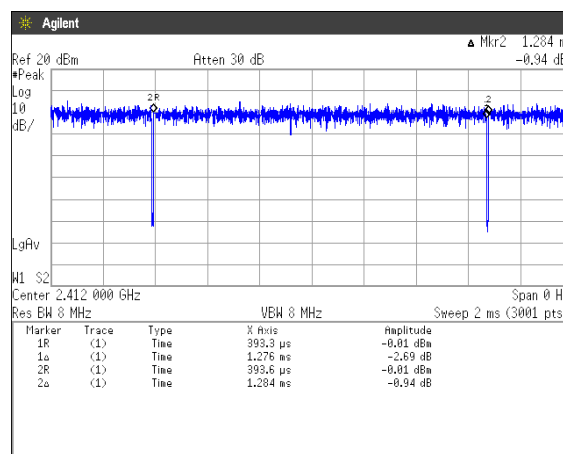

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1276[\mu\text{s}] / (1276[\mu\text{s}] + 8[\mu\text{s}]) = 99.38\%$$