

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1147
FCC ID: JOYEB1147

In accordance with FCC Part 27 Subpart C

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**



COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-22213-0

SIGNATURE			
NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	2022.11.28

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY - Result: Complied
A sample(s) of this product was tested and the result above was confirmed in accordance with FCC Part 27 Subpart C.

  <p>Certificate #3686.03</p>	<p>DISCLAIMER AND COPYRIGHT</p> <p>The results in this report are applicable only to the equipment tested. This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd. Client provided data, for which TÜV SÜD Japan Ltd. take no responsibility, which can affect validity of results within this report is clearly identified.</p> <p>ACCREDITATION</p> <p>This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.</p>
---	--

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
www.tuvsud.com/ja-jp



Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period.....	3
2	Equipment Under Test	4
2.1	EUT information	4
2.2	Modification to the EUT	6
2.3	Variation of family model(s)	6
2.4	Description of test mode.....	6
3	Configuration of Equipment	7
3.1	Equipment used	7
3.2	System configuration.....	7
4	Test Result	8
4.1	Effective Radiated Power	8
4.2	Radiated Emissions and Harmonic Emissions	15
5	Measurement Uncertainty	28
6	Laboratory Information	29
	Appendix A. Test Equipment	30

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-22213-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 27 Subpart C

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA 603-E-2016
ANSI C63.26-2015

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
27.50	Effective Radiated Power	Radiated	PASS	-
27.50	Peak to Average Ratio	Conducted	PASS	*2
2.1049	Occupied Bandwidth	Conducted	PASS	*2
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	*2
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
27.54 2.1055	Frequency Stability	Conducted	PASS	*2

*1 Refer to RF Exposure Report (Test Report SAR).

*2 Since there is no change in Module from FCC ID: JOYEB1146, only the Radiated test items were performed. Please refer to the test report "JPD-TR-22197-0" of "FCC ID: JOYEB1146".

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

3-November-2022 - 14-November-2022



2 Equipment Under Test

All information in this chapter was provided by the applicant.

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1147
Serial number	358067760004041, 358067760004066
Trade name	Kyocera
Number of sample(s)	2
EUT condition	Pre-Production
Power rating	Battery: DC 3.87 V
Size	(W) 72 mm x (D) 156 mm x (H) 8.9 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20 °C to 60 °C
Hardware version	DMT
Software version	0.100CX.9011.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link WCDMA Band IV: 1712.4-1752.6 MHz LTE Band IV: 1710.0-1755.0 MHz LTE Band XII: 699.0-716.0 MHz Down Link WCDMA Band IV: 2112.4-2152.6 MHz LTE Band IV: 2110.0-2155.0 MHz LTE Band XII: 729.0-746.0 MHz



Modulation type	WCDMA Band IV: QPSK, 16QAM LTE Band IV: QPSK, 16QAM, 64QAM LTE Band XII: QPSK, 16QAM, 64QAM
Emission designator	WCDMA Band IV: 4M13F9W LTE Band IV: BW 1.4M QPSK: 1M09G7D, 16QAM: 1M10W7D, 64QAM: 1M09W7D BW 3M QPSK: 2M70G7D, 16QAM: 2M70W7D, 64QAM: 2M72W7D BW 5M QPSK: 4M52G7D, 16QAM: 4M50W7D, 64QAM: 4M51W7D BW 10M QPSK: 9M00G7D, 16QAM: 8M98W7D, 64QAM: 8M96W7D BW 15M QPSK: 13M4G7D, 16QAM: 13M5W7D, 64QAM: 13M4W7D BW 20M QPSK: 17M9G7D, 16QAM: 18M0W7D, 16QAM: 17M9W7D LTE Band XII: BW 1.4M QPSK: 1M11G7D, 16QAM: 1M10W7D, 64QAM: 1M09W7D BW 3M QPSK: 2M71G7D, 16QAM: 2M70W7D, 64QAM: 2M72W7D BW 5M QPSK: 4M50G7D, 16QAM: 4M51W7D, 64QAM: 4M50W7D BW 10M QPSK: 8M97G7D, 16QAM: 8M96W7D, 64QAM: 8M97W7D
Effective Radiated Power (E.R.P.)	WCDMA Band IV: 0.151 W (21.8 dBm) LTE Band IV: 0.17 W (22.3 dBm) LTE Band XII: 0.034 W (15.3 dBm)
Antenna type	Internal antenna
Antenna gain	WCDMA Band IV: -2.1 dBi LTE Band IV: -2.1 dBi LTE Band XII: -9.0 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1147, Serial Number: 358067760004041, 358067760004066			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
WCDMA Band IV	QPSK	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
	16QAM	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
LTE Band IV	QPSK, 16QAM, 64QAM	1.4	19957, 20175, 20393	1710.7, 1732.5, 1754.3
		3	19965, 20175, 20385	1711.5, 1732.5, 1753.5
		5	19975, 20175, 20375	1712.5, 1732.5, 1752.5
		10	20000, 20175, 20350	1715.0, 1732.5, 1750.0
		15	20025, 20175, 20325	1717.5, 1732.5, 1747.5
		20	20050, 20175, 20300	1720.0, 1732.5, 1745.0
LTE Band XII	QPSK, 16QAM, 64QAM	1.4	23017, 23095, 23173	699.7, 707.5, 715.3
		3	23025, 23095, 23165	700.5, 707.5, 714.5
		5	23035, 23095, 23155	701.5, 707.5, 713.5
		10	23060, 23095, 23130	704.0, 707.5, 711.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis (WCDMA Band IV, LTE Band IV), Z-axis (LTE Band XII), and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

This test configuration is based on the manufacture’s instruction.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1147	358067760004041 358067760004066	JOYEB1147	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Effective Radiated Power

4.1.1 Measurement procedure

[FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

The frequency of the signal generator is adjusted to the measurement frequency.

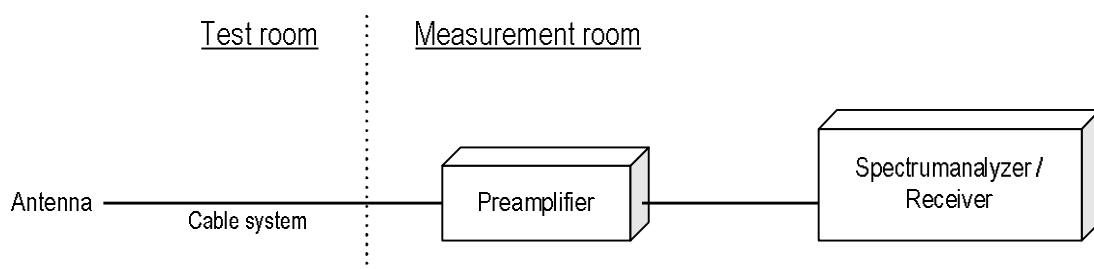
Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges.

If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration



4.1.2 Calculation method

Result (ERP) = S.G Reading - Cable loss + Antenna Gain
 Margin = Limit – Result (ERP)

Example:

Limit @ 707.5 MHz : 34.7 dBm
 Ant. Input = 15.0 dBm Cable loss = 1.1 dB Ant. Gain = 8.0 dBd
 Result = 15.0 – 1.1 + 8.0 = 21.9 dBm
 Margin = 34.7 – 21.9 = 8.1 dB

4.1.3 Limit

3 W (34.7 dBm)

4.1.4 Test data

Date	: 3-November-2022	Test engineer	:	Chiaki Kanno
Temperature	: 23.0 [°C]			
Humidity	: 37.0 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 11-November-2022	Test engineer	:	Chiaki Kanno
Temperature	: 24.3 [°C]			
Humidity	: 29.1 [%]			
Test place	: 3m Semi-anechoic chamber			

[WCDMA Band IV]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1712.4	-28.9	16.9	1.1	5.3	21.1	0.129	30.0	8.9
H	1732.6	-28.4	17.8	1.1	5.2	21.8	0.151	30.0	8.2
H	1752.6	-29.4	17.9	1.1	5.0	21.8	0.151	30.0	8.2

**[LTE Band IV]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1710.7	-29.1	16.8	1.1	5.3	21.0	0.126	30.0	9.0
H	1732.5	-28.3	17.9	1.1	5.2	21.9	0.155	30.0	8.1
H	1754.3	-29.0	18.4	1.1	5.0	22.3	0.170	30.0	7.7

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1710.7	-30.0	15.9	1.1	5.3	20.1	0.102	30.0	9.9
H	1732.5	-29.0	17.2	1.1	5.2	21.2	0.132	30.0	8.8
H	1754.3	-29.9	17.5	1.1	5.0	21.4	0.138	30.0	8.6

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1710.7	-31.0	14.9	1.1	5.3	19.1	0.081	30.0	10.9
H	1732.5	-30.0	16.2	1.1	5.2	20.2	0.105	30.0	9.8
H	1754.3	-30.8	16.6	1.1	5.0	20.5	0.112	30.0	9.5

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1711.5	-29.0	16.9	1.1	5.3	21.1	0.129	30.0	8.9
H	1732.5	-28.3	17.9	1.1	5.2	21.9	0.155	30.0	8.1
H	1753.5	-29.2	18.1	1.1	5.0	22.0	0.158	30.0	8.0

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1711.5	-30.0	15.9	1.1	5.3	20.1	0.102	30.0	9.9
H	1732.5	-28.9	17.3	1.1	5.2	21.3	0.135	30.0	8.7
H	1753.5	-30.1	17.2	1.1	5.0	21.1	0.129	30.0	8.9

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1711.5	-31.0	14.9	1.1	5.3	19.1	0.081	30.0	10.9
H	1732.5	-30.0	16.2	1.1	5.2	20.2	0.105	30.0	9.8
H	1753.5	-31.1	16.2	1.1	5.0	20.1	0.102	30.0	9.9

**[LTE Band IV]
QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1712.5	-29.0	16.9	1.1	5.3	21.1	0.129	30.0	8.9
H	1732.5	-28.2	18.0	1.1	5.2	22.0	0.158	30.0	8.0
H	1752.5	-29.5	17.9	1.1	5.0	21.8	0.151	30.0	8.2

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1712.5	-30.0	15.9	1.1	5.3	20.1	0.102	30.0	9.9
H	1732.5	-29.0	17.2	1.1	5.2	21.2	0.132	30.0	8.8
H	1752.5	-30.4	17.0	1.1	5.0	20.9	0.123	30.0	9.1

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1712.5	-31.0	14.9	1.1	5.3	19.1	0.081	30.0	10.9
H	1732.5	-30.0	16.2	1.1	5.2	20.2	0.105	30.0	9.8
H	1752.5	-31.5	15.9	1.1	5.0	19.8	0.095	30.0	10.2

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1715.0	-29.7	16.1	1.1	5.3	20.3	0.107	30.0	9.7
H	1732.5	-28.5	17.7	1.1	5.2	21.7	0.148	30.0	8.3
H	1750.0	-30.0	17.3	1.1	5.0	21.2	0.132	30.0	8.8

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1715.0	-30.6	15.2	1.1	5.3	19.4	0.087	30.0	10.6
H	1732.5	-29.4	16.8	1.1	5.2	20.8	0.120	30.0	9.2
H	1750.0	-31.2	16.1	1.1	5.0	20.0	0.100	30.0	10.0

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1715.0	-31.6	14.2	1.1	5.3	18.4	0.069	30.0	11.6
H	1732.5	-30.4	15.8	1.1	5.2	19.8	0.095	30.0	10.2
H	1750.0	-32.0	15.3	1.1	5.0	19.2	0.083	30.0	10.8

**[LTE Band IV]
QPSK, BW 15MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1717.5	-29.4	16.5	1.1	5.3	20.7	0.117	30.0	9.3
H	1732.5	-28.7	17.5	1.1	5.2	21.5	0.141	30.0	8.5
H	1747.5	-29.9	17.2	1.1	5.0	21.1	0.129	30.0	8.9

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1717.5	-30.2	15.7	1.1	5.3	19.9	0.098	30.0	10.1
H	1732.5	-29.8	16.4	1.1	5.2	20.4	0.110	30.0	9.6
H	1747.5	-31.1	15.9	1.1	5.0	19.8	0.095	30.0	10.2

64QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1717.5	-31.0	14.9	1.1	5.3	19.1	0.081	30.0	10.9
H	1732.5	-30.5	15.7	1.1	5.2	19.7	0.093	30.0	10.3
H	1747.5	-32.0	15.0	1.1	5.0	18.9	0.078	30.0	11.1

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1720.0	-29.1	16.9	1.1	5.3	21.0	0.126	30.0	9.0
H	1732.5	-28.6	17.6	1.1	5.2	21.6	0.145	30.0	8.4
H	1745.0	-29.9	16.9	1.1	5.1	20.8	0.120	30.0	9.2

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1720.0	-30.2	15.8	1.1	5.3	19.9	0.098	30.0	10.1
H	1732.5	-29.6	16.6	1.1	5.2	20.6	0.115	30.0	9.4
H	1745.0	-30.8	16.0	1.1	5.1	19.9	0.098	30.0	10.1

64QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	1720.0	-31.2	14.8	1.1	5.3	18.9	0.078	30.0	11.1
H	1732.5	-30.7	15.5	1.1	5.2	19.5	0.089	30.0	10.5
H	1745.0	-31.8	15.0	1.1	5.1	18.9	0.078	30.0	11.1

**[LTE Band XII]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	699.7	-40.0	20.4	0.7	-7.9	14.0	0.025	34.7	20.7
H	707.5	-39.0	21.8	0.7	-8.0	15.3	0.034	34.7	19.4
H	715.3	-39.2	21.8	0.7	-8.0	15.3	0.034	34.7	19.4

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	699.7	-40.9	19.5	0.7	-7.9	13.1	0.020	34.7	21.6
H	707.5	-39.8	21.0	0.7	-8.0	14.5	0.028	34.7	20.2
H	715.3	-40.3	20.7	0.7	-8.0	14.2	0.026	34.7	20.5

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	699.7	-41.7	18.7	0.7	-7.9	12.3	0.017	34.7	22.4
H	707.5	-40.9	19.9	0.7	-8.0	13.4	0.022	34.7	21.3
H	715.3	-41.3	19.7	0.7	-8.0	13.2	0.021	34.7	21.5

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	700.5	-40.0	20.4	0.7	-7.9	14.0	0.025	34.7	20.7
H	707.5	-39.0	21.8	0.7	-8.0	15.3	0.034	34.7	19.4
H	714.5	-39.2	21.8	0.7	-8.0	15.3	0.034	34.7	19.4

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	700.5	-40.8	19.6	0.7	-7.9	13.2	0.021	34.7	21.5
H	707.5	-39.8	21.0	0.7	-8.0	14.5	0.028	34.7	20.2
H	714.5	-40.1	20.9	0.7	-8.0	14.4	0.028	34.7	20.3

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	700.5	-41.6	18.8	0.7	-7.9	12.4	0.017	34.7	22.3
H	707.5	-40.9	19.9	0.7	-8.0	13.4	0.022	34.7	21.3
H	714.5	-40.9	20.1	0.7	-8.0	13.6	0.023	34.7	21.1

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	701.5	-39.7	20.7	0.7	-7.9	14.3	0.027	34.7	20.4
H	707.5	-39.2	21.6	0.7	-8.0	15.1	0.032	34.7	19.6
H	713.5	-39.7	21.3	0.7	-8.0	14.8	0.030	34.7	19.9

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	701.5	-40.6	19.8	0.7	-7.9	13.4	0.022	34.7	21.3
H	707.5	-40.3	20.5	0.7	-8.0	14.0	0.025	34.7	20.7
H	713.5	-40.4	20.6	0.7	-8.0	14.1	0.026	34.7	20.6

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	701.5	-41.5	18.9	0.7	-7.9	12.5	0.018	34.7	22.2
H	707.5	-41.2	19.6	0.7	-8.0	13.1	0.020	34.7	21.6
H	713.5	-41.6	19.4	0.7	-8.0	12.9	0.019	34.7	21.8

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	704.0	-39.5	20.9	0.7	-7.9	14.5	0.028	34.7	20.2
H	707.5	-39.3	21.5	0.7	-8.0	15.0	0.032	34.7	19.7
H	711.0	-39.5	21.5	0.7	-8.0	15.0	0.032	34.7	19.7

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	704.0	-40.7	19.7	0.7	-7.9	13.3	0.021	34.7	21.4
H	707.5	-40.3	20.5	0.7	-8.0	14.0	0.025	34.7	20.7
H	711.0	-40.3	20.7	0.7	-8.0	14.2	0.026	34.7	20.5

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant. Gain [dBi]	Result [dBm]	Result [W]	Limit [dBm]	Margin [dB]
H	704.0	-41.2	19.2	0.7	-7.9	12.8	0.019	34.7	21.9
H	707.5	-41.1	19.7	0.7	-8.0	13.2	0.021	34.7	21.5
H	711.0	-41.6	19.4	0.7	-8.0	12.9	0.019	34.7	21.8

4.2 Radiated Emissions and Harmonic Emissions

4.2.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height (Below 1GHz) or 0.6 meter x 0.6 meter surface, 1.5 meter height (Above 1GHz) styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

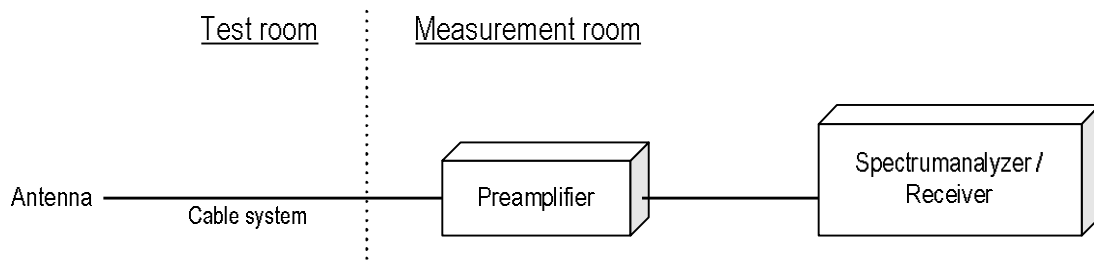
The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- RBW = 100 kHz for below 1GHz and 1MHz for above 1GHz / VBW \geq 3 x RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep time = auto-couple

- Test configuration



4.2.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain
 Margin = Limit – Result (EIRP)

Example:

Limit @ 1420 MHz: -13.0 dBm
 Ant. Input = -55.6 dBm Cable loss = 1.0dB Ant. Gain = 5.9 dBi
 Result = -55.6 - 1.0 + 5.9 = -50.7 dBm
 Margin = -13.0 - (-50.7) = 37.7 dB

4.2.3 Limit

-13 dBm or less

4.2.4 Test data

Date	: 3-November-2022		
Temperature	: 23.0 [°C]		
Humidity	: 37.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 5-November-2022		
Temperature	: 23.5 [°C]		
Humidity	: 28.6 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 9-November-2022		
Temperature	: 23.7 [°C]		
Humidity	: 27.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 11-November-2022		
Temperature	: 24.3 [°C]		
Humidity	: 29.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 14-November-2022		
Temperature	: 23.1 [°C]		
Humidity	: 28.6 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

**[WCDMA Band IV]****Channel: 1312**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3424.8	-54.2	-51.5	1.6	8.1	-45.0	-13.0	32.0

Channel: 1413

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
v	3465.2	-54.3	-51.7	1.6	8.3	-45.0	-13.0	32.0

Channel: 1513

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.2	-54.1	-51.6	1.6	8.3	-44.9	-13.0	31.9

**[LTE Band IV]
QPSK, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-54.5	-51.8	1.6	8.1	-45.3	-13.0	32.3

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.2	-51.6	1.6	8.3	-44.9	-13.0	31.9

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-54.7	-52.2	1.6	8.2	-45.6	-13.0	32.6

**16QAM, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-54.7	-52.0	1.6	8.1	-45.5	-13.0	32.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.2	-51.6	1.6	8.3	-44.9	-13.0	31.9

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-54.9	-52.4	1.6	8.2	-45.8	-13.0	32.8

**64QAM, BW 1.4MHz
Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-54.6	-51.9	1.6	8.1	-45.4	-13.0	32.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-51.8	1.6	8.3	-45.1	-13.0	32.1

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-54.6	-52.1	1.6	8.2	-45.5	-13.0	32.5

**[LTE Band IV]
QPSK, BW 3MHz
Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-54.3	-51.7	1.6	8.1	-45.2	-13.0	32.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.2	-51.6	1.6	8.3	-44.9	-13.0	31.9

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-54.2	-51.6	1.6	8.2	-45.0	-13.0	32.0

**16QAM, BW 3MHz
Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-54.5	-51.9	1.6	8.1	-45.4	-13.0	32.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.6	-52.0	1.6	8.3	-45.3	-13.0	32.3

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-54.2	-51.6	1.6	8.2	-45.0	-13.0	32.0

**64QAM, BW 3MHz
Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-54.6	-52.0	1.6	8.1	-45.5	-13.0	32.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.7	-52.1	1.6	8.3	-45.4	-13.0	32.4

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-54.3	-51.7	1.6	8.2	-45.1	-13.0	32.1

**[LTE Band IV]
QPSK, BW 5MHz
Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-54.3	-51.6	1.6	8.1	-45.1	-13.0	32.1

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.2	-51.6	1.6	8.3	-44.9	-13.0	31.9

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-54.5	-52.0	1.6	8.3	-45.3	-13.0	32.3

16QAM, BW 5MHz

Channel: 19975

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-54.3	-51.6	1.6	8.1	-45.1	-13.0	32.1

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.2	-51.6	1.6	8.3	-44.9	-13.0	31.9

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-54.6	-52.1	1.6	8.3	-45.4	-13.0	32.4

64QAM, BW 5MHz

Channel: 19975

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-54.5	-51.8	1.6	8.1	-45.3	-13.0	32.3

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.6	-52.0	1.6	8.3	-45.3	-13.0	32.3

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-54.6	-52.1	1.6	8.3	-45.4	-13.0	32.4

**[LTE Band IV]
QPSK, BW 10MHz
Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-54.2	-51.5	1.6	8.2	-44.9	-13.0	31.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.3	-51.7	1.6	8.3	-45.0	-13.0	32.0

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-54.5	-52.0	1.6	8.3	-45.3	-13.0	32.3

**16QAM, BW 10MHz
Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-54.5	-51.8	1.6	8.2	-45.2	-13.0	32.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-51.8	1.6	8.3	-45.1	-13.0	32.1

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-54.7	-52.2	1.6	8.3	-45.5	-13.0	32.5

**64QAM, BW 10MHz
Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-54.6	-51.9	1.6	8.2	-45.3	-13.0	32.3

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.7	-52.1	1.6	8.3	-45.4	-13.0	32.4

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-54.5	-52.0	1.6	8.3	-45.3	-13.0	32.3

**[LTE Band IV]
QPSK, BW 15MHz
Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-54.3	-51.6	1.6	8.2	-45.0	-13.0	32.0

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-51.8	1.6	8.3	-45.1	-13.0	32.1

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-54.2	-51.7	1.6	8.3	-45.0	-13.0	32.0

**16QAM, BW 15MHz
Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-54.2	-51.5	1.6	8.2	-44.9	-13.0	31.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-51.8	1.6	8.3	-45.1	-13.0	32.1

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-54.4	-52.0	1.6	8.3	-45.3	-13.0	32.3

**64QAM, BW 15MHz
Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-54.3	-51.6	1.6	8.2	-45.0	-13.0	32.0

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.5	-51.9	1.6	8.3	-45.2	-13.0	32.2

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-54.6	-52.2	1.6	8.3	-45.5	-13.0	32.5

**[LTE Band IV]
QPSK, BW 20MHz
Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-54.1	-51.4	1.6	8.3	-44.7	-13.0	31.7

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.6	-52.0	1.6	8.3	-45.3	-13.0	32.3

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-54.3	-51.8	1.6	8.3	-45.1	-13.0	32.1

**16QAM, BW 20MHz
Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-54.2	-51.5	1.6	8.3	-44.8	-13.0	31.8

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-52.2	1.6	8.3	-45.5	-13.0	32.5

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-54.3	-51.8	1.6	8.3	-45.1	-13.0	32.1

**64QAM, BW 20MHz
Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-54.5	-51.8	1.6	8.3	-45.1	-13.0	32.1

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-54.4	-52.2	1.6	8.3	-45.5	-13.0	32.5

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-54.5	-52.0	1.6	8.3	-45.3	-13.0	32.3

**[LTE Band XII]
QPSK, BW 1.4MHz
Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-55.2	-56.6	1.0	4.6	-53.0	-13.0	40.0

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.1	-56.5	1.0	4.8	-52.7	-13.0	39.7

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-55.2	-56.2	1.0	5.1	-52.2	-13.0	39.2

**16QAM, BW 1.4MHz
Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-55.3	-56.7	1.0	4.6	-53.1	-13.0	40.1

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.2	-56.6	1.0	4.8	-52.8	-13.0	39.8

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-55.3	-56.3	1.0	5.1	-52.3	-13.0	39.3

**64QAM, BW 1.4MHz
Channel: 23017**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1399.4	-55.5	-56.9	1.0	4.6	-53.3	-13.0	40.3

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.4	-56.8	1.0	4.8	-53.0	-13.0	40.0

Channel: 23173

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1430.6	-55.6	-56.6	1.0	5.1	-52.6	-13.0	39.6

QPSK, BW 3MHz**Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-55.0	-56.4	1.0	4.6	-52.8	-13.0	39.8

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.2	-56.6	1.0	4.8	-52.8	-13.0	39.8

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-55.4	-56.4	1.0	5.0	-52.4	-13.0	39.4

16QAM, BW 3MHz**Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-55.1	-56.5	1.0	4.6	-52.9	-13.0	39.9

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.3	-56.7	1.0	4.8	-52.9	-13.0	39.9

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-55.4	-56.4	1.0	5.0	-52.4	-13.0	39.4

64QAM, BW 3MHz**Channel: 23025**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1401.0	-55.3	-56.7	1.0	4.6	-53.1	-13.0	40.1

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.5	-56.9	1.0	4.8	-53.1	-13.0	40.1

Channel: 23165

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1429.0	-55.5	-56.5	1.0	5.0	-52.5	-13.0	39.5

QPSK, BW 5MHz**Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-55.0	-56.4	1.0	4.6	-52.8	-13.0	39.8

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.2	-56.6	1.0	4.8	-52.8	-13.0	39.8

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-55.2	-56.2	1.0	5.0	-52.2	-13.0	39.2

16QAM, BW 5MHz**Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-55.3	-56.7	1.0	4.6	-53.1	-13.0	40.1

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.4	-56.8	1.0	4.8	-53.0	-13.0	40.0

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-55.4	-56.4	1.0	5.0	-52.4	-13.0	39.4

64QAM, BW 5MHz**Channel: 23035**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1403.0	-55.4	-56.8	1.0	4.6	-53.2	-13.0	40.2

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.4	-56.8	1.0	4.8	-53.0	-13.0	40.0

Channel: 23155

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-55.5	-56.5	1.0	5.0	-52.5	-13.0	39.5

QPSK, BW 10MHz**Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-55.0	-56.4	1.0	4.7	-52.7	-13.0	39.7

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.1	-56.5	1.0	4.8	-52.7	-13.0	39.7

Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-55.1	-56.1	1.0	4.9	-52.2	-13.0	39.2

16QAM, BW 10MHz**Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-55.2	-56.6	1.0	4.7	-52.9	-13.0	39.9

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.3	-56.7	1.0	4.8	-52.9	-13.0	39.9

Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-55.3	-56.3	1.0	4.9	-52.4	-13.0	39.4

64QAM, BW 10MHz**Channel: 23060**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1408.0	-55.2	-56.6	1.0	4.7	-52.9	-13.0	39.9

Channel: 23095

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1415.0	-55.3	-56.7	1.0	4.8	-52.9	-13.0	39.9

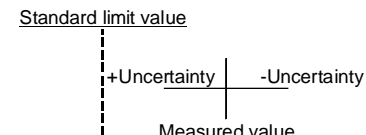



Channel: 23130

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-55.4	-56.4	1.0	4.9	-52.5	-13.0	39.5

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor k=2.
 Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	±3.7 dB
Conducted emission, AMN (150 kHz – 30 MHz)	±3.3 dB
Radiated emission (9kHz – 30 MHz)	±3.2 dB
Radiated emission (30 MHz – 1000 MHz)	±5.3 dB
Radiated emission (1 GHz – 6 GHz)	±4.8 dB
Radiated emission (6 GHz – 18 GHz)	±4.5 dB
Radiated emission (18 GHz – 40 GHz)	±6.4 dB
Radio Frequency	±1.4 * 10 ⁻⁸
RF power, conducted	±0.8 dB
Adjacent channel power	±2.4 dB
Temperature	±0.6 °C
Humidity	±1.2 %
Voltage (DC)	±0.4 %
Voltage (AC, <10kHz)	±0.2 %

Judge	Measured value and standard limit value
PASS	<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <p>Standard limit value</p>  </div> <div> <p>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</p> </div> </div>
	<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;">  </div> <div> <p>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</p> </div> </div>
FAIL	<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;">  </div> <div> <p>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</p> </div> </div>
	<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;">  </div> <div> <p>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</p> </div> </div>



Japan

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number: A-0166

Appendix A. Test Equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2023	14-Sep-2022
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	30-Sep-2023	05-Sep-2022
Preamplifier	SONOMA	310	372170	30-Sep-2023	15-Sep-2022
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1333	31-Dec-2022	15-Dec-2021
Log periodic antenna	Schwarzbeck	VUJSLP9111B	345	30-Nov-2022	08-Nov-2021
Attenuator	TOYO Connector	NA-PJ-6/6dB	N/A(S541)	30-Sep-2023	28-Sep-2022
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2023	14-Jul-2022
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Dec-2022	22-Dec-2021
Attenuator	AEROFLEX	26A-10	081217-08	31-Dec-2022	22-Dec-2021
Double ridged guide antenna	ETS LINDGREN	3117	00052315	30-Jun-2023	22-Jun-2022
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2340)	31-Dec-2022	23-Dec-2021
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2023	19-Aug-2022
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2023	19-Aug-2022
Notch Filter	Micro-Tronics	BRM50706	003	31-Jul-2023	14-Jul-2022
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Dec-2022	08-Dec-2021
RF power amplifier	R&K	CGA020M602-2633R	B40240	30-Jun-2023	16-Jun-2022
Attenuator	HUBER+SUHNER	6820.19.A	N/A(2399)	30-Sep-2023	28-Sep-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX102/2m	31648	31-Mar-2023	02-Mar-2022
Dipole antenna	Schwarzbeck	VHAP	1020	31-Jul-2023	05-Jul-2022
Dipole antenna	Schwarzbeck	UHAP	994	31-Jul-2023	05-Jul-2022
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2022	06-Dec-2021
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Aug-2023	15-Aug-2022
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2023	04-Aug-2022
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	my24610/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/8m	SN MY30033/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/1m	MY32976/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/2m	SN MY28404/4	31-Dec-2022	22-Dec-2021
		SUCOFLEX104/7m	41625/6	31-Dec-2022	22-Dec-2021
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V6.0.140	N/A	N/A
Absorber	RIKEN	PPF30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2023	28-May-2022
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2023	28-May-2022

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.