



TEST REPORT

Report number : Z101C-15086

Issue date : August 26, 2015

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part 27 Subpart C IC RSS-139

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Module
Model number	: KA36
FCC ID	: JOYKA36
IC Certification Number	: 574B-KA36

Date of test : August 23, 24, 2015

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe
Taiki Watanabe

Tested by : Hikaru Shibata
Hikaru Shibata

Authorized by : Hiroaki Suzuki
Hiroaki Suzuki
Manager of EMC Technical Department



Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory	3
2. Equipment Under Test	4
2.1 General Description of equipment	4
2.2 EUT information	4
2.3 Variation of the family model(s)	5
2.4 Description of Test mode	5
3. Configuration of equipment	6
3.1 Equipment(s) used	6
3.2 Cable(s) used	6
3.3 System configuration	6
4. Equivalent Isotropic Radiated Power	7
4.1 Measurement procedure	7
4.2 Calculation method	7
4.3 Limit	7
4.4 Test data	8
5. Radiated Emissions and Harmonic Emissions	11
5.1 Measurement procedure	11
5.2 Calculation method	11
5.3 Limit	11
5.4 Test data	12
6. Uncertainty of measurement	19
7. Laboratory description	20
Appendix A. Test equipment	21

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 27 Subpart C, IC RSS-139.

1.2 Standards

CFR47 FCC Part 27 Subpart C
IC RSS-139

1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v02r02
ANSI/TIA/EIA-603-D-2010

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

FCC Section	IC Section	Test items	Condition	Result
2.1046	N/A	Conducted Output Power	Conducted	N/A *
27.50(d)(4)	RSS-139 6.4	Equivalent Isotropic Radiated Power	Radiated	PASS
27.50(d)(5)	RSS-139 6.4	Peak to Average Ratio	Conducted	N/A *
2.1049	RSS-139 2.3	Occupied Bandwidth	Conducted	N/A *
27.53(h) 2.1051	RSS-139 6.5	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	N/A *
27.53(h) 2.1053	RSS-139 6.5, 6.6	Radiated emissions and Harmonic Emissions	Radiated	PASS
27.54 2.1055	RSS-139 6.3	Frequency Stability	Conducted	N/A *

*: For KA36, this model is a model that changed the LTE band of J79 (FCC ID: JOYJ79). Other than the LTE band 12 and 13, the module is electrically identical. Therefore, only the Radiated test items were performed. Refer to the following test report about other test items; J79 Test report number: Z071C-15079.

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Zacta

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Module.

2.2 EUT information

Applicant : KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa,
Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314

Equipment under test : Module

Trade name : Kyocera

Model number : KA36

Serial number : N/A

EUT condition : Pre-Production

Power ratings : DC 3.9V

Size : (W) 40.0 × (D) 40.0 × (H) 4.3 mm

Environment : Indoor and Outdoor use

Terminal limitation : -20°C to 60°C

RF Specification
Frequency of Operation : Up Link
LTE Band IV: 1710-1755MHz
Down Link
LTE Band IV: 2110-2155MHz

Modulation type : QPSK, 16QAM

Emission designator : BW 1.4M QPSK: 1M11G7D, 16QAM: 1M11W7D
BW 3M QPSK: 2M71G7D, 16QAM: 2M73W7D
BW 5M QPSK: 4M52G7D, 16QAM: 4M52W7D
BW 10M QPSK: 8M99G7D, 16QAM: 9M00W7D
BW 15M QPSK: 13M46G7D, 16QAM: 13M44W7D
BW 20M QPSK: 17M91G7D, 16QAM: 17M91W7D

Conducted
Output power : QPSK: 0.188W (22.74dBm)
16QAM: 0.150W (21.75dBm)

Antenna type : External antenna

Antenna gain : 4.0dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth	Channel	Frequency [MHz]
LTE Band IV	QPSK	1.4MHz	19957	1710.7
			20175	1732.5
			20393	1754.3
		3MHz	19965	1711.5
			20175	1732.5
			20385	1753.5
	5MHz	19975	1712.5	
		20175	1732.5	
	10MHz	20000	1715.0	
		20175	1732.5	
	15MHz	20350	1750.0	
		20025	1717.5	
	20MHz	20175	1732.5	
		20325	1747.5	
LTE Band IV	16QAM	1.4MHz	19957	1710.7
			20175	1732.5
			20393	1754.3
		3MHz	19965	1711.5
			20175	1732.5
			20385	1753.5
	5MHz	19975	1712.5	
		20175	1732.5	
	10MHz	20375	1752.5	
		20000	1715.0	
	15MHz	20175	1732.5	
		20350	1750.0	
	20MHz	20025	1717.5	
		20175	1732.5	
20MHz	20325	1747.5		
	20050	1720.0		
20MHz	20175	1732.5		
	20300	1745.0		

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

3. Configuration of equipment


3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Module	KYOCERA	KA36	N/A	JOYKA36	EUT
2	JOINT BOARD	KYOCERA	N/A	N/A	N/A	-
3	SHARK Antenna	YOKOWO	N/A	N/A	N/A	-
4	Whip Antenna	EAD	PTR7210	N/A	N/A	-
5	GPS Antenna	PASTERNAK	PE51066	N/A	N/A	-

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	RF cable (MAIN)	0.3	YES	Metal	-
b	RF cable (SUB)	0.3	YES	Metal	-
c	GPS Antenna cable	5.0	YES	Metal	-
d	DC cable	1.3	NO	Plastic	-
e	RF cable	0.9	YES	Metal	-

3.3 System configuration

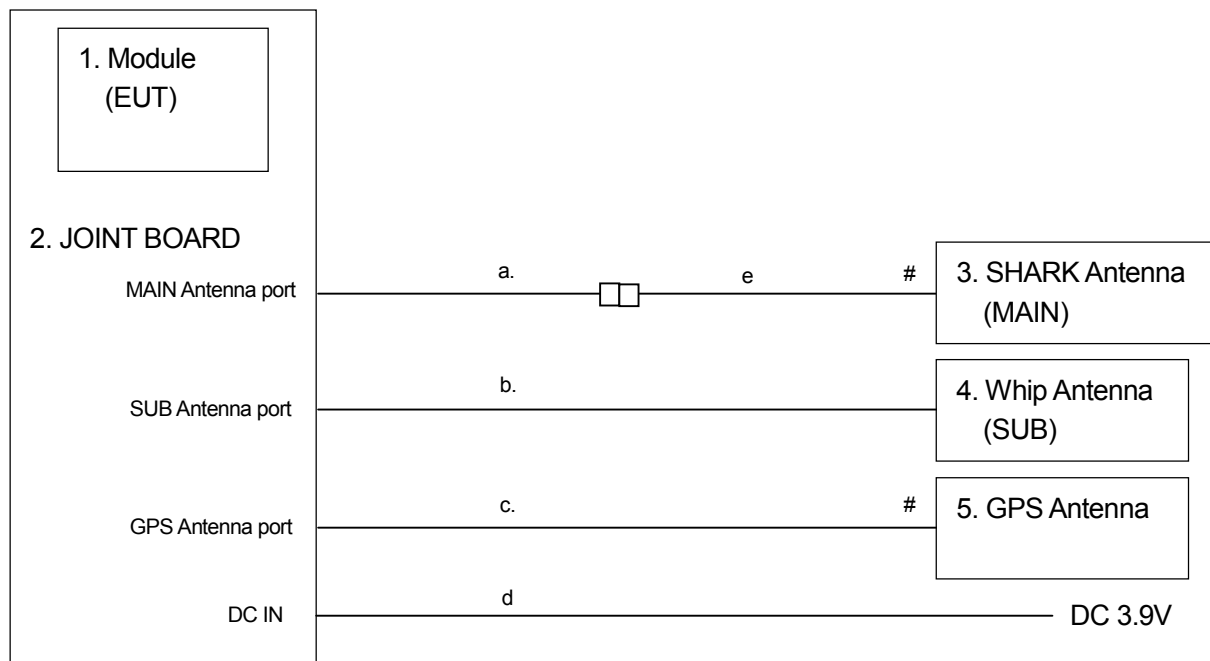

: Un-detachable cable

 : Connector

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. Equivalent Isotropic Radiated Power

4.1 Measurement procedure

[FCC 27.50(d)(4), IC RSS-139 6.4]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: RMS Average (RBW: 430kHz, VBW: 1.5MHz)

- Test configuration

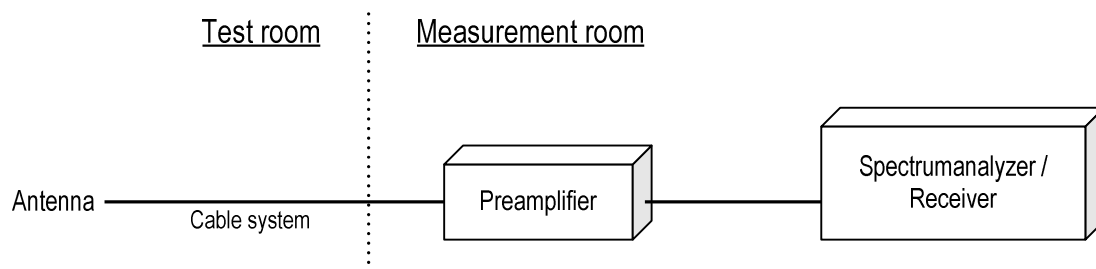

4.2 Calculation method

Result (EIRP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1732.5MHz : 30.0dBm

S.G Reading = 21.5dBm Cable loss = 1.1dB Ant. Gain = 8.5dBi

Result = 21.5 – 1.1 + 8.5 = 28.9dBm

Margin = 30.0 - 28.9 = 1.1dB

4.3 Limit

1 W (30.0dBm)

4.4 Test data

Date : August 23, 2015
 Temperature : 25.6 [°C]
 Humidity : 68.4 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Taiki Watanabe

Date : August 24, 2015
 Temperature : 25.0 [°C]
 Humidity : 59.8 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

[LTE Band IV]

QPSK, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-16.0	20.2	1.1	8.5	27.6	30.0	2.4
H	1732.5	-15.0	20.8	1.1	8.5	28.2	30.0	1.8
H	1754.3	-16.5	20.0	1.1	8.5	27.4	30.0	2.6

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-16.4	19.8	1.1	8.5	27.2	30.0	2.8
H	1732.5	-15.6	20.2	1.1	8.5	27.6	30.0	2.4
H	1754.3	-16.9	19.6	1.1	8.5	27.0	30.0	3.0

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-17.5	18.7	1.1	8.5	26.1	30.0	3.9
H	1732.5	-16.0	19.8	1.1	8.5	27.2	30.0	2.8
H	1753.5	-18.2	18.2	1.1	8.5	25.6	30.0	4.4

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-17.5	18.7	1.1	8.5	26.1	30.0	3.9
H	1732.5	-16.8	19.0	1.1	8.5	26.4	30.0	3.6
H	1753.5	-17.6	18.8	1.1	8.5	26.2	30.0	3.8

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-17.0	19.2	1.1	8.5	26.6	30.0	3.4
H	1732.5	-16.7	19.1	1.1	8.5	26.5	30.0	3.5
H	1752.5	-18.5	17.9	1.1	8.5	25.3	30.0	4.7

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-17.4	18.8	1.1	8.5	26.2	30.0	3.8
H	1732.5	-17.3	18.5	1.1	8.5	25.9	30.0	4.1
H	1752.5	-18.5	17.9	1.1	8.5	25.3	30.0	4.7

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-16.9	19.3	1.1	8.5	26.7	30.0	3.3
H	1732.5	-16.1	19.7	1.1	8.5	27.1	30.0	2.9
H	1750.0	-16.8	19.6	1.1	8.5	27.0	30.0	3.0

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-16.3	19.9	1.1	8.5	27.3	30.0	2.7
H	1732.5	-16.8	19.0	1.1	8.5	26.4	30.0	3.6
H	1750.0	-18.0	18.4	1.1	8.5	25.8	30.0	4.2

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-17.1	19.1	1.1	8.5	26.5	30.0	3.5
H	1732.5	-16.2	19.6	1.1	8.5	27.0	30.0	3.0
H	1747.5	-16.9	19.5	1.1	8.5	26.9	30.0	3.1

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-16.0	20.2	1.1	8.5	27.6	30.0	2.4
H	1732.5	-17.0	18.8	1.1	8.5	26.2	30.0	3.8
H	1747.5	-18.0	18.4	1.1	8.5	25.8	30.0	4.2



Zacta

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-17.1	19.1	1.1	8.5	26.5	30.0	3.5
H	1732.5	-16.6	19.2	1.1	8.5	26.6	30.0	3.4
H	1745.0	-16.9	19.5	1.1	8.5	26.9	30.0	3.1

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-16.6	19.6	1.1	8.5	27.0	30.0	3.0
H	1732.5	-16.1	19.7	1.1	8.5	27.1	30.0	2.9
H	1745.0	-18.3	18.1	1.1	8.5	25.5	30.0	4.5

5. Radiated Emissions and Harmonic Emissions

5.1 Measurement procedure

[FCC 27.53(h), 2.1053, IC RSS-139 6.5, 6.6]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration

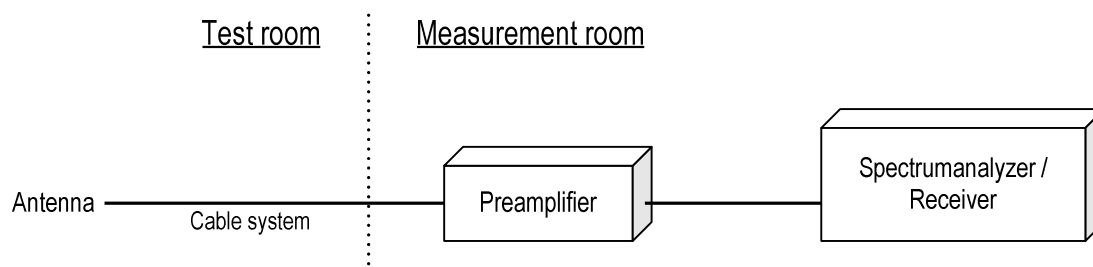

5.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3422.3MHz : -13.0dBm

S.G Reading = -48.7dBm Cable loss = 1.5dB Ant. Gain = 9.8dBi

Result = -48.7 – 1.5 + 9.8 = -40.4dBm

Margin = -13.0 – (-40.4) = 27.4dB

5.3 Limit

-13dBm or less



Zacta

5.4 Test data

Date : August 23, 2015
 Temperature : 25.6 [°C]
 Humidity : 68.4 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Taiki Watanabe

Date : August 24, 2015
 Temperature : 25.0 [°C]
 Humidity : 59.8 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Hikaru Shibata

Date : August 24, 2015
 Temperature : 25.1 [°C]
 Humidity : 62.1 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Taiki Watanabe

[LTE Band IV] QPSK, BW 1.4MHz Channel: 19957

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3422.3	-45.4	-45.3	1.5	9.8	-37.0	-13.0	24.0
V	3422.3	-40.3	-38.5	1.5	9.8	-30.2	-13.0	17.2

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3466.0	-48.0	-47.7	1.5	9.8	-39.5	-13.0	26.5
V	3466.0	-44.8	-43.0	1.5	9.8	-34.8	-13.0	21.8

Channel: 20395

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3510.0	-48.4	-48.3	1.5	9.8	-40.1	-13.0	27.1
V	3510.0	-46.8	-45.9	1.5	9.8	-37.7	-13.0	24.7

16QAM, BW 1.4MHz**Channel: 19957**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-44.8	-44.7	1.5	9.8	-36.4	-13.0	23.4
V	3421.4	-42.0	-40.2	1.5	9.8	-31.9	-13.0	18.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3464.8	-49.0	-48.7	1.5	9.8	-40.5	-13.0	27.5
V	3464.8	-45.0	-43.2	1.5	9.8	-35.0	-13.0	22.0

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.2	-49.5	-49.4	1.5	9.7	-41.2	-13.0	28.2
V	3508.2	-48.0	-47.1	1.5	9.7	-38.9	-13.0	25.9

QPSK, BW 3MHz**Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.6	-47.1	-47.0	1.5	9.8	-38.7	-13.0	25.7
V	3425.6	-43.6	-41.8	1.5	9.8	-33.5	-13.0	20.5

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3467.6	-54.0	-53.7	1.5	9.8	-45.5	-13.0	32.5
V	3467.7	-44.2	-42.4	1.5	9.8	-34.2	-13.0	21.2

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3509.6	-50.4	-50.3	1.5	9.7	-42.1	-13.0	29.1
V	3509.6	-47.0	-46.1	1.5	9.7	-37.9	-13.0	24.9

16QAM, BW 3MHz**Channel: 19965**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.5	-44.0	-43.9	1.5	9.8	-35.6	-13.0	22.6
V	3425.6	-38.2	-36.4	1.5	9.8	-28.1	-13.0	15.1

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3467.6	-52.0	-51.7	1.5	9.8	-43.5	-13.0	30.5
V	3467.5	-46.3	-44.5	1.5	9.8	-36.3	-13.0	23.3

Channel: 20385

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3509.5	-50.1	-50.0	1.5	9.7	-41.8	-13.0	28.8
V	3509.6	-47.2	-46.3	1.5	9.7	-38.1	-13.0	25.1

QPSK, BW 5MHz**Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3429.4	-37.0	-39.7	1.5	9.8	-31.4	-13.0	18.4
V	3429.4	-43.5	-41.7	1.5	9.8	-33.4	-13.0	20.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3469.4	-53.0	-52.7	1.5	9.8	-44.5	-13.0	31.5
V	3469.4	-48.9	-47.1	1.5	9.8	-38.9	-13.0	25.9

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3509.4	-47.4	-47.3	1.5	9.7	-39.1	-13.0	26.1
V	3509.4	-48.2	-47.3	1.5	9.7	-39.1	-13.0	26.1

16QAM, BW 5MHz**Channel: 19975**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3429.4	-37.0	-36.9	1.5	9.8	-28.6	-13.0	15.6
V	3429.4	-36.0	-34.2	1.5	9.8	-25.9	-13.0	12.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3469.4	-50.0	-49.7	1.5	9.8	-41.5	-13.0	28.5
V	3469.4	-47.0	-45.2	1.5	9.8	-37.0	-13.0	24.0

Channel: 20375

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3509.4	-49.0	-48.9	1.5	9.7	-40.7	-13.0	27.7
V	3509.4	-46.0	-45.1	1.5	9.7	-36.9	-13.0	23.9

QPSK, BW 10MHz**Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.2	-32.2	-30.9	1.5	9.8	-22.6	-13.0	9.6
V	3421.2	-35.0	-33.2	1.5	9.8	-24.9	-13.0	11.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3456.2	-43.5	-43.2	1.5	9.8	-34.9	-13.0	21.9
V	3456.2	-42.9	-41.1	1.5	9.8	-32.8	-13.0	19.8

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3491.2	-49.8	-49.7	1.5	9.7	-41.5	-13.0	28.5
V	3491.2	-47.0	-46.1	1.5	9.7	-37.9	-13.0	24.9

16QAM, BW 10MHz**Channel: 20000**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3438.9	-35.0	-34.9	1.5	9.8	-26.6	-13.0	13.6
V	3438.9	-44.8	-43.0	1.5	9.8	-34.7	-13.0	21.7

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3473.9	-47.0	-46.7	1.5	9.8	-38.5	-13.0	25.5
V	3473.9	-47.0	-45.2	1.5	9.8	-37.0	-13.0	24.0

Channel: 20393

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3509.0	-48.7	-48.6	1.5	9.7	-40.4	-13.0	27.4
V	3509.0	-47.0	-46.1	1.5	9.7	-37.9	-13.0	24.9

QPSK, BW 15MHz**Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.6	-36.2	-35.6	1.5	9.8	-27.3	-13.0	14.3
V	3421.6	-34.5	-32.7	1.5	9.8	-24.4	-13.0	11.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3451.7	-45.1	-44.8	1.5	9.8	-36.5	-13.0	23.5
V	3451.7	-47.6	-46.1	1.5	9.8	-37.8	-13.0	24.8

Channel: 20350

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3481.7	-48.6	-48.1	1.5	9.7	-39.9	-13.0	26.9
V	3481.7	-49.3	-48.5	1.5	9.7	-40.3	-13.0	27.3

16QAM, BW 15MHz**Channel: 20025**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3448.3	-45.0	-45.1	1.5	9.8	-36.8	-13.0	23.8
V	3448.3	-39.6	-40.2	1.5	9.8	-31.9	-13.0	18.9

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3478.3	-47.8	-47.4	1.5	9.8	-39.2	-13.0	26.2
V	3478.3	-49.9	-49.2	1.5	9.8	-41.0	-13.0	28.0

Channel: 20325

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.4	-47.0	-46.9	1.5	9.7	-38.7	-13.0	25.7
V	3508.3	-49.0	-48.1	1.5	9.7	-39.9	-13.0	26.9

QPSK, BW 20MHz**Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3422.2	-36.3	-36.2	1.5	9.8	-27.9	-13.0	14.9
V	3422.2	-34.5	-32.7	1.5	9.8	-24.4	-13.0	11.4

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3447.1	-42.6	-42.3	1.5	9.8	-34.0	-13.0	21.0
V	3447.2	-39.7	-37.9	1.5	9.8	-29.6	-13.0	16.6

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3472.3	-51.0	-50.9	1.5	9.8	-42.7	-13.0	29.7
V	3472.2	-49.7	-48.8	1.5	9.8	-40.6	-13.0	27.6



Zacta

16QAM, BW 20MHz**Channel: 20050**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3422.3	-34.5	-34.4	1.5	9.8	-26.1	-13.0	13.1
V	3422.2	-33.1	-31.3	1.5	9.8	-23.0	-13.0	10.0

Channel: 20175

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3447.2	-45.0	-44.7	1.5	9.8	-36.4	-13.0	23.4
V	3447.2	-43.9	-42.1	1.5	9.8	-33.8	-13.0	20.8

Channel: 20300

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3477.2	-52.4	-52.3	1.5	9.8	-44.1	-13.0	31.1
V	3477.2	-49.4	-48.5	1.5	9.8	-40.3	-13.0	27.3



Zacta

6. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$



Zacta

7. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	-	-	-	Jul. 3, 2017
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Dec. 3, 2017
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2017
3m Semi-anechoic chamber	-	A-0166	-	Jul. 3, 2017
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166	-	

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100451	Dec. 31, 2015	Dec. 25, 2014
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2016	Jun. 12, 2015
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	Jun. 30, 2016	Jun. 4, 2015
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2016	Jun. 4, 2015
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2016	Jun. 23, 2015
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2016	Jun. 23, 2015
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2016	Jun. 11, 2015
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	May 31, 2016	May 1, 2015
Attenuator	AEROFLEX	26A-10	081217-08	Mar. 31, 2016	Mar. 12, 2015
Dipole antenna	Schwarzbeck	VHAP	1020	Sep. 30, 2015	Sep. 5, 2014
Dipole antenna	Schwarzbeck	UHAP	994	Sep. 30, 2015	Sep. 5, 2014
Double ridged guide antenna	EMCO	3115	5205	Feb. 29, 2016	Feb. 16, 2015
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 29, 2016	Feb. 1, 2015
Double ridged guide antenna	EMCO	3115	000058532	Oct. 31, 2015	Oct. 14, 2014
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Jun. 30, 2016	Jun. 19, 2015
Power amplifier	R&K	CGA020M602-2633R	B40240	Mar.31, 2016	Mar. 23, 2015
Microwave cable	SUHNER	SUCOFLEX102/2m	31648/2	Mar. 28, 2016	Mar. 10, 2015
High pass filter	Micro-Tronics	HPM50115	004	Jul. 31, 2016	Jul. 12, 2016
High pass filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2016	Jul. 17, 2016
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	126079	Aug. 31, 2015	Aug. 28, 2014
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	Apr. 30, 2016	Apr. 27, 2015
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	Apr. 30, 2016	Apr. 27, 2015

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.