




**[11a]
W56 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

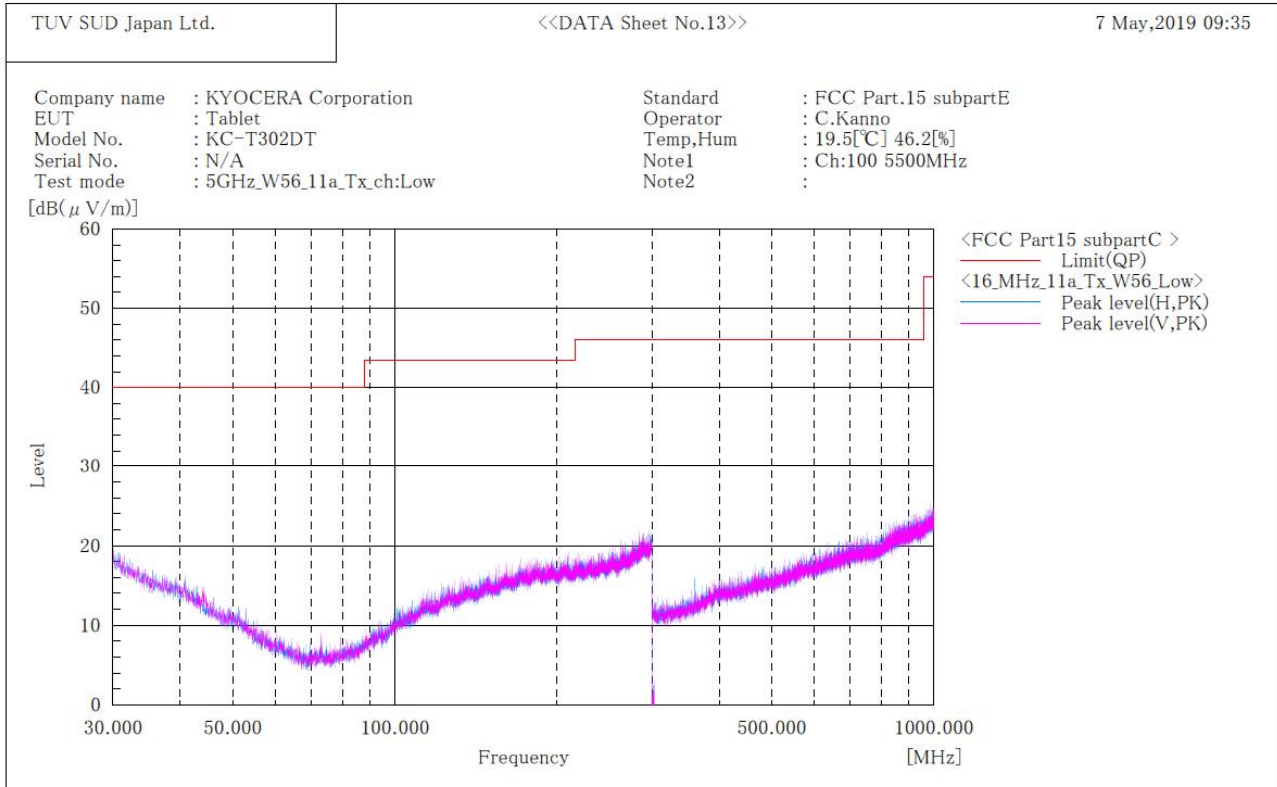

Final Result

No.	Frequency (P)	c.f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11a]
W56 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

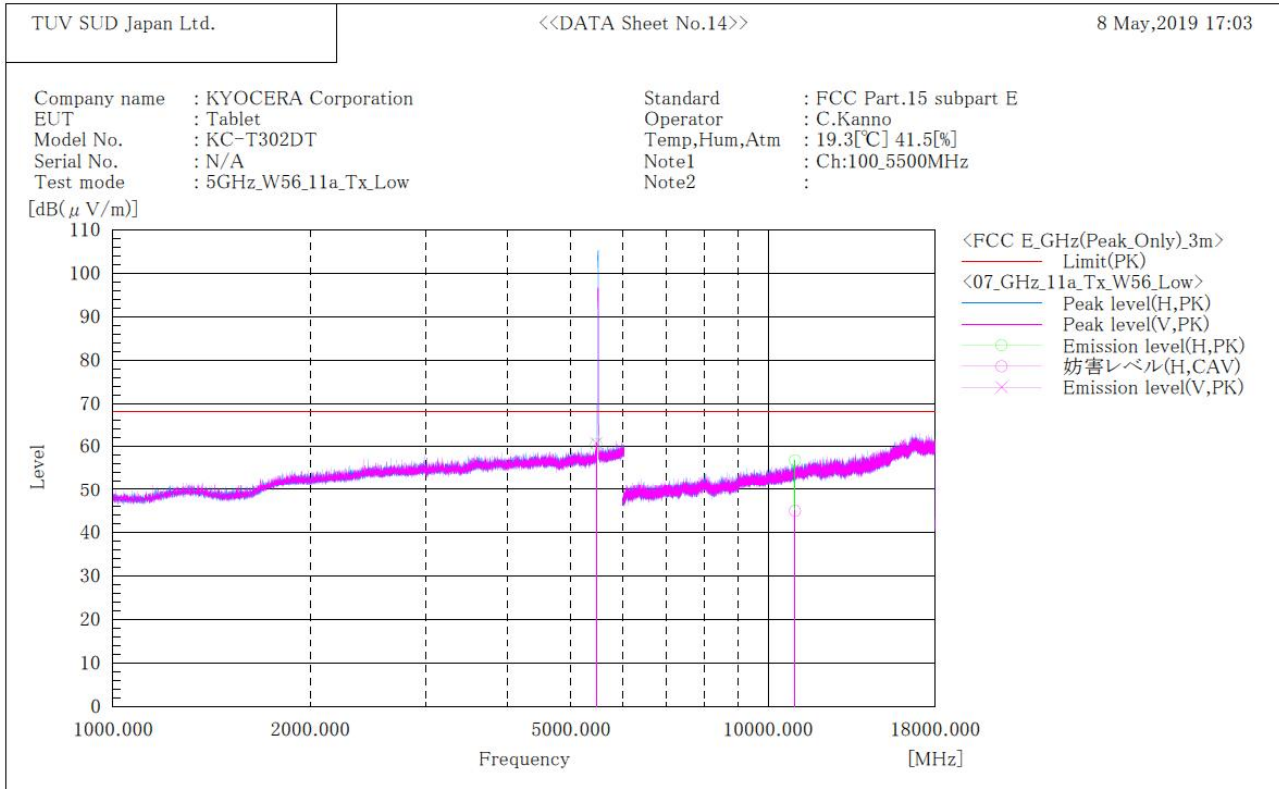

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	5465.700	H	49.5	-----	11.1	60.6	-----	68.2	7.6	-----	147.0	0.0
2	5465.900	V	49.8	-----	11.1	60.9	-----	68.2	7.3	-----	161.0	0.0
3	11000.000	H	45.3	33.4	11.6	56.9	45.0	74.0	17.1	9.0	121.0	328.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11a]
W56 / Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

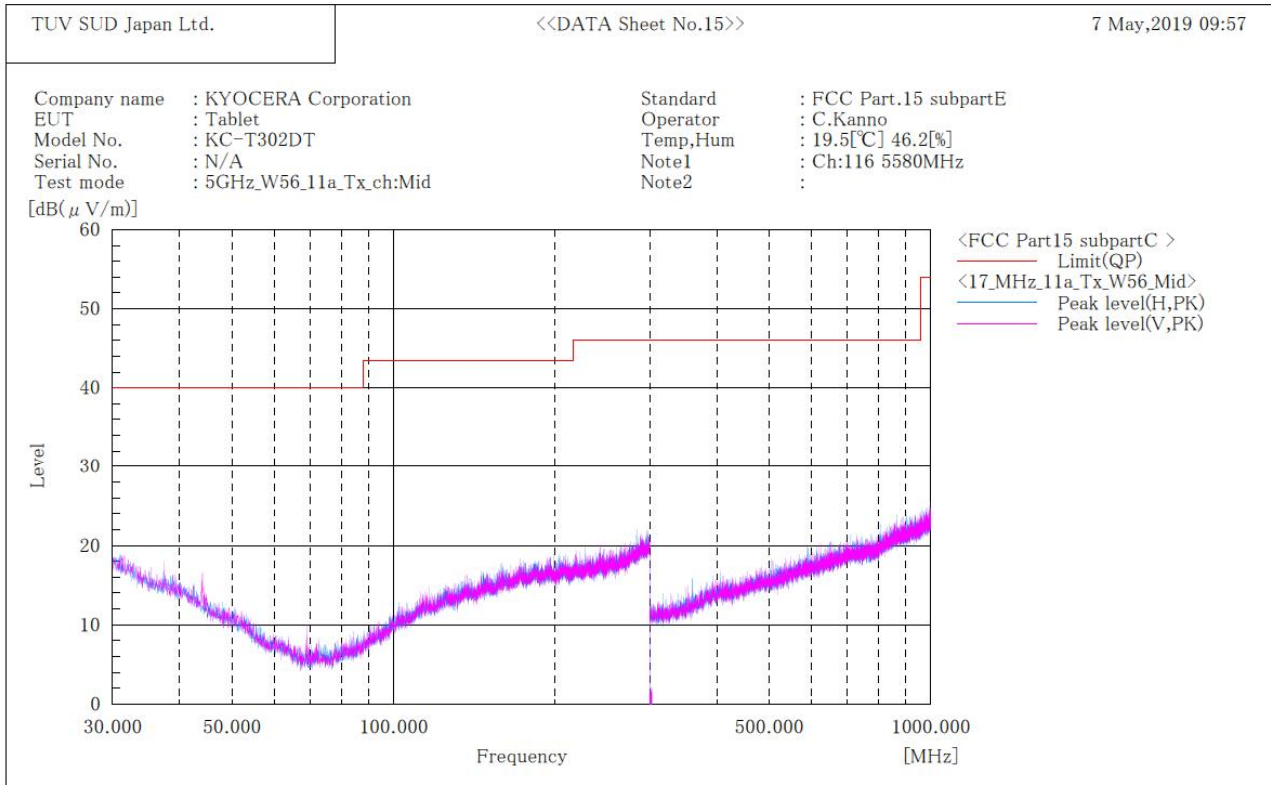

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

[11a]
W56 / Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

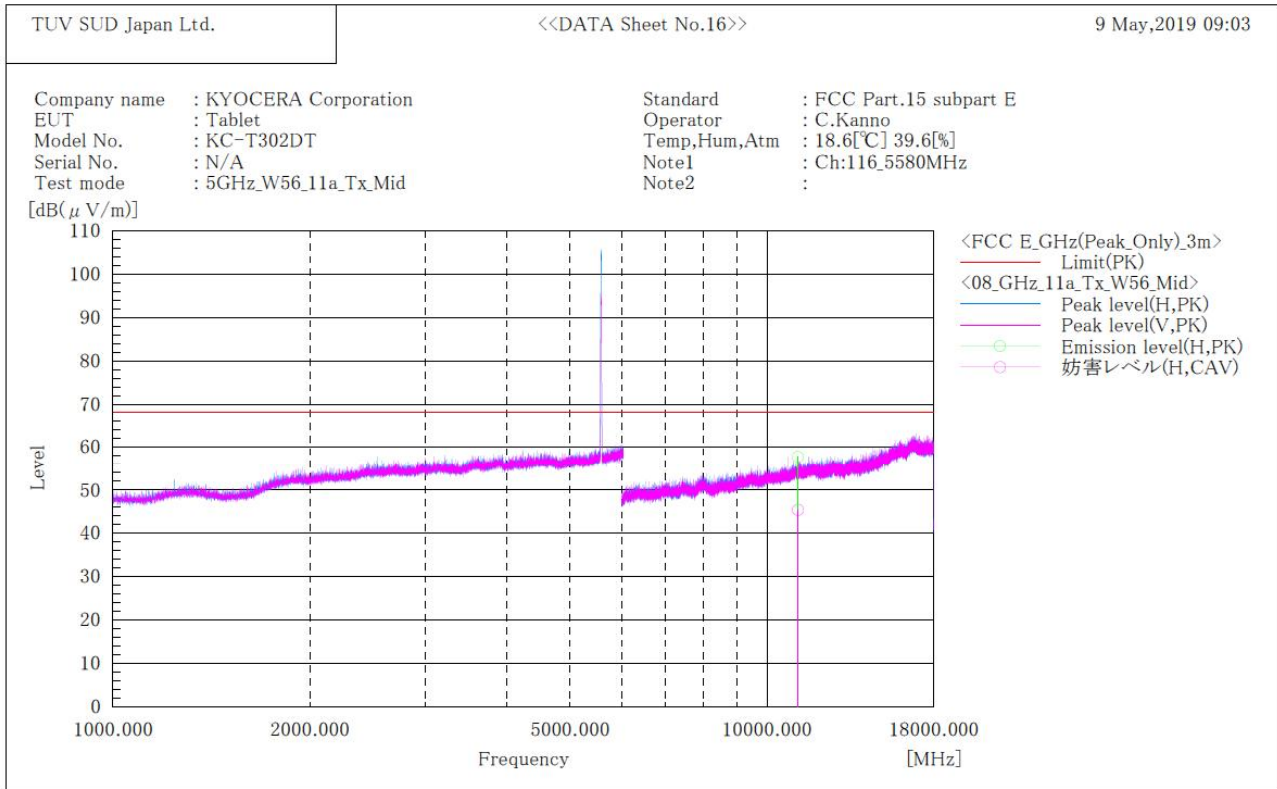

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	11160.000	H	46.0	33.6	11.8	57.8	45.4	74.0	16.2	8.6	151.0	307.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11a]
W56 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

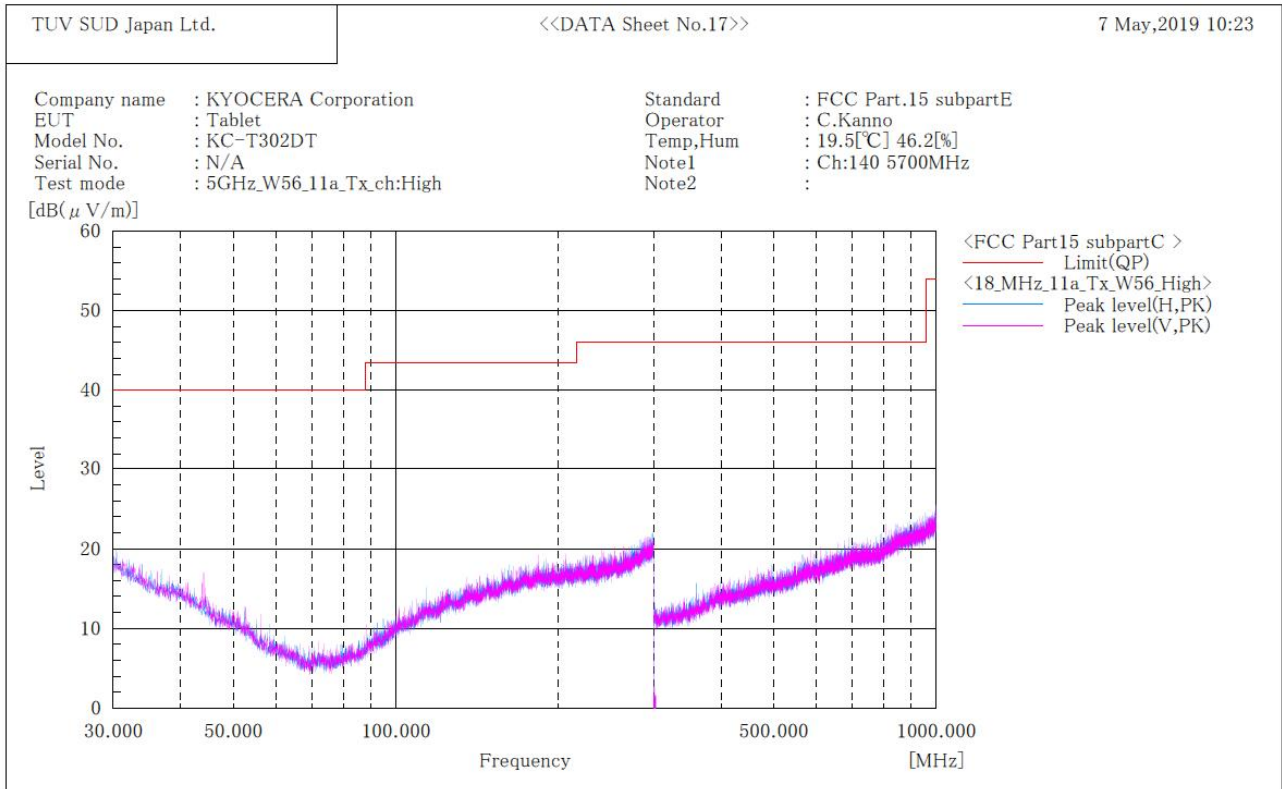

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]
No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.				

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

[11a]
W56 / Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

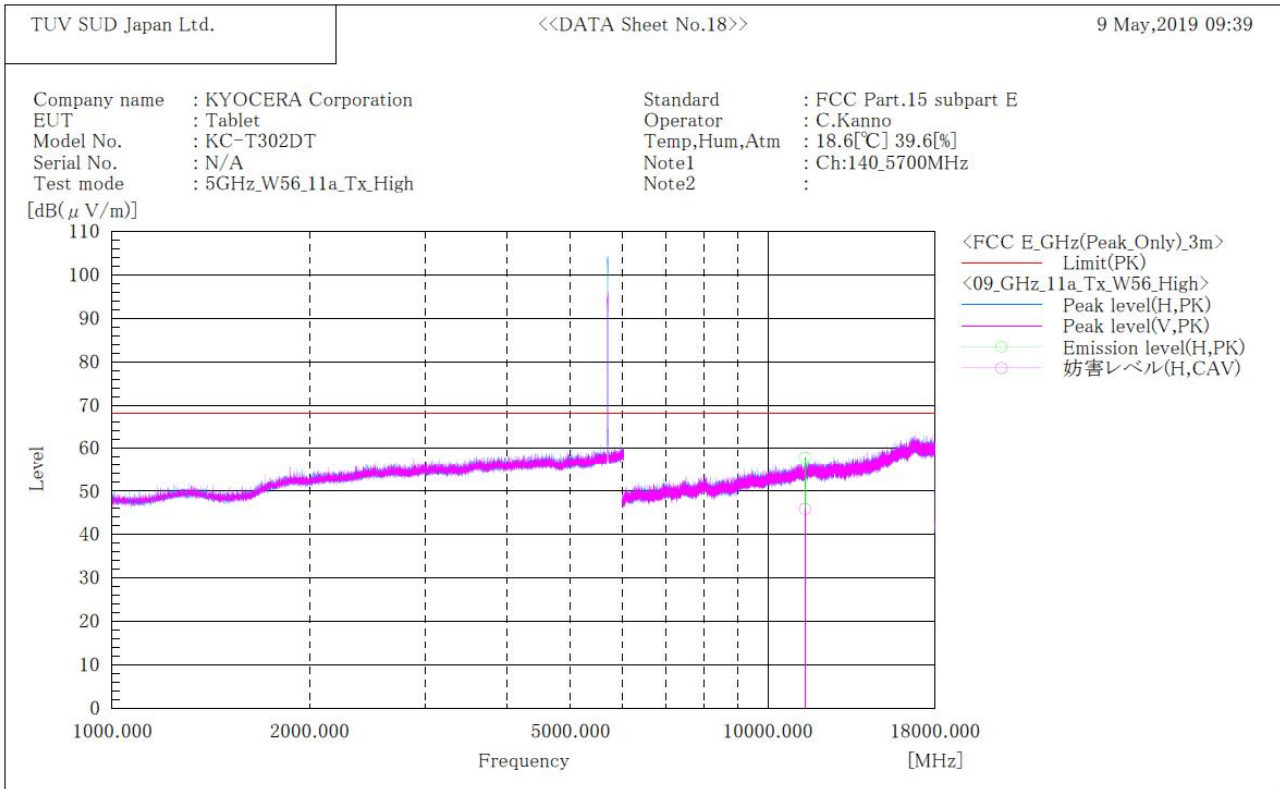

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	11400.000	H	45.8	33.8	12.1	57.9	45.9	74.0	16.1	8.1	141.0	89.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W52 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

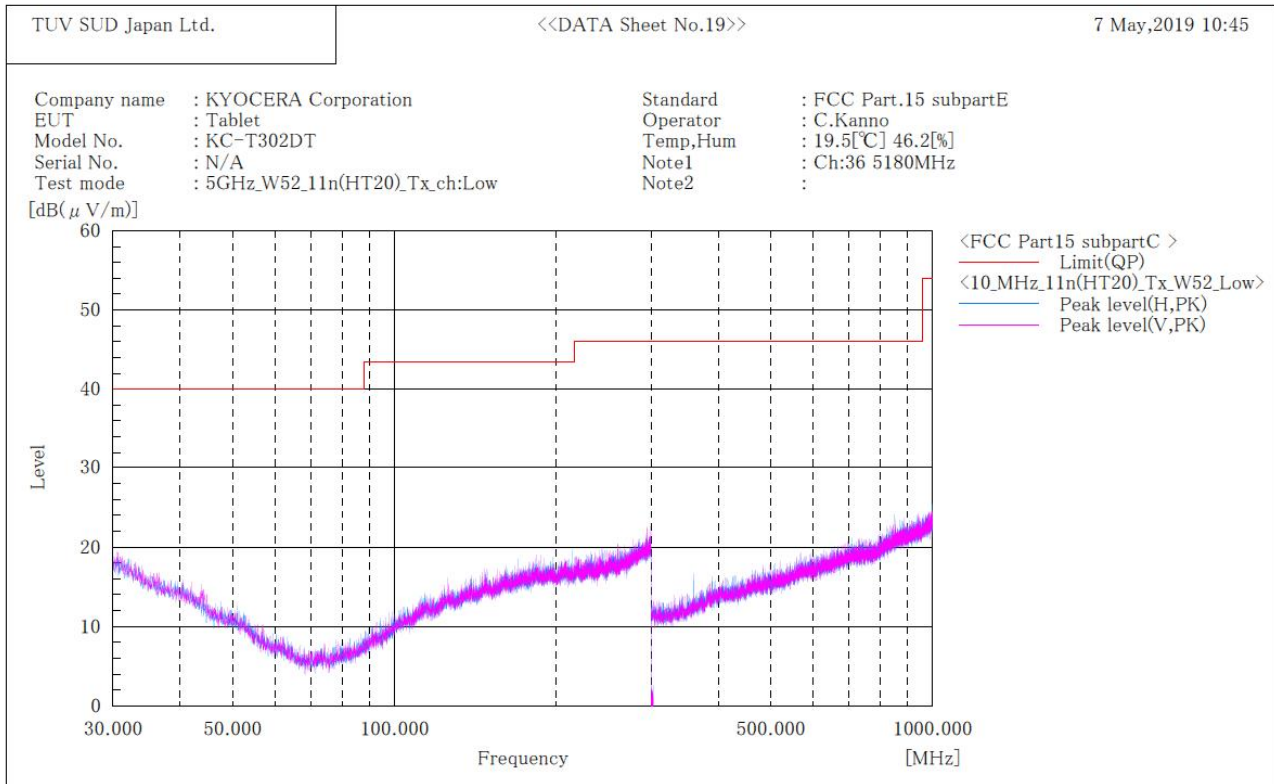

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT20)]
W52 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

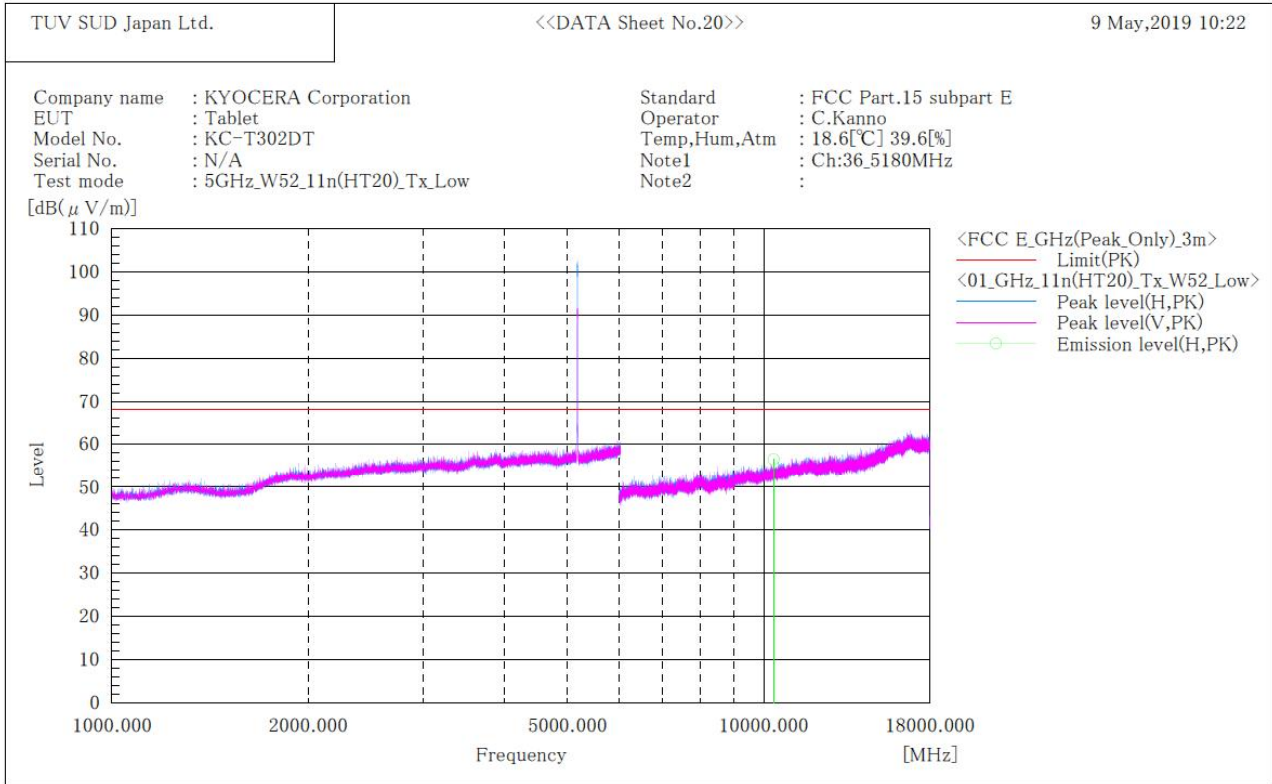

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10360.000	H	45.9	10.7	56.6	68.2	11.6	172.0	118.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W52 / Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

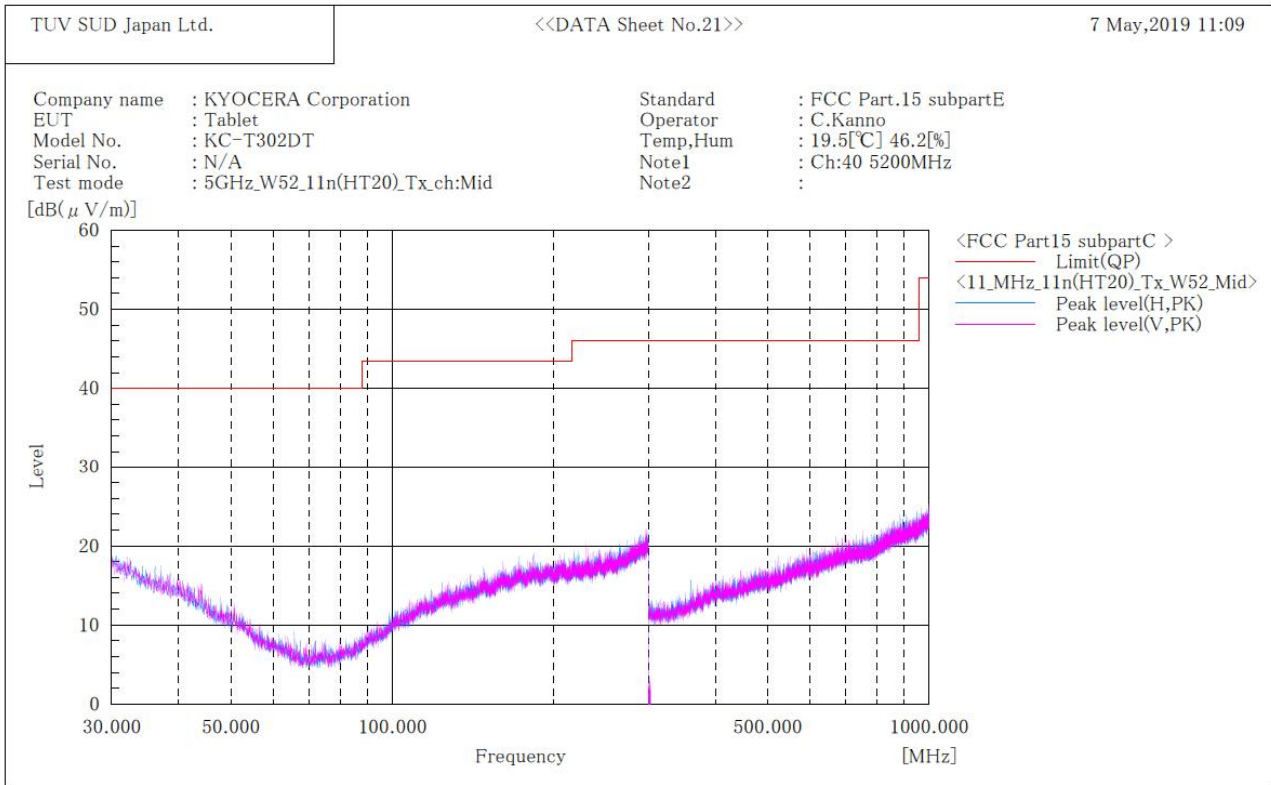

Final Result

No.	Frequency (P)	c.f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT20)]
W52 / Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

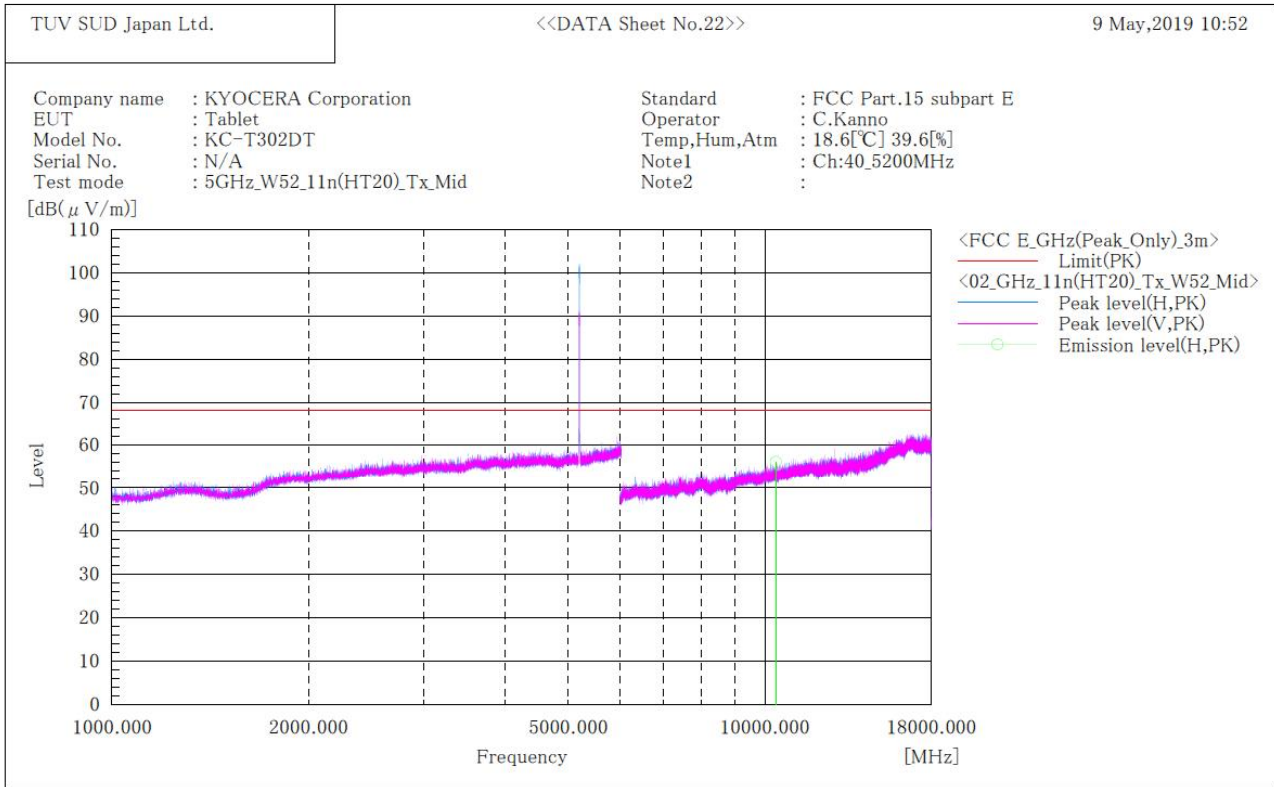

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10400.000	H	45.5	10.7	56.2	68.2	12.0	165.0	129.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11n(HT20)]
W52 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

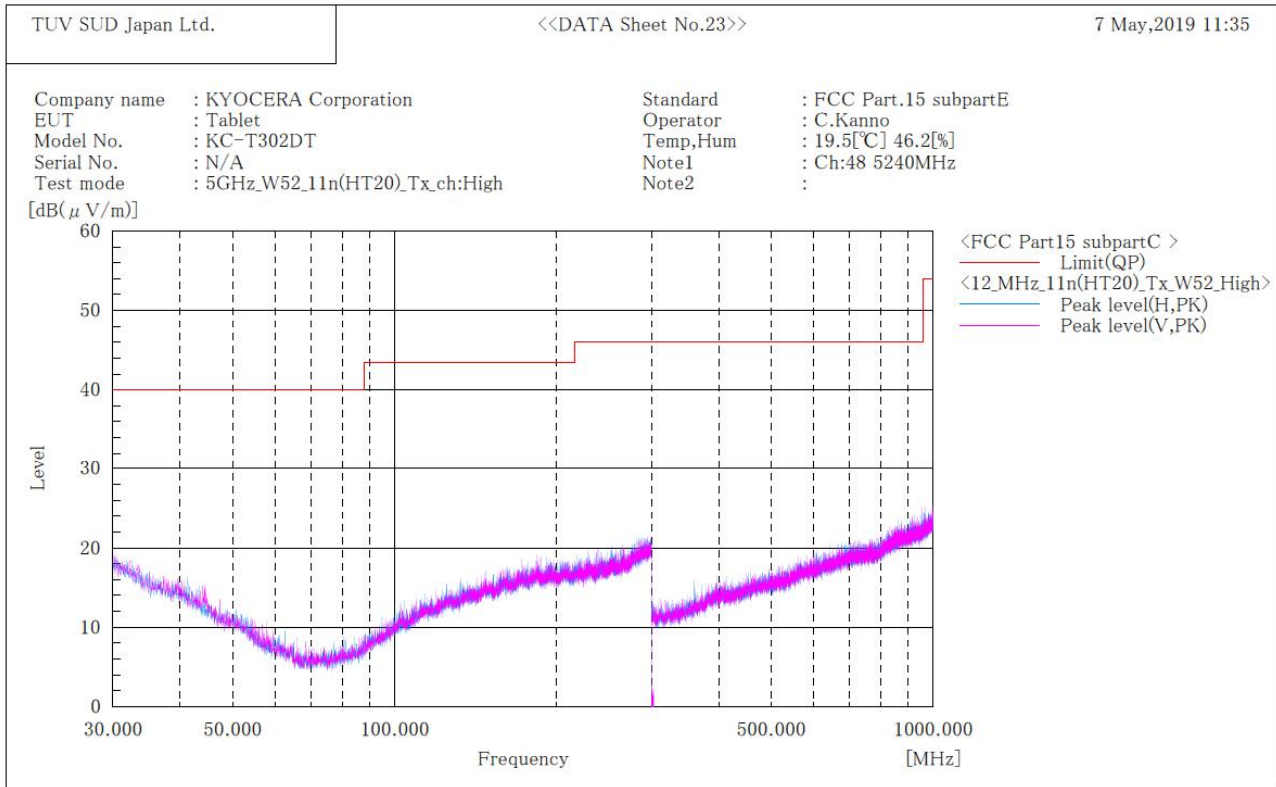

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT20)]
W52 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

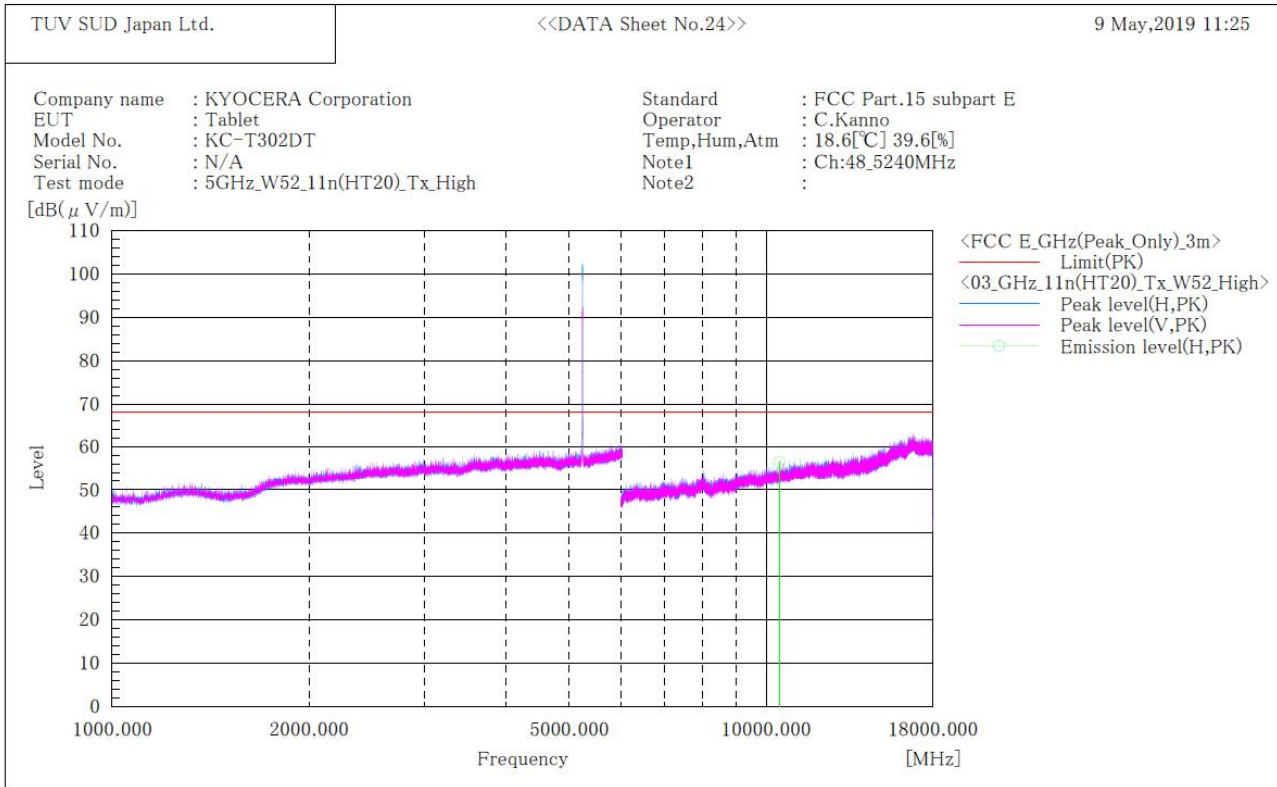

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10480.000	H	45.8	10.8	56.6	68.2	11.6	144.0	121.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W53 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

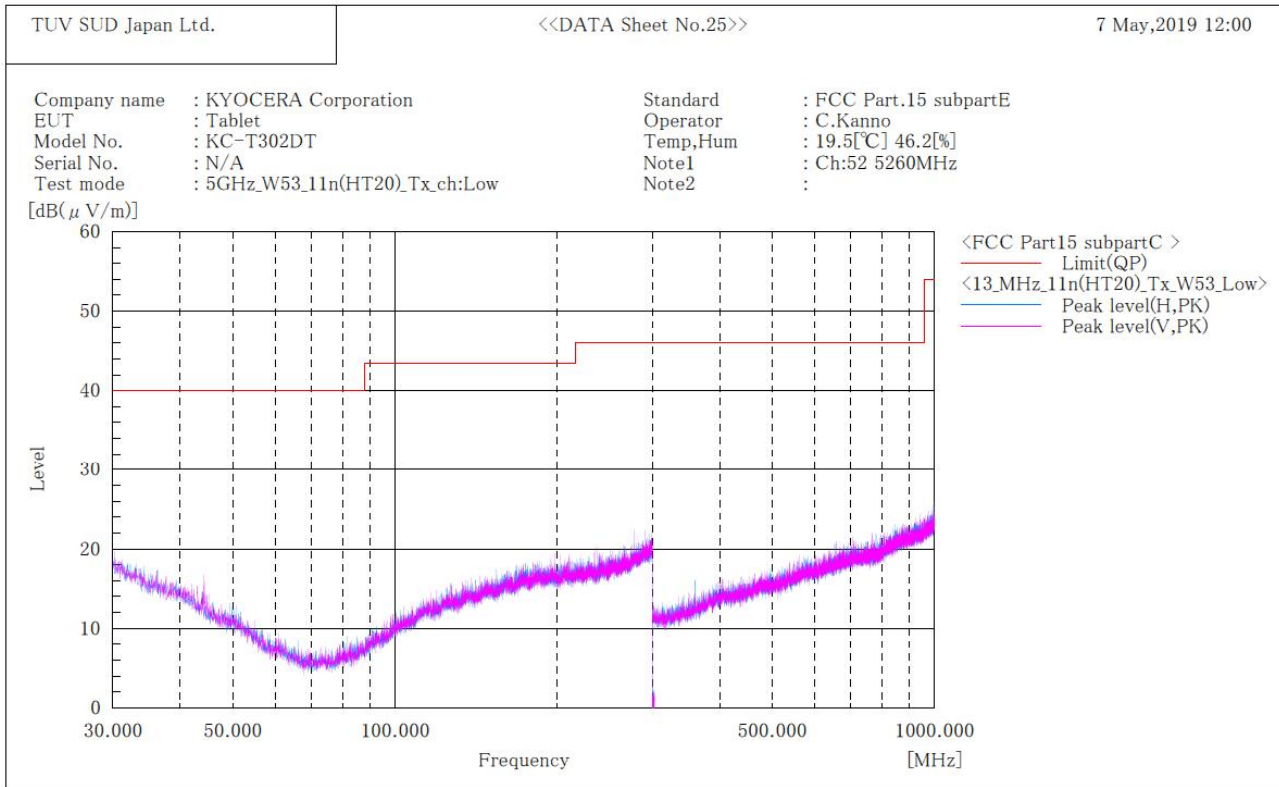

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT20)]
W53 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

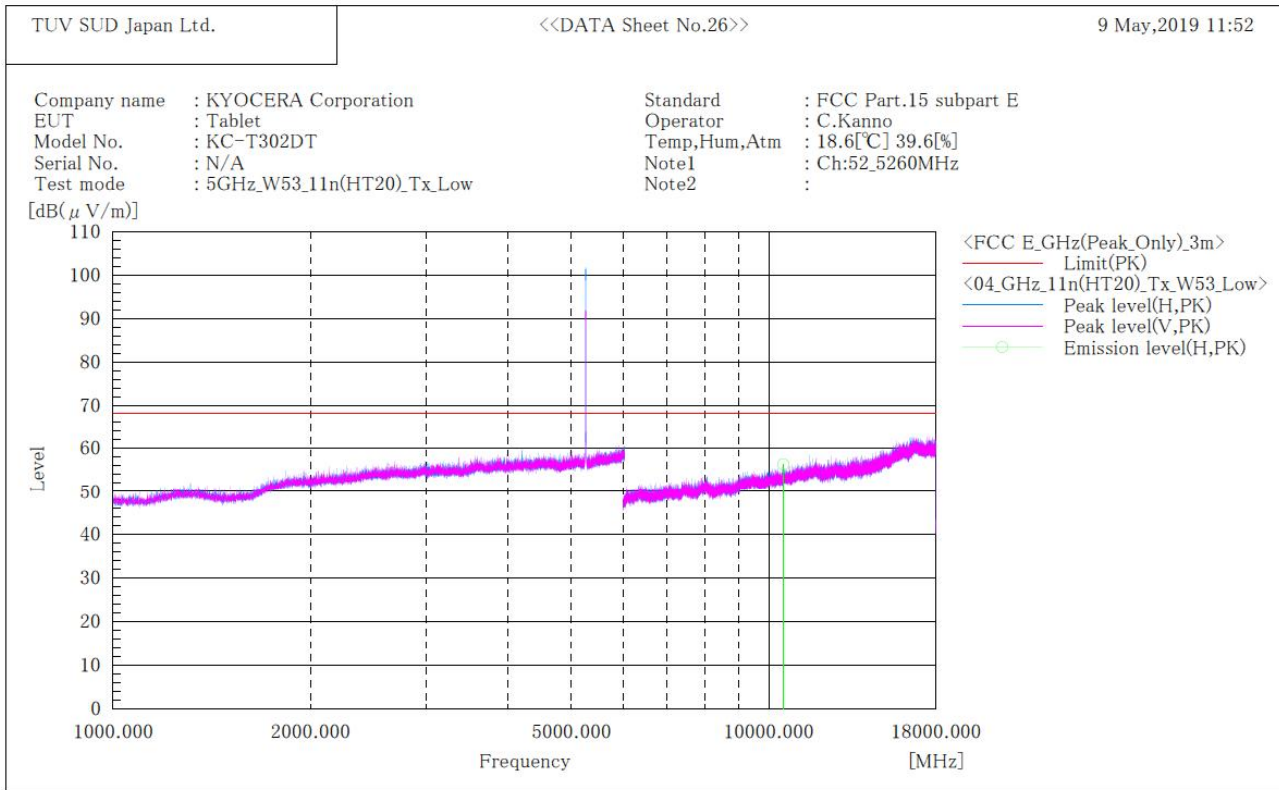

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10520.000	H	45.5	10.9	56.4	68.2	11.8	163.0	144.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W53 / Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

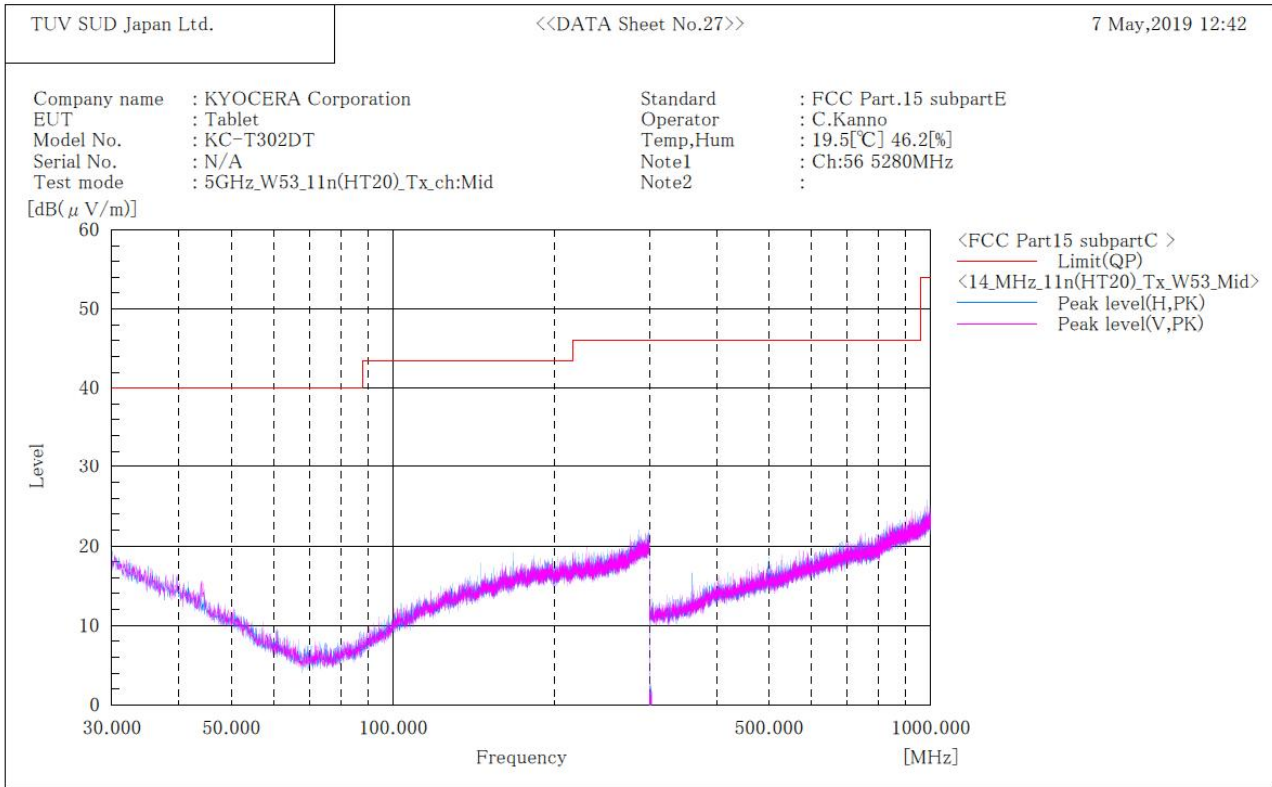

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT20)]
W53 / Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

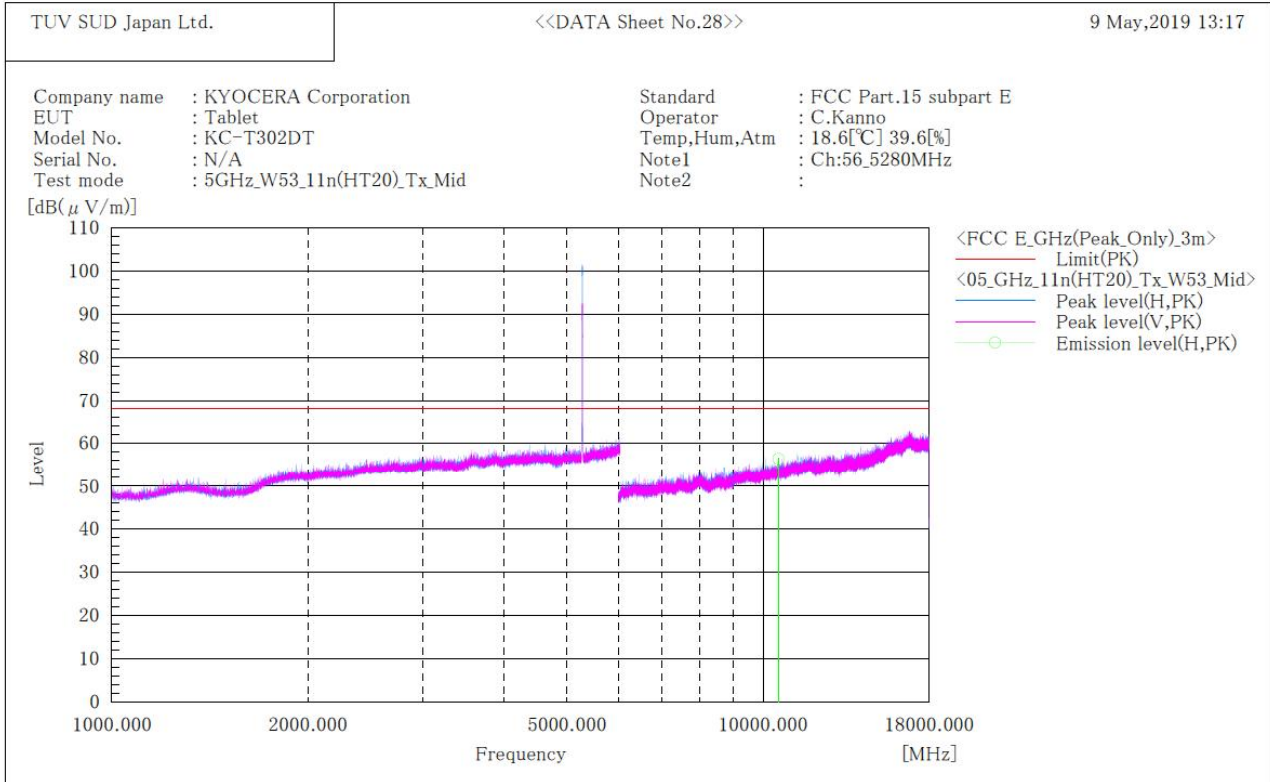

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10560.000	H	45.6	10.9	56.5	68.2	11.7	158.0	107.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W53 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

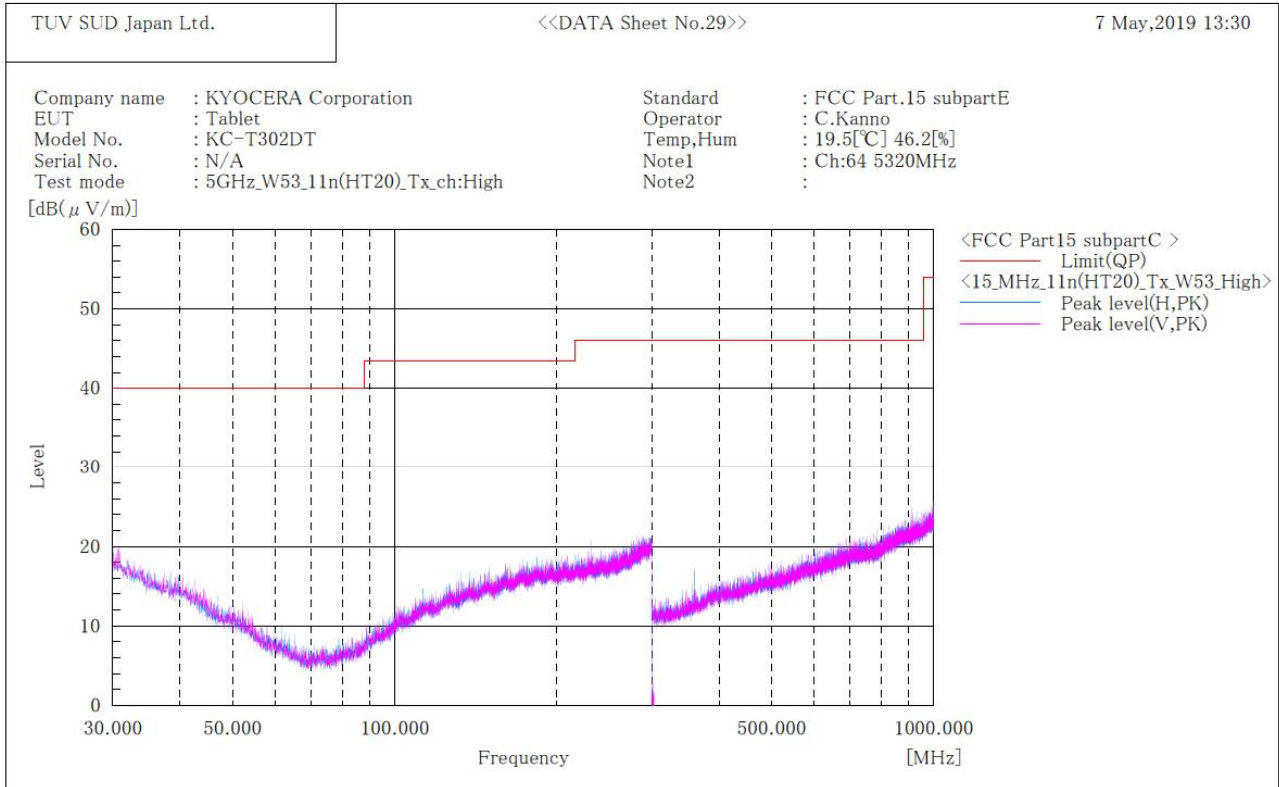

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT20)]
W53 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

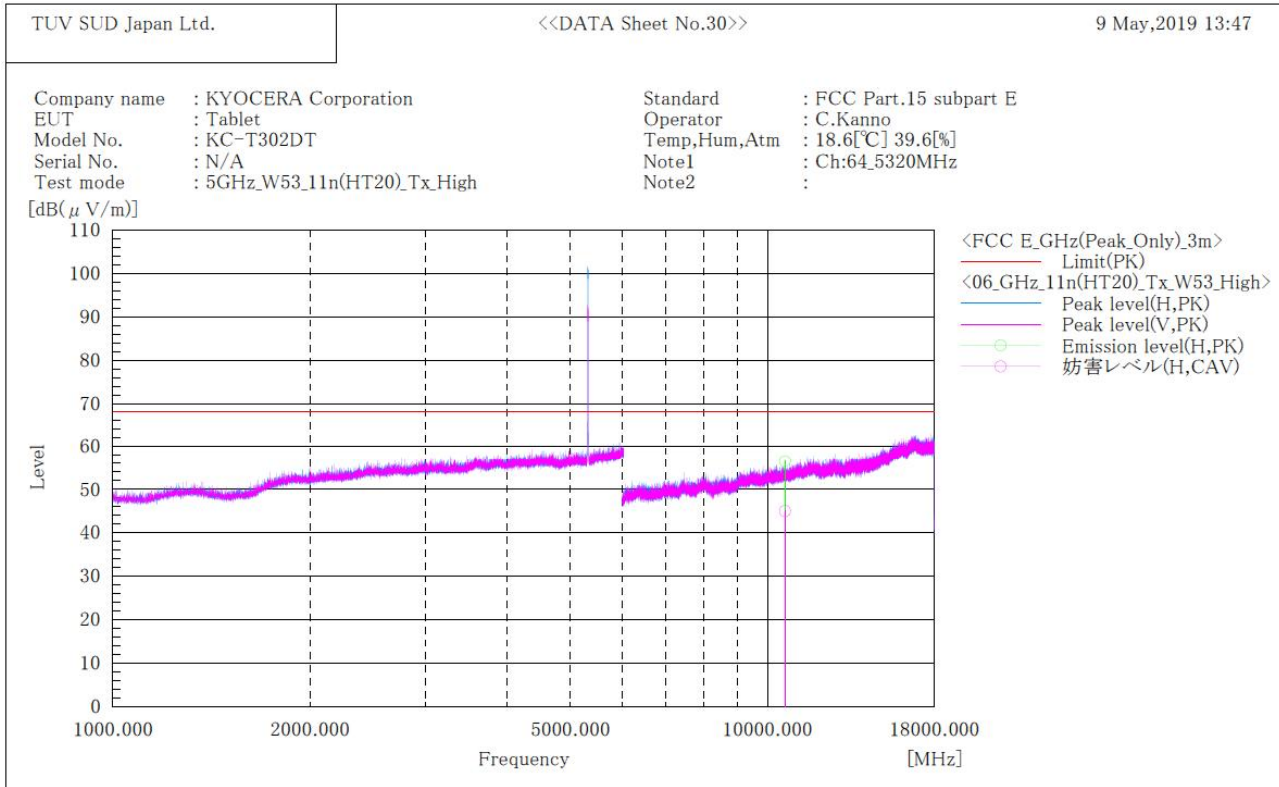

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	10640.000	H	45.5	33.9	11.1	56.6	45.0	74.0	17.4	9.0	153.0	148.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11n(HT20)]
W56 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

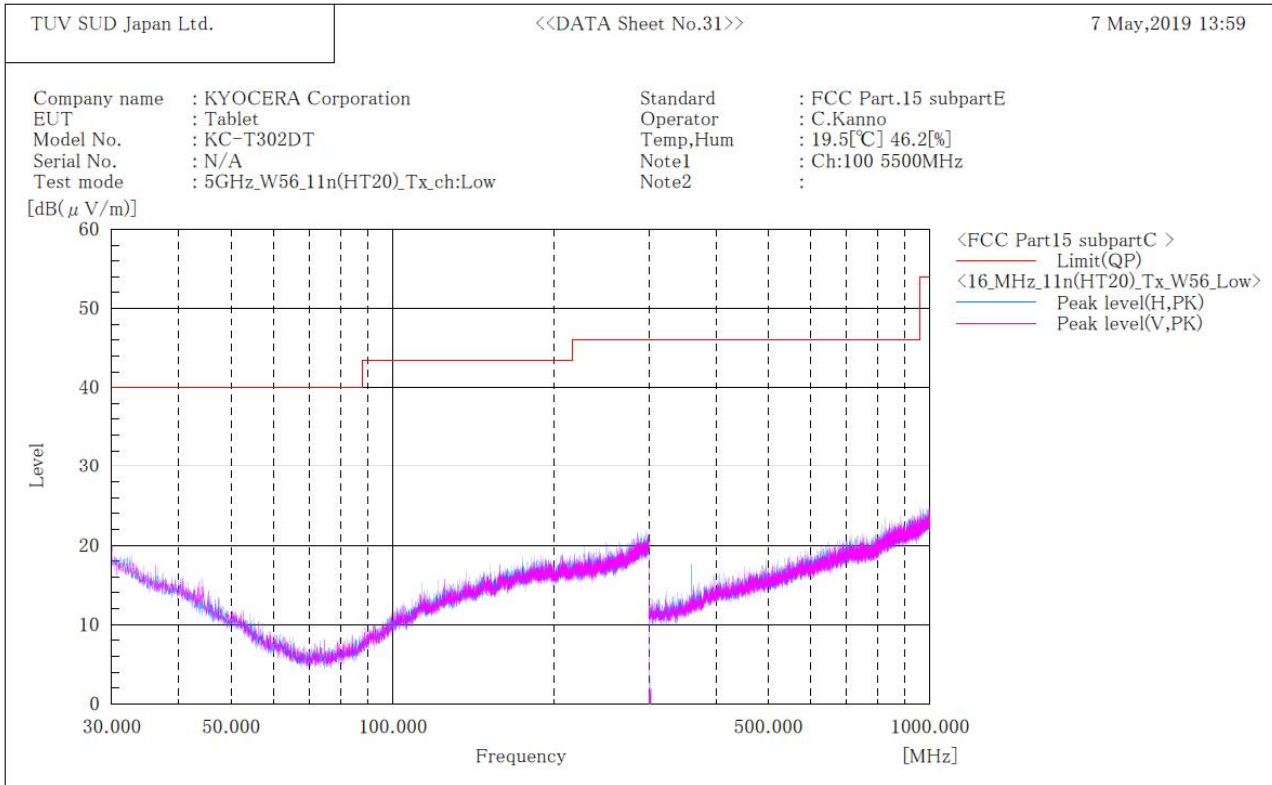

Final Result

No.	Frequency (P)	c.f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT20)]
W56 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

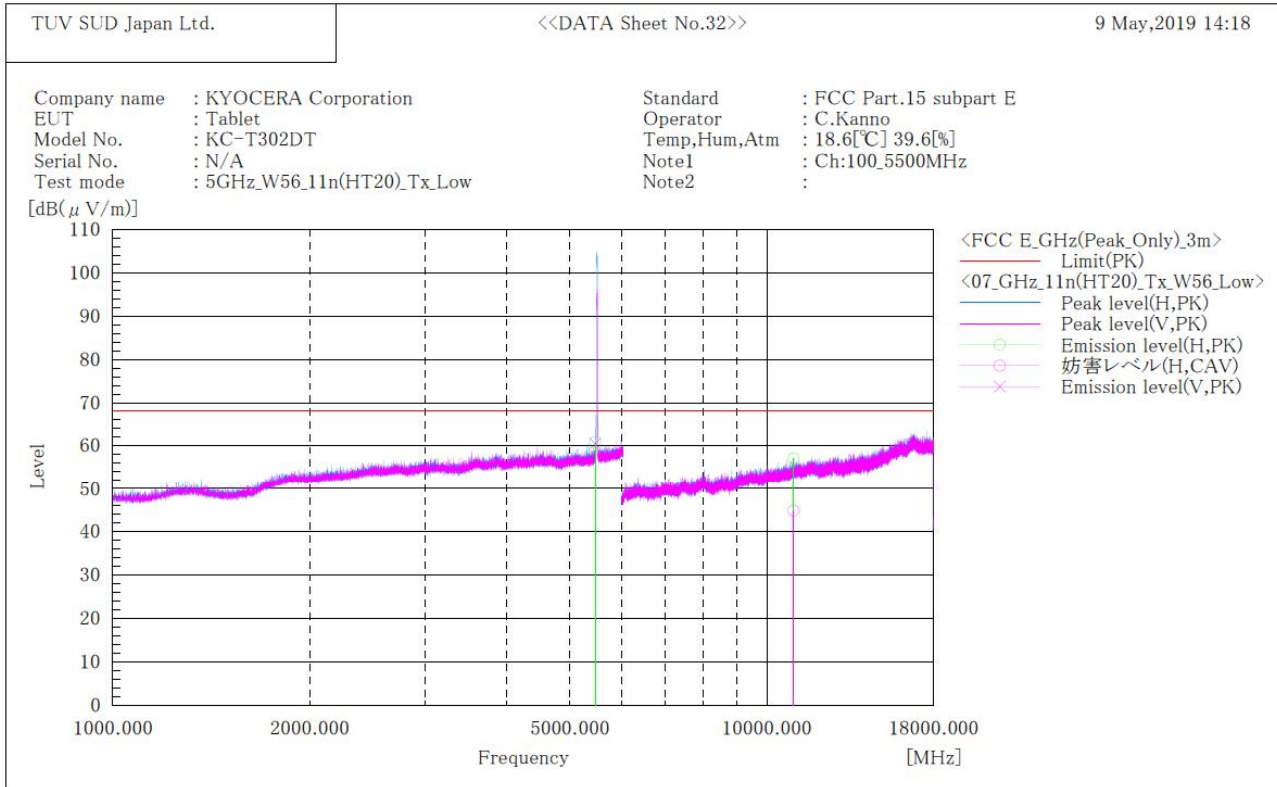

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	5467.000	H	49.8	-----	11.1	60.9	-----	68.2	7.3	-----	172.0	221.0
2	5463.000	V	49.5	-----	11.1	60.6	-----	68.2	7.6	-----	112.0	317.0
3	11000.000	H	45.5	33.3	11.6	57.1	44.9	74.0	16.9	9.1	127.0	74.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W56 / Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

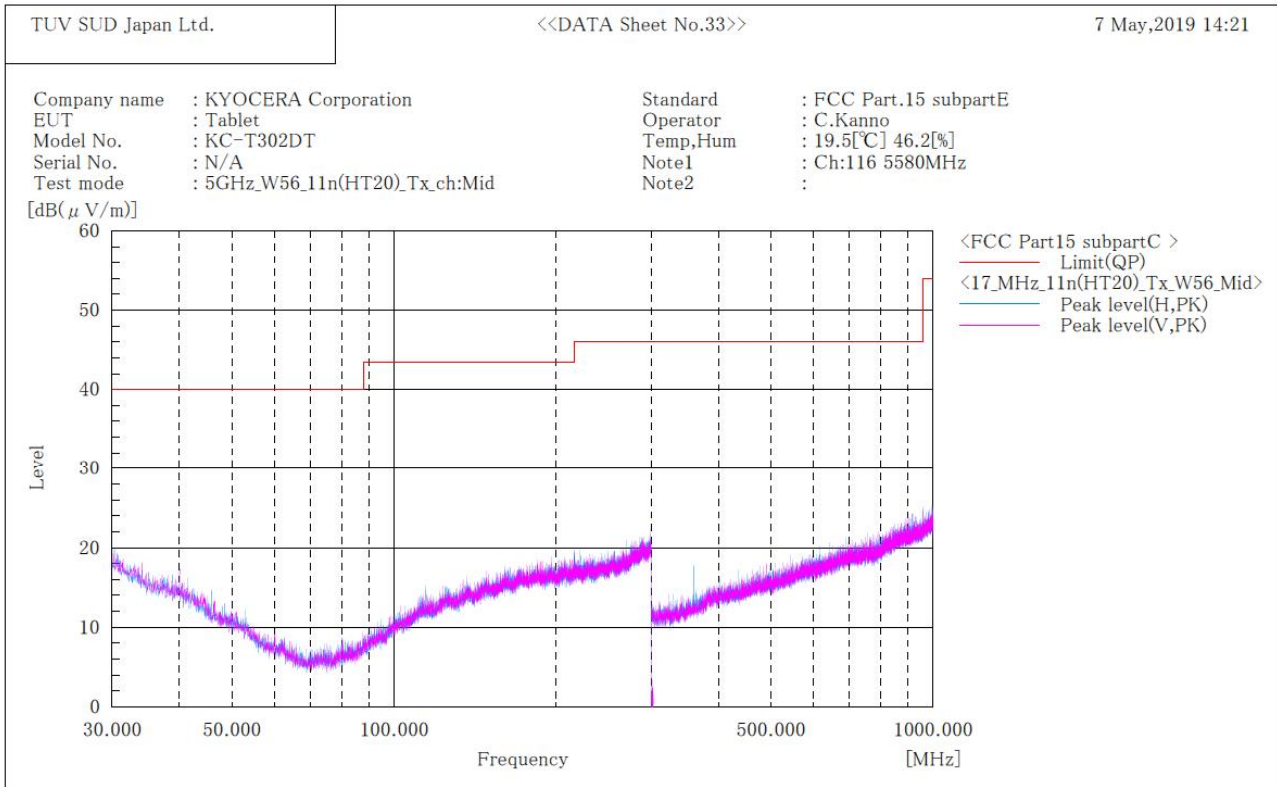

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT20)]
W56 / Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

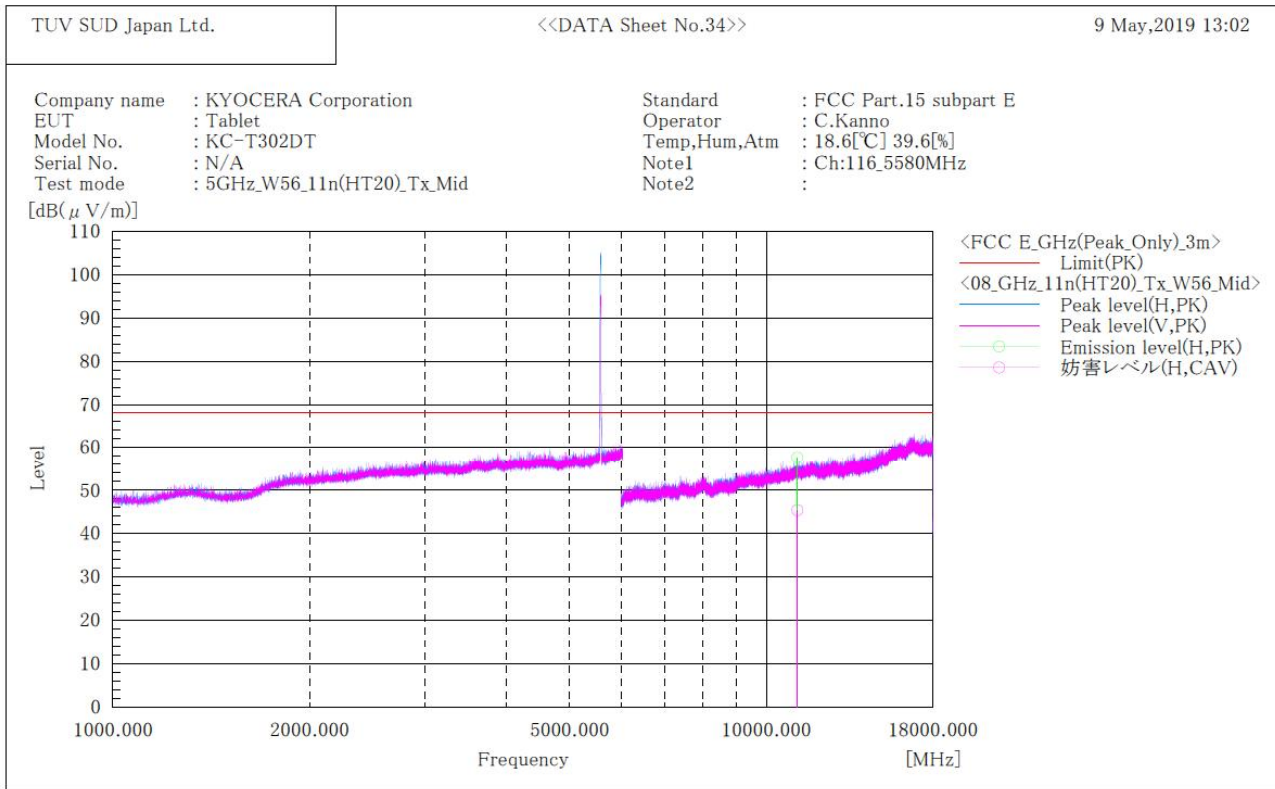

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	11160.000	H	45.9	33.6	11.8	57.7	45.4	74.0	16.3	8.6	100.0	67.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT20)]
W56 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

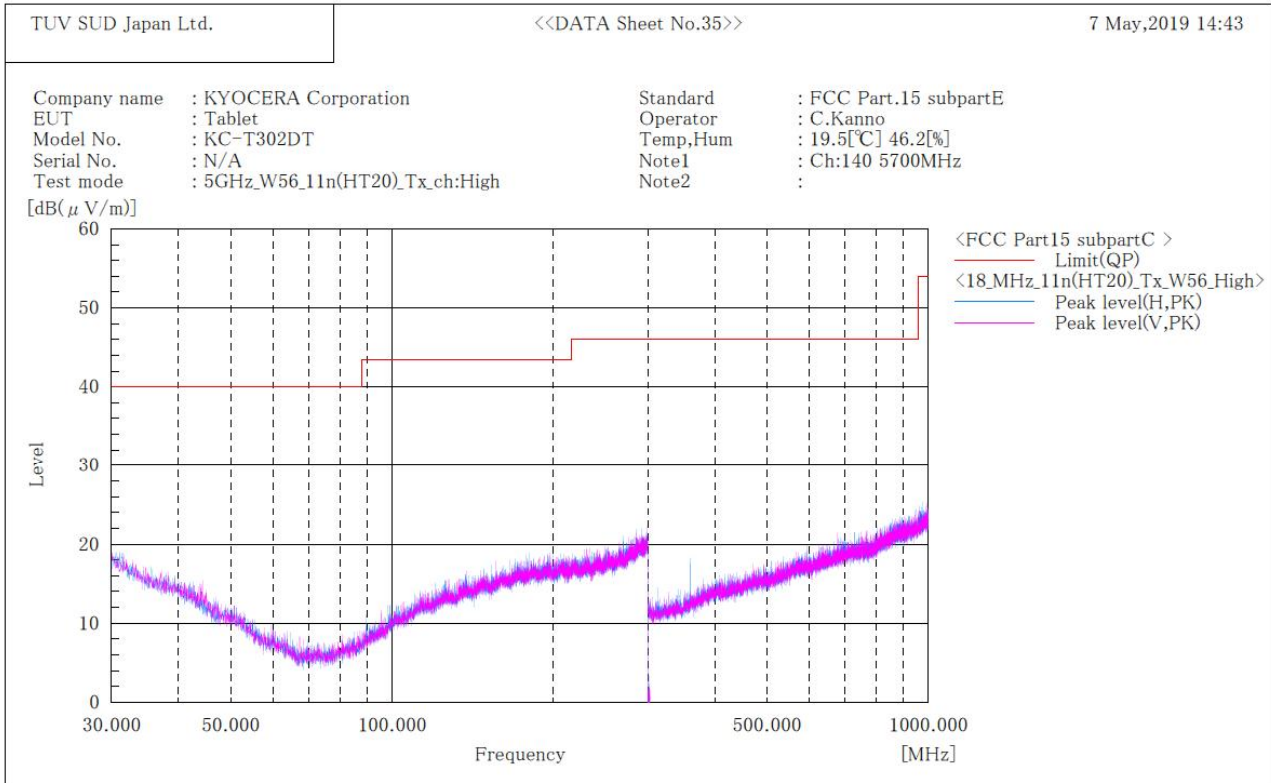

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT20)]
W56 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

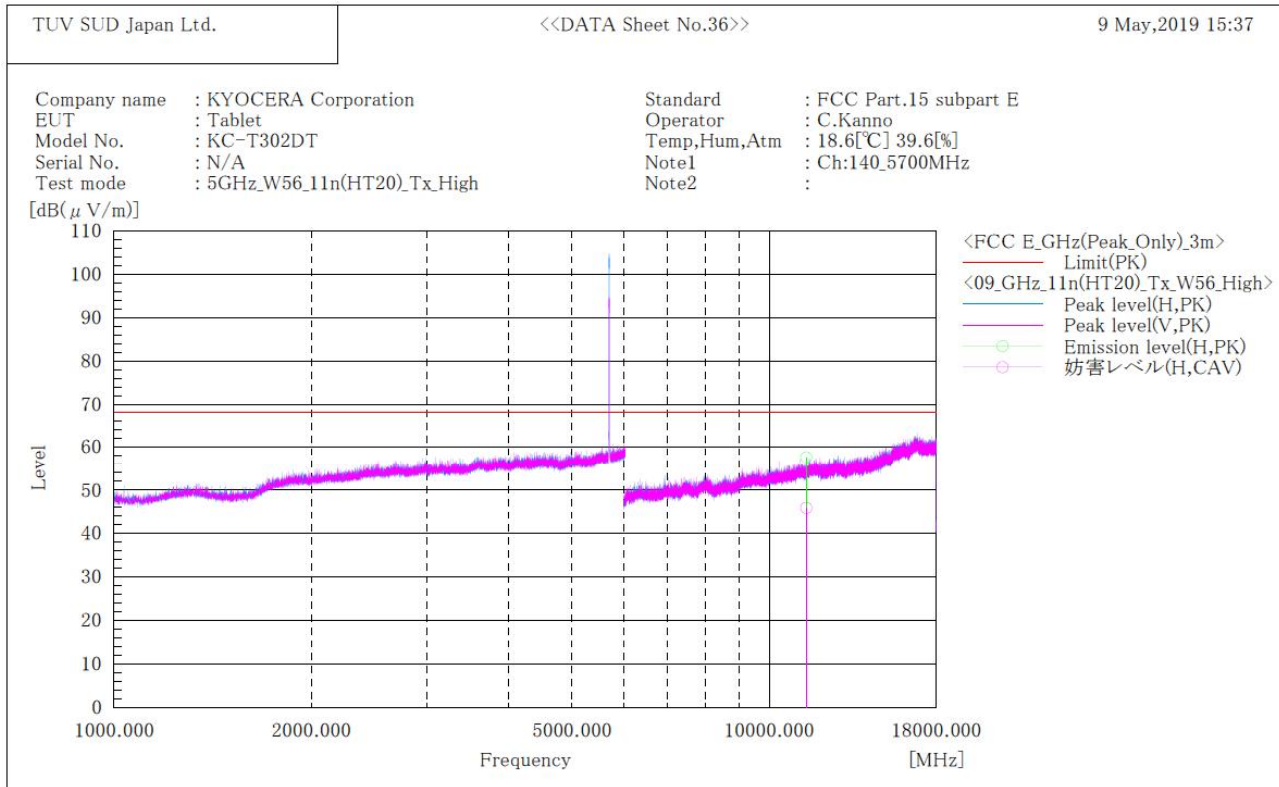

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	11400.000	H	45.6	33.8	12.1	57.7	45.9	74.0	16.3	8.1	137.0	90.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11n(HT40)]
W52 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

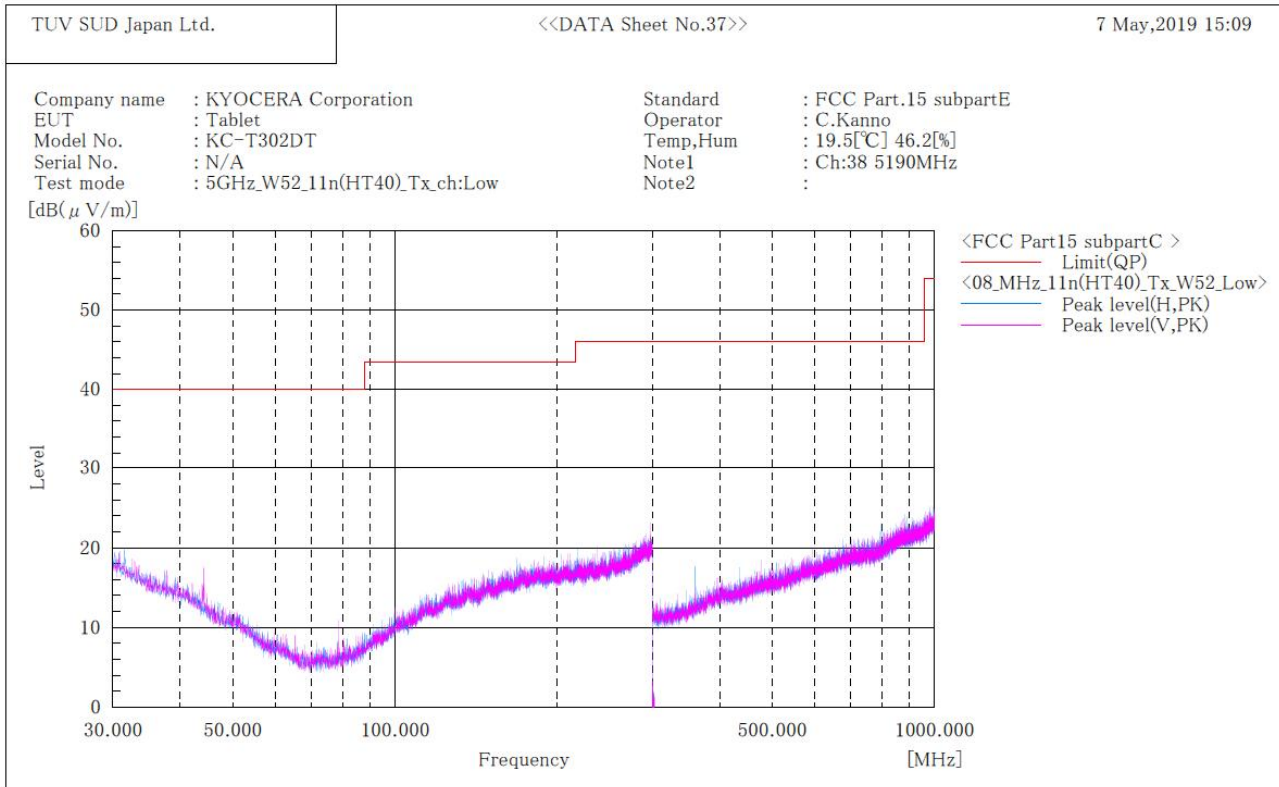

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT40)]
W52 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

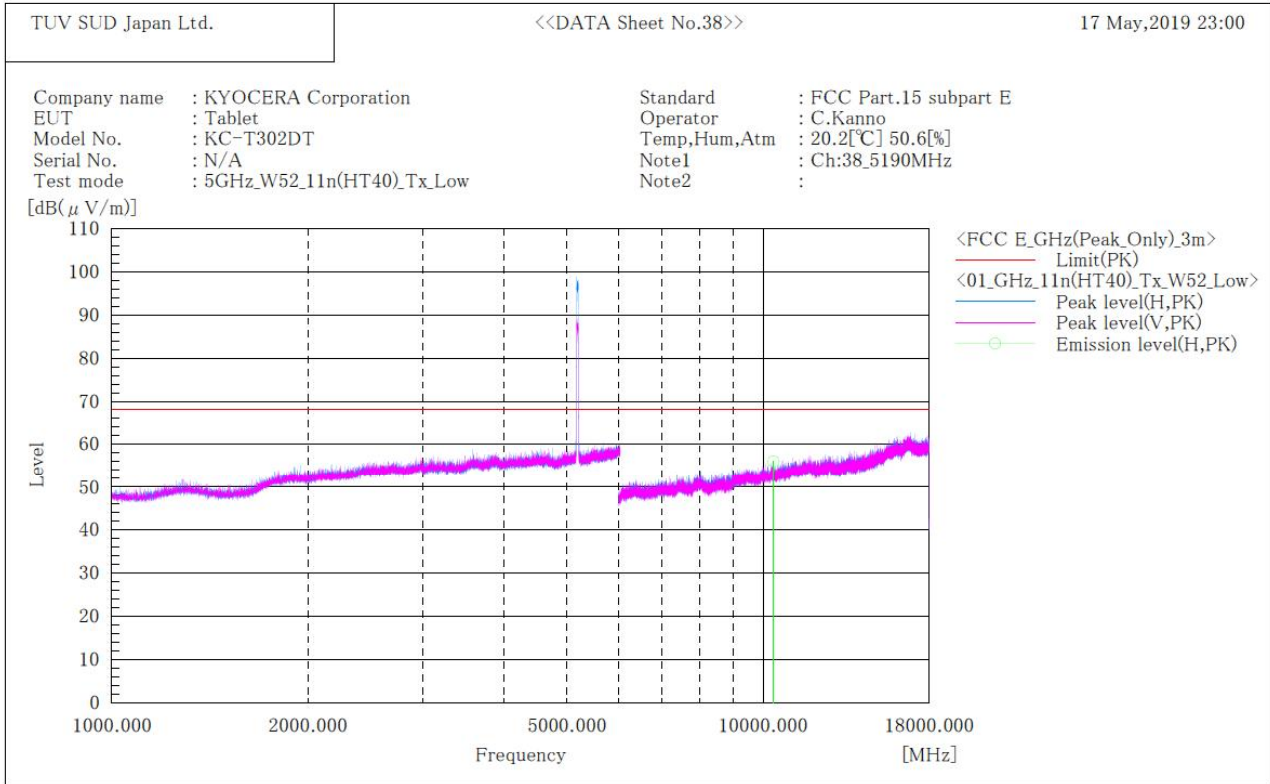

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10380.000	H	45.4	10.7	56.1	68.2	12.1	103.0	79.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT40)]
W52 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

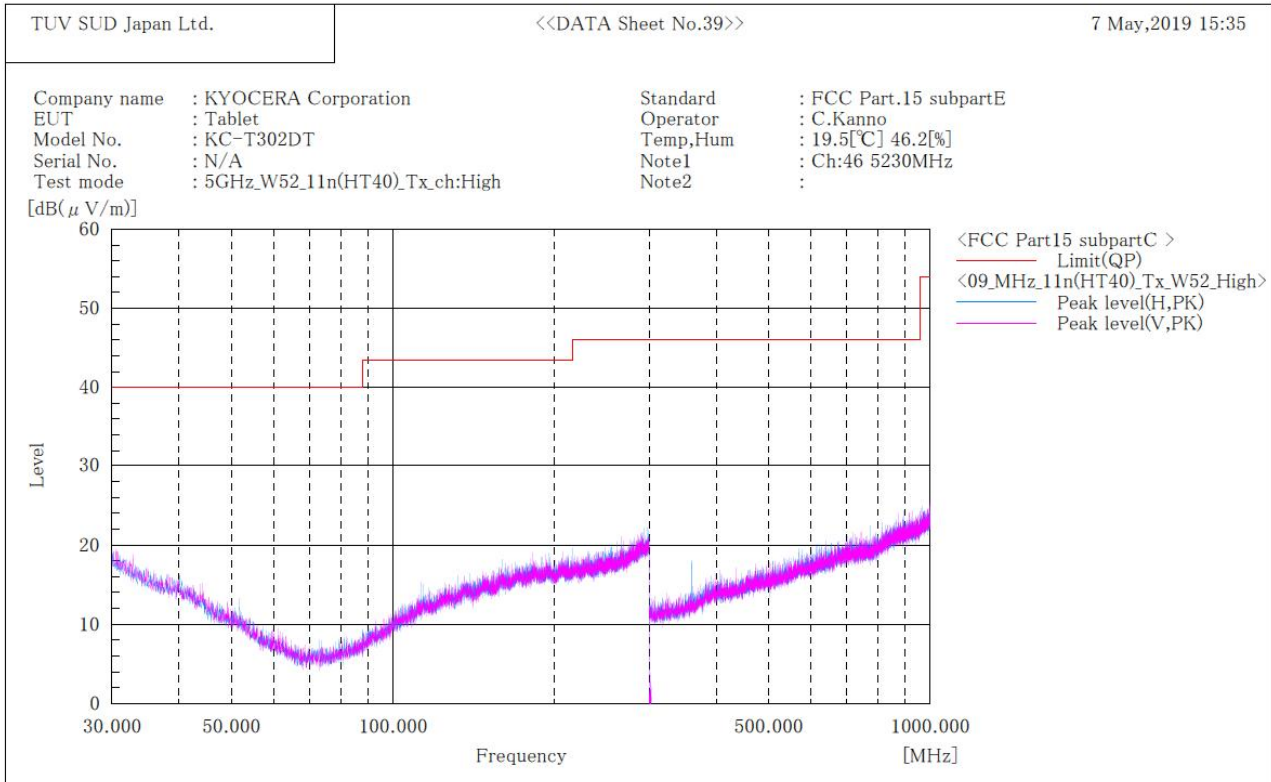

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT40)]
W52 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

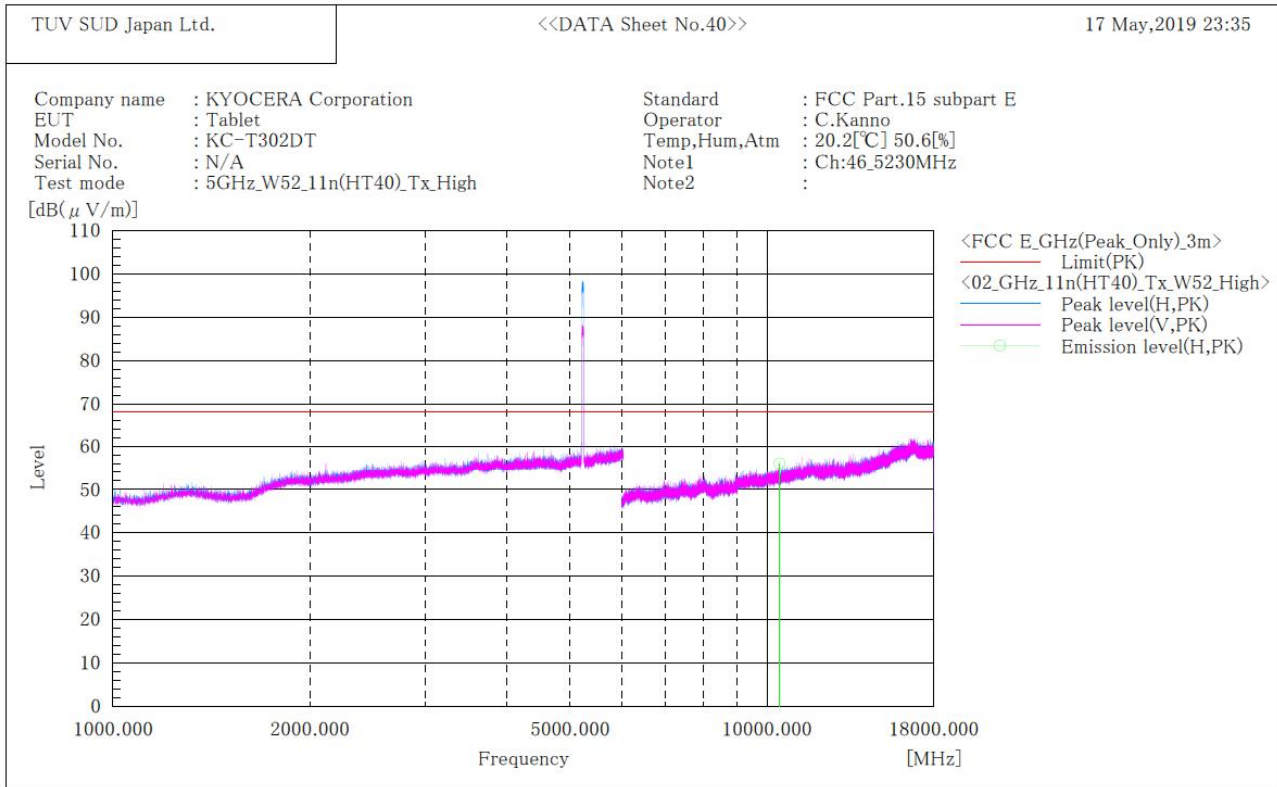

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10460.000	H	45.4	10.8	56.2	68.2	12.0	146.0	81.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11n(HT40)]
W53 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

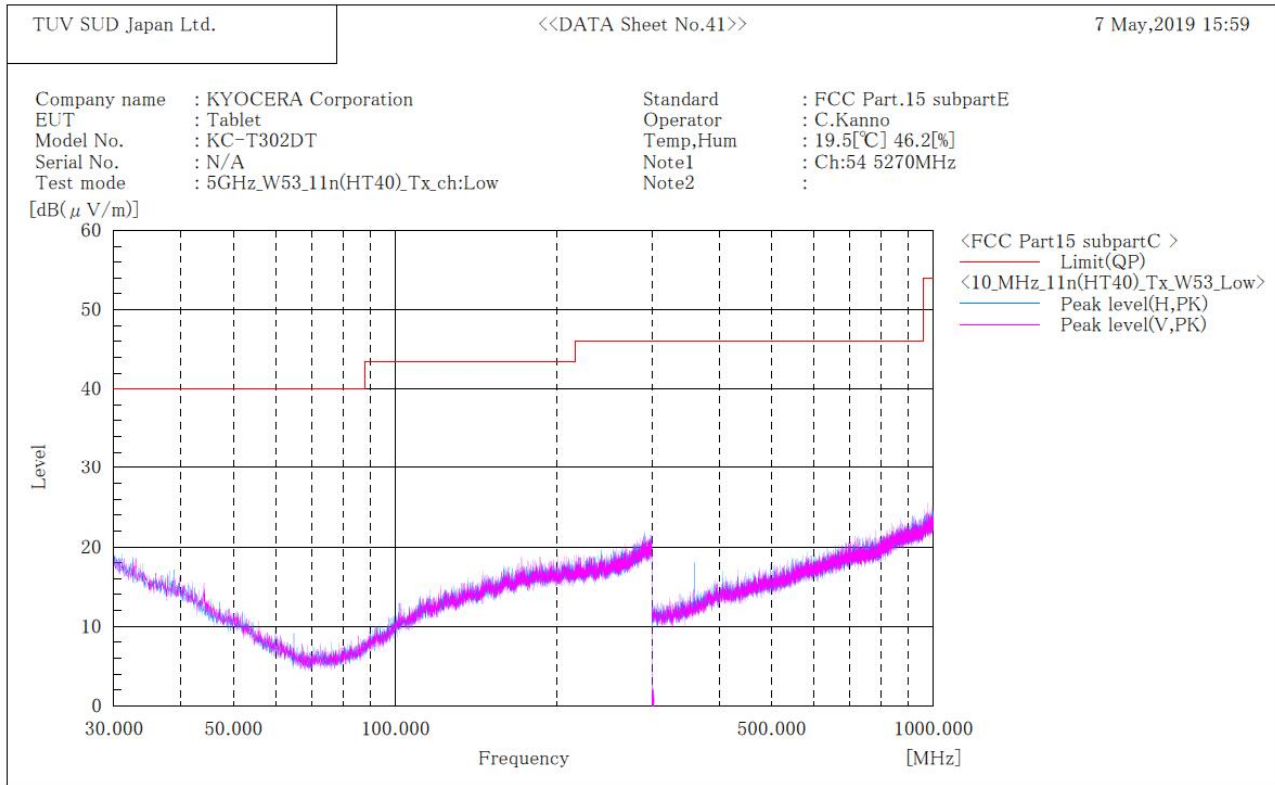

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT40)]
W53 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

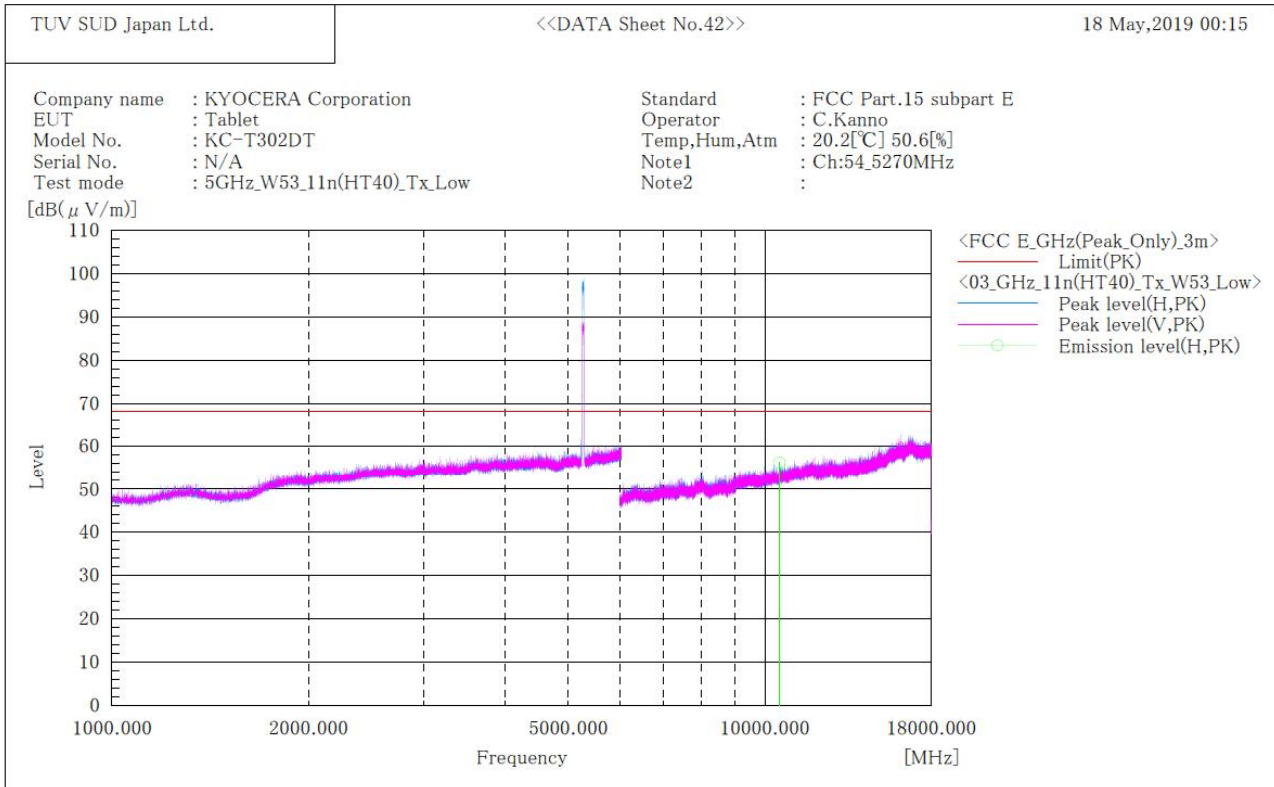

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]
1	10540.000	H	45.4	10.9	56.3	68.2	11.9	148.0	78.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT40)]
W53 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

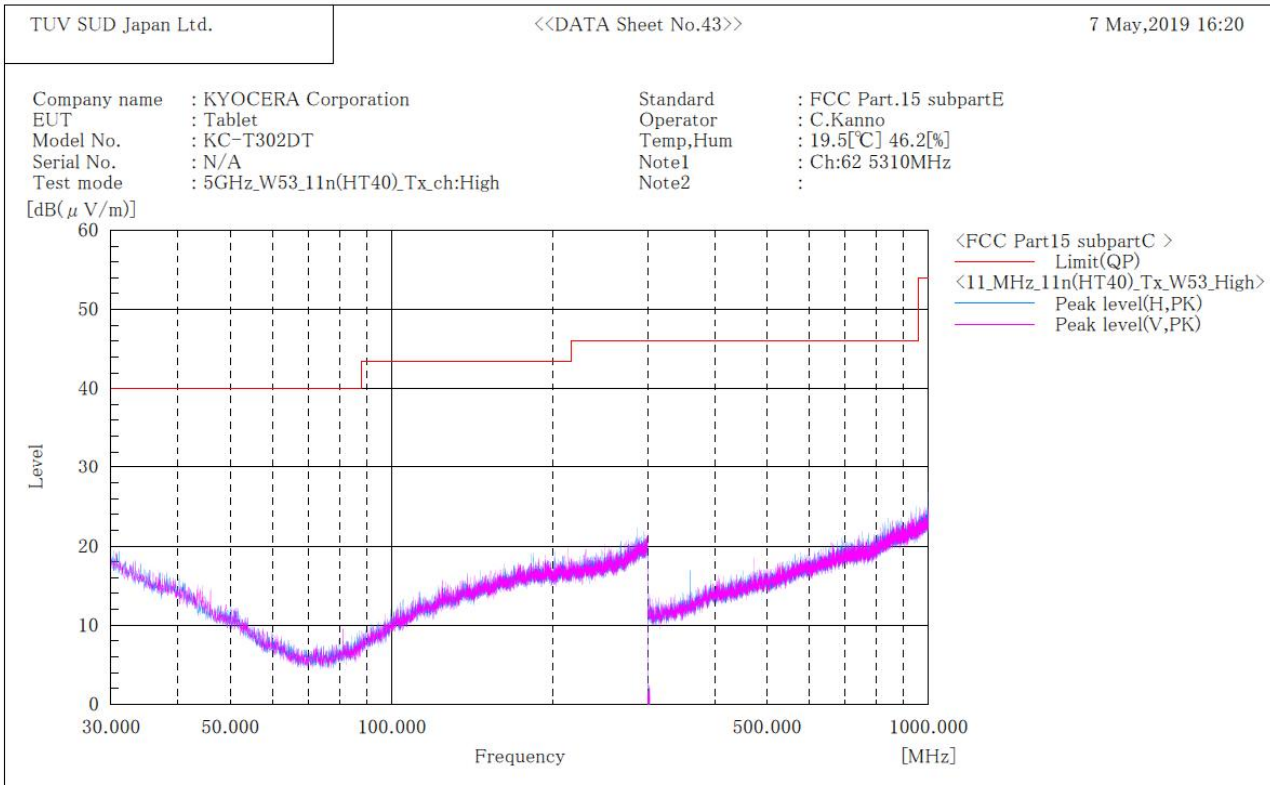

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT40)]
W53 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

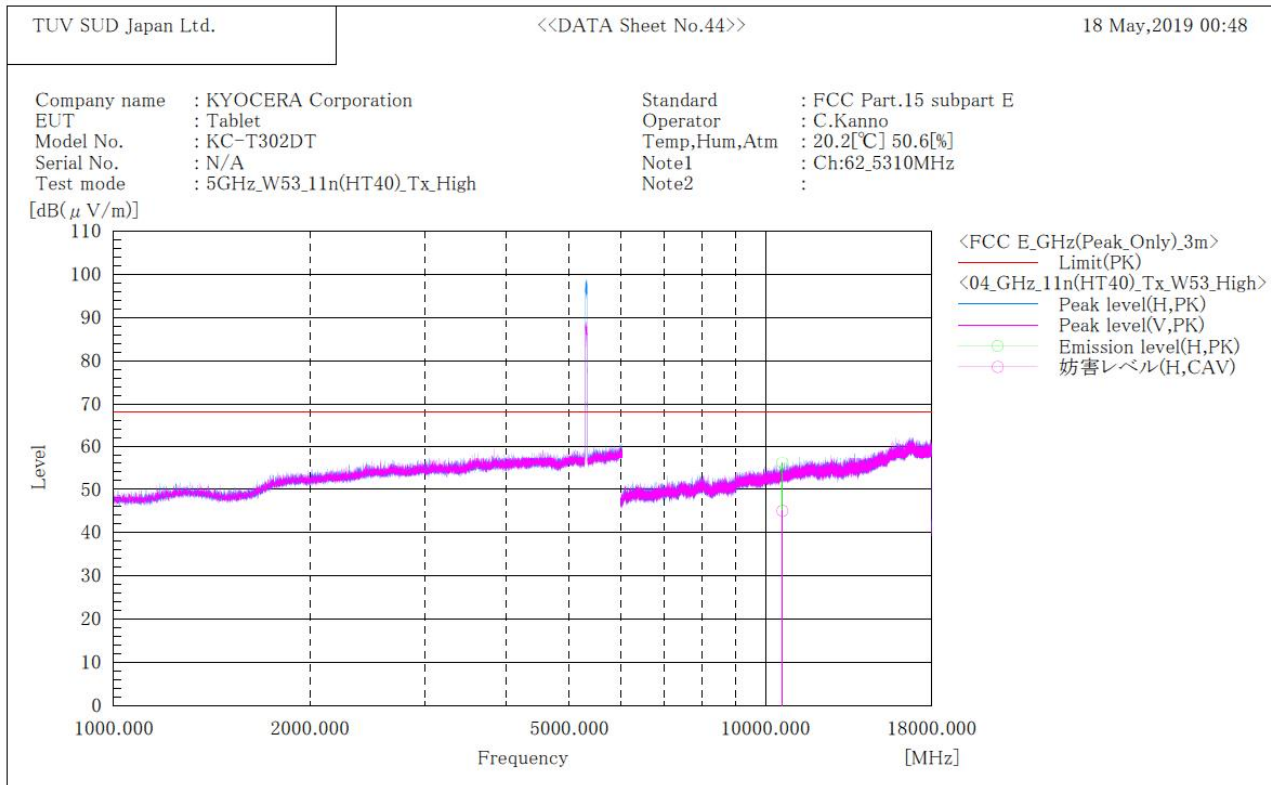

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	10620.000	H	45.1	33.9	11.1	56.2	45.0	74.0	17.8	9.0	146.0	79.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT40)]
W56 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

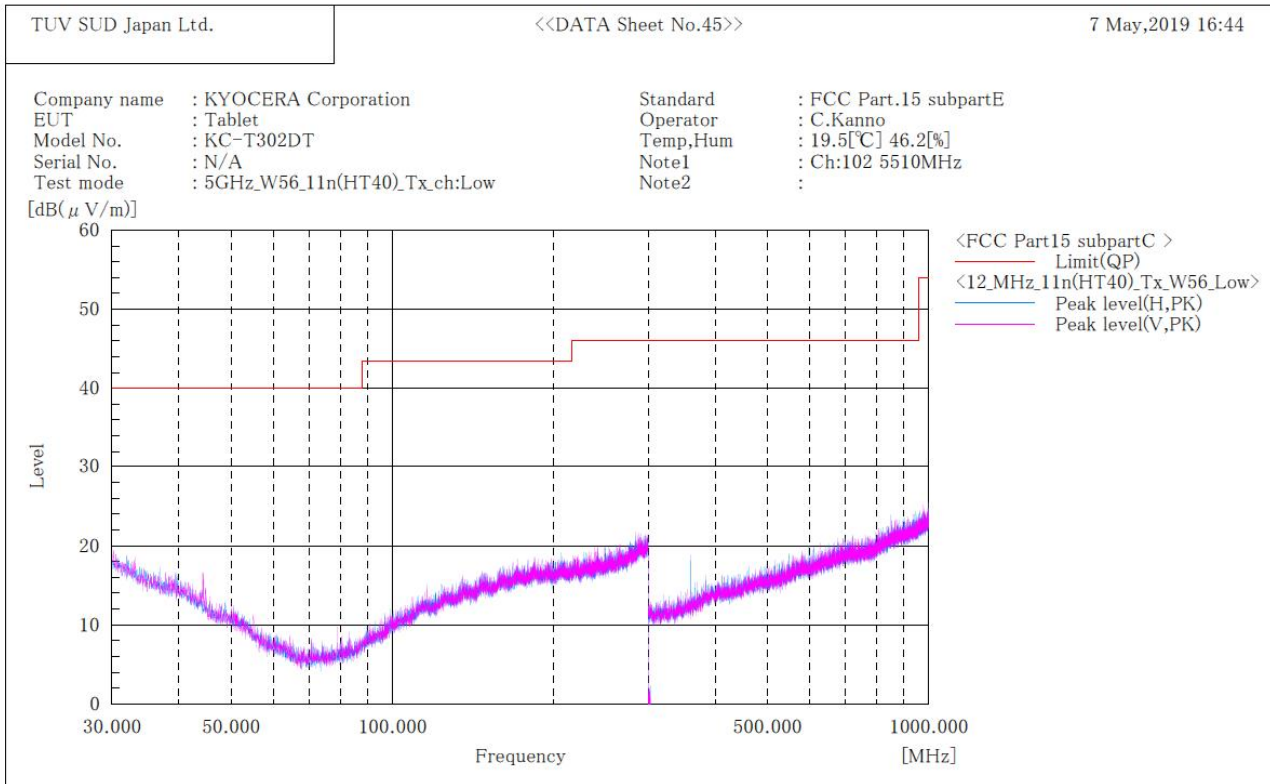

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11n(HT40)]
W56 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

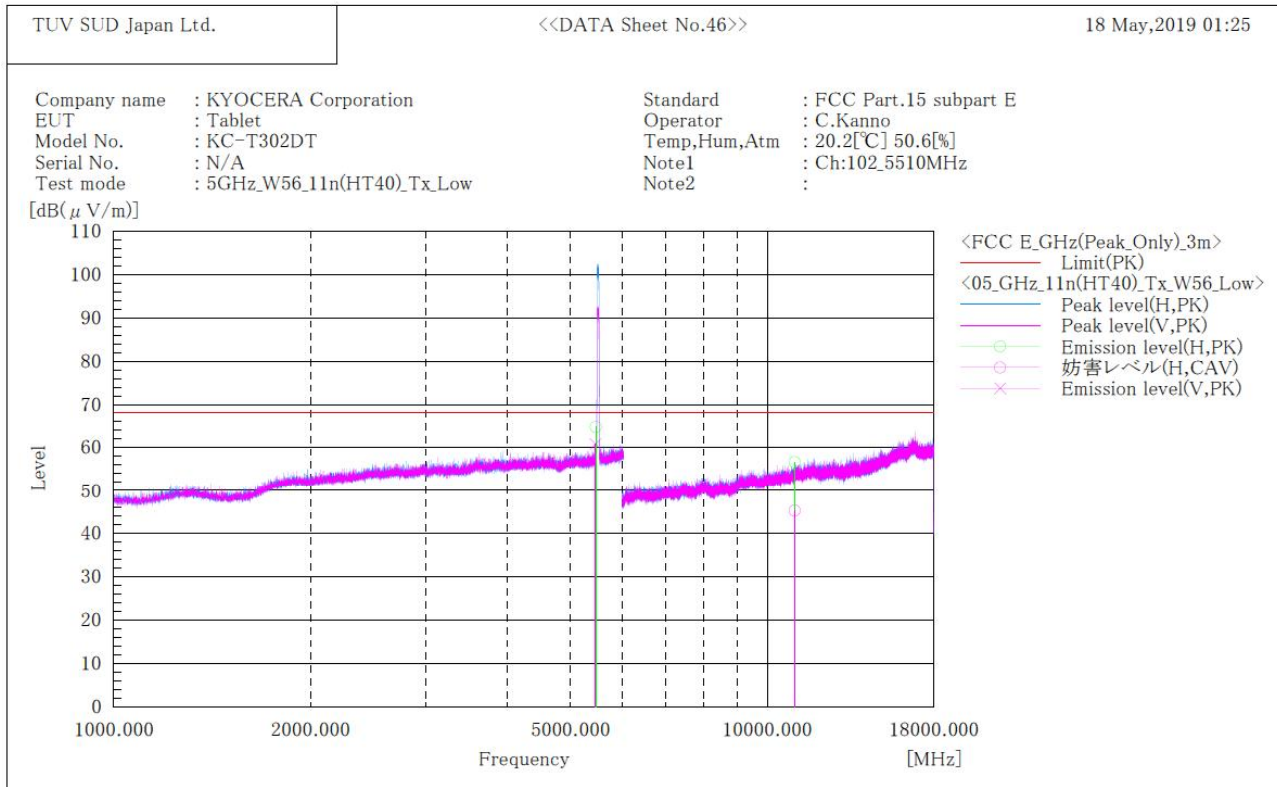

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	5465.200	H	53.7	-----	11.1	64.8	-----	68.2	3.4	-----	138.0	71.0
2	5462.300	V	49.8	-----	11.1	60.9	-----	68.2	7.3	-----	162.0	172.0
3	11020.000	H	45.1	33.7	11.6	56.7	45.3	74.0	17.3	8.7	145.0	73.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**[11n(HT40)]
W56 / Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

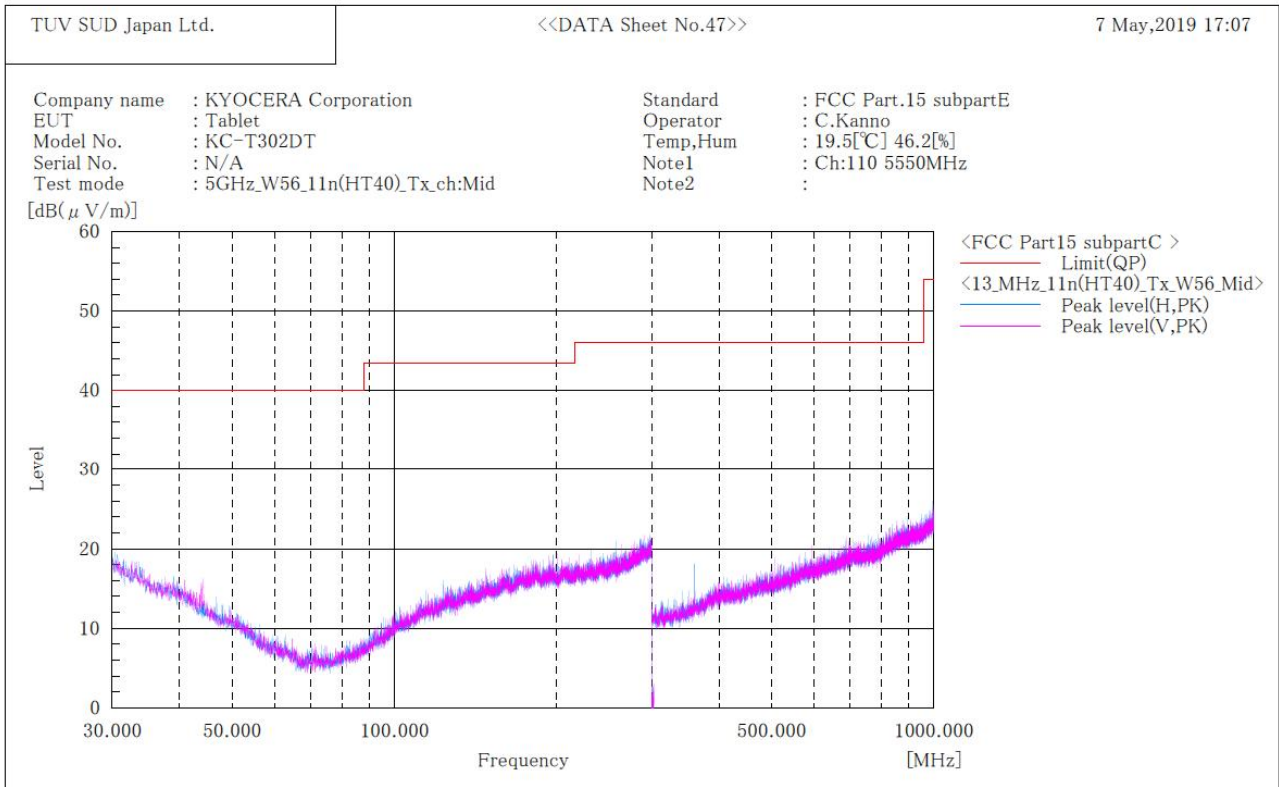

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT40)]
W56 / Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

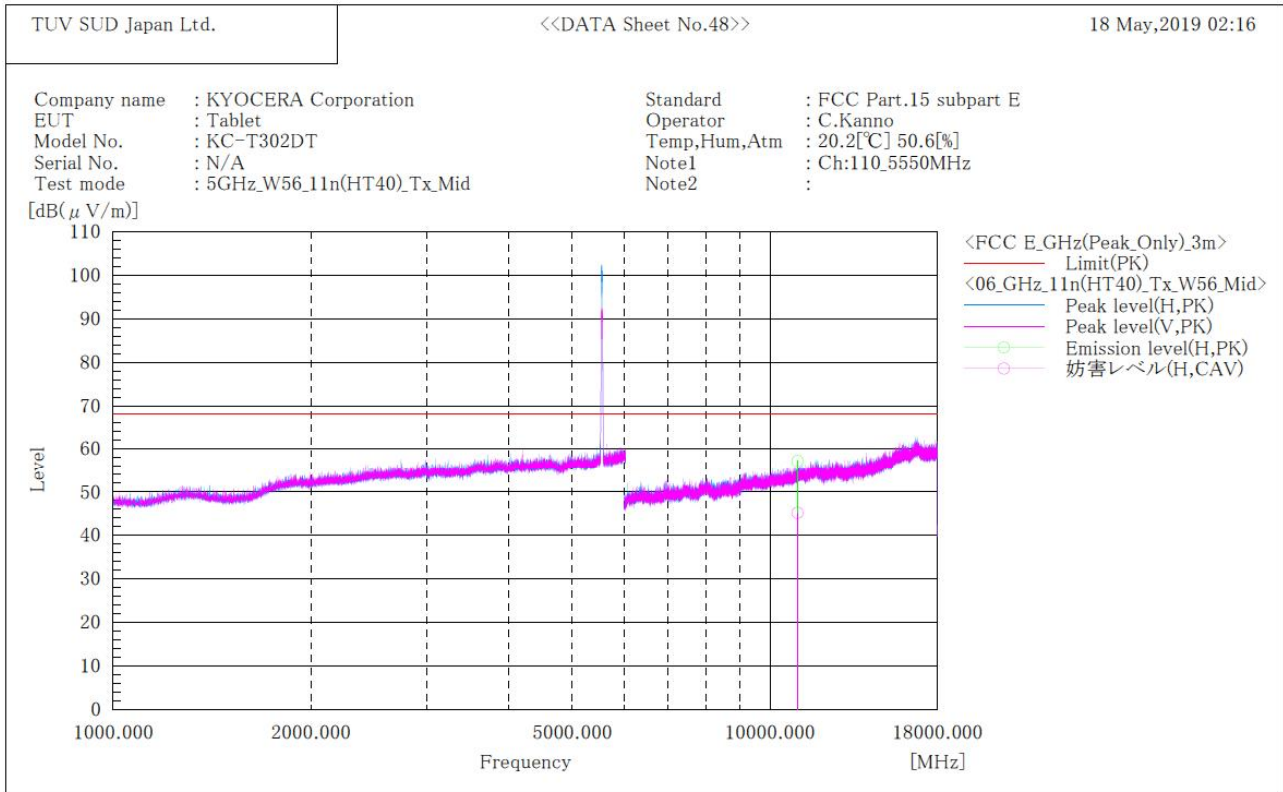

Final Result

No.	Frequency	(P)	Reading PK	Reading CAV	c. f	Result PK	Result CAV	Limit PK	Margin PK	Margin CAV	Height	Angle
	[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	11020.000	H	45.7	33.6	11.6	57.3	45.2	74.0	16.7	8.8	131.0	74.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**[11n(HT40)]
W56 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

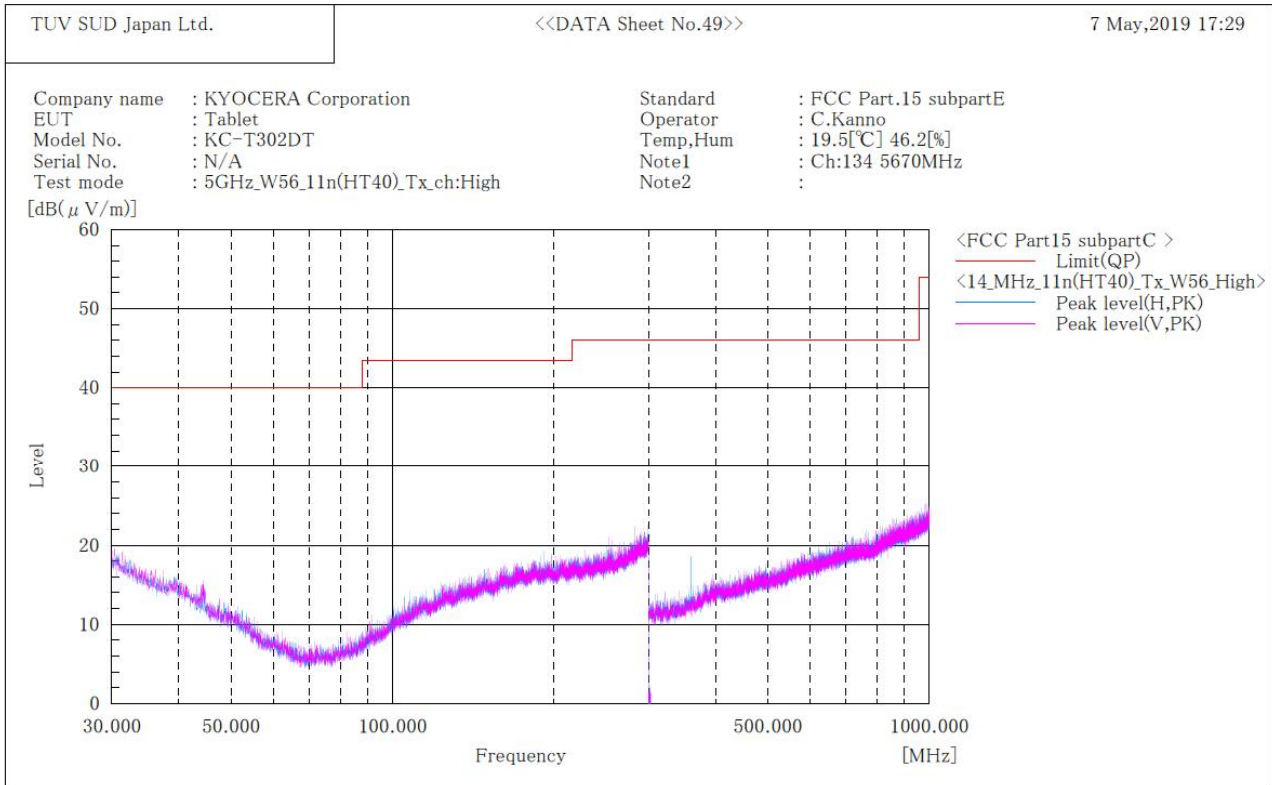

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Japan

**[11n(HT40)]
W56 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

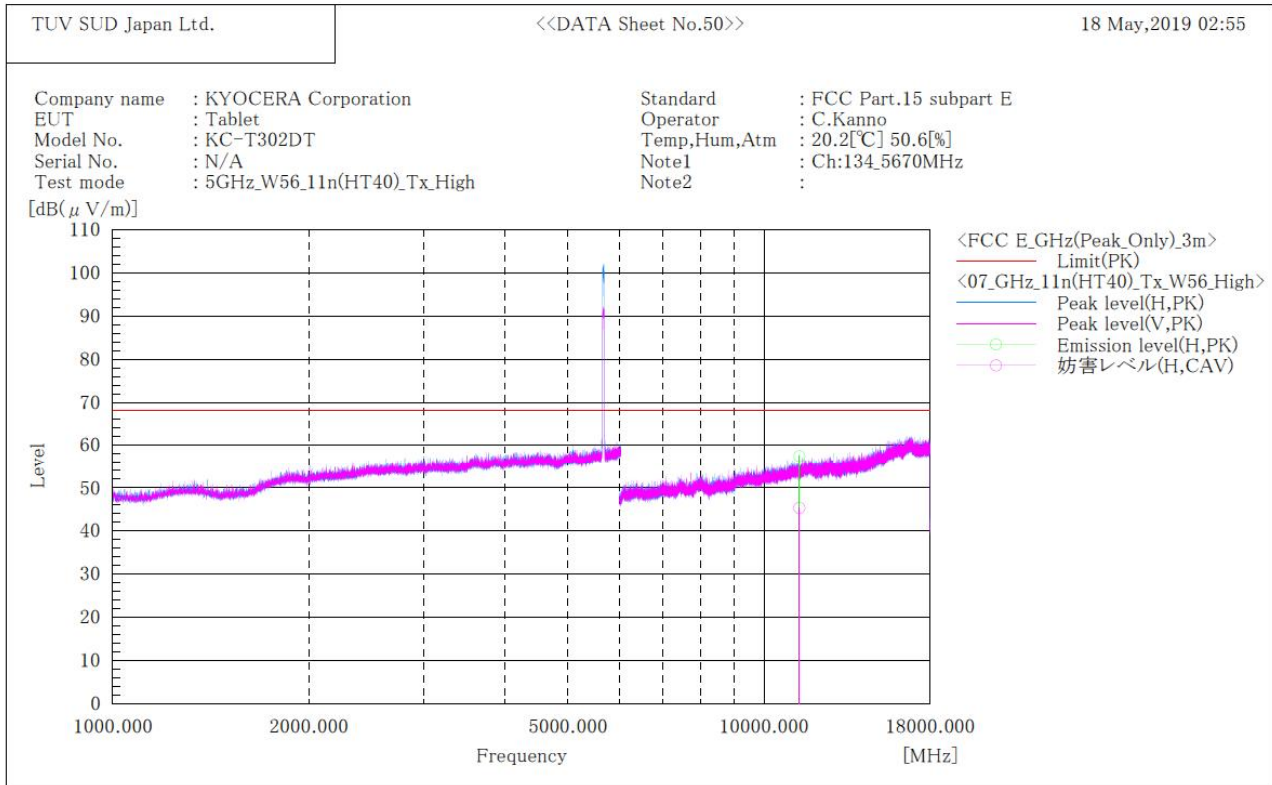

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]
1	11340.000	H	45.5	33.3	12.0	57.5	45.3	74.0	16.5	8.7	148.0	71.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Receive mode

**W52 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

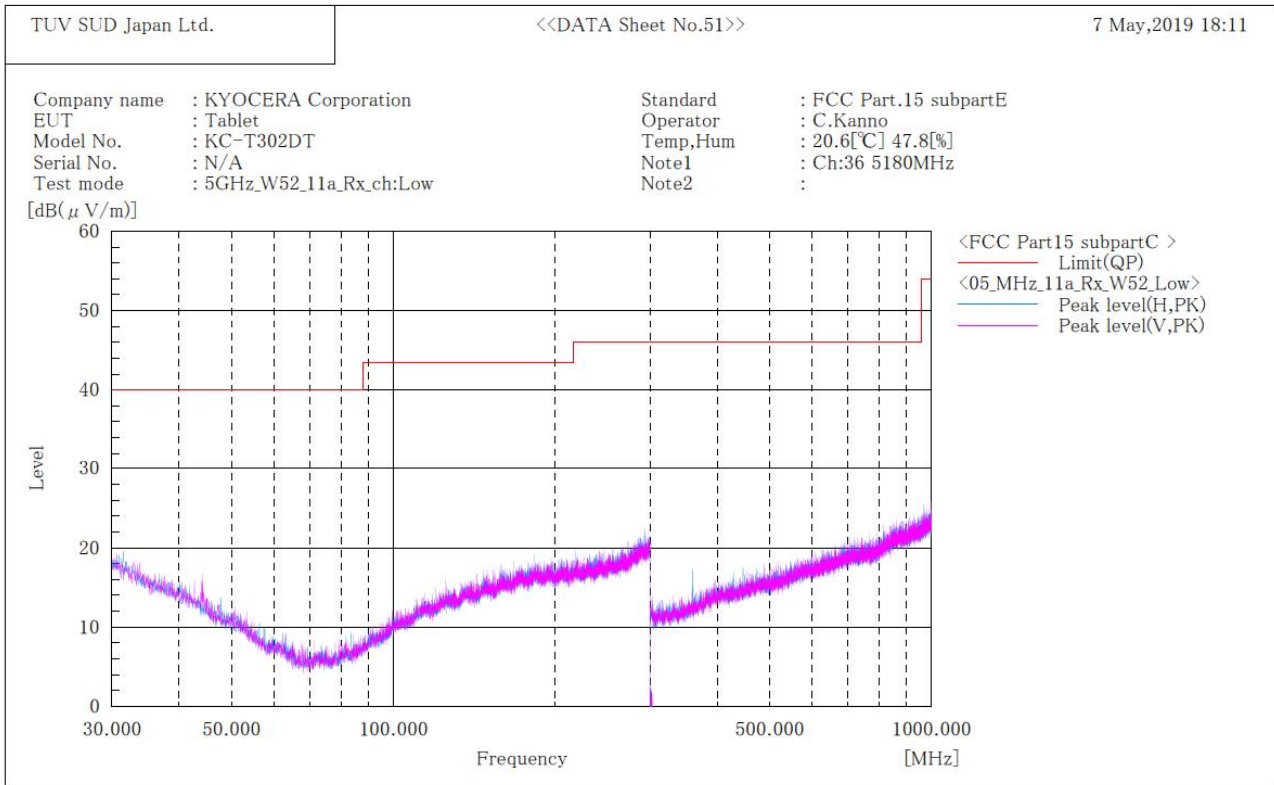

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**W52 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

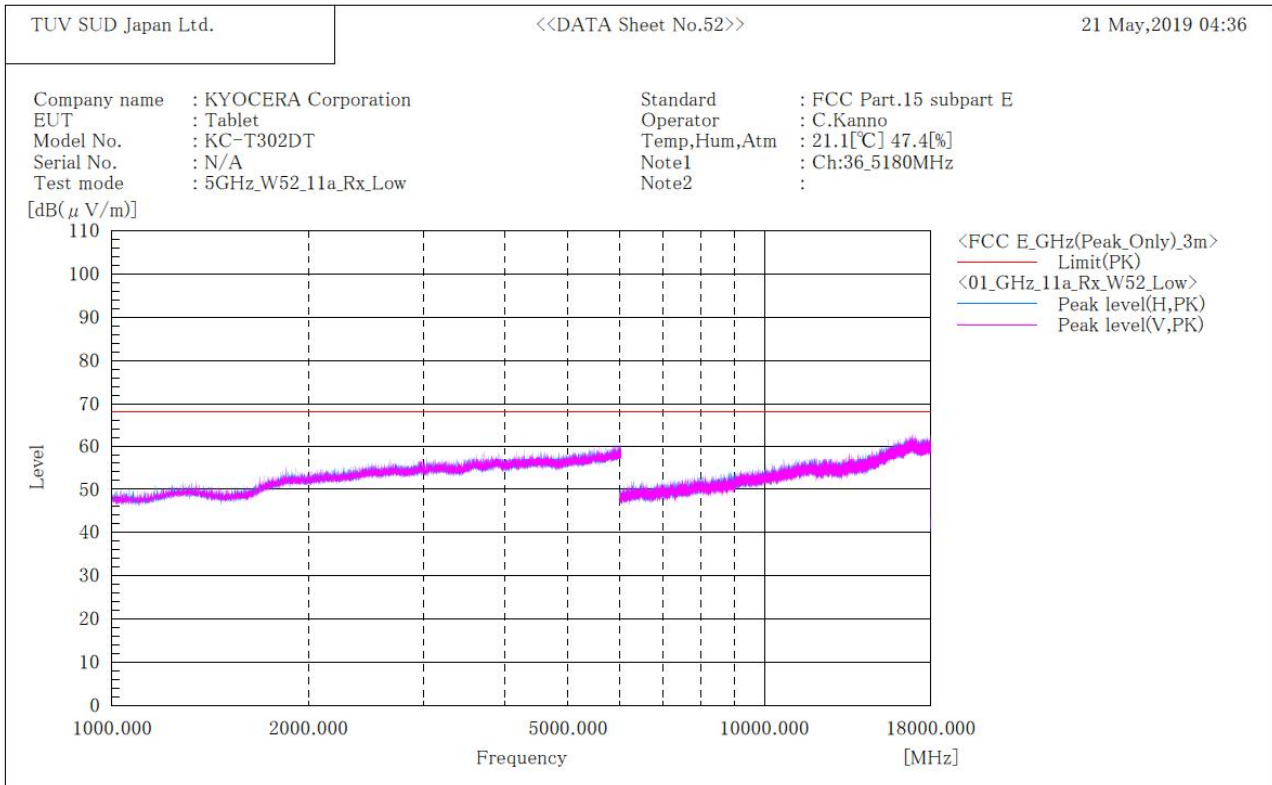

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**W53 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

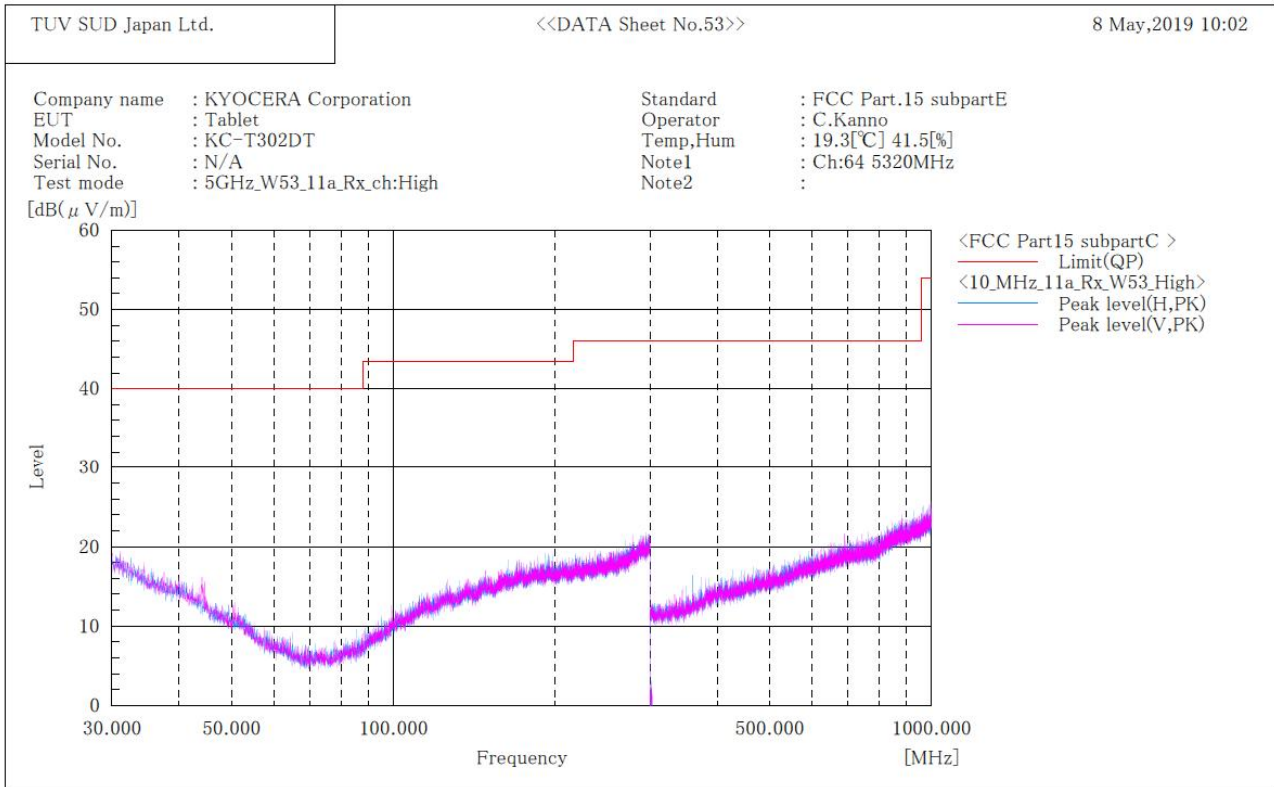

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**W53 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

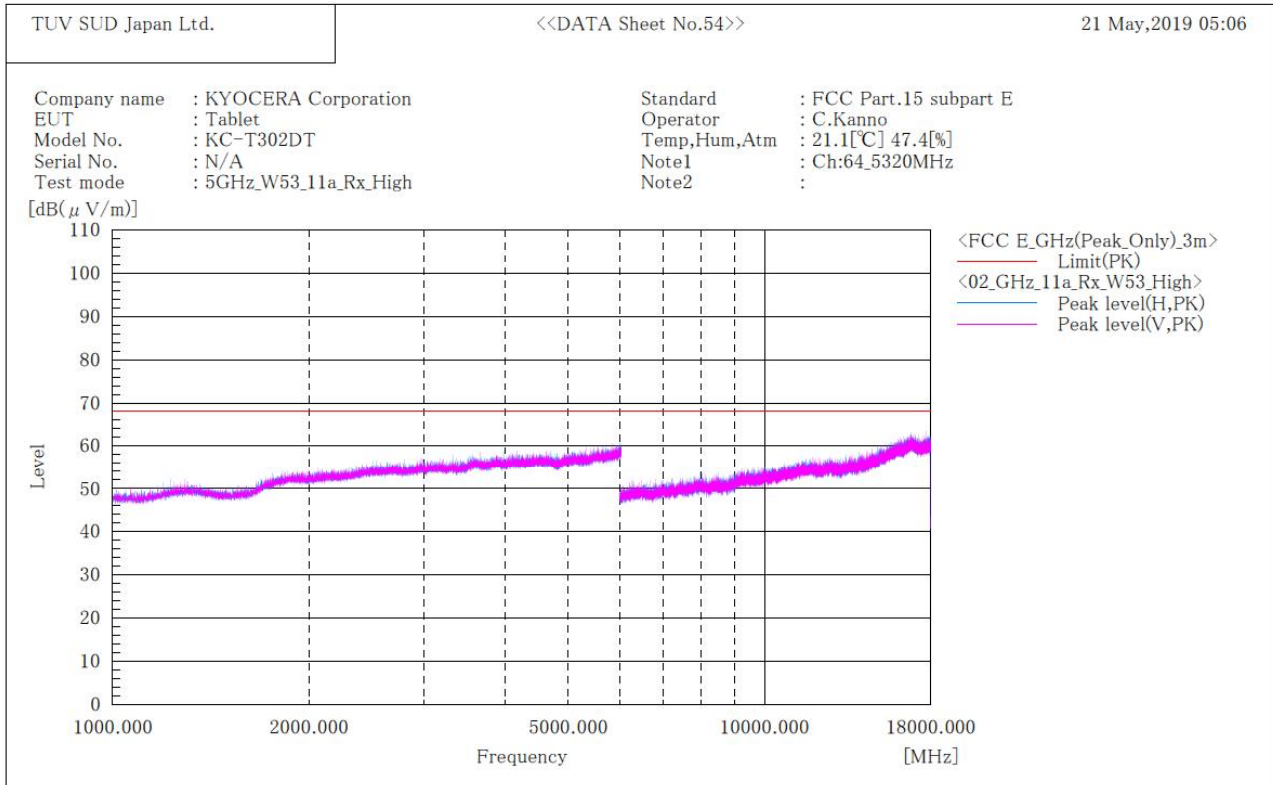

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



**W56 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

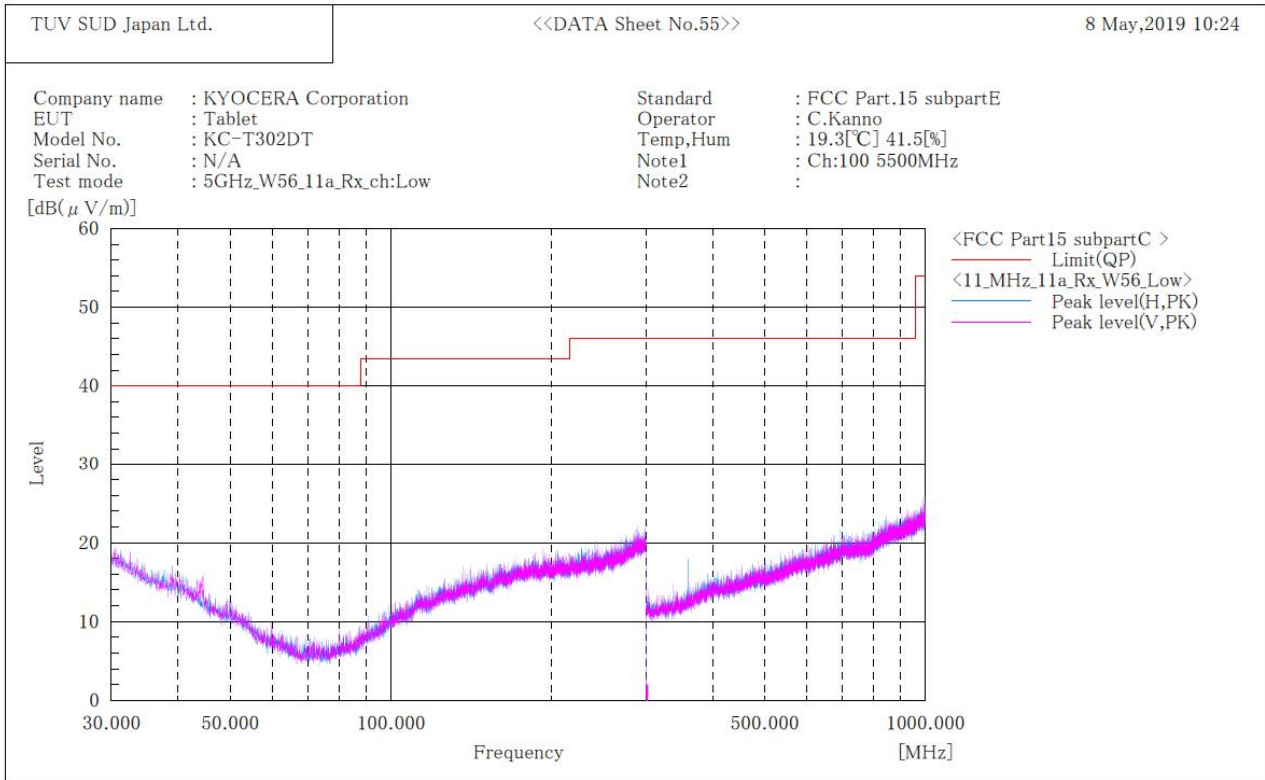

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**W56 / Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

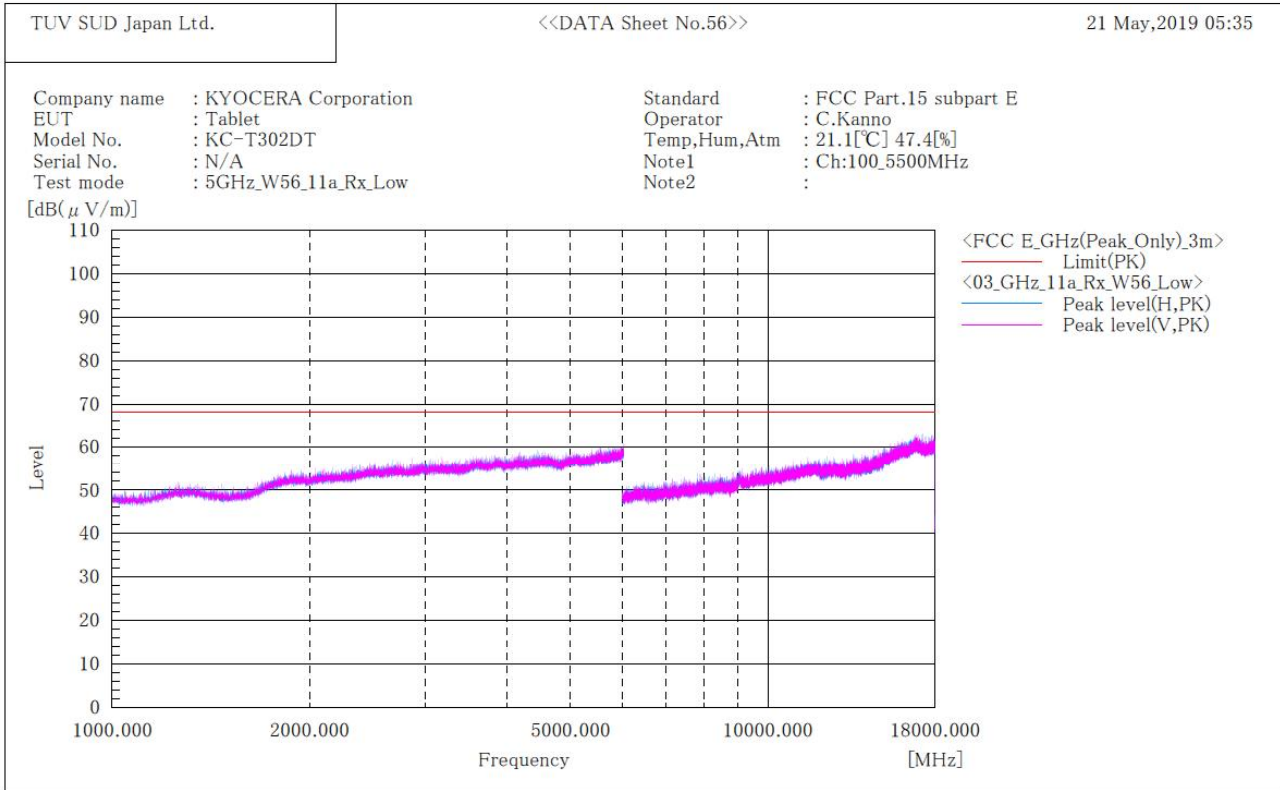

Final Result

No.	Frequency (P)	c.f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Japan

**W56 / Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

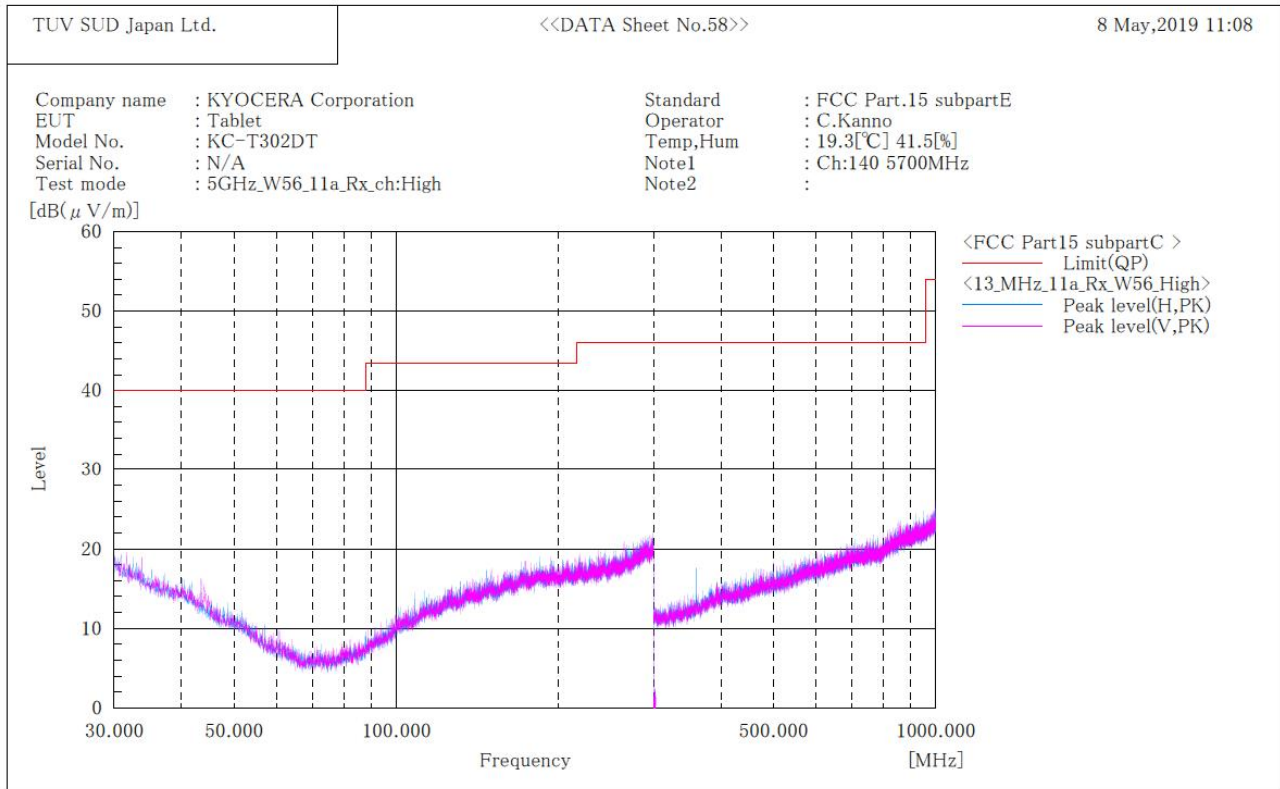

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**W56 / Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

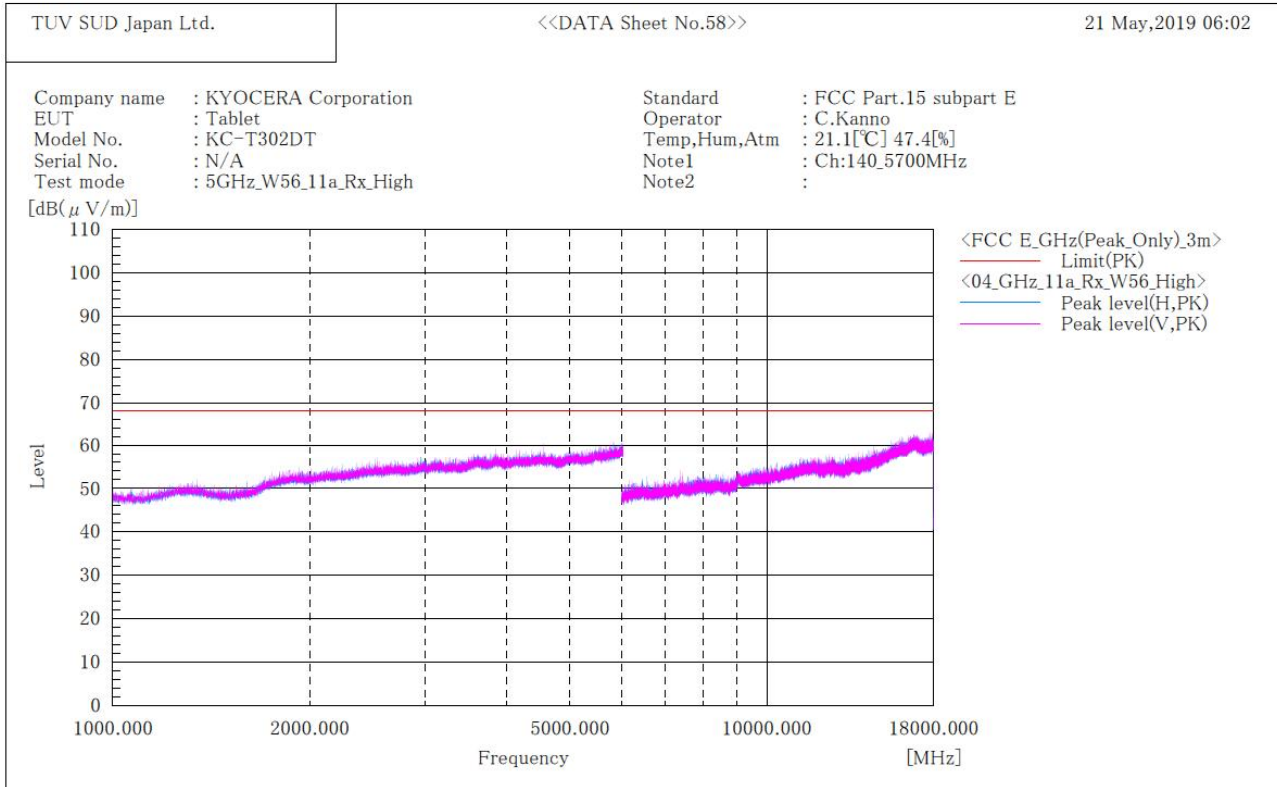

Final Result

No.	Frequency (P)	c. f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

4.5 Frequency Stability

4.5.1 Measurement procedure

[FCC 15.407(g)]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and $+60^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channels center frequency was recorded.


The EUT was set to operate with following conditions.

- 5.2 GHz Band, 5.3 GHz Band, 5.6 GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

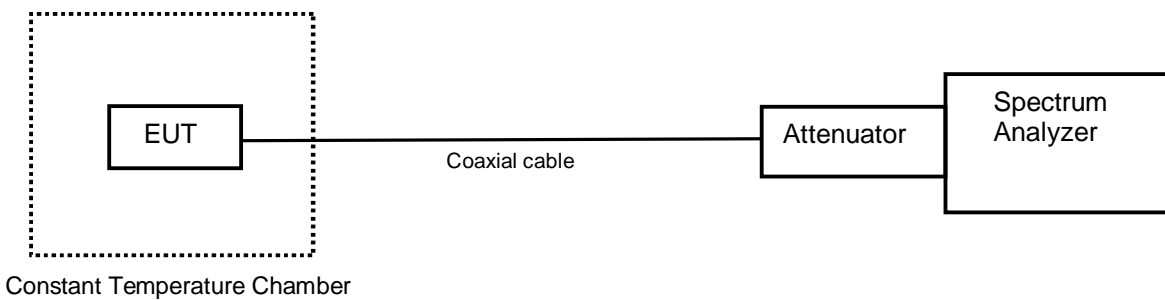

4.5.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified.



4.5.3 Measurement result

Date : 8-May-2019
 Temperature : 23.6 [°C]
 Humidity : 46.1 [%]
 Test place : Shielded room No.4

Test engineer : Taiki Watanabe

[Channel: 36 (5180 MHz)]

Power Supply	Temperature	Measurements Frequency (startup)	Frequency Tolerance (startup)	Measurements Frequency (2mins)	Frequency Tolerance (2mins)	Measurements Frequency (5mins)	Frequency Tolerance (5mins)	Measurements Frequency (10mins)	Frequency Tolerance (10mins)
[V]	[°C]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]
3.80	25(Ref.)	5179981922	0.00000000	5179986092	0.80502211	5179985881	0.76428838	5179976442	-1.05791875
	60	5179984233	0.44614055	5179976522	-1.04247468	5179961590	-3.92511022	5179973216	-1.68070085
	50	5179957847	-4.64769962	5179980068	-0.35791631	5179961945	-3.85657717	5179975956	-1.15174147
	40	5179977718	-0.81158584	5179983951	0.39170021	5179976320	-1.08147096	5179965816	-3.10927726
	30	5179984808	0.55714480	5179997996	3.10309963	5180004283	4.31681043	5179977406	-0.87181771
	20	5180001247	3.73070800	5180001587	3.79634530	5179990527	1.66120271	5179990996	1.75174357
	10	5179975564	-1.22741741	5179993178	2.17298056	5180006540	4.75252624	5180003555	4.17626940
	0	5179994445	2.41757600	5179994819	2.48977703	5180010263	5.47125462	5180007930	5.02086694
	-10	5180025703	8.45196000	5179983965	0.39440292	5180012649	5.93187398	5180012298	5.86411313
	-20	5180007529	4.94345355	5179983305	0.26698935	5179995318	2.58610941	5180011828	5.77337922
	-30	5179971638	-1.98533511	5179976436	-1.05907706	5179980444	-0.28532918	5180010721	5.55967191
3.42	25	5179991574	1.86332697	5180001693	3.81680869	5179979731	-0.42297445	5179994115	2.35386922
4.18	25	5179967133	-2.85502927	5180007942	5.02318355	5179998130	3.12896845	5179994774	2.48108974

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000



[Channel: 64 (5320 MHz)]

Power Supply	Temperature	Measurements Frequency (startup)	Frequency Tolerance (startup)	Measurements Frequency (2mins)	Frequency Tolerance (2mins)	Measurements Frequency (5mins)	Frequency Tolerance (5mins)	Measurements Frequency (10mins)	Frequency Tolerance (10mins)
[V]	[°C]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]
3.80	25(Ref.)	5319997598	0.0000000	5320003609	1.12988773	5319977638	-3.75188139	5319980559	-3.20282099
	60	5319979828	-3.34022707	5319986192	-2.14398593	5320007260	1.81616623	5319989684	-1.48759466
	50	5319960813	-6.91447681	5319983305	-2.68665535	5319990129	-1.40394800	5319964652	-6.19285994
	40	5319986318	-2.12030171	5319959502	-7.16090549	5319981888	-2.95300885	5319964366	-6.24661936
	30	5319977116	-3.85000174	5319982666	-2.80676818	5319974818	-4.28195682	5319963444	-6.41992771
	20	5319997260	-0.06353386	5319986158	-2.15037691	5319982770	-2.78721930	5319982630	-2.81353510
	10	5320009076	2.15751977	5320005938	1.56766988	5320003693	1.14567721	5320001617	0.75545147
	0	5320008513	2.05169266	5320024358	5.03007746	5320006768	1.72368499	5320003017	1.01860948
	-10	5320004471	1.29191788	5320025580	5.25977681	5319993274	-0.81278232	5320019938	4.19925002
	-20	5320024886	5.12932562	5319993689	-0.73477477	5319997639	0.00770677	5320010996	2.51842219
	-30	5319968385	-5.49116789	5319989829	-1.46033901	5319984093	-2.53853498	5319979453	-3.41071583
3.42	25	5319997365	-0.04379701	5319973436	-4.54173137	5319994735	-0.53815814	5320012177	2.74041477
4.18	25	5319998877	0.24041364	5319977677	-3.74455056	5319970033	-5.18139332	5319974842	-4.27744554

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

[Channel: 140 (5700 MHz)]

Power Supply	Temperature	Measurements Frequency (startup)	Frequency Tolerance (startup)	Measurements Frequency (2mins)	Frequency Tolerance (2mins)	Measurements Frequency (5mins)	Frequency Tolerance (5mins)	Measurements Frequency (10mins)	Frequency Tolerance (10mins)
[V]	[°C]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]	[Hz]	[ppm]
3.80	25(Ref.)	5699981620	0.0000000	5699975202	-1.12596854	5699968398	-2.31965660	5699977871	-0.65772142
	60	5699983652	0.35649238	5699971461	-1.78228645	5699975916	-1.00070498	5699969283	-2.16439294
	50	5699990459	1.55070675	5699974056	-1.32702182	5699972704	-1.56421557	5699974945	-1.17105641
	40	5699971439	-1.78614611	5699968162	-2.36106024	5699973127	-1.49000480	5699971988	-1.68983001
	30	5699976450	-0.90702047	5699978844	-0.48701911	5699967004	-2.56421879	5699986311	0.82298511
	20	5699991513	1.73561963	5700001548	3.49615162	5699975666	-1.04456477	5699985174	0.62351078
	10	5700001884	3.55509918	5699989696	1.41684667	5700014613	5.78826428	5699991461	1.72649680
	0	5700033671	9.13178383	5699995596	2.45193773	5700006631	4.38790889	5699989128	1.31719723
	-10	5700002433	3.65141528	5700010863	5.13036742	5700005859	4.25246985	5700005758	4.23475050
	-20	5699979726	-0.33228177	5700019664	6.67440749	5699986469	0.85070450	5699985379	0.65947581
	-30	5699972769	-1.55281202	5699966911	-2.58053464	5699985350	0.65438808	5699964529	-2.99843072
3.42	25	5699983385	0.30965012	5699985926	0.75544103	5699984971	0.58789663	5699986889	0.92438895
4.18	25	5699977922	-0.64877402	5699975632	-1.05052970	5699978330	-0.57719484	5699980786	-0.14631626

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

4.6 AC Power Line Conducted Emissions

4.6.1 Measurement procedure

[FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.10
Frequency range	:	0.15 MHz to 30 MHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W) 2.0 × (D) 1.0 × (H) 0.8 m
Vertical Metal Reference Plane	:	(W) 2.0 × (H) 2.0 m, 0.4 m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9 kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

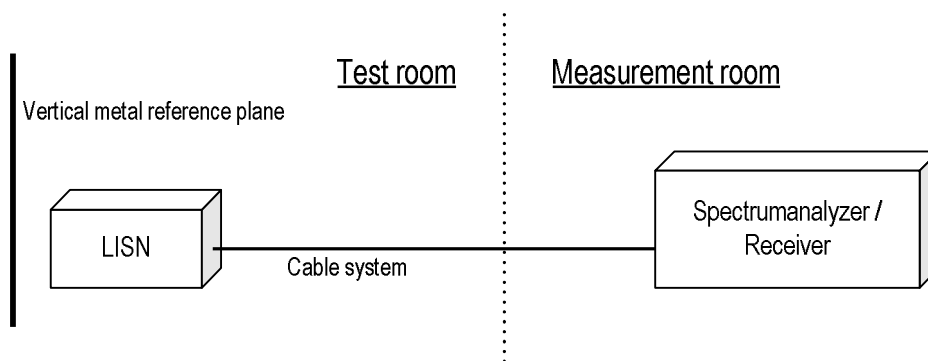

4.6.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

4.6.3 Limit


Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



4.6.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
 [3m Semi-anechoic chamber]

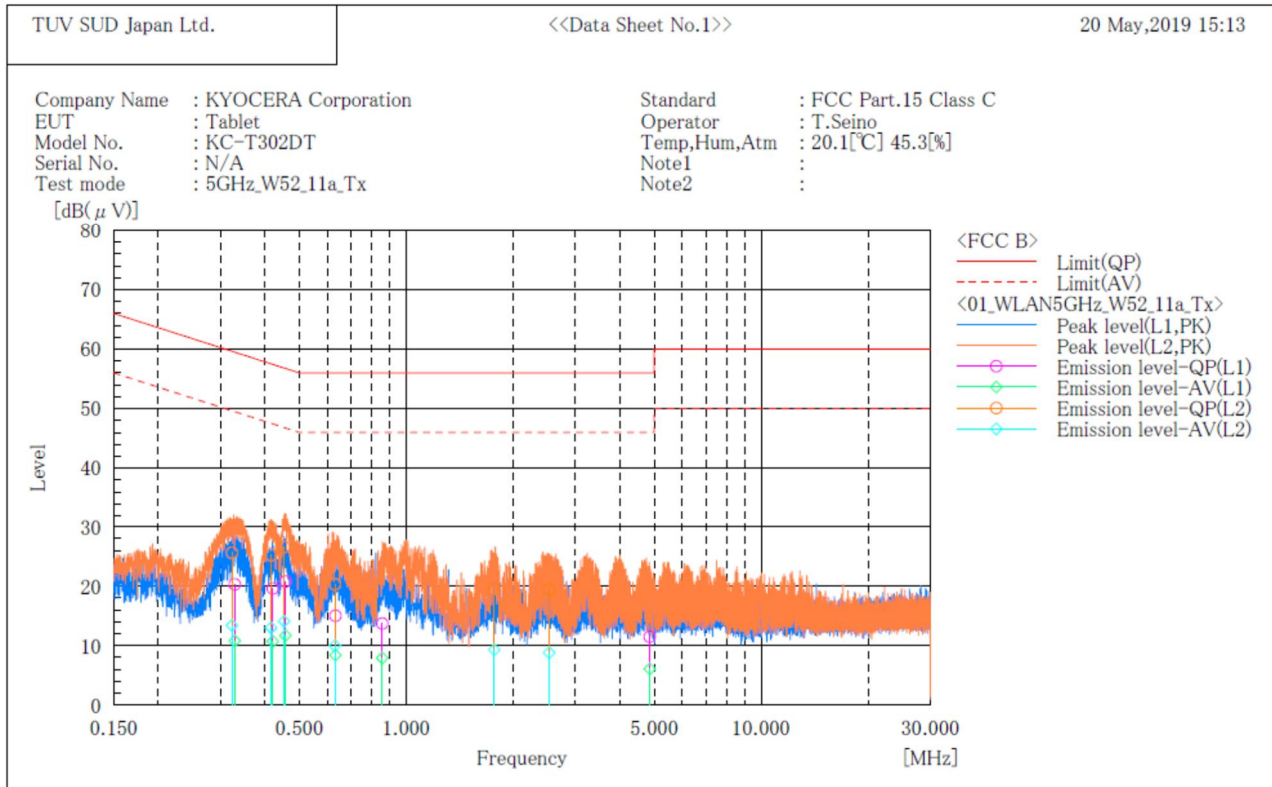

Final Result

--- L1 Phase ---


No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.329	9.9	0.4	10.4	20.3	10.8	59.5	49.5	39.2	38.7
2	0.421	9.2	0.3	10.4	19.6	10.7	57.4	47.4	37.8	36.7
3	0.457	10.4	1.3	10.4	20.8	11.7	56.7	46.7	35.9	35.0
4	0.632	4.6	-2.0	10.4	15.0	8.4	56.0	46.0	41.0	37.6
5	0.857	3.3	-2.5	10.4	13.7	7.9	56.0	46.0	42.3	38.1
6	4.857	0.8	-4.6	10.7	11.5	6.1	56.0	46.0	44.5	39.9

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.323	15.2	3.0	10.4	25.6	13.4	59.6	49.6	34.0	36.2
2	0.416	14.8	2.6	10.4	25.2	13.0	57.5	47.5	32.3	34.5
3	0.453	16.2	3.7	10.4	26.6	14.1	56.8	46.8	30.2	32.7
4	0.630	9.9	-0.4	10.4	20.3	10.0	56.0	46.0	35.7	36.0
5	1.772	9.1	-1.1	10.4	19.5	9.3	56.0	46.0	36.5	36.7
6	2.530	8.9	-1.7	10.5	19.4	8.8	56.0	46.0	36.6	37.2



***** CONDUCTED EMISSION at MAINS PORT *****
 [3m Semi-anechoic chamber]

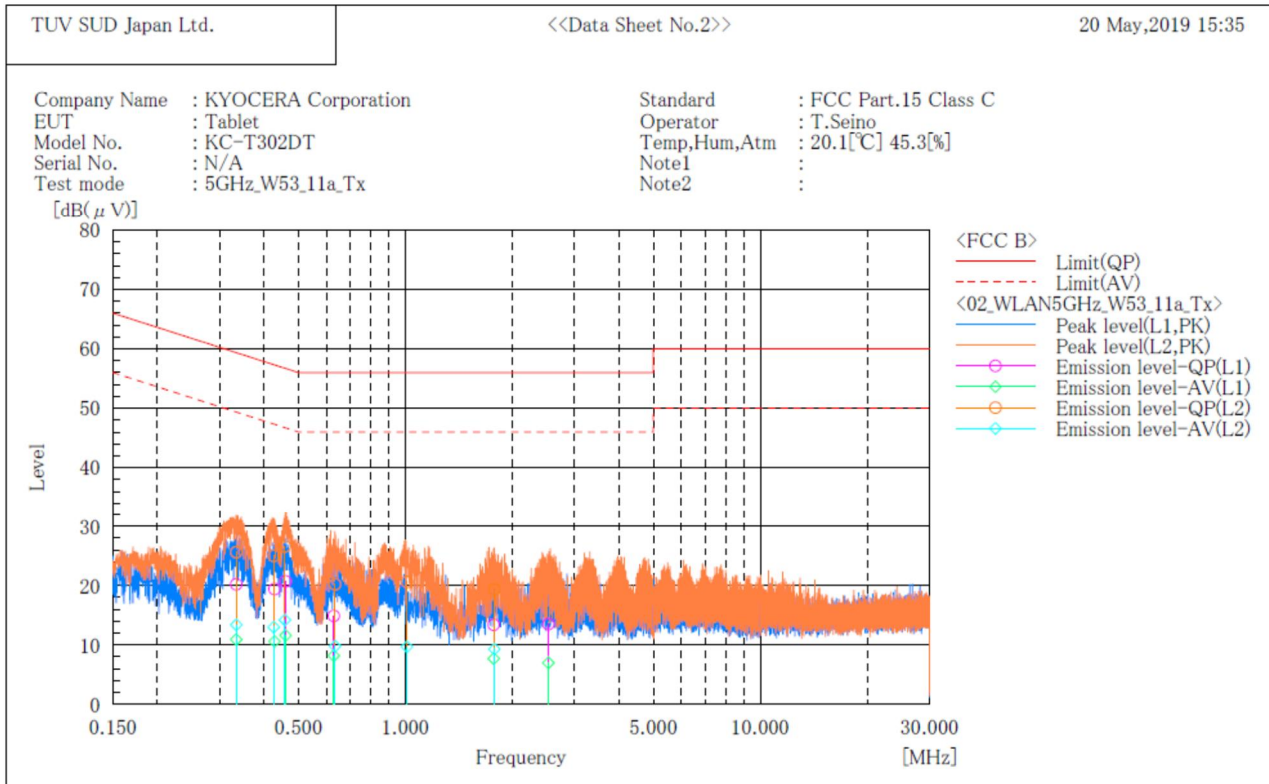

Final Result

--- L1 Phase ---


No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.334	9.8	0.5	10.4	20.2	10.9	59.4	49.4	39.2	38.5
2	0.428	9.0	0.2	10.4	19.4	10.6	57.3	47.3	37.9	36.7
3	0.460	10.3	1.2	10.4	20.7	11.6	56.7	46.7	36.0	35.1
4	0.629	4.5	-2.2	10.4	14.9	8.2	56.0	46.0	41.1	37.8
5	1.774	2.9	-2.8	10.5	13.4	7.7	56.0	46.0	42.6	38.3
6	2.532	3.0	-3.5	10.5	13.5	7.0	56.0	46.0	42.5	39.0

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.334	15.2	3.0	10.4	25.6	13.4	59.4	49.4	33.8	36.0
2	0.426	14.6	2.6	10.4	25.0	13.0	57.3	47.3	32.3	34.3
3	0.458	16.2	3.8	10.4	26.6	14.2	56.7	46.7	30.1	32.5
4	0.634	9.8	-0.6	10.4	20.2	9.8	56.0	46.0	35.8	36.2
5	1.011	10.2	-0.7	10.4	20.6	9.7	56.0	46.0	35.4	36.3
6	1.783	8.9	-1.1	10.4	19.3	9.3	56.0	46.0	36.7	36.7



***** CONDUCTED EMISSION at MAINS PORT *****
 [3m Semi-anechoic chamber]

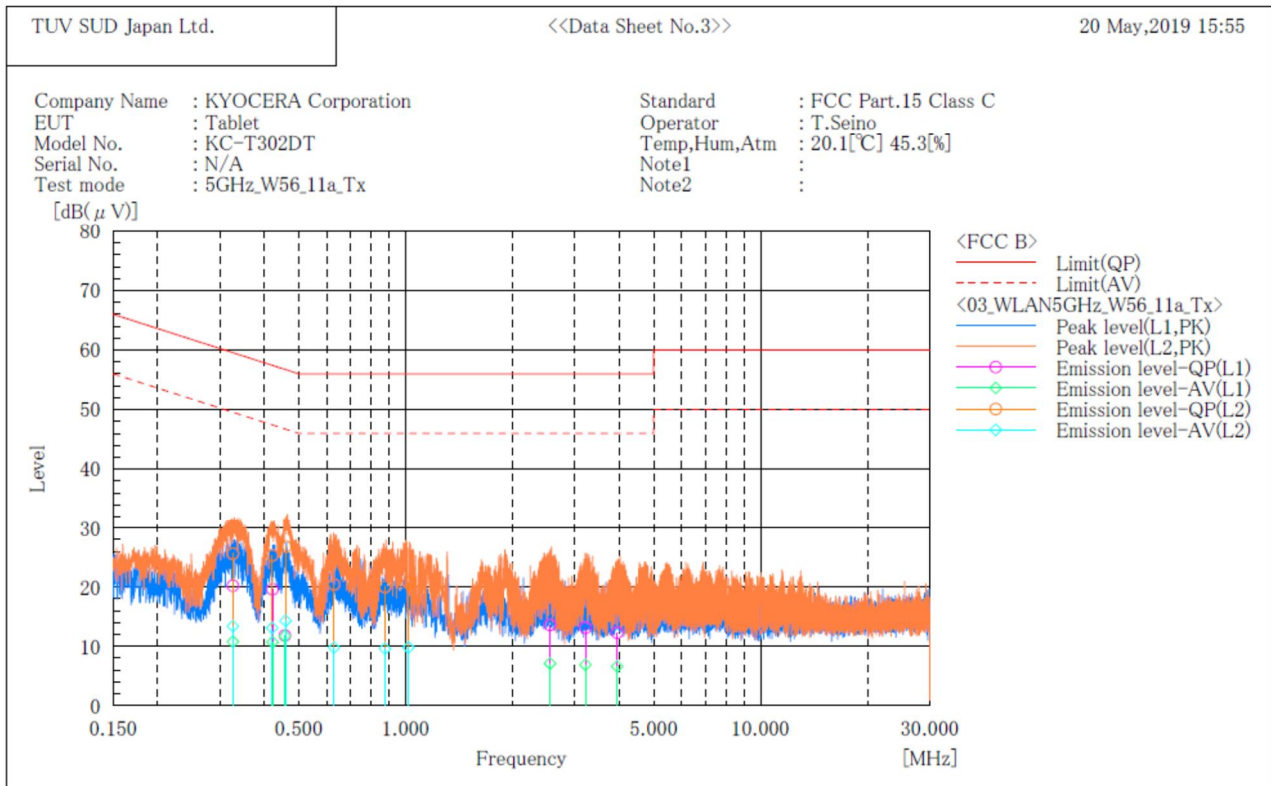

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.326	9.8	0.4	10.4	20.2	10.8	59.6	49.6	39.4	38.8
2	0.422	9.2	0.3	10.4	19.6	10.7	57.4	47.4	37.8	36.7
3	0.457	1.4	1.3	10.4	11.8	11.7	56.7	46.7	44.9	35.0
4	2.554	3.1	-3.4	10.5	13.6	7.1	56.0	46.0	42.4	38.9
5	3.211	2.5	-3.7	10.6	13.1	6.9	56.0	46.0	42.9	39.1
6	3.947	1.7	-4.0	10.6	12.3	6.6	56.0	46.0	43.7	39.4

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.326	15.2	3.0	10.4	25.6	13.4	59.6	49.6	34.0	36.2
2	0.421	14.9	2.7	10.4	25.3	13.1	57.4	47.4	32.1	34.3
3	0.459	16.4	3.9	10.4	26.8	14.3	56.7	46.7	29.9	32.4
4	0.629	10.0	-0.6	10.4	20.4	9.8	56.0	46.0	35.6	36.2
5	0.875	9.6	-0.8	10.4	20.0	9.6	56.0	46.0	36.0	36.4
6	1.019	10.3	-0.6	10.4	20.7	9.8	56.0	46.0	35.3	36.2

4.7 Duty Cycle

4.7.1 Measurement procedure

[KDB 789033 D02, Section B, Zero-Span Spectrum Analyzer Method]

The duty cycle is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=8 MHz, VBW=8 MHz, Span=0 Hz, Sweep=Auto, Detector=Peak, Trace mode=Single


The EUT was set to operate with following conditions.

- 5.2 GHz Band, 5.3 GHz Band, 5.6 GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

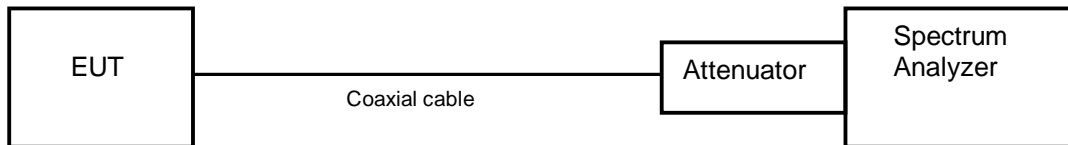

4.7.2 Limit

None

4.7.3 Measurement result

Date : 26-April-2019
Temperature : 20.5 [°C]
Humidity : 36.9 [%]
Test place : Shielded room No.4

Test engineer : Chiaki Kanno



Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11a	36	5180	1.364	1.372	0.994	733.1	0.025	0.051
	40	5200						
	58	5240						
	52	5260	1.364	1.372	0.994	733.1	0.025	0.051
	56	5280						
	64	5320						
	100	5500	1.364	1.372	0.994	733.1	0.025	0.051
	116	5580						
140	5700							

Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11n (20MHz)	36	5180	1.274	1.284	0.992	784.9	0.034	0.068
	40	5200						
	58	5240						
	52	5260	1.276	1.284	0.994	783.7	0.027	0.054
	56	5280						
	64	5320						
	100	5500	1.276	1.284	0.994	783.7	0.027	0.054
	116	5580						
140	5700							

Note: X = On time / (On + Off time)



Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11ac (20MHz)	36	5180	1024.000	8.000	128.000	1.0	-21.072	-42.144
	40	5200						
	58	5240						
	52	5260	1360.000	10.000	136.000	0.7	-21.335	-42.671
	56	5280						
	64	5320						
	100	5500	1276.000	10.000	127.600	0.8	-21.059	-42.117
	116	5580						
140	5700							

Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11n (40MHz)	38	5190	0.635	0.645	0.984	1574.8	0.068	0.136
	46	5230						
	54	5270	0.635	0.645	0.984	1574.8	0.068	0.136
	62	5310						
	102	5510	0.635	0.645	0.984	1574.8	0.068	0.136
	110	5550						
	134	5670						

Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11ac (40MHz)	38	5190	1024.000	8	128.000	1.0	-21.072	-42.144
	46	5230						
	54	5270	1360.000	10	136.000	0.7	-21.335	-42.671
	62	5310						
	102	5510	1276.000	10.000	127.600	0.8	-21.059	-42.117
	110	5550						
	134	5670						

Note: X = On time / (On + Off time)


Mode	Channel	Frequency (MHz)	Duty Cycle				DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X	1/T		
802.11ac (80MHz)	42	5210	1024.000	8.000	128.000	1.0	-21.072	-42.144
	58	5290	1360.000	10.000	136.000	0.7	-21.335	-42.671
	106	5530	1276.000	10.000	127.600	0.8	-21.059	-42.117
	122	5610	1276.000	10.000	127.600	0.8	-21.059	-42.117

Note: X = On time / (On + Off time)


4.7.4 Trace data

[IEEE802.11a]


Channel: 40

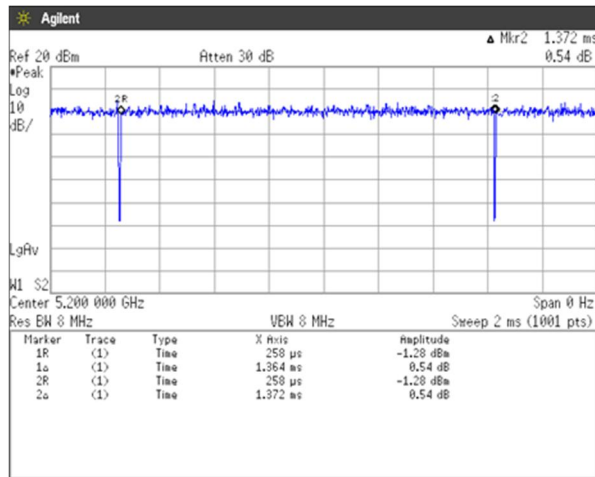

Channel: 56

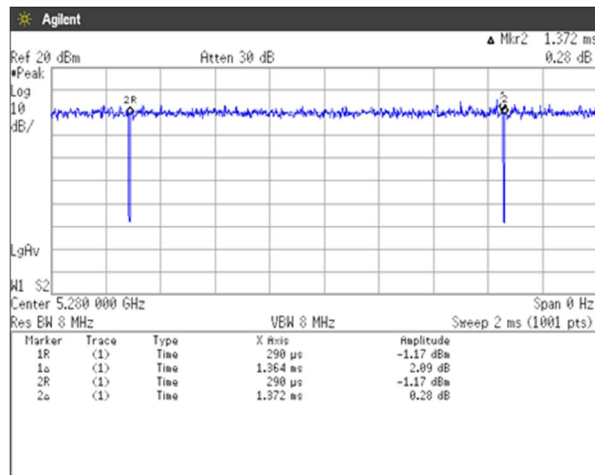


Channel: 116

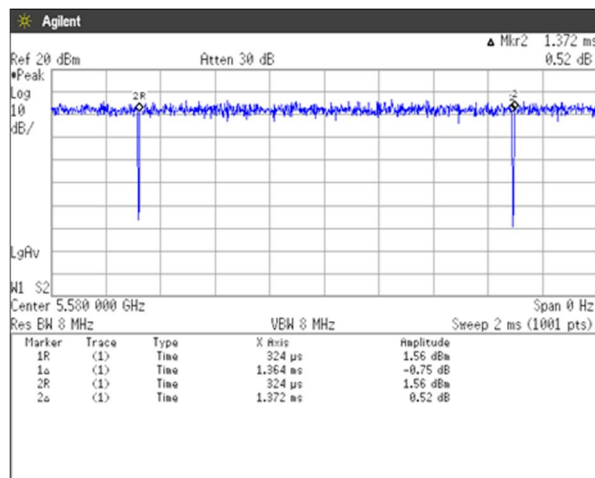


[IEEE802.11n (HT20)]


Channel: 40

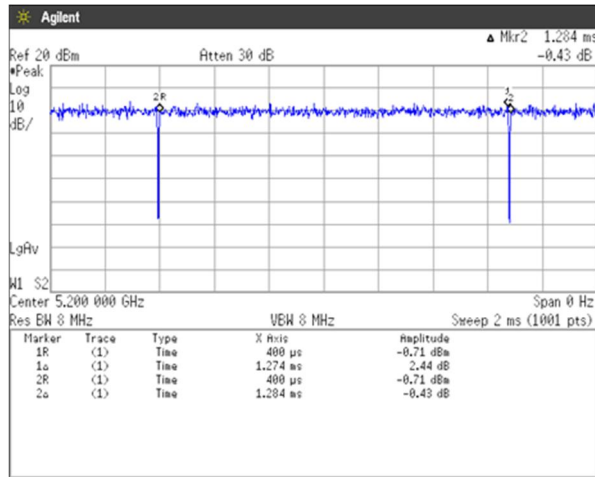

Channel: 56

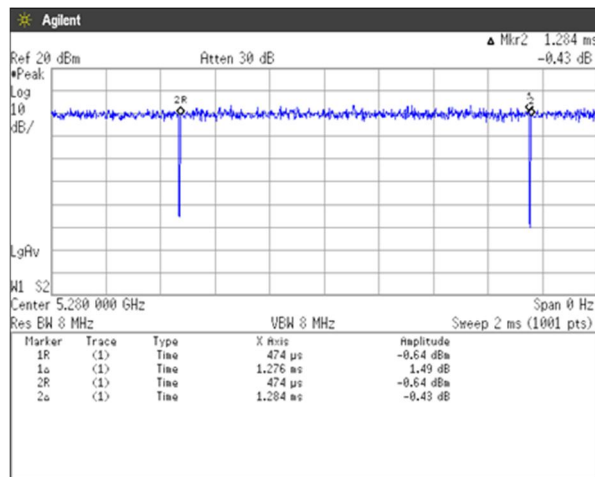


Channel: 116

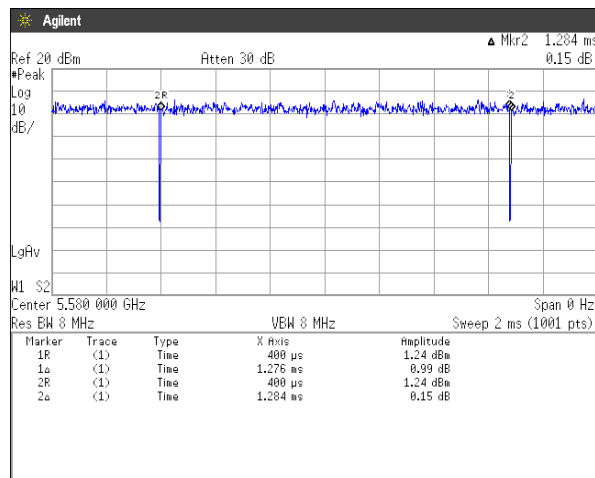


[IEEE802.11n (HT40)]


Channel: 38

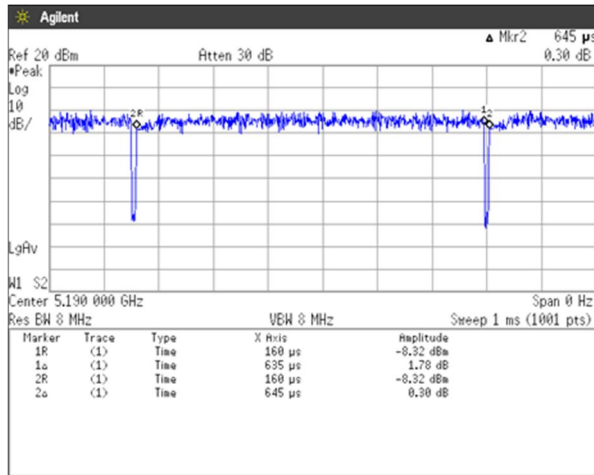

Channel: 54

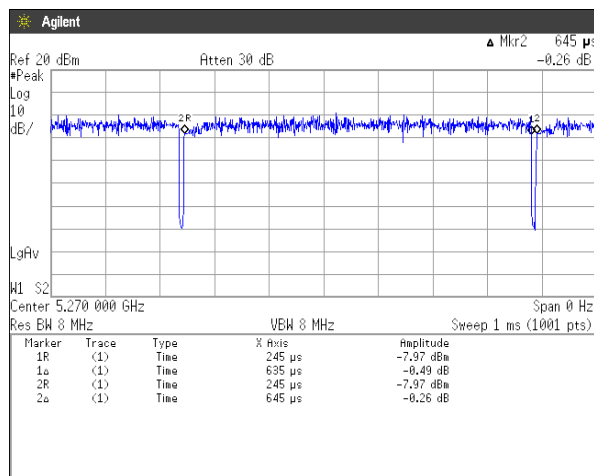

Channel: 110

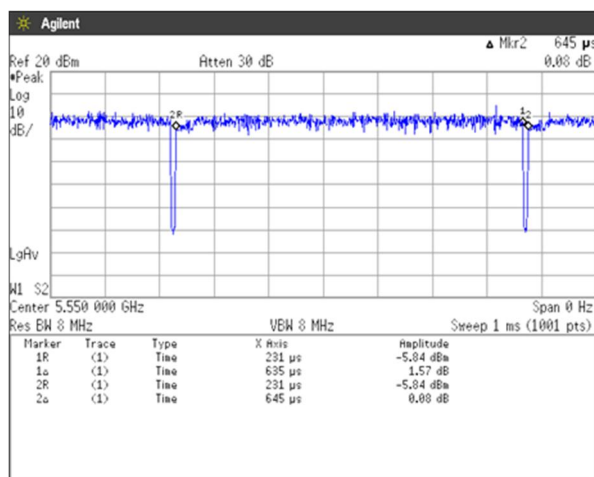



Japan





5 Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

6 Measurement uncertainty

Expanded uncertainties stated are calculated with a coverage Factor k=2.
 Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	±3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	±3.3 dB
Radiated emission (9kHz – 30 MHz)	±3.1 dB
Radiated emission (30 MHz – 1000 MHz)	±4.9 dB
Radiated emission (1 GHz – 6 GHz)	±4.8 dB
Radiated emission (6 GHz – 18 GHz)	±5.1 dB
Radiated emission (18 GHz – 40 GHz)	±5.8 dB
Radio Frequency	±1.4 * 10 ⁻⁸
RF power, conducted	±0.6 dB
Temperature	±0.6 °C
Humidity	±1.2 %
Voltage (DC)	±0.4 %
Voltage (AC, <10kHz)	±0.2 %

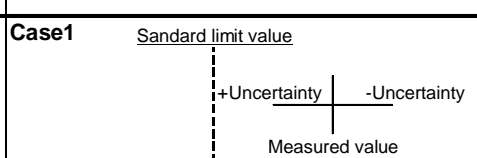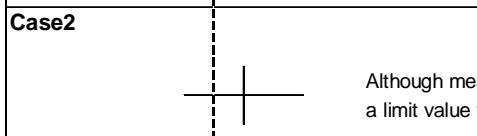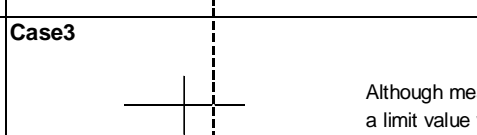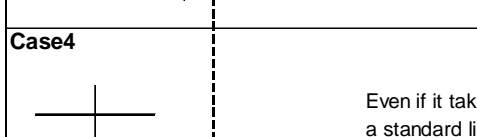Judge	Measured value and standard limit value	
PASS	Case1 	Standard limit value Even if it takes uncertainty into consideration, a standard limit value is fulfilled.
	Case2 	Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.
FAIL	Case3 	Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.
	Case4 	Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.



7 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Fax: +81-238-28-2888

Accreditation and Registration

NVLAP

LAB CODE: 200306-0

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

Site number	Facility	Expiration date
4224A-4	3 m Semi-anechoic chamber	27-November-2020
4224A-5	10 m Semi-anechoic chamber No. 1	27-November-2020
4224A-6	10 m Semi-anechoic chamber No. 2	14-December-2019

VCCI Council

Registration number	Expiration date
A-0166	03-July-2019

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Jul-2019	02-Jul-2018
Attenuator	Weinschel	56-10	J4180	31-Jul-2019	12-Jul-2018
Power meter	ROHDE&SCHWARZ	NRP2	103269	31-Aug-2019	01-Aug-2018
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102467	31-Aug-2019	01-Aug-2018
Temperature and humidity chamber	ESPEC	PL1KP	14007261	31-Dec-2019	07-Dec-2018

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2019	20-Sep-2018
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	30-Apr-2020	16-Apr-2019
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Oct-2019	12-Oct-2018
Preamplifier	SONOMA	310	372170	30-Sep-2019	20-Sep-2018
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	28-Mar-2020	07-Mar-2019
Attenuator	TDC	TAT-43B-06	N/A(S209)	31-Jul-2019	11-Jul-2018
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91032155	31-Aug-2019	06-Aug-2018
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	31-Aug-2019	06-Aug-2018
Attenuator	TAMAGAWA.ELEC	CFA-01/6dB	N/A(S465)	31-May-2020	17-May-2019
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2019	11-Jul-2018
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Jan-2020	17-Jan-2019
Attenuator	AEROFLEX	26A-10	081217-08	31-Jan-2020	17-Jan-2019
Double ridged guide antenna	ETS LINDGREN	3117	00224193	31-Jan-2020	23-Jan-2019
Attenuator	Agilent Technologies	8491B	MY39268633	31-Mar-2020	08-Mar-2019
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2019	24-Aug-2018
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2019	24-Aug-2018
Notch filter	Micro-Tronics	BRM50716	006	31-Jul-2019	12-Jul-2018
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1m	my24610/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/8m	SN MY30031/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1.5m	MY32976/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1.5m	MY19309/4	31-Jan-2020	16-Jan-2019
		SUCOFLEX104/7m	41625/6	31-Jan-2020	16-Jan-2019
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2019	21-May-2018
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2019	22-May-2018

Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2019	20-Sep-2018
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	31-Jan-2020	17-Jan-2019
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F2	12-17-110-2	31-May-2020	16-May-2019
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	31-Jan-2020	16-Jan-2019
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	31-Jan-2020	16-Jan-2019
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A (S194)	31-Jan-2020	16-Jan-2019
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.