

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: KB46
FCC ID: JOYKB46

In accordance with FCC Part 24 Subpart E

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19106-0

SIGNATURE

| NAME | JOB TITLE | RESPONSIBLE FOR | ISSUE DATE |
|----------------|----------------------------|--------------------|-------------|
| Hiroaki Suzuki | Deputy Manager of RF Group | Approved Signatory | 25 JUN 2019 |

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 24 Subpart E.



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

| | | |
|----------|---|-----------|
| 1 | Summary of Test | 3 |
| 1.1 | Modification history of the test report..... | 3 |
| 1.2 | Standards..... | 3 |
| 1.3 | Test methods..... | 3 |
| 1.4 | Deviation from standards..... | 3 |
| 1.5 | List of applied test(s) of the EUT..... | 3 |
| 1.6 | Test information..... | 3 |
| 1.7 | Test set up..... | 3 |
| 1.8 | Test period..... | 3 |
| 2 | Equipment Under Test | 4 |
| 2.1 | EUT information..... | 4 |
| 2.2 | Modification to the EUT..... | 5 |
| 2.3 | Variation of family model(s)..... | 5 |
| 2.4 | Description of test mode..... | 5 |
| 3 | Configuration of Equipment | 6 |
| 3.1 | Equipment used..... | 6 |
| 3.2 | System configuration..... | 6 |
| 4 | Test Result | 7 |
| 4.1 | Equivalent Isotropic Radiated Power..... | 7 |
| 4.2 | Peak to Average Ratio..... | 10 |
| 4.3 | Occupied Bandwidth..... | 13 |
| 4.4 | Band Edge Spurious and Harmonic at Antenna Terminals..... | 15 |
| 4.5 | Radiated Emissions and Harmonic Emissions..... | 20 |
| 4.6 | Frequency Stability..... | 22 |
| 5 | Measurement Uncertainty | 24 |
| 6 | Laboratory Information | 25 |
| | Appendix A. Test Equipment | 26 |

1 Summary of Test

1.1 Modification history of the test report

| Document Number | Modification History | Issue Date |
|-----------------|----------------------|-------------------------|
| JPD-TR-19106-0 | First Issue | Refer to the cover page |

1.2 Standards

CFR47 FCC Part 24 Subpart E

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

| Test item section | Test item | Condition | Result | Remark |
|---------------------|---|-----------|--------|--------|
| 2.1046 | Conducted Output Power | Conducted | PASS | *1 |
| 24.232(c) | Effective Radiated Power Equivalent Isotropic Radiated Power | Radiated | PASS | - |
| 24.232(d) | Peak to Average Ratio | Conducted | PASS | - |
| 24.238(a) 2.1049 | Occupied Bandwidth | Conducted | PASS | - |
| 24.238(a) 2.1051 | Band Edge Spurious and Harmonic at Antenna Terminal | Conducted | PASS | - |
| 24.238(a) 2.1053 | Radiated emissions and Harmonic Emissions | Radiated | PASS | - |
| 24.235 2.1055 | Frequency Stability | Conducted | PASS | - |

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

22-May--2019 - 18-June-2019



2 Equipment Under Test

2.1 EUT information

| | |
|---|---|
| Applicant | KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314 |
| Equipment Under Test (EUT) | Mobile Phone |
| Model number | KB46 |
| Serial number | N/A |
| Trade name | Kyocera |
| Number of sample(s) | 1 |
| EUT condition | Pre-Production |
| Power rating | Battery: DC 3.8 V |
| Size | (W) 78.2 × (D) 151.5 × (H) 17.4 mm |
| Environment | Indoor and Outdoor use |
| Terminal limitation | -20°C to 60°C |
| Hardware version | DMT2 |
| Software version | V0.030PR |
| Firmware version | Not applicable |
| RF Specification | |
| Frequency of Operation | Up Link GSM1900: 1850.2-1909.8 MHz Down Link GSM1900: 1930.2-1989.8 MHz |
| Modulation type | GSM1900: GMSK |
| Emission designator | GSM1900: 247KGXW |
| Equivalent Isotropic Radiated Power (E.I.R.P) | GSM1900: 1.9055 W (32.8 dBm) |
| Antenna type | Internal antenna |
| Antenna gain | GSM1900: 1.0 dBi |

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

| Modification State | Description of Modification | Modification fitted by | Date of Modification |
|---------------------------------|------------------------------|------------------------|----------------------|
| Model: KB46, Serial Number: N/A | | | |
| 0 | As supplied by the applicant | Not Applicable | Not Applicable |

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

| Band | Channel | Frequency [MHz] |
|---------|---------|-----------------|
| GSM1900 | 512 | 1850.2 |
| | 661 | 1880.0 |
| | 810 | 1909.8 |

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.



3 Configuration of Equipment


Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

| No. | Equipment | Company | Model No. | Serial No. | FCC ID/DoC | Comment |
|-----|--------------|---------|-----------|------------|------------|---------|
| 1 | Mobile Phone | KYOCERA | KB46 | N/A | JOYKB46 | EUT |

3.2 System configuration



4 Test Result

4.1 Equivalent Isotropic Radiated Power

4.1.1 Measurement procedure

[FCC 24.232(c)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

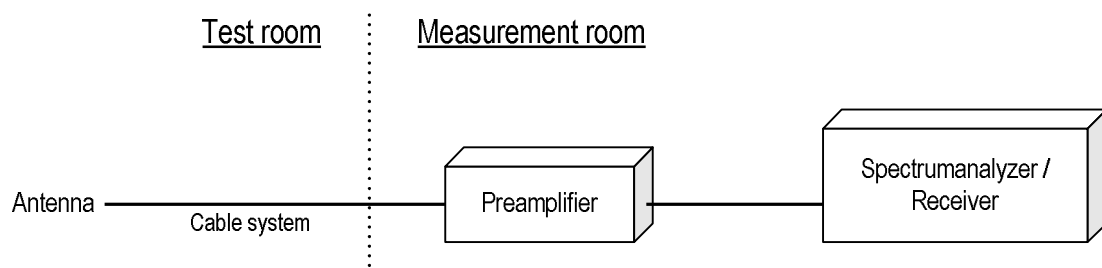



Japan

4.1.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain
Margin = Limit – Result (EIRP)

Example:

Limit @ 1880 MHz : 33.0 dBm
Ant. Input = 19.3 dBm Cable loss = 1.1dB Ant. Gain = 8.3 dBi
Result = 19.3 - 1.1 + 8.3 = 26.5 dBm
Margin = 33.0 - 26.5 = 6.5 dB

4.1.3 Limit

2 W (33 dBm)

4.1.4 Test data

Date : 22-May-2019
 Temperature : 20.2 [°C]
 Humidity : 50.3 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 6-June-2019
 Temperature : 21.4 [°C]
 Humidity : 56.8 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

[GSM1900]

| H/V | Frequency [MHz] | S.A Reading [dBm] | Ant. Input [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|------------------|-----------------|----------------|--------------|-------------|-------------|
| H | 1850.2 | -27.8 | 25.5 | 1.1 | 8.4 | 32.8 | 33.0 | 0.2 |
| H | 1880.0 | -27.9 | 23.9 | 1.1 | 8.4 | 31.1 | 33.0 | 1.9 |
| H | 1909.8 | -28.1 | 25.0 | 1.2 | 8.4 | 32.2 | 33.0 | 0.8 |

4.2 Peak to Average Ratio

4.2.1 Measurement procedure

[FCC 24.232(d)]


The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

[GSM1900]

- a) Span = 5 MHz
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Detector = Peak / Average
- e) Sweep time = auto-couple
- f) Trace mode=Max hold

- Test configuration

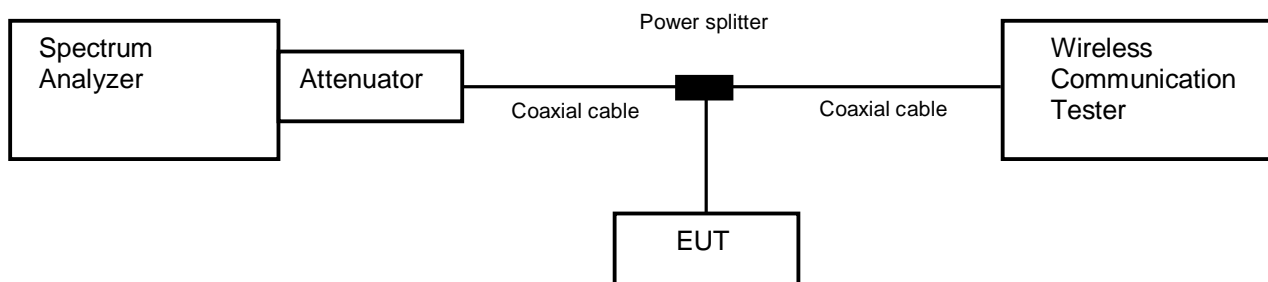

4.2.2 Limit

13 dB or less

4.2.3 Measurement result


Date : 11-June-2019
Temperature : 21.3 [°C]
Humidity : 48.5 [%] Test engineer : Chiaki Kanno
Test place : Shielded room No.4

| Band | Channel | Frequency [MHz] | Peak to Average Power Ratio [dB] | Limit [dB] |
|---------|---------|-----------------|----------------------------------|------------|
| GSM1900 | 512 | 1850.2 | 0.02 | 13.0 |
| | 661 | 1880.0 | 0.21 | |
| | 810 | 1909.8 | 0.01 | |


4.2.4 Trace data

[GSM1900]


Channel: 512

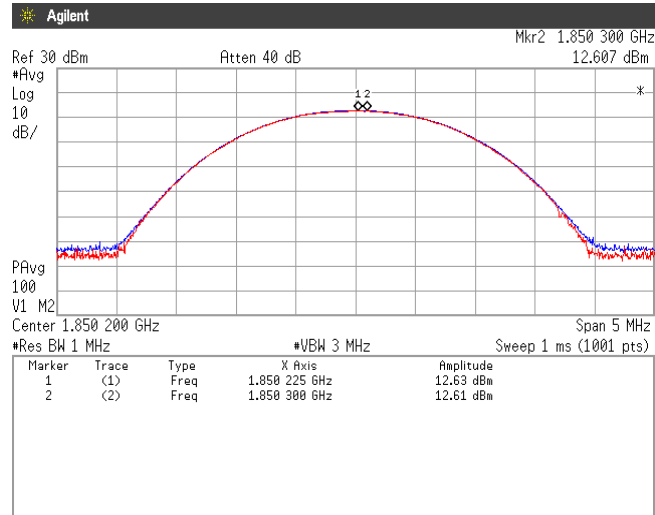

Channel: 661

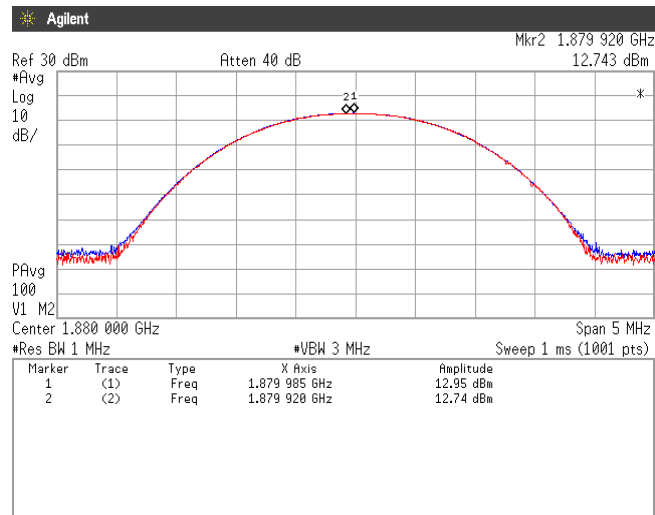

Channel: 810

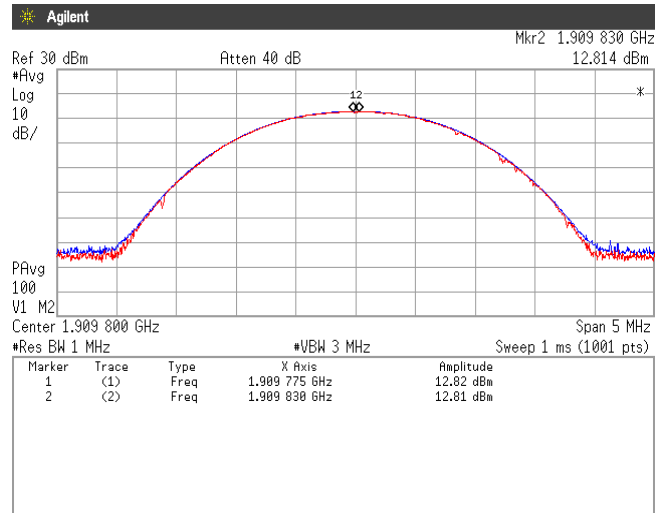

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

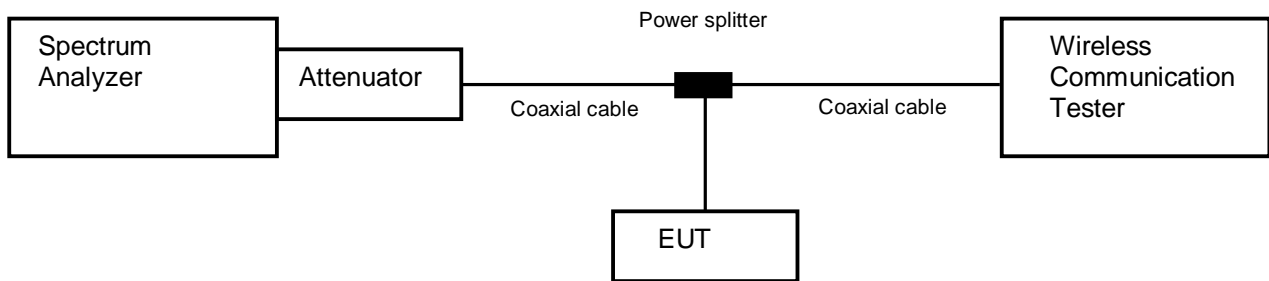

4.3.2 Limit

None

4.3.3 Measurement result

Date : 11-June-2019
 Temperature : 21.3 [°C]
 Humidity : 48.5 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


| Band | Channel | Frequency [MHz] | Test Result [kHz] |
|---------|---------|-----------------|-------------------|
| GSM1900 | 512 | 1850.2 | 245.2866 |
| | 661 | 1880.0 | 246.5892 |
| | 810 | 1909.8 | 246.3158 |




4.3.4 Trace data

[GSM1900]


Channel: 512

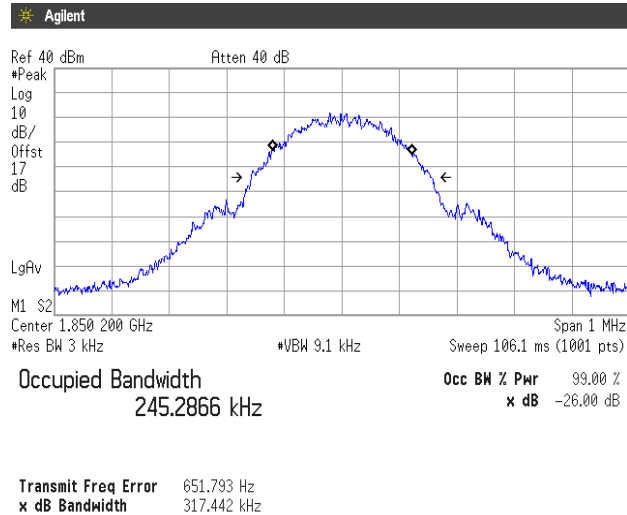

Channel: 661

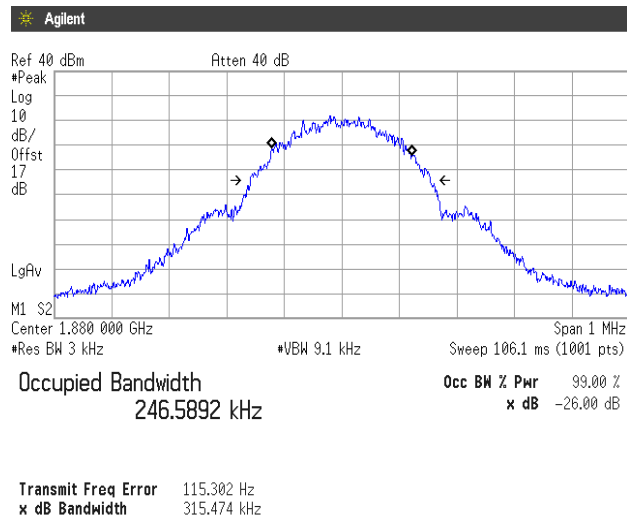

Channel: 810

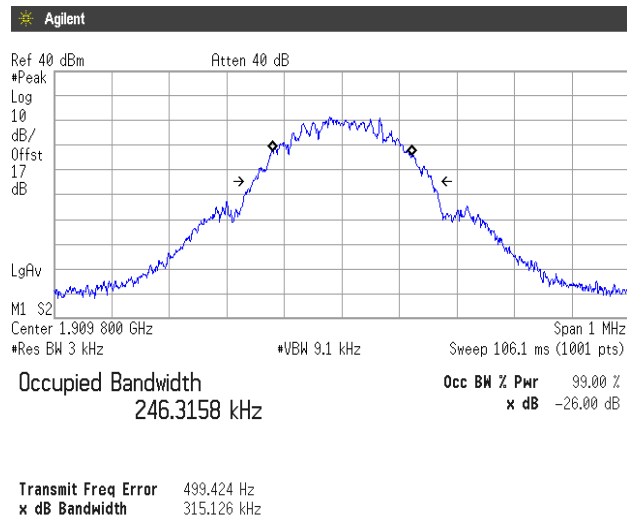

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 24.238(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) RBW \geq 1% of the emission bandwidth or 2% of the emission bandwidth
- c) VBW \geq 3 x RBW
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point \geq 2 x span / RBW

<Spurious Emissions>

- a) RBW = 1MHz & VBW \geq 3 x RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point \geq 2 x span / RBW

- Test configuration

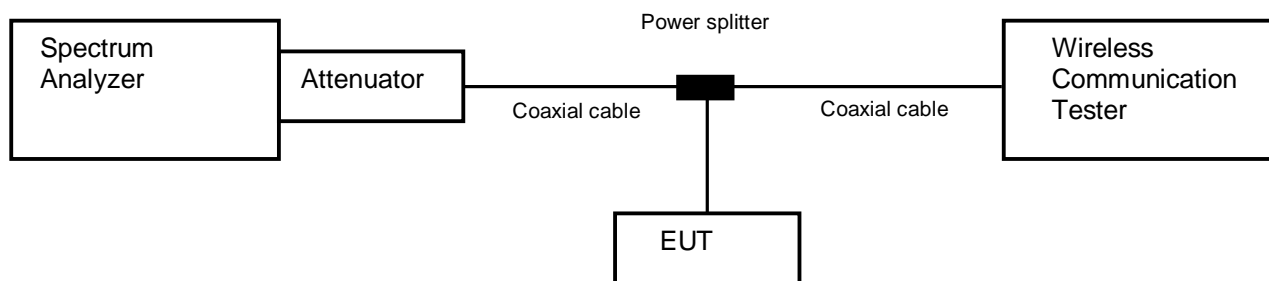

4.4.2 Limit

-13 dBm or less

4.4.3 Measurement result

Date : 11-June-2019
 Temperature : 21.3 [°C]
 Humidity : 48.5 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


| Band | Channel | Frequency [MHz] | Limit [dB] | Results | |
|---------|---------|-----------------|------------|--------------------|------|
| GSM1900 | 512 | 1850.2 | -13.0 | See the trace data | PASS |
| | 810 | 1909.8 | -13.0 | See the trace data | PASS |




4.4.4 Trace data

[GSM1900]
(Band Edge)

Channel: 512

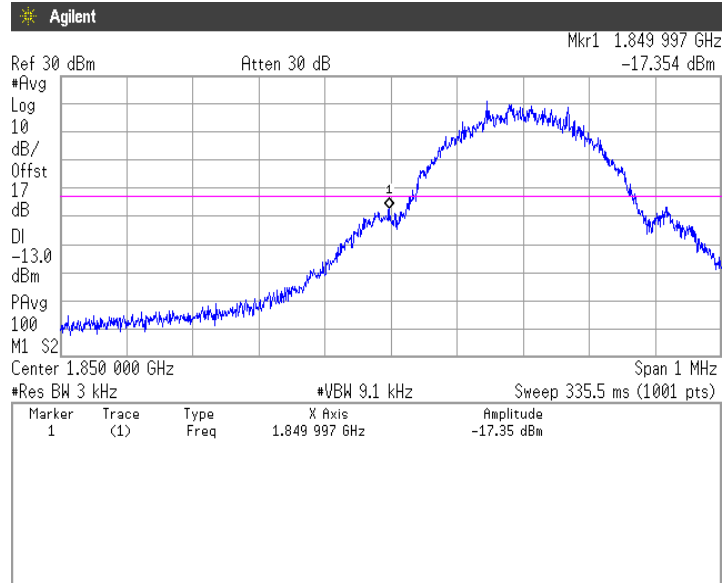

Channel: 810

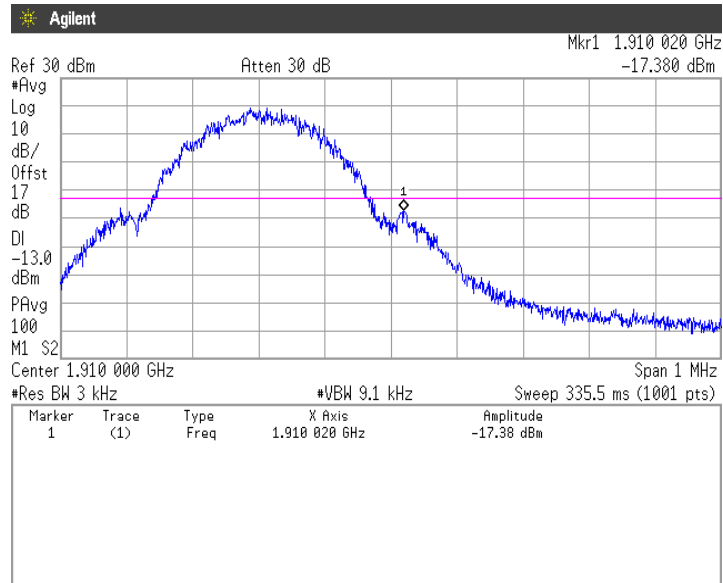





(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


**Channel: 512
30MHz-5GHz**

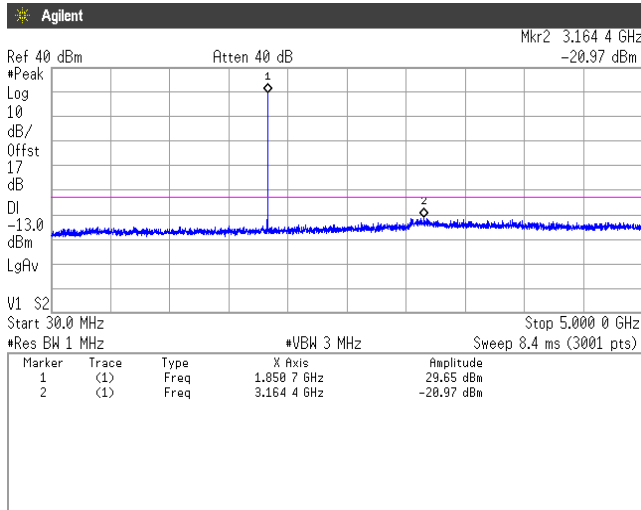


5GHz-10GHz

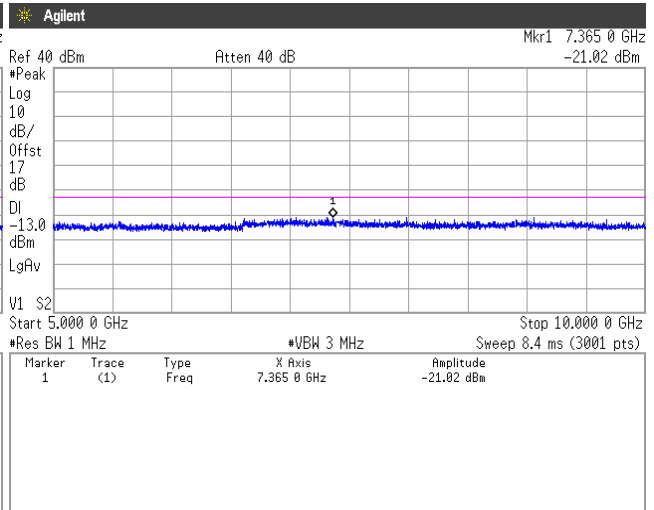

10GHz-15GHz

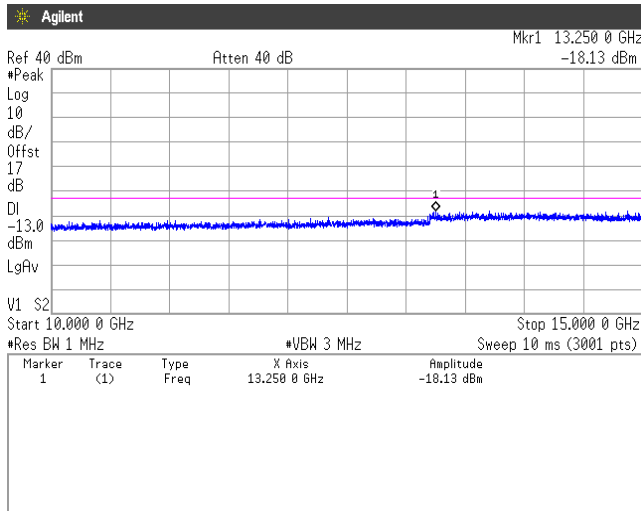


15GHz-20GHz

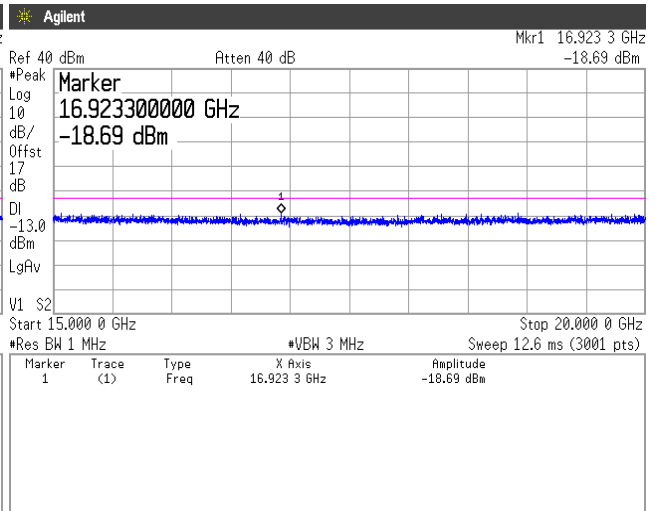





Channel: 661
30MHz-5GHz

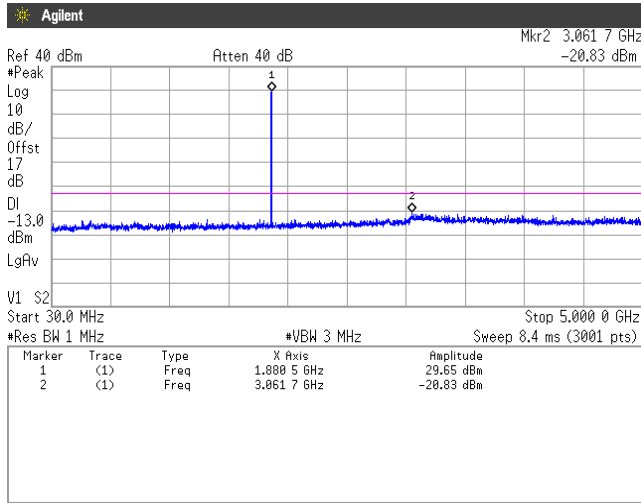


5GHz-10GHz

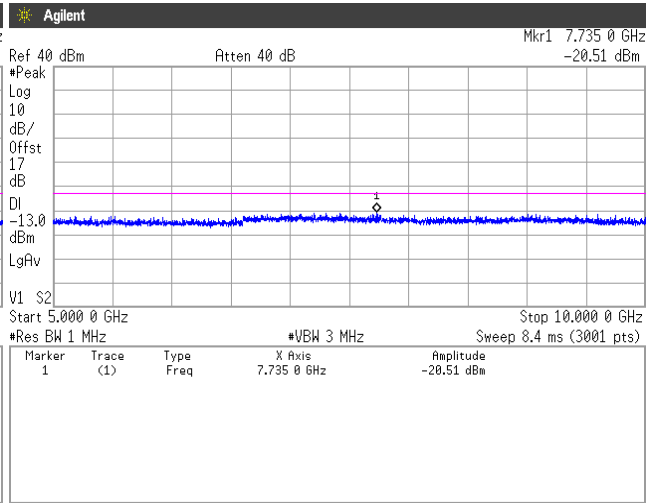

10GHz-15GHz

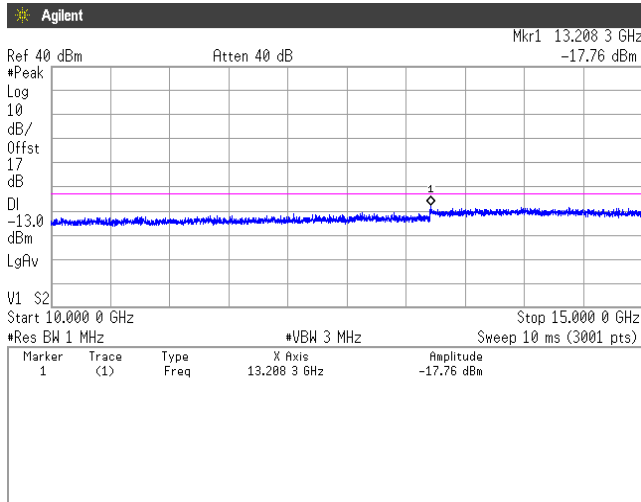


15GHz-20GHz

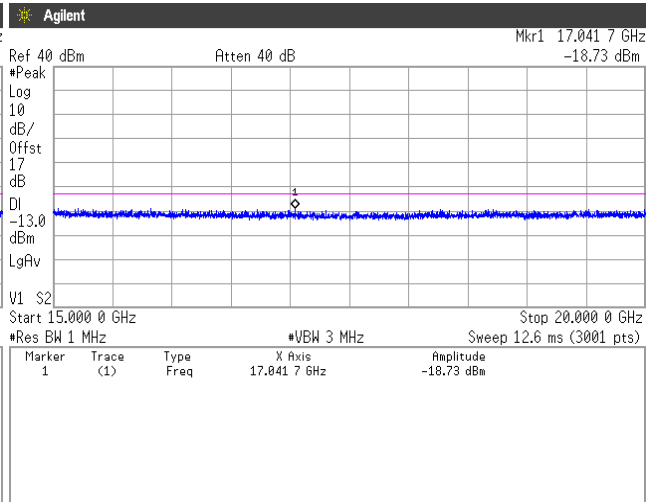





Channel: 810
30MHz-5GHz

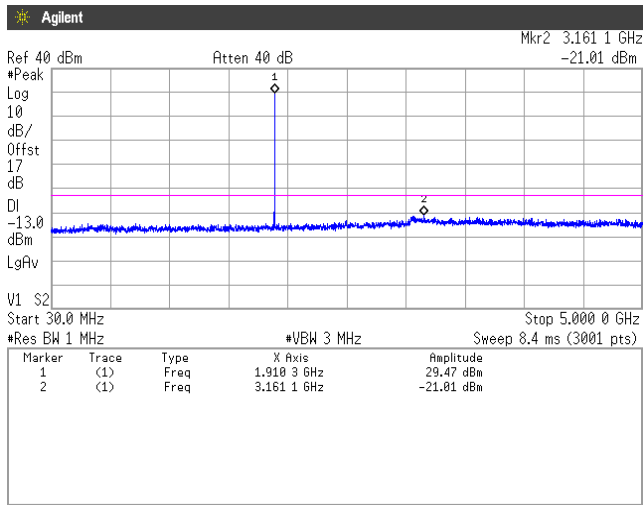


5GHz-10GHz

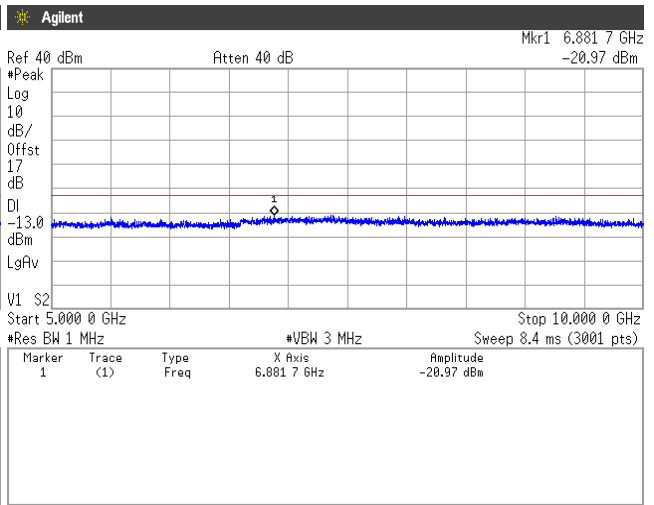

10GHz-15GHz

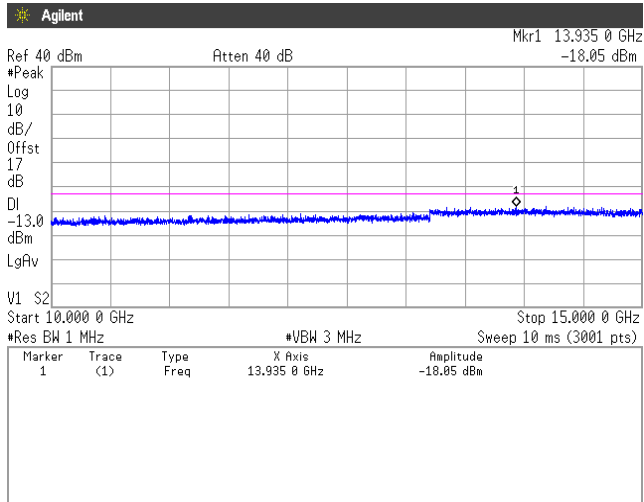

15GHz-20GHz

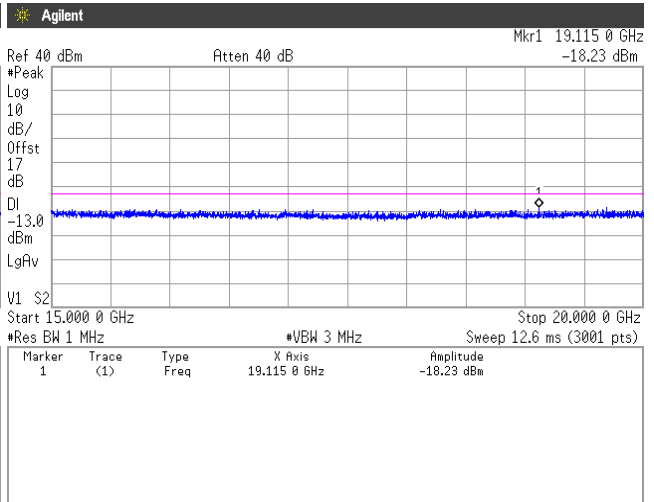

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 24.238(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20 GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW \geq 3 x RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep time = auto-couple

- Test configuration

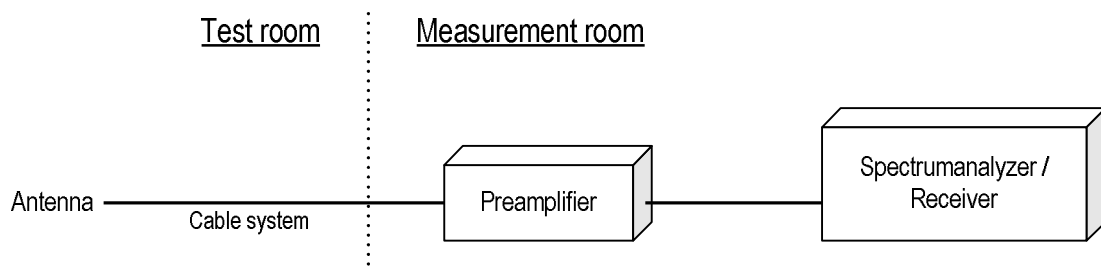



4.5.2 Calculation method

Result = Ant. Input - Cable loss + Antenna Gain
 Margin = Limit – Result (EIRP)

Example:

Limit @ 3700.4 MHz : -13.0 dBm
 Ant. Input = -55.6 dBm Cable loss = 1.6 dB Ant. Gain = 9.2 dBi
 Result = -55.6 - 1.6 + 9.2 = -49.3 dBm
 Margin = -13.0 - (-49.3) = 36.3 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date : 22-May-2019
 Temperature : 20.2 [°C]
 Humidity : 50.3 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Chiaki Kanno

Date : 29-May-2019
 Temperature : 23.1 [°C]
 Humidity : 52.5 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Chiaki Kanno

Date : 6-June-2019
 Temperature : 21.4 [°C]
 Humidity : 56.8 [%]
 Test place : 3m Semi-anechoic chamber
 Test engineer : Chiaki Kanno

**[GSM1900]
 Channel: 512**

| H/V | Frequency [MHz] | S.A Reading [dBm] | Ant. Input [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|------------------|-----------------|----------------|--------------|-------------|-------------|
| H | -56.1 | -56.1 | -56.0 | 1.6 | 9.5 | -48.1 | -13.0 | 35.1 |

Channel: 661

| H/V | Frequency [MHz] | S.A Reading [dBm] | Ant. Input [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|------------------|-----------------|----------------|--------------|-------------|-------------|
| H | 3760.0 | -56.3 | -57.3 | 1.6 | 9.4 | -49.5 | -13.0 | 36.5 |

Channel: 810

| H/V | Frequency [MHz] | S.A Reading [dBm] | Ant. Input [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|------------------|-----------------|----------------|--------------|-------------|-------------|
| H | 3819.6 | -56.1 | -57.0 | 1.7 | 9.3 | -49.3 | -13.0 | 36.3 |


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 24.235, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and $+50^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

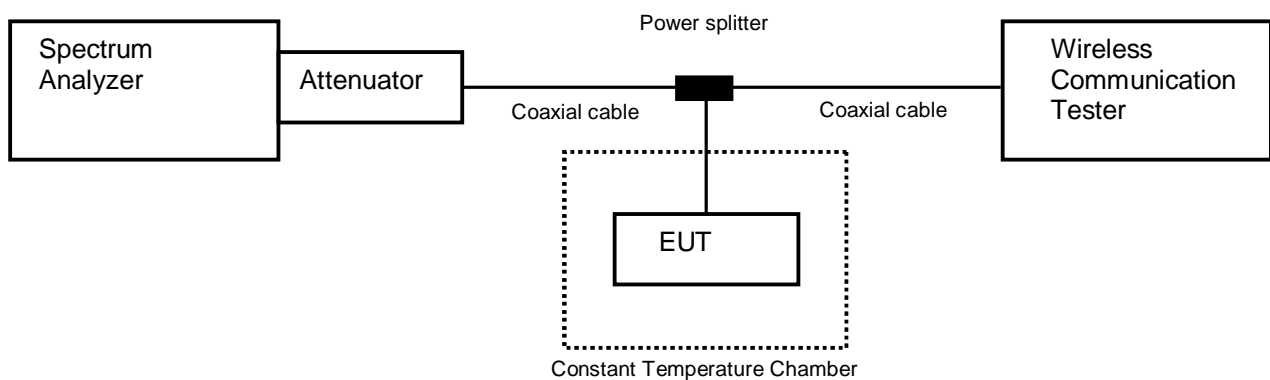

4.6.2 Limit

± 2.5 ppm

4.6.3 Measurement result

Date : 18-June-2019
 Temperature : 20.5 [°C]
 Humidity : 52.3 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

[GSM1900]

Channel: 661

| Limit: $\pm 0.00025\% = \pm 2.5$ ppm | | | | | |
|--------------------------------------|------------------|-----------------------------|---------------------------|-------------|--------|
| Power Supply [V] | Temperature [°C] | Measurements Frequency [Hz] | Frequency Tolerance [ppm] | Limit [ppm] | Result |
| 3.80 | 25(Ref.) | 1,880,000,035 | 0.00000 | ± 2.5 | Pass |
| | 50 | 1,880,000,019 | -0.00862 | ± 2.5 | Pass |
| | 40 | 1,880,000,025 | -0.00534 | ± 2.5 | Pass |
| | 30 | 1,880,000,026 | -0.00452 | ± 2.5 | Pass |
| | 20 | 1,880,000,032 | -0.00148 | ± 2.5 | Pass |
| | 10 | 1,880,000,037 | 0.00094 | ± 2.5 | Pass |
| | 0 | 1,880,000,043 | 0.00434 | ± 2.5 | Pass |
| | -10 | 1,880,000,044 | 0.00477 | ± 2.5 | Pass |
| | -20 | 1,880,000,036 | 0.00067 | ± 2.5 | Pass |
| | -30 | 1,880,000,026 | -0.00462 | ± 2.5 | Pass |
| 3.42 | 25 | 1,880,000,030 | -0.00243 | ± 2.5 | Pass |
| 4.18 | 25 | 1,880,000,024 | -0.00560 | ± 2.5 | Pass |





Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor k=2.
 Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.
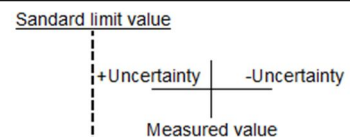
| Test item | Measurement uncertainty |
|--|-------------------------|
| Conducted emission, AMN (9 kHz – 150 kHz) | ±3.8 dB |
| Conducted emission, AMN (150 kHz – 30 MHz) | ±3.3 dB |
| Radiated emission (9kHz – 30 MHz) | ±3.1 dB |
| Radiated emission (30 MHz – 1000 MHz) | ±4.9 dB |
| Radiated emission (1 GHz – 6 GHz) | ±4.8 dB |
| Radiated emission (6 GHz – 18 GHz) | ±5.1 dB |
| Radiated emission (18 GHz – 40 GHz) | ±5.8 dB |
| Radio Frequency | ±1.4 * 10 ⁻⁸ |
| RF power, conducted | ±0.6 dB |
| Temperature | ±0.6 °C |
| Humidity | ±1.2 % |
| Voltage (DC) | ±0.4 % |
| Voltage (AC, <10kHz) | ±0.2 % |

| Judge | Measured value and standard limit value |
|-------|--|
| PASS | <p>Case1</p>  <p>Even if it takes uncertainty into consideration, a standard limit value is fulfilled.</p> |
| | <p>Case2</p>  <p>Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.</p> |
| FAIL | <p>Case3</p>  <p>Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.</p> |
| | <p>Case4</p>  <p>Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.</p> |



6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Fax: +81-238-28-2888

Accreditation and Registration

NVLAP

LAB CODE: 200306-0

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

| Site number | Facility | Expiration date |
|-------------|----------------------------------|------------------|
| 4224A-4 | 3 m Semi-anechoic chamber | 27-November-2020 |
| 4224A-5 | 10 m Semi-anechoic chamber No. 1 | 27-November-2020 |
| 4224A-6 | 10 m Semi-anechoic chamber No. 2 | 14-December-2019 |

VCCI Council

| Registration number | Expiration date |
|---------------------|-----------------|
| A-0166 | 03-July-2021 |

Appendix A. Test Equipment

Antenna port conducted test

| Equipment | Company | Model No. | Serial No. | Cal. Due | Cal. Date |
|----------------------------------|----------------------|----------------|------------|-------------|-------------|
| Spectrum analyzer | Agilent Technologies | E4440A | US44302655 | 31-Jul-2019 | 02-Jul-2018 |
| Attenuator | Weinschel | 56-10 | J4993 | 31-Dec-2019 | 20-Dec-2018 |
| Microwave cable | HUBER+SUHNER | SUCOFLEX 104 | 199119/4 | 31-Mar-2020 | 07-Mar-2019 |
| Microwave cable | HUBER+SUHNER | SUCOFELX102/2m | 31648 | 31-Mar-2020 | 08-Mar-2019 |
| Power divider | Keysight | 11636B | MY51359874 | 31-Oct-2019 | 11-Oct-2018 |
| Wideband Radio Frequency Tester | ROHDE&SCHWARZ | CMW500 | 126079 | 31-Oct-2019 | 12-Oct-2018 |
| Temperature and humidity chamber | ESPEC | PL1KP | 14007261 | 31-Dec-2019 | 07-Dec-2018 |

Radiated emission

| Equipment | Company | Model No. | Serial No. | Cal. Due | Cal. Date |
|---------------------------------|----------------------|-------------------|-----------------|-------------|-------------|
| EMI Receiver | ROHDE&SCHWARZ | ESCI | 100765 | 30-Sep-2019 | 20-Sep-2018 |
| Spectrum analyzer | Agilent Technologies | E4447A | MY46180188 | 30-Apr-2020 | 16-Apr-2019 |
| Spectrum analyzer | Agilent Technologies | E4440A | US40420937 | 31-Oct-2019 | 12-Oct-2018 |
| Preamplifier | SONOMA | 310 | 372170 | 30-Sep-2019 | 20-Sep-2018 |
| Biconical antenna | Schwarzbeck | VHA9103/BBA9106 | VHA91032155 | 31-Aug-2019 | 06-Aug-2018 |
| Log periodic antenna | Schwarzbeck | UHALP9108A | 0560 | 31-Aug-2019 | 06-Aug-2018 |
| Attenuator | TAMAGAWA.ELEC | CFA-01/6dB | N/A(S465) | 31-May-2020 | 17-May-2019 |
| Attenuator | TAMAGAWA.ELEC | CFA-10/3dB | N/A(S503) | 31-Jul-2019 | 11-Jul-2018 |
| Preamplifier | TSJ | MLA-100M18-B02-40 | 1929118 | 31-Jan-2020 | 17-Jan-2019 |
| Attenuator | AEROFLEX | 26A-10 | 081217-08 | 31-Jan-2020 | 17-Jan-2019 |
| Double ridged guide antenna | ETS LINDGREN | 3117 | 00224193 | 31-Jan-2020 | 23-Jan-2019 |
| Attenuator | Agilent Technologies | 8491B | MY39268633 | 31-Mar-2020 | 08-Mar-2019 |
| Double ridged guide antenna | A.H.Systems Inc. | SAS-574 | 469 | 31-Aug-2019 | 24-Aug-2018 |
| Preamplifier | TSJ | MLA-1840-B03-35 | 1240332 | 31-Aug-2019 | 24-Aug-2018 |
| High Pass Filter | Wainwright | WHKX2.8/18G-6SS | 1 | 31-Jul-2019 | 12-Jul-2018 |
| Band rejection filter | Micro-Tronics | BRC50720 | 014 | 31-Dec-2019 | 20-Dec-2018 |
| Signal generator | ROHDE&SCHWARZ | SMB100A | 177525 | 31-Jul-2019 | 31-Jul-2018 |
| RF power amplifier | R&K | CGA020M602-2633R | B40240 | 31-May-2020 | 16-May-2019 |
| Microwave cable | HUBER+SUHNER | SUCOFELX102/2m | 31648 | 31-Mar-2020 | 08-Mar-2019 |
| Dipole antenna | Schwarzbeck | VHAP | 1020 | 31-Aug-2019 | 03-Aug-2018 |
| Dipole antenna | Schwarzbeck | UHAP | 994 | 31-Aug-2019 | 03-Aug-2018 |
| Double ridged guide antenna | EMCO | 3115 | 00058532 | 29-Feb-2020 | 12-Feb-2019 |
| Double ridged guide antenna | ETS LINDGREN | 3117 | 00218815 | 31-Dec-2019 | 27-Dec-2018 |
| Wideband Radio Frequency Tester | ROHDE&SCHWARZ | CMW500 | 126079 | 31-Oct-2019 | 12-Oct-2018 |
| Microwave cable | HUBER+SUHNER | SUCOFLEX104/9m | MY30037/4 | 31-Jan-2020 | 16-Jan-2019 |
| | | SUCOFLEX104/1m | my24610/4 | 31-Jan-2020 | 16-Jan-2019 |
| | | SUCOFLEX104/8m | SN MY30031/4 | 31-Jan-2020 | 16-Jan-2019 |
| | | SUCOFLEX104 | MY32976/4 | 31-Jan-2020 | 16-Jan-2019 |
| | | SUCOFLEX104/1.5m | MY19309/4 | 31-Jan-2020 | 16-Jan-2019 |
| | | SUCOFLEX104/7m | 41625/6 | 31-Jan-2020 | 16-Jan-2019 |
| PC | DELL | DIMENSION E521 | 75465BX | N/A | N/A |
| Software | TOYO Corporation | EP5/RE-AJ | 0611193/V5.6.0 | N/A | N/A |
| Absorber | RIKEN | PFP30 | N/A | N/A | N/A |
| 3m Semi an-echoic Chamber | TOKIN | N/A | N/A(9002-NSA) | 31-May-2020 | 14-May-2019 |
| 3m Semi an-echoic Chamber | TOKIN | N/A | N/A(9002-SVSWR) | 31-May-2020 | 13-May-2019 |

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.