



Zacta

TEST REPORT

Report number : JPD-TR-17244-0

Issue date : December 29, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part 27 Subpart C FCC Part 27 Subpart L

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: YKFA21
FCC ID	: JOYYKFA21

Date of test : December 1, 4, 12, 13, 14, 15, 18, 22, 2017
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 5-4149-7, Hachimanpara, Yonezawa-shi,
 Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881 Fax: +81-238-28-2888
 Test results : Complied

The results in this report are applicable only to the equipment tested.
 This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
 This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino Chiaki Kanno
 Tadahiro Seino Chiaki Kanno

Approved by : Hiroaki Suzuki
 Hiroaki Suzuki
 Lab Manager of RF Lab



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards.....	4
1.3 List of applied test to the EUT.....	4
1.4 Modification to the EUT by laboratory.....	4
2. Equipment Under Test	5
2.1 General Description of equipment.....	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Description of Test mode	6
3. Configuration of equipment	7
3.1 Equipment(s) used	7
3.2 System configuration.....	7
4. Effective Isotropic Radiated Power	8
4.1 Measurement procedure	8
4.2 Calculation method	9
4.3 Limit	9
4.4 Test data.....	9
5. Peak to Average Ratio	12
5.1 Measurement procedure	12
5.2 Limit	12
5.3 Measurement result.....	13
5.4 Trace data	14
6. Occupied Bandwidth	19
6.1 Measurement procedure	19
6.2 Limit	19
6.3 Measurement result.....	20
6.4 Trace data	21
7. Band Edge Spurious and Harmonic at Antenna Terminals	28
7.1 Measurement procedure	28
7.2 Limit	28
7.3 Measurement result.....	29
7.4 Trace data	30
8. Radiated Emissions and Harmonic Emissions	61
8.1 Measurement procedure	61
8.2 Calculation method	62
8.3 Limit	62
8.4 Test data.....	63
9. Frequency Stability	70
9.1 Measurement procedure	70
9.2 Limit	70
9.3 Measurement result.....	70
10. Uncertainty of measurement	72



Zacta

11. Laboratory Information 73
Appendix A. Test equipment..... 74



Zacta

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 27 Subpart C and Subpart L.

1.2 Standards

CFR47 FCC Part 27 Subpart C
CFR47 FCC Part 27 Subpart L

1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v02r02
ANSI/TIA/EIA-603-D-2010

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046	Conducted Output Power	Conducted	PASS ^{Note 1}
27.50	Effective Radiated Power	Radiated	PASS
27.50	Peak to Average Ratio	Conducted	PASS
2.1049	Occupied Bandwidth	Conducted	PASS
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS
27.54 2.1055	Frequency Stability	Conducted	PASS

Note 1: Refer to RF Exposure Report (Test Report_SAR)

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Zacta

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	YKFA21
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 71.5mm × (D) 8.4mm × (H) 145.0mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification		
Frequency of Operation	:	Up Link WCDMA Band IV: 1712.4-1752.6MHz LTE Band IV: 1710.0-1755.0MHz
		Down Link WCDMA Band IV: 2112.4-2152.6MHz LTE Band IV: 2110.0-2155.0MHz
Modulation type	:	WCDMA Band IV: QPSK, 16QAM LTE Band IV: QPSK, 16QAM
Emission designator	:	WCDMA Band IV: 4M12F9W LTE Band IV: BW 1.4M QPSK: 1M10G7D, 16QAM: 1M10W7D BW 3M QPSK: 2M71G7D, 16QAM: 2M71W7D BW 5M QPSK: 4M52G7D, 16QAM: 4M51W7D BW 10M QPSK: 8M96G7D, 16QAM: 8M95W7D BW 15M QPSK: 13M4G7D, 16QAM: 13M4W7D BW 20M QPSK: 17M9G7D, 16QAM: 17M8W7D
Effective Radiated Power (E.R.P.)	:	WCDMA Band IV: 0.118W (20.7dBm) LTE Band IV: 0.159W (22.0dBm)
Antenna type	:	Internal antenna
Antenna gain	:	WCDMA Band IV: -7.6dBi LTE Band IV: -7.6dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
WCDMA Band IV	QPSK	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
	16QAM	-	1312, 1413, 1513	1712.4, 1732.6, 1752.6
LTE Band IV	QPSK	1.4	19957, 20175, 20393	1710.7, 1732.5, 1754.3
		3	19965, 20175, 20385	1711.5, 1732.5, 1753.5
		5	19975, 20175, 20375	1712.5, 1732.5, 1752.5
		10	20000, 20175, 20350	1715.0, 1732.5, 1750.0
		15	20025, 20175, 20325	1717.5, 1732.5, 1747.5
		20	20050, 20175, 20300	1720.0, 1732.5, 1745.0
	16QAM	1.4	19957, 20175, 20393	1710.7, 1732.5, 1754.3
		3	19965, 20175, 20385	1711.5, 1732.5, 1753.5
		5	19975, 20175, 20375	1712.5, 1732.5, 1752.5
		10	20000, 20175, 20350	1715.0, 1732.5, 1750.0
		15	20025, 20175, 20325	1717.5, 1732.5, 1747.5
		20	20050, 20175, 20300	1720.0, 1732.5, 1745.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis (All Bands) and the worst case recorded.



Zacta

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	YKFA21	N/A	JOYYKFA21	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Effective Isotropic Radiated Power

4.1 Measurement procedure [FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

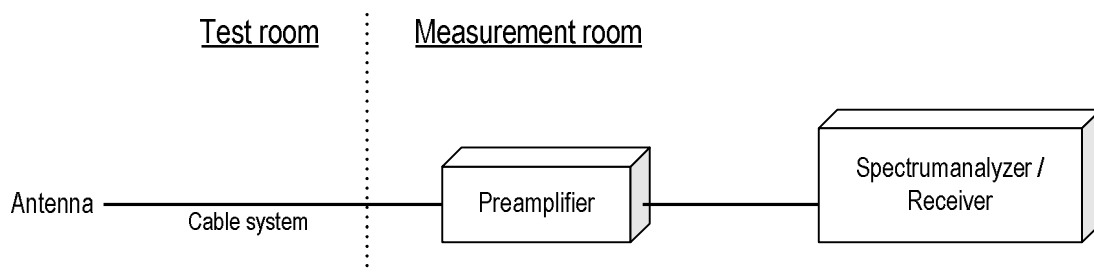



Zacta

4.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain
 Margin = Limit – Result (EIRP)

Example:

Limit @ 1732.5MHz : 30.0dBm
 Ant. Input = 15.0dBm Cable loss = 1.1dB Ant. Gain = 8.0dBi
 Result = 15.0 - 1.1 + 8.0 = 21.9dBm
 Margin = 30.0 – 21.9 = 8.1dB

4.3 Limit

1 W (30.0dBm)

4.4 Test data

Date	: December 12 2017	Test engineer	:	<u>Tadahiro Seino</u>
Temperature	: 22.9 [°C]			
Humidity	: 22.6 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 13, 2017	Test engineer	:	<u>Tadahiro Seino</u>
Temperature	: 20.0 [°C]			
Humidity	: 22.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 18, 2017	Test engineer	:	<u>Tadahiro Seino</u>
Temperature	: 20.2 [°C]			
Humidity	: 24.7 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 22, 2017	Test engineer	:	<u>Tadahiro Seino</u>
Temperature	: 20.4 [°C]			
Humidity	: 22.5 [%]			
Test place	: 3m Semi-anechoic chamber			

[WCDMA Band IV]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.4	-29.8	12.0	1.1	8.1	19.1	30.0	10.9
H	1732.6	-28.2	13.8	1.1	8.0	20.7	30.0	9.3
H	1752.6	-29.7	13.4	1.1	7.9	20.2	30.0	9.8

**[LTE Band IV]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-29.5	12.2	1.1	8.1	19.3	30.0	10.7
H	1732.5	-28.2	13.8	1.1	8.0	20.7	30.0	9.3
H	1754.3	-28.2	15.2	1.1	7.9	22.0	30.0	8.0

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1710.7	-30.2	11.5	1.1	8.1	18.6	30.0	11.4
H	1732.5	-29.6	12.4	1.1	8.0	19.3	30.0	10.7
H	1754.3	-29.4	14.0	1.1	7.9	20.8	30.0	9.2

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-29.7	12.0	1.1	8.1	19.1	30.0	10.9
H	1732.5	-28.2	13.8	1.1	8.0	20.7	30.0	9.3
H	1753.5	-28.2	15.1	1.1	7.9	21.9	30.0	8.1

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1711.5	-31.2	11.2	1.1	8.1	18.3	30.0	11.7
H	1732.5	-31.1	10.9	1.1	8.0	17.8	30.0	12.2
H	1753.5	-30.9	12.4	1.1	7.9	19.2	30.0	10.8

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-29.9	11.9	1.1	8.1	19.0	30.0	11.0
H	1732.5	-28.1	13.9	1.1	8.0	20.8	30.0	9.2
H	1752.5	-28.2	15.0	1.1	7.9	21.8	30.0	8.2

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1712.5	-30.3	11.5	1.1	8.1	18.6	30.0	11.4
H	1732.5	-30.8	11.2	1.1	8.0	18.1	30.0	11.9
H	1752.5	-29.4	13.8	1.1	7.9	20.6	30.0	9.4

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-30.0	12.0	1.1	8.1	19.0	30.0	11.0
H	1732.5	-28.5	13.5	1.1	8.0	20.4	30.0	9.6
H	1750.0	-28.5	14.3	1.1	7.9	21.0	30.0	9.0

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1715.0	-30.6	11.4	1.1	8.1	18.4	30.0	11.6
H	1732.5	-30.1	11.9	1.1	8.0	18.8	30.0	11.2
H	1750.0	-29.2	13.6	1.1	7.9	20.3	30.0	9.7

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-29.6	12.7	1.1	8.1	19.7	30.0	10.3
H	1732.5	-29.7	12.3	1.1	8.0	19.2	30.0	10.8
H	1747.5	-28.4	14.0	1.1	7.9	20.8	30.0	9.2

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1717.5	-30.5	12.3	1.1	8.1	19.3	30.0	10.7
H	1732.5	-30.9	11.1	1.1	8.0	18.0	30.0	12.0
H	1747.5	-29.7	12.4	1.1	7.9	19.2	30.0	10.8

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-29.4	13.1	1.1	8.1	20.1	30.0	9.9
H	1732.5	-28.1	14.0	1.1	8.0	20.9	30.0	9.1
H	1745.0	-28.5	13.6	1.1	7.9	20.4	30.0	9.6

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1720.0	-30.1	12.4	1.1	8.1	19.4	30.0	10.6
H	1732.5	-29.1	12.9	1.1	8.0	19.8	30.0	10.2
H	1745.0	-30.0	11.7	1.1	7.9	18.5	30.0	11.5

5. Peak to Average Ratio


5.1 Measurement procedure [FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth \geq signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

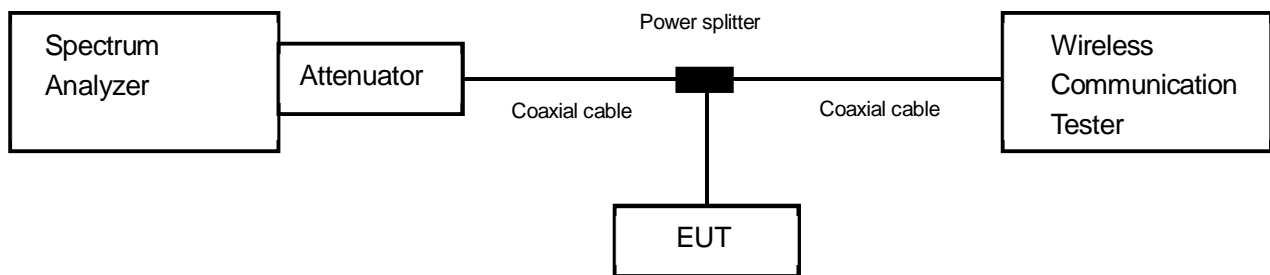

5.2 Limit

13dB or less



Zacta

5.3 Measurement result

Date : December 1, 2017
 Temperature : 21.4 [°C]
 Humidity : 35.9 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


Band	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
WCDMA Band IV	1312	1712.4	3.13	13.0
	1413	1732.6	3.18	
	1513	1752.6	3.19	

Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band IV	20175	1732.5	QPSK	1.4	6-0	5.13	13.0
				3	15-0	5.15	
				5	25-0	5.06	
				10	50-0	4.69	
				15	75-0	5.84	
				20	100-0	6.60	
			16QAM	1.4	6-0	5.96	
				3	15-0	5.96	
				5	25-0	5.93	
				10	50-0	6.21	
				15	75-0	6.93	
				20	100-0	7.32	




Zacta


5.4 Trace data
[WCDMA Band IV]
Channel: 1312

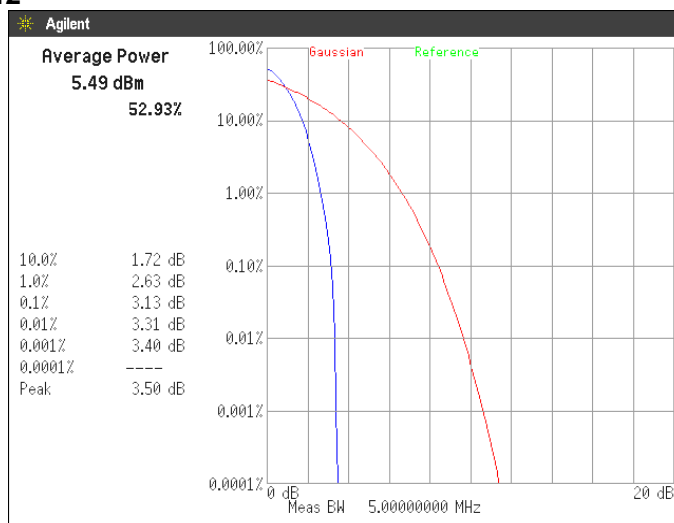

Channel: 1413

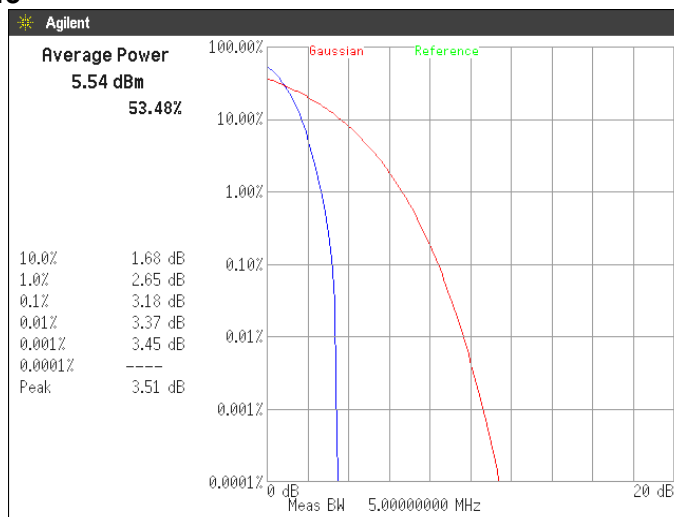

Channel: 1513

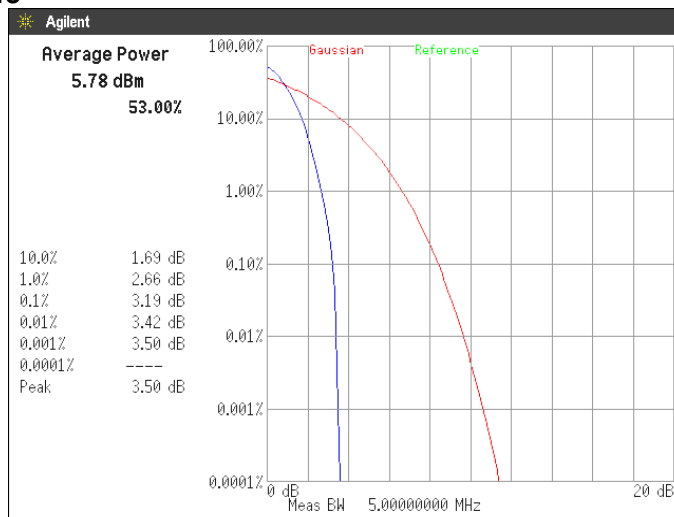




Zacta


[LTE Band IV]

Channel: 20175


QPSK, BW 1.4MHz, RB6-0

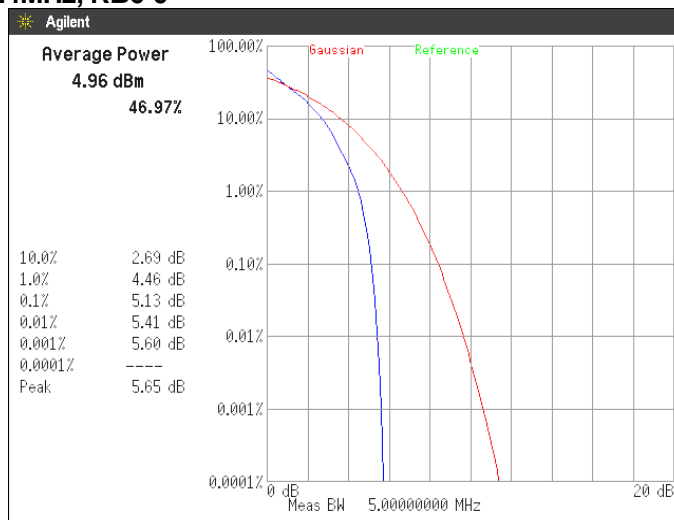

QPSK, BW 3MHz, RB15-0

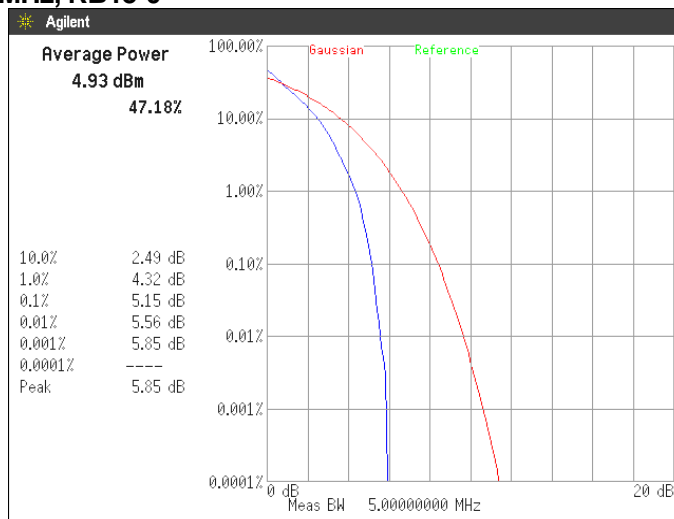


QPSK, BW 5MHz, RB25-0

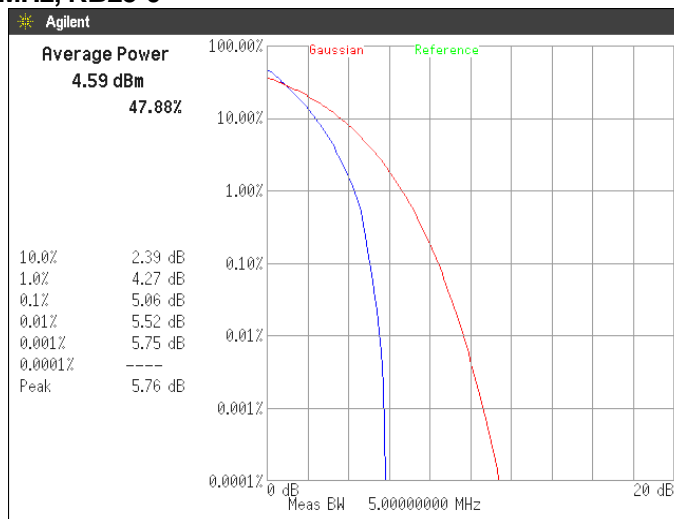




Zacta


**Channel: 20175
QPSK, BW 10MHz, RB50-0**

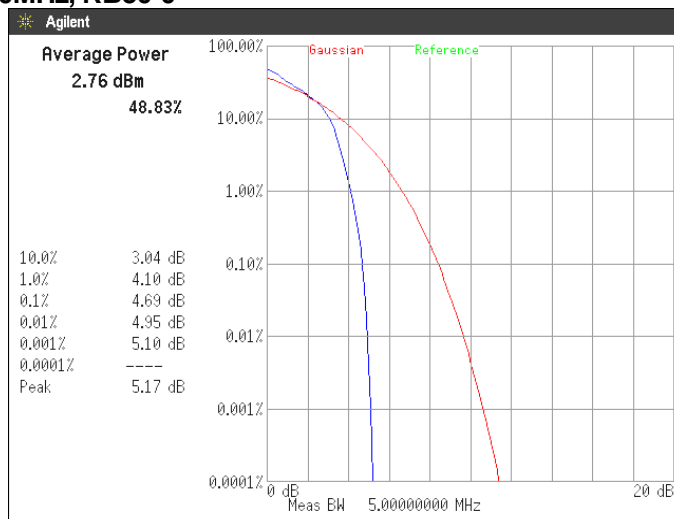

QPSK, BW 15MHz, RB75-0

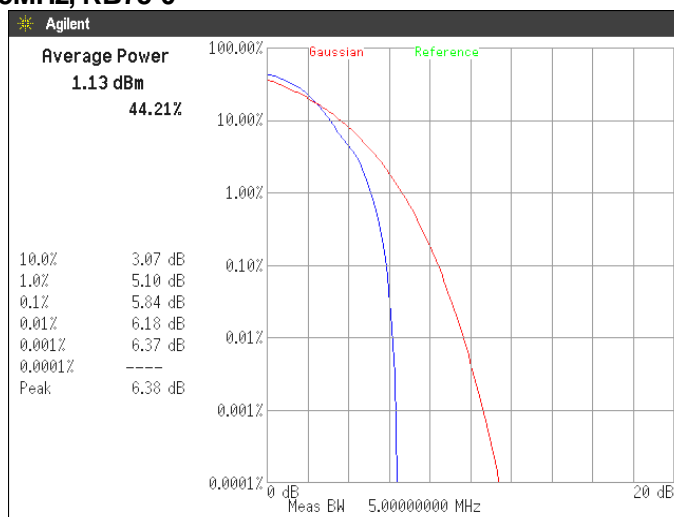


QPSK, BW 20MHz, RB100-0

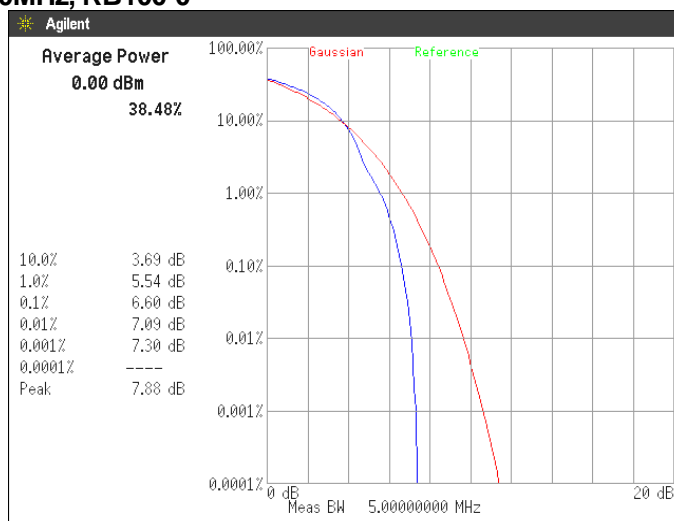




Zacta


Channel: 20175
16QAM, BW 1.4MHz, RB6-0

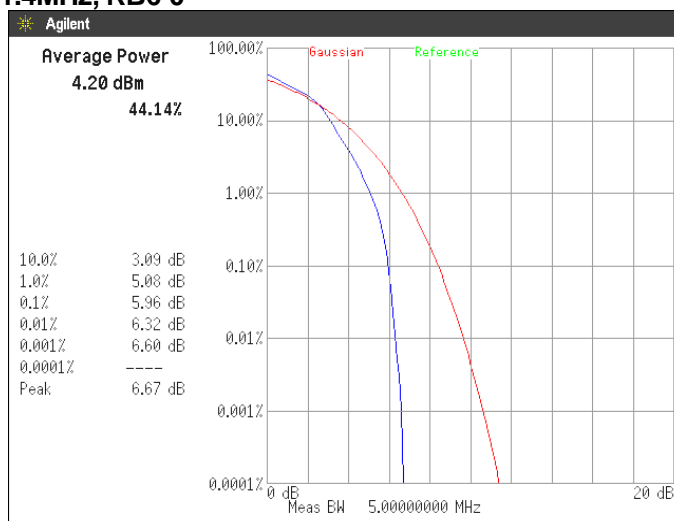

16QAM, BW 3MHz, RB15-0

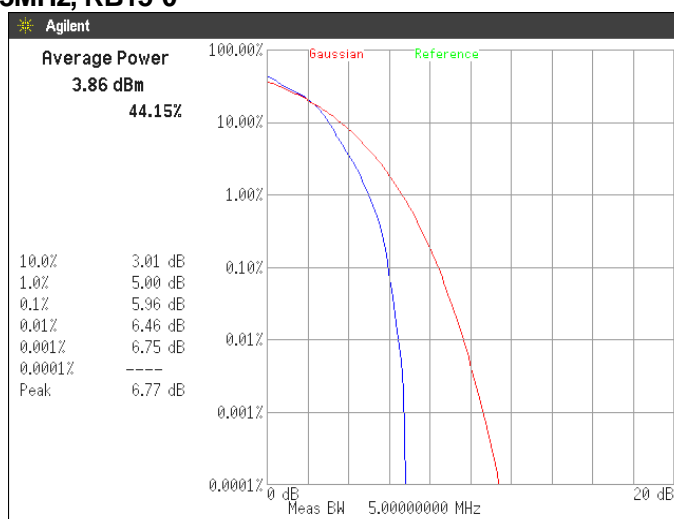


16QAM, BW 5MHz, RB25-0

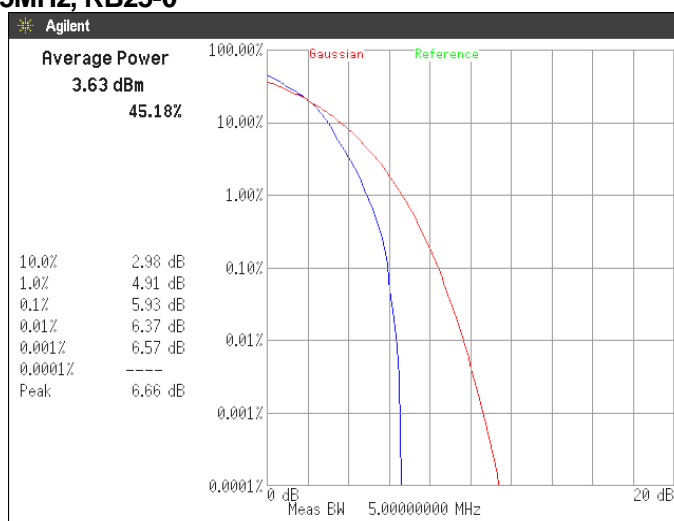




Zacta


**Channel: 20175
16QAM, BW 10MHz, RB50-0**

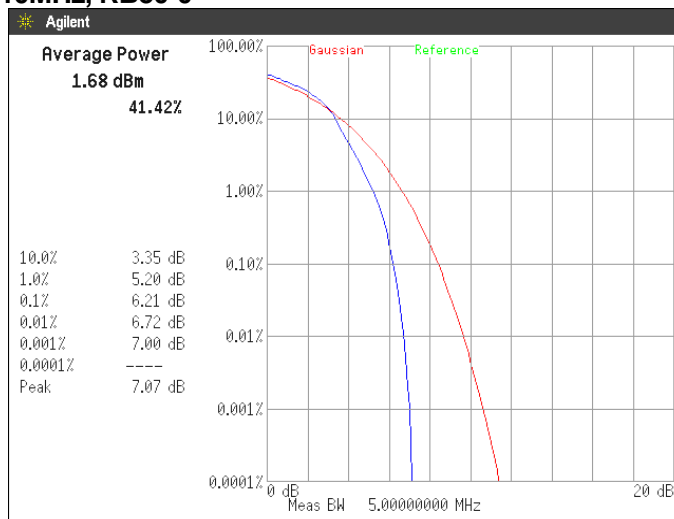

16QAM, BW 15MHz, RB75-0

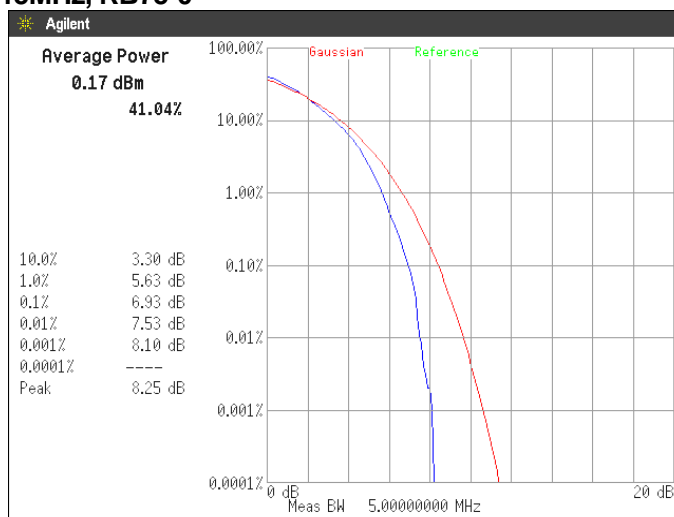

16QAM, BW 20MHz, RB100-0

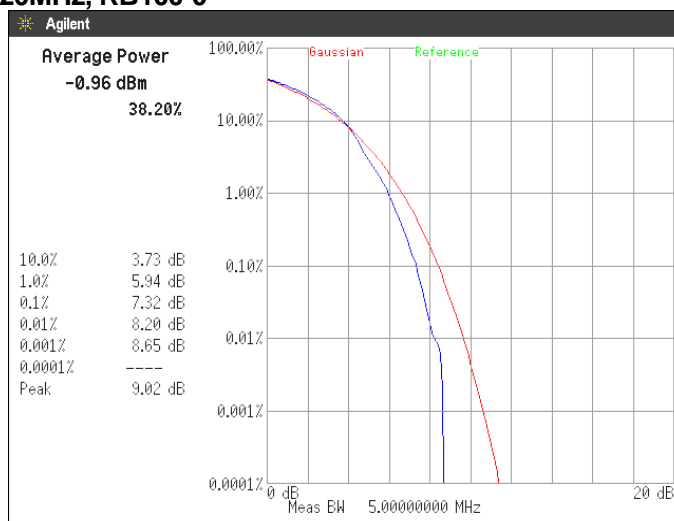

6. Occupied Bandwidth


6.1 Measurement procedure [FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep time = auto-couple

- Test configuration

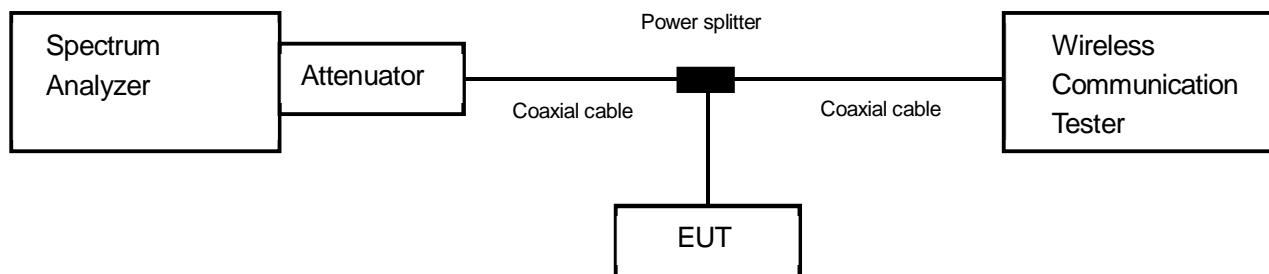

6.2 Limit

None

6.3 Measurement result

Date : December 1, 2017
 Temperature : 21.4 [°C]
 Humidity : 35.9 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


Band	Channel	Frequency [MHz]	Test Result [MHz]
WCDMA Band IV	1312	1712.4	4.1221
	1413	1732.6	4.1085
	1513	1752.6	4.1230

Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band IV	20175	1732.5	1.4	QPSK	3-1	0.6113
					6-0	1.0950
				16QAM	3-1	0.6244
					6-0	1.1000
			3	QPSK	8-4	1.5547
					15-0	2.7126
				16QAM	8-4	1.5460
					15-0	2.7078
			5	QPSK	12-7	2.3661
					25-0	4.5228
				16QAM	12-7	2.3481
					25-0	4.5141
			10	QPSK	25-12	4.6639
					50-0	8.9559
				16QAM	25-12	4.7008
					50-0	8.9509
			15	QPSK	36-20	6.8360
					75-0	13.4269
				16QAM	36-20	6.8075
					75-0	13.4458
			20	QPSK	50-24	9.2207
					100-0	17.8724
				16QAM	50-24	9.2640
					100-0	17.8381




Zacta


6.4 Trace data
[WCDMA Band IV]
Channel: 1312

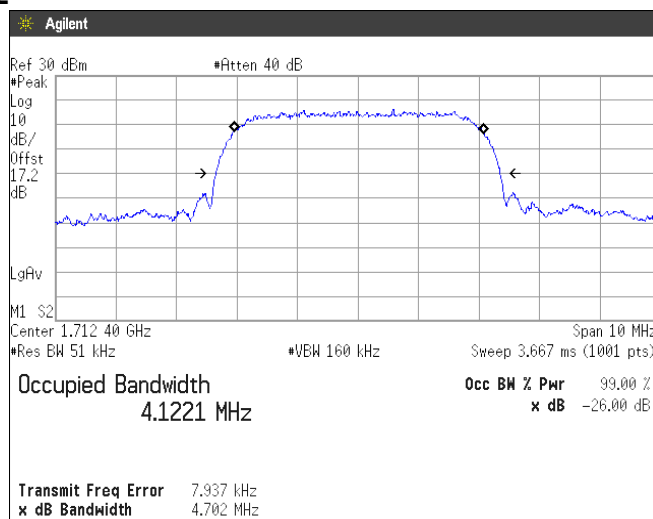

Channel: 1413

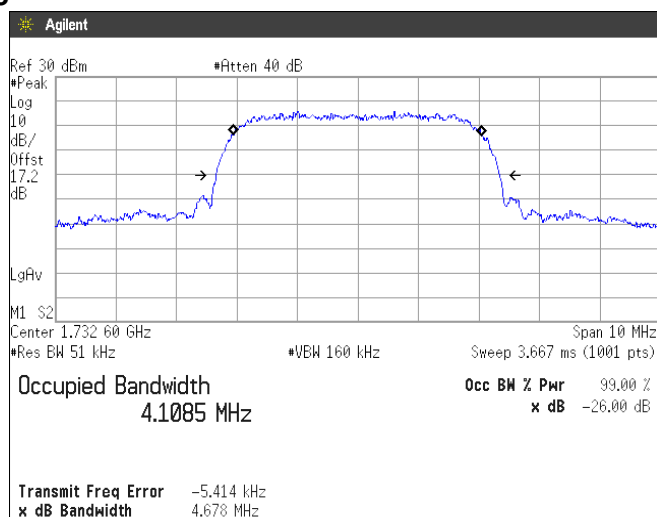

Channel: 1513

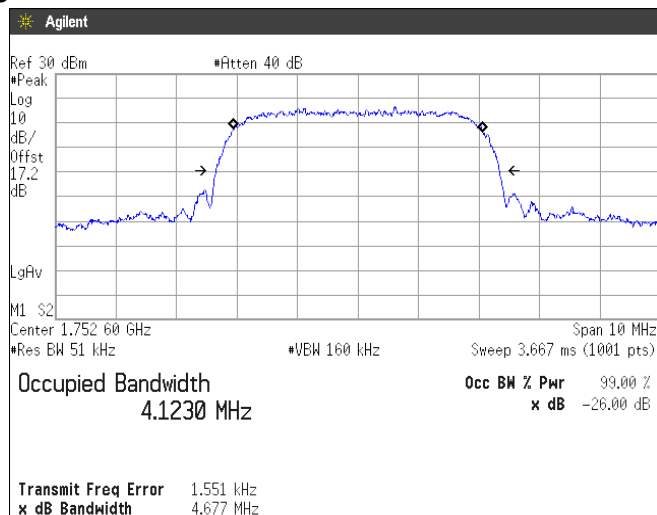





Zacta

**[LTE Band IV]
Channel: 20175**


**QPSK, BW 1.4MHz
RB3-1**

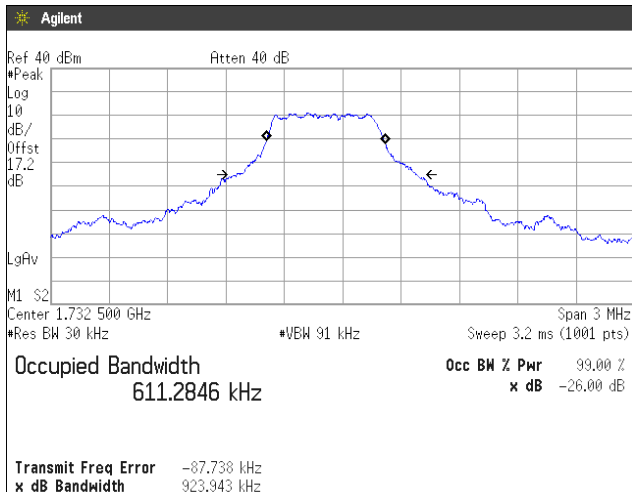


RB6-0

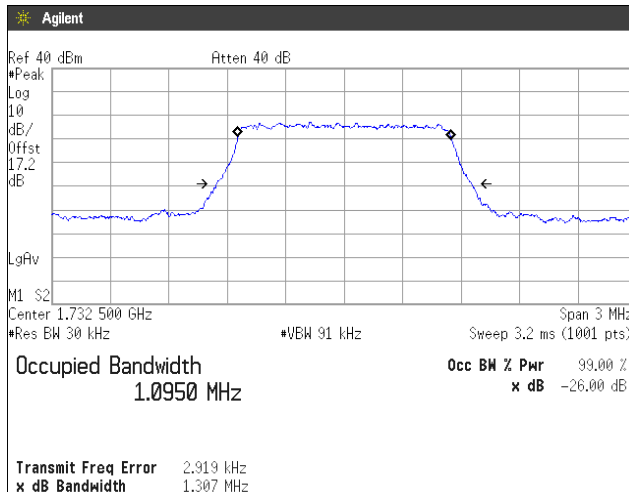

**16QAM, BW 1.4MHz
RB3-1**

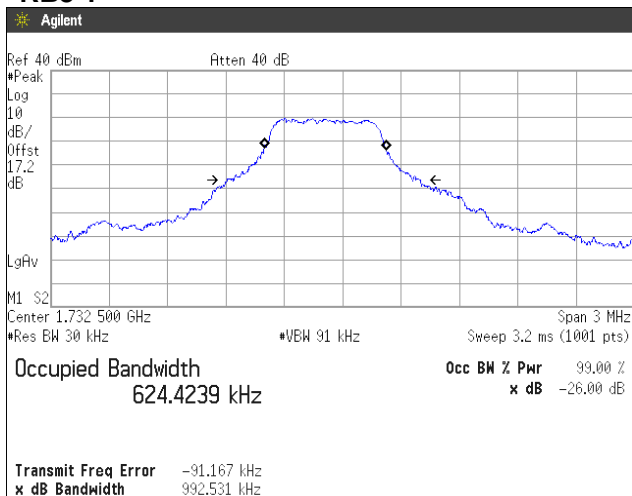


RB6-0

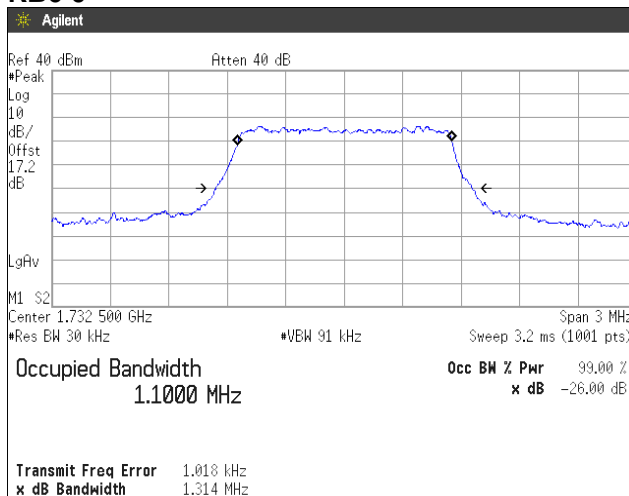




Zacta


**QPSK, BW 3MHz
RB8-4**

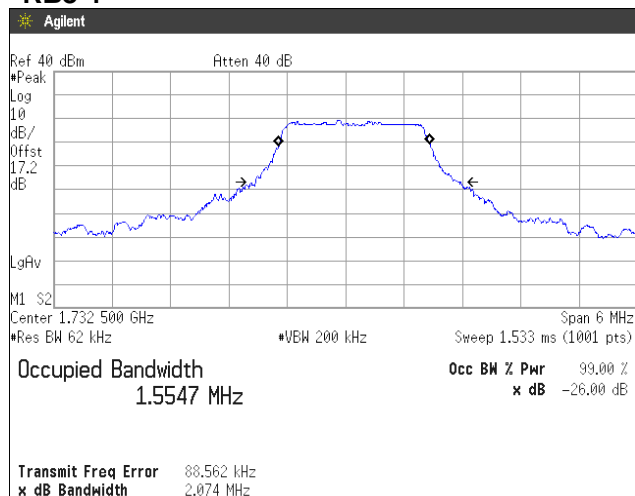


RB15-0

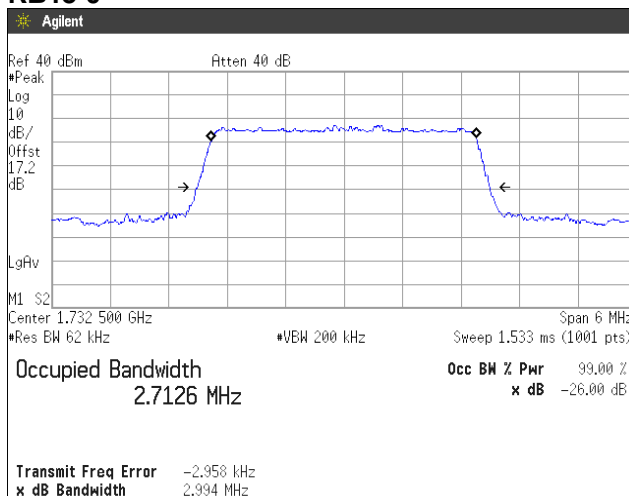

**16QAM, BW 3MHz
RB8-4**

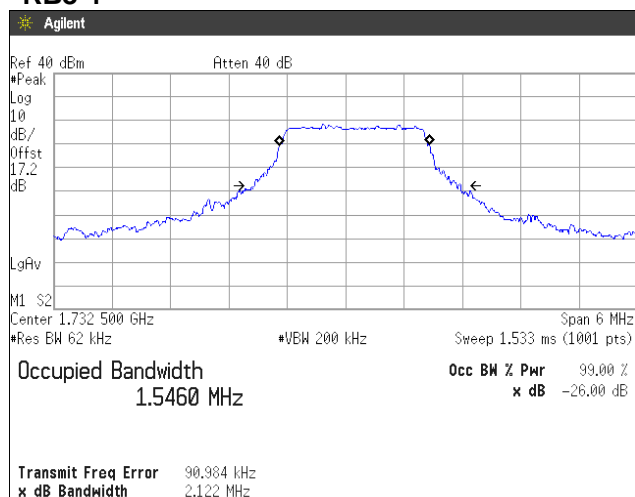


RB15-0

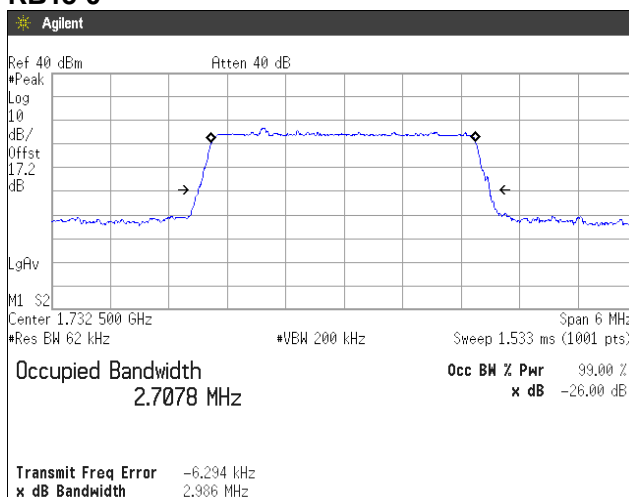




Zacta


**QPSK, BW 5MHz
RB12-7**

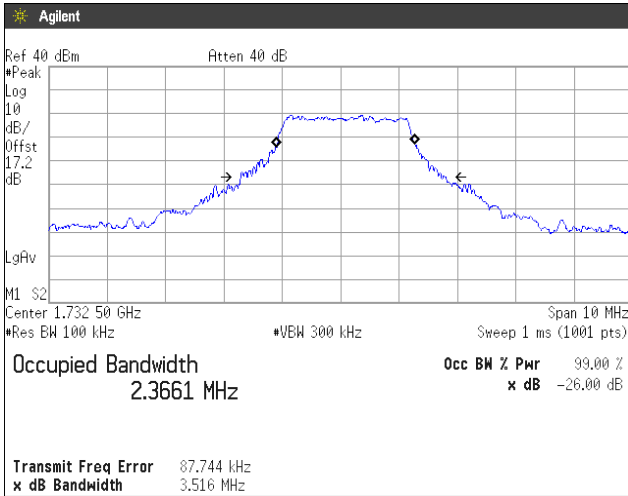


RB25-0

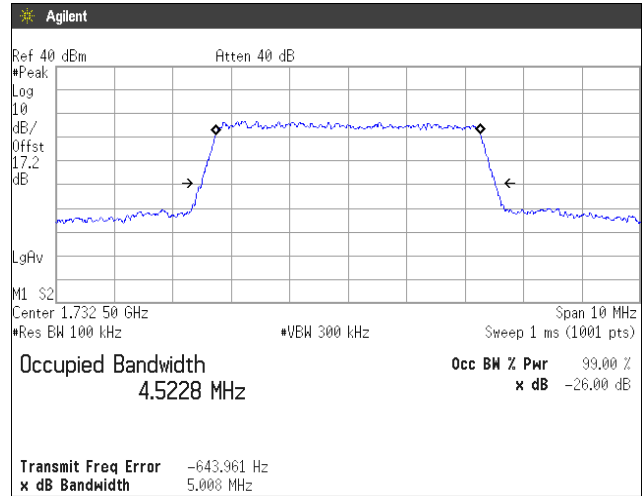

**16QAM, BW 5MHz
RB12-7**

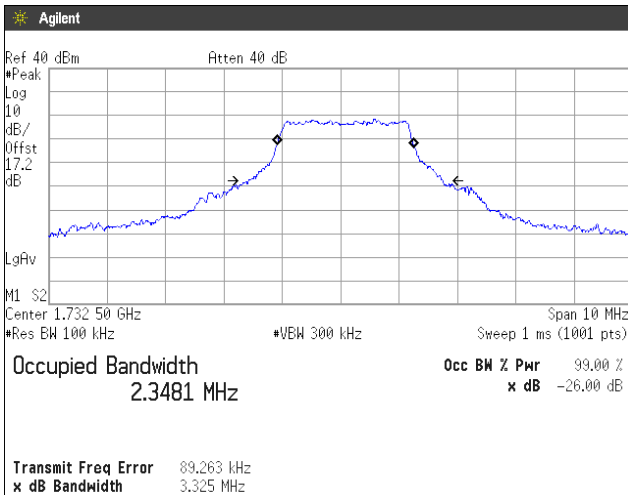


RB25-0

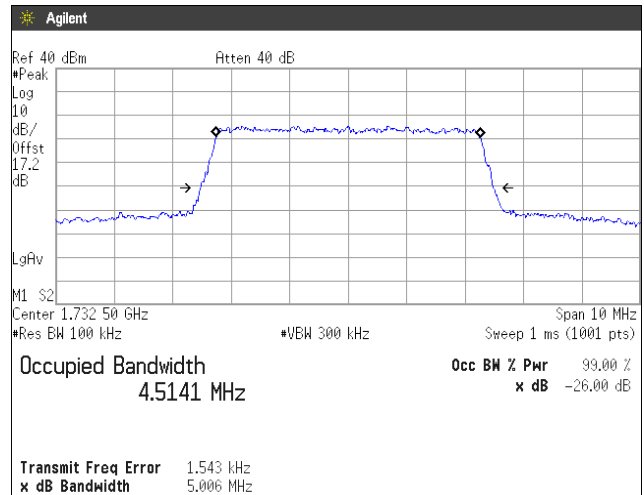




Zacta


**QPSK, BW 10MHz
RB25-12**

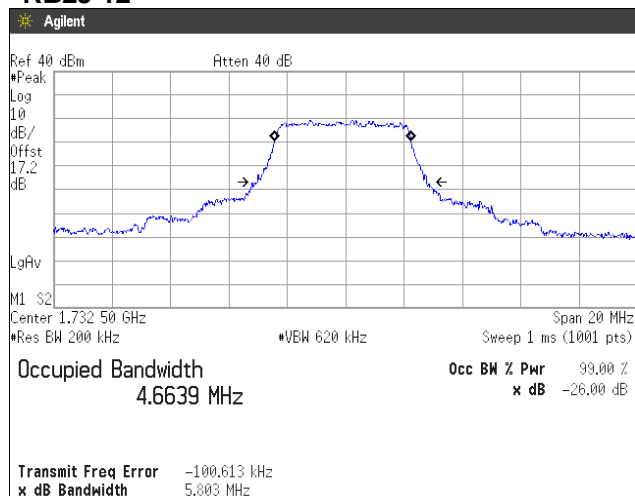


RB50-0

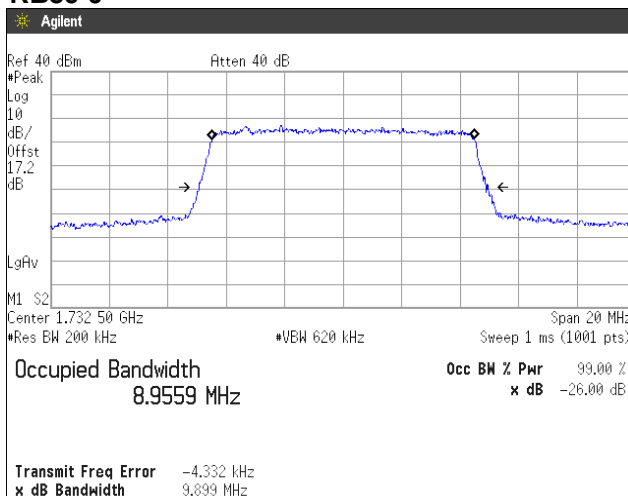

**16QAM, BW 10MHz
RB25-12**

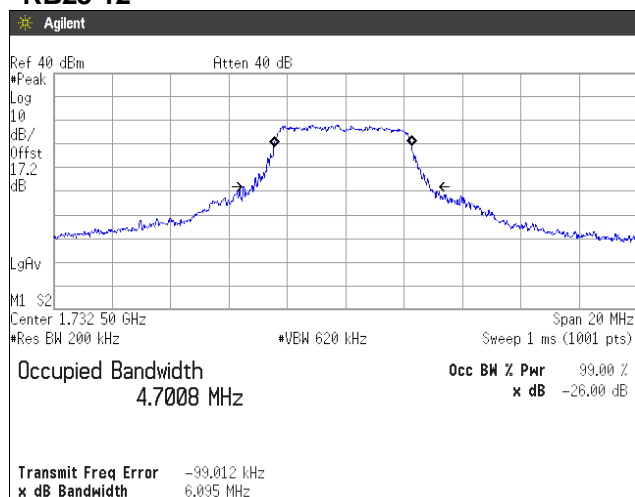


RB50-0

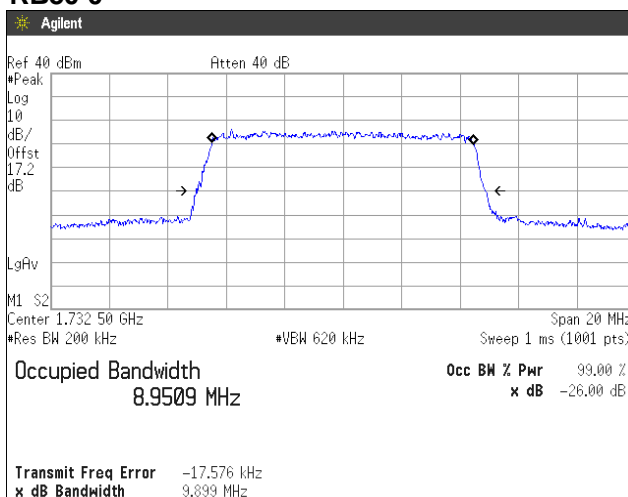




Zacta


**QPSK, BW 15MHz
RB36-20**

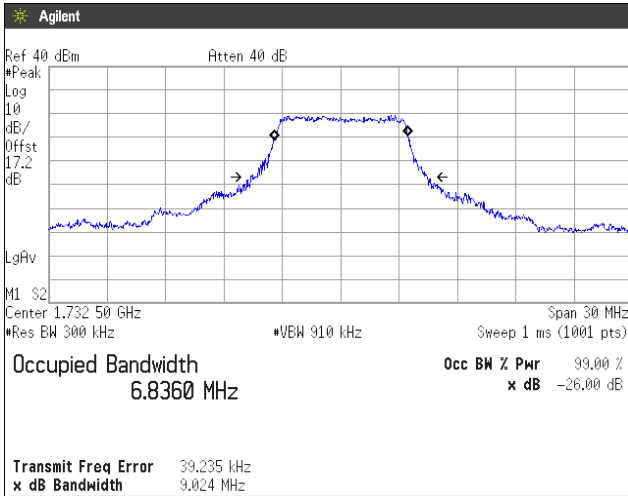


RB75-0

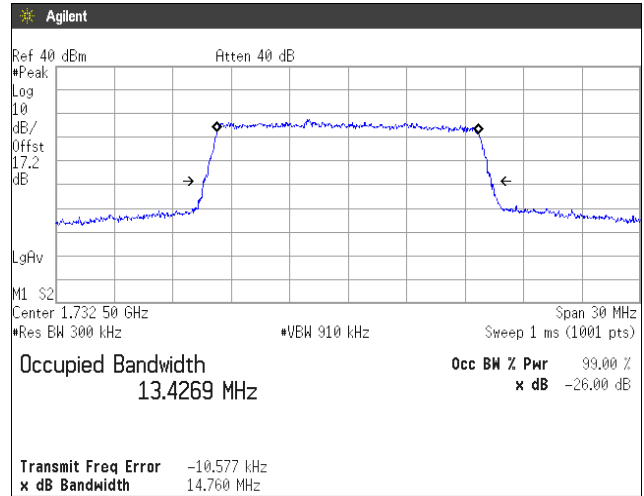

**16QAM, BW 15MHz
RB36-20**

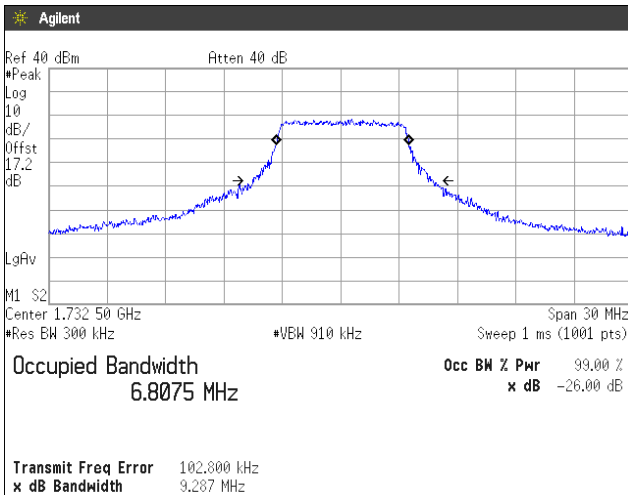


RB75-0

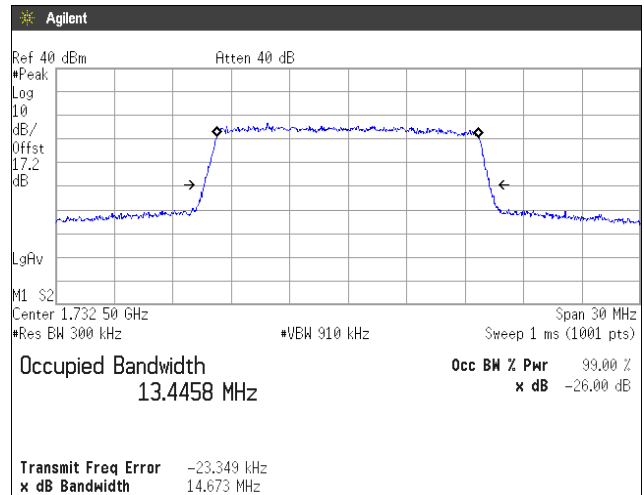




Zacta


QPSK, BW 20MHz RB50-24

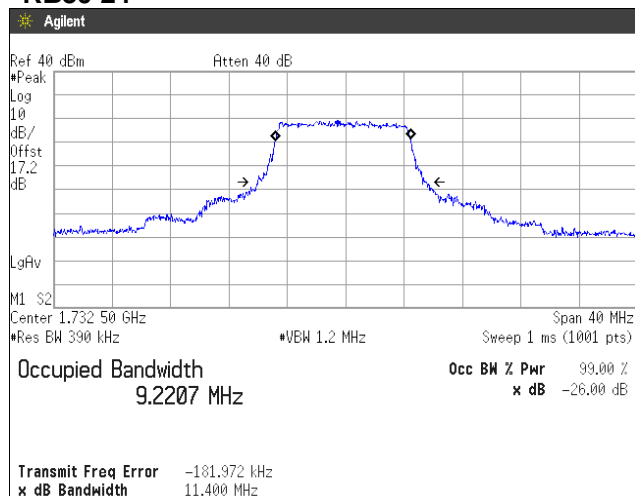


RB100-0

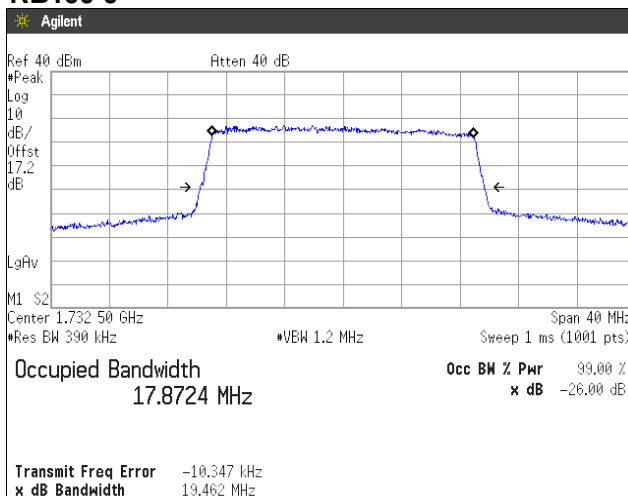

16QAM, BW 20MHz RB50-24

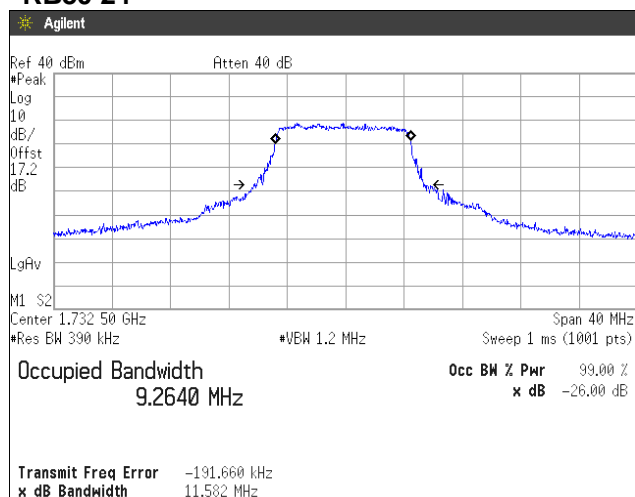

RB100-0

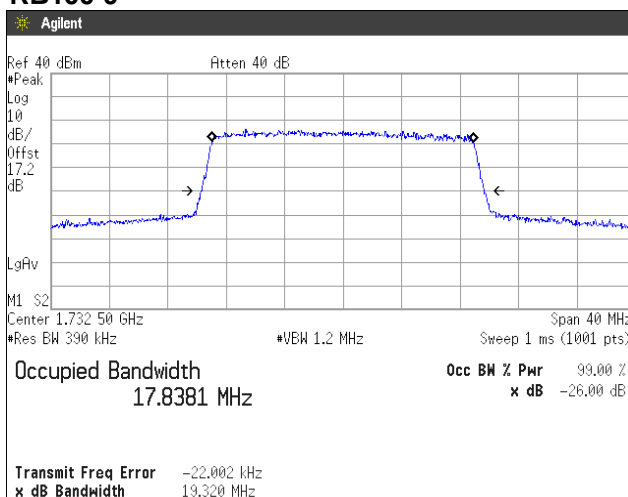

7. Band Edge Spurious and Harmonic at Antenna Terminals

7.1 Measurement procedure [FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) RBW \geq 1% of the emission bandwidth or 2% of the emission bandwidth
- c) VBW \geq 3 x RBW
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point \geq 2 x span / RBW

<Spurious Emissions>

- a) RBW = 1MHz & VBW \geq 3 x RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point \geq 2 x span / RBW

- Test configuration

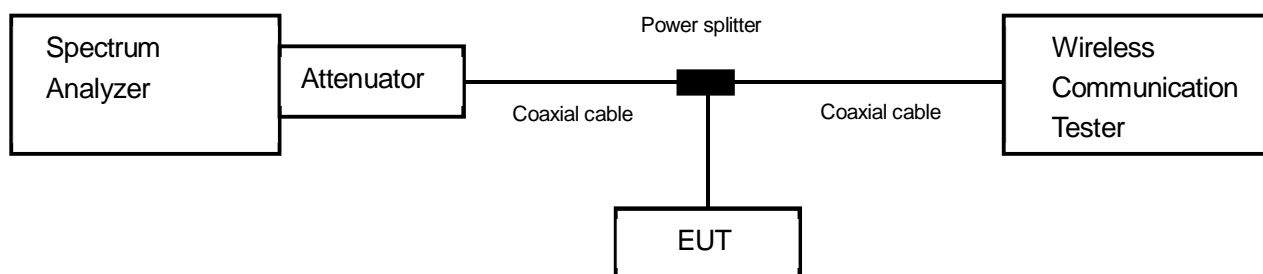

7.2 Limit

-13dB or less



Zacta

7.3 Measurement result

Date : December 1, 2017
 Temperature : 21.4 [°C]
 Humidity : 35.9 [%]
 Test place : Shielded room No.4

Test engineer :

Chiaki Kanno

Date : December 4, 2017
 Temperature : 21.1 [°C]
 Humidity : 38.4 [%]
 Test place : Shielded room No.4

Test engineer :

Chiaki Kanno

Band	Channel	Frequency [MHz]	Limit [dB]	Results	
WCDMA Band IV	1312	1712.4	-13.0	See the trace data	PASS
	1513	1752.6	-13.0	See the trace data	PASS


Band	Modulation	Bandwidth [MHz]	Limit [dB]	Results	
LTE Band IV	QPSK	1.4	-13.0	See the trace data	PASS
		3	-13.0	See the trace data	PASS
		5	-13.0	See the trace data	PASS
		10	-13.0	See the trace data	PASS
		15	-13.0	See the trace data	PASS
		20	-13.0	See the trace data	PASS
	16QAM	1.4	-13.0	See the trace data	PASS
		3	-13.0	See the trace data	PASS
		5	-13.0	See the trace data	PASS
		10	-13.0	See the trace data	PASS
		15	-13.0	See the trace data	PASS
		20	-13.0	See the trace data	PASS




Zacta

**7.4 Trace data
[WCDMA Band IV]
(Band Edge)**

Channel: 1312

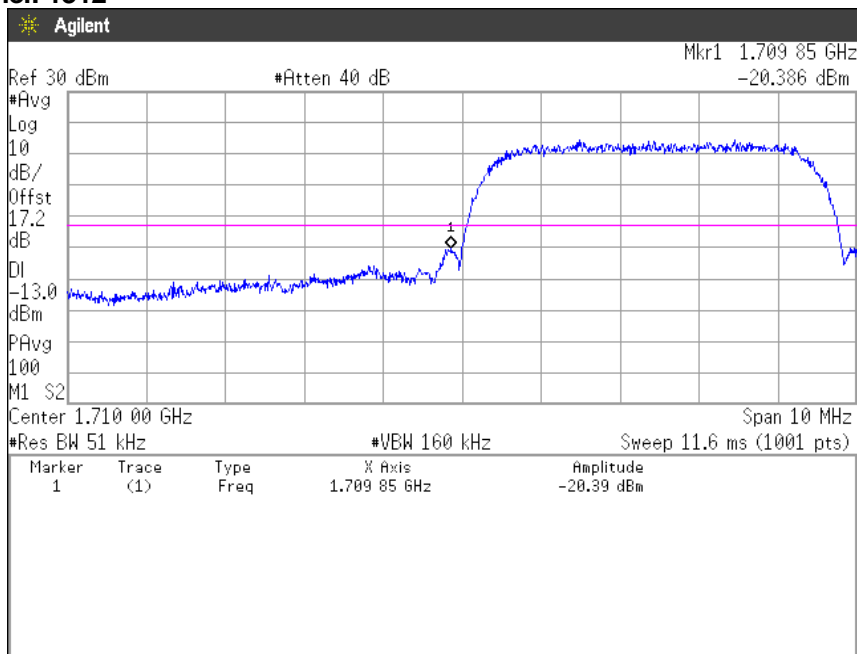


Channel: 1513

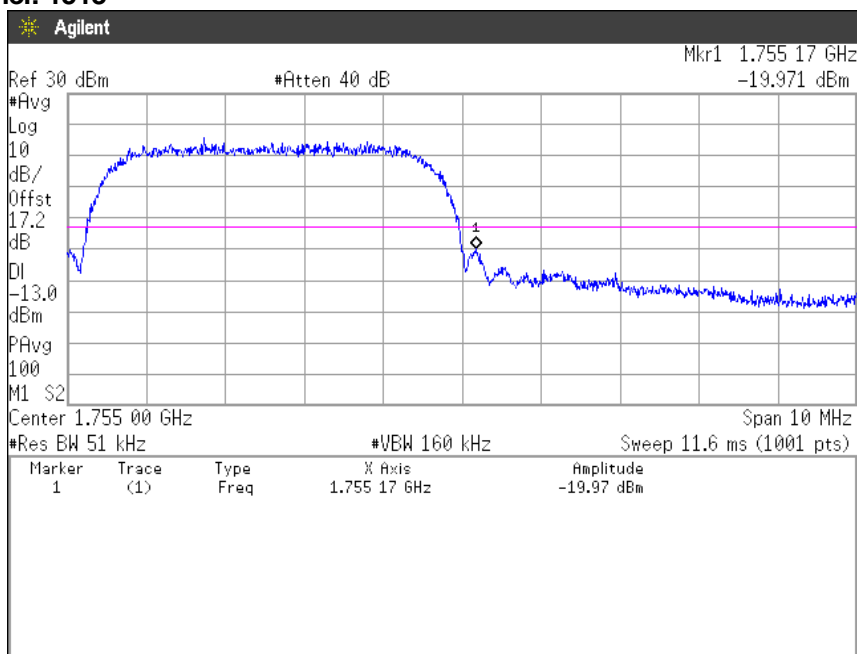


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


**Channel: 1312
30MHz-5GHz**

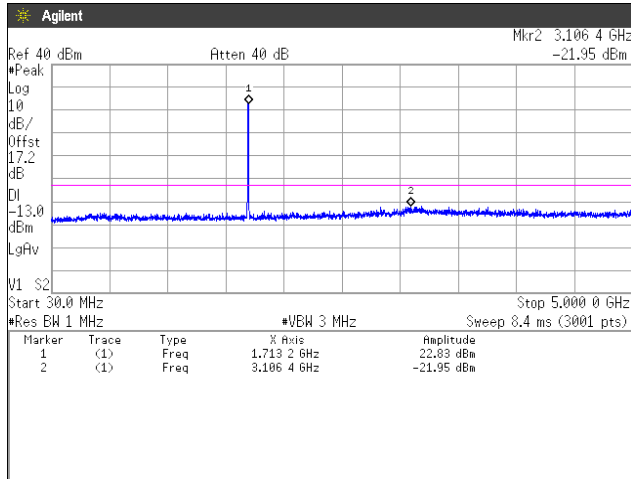


5GHz-10GHz

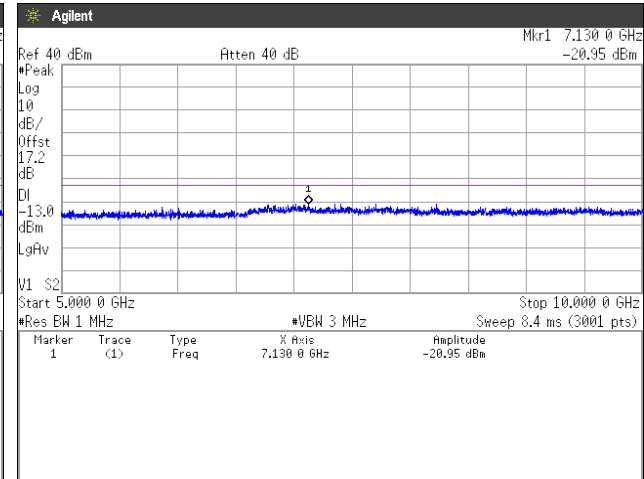

10GHz-15GHz

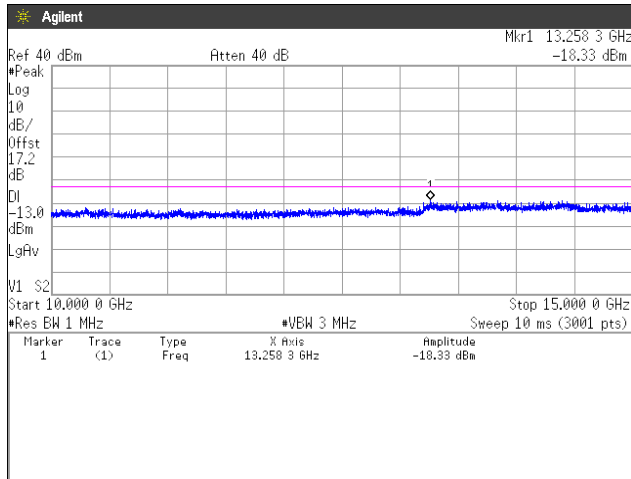


15GHz-20GHz

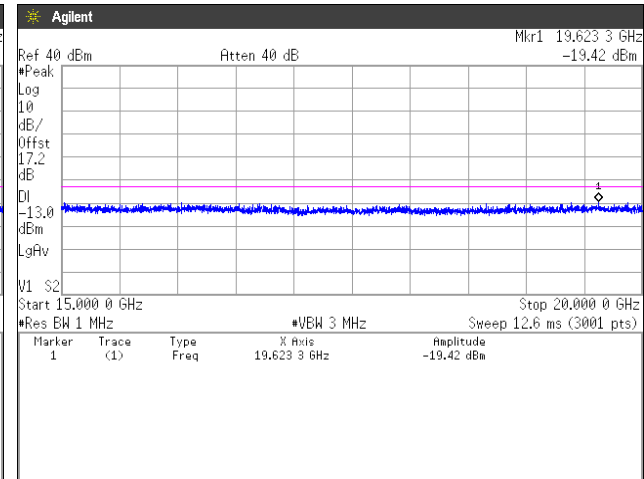




Zacta


Channel: 1413
30MHz-5GHz

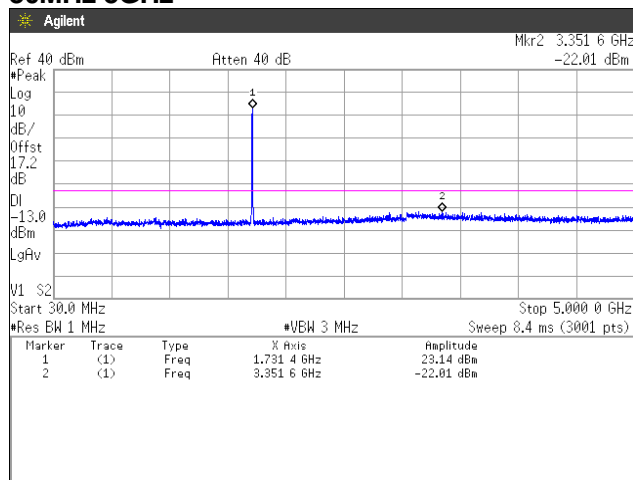


5GHz-10GHz

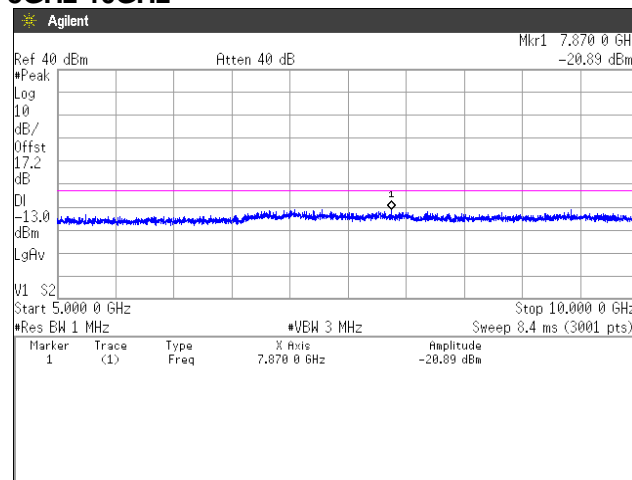

10GHz-15GHz

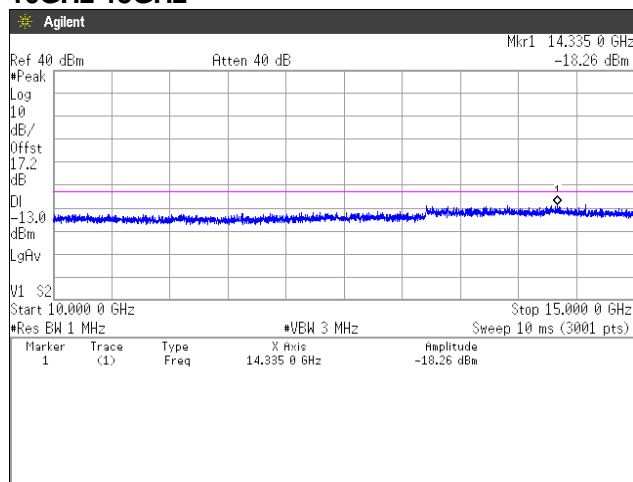


15GHz-20GHz

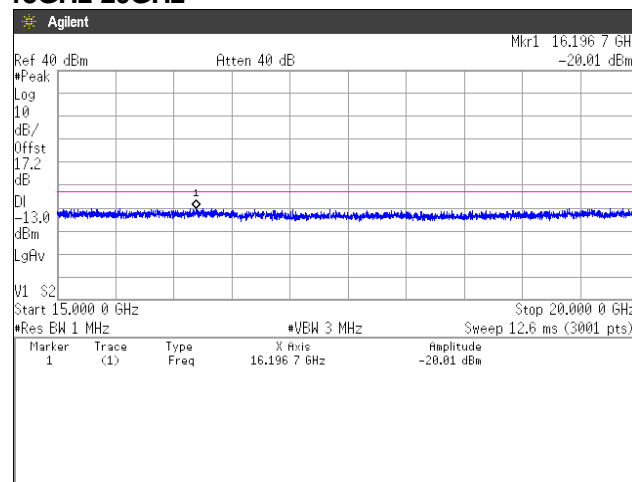




Zacta


Channel: 1513
30MHz-5GHz

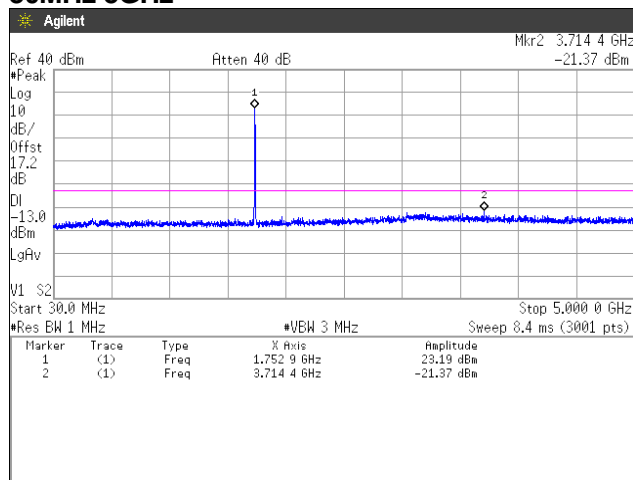


5GHz-10GHz

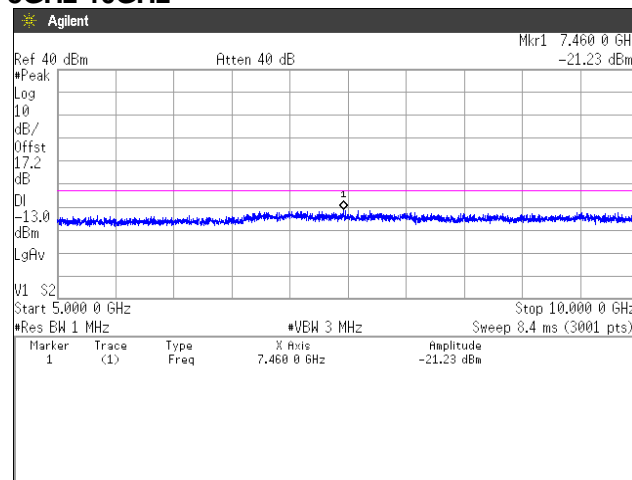

10GHz-15GHz

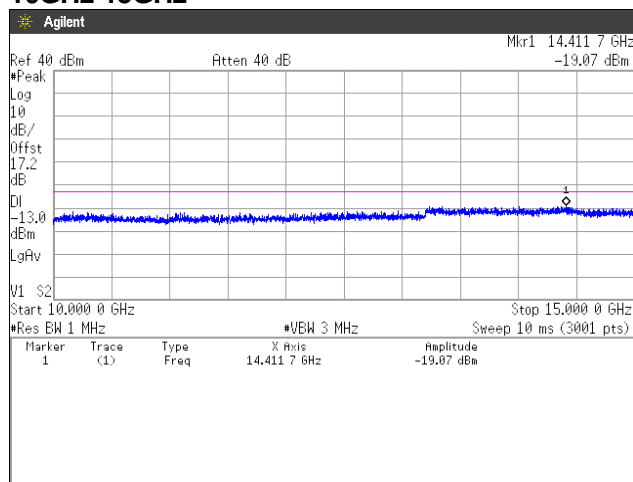


15GHz-20GHz

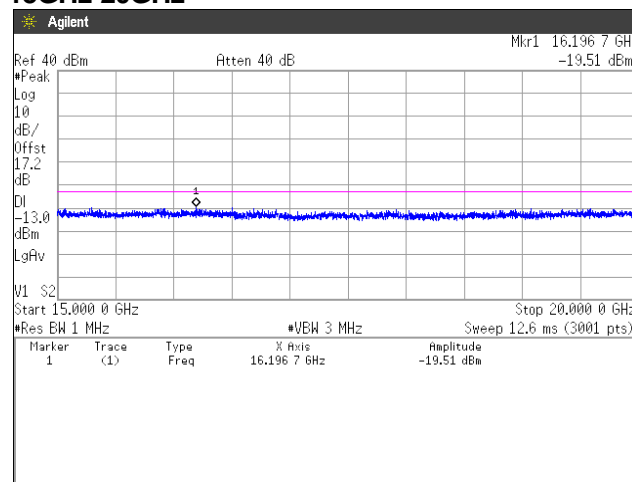




Zacta

**[LTE Band IV]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low**

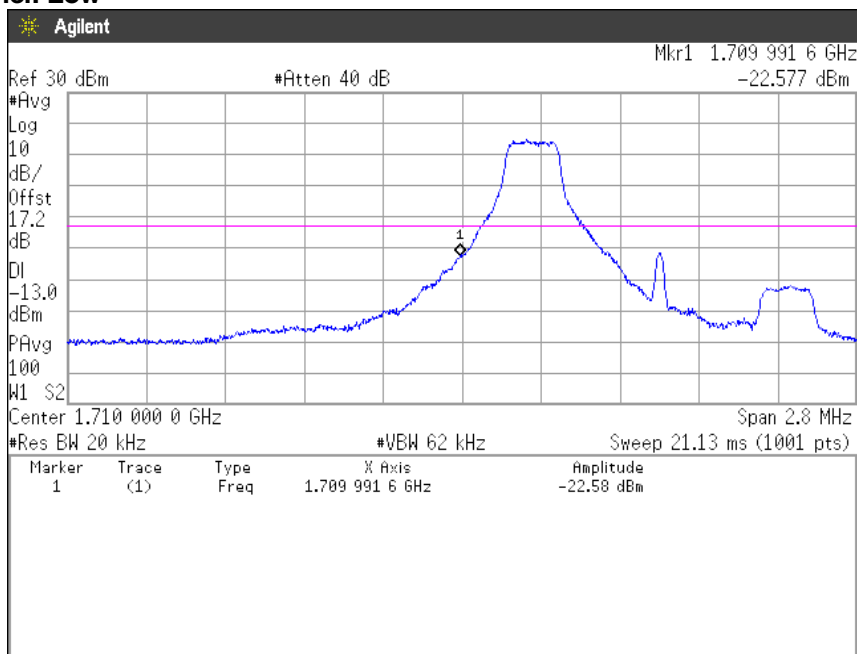


**QPSK, BW 1.4MHz, RB1-5
Channel: High**

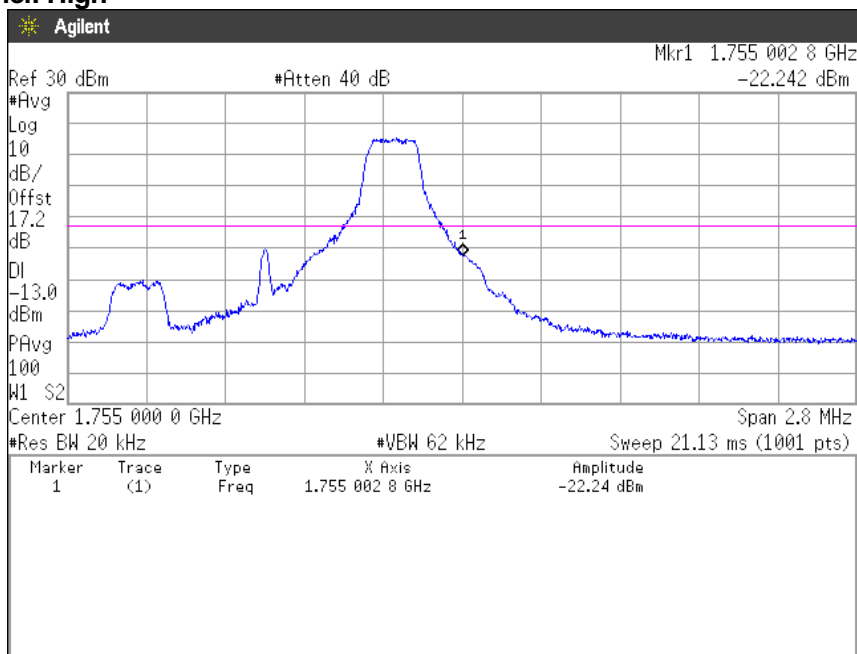




Zacta

QPSK, BW 1.4MHz, RB6-0
Channel: Low

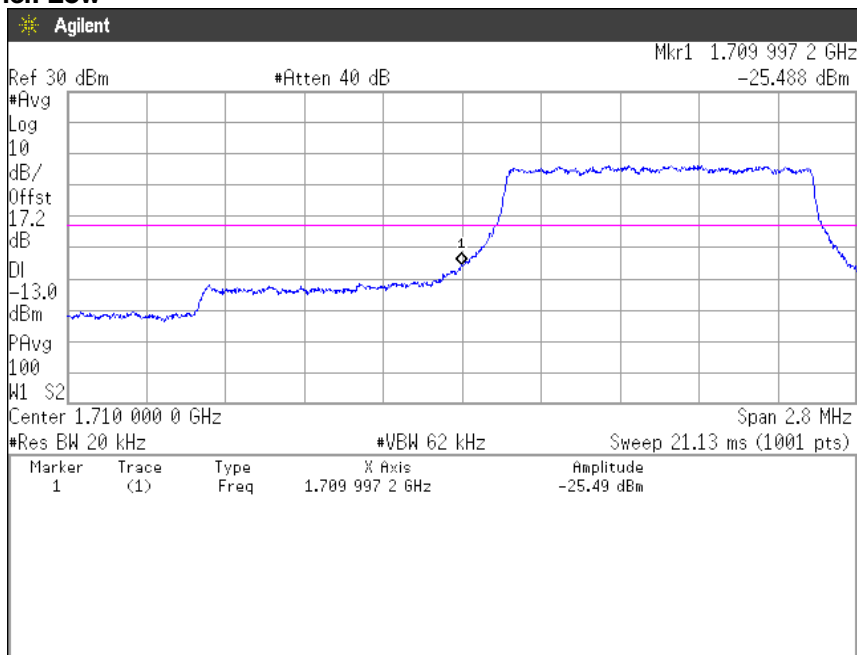


QPSK, BW 1.4MHz, RB6-0
Channel: High

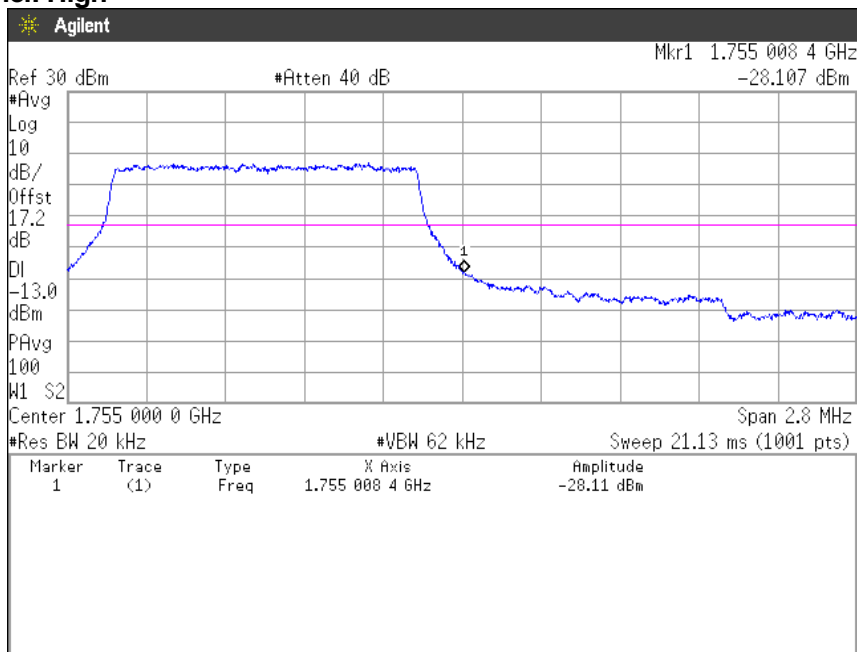




Zacta

QPSK, BW 3MHz, RB1-0
Channel: Low

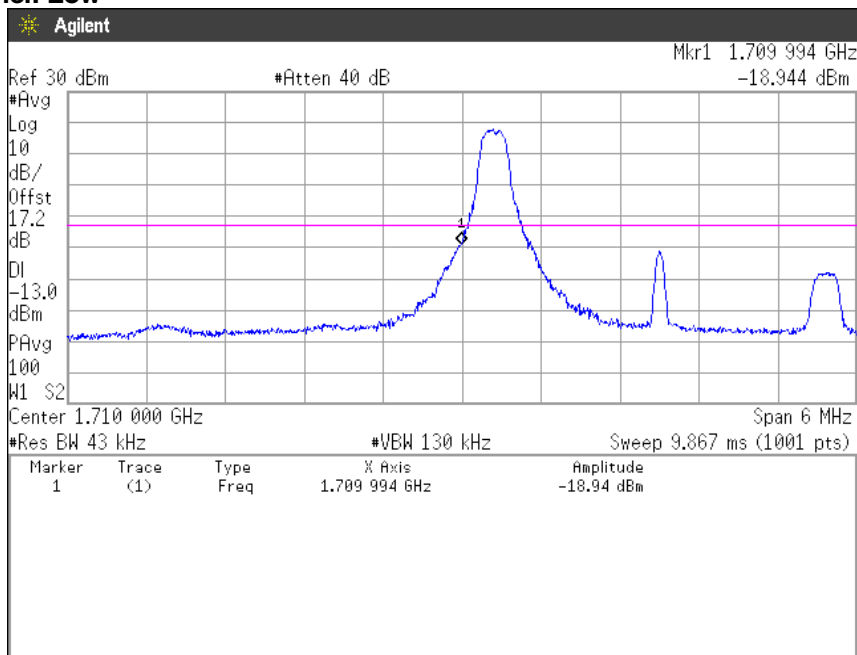


QPSK, BW 3MHz, RB1-14
Channel: High

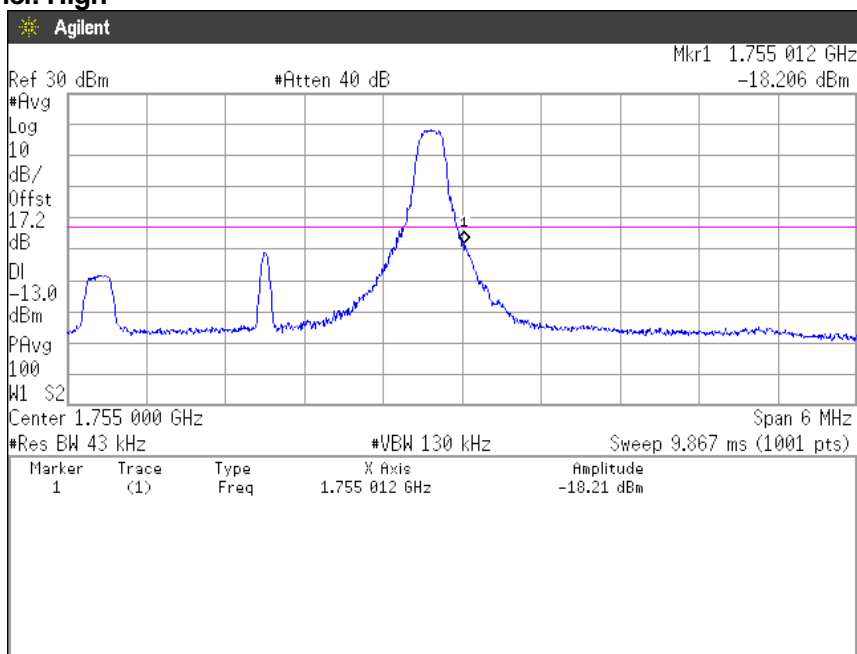




Zacta

QPSK, BW 3MHz, RB15-0
Channel: Low

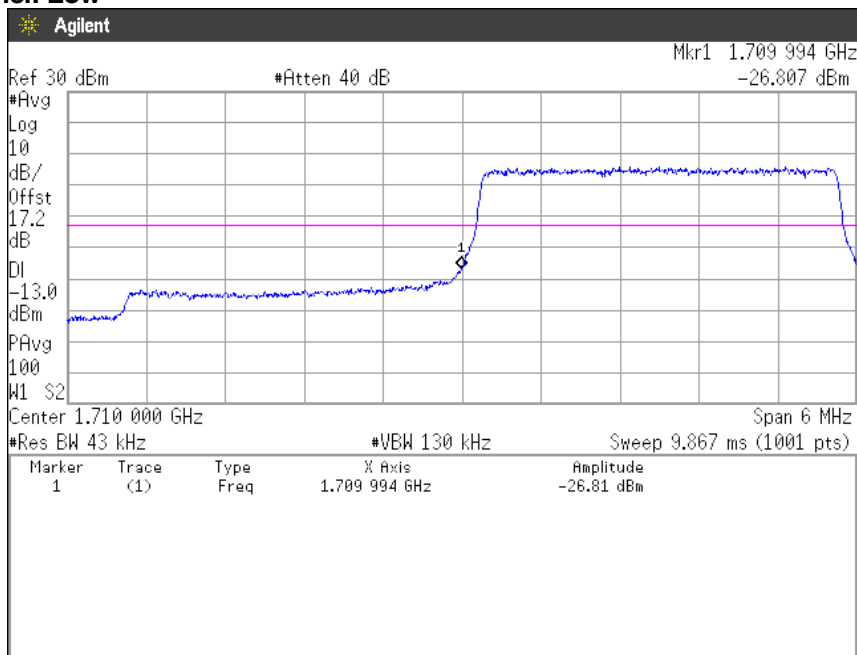


QPSK, BW 3MHz, RB15-0
Channel: High

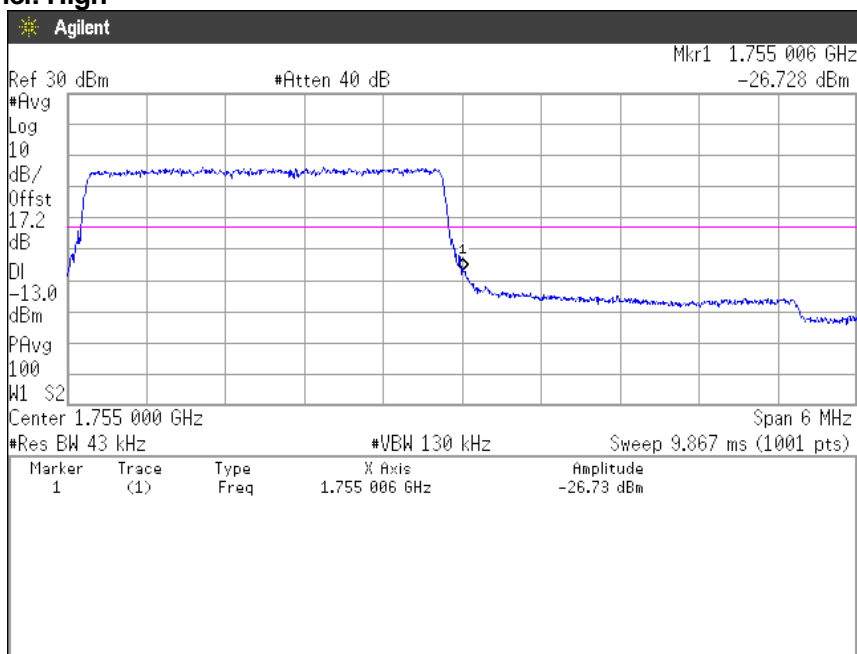




Zacta

QPSK, BW 5MHz, RB1-0
Channel: Low

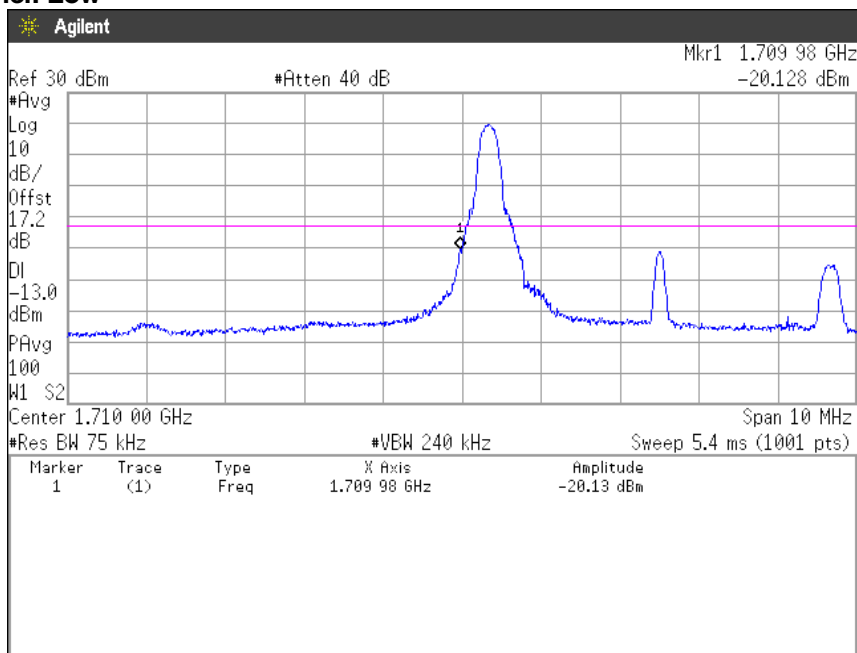


QPSK, BW 5MHz, RB1-24
Channel: High

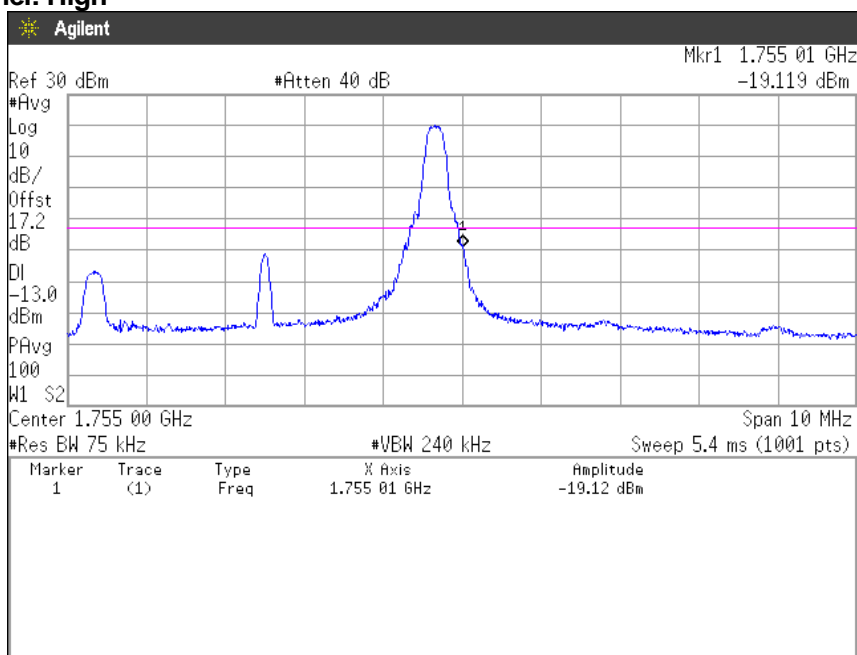




Zacta

QPSK, BW 5MHz, RB25-0
Channel: Low

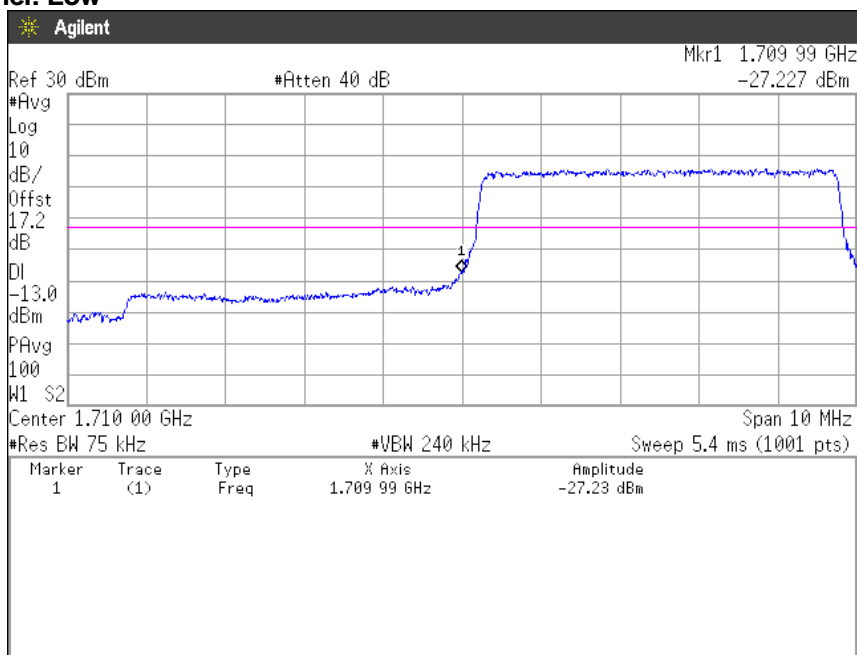


QPSK, BW 5MHz, RB25-0
Channel: High

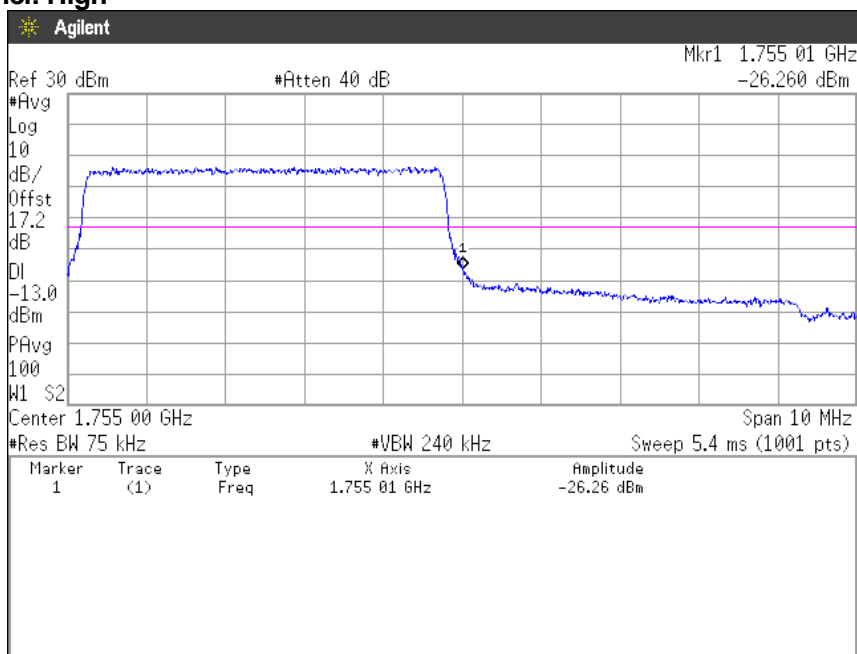




Zacta

QPSK, BW 10MHz, RB1-0
Channel: Low

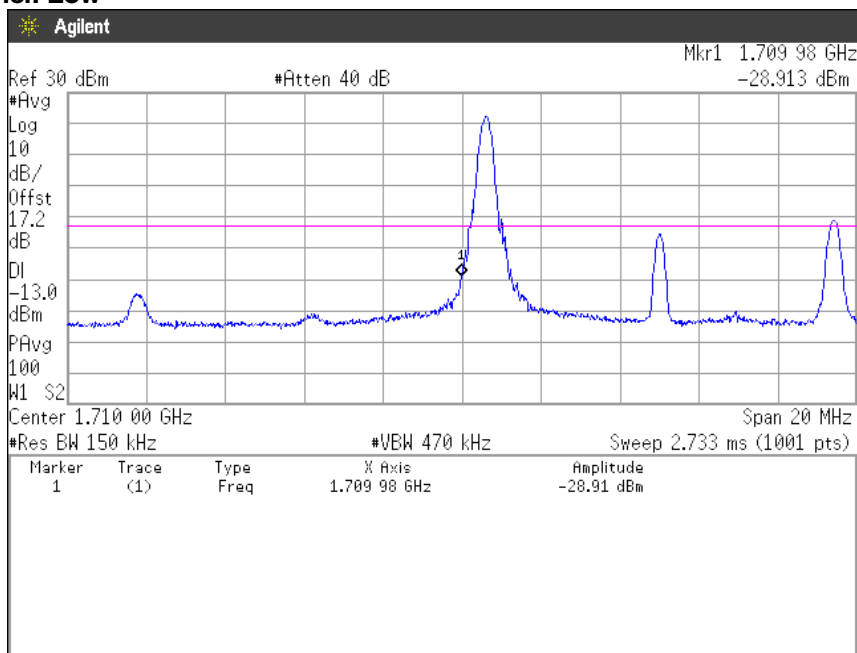


QPSK, BW 10MHz, RB1-49
Channel: High

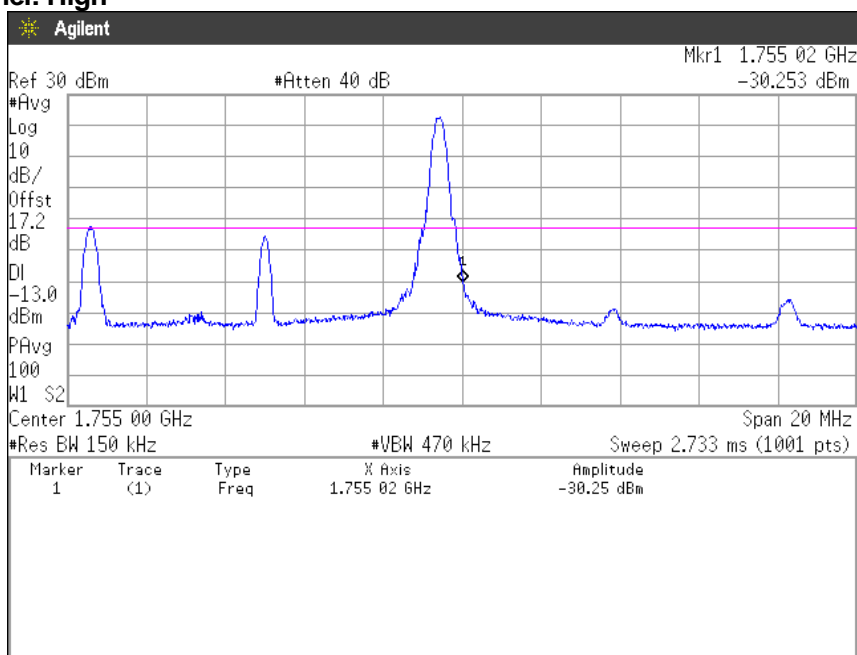




Zacta

QPSK, BW 10MHz, RB50-0
Channel: Low

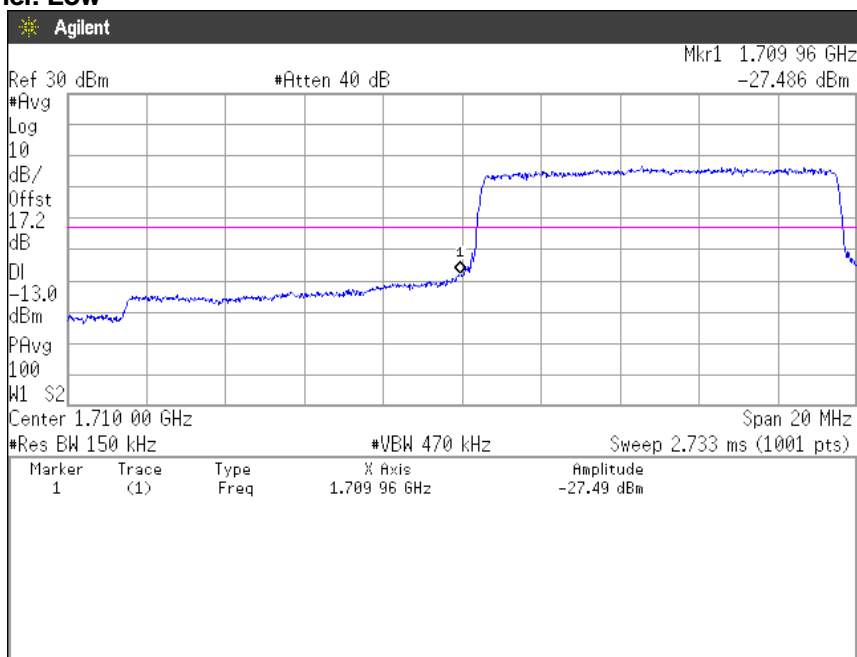


QPSK, BW 10MHz, RB50-0
Channel: High

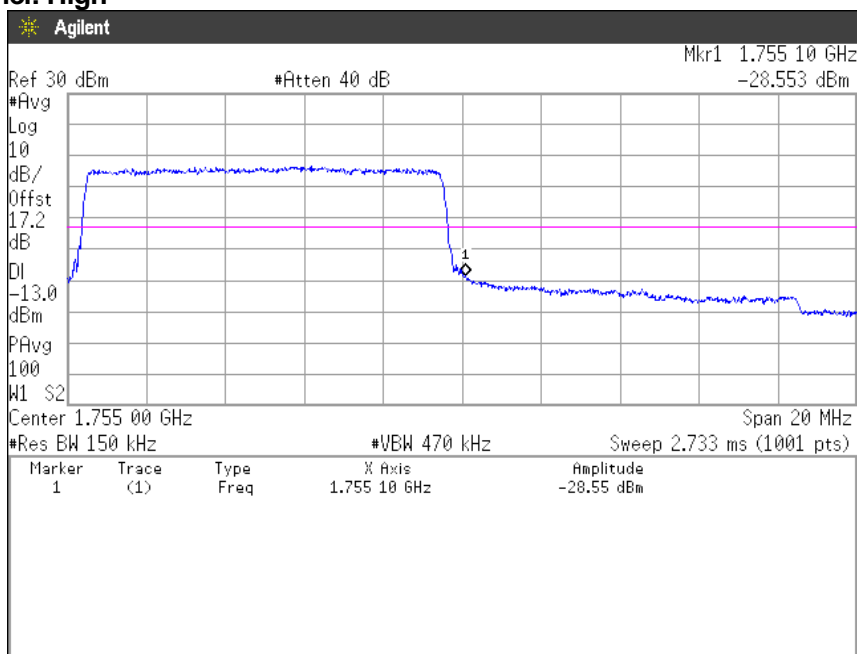




Zacta

QPSK, BW 15MHz, RB1-0
Channel: Low

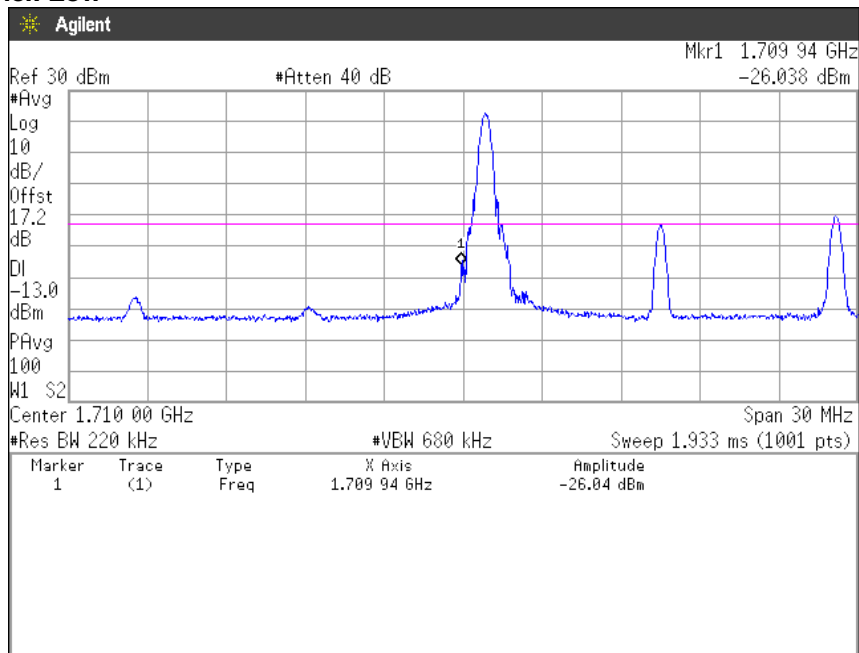


QPSK, BW 15MHz, RB1-74
Channel: High

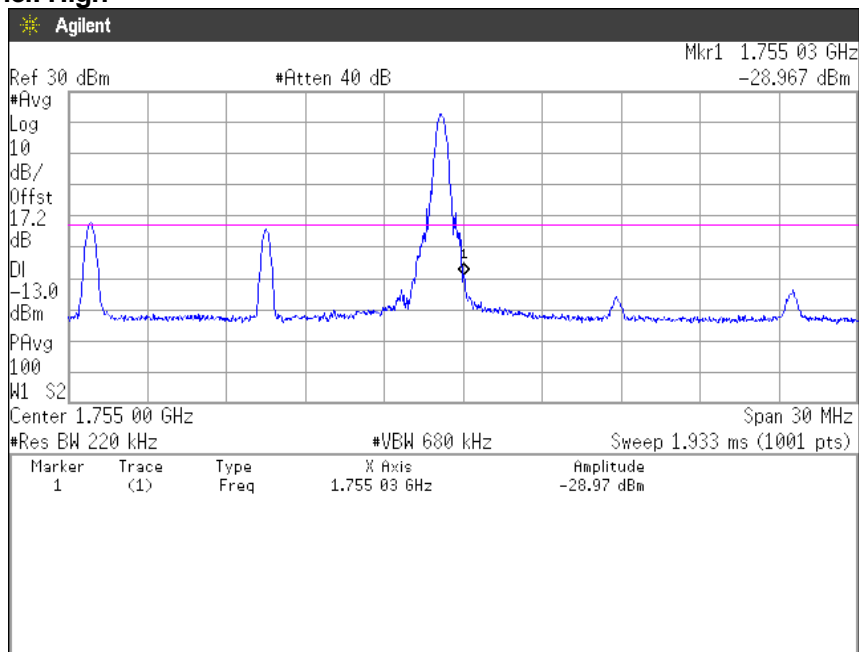




Zacta

QPSK, BW 15MHz, RB75-0
Channel: Low

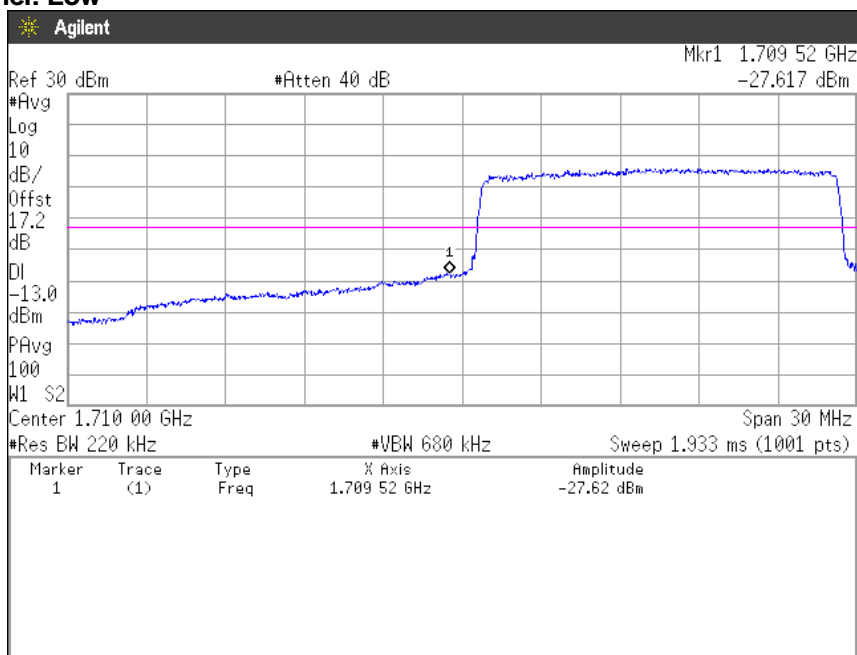


QPSK, BW 15MHz, RB75-0
Channel: High

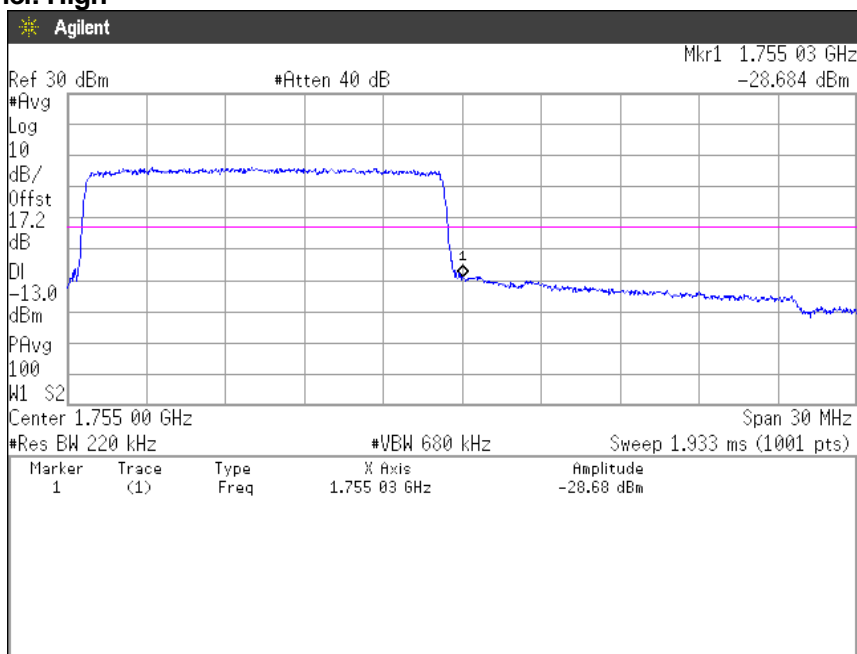




Zacta

QPSK, BW 20MHz, RB1-0
Channel: Low

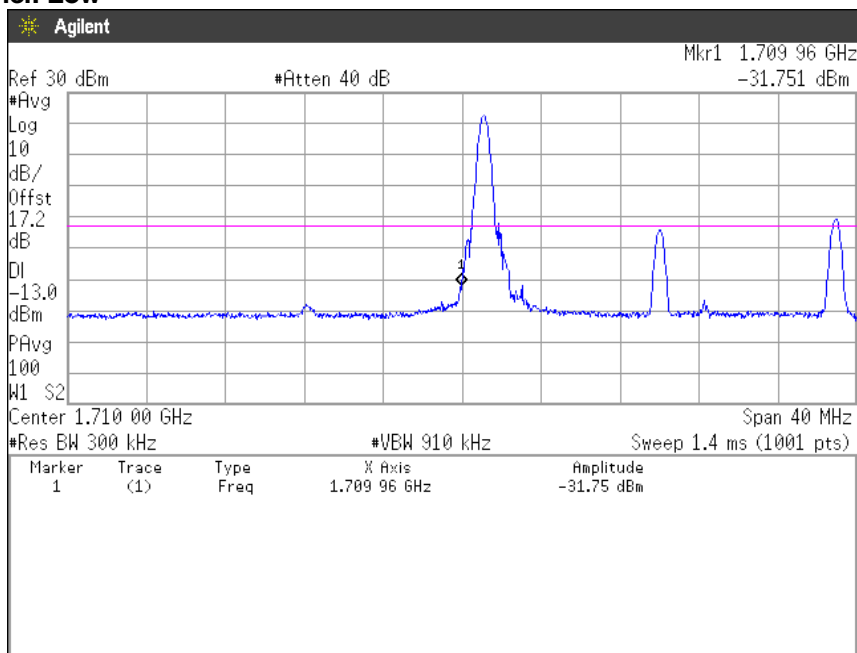


QPSK, BW 20MHz, RB1-99
Channel: High

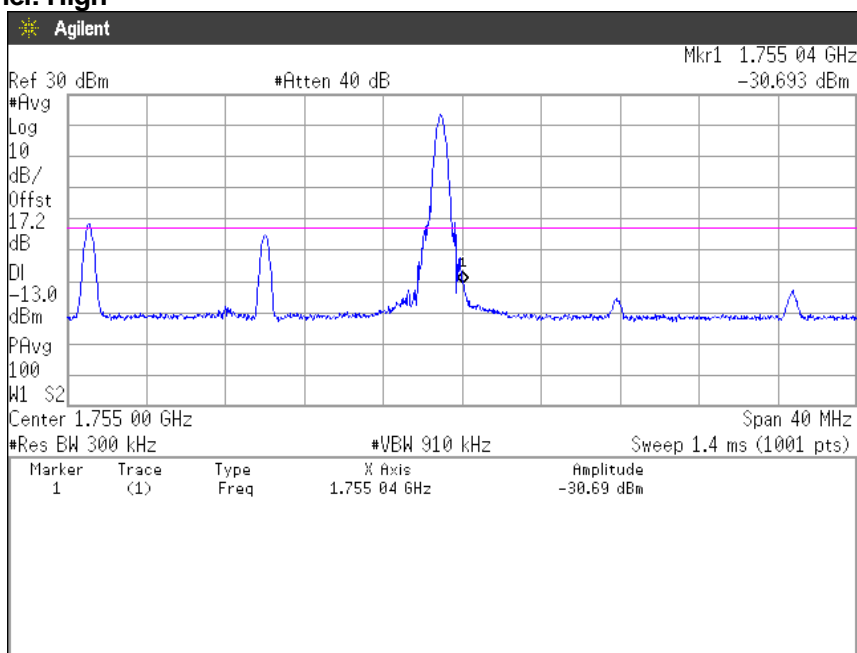




Zacta

QPSK, BW 20MHz, RB100-0
Channel: Low

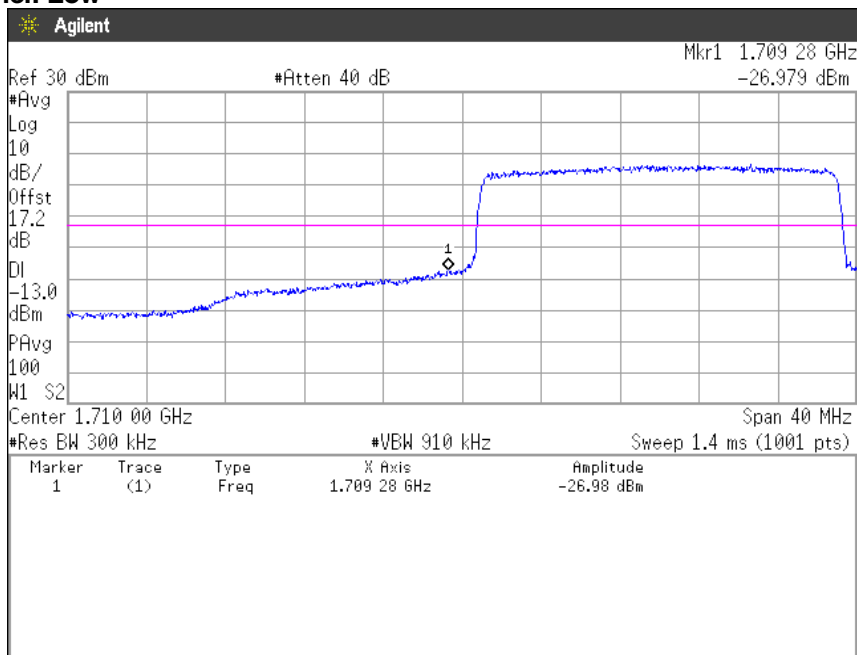


QPSK, BW 20MHz, RB100-0
Channel: High

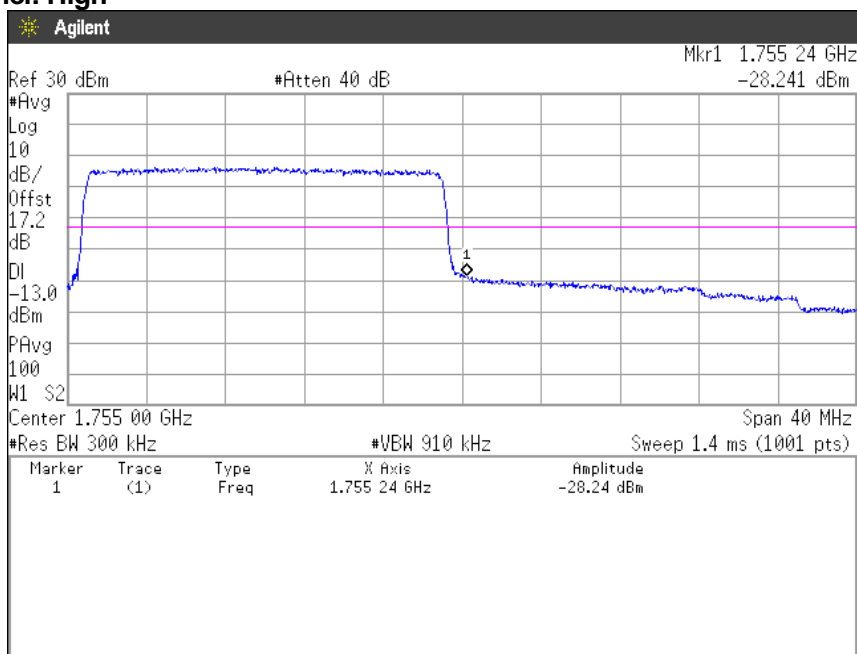




Zacta

16QAM, BW 1.4MHz, RB1-0
Channel: Low

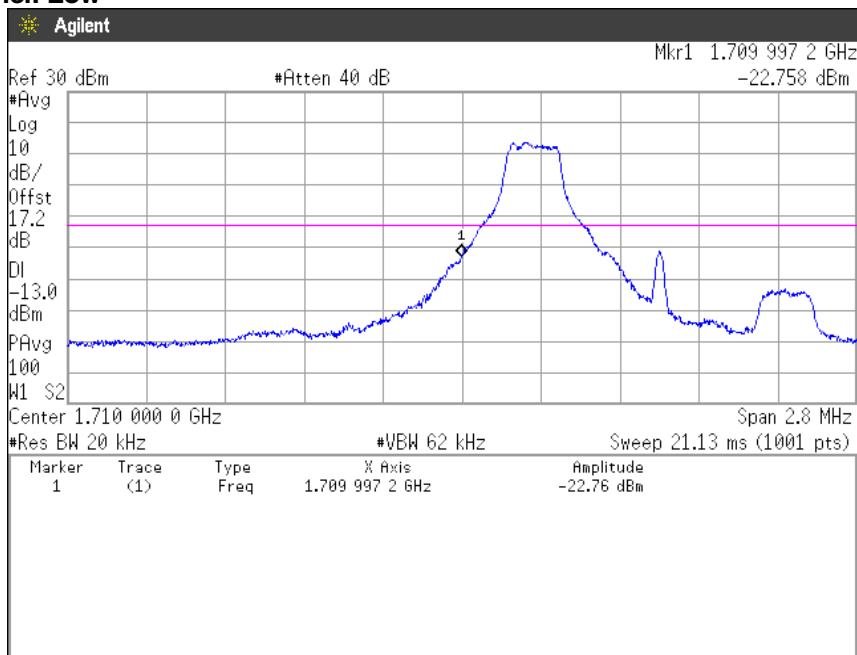


16QAM, BW 1.4MHz, RB1-5
Channel: High

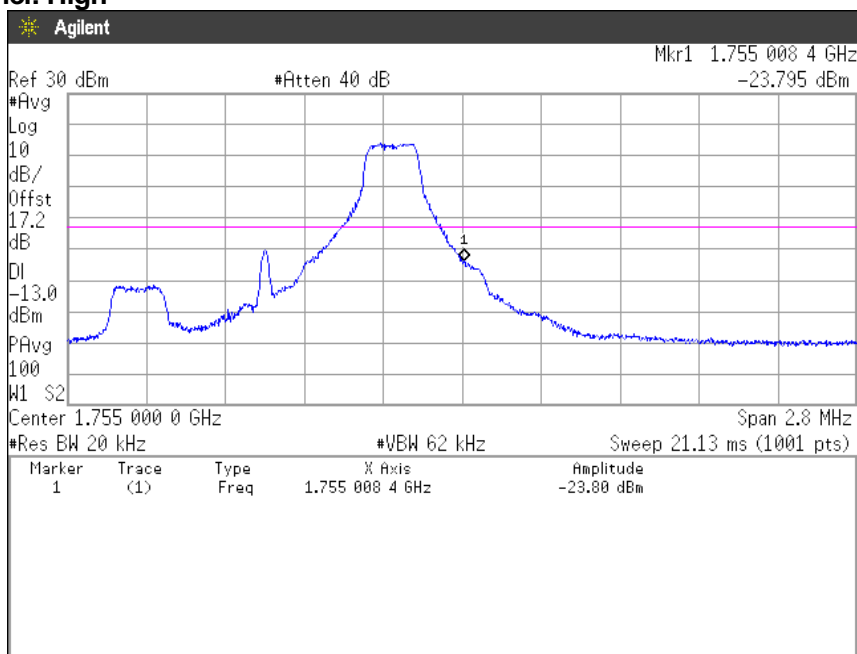




Zacta

16QAM, BW 1.4MHz, RB6-0
Channel: Low

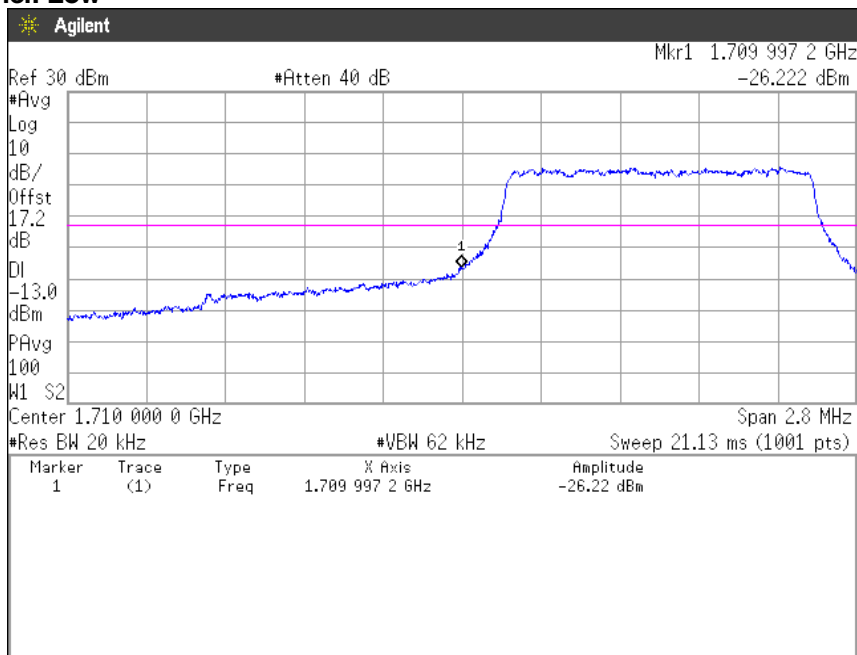


16QAM, BW 1.4MHz, RB6-0
Channel: High

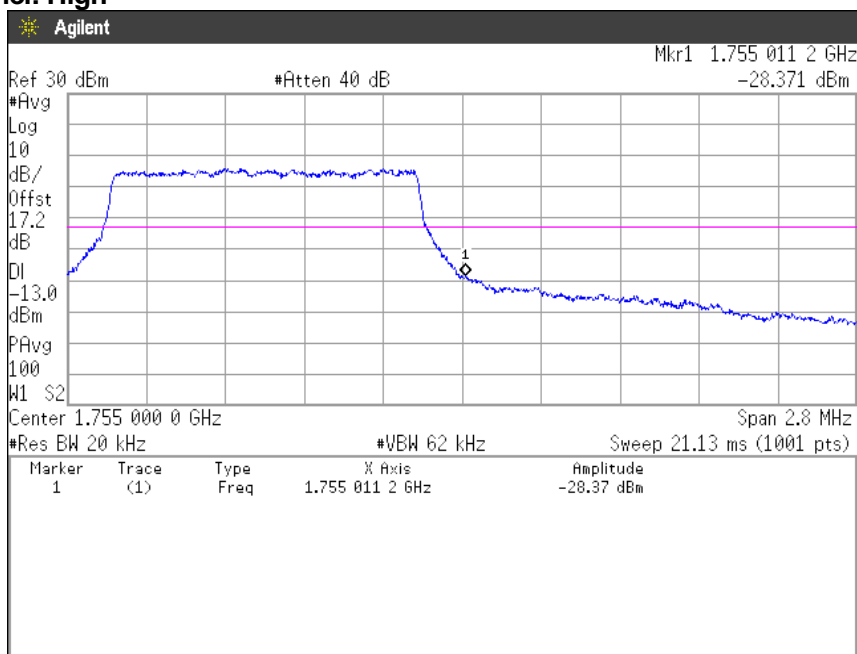




Zacta

16QAM, BW 3MHz, RB1-0
Channel: Low

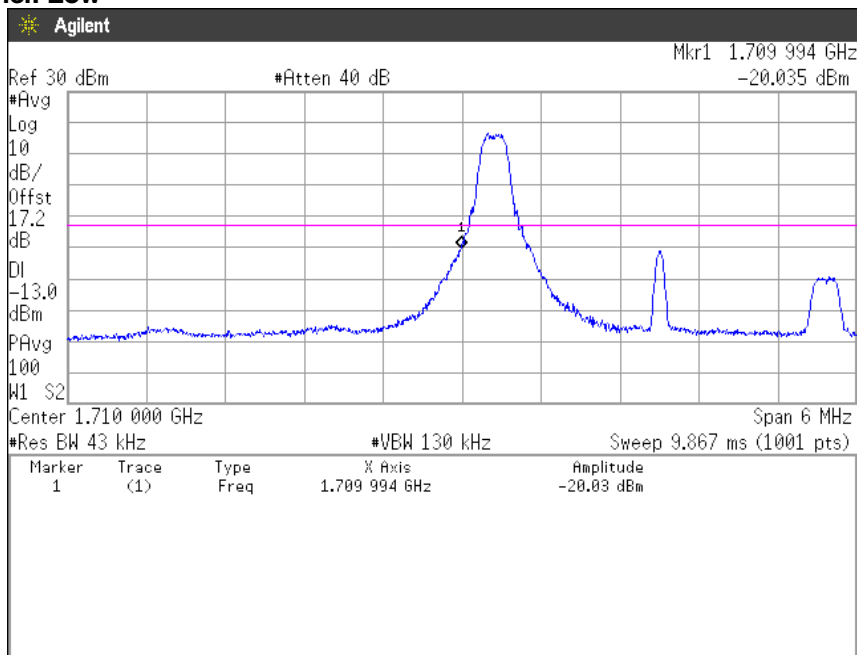


16QAM, BW 3MHz, RB1-14
Channel: High

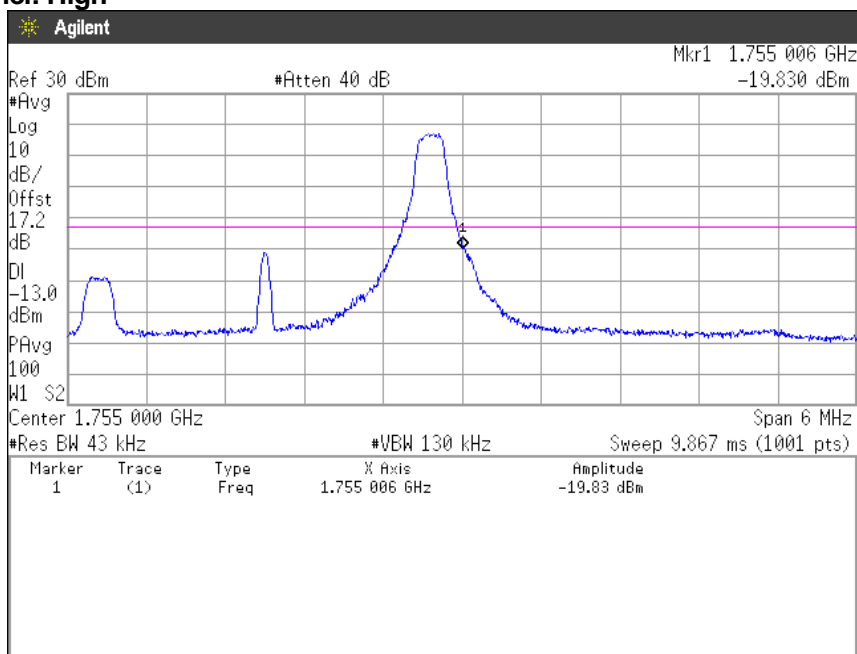




Zacta

16QAM, BW 3MHz, RB15-0
Channel: Low

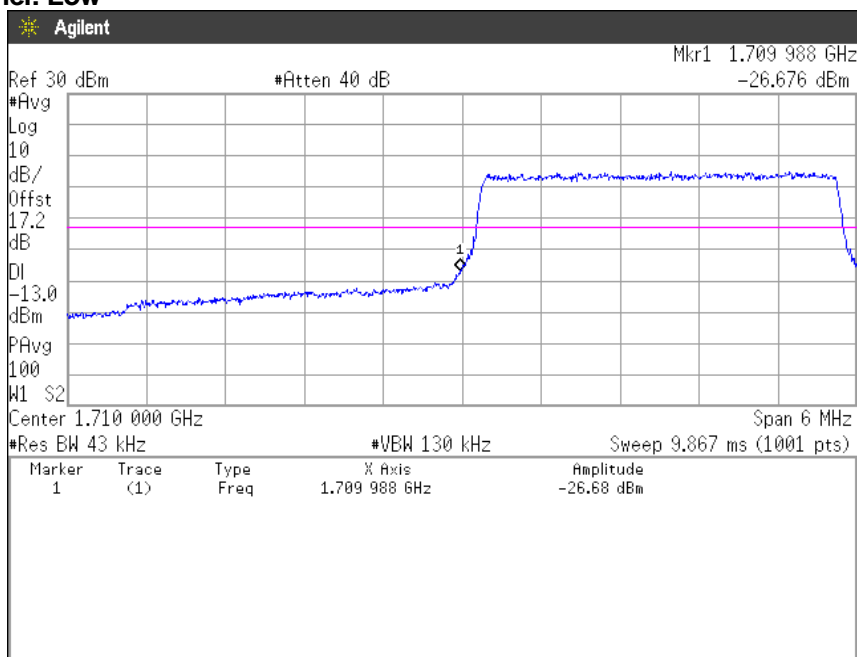


16QAM, BW 3MHz, RB15-0
Channel: High

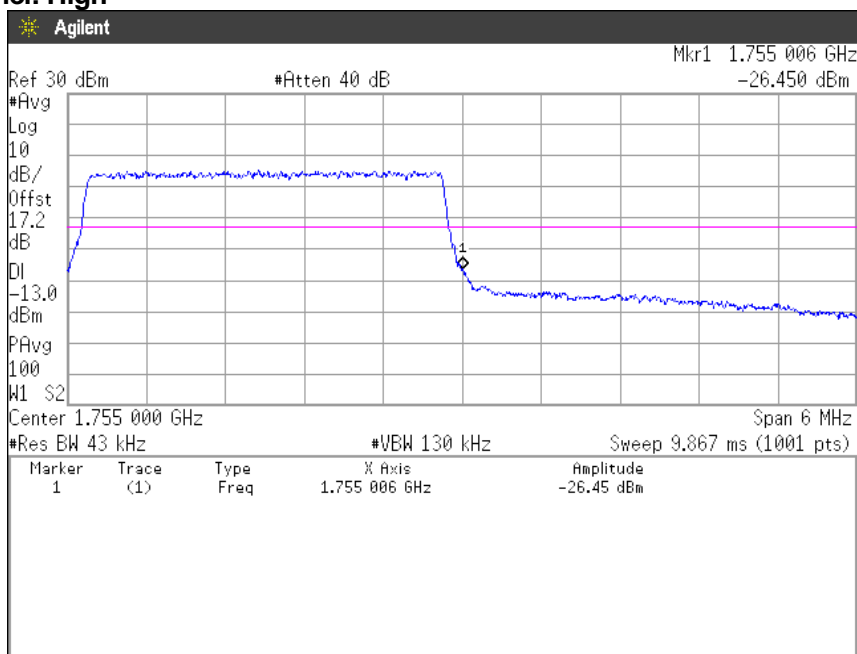




Zacta

16QAM, BW 5MHz, RB1-0
Channel: Low

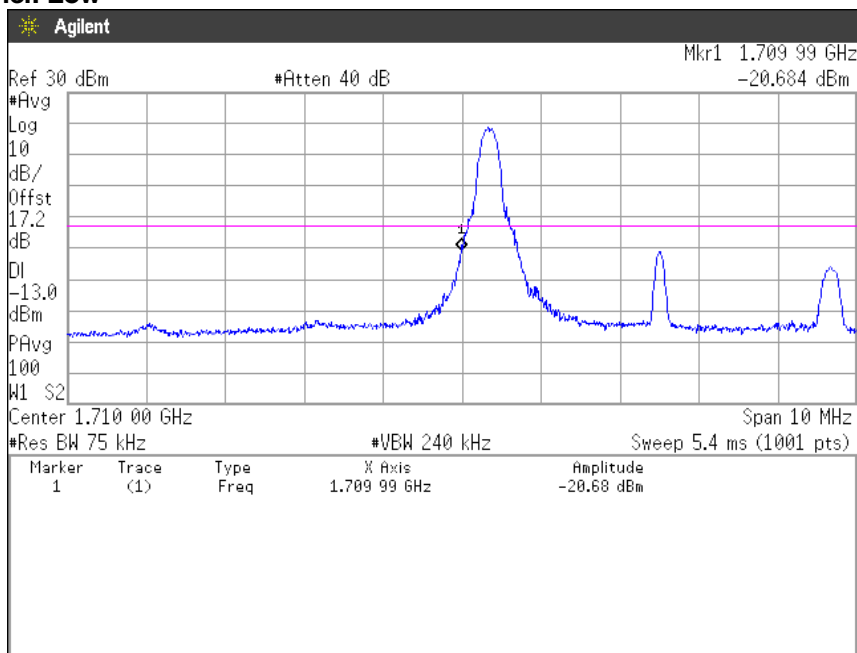


16QAM, BW 5MHz, RB1-24
Channel: High

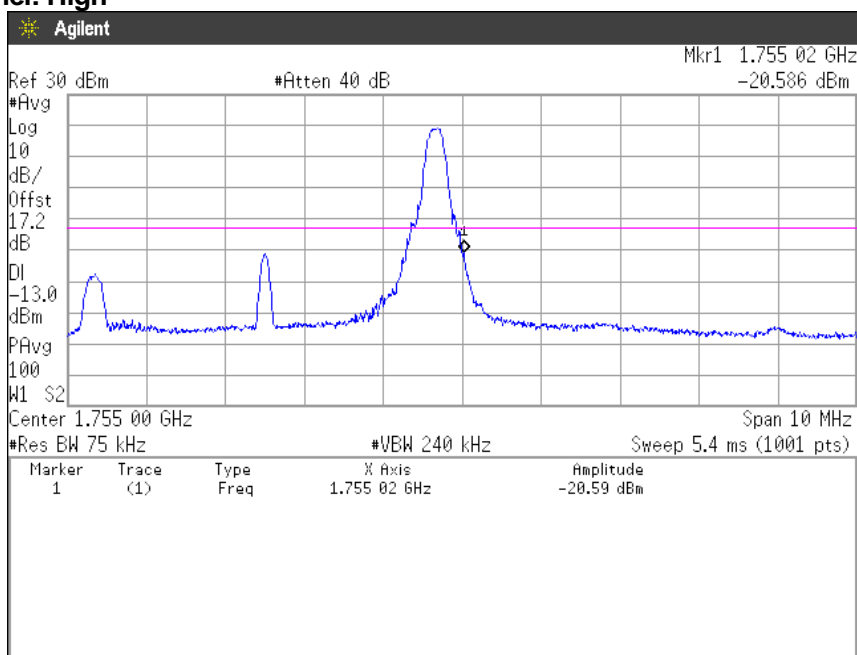




Zacta

16QAM, BW 5MHz, RB25-0
Channel: Low

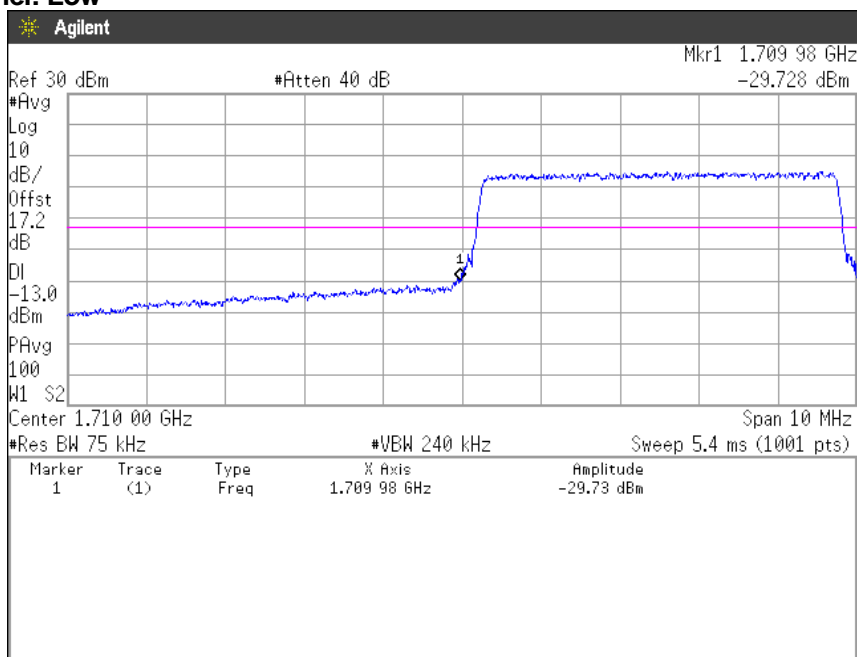


16QAM, BW 5MHz, RB25-0
Channel: High

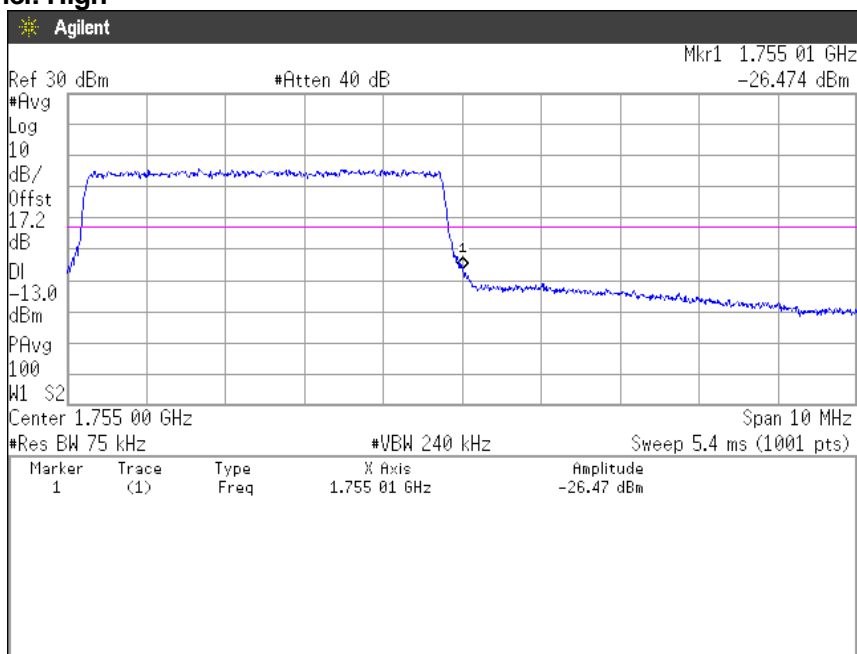




Zacta

16QAM, BW 10MHz, RB1-0
Channel: Low

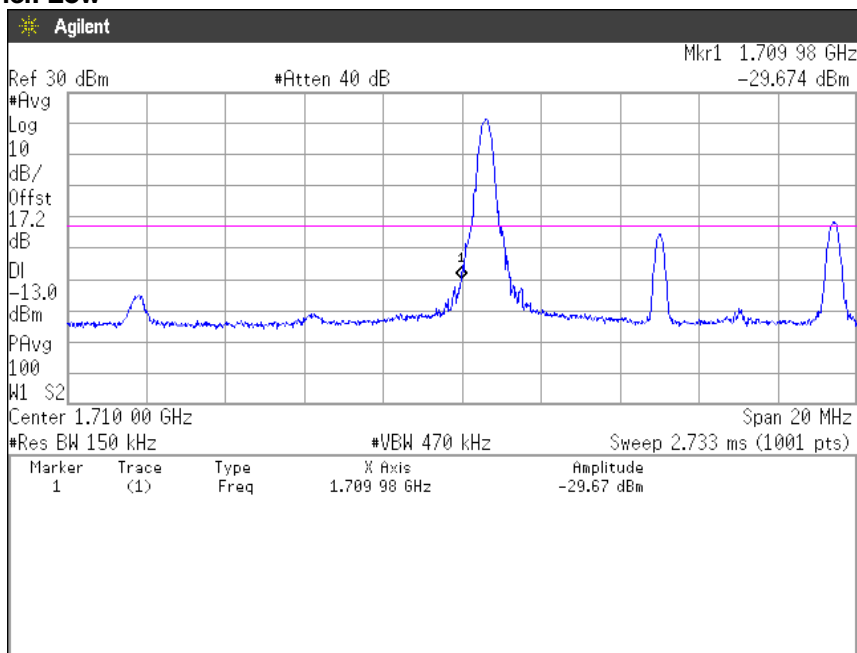


16QAM, BW 10MHz, RB1-49
Channel: High

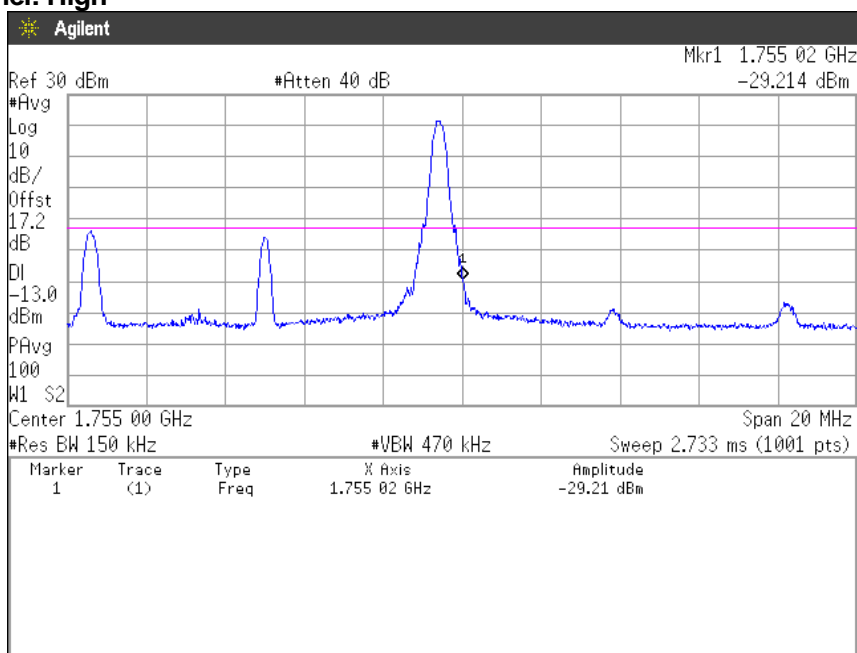




Zacta

16QAM, BW 10MHz, RB50-0
Channel: Low

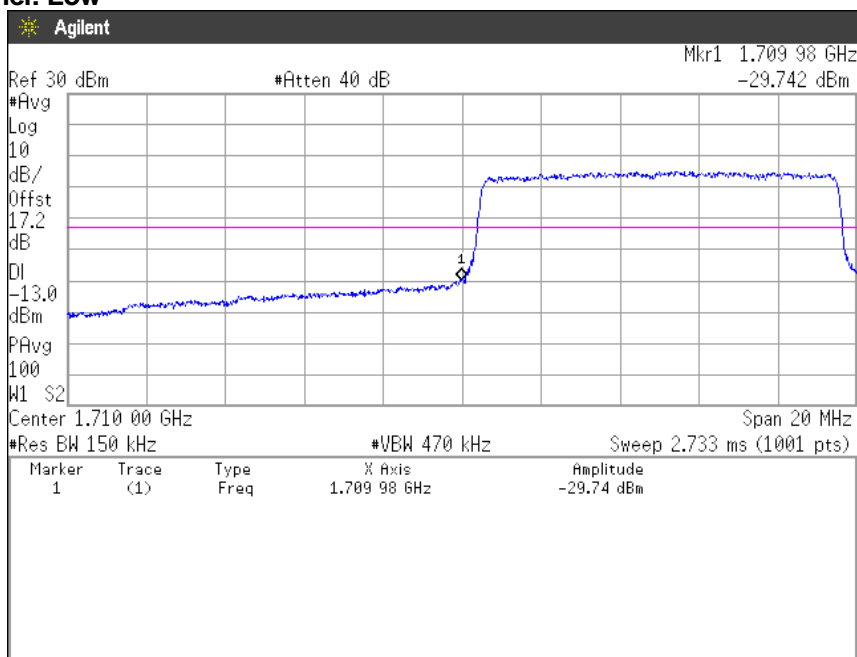


16QAM, BW 10MHz, RB50-0
Channel: High

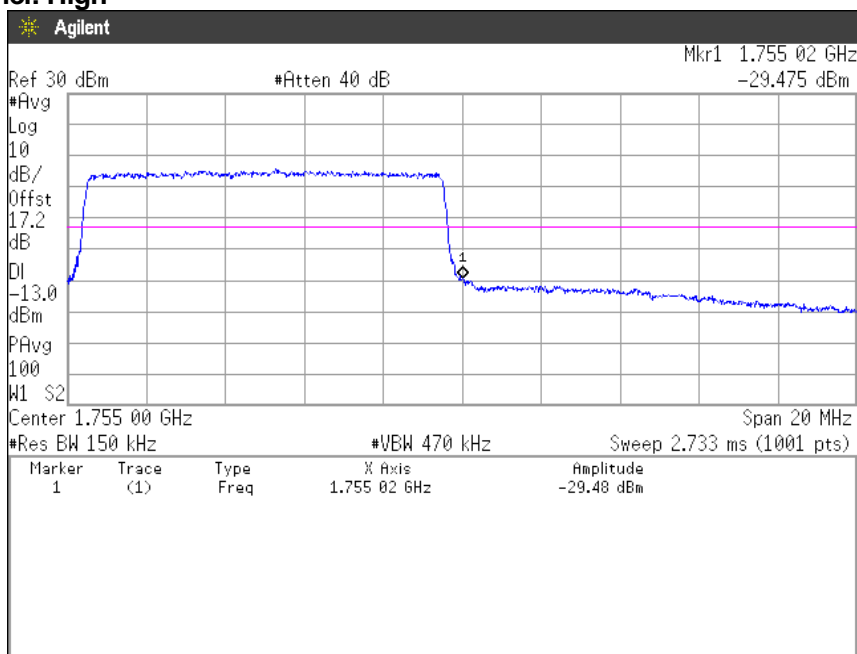




Zacta

16QAM, BW 15MHz, RB1-0
Channel: Low

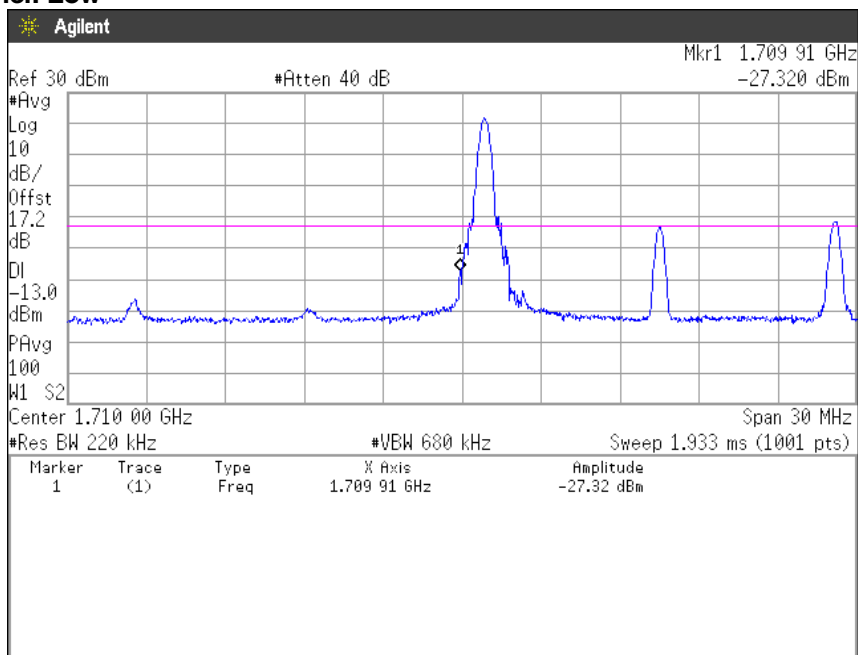


16QAM, BW 15MHz, RB1-74
Channel: High

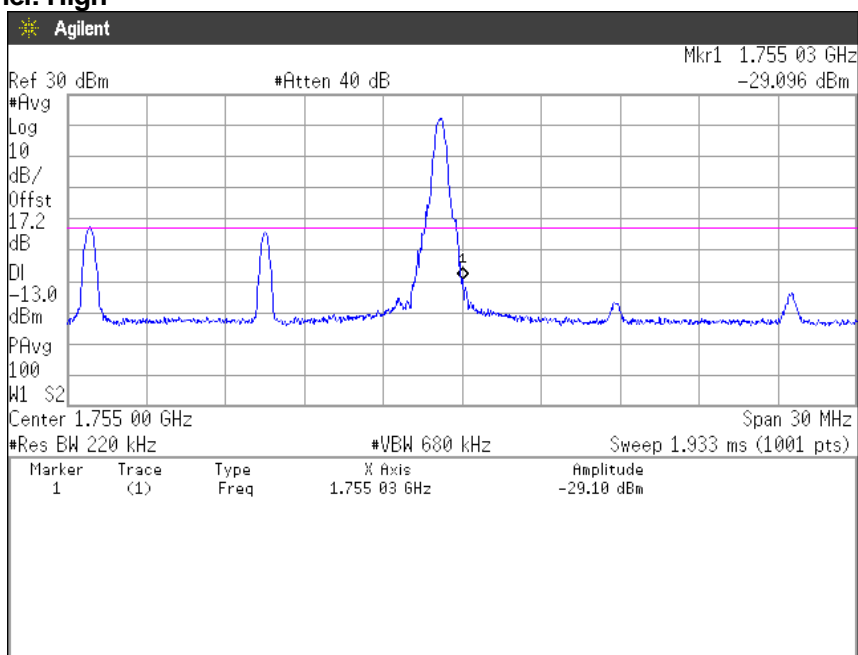




Zacta

16QAM, BW 15MHz, RB75-0
Channel: Low

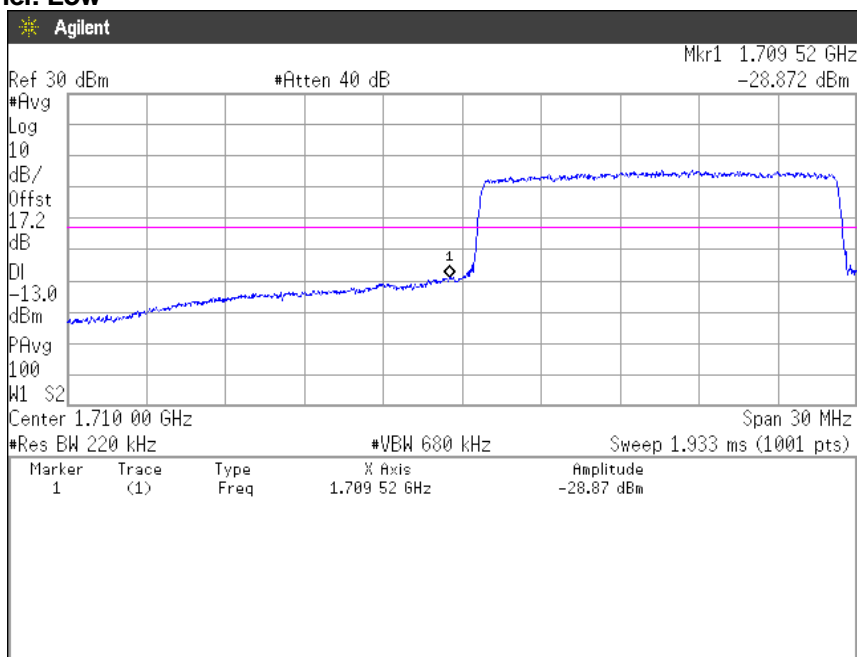


16QAM, BW 15MHz, RB75-0
Channel: High

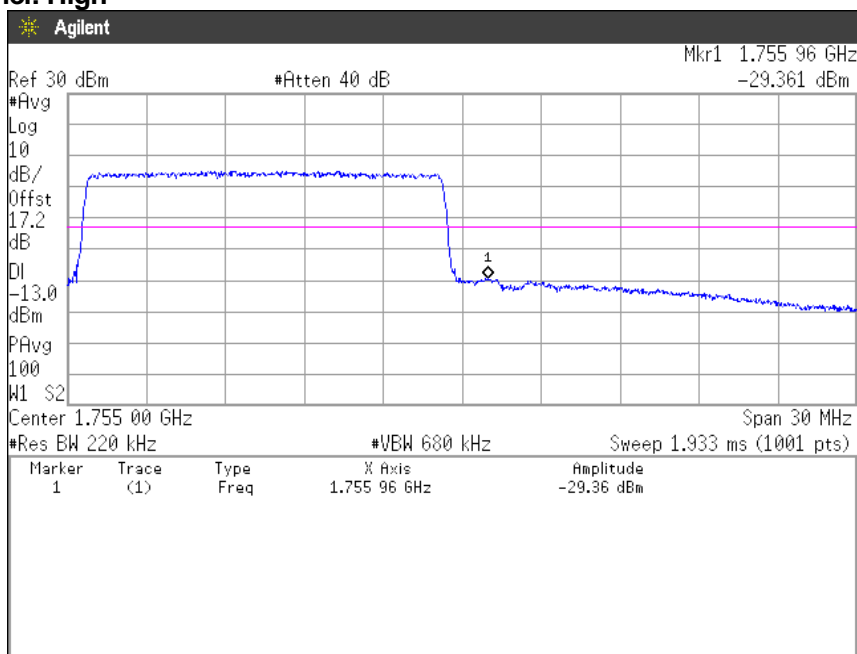




Zacta

16QAM, BW 20MHz, RB1-0
Channel: Low

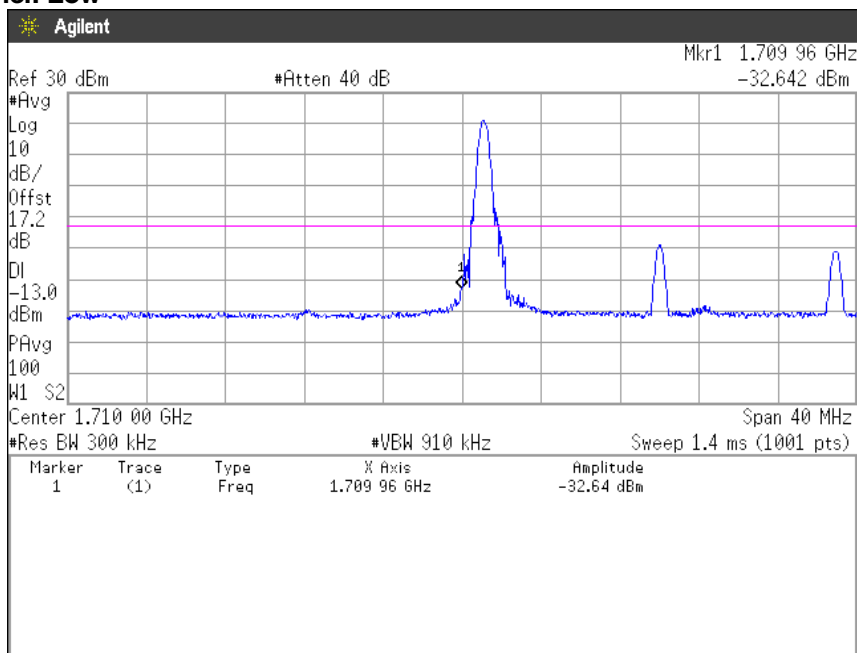


16QAM, BW 20MHz, RB1-99
Channel: High

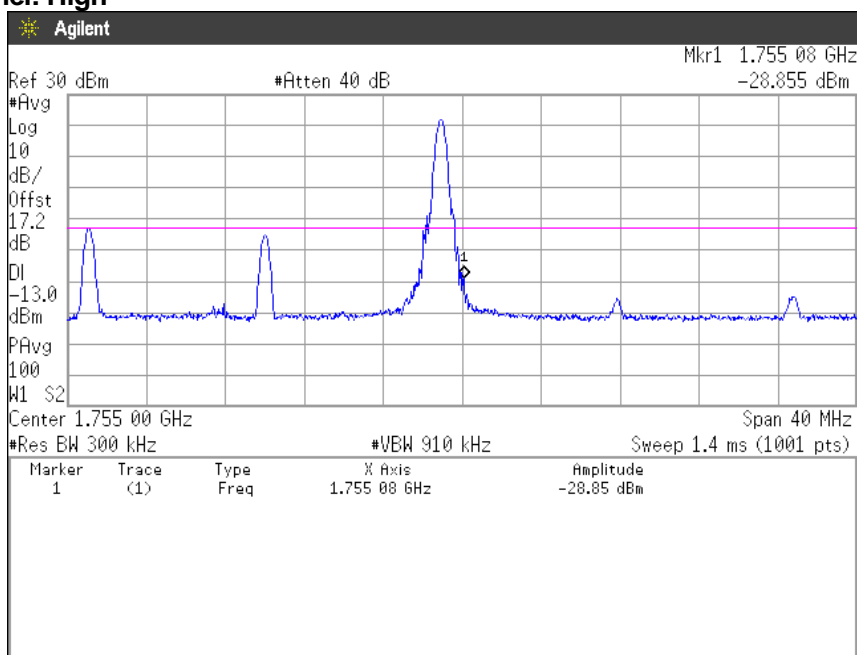




Zacta

16QAM, BW 20MHz, RB100-0
Channel: Low

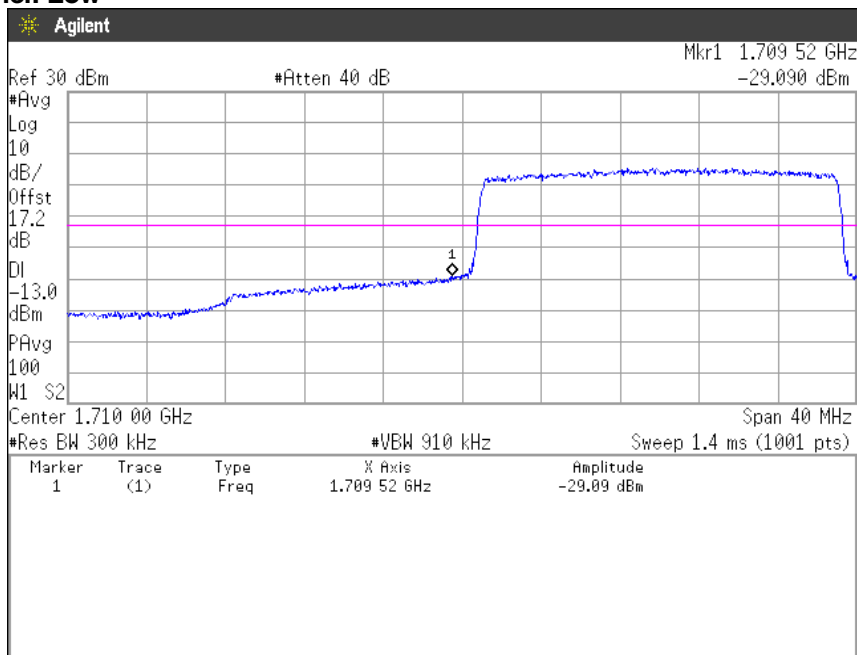

16QAM, BW 20MHz, RB100-0
Channel: High

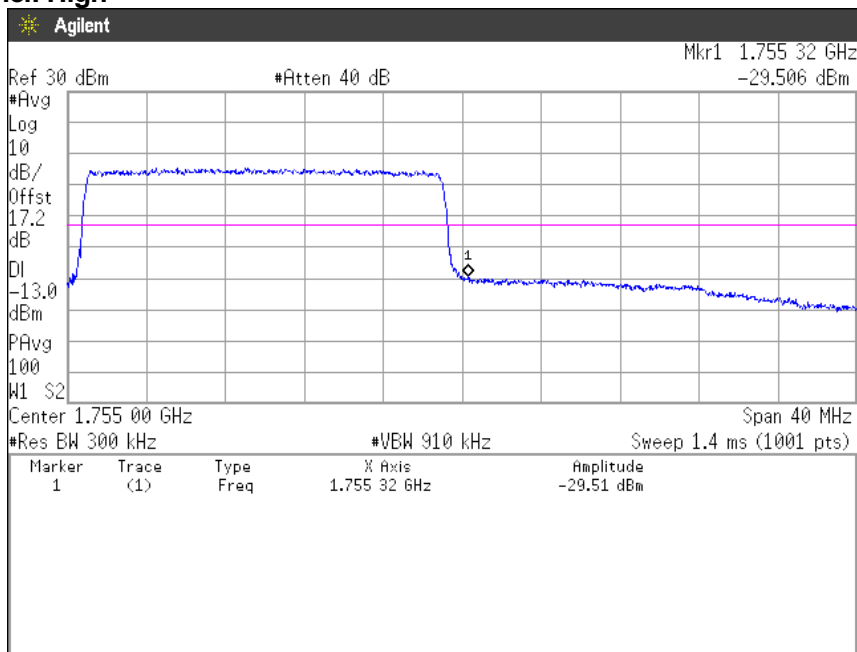



Zacta

(Spurious Emissions)



Note: Conducted spurious test was measured in the worst case of conducted output power.

QPSK, BW 20MHz

Channel: 20050



30MHz-5GHz

5GHz-10GHz

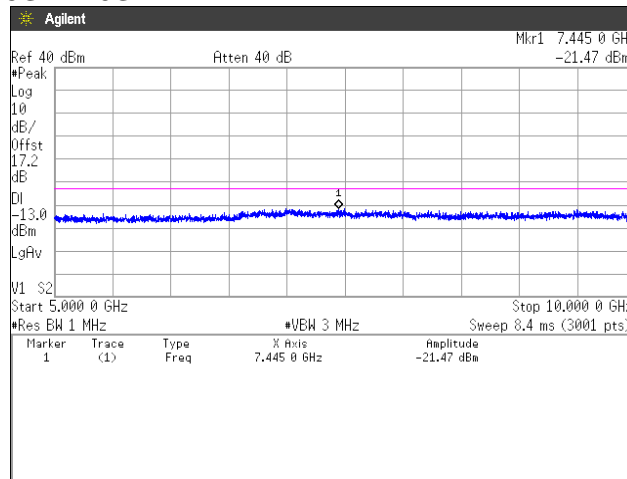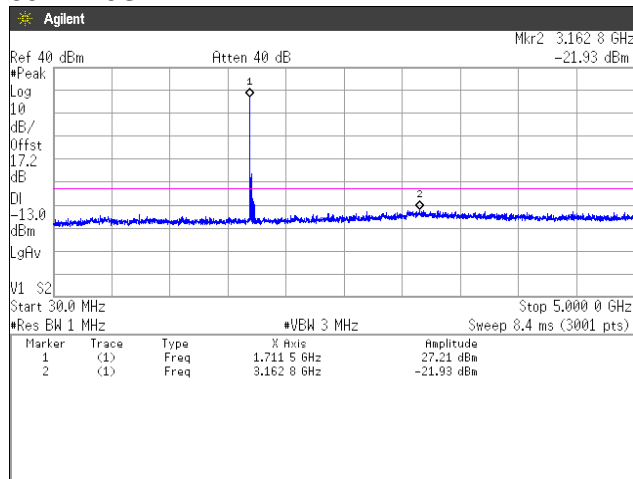

10GHz-15GHz


15GHz-20GHz

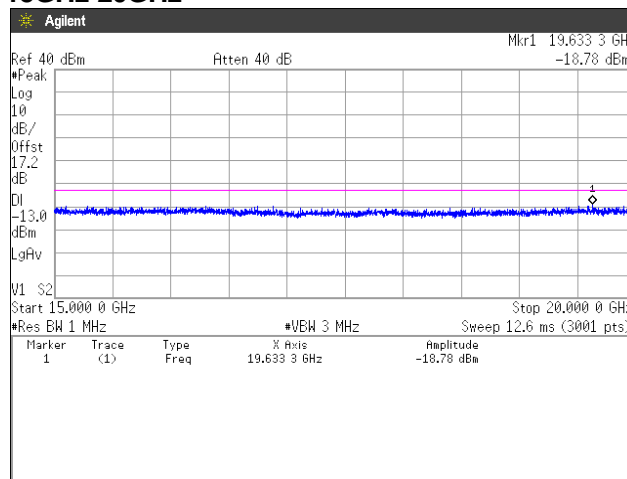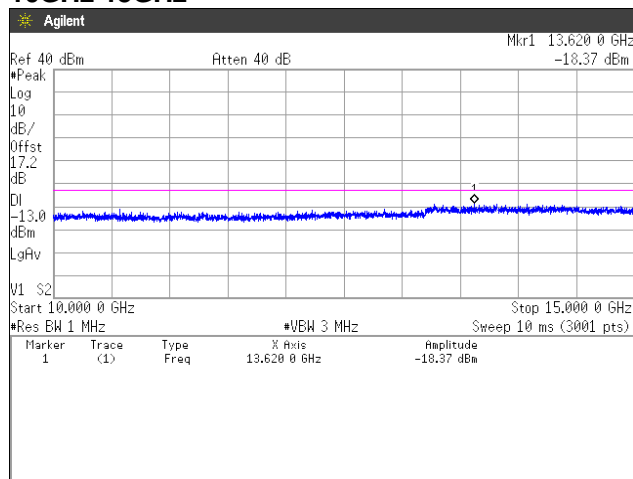




Zacta


Channel: 20175
30MHz-5GHz

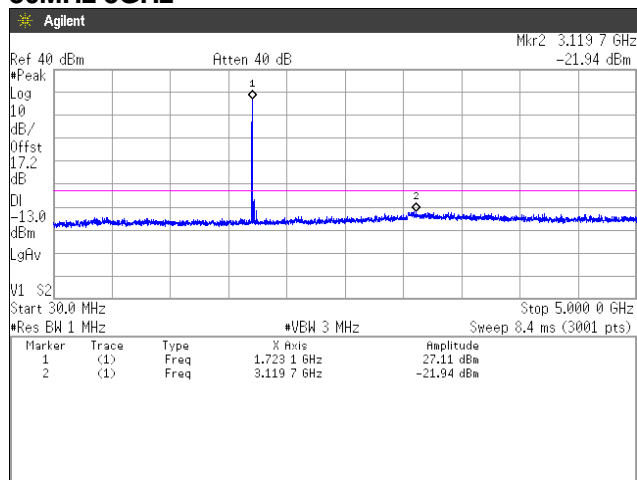


5GHz-10GHz

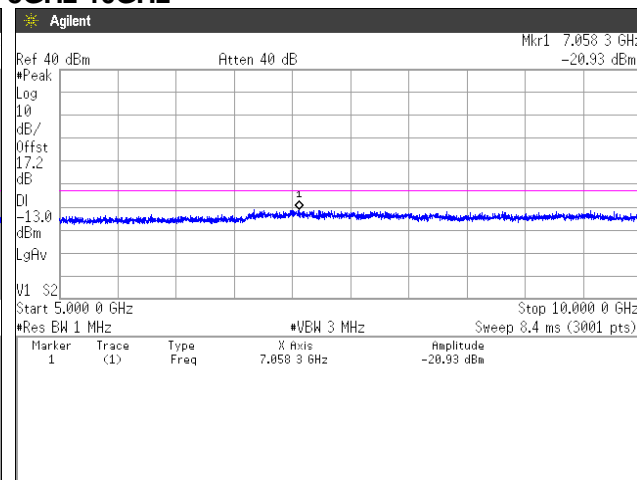

10GHz-15GHz

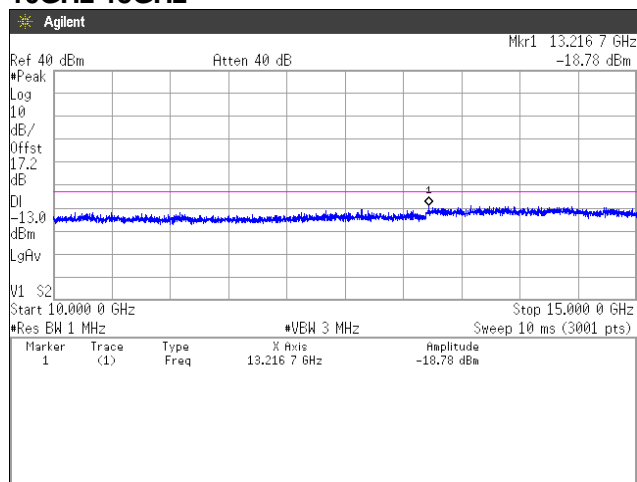


15GHz-20GHz

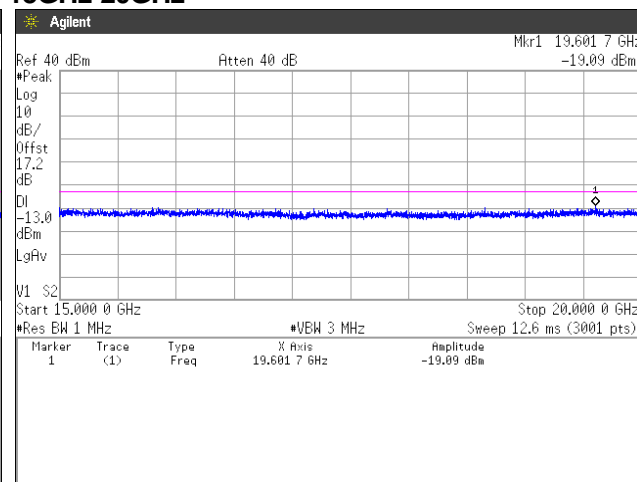




Zacta


Channel: 20300
30MHz-5GHz

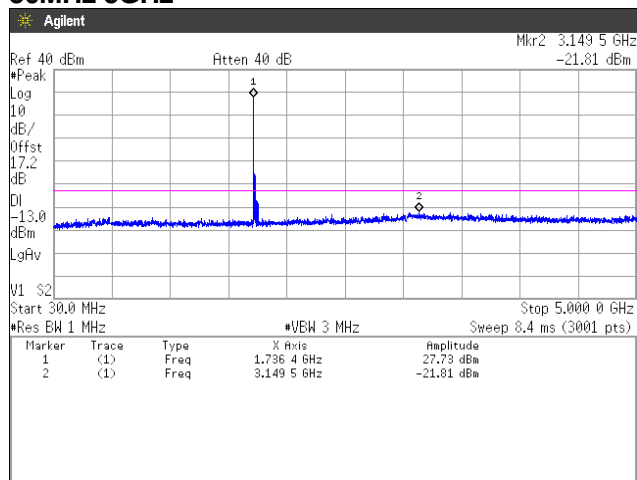


5GHz-10GHz

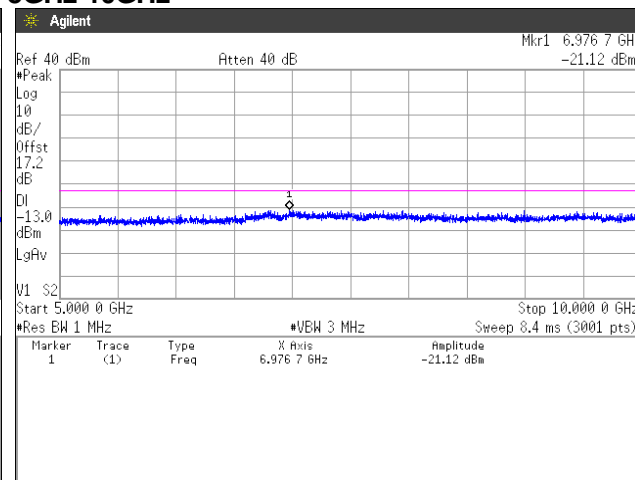

10GHz-15GHz

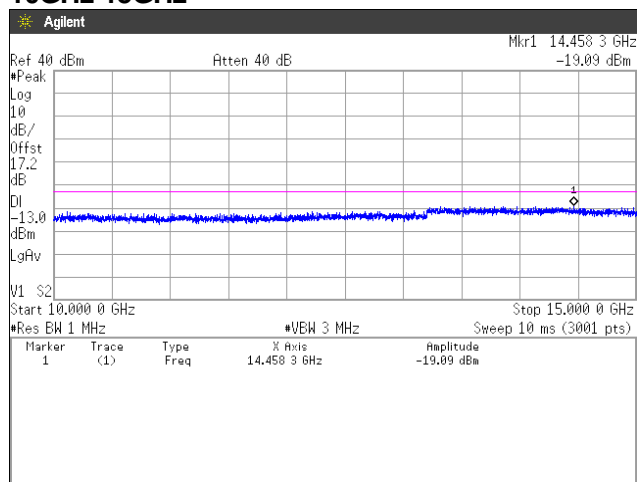

15GHz-20GHz

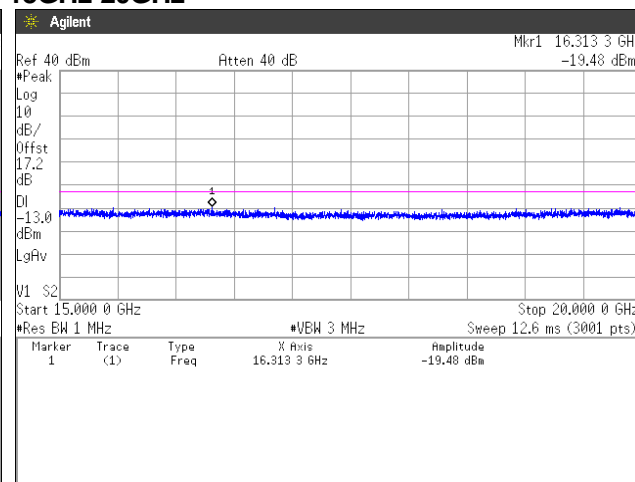

8. Radiated Emissions and Harmonic Emissions

8.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100kHz for below 1GHz and 1MHz for above 1GHz / VBW \geq 3 x RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

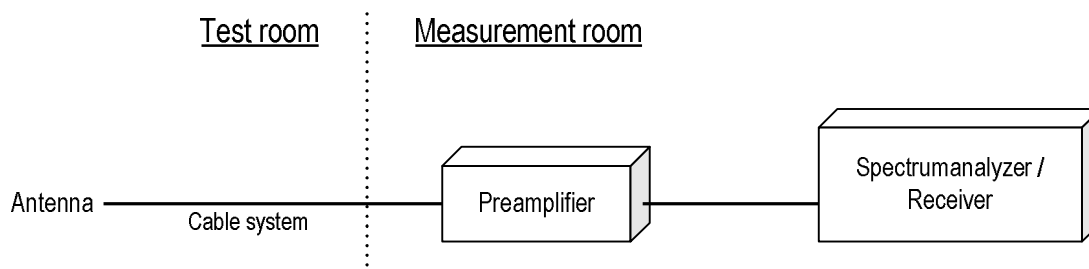



Zacta

8.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain
Margin = Limit – Result (EIRP)

Example:

Limit @ 3465.0MHz : -13.0dBm

Ant. Input = -50.7dBm Cable loss = 1.6dB Ant. Gain = 9.1dBi

Result = -50.7 - 1.6 + 9.1 = -43.2dBm

Margin = -13.0 - (-43.2) = 30.2dB

8.3 Limit

-13dBm or less



Zacta

8.4 Test data

Date	: December 13, 2017	Test engineer	:	_____
Temperature	: 20.0 [°C]			
Humidity	: 22.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 14, 2017	Test engineer	:	_____
Temperature	: 20.2 [°C]			
Humidity	: 21.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 15, 2017	Test engineer	:	_____
Temperature	: 20.5 [°C]			
Humidity	: 22.1 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: December 18, 2017	Test engineer	:	_____
Temperature	: 20.2 [°C]			
Humidity	: 24.7 [%]			
Test place	: 3m Semi-anechoic chamber			

[WCDMA Band IV]

Channel: 1312

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3424.8	-55.8	-63.4	1.6	9.1	-55.9	-13.0	42.9

Channel: 1413

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.2	-55.9	-63.6	1.6	9.1	-56.1	-13.0	43.1

Channel: 1513

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.2	-54.7	-61.0	1.6	9.1	-53.5	-13.0	40.5

**[LTE Band IV]
QPSK, BW 1.4MHz
Channel: 19957**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-53.0	-51.2	1.6	9.1	-43.7	-13.0	30.7

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.9	-50.7	1.6	9.1	-43.2	-13.0	30.2

Channel: 20393

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-49.9	-45.0	1.6	9.1	-37.5	-13.0	24.5

**16QAM, BW 1.4MHz
Channel: 19957**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3421.4	-52.8	-51.0	1.6	9.1	-43.5	-13.0	30.5

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-53.0	-51.1	1.6	9.1	-43.6	-13.0	30.6

Channel: 20393

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3508.6	-50.1	-45.4	1.6	9.1	-37.9	-13.0	24.9

QPSK, BW 3MHz**Channel: 19965**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-52.7	-50.8	1.6	9.1	-43.3	-13.0	30.3

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.9	-51.1	1.6	9.1	-43.6	-13.0	30.6

Channel: 20385

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-50.4	-45.8	1.6	9.1	-38.3	-13.0	25.3

16QAM, BW 3MHz**Channel: 19965**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3423.0	-52.7	-50.8	1.6	9.1	-43.3	-13.0	30.3

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.9	-51.1	1.6	9.1	-43.6	-13.0	30.6

Channel: 20385

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3507.0	-50.5	-46.3	1.6	9.1	-38.8	-13.0	25.8

QPSK, BW 5MHz**Channel: 19975**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-53.2	-51.6	1.6	9.1	-44.1	-13.0	31.1

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-53.0	-51.2	1.6	9.1	-43.7	-13.0	30.7

Channel: 20375

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-50.3	-45.8	1.6	9.1	-38.3	-13.0	25.3

16QAM, BW 5MHz**Channel: 19975**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3425.0	-52.4	-49.9	1.6	9.1	-42.4	-13.0	29.4

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-53.1	-51.4	1.6	9.1	-43.9	-13.0	30.9

Channel: 20375

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3505.0	-49.8	-44.9	1.6	9.1	-37.4	-13.0	24.4

QPSK, BW 10MHz**Channel: 20000**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-53.1	-51.8	1.6	9.1	-44.3	-13.0	31.3

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-53.0	-51.2	1.6	9.1	-43.7	-13.0	30.7

Channel: 20350

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-50.8	-46.5	1.6	9.1	-39.0	-13.0	26.0

16QAM, BW 10MHz**Channel: 20000**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3430.0	-53.3	-52.0	1.6	9.1	-44.5	-13.0	31.5

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.7	-50.4	1.6	9.1	-42.9	-13.0	29.9

Channel: 20350

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3500.0	-50.8	-46.5	1.6	9.1	-39.0	-13.0	26.0

QPSK, BW 15MHz**Channel: 20025**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-53.1	-51.8	1.6	9.1	-44.3	-13.0	31.3

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.7	-50.4	1.6	9.1	-42.9	-13.0	29.9

Channel: 20325

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-52.5	-50.8	1.6	9.1	-43.3	-13.0	30.3

16QAM, BW 15MHz**Channel: 20025**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3435.0	-53.0	-51.6	1.6	9.1	-44.1	-13.0	31.1

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.7	-50.4	1.6	9.1	-42.9	-13.0	29.9

Channel: 20325

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3495.0	-52.6	-51.1	1.6	9.1	-43.6	-13.0	30.6

QPSK, BW 20MHz**Channel: 20050**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-49.5	-44.0	1.6	9.1	-36.5	-13.0	23.5

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.7	-50.4	1.6	9.1	-42.9	-13.0	29.9

Channel: 20300

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-51.4	-47.6	1.6	9.1	-40.1	-13.0	27.1

16QAM, BW 20MHz**Channel: 20050**

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3440.0	-49.2	-44.0	1.6	11.3	-34.3	-13.0	21.3

Channel: 20175

HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3465.0	-52.9	-50.7	1.6	11.3	-41.0	-13.0	28.0

Channel: 20300


HV	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3490.0	-51.6	-47.9	1.6	11.3	-38.2	-13.0	25.2

9. Frequency Stability

9.1 Measurement procedure [FCC 27.54, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

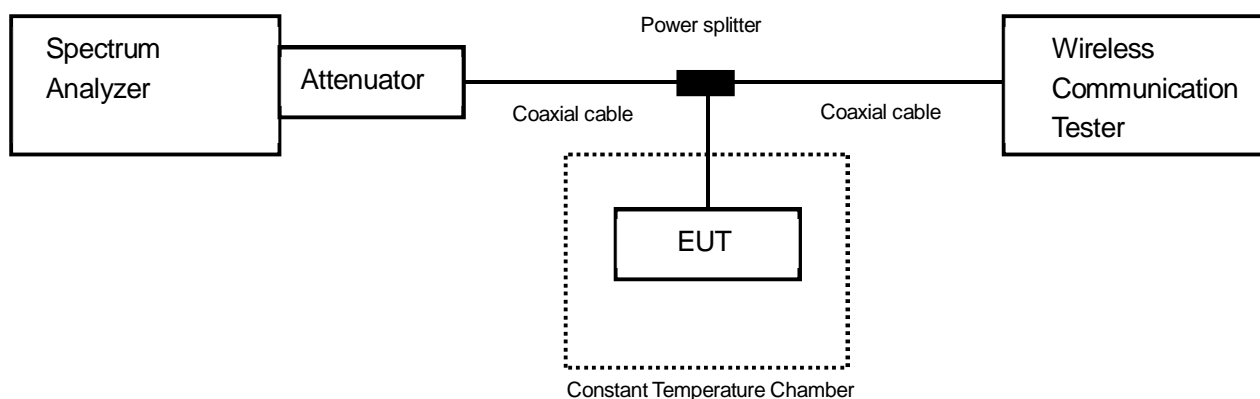

9.2 Limit

±2.5ppm

9.3 Measurement result

Date : December 4, 2017
 Temperature : 21.1 [°C]
 Humidity : 38.4 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

[WCDMA Band IV]**Channel: 1413**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.80	25(Ref.)	1,732,600,012	0.00000	± 2.5	Pass
	50	1,732,599,988	-0.01402	± 2.5	Pass
	40	1,732,599,987	-0.01460	± 2.5	Pass
	30	1,732,600,004	-0.00477	± 2.5	Pass
	20	1,732,600,003	-0.00519	± 2.5	Pass
	10	1,732,600,003	-0.00532	± 2.5	Pass
	0	1,732,600,004	-0.00489	± 2.5	Pass
	-10	1,732,600,003	-0.00545	± 2.5	Pass
	-20	1,732,599,995	-0.01007	± 2.5	Pass
	-30	1,732,600,007	-0.00319	± 2.5	Pass
3.42	25	1,732,600,011	-0.00100	± 2.5	Pass
4.18	25	1,732,600,012	-0.00010	± 2.5	Pass

[LTE Band IV]**QPSK, BW 20MHz****Channel: 20175**

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply	Temperature	Measurements Frequency	Frequency Tolerance	Limit	Result
[V]	[°C]	[Hz]	[ppm]	[ppm]	
3.80	25(Ref.)	1,732,499,993	0.00000	± 2.5	Pass
	50	1,732,500,006	0.00744	± 2.5	Pass
	40	1,732,500,005	0.00664	± 2.5	Pass
	30	1,732,500,004	0.00627	± 2.5	Pass
	20	1,732,500,006	0.00728	± 2.5	Pass
	10	1,732,500,006	0.00738	± 2.5	Pass
	0	1,732,500,005	0.00686	± 2.5	Pass
	-10	1,732,500,005	0.00711	± 2.5	Pass
	-20	1,732,500,005	0.00664	± 2.5	Pass
	-30	1,732,500,005	0.00668	± 2.5	Pass
3.42	25	1,732,499,994	0.00050	± 2.5	Pass
4.18	25	1,732,499,993	0.00015	± 2.5	Pass

Calculation;

$$\text{Frequency Tolerance (ppm)} = \frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$$



10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9kHz – 150kHz)	$\pm 3.8\text{dB}$
Conducted emission, AMN (150kHz – 30MHz)	$\pm 3.3\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 3.0\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.7\text{dB}$
Radiated emission (1GHz – 6GHz)	$\pm 4.9\text{dB}$
Radiated emission (6GHz – 18GHz)	$\pm 5.2\text{dB}$
Radiated emission (18GHz – 40GHz)	$\pm 5.8\text{dB}$



Zacta

11. Laboratory Information

1. Location

Name: Yonezawa Testing Center
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881
 Fax: +81-238-28-2888

2. Accreditation and Registration

- 1) VLAC
Accreditation No.: VLAC-013
- 2) NVLAP
LAB CODE: 200306-0
- 3) BSMI
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

4) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2020-11-27
4224A-5	10m Semi-anechoic chamber No.1	2020-11-27
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

5) VCCI Council

Registration number	Expiration date
A-0166	2019-07-03

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2018	Jun. 28, 2017
Attenuator	HUBER+SUHNER	6810.19.A	N/A(S450)	Jan. 31, 2018	Jan. 20, 2017
Microwave cable	HUBER+SUHNER	SUCOFLEX102	MY3385/2	Feb. 28, 2018	Feb. 2, 2017
Power divider	ANRITSU	K240B	1301239	Jul. 31, 2018	Jul. 21, 2017
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	Oct. 31, 2018	Oct. 13, 2017
Temperature and humidity chamber	ESPEC	PL1KP	14007261	Jan. 31, 2018	Jan. 20, 2017

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2018	Sep. 13, 2017
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	Mar. 31, 2018	Mar. 15, 2017
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 31, 2018	Oct. 19, 2017
Preamplifier	ANRITSU	MH648A	M96057	Feb. 28, 2018	Feb. 1, 2017
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jul. 31, 2018	Jul. 18, 2017
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jul. 31, 2018	Jul. 18, 2017
Attenuator	TME	CFA-01NPJ-6	N/A(S275)	Feb. 28, 2018	Feb. 3, 2017
Attenuator	TME	CFA-01NPJ-3	N/A(S272)	Feb. 28, 2018	Feb. 2, 2017
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	Feb. 28, 2018	Feb. 3, 2017
Attenuator	AEROFLEX	26A-10	081217-08	May 31, 2018	May 24, 2017
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Feb. 28, 2018	Feb. 23, 2017
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2018	Feb. 2, 2017
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2018	Jun. 7, 2017
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	Aug. 31, 2018	Aug. 8, 2017
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Aug. 31, 2018	Aug. 8, 2017
Band rejection filter	Micro-Tronics	BRC50719	014	Nov. 30, 2017	Nov. 1, 2016
				Dec. 31, 2018	Dec. 5, 2017
High Pass Filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2018	Jul. 20, 2017
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Jun. 30, 2018	Jun. 12, 2017
RF power amplifier	R&K	CGA020M602-2633R	B40240	May 31, 2018	May 26, 2017
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	Mar. 31, 2018	Mar. 13, 2017
Dipole antenna	Schwarzbeck	VHAP	1021	Aug. 31, 2018	Aug. 2, 2017
Dipole antenna	Schwarzbeck	UHAP	993	Aug. 31, 2018	Aug. 2, 2017
Double ridged guide antenna	EMCO	3115	00058532	Dec. 31, 2017	Dec. 6, 2016
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	Oct. 31, 2018	Oct. 13, 2017
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/1m	my24610/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/8m	SN MY30031/4	Feb. 28, 2018	Feb. 2, 2017
		SUCOFLEX104	MY32976/4	Dec. 31, 2017	Dec. 2, 2016
		SUCOFLEX104/1.5m	MY19309/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/7m	41625/6	Feb. 28, 2018	Feb. 3, 2017
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2018	May 30, 2017
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2018	May 31, 2017

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.