

**6. Input Offset Measurement (cont'd)**

Input shorted

| in $\mu\text{V}$ | Average | min. Offset | max. Offset | Std. Deviation |
|------------------|---------|-------------|-------------|----------------|
| Channel X        | -0.02   | -0.85       | 0.97        | 0.27           |
| Channel Y        | -0.69   | -2.12       | 0.97        | 0.35           |
| Channel Z        | -0.96   | -2.39       | 0.43        | 0.35           |

**7. Input Offset Current**

Nominal Input circuitry offset current on all channels: &lt;25fA

**8. Input Resistance**

| In MOhm   | Calibrating | Measuring |
|-----------|-------------|-----------|
| Channel X | 0.2001      | 199.9     |
| Channel Y | 0.1999      | 203.3     |
| Channel Z | 0.2000      | 200.4     |

**9. Low Battery Alarm Voltage**

| in V           | Alarm Level |
|----------------|-------------|
| Supply (+ Vcc) | 7.72        |
| Supply (- Vcc) | 7.55        |

**10. Power Consumption**

| in mA          | Switched off | Stand by | Transmitting |
|----------------|--------------|----------|--------------|
| Supply (+ Vcc) | 0.00         | 8.71     | 14.4         |
| Supply (- Vcc) | -0.01        | -8.03    | -9.20        |



## D4: 2450MHZ SYSTEM VALIDATION DIPOLE

Client **Auden > Chunghwa Telecom**

## CALIBRATION CERTIFICATE

Object(s) **D2450V2 - SN:737**

Calibration procedure(s) **QA CAL-05.v2  
Calibration procedure for dipole validation kits**

Calibration date: **August 27, 2003**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type                | ID #       | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|---------------------------|------------|---|------------------------|
| RF generator R&S SML-03   | 100698     | 27-Mar-2002 (R&S, No. 20-92389)           | In house check: Mar-05 |
| Power sensor HP 8481A     | MY41092317 | 18-Oct-02 (Agilent, No. 20021018)         | Oct-04                 |
| Power sensor HP 8481A     | US37292783 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Power meter EPM E442      | GB37480704 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (Agilent, No. 24BR1033101)      | In house check: Oct 03 |

|                | Name           | Function            | Signature   |
|----------------|----------------|---------------------|---|
| Calibrated by: | Judith Mueller | Technician          |  |
| Approved by:   | Katja Pokovic  | Laboratory Director |  |

Date issued: August 28, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

# DASY

## Dipole Validation Kit

Type: D2450V2

Serial: 737

Manufactured: August 26, 2003

Calibrated: August 27, 2003

## 1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters at 2450 MHz:

|                        |                   |           |
|------------------------|-------------------|-----------|
| Relative Dielectricity | <b>38.2</b>       | $\pm 5\%$ |
| Conductivity           | <b>1.89 mho/m</b> | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ES3DV2 (SN:3013, Conversion factor 4.8 at 2450 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.

## 2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ES3DV2 SN:3013 and applying the advanced extrapolation are:

|  |  |
|--|--|
| averaged over 1 cm <sup>3</sup> (1 g) of tissue:   | <b>55.2 mW/g <math>\pm 16.8\%</math> (k=2)<sup>1</sup></b> |
| averaged over 10 cm <sup>3</sup> (10 g) of tissue: | <b>24.8 mW/g <math>\pm 16.2\%</math> (k=2)<sup>1</sup></b> |

---

<sup>1</sup> validation uncertainty

### 3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:           **1.162 ns**   (one direction)  
Transmission factor:       **0.983**     (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 2450 MHz:            $\text{Re}\{Z\} = 52.5 \Omega$

$\text{Im}\{Z\} = 5.4 \Omega$

Return Loss at 2450 MHz                    **-24.8 dB**

### 4. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **body simulating solution** of the following electrical parameters at 2450 MHz:

Relative Dielectricity                    **50.8**            $\pm 5\%$   
Conductivity                                **2.03 mho/m**    $\pm 5\%$

The DASY4 System with a dosimetric E-field probe ES3DV2 (SN:3013, Conversion factor 4.2 at 2450 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. Lossless spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.

## 5. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ES3DV2 SN:3013 and applying the advanced extrapolation are:

averaged over 1 cm<sup>3</sup> (1 g) of tissue: **55.2 mW/g ± 16.8 % (k=2)<sup>2</sup>**

averaged over 10 cm<sup>3</sup> (10 g) of tissue: **25.4 mW/g ± 16.2 % (k=2)<sup>2</sup>**

## 6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 2450 MHz: **Re{Z} = 48.5 Ω**

**Im {Z} = 6.1 Ω**

Return Loss at 2450 MHz **-23.9 dB**

## 7. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

## 8. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Small end caps have been added to the dipole arms in order to improve matching when loaded according to the position as explained in Sections 1 and 4. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

## 9. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

---

<sup>2</sup> validation uncertainty

Test Laboratory: SPEAG, Zurich, Switzerland  
 File Name: SN737\_SN3013\_HSL2450\_270803.da4

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN737**  
**Program: Dipole Calibration**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL 2450 MHz ( $\sigma = 1.89$  mho/m,  $\epsilon_r = 38.19$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.8, 4.8, 4.8); Calibrated: 1/19/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASYS4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**$P_{in} = 250$  mW;  $d = 10$  mm/Area Scan (81x81x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Reference Value = 90.7 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 15.2 mW/g

**$P_{in} = 250$  mW;  $d = 10$  mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm


Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6.2 mW/g

Reference Value = 90.7 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 15.1 mW/g

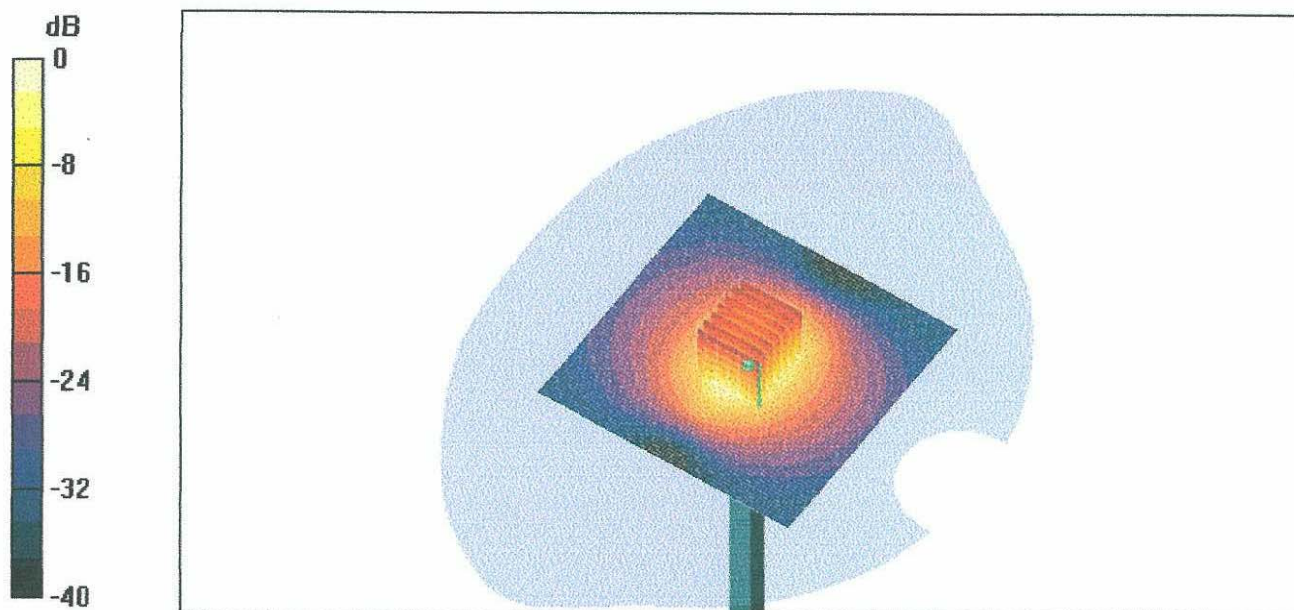

0 dB = 15.1mW/g