



TEST REPORT

Applicant Name : Polygroup Evergreen Limited
Address : Unit 606, 6th Floor, Fairmont House, No.8 Cotton Tree Drive,
Central, Hong Kong
Report Number : RA221208-60105E-RF-00
FCC ID: 2A62O-PDT015V

Test Standard (s)

FCC PART 15.231

Sample Description

Product Type: Remote Controller
Model No.: PDT-015-15
Multiple Model(s) No.: PDT-015-XX
Trade Mark: N/A
Date Received: 2022/12/08
Report Date: 2022/12/21

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Roger Ling

Candy Li

Roger Ling
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST AND DETAILS	9
FCC §1.1307 (B) & §2.1093 – RF EXPOSURE.....	10
APPLICABLE STANDARD	10
TEST RESULT:	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.231(A) (1) - DEACTIVATION TESTING.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221208-60105E-RF-00	Original Report	2022/12/21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Remote Controller
Tested Model	PDT-015-15
Multiple Models	PDT-015-XX (model difference see product declaration letter of similarity)
Frequency Range	433.92MHz
Modulation Technique	ASK
E-field strength	63.75dBuV/m@3m
Antenna Specification*	-9.78dBi (provided by the applicant)
Voltage Range	DC 3V From Battery
Sample number	1ULM-1(for PDT-015-15), 1ULM-2(for PDT-015-14), 1ULM-3(for PDT-015-13), 1ULM-4(for PDT-015-12), 1ULM-5(for PDT-015-11), 1ULM-6(for PDT-015-10), 1ULM-7(for PDT-015-09), 1ULM-8(for PDT-015-08), 1ULM-9(for PDT-015-07), 1ULM-10(for PDT-015-06), 1ULM-11(for PDT-015-05), 1ULM-12(for PDT-015-04), 1ULM-13(for PDT-015-03), 1ULM-14(for PDT-015-02), 1ULM-15(for PDT-015-01) (Assigned by ATC)
Sample/EUT Status	Good condition
Note: All models have same hardware version and same button position has the same functions, the EMC performance and the function of all models are the same, the model PDT-015-15 with 15 keys is the most complicate function model, so model PDT-015-15 was select to test.	

Objective

All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Note: According to the manufacturer, all keys of the device trigger same RF parameters. The EUT have 15 keys, pre-scan all keys, the 'S3' key (detail refer EUT photo) has the maximum fundamental level and the worst case duty cycle factor, so it's the worst case which select to test.

Special Accessories

No special accessories was used

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For radiated emission

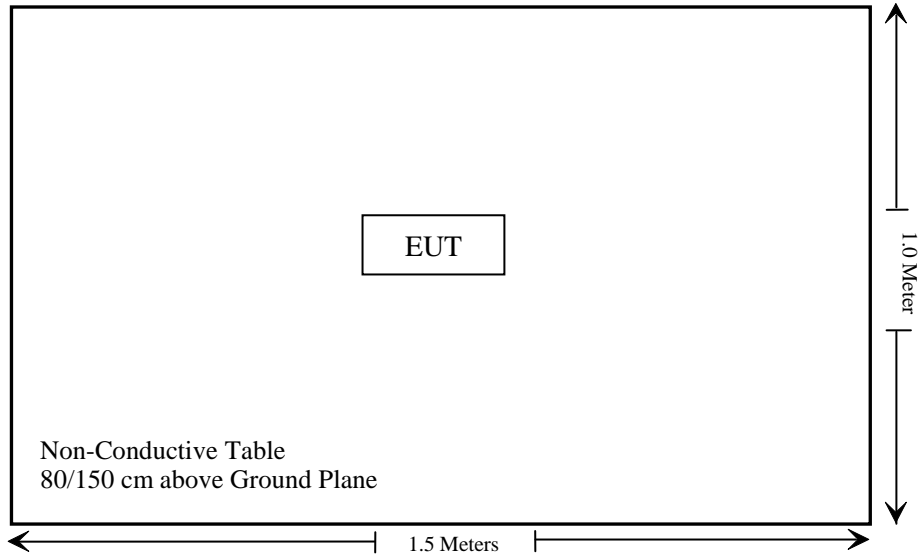

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 (b) & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231(b)	Radiated Emissions	Compliant
§15.231 (c)	20dB Emission Bandwidth	Compliant
§15.231 (a) (1)	Deactivation	Compliant

Not Applicable: The EUT is powered by battery only.

TEST EQUIPMENT LIST AND DETAILS

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 – 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Test Result:

For worst case:

Mode	Frequency	Maximum ERP		1-mW test Exemption
	(MHz)	(dBm)	(mW)	
SRD	433.92	-33.60	0.0004	Yes

Note 1: use the maximum E-field strength(63.75dBuV/m) for the RF exposure evaluation

Note 2: $E(\text{dBuV/m}) = \text{EIRP}(\text{dBm}) - 95.2$ for distance 3m
so the $\text{EIRP} = 63.75\text{dBuV/m} - 95.2 = -31.45\text{dBm}$

Note 3: $\text{EIRP}(\text{dBm}) = \text{ERP} + 2.15\text{dBi}$
so the $\text{ERP} = -31.45\text{dBm} - 2.15\text{dBi} = -33.60\text{dBm}$

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached. And the antenna gain is -9.78 dBi; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS

Applicable Standard

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250


*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

EUT Setup

Below 1 GHz:

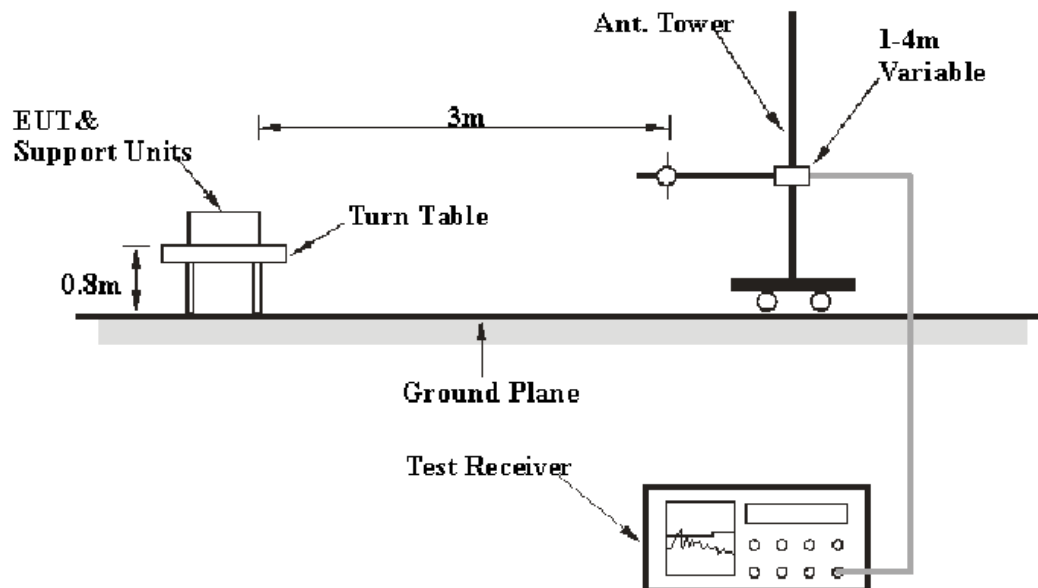

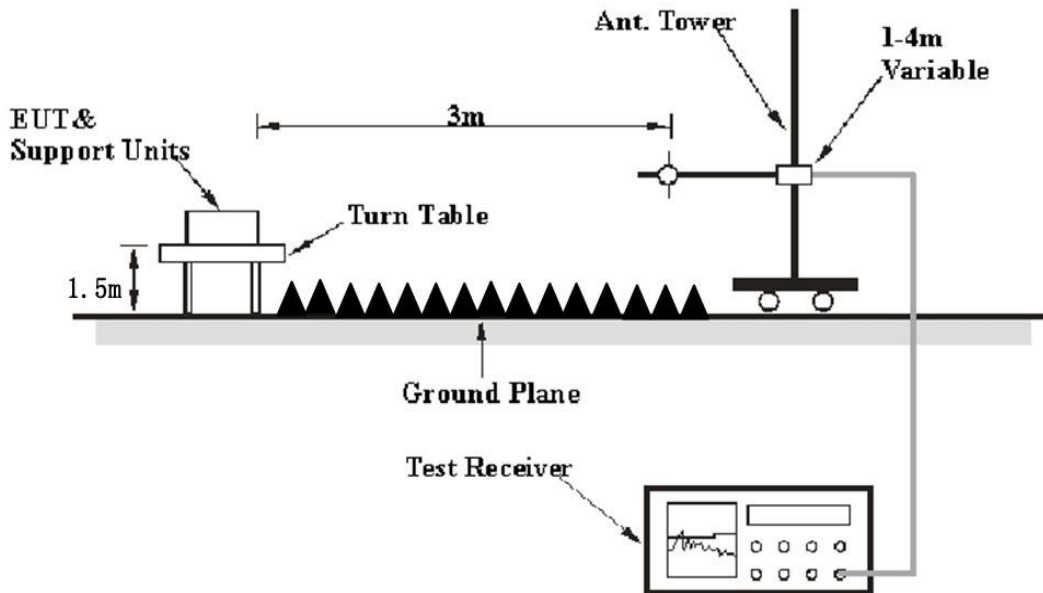Above 1 GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	PK
Above 1 GHz	1 MHz	3 MHz	/	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	20.3~24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Jason Liu on 2022-12-19 for below 1GHz, Jeff Jiang from 2022-12-12 to 2022-12-20 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz – 1 GHz:

Note: When the test result of peak was less than the limit of QP more than 6dB, just the peak value was recorded.


Horizontal

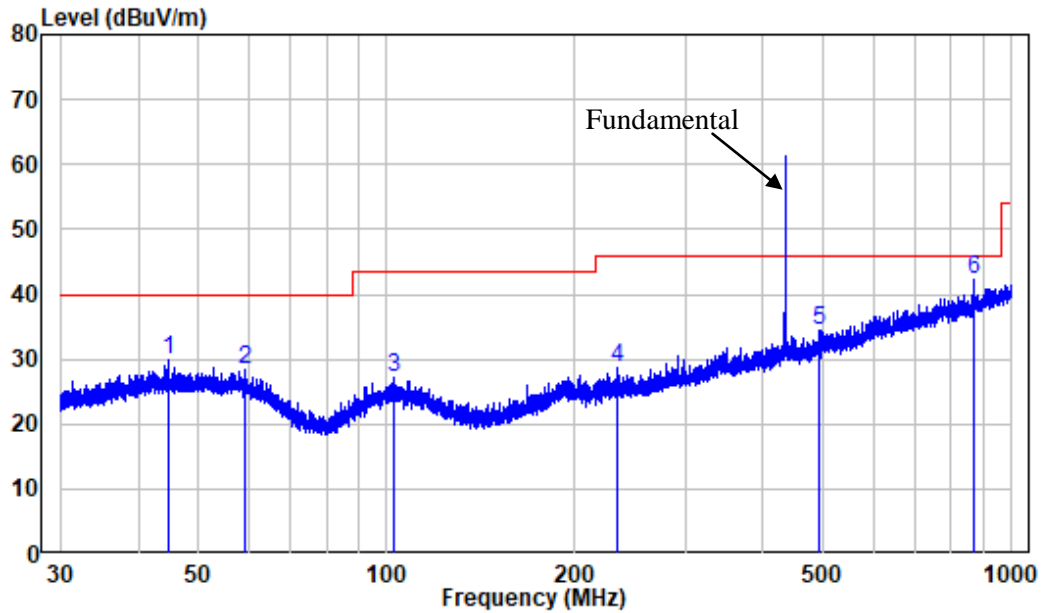

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA221208-60105E-RF
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.665	-9.92	39.90	29.98	40.00	-10.02	Peak
2	59.155	-10.32	38.66	28.34	40.00	-11.66	Peak
3	102.764	-11.64	38.83	27.19	43.50	-16.31	Peak
4	233.963	-10.99	39.56	28.57	46.00	-17.43	Peak
5	493.117	-4.55	38.96	34.41	46.00	-11.59	Peak
6	867.988	0.86	41.33	42.19	60.83	-18.64	Peak

Vertical

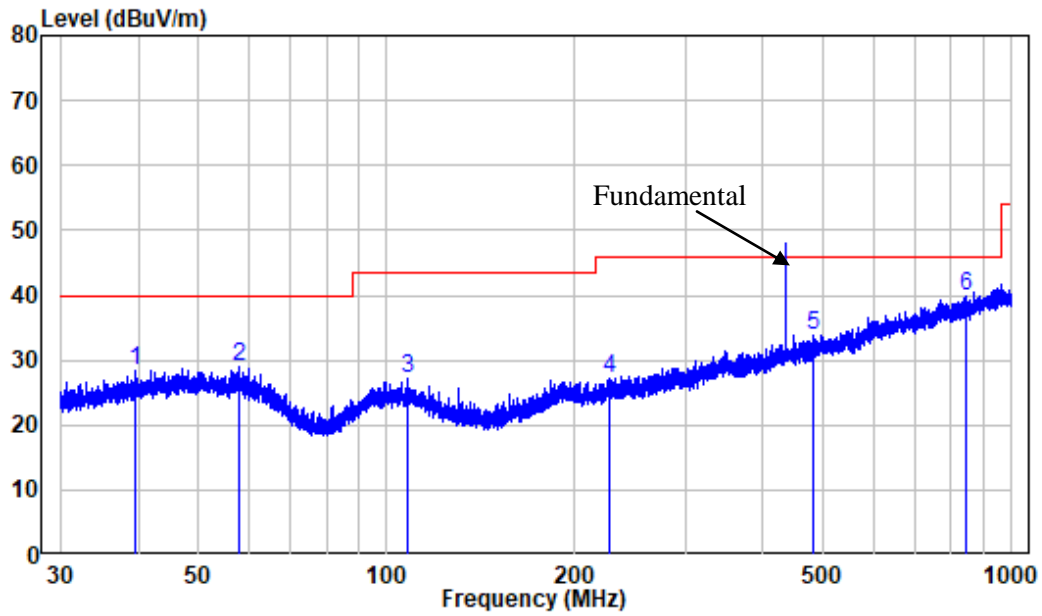

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA221208-60105E-RF
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.558	-10.45	38.84	28.39	40.00	-11.61	Peak
2	58.076	-9.93	39.06	29.13	40.00	-10.87	Peak
3	107.888	-11.99	39.18	27.19	43.50	-16.31	Peak
4	227.093	-11.20	38.28	27.08	46.00	-18.92	Peak
5	482.427	-4.94	38.88	33.94	46.00	-12.06	Peak
6	842.868	0.36	39.38	39.74	46.00	-6.26	Peak

Fundamental:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/AV		Height (m)	Polar (H/V)				
433.92MHz									
433.92	69.47	PK	234	1.3	H	-5.72	63.75	80.83	-17.08
433.92	56.04	PK	168	1.6	V	-5.72	50.32	80.83	-30.51

Note: the peak value can meet the limit of the QP value.

1 GHz - 5 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/AV		Height (m)	Polar (H/V)				
433.92MHz									
1301.76	67.56	PK	105	1.3	H	-10.20	57.36	74	-16.64
1301.76	56.22	PK	84	1.1	V	-10.20	46.02	74	-27.98
1735.68	65.38	PK	178	1.2	H	-8.85	56.53	80.83	-24.30
1735.68	52.31	PK	93	1.5	V	-8.85	43.46	80.83	-37.37
2169.60	61.48	PK	87	1.4	H	-7.22	54.26	80.83	-26.57
2169.60	55.22	PK	35	1.6	V	-7.22	48.00	80.83	-32.83

Field Strength of Average Emission							
Frequency (MHz)	Peak Measurement @3m (dB μ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.231(b)		
					Limit (dB μ V/m)	Margin (dB)	Comment
1301.76	57.36	H	-5.49	51.87	54	-2.13	Spurious
1301.76	46.02	V	-5.49	40.53	54	-13.47	Spurious
1735.68	56.53	H	-5.49	51.04	60.83	-9.79	Spurious
1735.68	43.46	V	-5.49	37.97	60.83	-22.86	Spurious
2169.60	54.26	H	-5.49	48.77	60.83	-12.06	Spurious
2169.60	48.00	V	-5.49	42.51	60.83	-18.32	Spurious

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor

Margin = Corr. Amplitude -Limit

Ave. = PK + 20*log(Duty Cycle)

Duty Cycle:

The worst case as below:

$$\text{Ton1} = 33 * 1.014\text{ms} = 33.462\text{ms}$$


$$\text{Ton2} = 2 * 9.844\text{ms} = 19.688\text{ms}$$

$$\text{Tp} = 100 \text{ ms}$$

$$\text{Duty cycle} = \text{Ton}/\text{Tp} = (\text{Ton1} + \text{Ton2})/100 = 0.5315$$


$$\text{Duty Cycle Corrected Factor} = 20\lg(\text{Duty cycle}) = 20\lg(0.5315) = -5.49$$

Duty Cycle

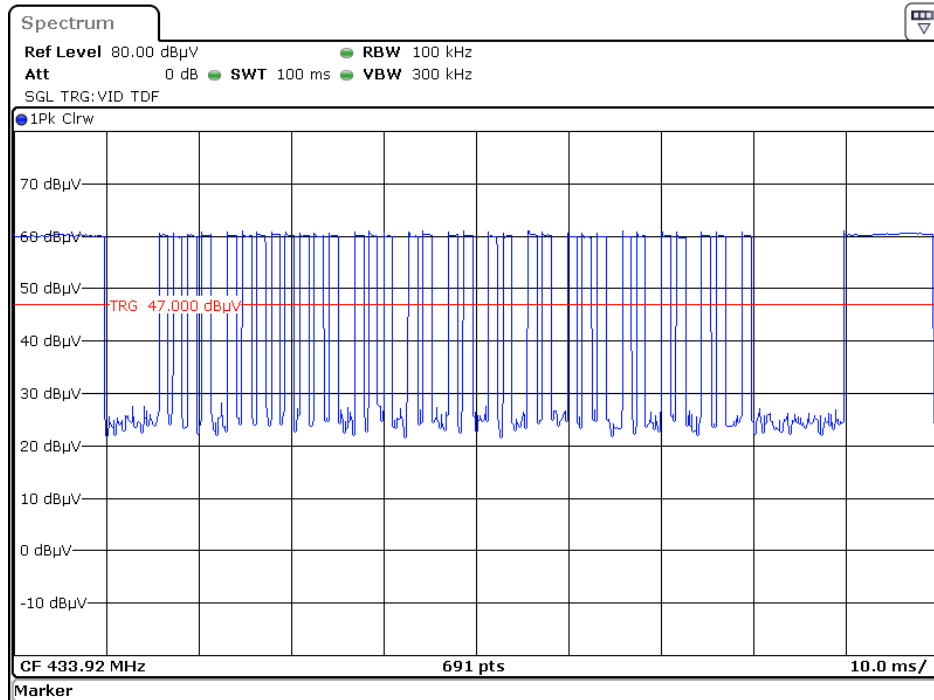


Date: 20.DEC.2022 13:36:16

Pulse 1

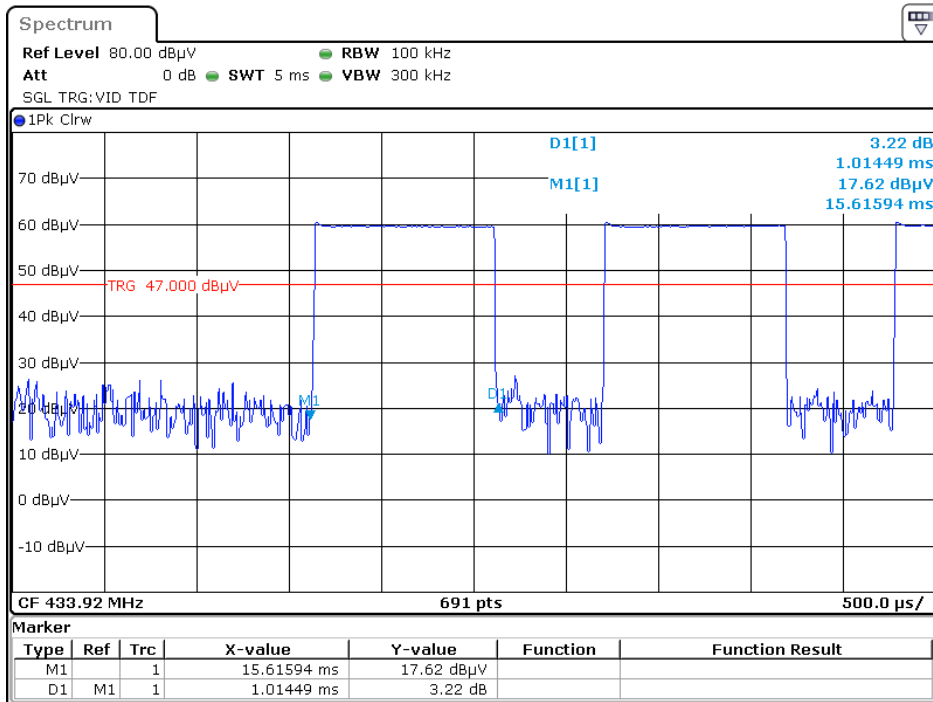

Date: 20.DEC.2022 13:40:01


Pulse 2

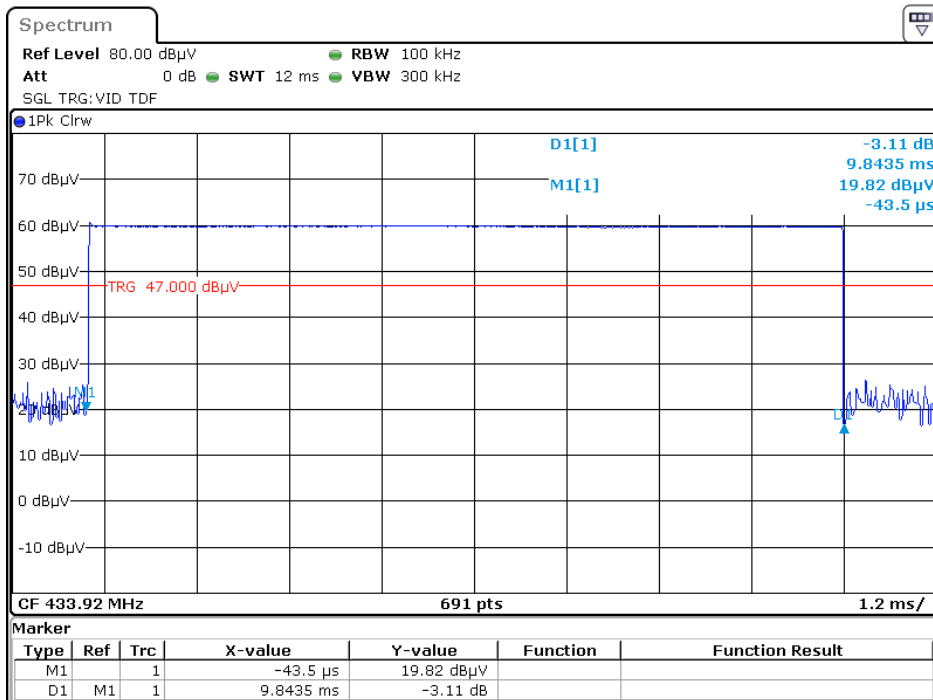


Date: 20.DEC.2022 13:37:36

1 GHz - 5 GHz:

Pre-scan-Horizontal

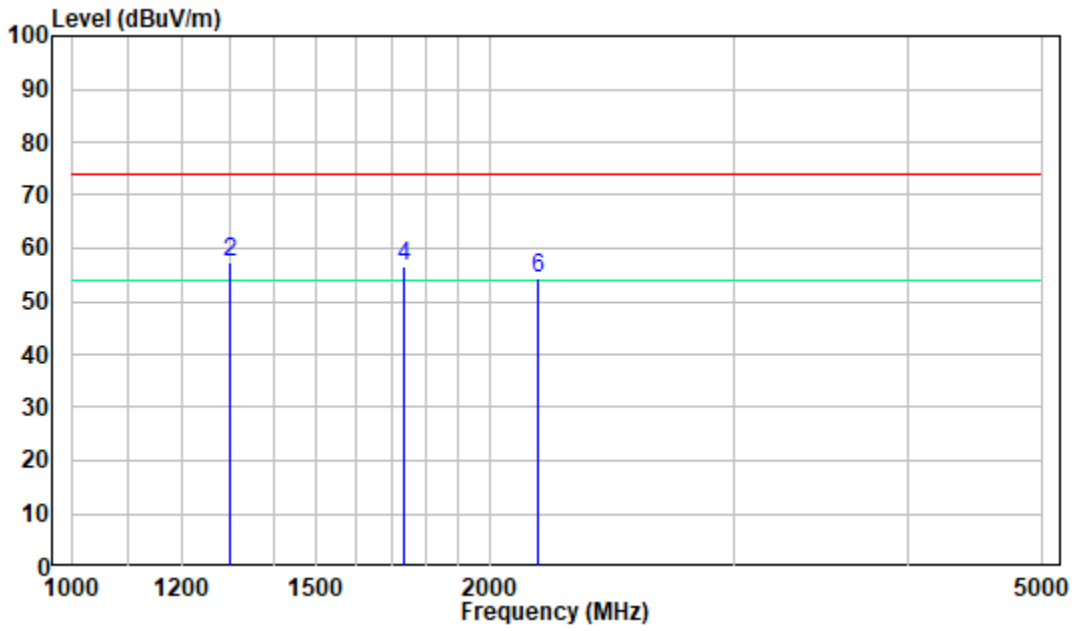

Pre-scan - Vertical

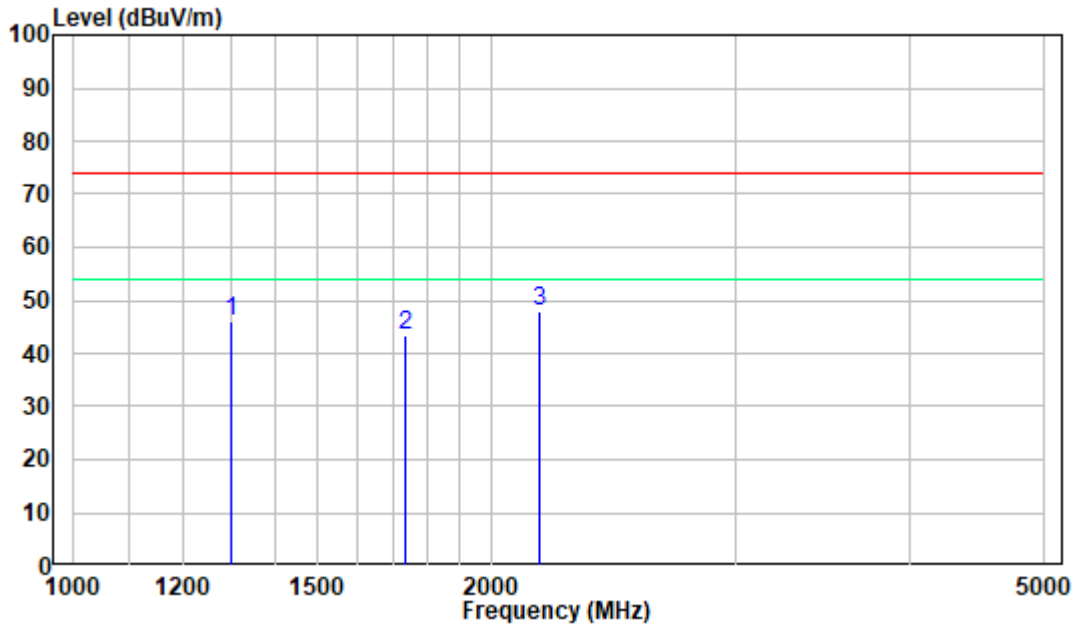

FCC §15.231(a) (1) - DEACTIVATION TESTING

Applicable Standard

Per FCC §15.231(a) (1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100kHz/ VBW=300kHz/ Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

Test Data


Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Zeki Ma on 2022-12-20.

Test mode: Transmitting

Test Result: Compliant. This product will cease transmission within 5 seconds after activation. Please refer to following plots.

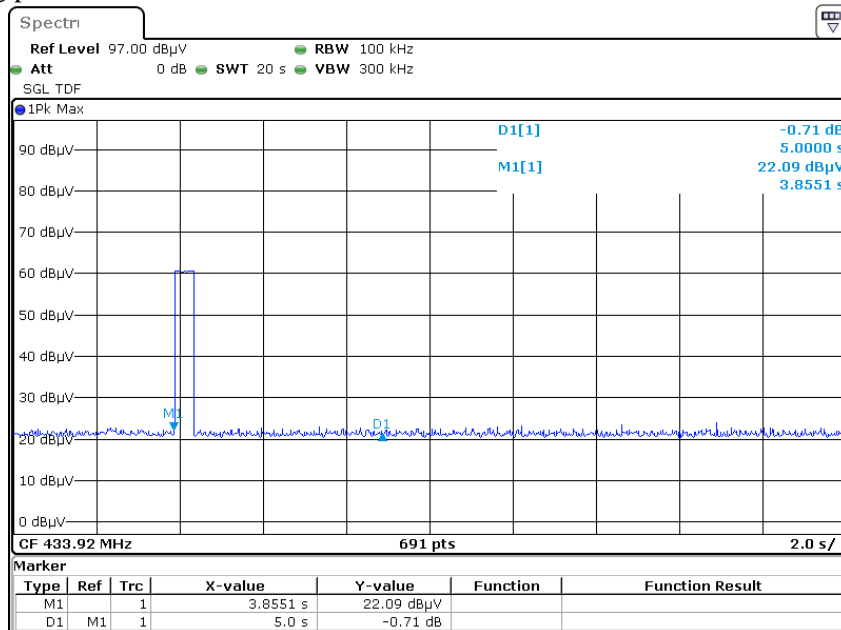

Date: 20.DEC.2022 18:09:59

FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Procedure

The EUT is setting to the transmit mode, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Zeki Ma on 2022-12-20.

Test Mode: Transmitting

Please refer to following table and plots.

Channel Frequency (MHz)	20dB Emission Bandwidth (kHz)	Limit (kHz)
433.92	3.47	<1084.8

20 dB Emission Bandwidth

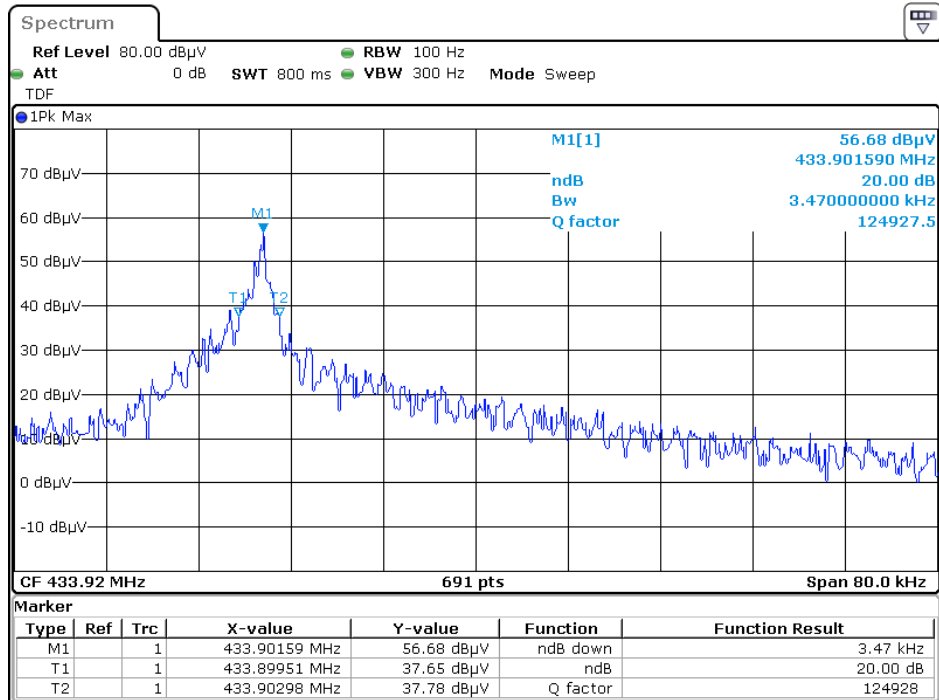

Date: 20.DEC.2022 18:16:26

******* END OF REPORT *******