

TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

TEST REPORT:

| | | |
|------|----------|--|
| PAGE | 1..... | COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR. |
| PAGE | 2..... | TECHNICAL DESCRIPTION CONTINUED |
| PAGE | 3..... | RF POWER OUTPUT |
| PAGE | 4..... | MODULATION CHARACTERISTICS |
| PAGE | 5-6.... | OCCUPIED BANDWIDTH |
| PAGE | 7..... | SPURIOUS EMISSIONS AT ANTENNA TERMINALS |
| PAGE | 8..... | FIELD STRENGTH OF SPURIOUS EMISSIONS |
| PAGE | 9..... | METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS |
| PAGE | 10..... | FREQUENCY STABILITY |
| PAGE | 11-12... | TRANSIENT FREQUENCY STABILITY |
| PAGE | 13..... | CERTIFICATION OF TECHNICAL DATA |
| PAGE | 14..... | LIST OF TEST EQUIPMENT |

EXHIBITS CONTAINING:

| | | |
|---------|------------|--|
| EXHIBIT | 1..... | POWER OF ATTORNEY LETTER |
| EXHIBIT | 2..... | FCC ID LABEL SAMPLE |
| EXHIBIT | 3..... | SKETCH OF FCC ID LABEL LOCATION |
| EXHIBIT | 4A-4B.... | EXTERNAL FRONT VIEW PHOTOGRAPHS |
| EXHIBIT | 4C-4D.... | EXTERNAL REAR VIEW PHOTOGRAPHS |
| EXHIBIT | 4E..... | EXTERNAL TOP VIEW PHOTOGRAPH |
| EXHIBIT | 4F..... | INTERNAL COMPONENT SIDE PHOTOGRAPH |
| EXHIBIT | 4G..... | INTERNAL SOLDER SIDE PHOTOGRAPH |
| EXHIBIT | 5..... | BLOCK DIAGRAM |
| EXHIBIT | 6..... | PARTS LIST |
| EXHIBIT | 7..... | SCHEMATICS |
| EXHIBIT | 8A-8D.... | USER'S MANUAL |
| EXHIBIT | 9A-9C.... | CIRCUIT DESCRIPTION |
| EXHIBIT | 10A-10C... | TUNING PROCEDURE |
| EXHIBIT | 11..... | AUDIO FREQUENCY RESPONSE GRAPH |
| EXHIBIT | 12A..... | MODULATION LIMITING -25 kHz CH SPACING -300 Hz |
| EXHIBIT | 12B..... | MODULATION LIMITING -25 kHz CH SPACING -1000 Hz |
| EXHIBIT | 12C..... | MODULATION LIMITING -25 kHz CH SPACING -3000 Hz |
| EXHIBIT | 12D..... | MODULATION LIMITING -12.5kHz CH SPACING -300 Hz |
| EXHIBIT | 12E..... | MODULATION LIMITING -12.5kHz CH SPACING -1000 Hz |
| EXHIBIT | 12F..... | MODULATION LIMITING -12.5kHz CH SPACING -3000 Hz |
| EXHIBIT | 13..... | AUDIO LOW PASS FILTER GRAPH |
| EXHIBIT | 14..... | OCCUPIED BANDWIDTH CW PLOT-25KHz CH |
| EXHIBIT | 15..... | OCCUPIED BANDWIDTH 2.5K TONE-25KHz PLOT |
| EXHIBIT | 16..... | OCCUPIED BANDWIDTH CW PLOT-12.5KHz CH |
| EXHIBIT | 17..... | OCCUPIED BANDWIDTH 2.5K TONE-12.5KHz PLOT |
| EXHIBIT | 18A-18D... | TRANSIENT FREQUENCY RESPONSE PLOTS |

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE: TABLE OF CONTENTS

GENERAL_INFORMATION_REQUIRED
FOR_TYPE_ACCEPTANCE

2.983 (a,b,c) YAESU MUSEN CO., LTD. will sell the
MODEL NO. K66VX-210V VHF transmitter in quantity,
for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL_DESCRIPTION

(1) Type of Emission: 12K8F3E For 25KHz
9K6F3E For 12.5KHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 3.4\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(4.2k)(1) = 6.0K + 8.4K = 14.4K$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.8\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(1.8K)(1) = 6.0K + 3.6K = 9.6K$$

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 148-174 MHz

(3) Power Range and Controls: There are NO user Power
controls.

(4) Maximum Output Power Rating:
5.0 & 1.0 Watts ,
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

POWER INPUT

FINAL AMPLIFIER ONLY

$$V_{ce} = 7.2 \text{ Volts}$$

$$I_{ce} = 1.50A.$$

$$P_{in} = 10.8 \text{ Watts}$$

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 1

- (6) Function of each electron tube or semiconductor device or other active circuit device:
- SEE EXHIBIT 6.
- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 7. The block diagram is included as EXHIBIT 5.
- (8) Instruction book. The instruction manual is included as EXHIBIT #8.
- (9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #8.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.
- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
- In addition to the interstage filtering the multi-section low pass filter made up of C1004, L1001, C1005, L1002, C1010, C1014 & C1015.
- Limiting Modulation:
The transmitter audio limiting circuitry is contained in the loop filter IC01.
- Limiting Power: There is no provision for limiting power.
- (12) Digital modulation. This unit does NOT use digital modulation.
- 2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF_power_output.


RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 13.6VDC, and the transmitter properly adjusted the RF output measures:

POWER

INPUT POWER: (13.6V)(13.2A) = 179 Watts

OUTPUT POWER: 50.0 Watts Efficiency: 28%

METHOD OF MEASURING RF POWER OUTPUT

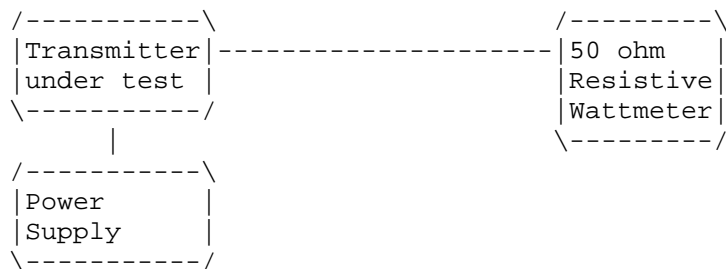

2.987(a) Voice Modulation_characteristics:

(a) AUDIO_FREQUENCY_RESPONSE See the EXHIBIT #11.

2.987(a) AUDIO_LOW_PASS_FILTER

The audio low pass filter is included and the plot is shown as EXHIBIT #13. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.

2.987(b) Audio_input_versus_modulation A plot of the audio input versus deviation is shown in in EXHIBIT #12A-12F.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 3

2.989(c) Occupied_bandwidth:

90.210(b,)

Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + \log(P)$ dB.

90.210(d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;


- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625kHz removed from f_{P0} : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd-2.88kHz)dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz $\log(P)$ or 70dB, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

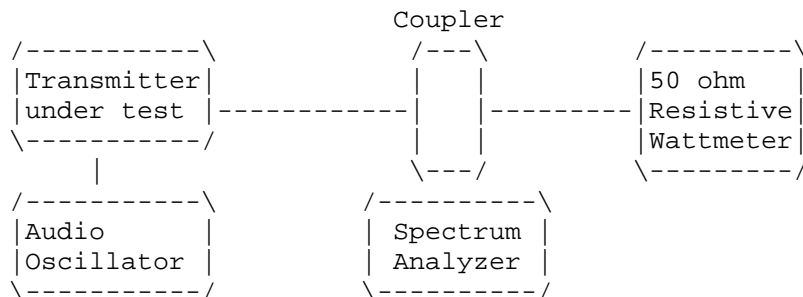

2.991 Spurious_emissions_at_antenna_terminals(conducted):

Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

APPLICANT: YAESU MUSEN CO., LTD.


FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 4

2.991 Continued Spurious_Emissions_at_the_Antenna_Terminals:
90.210(d)(3)

Method of Measuring Conducted Spurious Emissions

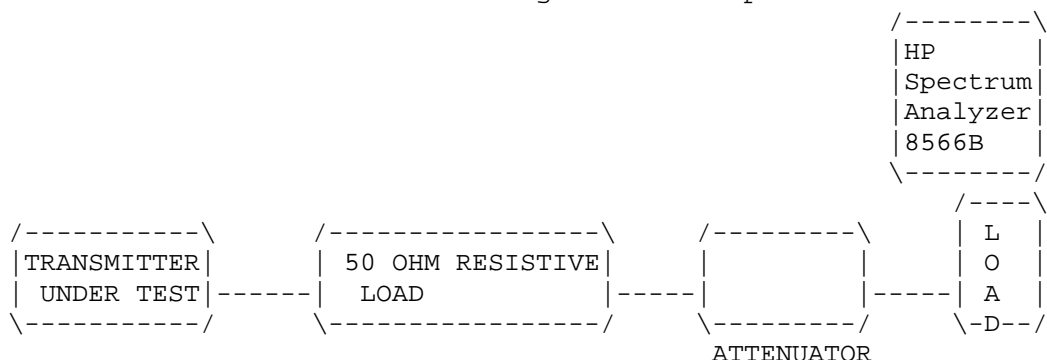

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

For 25KHz $43 + 10\log(5.1) = 43 + 7.0 = 50.1\text{dB}$

For 12.5KHz $50 + 10\log(5.0) = 50 + 7.0 = 57.0$

| | EMISSION FREQUENCY MHz | dB BELOW CARRIER |
|------------|------------------------------|---------------------|
| HIGH POWER | 160.05 | 00.0 |
| | 320.10 | -74.7 |
| | 480.15 | -105.6 |
| | 640.20 | -94.0 |
| | 800.25 | -79.1 |
| | 960.30 | -84.1 |
| | 1120.35 | -99.2 |
| | 1280.40 | -98.2 |
| | 1440.45 | -88.5 |
| | 1600.50 | -86.4 |
| LOW POWER | 160.05 | 00.0 |
| | 320.10 | -74.7 |
| | 480.15 | -105.6 |
| | 640.20 | -94.0 |
| | 800.25 | -79.1 |
| | 960.30 | -84.1 |
| | 1120.35 | -99.2 |
| | 1280.40 | -98.2 |
| | 1440.45 | -88.5 |
| | 1600.50 | -86.4 |

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY ROAD, NEWBERRY FLORIDA 32669.

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 5

2.993(a)(b) Field_strength_of_spurious_emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 50 +10log(Po) dB below the mean power output of the transmitter or 70dB, which ever is the lessor.

$$50 + 10\log(50) = 67.0 \text{ dB}$$

| EMISSION | METER READING @ 3 | COAX | | FIELD | | | |
|------------|-------------------------|------|-------|----------|-------|--------|-----|
| FREQUENCY | METERS | LOSS | ACF | STRENGTH | ATT. | MARGIN | |
| MHz | dBuV | dB | dB | dBuV/m | dB | dB | ANT |
| HIGH POWER | | | | | | | |
| 160.05 | 116.40 | 0.90 | 16.61 | 133.91 | 0.0 | 0.0 | H |
| 320.07 | 40.90 | 1.40 | 14.98 | 57.28 | 76.63 | 19.30 | H |
| 480.20 | 39.10 | 1.60 | 18.84 | 59.54 | 74.37 | 17.37 | H |
| 640.20 | 43.80 | 1.60 | 20.98 | 66.38 | 67.53 | 10.53 | H |
| 800.15 | 27.10 | 2.90 | 22.01 | 52.01 | 81.90 | 24.90 | H |
| 960.17 | 31.30 | 2.90 | 24.71 | 58.91 | 75.00 | 18.00 | H |
| 1120.20 | 22.50 | 1.00 | 24.48 | 47.98 | 85.93 | 28.93 | H |
| 1280.20 | 28.10 | 1.00 | 25.12 | 54.22 | 79.05 | 22.05 | V |
| 1440.20 | 28.10 | 1.00 | 25.76 | 54.86 | 79.05 | 22.05 | V |
| 1600.28 | 24.80 | 1.00 | 26.40 | 52.20 | 81.71 | 24.71 | V |
| LOW POWER | | | | | | | |
| 160.05 | 103.60 | 0.90 | 16.61 | 121.11 | 0.0 | 0.0 | H |
| 320.07 | 41.90 | 1.40 | 14.98 | 58.28 | 62.83 | 12.83 | H |
| 480.20 | 40.20 | 1.60 | 18.84 | 60.64 | 60.47 | 10.47 | H |
| 640.20 | 45.90 | 1.60 | 20.98 | 67.48 | 53.63 | 3.63 | H |
| 800.15 | 27.10 | 2.90 | 22.01 | 52.01 | 69.10 | 19.10 | H |
| 960.17 | 31.30 | 2.90 | 24.71 | 58.91 | 62.20 | 12.20 | H |
| 1120.20 | 22.50 | 1.00 | 24.48 | 47.98 | 73.13 | 23.13 | H |
| 1280.20 | 28.10 | 1.00 | 25.12 | 54.22 | 66.89 | 16.89 | V |
| 1440.20 | 30.30 | 1.00 | 25.76 | 57.06 | 64.05 | 14.05 | V |
| 1600.28 | 26.90 | 1.00 | 26.40 | 54.30 | 66.81 | 16.81 | V |

METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V


REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 6

2.993(a)(b)

2.993(a)(b) Continued Field_strength_of_spurious_emissions:

Method of Measuring Radiated Spurious Emissions

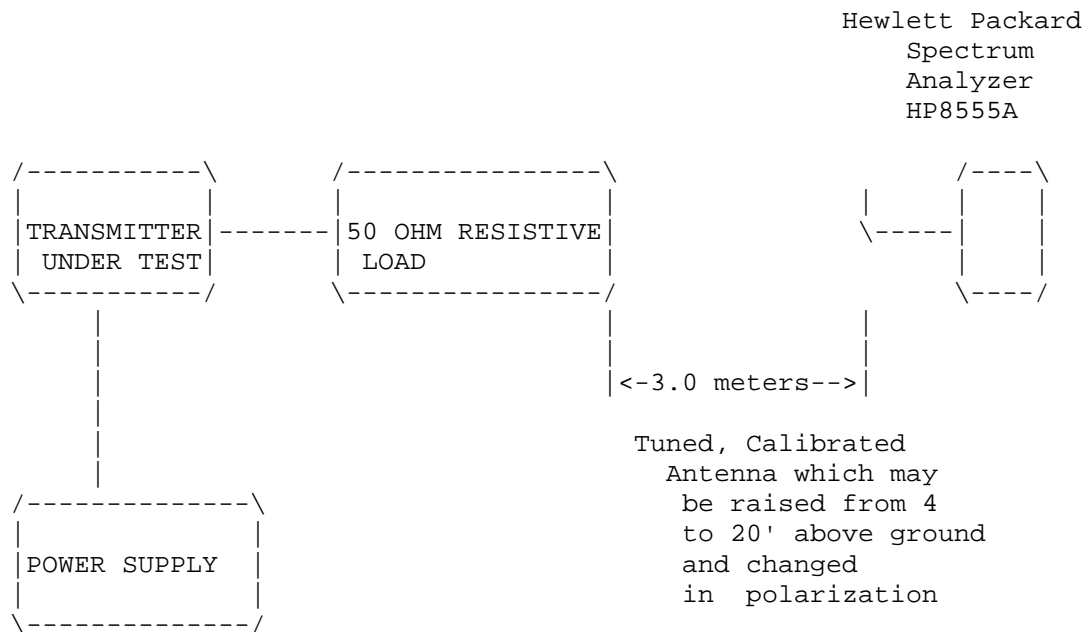

Equipment placed 4' above ground
on a rotatable platform.

2.995(a)(b)(d) Frequency_stability:
90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit, for 25KHz spacing & 0.00025% for 12.5KHz spacing and 0.0001% for 6.25KHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at minus 25% of the battery voltage of 5.4VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 160.025 000MHz

| TEMPERATURE_C | FREQUENCY_MHz | PPM |
|----------------|---------------|-------|
| REFERENCE_____ | 160.025 000 | 00.0 |
| -30_____ | 160.025 070 | +0.43 |
| -20_____ | 160.025 150 | +0.94 |
| -10_____ | 160.025 210 | +1.31 |
| 0_____ | 160.025 200 | +1.25 |
| +10_____ | 160.025 160 | 1.00 |
| +20_____ | 160.025 120 | +0.75 |
| +30_____ | 160.025 070 | +0.43 |
| +40_____ | 160.024 990 | -0.06 |
| +50_____ | 160.024 760 | -1.50 |

20oC Battery End-Point 5.6VDC 160.024 760 -1.50

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.50 to 1.31 ppm. The maximum frequency variation over the voltage range was -1.50 ppm.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 8

2.995(a)(b)(d) Frequency_stability:
90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

| Time Interval | Maximum Frequency | Portable Radios 150-174Mhz |
|---------------|-------------------|----------------------------|
| t1 | +12.5kHz | 5.0ms |
| t2 | +6.25kHz | 20.0ms |
| t3,t4 | +12.5kHz | 5.0ms |

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.


APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 9

2.995(a)(b)(d) Frequency_stability:
90.214 Transient Frequency Behavior
(Continued)

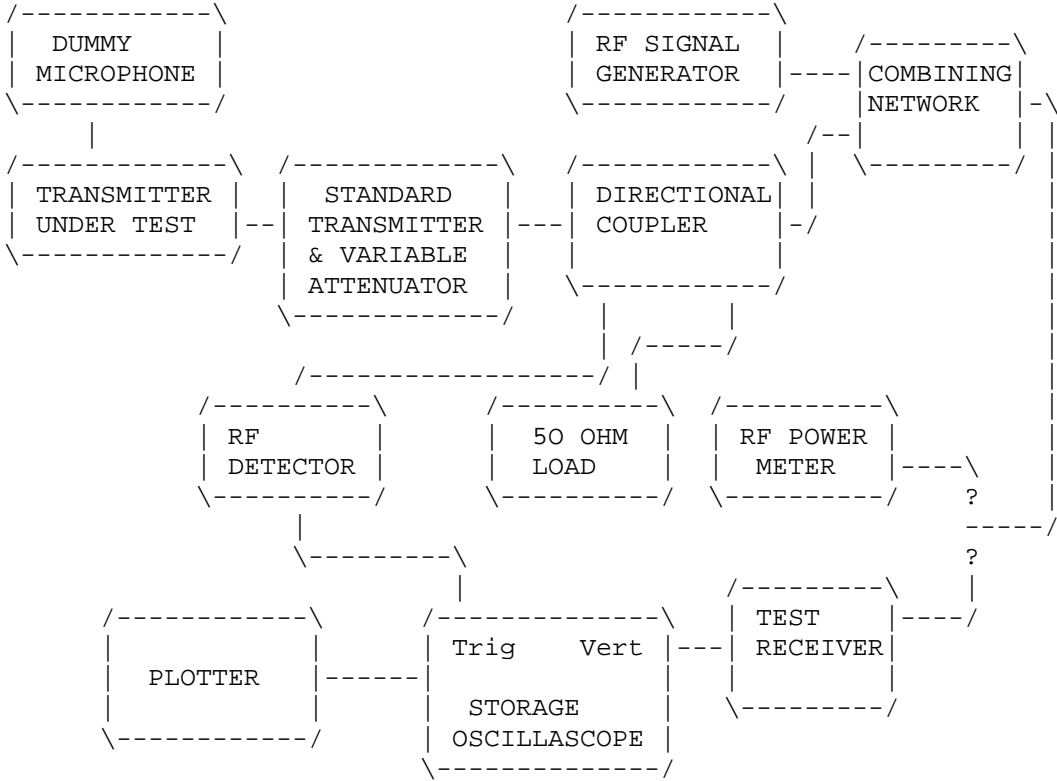

APPLICANT: YAESU MUSEN CO., LTD.
FCC ID: K66VX-210V
REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT
PAGE #: 10

- 2.983(f) Photo_or_Drawing_of_Label:
See Page 2.
- 2.983(g) Photos_of_Equipment:
See Pages 4A-4G.
- 2.999 Measurement_Procedures_for_Type_Acceptance:

Measurement techniques have been in accordance with EIA specifications and the FCC requirements.
- 2.909 Certification_of_Technical_Data_by_Engineers

We, the undersigned, certify that the enclosed measurements and enclosed data are true and correct.

S.S. Sanders
Engineer

LIST_OF_TEST_EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/ preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP 8449B - OPT H02 Cal. 6/26/98
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Eaton Biconnical Antenna Model 94455-1
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 10/30/98
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal. 11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-210V

REPORT #: F:\CUS\Y\YAE\YAE182\YAE182A9.RPT

PAGE #: 11