

BT MINI


PREMIUM ESSENTIAL INTERCOM

ENGLISH



ON/OFF

KEY DESCRIPTION

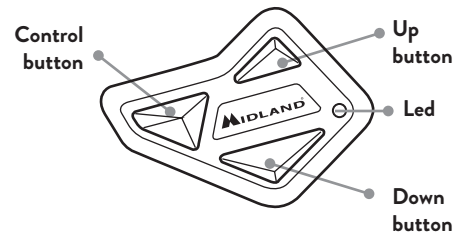


SWITCH ON

Press for 3 seconds





 Flashes


 Power on

SWITCH OFF

Press together for 3 seconds




 Flashes

 Power off

PAIRINGS

PAIRINGS DESCRIPTION

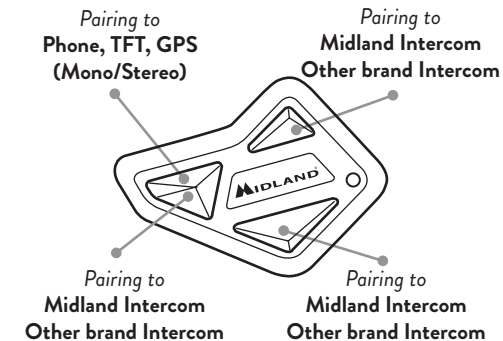



Note: you can pair in total up to 3 intercom devices (Midland and/or other brands). The pairing on one button overwrites the previous one.


PHONE, TFT, GPS PAIRING


Status: UNIT OFF


Press for 5 seconds



 Phone pairing







 Flashes

 Select BT Mini on phone, GPS or TFT

 Pairing successful

MIDLAND INTERCOM PAIRING

Status: unit on


	
Press for 7 seconds	Press for 7 seconds
 Flashes	 Flashes
 Intercom pairing	 Intercom pairing
Pairing successful	


Note: By following the same procedure, it is possible to pair two further devices to the Up/Down buttons.


RESET BLUETOOTH PAIRINGS

Status: unit on

Press together for 7 seconds







 Power off

 Confirmation (3 sec.)

OTHER BRAND INTERCOM PAIRING (UNIVERSAL INTERCOM)

Status: unit on

	
Press for 7 seconds	
 Flashes	Follow the procedure to pair with a phone
 Intercom pairing	
Pairing successful	


Note: By following the same procedure, it is possible to pair two further devices to the Up/Down buttons.

Frequency (GHz)	Max power (dBm)
2.402 - 2.480	8.890

INTERCOM

TO OPEN/CLOSE INTERCOM MANUALLY


Status: unit on and already paired

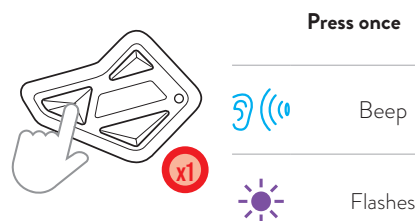

Note: to communicate with the other intercom paired to Up/Down keys, repeat the procedure on the correspondent buttons.

TO OPEN/CLOSE UNIVERSAL INTERCOM

Status: unit on and already paired

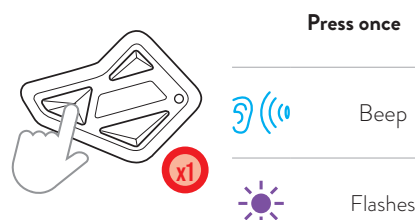

Note: to open/close the audio from a different brand device, use the voice call command (for some models, it is required to send the voice call twice).

Note: to communicate with the other intercom paired to Up/Down keys, repeat the procedure on the correspondent buttons.

PHONE


TO MAKE A CALL

Status: unit on and paired to a phone



TO ANSWER/END/REJECT A CALL

Status: All modes

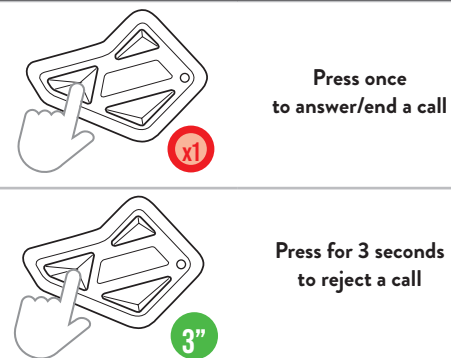


Note: if the Automatic Response is enabled, the phone automatically answers after 8 seconds.

MUSIC

PLAY/PAUSE

Status: Unit on and paired to a phone

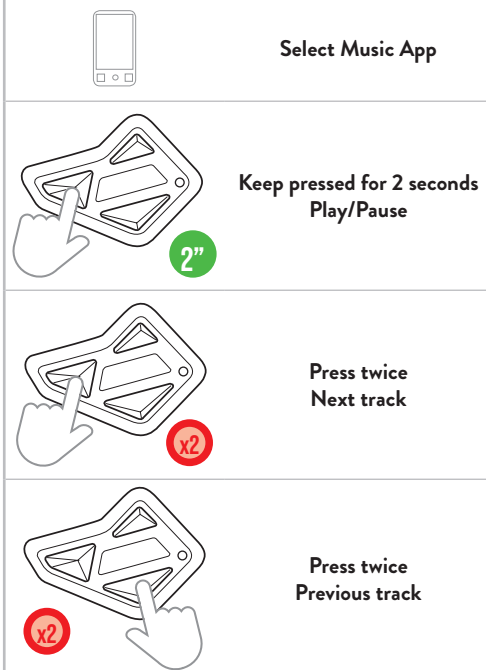


FCC RF Exposure requirements: The highest SAR value reported under this standard during product certification for use next to the head with the minimum separation distance of 0mm. This transmitter must not be collocated or operating in conjunction with any other antenna or transmitter.

This product is compliance to FCC RF Exposure requirements and refers to FCC website <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm> search for FCC ID: K6M-BTMINIQCC


VOLUME ADJUSTMENT

Status: while listening to an audio source (intercom, music, phone call).

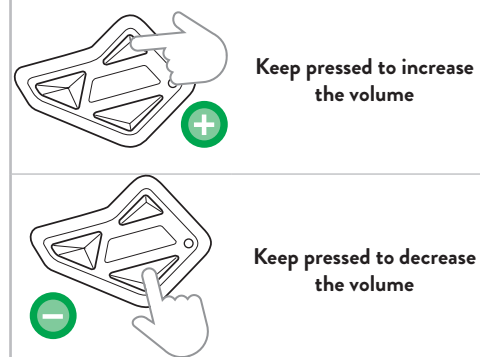

CHANGE LANGUAGE

Status: Unit on

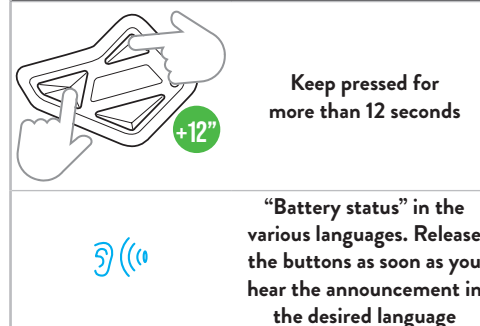

Go to midlandeuropa.com, download the full manual and software BT Updater.

Listen to your digital radio through BTPRO SetApp. Download from:



MIDLAND®

Prodotto o importato da/Produced or imported by: MIDLAND EUROPE srl Via. R.Sevardi 7 42124 Reggio Emilia - Italy. Prima dell'uso leggere attentamente le istruzioni - Read the instructions carefully before installation and use. Vertrieb durch: ALAN ELECTRONICS GmbH Daimlerstraße 1g - D 63303 Dreieich - Deutschland. Vor Benutzung Bedienungsanleitung beachten. Importado por: MIDLAND IBERIA, SA C/Cobalt, 48 - 08940 Cornellà de Llobregat, Barcelona - España. Antes de utilizar, lea atentamente el manual de uso. Distributed by: MotoDirect Limited Company Euro House, The Nursery, 1 Wincobank Way, South Normanton, Derbyshire. DE55 2FX - UK. Read the instructions carefully before installation and use. Distribuë par: Bihr S.A.S. - www.bihr.eu. Avant l'utilisation, lire les instructions.