

Ecovacs Home Service Robotics Co., Ltd.

EMC TEST REPORT

Report Type:

FCC Part 15B & ICES-003 EMC report

Model:

DDX19

REPORT NUMBER:

2403B0968SHA-005

ISSUE DATE:

April 1, 2024

DOCUMENT CONTROL NUMBER:

TTRF15b_V1 © 2018 Intertek



Applicant: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road,Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Manufacturer: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road,Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Factory 1: Ecovacs Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang
Street, Wuzhong District, Suzhou, Jiangsu, China

Factory 2: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang
Street, Wuzhong District, Suzhou, Jiangsu, China.

FCC ID: 2A64B-DDX19

IC: 28593- DDX19

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ICES-003 Issue 7 October 2020: Information Technology Equipment (Including Digital Apparatus) —Limits and Methods of Measurement.

PREPARED BY:

REVIEWED BY:



Project Engineer

Eric Li

Reviewer

Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 TEST ENVIRONMENT CONDITION:.....	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	11
3 RADIATED EMISSIONS	12
3.1 LIMIT	12
3.1.1 <i>Limits for radiated disturbance of class A device</i>	12
3.1.2 <i>Limits for radiated disturbance of class B device</i>	13
3.2 BLOCK DIAGRAM AND TEST SET UP	14
3.3 MEASUREMENT PROCEDURE	15
3.4 TEST RESULTS OF RADIATED EMISSIONS	16
4 POWER LINE CONDUCTED EMISSION	21
4.1 LIMIT	21
4.1.1 <i>Limits for conducted disturbance voltage at the mains ports of class A device</i>	21
4.1.2 <i>Limits for conducted disturbance voltage at the mains ports of class B device</i>	21
4.2 BLOCK DIAGRAM AND TEST SET UP	22
4.3 MEASUREMENT PROCEDURE	23
4.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	24
APPENDIX I: PHOTOGRAPH OF EQUIPMENT UNDER TEST	26

Revision History

Report No.	Version	Description	Issued Date
2403B0968SHA-005	Rev. 01	Initial issue of report	April 1, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Power line conducted emission	15.107	3.2.1	Pass
Radiated emission	15.109	3.2.2	Pass

Notes: 1: NA =Not Applicable

2: "*" means this test is no need and not performed within this report, and the result can refer to the related base report(s).

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Floor Cleaning Robot
Type/Model:	DDX19
Description of EUT:	The EUT is a Floor Cleaning Robot, it supports WIFI and Bluetooth functions, there are one model, we tested it and listed the worst results in this report.
Rating:	DC20V, 2A
Category of EUT:	Class B
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Highest operating frequency	< 2.5GHz
Software Version:	/
Hardware Version:	/
Sample Identification No.:	0240319-02-003
Sample received date:	2024.03.19
Date of test:	2024.03.20~2024.03.26

1.2 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)

ANSI C63.4 (2014)

ICES-003 Issue 7 October 2020

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency are specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Brand and Model	Description
1	Docking station	CH2358	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Power line conducted emission	24°C	54% RH
Radiated Emissions	25°C	53% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2024-12-07
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-19
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2024-07-17
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2024-06-05
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-22
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC6501	2024-09-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input checked="" type="checkbox"/>	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC 6402	2025-02-14
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2024-06-15
<input type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2024-12-07
<input type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2025-02-15
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2024-09-15
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
<input type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input checked="" type="checkbox"/>	Horn antenna	ETS	3116c	EC 5955	2024-07-22
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2025-03-07
<input type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2025-03-07
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2025-03-07
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2025-03-07
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2025-03-07
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2025-01-11
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2024-12-09

TEST REPORT

<input type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-06
<input type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2024-06-08
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-11
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2025-01-11
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
<input checked="" type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2024-07-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2024-08-28
<input type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6641	2024-08-28
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC6642	2024-08-28
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6643	2024-08-28
<input type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6644	2024-08-28
<input type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2024-08-16

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Radiated Emissions

Test result: Pass

3.1 Limit

3.1.1 Limits for radiated disturbance of class A device

FCC

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m
30 – 88	39
88 – 216	43.5
216 – 960	46.4
Above 960	49.5

Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.

IC

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0	50.0
88 ~ 216	43.5	54.0
216 ~ 230	46.4	56.9
230 ~ 960	47.0	57.0
960 ~ 1000	49.5	60.0

Note: The more stringent limit applies at transition frequencies.

Frequency (GHz)	Permitted limit in dB μ V/m (Peak) of Measurement Distance 3m	Permitted limit in dB μ V/m (Average) of Measurement Distance 3m
1 ~ F _M	80.0	60.0

Note: These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.

TEST REPORT

3.1.2 Limits for radiated disturbance of class B device

FCC

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
Above 960	54.0

Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.

IC

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	30.0	40.0
88 ~ 216	33.1	43.5
216 ~ 230	35.6	46.0
230 ~ 960	37.0	47.0
960 ~ 1000	43.5	54.0


Note: The more stringent limit applies at transition frequencies.

Frequency (GHz)	Permitted limit in dB μ V/m (Peak) of Measurement Distance 3m	Permitted limit in dB μ V/m (Average) of Measurement Distance 3m
1 ~ F _M	74.0	54.0


Note: These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.

3.2 Block diagram and test set up

For table top equipment

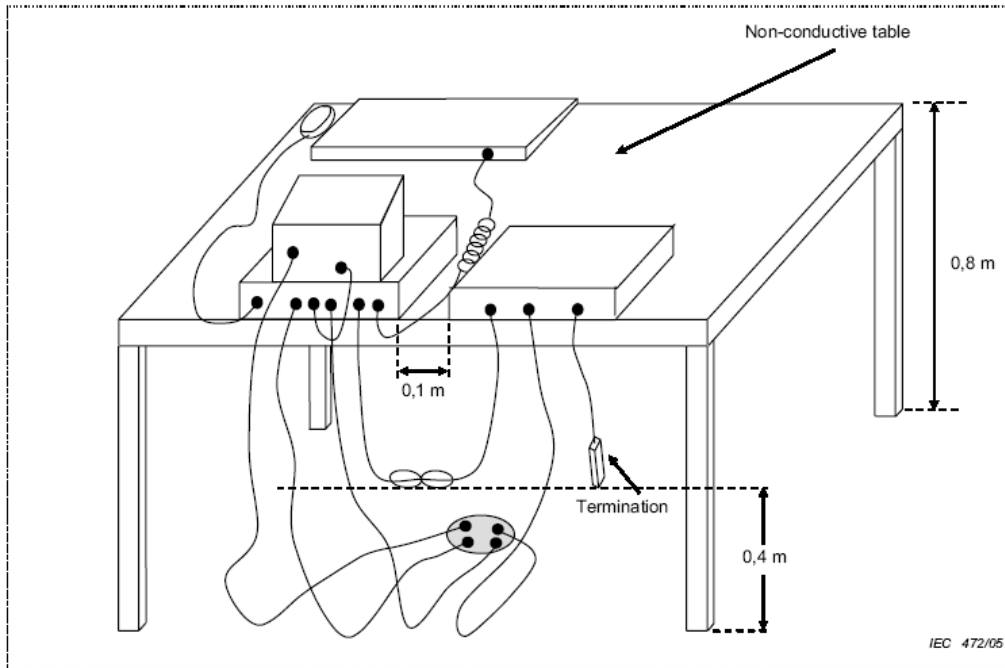

For floor standing equipment

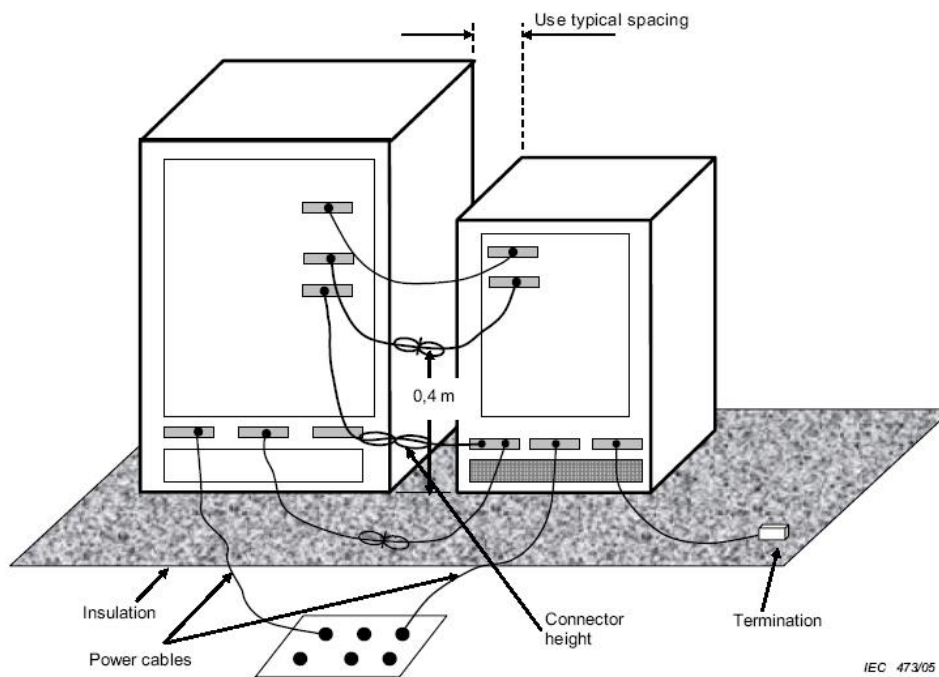

3.3 Measurement Procedure

The measurement was performed in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier (and high pass filter if necessary) is equipped just at the output terminal of the antenna.

The distance from EUT to receiving antenna is 3 meters.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.

EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.

The radiated emission was measured using the test receiver with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK)


Highest internal frequency (F _x)	Highest measured frequency F _M for radiated measurement	Measured Bandwidth
F _x ≤ 108 MHz	1 GHz	120kHz
108 MHz < F _x ≤ 500 MHz	2 GHz	1MHz
500 MHz < F _x ≤ 1 GHz	5 GHz	1MHz
F _x > 1 GHz	5 × F _x up to a maximum of 40 GHz	1MHz
Note: 1. F _x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.		

TEST REPORT


3.4 Test Results of Radiated Emissions

Test Curve of worst results with CH2358:

Horizontal

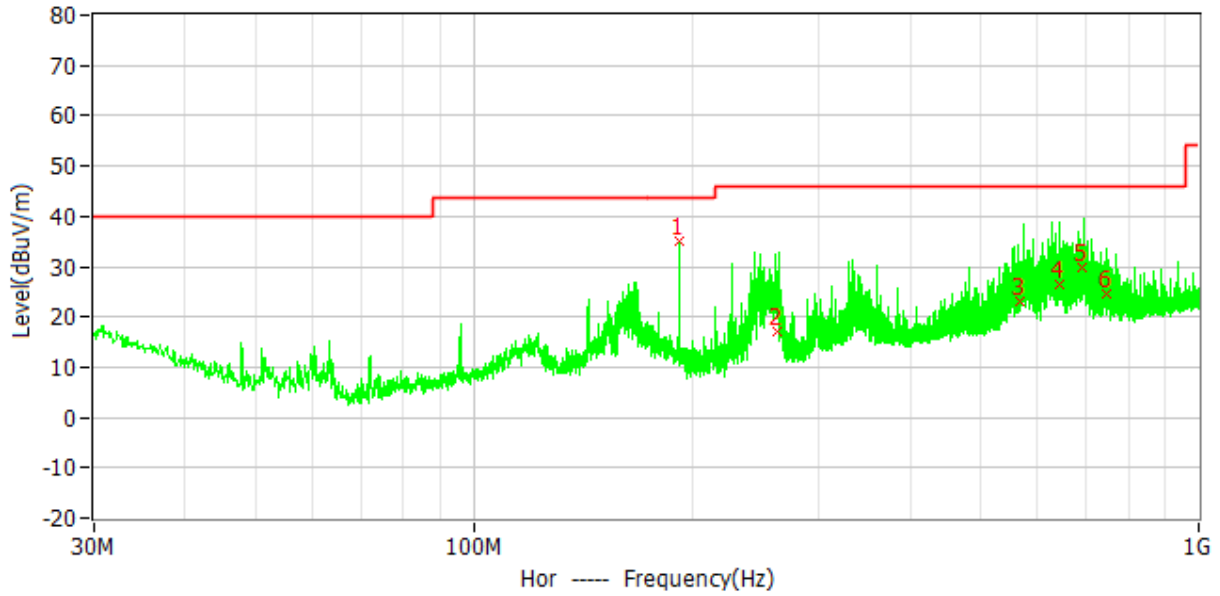

Vertical

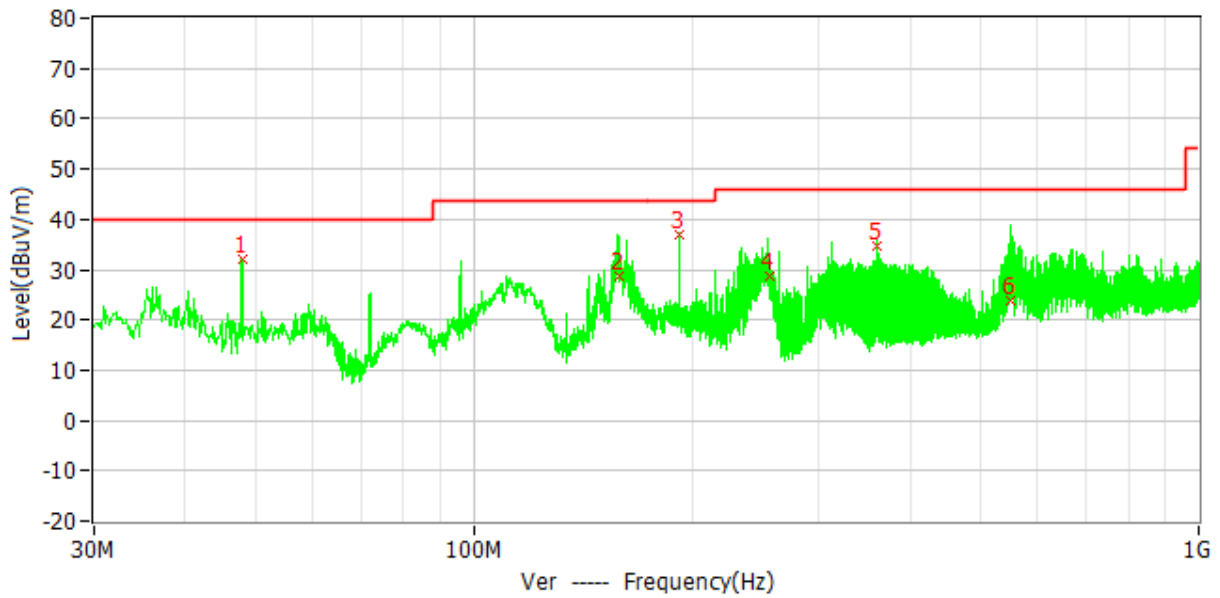

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	192.009MHz	35.00	43.50	8.50	QP
H	261.901MHz	17.10	46.00	28.90	QP
H	568.605MHz	23.00	46.00	23.00	QP
H	642.777MHz	26.60	46.00	19.40	QP
H	692.015MHz	29.80	46.00	16.20	QP
H	744.078MHz	24.40	46.00	21.60	QP
V	47.991MHz	29.9	40.00	8.10	QP
V	159.220MHz	30.0	43.50	14.70	QP
V	192.017MHz	30.9	43.50	6.70	QP
V	255.800MHz	30.6	46.00	17.40	QP
V	360.035MHz	20.0	46.00	11.40	QP
V	550.383MHz	14.3	46.00	22.00	QP

Above 1GHz


Polarization	Frequency (MHz)	Emission level (dBuV/m)	Limits (dBuV/m)	Margin (dBuV/m)	Detector
Horizontal	1000.00	*	74.0	*	PK
	5000.00	*	74.0	*	PK
	10000.00	*	74.0	*	PK
	15000.00	*	74.0	*	PK
	20000.00	*	74.0	*	PK
	25000.00	*	74.0	*	PK
Vertical	1000.00	*	74.0	*	PK
	5000.00	*	74.0	*	PK
	10000.00	*	74.0	*	PK
	15000.00	*	74.0	*	PK
	20000.00	*	74.0	*	PK
	25000.00	*	74.0	*	PK

Note: * means the emission level is 10dB or more lower than the relevant limit.


TEST REPORT

Test Curve of cleaning mode:

Horizontal

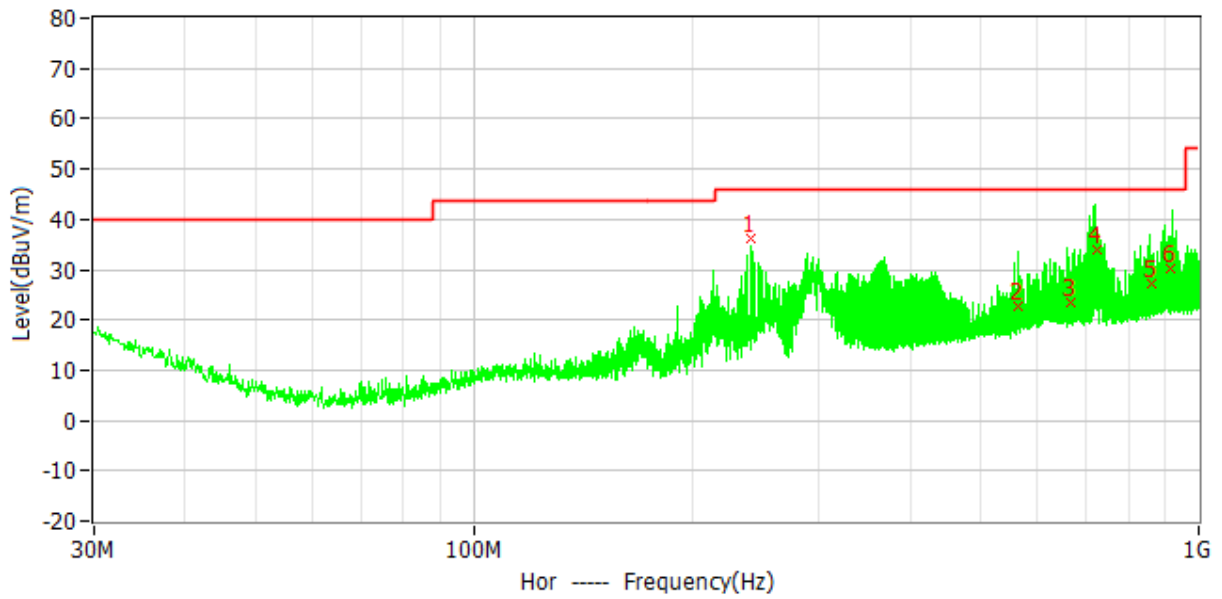

Vertical

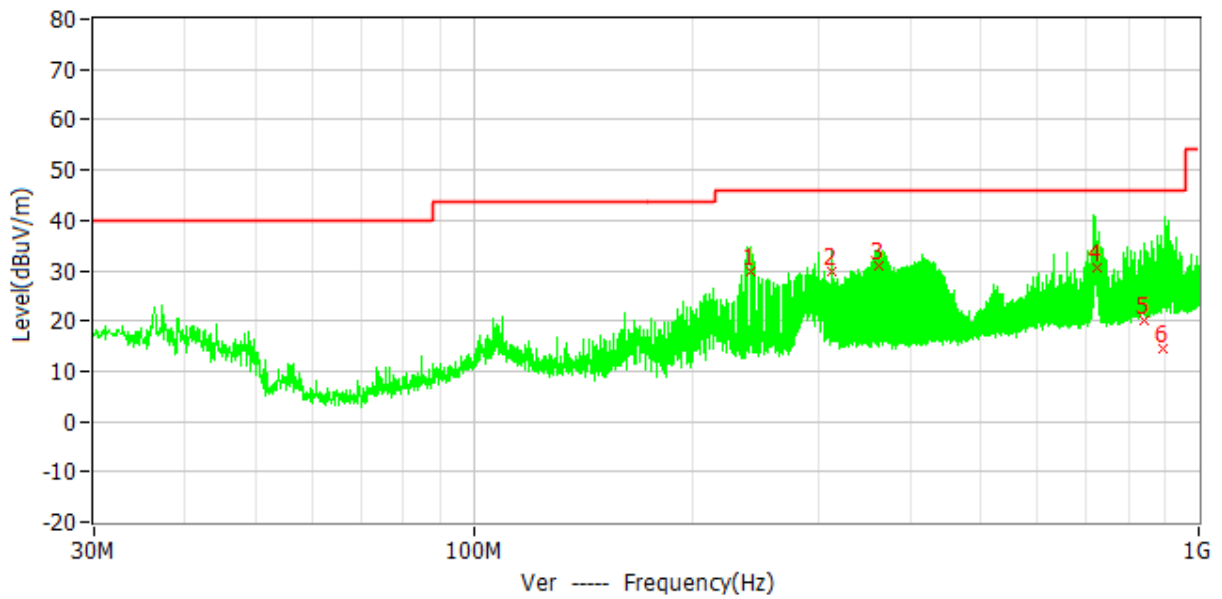

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	240.781MHz	36.10	46.00	9.90	QP
H	563.753MHz	22.60	46.00	23.40	QP
H	664.222MHz	23.60	46.00	22.40	QP
H	723.591MHz	34.00	46.00	12.00	QP
H	862.793MHz	27.20	46.00	18.80	QP
H	912.840MHz	30.30	46.00	15.70	QP
V	240.819MHz	29.9	46.00	16.10	QP
V	311.971MHz	30.0	46.00	16.00	QP
V	361.193MHz	30.9	46.00	15.10	QP
V	722.903MHz	30.6	46.00	15.40	QP
V	839.732MHz	20.0	46.00	26.00	QP
V	891.268MHz	14.3	46.00	31.70	QP

Above 1GHz

Polarization	Frequency (MHz)	Emission level (dBuV/m)	Limits (dBuV/m)	Margin (dBuV/m)	Detector
Horizontal	1000.00	*	74.0	*	PK
	5000.00	*	74.0	*	PK
	10000.00	*	74.0	*	PK
	15000.00	*	74.0	*	PK
	20000.00	*	74.0	*	PK
	25000.00	*	74.0	*	PK
Vertical	1000.00	*	74.0	*	PK
	5000.00	*	74.0	*	PK
	10000.00	*	74.0	*	PK
	15000.00	*	74.0	*	PK
	20000.00	*	74.0	*	PK
	25000.00	*	74.0	*	PK

Note: * means the emission level is 10dB or more lower than the relevant limit.

TEST REPORT

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

4 Power line conducted emission

Test result: Pass

4.1 Limit

4.1.1 Limits for conducted disturbance voltage at the mains ports of class A device

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.


4.1.2 Limits for conducted disturbance voltage at the mains ports of class B device

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

4.2 Block diagram and test set up

For table top equipment

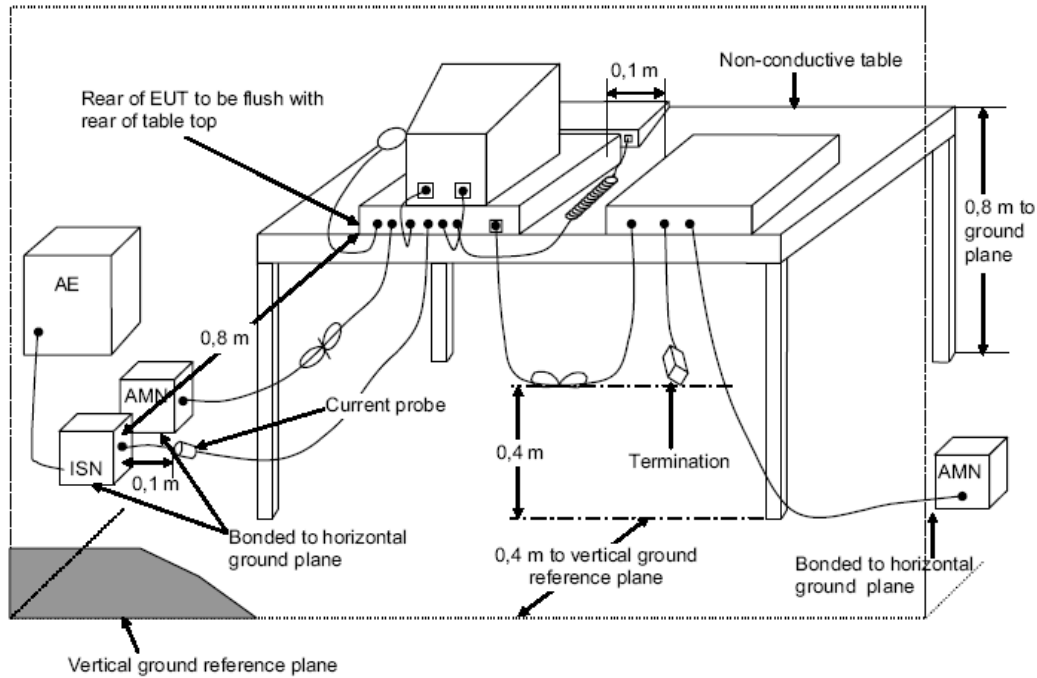

For floor standing equipment

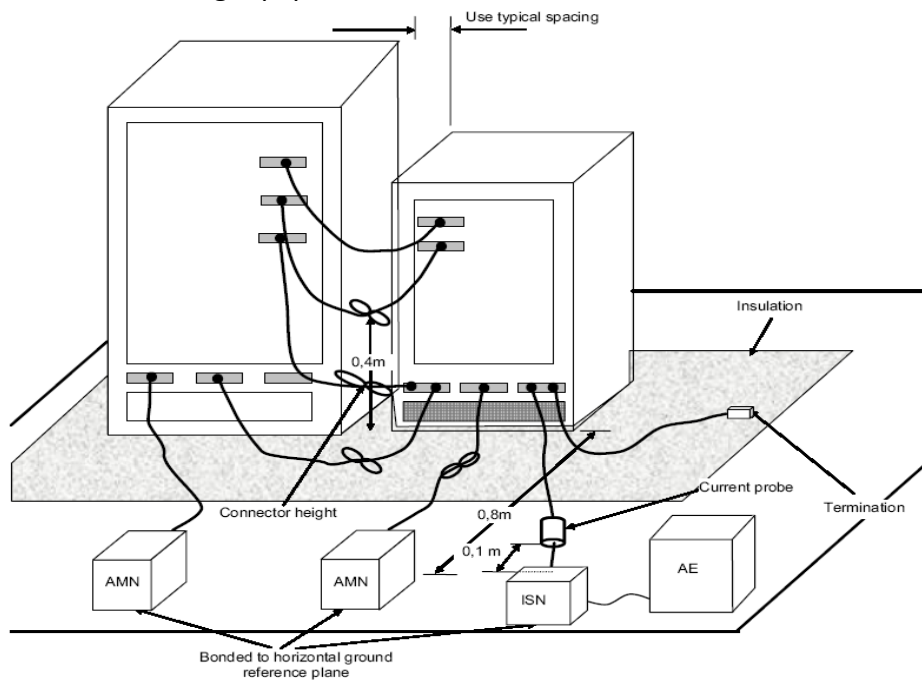

TEST REPORT**4.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


TEST REPORT

4.4 Test Results of Power line conducted emission


Test Curve:

Test Voltage: AC 120V, 60Hz

L Line

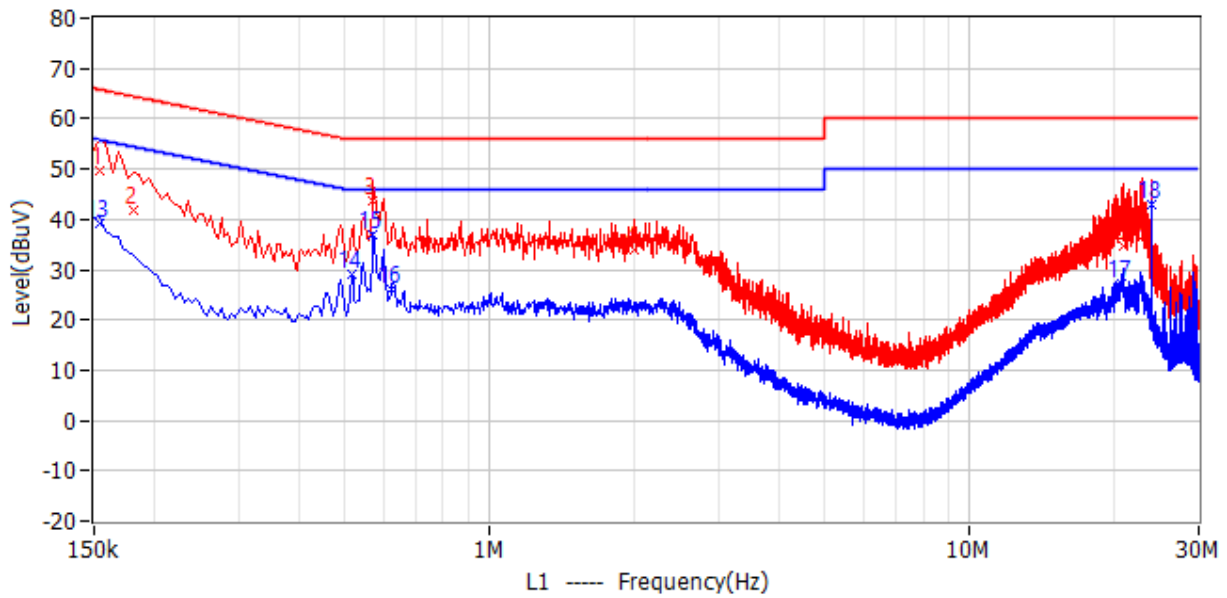

N Line

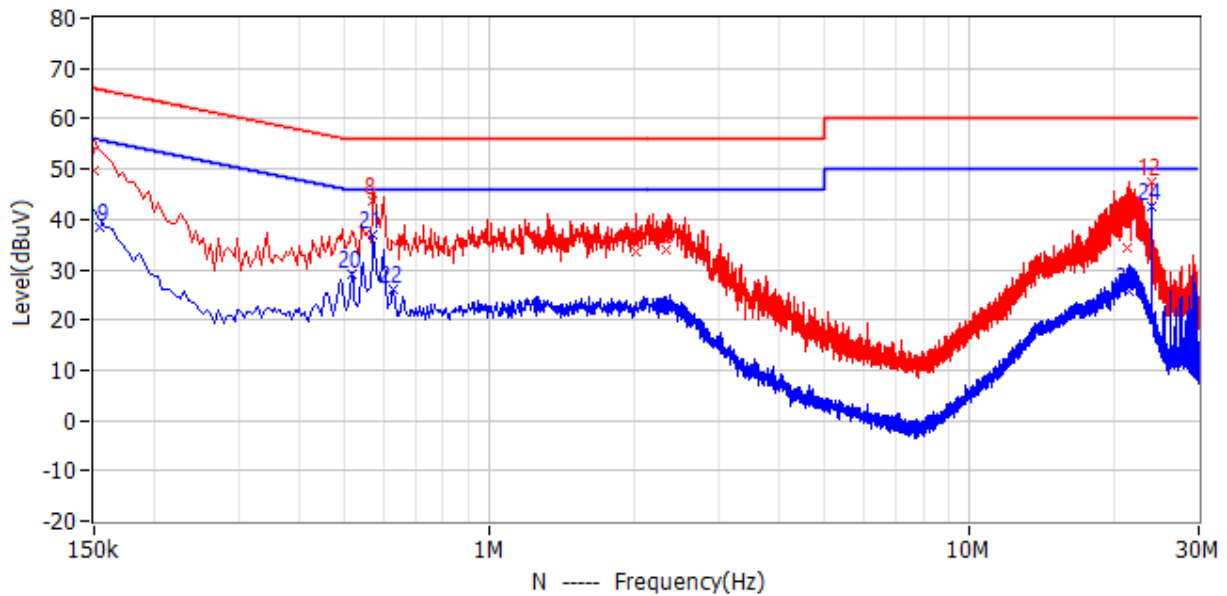

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	154.500kHz	65.8	49.8	-16.0	43.6	6.2	QP	L1
2	181.500kHz	64.4	41.9	-22.5	35.7	6.2	QP	L1
3	573.000kHz	56.0	43.8	-12.2	37.6	6.2	QP	L1
4	2.000MHz	56.0	34.0	-22.0	27.8	6.2	QP	L1
5	20.990MHz	60.0	34.5	-25.5	27.2	7.3	QP	L1
6	22.605MHz	60.0	36.0	-24.0	28.6	7.4	QP	L1
7	150.000kHz	66.0	49.7	-16.3	43.5	6.2	QP	N
8	573.000kHz	56.0	43.8	-12.2	37.6	6.2	QP	N
9	2.018MHz	56.0	33.4	-22.6	27.2	6.2	QP	N
10	2.328MHz	56.0	33.8	-22.2	27.6	6.2	QP	N
11	21.345MHz	60.0	34.3	-25.7	27.0	7.3	QP	N
12	24.000MHz	60.0	47.6	-12.4	40.2	7.4	QP	N
13	154.500kHz	55.8	39.3	-16.4	33.1	6.2	CAV	L1
14	514.500kHz	46.0	29.2	-16.8	23.0	6.2	CAV	L1
15	573.000kHz	46.0	36.8	-9.2	30.6	6.2	CAV	L1
16	627.000kHz	46.0	26.2	-19.8	20.0	6.2	CAV	L1
17	20.742MHz	50.0	27.1	-22.9	19.8	7.3	CAV	L1
18	24.000MHz	50.0	43.1	-6.9	35.6	7.5	CAV	L1
19	154.500kHz	55.8	38.3	-17.5	32.1	6.2	CAV	N
20	514.500kHz	46.0	28.9	-17.1	22.7	6.2	CAV	N
21	573.000kHz	46.0	37.0	-9.0	30.8	6.2	CAV	N
22	631.500kHz	46.0	26.2	-19.8	20.0	6.2	CAV	N
23	21.507MHz	50.0	25.6	-24.4	18.3	7.3	CAV	N
24	24.000MHz	50.0	42.4	-7.6	35.0	7.4	CAV	N

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Correct Factor
 3. Delta = Level - Limit
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Appendix I: Photograph of equipment under test

Refer to the documents for the External and Internal Photos

***** END *****