

Giant Electronics Ltd.

Application
For
Certification

Two Way Radio with GMRS, FRS,
Weather Band Receiver and Repeater Channel

(FCC ID: K7GMRCEE)

HK08120421-1
TL/ ac
January 22, 2009

- The test report only allows to be revised the retention period issued date unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Applicant : **Giant Electronics Ltd.**
Trade Name/Model No : **MR355**
Date : **January 22, 2009**

This report concerns (check one:) Original Grant Class II Change

Equipment Type: FRF – Part 95 Family Radio Face Held Transmitter
CXX - Communications Rcvr for use w/ licensed Tx and CBs

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No
If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by: Leung Wai Leung, Tommy
Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8538
Fax: 852-2741-1693

INTERTEK TESTING SERVICES

Table of Contents

1.0	General Description	4
1.1	Product Description	4
1.2	Related Submittal(s) Grants.....	5
1.3	Test Methodology	5
1.4	Test Facility	5
2.0	System Test Configuration	7
2.1	Justification	7
2.2	EUT Exercising Software.....	8
2.3	Special Accessories	8
2.4	Measurement Uncertainty.....	8
2.5	Equipment Modification	8
2.6	Support Equipment.....	9
3.0	RF Power Output (Section 2.1046(a), 95.639(d))	11
4.0	Modulation Characteristics (Section 2.1047(a)(b), 95.637(a))	15
4.1	Modulation Frequency Response	16
4.2	Modulation Limiting Characteristics	18
4.3	Audio Low Pass Filter Response.....	20
5.0	Occupied Bandwidth (Section 95.633(c))	23
6.0	Spurious Emission	26
6.1	Field Strength of Spurious Radiation (Section 2.1053, 95.635(b)).....	27
6.2	Field Strength of Radiated Emission and AC line Conducted Emission (Section 15.109 & 15.107)	32
7.0	Frequency Stability (Section 2.1055(a)(b)(d), 95.627(b))	41
7.1	Frequency Tolerance.....	42
7.2	Temperature Extreme Condition.....	44
7.3	Voltage Extreme Condition	46

Appendix - Exhibits of Application for Certification

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Two Way Radio with GMRS, FRS, Weather Band and Repeater Channel operating between 462.5500MHz and 467.7250MHz. Weather band receiver operates between 161.650MHz and 162.550MHz. The EUT is powered by 3.6V (1 x 3.6V "Ni-MH" type rechargeable battery) or 4.5V (3 x "AA" size 1.5V alkaline batteries). Power adaptor, USB port from computer and charging cradle can be alternative power sources.

Transmitter Portion

- (i) Type of Emission : GMRS: 5K64F3E; FRS: 5K60F3E
- (ii) Frequency Range : GMRS 15 Channels from 462.5500MHz to 462.7250MHz
FRS 7 Channels from 467.5625MHz to 467.7125MHz
GMRS Repeater 8 Channels from 467.5500MHz to 467.7250MHz
- (iii) Maximum Power Rating : GMRS: 1.32W ERP; FRS: 0.38W ERP
- (iv) Antenna Type : Integral
- (v) dc voltage of radio frequency amplifying device: 4.5V
dc current of radio frequency amplifying device: 1000mA

The brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a GMRS + FRS Transceiver, weather band receiver and repeater channels. The receiver section of this Transceiver and digital device portion is subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and ANSI/TIA-603-C-2004. Conducted emission measurement were performed according to the procedures in ANSI C63.4 (2003). All radiated measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted emission test site used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. The device has been tested with headset and without headset when the radiated emissions are measured.

The frequency range of transmitter from 30MHz to 10th harmonics was searched for spurious emissions from the device. The frequency range of weather band receiver from 30MHz to 2GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

For transmitter radiated spurious measurement, the spectrum analyzer resolution bandwidth was 10kHz for emissions below 1GHz, and 1MHz for emissions above 1GHz. Video bandwidth was 300kHz for emissions below 1GHz, and 3MHz for emissions above 1GHz. For receiver radiated spurious measurement, the spectrum analyzer resolution bandwidth was 100kHz for emission below 1GHz, and 1MHz for emissions above 1GHz. Video bandwidth was 3 times greater than resolution bandwidth.

This device supported several power-up methods (powered by rechargeable battery pack, alkaline batteries, charging cradle, adaptor and DC source from computer's USB port). All power-up methods were tested and the worst-case data were reported.

The following are all the test modes (only the worst-case was reported):

GMRS, Tx without headset

GMRS, Tx with headset

GMRS, Tx with USB adaptor (with / without headset)

GMRS, Tx with USB cable via computer (with / without headset)

GMRS, Tx with Extra charger (with / without headset)

FRS, Tx without headset

FRS, Tx with headset

FRS, Tx with USB adaptor (with / without headset)

FRS, Tx with USB cable via computer (with / without headset)

FRS, Tx with Extra charger (with / without headset)

Weather band receiver, without headset

Weather band receiver, with headset

Weather band receiver, with USB adaptor (with / without headset)

Weather band receiver, with Extra charger (with / without headset)

Weather band receiver, with USB cable via computer (with / without headset)

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the PTT button was pushed, a signal was transmitted.

2.3 Special Accessories

No special accessory is needed for compliance of this device.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Equipment Modification

Any modification installed previous to testing by Giant Electronics Ltd. will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services Hong Kong Ltd.

INTERTEK TESTING SERVICES

2.6 Support Equipment

1. A headset with 1.2 m unshielded cable. (Supplied by Client)
2. 1 x USB cable with 1 meter long (Supplied by Client)
3. An ac adaptor for extra charger: 120VAC, 60 Hz, 4W to 9VAC, 200mA, Model No: DV-0920ACS (Supplied by Client)
4. An ac adaptor with USB jack: 100-240VAC, 50/60Hz, 0.2A to 5.0VDC, 200mA, Model No: SSA-5W-05 US 050020F (Supplied by Client)
5. Notebook, Brand: Lenovo, Model: T61, S/N: L3-CF468 (Supplied by Intertek)
6. External 1394 HDD, Brand: Smart-drive, Model: HD3-SU2FW, S/N: 0800261 (HDD: Seagate 120GB, Model: ST912017AS, S/N: 5RE031DT) (Supplied by Intertek)
7. HP Notebook, Model: NX6320, S/N: CNU6370FWN, DoC Product (Supplied by Intertek)
8. HP Printer, Model: C6431D, S/N: CN23B 680ZP, DoC Product (Supplied by Intertek)
9. Genius Modem, Model: GM56EX, S/N: ZT5505000355, DoC Product (Supplied by Intertek)

Confirmed by:

*Leung Wai Leung, Tommy
Senior Manager
Intertek Testing Services Hong Kong Ltd.
Agent for Giant Electronics Ltd.*



Signature

January 22, 2009

Date

EXHIBIT 3

RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 **RF Power Output (Section 2.1046(a), 95.639(d))**

A. Equipment Used

Equipment	Brand Name	Model No.
Log Periodic Antenna	EMCO	3148
Biconical Antenna	EMCO	3104C
Test receiver	Rohde & Schwarz	ESVS30
Tuned Dipole Antenna	CDI	A100
Signal Generator	IFR	2023B

B. Testing Procedure

1. On a test site, the EUT shall be placed at 0.8m height on a wooden turntable, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

INTERTEK TESTING SERVICES

Table 1

**Giant Electronics Ltd.
MR355**

Transmission Power

Channel	Frequency (MHz)	Effective Radiated Power		FCC 95.639 Limit (W)	Margin (W)	RSS-210 Limit (W)	Margin (W)
		(dBm)	(W)				
1	462.5625	31.2	1.32	5.0	-3.68	2.0	-0.68
2	462.5875	31.2	1.32	5.0	-3.68	2.0	-0.68
3	462.6125	31.2	1.32	5.0	-3.68	2.0	-0.68
4	462.6375	31.2	1.32	5.0	-3.68	2.0	-0.68
5	462.6625	31.2	1.32	5.0	-3.68	2.0	-0.68
6	462.6875	31.2	1.32	5.0	-3.68	2.0	-0.68
7	462.7125	31.2	1.32	5.0	-3.68	2.0	-0.68
8	467.5625	25.8	0.38	0.5	-0.12	0.5	-0.12
9	467.5875	25.8	0.38	0.5	-0.12	0.5	-0.12
10	467.6125	25.8	0.38	0.5	-0.12	0.5	-0.12
11	467.6375	25.8	0.38	0.5	-0.12	0.5	-0.12
12	467.6625	25.8	0.38	0.5	-0.12	0.5	-0.12
13	467.6875	25.8	0.38	0.5	-0.12	0.5	-0.12
14	467.7125	25.8	0.38	0.5	-0.12	0.5	-0.12
15	462.5500	31.2	1.32	5.0	-3.68	2.0	-0.68
16	462.5750	31.2	1.32	5.0	-3.68	2.0	-0.68
17	462.6000	31.2	1.32	5.0	-3.68	2.0	-0.68
18	462.6250	31.2	1.32	5.0	-3.68	2.0	-0.68
19	462.6500	31.2	1.32	5.0	-3.68	2.0	-0.68
20	462.6750	31.2	1.32	5.0	-3.68	2.0	-0.68
21	462.7000	31.2	1.32	5.0	-3.68	2.0	-0.68
22	462.7250	31.2	1.32	5.0	-3.68	2.0	-0.68
23	467.5500	31.2	1.32	5.0	-3.68	2.0	-0.68
24	467.5750	31.2	1.32	5.0	-3.68	2.0	-0.68
25	467.6000	31.2	1.32	5.0	-3.68	2.0	-0.68
26	467.6250	31.2	1.32	5.0	-3.68	2.0	-0.68
27	467.6500	31.2	1.32	5.0	-3.68	2.0	-0.68
28	467.6550	31.2	1.32	5.0	-3.68	2.0	-0.68
29	467.7000	31.2	1.32	5.0	-3.68	2.0	-0.68
30	467.7250	31.2	1.32	5.0	-3.68	2.0	-0.68

Notes: Negative sign in the margin column shows the value below limits.

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

EXHIBIT 4

MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 Modulation Characteristics (Section 2.1047(a)(b), 95.637(a))

In order to satisfy the 95.637(a) and 2.1047(b) requirements, Modulation Frequency Response and Modulation Limiting Characteristics are attached in Exhibit 4.1 & 4.2.

In order to satisfy the 2.1047(a) requirement, Audio Low Pass Filter Response is attached in Exhibit 4.3.

For electronic filing, the modulation frequency response curve and modulation limiting characteristic curve are saved with filename: mfr.pdf and mlc.pdf respectively.

For electronic filing, the audio low pass frequency response curve is saved with filename: lpf.pdf.

INTERTEK TESTING SERVICES


4.1 Modulation Frequency Response (Section 2.1047(a), 95.637(a))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
AC Millivoltmeter	Leader	LMV-182A
20 dB RF Attenuator	Bird	8304-200-N
Radiocommunication Service Monitor	R&S	CMS54

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

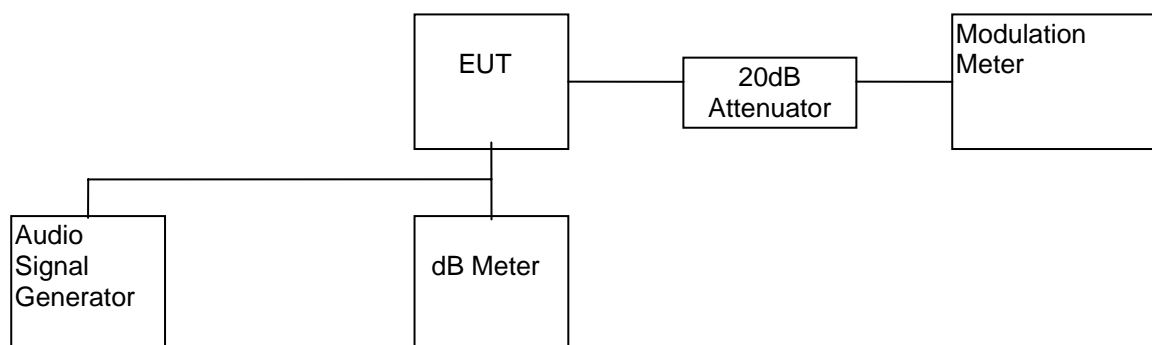

- 2) Set the audio signal generator frequency to the sound pressure level 117dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 100Hz to 5kHz.
- 4) Record the frequency deviation.
- 5) The peak frequency deviation must not exceed:

GMRS + FRS : ± 2.5 kHz

INTERTEK TESTING SERVICES

C. Test Result

Table 2

**Giant Electronics Ltd.
MR355**

Modulation Frequency Response

Test Channel : 4
Input level = 117dB SPL

Modulation Frequency (Hz)	Modulation index
100	0.61
200	0.95
300	2.48
400	3.10
500	3.26
600	3.00
700	2.81
800	2.56
900	2.18
1000	2.05
1250	1.64
1500	1.39
1750	1.17
2000	1.01
2250	0.81
2500	0.64
2750	0.47
3000	0.37
3125	0.34
3250	0.30
3500	0.25
4000	0.17
5000	0.09

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES


4.2 Modulation Limiting Characteristics (Section 2.1047(b), 95.637(a))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
20 dB RF Attenuator	Bird	8304-200-N
Radiocommunication Service Monitor	R&S	CMS54

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

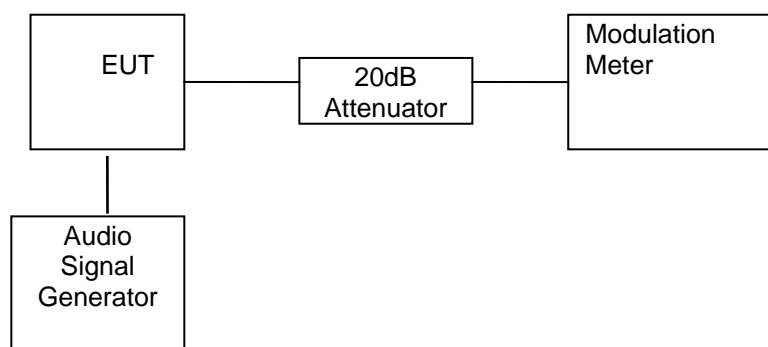

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dB SPL to 137dB SPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.
- 5) The peak frequency deviation must not exceed:

GMRS + FRS : $\pm 2.5\text{kHz}$

INTERTEK TESTING SERVICES

C. Test Result

Table 3

**Giant Electronics Ltd.
MR355**

Modulation Limiting Characteristics

Test Channel : 4

Modulation Input (dB SPL)	Peak Frequency Deviation (kHz) at 500Hz	Peak Frequency Deviation (kHz) at 1000Hz	Peak Frequency Deviation (kHz) at 2500Hz	Peak Frequency Deviation (kHz) at 3125Hz
47	0.032	0.033	0.033	0.033
57	0.032	0.034	0.033	0.034
67	0.033	0.038	0.039	0.039
77	0.035	0.068	0.075	0.061
87	0.050	0.186	0.404	0.159
97	0.120	0.947	1.012	0.764
107	0.649	1.822	1.414	0.990
117	1.628	2.052	1.588	1.070
127	2.039	1.903	1.594	1.113
137	2.022	1.842	1.567	1.089

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

4.3 Audio Low Pass Filter Response (Section 2.1047(a))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
AC Millivoltmeter	Leader	LMV-182A

B. Testing Procedure

- 1) Connect the audio signal generator to the input of the post limiter low pass filter and the dB meter to the output of the post limiter low pass filter.
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer's specifications. Record the dB level of the 1000 Hz tone as LEV_{REF} .
- 3) Set the audio signal generator to the desired test frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as LEV_{FREQ} .
- 4) Calculate the audio frequency response at the test frequency as:

$$\text{low pass filter response} = LEV_{FREQ} - LEV_{REF}$$

- 5) Repeat the above procedure for all the desired test frequencies.

INTERTEK TESTING SERVICES

C. Test Result

Table 4

**Giant Electronics Ltd.
MR355**

Low-Pass Filter Response

Test Channel : 4

Audio Input Strength = 500mVrms

Frequency (kHz)	dB relative to 1 kHz	TIA/EIA-603C
1	0.0	0.0
3	-12.5	0.0
4	-18.5	-7.5
5	-23.0	-13.3
6	-26.5	-18.1
8	-32.5	-25.6
10	-37.5	-31.4
15	-46.0	-41.9
20	-52.0	-50.0
30	-54.5	-50.0
40	-55.5	-50.0
50	-55.5	-50.0
60	-56.0	-50.0
70	-55.0	-50.0
80	-58.0	-50.0
90	-55.0	-50.0
100	-55.5	-50.0

Audio Output at 1kHz: -4.0dBV

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(c))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	HP	HP8904A
AC Millivoltmeter	Leader	LMV-182A
20 dB RF Attenuator	Bird	8304-200-N
Spectrum Analyzer	HP	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

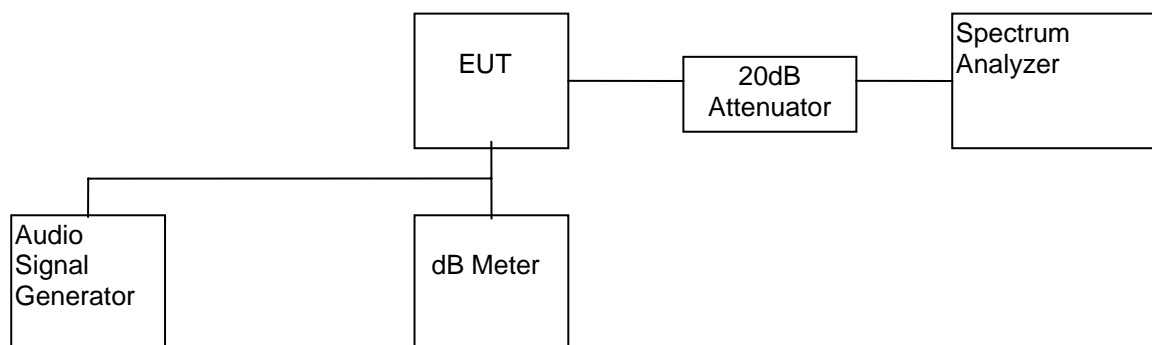

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 2kHz/div scan and 10dB/div.

INTERTEK TESTING SERVICES

C. Test Result

Table 5

**Giant Electronics Ltd.
MR355**

System	Channel	Measured Bandwidth (kHz)	Limit (kHz)
GMRS	4	5.64	≤20
FRS	11	5.60	≤12.5

Verdict: Passed

For the electronic filing, the bandwidth plot is saved with filename: bw.pdf

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

EXHIBIT 6

SPURIOUS EMISSION

INTERTEK TESTING SERVICES

6.0 **Spurious Emission (Section 2.1053, 95.635(b))**

In order to satisfy the 95.635(b) requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation (Section 2.1053, 95.635(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	EMCO	A100, 3148, 3104C, 3115
Spectrum Analyzer	ADVANTEST	U3661
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Trilithic	3VF500/1000-5-50-CC
Signal Generator	IFR	2023B

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(2003). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

INTERTEK TESTING SERVICES

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: config photos.pdf

INTERTEK TESTING SERVICES

C. Test Result

**Giant Electronics Ltd.
MR355**

Table 6(a)

- 1) Unwanted emission from CARRIER $\pm 6.25\text{kHz}$ to CARRIER $\pm 31.25\text{kHz}$
(Refer to the plots which is saved with filename: spurious.pdf)

Region	Unwanted emission	
	Channel 4	Channel 11
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB	<35dB

INTERTEK TESTING SERVICES

Table 6(b): Channel 4 - Mode: Transmitter without Earphone

Frequency (MHz)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dBc)	Limit (dBc)	Margin (dB)
231.319	-33.0	31.2	64.2	44.2	-20.0
693.956	-15.0	31.2	46.2	44.2	-2.0
925.274	-23.8	31.2	55.0	44.2	-10.8
1156.593	-38.9	31.2	70.1	44.2	-25.9
1387.911	-37.0	31.2	68.2	44.2	-24.0
1619.230	-35.0	31.2	66.2	44.2	-22.0
1850.548	-26.9	31.2	58.1	44.2	-13.9
2081.867	-37.2	31.2	68.4	44.2	-24.2
2313.185	-37.8	31.2	69.0	44.2	-24.8
2544.504	-33.2	31.2	64.4	44.2	-20.2
2775.822	-36.6	31.2	67.8	44.2	-23.6
3007.141	-32.6	31.2	63.8	44.2	-19.6
3238.459	-37.8	31.2	69.0	44.2	-24.8
3469.778	-38.2	31.2	69.4	44.2	-25.2
3701.096	-37.2	31.2	68.4	44.2	-24.2
3932.415	-39.0	31.2	70.2	44.2	-26.0
4163.733	-32.9	31.2	64.1	44.2	-19.9
4395.052	-28.9	31.2	60.1	44.2	-15.9
4626.370	-37.8	31.2	69.0	44.2	-24.8

- Remark: 1. Transmission power is 31.2 dBm or 1.2 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 44.2 dB.
3. The test is performed according to ANSI/TIA-603-C-2004.

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

Table 6(c): Channel 11

Mode: Transmitter with Extra Charger & Earphone

Frequency (MHz)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dBc)	Limit (dBc)	Margin (dB)
233.819	-38.5	25.8	64.3	38.8	-25.5
701.456	-25.4	25.8	51.2	38.8	-12.4
935.274	-15.5	25.8	41.3	38.8	-2.5
1169.093	-33.2	25.8	59.0	38.8	-20.2
1402.911	-30.2	25.8	56.0	38.8	-17.2
1636.730	-37.0	25.8	62.8	38.8	-24.0
1870.548	-29.5	25.8	55.3	38.8	-16.5
2104.367	-37.8	25.8	63.6	38.8	-24.8
2338.185	-34.4	25.8	60.2	38.8	-21.4
2572.004	-31.2	25.8	57.0	38.8	-18.2
2805.822	-20.5	25.8	46.3	38.8	-7.5
3039.641	-31.5	25.8	57.3	38.8	-18.5
3273.459	-18.8	25.8	44.6	38.8	-5.8
3507.278	-32.0	25.8	57.8	38.8	-19.0
3741.096	-27.8	25.8	53.6	38.8	-14.8
3974.915	-33.8	25.8	59.6	38.8	-20.8
4208.733	-35.2	25.8	61.0	38.8	-22.2
4442.552	-34.0	25.8	59.8	38.8	-21.0
4676.370	-35.3	25.8	61.1	38.8	-22.3

- Remark: 1. Transmission power is 25.8 dBm or -4.2 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 38.8 dB.
3. The test is performed according to ANSI/TIA-603-C-2004.

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

6.2 Field Strength of Radiation Emission and AC line Conducted Emission (Section 15.109 & 15.107)

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

A. Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

INTERTEK TESTING SERVICES

A. Field Strength Calculation (cont'd)

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

B. Radiated Emission Configuration Photograph - Weather Band Receiver

Worst Case Radiated Emission
at
141.025 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: config photos.pdf.

INTERTEK TESTING SERVICES

C. Radiated Emission Data - Weather Band Receiver

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.4 dB margin

TEST PERSONNEL:



Signature

Ken Sit, Assistant Manager

Typed/Printed Name

January 22, 2009

Date

INTERTEK TESTING SERVICES

Company: Giant Electronics Ltd. Date of Test: December 29, 2008-January 17, 2009

Model: MR355

Mode: Weather Band with Earphone

Table 4(c)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	141.025	36.1	16	14.0	34.1	43.5	-9.4
V	282.050	27.9	16	22.0	33.9	46.0	-12.1
V	423.075	24.2	16	25.0	33.2	46.0	-12.8
V	564.100	20.6	16	28.0	32.6	46.0	-13.4
V	705.125	18.4	16	30.0	32.4	46.0	-13.6
V	846.150	17.0	16	31.0	32.0	46.0	-14.0

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters.

3. Negative value in the margin column shows emission below limit.

Test Engineer: Ken Sit

INTERTEK TESTING SERVICES

Conducted Emission Configuration Photograph

Worst Case Conducted Emission

Tx at 0.150 MHz

Weather band receiver at 0.393 MHz

For electronic filing, the conducted emission configurations photograph is saved with filename: config photos.pdf

INTERTEK TESTING SERVICES

D. AC Line Conducted Emission Data

Judgement:

Tx: Passed by 11.3 dB margin

Weather band receiver: Passed by 17.7 dB margin

For electronic filing, the conducted emission test result is saved with filename:
conduct.pdf

TEST PERSONNEL:



Tester Signature

Ken Sit, Assistant Manager
Typed/Printed Name

January 22, 2009
Date

INTERTEK TESTING SERVICES

EXHIBIT 7

FREQUENCY STABILITY

INTERTEK TESTING SERVICES

7.0 **Frequency Stability (Section 2.1055(a)(b)(d), 95.627(b))**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES


7.1 Frequency Tolerance (Section 95.627(b))

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Attenuator	Bird	8304-200-N
Frequency Counter	OPTOELECTRONICS	3000A

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

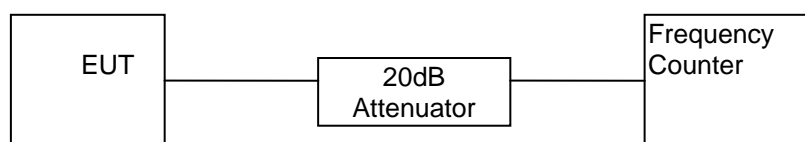

- 2) Measure all transmit channel frequencies in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 7

**Giant Electronics Ltd.
MR355**

Frequency Tolerance

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
4	462.6375	462.63795	0.000097
11	467.6375	467.63795	0.000096

FCC Limit for FRS (95.627(b)): $\leq \pm 0.00025\%$

RSS-210 Limit for GMRS and FRS (A6.2.6, A6.1.6): $< \pm 5\text{ppm}$

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES

7.2 Frequency Stability - Temperature (Section 2.1055(a)(b), 95.627(b))


A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Attenuator	Bird	8304-200-N
Frequency Counter	OPTOELECTRONICS	3000A

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

Temperature Chamber

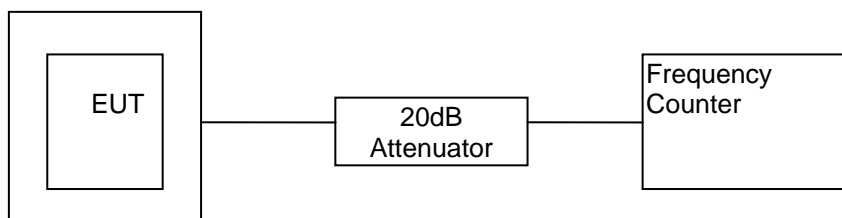

- 2) Set the Temperature Chamber to 20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF.
- 5) Repeat the above procedure from -30°C to 50°C with 10°C increment for GMRS.
- 6) Repeat the above procedure from -20°C to 50°C with 10°C increment for FRS.

INTERTEK TESTING SERVICES

C. Test Result

Table 8

**Giant Electronics Ltd.
MR355**

Frequency Deviation with Temperature Variation

Channel : 4

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (%)	*Frequency Tolerance with reference to its value at +20°C (ppm)
-30#	462.63750	462.63576	-0.000376	-4.7
-20	462.63750	462.63742	-0.000017	-1.1
-10	462.63750	462.63773	0.000050	-0.5
0	462.63750	462.63823	0.000158	0.6
10	462.63750	462.63818	0.000147	0.5
20	462.63750	462.63795	0.000097	0.0
30	462.63750	462.63754	0.000009	-0.9
40	462.63750	462.63742	-0.000017	-1.1
50	462.63750	462.63745	-0.000011	-1.1

Remark: 1) For GMRS, frequency tolerance must be maintained within a frequency tolerance of 0.0005%.

2) *This column is presentable for Industry Canada Certification only.

3) #Data is for GMRS compliance, not for FRS.

Verdict: Passed

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009

INTERTEK TESTING SERVICES


7.3 Frequency Stability - Voltage (Section 2.1055(d), 95.627(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Attenuator	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	OPTOELECTRONICS	3000A

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

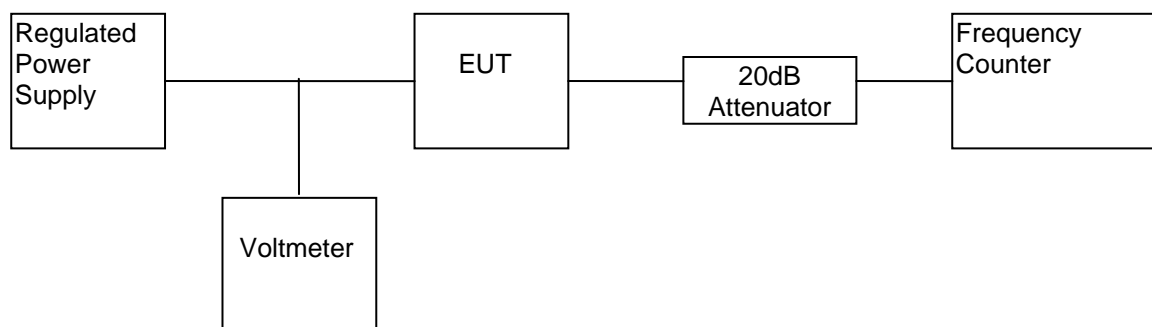

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency of channel 4 and 11 in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 9

**Giant Electronics Ltd.
MR355**

Frequency Deviation with Voltage Variation

The manufacturer specified battery end point 3.4V

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
4	462.63750	462.63792	0.000091
11	467.63750	467.63792	0.000090

- Remark: 1) For FRS, frequency tolerance must be maintained within a frequency tolerance of 0.00025%.
2) For GMRS, frequency tolerance must be maintained within a frequency tolerance of 0.0005%.
3) The test voltage is from primary supply voltage to 3.4V

Test Engineer: Ken Sit

Date of Test: December 29, 2008-January 17, 2009