

Ecovacs Home Service Robotics Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

DKX55, DKX56

REPORT NUMBER:

2403B1431SHA-001

ISSUE DATE:

May 10, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Manufacturer: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Factory 1: Ecovacs Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China

Factory 2: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

FCC ID: 2A64B-DKX55

IC: 28593-DKX55

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (March 2019) Amendment1: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Sky Yang

REVIEWED BY:

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS.....	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST.....	10
2.4 TEST PERIPHERALS LIST	10
2.5 TEST ENVIRONMENT CONDITION:	10
2.6 INSTRUMENT LIST.....	11
2.7 MEASUREMENT UNCERTAINTY	12
3 MINIMUM 6DB BANDWIDTH.....	13
3.1 LIMIT.....	13
3.2 MEASUREMENT PROCEDURE.....	13
3.3 TEST CONFIGURATION.....	13
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	13
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	14
4.1 LIMIT.....	14
4.2 MEASUREMENT PROCEDURE.....	14
4.3 TEST CONFIGURATION.....	15
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	15
5 POWER SPECTRUM DENSITY	16
5.1 LIMIT.....	16
5.2 MEASUREMENT PROCEDURE.....	16
5.3 TEST CONFIGURATION.....	17
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	17
6 EMISSION OUTSIDE THE FREQUENCY BAND	18
6.1 LIMIT.....	18
6.2 MEASUREMENT PROCEDURE.....	18
6.3 TEST CONFIGURATION.....	19
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	19
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	20
7.1 LIMIT.....	20
7.2 MEASUREMENT PROCEDURE.....	20
7.3 TEST CONFIGURATION.....	22
7.4 TEST RESULTS OF RADIATED EMISSIONS	24
8 POWER LINE CONDUCTED EMISSION.....	28
8.1 LIMIT.....	28
8.2 TEST CONFIGURATION	28
8.3 MEASUREMENT PROCEDURE.....	29

TEST REPORT

8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION	30
9 OCCUPIED BANDWIDTH	32
9.1 LIMIT.....	32
9.2 MEASUREMENT PROCEDURE.....	32
9.3 TEST CONFIGURATION.....	32
9.4 THE RESULTS OF OCCUPIED BANDWIDTH.....	32
10 ANTENNA REQUIREMENT.....	33
APPENDIX A: TEST RESULTS	34
DTS BANDWIDTH	34
<i>Test Graphs</i>	35
OCCUPIED CHANNEL BANDWIDTH.....	39
<i>Test Graphs</i>	40
MAXIMUM CONDUCTED OUTPUT POWER	44
<i>Test Graphs</i>	45
MAXIMUM POWER SPECTRAL DENSITY	49
<i>Test Graphs</i>	50
BAND EDGE MEASUREMENTS	54
<i>Test Graphs</i>	55
CONDUCTED SPURIOUS EMISSION.....	58
<i>Test Graphs</i>	59
DUTY CYCLE.....	71
<i>Test Graphs</i>	72

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
2403B1431SHA-001	Rev. 01	Initial issue of report	May 10, 2024

TEST REPORT**Measurement result summary**

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 3 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 3 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 3 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.7	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	Floor Cleaning Robot
Type/Model:	DKX55, DKX56
Description of EUT:	The EUT is a floor cleaning robot with WIFI function. Two models are identical except that DKX56 doesn't have mopping motor in water tank and related drive circuit. We test DKX55 as representative and list the results in this report.
Rating:	20VDC, 1A
Category of EUT:	Class B
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Software Version:	-
Hardware Version:	-
Sample Identification No.:	A240407-03
Sample received date:	April 08, 2024
Date of test:	April 09, 2024 ~ April 18, 2023

1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20) 7 Channels for 802.11n(HT40)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Channel Separation:	5 MHz
Antenna Information:	3.66dBi, FPC Antenna

TEST REPORT**1.3 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No.: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)
ANSI C63.10 (2020)
KDB 558074 (v05r02)
RSS-247 Issue 3 (August 2023)
RSS-Gen Issue 5 (March 2019) Amendment1

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
Putty	-	0.67.0.0	applicant

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462
	802.11n(HT40)	2422	2437	2452

Data rate VS Power:

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rate as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate	Power Setting
2400-2483.5	802.11b	1Mbps	Default
	802.11g	6Mbps	Default
	802.11n(HT20)	MCS0	Default
	802.11n(HT40)	MCS0	Default

And there have the following test mode:

Radiated test mode:

Mode 1: EUT transmitted signal with internal antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from PCBA RF port connected to SPA directly;

We have verified all test modes, and list all the results in this report.

TEST REPORT**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz
2	Docking station	CH2405	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	23°C	52% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Power line conducted emission	22°C	53% RH
Radiated Emissions in restricted frequency bands	22°C	55% RH

TEST REPORT
2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-19
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-22
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input checked="" type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2024-12-07
<input checked="" type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2025-02-14
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2025-03-07
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2024-06-15
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2025-03-09
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	EC 6172	2024-08-08
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	EC 6171	2024-08-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	Testo	175h1	EC 6640	2024-08-28
<input checked="" type="checkbox"/>	Therom-Hygrograph	Testo	175h1	EC6642	2024-08-28
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2024-08-16

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB

TEST REPORT

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit

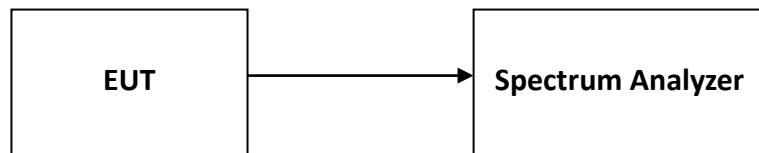
For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration



3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

TEST REPORT**4 Maximum conducted output power and e.i.r.p.**

Test result: Pass

4.1 Limit

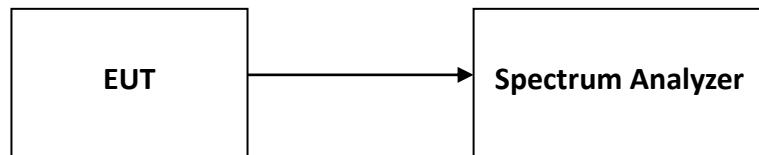
For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.2.2.2) for compliance requirements.

- a) Set span to at least 1.5OBW.
- b) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- c) Set VBW \geq 3RBW.
- d) Number of points in sweep \geq 2span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

TEST REPORT**4.3 Test Configuration****4.4 Test Results of Maximum conducted output power**

Please refer to Appendix A

TEST REPORT

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

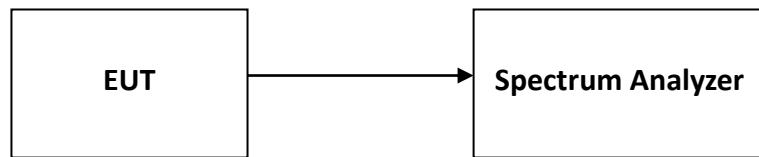
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).

5.2 Measurement Procedure

The power output was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.3) for compliance requirements.

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle \geq 98 %); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3\text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2\text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

TEST REPORT**5.3 Test Configuration****5.4 Test Results of Power spectrum density**

Please refer to Appendix A

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 11.0) for compliance requirements.

Reference level measurement

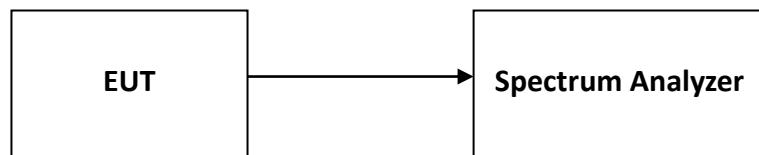
Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

TEST REPORT**6.3 Test Configuration****6.4 The results of Emission outside the frequency band**

Please refer to Appendix A

TEST REPORT**7 Radiated Emissions in restricted frequency bands****Test result:** Pass**7.1 Limit**

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure**For Radiated emission below 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

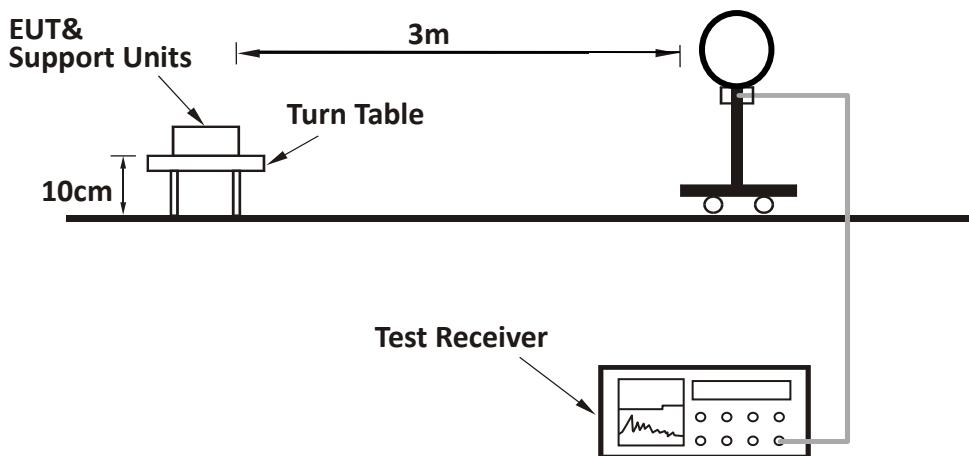
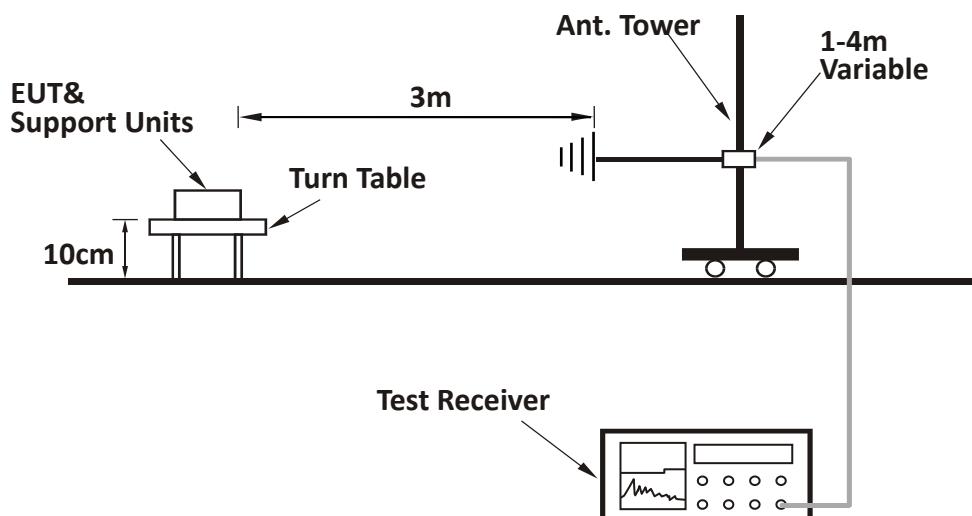
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

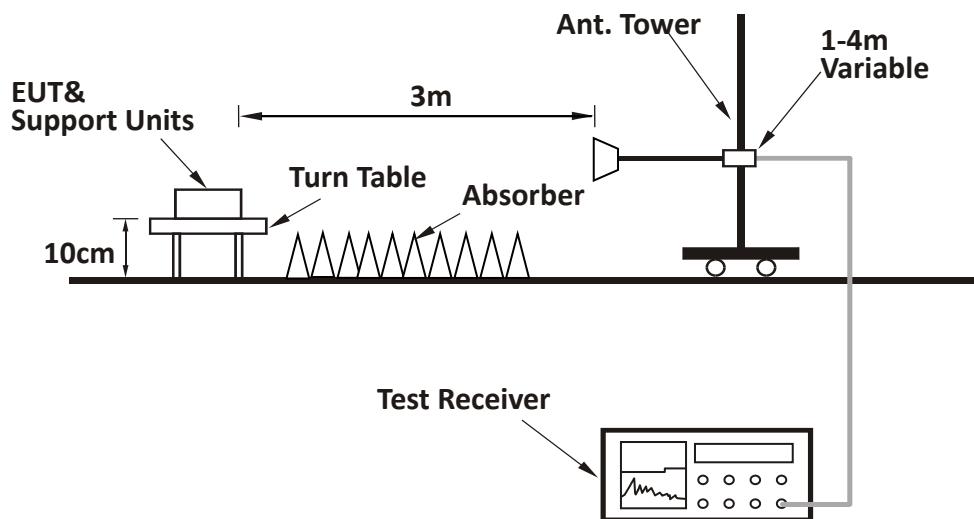
TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.1 meters (for 30MHz ~ 1GHz) / 0.1 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

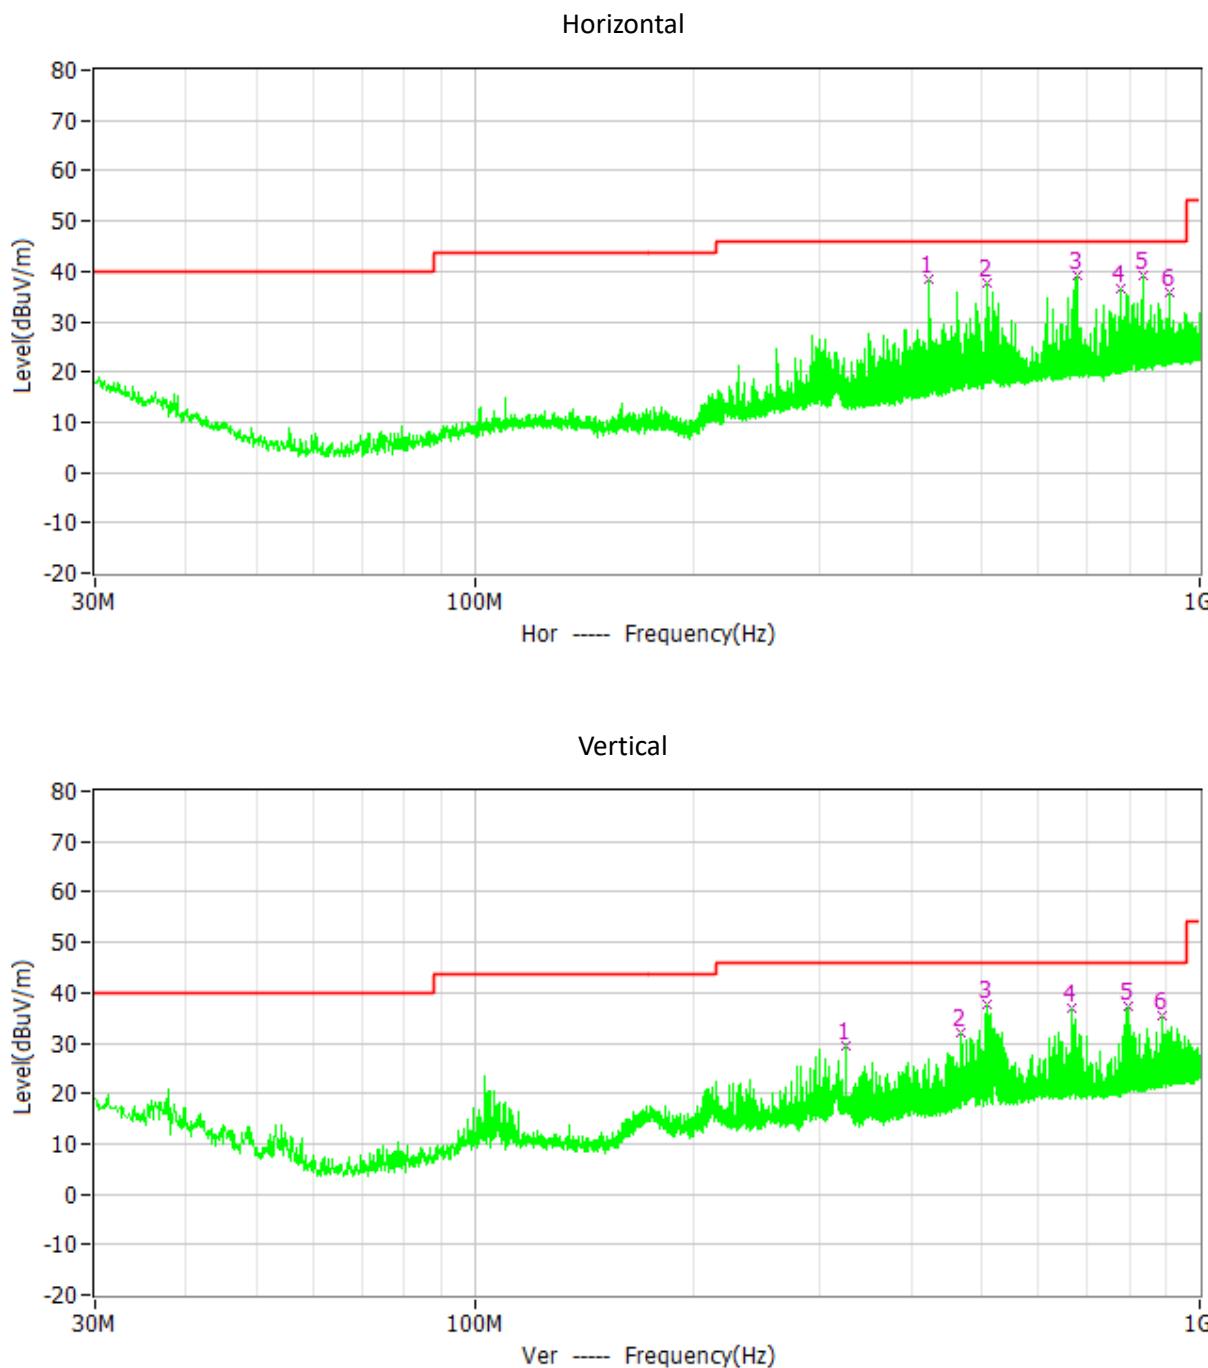
TEST REPORT**7.3 Test Configuration****For Radiated emission below 30MHz:****For Radiated emission 30MHz to 1GHz:**

TEST REPORT**For Radiated emission above 1GHz:**

TEST REPORT**7.4 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:



TEST REPORT
Test data:

Antenna	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)	Detector
H	423.529MHz	46.0	38.3	7.7	PK
	508.986MHz	46.0	37.6	8.4	PK
	678.542MHz	46.0	39.2	6.8	PK
	777.773MHz	46.0	36.7	9.3	PK
	835.391MHz	46.0	39.3	6.7	PK
	910.954MHz	46.0	35.9	10.1	PK
V	325.656MHz	46.0	29.6	16.4	PK
	467.082MHz	46.0	32.0	14.0	PK
	509.277MHz	46.0	37.7	8.3	PK
	666.999MHz	46.0	37.1	8.9	PK
	798.240MHz	46.0	37.3	8.7	PK
	885.540MHz	46.0	35.6	10.4	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Level = Original Receiver Reading + Correct Factor
3. Margin = Limit - Level
4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB}/\text{m}$;
Level = $10\text{dBuV} + 0.20\text{dB}/\text{m} = 10.20\text{dBuV}/\text{m}$;
Margin = $40.00\text{dBuV}/\text{m} - 10.20\text{dBuV}/\text{m} = 29.80\text{dB}$.

TEST REPORT
Test result above 1GHz:

The emission test was conducted from 1GHz to 25GHz

802.11b:

CH	Antenna	Frequency (MHz)	Measured Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	54.9	74.0	19.1	PK
	H	2390.00	41.9	54.0	12.1	AV
	V	2390.00	55.4	74.0	18.6	PK
	V	2390.00	43.5	54.0	10.5	AV
	H	4824.00	42.4	74.0	31.6	PK
	V	4824.00	45.6	74.0	28.4	PK
M	H	4874.00	44.1	74.0	29.9	PK
	V	4874.00	45.5	74.0	28.5	PK
H	H	2483.50	54.4	74.0	19.6	PK
	H	2483.50	42.4	54.0	11.6	AV
	V	2483.50	55.7	74.0	18.3	PK
	V	2483.50	43.4	54.0	10.6	AV
	H	4924.00	43.7	74.0	30.3	PK
	V	4924.00	44.1	74.0	29.9	PK

802.11g:

CH	Antenna	Frequency (MHz)	Measured Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	55.0	74.0	19.0	PK
	H	2390.00	42.2	54.0	11.8	AV
	V	2390.00	55.7	74.0	18.3	PK
	V	2390.00	42.8	54.0	11.2	AV
	H	4824.00	43.2	74.0	30.8	PK
	V	4824.00	44.0	74.0	30.0	PK
M	H	4874.00	43.7	74.0	30.3	PK
	V	4874.00	44.8	74.0	29.2	PK
H	H	2483.50	55.0	74.0	19.0	PK
	H	2483.50	42.8	54.0	11.2	AV
	V	2483.50	58.8	74.0	15.2	PK
	V	2483.50	43.8	54.0	10.2	AV
	H	4924.00	43.6	74.0	30.4	PK
	V	4924.00	44.3	74.0	29.7	PK

TEST REPORT
802.11n (HT20):

CH	Antenna	Frequency (MHz)	Measured Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	54.9	74.0	19.1	PK
	H	2390.00	42.9	54.0	11.1	AV
	V	2390.00	55.4	74.0	18.6	PK
	V	2390.00	43.2	54.0	10.8	AV
	H	4824.00	42.9	74.0	31.1	PK
	V	4824.00	43.7	74.0	30.3	PK
M	H	4874.00	42.5	74.0	31.5	PK
	V	4874.00	44.0	74.0	30.0	PK
H	H	2483.50	54.3	74.0	19.7	PK
	H	2483.50	42.2	54.0	11.8	AV
	V	2483.50	59.4	74.0	14.6	PK
	V	2483.50	46.2	54.0	7.8	AV
	H	4924.00	43.1	74.0	30.9	PK
	V	4924.00	44.3	74.0	29.7	PK

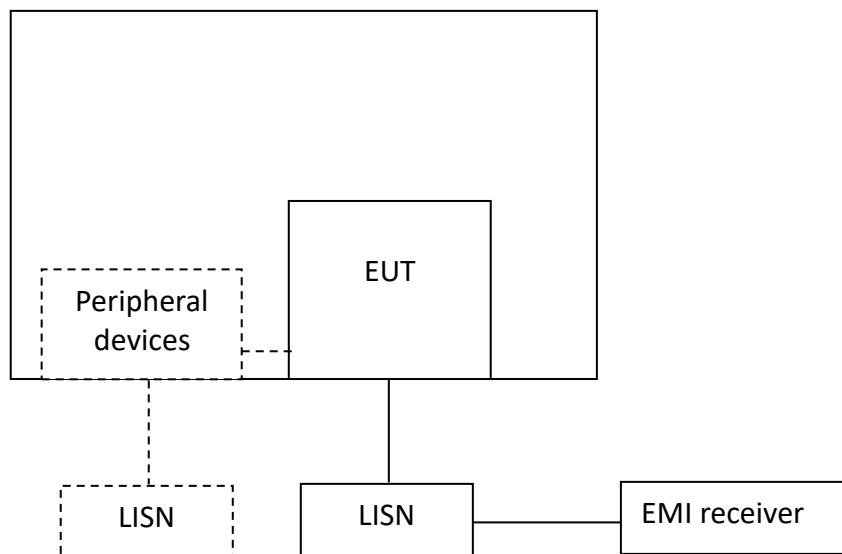
802.11n (HT40):

CH	Antenna	Frequency (MHz)	Measured Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	54.0	74.0	20.0	PK
	H	2390.00	41.9	54.0	12.1	AV
	V	2390.00	55.2	74.0	18.8	PK
	V	2390.00	42.9	54.0	11.1	AV
	H	4844.00	41.9	74.0	32.1	PK
	V	4844.00	42.7	74.0	31.3	PK
M	H	4874.00	42.1	74.0	31.9	PK
	V	4874.00	43.3	74.0	30.7	PK
H	H	2483.50	54.5	74.0	19.5	PK
	H	2483.50	41.9	54.0	12.1	AV
	V	2483.50	61.8	74.0	12.2	PK
	V	2483.50	48.4	54.0	5.6	AV
	H	4904.00	43.6	74.0	30.4	PK
	V	4904.00	44.9	74.0	29.1	PK

TEST REPORT**8 Power line conducted emission****Test result:** Pass**8.1 Limit**

Frequency range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

8.2 Test Configuration

TEST REPORT**8.3 Measurement Procedure**

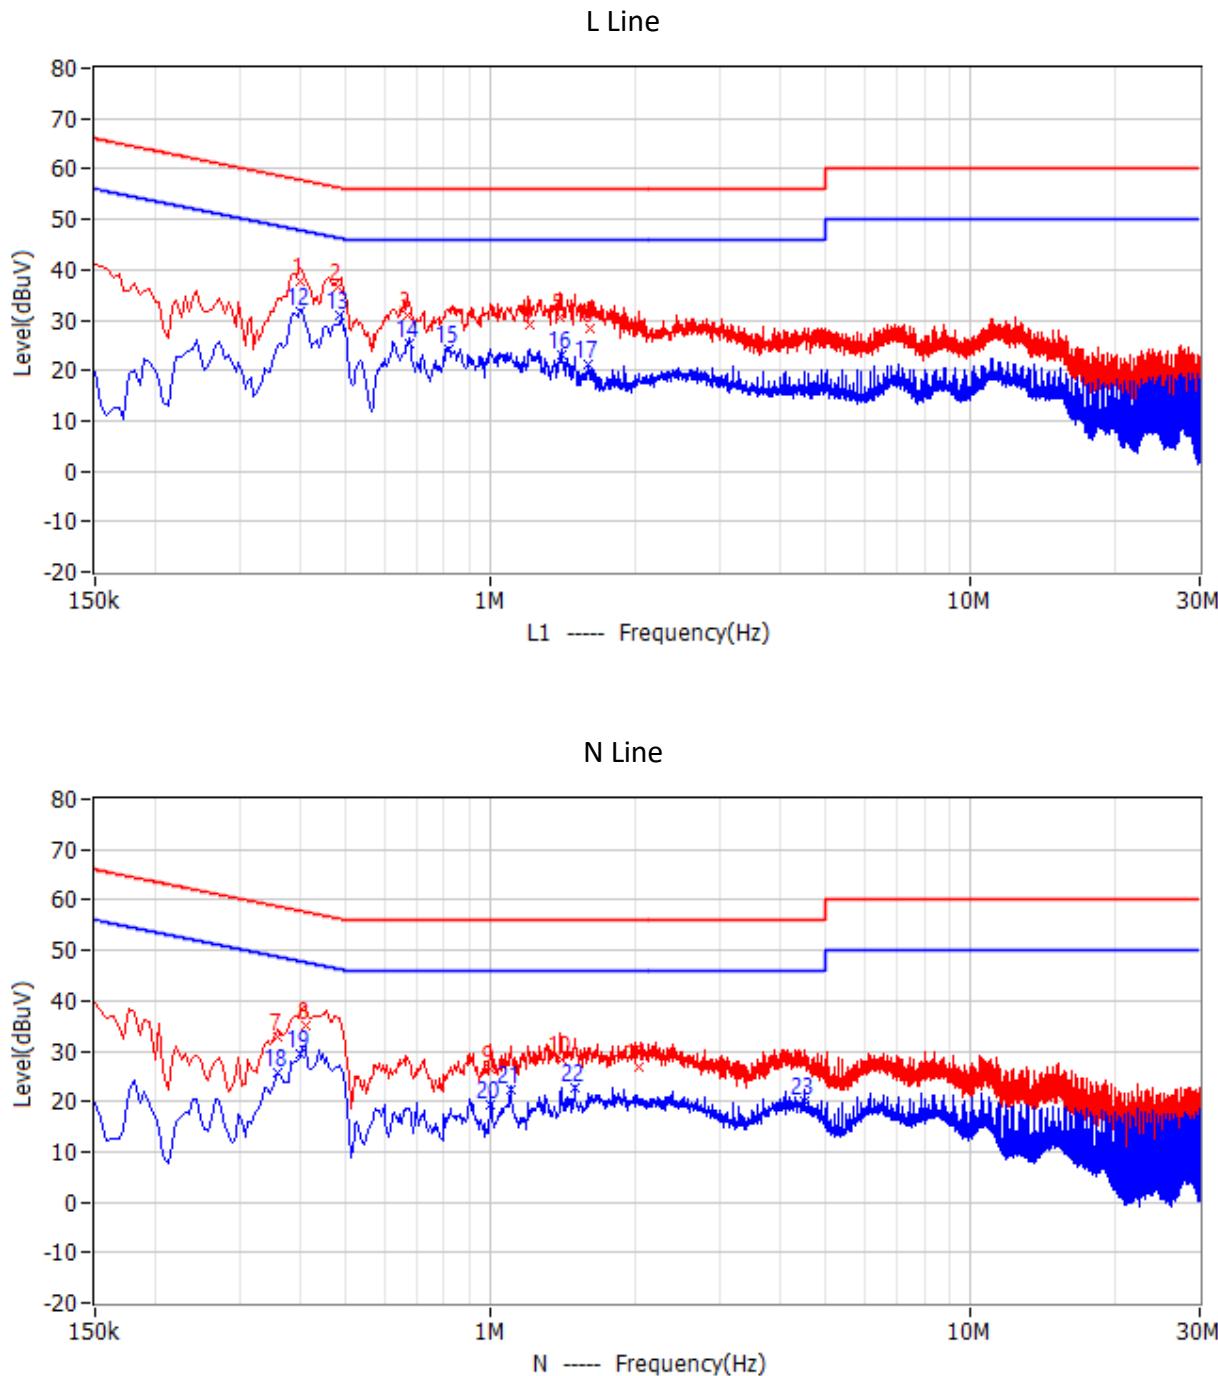
Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT**8.4 Test Results of Power line conducted emission**

Test Voltage: 120V/60Hz

Test Curve:

TEST REPORT
Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Detector	Phase
1	402.000kHz	57.8	37.6	-20.2	QP	L
2	478.500kHz	56.4	36.7	-19.7	QP	L
3	672.000kHz	56.0	31.0	-25.0	QP	L
4	1.212MHz	56.0	29.2	-26.8	QP	L
5	1.397MHz	56.0	30.7	-25.3	QP	L
6	1.608MHz	56.0	28.4	-27.6	QP	L
7	361.500kHz	58.7	32.8	-25.9	QP	N
8	411.000kHz	57.6	35.1	-22.5	QP	N
9	1.001MHz	56.0	26.6	-29.4	QP	N
10	1.401MHz	56.0	28.4	-27.6	QP	N
11	2.031MHz	56.0	27.0	-29.0	QP	N
12	402.000kHz	47.8	31.5	-16.3	CAV	L
13	483.000kHz	46.3	31.1	-15.2	CAV	L
14	676.500kHz	46.0	25.4	-20.6	CAV	L
15	816.000kHz	46.0	24.1	-21.9	CAV	L
16	1.401MHz	46.0	23.2	-22.8	CAV	L
17	1.599MHz	46.0	21.3	-24.7	CAV	L
18	361.500kHz	48.7	25.6	-23.1	CAV	N
19	402.000kHz	47.8	29.6	-18.2	CAV	N
20	1.001MHz	46.0	19.3	-26.7	CAV	N
21	1.100MHz	46.0	22.2	-23.8	CAV	N
22	1.500MHz	46.0	22.7	-23.3	CAV	N
23	4.502MHz	46.0	20.2	-25.8	CAV	N

- Remark:*
1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Factor
 3. Delta = Level - Limit
 4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
Then Factor = 10.00 + 2.00 = 12.00dB;
Level = 10dBuV + 12.00dB = 22.00dBuV;
Delta = 22.00dBuV - 66.00dBuV = -44.00dB.

TEST REPORT

9 Occupied Bandwidth

Test result: Pass

9.1 Limit

None

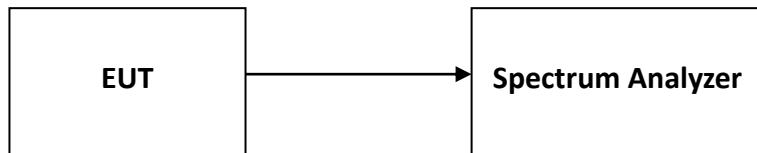
9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 5 Clause 6.7 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration



9.4 The results of Occupied Bandwidth

Please refer to Appendix A

TEST REPORT

10 Antenna requirement

Requirement:

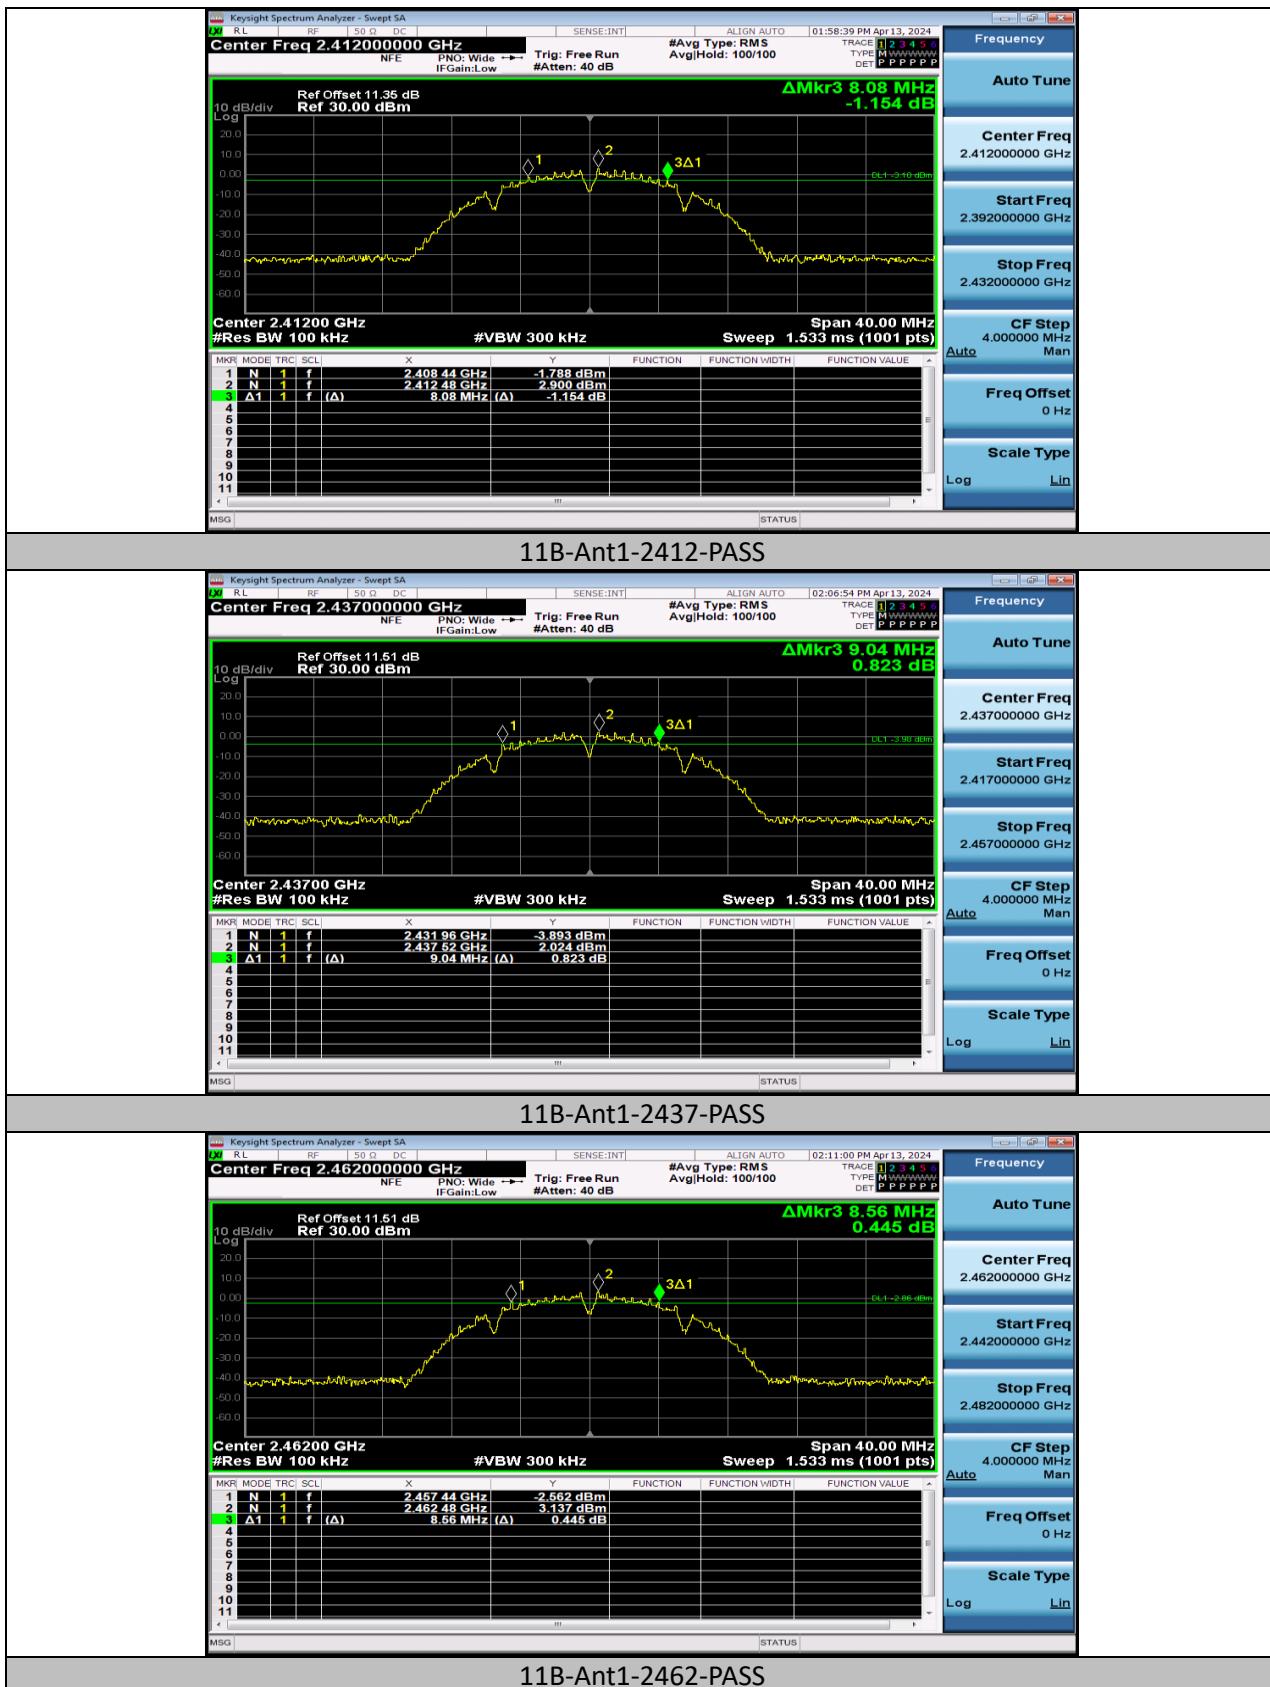
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

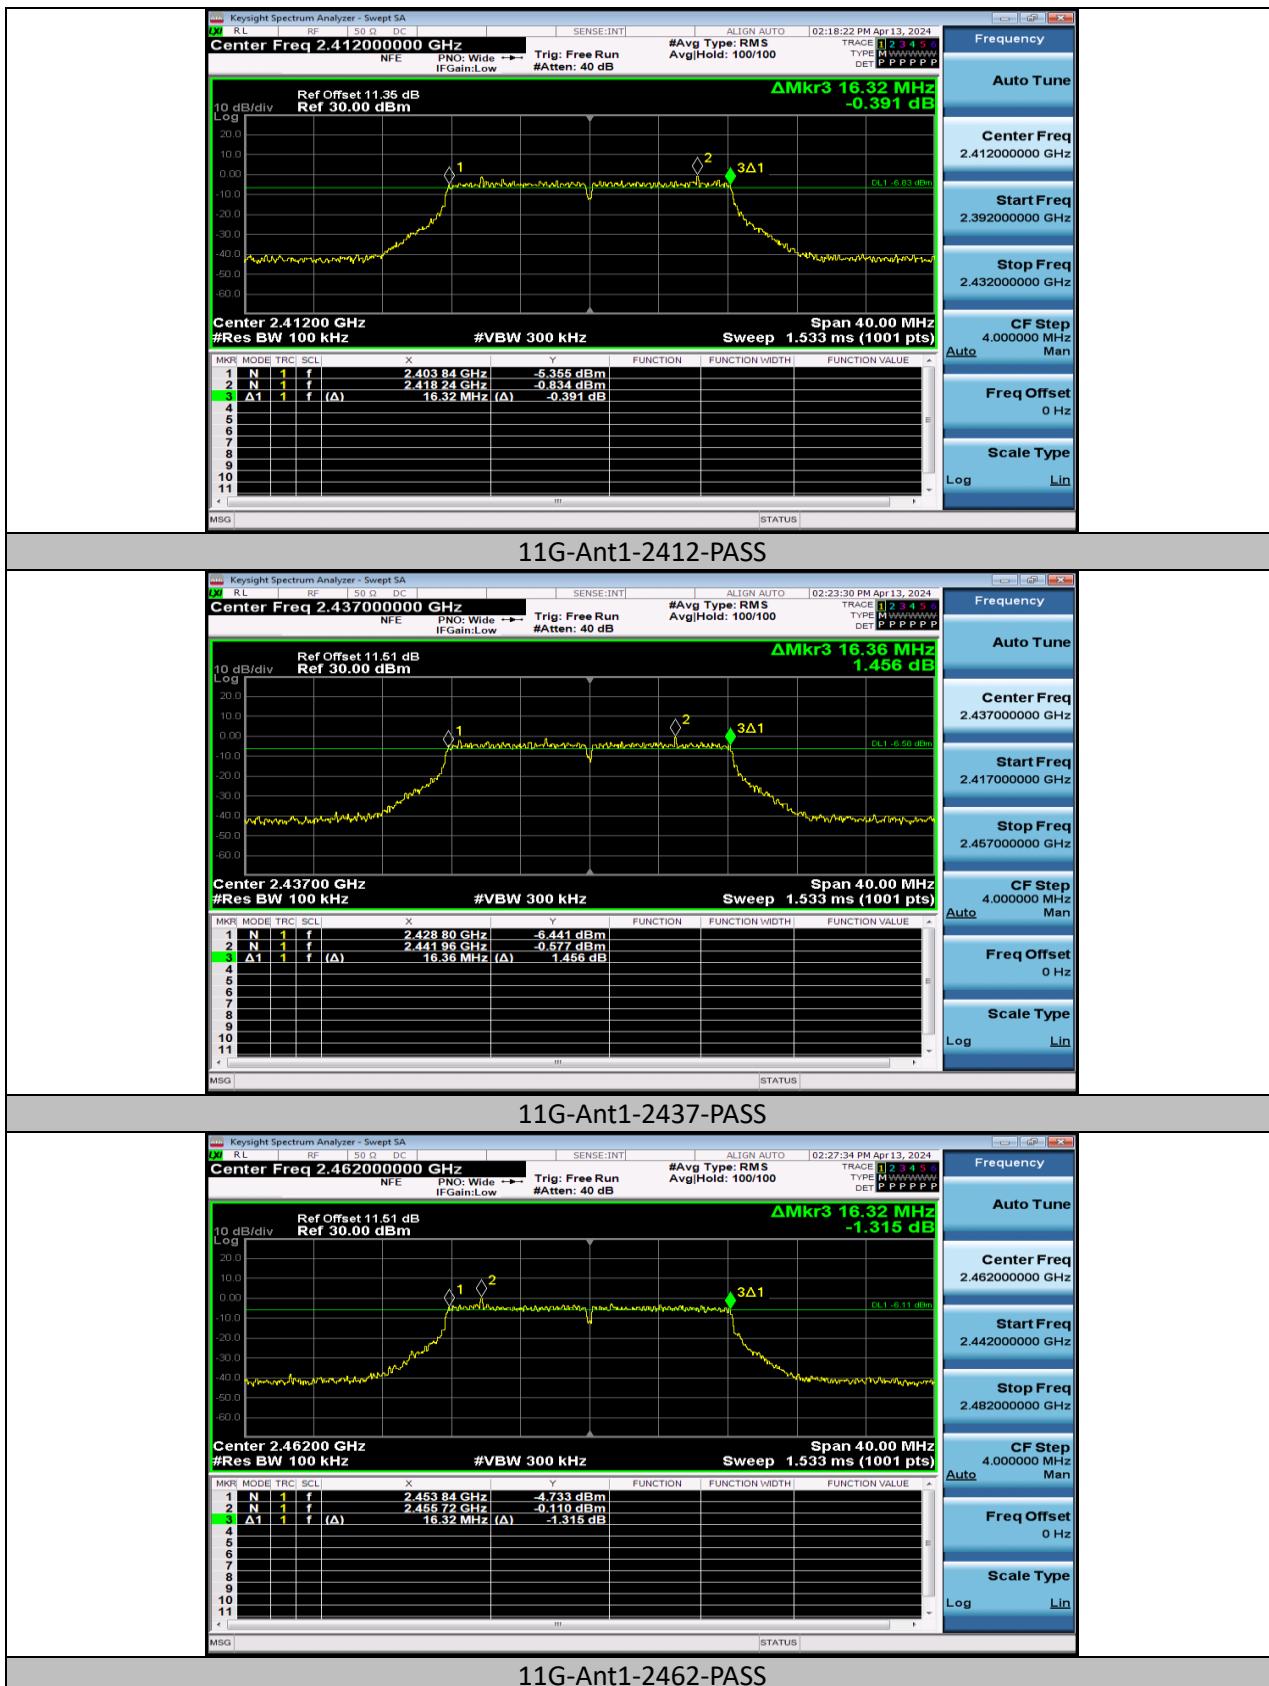
EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT**Appendix A: Test results****DTS Bandwidth**

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.080	2408.440	2416.520	0.5	PASS
11B	Ant1	2437	9.040	2431.960	2441.000	0.5	PASS
11B	Ant1	2462	8.560	2457.440	2466.000	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
11G	Ant1	2437	16.360	2428.800	2445.160	0.5	PASS
11G	Ant1	2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.200	2420.760	0.5	PASS
11N20SISO	Ant1	2437	17.560	2428.200	2445.760	0.5	PASS
11N20SISO	Ant1	2462	17.560	2453.200	2470.760	0.5	PASS
11N40SISO	Ant1	2422	35.600	2404.240	2439.840	0.5	PASS
11N40SISO	Ant1	2437	35.680	2419.240	2454.920	0.5	PASS
11N40SISO	Ant1	2452	35.120	2434.400	2469.520	0.5	PASS

TEST REPORT
Test Graphs


TEST REPORT



TEST REPORT

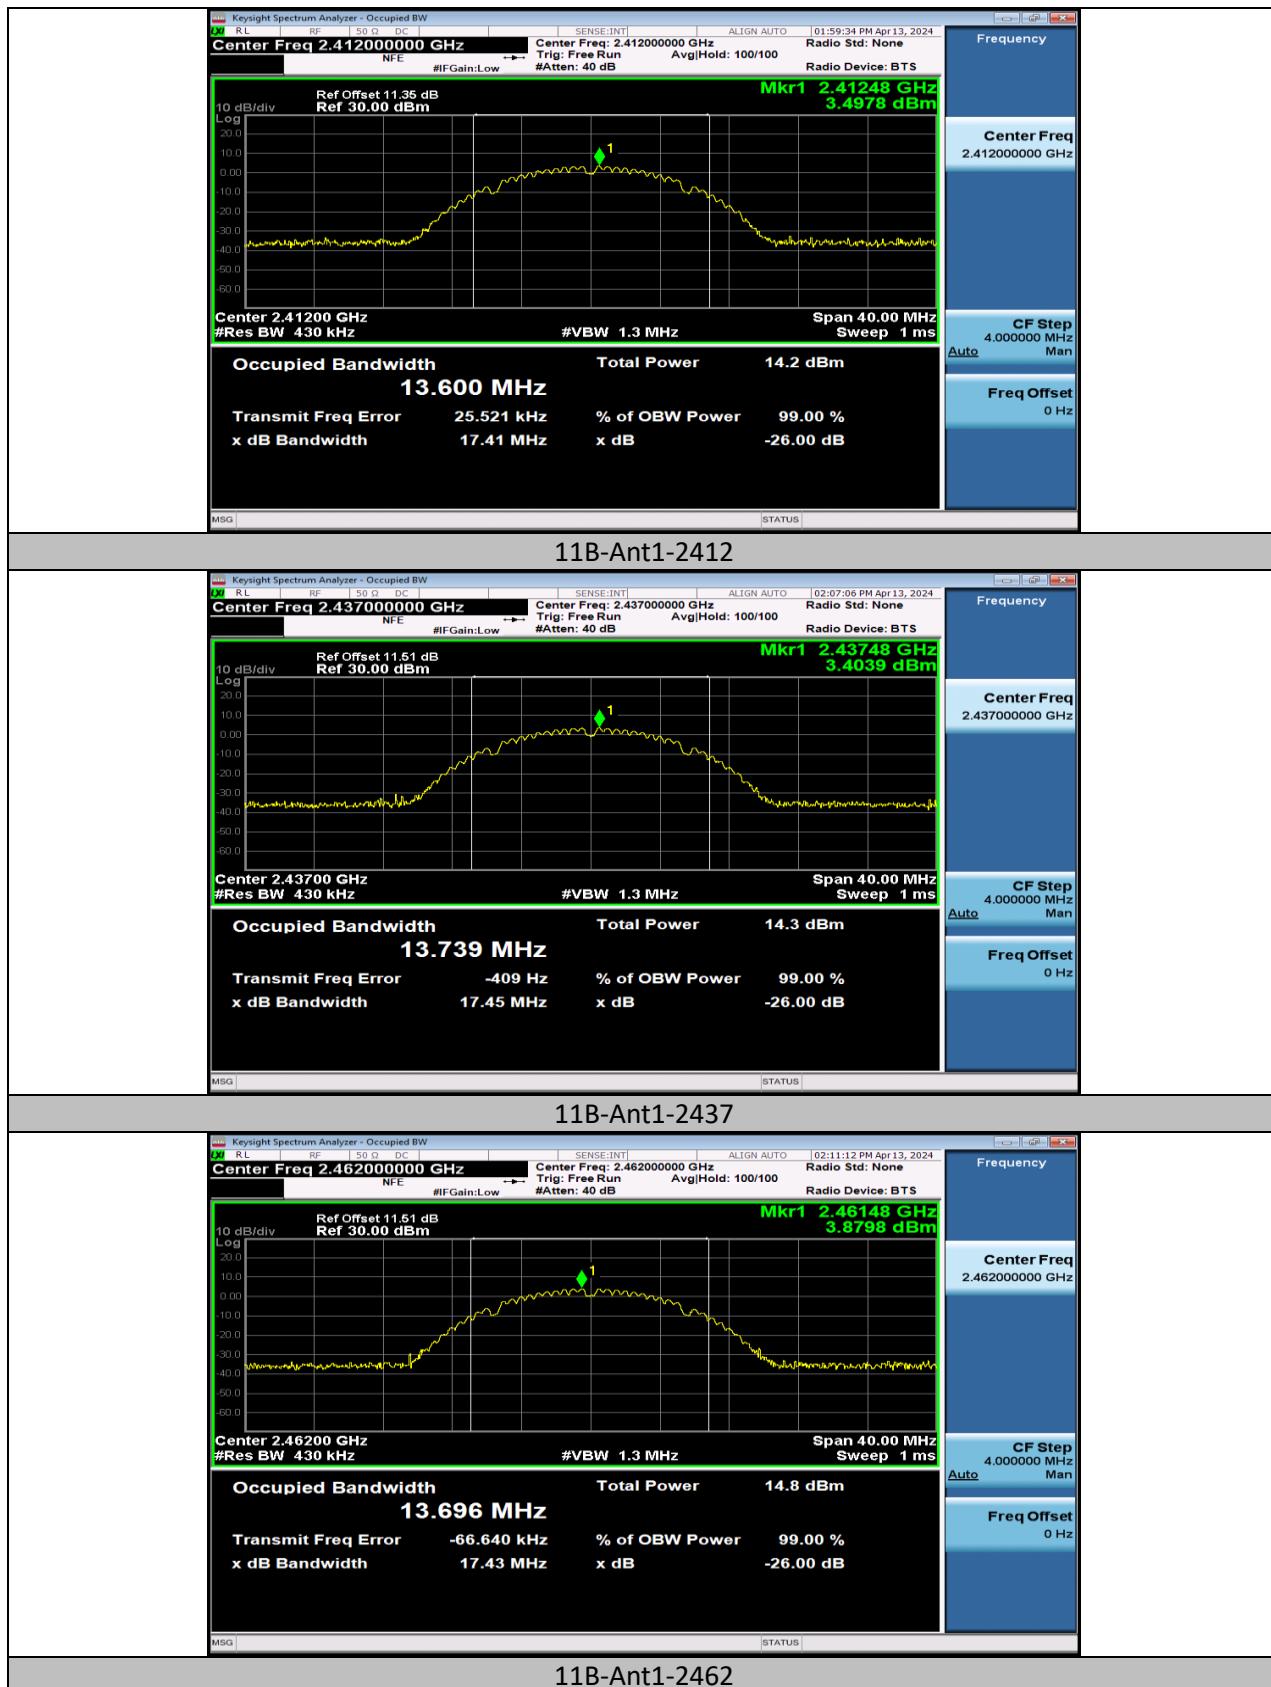


TEST REPORT

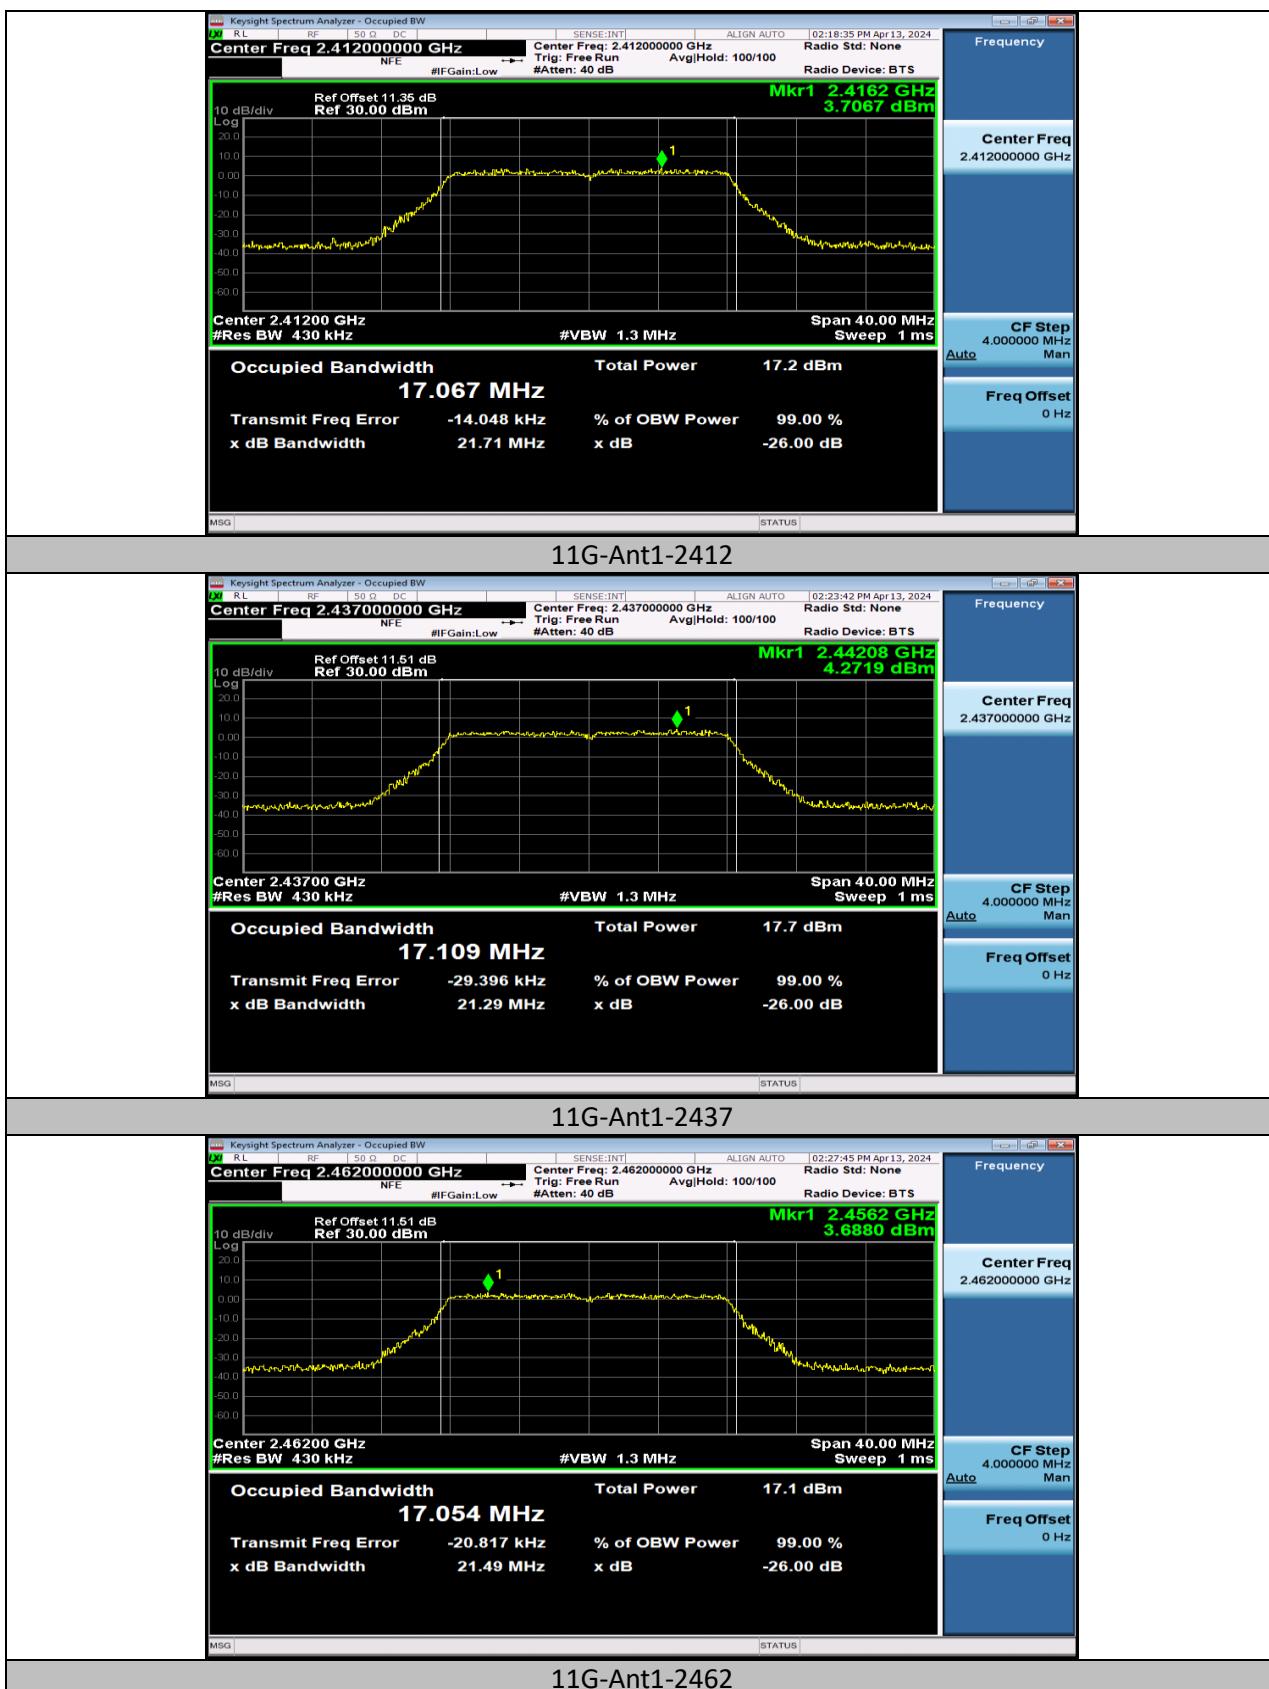


TEST REPORT**Occupied Channel Bandwidth**

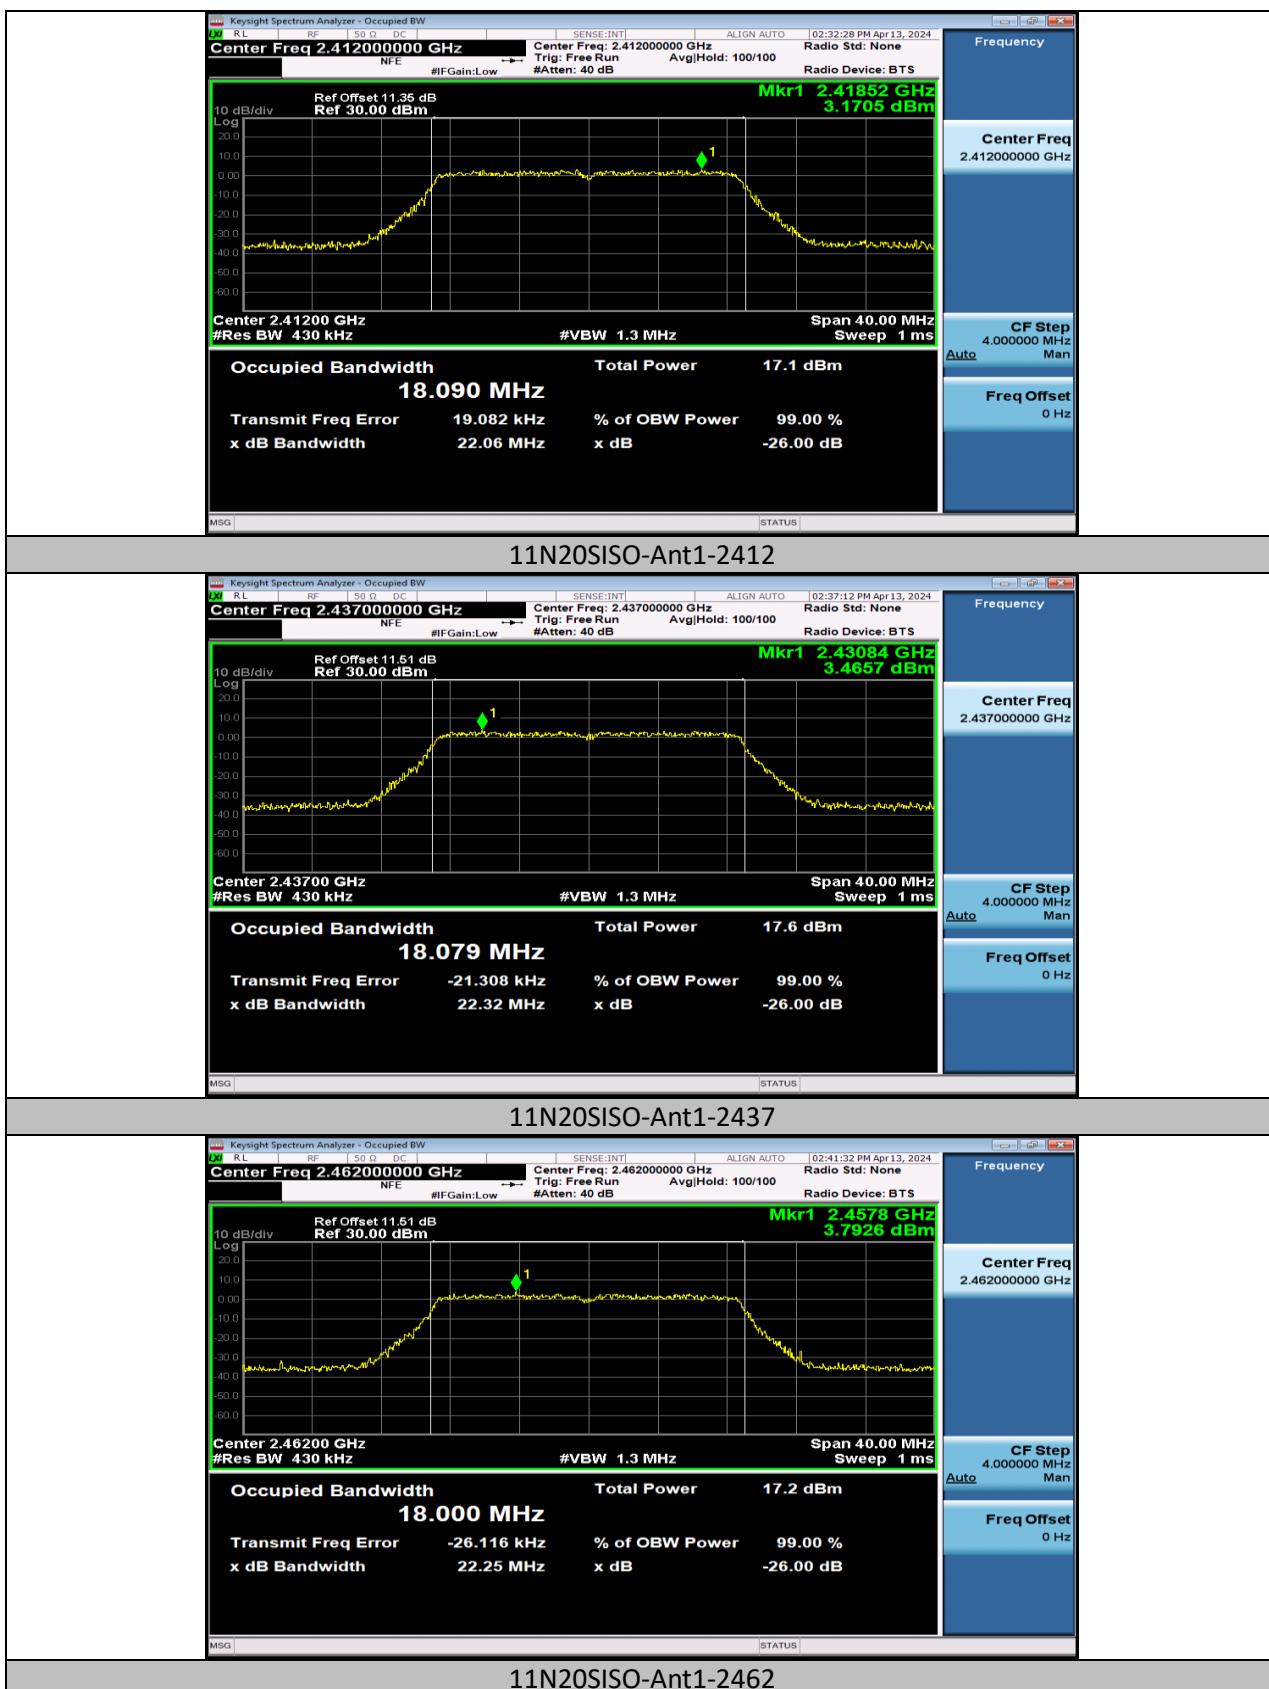
Test Mode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	13.600	2405.2255	2418.8255	---	---
11B	Ant1	2437	13.739	2430.1301	2443.8691	---	---
11B	Ant1	2462	13.696	2455.0854	2468.7814	---	---
11G	Ant1	2412	17.067	2403.4525	2420.5195	---	---
11G	Ant1	2437	17.109	2428.4161	2445.5251	---	---
11G	Ant1	2462	17.054	2453.4522	2470.5062	---	---
11N20SISO	Ant1	2412	18.090	2402.9741	2421.0641	---	---
11N20SISO	Ant1	2437	18.079	2427.9392	2446.0182	---	---
11N20SISO	Ant1	2462	18.000	2452.9739	2470.9739	---	---
11N40SISO	Ant1	2422	36.384	2403.8395	2440.2235	---	---
11N40SISO	Ant1	2437	36.219	2418.8661	2455.0851	---	---
11N40SISO	Ant1	2452	36.286	2433.7444	2470.0304	---	---

TEST REPORT
Test Graphs


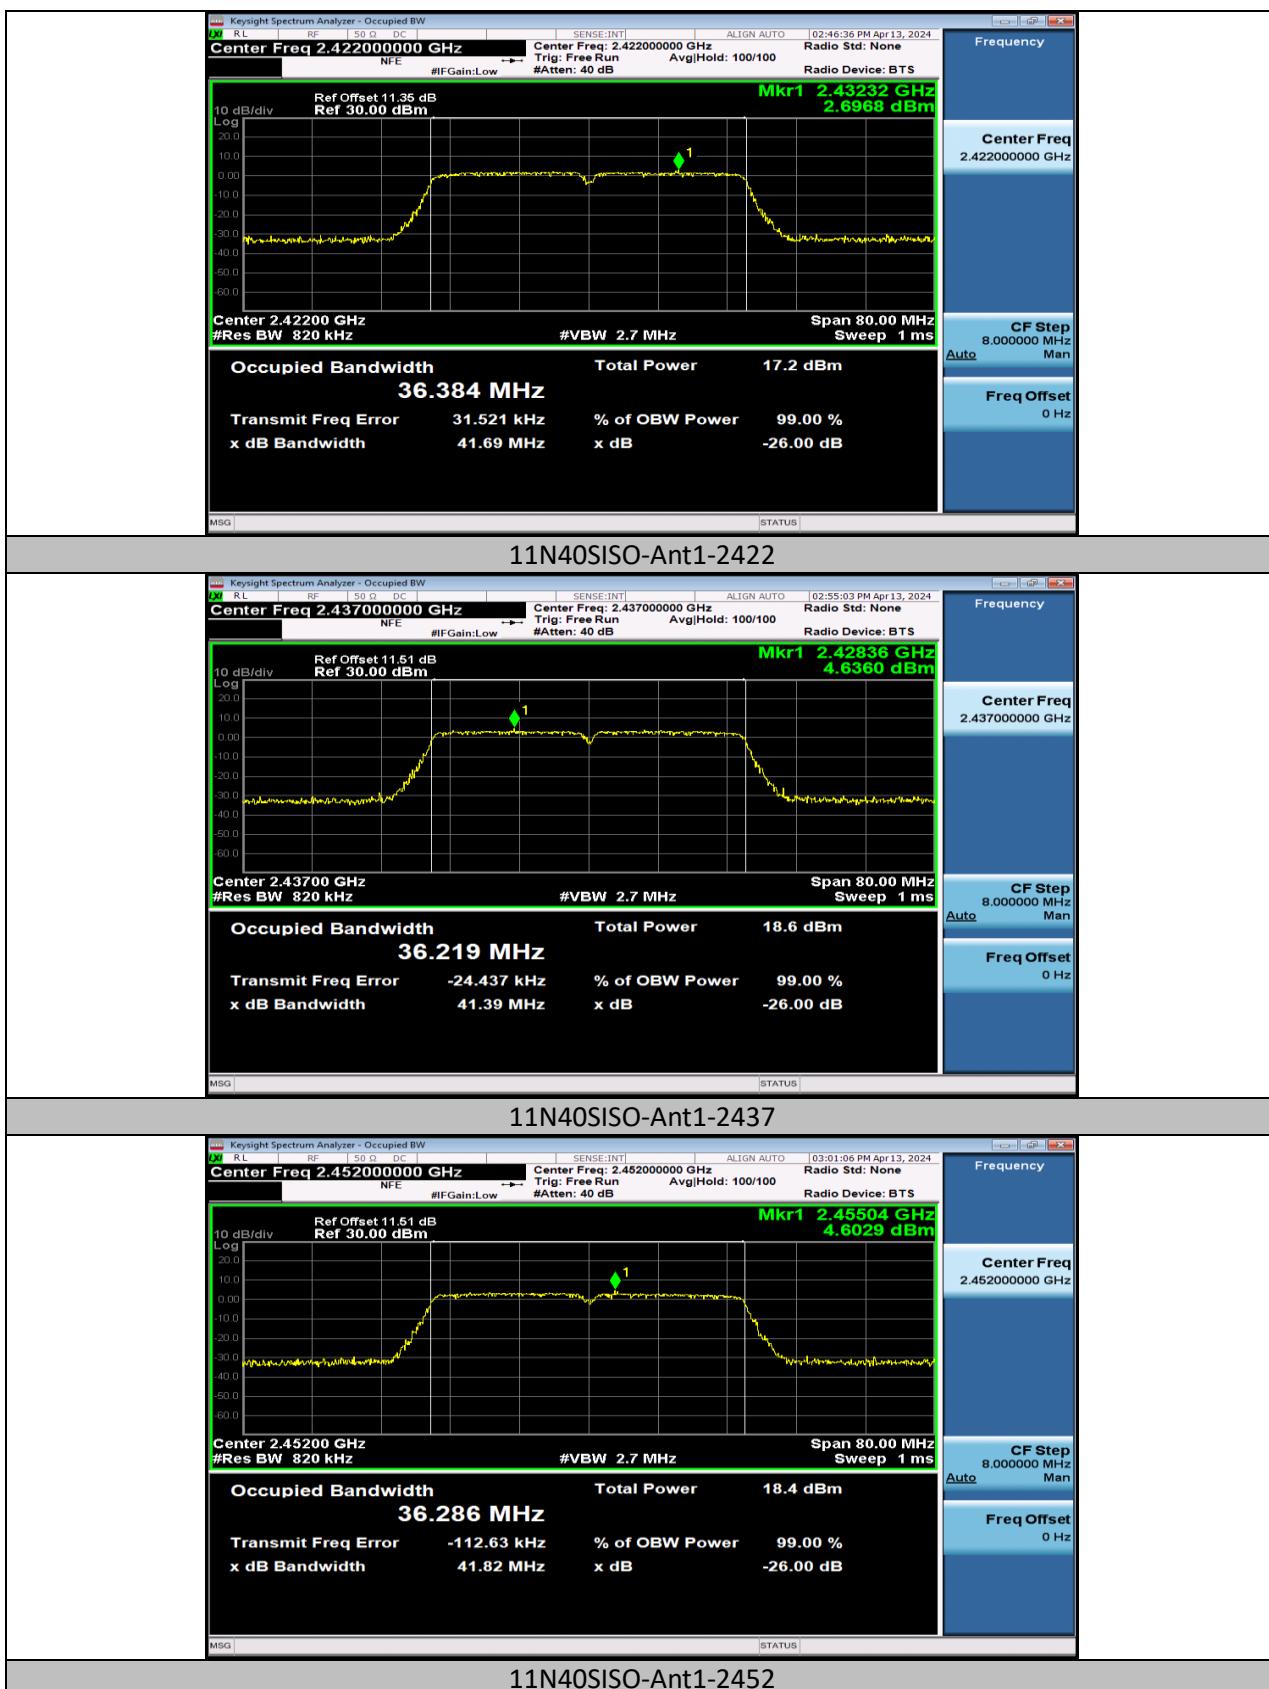
TEST REPORT



TEST REPORT

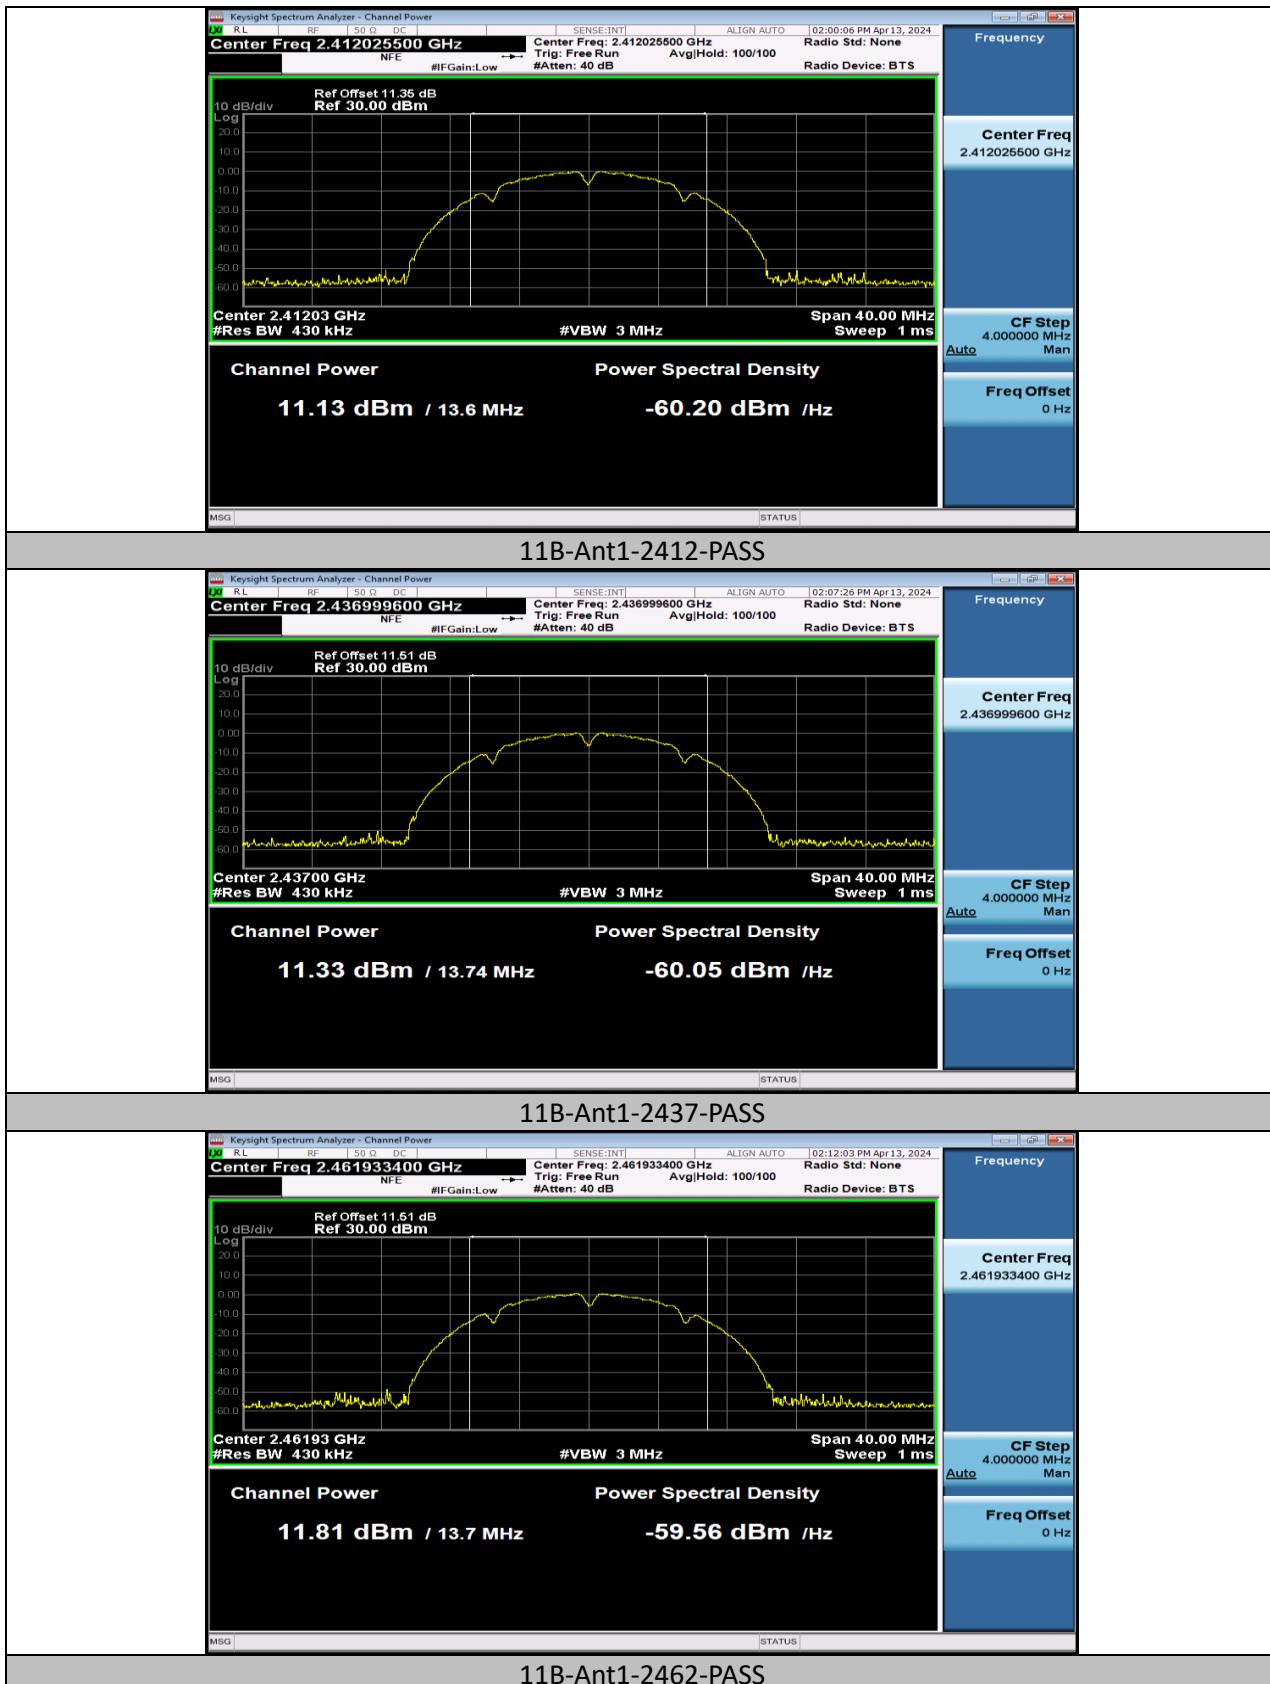


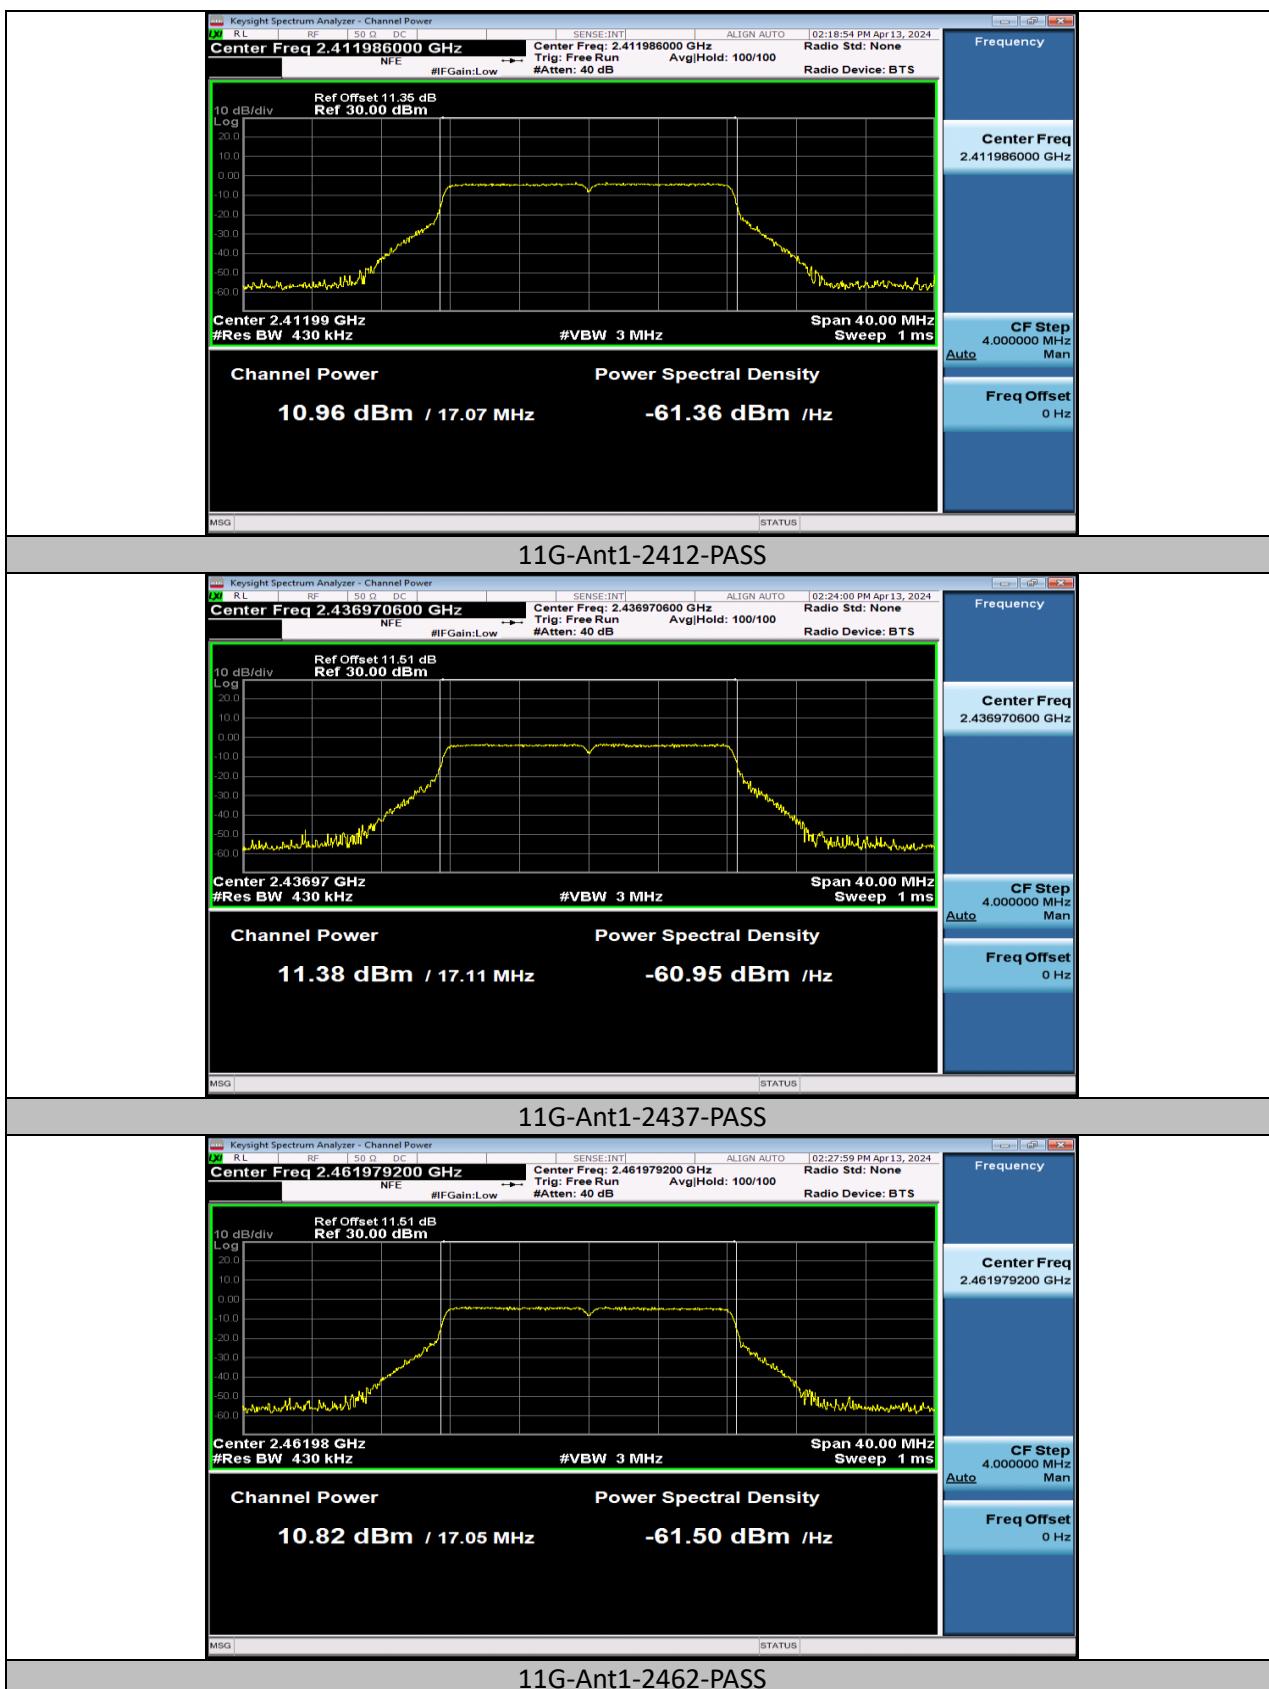
TEST REPORT

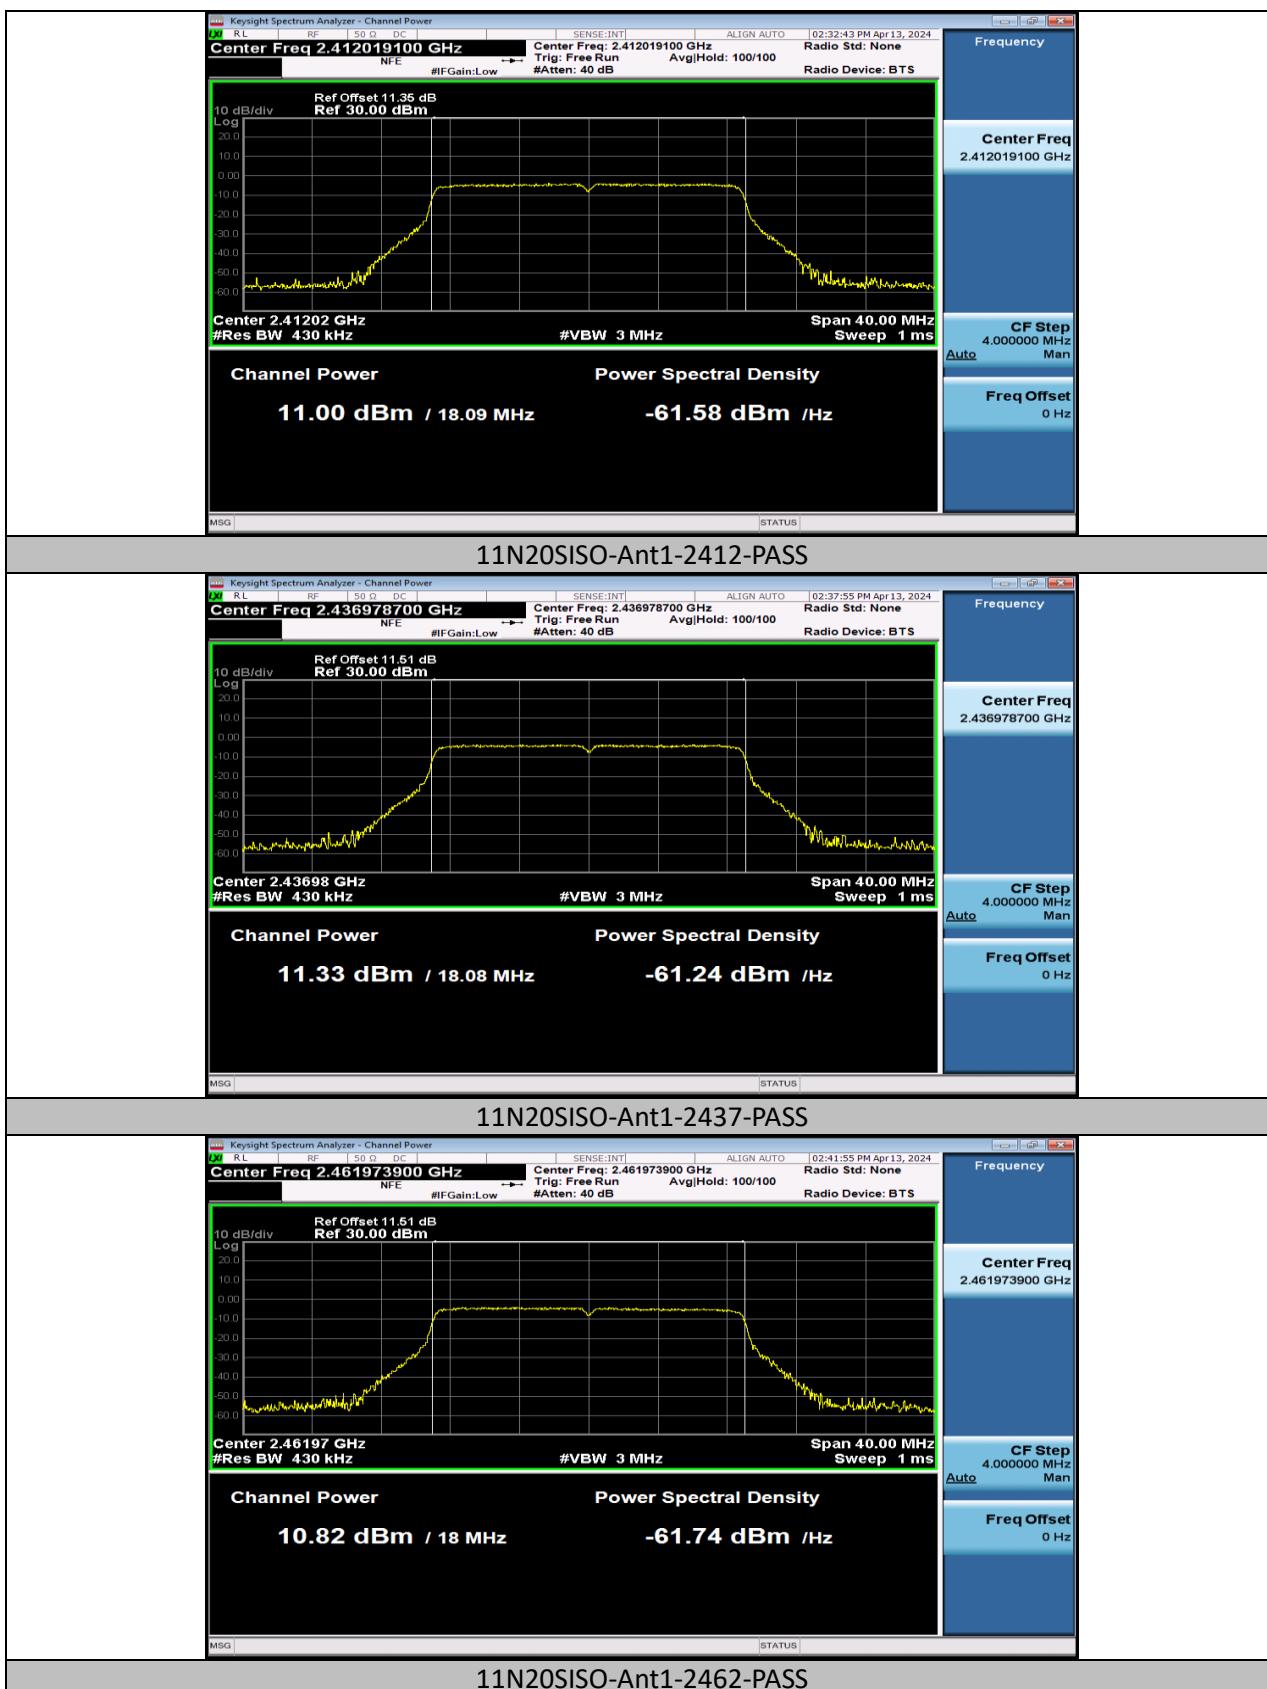


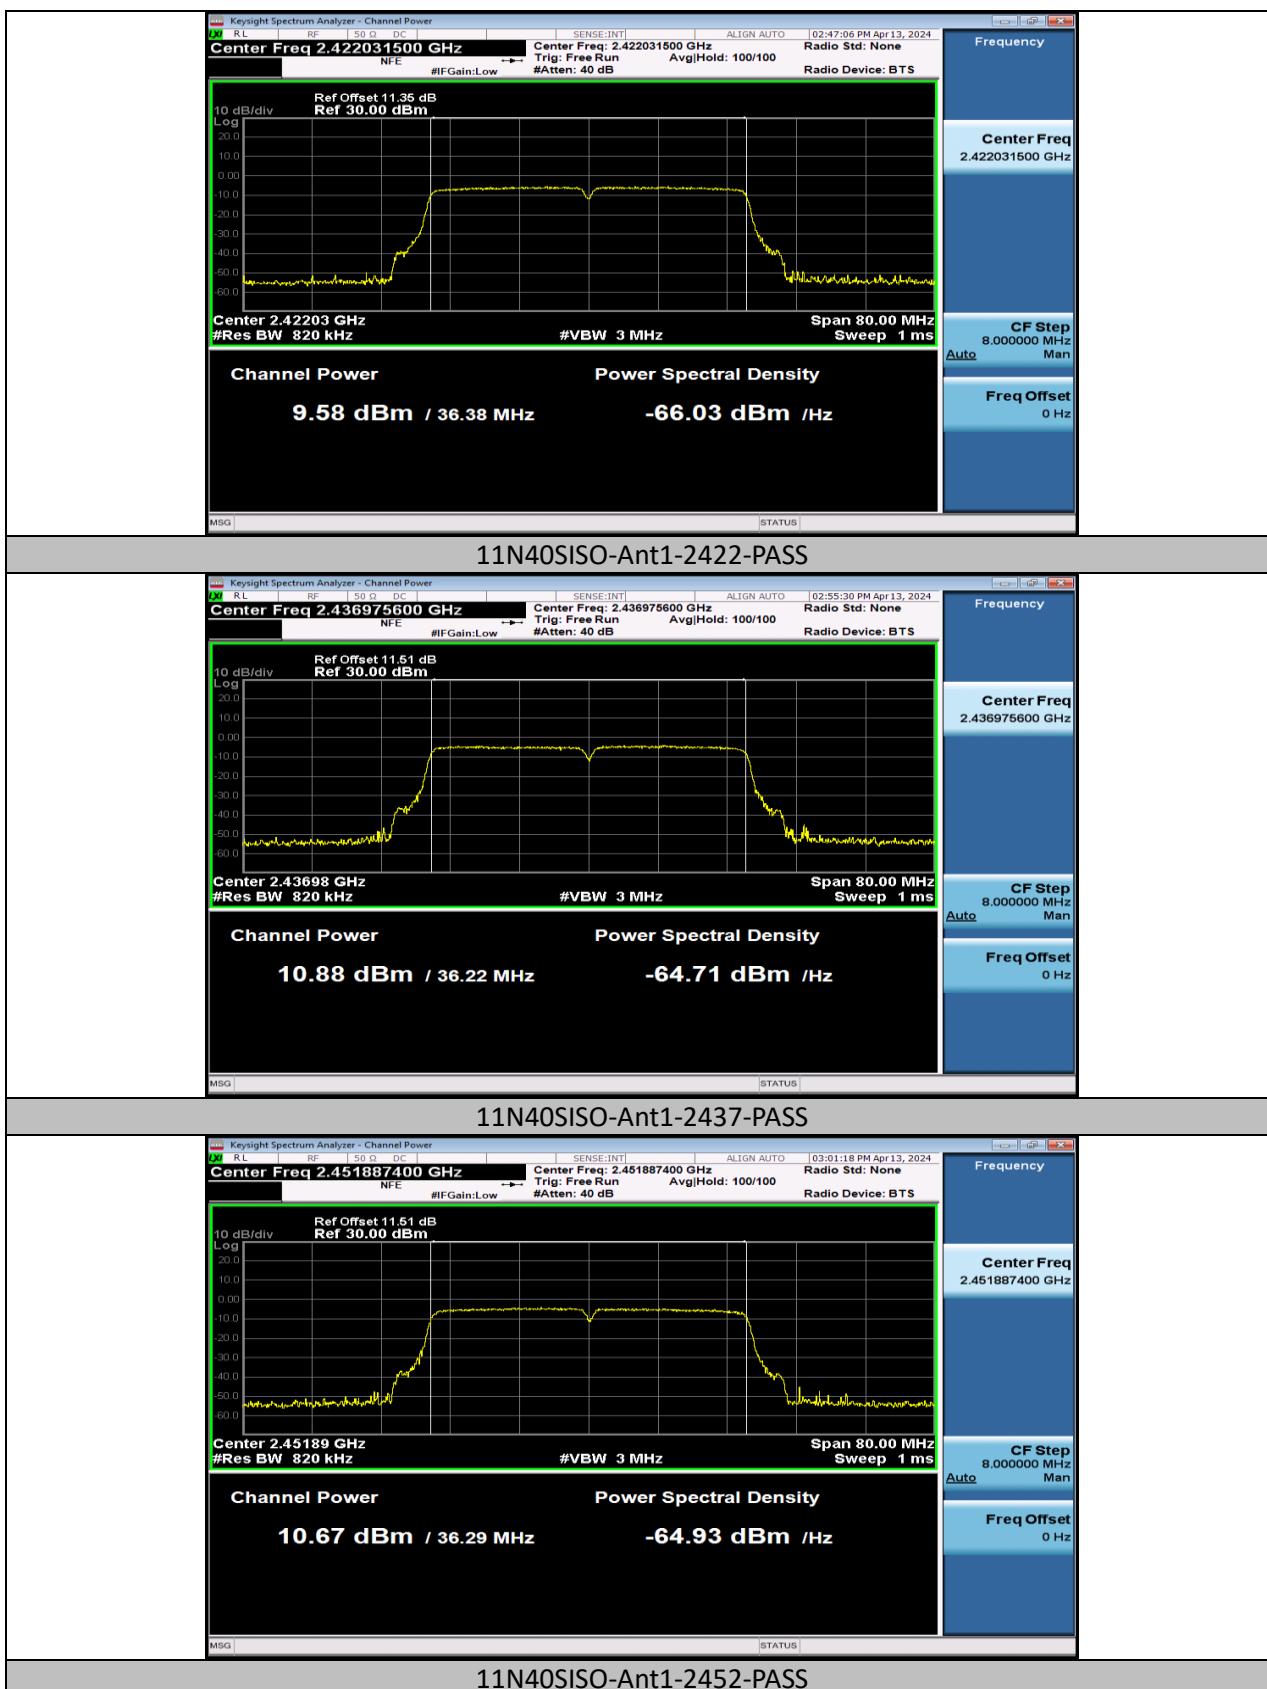
TEST REPORT
Maximum conducted output power

Test Mode	Freq. [MHz]	Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	2412	11.13	99.12	0.04	11.17	≤30.00	3.66	14.83	≤36.00	PASS
11B	2437	11.33	100.00	0.00	11.33	≤30.00	3.66	14.99	≤36.00	PASS
11B	2462	11.81	98.96	0.05	11.86	≤30.00	3.66	15.52	≤36.00	PASS
11G	2412	10.96	96.28	0.16	11.12	≤30.00	3.66	14.78	≤36.00	PASS
11G	2437	11.38	91.59	0.38	11.76	≤30.00	3.66	15.42	≤36.00	PASS
11G	2462	10.82	92.41	0.34	11.16	≤30.00	3.66	14.82	≤36.00	PASS
11N20SISO	2412	11.00	97.96	0.09	11.09	≤30.00	3.66	14.75	≤36.00	PASS
11N20SISO	2437	11.33	95.52	0.20	11.53	≤30.00	3.66	15.19	≤36.00	PASS
11N20SISO	2462	10.82	96.00	0.18	11.00	≤30.00	3.66	14.66	≤36.00	PASS
11N40SISO	2422	9.58	79.66	0.99	10.57	≤30.00	3.66	14.23	≤36.00	PASS
11N40SISO	2437	10.88	84.82	0.72	11.60	≤30.00	3.66	15.26	≤36.00	PASS
11N40SISO	2452	10.67	78.99	1.02	11.69	≤30.00	3.66	15.35	≤36.00	PASS

TEST REPORT
Test Graphs


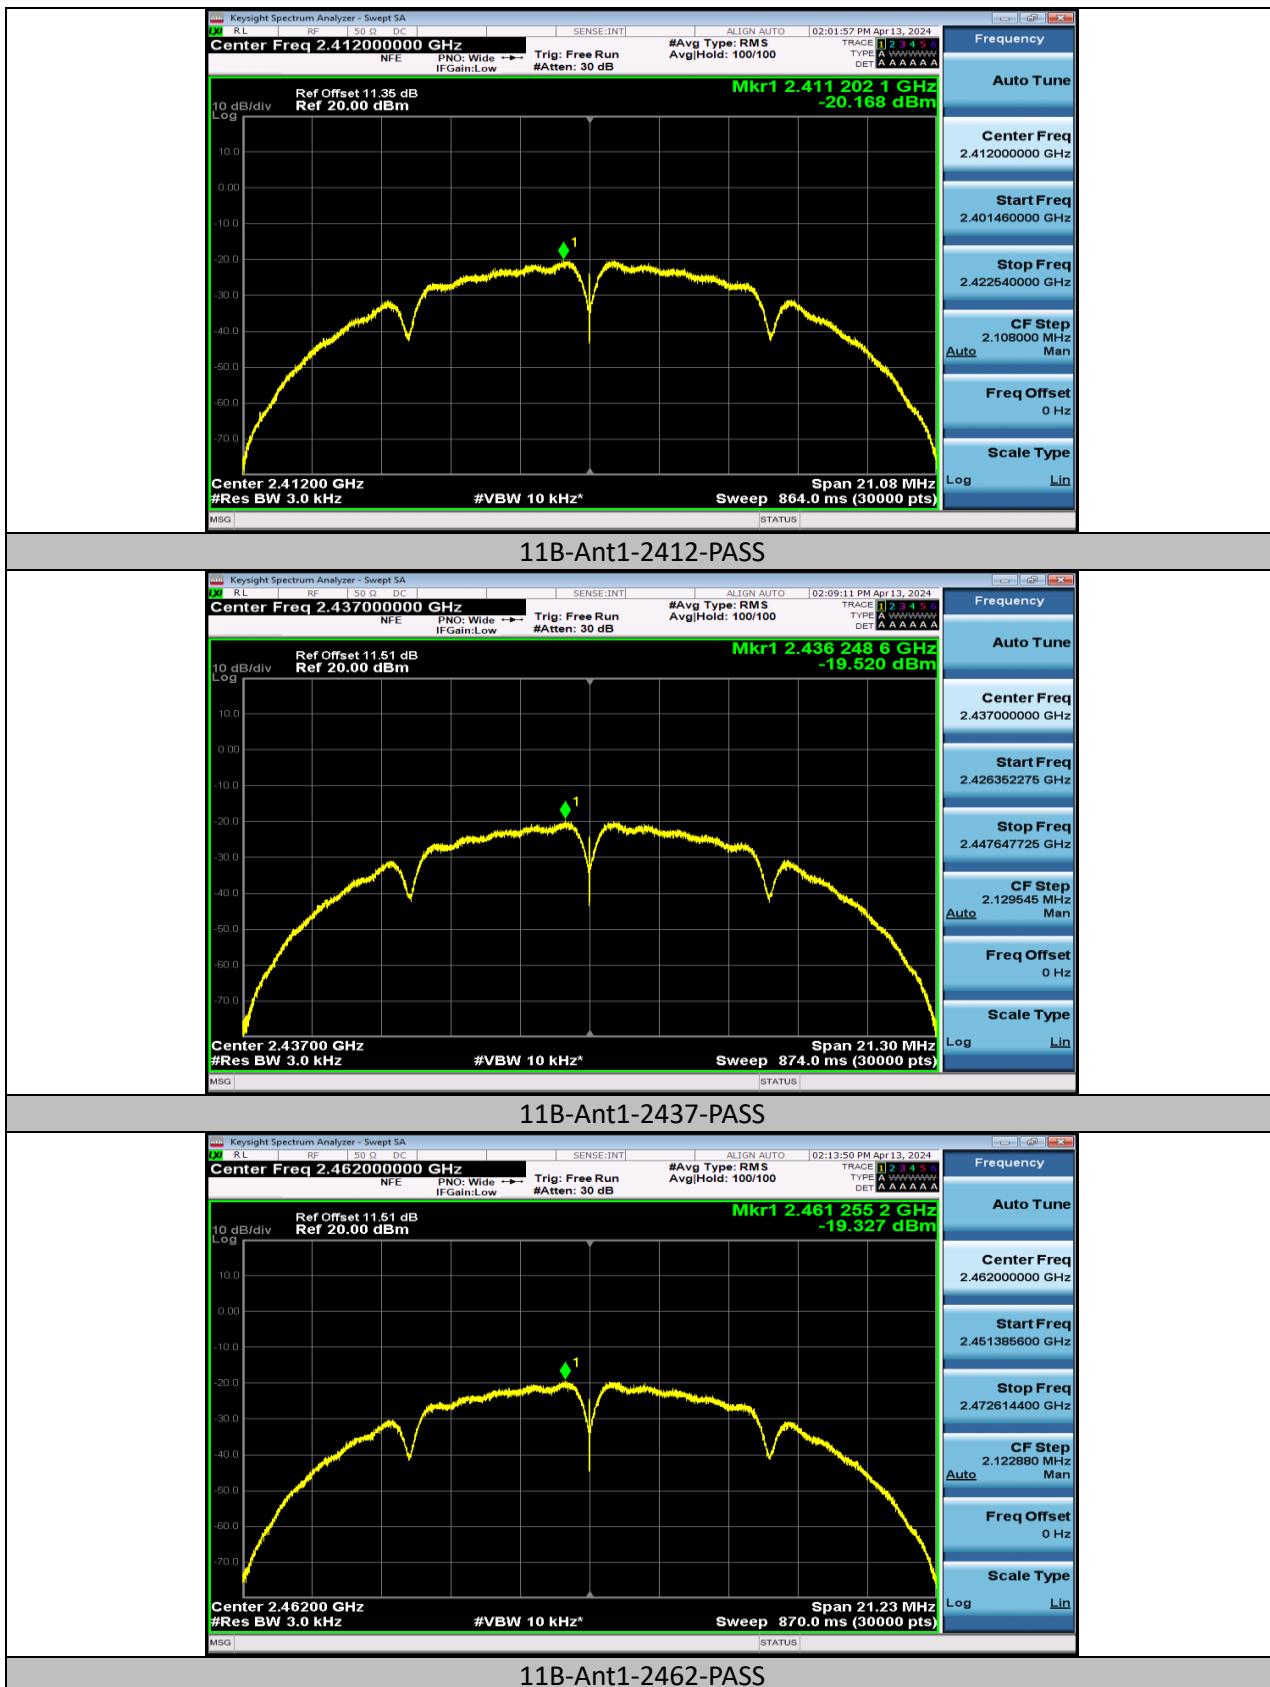
TEST REPORT


TEST REPORT


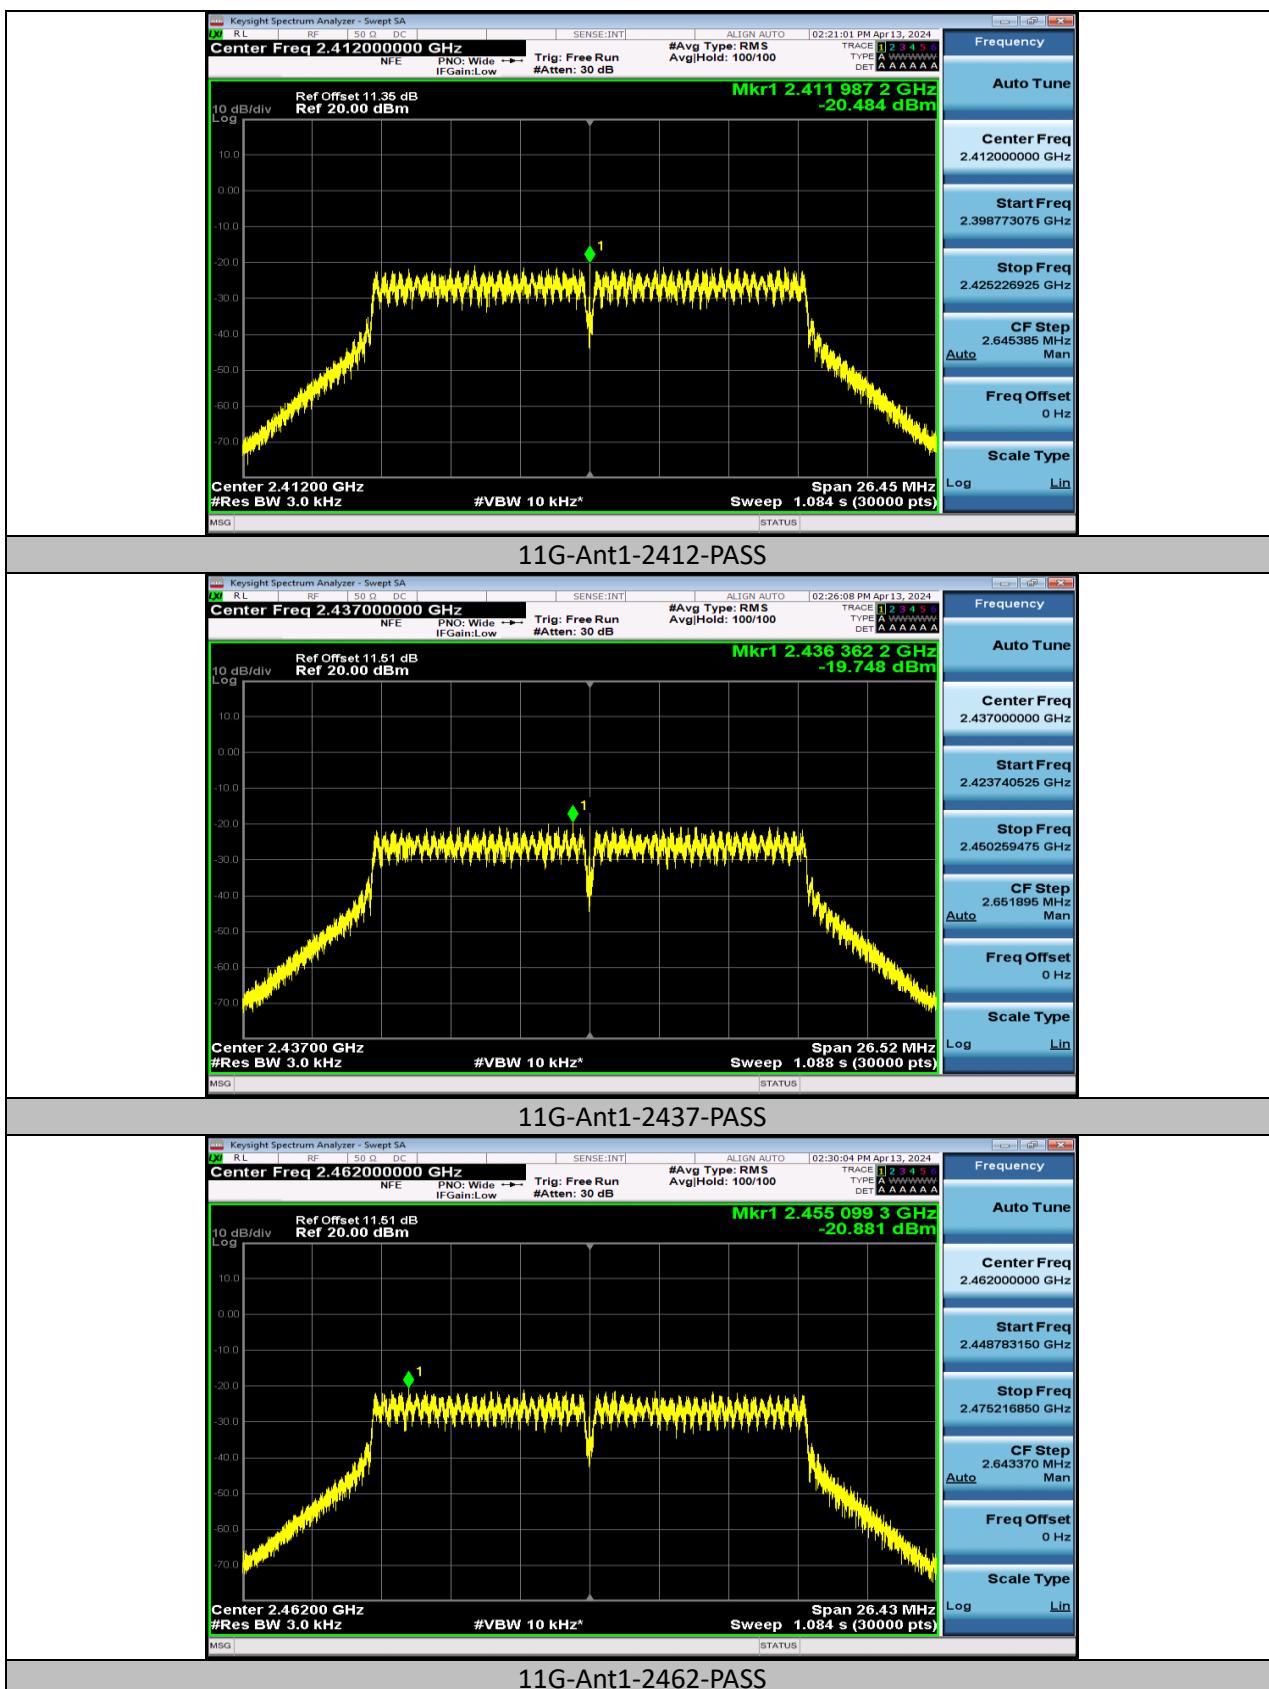
TEST REPORT


TEST REPORT**Maximum power spectral density**

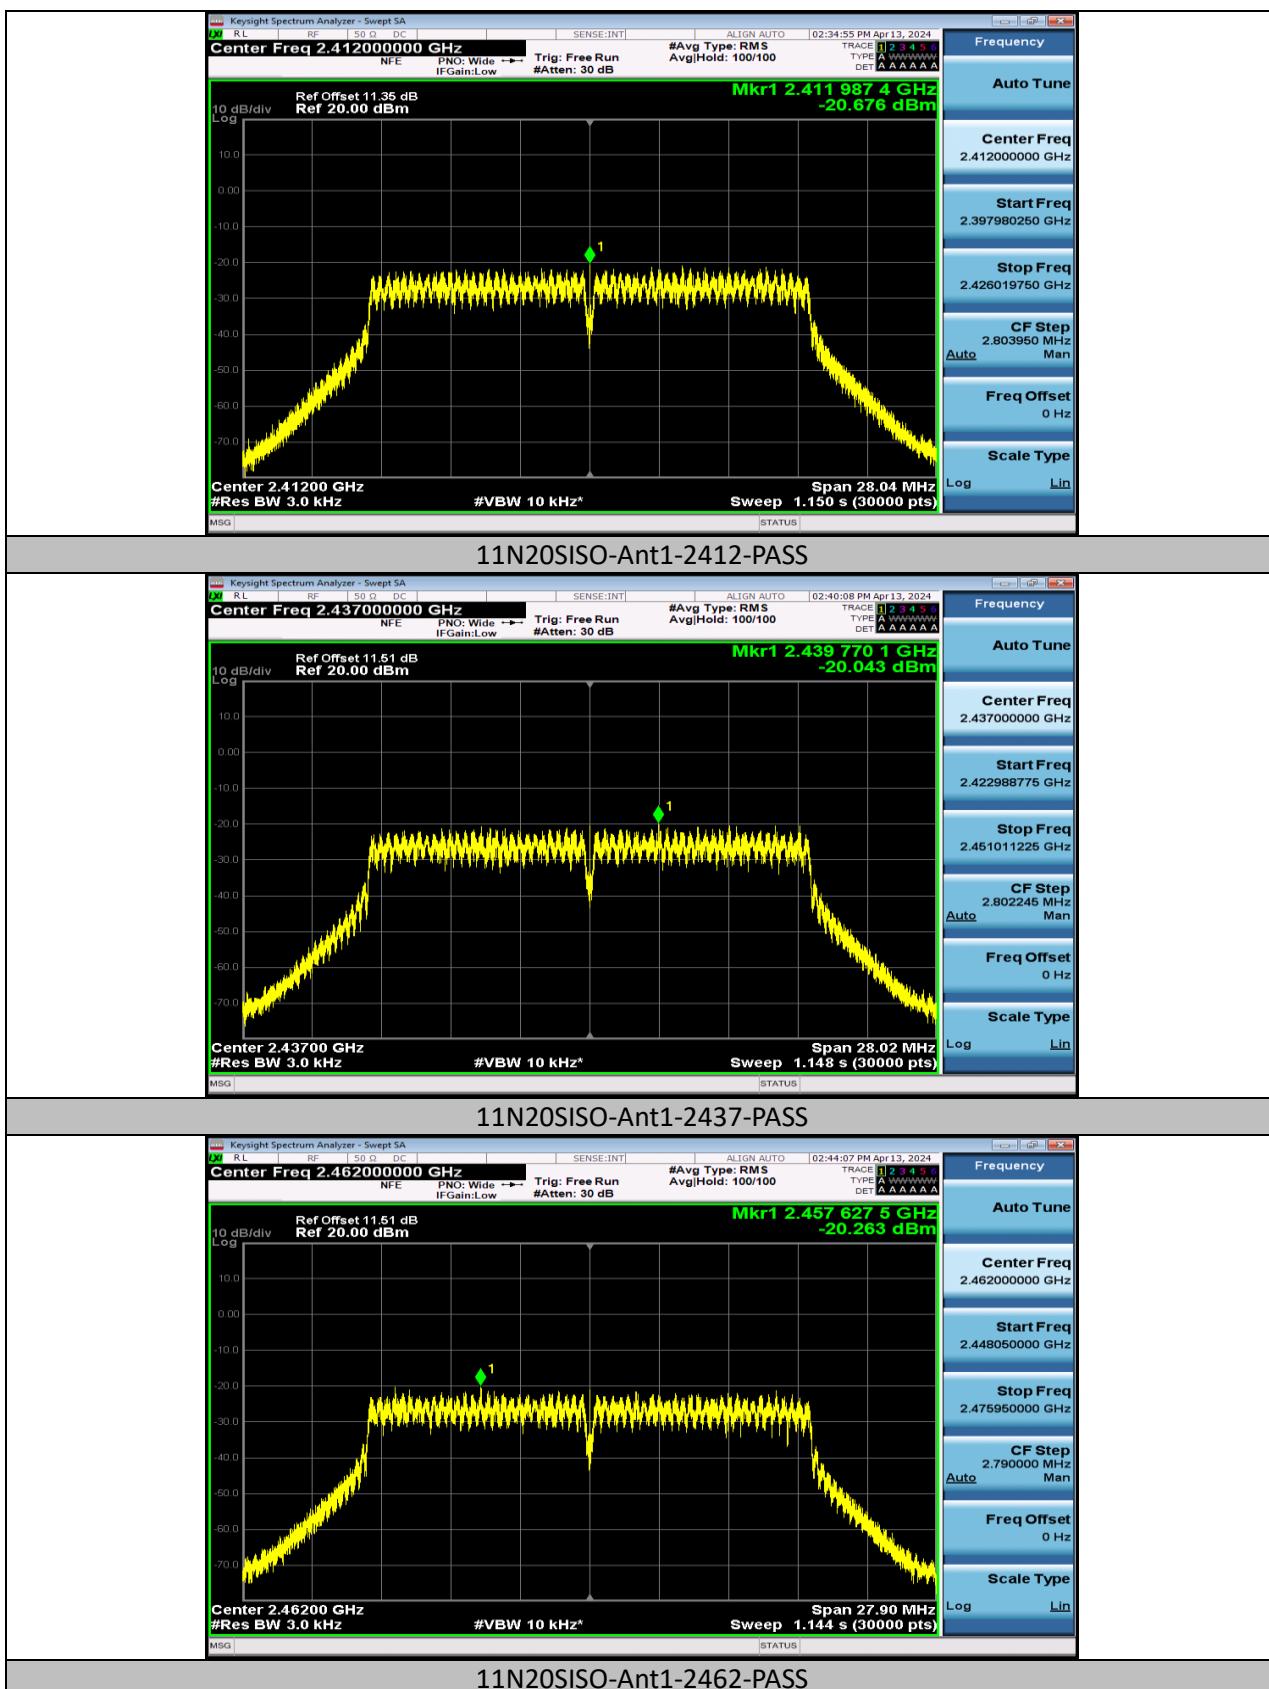
Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-20.13	≤8.00	PASS
11B	Ant1	2437	-19.52	≤8.00	PASS
11B	Ant1	2462	-19.28	≤8.00	PASS
11G	Ant1	2412	-20.32	≤8.00	PASS
11G	Ant1	2437	-19.37	≤8.00	PASS
11G	Ant1	2462	-20.54	≤8.00	PASS
11N20SISO	Ant1	2412	-20.59	≤8.00	PASS
11N20SISO	Ant1	2437	-19.84	≤8.00	PASS
11N20SISO	Ant1	2462	-20.08	≤8.00	PASS
11N40SISO	Ant1	2422	-20.76	≤8.00	PASS
11N40SISO	Ant1	2437	-21.60	≤8.00	PASS
11N40SISO	Ant1	2452	-20.98	≤8.00	PASS

TEST REPORT
Test Graphs


TEST REPORT



TEST REPORT



TEST REPORT

