

F8E206-BLK-PS2 SPECIFICATION

1. Outline:



DimensionS: LxWxH=459x172x39mm

2.Scope:

This keyboard F8E206-BLK-PS2 is 107/108 key, especially with new key support for Microsoft Windows, also compatible with AT or PS/2 .

3.Features:

- 3.1.ACPI power management keys
- 3.2.107/108 Enhanced layout
- 3.3.Fully compatible with PS/2 and Microsoft Windows OS
- 3.4.Membrane key switch with tactile feedback
- 3.5.High quality membrane tactile key switch
- 3.6.Worldwide language layout supported
- 3.7.A target calculated Mean Time Between Failures(MTBF) is greater than 5,000 hour

4.Specifications :

- | | |
|------------------------------|--|
| 4.1.Key Switch Actuation | Switch Travel: 3.5±0.3mm
Switch Feeling: Silent tactile feedback
Working Voltage:5.0±0.25VDC |
| 4.2.Electrical Specification | Current Consumption:30mA Max
Power Consumption: 0.2 Watts Max |

4.3. Environmental data: Operating temperature:0 to 45
 Storage temperature:-20 to 60
 Humidity: -20% to 90%(non-condensing)

4.4. Connector

4.4.1. MINI DIN 6 pin connector pin assignment , See Figure 1

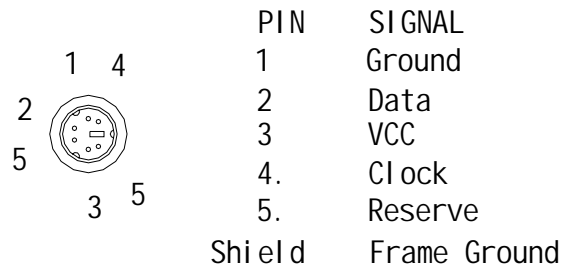


Figure 1

4.4.2. DIN standard 5 pin connector pin assignment , See Figure 2

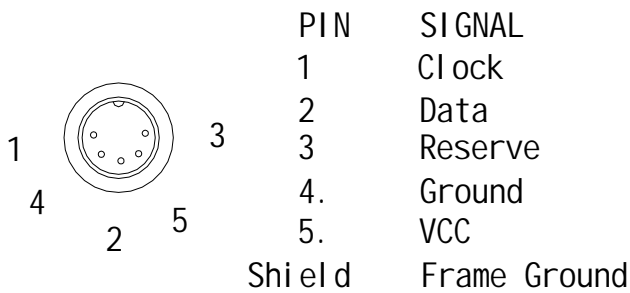


Figure 2

FEDERAL COMMUNICATIONS COMMISSION
INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation, if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

To assure continued FCC compliance:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.