


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal


115 dBuV/m

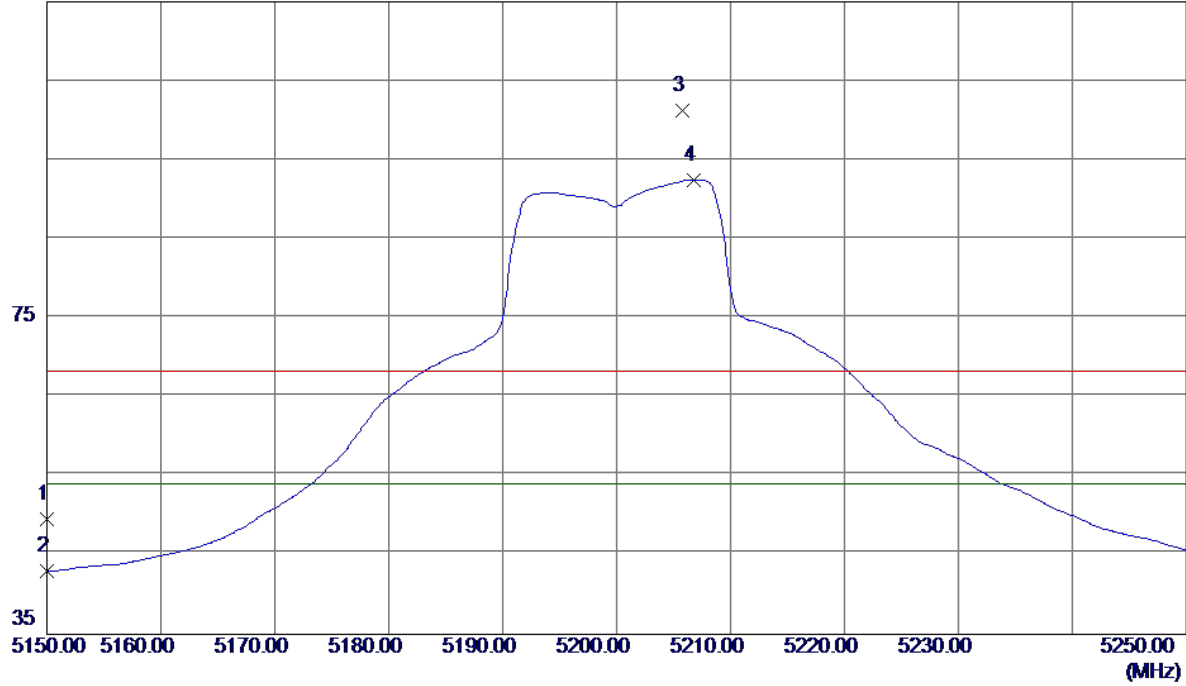

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.97	40.62	49.59	68.30	-18.71	Peak	
2	5150.0000	2.32	40.62	42.94	54.00	-11.06	AVG	
3	5205.8000	60.42	40.81	101.23	68.30	32.93	Peak	No Limit
4 *	5206.8000	51.67	40.81	92.48	54.00	38.48	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

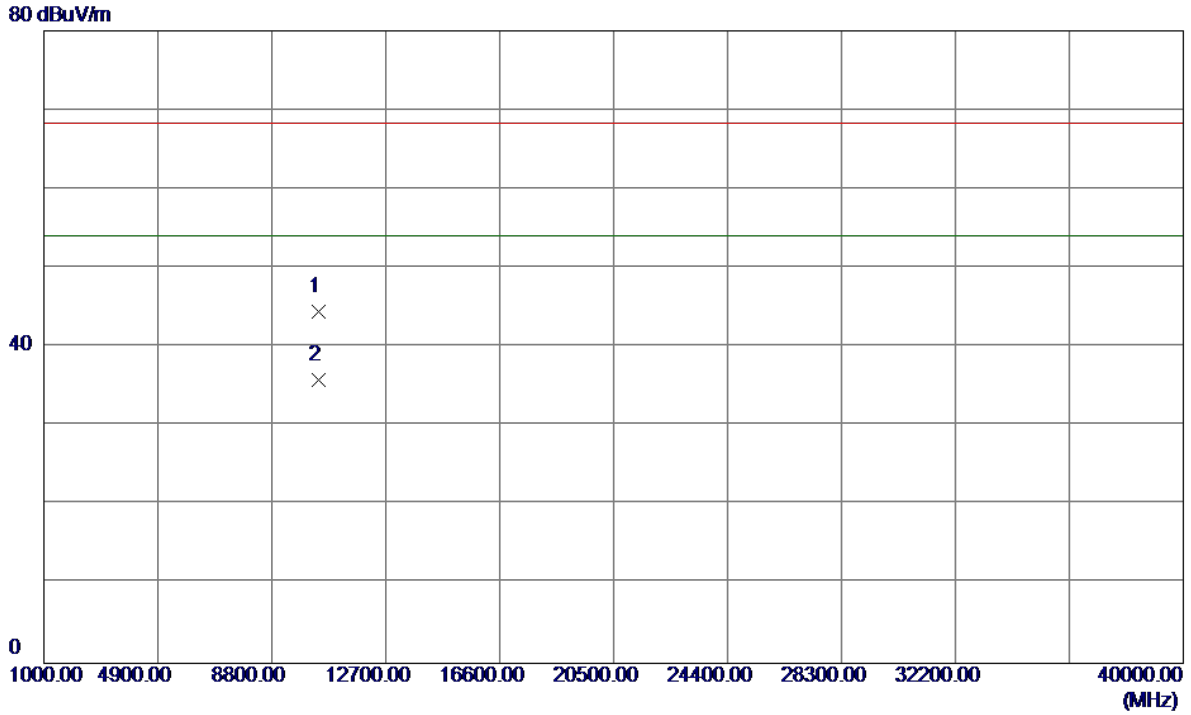


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.7000	29.40	15.06	44.46	68.30	-23.84	Peak	
2 *	10400.8000	20.83	15.06	35.89	54.00	-18.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

120 dBuV/m

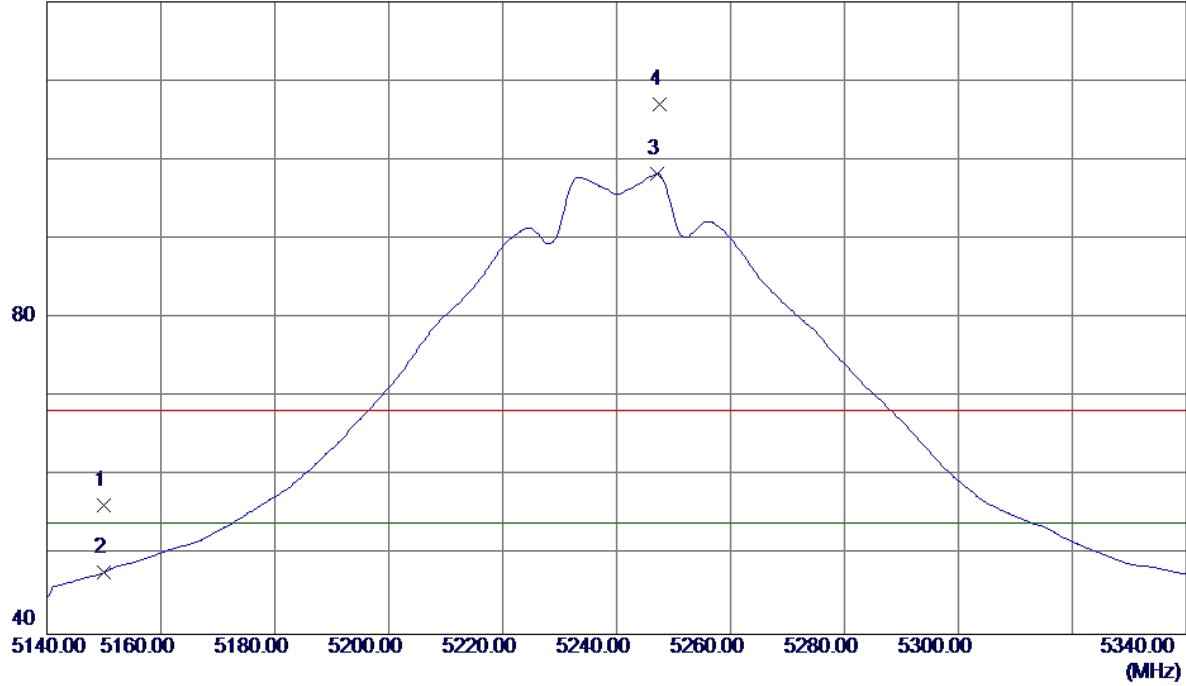


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	15.76	40.62	56.38	68.30	-11.92	Peak	
2	5150.0000	7.22	40.62	47.84	54.00	-6.16	AVG	
3 *	5247.2000	57.30	40.95	98.25	54.00	44.25	AVG	No Limit
4	5247.6000	66.05	40.95	107.00	68.30	38.70	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

80 dBuV/m

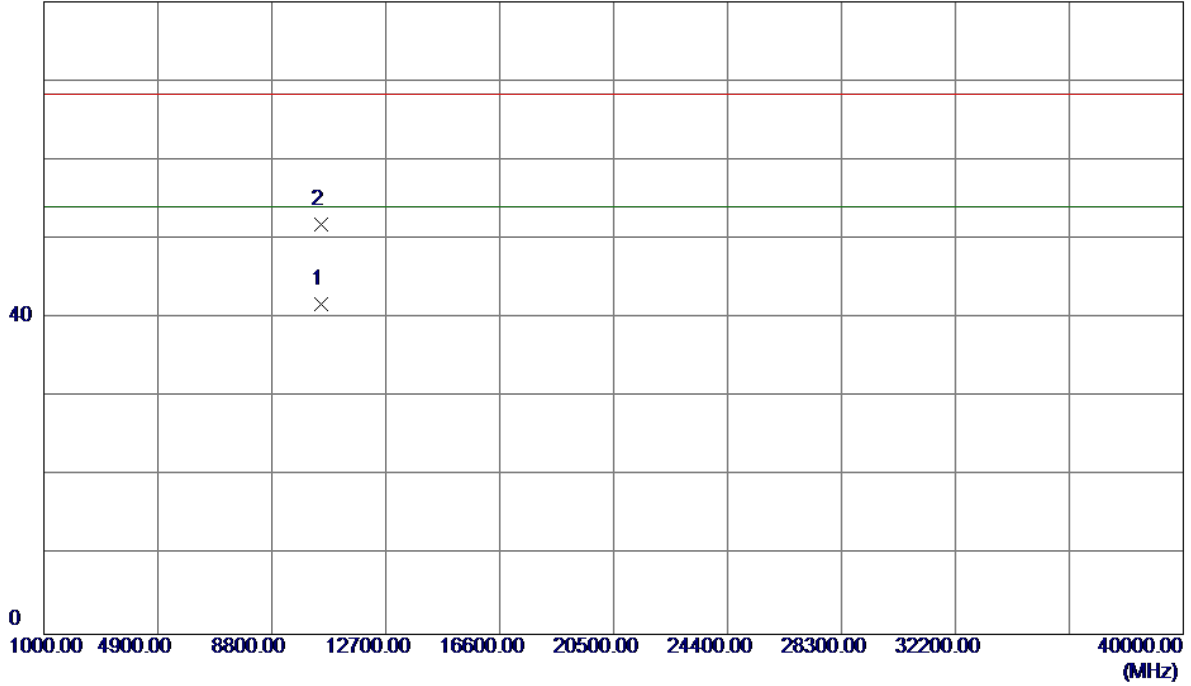


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.1000	26.44	15.25	41.69	54.00	-12.31	AVG	
2	10481.4000	36.62	15.25	51.87	68.30	-16.43	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal


115 dBuV/m

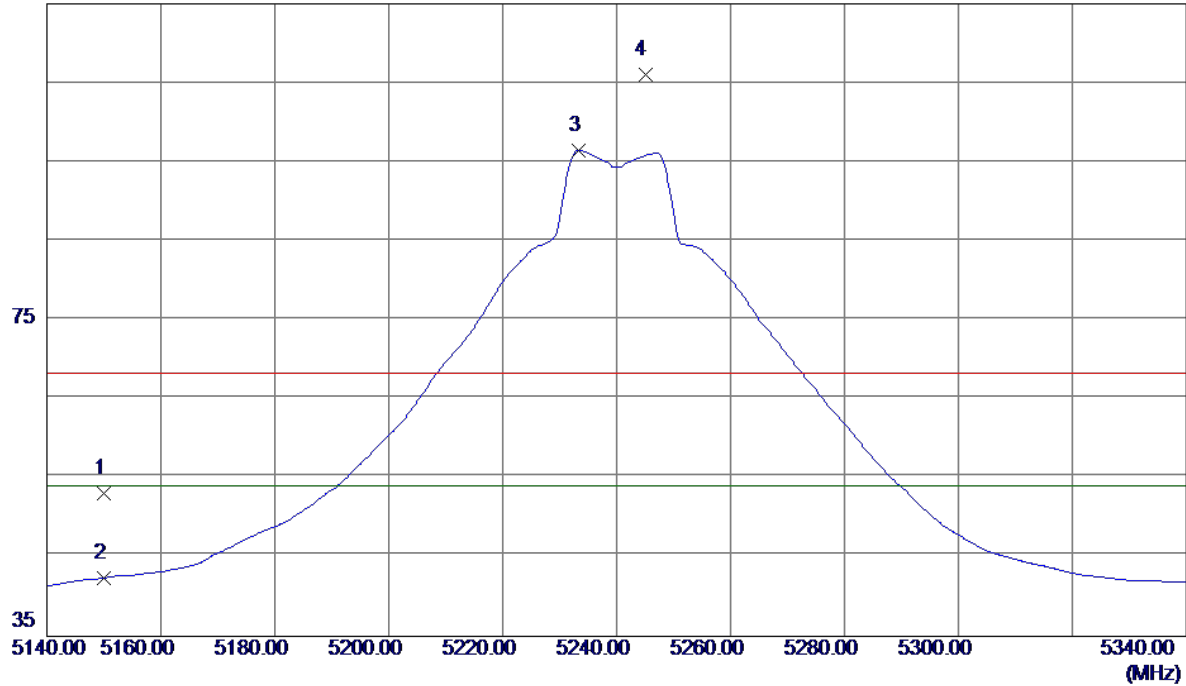

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	12.47	40.62	53.09	68.30	-15.21	Peak	
2	5150.0000	1.75	40.62	42.37	54.00	-11.63	AVG	
3 *	5233.4000	55.59	40.90	96.49	54.00	42.49	AVG	No Limit
4	5245.0000	65.12	40.94	106.06	68.30	37.76	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

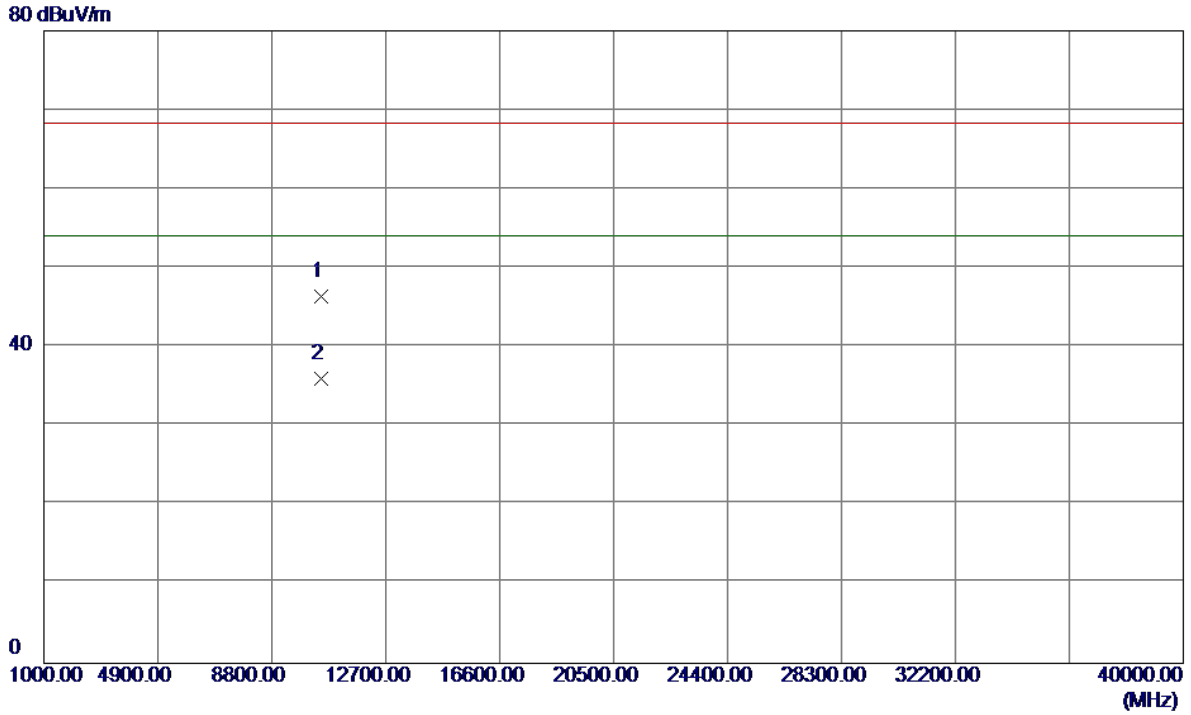


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10481.0000	31.10	15.25	46.35	68.30	-21.95	Peak	
2 *	10481.2000	20.76	15.25	36.01	54.00	-17.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


120 dBuV/m

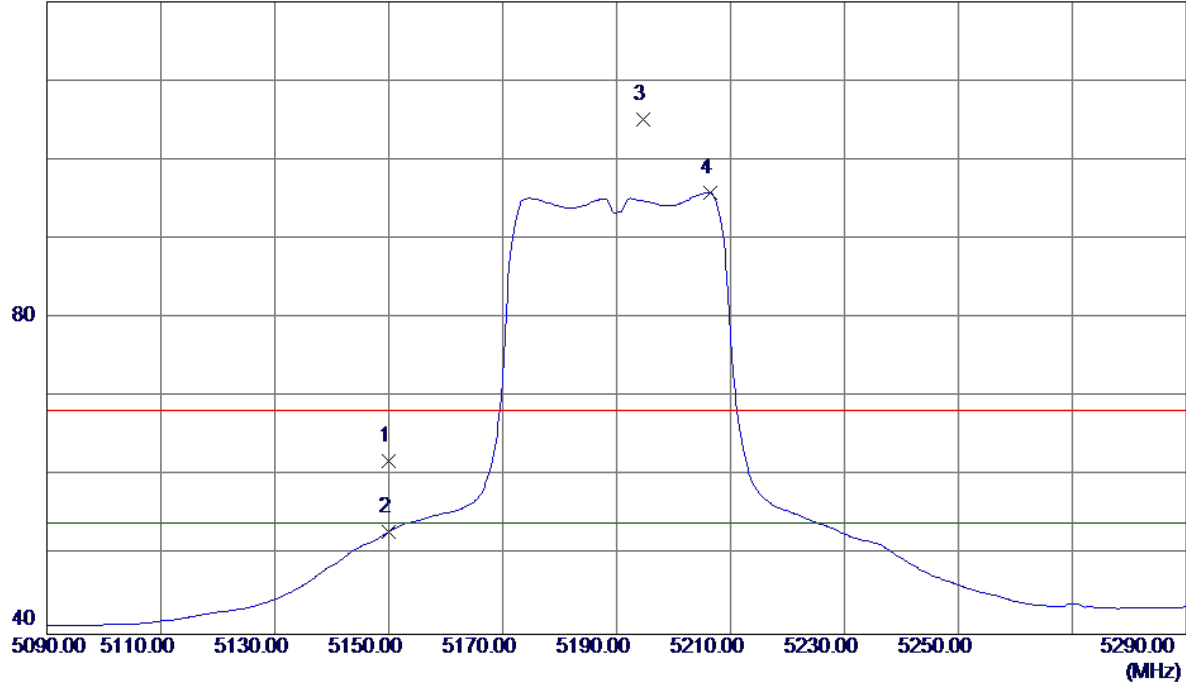

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	21.28	40.62	61.90	68.30	-6.40	Peak	
2	5150.0000	12.34	40.62	52.96	54.00	-1.04	AVG	
3	5194.6000	64.38	40.77	105.15	68.30	36.85	Peak	No Limit
4 *	5206.4000	55.01	40.81	95.82	54.00	41.82	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

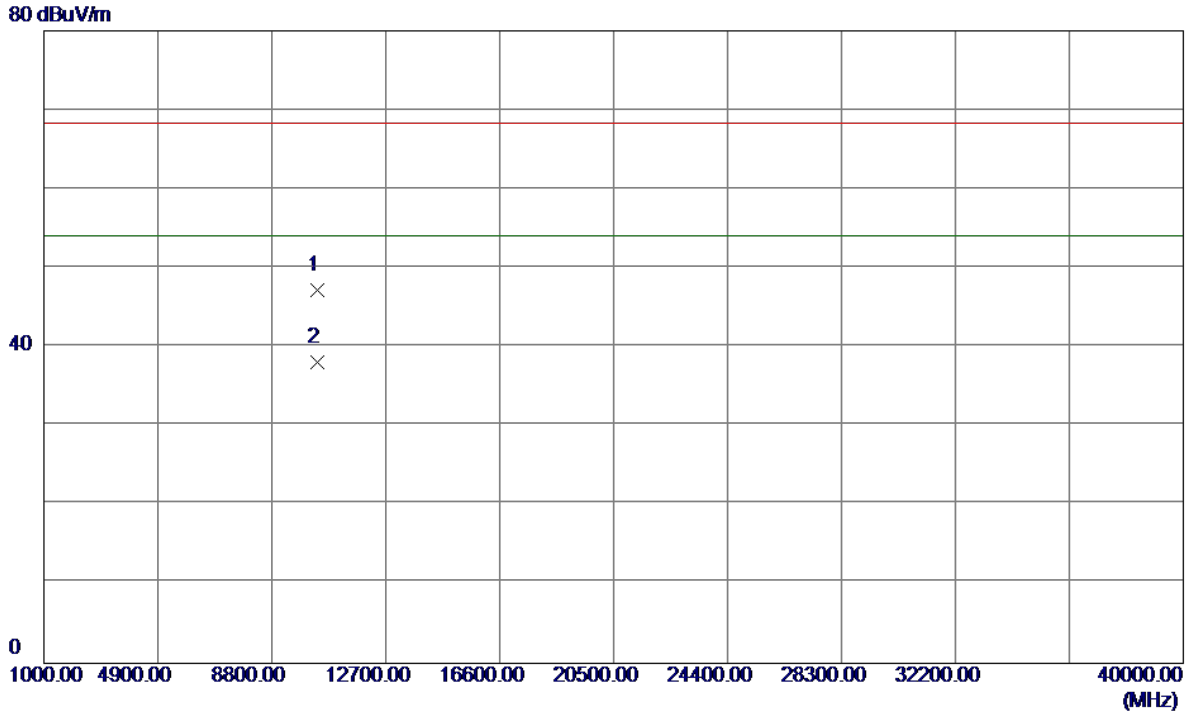


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	32.18	15.01	47.19	68.30	-21.11	Peak	
2 *	10381.2000	23.02	15.01	38.03	54.00	-15.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


115 dBuV/m

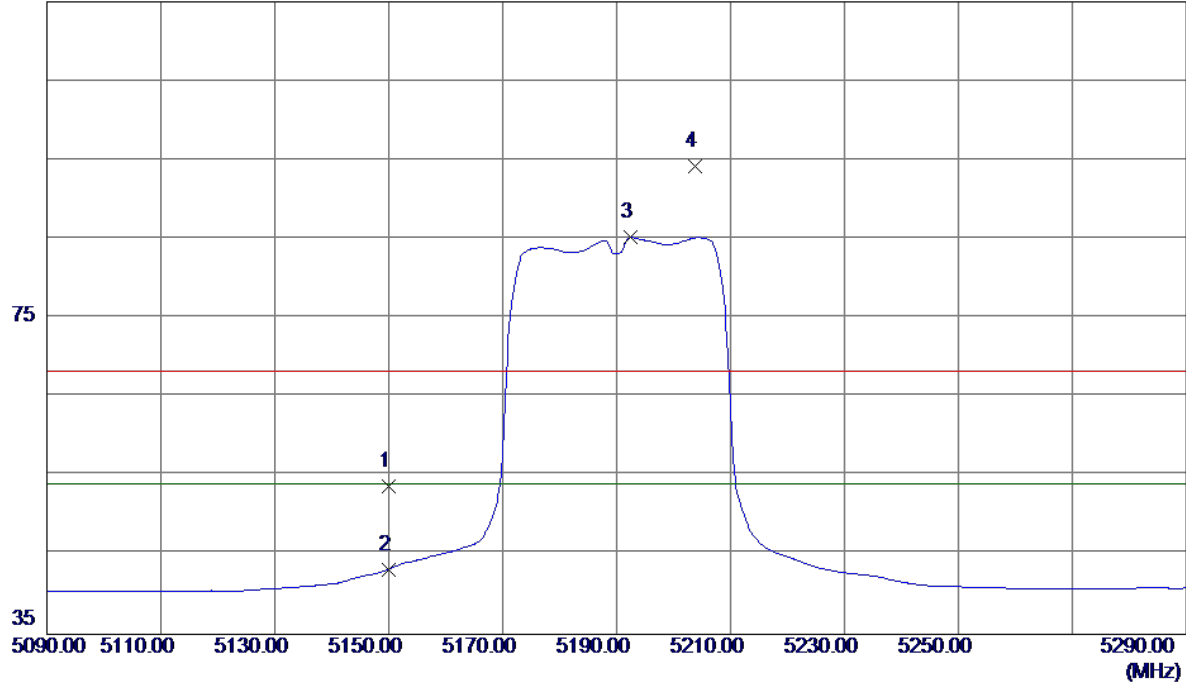

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.17	40.62	53.79	68.30	-14.51	Peak	
2	5150.0000	2.61	40.62	43.23	54.00	-10.77	AVG	
3 *	5192.4000	44.43	40.76	85.19	54.00	31.19	AVG	No Limit
4	5203.8000	53.46	40.80	94.26	68.30	25.96	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

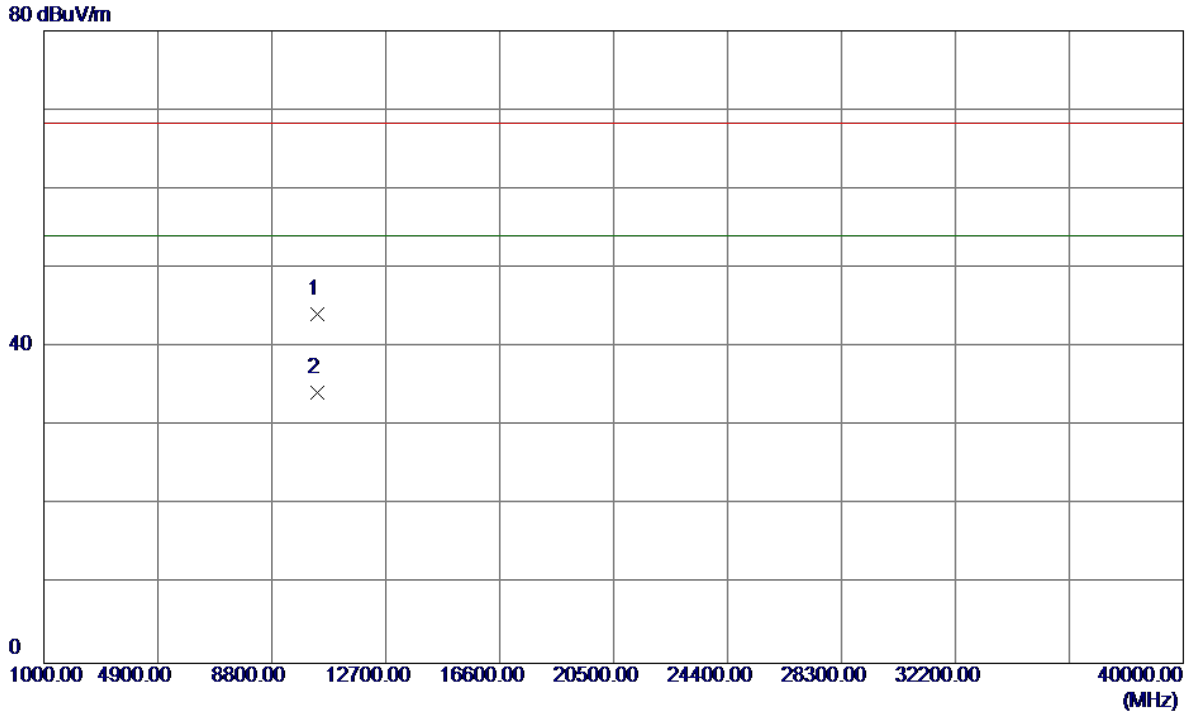


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10379.2000	29.15	15.01	44.16	68.30	-24.14	Peak	
2 *	10380.2000	19.17	15.01	34.18	54.00	-19.82	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

120 dBuV/m

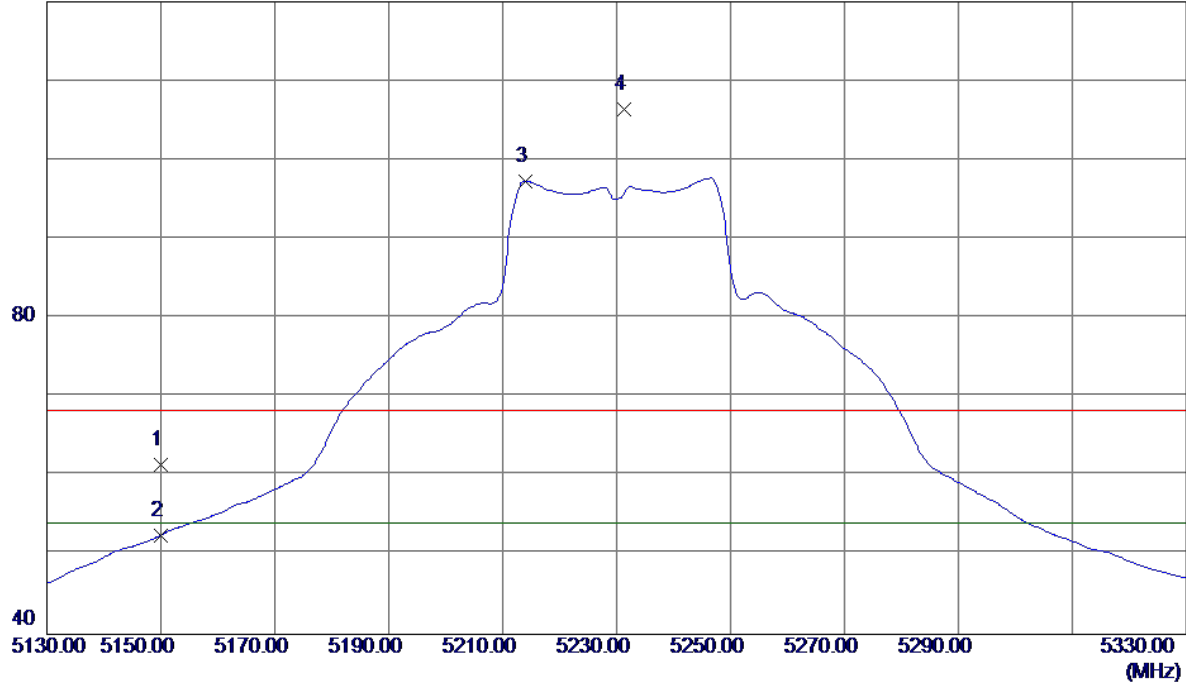


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	20.86	40.62	61.48	68.30	-6.82	Peak	
2	5150.0000	11.93	40.62	52.55	54.00	-1.45	AVG	
3 *	5214.0000	56.44	40.84	97.28	54.00	43.28	AVG	No Limit
4	5231.4000	65.44	40.89	106.33	68.30	38.03	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

80 dBuV/m

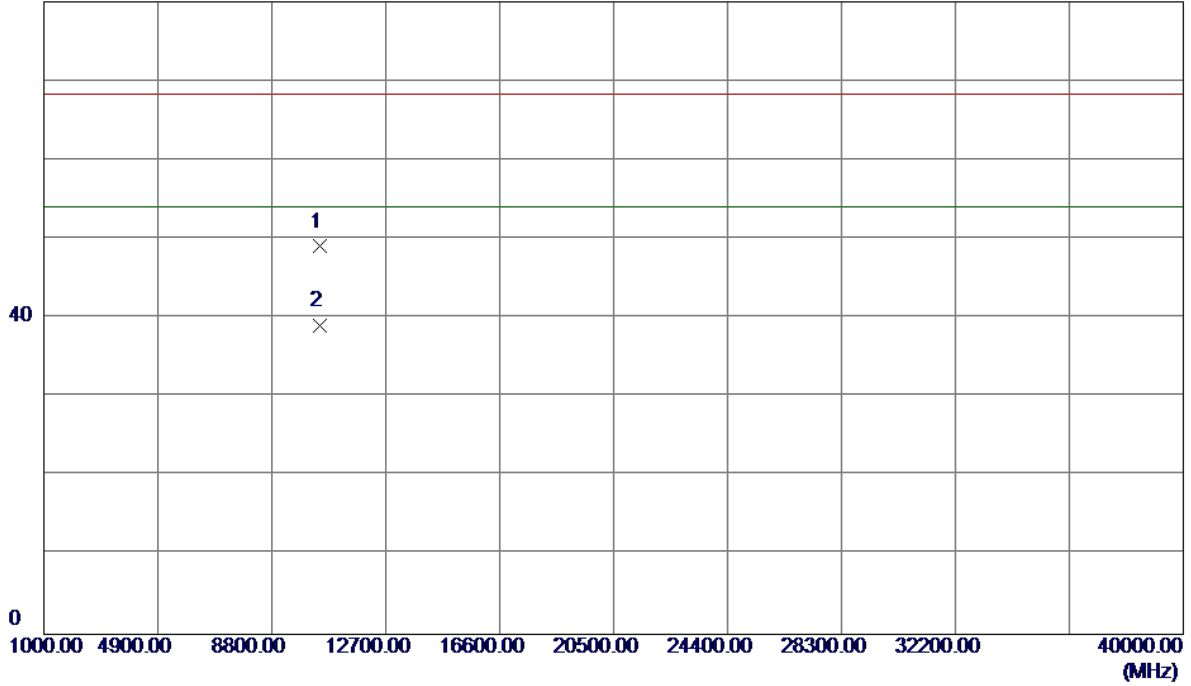


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10463.5100	33.84	15.20	49.04	68.30	-19.26	Peak	
2 *	10461.5100	23.77	15.20	38.97	54.00	-15.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


115 dBuV/m

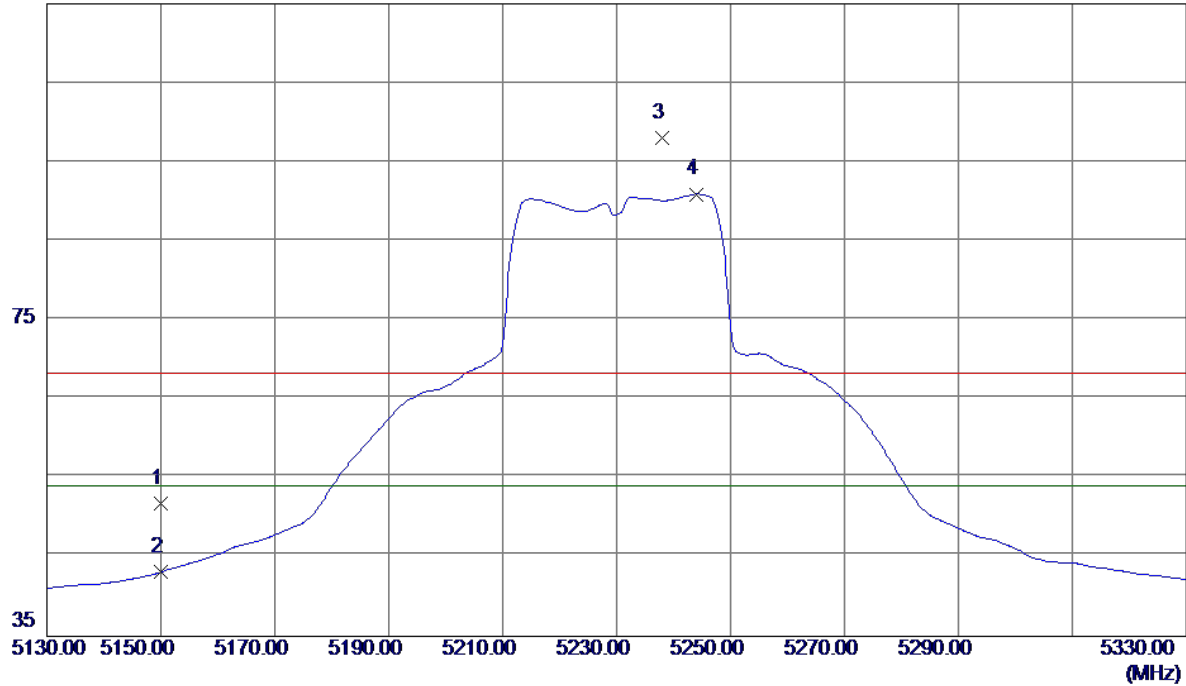

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	11.17	40.62	51.79	68.30	-16.51	Peak	
2	5150.0000	2.50	40.62	43.12	54.00	-10.88	AVG	
3	5238.0000	57.14	40.92	98.06	68.30	29.76	Peak	No Limit
4 *	5244.0000	49.98	40.94	90.92	54.00	36.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

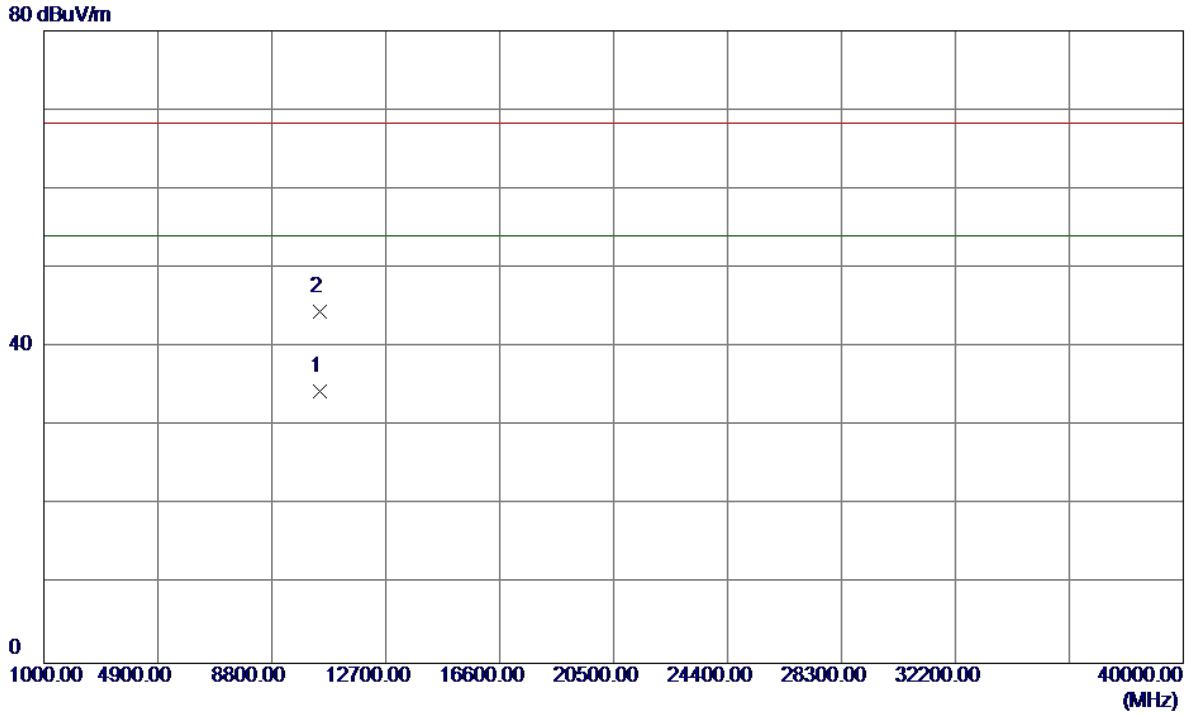


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.8000	19.14	15.19	34.33	54.00	-19.67	AVG	
2	10461.2000	29.28	15.20	44.48	68.30	-23.82	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


120 dBuV/m

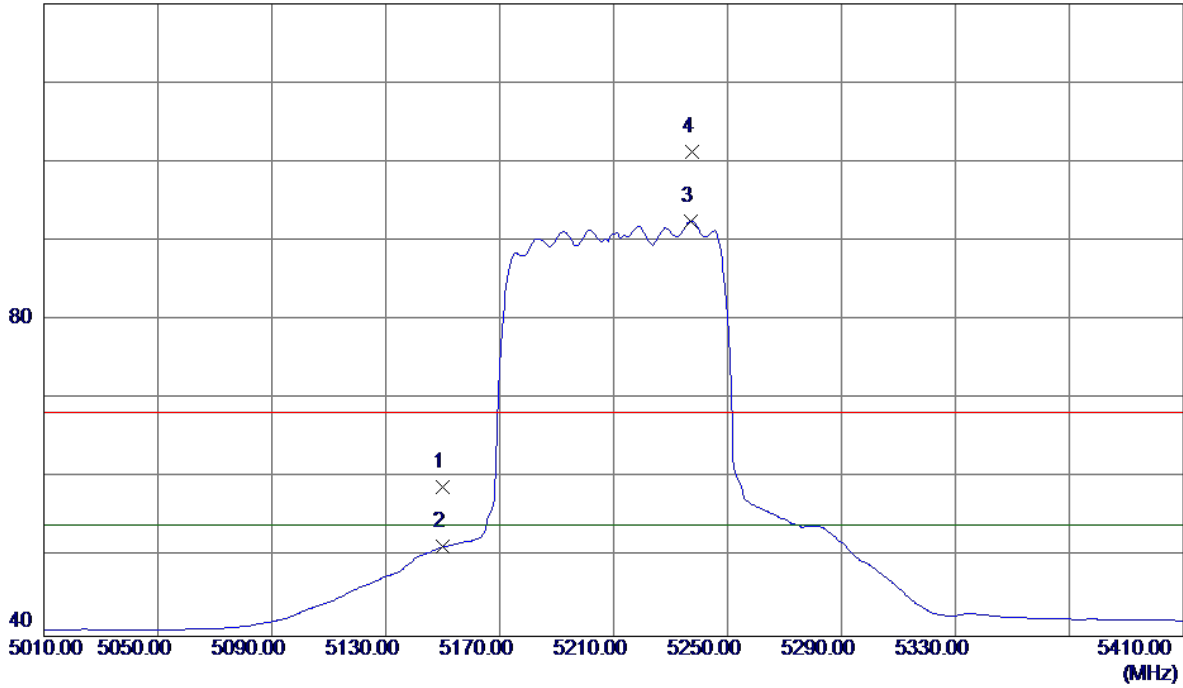

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	18.30	40.62	58.92	68.30	-9.38	Peak	
2	5150.0000	10.72	40.62	51.34	54.00	-2.66	AVG	
3 *	5237.2000	51.55	40.91	92.46	54.00	38.46	AVG	No Limit
4	5237.6000	60.33	40.91	101.24	68.30	32.94	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

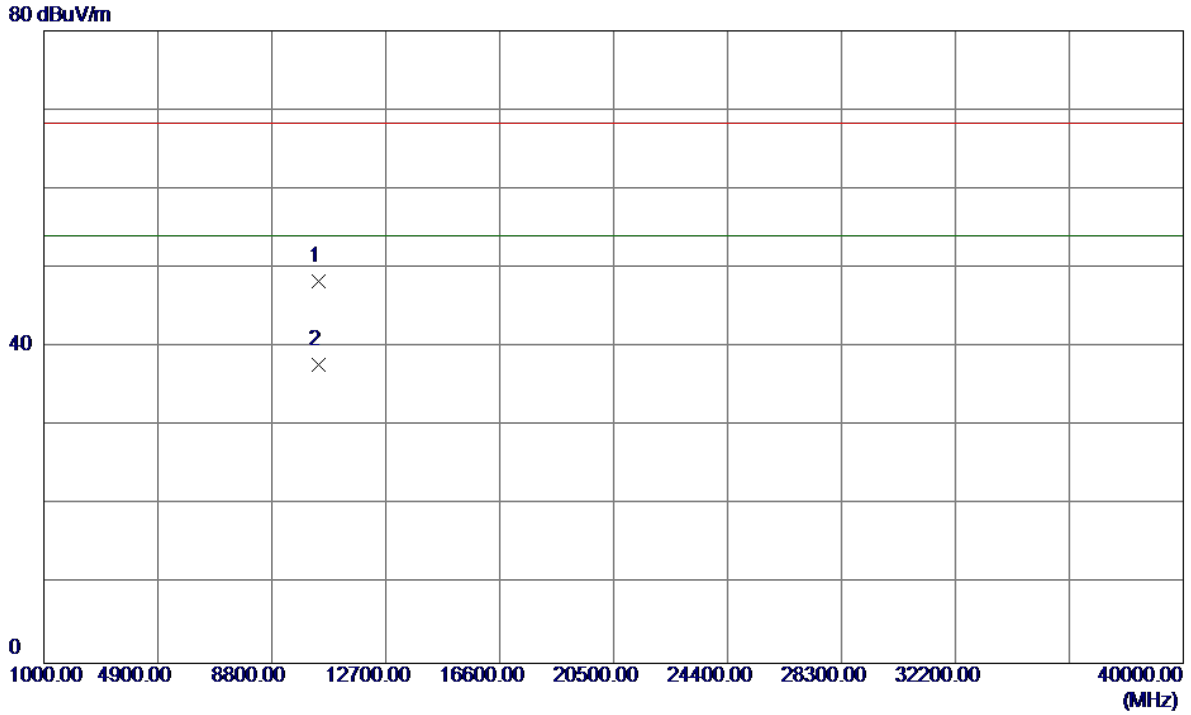


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10419.0000	33.21	15.10	48.31	68.30	-19.99	Peak	
2 *	10420.0000	22.72	15.10	37.82	54.00	-16.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


115 dBuV/m

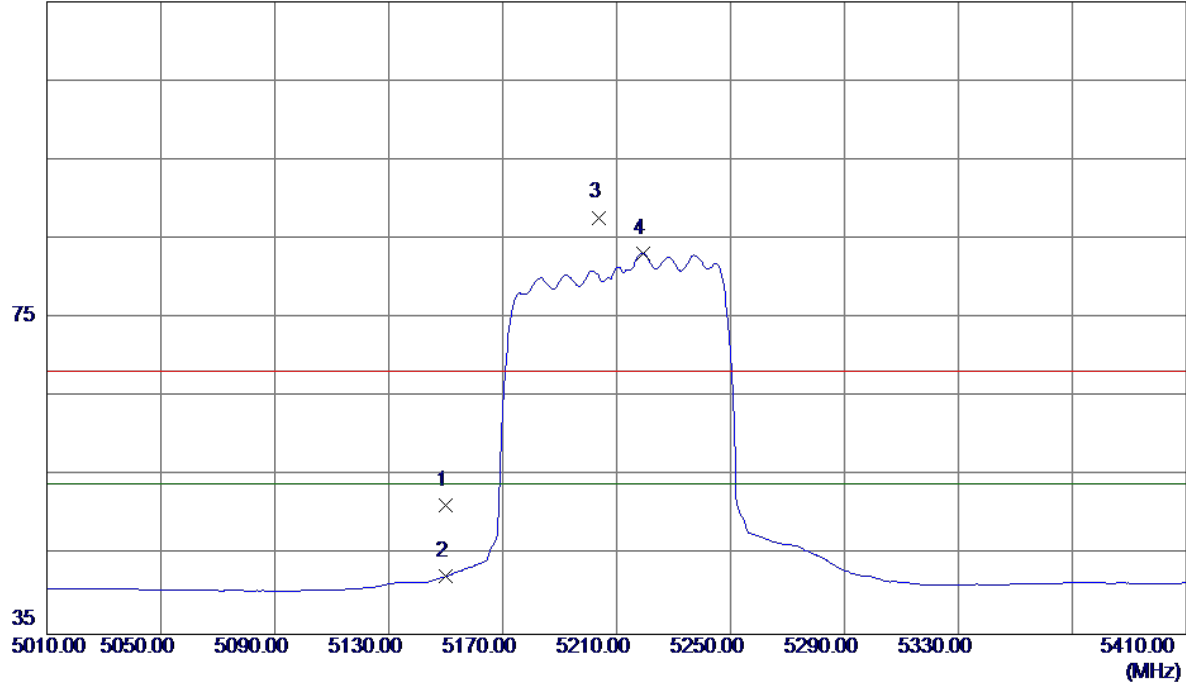

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.69	40.62	51.31	68.30	-16.99	Peak	
2	5150.0000	1.71	40.62	42.33	54.00	-11.67	AVG	
3	5203.8000	46.92	40.80	87.72	68.30	19.42	Peak	No Limit
4 *	5219.2000	42.35	40.85	83.20	54.00	29.20	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

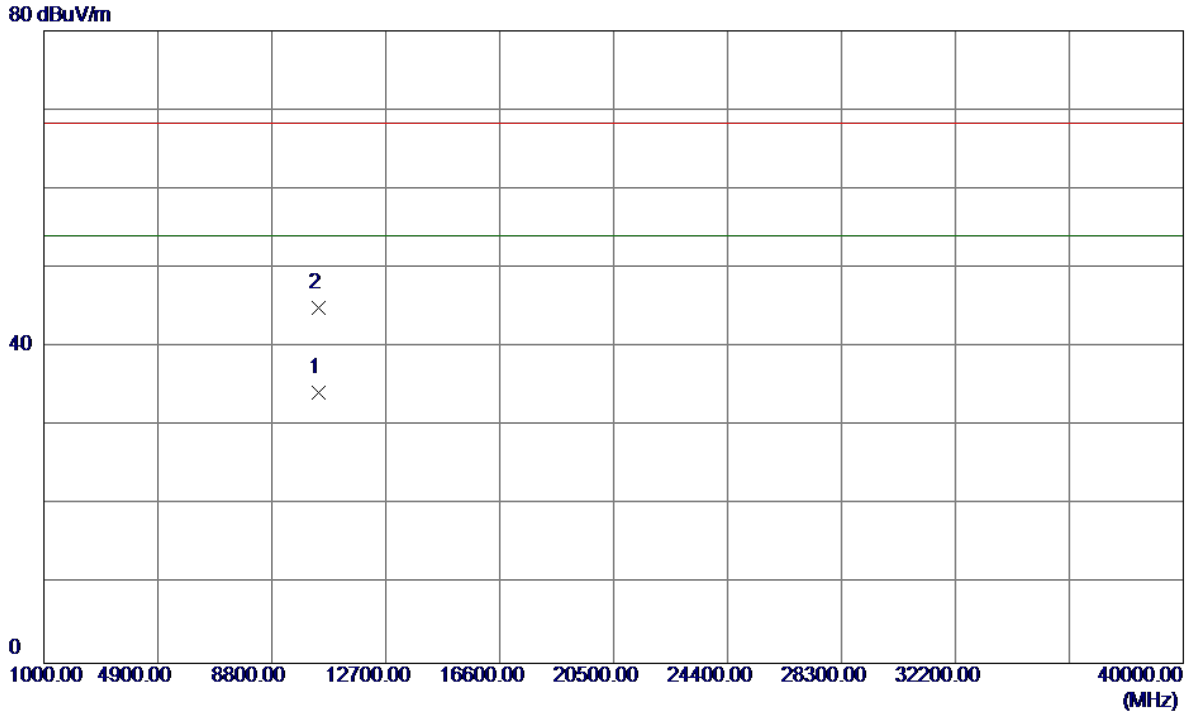

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10417.5000	19.18	15.10	34.28	54.00	-19.72	AVG	
2	10420.5000	29.93	15.10	45.03	68.30	-23.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

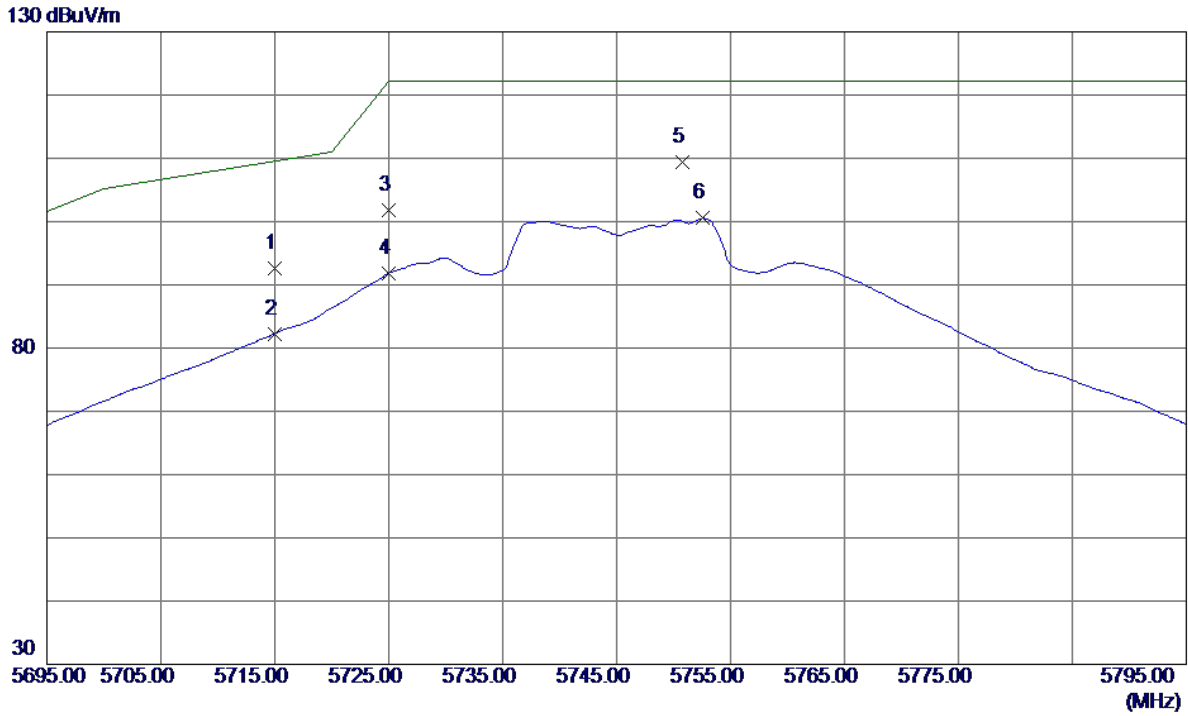

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.07	42.55	92.62	109.50	-16.88	Peak	
2	5715.0000	39.72	42.55	82.27	109.50	-27.23	AVG	
3	5725.0000	59.26	42.58	101.84	122.30	-20.46	Peak	
4	5725.0000	49.25	42.58	91.83	122.30	-30.47	AVG	
5 *	5750.8000	66.70	42.67	109.37	122.30	-12.93	Peak	
6	5752.6000	57.83	42.68	100.51	122.30	-21.79	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

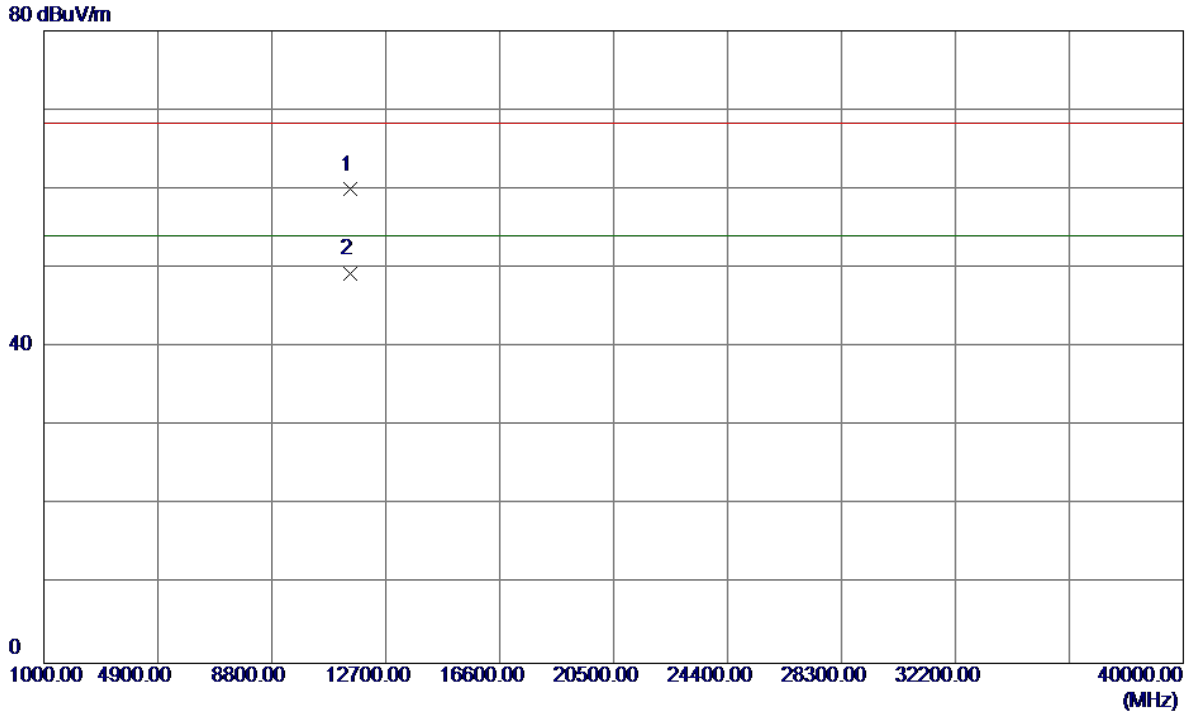

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	44.43	15.49	59.92	68.30	-8.38	Peak	
2 *	11490.9000	33.83	15.49	49.32	54.00	-4.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

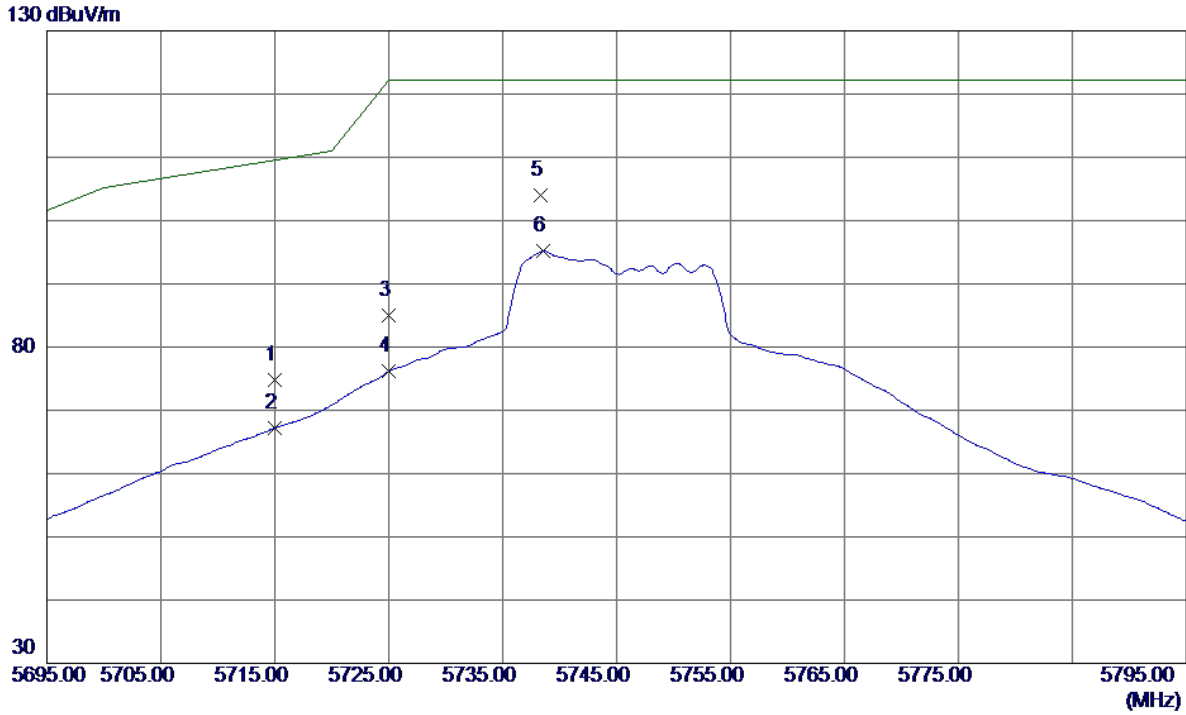

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	32.17	42.55	74.72	109.50	-34.78	Peak	
2	5715.0000	24.63	42.55	67.18	109.50	-42.32	AVG	
3	5725.0000	42.38	42.58	84.96	122.30	-37.34	Peak	
4	5725.0000	33.61	42.58	76.19	122.30	-46.11	AVG	
5 *	5738.3000	61.45	42.63	104.08	122.30	-18.22	Peak	
6	5738.6000	52.53	42.63	95.16	122.30	-27.14	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

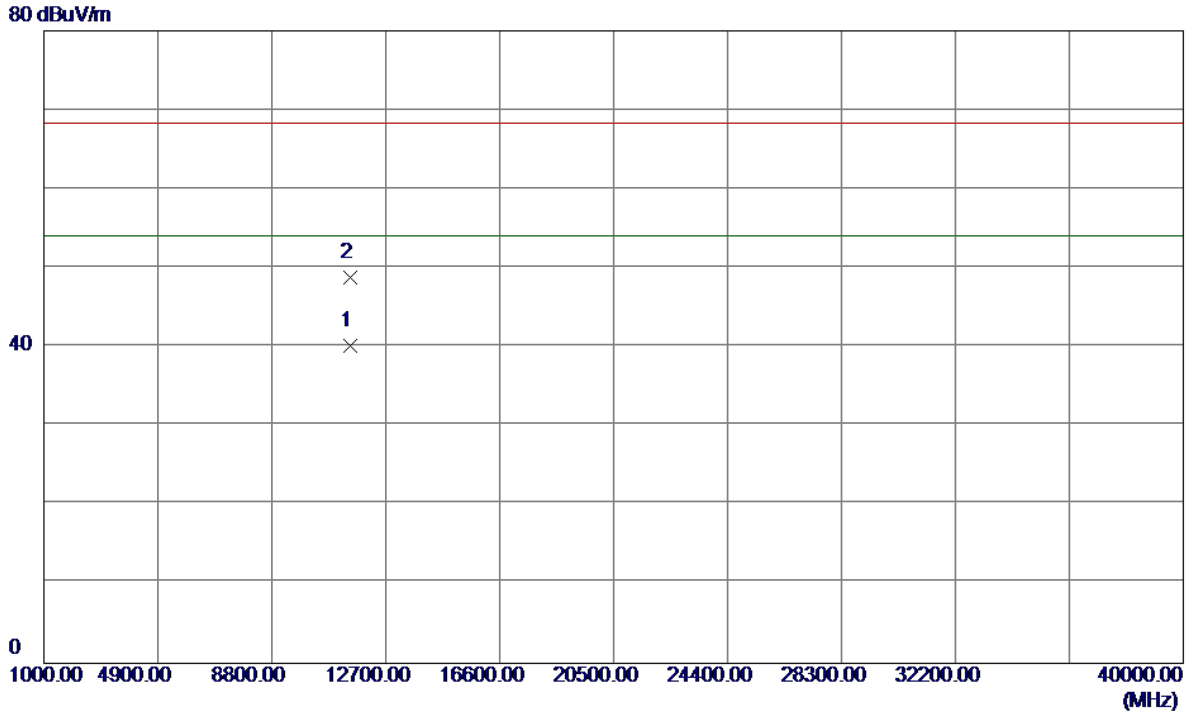

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.6000	24.62	15.49	40.11	54.00	-13.89	AVG	
2	11488.2000	33.29	15.49	48.78	68.30	-19.52	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

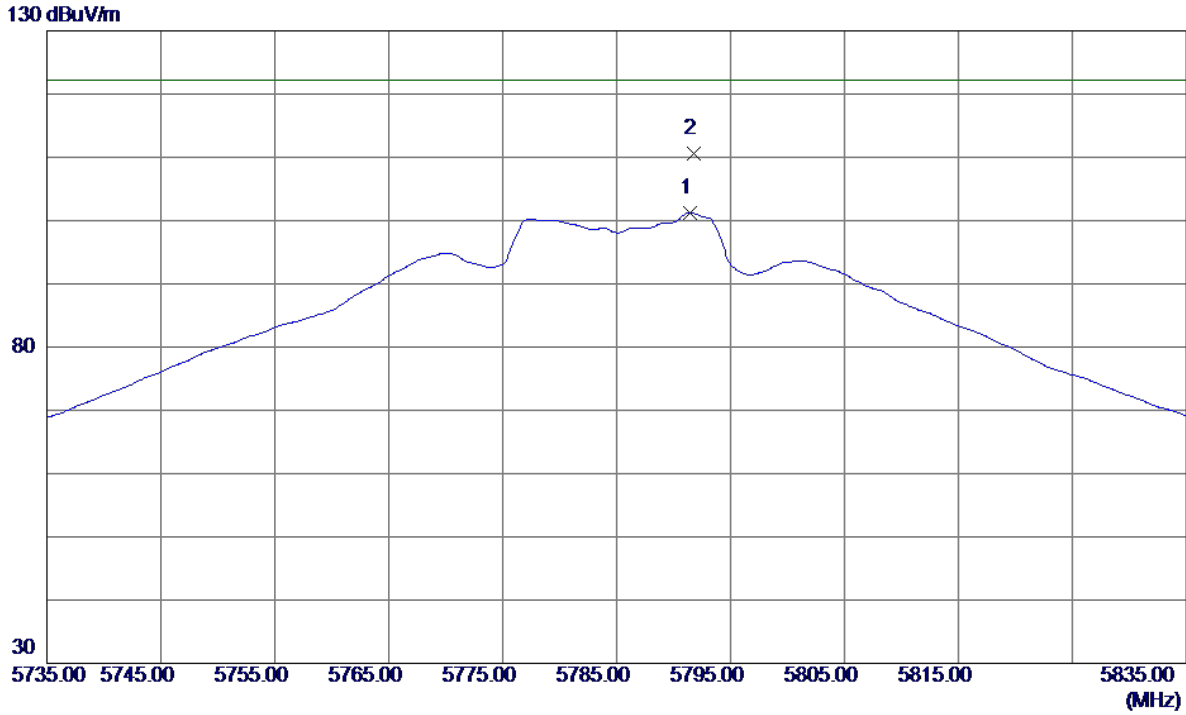

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5791.4000	58.42	42.82	101.24	122.30	-21.06	AVG	
2 *	5791.8000	67.85	42.82	110.67	122.30	-11.63	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

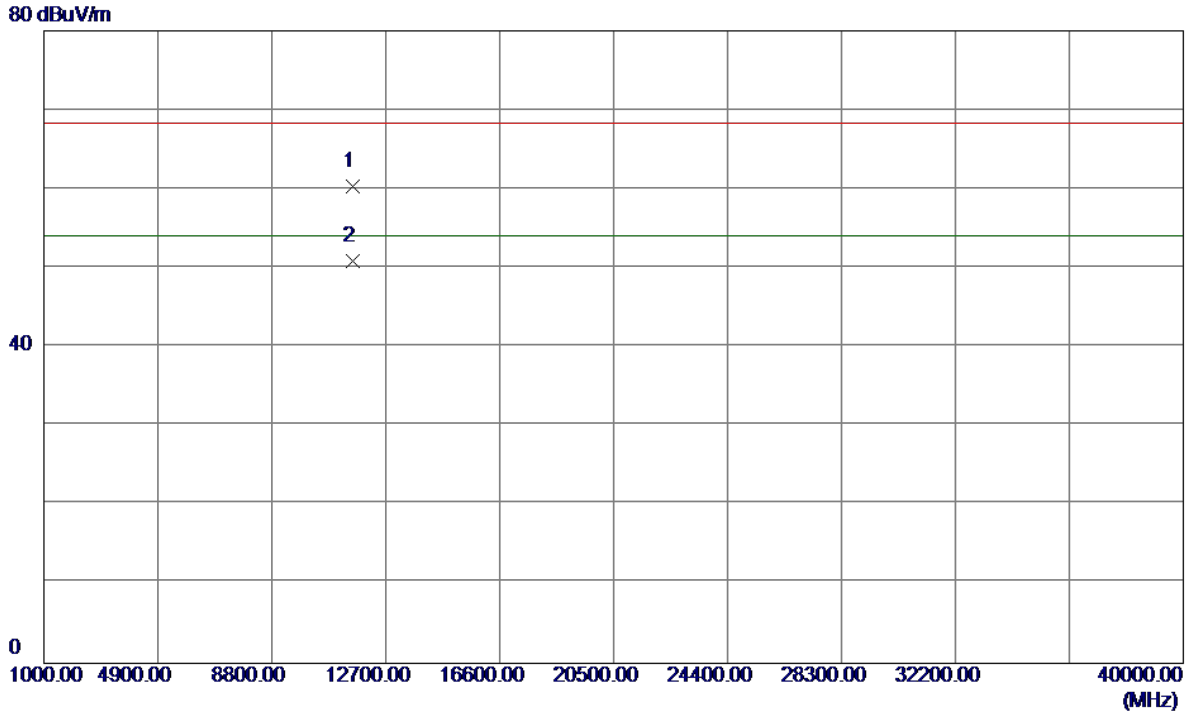

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.0000	44.82	15.48	60.30	68.30	-8.00	Peak	
2 *	11571.1000	35.43	15.48	50.91	54.00	-3.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Horizontal

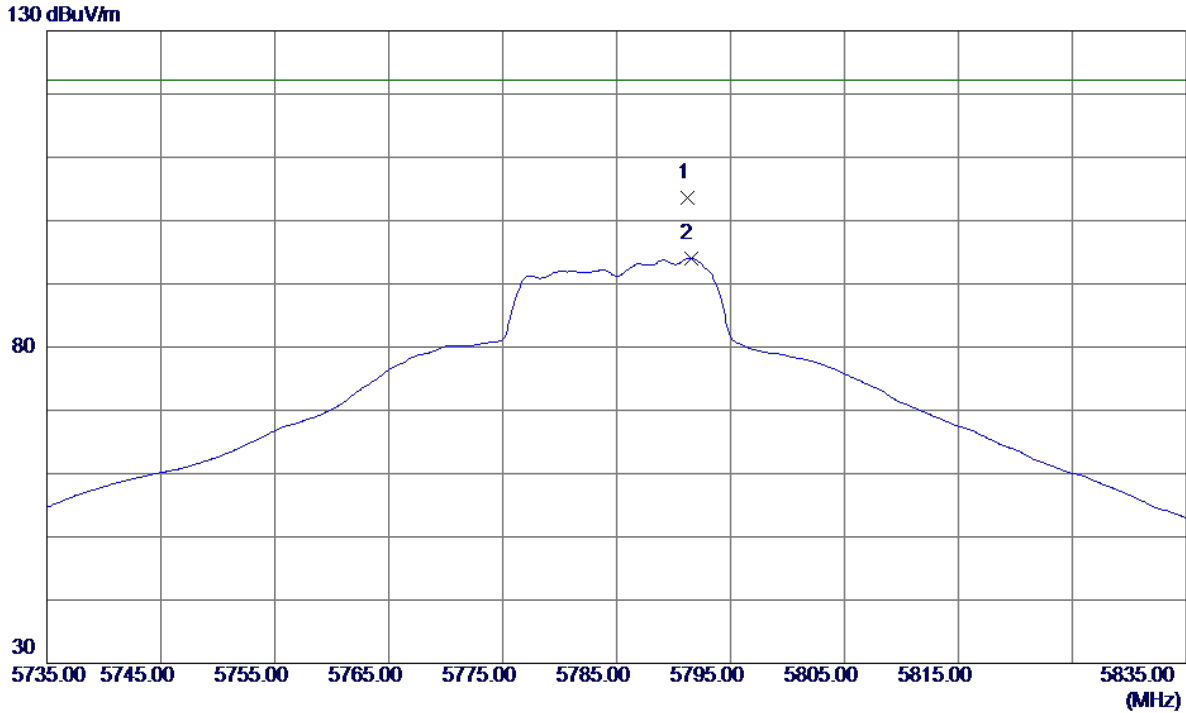

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.2000	60.79	42.82	103.61	122.30	-18.69	Peak	
2	5791.5000	51.28	42.82	94.10	122.30	-28.20	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

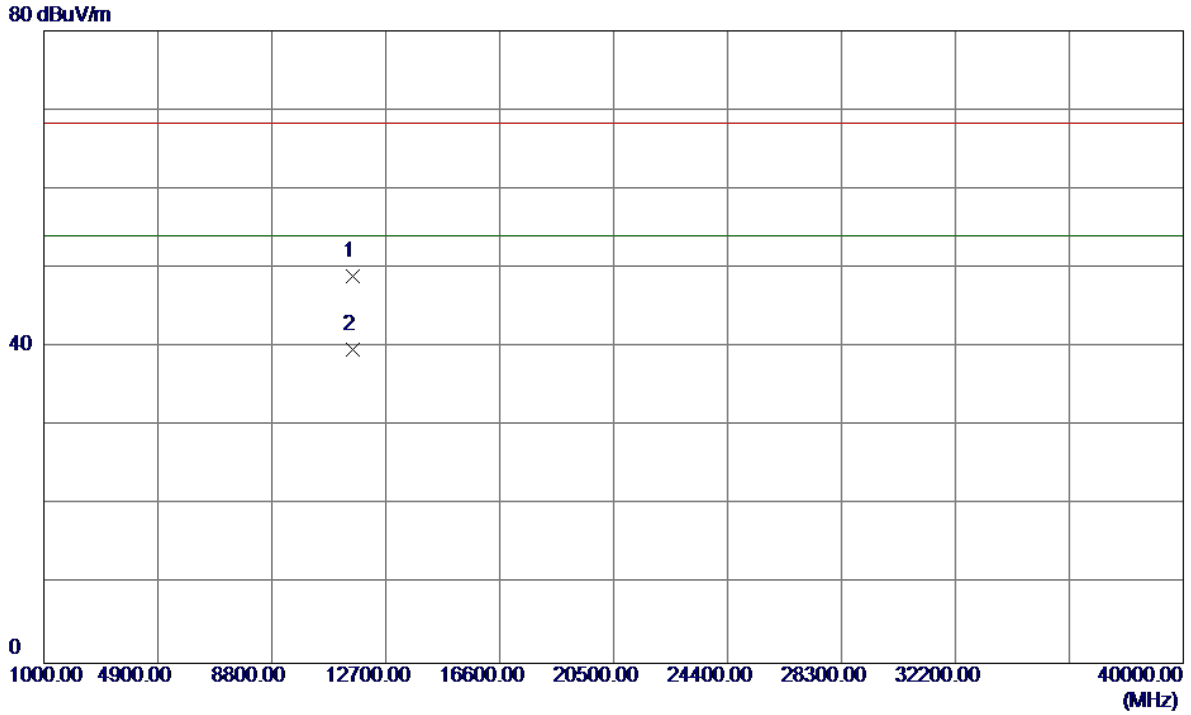


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11568.8000	33.40	15.48	48.88	68.30	-19.42	Peak	
2 *	11571.4000	24.14	15.48	39.62	54.00	-14.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


130 dBuV/m

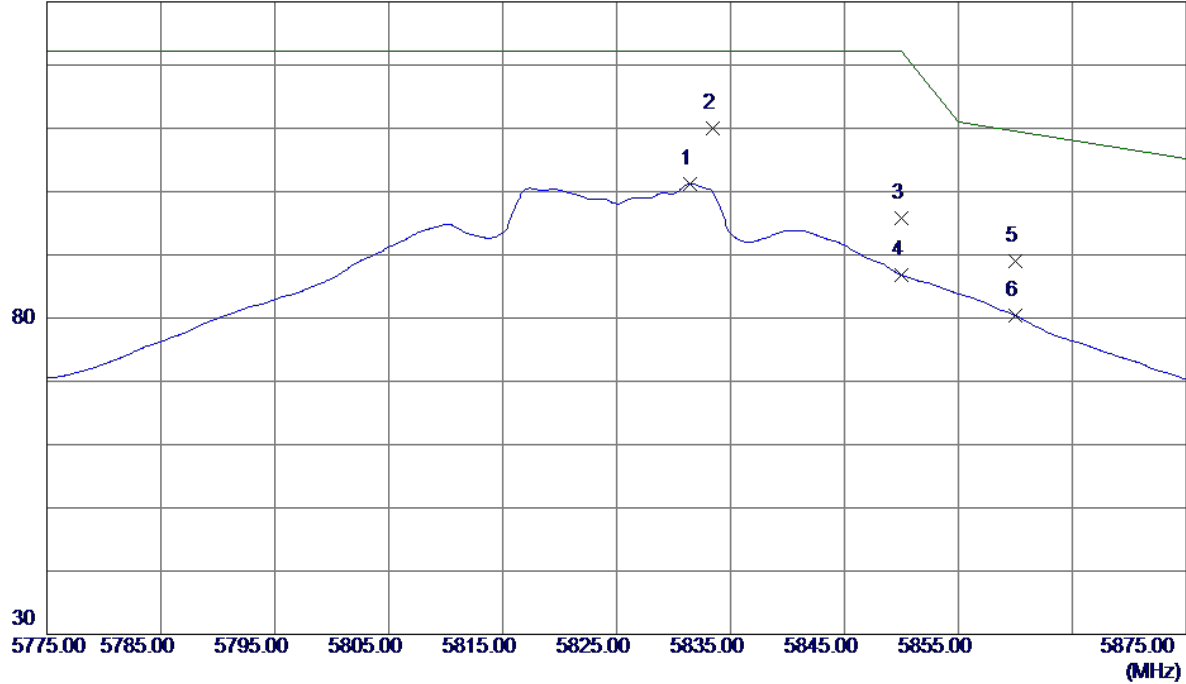

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5831.4000	58.27	42.96	101.23	122.30	-21.07	AVG	
2 *	5833.4000	67.00	42.97	109.97	122.30	-12.33	Peak	
3	5850.0000	52.85	43.03	95.88	122.30	-26.42	Peak	
4	5850.0000	43.79	43.03	86.82	122.30	-35.48	AVG	
5	5860.0000	46.04	43.06	89.10	109.50	-20.40	Peak	
6	5860.0000	37.35	43.06	80.41	109.50	-29.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

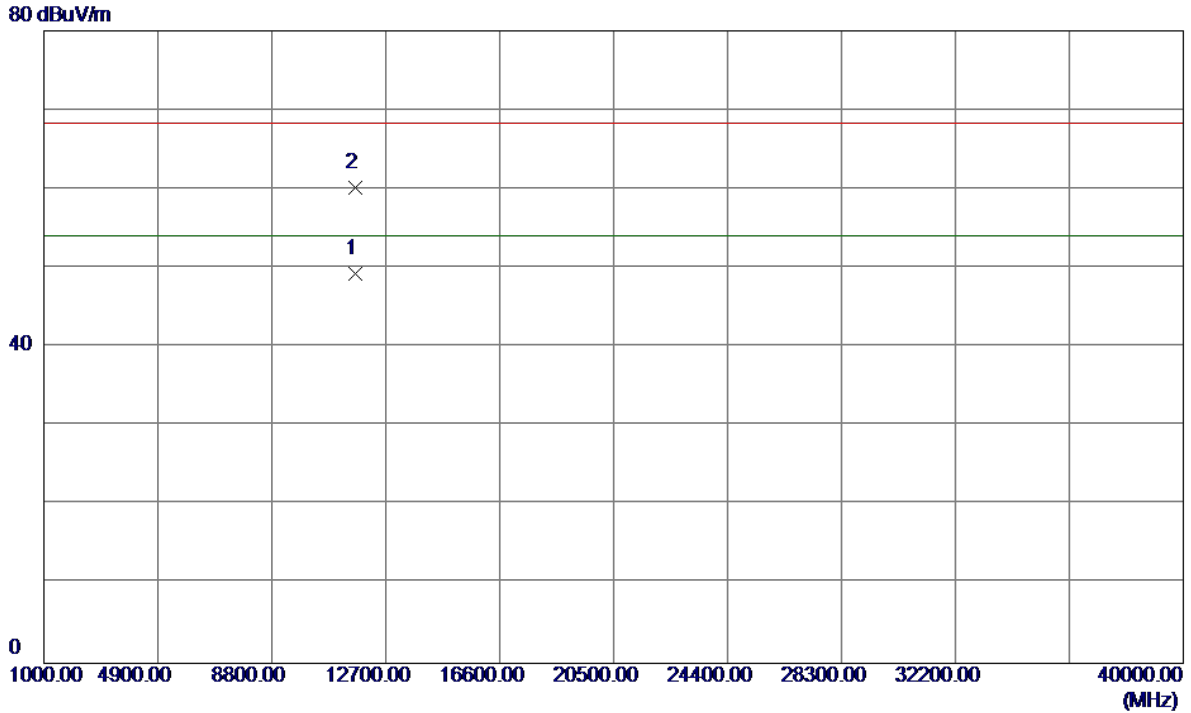

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.0000	33.87	15.48	49.35	54.00	-4.65	AVG	
2	11652.8000	44.61	15.48	60.09	68.30	-8.21	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

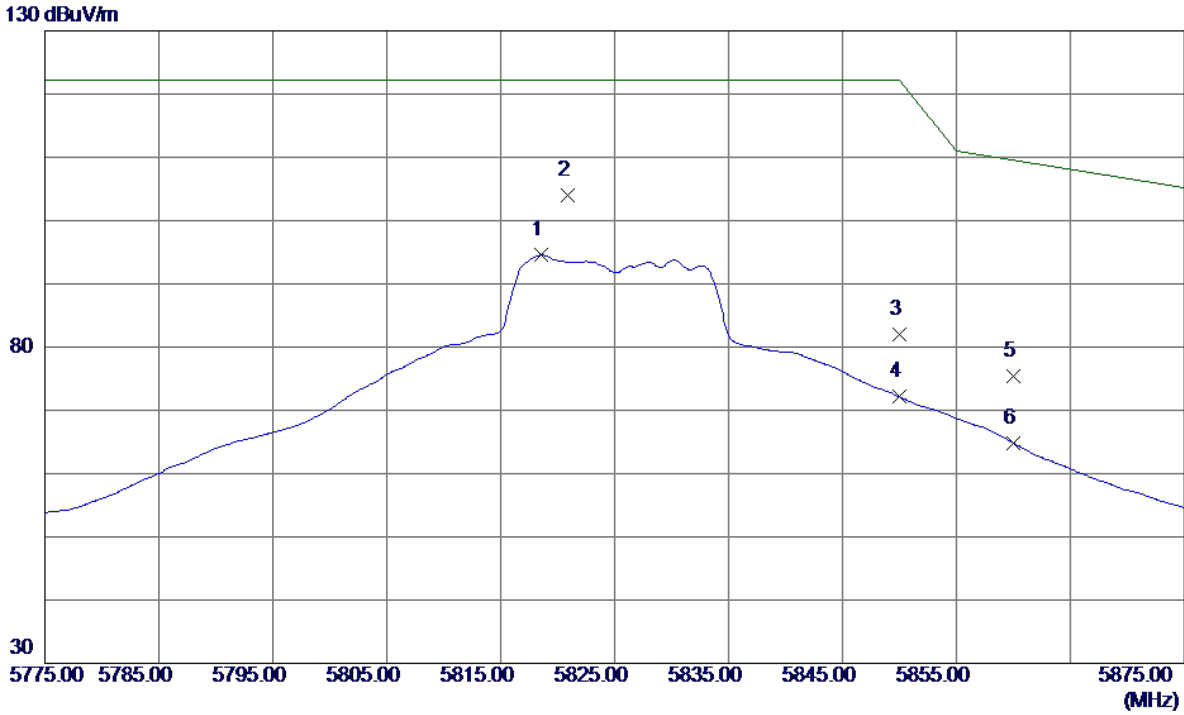

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5818.6000	51.62	42.91	94.53	122.30	-27.77	AVG	
2 *	5820.9000	61.04	42.92	103.96	122.30	-18.34	Peak	
3	5850.0000	39.01	43.03	82.04	122.30	-40.26	Peak	
4	5850.0000	29.08	43.03	72.11	122.30	-50.19	AVG	
5	5860.0000	32.42	43.06	75.48	109.50	-34.02	Peak	
6	5860.0000	21.76	43.06	64.82	109.50	-44.68	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

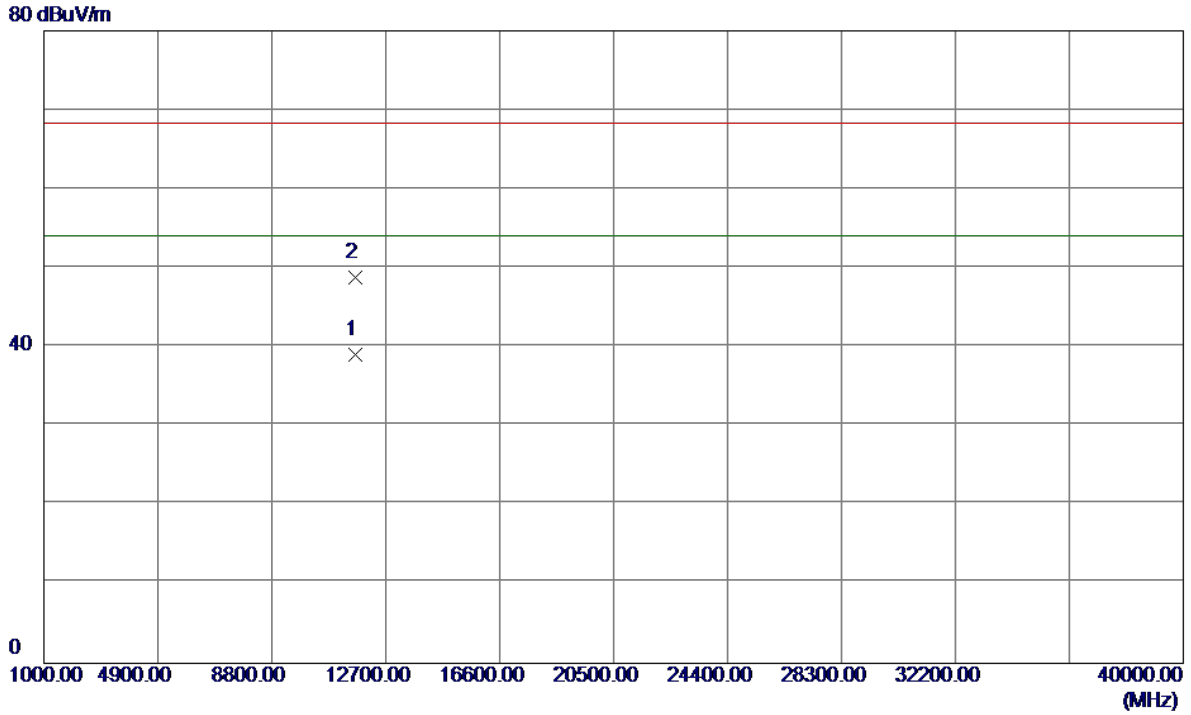

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.0000	23.60	15.48	39.08	54.00	-14.92	AVG	
2	11651.0000	33.35	15.48	48.83	68.30	-19.47	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

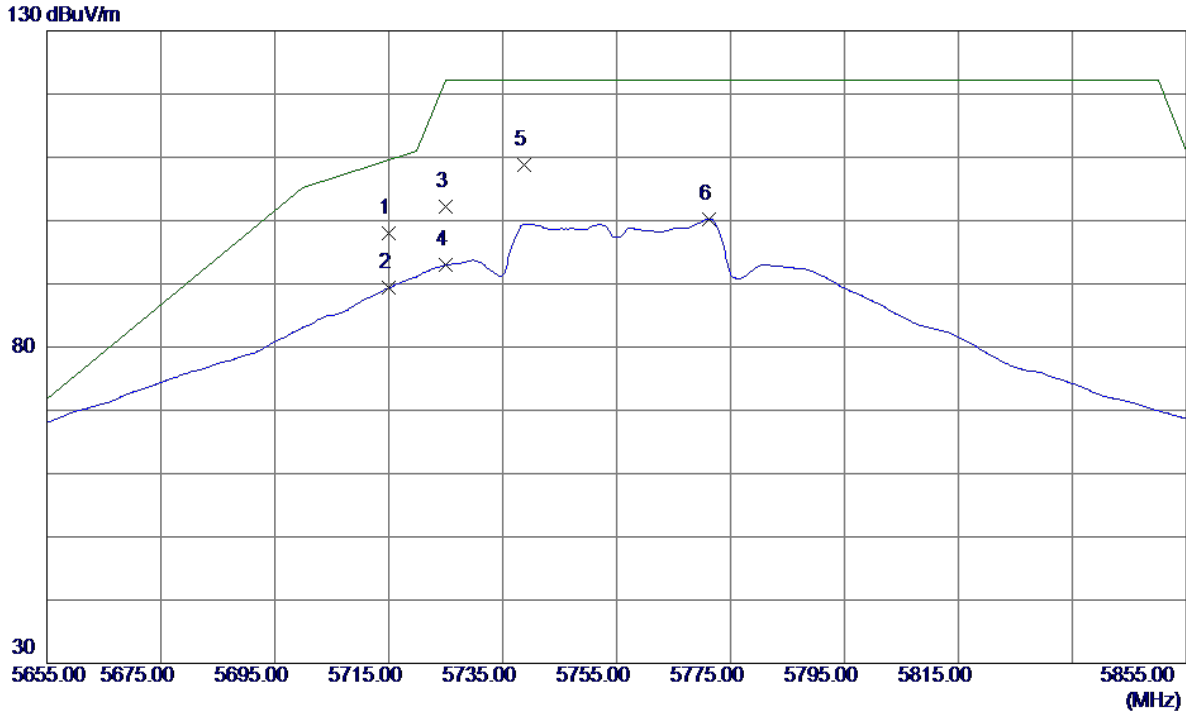

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5715.0000	55.55	42.55	98.10	109.50	-11.40	Peak	
2	5715.0000	46.79	42.55	89.34	109.50	-20.16	AVG	
3	5725.0000	59.69	42.58	102.27	122.30	-20.03	Peak	
4	5725.0000	50.38	42.58	92.96	122.30	-29.34	AVG	
5	5738.8000	66.23	42.63	108.86	122.30	-13.44	Peak	
6	5771.2000	57.53	42.75	100.28	122.30	-22.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

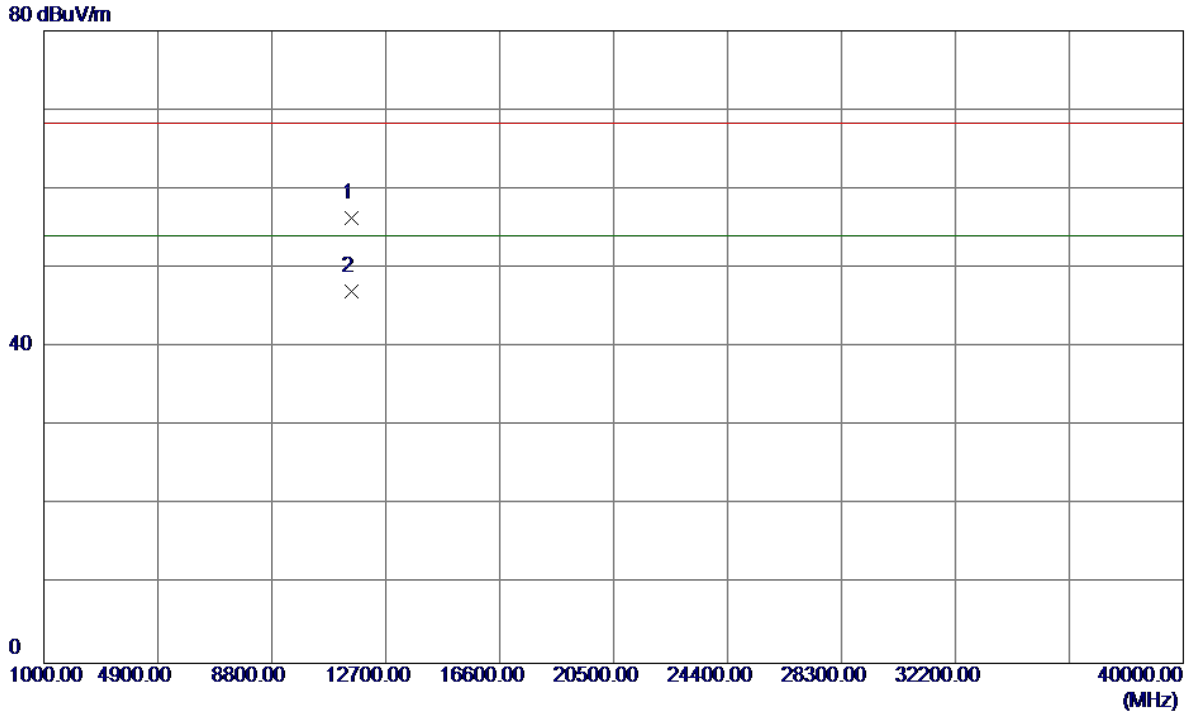

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.6000	40.78	15.48	56.26	68.30	-12.04	Peak	
2 *	11512.2000	31.58	15.48	47.06	54.00	-6.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

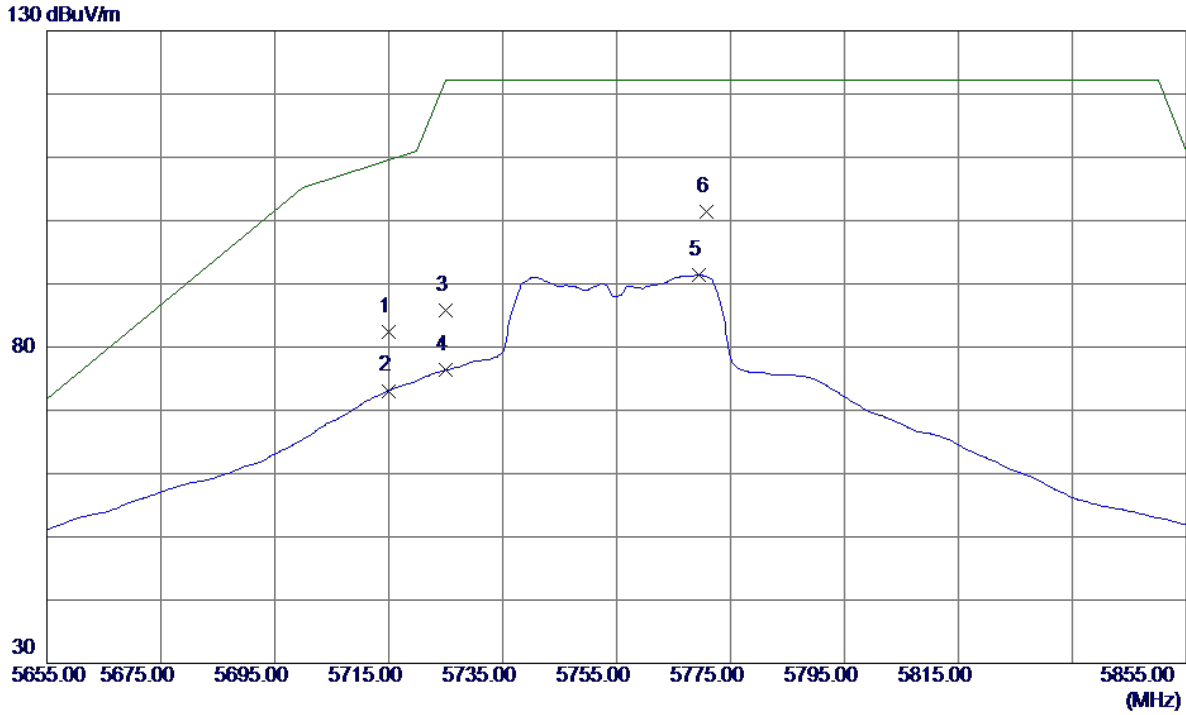

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.85	42.55	82.40	109.50	-27.10	Peak	
2	5715.0000	30.55	42.55	73.10	109.50	-36.40	AVG	
3	5725.0000	43.15	42.58	85.73	122.30	-36.57	Peak	
4	5725.0000	33.82	42.58	76.40	122.30	-45.90	AVG	
5	5769.4000	48.64	42.74	91.38	122.30	-30.92	AVG	
6 *	5770.8000	58.66	42.74	101.40	122.30	-20.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

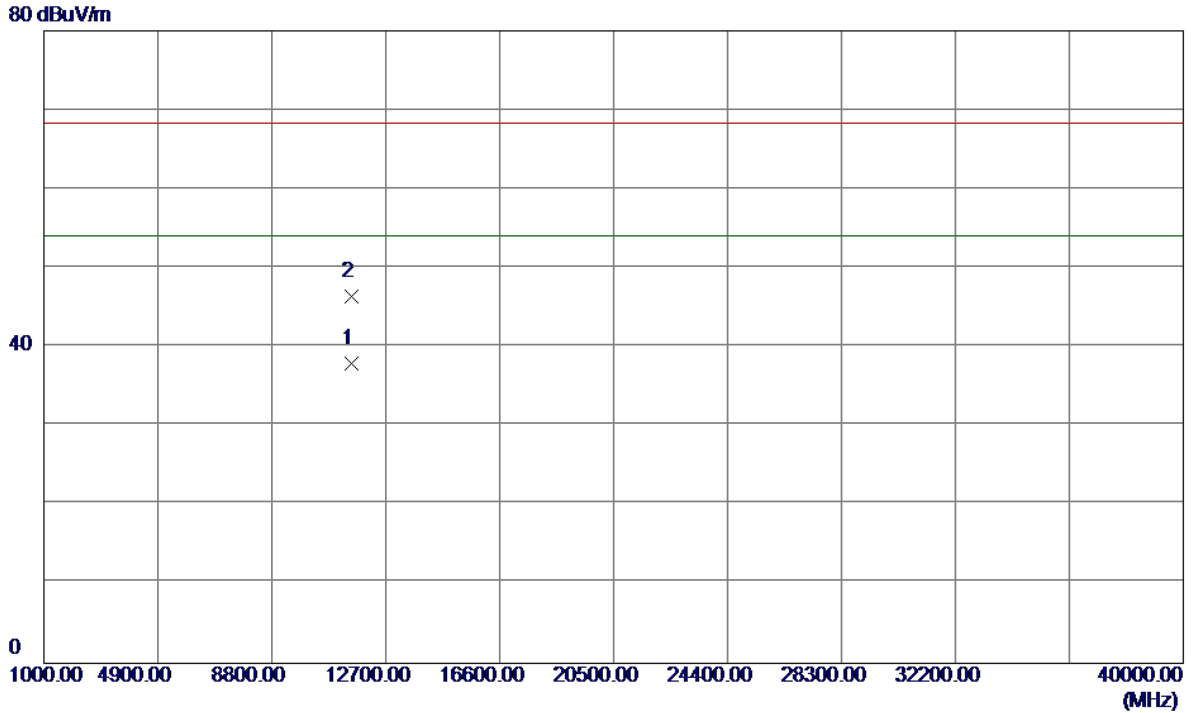

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.8000	22.43	15.48	37.91	54.00	-16.09	AVG	
2	11511.0000	30.88	15.48	46.36	68.30	-21.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

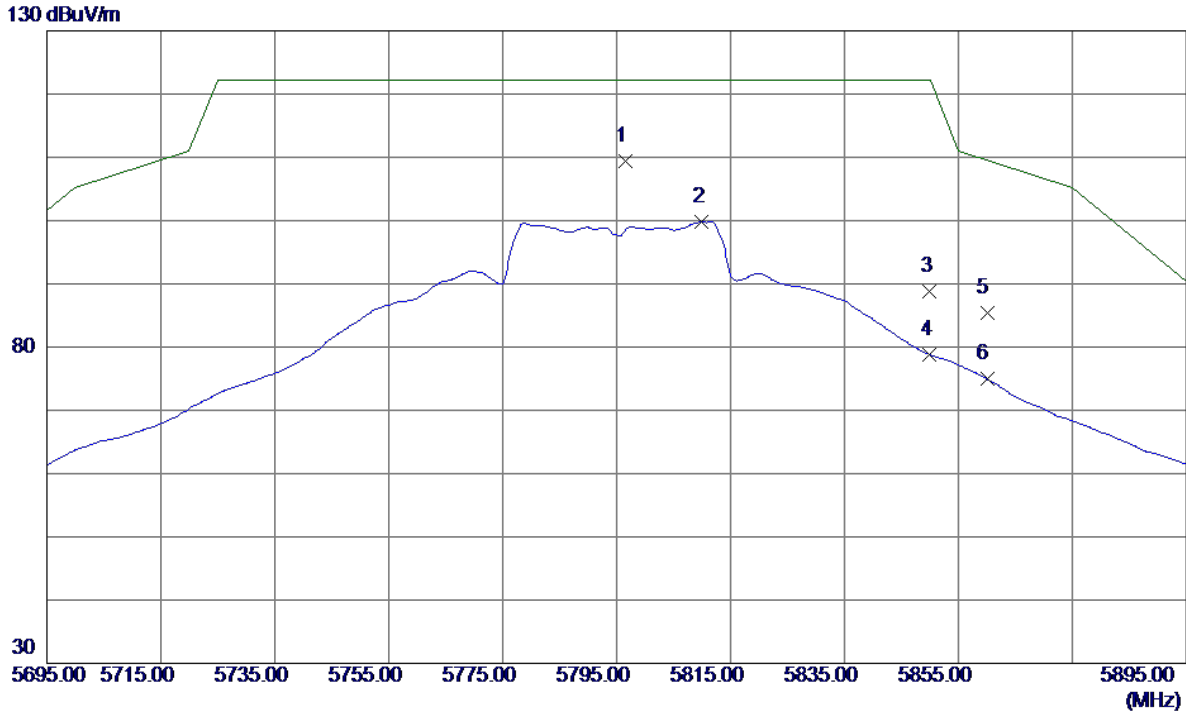


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.6000	66.64	42.84	109.48	122.30	-12.82	Peak	
2	5810.0000	56.97	42.88	99.85	122.30	-22.45	AVG	
3	5850.0000	45.72	43.03	88.75	122.30	-33.55	Peak	
4	5850.0000	35.74	43.03	78.77	122.30	-43.53	AVG	
5	5860.0000	42.41	43.06	85.47	109.50	-24.03	Peak	
6	5860.0000	31.92	43.06	74.98	109.50	-34.52	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical


80 dBuV/m

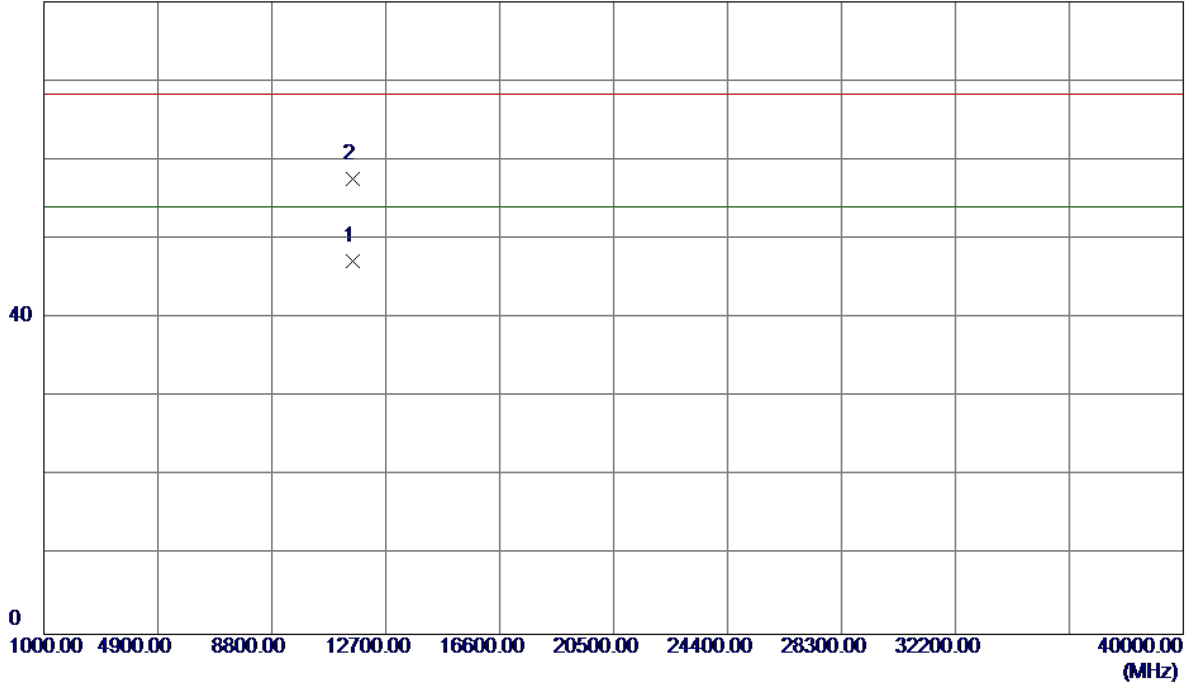

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.6000	31.65	15.48	47.13	54.00	-6.87	AVG	
2	11591.8000	42.16	15.48	57.64	68.30	-10.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

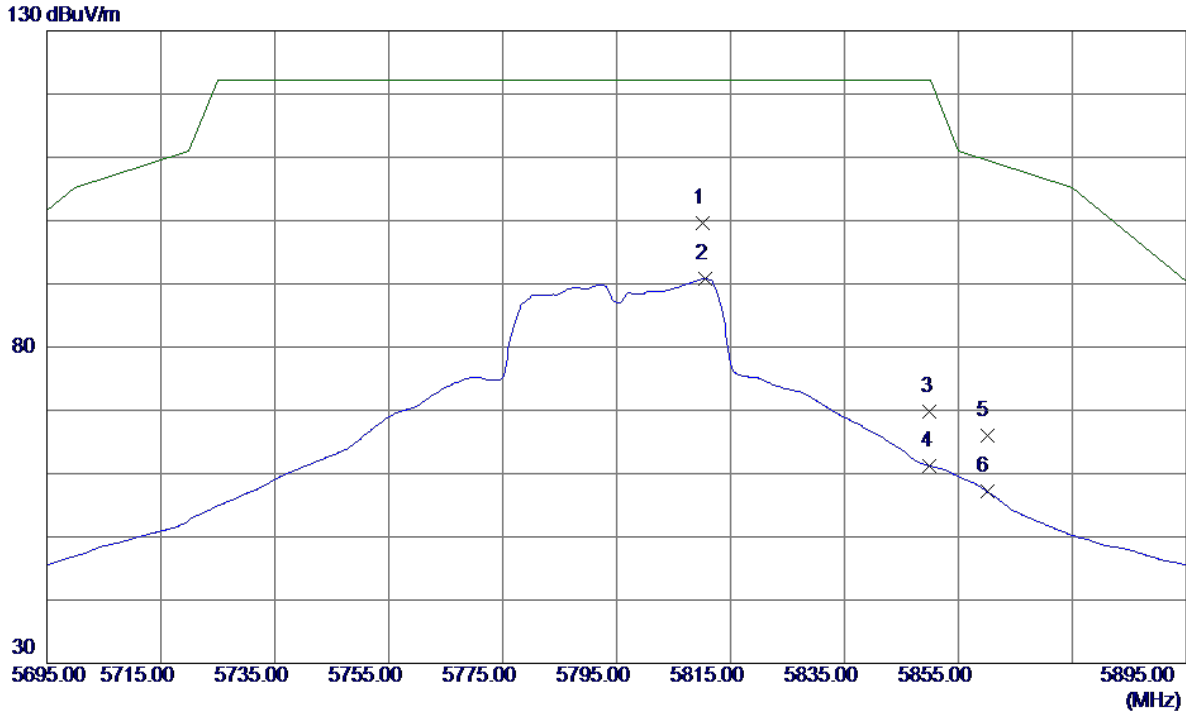

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5810.2000	56.81	42.88	99.69	122.30	-22.61	Peak	
2	5810.6000	47.85	42.89	90.74	122.30	-31.56	AVG	
3	5850.0000	26.72	43.03	69.75	122.30	-52.55	Peak	
4	5850.0000	18.20	43.03	61.23	122.30	-61.07	AVG	
5	5860.0000	22.91	43.06	65.97	109.50	-43.53	Peak	
6	5860.0000	14.15	43.06	57.21	109.50	-52.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

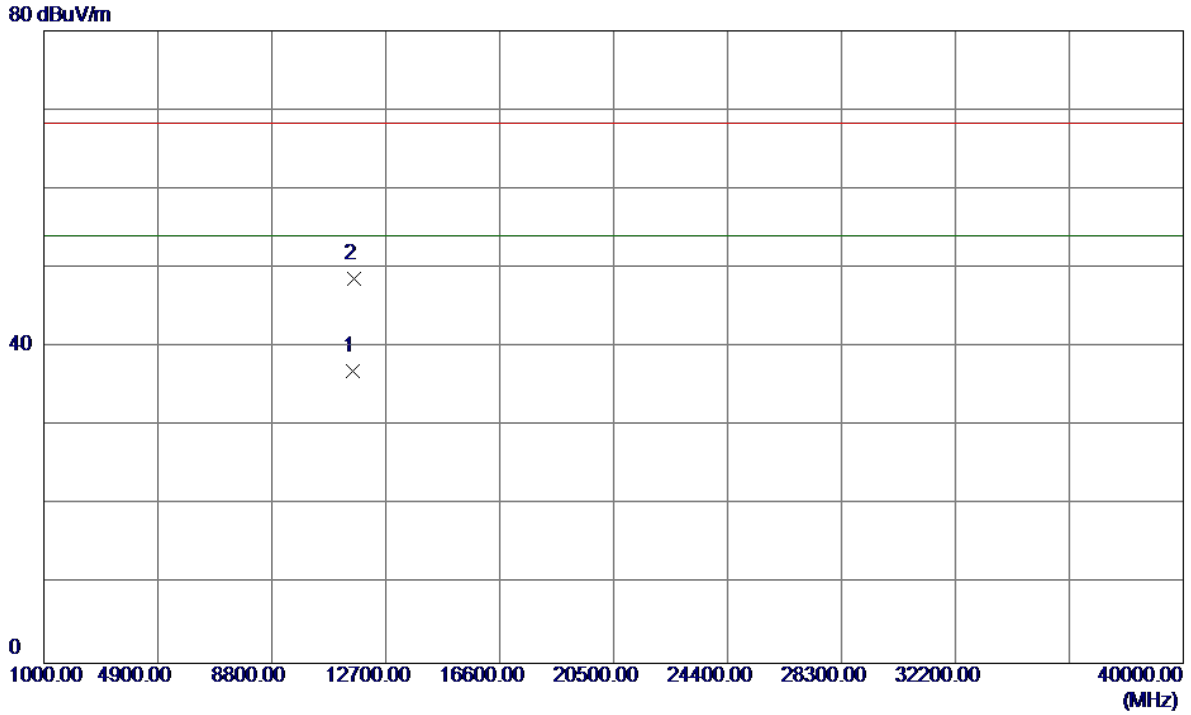

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.5000	21.43	15.48	36.91	54.00	-17.09	AVG	
2	11597.5000	33.19	15.48	48.67	68.30	-19.63	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

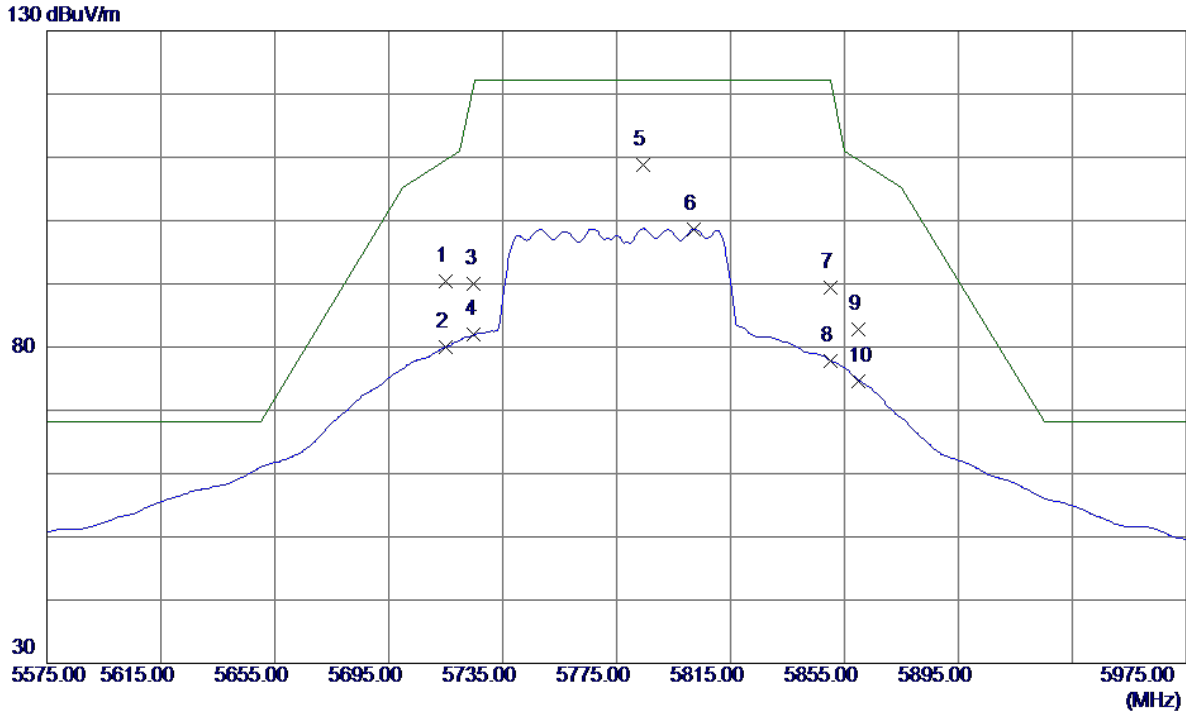

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	47.89	42.55	90.44	109.50	-19.06	Peak	
2	5715.0000	37.49	42.55	80.04	109.50	-29.46	AVG	
3	5725.0000	47.42	42.58	90.00	122.30	-32.30	Peak	
4	5725.0000	39.35	42.58	81.93	122.30	-40.37	AVG	
5 *	5784.2000	65.94	42.79	108.73	122.30	-13.57	Peak	
6	5802.2000	55.82	42.86	98.68	122.30	-23.62	AVG	
7	5850.0000	46.29	43.03	89.32	122.30	-32.98	Peak	
8	5850.0000	34.84	43.03	77.87	122.30	-44.43	AVG	
9	5860.0000	39.78	43.06	82.84	109.50	-26.66	Peak	
10	5860.0000	31.63	43.06	74.69	109.50	-34.81	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

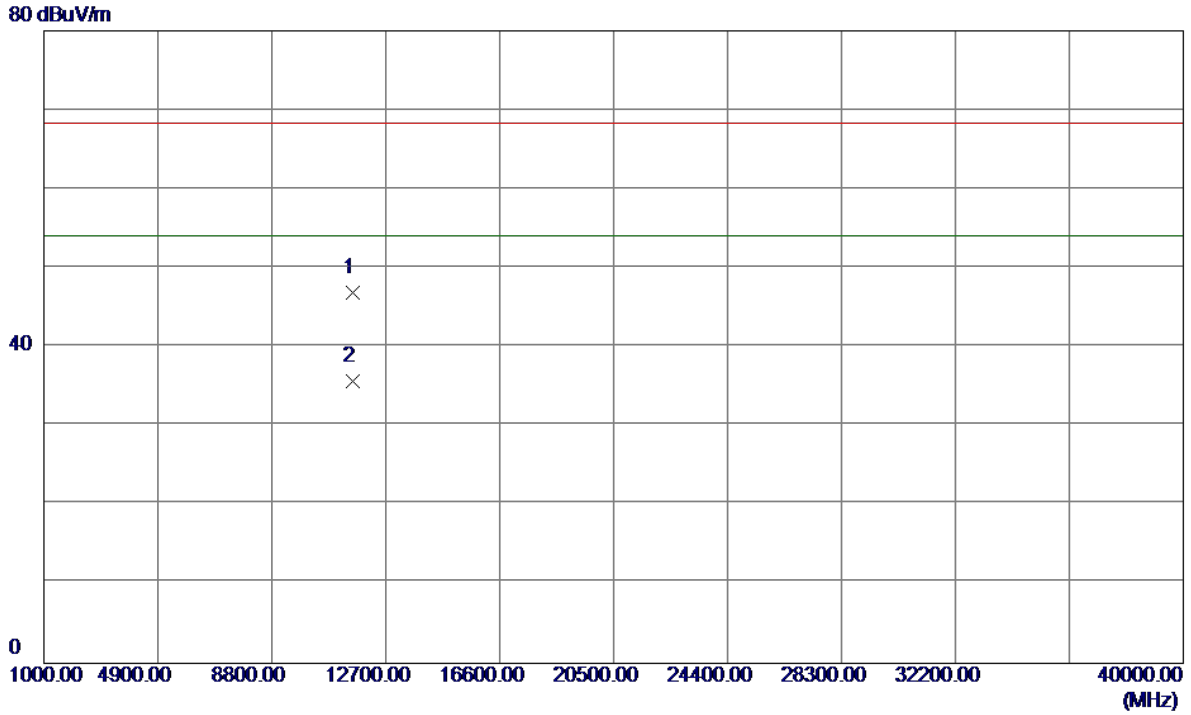

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11555.0000	31.38	15.48	46.86	68.30	-21.44	Peak	
2 *	11555.0000	20.16	15.48	35.64	54.00	-18.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

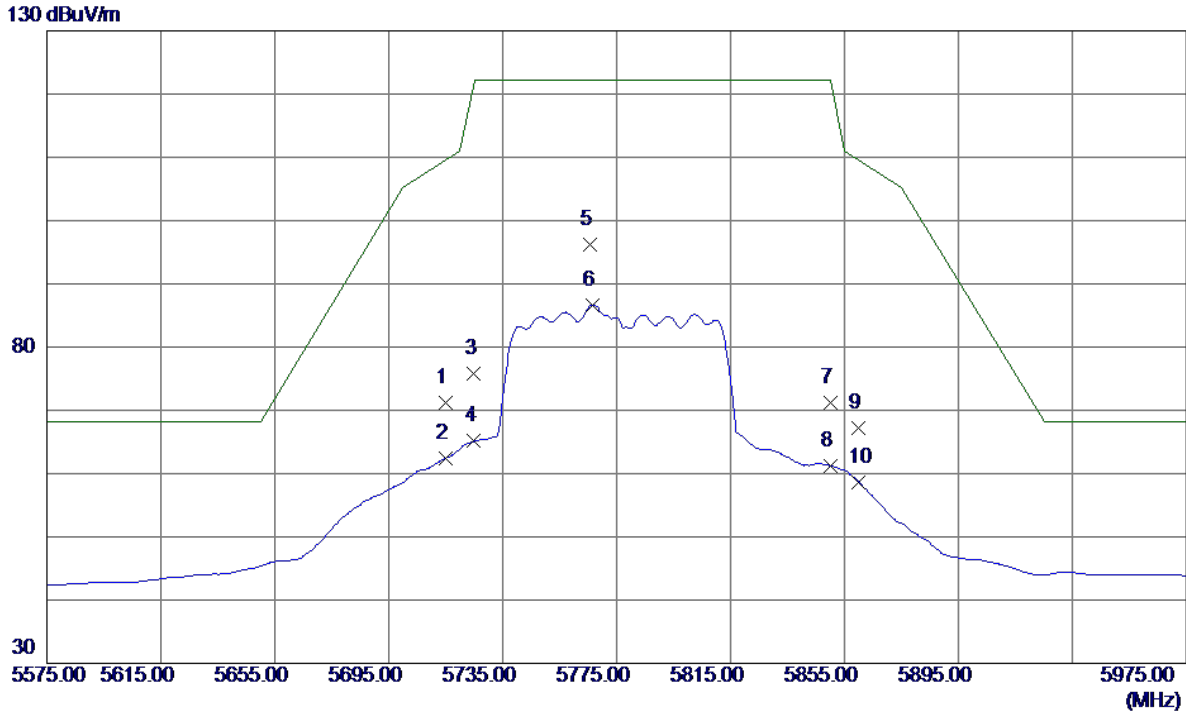

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	28.64	42.55	71.19	109.50	-38.31	Peak	
2	5715.0000	19.89	42.55	62.44	109.50	-47.06	AVG	
3	5725.0000	33.22	42.58	75.80	122.30	-46.50	Peak	
4	5725.0000	22.57	42.58	65.15	122.30	-57.15	AVG	
5 *	5765.8000	53.39	42.73	96.12	122.30	-26.18	Peak	
6	5766.6000	43.96	42.73	86.69	122.30	-35.61	AVG	
7	5850.0000	28.23	43.03	71.26	122.30	-51.04	Peak	
8	5850.0000	18.17	43.03	61.20	122.30	-61.10	AVG	
9	5860.0000	24.07	43.06	67.13	109.50	-42.37	Peak	
10	5860.0000	15.49	43.06	58.55	109.50	-50.95	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

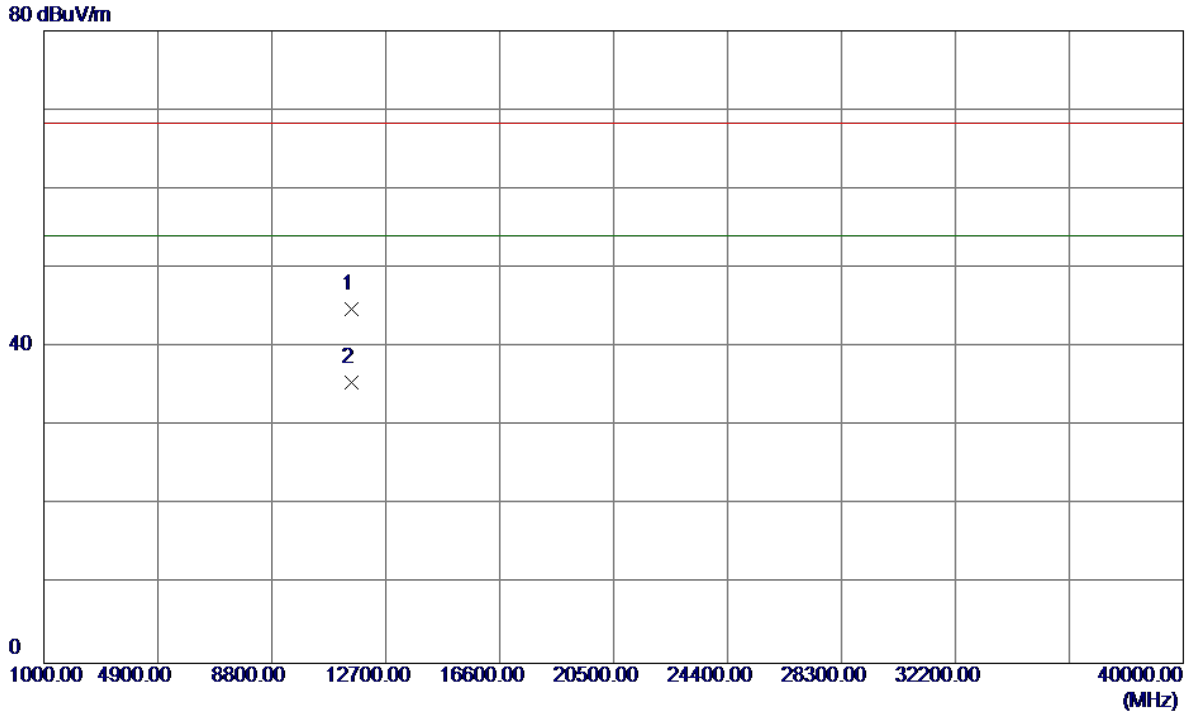

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11551.0000	29.27	15.48	44.75	68.30	-23.55	Peak	
2 *	11551.2000	20.05	15.48	35.53	54.00	-18.47	AVG	

TX A Mode_DUTY CYCLE

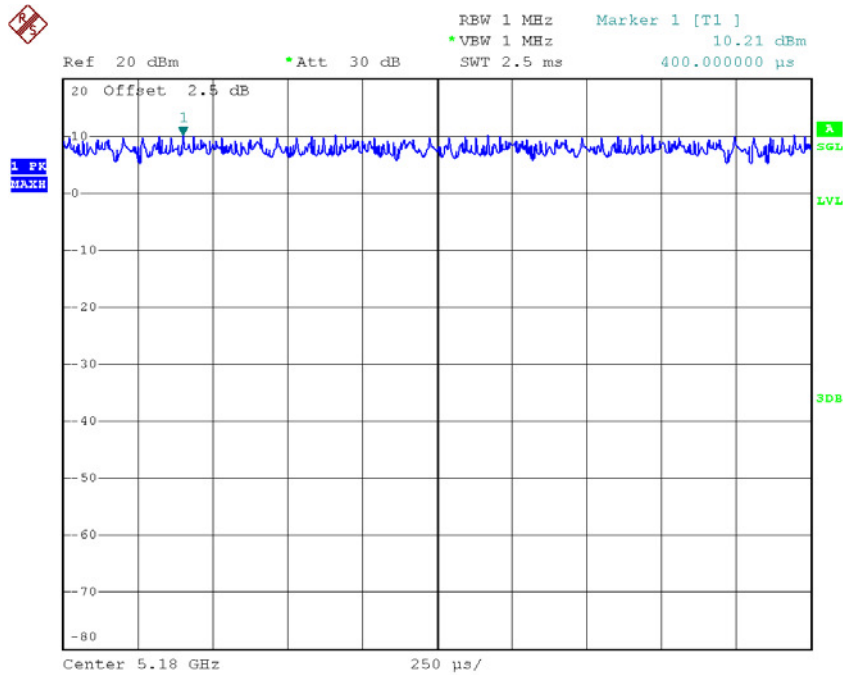

Date: 2.SEP.2016 11:00:49

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)


Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

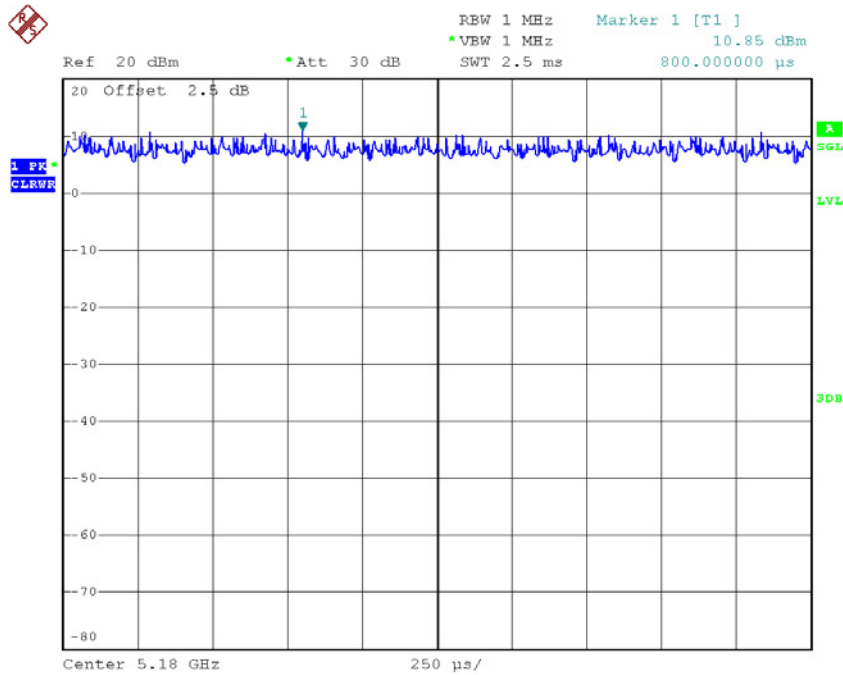

Date: 2.SEP.2016 11:01:18

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)


Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

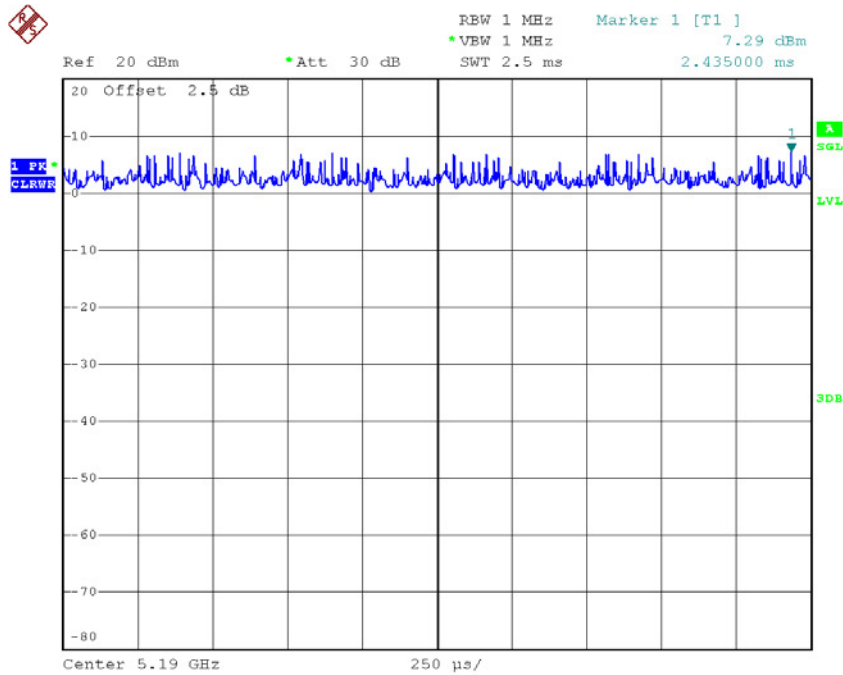

Date: 2.SEP.2016 11:02:09

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)


Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

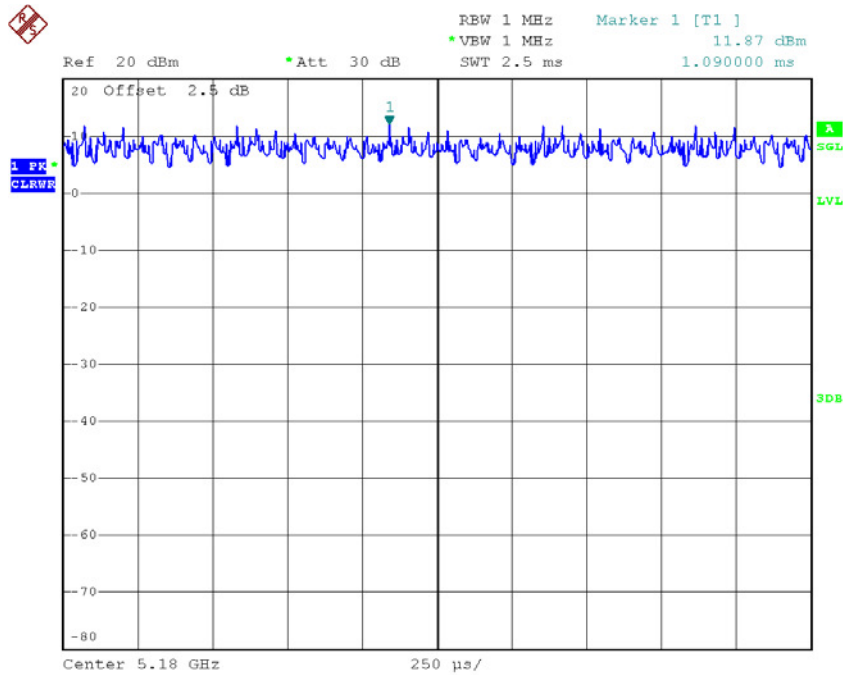

Date: 2.SEP.2016 11:01:48

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)


Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

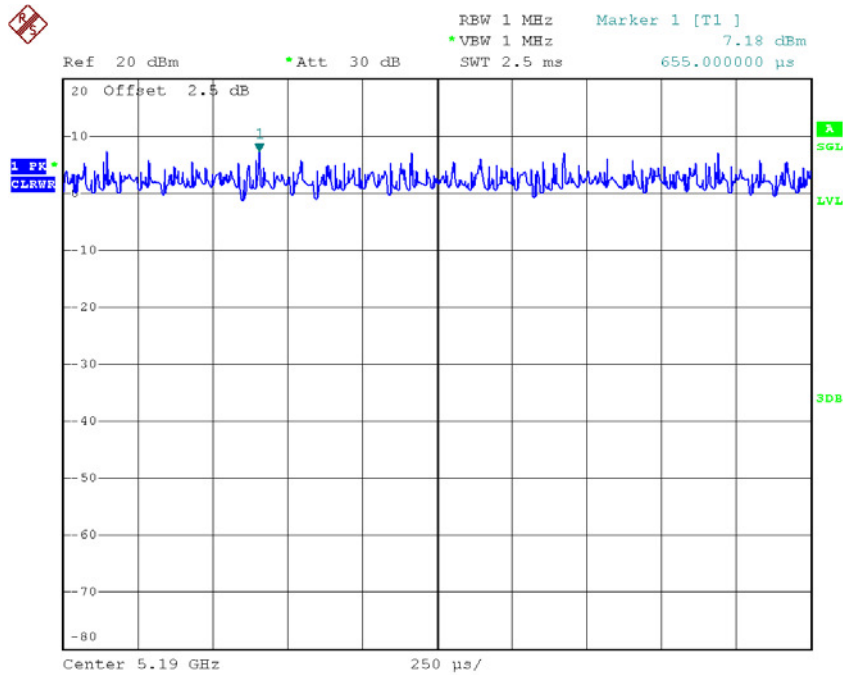

Date: 2.SEP.2016 11:02:24

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)


Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

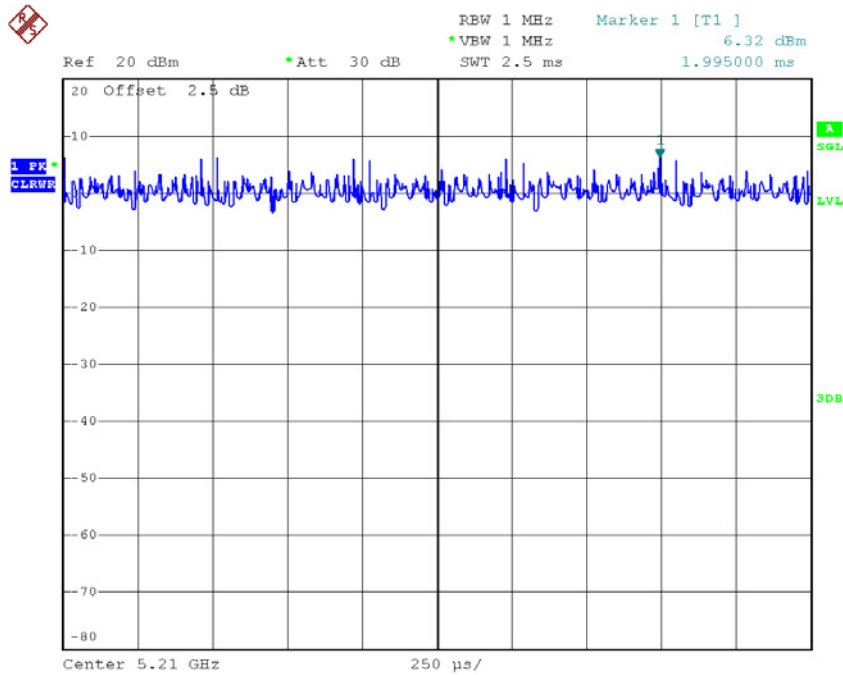

Date: 2.SEP.2016 11:02:41

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :100000.00msec

T_{Total} :100000.00msec

Duty cycle: 100.00%

Duty Factor= 10 log(1/Duty cycle)

Duty Factor =0.00

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENTE -BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	25.35	17.10
CH40	5200	42.45	28.50
CH48	5240	46.69	34.20

TX CH36

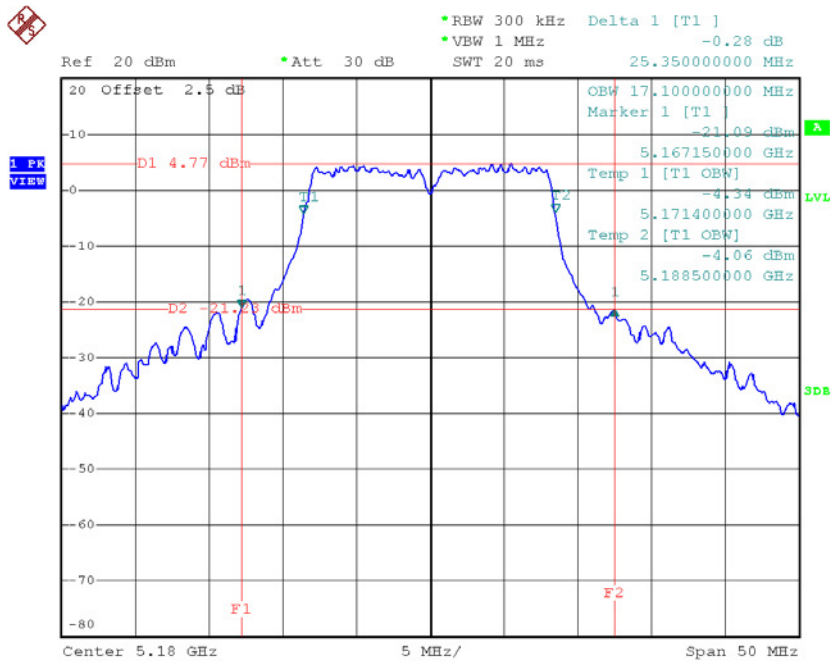


Date: 2.SEP.2016 12:12:02

TX CH40

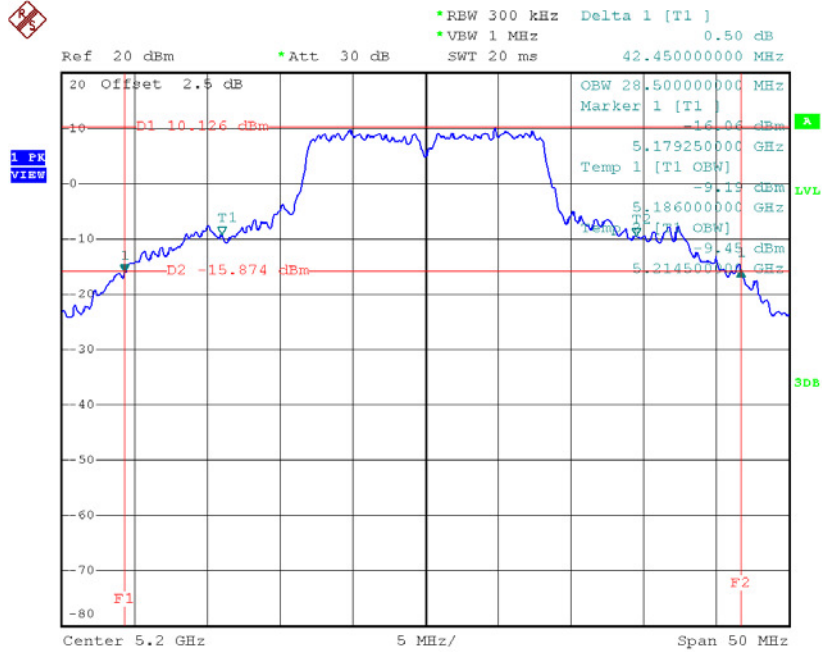

Date: 2.SEP.2016 12:13:02

TX CH48

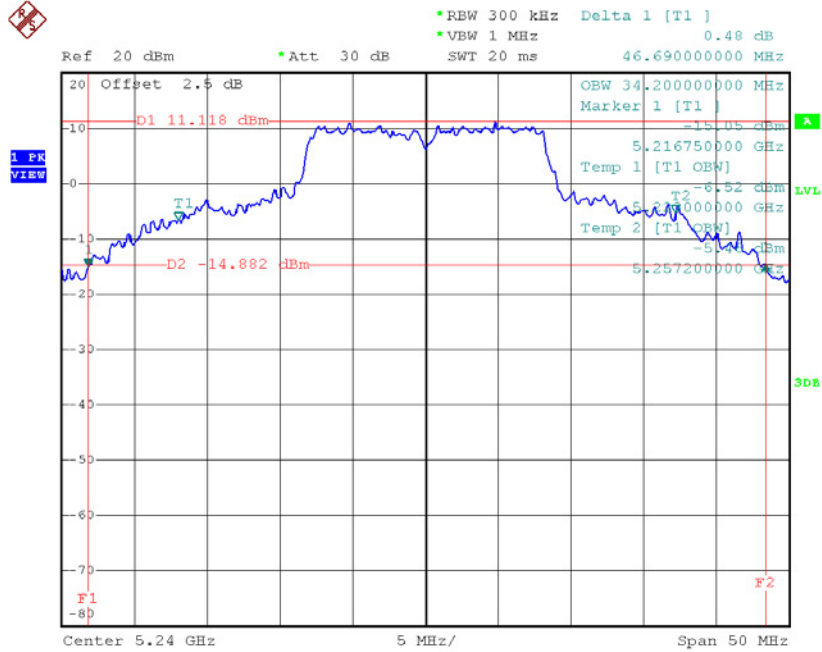


Date: 2.SEP.2016 12:13:39

Test Mode: UNII-1/TXN20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	28.95	18.20
CH40	5200	48.05	33.00
CH48	5240	48.20	34.50

TX CH36

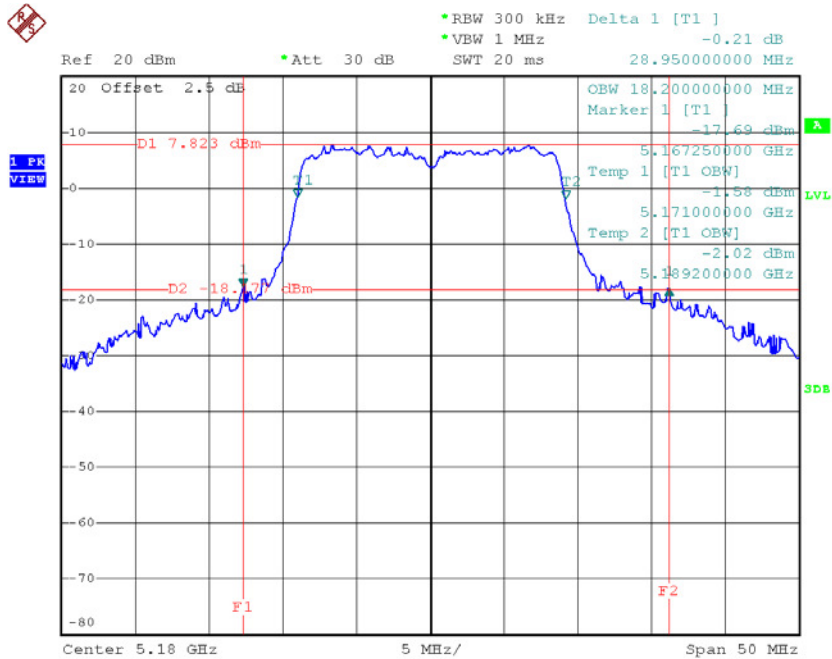


Date: 2.SEP.2016 12:27:02

TX CH40

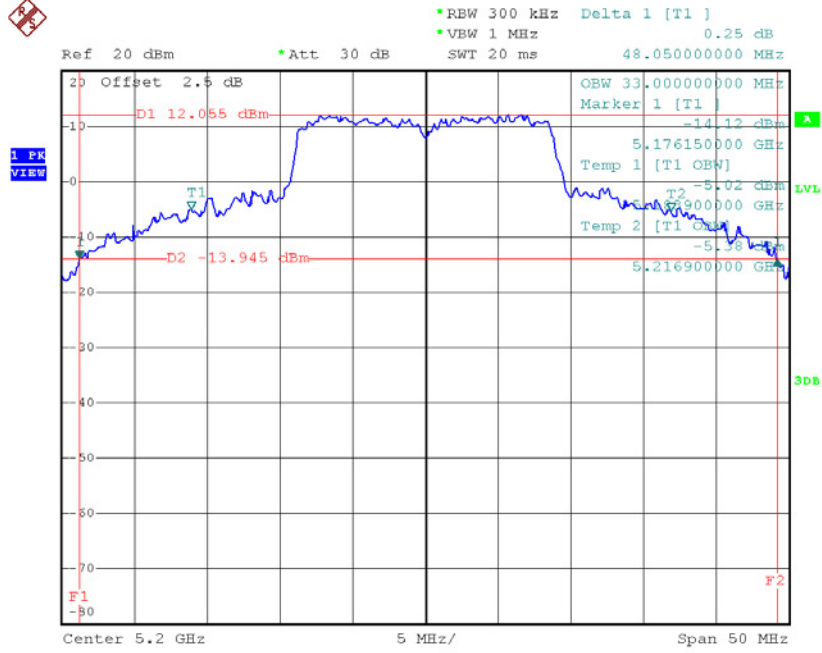

Date: 2.SEP.2016 12:27:52

TX CH48

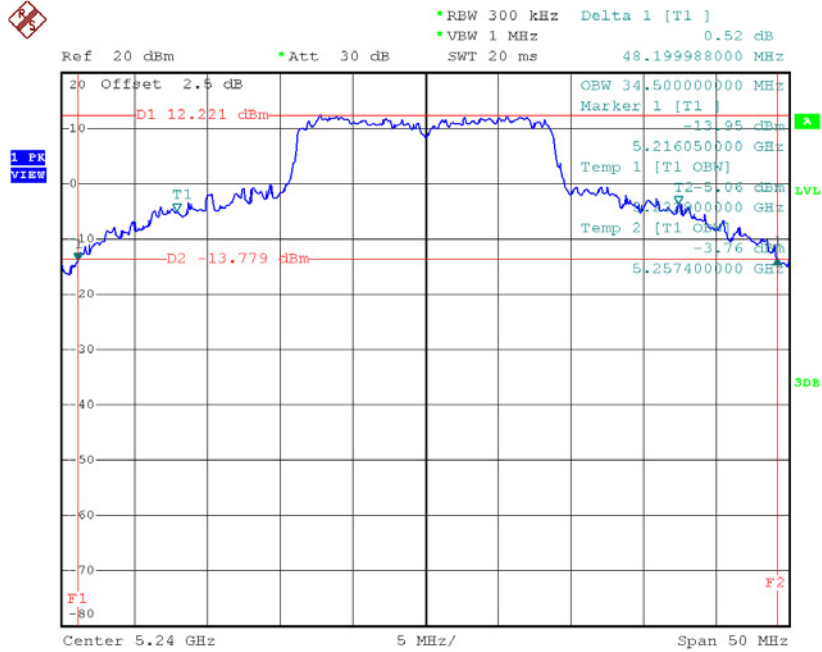


Date: 2.SEP.2016 12:30:47

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	42.30	36.20
CH46	5230	90.50	51.40

TX CH38

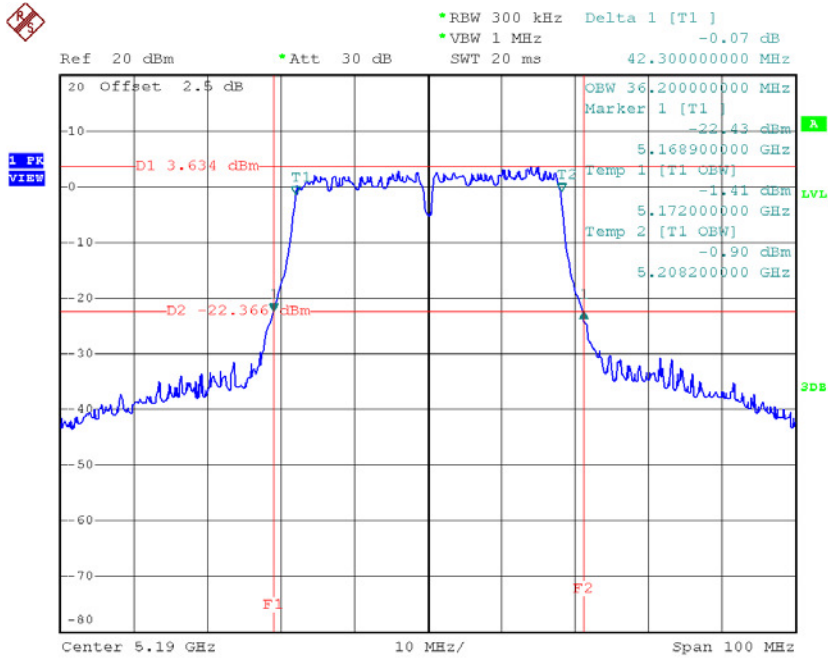

Date: 2.SEP.2016 14:29:14

TX CH46

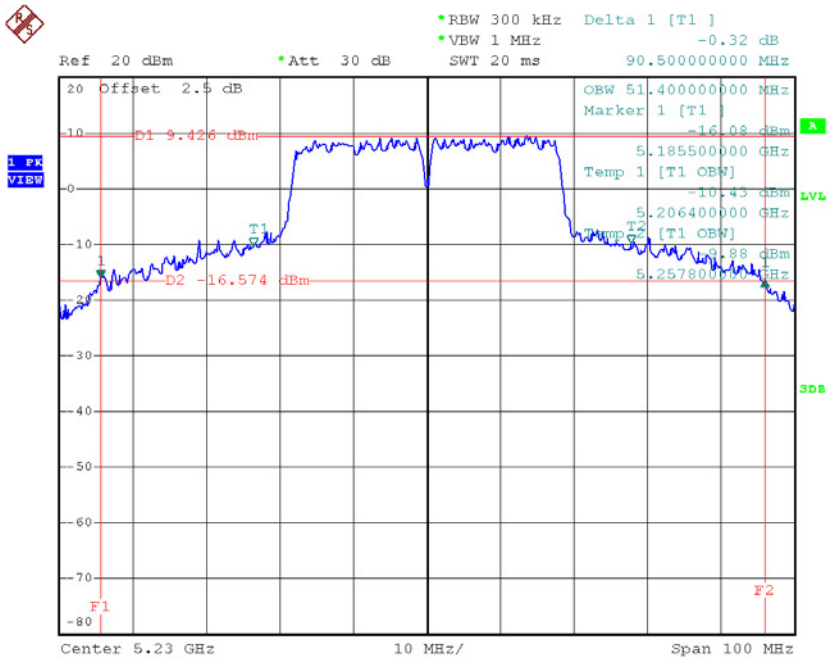


Date: 2.SEP.2016 14:30:02

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.55	36.80	>=500
CH157	5785	16.60	37.20	>=500
CH165	5825	16.59	37.10	>=500

TX CH 149

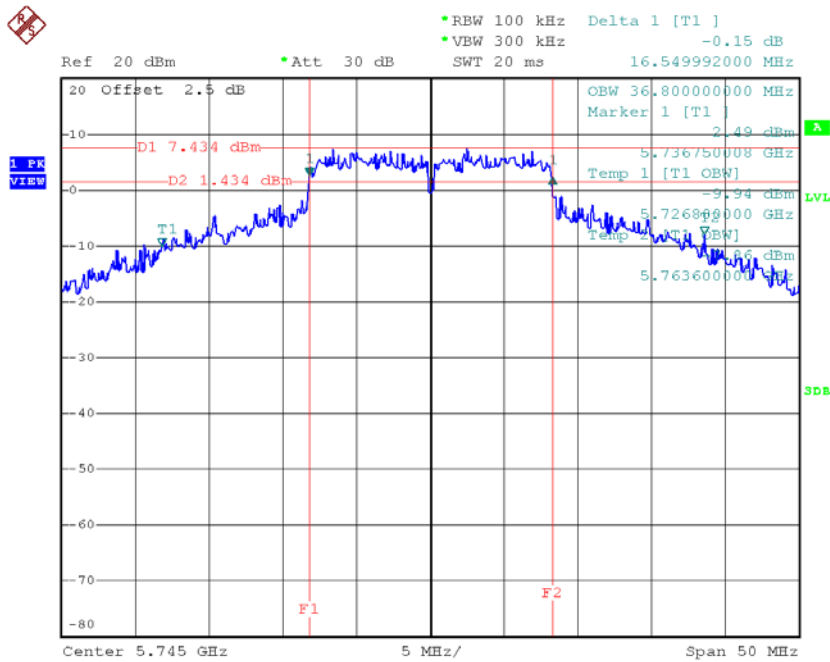


Date: 2.SEP.2016 12:15:47

TX CH 157

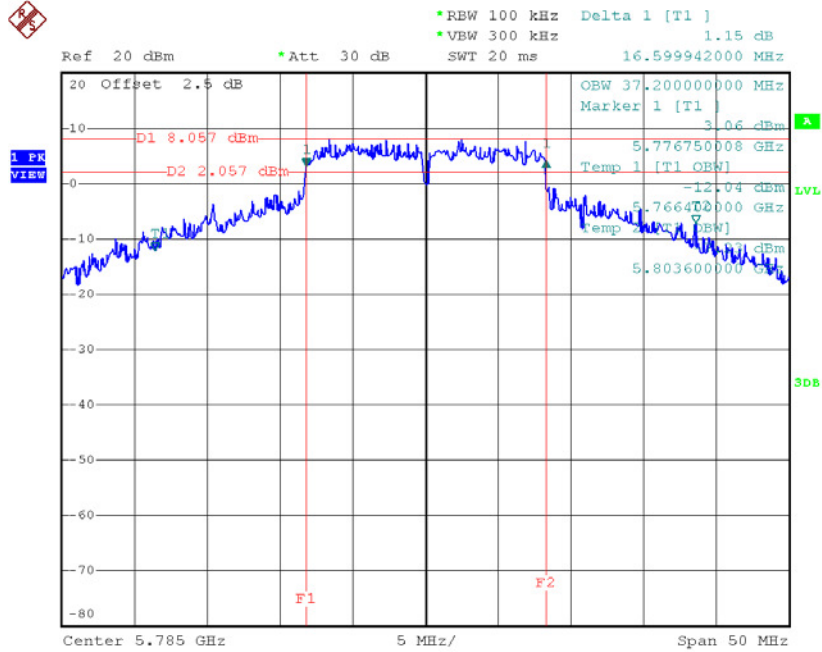

Date: 2.SEP.2016 12:16:55

TX CH 165

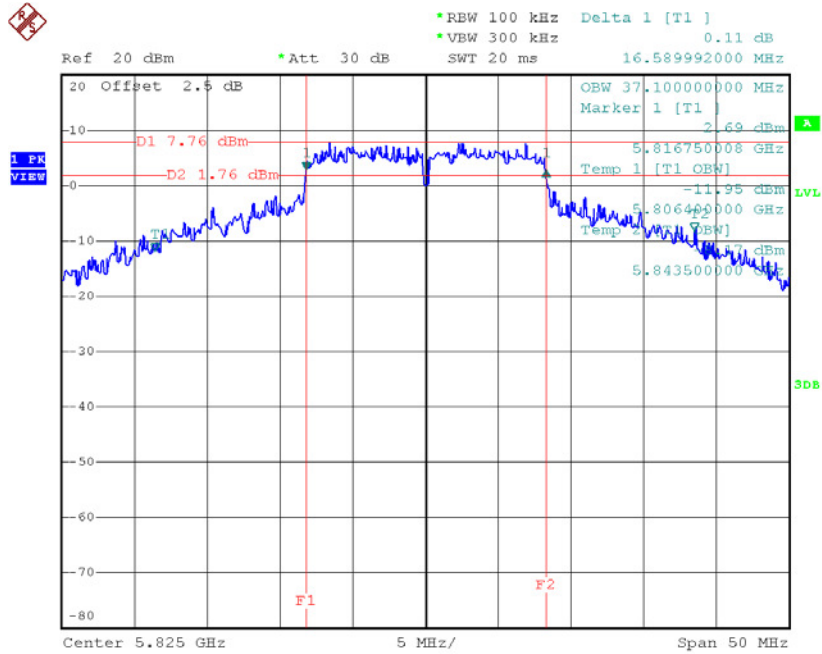


Date: 2.SEP.2016 12:17:47

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	39.10	>=500
CH157	5785	17.85	39.00	>=500
CH165	5825	17.90	39.10	>=500

TX CH 149

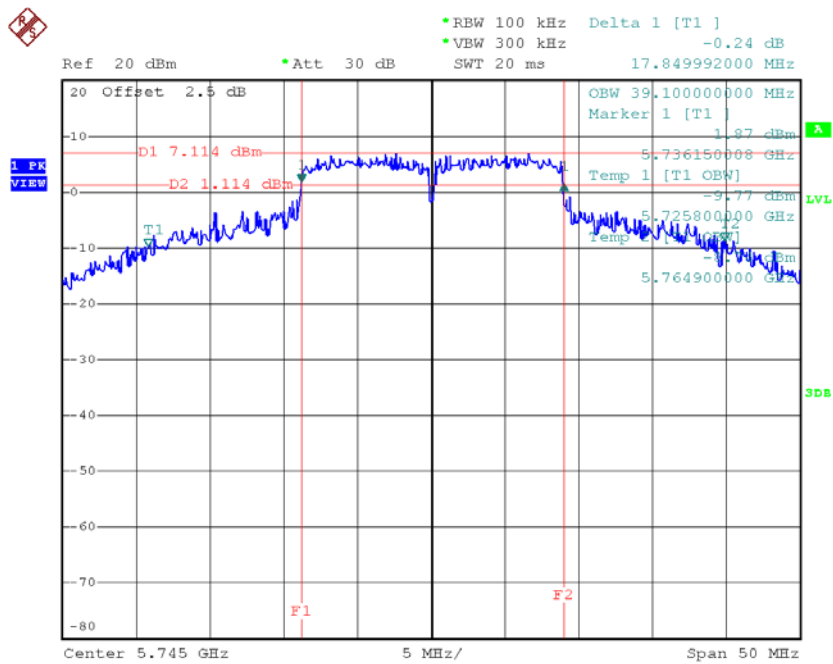


Date: 2.SEP.2016 14:04:03

TX CH 157

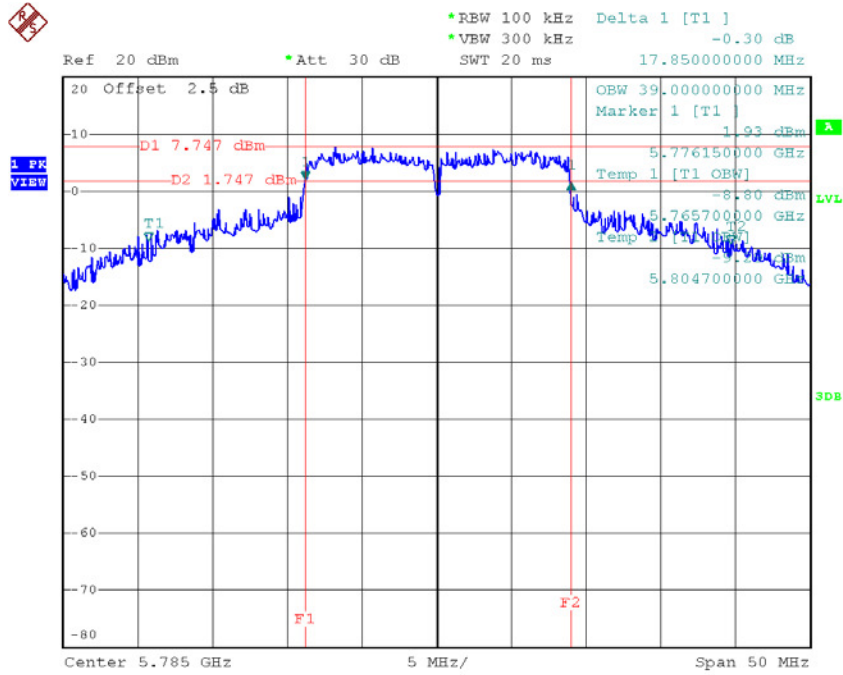

Date: 2.SEP.2016 14:05:18

TX CH 165

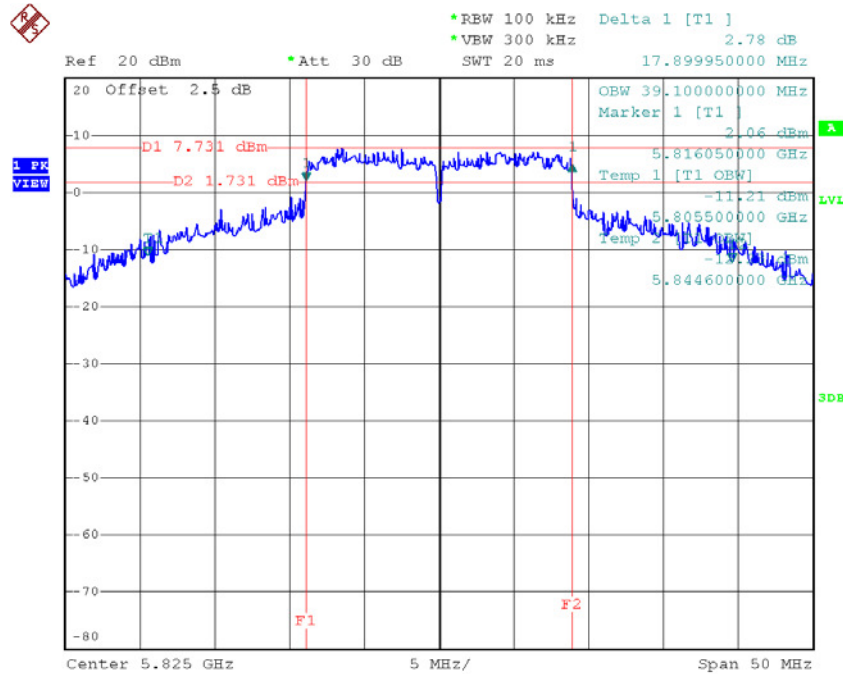


Date: 2.SEP.2016 14:06:07

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.70	79.00	>=500
CH159	5795	36.59	66.60	>=500

TX CH 151

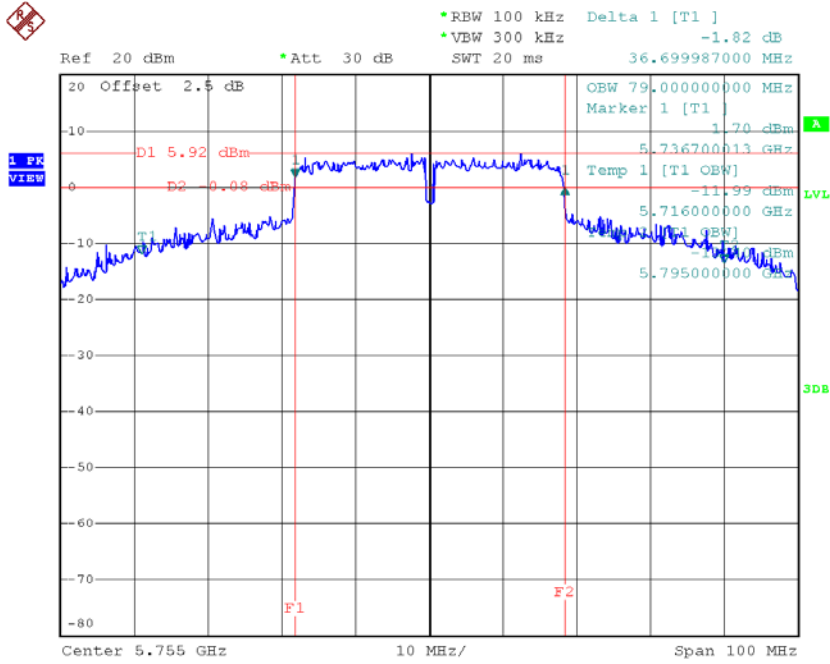

Date: 2.SEP.2016 14:31:07

TX CH 159

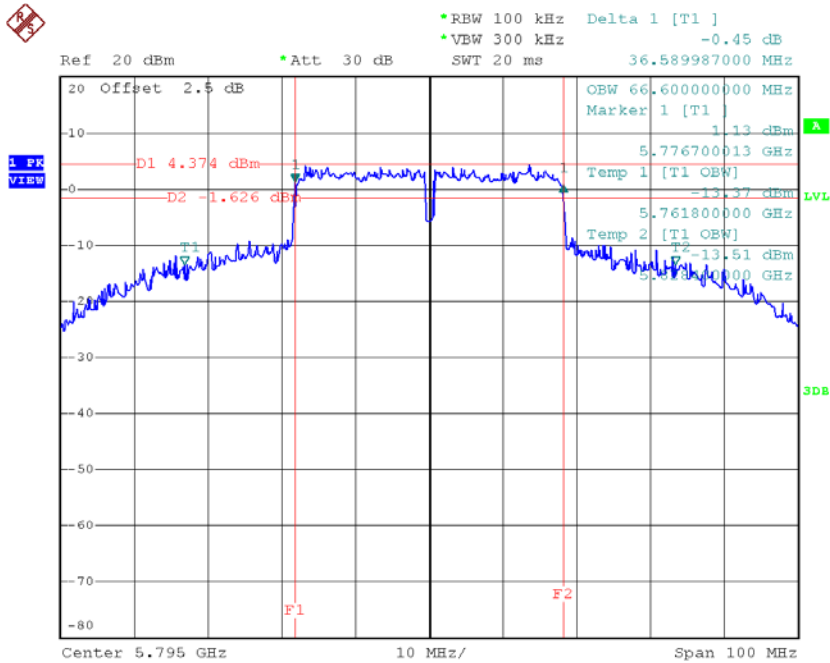


Date: 2.SEP.2016 14:32:29

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.69	18.10
CH40	5200	43.09	27.10
CH48	5240	44.25	28.20

TX CH36

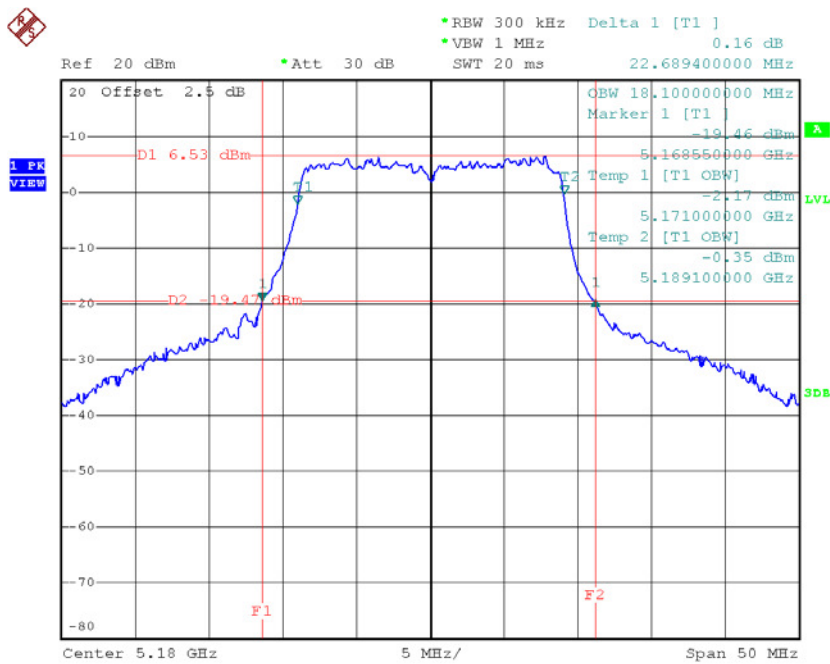


Date: 2.SEP.2016 14:14:49

TX CH40

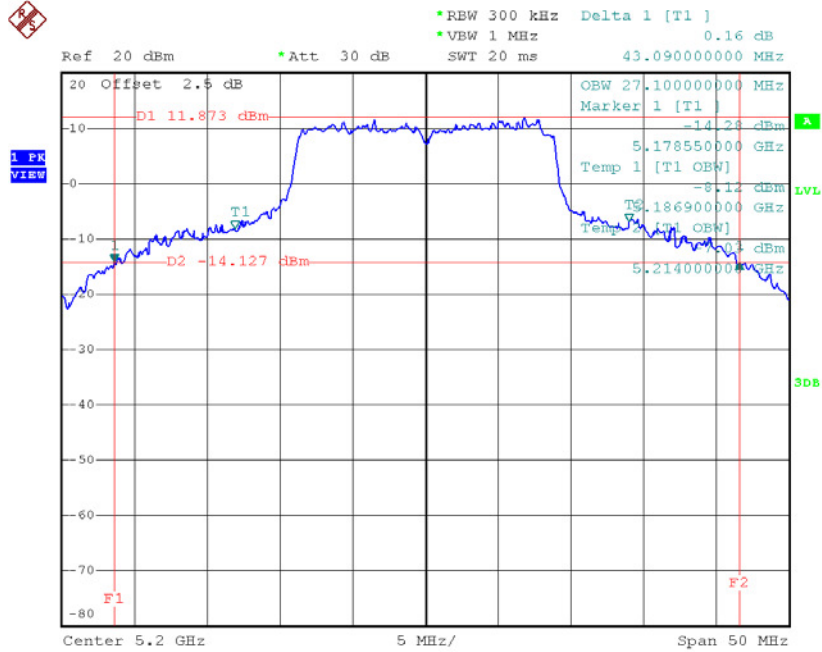

Date: 2.SEP.2016 14:15:40

TX CH48

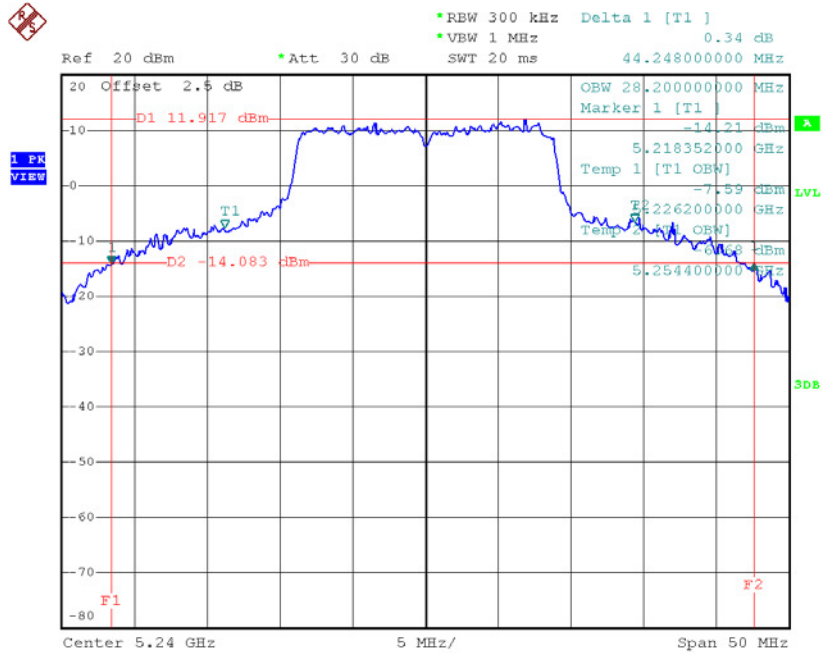


Date: 2.SEP.2016 14:16:53

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.19	36.20
CH46	5230	84.19	49.20

TX CH38

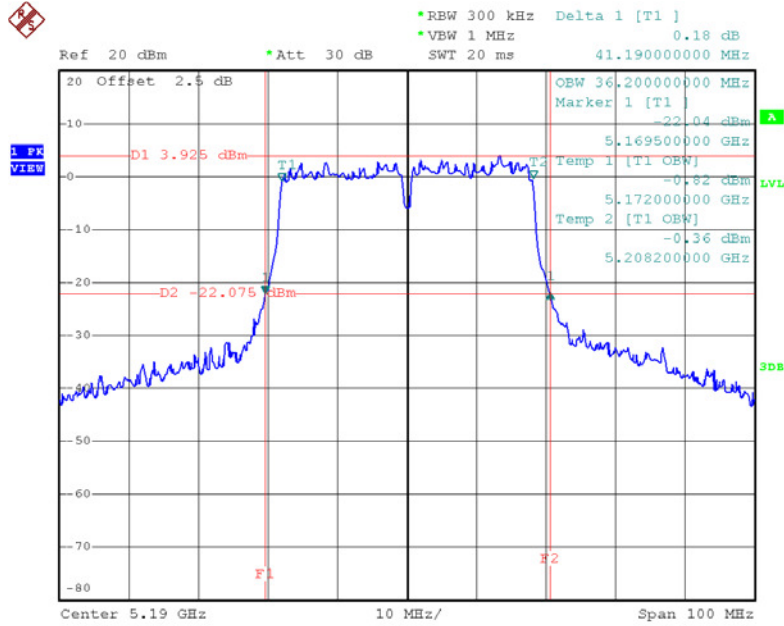

Date: 2.SEP.2016 14:39:17

TX CH46

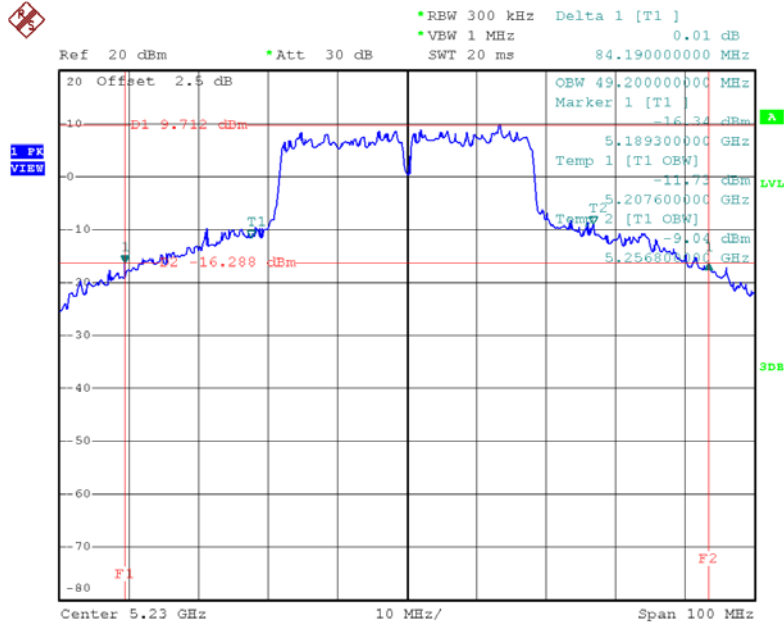


Date: 2.SEP.2016 14:40:18

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	79.20	75.20


TX CH42

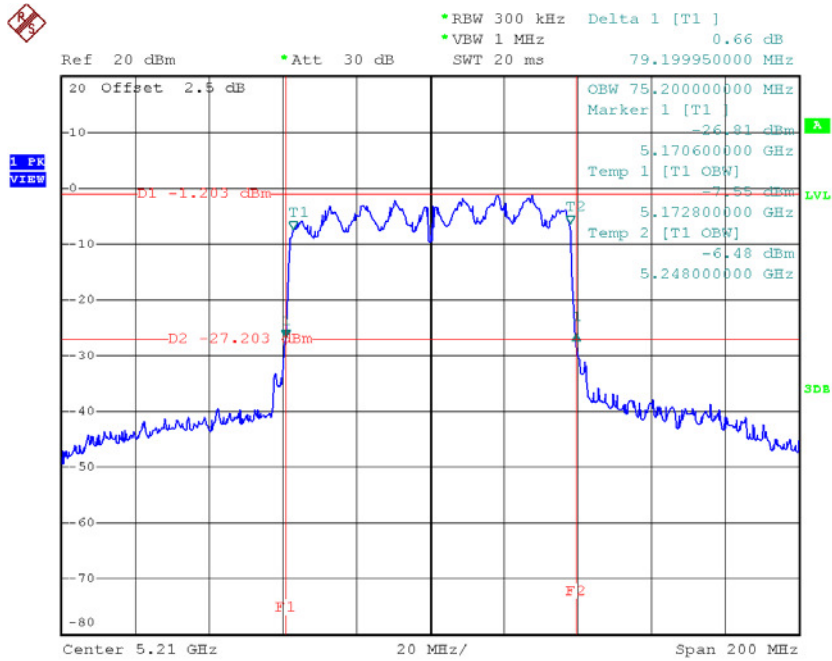

Date: 2.SEP.2016 14:48:52


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.85	39.30	>=500
CH157	5785	17.85	39.50	>=500
CH165	5825	17.90	39.90	>=500

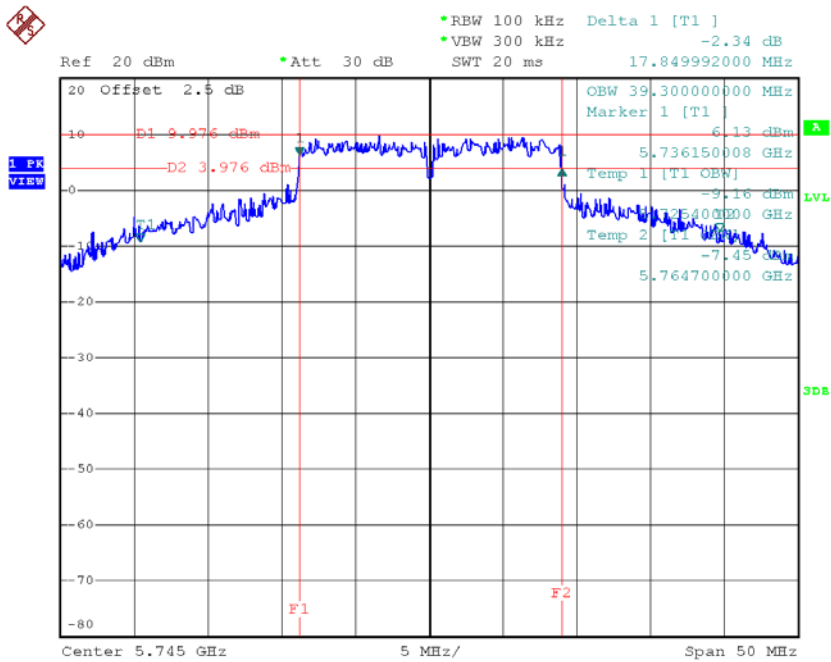TX CH 149


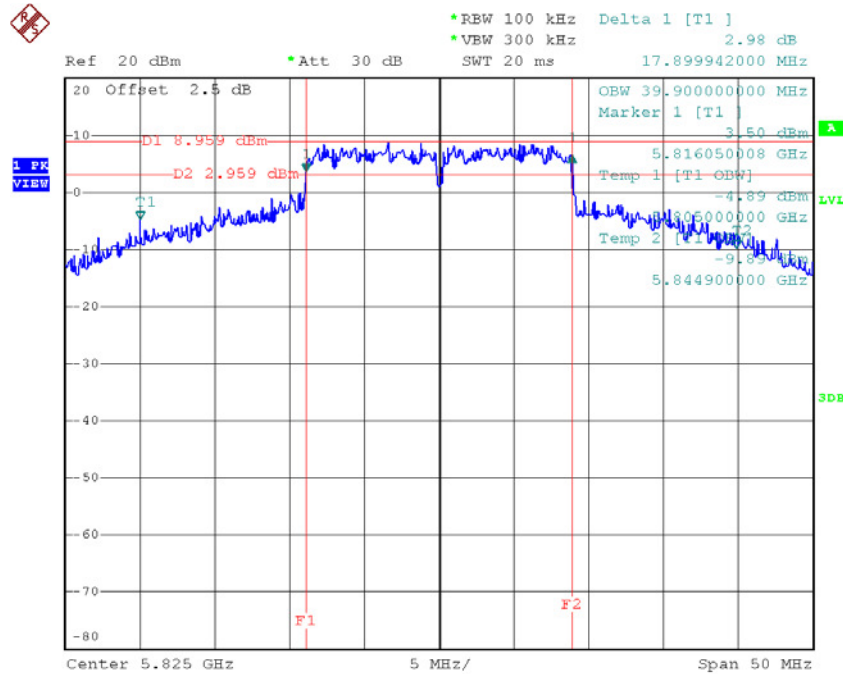
Date: 2.SEP.2016 14:18:19

TX CH 157

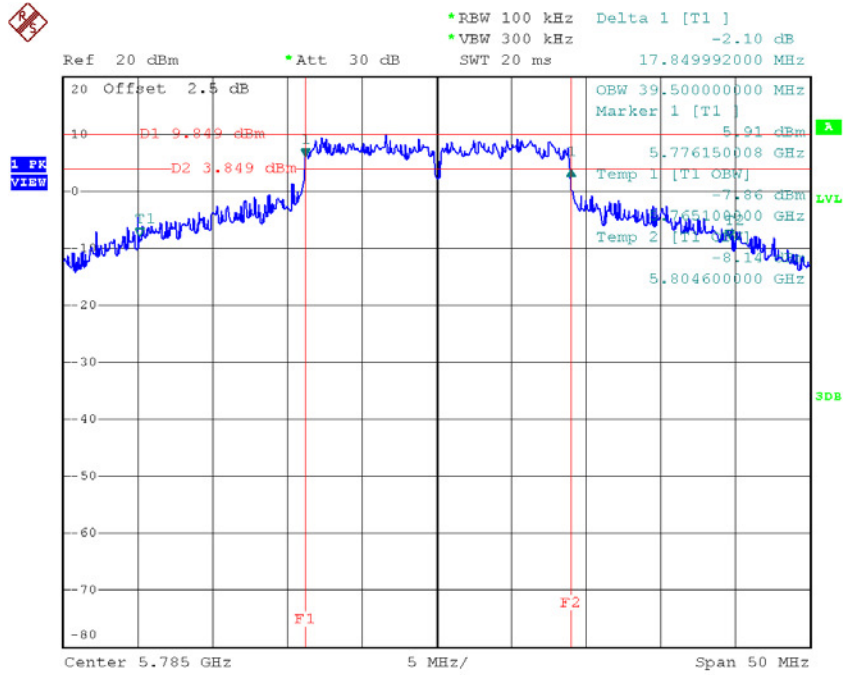

Date: 2.SEP.2016 14:19:29

TX CH 165




Date: 2.SEP.2016 14:20:26

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.70	75.20	>=500
CH159	5795	36.50	65.60	>=500

TX CH 151

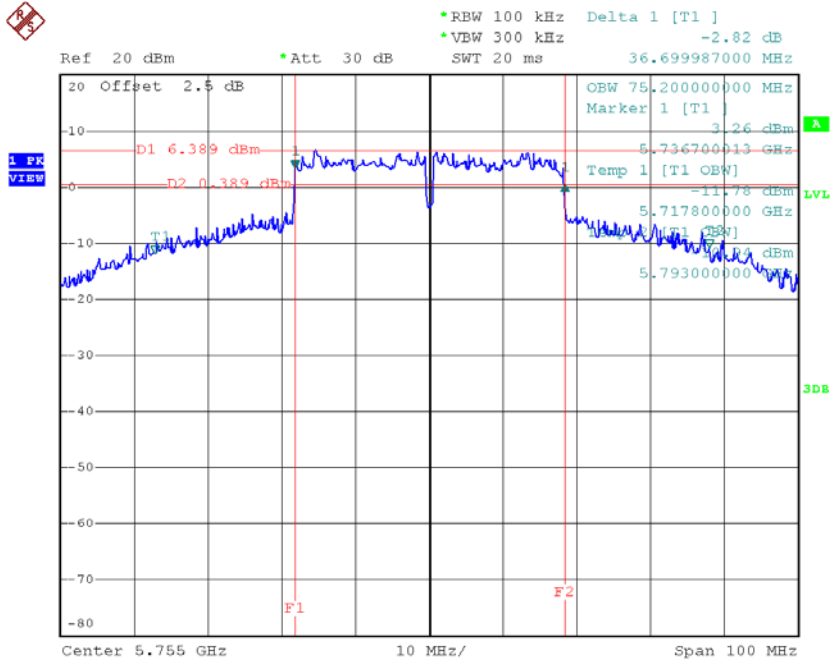

Date: 2.SEP.2016 14:41:26


TX CH 159

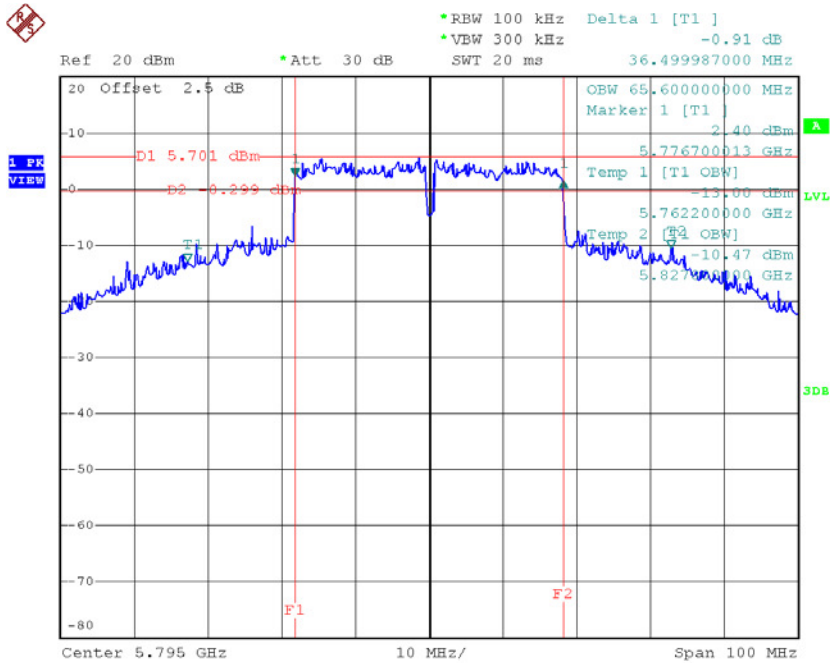

Date: 2.SEP.2016 14:42:34

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	75.40	83.20	>=500

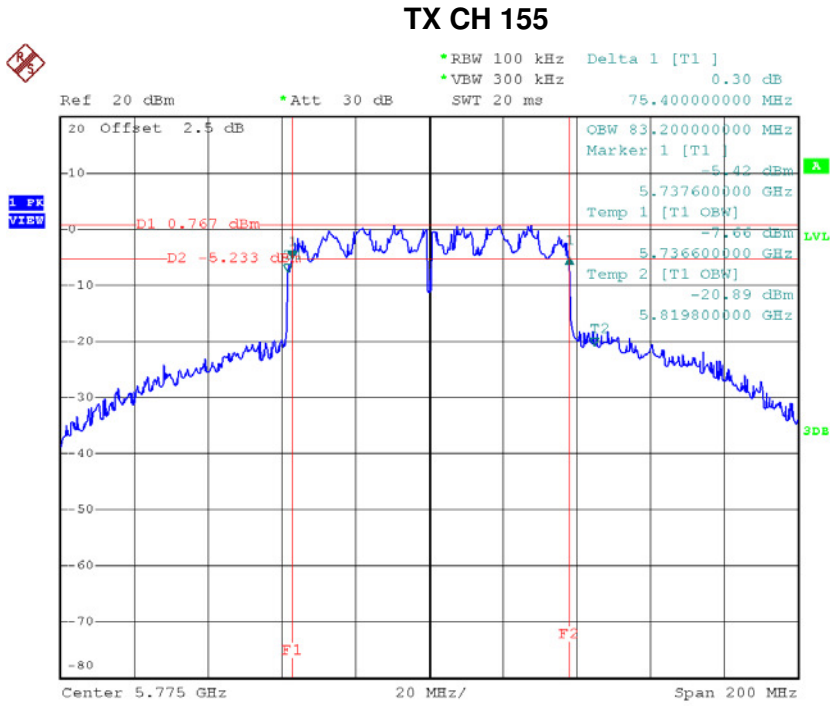

Date: 2.SEP.2016 14:50:10

ATTACHMENTF - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.16	0.00	18.16	27.90	0.62
CH40	5200	21.96	0.00	21.96	27.90	0.62
CH48	5240	23.78	0.00	23.78	27.90	0.62

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.12	0.00	16.12	27.90	0.62
CH40	5200	21.13	0.00	21.13	27.90	0.62
CH48	5240	23.39	0.00	23.39	27.90	0.62

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.27	27.90	0.62
CH40	5200	24.58	27.90	0.62
CH48	5240	26.60	27.90	0.62

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.11	0.00	19.11	27.90	0.62
CH40	5200	22.22	0.00	22.22	27.90	0.62
CH48	5240	23.54	0.00	23.54	27.90	0.62

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.17	0.00	17.17	27.90	0.62
CH40	5200	21.45	0.00	21.45	27.90	0.62
CH48	5240	23.21	0.00	23.21	27.90	0.62

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	21.26	27.90	0.62
CH40	5200	24.86	27.90	0.62
CH48	5240	26.39	27.90	0.62

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.31	0.00	18.31	27.90	0.62
CH46	5230	22.15	0.00	22.15	27.90	0.62

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.03	0.00	16.03	27.90	0.62
CH46	5230	21.29	0.00	21.29	27.90	0.62

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	20.33	27.90	0.62
CH46	5230	24.75	27.90	0.62

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.15	0.00	22.15	27.90	0.62
CH157	5785	22.51	0.00	22.51	27.90	0.62
CH165	5825	21.93	0.00	21.93	27.90	0.62

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	23.93	0.00	23.93	27.90	0.62
CH157	5785	23.46	0.00	23.46	27.90	0.62
CH165	5825	23.01	0.00	23.01	27.90	0.62

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	26.14	27.90	0.62
CH157	5785	26.02	27.90	0.62
CH165	5825	25.51	27.90	0.62

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.21	0.00	22.21	27.90	0.62
CH157	5785	22.66	0.00	22.66	27.90	0.62
CH165	5825	22.62	0.00	22.62	27.90	0.62

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	23.99	0.00	23.99	27.90	0.62
CH157	5785	23.55	0.00	23.55	27.90	0.62
CH165	5825	23.51	0.00	23.51	27.90	0.62

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	26.20	27.90	0.62
CH157	5785	26.14	27.90	0.62
CH165	5825	26.10	27.90	0.62

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	23.05	0.00	23.05	27.90	0.62
CH159	5795	22.29	0.00	22.29	27.90	0.62

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	24.22	0.00	24.22	27.90	0.62
CH159	5795	23.23	0.00	23.23	27.90	0.62

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	26.68	27.90	0.62
CH159	5795	25.80	27.90	0.62

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.87	0.00	17.87	27.90	0.62
CH40	5200	21.99	0.00	21.99	27.90	0.62
CH48	5240	23.43	0.00	23.43	27.90	0.62

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.03	0.00	16.03	27.90	0.62
CH40	5200	21.17	0.00	21.17	27.90	0.62
CH48	5240	23.05	0.00	23.05	27.90	0.62

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.06	27.90	0.62
CH40	5200	24.61	27.90	0.62
CH48	5240	26.25	27.90	0.62

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.76	0.00	18.76	27.90	0.62
CH46	5230	22.13	0.00	22.13	27.90	0.62

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.47	0.00	16.47	27.90	0.62
CH46	5230	20.83	0.00	20.83	27.90	0.62

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	20.77	27.90	0.62
CH46	5230	24.54	27.90	0.62

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.97	0.00	15.97	27.90	0.62

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	13.65	0.00	13.65	27.90	0.62

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	17.97	27.90	0.62

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.31	0.00	22.31	27.90	0.62
CH157	5785	22.75	0.00	22.75	27.90	0.62
CH165	5825	22.67	0.00	22.67	27.90	0.62

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	24.01	0.00	24.01	27.90	0.62
CH157	5785	23.36	0.00	23.36	27.90	0.62
CH165	5825	23.46	0.00	23.46	27.90	0.62

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	26.25	27.90	0.62
CH157	5785	26.08	27.90	0.62
CH165	5825	26.09	27.90	0.62

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	23.03	0.00	23.03	27.90	0.62
CH159	5795	22.43	0.00	22.43	27.90	0.62

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	24.22	0.00	24.22	27.90	0.62
CH159	5795	23.47	0.00	23.47	27.90	0.62

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	26.68	27.90	0.62
CH159	5795	25.99	27.90	0.62

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	20.21	0.00	20.21	27.90	0.62

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	21.24	0.00	21.24	27.90	0.62


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	23.77	27.90	0.62

ATTACHMENTH - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.87	0.00	1.87	14.90
CH40	5200	6.67	0.00	6.67	14.90
CH48	5240	8.22	0.00	8.22	14.90

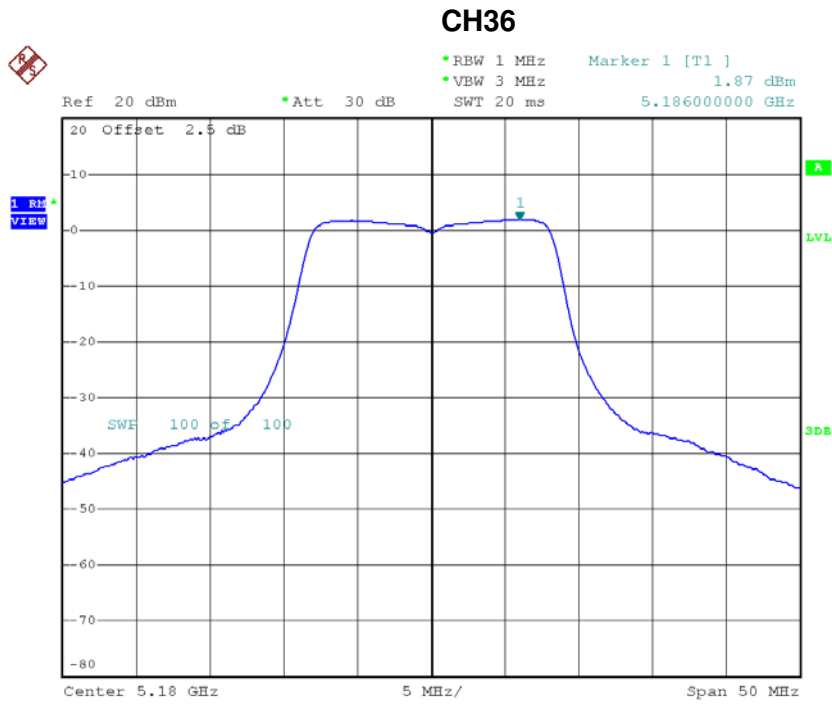


Date: 2.SEP.2016 12:12:12

CH40

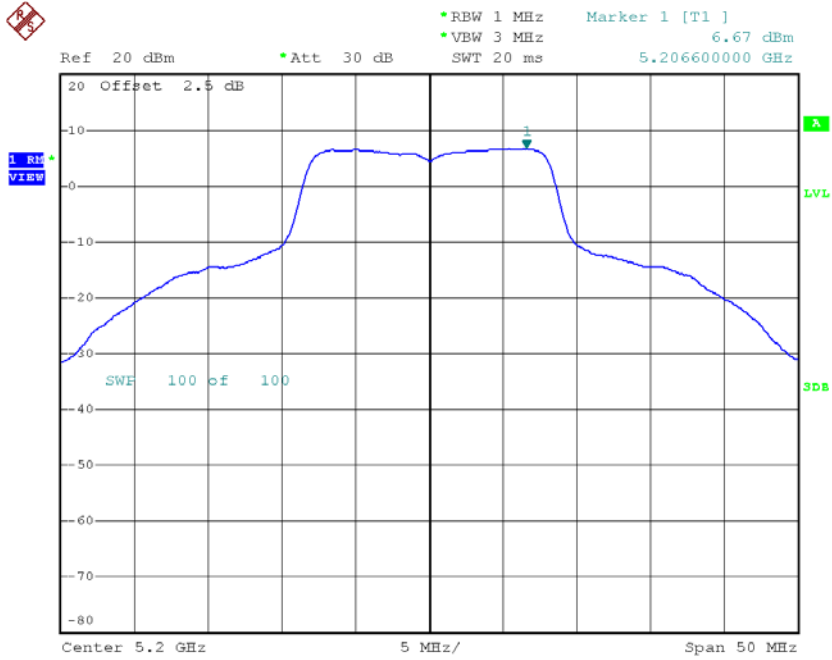

Date: 2.SEP.2016 12:13:11


CH48

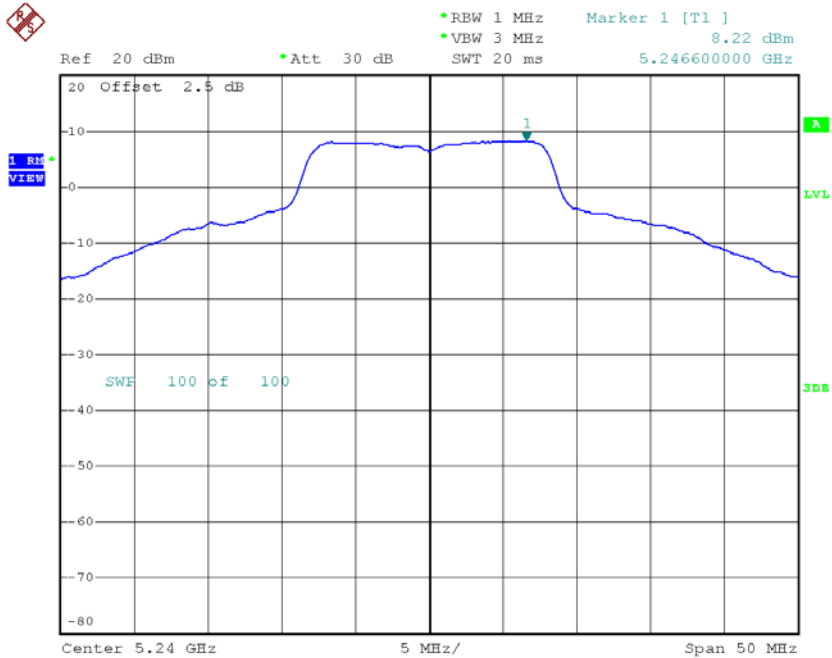

Date: 2.SEP.2016 12:14:36


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.96	0.00	1.96	14.90
CH40	5200	7.48	0.00	7.48	14.90
CH48	5240	9.61	0.00	9.61	14.90

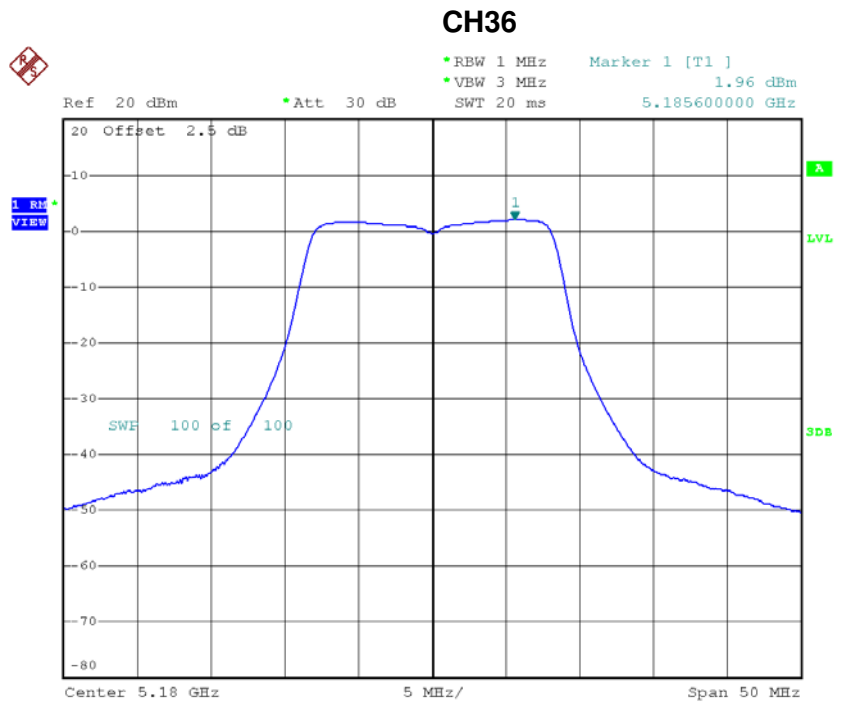


Date: 2.SEP.2016 12:19:14

CH40

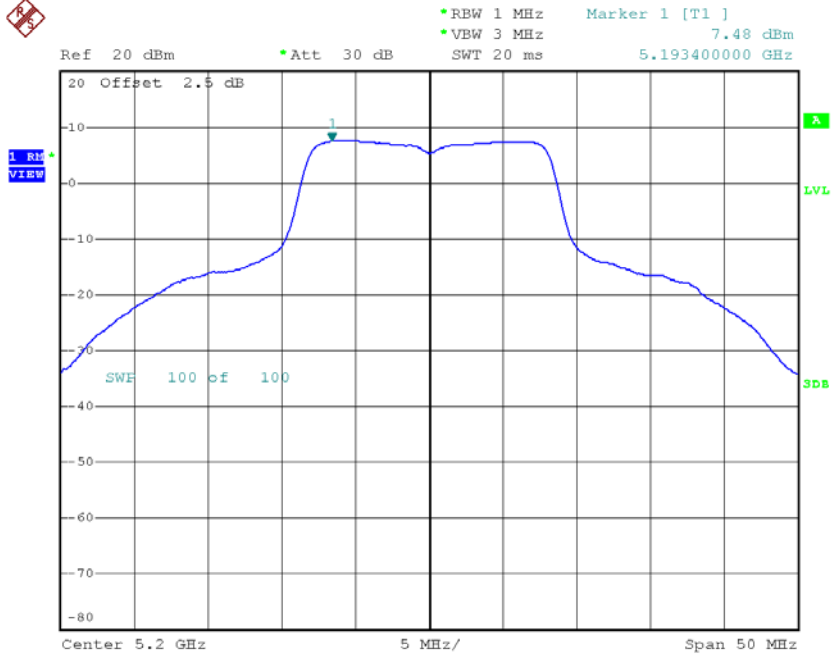

Date: 2.SEP.2016 12:20:07

CH48

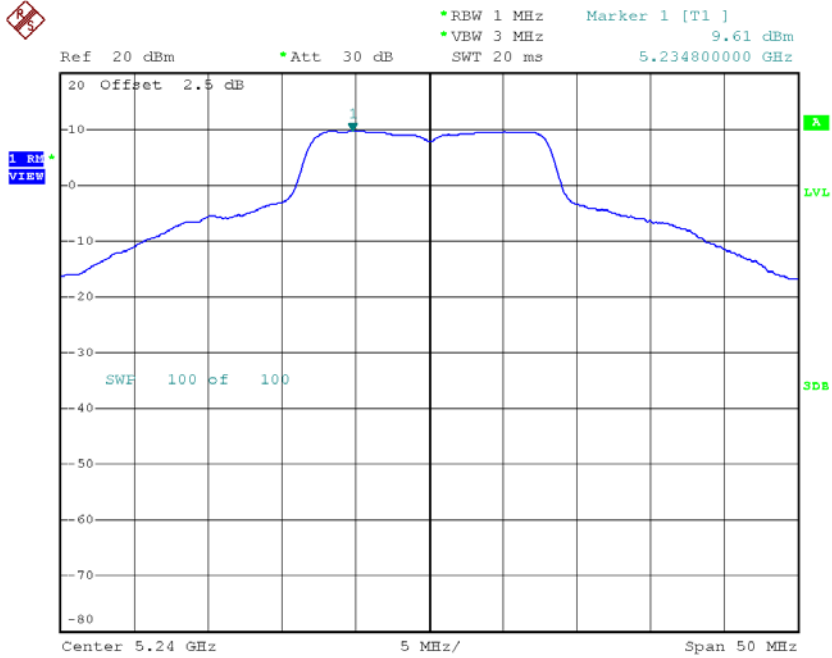


Date: 2.SEP.2016 12:21:45

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.93	14.90
CH40	5200	10.10	14.90
CH48	5240	11.98	14.90


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.95	0.00	4.95	14.90
CH40	5200	9.02	0.00	9.02	14.90
CH48	5240	10.17	0.00	10.17	14.90

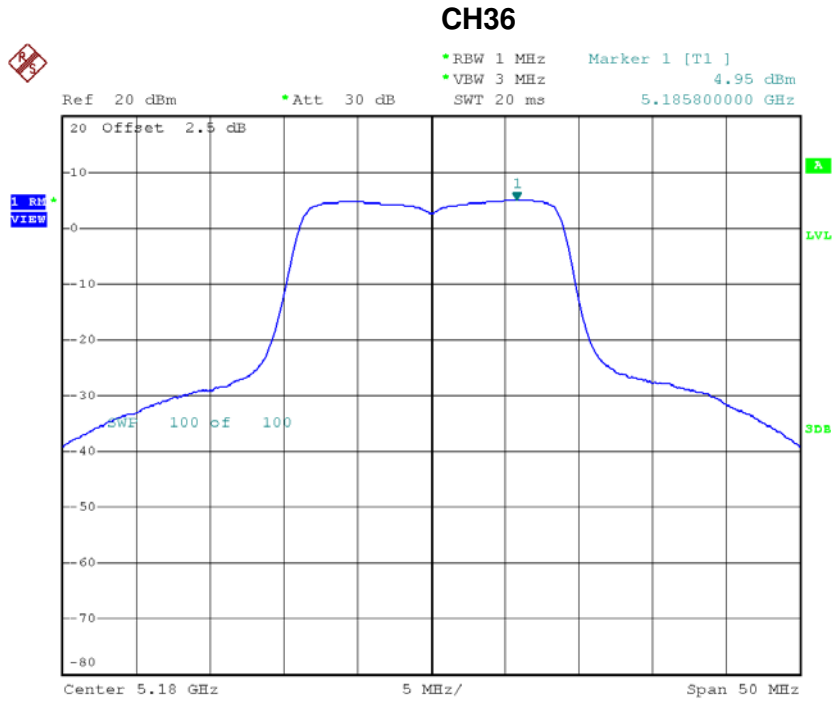


Date: 2.SEP.2016 12:27:12

CH40

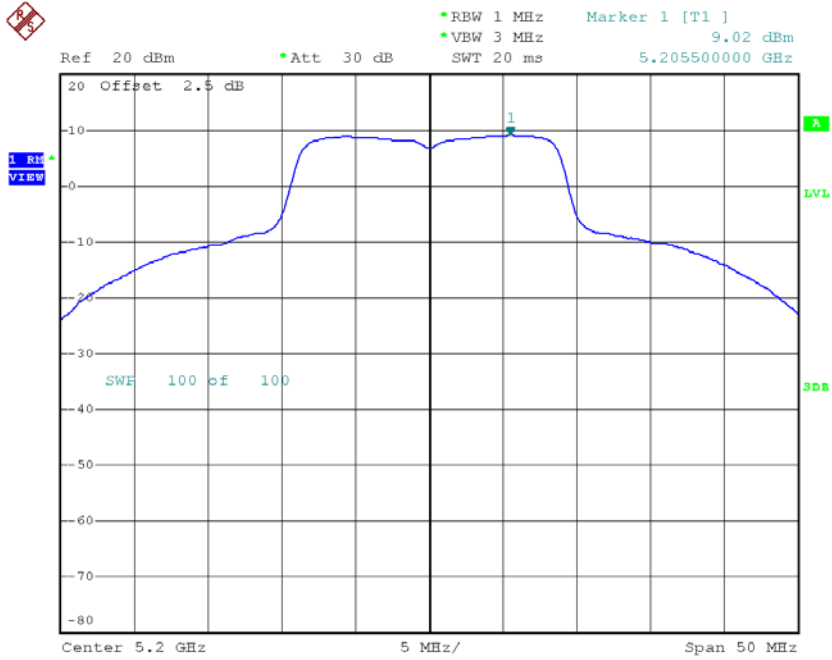

Date: 2.SEP.2016 12:28:02


CH48

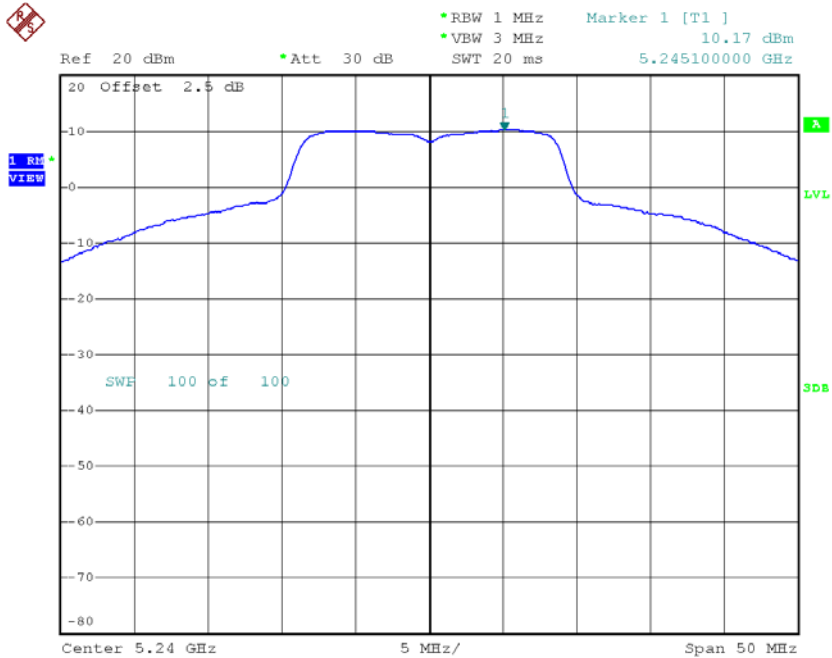

Date: 2.SEP.2016 12:31:29


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.04	0.00	3.04	14.90
CH40	5200	7.75	0.00	7.75	14.90
CH48	5240	9.55	0.00	9.55	14.90

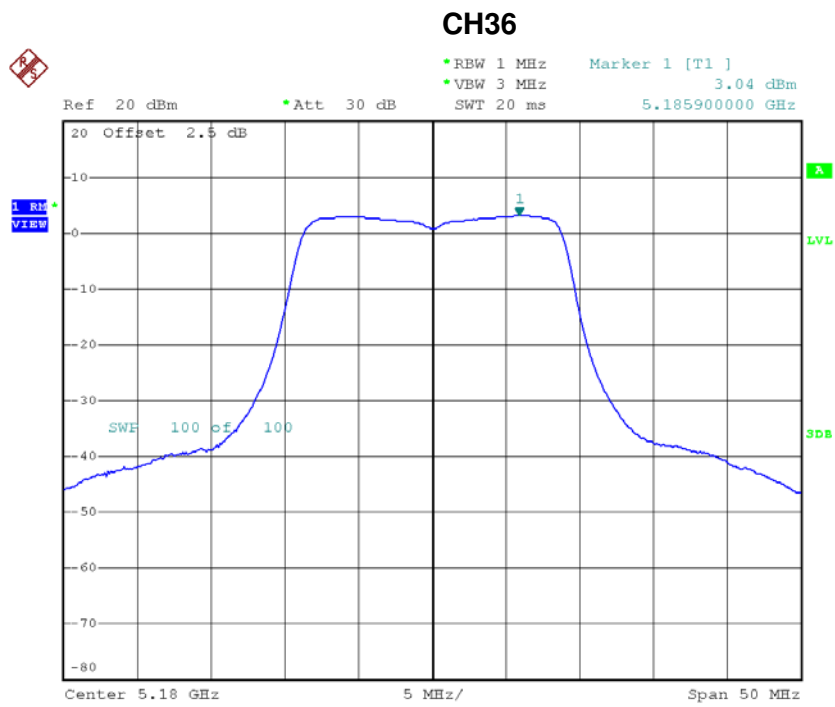


Date: 2.SEP.2016 14:07:28

CH40

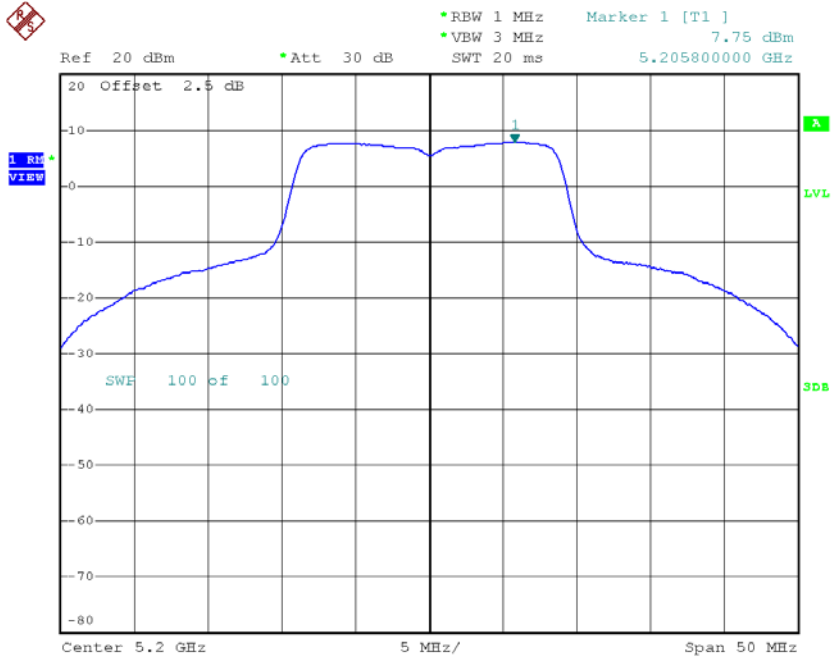

Date: 2.SEP.2016 14:08:11

CH48

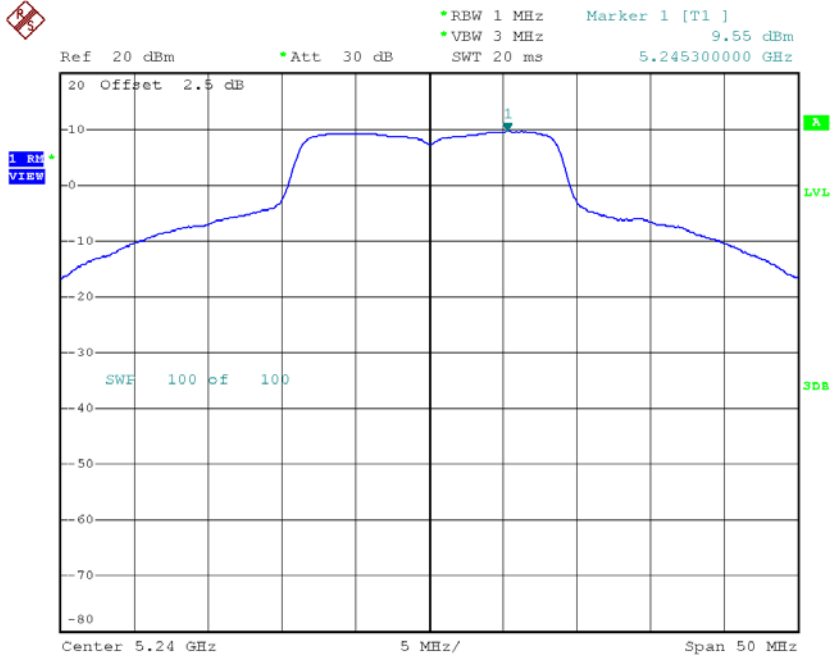

Date: 2.SEP.2016 14:09:37


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.11	14.90
CH40	5200	11.44	14.90
CH48	5240	12.88	14.90

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	0.38	0.00	0.38	14.90
CH46	5230	6.06	0.00	6.06	14.90

CH38

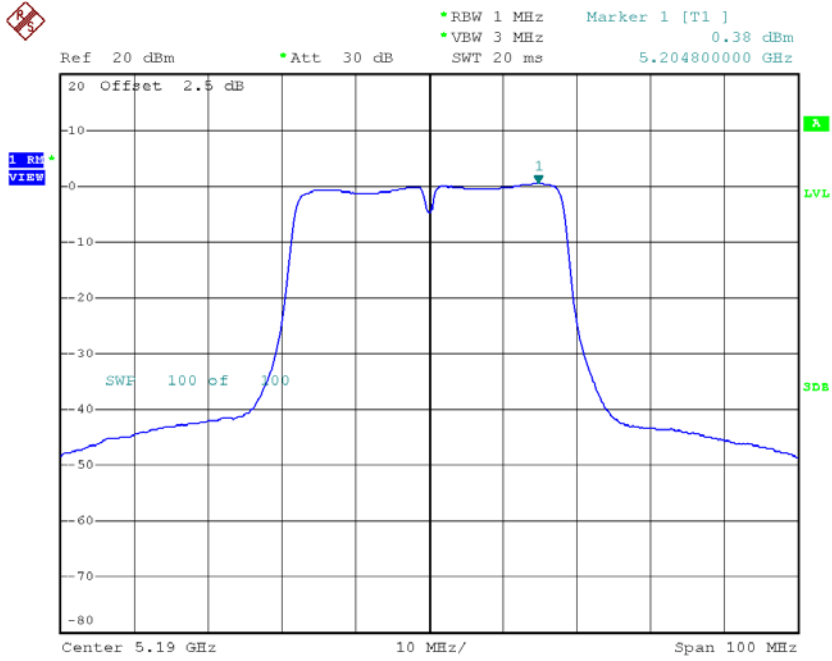

Date: 2.SEP.2016 14:29:27

CH46

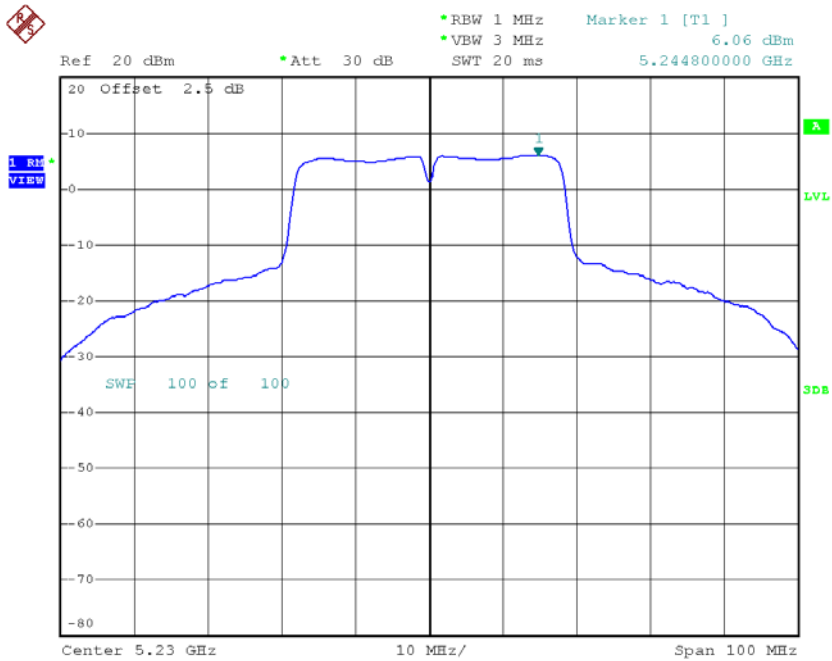


Date: 2.SEP.2016 14:30:14

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density+Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.98	0.00	-2.98	14.90
CH46	5230	2.53	0.00	2.53	14.90

CH38

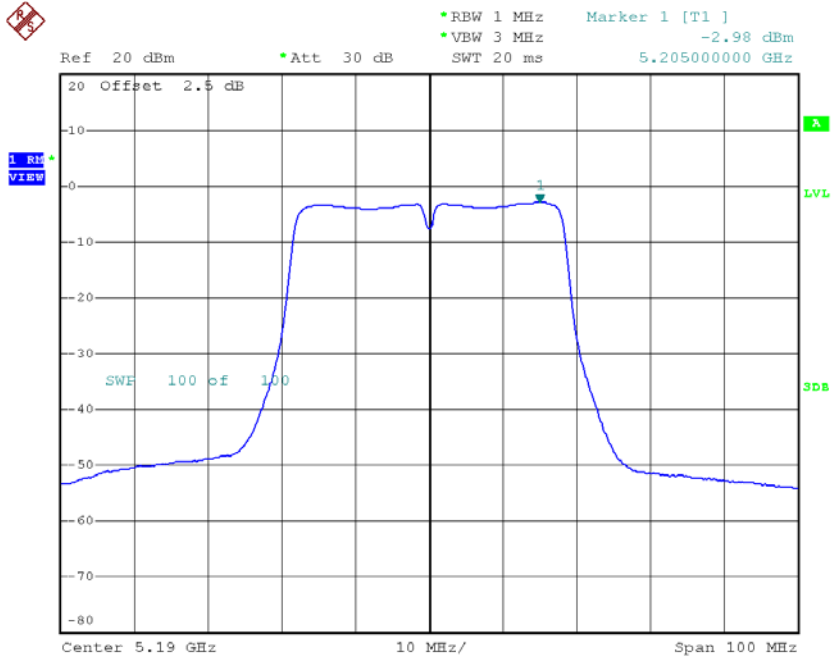

Date: 2.SEP.2016 14:33:54

CH46

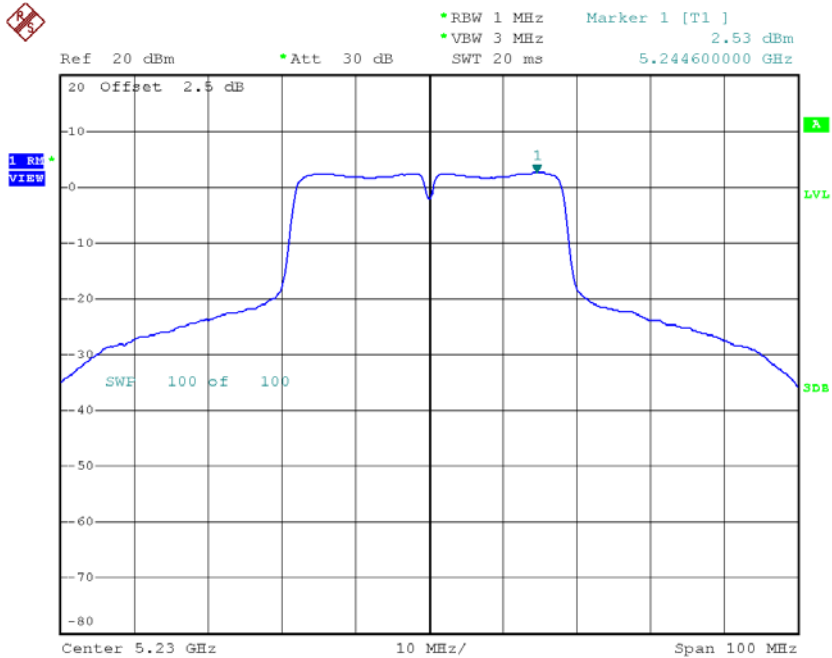

Date: 2.SEP.2016 14:35:05


Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	2.03	14.90
CH46	5230	7.65	14.90

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	6.07	0.00	6.07	27.90
CH157	5785	6.22	0.00	6.22	27.90
CH165	5825	6.21	0.00	6.21	27.90

TX CH149

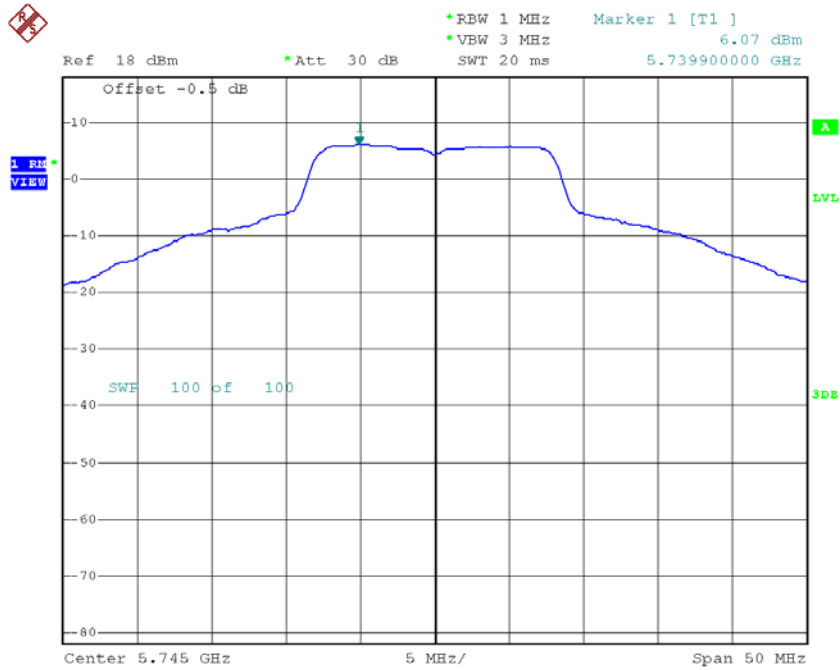


Date: 2.SEP.2016 12:15:16

TX CH157

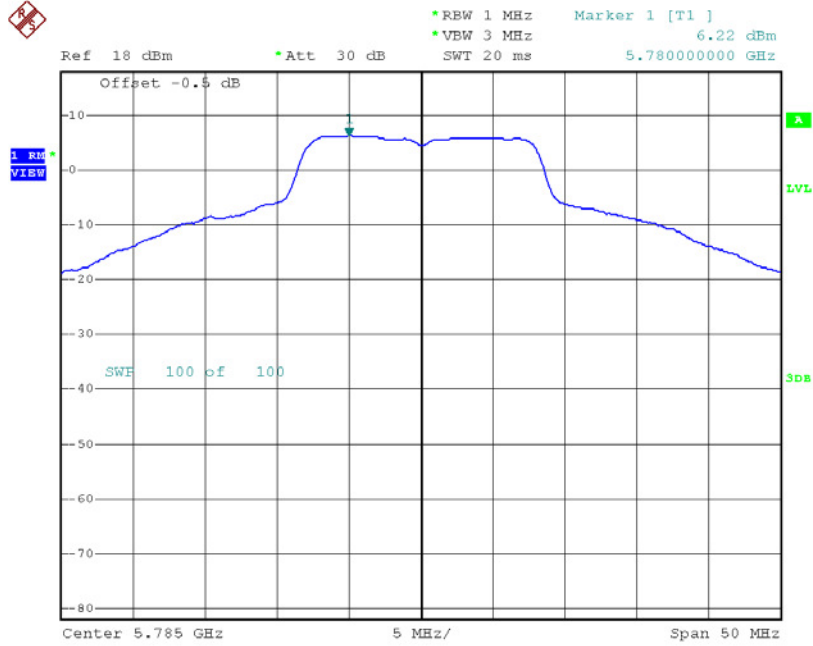

Date: 2.SEP.2016 12:17:05

TX CH165

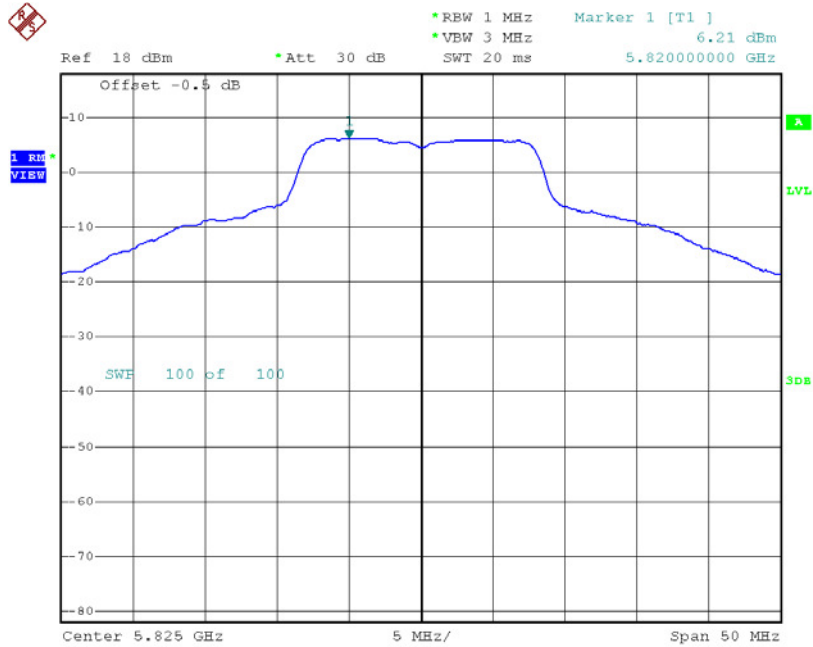


Date: 2.SEP.2016 12:17:57

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	8.20	0.00	8.20	27.90
CH157	5785	7.77	0.00	7.77	27.90
CH165	5825	7.18	0.00	7.18	27.90

TX CH149

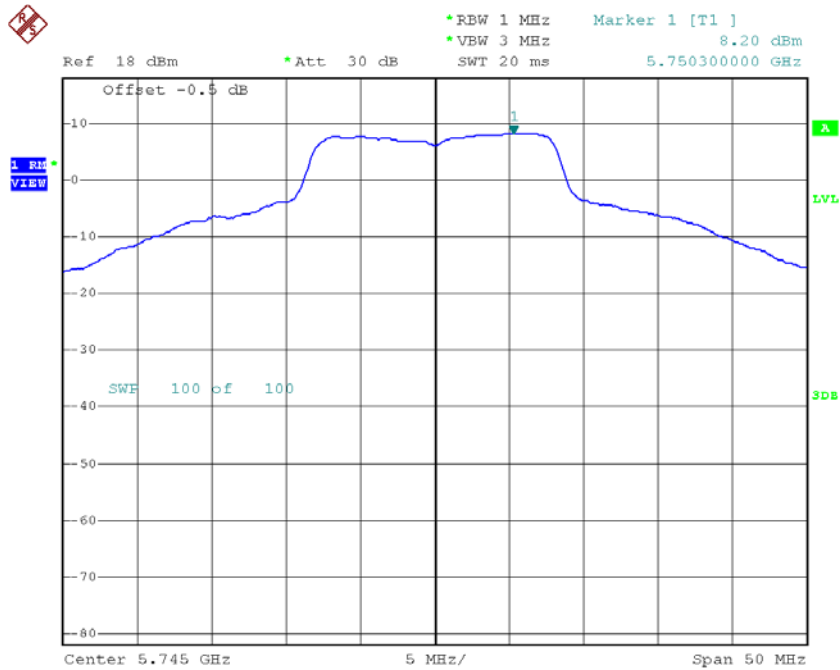


Date: 2.SEP.2016 12:22:13

TX CH157

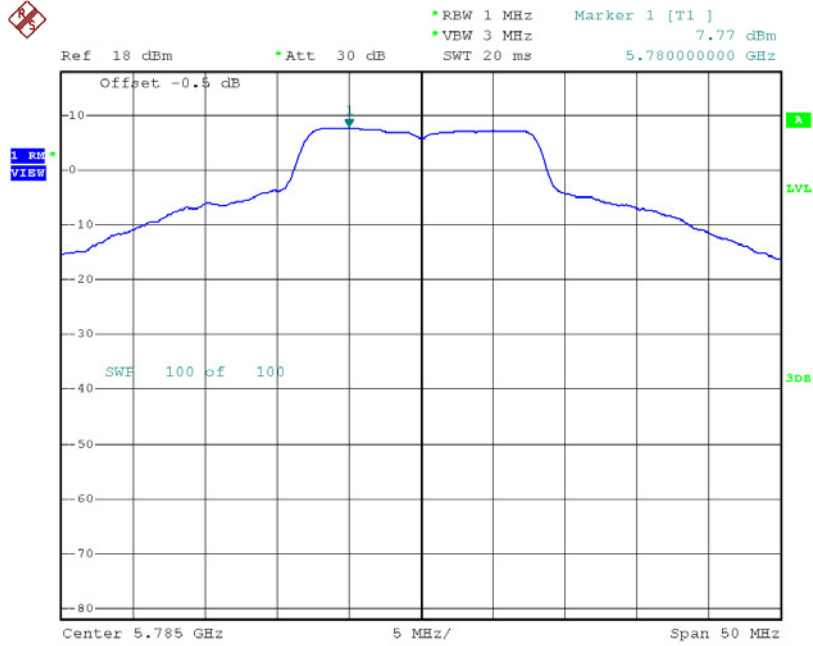

Date: 2.SEP.2016 12:23:56

TX CH165

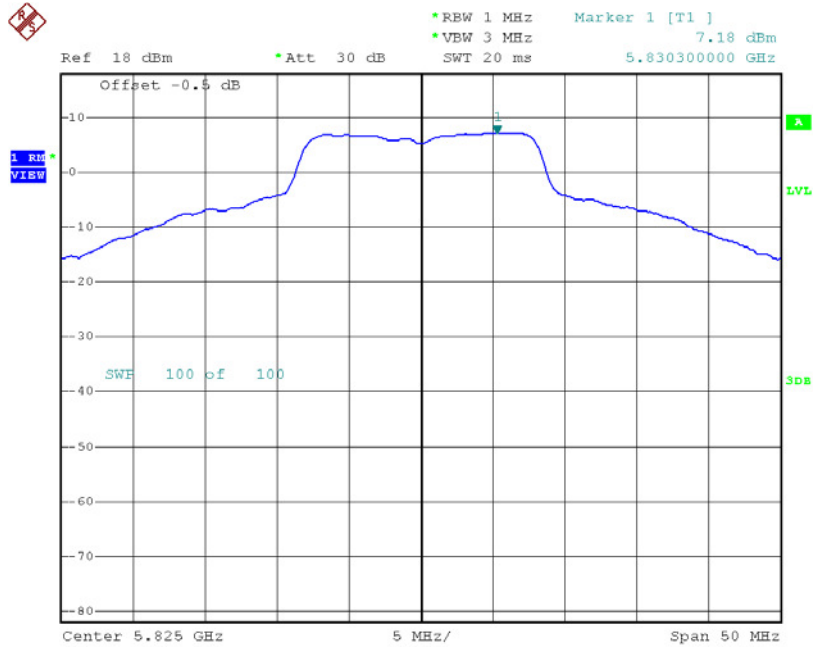

Date: 2.SEP.2016 12:24:46


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	10.27	27.90
CH157	5785	10.07	27.90
CH165	5825	9.73	27.90

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	5.77	0.00	5.77	27.90
CH157	5785	6.15	0.00	6.15	27.90
CH165	5825	6.07	0.00	6.07	27.90

TX CH149

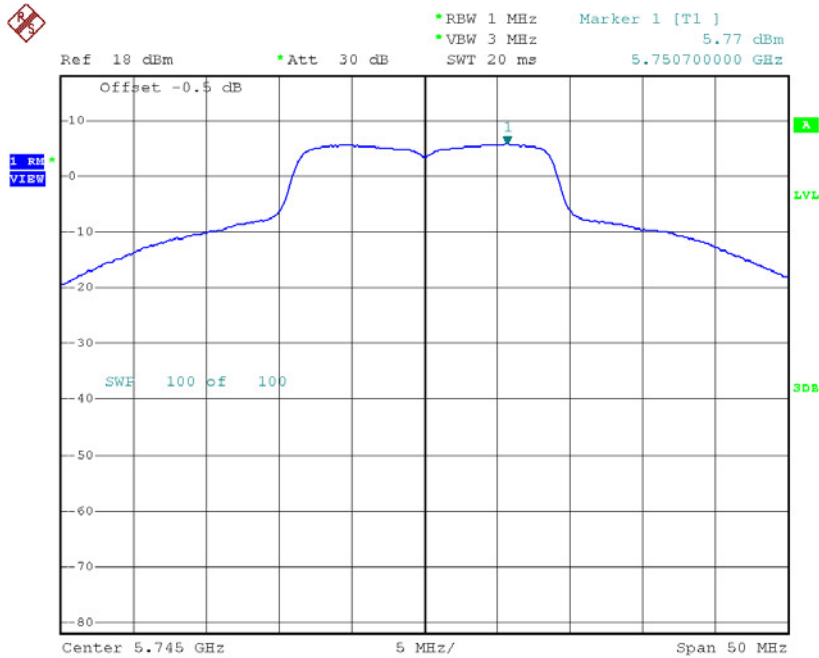


Date: 2.SEP.2016 14:04:13

TX CH157

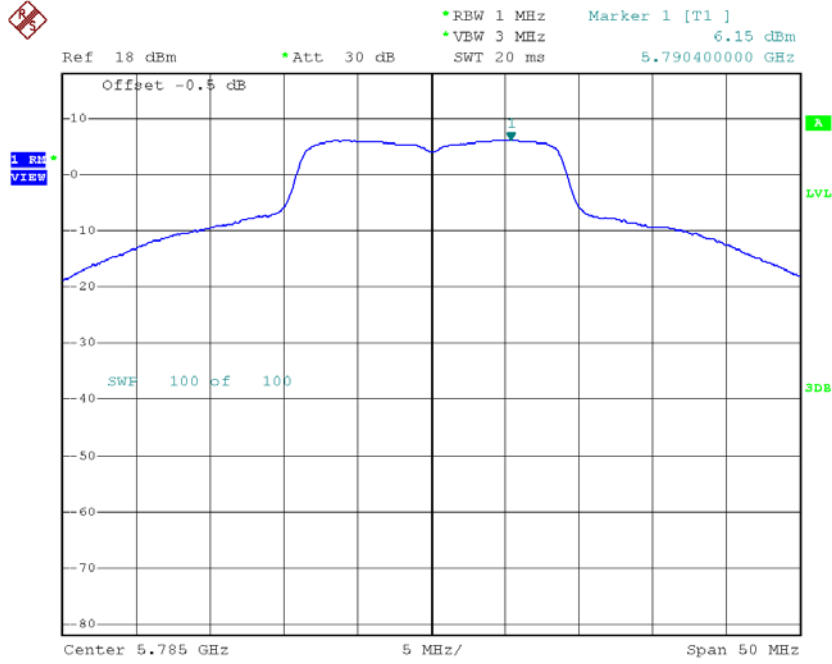

Date: 2.SEP.2016 14:05:28

TX CH165

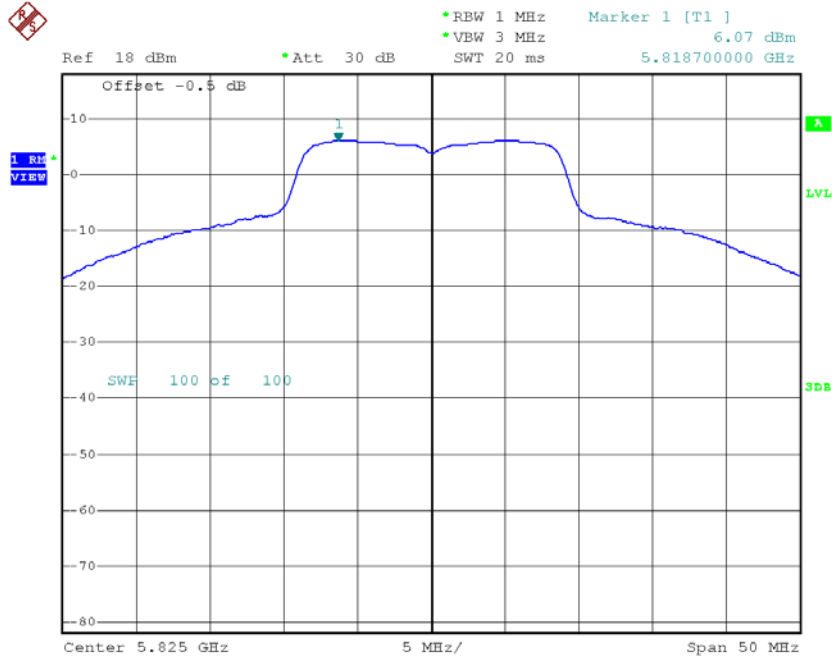


Date: 2.SEP.2016 14:06:17

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	8.05	0.00	8.05	27.90
CH157	5785	7.71	0.00	7.71	27.90
CH165	5825	7.14	0.00	7.14	27.90

TX CH149

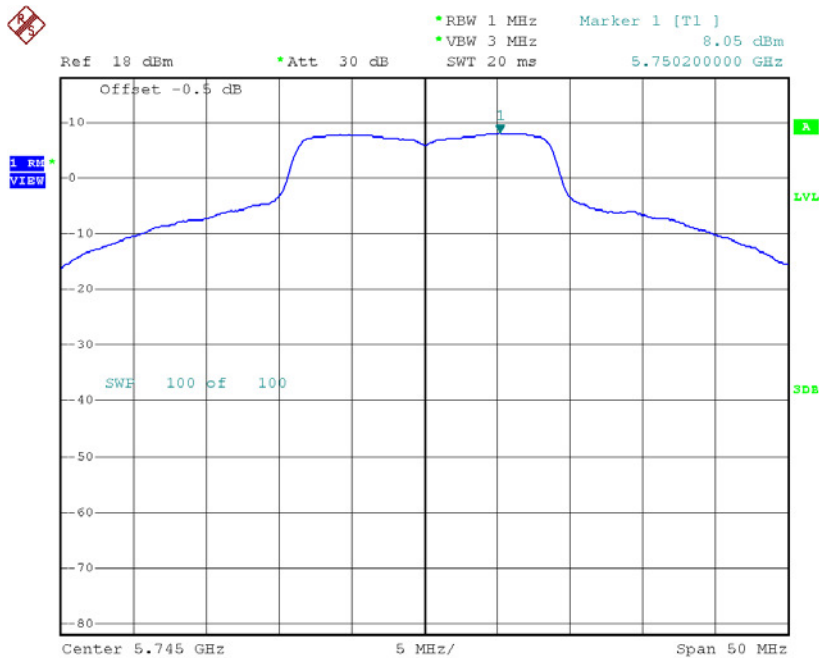


Date: 2.SEP.2016 14:10:32

TX CH157

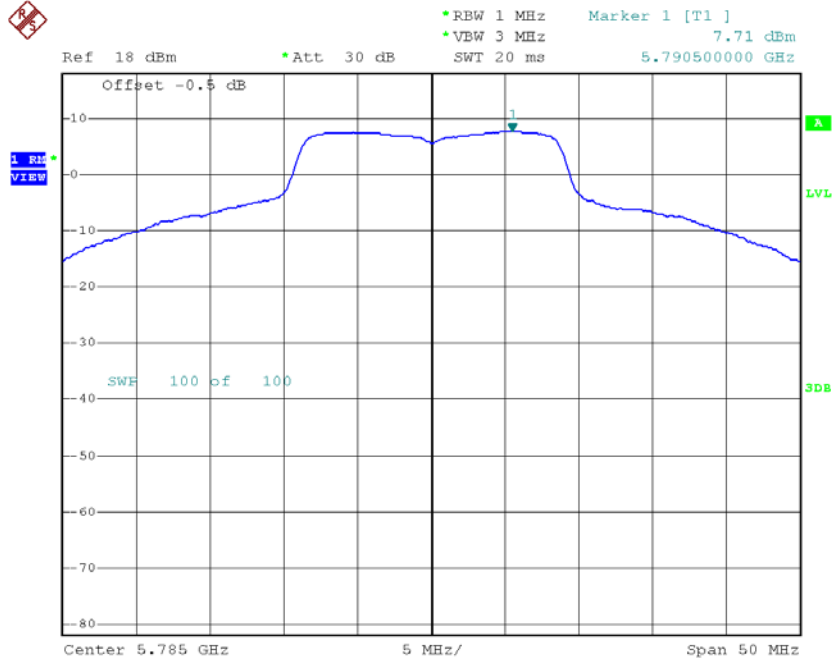

Date: 2.SEP.2016 14:11:34

TX CH165

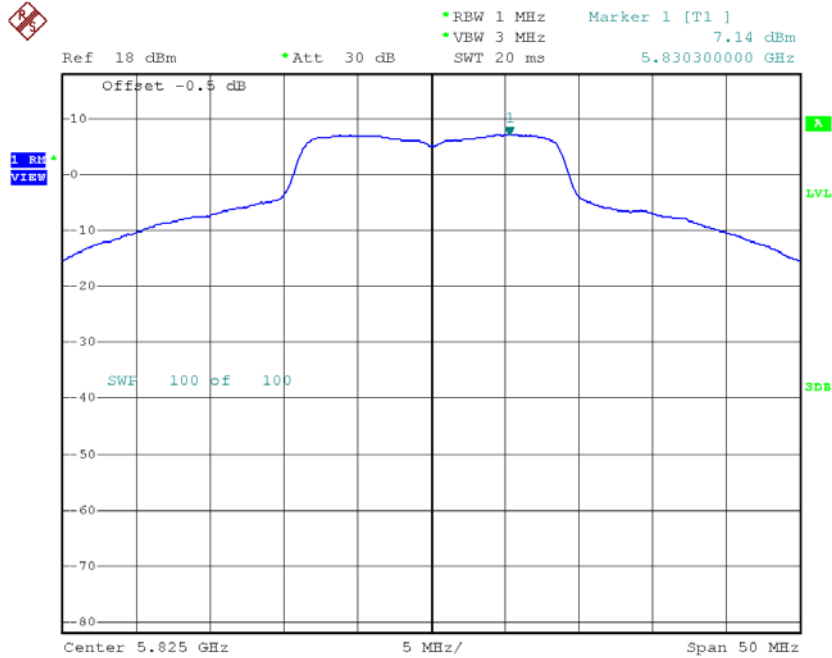

Date: 2.SEP.2016 14:12:30


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	10.07	27.90
CH157	5785	10.01	27.90
CH165	5825	9.65	27.90

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	4.19	0.00	4.19	27.90
CH159	5795	3.14	0.00	3.14	27.90

TX CH151

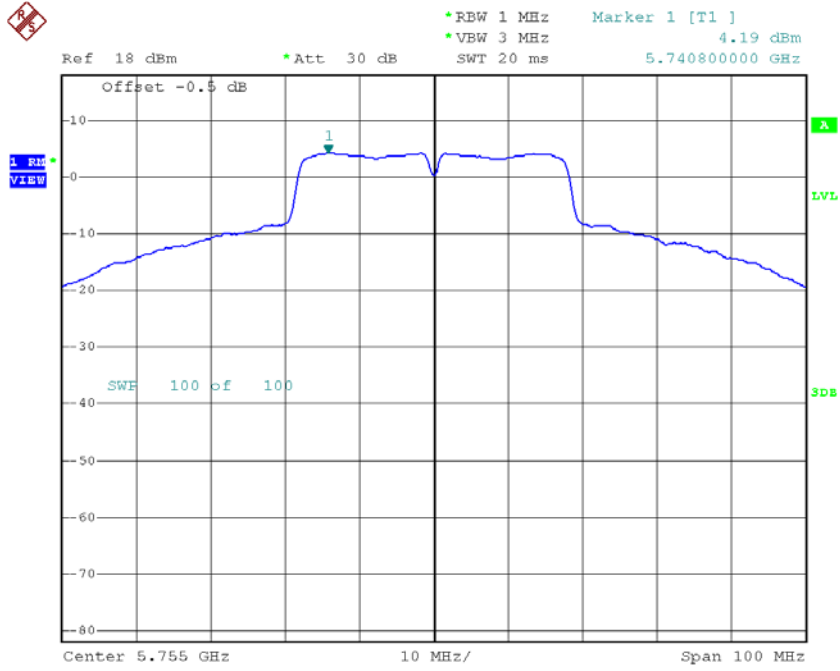

Date: 2.SEP.2016 14:31:19

TX CH159

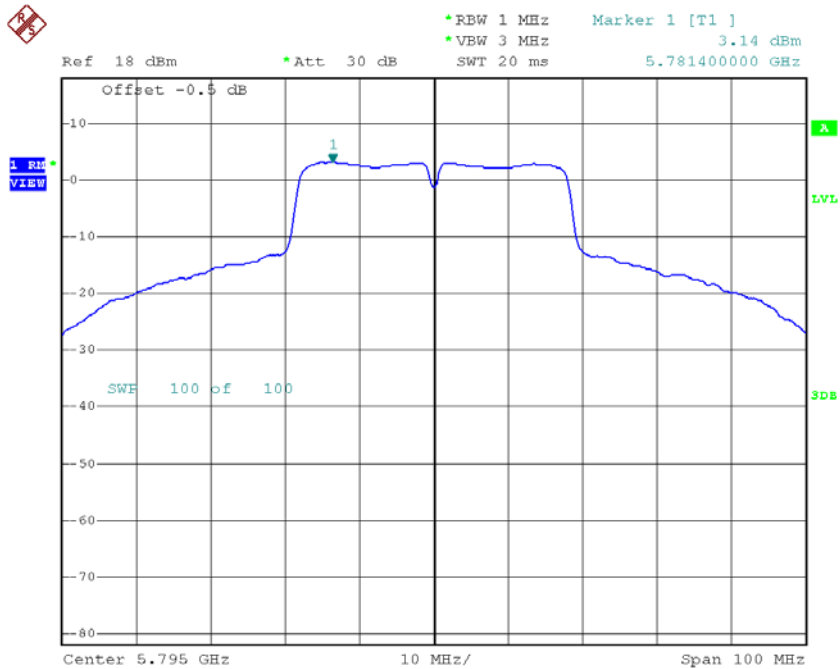

Date: 2.SEP.2016 14:32:41

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density+Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	4.61	0.00	4.61	27.90
CH159	5795	3.51	0.00	3.51	27.90