



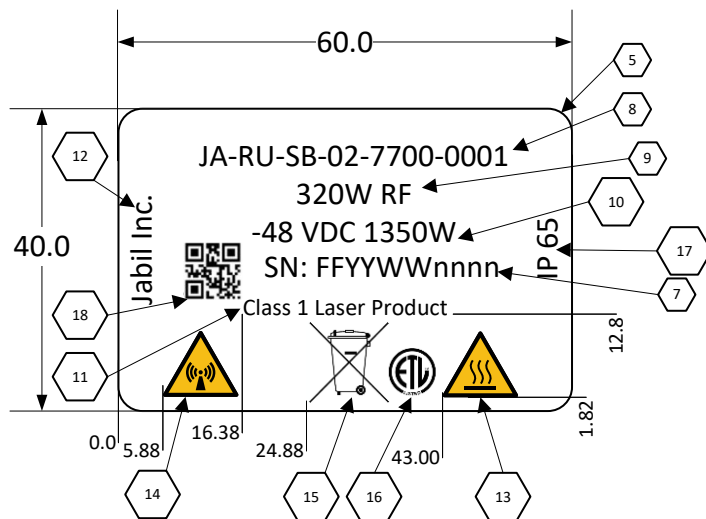

- NOTES:
1. All dimensions in millimeters
 2. Interpret as per ASME Y14.5M-94
 3. Dimensions and tolerances apply after finishing.
 4. Finish: Clean
 5. Fillet radius 3.0 maximum.
 6. Material : Matte/polished 50 micron White PET TC/S333/BG50#WH with general purpose permanent, acrylic based adhesive
 7. Text: SN: FFYYWWnnnn
(FF: Factory Code; YY: Year; WW: Week; nnnn: Numerical counter starts from 0001 and increases per label printed/units required)
 8. Text: JA-RU-SB-02-7700-0001
Font : Calibri, Points: 12 Black
 9. Text: 320W RF
Font : Calibri, Points: 12 Black
 10. Text: -48 VDC 1350W
Font : Calibri, Points: 12 Black
 11. Text: Class 1 Laser Product
Font : Calibri, Points: 9 Black
 12. Text: Jabil Inc.
Font: Calibri, Points: 12 Black
 13. Warning Hot Surface symbol as per ISO 3864 and ISO 7010-W017.Yellow (RGB 255, 204, 5)
 14. Warning Non-ionizing Radiation symbol as per ISO 3864 and ISO 7010-W005. Yellow (RGB 255, 204, 5)
 15. Waste Electronic equipment symbol per European Standard EN 50419.
 16. ETL Certification symbol
 17. Text: IP 65
Font: Calibri, Points: 12 Black
 18. QR Code:
(Coded and printed by Manufacturing Site, Aligned with R&D with code type and size)
 19. Materials used must be fully compliant to the EU RoHS directive without any exception.

TOLERANCES		NAME	DATE	TITLE: Vernon Label
X ± 0.5 .X ± 0.2 .XX ± 0.10 .XXX ± 0.020		DRAWN	IW	
ANGULAR: ± 1		DESIGNED		
SURFACE ROUGHNESS		CHECKED		
		DESIGN APPD		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF JABIL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF JABIL CORPORATION IS PROHIBITED.		INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL SEE INDIVIDUAL PARTS FINISH SEE INDIVIDUAL PARTS DO NOT SCALE DRAWING		SIZE DWG. NO. REV V00
		JABIL 1Brewer Hunt Way Kanata, ON, K2K 2B5, Canada		SCALE: DNS WEIGHT: SHEET 1 OF 1

Wuxi Print

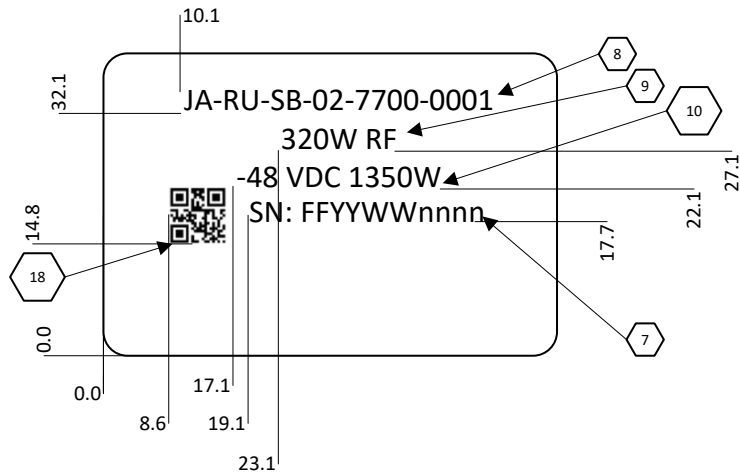

Items to be Printed by Wuxi:

7. Text: SN: FFYYWWnnnn

(FF: Factory Code; YY: Year; WW: Week; nnnn: Numerical counter starts from 0001 and increases per label printed/units required)

Font : Calibri, Points: 12 Black

8. Text: JA-RU-SB-02-7700-0001

Font : Calibri, Points: 12 Black

9. Text: 320W RF

Font : Calibri, Points: 12 Black

10. Text: -48 VDC 1350W

Font : Calibri, Points: 12 Black

18. QR Code:

(Coded and printed by Manufacturing Site, Aligned with R&D with code type and size)