



DFS TEST REPORT

REPORT NO.: RF120305C07A-1

MODEL NO.: DIR-826LMO1

FCC ID: KA2IR826LMO1

RECEIVED: May 03, 2012

TESTED: Jun. 01, 2012

ISSUED: Jun. 13, 2012

APPLICANT: D-Link Corporation

ADDRESS: 17595 Mt. Herrmann, Fountain Valley, CA
92708, U.S.A.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

Table of Contents

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. EUT INFORMATION.....	5
2.1 OPERATING FREQUENCY BANDS AND MODE OF EUT	5
2.2 EUT SOFTWARE AND FIRMWARE VERSION	5
2.3 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT	5
2.4 EUT MAXIMUM AND MINIMUM CONDUCTED POWER.....	6
2.5 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER	6
3. U-NII DFS RULE REQUIREMENTS	7
3.1 WORKING MODES AND REQUIRED TEST ITEMS	7
3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS	8
4. TEST & SUPPORT EQUIPMENT LIST	10
4.1 TEST INSTRUMENTS	10
4.2 DESCRIPTION OF SUPPORT UNITS	10
5. TEST PROCEDURE	11
5.1 ADT DFS MEASUREMENT SYSTEM:.....	11
5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:.....	12
5.3 DEVIATION FROM TEST STANDARD	13
5.4 CONDUCTED TEST SETUP CONFIGURATION.....	13
5.4.1 MASTER MODE	13
6. TEST RESULTS	14
6.1 SUMMARY OF TEST RESULT	14
6.2 DELETED TEST RESULTS.....	15
6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.....	15
6.2.2 DFS DETECTION THRESHOLD	15
6.2.3 U-NII DETECTION BANDWIDTH.....	19
6.2.4 CHANNEL AVAILABILITY CHECK TIME.....	22
6.2.5 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME.....	24
6.2.6 NON-OCCUPANCY PERIOD	33
6.2.7 UNIFORM SPREADING.....	34
6.2.8 TRANSMIT POWER CONTROL (TPC).....	34
7. TESTING LABORATORIES INFORMATION	35
Annex A.	A-1



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120305C07A-1	Original release	Jun. 13, 2012

1. CERTIFICATION

PRODUCT: IEEE 802.11a/n Wireless PCIe Module

MODEL: DIR-826LMO1

BRAND: D-Link

APPLICANT: D-Link Corporation

TESTED: Jun. 01, 2012

TEST SAMPLE: ENGINEERING SAMPLE

**Standards: FCC Part 15, Subpart E (Section 15.407)
FCC 06-96**

The above equipment (Model: APL25-091) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE** : Jun. 13, 2012
Andrea Hsia / Specialist

APPROVED BY : Gary Chang , **DATE** : Jun. 13, 2012
Gary Chang / Technical Manager

2. EUT INFORMATION

2.1 OPERATING FREQUENCY BANDS AND MODE OF EUT

Table 1: Operating frequency bands and mode of EUT.

Operational Mode	Operating Frequency Range	
	5250~5350MHz	5470~5725MHz
Master	✓	✓

The EUT has disabled the 5600 ~ 5650 MHz band

2.2 EUT SOFTWARE AND FIRMWARE VERSION

Table 2: The EUT software/firmware version.

Product	Model No.	Software/Firmware Version
IEEE 802.11a/n Wireless PCIe Module	DIR-826LMO1_ Class II Chang	1.00

The modular is installed in below specific host to perform DFS test.

Product	Brand	Model No.
Wireless N600 Dual Band Gigabit Cloud Router	D-Link	DIR-826L

2.3 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

Table 3: Antenna list

Ant NO.	Antenna	Type	Operation Frequency Range(MHz)	Max. Gain(dBi)
1	PCB	PCB	5250~5350	0
1	PCB	PCB	5470~5725	0

2.4 EUT MAXIMUM AND MINIMUM CONDUCTED POWER

TABLE 4: THE MEASURED CONDUCTED OUTPUT POWER

802.11n (20MHz)

ANT NO.	FREQUENCY BAND (MHz)	MAX. POWER		MIN. POWER	
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
1	5250~5350	21.9	153.8	15.9	38.9
1	5470~5725	21.7	149.1	15.7	37.2

802.11n (40MHz)

ANT NO.	FREQUENCY BAND (MHz)	MAX. POWER		MIN. POWER	
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
1	5250~5350	23.6	229.4	17.6	57.5
1	5470~5725	23.8	240.0	17.8	60.3

2.5 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER

TABLE 5: THE E.I.R.P OUTPUT POWER LIST

802.11n (20MHz)

ANT NO.	FREQUENCY BAND (MHz)	MAX. POWER		MIN. POWER	
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
1	5250~5350	21.9	153.8	15.9	38.9
1	5470~5725	21.7	149.1	15.7	37.2

802.11n (40MHz)

ANT NO.	FREQUENCY BAND (MHz)	MAX. POWER		MIN. POWER	
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
1	5250~5350	23.6	229.4	17.6	57.5
1	5470~5725	23.8	240.0	17.8	60.3

3. U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the EUT is capable of operating as a Master and/or a Client. If the EUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 7: Applicability of DFS requirements during normal operation.

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

Table 8: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 9: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:
 • For the Short Pulse Radar Test Signals this instant is the end of the Burst.
 • For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
 • For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4. TEST & SUPPORT EQUIPMENT LIST

4.1 TEST INSTRUMENTS

Table 1: Test instruments list.

DESCRIPTION & MANUFACTURER	MODEL NO.	BRAND	CALIBRATED UNTIL
R&S Spectrum analyzer	FSP40	R&S	2013/01/29
Signal generator	8645A	Agilent	2012/06/09
Oscilloscope	TDS 5104	Tektronix	2013/03/04
Control PC	Pavilion a320d	HP	--

4.2 DESCRIPTION OF SUPPORT UNITS

TABLE 2: SUPPORT UNIT INFORMATION.

No.	Product	Brand	Model No.	FCC ID
1	IEEE 802.11a/b/g/n Cardbus	ATHEROS	AR5BCB-0072TA	PPD-AR5BCB-00072


Note: This device was functioned as a Master Slave device during the DFS test.

5. TEST PROCEDURE

5.1 ADT DFS MEASUREMENT SYSTEM:

A complete ADT DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating Subsystem and (2) the Traffic Monitoring Subsystem. The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (EUT).

Conducted setup configuration of ADT DFS Measurement System

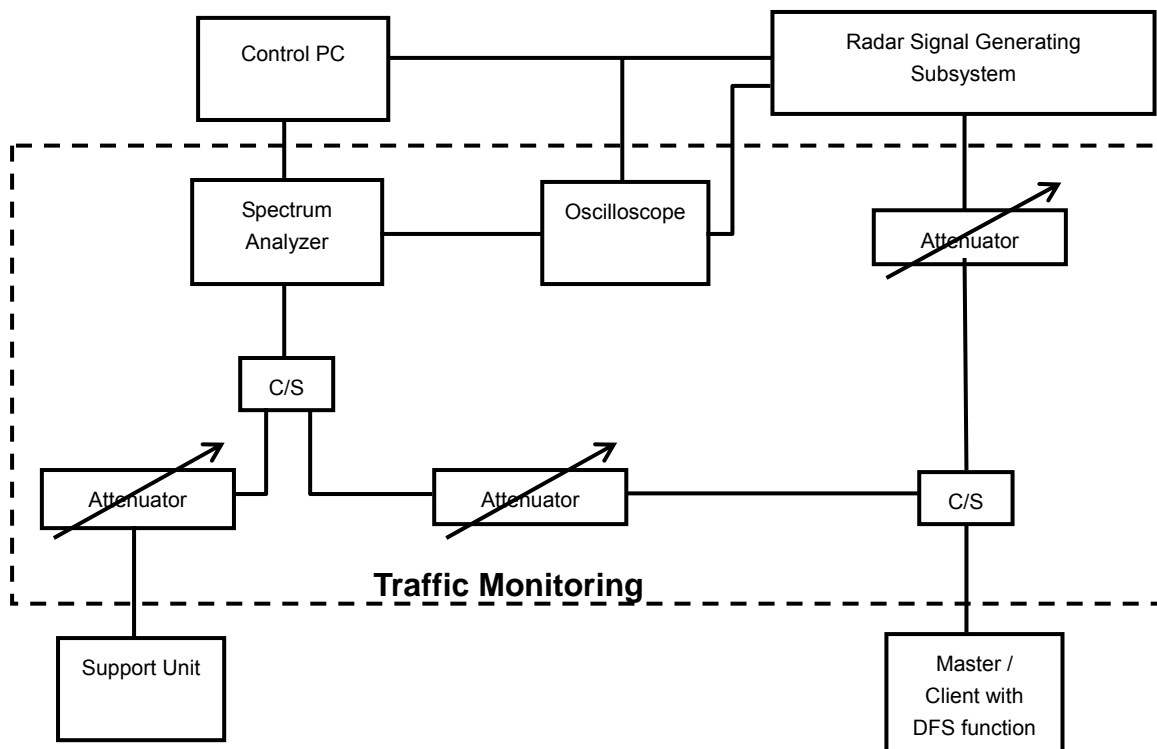


The test transmission will always be from the Master Device to the Client Device. While the Client device is set up to associate with the Master device and play the MPEG file (6 ½ Magic Hours) from Master device, the designated MPEG test file and instructions are located at:

<http://ntiacsd.ntia.doc.gov/dfs/>.

5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:

The measured channel is 5500MHz and 5510MHz , The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The Master minimum antenna gain is 0dBi, and required detection threshold is -64 dBm.

Conducted setup configuration of Calibration of DFS Detection Threshold Level

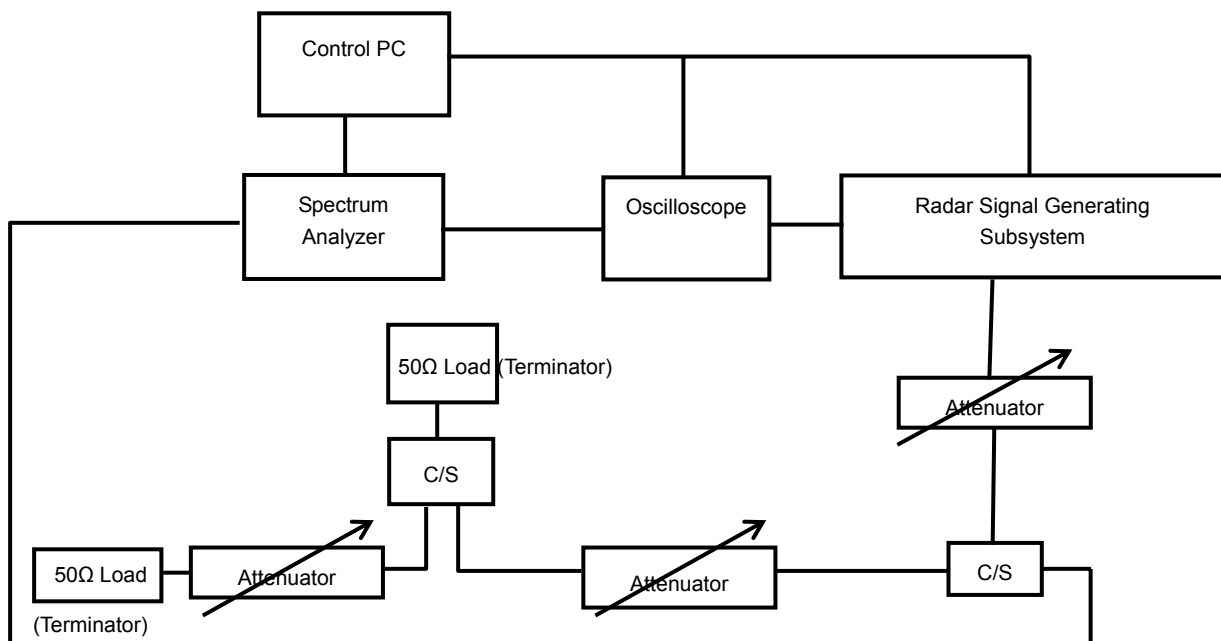


5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 CONDUCTED TEST SETUP CONFIGURATION

5.4.1 MASTER MODE

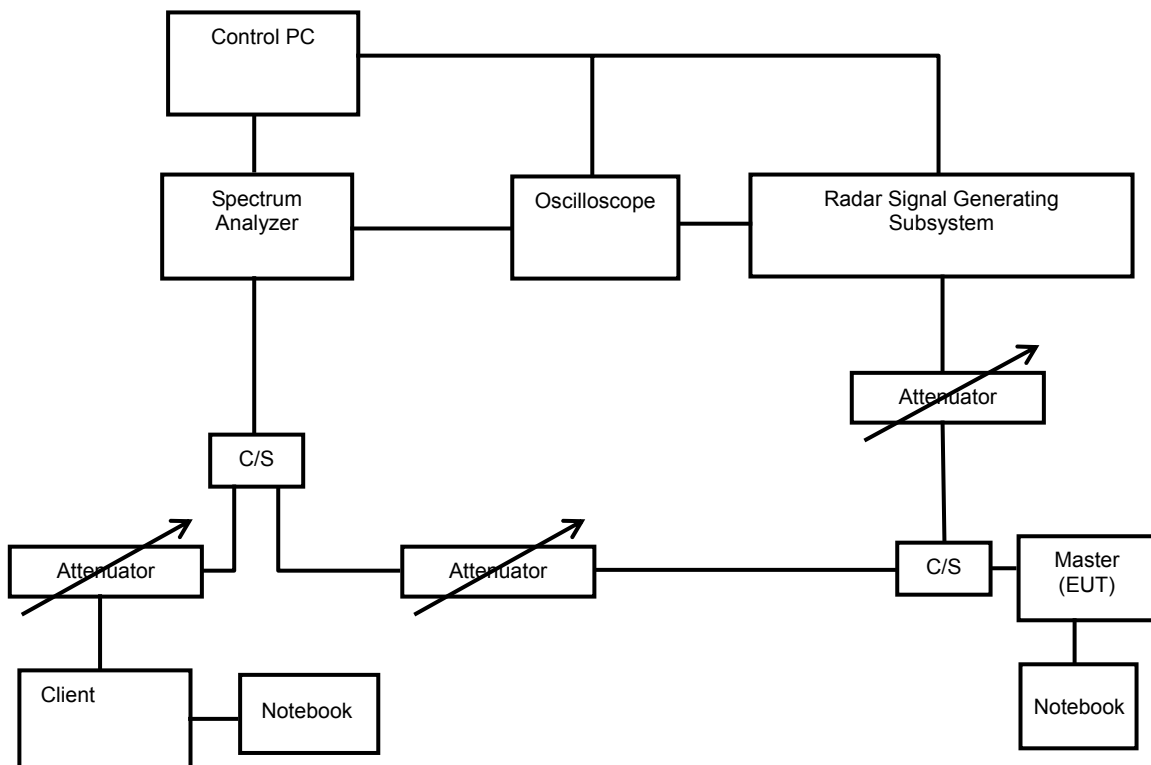

The EUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

6. TEST RESULTS

6.1 SUMMARY OF TEST RESULT

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass


6.2 DETELED TEST RESULTS

6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.


Master with injection at the Master. (Radar Test Waveforms are injected into the Master.

6.2.2 DFS DETECTION THRESHOLD


For a detection threshold level of -64dBm and the Master minimum antenna gain is 0dBi , and required detection threshold is -64dBm ($= -64 + 0$). The conducted radar burst level is set to -64dBm .

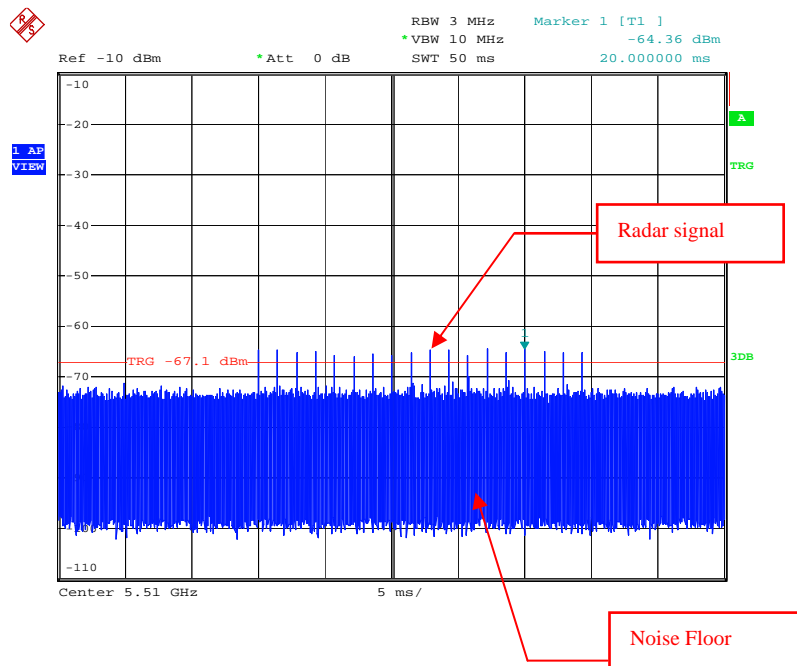


Radar Signal 1

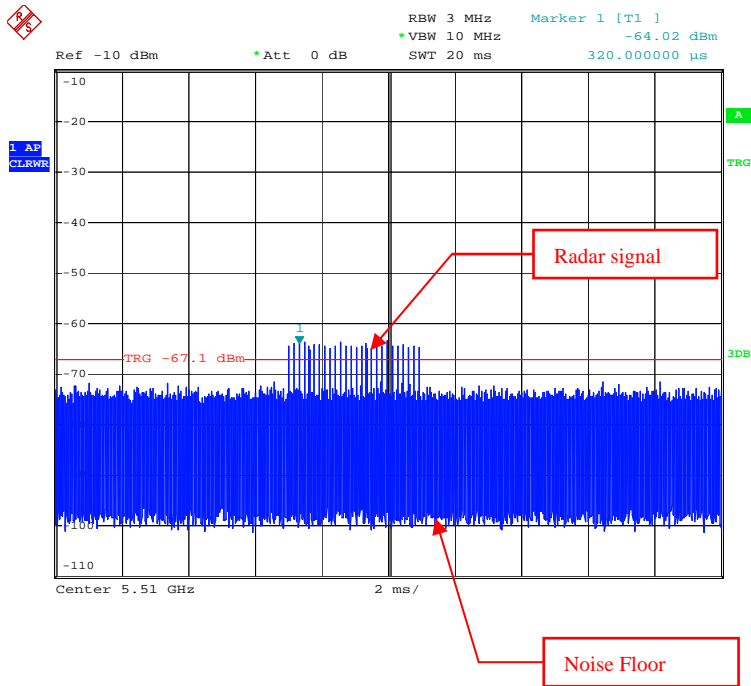


Radar Signal 2

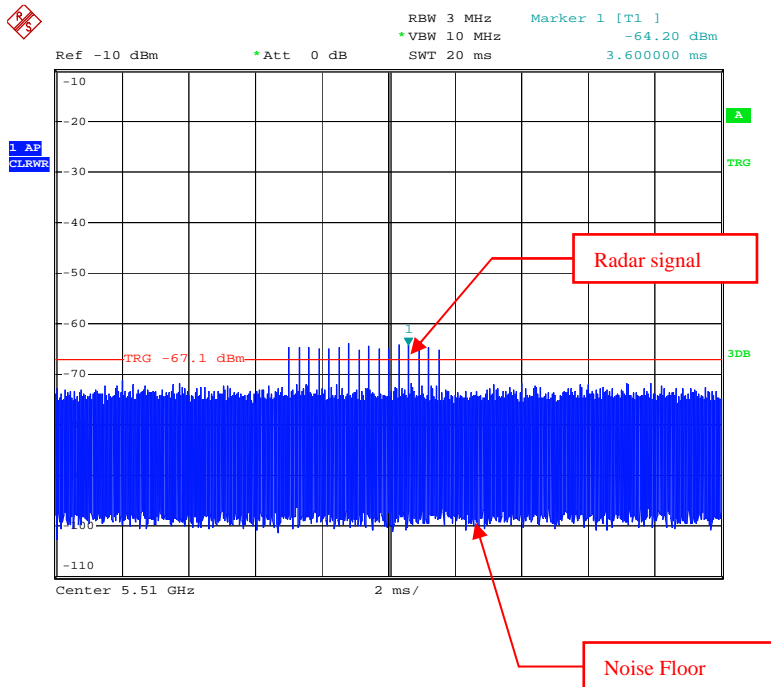


Radar Signal 3

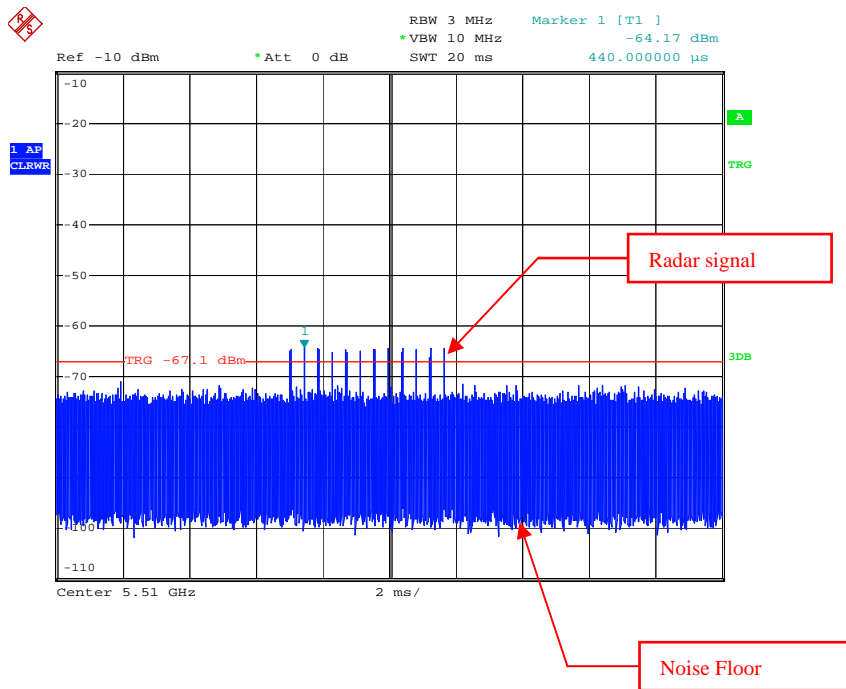


Radar Signal 4

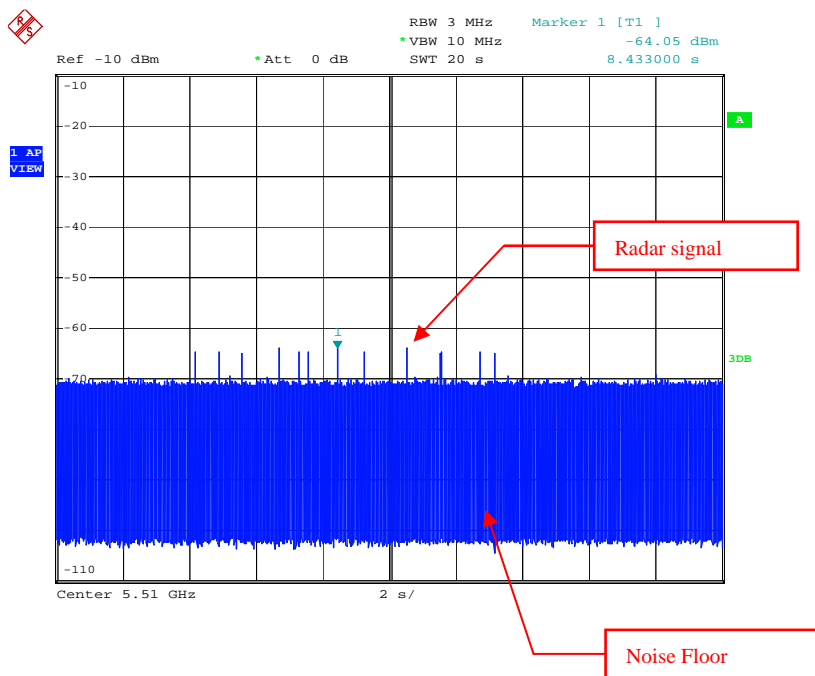

Radar Signal 5

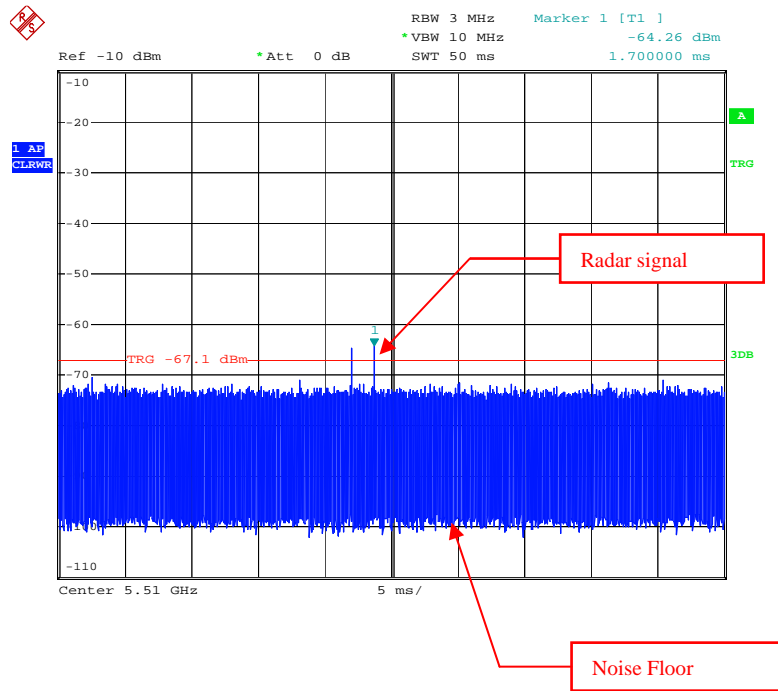


Single Burst of Radar Signal 5

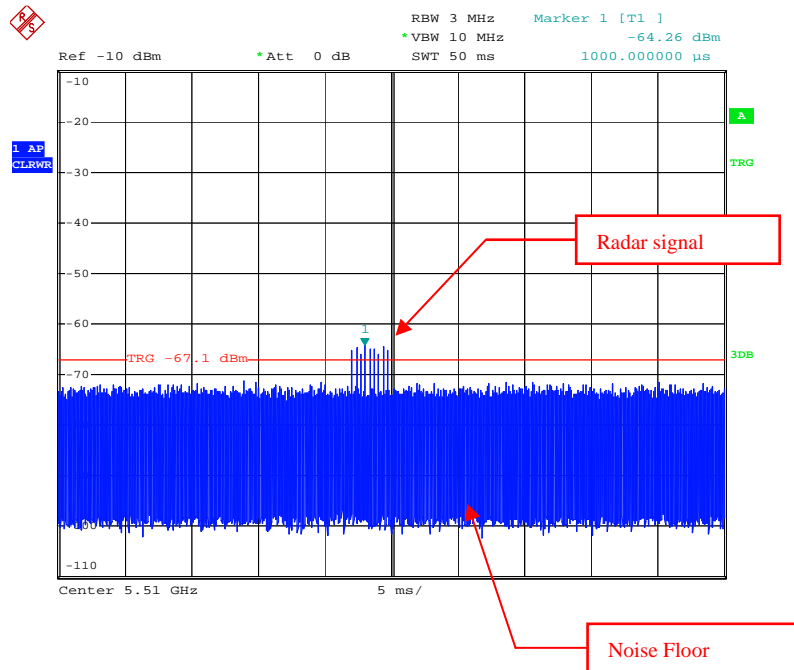

Radar Signal 6


6.2.3 U-NII DETECTION BANDWIDTH

IEEE 802.11n (20MHz)

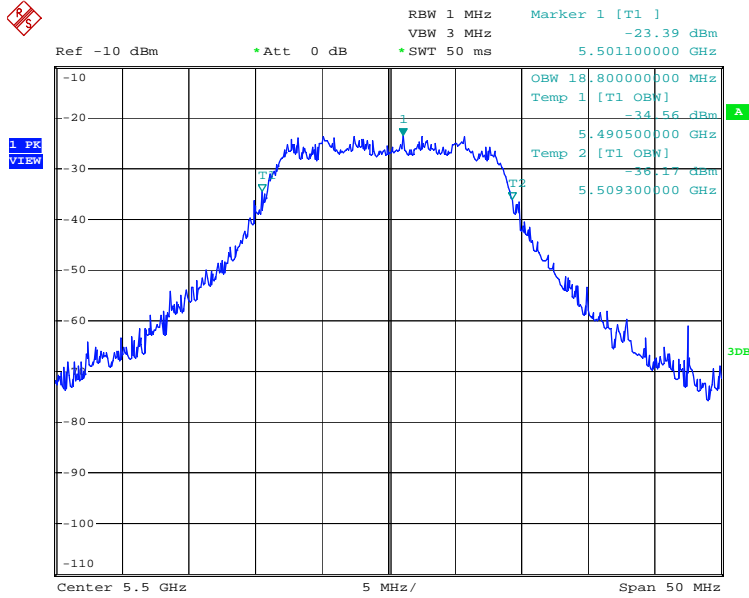

U-NII 99% Channel bandwidth

IEEE 802.11n (40MHz)

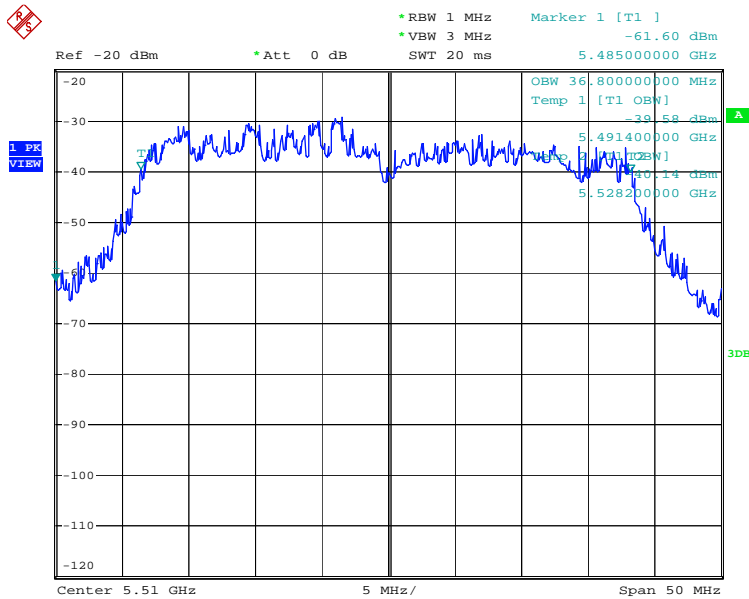

U-NII 99% Channel bandwidth



A D T

Detection Bandwidth Test - IEEE 802.11N 20MHz
 EUT Frequency: 5500MHz
 EUT 99% Power bandwidth: 18.8MHz
 Detection bandwidth limit (80% of EUT 99% Power bandwidth): 15.04MHz
 Detection bandwidth (5510(FH) – 5490(FL)) : 20 MHz
 Test Result : PASS

Radar Frequency (MHz)	Trial Number / Detection										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	N	N	N	N	N	N	N	N	N	N	0
5490(FL)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5491	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5492	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5493	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5494	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5495	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5496	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5497	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5498	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5499	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5500	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5501	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5502	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5503	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5504	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5505	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5506	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5507	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5508	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5509	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5510(FH)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5511	N	N	N	N	N	N	N	N	N	N	0



A D T

Detection Bandwidth Test - IEEE 802.11N 40MHz
 EUT Frequency: 5510MHz
 EUT 99% Power bandwidth: 36.8MHz
 Detection bandwidth limit (80% of EUT 99% Power bandwidth): 29.44MHz
 Detection bandwidth (5530(FH) – 5490(FL)) : 40MHz
 Test Result : PASS


Radar Frequency (MHz)	Trial Number / Detection										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	N	N	N	N	N	N	N	N	N	N	0
5490(FL)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5491	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5492	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5493	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5494	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5495	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5496	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5497	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5498	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5499	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5500	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5501	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5502	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5503	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5504	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5505	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5506	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5507	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5508	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5509	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5510	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5511	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5512	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5513	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5514	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5515	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5516	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5517	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5518	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5519	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5520	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5521	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5522	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5523	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5524	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5525	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5526	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5527	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5528	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5529	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5530	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100
5530(FH)	N	N	N	N	N	N	N	N	N	N	0

6.2.4 CHANNEL AVAILABILITY CHECK TIME

If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.


Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 1 to 6 second	Detected	No transmissions
Within 54 to 60 second	Detected	No transmissions

Initial Channel Availability Check Time

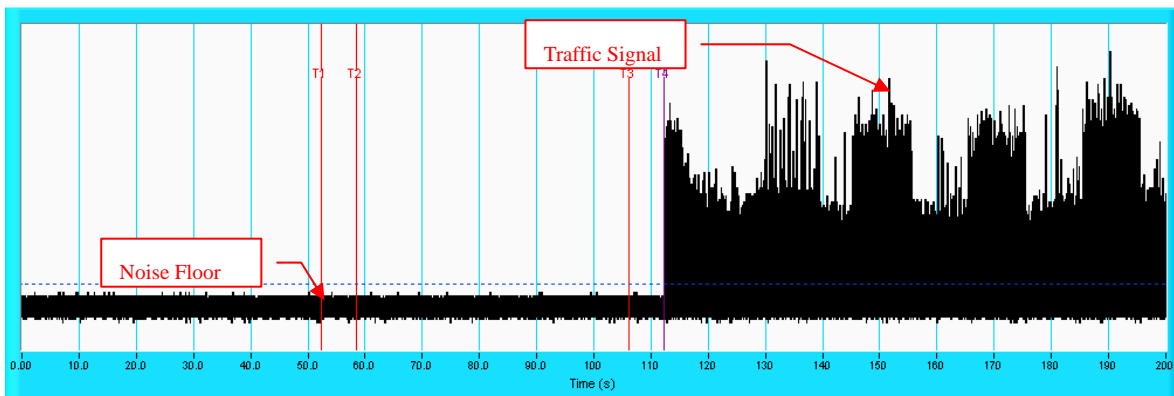


NOTE: T1 denotes the end of power-up time period is 52 second. T4 denotes the end of Channel Availability Check time is 112 second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

Radar Burst at the Beginning of the Channel Availability Check Time

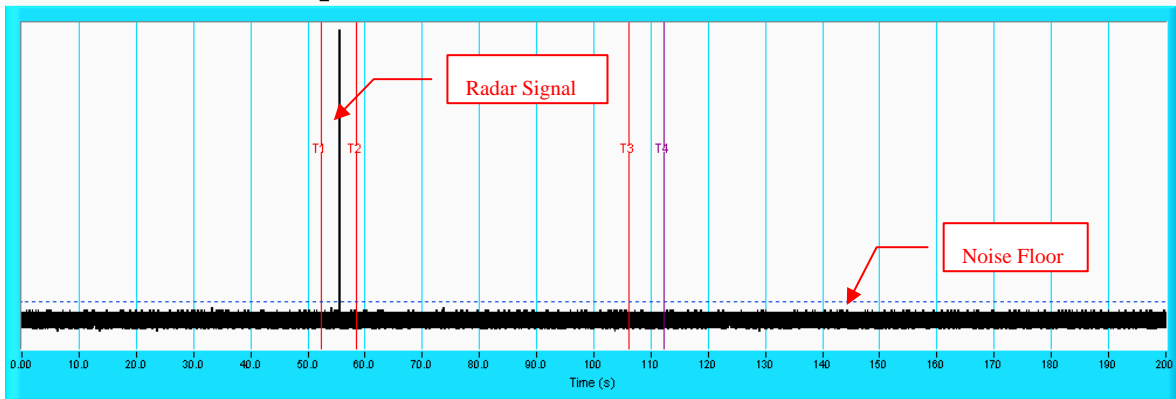

NOTE: T1 denotes the end of power up time period is 52 second. T2 denotes 58 second , the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 112 second.

Radar Burst at the End of the Channel Availability Check Time

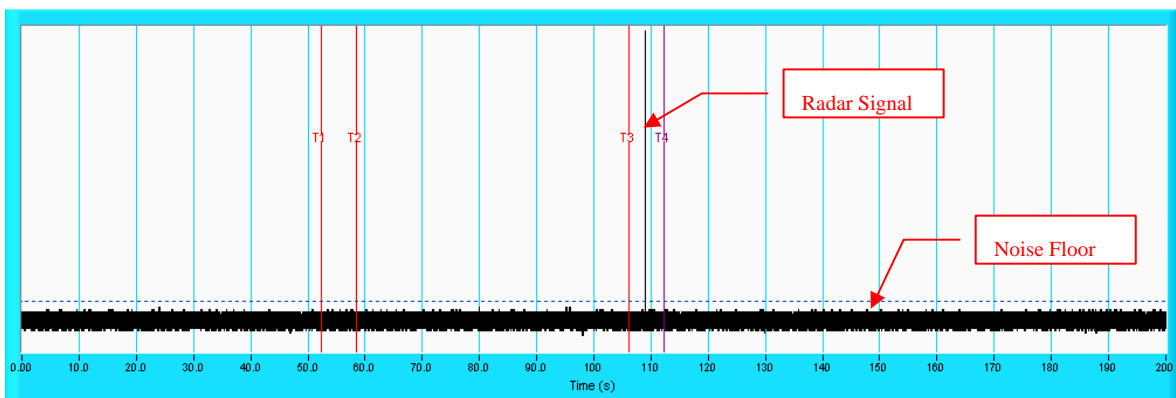


NOTE: T1 denotes the end of power up time period is 52 second. T3 denotes 106 second and radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 112 second.


6.2.5 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME

Wireless Traffic Loading

IEEE 802.11n (20MHz)

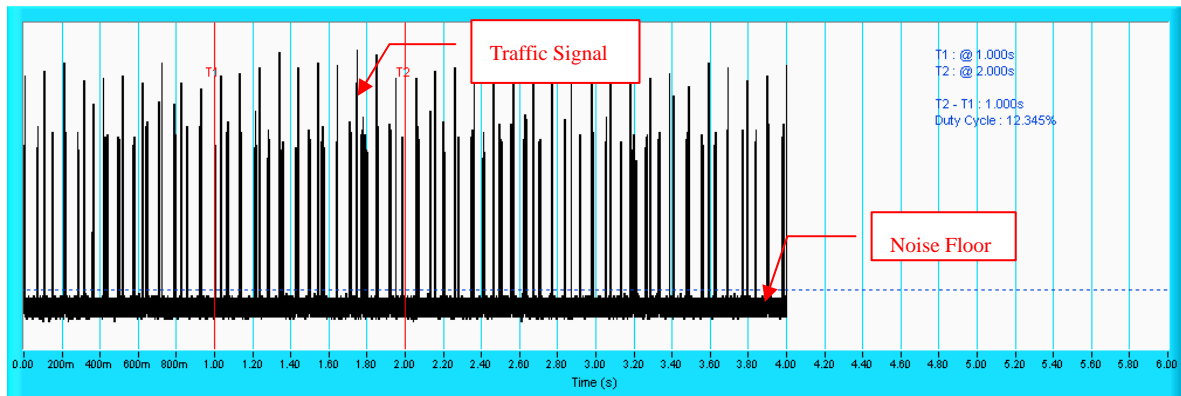

IEEE 802.11n (40MHz)

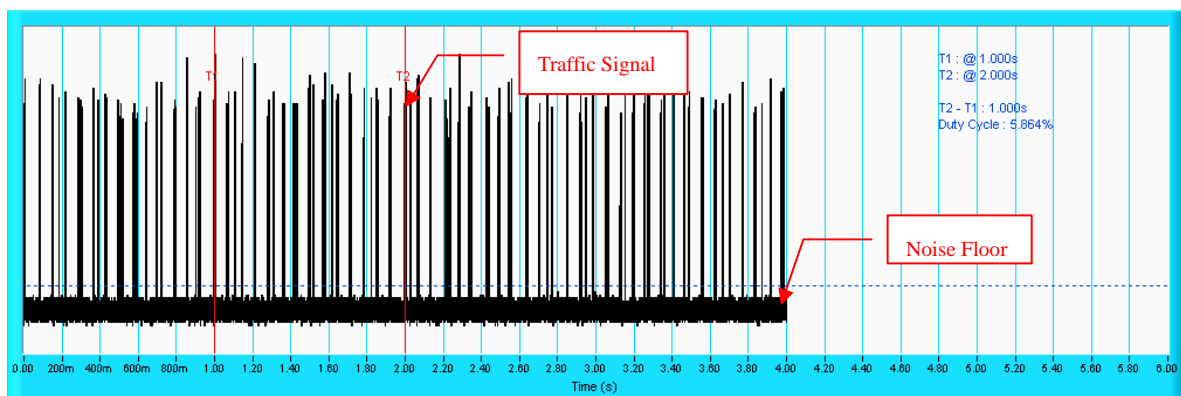



IEEE 802.11n (20MHz)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)
1	1	1428	18	30	96.7
2	1-5	150-230	23-29	30	86.7
3	6-10	200-500	16-18	30	83.3
4	11-20	200-500	12-16	30	96.7
Aggregate (Radar Types 1-4)				120	90.85

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	93.3

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	93.3

The Detailed Radar pattern and Statistical Performance showed in Annex A.

IEEE 802.11n (40MHz)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)
1	1	1428	18	30	96.7
2	1-5	150-230	23-29	30	93.3
3	6-10	200-500	16-18	30	96.7
4	11-20	200-500	12-16	30	96.7
Aggregate (Radar Types 1-4)				120	95.85

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	100


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	100


The Detailed Radar pattern and Statistical Performance showed in Annex A.

Radar signal 1

IEEE 802.11n (20MHz)

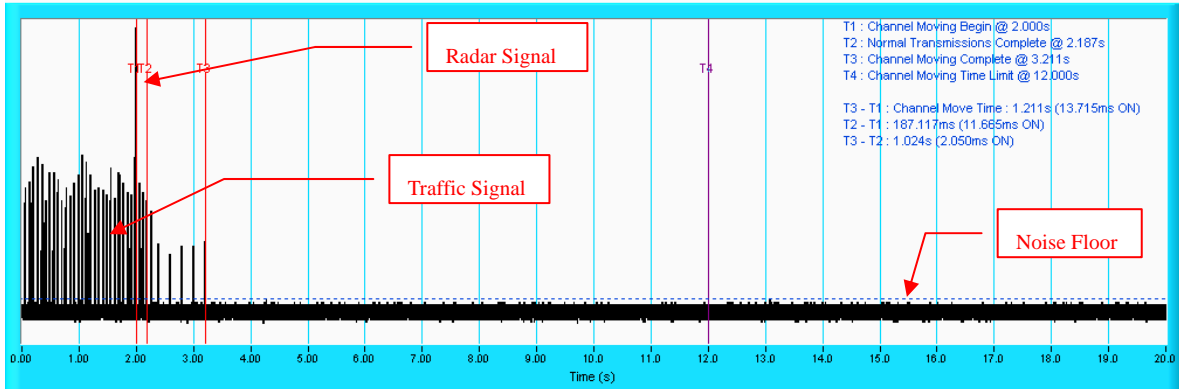


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

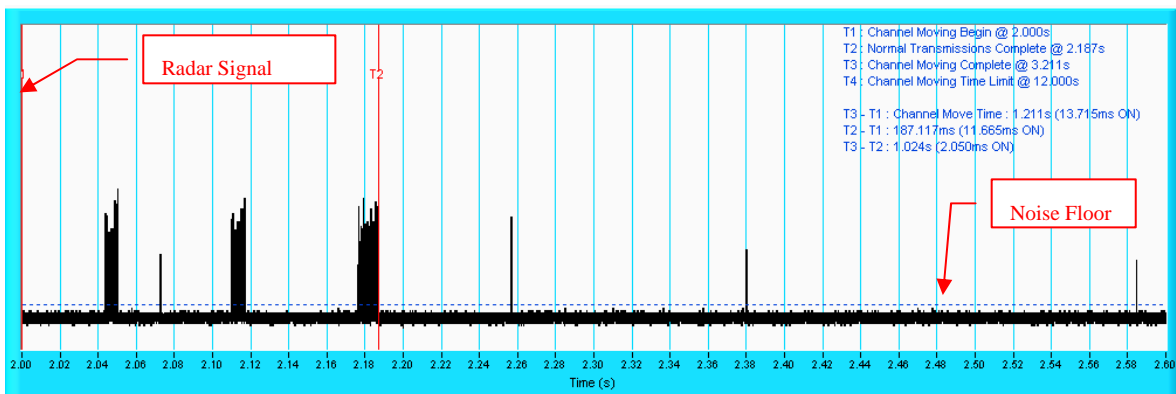


NOTE: Room-in of the first 600ms after radar signal applied.

Radar signal 2

IEEE 802.11n (20MHz)

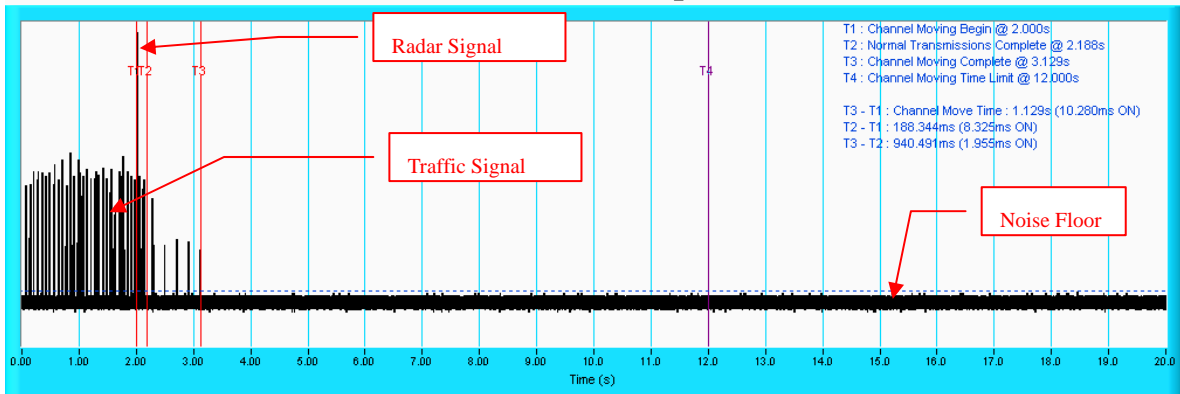


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

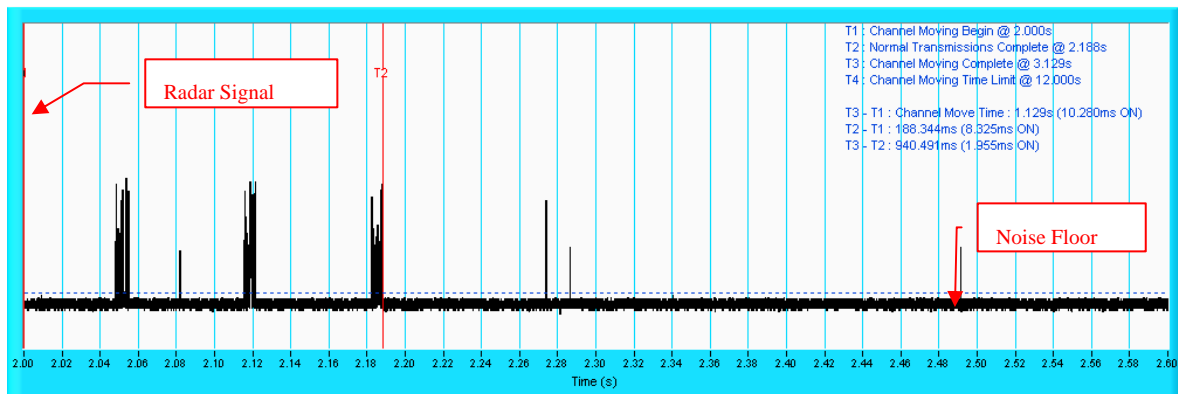


NOTE: Room-in of the first 600ms after radar signal applied.

Radar signal 3

IEEE 802.11n (20MHz)

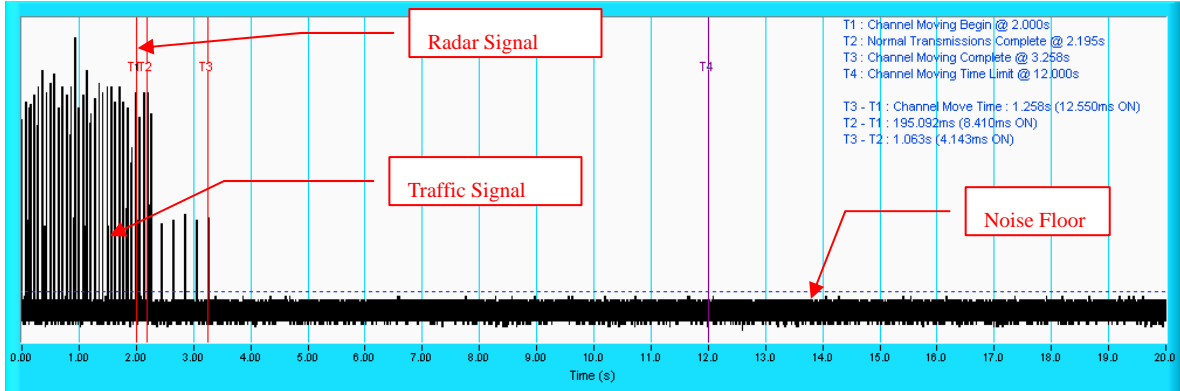


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

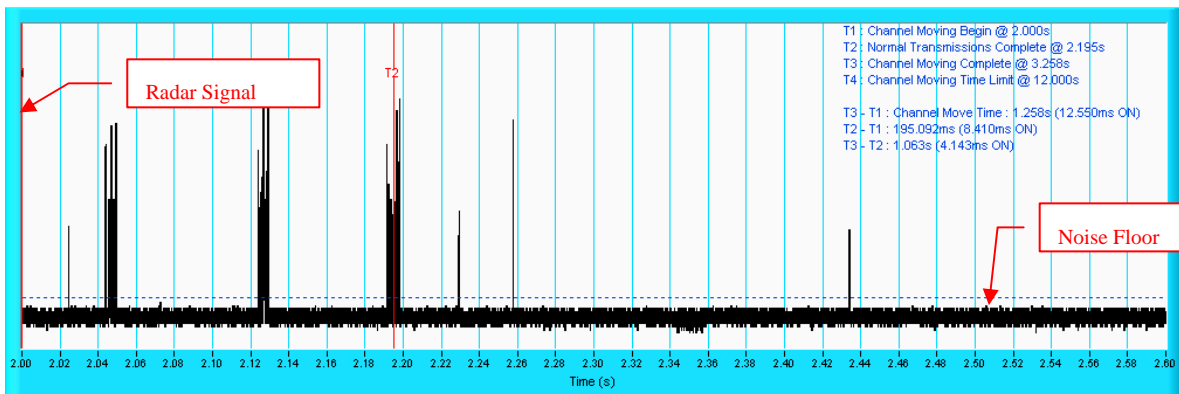


NOTE: Room-in of the first 600ms after radar signal applied.

Radar signal 4

IEEE 802.11n (20MHz)

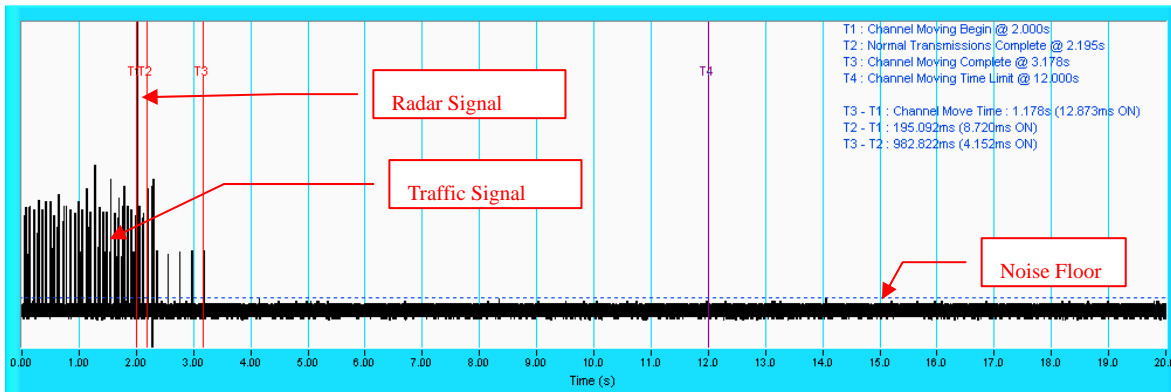


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

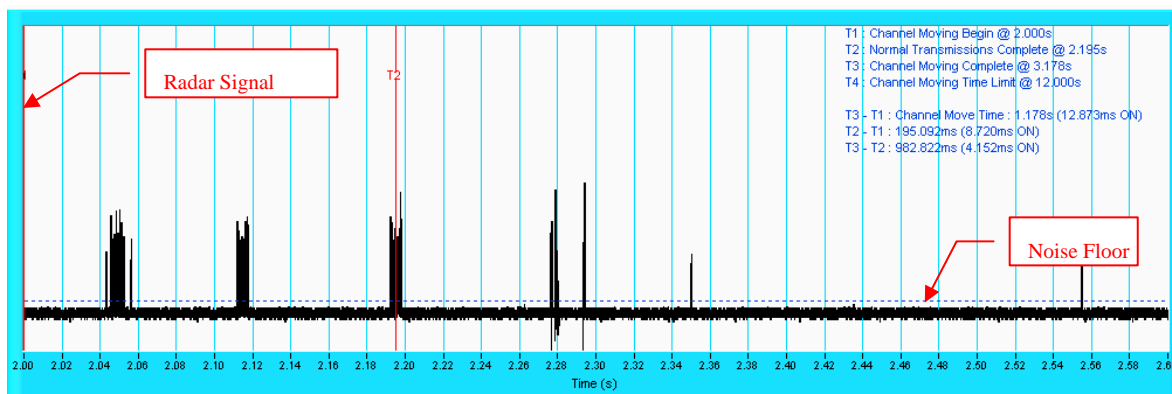


NOTE: Room-in of the first 600ms after radar signal applied.

Radar signal 5

IEEE 802.11n (20MHz)

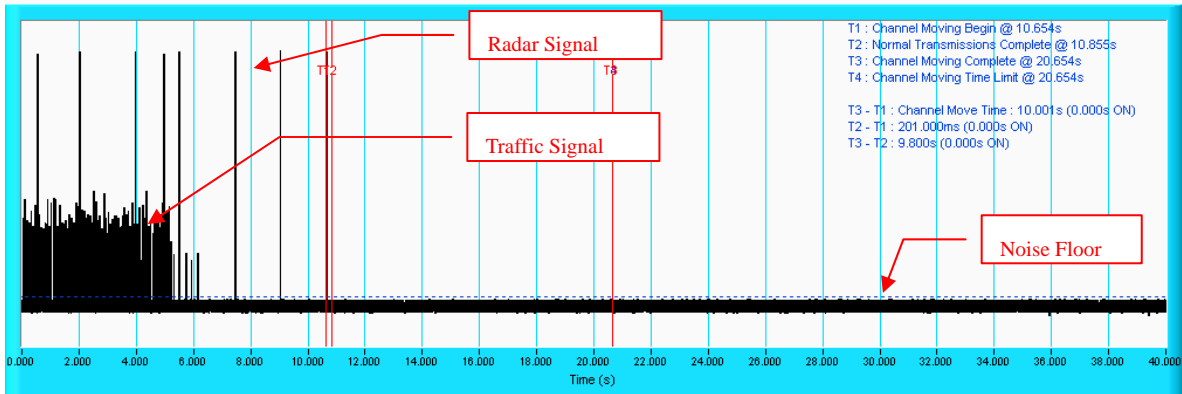


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

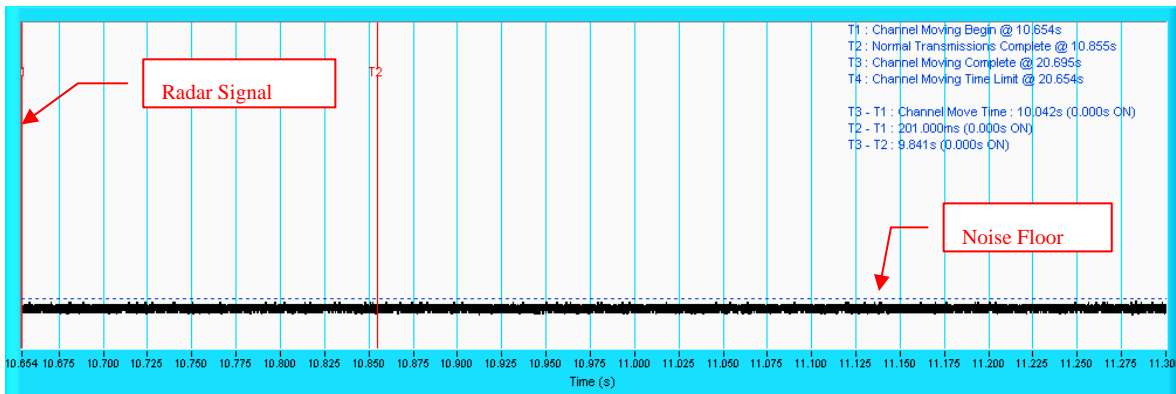


NOTE: Room-in of the first 600ms after radar signal applied.

Radar signal 6

IEEE 802.11n (20MHz)

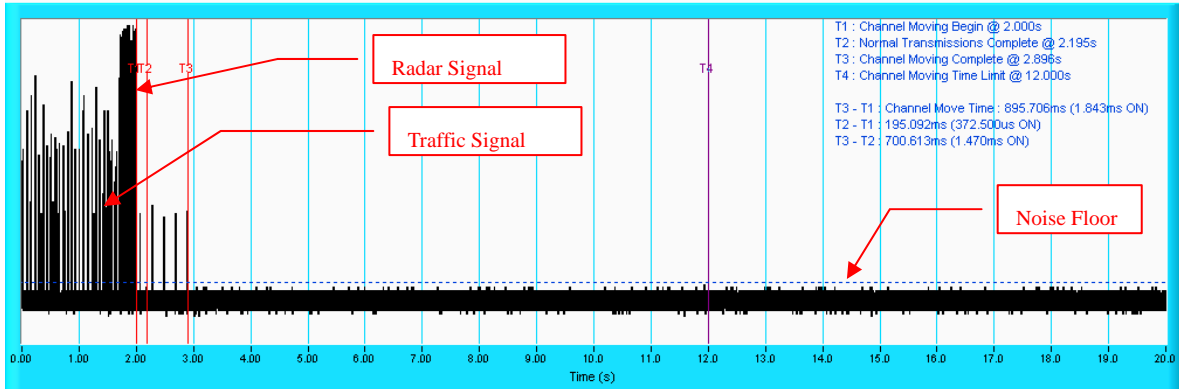

NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

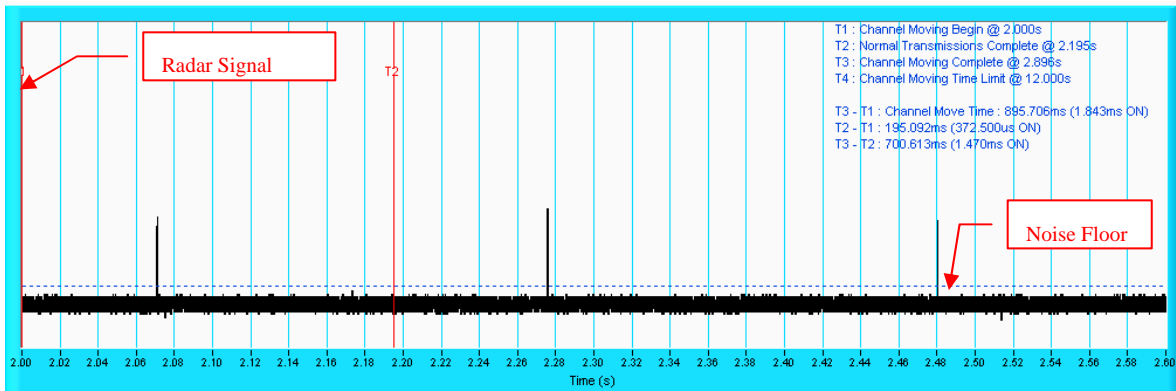

NOTE: Room-in of the first 600ms after radar signal applied.


6.2.6 NON-OCCUPANCY PERIOD

Associate test:

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.


1) EUT (Client) links with master on 5500MHz.

Waveform of EUT links up with Master

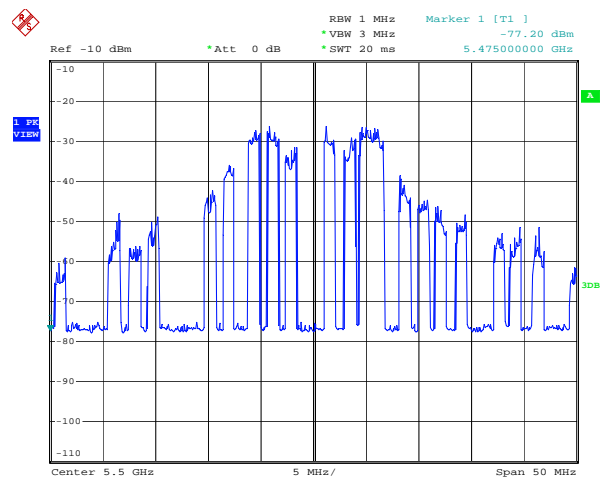

2) Client plays specified files via master.


Waveform of transmission

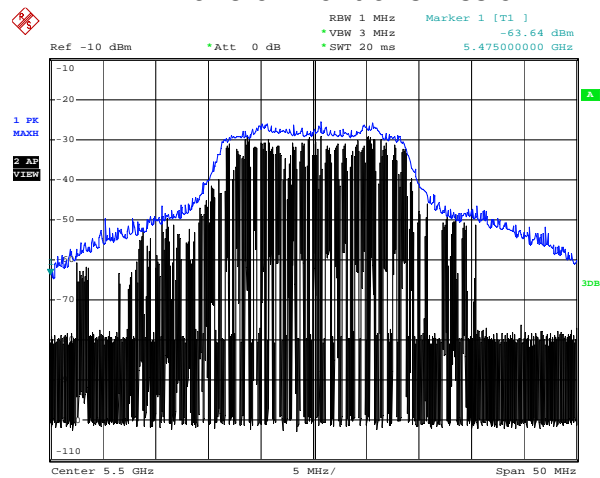

- 3) Radar signal 1~6 are applied to the Master device and WiFi traffic signal stop immediately. Radar signal applied to the master and traffic stopped as described in section 6.2.5.
- 4) 5500MHz has been monitored in 30 minutes period. In this period, no any transmission occurs.

Plot of 30minutes period

802.11an (20MHz)

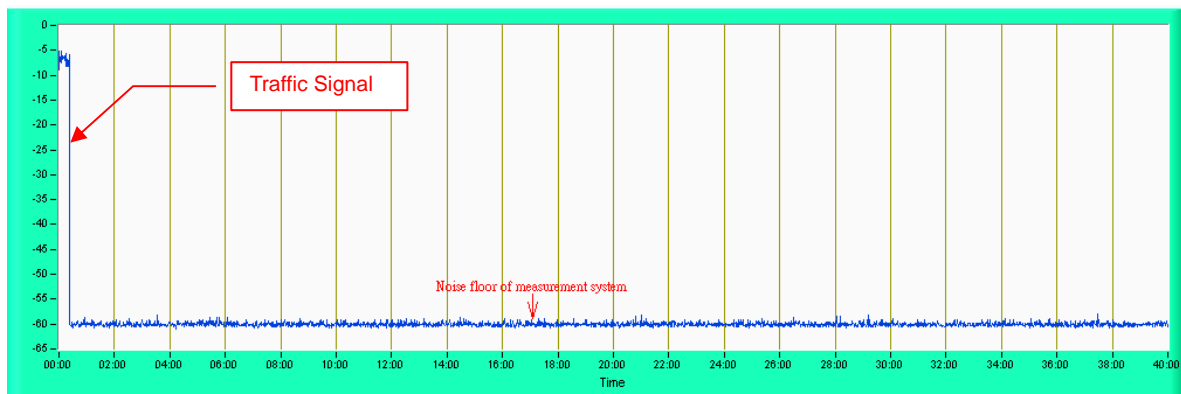

NOTE: Test setup are shown on Test set up photo.pdf

6.2.7 UNIFORM SPREADING

The intention of the uniform spreading is to provide, on aggregate, a uniform loading of the spectrum. The EUT using the DFS bands 5250 to 5350MHz and 5470 to 5725 MHz channels so that the probability of selecting a given channel shall be the same for all channels.

The EUT will select channel by random mode and mark this channel after detecting radar signal, so that will select unused channel by random mode.

6.2.8 TRANSMIT POWER CONTROL (TPC)

According to FCC 15.407(h)(1) the TPC mechanism is not required for system with an E.I.R.P. of less 500mW



7. TESTING LABORATORIES INFORMATION

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

---END---

Annex-A

Annex A.1 : The Detailed Radar pattern and Statistical Performance

IEEE 802.11n (20MHz)

Type 1 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	18	1.0u	1.428m	Yes
2	18	1.0u	1.428m	Yes
3	18	1.0u	1.428m	Yes
4	18	1.0u	1.428m	Yes
5	18	1.0u	1.428m	Yes
6	18	1.0u	1.428m	Yes
7	18	1.0u	1.428m	Yes
8	18	1.0u	1.428m	Yes
9	18	1.0u	1.428m	Yes
10	18	1.0u	1.428m	Yes
11	18	1.0u	1.428m	Yes
12	18	1.0u	1.428m	Yes
13	18	1.0u	1.428m	Yes
14	18	1.0u	1.428m	Yes
15	18	1.0u	1.428m	Yes
16	18	1.0u	1.428m	Yes
17	18	1.0u	1.428m	Yes
18	18	1.0u	1.428m	Yes
19	18	1.0u	1.428m	Yes
20	18	1.0u	1.428m	Yes
21	18	1.0u	1.428m	Yes
22	18	1.0u	1.428m	Yes
23	18	1.0u	1.428m	No
24	18	1.0u	1.428m	Yes
25	18	1.0u	1.428m	Yes
26	18	1.0u	1.428m	Yes
27	18	1.0u	1.428m	Yes
28	18	1.0u	1.428m	Yes
29	18	1.0u	1.428m	Yes
30	18	1.0u	1.428m	Yes
				Detection Rate: 96.7 %

Type 2 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	28	2.9u	187.0u	Yes
2	29	2.5u	180.0u	Yes
3	26	2.6u	181.0u	No
4	24	3.7u	193.0u	Yes
5	25	2.5u	200.0u	Yes
6	25	4.0u	208.0u	Yes
7	29	4.2u	195.0u	Yes
8	25	1.5u	223.0u	Yes
9	25	1.4u	156.0u	Yes
10	24	1.7u	196.0u	Yes
11	24	2.2u	196.0u	Yes
12	24	4.3u	189.0u	No
13	24	4.2u	171.0u	Yes
14	28	3.2u	184.0u	Yes
15	25	3.2u	196.0u	Yes
16	24	2.7u	161.0u	Yes
17	25	4.0u	172.0u	Yes
18	27	4.9u	210.0u	Yes
19	23	2.7u	230.0u	Yes
20	25	3.9u	207.0u	Yes
21	24	2.4u	218.0u	No
22	27	3.0u	160.0u	Yes
23	24	2.6u	218.0u	Yes
24	28	4.0u	230.0u	Yes
25	25	4.1u	213.0u	Yes
26	25	3.5u	165.0u	Yes
27	25	3.2u	213.0u	Yes
28	25	2.7u	202.0u	Yes
29	27	2.6u	187.0u	Yes
30	28	3.3u	226.0u	No
				Detection Rate: 86.7 %

Type 3 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	17	7.1u	303.0u	Yes
2	17	9.6u	257.0u	Yes
3	17	6.1u	495.0u	No
4	17	8.5u	392.0u	No
5	16	7.4u	349.0u	Yes
6	16	9.3u	325.0u	Yes
7	16	9.9u	302.0u	Yes
8	18	10.0u	347.0u	Yes
9	18	7.6u	469.0u	Yes
10	17	9.1u	475.0u	Yes
11	16	6.1u	418.0u	Yes
12	17	7.4u	341.0u	Yes
13	18	7.2u	481.0u	Yes
14	17	8.9u	219.0u	Yes
15	17	6.4u	428.0u	Yes
16	17	7.7u	427.0u	Yes
17	17	6.8u	464.0u	Yes
18	18	8.2u	277.0u	No
19	16	7.9u	495.0u	No
20	17	10.0u	230.0u	Yes
21	17	6.9u	496.0u	No
22	18	8.8u	441.0u	Yes
23	18	7.5u	495.0u	Yes
24	18	9.1u	448.0u	Yes
25	17	9.6u	298.0u	Yes
26	16	9.4u	246.0u	Yes
27	18	8.6u	267.0u	Yes
28	16	9.4u	250.0u	Yes
29	17	6.1u	205.0u	Yes
30	17	6.6u	460.0u	Yes
				Detection Rate: 83.3 %

Type 4 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	13	13.0u	283.0u	Yes
2	15	14.2u	209.0u	Yes
3	14	11.9u	418.0u	Yes
4	13	16.1u	329.0u	Yes
5	12	17.1u	480.0u	Yes
6	13	14.6u	239.0u	Yes
7	16	12.3u	279.0u	Yes
8	12	13.7u	312.0u	Yes
9	12	13.2u	315.0u	Yes
10	16	11.3u	359.0u	Yes
11	15	17.1u	371.0u	Yes
12	16	14.4u	279.0u	Yes
13	12	18.9u	377.0u	Yes
14	14	15.0u	232.0u	Yes
15	13	16.4u	443.0u	Yes
16	13	19.8u	476.0u	Yes
17	12	11.9u	325.0u	Yes
18	15	16.9u	469.0u	Yes
19	14	19.5u	421.0u	Yes
20	14	13.1u	402.0u	Yes
21	14	12.5u	240.0u	Yes
22	13	15.4u	209.0u	Yes
23	13	11.4u	460.0u	Yes
24	15	17.1u	317.0u	Yes
25	15	18.8u	434.0u	No
26	14	19.7u	389.0u	Yes
27	13	12.2u	424.0u	Yes
28	14	12.6u	476.0u	Yes
29	15	11.7u	326.0u	Yes
30	16	19.7u	461.0u	Yes
				Detection Rate: 96.7 %

Type 5 Radar Statistical Performances		
Trial #	Test Signal Name	Detection
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	No
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	No
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
		Detection Rate: 93.3 %

Type 6 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	9	1.0u	333.0u	Yes
2	9	1.0u	333.0u	Yes
3	9	1.0u	333.0u	Yes
4	9	1.0u	333.0u	Yes
5	9	1.0u	333.0u	Yes
6	9	1.0u	333.0u	Yes
7	9	1.0u	333.0u	Yes
8	9	1.0u	333.0u	Yes
9	9	1.0u	333.0u	Yes
10	9	1.0u	333.0u	Yes
11	9	1.0u	333.0u	No
12	9	1.0u	333.0u	Yes
13	9	1.0u	333.0u	Yes
14	9	1.0u	333.0u	Yes
15	9	1.0u	333.0u	Yes
16	9	1.0u	333.0u	Yes
17	9	1.0u	333.0u	Yes
18	9	1.0u	333.0u	Yes
19	9	1.0u	333.0u	Yes
20	9	1.0u	333.0u	Yes
21	9	1.0u	333.0u	Yes
22	9	1.0u	333.0u	Yes
23	9	1.0u	333.0u	Yes
24	9	1.0u	333.0u	Yes
25	9	1.0u	333.0u	Yes
26	9	1.0u	333.0u	Yes
27	9	1.0u	333.0u	No
28	9	1.0u	333.0u	Yes
29	9	1.0u	333.0u	Yes
30	9	1.0u	333.0u	Yes
				Detection Rate: 93.3 %

IEEE 802.11n (40MHz)

Type 1 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	18	1.0u	1.428m	Yes
2	18	1.0u	1.428m	Yes
3	18	1.0u	1.428m	Yes
4	18	1.0u	1.428m	No
5	18	1.0u	1.428m	Yes
6	18	1.0u	1.428m	Yes
7	18	1.0u	1.428m	Yes
8	18	1.0u	1.428m	Yes
9	18	1.0u	1.428m	Yes
10	18	1.0u	1.428m	Yes
11	18	1.0u	1.428m	Yes
12	18	1.0u	1.428m	Yes
13	18	1.0u	1.428m	Yes
14	18	1.0u	1.428m	Yes
15	18	1.0u	1.428m	Yes
16	18	1.0u	1.428m	Yes
17	18	1.0u	1.428m	Yes
18	18	1.0u	1.428m	Yes
19	18	1.0u	1.428m	Yes
20	18	1.0u	1.428m	Yes
21	18	1.0u	1.428m	Yes
22	18	1.0u	1.428m	Yes
23	18	1.0u	1.428m	Yes
24	18	1.0u	1.428m	Yes
25	18	1.0u	1.428m	Yes
26	18	1.0u	1.428m	Yes
27	18	1.0u	1.428m	Yes
28	18	1.0u	1.428m	Yes
29	18	1.0u	1.428m	Yes
30	18	1.0u	1.428m	Yes
Detection Rate: 96.7 %				

Type 2 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	24	3.5u	178.0u	Yes
2	26	1.2u	155.0u	Yes
3	27	1.7u	181.0u	Yes
4	28	2.2u	179.0u	Yes
5	26	2.0u	209.0u	Yes
6	29	3.6u	185.0u	Yes
7	23	3.8u	150.0u	Yes
8	27	1.0u	176.0u	No
9	26	2.7u	179.0u	Yes
10	28	4.8u	155.0u	Yes
11	25	1.1u	199.0u	Yes
12	25	1.8u	151.0u	Yes
13	27	2.3u	175.0u	Yes
14	25	4.7u	210.0u	No
15	25	4.5u	225.0u	Yes
16	29	2.7u	160.0u	Yes
17	25	3.3u	209.0u	Yes
18	28	1.9u	218.0u	Yes
19	26	2.8u	217.0u	Yes
20	26	2.7u	157.0u	Yes
21	25	3.9u	198.0u	Yes
22	26	3.2u	164.0u	Yes
23	26	3.4u	188.0u	Yes
24	26	4.4u	200.0u	Yes
25	26	4.8u	163.0u	Yes
26	26	1.1u	227.0u	Yes
27	25	3.7u	169.0u	Yes
28	27	3.2u	162.0u	Yes
29	26	2.9u	217.0u	Yes
30	25	3.1u	161.0u	Yes
				Detection Rate: 93.3 %

Type 3 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	17	6.5u	328.0u	Yes
2	17	7.2u	302.0u	Yes
3	18	8.8u	280.0u	Yes
4	17	6.0u	282.0u	Yes
5	17	8.5u	413.0u	Yes
6	17	6.7u	433.0u	Yes
7	18	7.3u	352.0u	Yes
8	16	8.0u	242.0u	Yes
9	18	9.9u	450.0u	Yes
10	17	8.8u	285.0u	Yes
11	17	8.5u	443.0u	Yes
12	18	6.2u	419.0u	Yes
13	16	9.8u	469.0u	No
14	17	8.7u	290.0u	Yes
15	17	8.3u	262.0u	Yes
16	17	8.5u	385.0u	Yes
17	16	9.6u	455.0u	Yes
18	16	9.6u	376.0u	Yes
19	16	7.8u	318.0u	Yes
20	17	8.8u	244.0u	Yes
21	17	8.3u	289.0u	Yes
22	18	9.6u	212.0u	Yes
23	17	7.7u	360.0u	Yes
24	16	9.4u	492.0u	Yes
25	17	8.3u	341.0u	Yes
26	17	9.8u	346.0u	Yes
27	17	8.8u	313.0u	Yes
28	17	8.0u	442.0u	Yes
29	17	6.2u	430.0u	Yes
30	17	8.5u	361.0u	Yes
				Detection Rate: 96.7 %

Type 4 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	15	17.1u	393.0u	Yes
2	13	17.7u	450.0u	Yes
3	13	16.5u	282.0u	Yes
4	16	12.9u	277.0u	Yes
5	12	13.5u	409.0u	No
6	14	19.6u	416.0u	Yes
7	16	19.1u	331.0u	Yes
8	12	17.2u	353.0u	Yes
9	14	13.3u	495.0u	Yes
10	12	18.0u	236.0u	Yes
11	13	16.0u	221.0u	Yes
12	13	14.0u	424.0u	Yes
13	14	13.7u	227.0u	Yes
14	16	19.5u	311.0u	Yes
15	13	11.3u	487.0u	Yes
16	13	11.0u	465.0u	Yes
17	15	14.7u	308.0u	Yes
18	13	12.1u	209.0u	Yes
19	15	16.2u	487.0u	Yes
20	13	13.2u	223.0u	Yes
21	16	17.6u	330.0u	Yes
22	15	13.2u	250.0u	Yes
23	15	19.7u	335.0u	Yes
24	16	13.6u	286.0u	Yes
25	14	14.9u	445.0u	Yes
26	12	16.7u	332.0u	Yes
27	15	15.8u	439.0u	Yes
28	13	18.1u	449.0u	Yes
29	14	13.3u	270.0u	Yes
30	12	15.5u	348.0u	Yes
				Detection Rate: 96.7 %

Type 5 Radar Statistical Performances		
Trial #	Test Signal Name	Detection
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
		Detection Rate: 100.0 %

Type 6 Radar Statistical Performances				
Trial #	Pulses per Burst	Pulse Width (s)	PRI (s)	Detection
1	9	1.0u	333.0u	Yes
2	9	1.0u	333.0u	Yes
3	9	1.0u	333.0u	Yes
4	9	1.0u	333.0u	Yes
5	9	1.0u	333.0u	Yes
6	9	1.0u	333.0u	Yes
7	9	1.0u	333.0u	Yes
8	9	1.0u	333.0u	Yes
9	9	1.0u	333.0u	Yes
10	9	1.0u	333.0u	Yes
11	9	1.0u	333.0u	Yes
12	9	1.0u	333.0u	Yes
13	9	1.0u	333.0u	Yes
14	9	1.0u	333.0u	Yes
15	9	1.0u	333.0u	Yes
16	9	1.0u	333.0u	Yes
17	9	1.0u	333.0u	Yes
18	9	1.0u	333.0u	Yes
19	9	1.0u	333.0u	Yes
20	9	1.0u	333.0u	Yes
21	9	1.0u	333.0u	Yes
22	9	1.0u	333.0u	Yes
23	9	1.0u	333.0u	Yes
24	9	1.0u	333.0u	Yes
25	9	1.0u	333.0u	Yes
26	9	1.0u	333.0u	Yes
27	9	1.0u	333.0u	Yes
28	9	1.0u	333.0u	Yes
29	9	1.0u	333.0u	Yes
30	9	1.0u	333.0u	Yes
				Detection Rate: 100.0 %

Annex-A2 : The Long Pulse Radar Pattern

IEEE 802.11n (20MHz)

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_01						
Number of Bursts in Trial: 15						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	11M	93.1u	1.852m	-	279.6m
2	2	12M	92.4u	1.624m	-	563.5m
3	2	12M	95.5u	1.325m	-	572.0m
4	2	5M	81.3u	1.290m	-	572.6m
5	1	14M	54.4u	-	-	566.8m
6	2	8M	54.9u	1.228m	-	600.1m
7	3	9M	98.3u	1.217m	1.418m	779.0m
8	2	20M	72.5u	951.5u	-	731.8m
9	2	17M	60.6u	1.607m	-	398.0m
10	3	7M	66.6u	1.539m	1.015m	537.3m
11	2	12M	93.2u	1.575m	-	80.64m
12	2	10M	57.6u	1.367m	-	166.1m
13	3	13M	67.6u	1.699m	1.341m	80.09m
14	2	13M	82.5u	1.759m	-	241.5m
15	3	8M	57.1u	1.271m	1.772m	583.0m

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_02

Number of Bursts in Trial: 18

Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	13M	63.9u	1.541m	1.154m	557.6m
2	2	19M	79.2u	1.448m	-	158.8m
3	2	7M	60.5u	1.164m	-	580.3m
4	2	12M	72.1u	993.9u	-	133.7m
5	3	9M	57.3u	1.171m	1.660m	418.0m
6	2	13M	91.4u	1.761m	-	278.2m
7	1	8M	65.3u	-	-	166.8m
8	1	8M	64.9u	-	-	248.6m
9	3	8M	95.6u	941.4u	1.206m	378.2m
10	1	11M	99.8u	-	-	266.3m
11	3	15M	80.3u	1.289m	1.889m	70.96m
12	3	9M	77.6u	1.831m	1.084m	282.3m
13	1	10M	75.9u	-	-	23.80m
14	2	19M	73.5u	1.891m	-	288.7m
15	2	8M	74.2u	1.878m	-	95.70m
16	1	10M	74.5u	-	-	18.05m
17	2	17M	51.1u	1.227m	-	452.7m
18	1	16M	86.5u	-	-	655.2m

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_03

Number of Bursts in Trial: 16

Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	14M	64.4u	-	-	615.2m
2	2	19M	64.4u	1.837m	-	494.9m
3	3	17M	72.3u	1.899m	1.838m	335.0m
4	2	7M	95.5u	1.802m	-	323.3m
5	1	8M	95.0u	-	-	414.1m
6	2	16M	71.5u	1.190m	-	361.0m
7	3	14M	66.7u	1.875m	1.479m	219.1m
8	3	8M	95.8u	1.684m	1.486m	240.8m
9	3	11M	94.5u	923.5u	1.842m	367.6m
10	2	15M	99.4u	1.325m	-	53.35m
11	2	15M	57.4u	1.086m	-	595.1m
12	2	19M	70.1u	1.570m	-	737.9m
13	1	10M	82.0u	-	-	636.7m
14	3	5M	76.9u	1.396m	1.787m	31.43m
15	2	11M	88.3u	1.759m	-	595.9m
16	1	6M	82.0u	-	-	585.8m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_04						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	9M	87.4u	1.519m	-	555.1m
2	2	13M	80.9u	1.166m	-	146.7m
3	2	9M	74.0u	1.846m	-	446.0m
4	2	14M	61.2u	1.296m	-	221.2m
5	1	6M	60.5u	-	-	577.0m
6	2	8M	64.8u	1.161m	-	210.5m
7	2	12M	90.9u	1.281m	-	538.6m
8	1	14M	84.2u	-	-	502.2m
9	3	18M	62.4u	1.056m	1.267m	853.1m
10	2	13M	66.8u	1.040m	-	16.57m
11	2	15M	84.4u	1.846m	-	654.2m
12	3	7M	56.6u	1.891m	1.477m	821.9m
13	2	15M	58.4u	1.205m	-	103.3m
14	1	20M	65.6u	-	-	709.5m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_05						
Number of Bursts in Trial: 11						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	10M	84.3u	-	-	738.4m
2	2	9M	91.1u	1.122m	-	384.8m
3	3	11M	75.0u	1.409m	1.710m	722.4m
4	1	14M	73.7u	-	-	403.7m
5	2	13M	60.7u	1.127m	-	206.1m
6	2	16M	60.1u	1.374m	-	592.1m
7	2	19M	82.1u	1.105m	-	728.5m
8	2	7M	73.0u	1.275m	-	219.6m
9	2	8M	91.5u	1.328m	-	275.0m
10	2	20M	93.3u	1.190m	-	607.7m
11	1	15M	66.9u	-	-	755.0m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_06						
Number of Bursts in Trial: 18						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	11M	87.2u	1.365m	-	120.8m
2	2	16M	61.9u	1.337m	-	233.8m
3	3	10M	89.6u	1.404m	1.410m	323.4m
4	1	5M	80.3u	-	-	149.4m
5	3	13M	98.1u	1.851m	1.784m	291.0m
6	2	16M	89.9u	1.879m	-	15.25m
7	1	13M	78.9u	-	-	324.4m
8	2	6M	54.9u	1.276m	-	544.1m
9	1	9M	95.6u	-	-	578.3m
10	2	7M	98.8u	1.089m	-	145.0m
11	2	16M	52.9u	1.939m	-	584.1m
12	1	17M	58.9u	-	-	577.7m
13	1	8M	56.6u	-	-	588.8m
14	3	9M	94.8u	1.667m	1.460m	87.45m
15	1	9M	71.5u	-	-	660.1m
16	2	12M	91.8u	1.301m	-	301.9m
17	2	10M	90.6u	1.463m	-	469.8m
18	2	6M	63.7u	1.311m	-	590.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_07						
Number of Bursts in Trial: 9						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	12M	66.5u	-	-	1.087
2	1	13M	65.9u	-	-	218.9m
3	1	14M	98.9u	-	-	908.2m
4	2	5M	56.6u	1.015m	-	514.8m
5	1	14M	74.4u	-	-	156.4m
6	2	12M	86.7u	1.234m	-	678.1m
7	2	14M	85.3u	1.451m	-	1.161
8	2	19M	83.3u	1.060m	-	596.4m
9	2	10M	74.5u	1.688m	-	143.3m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_08						
Number of Bursts in Trial: 9						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	19M	58.1u	1.781m	-	360.8m
2	2	14M	98.2u	1.782m	-	422.6m
3	1	9M	81.2u	-	-	748.2m
4	3	16M	98.9u	1.288m	1.772m	803.1m
5	1	20M	56.8u	-	-	164.9m
6	2	13M	80.2u	1.592m	-	640.6m
7	3	9M	51.5u	1.260m	1.677m	970.3m
8	2	14M	91.3u	1.086m	-	429.6m
9	2	16M	82.3u	1.212m	-	780.9m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_09						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	20M	79.3u	1.108m	-	240.1m
2	2	15M	75.1u	1.846m	-	813.8m
3	3	16M	91.6u	921.4u	1.366m	215.7m
4	2	10M	85.2u	1.364m	-	65.31m
5	2	11M	64.7u	1.378m	-	21.50m
6	3	8M	94.8u	1.116m	1.589m	817.8m
7	3	12M	78.6u	1.327m	1.356m	957.1m
8	2	7M	88.6u	1.555m	-	699.8m
9	2	13M	54.2u	1.212m	-	584.7m
10	3	15M	85.4u	1.575m	1.339m	568.4m
11	2	19M	51.1u	1.224m	-	967.4m
12	1	11M	61.2u	-	-	82.00m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_10						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	19M	58.0u	1.834m	1.009m	456.3m
2	3	12M	55.1u	1.265m	1.651m	64.05m
3	1	12M	53.1u	-	-	435.3m
4	2	16M	78.9u	1.156m	-	418.4m
5	2	12M	84.1u	1.292m	-	627.0m
6	2	12M	81.1u	1.407m	-	712.0m
7	1	19M	69.1u	-	-	137.5m
8	2	8M	89.6u	1.100m	-	424.7m
9	1	12M	65.3u	-	-	385.9m
10	2	6M	75.6u	1.533m	-	484.8m
11	1	10M	87.8u	-	-	117.3m
12	2	17M	55.6u	979.4u	-	394.2m
13	2	7M	92.3u	989.7u	-	716.0m
14	3	9M	73.5u	1.210m	1.839m	549.3m
15	2	15M	61.6u	1.804m	-	613.0m
16	2	7M	50.8u	1.279m	-	360.8m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_11						
Number of Bursts in Trial: 15						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	16M	63.4u	1.510m	-	520.4m
2	2	18M	70.6u	1.433m	-	315.0m
3	2	10M	63.7u	1.480m	-	759.9m
4	2	15M	73.8u	1.247m	-	248.5m
5	2	10M	52.2u	1.038m	-	683.7m
6	2	7M	80.8u	1.586m	-	589.3m
7	3	14M	62.0u	1.915m	1.448m	566.9m
8	2	8M	58.4u	1.804m	-	539.7m
9	1	18M	61.0u	-	-	359.0m
10	2	17M	65.5u	1.517m	-	605.1m
11	2	14M	79.1u	1.558m	-	550.5m
12	3	15M	52.6u	1.688m	988.4u	188.4m
13	1	16M	61.5u	-	-	698.4m
14	1	19M	66.9u	-	-	28.41m
15	3	5M	81.3u	1.665m	1.036m	414.0m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_12						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	17M	94.4u	1.587m	-	130.3m
2	1	13M	91.3u	-	-	73.00m
3	3	19M	53.2u	1.377m	1.540m	835.5m
4	2	7M	60.1u	1.031m	-	194.8m
5	3	10M	66.0u	1.687m	1.323m	790.5m
6	1	16M	75.4u	-	-	308.0m
7	1	7M	76.5u	-	-	628.0m
8	3	20M	79.1u	1.040m	1.229m	642.5m
9	1	10M	91.1u	-	-	334.5m
10	3	14M	85.7u	1.832m	1.758m	828.7m
11	1	15M	76.9u	-	-	263.7m
12	2	12M	52.1u	1.784m	-	767.0m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_13						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	17M	86.0u	1.104m	1.155m	410.8m
2	3	6M	60.2u	1.262m	1.874m	858.7m
3	2	17M	51.1u	995.9u	-	315.2m
4	3	10M	75.7u	1.647m	1.687m	259.3m
5	1	18M	88.9u	-	-	217.8m
6	3	7M	69.0u	1.276m	1.726m	480.9m
7	2	16M	53.1u	1.143m	-	102.6m
8	2	11M	64.9u	1.574m	-	317.4m
9	3	19M	58.6u	1.934m	1.285m	539.8m
10	2	6M	62.9u	1.374m	-	546.1m
11	2	19M	64.5u	989.5u	-	164.8m
12	1	19M	66.7u	-	-	795.5m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_14						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	10M	81.2u	1.707m	1.068m	341.6m
2	2	18M	88.5u	1.112m	-	682.9m
3	1	10M	84.2u	-	-	738.2m
4	2	13M	68.7u	1.244m	-	286.8m
5	2	10M	57.4u	1.756m	-	467.3m
6	2	9M	62.9u	1.364m	-	734.3m
7	3	6M	75.6u	1.686m	1.445m	824.5m
8	2	10M	52.7u	1.581m	-	651.3m
9	2	10M	88.5u	959.5u	-	507.3m
10	3	7M	60.1u	946.9u	1.639m	295.1m
11	2	11M	74.3u	1.509m	-	277.4m
12	1	15M	91.2u	-	-	191.1m
13	1	7M	57.1u	-	-	526.6m
14	3	12M	86.8u	1.618m	1.398m	282.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_15						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	12M	97.8u	1.278m	-	146.3m
2	2	9M	64.2u	1.615m	-	1.011
3	1	14M	97.7u	-	-	573.4m
4	3	11M	84.4u	1.325m	1.795m	255.1m
5	1	6M	78.1u	-	-	609.4m
6	2	10M	66.2u	937.8u	-	228.9m
7	2	16M	70.7u	1.253m	-	590.7m
8	1	12M	89.7u	-	-	335.6m
9	1	11M	84.2u	-	-	483.7m
10	1	9M	74.8u	-	-	383.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_16						
Number of Bursts in Trial: 19						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	7M	57.7u	1.905m	1.817m	193.3m
2	3	18M	60.3u	1.299m	1.759m	363.0m
3	2	9M	60.7u	1.137m	-	235.2m
4	3	14M	93.8u	1.353m	1.673m	551.0m
5	2	7M	60.9u	1.034m	-	125.5m
6	3	12M	61.9u	1.754m	1.891m	369.7m
7	3	6M	97.3u	1.889m	1.609m	132.4m
8	3	13M	92.9u	1.862m	1.011m	69.35m
9	2	10M	79.3u	1.402m	-	359.7m
10	2	16M	53.9u	1.828m	-	43.87m
11	1	15M	68.2u	-	-	613.2m
12	1	7M	77.0u	-	-	190.4m
13	2	11M	90.9u	1.466m	-	4.856m
14	1	18M	73.9u	-	-	345.1m
15	3	11M	51.9u	1.584m	1.761m	435.1m
16	2	11M	60.6u	1.734m	-	197.3m
17	1	10M	70.9u	-	-	451.5m
18	2	15M	99.6u	1.409m	-	353.1m
19	3	8M	87.6u	1.218m	983.4u	219.7m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_17						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	6M	71.1u	1.529m	-	36.13m
2	2	13M	75.5u	1.492m	-	923.2m
3	2	16M	59.4u	1.018m	-	1.026
4	2	9M	80.4u	1.186m	-	288.7m
5	3	12M	72.0u	1.039m	1.690m	93.80m
6	2	15M	95.5u	1.371m	-	204.5m
7	2	19M	69.5u	1.213m	-	1.085
8	3	10M	82.3u	1.212m	1.082m	1.031
9	2	19M	89.8u	1.664m	-	501.6m
10	3	15M	62.9u	1.615m	1.025m	1.165

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_18

Number of Bursts in Trial: 20

Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	19M	83.3u	1.616m	-	15.20m
2	2	19M	56.8u	1.038m	-	587.6m
3	2	17M	80.2u	1.405m	-	499.4m
4	3	17M	88.9u	1.412m	1.774m	383.6m
5	2	16M	64.2u	1.682m	-	143.0m
6	3	19M	88.3u	1.481m	1.909m	215.8m
7	2	6M	83.4u	1.606m	-	114.4m
8	1	20M	92.6u	-	-	71.31m
9	2	19M	89.8u	1.266m	-	265.5m
10	1	7M	92.7u	-	-	19.40m
11	1	6M	76.3u	-	-	163.7m
12	1	9M	57.4u	-	-	588.9m
13	2	9M	60.4u	1.654m	-	252.0m
14	1	13M	78.6u	-	-	558.2m
15	3	15M	71.0u	1.048m	1.593m	536.8m
16	3	13M	95.4u	1.752m	1.037m	287.2m
17	1	10M	81.3u	-	-	33.47m
18	2	14M	98.4u	1.534m	-	177.5m
19	1	11M	98.6u	-	-	164.1m
20	1	6M	97.8u	-	-	390.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_19						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	15M	60.5u	1.597m	1.493m	666.2m
2	3	7M	67.4u	1.834m	1.767m	664.8m
3	2	13M	90.9u	1.717m	-	134.9m
4	2	20M	80.0u	1.686m	-	454.7m
5	3	16M	50.1u	1.625m	1.583m	632.4m
6	1	10M	79.9u	-	-	404.9m
7	1	14M	68.3u	-	-	228.0m
8	2	10M	87.3u	1.051m	-	318.2m
9	3	8M	85.6u	1.175m	1.273m	38.34m
10	1	18M	71.8u	-	-	606.4m
11	1	17M	75.1u	-	-	746.3m
12	2	17M	59.0u	945.0u	-	648.2m
13	2	18M	95.1u	992.9u	-	51.35m
14	2	12M	53.2u	1.433m	-	691.9m
15	2	13M	50.9u	1.701m	-	558.9m
16	2	19M	76.8u	968.2u	-	441.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_20						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	8M	66.4u	1.933m	938.6u	578.3m
2	2	10M	55.0u	1.372m	-	216.5m
3	2	20M	90.9u	1.870m	-	747.0m
4	2	6M	68.4u	1.505m	-	734.6m
5	3	13M	95.1u	1.368m	1.164m	656.1m
6	3	14M	78.5u	1.868m	1.082m	301.8m
7	2	7M	56.2u	1.186m	-	601.6m
8	2	6M	76.6u	1.250m	-	187.5m
9	1	18M	67.9u	-	-	325.1m
10	1	17M	75.3u	-	-	684.2m
11	2	19M	70.9u	1.057m	-	300.6m
12	3	11M	68.0u	1.029m	1.461m	421.8m
13	3	6M	68.1u	1.760m	1.478m	336.1m
14	2	12M	50.6u	1.454m	-	588.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_21						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	17M	92.1u	1.674m	-	398.6m
2	2	20M	96.7u	1.696m	-	1.151
3	2	8M	77.4u	1.065m	-	1.176
4	3	12M	61.3u	1.007m	1.667m	783.3m
5	2	13M	72.8u	1.030m	-	419.8m
6	3	12M	62.8u	942.2u	1.215m	109.9m
7	3	12M	78.2u	1.319m	1.828m	488.8m
8	2	8M	69.3u	1.431m	-	231.8m
9	2	7M	96.3u	1.313m	-	651.8m
10	1	12M	75.8u	-	-	517.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_22						
Number of Bursts in Trial: 17						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	14M	54.9u	-	-	314.6m
2	3	7M	75.8u	1.882m	1.281m	58.89m
3	1	18M	92.5u	-	-	133.9m
4	1	19M	77.5u	-	-	70.85m
5	3	8M	67.7u	1.797m	1.798m	597.5m
6	2	17M	79.4u	1.560m	-	307.3m
7	3	12M	75.5u	989.5u	1.778m	329.2m
8	3	16M	73.3u	1.388m	1.656m	700.4m
9	2	6M	98.6u	1.337m	-	687.0m
10	2	16M	62.2u	1.602m	-	404.4m
11	3	6M	85.3u	1.403m	1.861m	174.3m
12	1	5M	93.8u	-	-	125.6m
13	3	10M	77.6u	968.4u	1.750m	639.1m
14	3	13M	73.5u	964.5u	1.859m	638.6m
15	2	9M	96.6u	1.191m	-	699.9m
16	2	10M	61.5u	1.855m	-	593.5m
17	2	11M	87.0u	1.026m	-	528.8m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_23						
Number of Bursts in Trial: 13						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	7M	95.2u	-	-	761.0m
2	3	12M	65.0u	1.162m	1.824m	764.0m
3	2	14M	67.7u	1.494m	-	144.6m
4	2	12M	86.4u	1.317m	-	80.95m
5	1	16M	68.5u	-	-	97.48m
6	1	16M	84.8u	-	-	262.0m
7	1	15M	66.9u	-	-	739.4m
8	1	10M	63.1u	-	-	483.4m
9	3	6M	76.5u	1.579m	1.523m	440.7m
10	2	11M	75.3u	1.156m	-	314.4m
11	2	18M	83.4u	1.173m	-	778.0m
12	3	19M	53.8u	1.623m	1.629m	534.7m
13	3	6M	64.8u	1.290m	1.522m	22.59m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_24						
Number of Bursts in Trial: 11						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	19M	96.8u	-	-	99.45m
2	1	18M	96.7u	-	-	920.4m
3	3	19M	50.1u	1.420m	1.009m	621.8m
4	1	8M	62.8u	-	-	6.263m
5	2	10M	88.6u	1.284m	-	1.070
6	2	19M	83.2u	1.585m	-	658.3m
7	1	7M	74.0u	-	-	945.9m
8	2	19M	92.9u	1.260m	-	163.9m
9	2	17M	60.7u	1.165m	-	233.1m
10	2	14M	92.8u	1.885m	-	551.2m
11	2	12M	83.8u	1.869m	-	641.7m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_25						
Number of Bursts in Trial: 9						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	17M	99.1u	1.776m	1.599m	549.6m
2	1	9M	68.6u	-	-	1.163
3	1	15M	60.5u	-	-	345.4m
4	2	11M	88.4u	997.6u	-	1.046
5	3	13M	50.5u	1.161m	951.5u	43.49m
6	3	12M	50.9u	1.568m	1.297m	482.7m
7	3	13M	95.5u	1.403m	1.583m	436.2m
8	2	9M	89.4u	932.6u	-	385.0m
9	1	11M	87.1u	-	-	576.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_26						
Number of Bursts in Trial: 13						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	15M	60.5u	-	-	38.87m
2	3	9M	75.5u	1.606m	1.066m	122.8m
3	2	7M	59.0u	1.529m	-	322.0m
4	2	15M	56.3u	1.195m	-	235.3m
5	2	15M	63.6u	1.586m	-	328.5m
6	3	13M	71.6u	1.006m	1.240m	274.0m
7	3	6M	71.3u	1.387m	1.053m	22.44m
8	1	12M	68.7u	-	-	30.22m
9	1	9M	78.2u	-	-	335.9m
10	3	6M	82.6u	1.871m	1.733m	357.9m
11	2	19M	75.4u	1.273m	-	230.7m
12	3	12M	60.6u	1.934m	1.279m	50.72m
13	2	18M	81.6u	1.460m	-	886.9m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_27						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	10M	96.8u	1.762m	1.344m	319.4m
2	2	8M	61.0u	1.364m	-	49.27m
3	2	13M	52.7u	1.415m	-	47.44m
4	2	16M	64.1u	1.623m	-	324.2m
5	1	13M	74.4u	-	-	729.9m
6	1	9M	81.8u	-	-	719.5m
7	3	14M	57.5u	1.687m	1.487m	343.1m
8	2	9M	77.0u	1.522m	-	7.407m
9	2	16M	70.3u	1.601m	-	611.6m
10	2	11M	56.0u	1.009m	-	60.39m
11	2	5M	60.2u	1.877m	-	13.99m
12	2	6M	75.9u	1.261m	-	376.2m
13	3	14M	97.6u	1.099m	1.739m	458.5m
14	1	9M	82.0u	-	-	305.5m
15	2	10M	55.6u	1.825m	-	269.2m
16	2	11M	81.6u	1.202m	-	488.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_28						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	15M	60.4u	1.331m	1.836m	689.7m
2	1	11M	67.8u	-	-	392.1m
3	1	7M	91.1u	-	-	600.1m
4	2	16M	70.4u	1.913m	-	471.1m
5	2	7M	99.4u	1.214m	-	624.5m
6	3	12M	98.6u	1.792m	1.286m	526.6m
7	2	14M	56.4u	1.317m	-	551.8m
8	1	12M	88.9u	-	-	558.6m
9	2	10M	74.6u	1.774m	-	180.7m
10	2	7M	99.9u	1.381m	-	287.7m
11	2	5M	54.2u	1.388m	-	853.0m
12	2	12M	75.3u	1.105m	-	242.5m
13	2	12M	73.8u	1.841m	-	584.7m
14	3	7M	65.6u	1.436m	1.825m	325.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_29						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	9M	53.9u	1.039m	-	234.8m
2	2	16M	97.2u	1.806m	-	79.23m
3	2	12M	63.9u	1.349m	-	366.1m
4	3	17M	65.0u	1.470m	1.420m	355.0m
5	2	9M	63.4u	1.104m	-	168.1m
6	2	10M	70.8u	1.483m	-	499.9m
7	3	16M	97.0u	1.482m	1.834m	972.5m
8	2	18M	95.2u	1.335m	-	708.7m
9	2	6M	76.8u	1.725m	-	957.7m
10	2	5M	98.8u	956.2u	-	249.6m
11	1	17M	80.4u	-	-	604.4m
12	2	7M	58.1u	1.531m	-	950.9m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_30						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	16M	79.1u	1.160m	-	766.1m
2	3	7M	51.2u	1.334m	1.095m	510.7m
3	2	13M	77.4u	1.902m	-	514.9m
4	2	8M	68.4u	1.539m	-	318.6m
5	2	6M	57.3u	1.865m	-	709.3m
6	2	9M	83.9u	1.250m	-	154.8m
7	2	7M	95.2u	1.603m	-	214.0m
8	2	19M	87.6u	1.775m	-	312.7m
9	2	6M	70.6u	1.239m	-	452.0m
10	2	17M	61.8u	1.929m	-	502.9m
11	3	6M	88.5u	1.475m	1.419m	467.7m
12	2	13M	55.3u	1.762m	-	990.5m

IEEE 802.11n (40MHz)

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_01						
Number of Bursts in Trial: 20						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	17M	71.6u	1.132m	-	549.9m
2	1	17M	86.5u	-	-	49.57m
3	2	19M	63.9u	1.475m	-	79.24m
4	2	9M	63.3u	1.412m	-	109.0m
5	3	17M	77.1u	1.358m	1.045m	306.9m
6	2	5M	51.1u	1.348m	-	321.8m
7	2	5M	84.4u	1.861m	-	70.99m
8	2	8M	52.5u	1.685m	-	154.6m
9	1	19M	83.4u	-	-	316.3m
10	2	13M	82.0u	1.834m	-	91.39m
11	2	7M	95.3u	1.183m	-	429.2m
12	1	10M	66.7u	-	-	164.6m
13	2	12M	99.0u	1.584m	-	283.3m
14	1	19M	51.1u	-	-	108.8m
15	3	7M	87.5u	1.685m	1.809m	463.6m
16	2	10M	84.3u	966.7u	-	432.0m
17	2	7M	82.1u	1.598m	-	392.7m
18	3	6M	85.1u	1.728m	1.652m	301.0m
19	2	7M	62.2u	1.908m	-	371.2m
20	2	6M	69.5u	1.416m	-	352.9m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_02						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	16M	73.6u	1.176m	-	833.7m
2	1	9M	87.4u	-	-	62.31m
3	3	10M	83.1u	1.217m	960.9u	180.4m
4	2	18M	81.8u	1.910m	-	911.8m
5	2	13M	75.3u	1.889m	-	877.7m
6	1	10M	67.7u	-	-	5.806m
7	1	13M	50.5u	-	-	406.0m
8	1	7M	53.0u	-	-	176.0m
9	1	11M	74.4u	-	-	1.081
10	1	6M	75.1u	-	-	750.1m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_03						
Number of Bursts in Trial: 8						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	17M	53.2u	1.577m	1.114m	936.2m
2	3	11M	91.3u	1.105m	1.813m	700.5m
3	2	9M	80.7u	1.475m	-	93.69m
4	2	16M	55.5u	1.505m	-	327.1m
5	2	10M	93.5u	1.535m	-	647.6m
6	2	9M	67.0u	1.288m	-	420.9m
7	1	8M	88.8u	-	-	227.0m
8	2	6M	83.8u	1.639m	-	317.5m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_04						
Number of Bursts in Trial: 8						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	15M	57.7u	947.3u	-	43.40m
2	3	5M	83.8u	1.854m	1.294m	1.322
3	3	19M	98.8u	1.794m	1.604m	1.447
4	1	16M	94.5u	-	-	866.9m
5	2	18M	74.8u	1.393m	-	319.3m
6	2	18M	50.3u	1.228m	-	761.2m
7	1	13M	72.2u	-	-	432.4m
8	2	8M	87.0u	1.379m	-	1.447

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_05

Number of Bursts in Trial: 18

Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	11M	74.4u	1.907m	-	329.0m
2	2	7M	70.1u	1.222m	-	317.0m
3	2	18M	76.4u	1.251m	-	586.4m
4	3	8M	55.0u	1.547m	1.794m	179.0m
5	1	8M	96.4u	-	-	475.0m
6	3	7M	59.5u	1.084m	1.250m	636.0m
7	3	19M	96.1u	1.063m	1.047m	118.7m
8	2	7M	78.7u	1.159m	-	574.8m
9	2	6M	90.0u	1.724m	-	539.3m
10	2	13M	72.7u	1.742m	-	399.0m
11	3	11M	84.7u	1.781m	1.447m	110.6m
12	1	7M	95.7u	-	-	550.8m
13	3	14M	76.5u	1.419m	1.548m	505.7m
14	2	9M	80.0u	1.650m	-	243.4m
15	2	17M	86.9u	1.329m	-	424.8m
16	2	18M	77.9u	1.353m	-	236.2m
17	3	9M	54.7u	1.896m	996.3u	209.0m
18	2	16M	99.6u	1.684m	-	422.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_06						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	12M	97.9u	1.588m	-	653.6m
2	2	7M	84.3u	1.408m	-	758.7m
3	2	6M	68.3u	1.658m	-	834.6m
4	2	14M	70.2u	1.846m	-	640.6m
5	1	19M	77.7u	-	-	833.4m
6	1	10M	64.9u	-	-	666.7m
7	3	16M	70.3u	1.815m	1.392m	269.2m
8	2	5M	77.3u	1.765m	-	112.4m
9	1	11M	53.3u	-	-	598.6m
10	3	16M	79.1u	1.212m	1.613m	885.3m
11	2	11M	65.4u	1.135m	-	141.1m
12	3	17M	91.3u	1.429m	1.783m	645.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_07						
Number of Bursts in Trial: 18						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	10M	75.6u	1.452m	-	98.49m
2	2	13M	50.8u	965.2u	-	625.2m
3	2	19M	95.2u	1.128m	-	474.9m
4	2	10M	98.6u	1.728m	-	624.9m
5	2	19M	96.8u	1.033m	-	649.9m
6	3	19M	72.4u	1.015m	1.496m	607.6m
7	2	18M	52.1u	1.324m	-	482.9m
8	2	17M	63.0u	1.026m	-	657.1m
9	1	6M	66.7u	-	-	396.7m
10	3	14M	68.0u	1.174m	1.245m	528.7m
11	1	13M	73.5u	-	-	560.6m
12	1	15M	66.2u	-	-	443.4m
13	3	20M	56.0u	1.101m	1.634m	513.5m
14	2	13M	77.1u	1.565m	-	523.6m
15	2	8M	72.6u	1.598m	-	578.3m
16	2	7M	63.7u	1.678m	-	340.6m
17	1	7M	66.2u	-	-	510.2m
18	3	17M	96.5u	1.826m	1.823m	25.79m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_08						
Number of Bursts in Trial: 17						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	8M	70.9u	1.001m	-	353.9m
2	3	15M	54.3u	1.192m	1.575m	168.7m
3	2	6M	74.0u	1.659m	-	348.8m
4	3	7M	59.4u	1.140m	1.818m	674.9m
5	1	12M	77.7u	-	-	209.8m
6	2	8M	71.0u	1.622m	-	663.5m
7	3	6M	90.1u	1.101m	1.046m	547.3m
8	3	13M	70.9u	1.065m	1.705m	105.3m
9	2	19M	78.8u	1.513m	-	639.7m
10	2	18M	91.8u	919.2u	-	329.2m
11	2	15M	57.1u	1.606m	-	398.8m
12	2	20M	99.4u	1.609m	-	636.0m
13	1	15M	80.3u	-	-	135.2m
14	3	12M	60.6u	1.343m	1.060m	71.03m
15	2	8M	72.3u	1.338m	-	91.07m
16	2	15M	77.5u	1.690m	-	214.1m
17	1	9M	79.3u	-	-	77.81m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_09						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	18M	92.7u	1.164m	1.738m	888.8m
2	2	18M	78.0u	955.0u	-	944.3m
3	1	20M	86.7u	-	-	292.9m
4	3	6M	98.2u	1.797m	1.197m	757.0m
5	1	7M	53.3u	-	-	269.2m
6	2	13M	50.9u	1.221m	-	28.38m
7	2	8M	89.3u	1.511m	-	738.4m
8	2	9M	96.3u	1.081m	-	442.2m
9	3	19M	87.2u	1.236m	1.657m	620.9m
10	3	15M	94.5u	1.731m	1.754m	517.1m
11	1	16M	64.1u	-	-	422.1m
12	3	8M	69.2u	1.405m	1.871m	347.5m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_10						
Number of Bursts in Trial: 18						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	6M	71.0u	-	-	101.2m
2	2	18M	52.8u	1.846m	-	641.8m
3	2	13M	83.5u	947.5u	-	619.3m
4	2	14M	74.8u	1.354m	-	124.4m
5	2	13M	89.2u	1.222m	-	282.9m
6	2	16M	90.8u	1.014m	-	138.5m
7	2	11M	66.9u	939.1u	-	659.5m
8	2	11M	96.9u	1.411m	-	116.7m
9	3	8M	85.3u	1.165m	1.048m	2.282m
10	3	10M	77.5u	1.891m	944.5u	427.3m
11	2	16M	79.4u	1.340m	-	410.7m
12	3	17M	90.1u	1.150m	1.148m	176.6m
13	2	7M	97.6u	1.566m	-	273.3m
14	1	12M	93.5u	-	-	404.4m
15	1	12M	73.3u	-	-	330.0m
16	1	14M	87.6u	-	-	198.4m
17	2	10M	90.9u	1.093m	-	33.85m
18	2	18M	92.5u	1.680m	-	118.8m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_11						
Number of Bursts in Trial: 11						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	12M	75.7u	1.065m	-	550.5m
2	2	14M	64.7u	1.881m	-	818.7m
3	2	17M	50.4u	1.087m	-	11.35m
4	2	14M	59.5u	1.771m	-	68.46m
5	1	10M	96.9u	-	-	299.1m
6	2	8M	66.5u	964.5u	-	149.6m
7	2	13M	82.5u	1.779m	-	168.4m
8	2	7M	54.0u	1.401m	-	535.8m
9	3	11M	74.4u	1.824m	1.194m	446.6m
10	2	14M	51.7u	1.656m	-	256.5m
11	2	19M	58.2u	1.206m	-	394.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_12						
Number of Bursts in Trial: 8						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	13M	93.7u	1.592m	-	861.6m
2	1	15M	87.6u	-	-	987.5m
3	3	14M	98.4u	1.062m	1.667m	215.7m
4	3	13M	84.8u	1.910m	1.542m	710.0m
5	2	12M	76.3u	1.793m	-	141.2m
6	1	7M	88.1u	-	-	1.192
7	3	18M	72.2u	1.568m	1.625m	726.9m
8	2	11M	99.8u	1.499m	-	1.212

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_13						
Number of Bursts in Trial: 13						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	12M	66.7u	1.586m	1.374m	229.3m
2	3	16M	55.8u	983.2u	1.842m	257.2m
3	2	19M	74.6u	1.553m	-	593.7m
4	2	8M	76.8u	1.587m	-	318.0m
5	1	18M	58.4u	-	-	109.8m
6	2	11M	80.5u	1.257m	-	567.6m
7	2	9M	81.2u	1.680m	-	145.9m
8	3	13M	62.1u	1.131m	1.002m	796.0m
9	3	5M	56.1u	1.042m	1.318m	737.2m
10	2	10M	52.8u	1.671m	-	376.7m
11	2	7M	53.9u	1.093m	-	156.4m
12	3	5M	94.0u	1.208m	1.031m	312.2m
13	3	18M	74.3u	1.243m	1.461m	276.5m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_14						
Number of Bursts in Trial: 13						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	16M	82.3u	-	-	513.3m
2	3	11M	76.2u	1.580m	1.846m	726.0m
3	2	10M	63.3u	1.549m	-	737.0m
4	2	9M	96.9u	1.700m	-	785.9m
5	3	20M	63.5u	1.891m	1.464m	396.8m
6	2	8M	70.6u	932.4u	-	838.9m
7	3	19M	85.5u	1.661m	1.112m	139.9m
8	3	7M	90.8u	1.006m	1.302m	318.4m
9	3	13M	70.7u	1.370m	1.350m	142.8m
10	1	12M	83.3u	-	-	761.7m
11	1	6M	91.8u	-	-	439.6m
12	2	12M	73.0u	943.0u	-	279.2m
13	1	15M	78.7u	-	-	659.9m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_15						
Number of Bursts in Trial: 15						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	7M	94.2u	-	-	172.4m
2	2	6M	96.9u	1.019m	-	229.5m
3	1	6M	83.4u	-	-	68.14m
4	3	6M	79.8u	944.2u	1.786m	210.0m
5	2	10M	74.9u	1.913m	-	520.3m
6	3	16M	99.0u	977.0u	1.868m	310.3m
7	2	14M	94.7u	1.670m	-	249.3m
8	2	7M	67.3u	1.230m	-	420.0m
9	2	7M	75.0u	1.394m	-	143.1m
10	1	9M	58.6u	-	-	692.0m
11	3	9M	54.0u	1.377m	1.018m	240.6m
12	2	10M	73.6u	1.542m	-	109.1m
13	2	15M	97.7u	1.195m	-	4.096m
14	2	17M	56.1u	1.222m	-	96.83m
15	2	19M	74.5u	1.597m	-	478.8m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_16						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	8M	92.8u	-	-	1.074
2	1	6M	54.5u	-	-	68.01m
3	2	15M	81.6u	1.697m	-	778.8m
4	2	14M	60.9u	1.696m	-	304.8m
5	2	13M	64.6u	1.549m	-	794.6m
6	2	15M	82.9u	1.549m	-	186.0m
7	2	6M	76.6u	1.641m	-	602.8m
8	1	14M	73.1u	-	-	319.5m
9	1	7M	79.4u	-	-	675.5m
10	2	12M	79.9u	1.593m	-	1.047

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_17						
Number of Bursts in Trial: 18						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	8M	68.3u	1.292m	-	268.7m
2	2	10M	75.7u	1.622m	-	288.5m
3	2	14M	80.0u	1.615m	-	534.6m
4	1	11M	85.6u	-	-	557.1m
5	2	18M	53.3u	1.551m	-	282.8m
6	3	8M	68.0u	1.483m	1.805m	128.3m
7	3	17M	88.2u	1.385m	1.020m	334.6m
8	1	18M	71.4u	-	-	228.1m
9	3	19M	92.0u	1.770m	1.113m	160.2m
10	3	7M	93.7u	1.051m	1.092m	487.9m
11	2	8M	61.3u	1.785m	-	401.2m
12	3	12M	54.5u	1.306m	1.559m	583.3m
13	2	6M	99.4u	1.846m	-	10.47m
14	1	14M	53.6u	-	-	491.9m
15	1	18M	84.7u	-	-	56.82m
16	2	15M	93.8u	1.114m	-	167.8m
17	3	5M	99.9u	1.618m	1.452m	113.2m
18	2	12M	96.7u	1.661m	-	545.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_18						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	14M	84.4u	-	-	116.0m
2	2	15M	50.7u	1.347m	-	696.7m
3	1	13M	88.3u	-	-	652.4m
4	2	11M	89.6u	1.046m	-	199.8m
5	3	14M	97.4u	1.901m	1.199m	428.6m
6	3	7M	80.1u	1.506m	1.049m	10.17m
7	3	9M	70.0u	1.661m	1.051m	197.2m
8	2	17M	97.1u	1.219m	-	231.3m
9	1	15M	66.8u	-	-	175.3m
10	2	6M	54.6u	1.867m	-	546.2m
11	2	7M	65.8u	1.169m	-	442.1m
12	1	16M	81.0u	-	-	616.4m
13	2	5M	96.1u	1.828m	-	358.6m
14	2	13M	58.3u	1.236m	-	148.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_19						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	12M	81.3u	1.671m	1.882m	88.92m
2	1	6M	85.2u	-	-	78.50m
3	2	14M	71.6u	1.237m	-	225.7m
4	2	19M	92.6u	1.234m	-	151.7m
5	3	16M	89.8u	1.709m	1.505m	289.6m
6	1	20M	93.6u	-	-	737.6m
7	2	16M	65.8u	1.370m	-	387.6m
8	2	6M	59.3u	1.731m	-	539.5m
9	3	8M	95.1u	1.022m	1.752m	307.3m
10	1	7M	74.0u	-	-	348.7m
11	1	19M	91.9u	-	-	219.6m
12	2	19M	85.5u	1.815m	-	268.2m
13	2	8M	78.2u	1.320m	-	532.9m
14	1	18M	56.7u	-	-	487.5m
15	1	18M	92.4u	-	-	550.7m
16	3	6M	80.6u	1.534m	1.525m	498.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_20						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	8M	63.7u	1.449m	-	14.86m
2	2	7M	64.8u	1.677m	-	400.9m
3	1	6M	84.8u	-	-	583.5m
4	3	5M	77.8u	1.683m	1.499m	102.1m
5	3	18M	99.8u	1.491m	1.314m	343.4m
6	2	16M	85.8u	1.155m	-	433.5m
7	1	17M	77.9u	-	-	378.4m
8	2	17M	74.6u	1.389m	-	415.5m
9	3	19M	65.0u	1.605m	1.256m	632.1m
10	3	19M	74.6u	937.4u	1.650m	393.3m
11	2	13M	63.3u	1.594m	-	460.8m
12	1	19M	71.1u	-	-	326.9m
13	3	6M	81.4u	1.479m	1.705m	679.3m
14	1	15M	67.0u	-	-	99.10m
15	2	13M	53.5u	1.464m	-	237.9m
16	3	7M	85.5u	1.677m	938.5u	450.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_21						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	8M	95.9u	1.283m	1.765m	415.5m
2	1	16M	60.8u	-	-	800.0m
3	1	11M	56.3u	-	-	653.3m
4	1	16M	52.5u	-	-	715.6m
5	2	13M	91.6u	1.031m	-	662.8m
6	1	10M	60.9u	-	-	607.8m
7	1	17M	79.9u	-	-	893.0m
8	3	18M	57.1u	955.9u	1.765m	11.90m
9	3	20M	70.0u	1.190m	1.432m	983.0m
10	3	16M	94.4u	1.867m	1.807m	444.4m
11	2	17M	62.2u	1.168m	-	436.1m
12	1	15M	72.1u	-	-	349.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_22						
Number of Bursts in Trial: 20						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	20M	50.9u	1.399m	-	207.9m
2	1	12M	85.7u	-	-	541.1m
3	2	11M	84.0u	1.007m	-	141.2m
4	3	7M	60.0u	1.451m	1.453m	48.63m
5	1	12M	69.2u	-	-	442.8m
6	3	14M	52.0u	951.0u	1.892m	286.4m
7	3	8M	93.7u	1.845m	1.074m	394.8m
8	2	14M	50.5u	1.924m	-	213.8m
9	2	16M	87.1u	1.654m	-	561.3m
10	1	7M	63.7u	-	-	24.71m
11	2	19M	73.5u	1.396m	-	520.6m
12	2	14M	72.9u	1.864m	-	240.3m
13	3	6M	61.0u	1.000m	1.499m	21.96m
14	1	7M	66.0u	-	-	500.3m
15	2	6M	55.8u	1.861m	-	525.1m
16	3	16M	78.9u	1.188m	1.518m	484.2m
17	2	5M	84.7u	1.198m	-	478.5m
18	2	8M	89.3u	1.372m	-	7.376m
19	2	14M	87.2u	1.193m	-	150.3m
20	2	8M	85.4u	1.051m	-	257.6m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_23						
Number of Bursts in Trial: 13						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	17M	75.8u	1.678m	-	716.3m
2	2	10M	99.4u	1.860m	-	387.5m
3	2	7M	82.5u	1.184m	-	237.8m
4	1	19M	58.0u	-	-	58.39m
5	1	18M	71.2u	-	-	581.7m
6	1	8M	50.0u	-	-	192.3m
7	1	9M	99.9u	-	-	288.6m
8	2	17M	89.5u	1.685m	-	457.4m
9	2	16M	61.9u	1.709m	-	867.3m
10	3	11M	82.1u	1.782m	1.266m	851.6m
11	2	6M	86.5u	1.909m	-	787.0m
12	1	17M	73.4u	-	-	75.80m
13	2	7M	90.6u	1.799m	-	376.0m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_24						
Number of Bursts in Trial: 18						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	17M	89.6u	-	-	193.7m
2	1	6M	74.5u	-	-	390.2m
3	2	17M	74.8u	1.731m	-	644.7m
4	3	8M	71.5u	1.825m	1.132m	491.5m
5	1	11M	84.1u	-	-	659.8m
6	3	9M	54.6u	1.547m	1.004m	466.2m
7	2	11M	93.5u	1.755m	-	219.2m
8	3	12M	82.0u	1.420m	1.762m	366.6m
9	3	18M	83.6u	1.160m	1.026m	390.0m
10	2	16M	72.7u	1.064m	-	49.16m
11	1	9M	85.7u	-	-	515.1m
12	1	16M	96.9u	-	-	526.5m
13	1	9M	60.6u	-	-	147.1m
14	2	16M	96.6u	1.474m	-	450.2m
15	2	19M	77.4u	1.865m	-	582.7m
16	3	8M	57.6u	1.567m	1.363m	546.3m
17	3	13M	78.5u	1.792m	1.460m	191.3m
18	2	15M	91.5u	1.077m	-	629.4m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_25						
Number of Bursts in Trial: 10						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	10M	83.5u	1.115m	-	773.2m
2	3	16M	98.7u	1.816m	1.786m	185.6m
3	2	14M	92.0u	1.740m	-	454.9m
4	3	14M	92.3u	1.145m	1.828m	1.128
5	2	8M	97.8u	1.239m	-	1.117
6	2	15M	79.1u	1.033m	-	549.3m
7	2	9M	78.4u	1.847m	-	446.3m
8	1	18M	77.2u	-	-	784.2m
9	2	19M	92.8u	1.603m	-	389.7m
10	2	16M	90.5u	1.125m	-	32.05m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_26						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	2	11M	60.7u	1.697m	-	236.5m
2	2	19M	69.9u	1.032m	-	67.03m
3	2	9M	82.9u	1.428m	-	21.66m
4	3	7M	86.2u	1.828m	1.795m	486.5m
5	3	17M	80.0u	1.783m	1.706m	692.1m
6	2	16M	68.0u	1.207m	-	628.8m
7	2	7M	94.8u	1.263m	-	186.8m
8	2	20M	81.2u	1.457m	-	386.4m
9	3	5M	94.0u	1.491m	1.256m	833.7m
10	1	7M	68.3u	-	-	623.9m
11	2	17M	90.6u	1.534m	-	454.3m
12	3	13M	78.4u	1.231m	1.857m	690.6m
13	3	7M	55.0u	1.436m	1.210m	837.9m
14	2	17M	52.3u	1.480m	-	745.1m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_27						
Number of Bursts in Trial: 14						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	6M	73.9u	1.223m	1.746m	36.36m
2	2	7M	77.0u	1.221m	-	210.0m
3	2	11M	65.1u	1.838m	-	296.5m
4	1	18M	56.0u	-	-	338.4m
5	2	9M	50.1u	1.727m	-	837.2m
6	2	10M	83.0u	1.006m	-	554.4m
7	2	17M	96.8u	1.251m	-	539.3m
8	1	14M	77.5u	-	-	280.7m
9	1	17M	96.6u	-	-	187.4m
10	1	13M	67.5u	-	-	20.51m
11	3	7M	53.3u	1.298m	1.680m	274.2m
12	2	6M	85.0u	1.878m	-	47.95m
13	1	7M	97.1u	-	-	506.9m
14	2	16M	69.5u	1.582m	-	475.2m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_28						
Number of Bursts in Trial: 12						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	10M	91.8u	-	-	242.9m
2	2	18M	96.4u	1.746m	-	102.8m
3	3	9M	53.1u	1.357m	1.076m	100.0m
4	2	15M	68.6u	1.364m	-	351.9m
5	1	8M	72.5u	-	-	257.5m
6	2	6M	78.7u	1.000m	-	834.2m
7	2	15M	76.9u	1.625m	-	101.1m
8	2	18M	66.0u	1.094m	-	245.8m
9	3	10M	64.4u	1.767m	1.010m	928.1m
10	2	8M	96.3u	1.197m	-	507.8m
11	2	17M	80.9u	1.038m	-	27.89m
12	2	19M	61.9u	1.610m	-	15.57m

Long Pulse Radar Test Signal						
Test Signal Name: LP_Signal_29						
Number of Bursts in Trial: 16						
Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	3	20M	87.5u	1.159m	1.543m	641.2m
2	2	8M	72.5u	1.688m	-	523.9m
3	3	9M	85.0u	1.445m	1.136m	244.7m
4	2	14M	71.8u	1.737m	-	337.4m
5	2	17M	83.6u	1.912m	-	538.3m
6	3	13M	90.0u	1.758m	1.186m	14.54m
7	2	13M	60.3u	1.681m	-	268.9m
8	2	11M	55.4u	1.662m	-	208.7m
9	3	16M	70.9u	1.239m	1.061m	730.5m
10	2	15M	66.4u	1.294m	-	217.8m
11	2	18M	59.4u	1.446m	-	408.8m
12	1	11M	54.0u	-	-	689.3m
13	2	5M	58.2u	1.111m	-	255.4m
14	2	15M	76.7u	1.399m	-	129.6m
15	1	6M	80.4u	-	-	501.3m
16	1	8M	82.8u	-	-	91.23m

Long Pulse Radar Test Signal

Test Signal Name: LP_Signal_30

Number of Bursts in Trial: 12

Burst	Pulses per Burst	Chrip (Hz)	Pulse Width (s)	Pulse 1 to 2 Spacing (s)	Pulse 2 to 3 Spacing (s)	Start Location (s)
1	1	14M	55.1u	-	-	989.7m
2	2	18M	77.2u	1.118m	-	671.5m
3	1	7M	93.9u	-	-	765.5m
4	2	14M	53.6u	1.264m	-	791.0m
5	1	6M	50.4u	-	-	685.5m
6	3	12M	68.9u	1.194m	1.476m	291.7m
7	2	11M	80.3u	1.565m	-	17.96m
8	1	13M	78.2u	-	-	371.7m
9	2	8M	98.8u	1.309m	-	960.1m
10	3	12M	55.1u	1.212m	1.469m	260.2m
11	2	11M	67.9u	1.716m	-	717.9m
12	2	8M	51.6u	1.741m	-	514.1m

Annex-A3 : The Frequency Hopping Radar Pattern

IEEE 802.11n (20MHz)

Type 6 Radar Statistical Performances		
Trial #	Hopping Frequency Sequence Name	Detection
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	No
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	No
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
		Detection Rate: 93.3 %

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_01							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.347G	2	5.323G	3	5.404G	4	5.326G
5	5.497G	6	5.301G	7	5.304G	8	5.443G
9	5.280G	10	5.274G	11	5.689G	12	5.338G
13	5.442G	14	5.439G	15	5.703G	16	5.702G
17	5.707G	18	5.704G	19	5.604G	20	5.340G
21	5.709G	22	5.655G	23	5.256G	24	5.603G
25	5.469G	26	5.597G	27	5.527G	28	5.389G
29	5.369G	30	5.471G	31	5.346G	32	5.576G
33	5.348G	34	5.448G	35	5.265G	36	5.321G
37	5.637G	38	5.634G	39	5.613G	40	5.630G
41	5.723G	42	5.376G	43	5.365G	44	5.529G
45	5.386G	46	5.276G	47	5.416G	48	5.561G
49	5.685G	50	5.490G	51	5.570G	52	5.498G
53	5.654G	54	5.609G	55	5.420G	56	5.645G
57	5.519G	58	5.647G	59	5.412G	60	5.560G
61	5.351G	62	5.673G	63	5.447G	64	5.441G
65	5.333G	66	5.691G	67	5.540G	68	5.464G
69	5.591G	70	5.311G	71	5.623G	72	5.581G
73	5.480G	74	5.286G	75	5.569G	76	5.440G
77	5.516G	78	5.423G	79	5.535G	80	5.659G
81	5.571G	82	5.289G	83	5.648G	84	5.363G
85	5.366G	86	5.378G	87	5.331G	88	5.461G
89	5.635G	90	5.496G	91	5.508G	92	5.546G
93	5.459G	94	5.714G	95	5.250G	96	5.457G
97	5.620G	98	5.614G	99	5.658G	100	5.330G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_02							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.354G	2	5.724G	3	5.465G	4	5.574G
5	5.566G	6	5.367G	7	5.320G	8	5.273G
9	5.416G	10	5.312G	11	5.328G	12	5.485G
13	5.611G	14	5.662G	15	5.581G	16	5.254G
17	5.490G	18	5.347G	19	5.664G	20	5.481G
21	5.702G	22	5.565G	23	5.671G	24	5.382G
25	5.360G	26	5.349G	27	5.335G	28	5.520G
29	5.707G	30	5.699G	31	5.643G	32	5.296G
33	5.467G	34	5.361G	35	5.591G	36	5.297G
37	5.504G	38	5.524G	39	5.519G	40	5.443G
41	5.692G	42	5.583G	43	5.326G	44	5.672G
45	5.567G	46	5.651G	47	5.371G	48	5.376G
49	5.718G	50	5.355G	51	5.466G	52	5.610G
53	5.253G	54	5.512G	55	5.536G	56	5.437G
57	5.716G	58	5.290G	59	5.503G	60	5.431G
61	5.530G	62	5.535G	63	5.279G	64	5.637G
65	5.428G	66	5.576G	67	5.499G	68	5.603G
69	5.563G	70	5.491G	71	5.282G	72	5.252G
73	5.501G	74	5.540G	75	5.429G	76	5.620G
77	5.602G	78	5.537G	79	5.461G	80	5.419G
81	5.395G	82	5.683G	83	5.264G	84	5.369G
85	5.422G	86	5.708G	87	5.305G	88	5.263G
89	5.584G	90	5.325G	91	5.284G	92	5.720G
93	5.616G	94	5.454G	95	5.259G	96	5.595G
97	5.262G	98	5.453G	99	5.276G	100	5.571G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_03							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.253G	2	5.546G	3	5.606G	4	5.598G
5	5.599G	6	5.696G	7	5.450G	8	5.419G
9	5.679G	10	5.473G	11	5.458G	12	5.492G
13	5.266G	14	5.434G	15	5.379G	16	5.642G
17	5.563G	18	5.544G	19	5.276G	20	5.329G
21	5.663G	22	5.603G	23	5.452G	24	5.256G
25	5.535G	26	5.446G	27	5.501G	28	5.278G
29	5.260G	30	5.436G	31	5.667G	32	5.353G
33	5.547G	34	5.586G	35	5.317G	36	5.717G
37	5.426G	38	5.437G	39	5.281G	40	5.271G
41	5.600G	42	5.282G	43	5.261G	44	5.703G
45	5.710G	46	5.377G	47	5.533G	48	5.719G
49	5.629G	50	5.569G	51	5.693G	52	5.273G
53	5.454G	54	5.455G	55	5.457G	56	5.330G
57	5.671G	58	5.587G	59	5.303G	60	5.666G
61	5.433G	62	5.469G	63	5.328G	64	5.608G
65	5.551G	66	5.588G	67	5.480G	68	5.577G
69	5.486G	70	5.723G	71	5.292G	72	5.401G
73	5.521G	74	5.550G	75	5.722G	76	5.287G
77	5.559G	78	5.274G	79	5.335G	80	5.444G
81	5.583G	82	5.669G	83	5.689G	84	5.307G
85	5.333G	86	5.300G	87	5.549G	88	5.463G
89	5.269G	90	5.594G	91	5.565G	92	5.371G
93	5.654G	94	5.567G	95	5.323G	96	5.301G
97	5.429G	98	5.428G	99	5.352G	100	5.402G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_04							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.685G	2	5.645G	3	5.486G	4	5.448G
5	5.286G	6	5.454G	7	5.625G	8	5.349G
9	5.650G	10	5.621G	11	5.538G	12	5.362G
13	5.434G	14	5.324G	15	5.622G	16	5.636G
17	5.612G	18	5.432G	19	5.428G	20	5.258G
21	5.375G	22	5.294G	23	5.700G	24	5.343G
25	5.698G	26	5.388G	27	5.323G	28	5.371G
29	5.392G	30	5.412G	31	5.466G	32	5.352G
33	5.442G	34	5.553G	35	5.353G	36	5.400G
37	5.408G	38	5.601G	39	5.706G	40	5.280G
41	5.256G	42	5.373G	43	5.684G	44	5.659G
45	5.500G	46	5.714G	47	5.422G	48	5.417G
49	5.531G	50	5.611G	51	5.283G	52	5.328G
53	5.495G	54	5.354G	55	5.311G	56	5.541G
57	5.652G	58	5.299G	59	5.254G	60	5.298G
61	5.326G	62	5.576G	63	5.549G	64	5.635G
65	5.619G	66	5.658G	67	5.637G	68	5.648G
69	5.450G	70	5.293G	71	5.357G	72	5.638G
73	5.394G	74	5.289G	75	5.519G	76	5.370G
77	5.533G	78	5.540G	79	5.599G	80	5.313G
81	5.472G	82	5.591G	83	5.696G	84	5.372G
85	5.505G	86	5.297G	87	5.316G	88	5.597G
89	5.473G	90	5.401G	91	5.376G	92	5.440G
93	5.420G	94	5.292G	95	5.701G	96	5.330G
97	5.711G	98	5.332G	99	5.414G	100	5.347G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_05							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.568G	2	5.712G	3	5.470G	4	5.476G
5	5.319G	6	5.330G	7	5.710G	8	5.485G
9	5.610G	10	5.450G	11	5.520G	12	5.552G
13	5.451G	14	5.650G	15	5.407G	16	5.404G
17	5.719G	18	5.657G	19	5.491G	20	5.518G
21	5.528G	22	5.300G	23	5.335G	24	5.510G
25	5.634G	26	5.284G	27	5.438G	28	5.313G
29	5.720G	30	5.487G	31	5.526G	32	5.488G
33	5.541G	34	5.668G	35	5.393G	36	5.372G
37	5.616G	38	5.449G	39	5.637G	40	5.508G
41	5.354G	42	5.467G	43	5.305G	44	5.397G
45	5.415G	46	5.705G	47	5.482G	48	5.435G
49	5.651G	50	5.489G	51	5.268G	52	5.350G
53	5.688G	54	5.548G	55	5.288G	56	5.323G
57	5.333G	58	5.505G	59	5.625G	60	5.639G
61	5.419G	62	5.461G	63	5.376G	64	5.647G
65	5.723G	66	5.549G	67	5.309G	68	5.557G
69	5.433G	70	5.717G	71	5.253G	72	5.630G
73	5.542G	74	5.533G	75	5.667G	76	5.471G
77	5.358G	78	5.473G	79	5.297G	80	5.619G
81	5.592G	82	5.569G	83	5.540G	84	5.495G
85	5.276G	86	5.571G	87	5.714G	88	5.261G
89	5.564G	90	5.316G	91	5.699G	92	5.681G
93	5.661G	94	5.537G	95	5.689G	96	5.367G
97	5.275G	98	5.256G	99	5.259G	100	5.334G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_06							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.277G	2	5.676G	3	5.328G	4	5.461G
5	5.330G	6	5.522G	7	5.575G	8	5.477G
9	5.422G	10	5.593G	11	5.557G	12	5.444G
13	5.569G	14	5.710G	15	5.604G	16	5.613G
17	5.562G	18	5.614G	19	5.596G	20	5.508G
21	5.416G	22	5.409G	23	5.366G	24	5.502G
25	5.367G	26	5.680G	27	5.408G	28	5.311G
29	5.530G	30	5.339G	31	5.315G	32	5.393G
33	5.374G	34	5.472G	35	5.267G	36	5.417G
37	5.474G	38	5.627G	39	5.600G	40	5.602G
41	5.539G	42	5.264G	43	5.292G	44	5.612G
45	5.459G	46	5.282G	47	5.670G	48	5.297G
49	5.573G	50	5.722G	51	5.323G	52	5.368G
53	5.301G	54	5.413G	55	5.581G	56	5.487G
57	5.534G	58	5.462G	59	5.284G	60	5.526G
61	5.435G	62	5.571G	63	5.591G	64	5.667G
65	5.331G	66	5.671G	67	5.682G	68	5.510G
69	5.418G	70	5.387G	71	5.647G	72	5.447G
73	5.628G	74	5.706G	75	5.266G	76	5.702G
77	5.533G	78	5.337G	79	5.471G	80	5.263G
81	5.630G	82	5.402G	83	5.270G	84	5.513G
85	5.555G	86	5.453G	87	5.603G	88	5.592G
89	5.589G	90	5.336G	91	5.708G	92	5.495G
93	5.353G	94	5.356G	95	5.260G	96	5.273G
97	5.451G	98	5.332G	99	5.586G	100	5.686G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_07							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.310G	2	5.391G	3	5.321G	4	5.324G
5	5.330G	6	5.613G	7	5.558G	8	5.644G
9	5.264G	10	5.621G	11	5.597G	12	5.378G
13	5.423G	14	5.453G	15	5.531G	16	5.288G
17	5.590G	18	5.396G	19	5.614G	20	5.299G
21	5.422G	22	5.280G	23	5.349G	24	5.462G
25	5.598G	26	5.452G	27	5.476G	28	5.316G
29	5.274G	30	5.360G	31	5.432G	32	5.505G
33	5.438G	34	5.389G	35	5.461G	36	5.294G
37	5.366G	38	5.522G	39	5.323G	40	5.587G
41	5.307G	42	5.404G	43	5.282G	44	5.634G
45	5.696G	46	5.312G	47	5.428G	48	5.397G
49	5.455G	50	5.501G	51	5.670G	52	5.636G
53	5.630G	54	5.536G	55	5.267G	56	5.265G
57	5.647G	58	5.350G	59	5.617G	60	5.276G
61	5.710G	62	5.393G	63	5.673G	64	5.581G
65	5.258G	66	5.596G	67	5.642G	68	5.535G
69	5.679G	70	5.388G	71	5.318G	72	5.481G
73	5.301G	74	5.658G	75	5.325G	76	5.533G
77	5.591G	78	5.309G	79	5.724G	80	5.411G
81	5.279G	82	5.293G	83	5.305G	84	5.549G
85	5.528G	86	5.553G	87	5.400G	88	5.420G
89	5.401G	90	5.520G	91	5.355G	92	5.374G
93	5.256G	94	5.469G	95	5.380G	96	5.513G
97	5.472G	98	5.694G	99	5.490G	100	5.626G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_08							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.357G	2	5.472G	3	5.274G	4	5.401G
5	5.692G	6	5.258G	7	5.654G	8	5.474G
9	5.556G	10	5.631G	11	5.674G	12	5.588G
13	5.361G	14	5.322G	15	5.531G	16	5.615G
17	5.358G	18	5.374G	19	5.378G	20	5.629G
21	5.559G	22	5.539G	23	5.254G	24	5.499G
25	5.377G	26	5.369G	27	5.272G	28	5.388G
29	5.700G	30	5.641G	31	5.573G	32	5.265G
33	5.568G	34	5.553G	35	5.467G	36	5.517G
37	5.409G	38	5.583G	39	5.463G	40	5.430G
41	5.408G	42	5.675G	43	5.638G	44	5.658G
45	5.329G	46	5.561G	47	5.577G	48	5.696G
49	5.334G	50	5.602G	51	5.442G	52	5.597G
53	5.253G	54	5.643G	55	5.580G	56	5.712G
57	5.390G	58	5.688G	59	5.315G	60	5.312G
61	5.397G	62	5.359G	63	5.647G	64	5.683G
65	5.697G	66	5.703G	67	5.271G	68	5.330G
69	5.593G	70	5.291G	71	5.385G	72	5.386G
73	5.618G	74	5.416G	75	5.662G	76	5.316G
77	5.557G	78	5.543G	79	5.348G	80	5.375G
81	5.718G	82	5.639G	83	5.456G	84	5.344G
85	5.338G	86	5.420G	87	5.698G	88	5.664G
89	5.299G	90	5.251G	91	5.503G	92	5.558G
93	5.621G	94	5.277G	95	5.540G	96	5.578G
97	5.403G	98	5.333G	99	5.651G	100	5.510G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_09							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.713G	2	5.310G	3	5.717G	4	5.401G
5	5.492G	6	5.712G	7	5.591G	8	5.581G
9	5.301G	10	5.469G	11	5.332G	12	5.398G
13	5.357G	14	5.486G	15	5.482G	16	5.602G
17	5.286G	18	5.355G	19	5.614G	20	5.480G
21	5.347G	22	5.491G	23	5.453G	24	5.574G
25	5.400G	26	5.620G	27	5.643G	28	5.644G
29	5.631G	30	5.254G	31	5.616G	32	5.594G
33	5.267G	34	5.610G	35	5.490G	36	5.635G
37	5.587G	38	5.517G	39	5.473G	40	5.519G
41	5.382G	42	5.569G	43	5.683G	44	5.513G
45	5.681G	46	5.402G	47	5.470G	48	5.521G
49	5.412G	50	5.527G	51	5.292G	52	5.378G
53	5.514G	54	5.615G	55	5.261G	56	5.424G
57	5.426G	58	5.284G	59	5.557G	60	5.556G
61	5.606G	62	5.449G	63	5.583G	64	5.418G
65	5.522G	66	5.558G	67	5.394G	68	5.367G
69	5.559G	70	5.677G	71	5.409G	72	5.543G
73	5.642G	74	5.578G	75	5.314G	76	5.256G
77	5.450G	78	5.281G	79	5.429G	80	5.699G
81	5.298G	82	5.706G	83	5.289G	84	5.359G
85	5.688G	86	5.331G	87	5.523G	88	5.663G
89	5.633G	90	5.465G	91	5.648G	92	5.502G
93	5.344G	94	5.388G	95	5.467G	96	5.567G
97	5.693G	98	5.687G	99	5.607G	100	5.657G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_10							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.348G	2	5.585G	3	5.620G	4	5.539G
5	5.628G	6	5.685G	7	5.521G	8	5.546G
9	5.266G	10	5.616G	11	5.710G	12	5.669G
13	5.350G	14	5.613G	15	5.276G	16	5.261G
17	5.397G	18	5.495G	19	5.718G	20	5.281G
21	5.443G	22	5.579G	23	5.486G	24	5.339G
25	5.416G	26	5.285G	27	5.433G	28	5.537G
29	5.492G	30	5.293G	31	5.595G	32	5.255G
33	5.605G	34	5.312G	35	5.434G	36	5.324G
37	5.544G	38	5.286G	39	5.510G	40	5.481G
41	5.398G	42	5.272G	43	5.686G	44	5.638G
45	5.425G	46	5.531G	47	5.288G	48	5.364G
49	5.701G	50	5.362G	51	5.593G	52	5.296G
53	5.405G	54	5.274G	55	5.499G	56	5.682G
57	5.713G	58	5.512G	59	5.687G	60	5.287G
61	5.511G	62	5.476G	63	5.487G	64	5.273G
65	5.328G	66	5.269G	67	5.514G	68	5.673G
69	5.402G	70	5.636G	71	5.643G	72	5.304G
73	5.684G	74	5.596G	75	5.646G	76	5.554G
77	5.606G	78	5.451G	79	5.580G	80	5.453G
81	5.346G	82	5.712G	83	5.354G	84	5.299G
85	5.525G	86	5.470G	87	5.648G	88	5.303G
89	5.464G	90	5.251G	91	5.275G	92	5.253G
93	5.277G	94	5.637G	95	5.338G	96	5.270G
97	5.529G	98	5.621G	99	5.690G	100	5.574G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_11							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.640G	2	5.699G	3	5.517G	4	5.329G
5	5.704G	6	5.347G	7	5.262G	8	5.472G
9	5.650G	10	5.334G	11	5.256G	12	5.373G
13	5.524G	14	5.688G	15	5.520G	16	5.578G
17	5.670G	18	5.703G	19	5.590G	20	5.258G
21	5.533G	22	5.451G	23	5.420G	24	5.655G
25	5.432G	26	5.376G	27	5.565G	28	5.401G
29	5.279G	30	5.721G	31	5.596G	32	5.502G
33	5.593G	34	5.366G	35	5.706G	36	5.661G
37	5.452G	38	5.534G	39	5.701G	40	5.696G
41	5.389G	42	5.390G	43	5.589G	44	5.290G
45	5.343G	46	5.304G	47	5.416G	48	5.340G
49	5.620G	50	5.438G	51	5.539G	52	5.644G
53	5.417G	54	5.525G	55	5.277G	56	5.612G
57	5.266G	58	5.658G	59	5.388G	60	5.722G
61	5.442G	62	5.268G	63	5.713G	64	5.448G
65	5.395G	66	5.316G	67	5.720G	68	5.449G
69	5.536G	70	5.346G	71	5.481G	72	5.422G
73	5.588G	74	5.295G	75	5.653G	76	5.424G
77	5.254G	78	5.641G	79	5.561G	80	5.385G
81	5.483G	82	5.691G	83	5.307G	84	5.594G
85	5.702G	86	5.585G	87	5.271G	88	5.293G
89	5.338G	90	5.341G	91	5.457G	92	5.386G
93	5.602G	94	5.439G	95	5.484G	96	5.625G
97	5.700G	98	5.600G	99	5.716G	100	5.284G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_12							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.258G	2	5.713G	3	5.474G	4	5.666G
5	5.266G	6	5.318G	7	5.370G	8	5.259G
9	5.483G	10	5.500G	11	5.581G	12	5.602G
13	5.297G	14	5.388G	15	5.550G	16	5.264G
17	5.592G	18	5.492G	19	5.516G	20	5.286G
21	5.621G	22	5.422G	23	5.723G	24	5.468G
25	5.252G	26	5.478G	27	5.707G	28	5.390G
29	5.397G	30	5.340G	31	5.446G	32	5.350G
33	5.660G	34	5.502G	35	5.596G	36	5.373G
37	5.415G	38	5.632G	39	5.501G	40	5.580G
41	5.401G	42	5.271G	43	5.616G	44	5.611G
45	5.677G	46	5.309G	47	5.528G	48	5.262G
49	5.396G	50	5.671G	51	5.558G	52	5.465G
53	5.394G	54	5.564G	55	5.497G	56	5.299G
57	5.412G	58	5.456G	59	5.328G	60	5.283G
61	5.718G	62	5.546G	63	5.281G	64	5.290G
65	5.509G	66	5.517G	67	5.393G	68	5.645G
69	5.477G	70	5.717G	71	5.656G	72	5.541G
73	5.714G	74	5.400G	75	5.530G	76	5.505G
77	5.545G	78	5.440G	79	5.711G	80	5.641G
81	5.376G	82	5.346G	83	5.676G	84	5.590G
85	5.267G	86	5.421G	87	5.366G	88	5.658G
89	5.365G	90	5.323G	91	5.416G	92	5.697G
93	5.476G	94	5.522G	95	5.389G	96	5.504G
97	5.274G	98	5.496G	99	5.629G	100	5.696G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_13							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.635G	2	5.326G	3	5.462G	4	5.667G
5	5.411G	6	5.694G	7	5.546G	8	5.716G
9	5.272G	10	5.666G	11	5.509G	12	5.561G
13	5.700G	14	5.671G	15	5.444G	16	5.622G
17	5.625G	18	5.324G	19	5.619G	20	5.648G
21	5.629G	22	5.443G	23	5.664G	24	5.595G
25	5.520G	26	5.536G	27	5.724G	28	5.391G
29	5.328G	30	5.413G	31	5.608G	32	5.264G
33	5.645G	34	5.656G	35	5.570G	36	5.651G
37	5.486G	38	5.441G	39	5.465G	40	5.408G
41	5.688G	42	5.658G	43	5.414G	44	5.659G
45	5.717G	46	5.434G	47	5.374G	48	5.500G
49	5.452G	50	5.412G	51	5.590G	52	5.450G
53	5.401G	54	5.363G	55	5.686G	56	5.257G
57	5.668G	58	5.628G	59	5.315G	60	5.598G
61	5.672G	62	5.594G	63	5.457G	64	5.430G
65	5.538G	66	5.527G	67	5.369G	68	5.641G
69	5.254G	70	5.669G	71	5.485G	72	5.631G
73	5.380G	74	5.274G	75	5.342G	76	5.534G
77	5.540G	78	5.617G	79	5.567G	80	5.643G
81	5.568G	82	5.259G	83	5.657G	84	5.321G
85	5.565G	86	5.454G	87	5.627G	88	5.421G
89	5.703G	90	5.287G	91	5.665G	92	5.358G
93	5.461G	94	5.522G	95	5.300G	96	5.653G
97	5.574G	98	5.499G	99	5.715G	100	5.480G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_14							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.288G	2	5.513G	3	5.443G	4	5.548G
5	5.372G	6	5.636G	7	5.363G	8	5.704G
9	5.307G	10	5.671G	11	5.504G	12	5.432G
13	5.656G	14	5.570G	15	5.638G	16	5.466G
17	5.553G	18	5.644G	19	5.678G	20	5.301G
21	5.499G	22	5.367G	23	5.609G	24	5.370G
25	5.357G	26	5.633G	27	5.684G	28	5.591G
29	5.334G	30	5.373G	31	5.560G	32	5.342G
33	5.418G	34	5.492G	35	5.604G	36	5.502G
37	5.340G	38	5.642G	39	5.371G	40	5.324G
41	5.568G	42	5.612G	43	5.386G	44	5.599G
45	5.455G	46	5.615G	47	5.508G	48	5.595G
49	5.719G	50	5.446G	51	5.313G	52	5.687G
53	5.331G	54	5.412G	55	5.598G	56	5.338G
57	5.398G	58	5.697G	59	5.277G	60	5.314G
61	5.362G	62	5.637G	63	5.518G	64	5.622G
65	5.333G	66	5.490G	67	5.724G	68	5.590G
69	5.376G	70	5.453G	71	5.424G	72	5.478G
73	5.379G	74	5.496G	75	5.359G	76	5.689G
77	5.297G	78	5.317G	79	5.339G	80	5.295G
81	5.287G	82	5.584G	83	5.558G	84	5.326G
85	5.290G	86	5.407G	87	5.428G	88	5.516G
89	5.385G	90	5.346G	91	5.706G	92	5.436G
93	5.257G	94	5.355G	95	5.374G	96	5.349G
97	5.572G	98	5.515G	99	5.252G	100	5.544G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_15							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.698G	2	5.362G	3	5.523G	4	5.649G
5	5.261G	6	5.287G	7	5.363G	8	5.397G
9	5.674G	10	5.327G	11	5.434G	12	5.635G
13	5.648G	14	5.600G	15	5.695G	16	5.263G
17	5.610G	18	5.255G	19	5.421G	20	5.403G
21	5.455G	22	5.405G	23	5.320G	24	5.425G
25	5.329G	26	5.370G	27	5.335G	28	5.476G
29	5.702G	30	5.399G	31	5.679G	32	5.721G
33	5.547G	34	5.525G	35	5.669G	36	5.319G
37	5.304G	38	5.497G	39	5.446G	40	5.407G
41	5.288G	42	5.505G	43	5.706G	44	5.626G
45	5.464G	46	5.563G	47	5.531G	48	5.503G
49	5.435G	50	5.456G	51	5.637G	52	5.326G
53	5.316G	54	5.323G	55	5.572G	56	5.541G
57	5.428G	58	5.303G	59	5.512G	60	5.587G
61	5.638G	62	5.264G	63	5.606G	64	5.416G
65	5.500G	66	5.365G	67	5.289G	68	5.355G
69	5.618G	70	5.350G	71	5.369G	72	5.714G
73	5.650G	74	5.459G	75	5.285G	76	5.552G
77	5.666G	78	5.254G	79	5.580G	80	5.611G
81	5.703G	82	5.617G	83	5.307G	84	5.427G
85	5.325G	86	5.343G	87	5.354G	88	5.514G
89	5.450G	90	5.682G	91	5.373G	92	5.722G
93	5.593G	94	5.342G	95	5.592G	96	5.273G
97	5.504G	98	5.684G	99	5.311G	100	5.607G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_16							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.337G	2	5.394G	3	5.593G	4	5.452G
5	5.699G	6	5.406G	7	5.611G	8	5.359G
9	5.475G	10	5.316G	11	5.544G	12	5.398G
13	5.572G	14	5.621G	15	5.357G	16	5.306G
17	5.413G	18	5.255G	19	5.420G	20	5.576G
21	5.266G	22	5.443G	23	5.318G	24	5.524G
25	5.422G	26	5.405G	27	5.589G	28	5.335G
29	5.251G	30	5.383G	31	5.498G	32	5.714G
33	5.645G	34	5.557G	35	5.514G	36	5.527G
37	5.659G	38	5.473G	39	5.620G	40	5.605G
41	5.596G	42	5.367G	43	5.713G	44	5.499G
45	5.573G	46	5.283G	47	5.442G	48	5.508G
49	5.549G	50	5.304G	51	5.455G	52	5.275G
53	5.439G	54	5.492G	55	5.661G	56	5.414G
57	5.447G	58	5.257G	59	5.446G	60	5.294G
61	5.295G	62	5.515G	63	5.291G	64	5.698G
65	5.657G	66	5.553G	67	5.682G	68	5.644G
69	5.590G	70	5.385G	71	5.418G	72	5.501G
73	5.340G	74	5.625G	75	5.347G	76	5.631G
77	5.701G	78	5.426G	79	5.360G	80	5.313G
81	5.569G	82	5.349G	83	5.407G	84	5.580G
85	5.305G	86	5.384G	87	5.326G	88	5.672G
89	5.362G	90	5.719G	91	5.483G	92	5.345G
93	5.416G	94	5.352G	95	5.697G	96	5.504G
97	5.321G	98	5.503G	99	5.517G	100	5.451G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_17							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.708G	2	5.560G	3	5.492G	4	5.573G
5	5.290G	6	5.624G	7	5.457G	8	5.542G
9	5.546G	10	5.476G	11	5.575G	12	5.490G
13	5.326G	14	5.641G	15	5.303G	16	5.677G
17	5.679G	18	5.511G	19	5.636G	20	5.544G
21	5.588G	22	5.325G	23	5.253G	24	5.252G
25	5.685G	26	5.497G	27	5.433G	28	5.259G
29	5.656G	30	5.336G	31	5.621G	32	5.716G
33	5.625G	34	5.597G	35	5.616G	36	5.455G
37	5.611G	38	5.334G	39	5.669G	40	5.606G
41	5.375G	42	5.373G	43	5.363G	44	5.534G
45	5.682G	46	5.338G	47	5.594G	48	5.578G
49	5.399G	50	5.698G	51	5.592G	52	5.591G
53	5.415G	54	5.324G	55	5.595G	56	5.434G
57	5.638G	58	5.585G	59	5.308G	60	5.293G
61	5.416G	62	5.705G	63	5.437G	64	5.458G
65	5.454G	66	5.648G	67	5.613G	68	5.459G
69	5.602G	70	5.521G	71	5.318G	72	5.649G
73	5.328G	74	5.517G	75	5.574G	76	5.404G
77	5.274G	78	5.644G	79	5.627G	80	5.711G
81	5.647G	82	5.643G	83	5.513G	84	5.540G
85	5.286G	86	5.289G	87	5.654G	88	5.442G
89	5.414G	90	5.344G	91	5.383G	92	5.489G
93	5.530G	94	5.448G	95	5.257G	96	5.583G
97	5.714G	98	5.668G	99	5.360G	100	5.603G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_18							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.444G	2	5.525G	3	5.627G	4	5.722G
5	5.543G	6	5.700G	7	5.559G	8	5.314G
9	5.549G	10	5.352G	11	5.672G	12	5.515G
13	5.536G	14	5.365G	15	5.370G	16	5.399G
17	5.294G	18	5.453G	19	5.463G	20	5.448G
21	5.261G	22	5.703G	23	5.541G	24	5.350G
25	5.634G	26	5.589G	27	5.464G	28	5.566G
29	5.427G	30	5.251G	31	5.695G	32	5.361G
33	5.498G	34	5.434G	35	5.527G	36	5.592G
37	5.633G	38	5.451G	39	5.659G	40	5.688G
41	5.628G	42	5.720G	43	5.542G	44	5.611G
45	5.687G	46	5.481G	47	5.377G	48	5.503G
49	5.562G	50	5.674G	51	5.274G	52	5.582G
53	5.359G	54	5.420G	55	5.577G	56	5.621G
57	5.699G	58	5.557G	59	5.439G	60	5.344G
61	5.426G	62	5.349G	63	5.328G	64	5.617G
65	5.517G	66	5.416G	67	5.469G	68	5.402G
69	5.342G	70	5.335G	71	5.714G	72	5.313G
73	5.321G	74	5.276G	75	5.457G	76	5.323G
77	5.407G	78	5.670G	79	5.529G	80	5.540G
81	5.477G	82	5.711G	83	5.641G	84	5.285G
85	5.588G	86	5.412G	87	5.418G	88	5.678G
89	5.394G	90	5.369G	91	5.258G	92	5.296G
93	5.301G	94	5.535G	95	5.660G	96	5.254G
97	5.256G	98	5.492G	99	5.398G	100	5.334G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_19							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.489G	2	5.505G	3	5.688G	4	5.599G
5	5.477G	6	5.395G	7	5.644G	8	5.459G
9	5.316G	10	5.668G	11	5.296G	12	5.466G
13	5.257G	14	5.690G	15	5.491G	16	5.453G
17	5.387G	18	5.504G	19	5.361G	20	5.717G
21	5.288G	22	5.379G	23	5.430G	24	5.305G
25	5.663G	26	5.539G	27	5.270G	28	5.619G
29	5.662G	30	5.499G	31	5.414G	32	5.347G
33	5.701G	34	5.513G	35	5.642G	36	5.349G
37	5.639G	38	5.626G	39	5.451G	40	5.627G
41	5.468G	42	5.679G	43	5.714G	44	5.617G
45	5.251G	46	5.458G	47	5.333G	48	5.315G
49	5.683G	50	5.339G	51	5.718G	52	5.416G
53	5.571G	54	5.272G	55	5.587G	56	5.424G
57	5.312G	58	5.274G	59	5.519G	60	5.454G
61	5.334G	62	5.533G	63	5.694G	64	5.389G
65	5.549G	66	5.393G	67	5.294G	68	5.367G
69	5.703G	70	5.680G	71	5.405G	72	5.686G
73	5.284G	74	5.498G	75	5.422G	76	5.440G
77	5.437G	78	5.362G	79	5.433G	80	5.695G
81	5.574G	82	5.485G	83	5.629G	84	5.467G
85	5.582G	86	5.278G	87	5.377G	88	5.573G
89	5.604G	90	5.562G	91	5.350G	92	5.302G
93	5.320G	94	5.262G	95	5.588G	96	5.579G
97	5.667G	98	5.659G	99	5.635G	100	5.419G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_20							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.539G	2	5.682G	3	5.663G	4	5.315G
5	5.470G	6	5.363G	7	5.674G	8	5.580G
9	5.648G	10	5.373G	11	5.385G	12	5.665G
13	5.345G	14	5.653G	15	5.358G	16	5.444G
17	5.410G	18	5.364G	19	5.396G	20	5.336G
21	5.250G	22	5.645G	23	5.636G	24	5.581G
25	5.325G	26	5.451G	27	5.264G	28	5.519G
29	5.276G	30	5.466G	31	5.467G	32	5.522G
33	5.508G	34	5.584G	35	5.593G	36	5.576G
37	5.660G	38	5.350G	39	5.689G	40	5.281G
41	5.437G	42	5.313G	43	5.607G	44	5.429G
45	5.683G	46	5.718G	47	5.612G	48	5.562G
49	5.491G	50	5.587G	51	5.594G	52	5.380G
53	5.412G	54	5.270G	55	5.716G	56	5.344G
57	5.474G	58	5.617G	59	5.324G	60	5.556G
61	5.277G	62	5.355G	63	5.460G	64	5.367G
65	5.343G	66	5.393G	67	5.538G	68	5.600G
69	5.628G	70	5.521G	71	5.679G	72	5.543G
73	5.557G	74	5.541G	75	5.293G	76	5.497G
77	5.542G	78	5.650G	79	5.694G	80	5.260G
81	5.330G	82	5.449G	83	5.695G	84	5.427G
85	5.479G	86	5.473G	87	5.626G	88	5.644G
89	5.327G	90	5.485G	91	5.390G	92	5.301G
93	5.302G	94	5.545G	95	5.374G	96	5.386G
97	5.476G	98	5.305G	99	5.558G	100	5.275G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_21							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.579G	2	5.552G	3	5.366G	4	5.374G
5	5.259G	6	5.529G	7	5.686G	8	5.554G
9	5.527G	10	5.369G	11	5.455G	12	5.381G
13	5.683G	14	5.448G	15	5.597G	16	5.475G
17	5.408G	18	5.270G	19	5.556G	20	5.279G
21	5.445G	22	5.416G	23	5.673G	24	5.667G
25	5.602G	26	5.310G	27	5.670G	28	5.371G
29	5.680G	30	5.649G	31	5.449G	32	5.272G
33	5.513G	34	5.418G	35	5.289G	36	5.452G
37	5.619G	38	5.701G	39	5.439G	40	5.387G
41	5.613G	42	5.461G	43	5.616G	44	5.298G
45	5.349G	46	5.675G	47	5.672G	48	5.515G
49	5.318G	50	5.498G	51	5.331G	52	5.431G
53	5.342G	54	5.480G	55	5.553G	56	5.301G
57	5.620G	58	5.325G	59	5.660G	60	5.580G
61	5.638G	62	5.589G	63	5.511G	64	5.314G
65	5.618G	66	5.522G	67	5.256G	68	5.547G
69	5.537G	70	5.472G	71	5.517G	72	5.384G
73	5.703G	74	5.278G	75	5.260G	76	5.665G
77	5.324G	78	5.388G	79	5.340G	80	5.354G
81	5.332G	82	5.490G	83	5.446G	84	5.542G
85	5.609G	86	5.474G	87	5.704G	88	5.583G
89	5.290G	90	5.286G	91	5.606G	92	5.694G
93	5.261G	94	5.359G	95	5.652G	96	5.722G
97	5.424G	98	5.322G	99	5.628G	100	5.546G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_22							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.515G	2	5.470G	3	5.313G	4	5.547G
5	5.321G	6	5.565G	7	5.602G	8	5.316G
9	5.374G	10	5.658G	11	5.292G	12	5.459G
13	5.458G	14	5.305G	15	5.605G	16	5.525G
17	5.472G	18	5.307G	19	5.296G	20	5.256G
21	5.566G	22	5.448G	23	5.570G	24	5.641G
25	5.597G	26	5.409G	27	5.668G	28	5.511G
29	5.499G	30	5.343G	31	5.342G	32	5.519G
33	5.320G	34	5.715G	35	5.559G	36	5.282G
37	5.484G	38	5.578G	39	5.604G	40	5.509G
41	5.673G	42	5.571G	43	5.455G	44	5.364G
45	5.584G	46	5.280G	47	5.410G	48	5.451G
49	5.450G	50	5.645G	51	5.661G	52	5.638G
53	5.386G	54	5.462G	55	5.510G	56	5.279G
57	5.554G	58	5.438G	59	5.425G	60	5.344G
61	5.550G	62	5.568G	63	5.435G	64	5.271G
65	5.693G	66	5.396G	67	5.520G	68	5.496G
69	5.352G	70	5.454G	71	5.548G	72	5.705G
73	5.315G	74	5.362G	75	5.664G	76	5.656G
77	5.337G	78	5.355G	79	5.447G	80	5.415G
81	5.270G	82	5.263G	83	5.489G	84	5.260G
85	5.428G	86	5.657G	87	5.422G	88	5.449G
89	5.633G	90	5.517G	91	5.466G	92	5.716G
93	5.581G	94	5.601G	95	5.564G	96	5.310G
97	5.445G	98	5.514G	99	5.698G	100	5.582G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_23							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.256G	2	5.670G	3	5.509G	4	5.717G
5	5.549G	6	5.687G	7	5.569G	8	5.590G
9	5.345G	10	5.685G	11	5.679G	12	5.252G
13	5.456G	14	5.644G	15	5.356G	16	5.321G
17	5.671G	18	5.361G	19	5.490G	20	5.388G
21	5.439G	22	5.603G	23	5.258G	24	5.715G
25	5.342G	26	5.578G	27	5.542G	28	5.686G
29	5.275G	30	5.382G	31	5.385G	32	5.358G
33	5.280G	34	5.503G	35	5.702G	36	5.633G
37	5.631G	38	5.458G	39	5.511G	40	5.407G
41	5.259G	42	5.434G	43	5.272G	44	5.683G
45	5.481G	46	5.442G	47	5.431G	48	5.576G
49	5.658G	50	5.440G	51	5.370G	52	5.643G
53	5.501G	54	5.695G	55	5.700G	56	5.375G
57	5.369G	58	5.276G	59	5.334G	60	5.372G
61	5.291G	62	5.274G	63	5.519G	64	5.354G
65	5.564G	66	5.678G	67	5.555G	68	5.309G
69	5.616G	70	5.666G	71	5.413G	72	5.619G
73	5.724G	74	5.622G	75	5.470G	76	5.484G
77	5.436G	78	5.690G	79	5.598G	80	5.261G
81	5.525G	82	5.491G	83	5.600G	84	5.502G
85	5.406G	86	5.279G	87	5.597G	88	5.469G
89	5.721G	90	5.517G	91	5.462G	92	5.640G
93	5.479G	94	5.416G	95	5.297G	96	5.489G
97	5.706G	98	5.657G	99	5.468G	100	5.629G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_24							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.265G	2	5.472G	3	5.405G	4	5.333G
5	5.313G	6	5.535G	7	5.259G	8	5.613G
9	5.715G	10	5.509G	11	5.276G	12	5.380G
13	5.508G	14	5.548G	15	5.281G	16	5.675G
17	5.611G	18	5.373G	19	5.591G	20	5.439G
21	5.600G	22	5.679G	23	5.390G	24	5.519G
25	5.374G	26	5.498G	27	5.544G	28	5.628G
29	5.621G	30	5.655G	31	5.563G	32	5.442G
33	5.633G	34	5.328G	35	5.565G	36	5.691G
37	5.263G	38	5.706G	39	5.420G	40	5.666G
41	5.674G	42	5.724G	43	5.418G	44	5.394G
45	5.520G	46	5.251G	47	5.427G	48	5.606G
49	5.559G	50	5.309G	51	5.492G	52	5.531G
53	5.462G	54	5.409G	55	5.564G	56	5.358G
57	5.580G	58	5.250G	59	5.578G	60	5.505G
61	5.570G	62	5.370G	63	5.667G	64	5.624G
65	5.714G	66	5.530G	67	5.363G	68	5.546G
69	5.387G	70	5.639G	71	5.511G	72	5.471G
73	5.623G	74	5.656G	75	5.260G	76	5.549G
77	5.513G	78	5.604G	79	5.597G	80	5.386G
81	5.682G	82	5.291G	83	5.469G	84	5.470G
85	5.644G	86	5.376G	87	5.453G	88	5.642G
89	5.422G	90	5.297G	91	5.458G	92	5.398G
93	5.372G	94	5.480G	95	5.523G	96	5.662G
97	5.426G	98	5.515G	99	5.396G	100	5.476G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_25							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.424G	2	5.459G	3	5.515G	4	5.617G
5	5.342G	6	5.393G	7	5.286G	8	5.333G
9	5.433G	10	5.498G	11	5.691G	12	5.663G
13	5.685G	14	5.268G	15	5.273G	16	5.624G
17	5.446G	18	5.371G	19	5.667G	20	5.325G
21	5.327G	22	5.280G	23	5.587G	24	5.267G
25	5.707G	26	5.263G	27	5.259G	28	5.512G
29	5.558G	30	5.384G	31	5.331G	32	5.436G
33	5.639G	34	5.301G	35	5.323G	36	5.406G
37	5.299G	38	5.255G	39	5.480G	40	5.671G
41	5.627G	42	5.368G	43	5.615G	44	5.660G
45	5.566G	46	5.391G	47	5.427G	48	5.688G
49	5.706G	50	5.568G	51	5.599G	52	5.285G
53	5.381G	54	5.513G	55	5.573G	56	5.479G
57	5.542G	58	5.702G	59	5.335G	60	5.295G
61	5.548G	62	5.348G	63	5.442G	64	5.721G
65	5.553G	66	5.279G	67	5.693G	68	5.250G
69	5.430G	70	5.417G	71	5.612G	72	5.722G
73	5.569G	74	5.440G	75	5.426G	76	5.634G
77	5.438G	78	5.575G	79	5.420G	80	5.444G
81	5.680G	82	5.264G	83	5.579G	84	5.698G
85	5.645G	86	5.626G	87	5.604G	88	5.508G
89	5.354G	90	5.289G	91	5.489G	92	5.608G
93	5.353G	94	5.718G	95	5.661G	96	5.504G
97	5.720G	98	5.620G	99	5.589G	100	5.577G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_26							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.593G	2	5.694G	3	5.455G	4	5.528G
5	5.346G	6	5.330G	7	5.521G	8	5.477G
9	5.655G	10	5.704G	11	5.327G	12	5.324G
13	5.351G	14	5.403G	15	5.321G	16	5.650G
17	5.394G	18	5.382G	19	5.516G	20	5.414G
21	5.495G	22	5.490G	23	5.370G	24	5.537G
25	5.369G	26	5.527G	27	5.513G	28	5.480G
29	5.680G	30	5.576G	31	5.274G	32	5.306G
33	5.648G	34	5.673G	35	5.456G	36	5.683G
37	5.284G	38	5.448G	39	5.428G	40	5.641G
41	5.395G	42	5.530G	43	5.442G	44	5.289G
45	5.546G	46	5.572G	47	5.618G	48	5.261G
49	5.367G	50	5.575G	51	5.699G	52	5.459G
53	5.703G	54	5.489G	55	5.396G	56	5.269G
57	5.410G	58	5.702G	59	5.276G	60	5.685G
61	5.533G	62	5.531G	63	5.625G	64	5.486G
65	5.425G	66	5.338G	67	5.389G	68	5.294G
69	5.652G	70	5.675G	71	5.465G	72	5.250G
73	5.293G	74	5.631G	75	5.491G	76	5.333G
77	5.472G	78	5.712G	79	5.354G	80	5.251G
81	5.627G	82	5.431G	83	5.586G	84	5.340G
85	5.426G	86	5.281G	87	5.500G	88	5.362G
89	5.297G	90	5.430G	91	5.718G	92	5.406G
93	5.566G	94	5.654G	95	5.706G	96	5.419G
97	5.574G	98	5.554G	99	5.502G	100	5.639G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_27							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.389G	2	5.455G	3	5.417G	4	5.707G
5	5.367G	6	5.600G	7	5.415G	8	5.273G
9	5.450G	10	5.532G	11	5.689G	12	5.536G
13	5.674G	14	5.528G	15	5.278G	16	5.534G
17	5.664G	18	5.355G	19	5.692G	20	5.473G
21	5.281G	22	5.252G	23	5.631G	24	5.489G
25	5.654G	26	5.564G	27	5.328G	28	5.541G
29	5.362G	30	5.350G	31	5.268G	32	5.621G
33	5.592G	34	5.715G	35	5.334G	36	5.352G
37	5.614G	38	5.323G	39	5.716G	40	5.438G
41	5.384G	42	5.424G	43	5.693G	44	5.292G
45	5.327G	46	5.522G	47	5.691G	48	5.351G
49	5.259G	50	5.597G	51	5.679G	52	5.378G
53	5.481G	54	5.571G	55	5.568G	56	5.537G
57	5.482G	58	5.698G	59	5.589G	60	5.559G
61	5.338G	62	5.663G	63	5.539G	64	5.551G
65	5.365G	66	5.388G	67	5.345G	68	5.454G
69	5.590G	70	5.251G	71	5.514G	72	5.639G
73	5.519G	74	5.293G	75	5.680G	76	5.385G
77	5.433G	78	5.498G	79	5.517G	80	5.570G
81	5.463G	82	5.566G	83	5.276G	84	5.456G
85	5.321G	86	5.658G	87	5.583G	88	5.318G
89	5.462G	90	5.608G	91	5.442G	92	5.586G
93	5.666G	94	5.618G	95	5.622G	96	5.558G
97	5.722G	98	5.704G	99	5.410G	100	5.687G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_28							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.397G	2	5.580G	3	5.263G	4	5.372G
5	5.652G	6	5.643G	7	5.637G	8	5.296G
9	5.612G	10	5.537G	11	5.627G	12	5.412G
13	5.549G	14	5.408G	15	5.463G	16	5.476G
17	5.316G	18	5.503G	19	5.401G	20	5.370G
21	5.301G	22	5.326G	23	5.661G	24	5.695G
25	5.430G	26	5.576G	27	5.707G	28	5.466G
29	5.273G	30	5.363G	31	5.691G	32	5.276G
33	5.670G	34	5.540G	35	5.459G	36	5.578G
37	5.653G	38	5.433G	39	5.332G	40	5.562G
41	5.671G	42	5.704G	43	5.681G	44	5.470G
45	5.680G	46	5.565G	47	5.462G	48	5.596G
49	5.604G	50	5.304G	51	5.359G	52	5.638G
53	5.299G	54	5.394G	55	5.531G	56	5.250G
57	5.684G	58	5.461G	59	5.272G	60	5.356G
61	5.650G	62	5.720G	63	5.564G	64	5.333G
65	5.473G	66	5.364G	67	5.436G	68	5.550G
69	5.662G	70	5.566G	71	5.523G	72	5.629G
73	5.717G	74	5.308G	75	5.495G	76	5.711G
77	5.539G	78	5.548G	79	5.416G	80	5.706G
81	5.411G	82	5.635G	83	5.709G	84	5.655G
85	5.475G	86	5.352G	87	5.390G	88	5.527G
89	5.640G	90	5.317G	91	5.679G	92	5.398G
93	5.252G	94	5.264G	95	5.509G	96	5.641G
97	5.300G	98	5.624G	99	5.719G	100	5.587G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_29							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.411G	2	5.711G	3	5.491G	4	5.348G
5	5.296G	6	5.351G	7	5.373G	8	5.661G
9	5.464G	10	5.522G	11	5.604G	12	5.678G
13	5.426G	14	5.354G	15	5.532G	16	5.595G
17	5.392G	18	5.254G	19	5.455G	20	5.429G
21	5.616G	22	5.357G	23	5.347G	24	5.619G
25	5.266G	26	5.714G	27	5.458G	28	5.379G
29	5.297G	30	5.399G	31	5.291G	32	5.529G
33	5.536G	34	5.559G	35	5.710G	36	5.587G
37	5.424G	38	5.651G	39	5.675G	40	5.440G
41	5.558G	42	5.381G	43	5.311G	44	5.495G
45	5.705G	46	5.523G	47	5.550G	48	5.691G
49	5.583G	50	5.605G	51	5.445G	52	5.331G
53	5.481G	54	5.478G	55	5.497G	56	5.408G
57	5.314G	58	5.664G	59	5.425G	60	5.467G
61	5.352G	62	5.712G	63	5.465G	64	5.645G
65	5.565G	66	5.310G	67	5.304G	68	5.656G
69	5.706G	70	5.253G	71	5.666G	72	5.567G
73	5.688G	74	5.640G	75	5.546G	76	5.435G
77	5.282G	78	5.686G	79	5.355G	80	5.519G
81	5.590G	82	5.719G	83	5.715G	84	5.356G
85	5.637G	86	5.490G	87	5.499G	88	5.405G
89	5.632G	90	5.396G	91	5.643G	92	5.391G
93	5.593G	94	5.466G	95	5.603G	96	5.721G
97	5.438G	98	5.448G	99	5.477G	100	5.650G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_30							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.283G	2	5.273G	3	5.694G	4	5.682G
5	5.628G	6	5.492G	7	5.297G	8	5.688G
9	5.664G	10	5.674G	11	5.546G	12	5.300G
13	5.397G	14	5.670G	15	5.514G	16	5.669G
17	5.258G	18	5.450G	19	5.582G	20	5.295G
21	5.543G	22	5.503G	23	5.257G	24	5.484G
25	5.310G	26	5.458G	27	5.438G	28	5.517G
29	5.432G	30	5.368G	31	5.328G	32	5.355G
33	5.578G	34	5.348G	35	5.672G	36	5.512G
37	5.690G	38	5.550G	39	5.426G	40	5.308G
41	5.389G	42	5.615G	43	5.574G	44	5.697G
45	5.473G	46	5.603G	47	5.296G	48	5.307G
49	5.261G	50	5.256G	51	5.708G	52	5.395G
53	5.643G	54	5.719G	55	5.524G	56	5.544G
57	5.336G	58	5.413G	59	5.600G	60	5.394G
61	5.676G	62	5.481G	63	5.532G	64	5.637G
65	5.392G	66	5.612G	67	5.634G	68	5.414G
69	5.642G	70	5.418G	71	5.702G	72	5.479G
73	5.519G	74	5.486G	75	5.610G	76	5.535G
77	5.346G	78	5.489G	79	5.321G	80	5.667G
81	5.596G	82	5.293G	83	5.334G	84	5.491G
85	5.679G	86	5.399G	87	5.528G	88	5.508G
89	5.718G	90	5.430G	91	5.364G	92	5.274G
93	5.374G	94	5.445G	95	5.646G	96	5.547G
97	5.356G	98	5.520G	99	5.668G	100	5.309G

IEEE 802.11n (40MHz)

Type 6 Radar Statistical Performances		
Trial #	Hopping Frequency Sequence Name	Detection
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
		Detection Rate: 100.0 %

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_01							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.265G	2	5.649G	3	5.685G	4	5.443G
5	5.251G	6	5.478G	7	5.683G	8	5.688G
9	5.364G	10	5.678G	11	5.514G	12	5.707G
13	5.467G	14	5.273G	15	5.695G	16	5.521G
17	5.584G	18	5.322G	19	5.394G	20	5.373G
21	5.595G	22	5.272G	23	5.259G	24	5.607G
25	5.388G	26	5.287G	27	5.682G	28	5.431G
29	5.456G	30	5.455G	31	5.599G	32	5.274G
33	5.610G	34	5.629G	35	5.402G	36	5.590G
37	5.630G	38	5.289G	39	5.350G	40	5.633G
41	5.670G	42	5.625G	43	5.547G	44	5.560G
45	5.520G	46	5.317G	47	5.266G	48	5.477G
49	5.459G	50	5.706G	51	5.540G	52	5.662G
53	5.413G	54	5.386G	55	5.258G	56	5.716G
57	5.507G	58	5.634G	59	5.674G	60	5.485G
61	5.353G	62	5.434G	63	5.624G	64	5.661G
65	5.681G	66	5.314G	67	5.476G	68	5.687G
69	5.466G	70	5.572G	71	5.631G	72	5.558G
73	5.382G	74	5.646G	75	5.307G	76	5.713G
77	5.597G	78	5.561G	79	5.565G	80	5.328G
81	5.468G	82	5.338G	83	5.489G	84	5.336G
85	5.673G	86	5.444G	87	5.493G	88	5.496G
89	5.677G	90	5.284G	91	5.327G	92	5.341G
93	5.492G	94	5.268G	95	5.577G	96	5.440G
97	5.472G	98	5.319G	99	5.723G	100	5.435G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_02							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.387G	2	5.369G	3	5.615G	4	5.705G
5	5.642G	6	5.563G	7	5.379G	8	5.528G
9	5.378G	10	5.376G	11	5.689G	12	5.560G
13	5.354G	14	5.263G	15	5.299G	16	5.407G
17	5.526G	18	5.425G	19	5.340G	20	5.404G
21	5.701G	22	5.630G	23	5.430G	24	5.349G
25	5.336G	26	5.401G	27	5.464G	28	5.316G
29	5.684G	30	5.417G	31	5.324G	32	5.377G
33	5.275G	34	5.485G	35	5.265G	36	5.508G
37	5.566G	38	5.451G	39	5.306G	40	5.698G
41	5.495G	42	5.270G	43	5.542G	44	5.312G
45	5.391G	46	5.649G	47	5.687G	48	5.496G
49	5.432G	50	5.342G	51	5.532G	52	5.580G
53	5.622G	54	5.322G	55	5.431G	56	5.438G
57	5.458G	58	5.513G	59	5.374G	60	5.559G
61	5.656G	62	5.283G	63	5.612G	64	5.285G
65	5.380G	66	5.356G	67	5.350G	68	5.504G
69	5.564G	70	5.697G	71	5.702G	72	5.415G
73	5.434G	74	5.645G	75	5.413G	76	5.568G
77	5.368G	78	5.288G	79	5.503G	80	5.445G
81	5.362G	82	5.291G	83	5.385G	84	5.315G
85	5.677G	86	5.577G	87	5.624G	88	5.574G
89	5.660G	90	5.289G	91	5.486G	92	5.339G
93	5.598G	94	5.474G	95	5.256G	96	5.583G
97	5.602G	98	5.681G	99	5.718G	100	5.277G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_03							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.571G	2	5.423G	3	5.322G	4	5.283G
5	5.316G	6	5.399G	7	5.689G	8	5.278G
9	5.467G	10	5.429G	11	5.332G	12	5.442G
13	5.594G	14	5.505G	15	5.517G	16	5.455G
17	5.294G	18	5.619G	19	5.690G	20	5.561G
21	5.532G	22	5.681G	23	5.500G	24	5.320G
25	5.552G	26	5.327G	27	5.306G	28	5.471G
29	5.651G	30	5.277G	31	5.553G	32	5.518G
33	5.705G	34	5.605G	35	5.359G	36	5.470G
37	5.480G	38	5.655G	39	5.314G	40	5.663G
41	5.662G	42	5.450G	43	5.368G	44	5.549G
45	5.329G	46	5.607G	47	5.379G	48	5.494G
49	5.572G	50	5.280G	51	5.254G	52	5.263G
53	5.600G	54	5.696G	55	5.296G	56	5.376G
57	5.252G	58	5.596G	59	5.297G	60	5.632G
61	5.556G	62	5.462G	63	5.346G	64	5.293G
65	5.362G	66	5.364G	67	5.414G	68	5.524G
69	5.723G	70	5.602G	71	5.512G	72	5.281G
73	5.691G	74	5.457G	75	5.514G	76	5.633G
77	5.453G	78	5.501G	79	5.531G	80	5.279G
81	5.337G	82	5.341G	83	5.569G	84	5.665G
85	5.269G	86	5.374G	87	5.508G	88	5.627G
89	5.618G	90	5.542G	91	5.661G	92	5.389G
93	5.435G	94	5.720G	95	5.342G	96	5.682G
97	5.694G	98	5.499G	99	5.566G	100	5.638G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_04							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.369G	2	5.672G	3	5.717G	4	5.351G
5	5.283G	6	5.654G	7	5.677G	8	5.697G
9	5.652G	10	5.453G	11	5.593G	12	5.653G
13	5.404G	14	5.415G	15	5.584G	16	5.428G
17	5.556G	18	5.430G	19	5.573G	20	5.368G
21	5.597G	22	5.694G	23	5.447G	24	5.676G
25	5.495G	26	5.408G	27	5.400G	28	5.529G
29	5.460G	30	5.358G	31	5.674G	32	5.588G
33	5.252G	34	5.689G	35	5.250G	36	5.275G
37	5.450G	38	5.669G	39	5.393G	40	5.345G
41	5.603G	42	5.625G	43	5.376G	44	5.396G
45	5.662G	46	5.395G	47	5.267G	48	5.623G
49	5.260G	50	5.439G	51	5.528G	52	5.457G
53	5.403G	54	5.410G	55	5.557G	56	5.371G
57	5.443G	58	5.548G	59	5.261G	60	5.352G
61	5.598G	62	5.708G	63	5.382G	64	5.353G
65	5.564G	66	5.342G	67	5.684G	68	5.266G
69	5.713G	70	5.310G	71	5.578G	72	5.565G
73	5.563G	74	5.441G	75	5.711G	76	5.475G
77	5.290G	78	5.412G	79	5.519G	80	5.299G
81	5.350G	82	5.632G	83	5.378G	84	5.579G
85	5.471G	86	5.670G	87	5.391G	88	5.637G
89	5.271G	90	5.344G	91	5.607G	92	5.608G
93	5.370G	94	5.539G	95	5.485G	96	5.329G
97	5.407G	98	5.667G	99	5.599G	100	5.399G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_05							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.663G	2	5.691G	3	5.277G	4	5.701G
5	5.343G	6	5.542G	7	5.435G	8	5.614G
9	5.257G	10	5.252G	11	5.276G	12	5.707G
13	5.470G	14	5.485G	15	5.423G	16	5.669G
17	5.625G	18	5.359G	19	5.443G	20	5.260G
21	5.684G	22	5.487G	23	5.329G	24	5.661G
25	5.476G	26	5.693G	27	5.511G	28	5.636G
29	5.351G	30	5.641G	31	5.320G	32	5.541G
33	5.722G	34	5.532G	35	5.611G	36	5.567G
37	5.643G	38	5.378G	39	5.672G	40	5.550G
41	5.559G	42	5.436G	43	5.348G	44	5.313G
45	5.606G	46	5.259G	47	5.451G	48	5.600G
49	5.285G	50	5.308G	51	5.705G	52	5.357G
53	5.490G	54	5.255G	55	5.274G	56	5.297G
57	5.621G	58	5.633G	59	5.582G	60	5.467G
61	5.577G	62	5.695G	63	5.358G	64	5.593G
65	5.379G	66	5.558G	67	5.415G	68	5.381G
69	5.534G	70	5.426G	71	5.680G	72	5.519G
73	5.265G	74	5.251G	75	5.506G	76	5.609G
77	5.344G	78	5.552G	79	5.454G	80	5.402G
81	5.303G	82	5.311G	83	5.439G	84	5.510G
85	5.416G	86	5.505G	87	5.677G	88	5.591G
89	5.466G	90	5.676G	91	5.713G	92	5.376G
93	5.411G	94	5.432G	95	5.338G	96	5.278G
97	5.346G	98	5.444G	99	5.477G	100	5.720G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_06							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.627G	2	5.312G	3	5.587G	4	5.347G
5	5.580G	6	5.682G	7	5.611G	8	5.271G
9	5.712G	10	5.461G	11	5.568G	12	5.376G
13	5.410G	14	5.495G	15	5.369G	16	5.355G
17	5.298G	18	5.454G	19	5.450G	20	5.694G
21	5.391G	22	5.460G	23	5.621G	24	5.507G
25	5.439G	26	5.433G	27	5.529G	28	5.468G
29	5.683G	30	5.560G	31	5.687G	32	5.428G
33	5.438G	34	5.466G	35	5.494G	36	5.447G
37	5.255G	38	5.259G	39	5.380G	40	5.600G
41	5.616G	42	5.404G	43	5.521G	44	5.363G
45	5.386G	46	5.633G	47	5.358G	48	5.264G
49	5.323G	50	5.399G	51	5.366G	52	5.610G
53	5.540G	54	5.596G	55	5.551G	56	5.671G
57	5.550G	58	5.427G	59	5.250G	60	5.327G
61	5.339G	62	5.378G	63	5.486G	64	5.723G
65	5.405G	66	5.691G	67	5.476G	68	5.364G
69	5.414G	70	5.588G	71	5.699G	72	5.566G
73	5.622G	74	5.307G	75	5.534G	76	5.432G
77	5.605G	78	5.340G	79	5.470G	80	5.637G
81	5.614G	82	5.543G	83	5.422G	84	5.419G
85	5.443G	86	5.417G	87	5.703G	88	5.603G
89	5.553G	90	5.644G	91	5.350G	92	5.641G
93	5.452G	94	5.547G	95	5.464G	96	5.513G
97	5.317G	98	5.630G	99	5.277G	100	5.659G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_07							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.663G	2	5.374G	3	5.418G	4	5.417G
5	5.309G	6	5.546G	7	5.544G	8	5.671G
9	5.371G	10	5.281G	11	5.430G	12	5.495G
13	5.365G	14	5.279G	15	5.254G	16	5.612G
17	5.448G	18	5.391G	19	5.598G	20	5.539G
21	5.628G	22	5.550G	23	5.570G	24	5.412G
25	5.646G	26	5.538G	27	5.487G	28	5.549G
29	5.708G	30	5.415G	31	5.609G	32	5.267G
33	5.308G	34	5.375G	35	5.493G	36	5.352G
37	5.423G	38	5.276G	39	5.492G	40	5.465G
41	5.414G	42	5.715G	43	5.543G	44	5.498G
45	5.298G	46	5.676G	47	5.719G	48	5.345G
49	5.294G	50	5.315G	51	5.455G	52	5.589G
53	5.392G	54	5.647G	55	5.299G	56	5.258G
57	5.600G	58	5.520G	59	5.556G	60	5.436G
61	5.714G	62	5.270G	63	5.607G	64	5.664G
65	5.353G	66	5.410G	67	5.404G	68	5.452G
69	5.443G	70	5.524G	71	5.330G	72	5.446G
73	5.286G	74	5.555G	75	5.686G	76	5.642G
77	5.338G	78	5.572G	79	5.633G	80	5.479G
81	5.467G	82	5.366G	83	5.360G	84	5.470G
85	5.288G	86	5.441G	87	5.456G	88	5.649G
89	5.261G	90	5.666G	91	5.603G	92	5.269G
93	5.307G	94	5.316G	95	5.449G	96	5.623G
97	5.519G	98	5.515G	99	5.447G	100	5.503G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_08							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.379G	2	5.674G	3	5.566G	4	5.300G
5	5.545G	6	5.704G	7	5.550G	8	5.288G
9	5.446G	10	5.317G	11	5.394G	12	5.334G
13	5.589G	14	5.658G	15	5.685G	16	5.475G
17	5.605G	18	5.722G	19	5.573G	20	5.398G
21	5.357G	22	5.341G	23	5.285G	24	5.271G
25	5.457G	26	5.384G	27	5.584G	28	5.599G
29	5.670G	30	5.586G	31	5.422G	32	5.434G
33	5.648G	34	5.523G	35	5.512G	36	5.431G
37	5.356G	38	5.491G	39	5.372G	40	5.279G
41	5.682G	42	5.668G	43	5.645G	44	5.451G
45	5.556G	46	5.354G	47	5.542G	48	5.284G
49	5.401G	50	5.680G	51	5.307G	52	5.649G
53	5.352G	54	5.570G	55	5.270G	56	5.368G
57	5.524G	58	5.511G	59	5.470G	60	5.306G
61	5.653G	62	5.281G	63	5.484G	64	5.626G
65	5.268G	66	5.594G	67	5.259G	68	5.503G
69	5.602G	70	5.361G	71	5.604G	72	5.505G
73	5.369G	74	5.296G	75	5.459G	76	5.669G
77	5.628G	78	5.266G	79	5.410G	80	5.478G
81	5.575G	82	5.273G	83	5.494G	84	5.516G
85	5.558G	86	5.419G	87	5.275G	88	5.551G
89	5.546G	90	5.283G	91	5.695G	92	5.541G
93	5.400G	94	5.301G	95	5.340G	96	5.421G
97	5.299G	98	5.313G	99	5.712G	100	5.519G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_09							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.513G	2	5.427G	3	5.547G	4	5.674G
5	5.702G	6	5.562G	7	5.398G	8	5.494G
9	5.420G	10	5.651G	11	5.613G	12	5.611G
13	5.580G	14	5.366G	15	5.666G	16	5.378G
17	5.415G	18	5.617G	19	5.320G	20	5.323G
21	5.612G	22	5.672G	23	5.274G	24	5.608G
25	5.256G	26	5.539G	27	5.298G	28	5.582G
29	5.581G	30	5.505G	31	5.464G	32	5.269G
33	5.425G	34	5.403G	35	5.610G	36	5.430G
37	5.374G	38	5.661G	39	5.432G	40	5.277G
41	5.512G	42	5.255G	43	5.367G	44	5.402G
45	5.315G	46	5.342G	47	5.675G	48	5.456G
49	5.399G	50	5.522G	51	5.371G	52	5.594G
53	5.497G	54	5.595G	55	5.302G	56	5.297G
57	5.645G	58	5.696G	59	5.473G	60	5.356G
61	5.715G	62	5.599G	63	5.699G	64	5.441G
65	5.472G	66	5.579G	67	5.601G	68	5.435G
69	5.461G	70	5.339G	71	5.322G	72	5.333G
73	5.691G	74	5.606G	75	5.329G	76	5.400G
77	5.707G	78	5.655G	79	5.564G	80	5.278G
81	5.365G	82	5.648G	83	5.650G	84	5.631G
85	5.372G	86	5.605G	87	5.251G	88	5.480G
89	5.290G	90	5.549G	91	5.567G	92	5.686G
93	5.387G	94	5.404G	95	5.618G	96	5.643G
97	5.690G	98	5.687G	99	5.482G	100	5.548G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_10							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.375G	2	5.353G	3	5.323G	4	5.500G
5	5.386G	6	5.650G	7	5.630G	8	5.608G
9	5.313G	10	5.341G	11	5.483G	12	5.579G
13	5.364G	14	5.629G	15	5.407G	16	5.344G
17	5.268G	18	5.659G	19	5.282G	20	5.378G
21	5.317G	22	5.393G	23	5.647G	24	5.654G
25	5.638G	26	5.416G	27	5.530G	28	5.527G
29	5.285G	30	5.273G	31	5.588G	32	5.495G
33	5.310G	34	5.297G	35	5.577G	36	5.296G
37	5.486G	38	5.398G	39	5.427G	40	5.520G
41	5.624G	42	5.581G	43	5.604G	44	5.322G
45	5.328G	46	5.651G	47	5.327G	48	5.342G
49	5.260G	50	5.396G	51	5.258G	52	5.533G
53	5.330G	54	5.265G	55	5.714G	56	5.376G
57	5.434G	58	5.372G	59	5.625G	60	5.319G
61	5.458G	62	5.426G	63	5.674G	64	5.337G
65	5.452G	66	5.697G	67	5.368G	68	5.689G
69	5.439G	70	5.515G	71	5.667G	72	5.584G
73	5.605G	74	5.377G	75	5.706G	76	5.596G
77	5.669G	78	5.666G	79	5.593G	80	5.693G
81	5.553G	82	5.308G	83	5.417G	84	5.509G
85	5.391G	86	5.668G	87	5.600G	88	5.643G
89	5.280G	90	5.286G	91	5.594G	92	5.712G
93	5.256G	94	5.525G	95	5.333G	96	5.701G
97	5.677G	98	5.392G	99	5.276G	100	5.661G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_11							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.638G	2	5.390G	3	5.369G	4	5.395G
5	5.280G	6	5.352G	7	5.348G	8	5.699G
9	5.581G	10	5.660G	11	5.322G	12	5.720G
13	5.351G	14	5.355G	15	5.549G	16	5.646G
17	5.426G	18	5.515G	19	5.250G	20	5.288G
21	5.663G	22	5.265G	23	5.672G	24	5.406G
25	5.517G	26	5.314G	27	5.443G	28	5.621G
29	5.592G	30	5.546G	31	5.254G	32	5.298G
33	5.485G	34	5.608G	35	5.693G	36	5.681G
37	5.359G	38	5.584G	39	5.440G	40	5.624G
41	5.511G	42	5.705G	43	5.380G	44	5.506G
45	5.276G	46	5.266G	47	5.492G	48	5.697G
49	5.445G	50	5.572G	51	5.296G	52	5.383G
53	5.349G	54	5.277G	55	5.703G	56	5.671G
57	5.620G	58	5.319G	59	5.310G	60	5.530G
61	5.333G	62	5.484G	63	5.330G	64	5.453G
65	5.622G	66	5.533G	67	5.599G	68	5.522G
69	5.436G	70	5.513G	71	5.667G	72	5.673G
73	5.261G	74	5.326G	75	5.532G	76	5.337G
77	5.366G	78	5.313G	79	5.538G	80	5.601G
81	5.293G	82	5.505G	83	5.518G	84	5.629G
85	5.635G	86	5.639G	87	5.465G	88	5.371G
89	5.707G	90	5.251G	91	5.678G	92	5.340G
93	5.301G	94	5.503G	95	5.565G	96	5.665G
97	5.318G	98	5.480G	99	5.317G	100	5.402G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_12							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.692G	2	5.291G	3	5.358G	4	5.630G
5	5.290G	6	5.592G	7	5.412G	8	5.279G
9	5.547G	10	5.425G	11	5.364G	12	5.300G
13	5.357G	14	5.699G	15	5.418G	16	5.396G
17	5.406G	18	5.256G	19	5.548G	20	5.500G
21	5.411G	22	5.264G	23	5.502G	24	5.464G
25	5.616G	26	5.304G	27	5.704G	28	5.585G
29	5.532G	30	5.324G	31	5.272G	32	5.674G
33	5.258G	34	5.564G	35	5.668G	36	5.349G
37	5.350G	38	5.516G	39	5.297G	40	5.628G
41	5.252G	42	5.400G	43	5.549G	44	5.263G
45	5.354G	46	5.265G	47	5.556G	48	5.365G
49	5.523G	50	5.509G	51	5.595G	52	5.280G
53	5.655G	54	5.601G	55	5.522G	56	5.372G
57	5.322G	58	5.715G	59	5.454G	60	5.612G
61	5.386G	62	5.374G	63	5.379G	64	5.552G
65	5.335G	66	5.631G	67	5.315G	68	5.292G
69	5.387G	70	5.426G	71	5.619G	72	5.680G
73	5.421G	74	5.255G	75	5.301G	76	5.550G
77	5.644G	78	5.313G	79	5.558G	80	5.346G
81	5.391G	82	5.495G	83	5.481G	84	5.615G
85	5.368G	86	5.303G	87	5.584G	88	5.614G
89	5.375G	90	5.413G	91	5.273G	92	5.590G
93	5.637G	94	5.484G	95	5.676G	96	5.266G
97	5.448G	98	5.382G	99	5.470G	100	5.722G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_13							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.362G	2	5.342G	3	5.264G	4	5.631G
5	5.617G	6	5.588G	7	5.721G	8	5.390G
9	5.506G	10	5.668G	11	5.418G	12	5.574G
13	5.368G	14	5.615G	15	5.662G	16	5.585G
17	5.691G	18	5.471G	19	5.602G	20	5.596G
21	5.454G	22	5.555G	23	5.643G	24	5.329G
25	5.505G	26	5.719G	27	5.499G	28	5.290G
29	5.429G	30	5.263G	31	5.426G	32	5.326G
33	5.489G	34	5.287G	35	5.375G	36	5.616G
37	5.300G	38	5.495G	39	5.689G	40	5.282G
41	5.563G	42	5.544G	43	5.607G	44	5.359G
45	5.413G	46	5.521G	47	5.632G	48	5.509G
49	5.443G	50	5.250G	51	5.500G	52	5.690G
53	5.433G	54	5.268G	55	5.683G	56	5.723G
57	5.285G	58	5.365G	59	5.312G	60	5.361G
61	5.501G	62	5.620G	63	5.523G	64	5.551G
65	5.716G	66	5.400G	67	5.610G	68	5.629G
69	5.293G	70	5.296G	71	5.676G	72	5.474G
73	5.335G	74	5.611G	75	5.284G	76	5.705G
77	5.651G	78	5.307G	79	5.601G	80	5.609G
81	5.371G	82	5.661G	83	5.338G	84	5.302G
85	5.435G	86	5.587G	87	5.414G	88	5.372G
89	5.647G	90	5.339G	91	5.603G	92	5.582G
93	5.313G	94	5.548G	95	5.604G	96	5.404G
97	5.257G	98	5.700G	99	5.348G	100	5.696G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_14							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.652G	2	5.589G	3	5.637G	4	5.615G
5	5.645G	6	5.251G	7	5.716G	8	5.482G
9	5.393G	10	5.273G	11	5.349G	12	5.486G
13	5.487G	14	5.527G	15	5.564G	16	5.481G
17	5.722G	18	5.258G	19	5.411G	20	5.631G
21	5.673G	22	5.503G	23	5.677G	24	5.703G
25	5.565G	26	5.531G	27	5.266G	28	5.453G
29	5.648G	30	5.538G	31	5.719G	32	5.657G
33	5.396G	34	5.667G	35	5.688G	36	5.617G
37	5.692G	38	5.347G	39	5.421G	40	5.636G
41	5.602G	42	5.699G	43	5.399G	44	5.292G
45	5.591G	46	5.609G	47	5.298G	48	5.502G
49	5.611G	50	5.561G	51	5.360G	52	5.323G
53	5.720G	54	5.367G	55	5.319G	56	5.413G
57	5.424G	58	5.345G	59	5.519G	60	5.650G
61	5.588G	62	5.682G	63	5.566G	64	5.499G
65	5.710G	66	5.554G	67	5.647G	68	5.322G
69	5.485G	70	5.593G	71	5.402G	72	5.543G
73	5.295G	74	5.548G	75	5.685G	76	5.437G
77	5.385G	78	5.473G	79	5.426G	80	5.618G
81	5.303G	82	5.415G	83	5.551G	84	5.351G
85	5.262G	86	5.254G	87	5.309G	88	5.289G
89	5.250G	90	5.333G	91	5.474G	92	5.691G
93	5.690G	94	5.614G	95	5.428G	96	5.608G
97	5.526G	98	5.293G	99	5.572G	100	5.709G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_15							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.672G	2	5.527G	3	5.622G	4	5.398G
5	5.680G	6	5.324G	7	5.370G	8	5.515G
9	5.283G	10	5.502G	11	5.489G	12	5.623G
13	5.498G	14	5.542G	15	5.469G	16	5.279G
17	5.392G	18	5.448G	19	5.656G	20	5.312G
21	5.481G	22	5.601G	23	5.292G	24	5.670G
25	5.530G	26	5.363G	27	5.539G	28	5.364G
29	5.686G	30	5.715G	31	5.501G	32	5.321G
33	5.434G	34	5.421G	35	5.571G	36	5.552G
37	5.553G	38	5.273G	39	5.497G	40	5.337G
41	5.642G	42	5.443G	43	5.485G	44	5.340G
45	5.371G	46	5.692G	47	5.399G	48	5.582G
49	5.637G	50	5.260G	51	5.720G	52	5.574G
53	5.445G	54	5.329G	55	5.307G	56	5.410G
57	5.545G	58	5.712G	59	5.303G	60	5.688G
61	5.323G	62	5.538G	63	5.405G	64	5.334G
65	5.424G	66	5.490G	67	5.254G	68	5.318G
69	5.522G	70	5.459G	71	5.706G	72	5.647G
73	5.606G	74	5.558G	75	5.523G	76	5.569G
77	5.589G	78	5.356G	79	5.280G	80	5.251G
81	5.325G	82	5.531G	83	5.382G	84	5.284G
85	5.524G	86	5.504G	87	5.519G	88	5.534G
89	5.411G	90	5.263G	91	5.297G	92	5.347G
93	5.319G	94	5.450G	95	5.700G	96	5.626G
97	5.311G	98	5.631G	99	5.651G	100	5.328G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_16							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.259G	2	5.665G	3	5.533G	4	5.620G
5	5.301G	6	5.617G	7	5.576G	8	5.649G
9	5.313G	10	5.673G	11	5.580G	12	5.319G
13	5.614G	14	5.490G	15	5.723G	16	5.581G
17	5.690G	18	5.428G	19	5.542G	20	5.695G
21	5.664G	22	5.431G	23	5.430G	24	5.507G
25	5.359G	26	5.440G	27	5.369G	28	5.676G
29	5.346G	30	5.408G	31	5.253G	32	5.491G
33	5.480G	34	5.559G	35	5.405G	36	5.604G
37	5.544G	38	5.252G	39	5.720G	40	5.546G
41	5.679G	42	5.654G	43	5.347G	44	5.435G
45	5.698G	46	5.722G	47	5.284G	48	5.678G
49	5.661G	50	5.590G	51	5.605G	52	5.635G
53	5.302G	54	5.526G	55	5.703G	56	5.311G
57	5.379G	58	5.362G	59	5.517G	60	5.457G
61	5.377G	62	5.389G	63	5.697G	64	5.325G
65	5.432G	66	5.658G	67	5.612G	68	5.563G
69	5.668G	70	5.469G	71	5.712G	72	5.636G
73	5.420G	74	5.287G	75	5.382G	76	5.448G
77	5.562G	78	5.339G	79	5.293G	80	5.422G
81	5.375G	82	5.383G	83	5.628G	84	5.622G
85	5.299G	86	5.269G	87	5.716G	88	5.525G
89	5.583G	90	5.273G	91	5.718G	92	5.518G
93	5.652G	94	5.700G	95	5.270G	96	5.263G
97	5.324G	98	5.711G	99	5.305G	100	5.549G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_17							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.340G	2	5.474G	3	5.507G	4	5.385G
5	5.672G	6	5.310G	7	5.348G	8	5.568G
9	5.482G	10	5.417G	11	5.701G	12	5.416G
13	5.437G	14	5.413G	15	5.639G	16	5.654G
17	5.675G	18	5.485G	19	5.699G	20	5.393G
21	5.684G	22	5.659G	23	5.257G	24	5.673G
25	5.283G	26	5.521G	27	5.427G	28	5.396G
29	5.335G	30	5.514G	31	5.367G	32	5.497G
33	5.336G	34	5.270G	35	5.551G	36	5.448G
37	5.439G	38	5.294G	39	5.423G	40	5.372G
41	5.347G	42	5.544G	43	5.696G	44	5.570G
45	5.577G	46	5.626G	47	5.401G	48	5.466G
49	5.388G	50	5.452G	51	5.295G	52	5.503G
53	5.549G	54	5.509G	55	5.524G	56	5.576G
57	5.266G	58	5.498G	59	5.370G	60	5.571G
61	5.267G	62	5.493G	63	5.415G	64	5.358G
65	5.621G	66	5.290G	67	5.537G	68	5.475G
69	5.406G	70	5.508G	71	5.492G	72	5.343G
73	5.644G	74	5.661G	75	5.586G	76	5.280G
77	5.300G	78	5.532G	79	5.273G	80	5.683G
81	5.680G	82	5.337G	83	5.523G	84	5.459G
85	5.624G	86	5.583G	87	5.611G	88	5.392G
89	5.329G	90	5.292G	91	5.412G	92	5.346G
93	5.510G	94	5.376G	95	5.516G	96	5.489G
97	5.308G	98	5.591G	99	5.718G	100	5.668G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_18							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.703G	2	5.279G	3	5.317G	4	5.366G
5	5.332G	6	5.652G	7	5.278G	8	5.326G
9	5.437G	10	5.568G	11	5.581G	12	5.357G
13	5.380G	14	5.517G	15	5.295G	16	5.708G
17	5.471G	18	5.533G	19	5.418G	20	5.344G
21	5.548G	22	5.680G	23	5.304G	24	5.665G
25	5.585G	26	5.649G	27	5.420G	28	5.610G
29	5.454G	30	5.438G	31	5.447G	32	5.541G
33	5.646G	34	5.584G	35	5.538G	36	5.657G
37	5.463G	38	5.679G	39	5.562G	40	5.696G
41	5.643G	42	5.399G	43	5.334G	44	5.252G
45	5.518G	46	5.255G	47	5.297G	48	5.666G
49	5.702G	50	5.358G	51	5.676G	52	5.274G
53	5.404G	54	5.270G	55	5.586G	56	5.535G
57	5.690G	58	5.389G	59	5.687G	60	5.712G
61	5.635G	62	5.464G	63	5.262G	64	5.449G
65	5.482G	66	5.485G	67	5.539G	68	5.608G
69	5.721G	70	5.427G	71	5.364G	72	5.392G
73	5.629G	74	5.645G	75	5.678G	76	5.509G
77	5.387G	78	5.486G	79	5.354G	80	5.480G
81	5.508G	82	5.664G	83	5.377G	84	5.436G
85	5.692G	86	5.333G	87	5.305G	88	5.289G
89	5.587G	90	5.307G	91	5.285G	92	5.720G
93	5.462G	94	5.660G	95	5.601G	96	5.378G
97	5.283G	98	5.492G	99	5.598G	100	5.520G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_19							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.568G	2	5.609G	3	5.360G	4	5.447G
5	5.682G	6	5.365G	7	5.401G	8	5.323G
9	5.329G	10	5.461G	11	5.426G	12	5.611G
13	5.547G	14	5.460G	15	5.697G	16	5.507G
17	5.377G	18	5.440G	19	5.537G	20	5.393G
21	5.493G	22	5.343G	23	5.523G	24	5.476G
25	5.570G	26	5.282G	27	5.424G	28	5.574G
29	5.453G	30	5.516G	31	5.266G	32	5.519G
33	5.352G	34	5.479G	35	5.664G	36	5.381G
37	5.636G	38	5.572G	39	5.276G	40	5.349G
41	5.550G	42	5.279G	43	5.281G	44	5.489G
45	5.525G	46	5.350G	47	5.459G	48	5.470G
49	5.676G	50	5.681G	51	5.366G	52	5.475G
53	5.402G	54	5.713G	55	5.613G	56	5.558G
57	5.321G	58	5.390G	59	5.660G	60	5.429G
61	5.253G	62	5.653G	63	5.463G	64	5.675G
65	5.522G	66	5.389G	67	5.592G	68	5.626G
69	5.394G	70	5.280G	71	5.467G	72	5.691G
73	5.361G	74	5.416G	75	5.384G	76	5.254G
77	5.252G	78	5.452G	79	5.599G	80	5.457G
81	5.412G	82	5.635G	83	5.644G	84	5.465G
85	5.640G	86	5.714G	87	5.512G	88	5.271G
89	5.598G	90	5.298G	91	5.579G	92	5.632G
93	5.673G	94	5.300G	95	5.370G	96	5.434G
97	5.446G	98	5.621G	99	5.315G	100	5.466G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_20							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.369G	2	5.340G	3	5.707G	4	5.569G
5	5.612G	6	5.283G	7	5.461G	8	5.550G
9	5.292G	10	5.309G	11	5.617G	12	5.518G
13	5.595G	14	5.570G	15	5.693G	16	5.343G
17	5.539G	18	5.660G	19	5.534G	20	5.557G
21	5.589G	22	5.351G	23	5.441G	24	5.392G
25	5.560G	26	5.546G	27	5.329G	28	5.600G
29	5.390G	30	5.685G	31	5.528G	32	5.525G
33	5.380G	34	5.286G	35	5.562G	36	5.386G
37	5.701G	38	5.349G	39	5.619G	40	5.257G
41	5.311G	42	5.416G	43	5.361G	44	5.603G
45	5.511G	46	5.632G	47	5.267G	48	5.724G
49	5.722G	50	5.548G	51	5.559G	52	5.366G
53	5.427G	54	5.627G	55	5.592G	56	5.700G
57	5.303G	58	5.450G	59	5.477G	60	5.266G
61	5.597G	62	5.335G	63	5.431G	64	5.723G
65	5.519G	66	5.418G	67	5.665G	68	5.523G
69	5.385G	70	5.364G	71	5.408G	72	5.533G
73	5.552G	74	5.480G	75	5.651G	76	5.422G
77	5.382G	78	5.654G	79	5.633G	80	5.494G
81	5.506G	82	5.610G	83	5.489G	84	5.255G
85	5.566G	86	5.337G	87	5.317G	88	5.495G
89	5.479G	90	5.332G	91	5.352G	92	5.531G
93	5.598G	94	5.388G	95	5.425G	96	5.269G
97	5.353G	98	5.433G	99	5.641G	100	5.319G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_21							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.554G	2	5.668G	3	5.398G	4	5.276G
5	5.596G	6	5.497G	7	5.558G	8	5.717G
9	5.467G	10	5.350G	11	5.416G	12	5.338G
13	5.409G	14	5.257G	15	5.723G	16	5.703G
17	5.273G	18	5.406G	19	5.408G	20	5.321G
21	5.686G	22	5.445G	23	5.588G	24	5.332G
25	5.455G	26	5.584G	27	5.581G	28	5.362G
29	5.400G	30	5.623G	31	5.724G	32	5.516G
33	5.714G	34	5.331G	35	5.307G	36	5.591G
37	5.666G	38	5.665G	39	5.503G	40	5.418G
41	5.313G	42	5.356G	43	5.547G	44	5.701G
45	5.604G	46	5.461G	47	5.475G	48	5.485G
49	5.348G	50	5.274G	51	5.255G	52	5.569G
53	5.424G	54	5.368G	55	5.402G	56	5.557G
57	5.639G	58	5.696G	59	5.608G	60	5.419G
61	5.650G	62	5.382G	63	5.571G	64	5.599G
65	5.405G	66	5.644G	67	5.469G	68	5.374G
69	5.268G	70	5.562G	71	5.375G	72	5.501G
73	5.464G	74	5.549G	75	5.473G	76	5.646G
77	5.528G	78	5.568G	79	5.715G	80	5.361G
81	5.413G	82	5.611G	83	5.453G	84	5.688G
85	5.412G	86	5.512G	87	5.483G	88	5.305G
89	5.456G	90	5.699G	91	5.721G	92	5.670G
93	5.251G	94	5.340G	95	5.545G	96	5.422G
97	5.523G	98	5.575G	99	5.520G	100	5.260G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_22							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.650G	2	5.426G	3	5.340G	4	5.700G
5	5.658G	6	5.389G	7	5.597G	8	5.547G
9	5.615G	10	5.427G	11	5.589G	12	5.621G
13	5.535G	14	5.488G	15	5.330G	16	5.533G
17	5.456G	18	5.573G	19	5.284G	20	5.481G
21	5.433G	22	5.527G	23	5.583G	24	5.429G
25	5.458G	26	5.697G	27	5.551G	28	5.577G
29	5.411G	30	5.381G	31	5.416G	32	5.393G
33	5.614G	34	5.292G	35	5.613G	36	5.723G
37	5.530G	38	5.469G	39	5.335G	40	5.519G
41	5.286G	42	5.674G	43	5.571G	44	5.653G
45	5.325G	46	5.687G	47	5.419G	48	5.604G
49	5.714G	50	5.532G	51	5.698G	52	5.564G
53	5.271G	54	5.635G	55	5.464G	56	5.654G
57	5.526G	58	5.250G	59	5.448G	60	5.353G
61	5.489G	62	5.295G	63	5.415G	64	5.538G
65	5.421G	66	5.430G	67	5.667G	68	5.560G
69	5.499G	70	5.716G	71	5.643G	72	5.708G
73	5.656G	74	5.414G	75	5.625G	76	5.256G
77	5.259G	78	5.417G	79	5.503G	80	5.601G
81	5.699G	82	5.446G	83	5.695G	84	5.515G
85	5.336G	86	5.266G	87	5.505G	88	5.447G
89	5.502G	90	5.517G	91	5.506G	92	5.626G
93	5.283G	94	5.702G	95	5.484G	96	5.365G
97	5.664G	98	5.270G	99	5.366G	100	5.513G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_23							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.667G	2	5.318G	3	5.545G	4	5.558G
5	5.280G	6	5.356G	7	5.283G	8	5.260G
9	5.642G	10	5.359G	11	5.346G	12	5.520G
13	5.312G	14	5.572G	15	5.606G	16	5.414G
17	5.669G	18	5.335G	19	5.448G	20	5.650G
21	5.708G	22	5.455G	23	5.352G	24	5.293G
25	5.627G	26	5.573G	27	5.506G	28	5.267G
29	5.507G	30	5.704G	31	5.357G	32	5.311G
33	5.452G	34	5.315G	35	5.258G	36	5.666G
37	5.290G	38	5.298G	39	5.693G	40	5.411G
41	5.277G	42	5.626G	43	5.287G	44	5.699G
45	5.422G	46	5.494G	47	5.569G	48	5.442G
49	5.399G	50	5.584G	51	5.419G	52	5.395G
53	5.309G	54	5.656G	55	5.619G	56	5.641G
57	5.612G	58	5.353G	59	5.345G	60	5.554G
61	5.314G	62	5.285G	63	5.409G	64	5.522G
65	5.403G	66	5.438G	67	5.322G	68	5.484G
69	5.510G	70	5.678G	71	5.334G	72	5.463G
73	5.349G	74	5.389G	75	5.407G	76	5.602G
77	5.296G	78	5.483G	79	5.535G	80	5.291G
81	5.698G	82	5.284G	83	5.493G	84	5.481G
85	5.690G	86	5.372G	87	5.286G	88	5.391G
89	5.474G	90	5.488G	91	5.268G	92	5.383G
93	5.364G	94	5.706G	95	5.512G	96	5.413G
97	5.424G	98	5.547G	99	5.262G	100	5.508G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_24							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.387G	2	5.548G	3	5.527G	4	5.364G
5	5.568G	6	5.611G	7	5.405G	8	5.425G
9	5.536G	10	5.532G	11	5.473G	12	5.460G
13	5.724G	14	5.320G	15	5.362G	16	5.721G
17	5.315G	18	5.613G	19	5.699G	20	5.489G
21	5.446G	22	5.417G	23	5.472G	24	5.571G
25	5.664G	26	5.274G	27	5.318G	28	5.709G
29	5.418G	30	5.686G	31	5.659G	32	5.604G
33	5.447G	34	5.603G	35	5.389G	36	5.323G
37	5.430G	38	5.443G	39	5.414G	40	5.720G
41	5.476G	42	5.342G	43	5.596G	44	5.602G
45	5.683G	46	5.667G	47	5.255G	48	5.470G
49	5.719G	50	5.286G	51	5.494G	52	5.272G
53	5.445G	54	5.633G	55	5.694G	56	5.374G
57	5.438G	58	5.589G	59	5.713G	60	5.647G
61	5.622G	62	5.297G	63	5.675G	64	5.503G
65	5.528G	66	5.563G	67	5.457G	68	5.514G
69	5.328G	70	5.372G	71	5.396G	72	5.674G
73	5.584G	74	5.541G	75	5.673G	76	5.507G
77	5.378G	78	5.560G	79	5.682G	80	5.379G
81	5.492G	82	5.716G	83	5.704G	84	5.575G
85	5.322G	86	5.289G	87	5.615G	88	5.586G
89	5.256G	90	5.654G	91	5.564G	92	5.358G
93	5.678G	94	5.702G	95	5.413G	96	5.464G
97	5.462G	98	5.506G	99	5.407G	100	5.329G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_25							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.484G	2	5.584G	3	5.657G	4	5.426G
5	5.573G	6	5.317G	7	5.316G	8	5.348G
9	5.720G	10	5.693G	11	5.580G	12	5.414G
13	5.649G	14	5.340G	15	5.669G	16	5.296G
17	5.500G	18	5.523G	19	5.556G	20	5.499G
21	5.488G	22	5.385G	23	5.458G	24	5.706G
25	5.382G	26	5.328G	27	5.567G	28	5.262G
29	5.678G	30	5.302G	31	5.456G	32	5.344G
33	5.337G	34	5.386G	35	5.546G	36	5.343G
37	5.300G	38	5.252G	39	5.438G	40	5.289G
41	5.327G	42	5.568G	43	5.417G	44	5.624G
45	5.535G	46	5.457G	47	5.365G	48	5.608G
49	5.717G	50	5.313G	51	5.398G	52	5.704G
53	5.413G	54	5.679G	55	5.702G	56	5.485G
57	5.376G	58	5.448G	59	5.341G	60	5.290G
61	5.450G	62	5.465G	63	5.305G	64	5.534G
65	5.536G	66	5.301G	67	5.257G	68	5.307G
69	5.374G	70	5.652G	71	5.503G	72	5.443G
73	5.646G	74	5.589G	75	5.585G	76	5.466G
77	5.559G	78	5.345G	79	5.598G	80	5.622G
81	5.711G	82	5.315G	83	5.626G	84	5.600G
85	5.558G	86	5.637G	87	5.251G	88	5.463G
89	5.723G	90	5.634G	91	5.355G	92	5.520G
93	5.490G	94	5.396G	95	5.587G	96	5.592G
97	5.326G	98	5.451G	99	5.373G	100	5.383G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_26							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.395G	2	5.354G	3	5.480G	4	5.424G
5	5.536G	6	5.392G	7	5.615G	8	5.620G
9	5.699G	10	5.396G	11	5.505G	12	5.541G
13	5.439G	14	5.721G	15	5.671G	16	5.309G
17	5.271G	18	5.542G	19	5.650G	20	5.501G
21	5.252G	22	5.664G	23	5.461G	24	5.363G
25	5.473G	26	5.681G	27	5.400G	28	5.479G
29	5.633G	30	5.269G	31	5.435G	32	5.555G
33	5.334G	34	5.414G	35	5.493G	36	5.616G
37	5.315G	38	5.469G	39	5.384G	40	5.722G
41	5.514G	42	5.573G	43	5.302G	44	5.543G
45	5.413G	46	5.329G	47	5.659G	48	5.328G
49	5.613G	50	5.333G	51	5.678G	52	5.311G
53	5.359G	54	5.257G	55	5.316G	56	5.313G
57	5.415G	58	5.274G	59	5.305G	60	5.526G
61	5.427G	62	5.265G	63	5.348G	64	5.696G
65	5.335G	66	5.428G	67	5.552G	68	5.470G
69	5.637G	70	5.325G	71	5.268G	72	5.602G
73	5.597G	74	5.397G	75	5.635G	76	5.672G
77	5.563G	78	5.292G	79	5.270G	80	5.625G
81	5.411G	82	5.296G	83	5.622G	84	5.273G
85	5.472G	86	5.548G	87	5.398G	88	5.412G
89	5.630G	90	5.715G	91	5.482G	92	5.280G
93	5.474G	94	5.592G	95	5.251G	96	5.560G
97	5.520G	98	5.327G	99	5.515G	100	5.330G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_27							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.602G	2	5.321G	3	5.373G	4	5.324G
5	5.282G	6	5.363G	7	5.296G	8	5.689G
9	5.470G	10	5.431G	11	5.349G	12	5.368G
13	5.404G	14	5.711G	15	5.392G	16	5.390G
17	5.417G	18	5.513G	19	5.693G	20	5.413G
21	5.569G	22	5.657G	23	5.672G	24	5.343G
25	5.496G	26	5.387G	27	5.578G	28	5.384G
29	5.330G	30	5.544G	31	5.618G	32	5.348G
33	5.700G	34	5.345G	35	5.328G	36	5.670G
37	5.410G	38	5.505G	39	5.677G	40	5.514G
41	5.427G	42	5.480G	43	5.708G	44	5.502G
45	5.644G	46	5.720G	47	5.493G	48	5.357G
49	5.599G	50	5.371G	51	5.690G	52	5.446G
53	5.594G	54	5.379G	55	5.571G	56	5.552G
57	5.356G	58	5.385G	59	5.498G	60	5.541G
61	5.723G	62	5.531G	63	5.648G	64	5.299G
65	5.632G	66	5.563G	67	5.658G	68	5.365G
69	5.654G	70	5.358G	71	5.398G	72	5.458G
73	5.359G	74	5.370G	75	5.383G	76	5.520G
77	5.253G	78	5.600G	79	5.444G	80	5.451G
81	5.301G	82	5.411G	83	5.342G	84	5.642G
85	5.716G	86	5.433G	87	5.662G	88	5.483G
89	5.575G	90	5.647G	91	5.646G	92	5.326G
93	5.374G	94	5.695G	95	5.523G	96	5.285G
97	5.676G	98	5.290G	99	5.537G	100	5.663G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_28							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.320G	2	5.311G	3	5.334G	4	5.526G
5	5.508G	6	5.385G	7	5.354G	8	5.630G
9	5.533G	10	5.519G	11	5.576G	12	5.415G
13	5.577G	14	5.343G	15	5.676G	16	5.589G
17	5.647G	18	5.452G	19	5.365G	20	5.579G
21	5.423G	22	5.425G	23	5.465G	24	5.559G
25	5.289G	26	5.321G	27	5.439G	28	5.357G
29	5.539G	30	5.485G	31	5.531G	32	5.364G
33	5.654G	34	5.260G	35	5.585G	36	5.462G
37	5.547G	38	5.521G	39	5.554G	40	5.518G
41	5.363G	42	5.650G	43	5.442G	44	5.517G
45	5.454G	46	5.390G	47	5.495G	48	5.718G
49	5.404G	50	5.541G	51	5.570G	52	5.392G
53	5.356G	54	5.405G	55	5.280G	56	5.288G
57	5.564G	58	5.673G	59	5.598G	60	5.722G
61	5.265G	62	5.571G	63	5.253G	64	5.330G
65	5.581G	66	5.349G	67	5.652G	68	5.317G
69	5.468G	70	5.463G	71	5.667G	72	5.565G
73	5.713G	74	5.706G	75	5.284G	76	5.369G
77	5.471G	78	5.671G	79	5.620G	80	5.367G
81	5.683G	82	5.351G	83	5.381G	84	5.483G
85	5.512G	86	5.505G	87	5.286G	88	5.295G
89	5.553G	90	5.684G	91	5.523G	92	5.296G
93	5.704G	94	5.548G	95	5.697G	96	5.644G
97	5.578G	98	5.318G	99	5.515G	100	5.456G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_29							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.377G	2	5.629G	3	5.689G	4	5.298G
5	5.540G	6	5.433G	7	5.434G	8	5.407G
9	5.453G	10	5.613G	11	5.695G	12	5.693G
13	5.306G	14	5.512G	15	5.599G	16	5.366G
17	5.345G	18	5.536G	19	5.544G	20	5.463G
21	5.368G	22	5.344G	23	5.562G	24	5.343G
25	5.428G	26	5.479G	27	5.697G	28	5.589G
29	5.621G	30	5.276G	31	5.719G	32	5.355G
33	5.660G	34	5.475G	35	5.442G	36	5.483G
37	5.587G	38	5.274G	39	5.509G	40	5.272G
41	5.287G	42	5.546G	43	5.412G	44	5.398G
45	5.301G	46	5.490G	47	5.333G	48	5.359G
49	5.452G	50	5.560G	51	5.611G	52	5.640G
53	5.294G	54	5.507G	55	5.607G	56	5.378G
57	5.713G	58	5.715G	59	5.385G	60	5.330G
61	5.370G	62	5.254G	63	5.716G	64	5.256G
65	5.575G	66	5.590G	67	5.292G	68	5.458G
69	5.704G	70	5.545G	71	5.326G	72	5.299G
73	5.518G	74	5.376G	75	5.439G	76	5.291G
77	5.597G	78	5.530G	79	5.572G	80	5.311G
81	5.531G	82	5.591G	83	5.602G	84	5.570G
85	5.550G	86	5.450G	87	5.494G	88	5.584G
89	5.310G	90	5.296G	91	5.724G	92	5.565G
93	5.669G	94	5.594G	95	5.596G	96	5.580G
97	5.506G	98	5.650G	99	5.253G	100	5.372G

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_30							
SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)	SEQ#	Frequency (Hz)
1	5.549G	2	5.340G	3	5.686G	4	5.265G
5	5.304G	6	5.398G	7	5.552G	8	5.324G
9	5.372G	10	5.594G	11	5.622G	12	5.361G
13	5.631G	14	5.692G	15	5.689G	16	5.632G
17	5.336G	18	5.251G	19	5.367G	20	5.280G
21	5.529G	22	5.309G	23	5.480G	24	5.615G
25	5.646G	26	5.647G	27	5.383G	28	5.634G
29	5.711G	30	5.470G	31	5.281G	32	5.411G
33	5.436G	34	5.266G	35	5.722G	36	5.637G
37	5.561G	38	5.609G	39	5.629G	40	5.494G
41	5.284G	42	5.487G	43	5.327G	44	5.357G
45	5.701G	46	5.522G	47	5.449G	48	5.543G
49	5.658G	50	5.455G	51	5.345G	52	5.464G
53	5.557G	54	5.484G	55	5.462G	56	5.671G
57	5.268G	58	5.537G	59	5.554G	60	5.322G
61	5.454G	62	5.260G	63	5.571G	64	5.423G
65	5.716G	66	5.645G	67	5.499G	68	5.510G
69	5.526G	70	5.293G	71	5.539G	72	5.659G
73	5.466G	74	5.319G	75	5.718G	76	5.593G
77	5.506G	78	5.291G	79	5.254G	80	5.481G
81	5.282G	82	5.612G	83	5.570G	84	5.270G
85	5.295G	86	5.705G	87	5.451G	88	5.287G
89	5.376G	90	5.448G	91	5.312G	92	5.437G
93	5.365G	94	5.360G	95	5.676G	96	5.500G
97	5.657G	98	5.546G	99	5.679G	100	5.445G