


| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

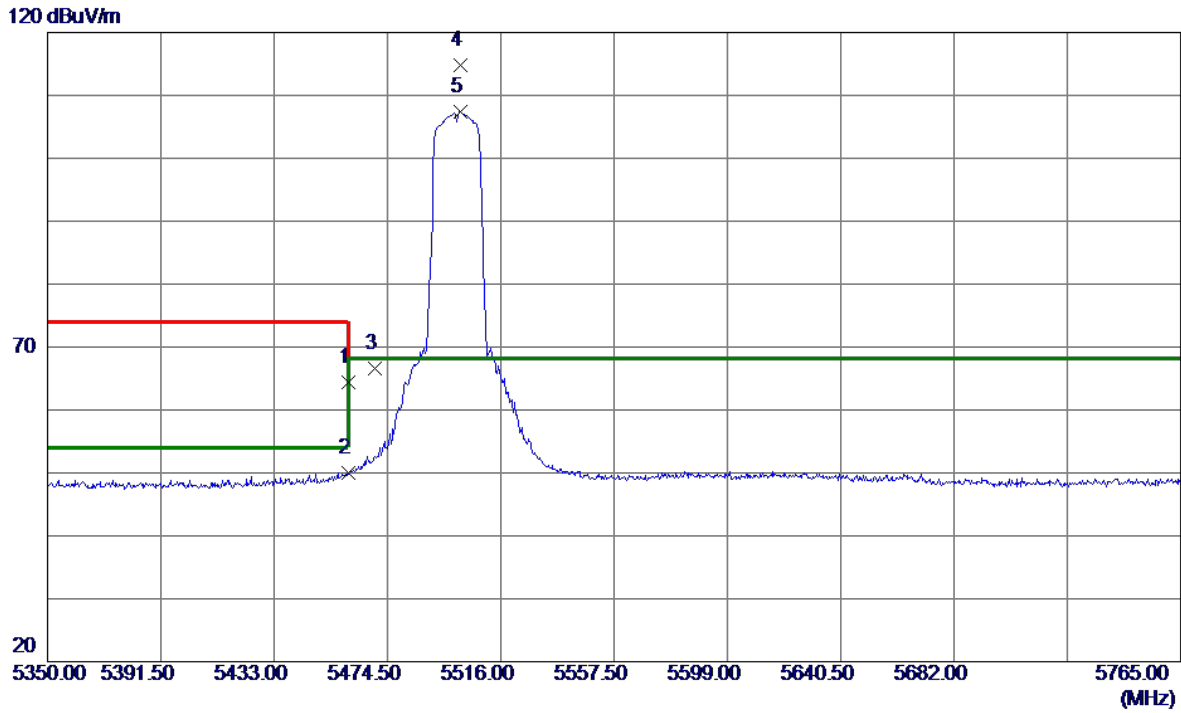


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 26.36 | 38.12 | 64.48 | 74.00 | -9.52 | Peak | |
| 2 | 5460.0000 | 11.80 | 38.12 | 49.92 | 54.00 | -4.08 | AVG | |
| 3 | 5470.0000 | 28.40 | 38.15 | 66.55 | 68.20 | -1.65 | Peak | |
| 4 * | 5501.0600 | 76.49 | 38.24 | 114.73 | 68.20 | 46.53 | Peak | No limit |
| 5 | 5501.0600 | 69.11 | 38.24 | 107.35 | 68.20 | 39.15 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

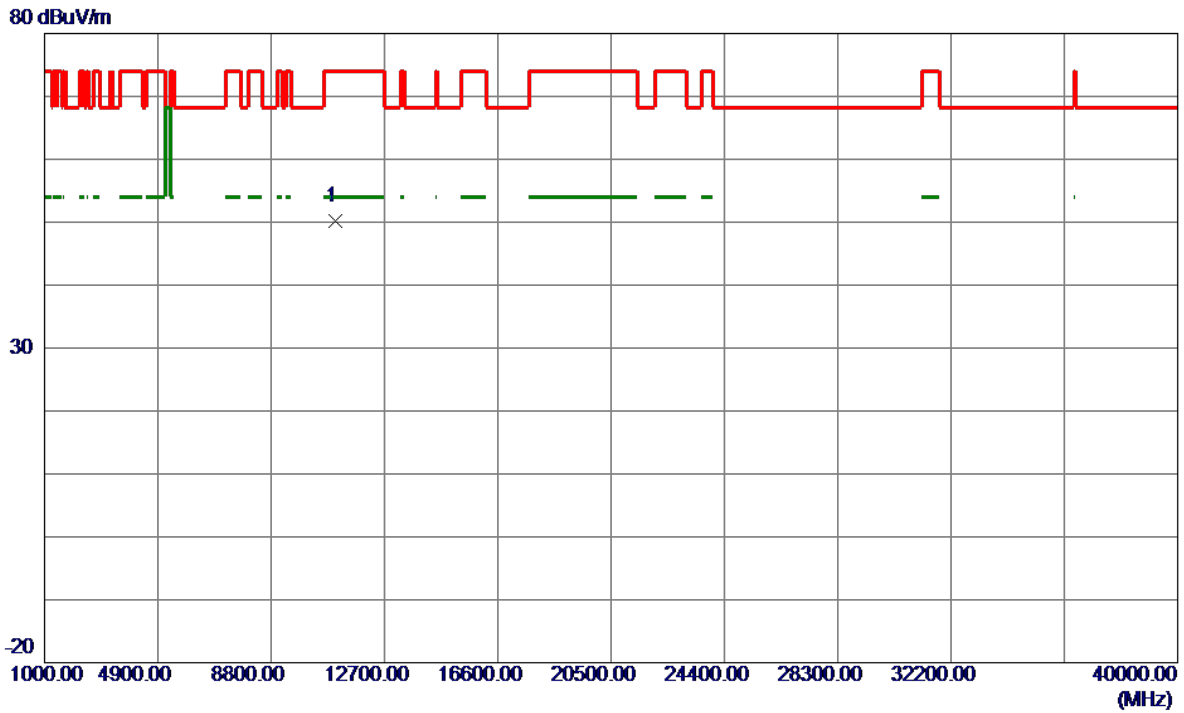


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10995.7000 | 47.85 | 2.33 | 50.18 | 74.00 | -23.82 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

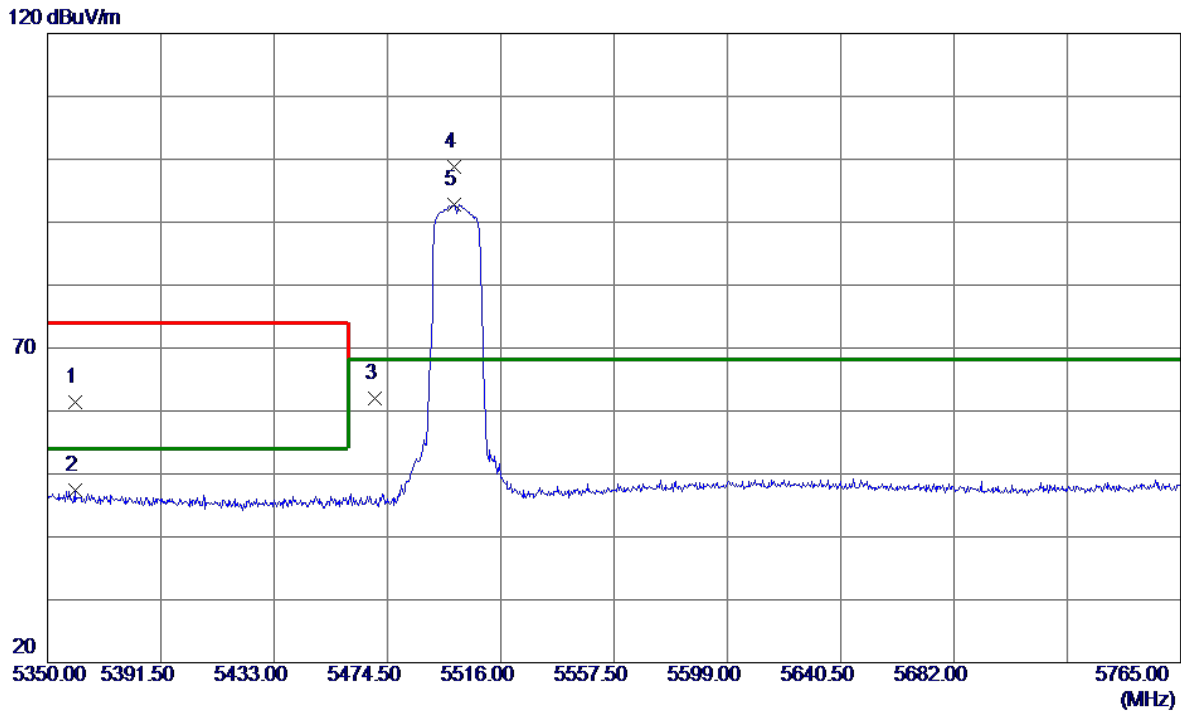


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5360.1669 | 23.61 | 37.78 | 61.39 | 74.00 | -12.61 | Peak | |
| 2 | 5360.1669 | 9.55 | 37.78 | 47.33 | 54.00 | -6.67 | AVG | |
| 3 | 5470.0000 | 23.90 | 38.15 | 62.05 | 68.20 | -6.15 | Peak | |
| 4 * | 5498.9850 | 60.57 | 38.24 | 98.81 | 68.20 | 30.61 | Peak | No limit |
| 5 | 5498.9850 | 54.55 | 38.24 | 92.79 | 68.20 | 24.59 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

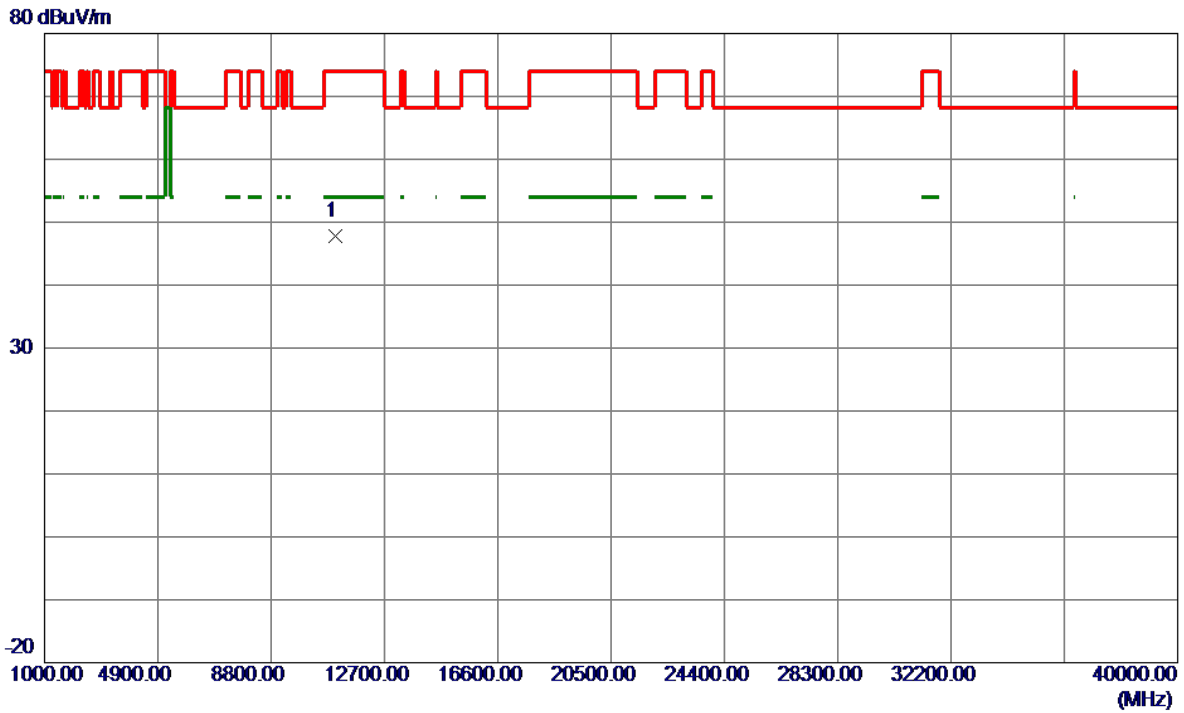


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.0000 | 45.39 | 2.34 | 47.73 | 74.00 | -26.27 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

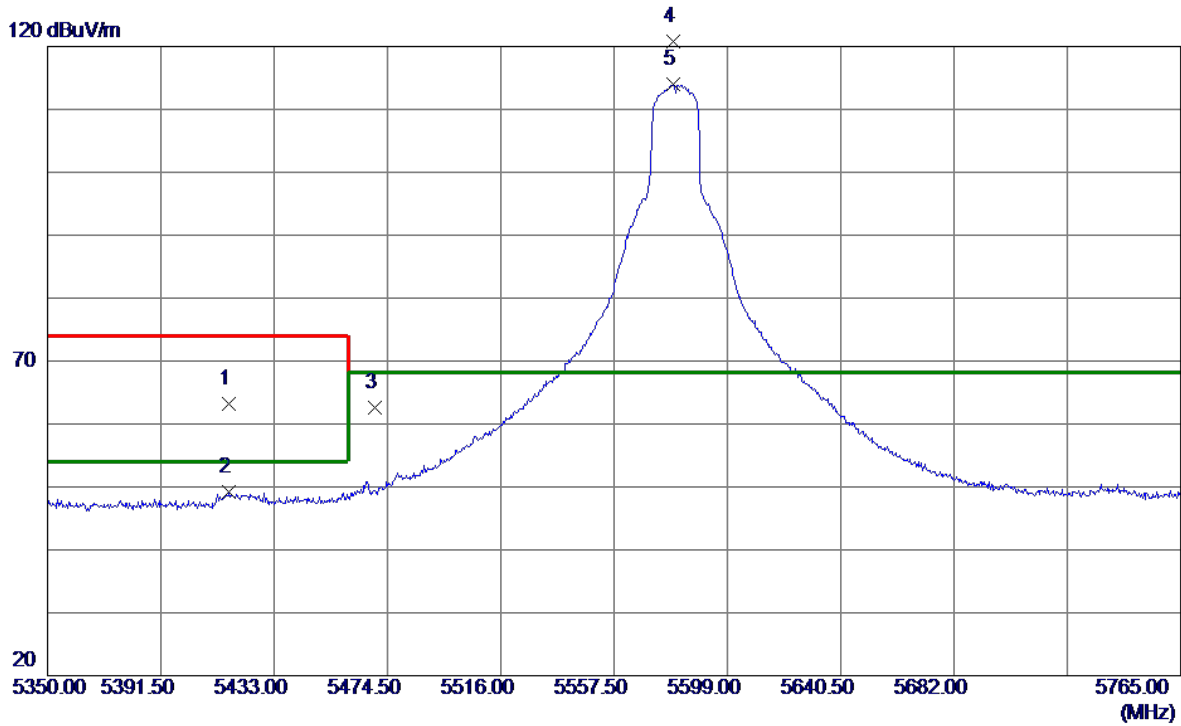


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5416.4000 | 25.26 | 37.99 | 63.25 | 74.00 | -10.75 | Peak | |
| 2 | 5416.4000 | 11.14 | 37.99 | 49.13 | 54.00 | -4.87 | AVG | |
| 3 | 5470.0000 | 24.46 | 38.15 | 62.61 | 68.20 | -5.59 | Peak | |
| 4 * | 5579.0800 | 82.45 | 38.32 | 120.77 | 68.20 | 52.57 | Peak | No limit |
| 5 | 5579.0800 | 75.64 | 38.32 | 113.96 | 68.20 | 45.76 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

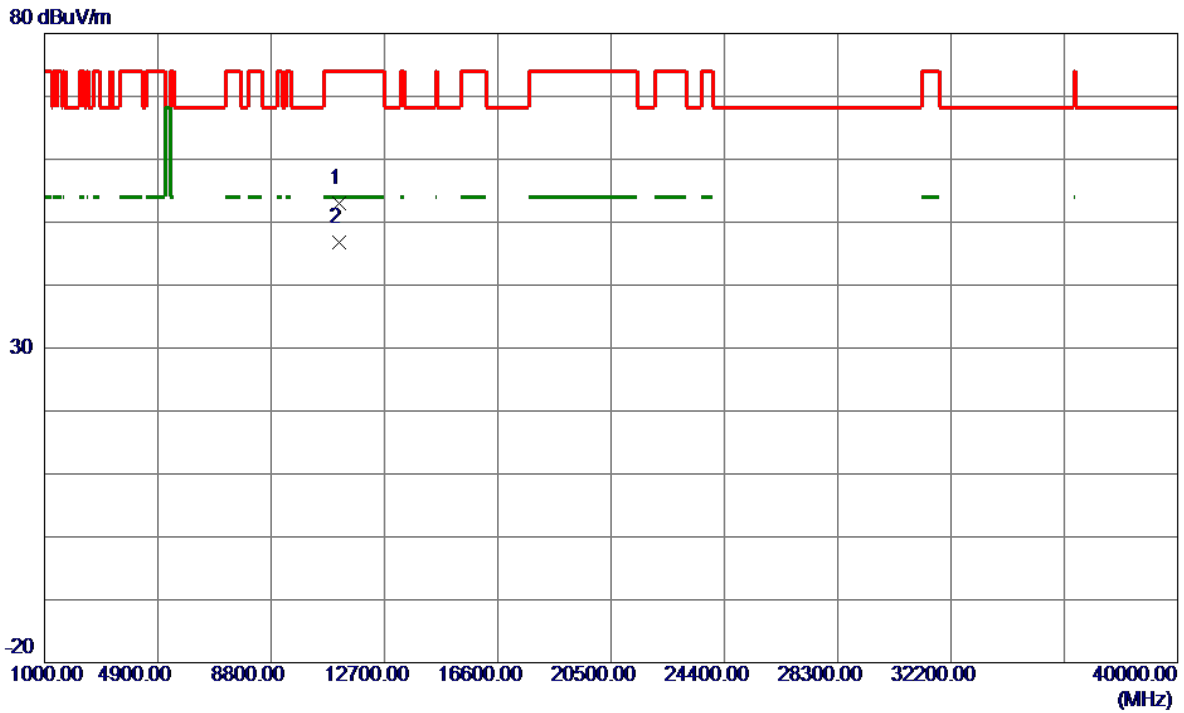


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11155.6000 | 51.03 | 2.04 | 53.07 | 74.00 | -20.93 | Peak | |
| 2 * | 11157.2619 | 44.85 | 2.04 | 46.89 | 54.00 | -7.11 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

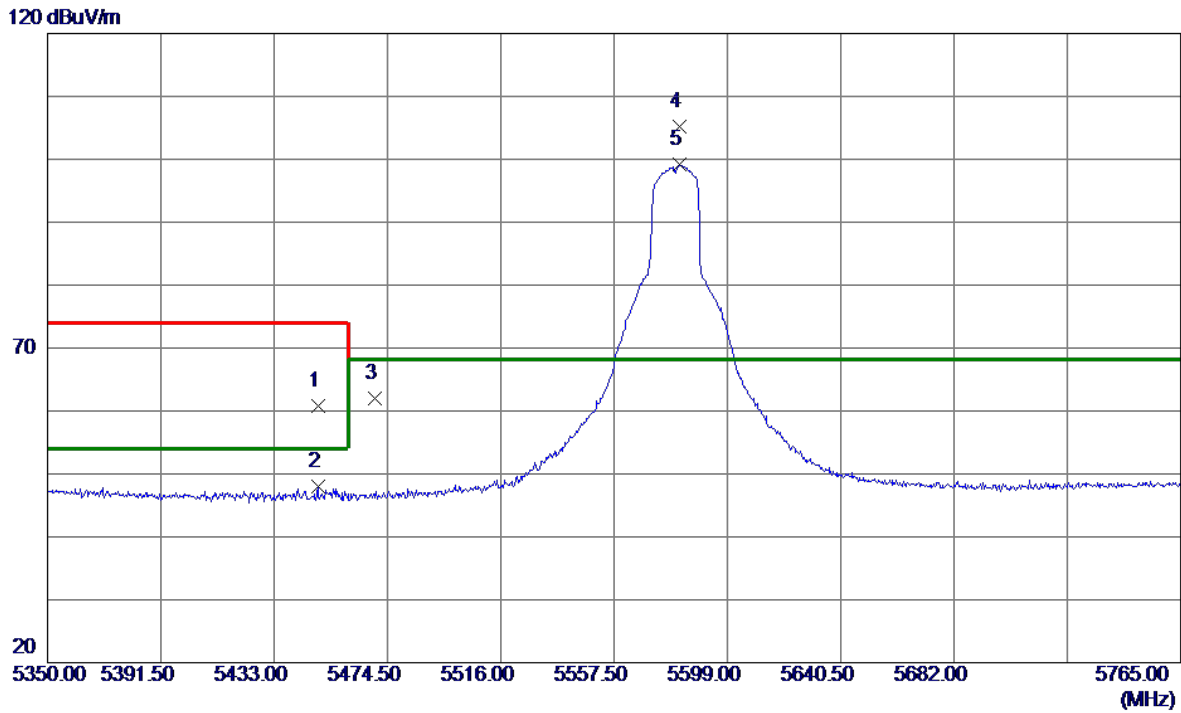


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5448.9770 | 22.66 | 38.09 | 60.75 | 74.00 | -13.25 | Peak | |
| 2 | 5448.9770 | 9.98 | 38.09 | 48.07 | 54.00 | -5.93 | AVG | |
| 3 | 5470.0000 | 23.82 | 38.15 | 61.97 | 68.20 | -6.23 | Peak | |
| 4 * | 5581.3630 | 66.81 | 38.32 | 105.13 | 68.20 | 36.93 | Peak | No limit |
| 5 | 5581.3630 | 60.80 | 38.32 | 99.12 | 68.20 | 30.92 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

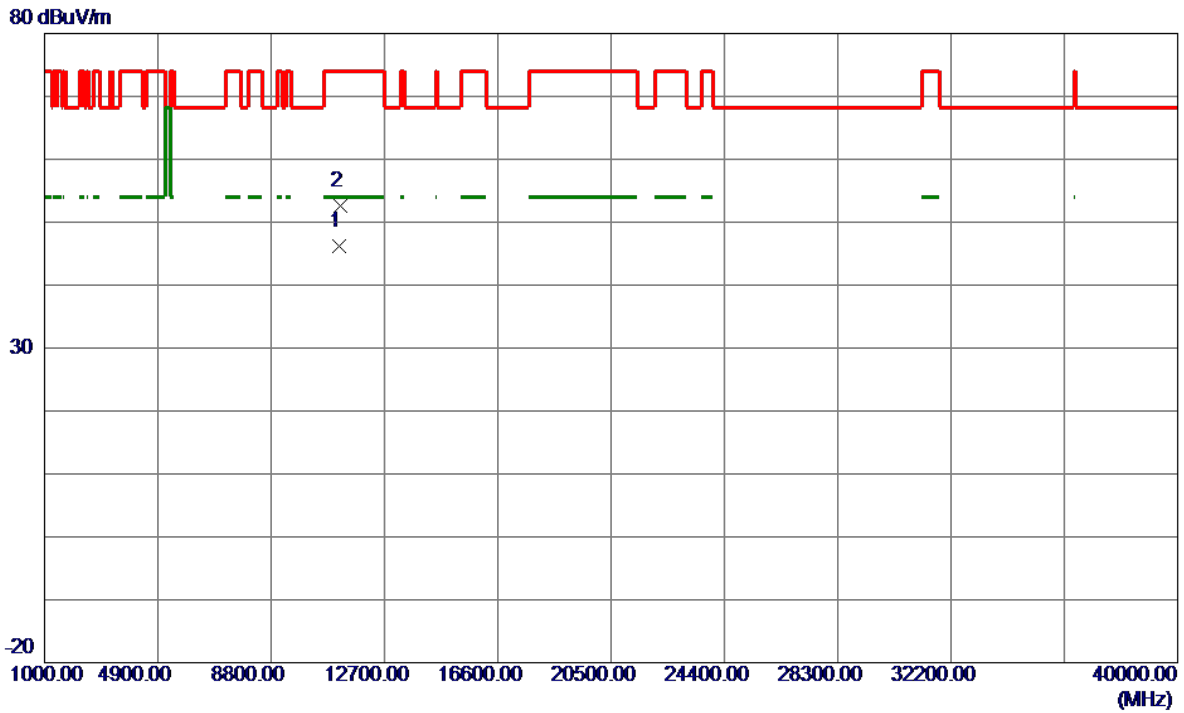


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11161.0990 | 44.24 | 2.03 | 46.27 | 54.00 | -7.73 | AVG | |
| 2 | 11163.4000 | 50.51 | 2.03 | 52.54 | 74.00 | -21.46 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

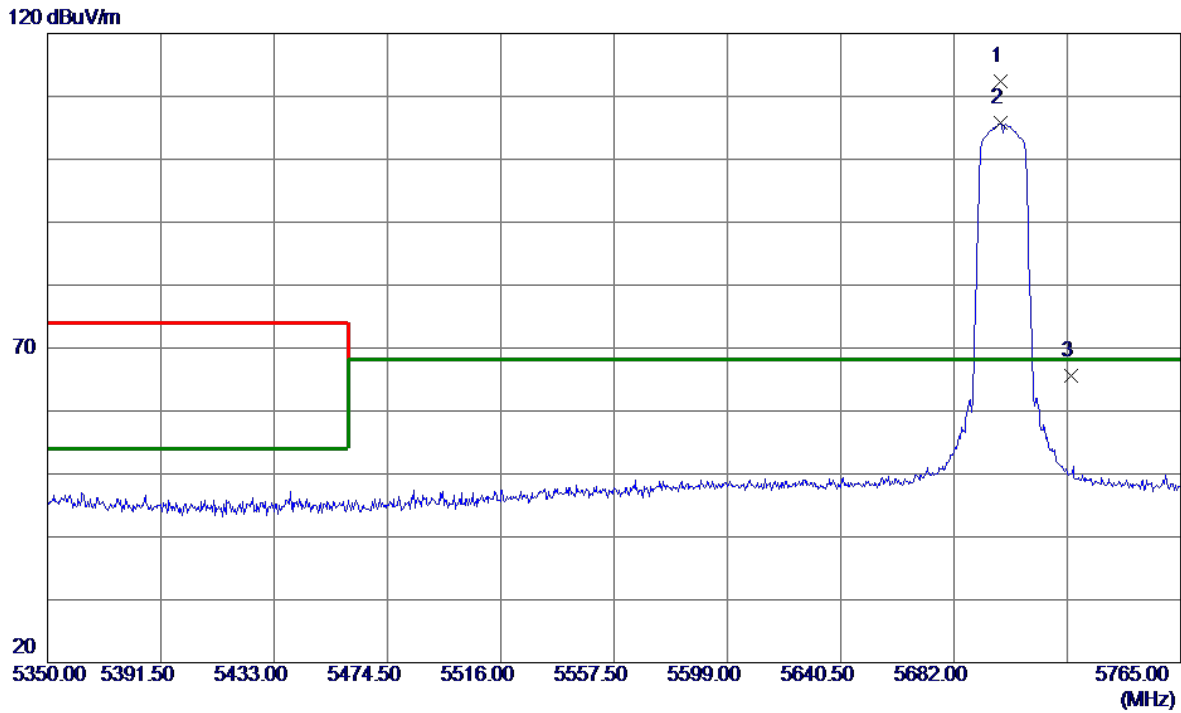


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5699.0150 | 73.98 | 38.40 | 112.38 | 68.20 | 44.18 | Peak | No limit |
| 2 | 5699.0150 | 67.33 | 38.40 | 105.73 | 68.20 | 37.53 | AVG | No limit |
| 3 | 5725.0000 | 27.12 | 38.50 | 65.62 | 68.20 | -2.58 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

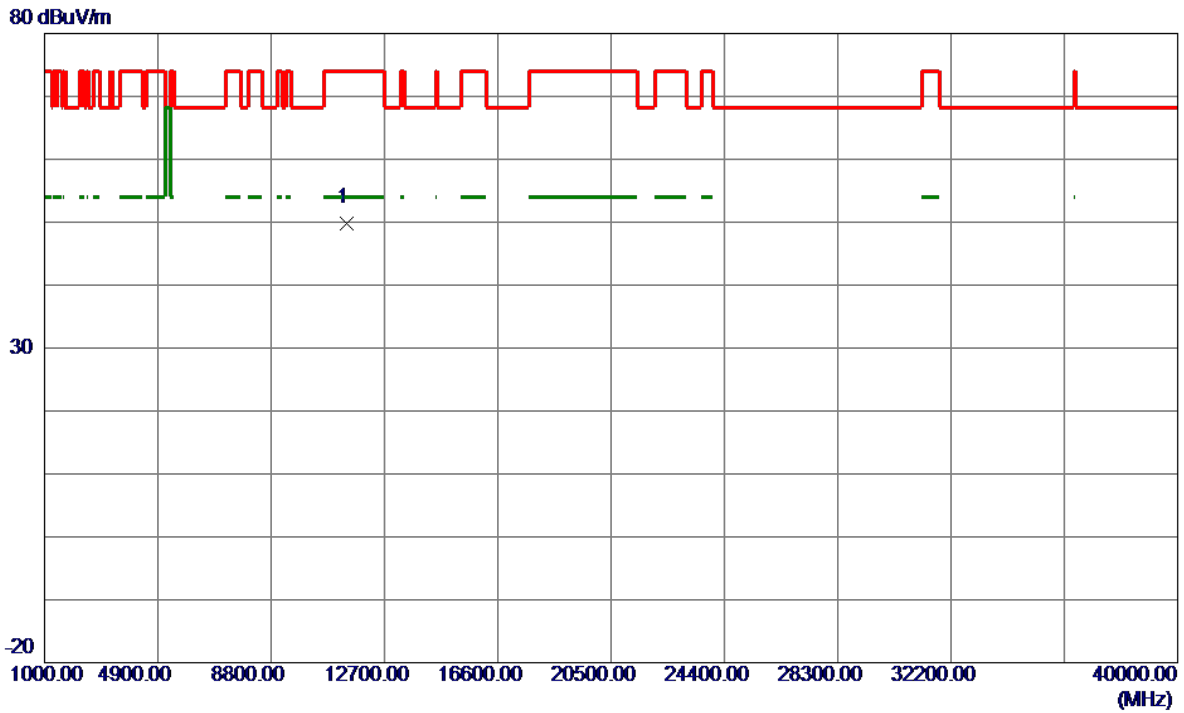


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11395.4500 | 47.77 | 2.13 | 49.90 | 74.00 | -24.10 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

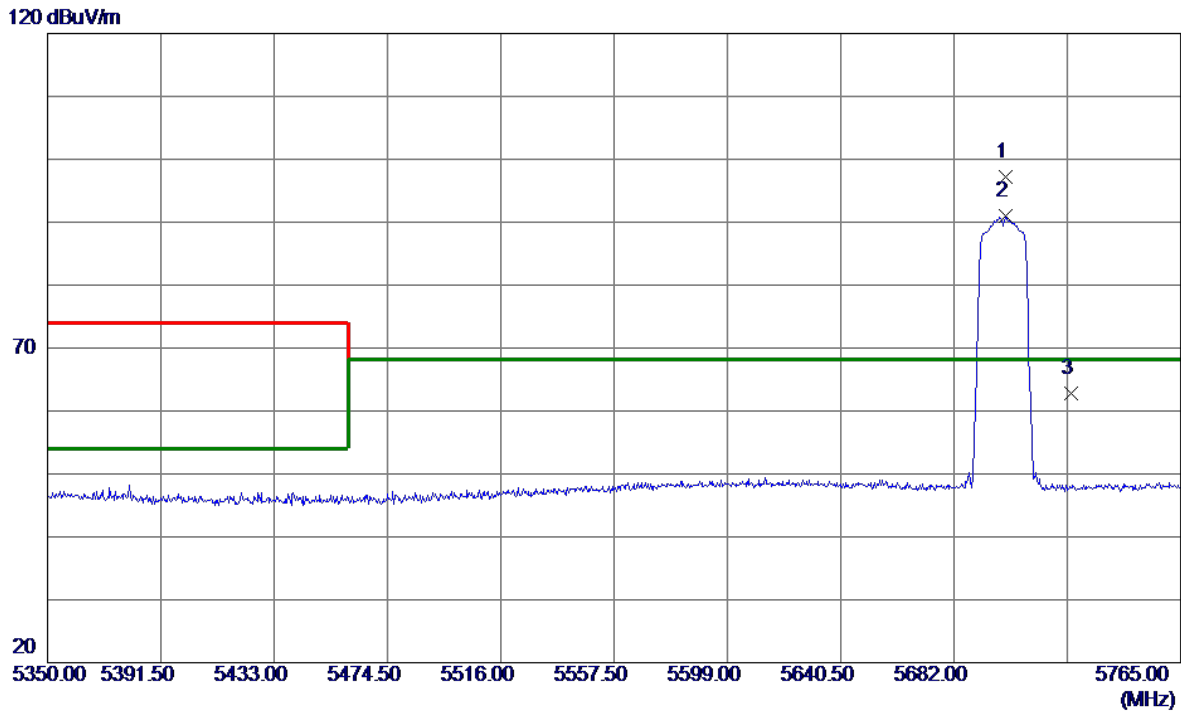


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5701.0900 | 58.70 | 38.41 | 97.11 | 68.20 | 28.91 | Peak | No limit |
| 2 | 5701.0900 | 52.60 | 38.41 | 91.01 | 68.20 | 22.81 | AVG | No limit |
| 3 | 5725.0000 | 24.26 | 38.50 | 62.76 | 68.20 | -5.44 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

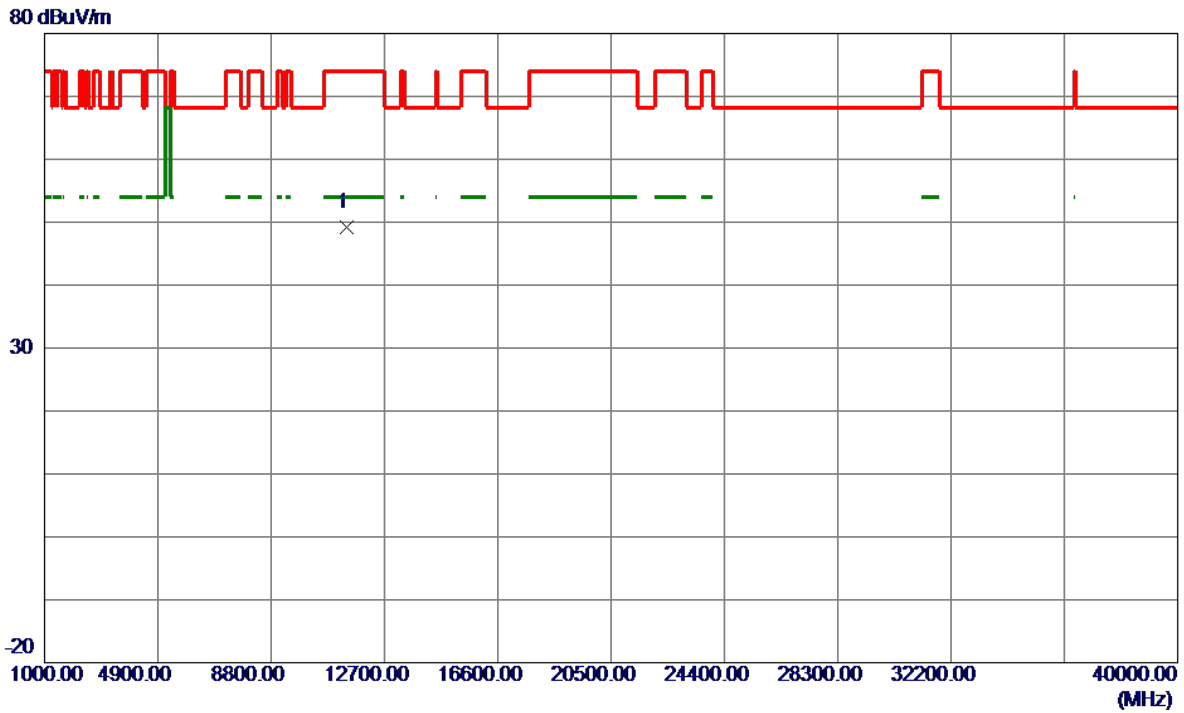


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000 | 47.09 | 2.13 | 49.22 | 74.00 | -24.78 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

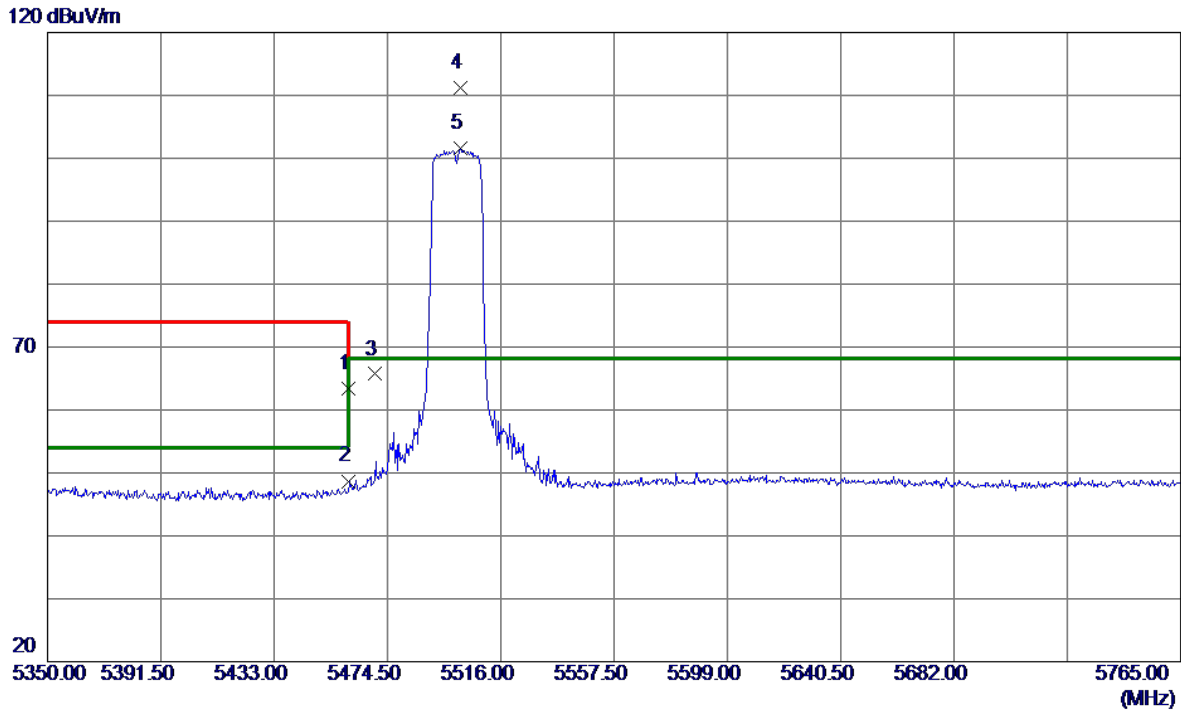


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 25.30 | 38.12 | 63.42 | 74.00 | -10.58 | Peak | |
| 2 | 5460.0000 | 10.58 | 38.12 | 48.70 | 54.00 | -5.30 | AVG | |
| 3 | 5470.0000 | 27.55 | 38.15 | 65.70 | 68.20 | -2.50 | Peak | |
| 4 * | 5501.0600 | 72.96 | 38.24 | 111.20 | 68.20 | 43.00 | Peak | No limit |
| 5 | 5501.0600 | 63.37 | 38.24 | 101.61 | 68.20 | 33.41 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

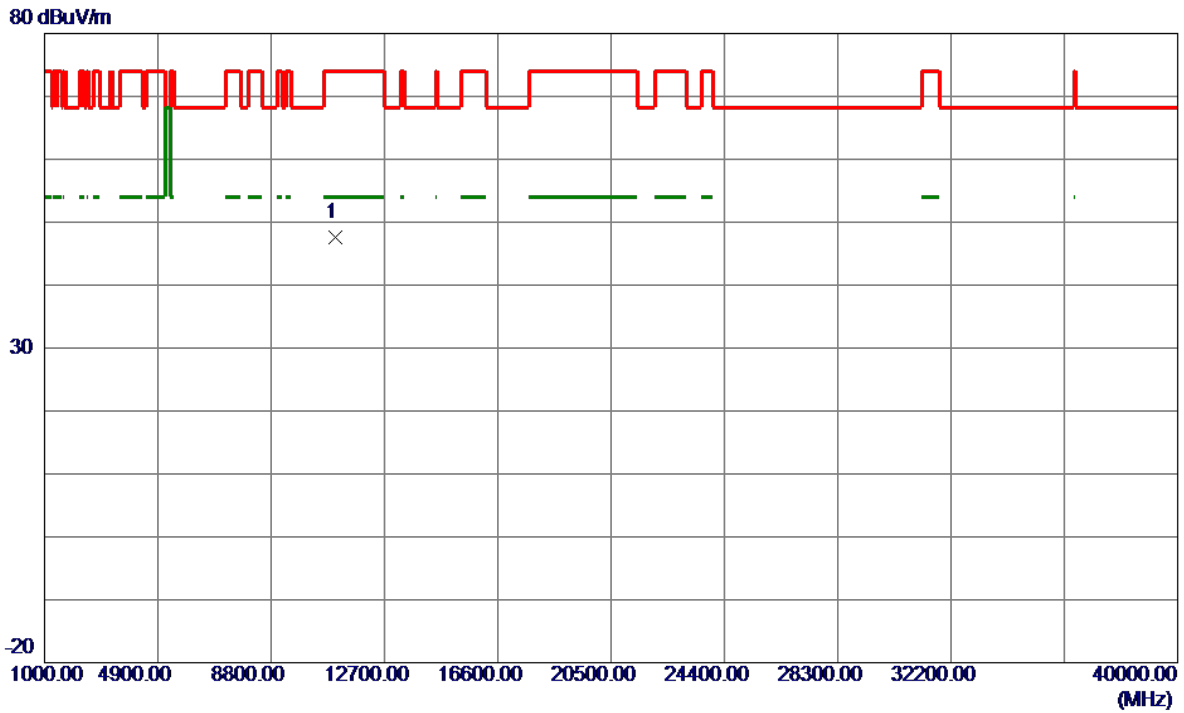


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.0000 | 45.35 | 2.34 | 47.69 | 74.00 | -26.31 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

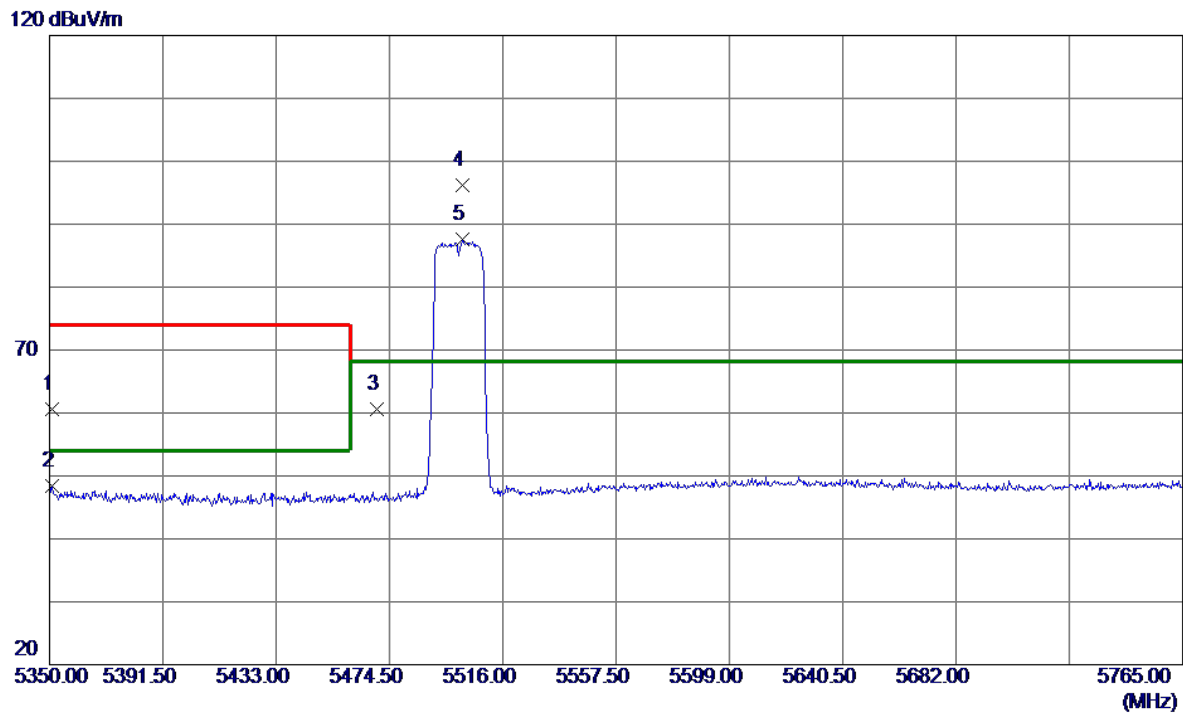


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5350.8300 | 22.80 | 37.74 | 60.54 | 74.00 | -13.46 | Peak | |
| 2 | 5350.8300 | 10.64 | 37.74 | 48.38 | 54.00 | -5.62 | AVG | |
| 3 | 5470.0000 | 22.52 | 38.15 | 60.67 | 68.20 | -7.53 | Peak | |
| 4 * | 5501.2670 | 57.96 | 38.24 | 96.20 | 68.20 | 28.00 | Peak | No limit |
| 5 | 5501.2670 | 49.36 | 38.24 | 87.60 | 68.20 | 19.40 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

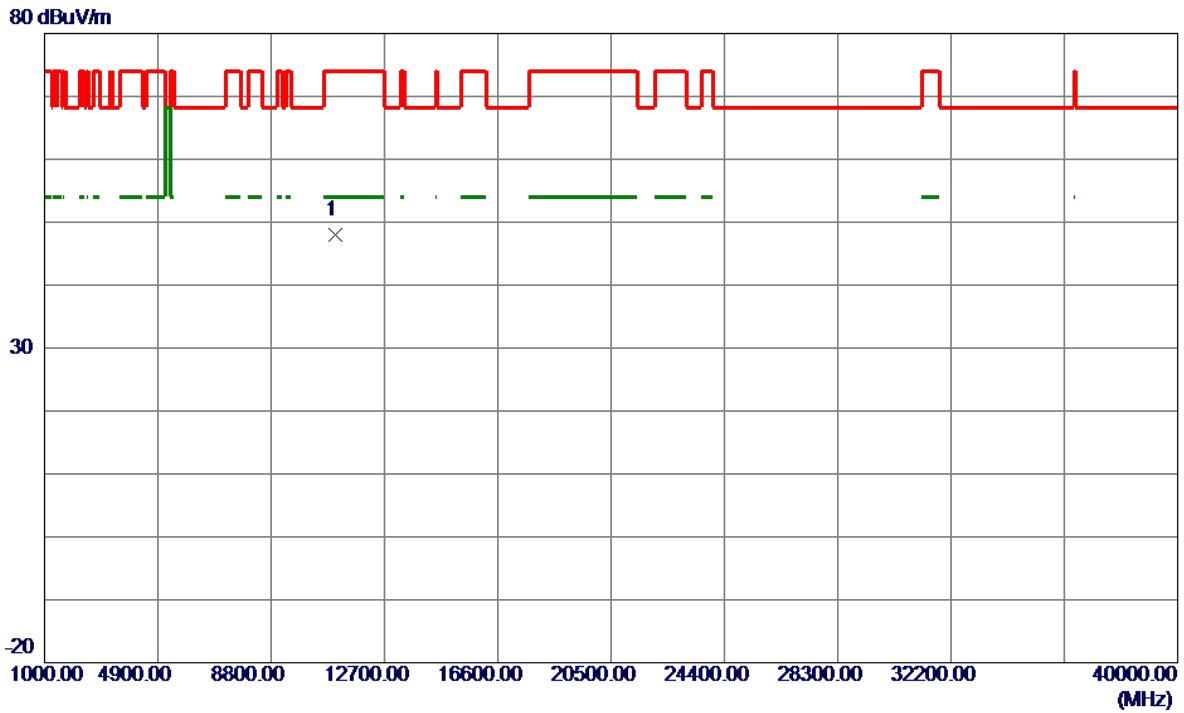


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.0000 | 45.69 | 2.34 | 48.03 | 74.00 | -25.97 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

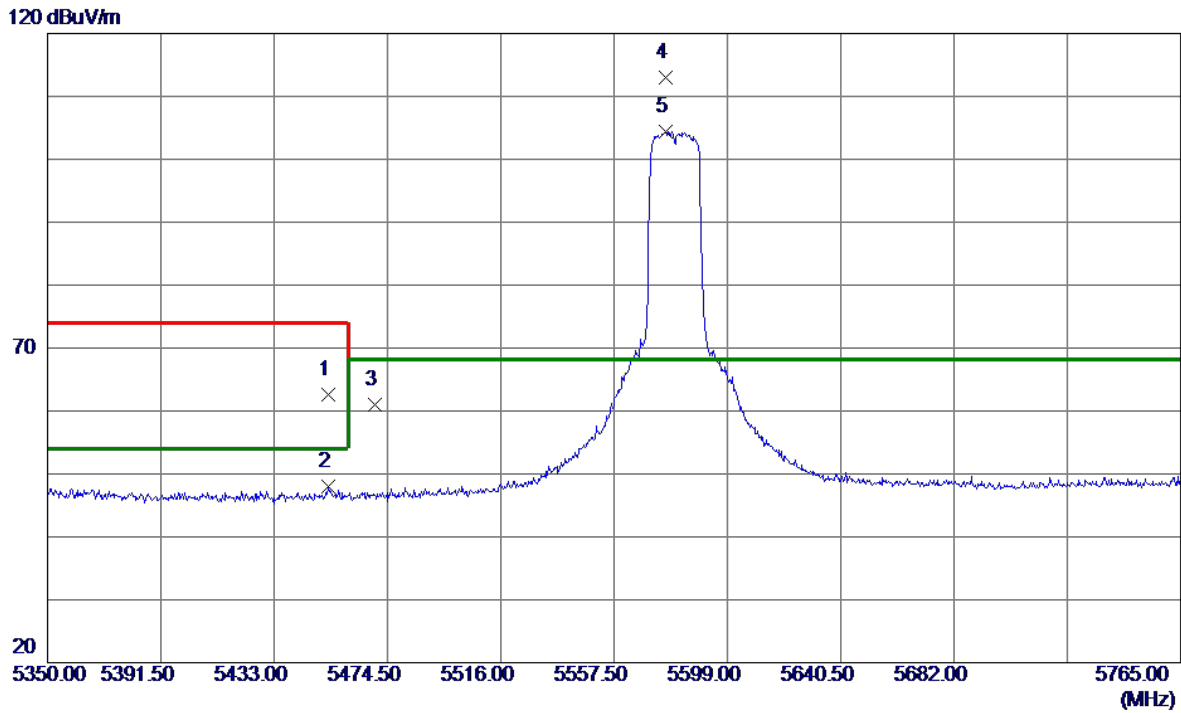

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5452.7120 | 24.58 | 38.10 | 62.68 | 74.00 | -11.32 | Peak | |
| 2 | 5452.7120 | 9.81 | 38.10 | 47.91 | 54.00 | -6.09 | AVG | |
| 3 | 5470.0000 | 22.78 | 38.15 | 60.93 | 68.20 | -7.27 | Peak | |
| 4 * | 5576.5900 | 74.72 | 38.32 | 113.04 | 68.20 | 44.84 | Peak | No limit |
| 5 | 5576.5900 | 66.16 | 38.32 | 104.48 | 68.20 | 36.28 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|




| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11160.0000 | 45.71 | 2.04 | 47.75 | 74.00 | -26.25 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

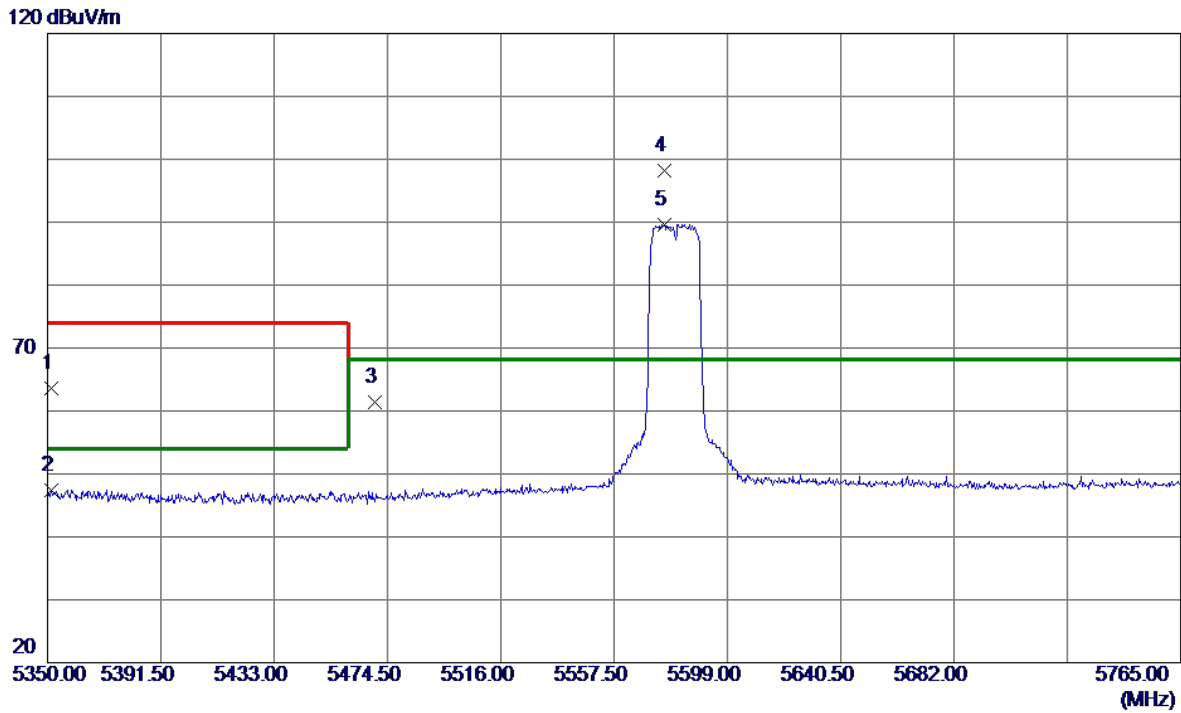


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5351.2450 | 25.86 | 37.74 | 63.60 | 74.00 | -10.40 | Peak | |
| 2 | 5351.2450 | 9.75 | 37.74 | 47.49 | 54.00 | -6.51 | AVG | |
| 3 | 5470.0000 | 23.20 | 38.15 | 61.35 | 68.20 | -6.85 | Peak | |
| 4 * | 5575.9670 | 59.85 | 38.32 | 98.17 | 68.20 | 29.97 | Peak | No limit |
| 5 | 5575.9670 | 51.37 | 38.32 | 89.69 | 68.20 | 21.49 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

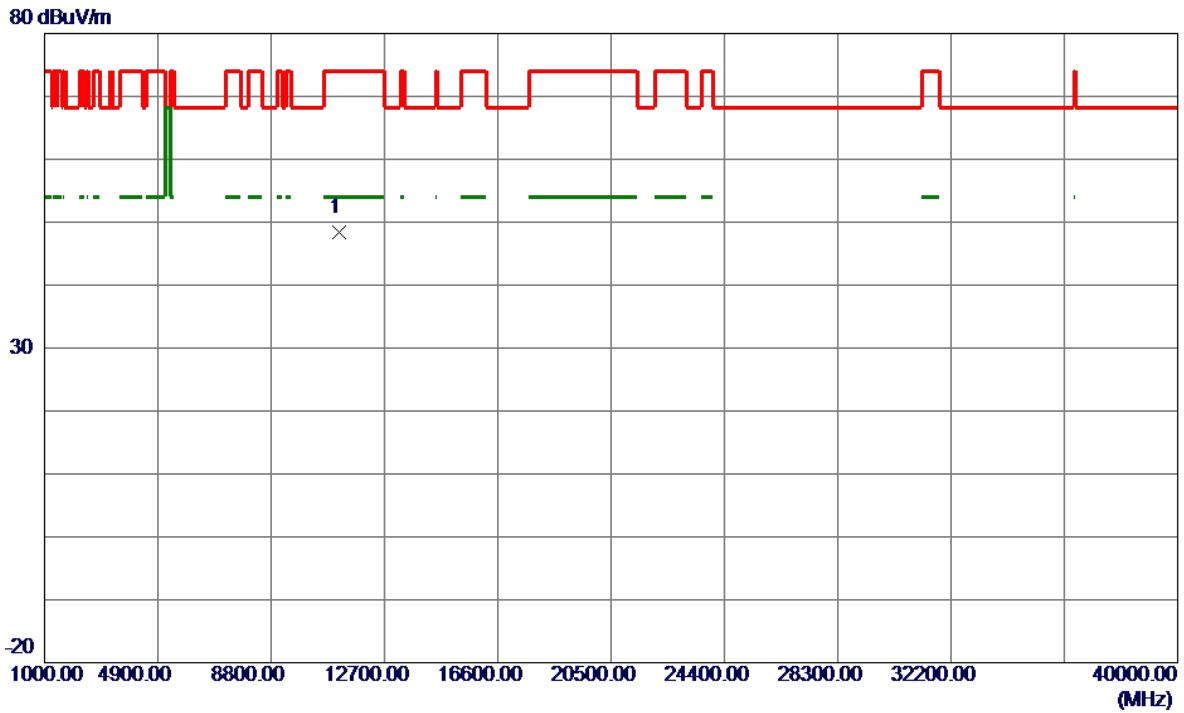


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11160.0000 | 46.32 | 2.04 | 48.36 | 74.00 | -25.64 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

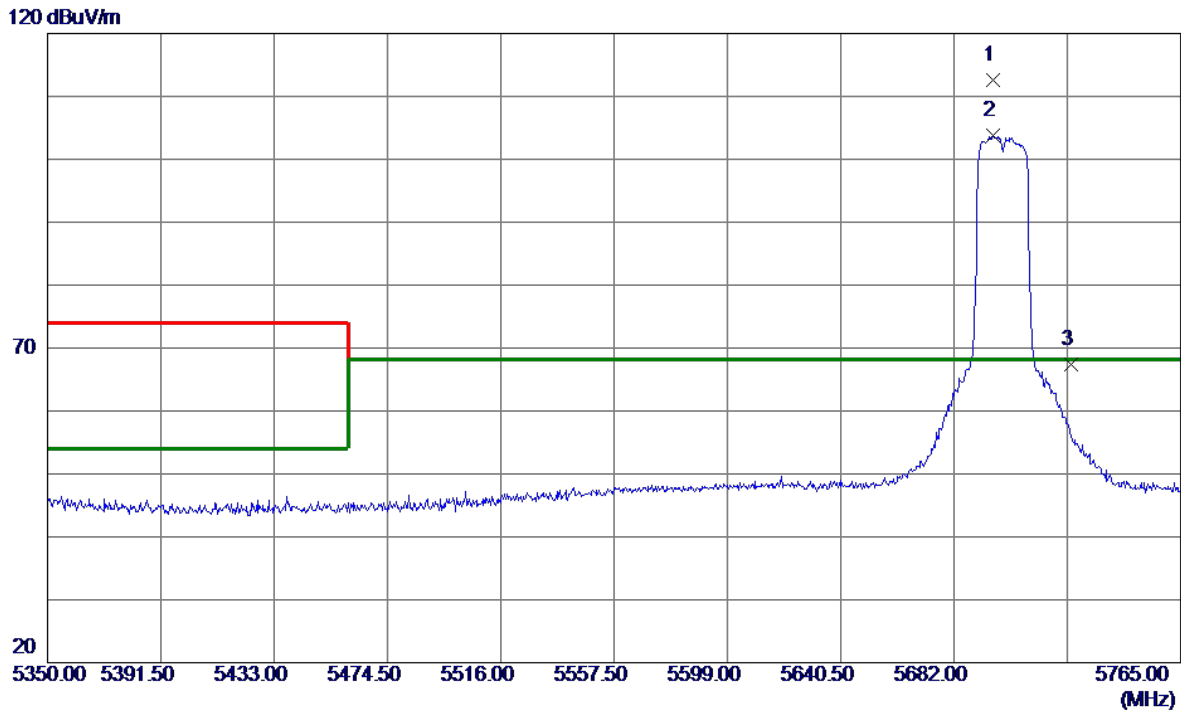


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5696.1100 | 74.15 | 38.40 | 112.55 | 68.20 | 44.35 | Peak | No limit |
| 2 | 5696.1100 | 65.38 | 38.40 | 103.78 | 68.20 | 35.58 | AVG | No limit |
| 3 | 5725.0000 | 28.98 | 38.50 | 67.48 | 68.20 | -0.72 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

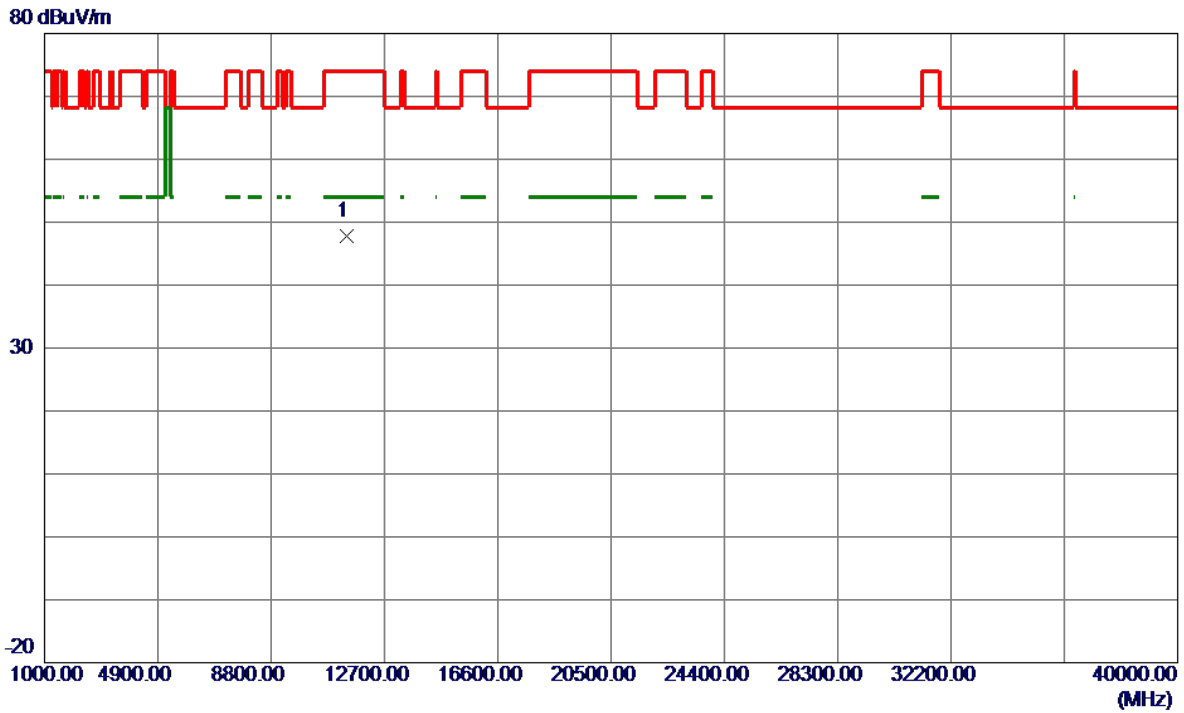


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000 | 45.58 | 2.13 | 47.71 | 74.00 | -26.29 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

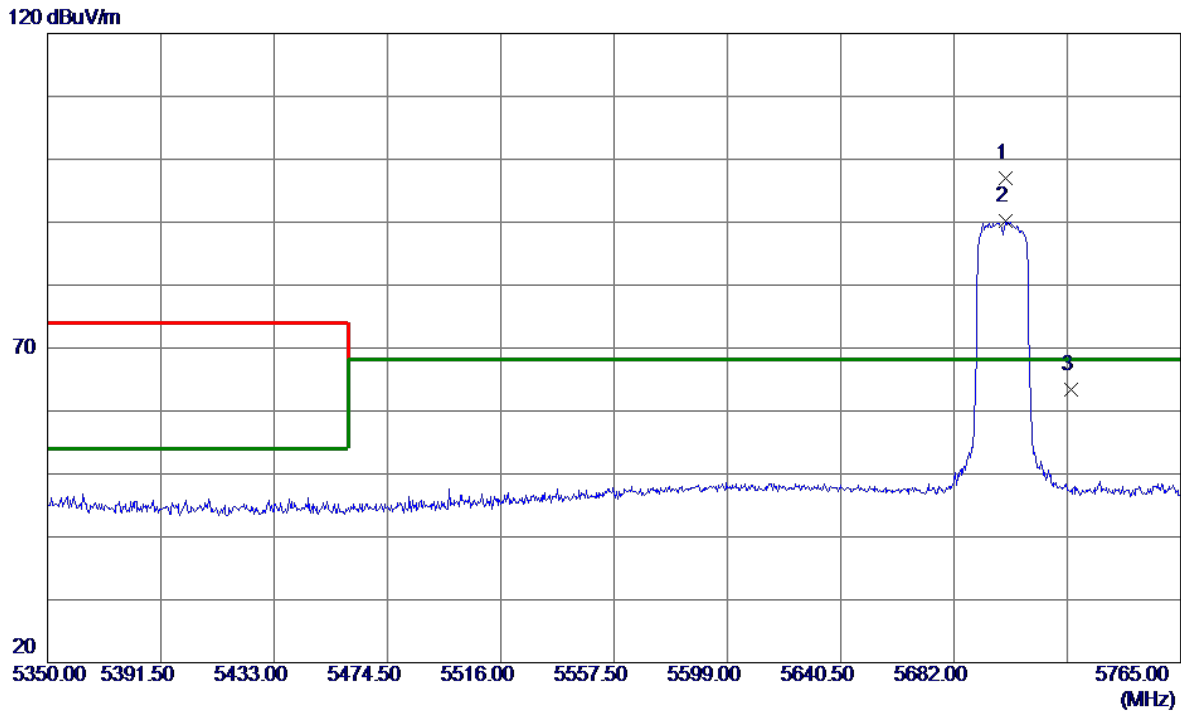


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5701.0900 | 58.52 | 38.41 | 96.93 | 68.20 | 28.73 | Peak | No limit |
| 2 | 5701.0900 | 51.74 | 38.41 | 90.15 | 68.20 | 21.95 | AVG | No limit |
| 3 | 5725.0000 | 24.96 | 38.50 | 63.46 | 68.20 | -4.74 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

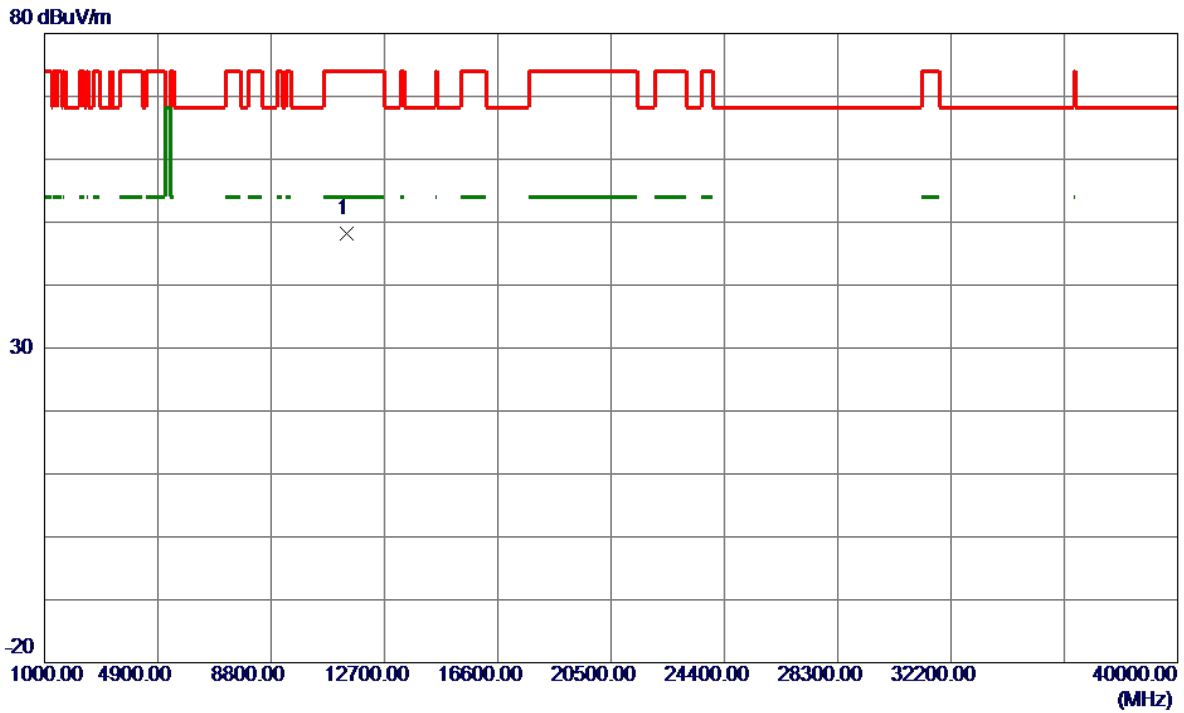


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000 | 46.13 | 2.13 | 48.26 | 74.00 | -25.74 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

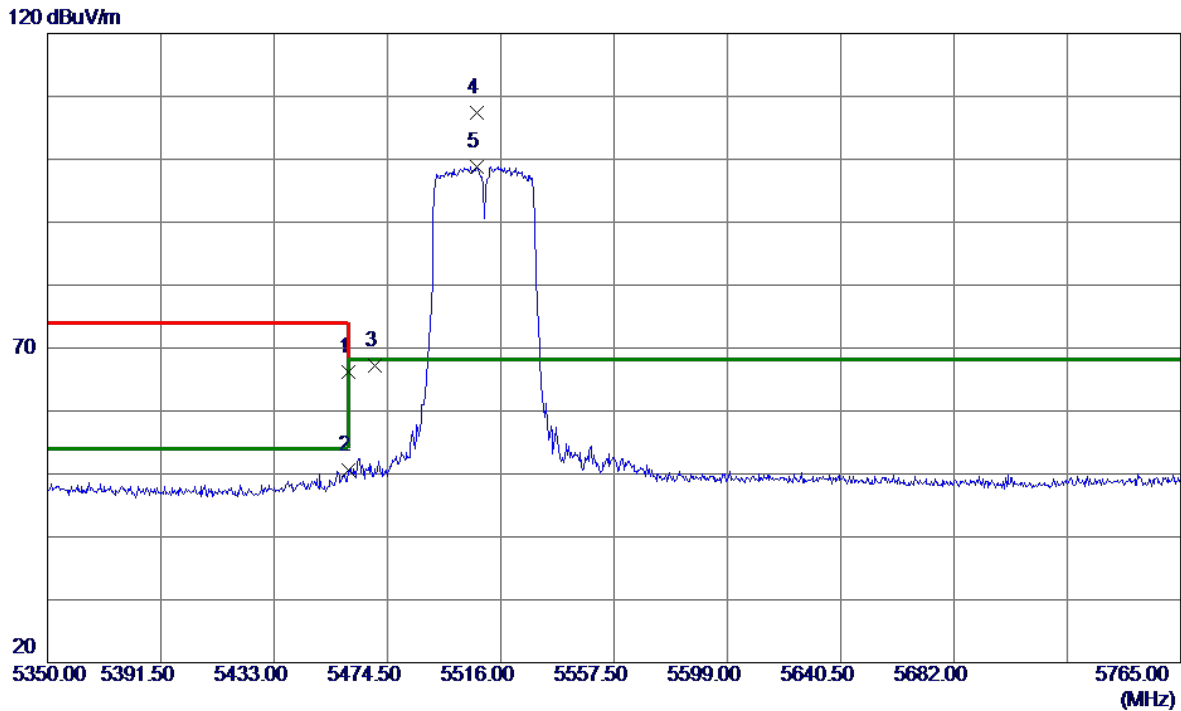


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 27.99 | 38.12 | 66.11 | 74.00 | -7.89 | Peak | |
| 2 | 5460.0000 | 12.43 | 38.12 | 50.55 | 54.00 | -3.45 | AVG | |
| 3 | 5470.0000 | 29.00 | 38.15 | 67.15 | 68.20 | -1.05 | Peak | |
| 4 * | 5507.2850 | 69.07 | 38.25 | 107.32 | 68.20 | 39.12 | Peak | No limit |
| 5 | 5507.2850 | 60.63 | 38.25 | 98.88 | 68.20 | 30.68 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

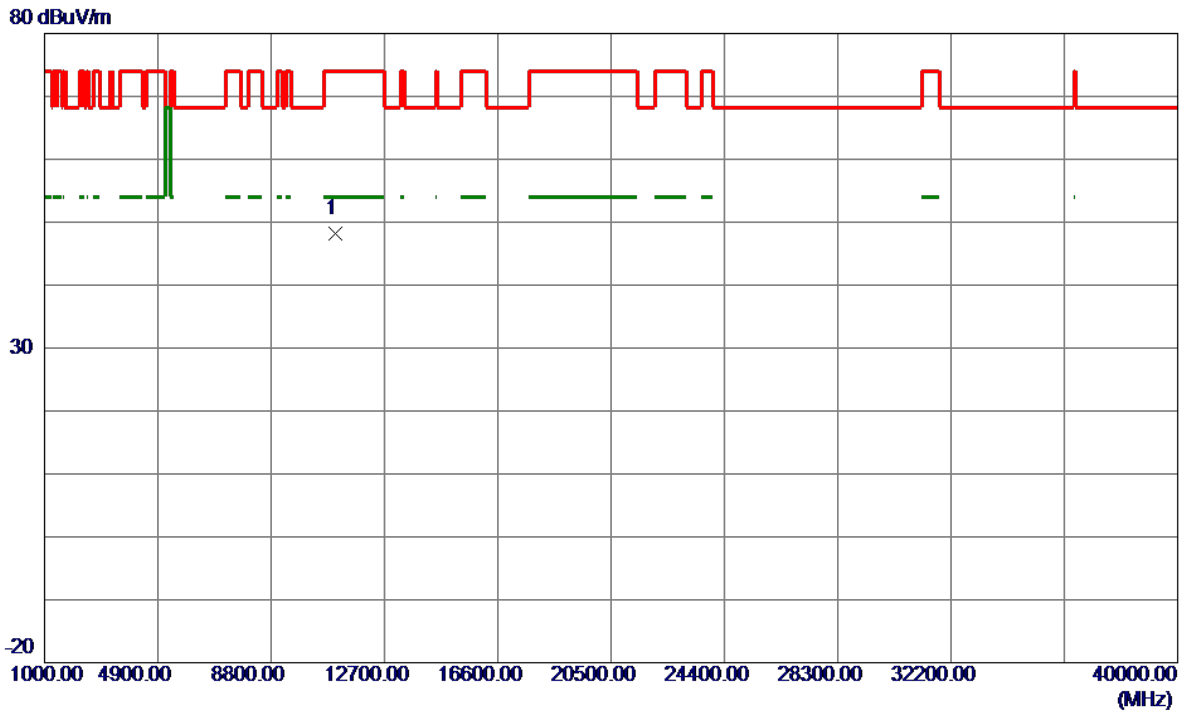


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11020.0000 | 45.93 | 2.30 | 48.23 | 74.00 | -25.77 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

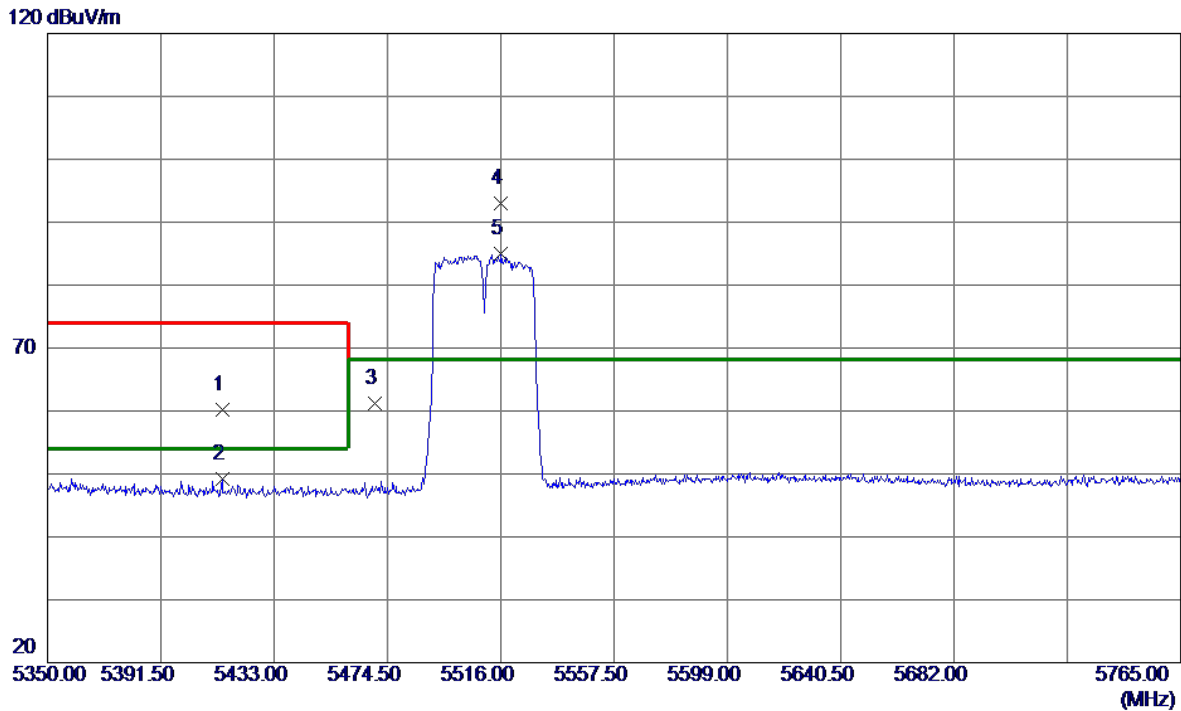


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5413.9100 | 22.21 | 37.98 | 60.19 | 74.00 | -13.81 | Peak | |
| 2 | 5413.9100 | 11.23 | 37.98 | 49.21 | 54.00 | -4.79 | AVG | |
| 3 | 5470.0000 | 23.06 | 38.15 | 61.21 | 68.20 | -6.99 | Peak | |
| 4 * | 5516.2080 | 54.75 | 38.26 | 93.01 | 68.20 | 24.81 | Peak | No limit |
| 5 | 5516.2080 | 46.66 | 38.26 | 84.92 | 68.20 | 16.72 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

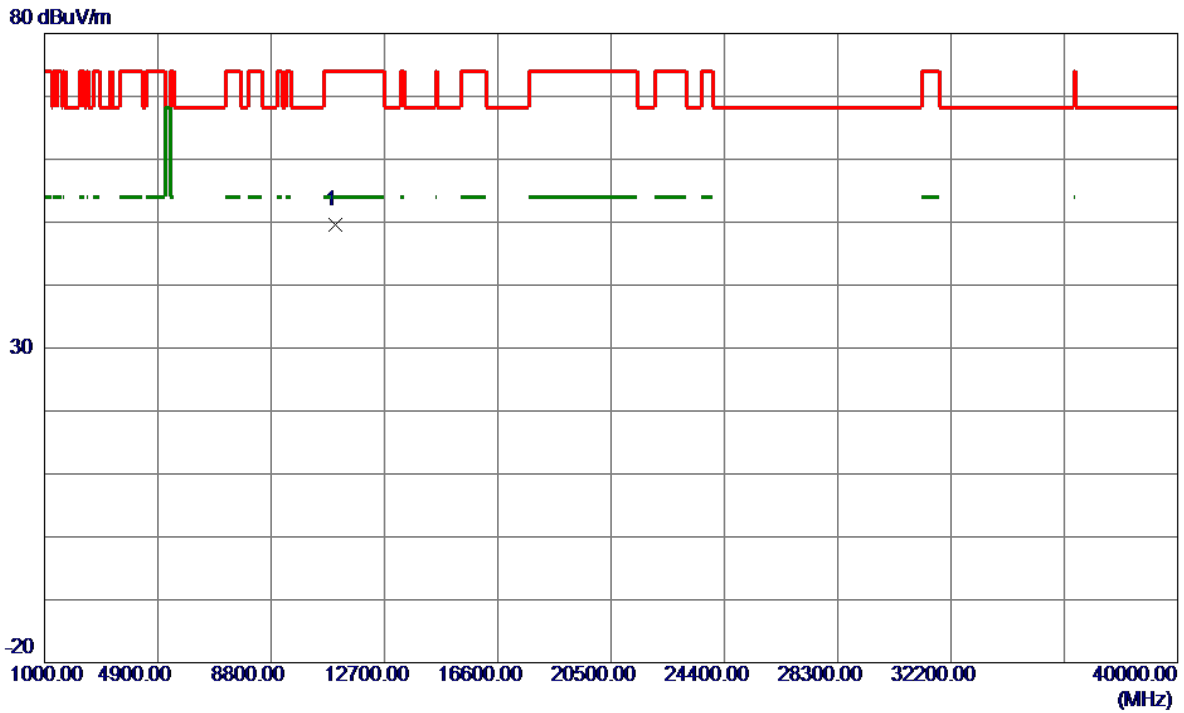


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11011.3000 | 47.23 | 2.32 | 49.55 | 74.00 | -24.45 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

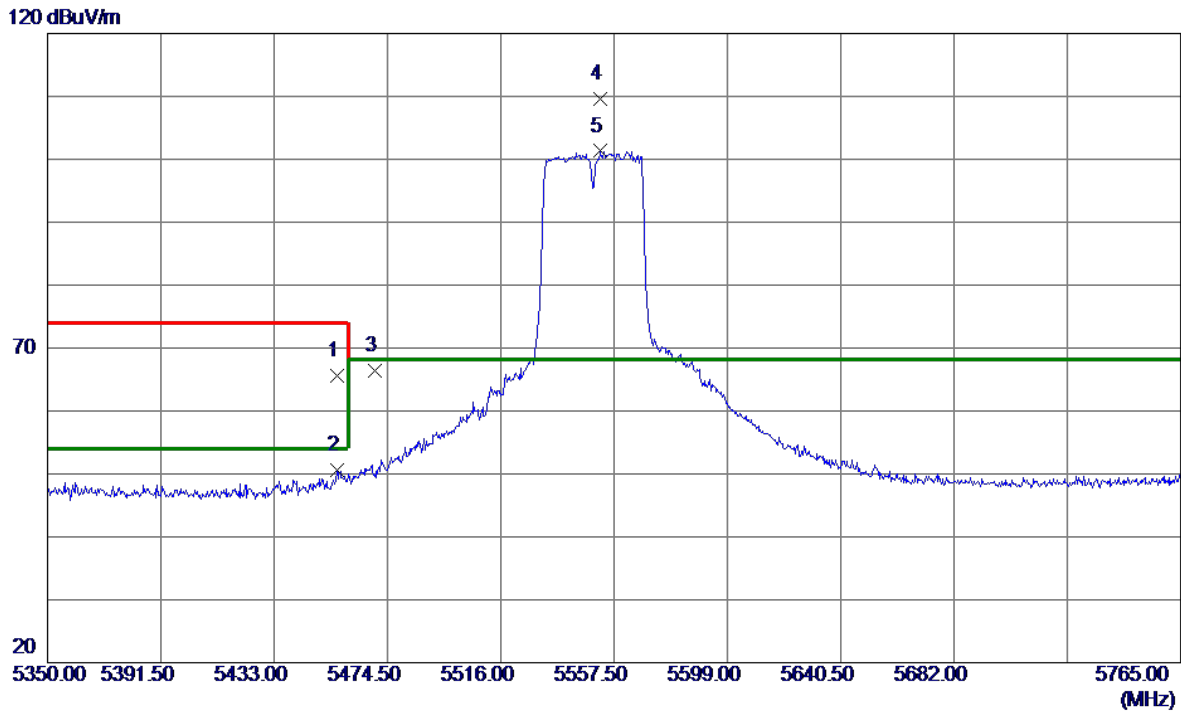


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5456.0330 | 27.57 | 38.11 | 65.68 | 74.00 | -8.32 | Peak | |
| 2 | 5456.0330 | 12.45 | 38.11 | 50.56 | 54.00 | -3.44 | AVG | |
| 3 | 5470.0000 | 28.23 | 38.15 | 66.38 | 68.20 | -1.82 | Peak | |
| 4 * | 5552.3130 | 71.28 | 38.29 | 109.57 | 68.20 | 41.37 | Peak | No limit |
| 5 | 5552.3130 | 63.01 | 38.29 | 101.30 | 68.20 | 33.10 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

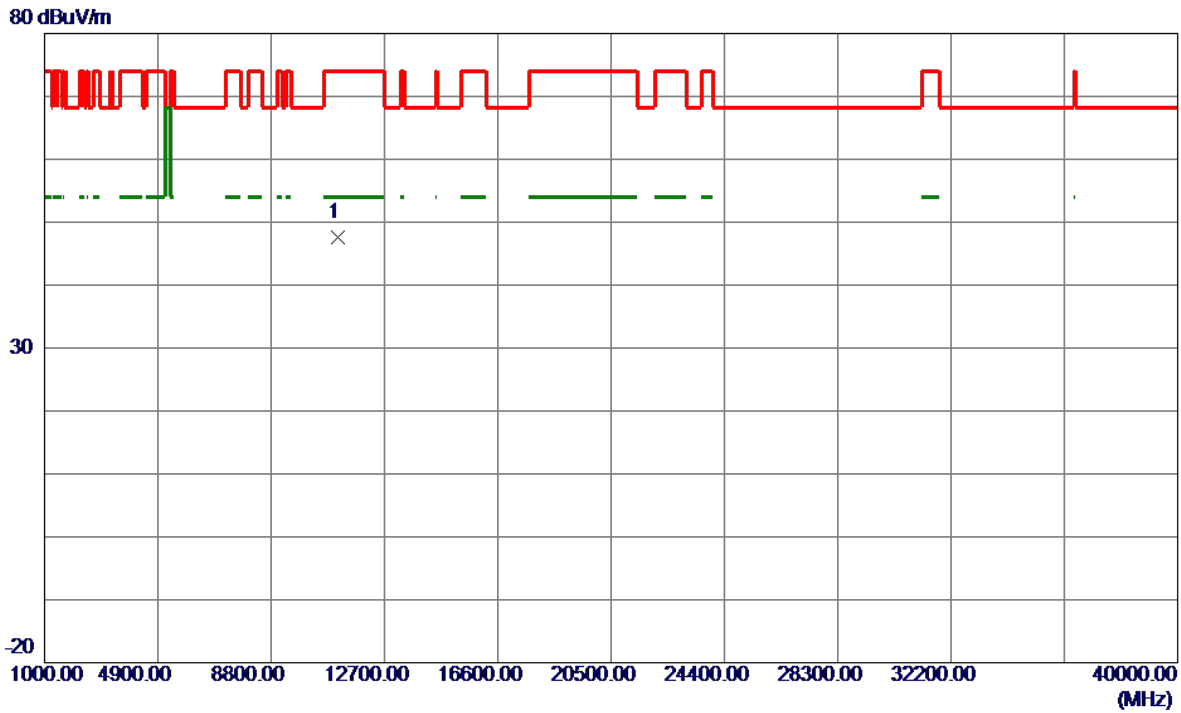


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0000 | 45.42 | 2.15 | 47.57 | 74.00 | -26.43 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

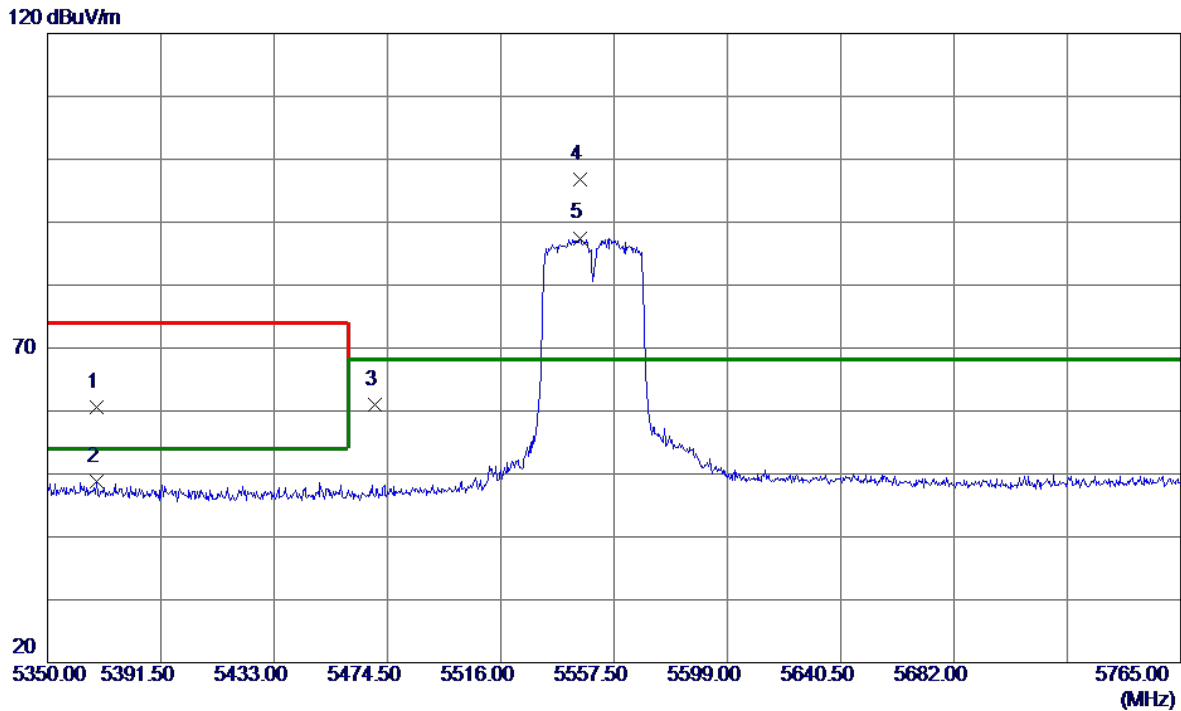


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5367.8450 | 22.83 | 37.81 | 60.64 | 74.00 | -13.36 | Peak | |
| 2 | 5367.8450 | 10.97 | 37.81 | 48.78 | 54.00 | -5.22 | AVG | |
| 3 | 5470.0000 | 22.90 | 38.15 | 61.05 | 68.20 | -7.15 | Peak | |
| 4 * | 5545.0500 | 58.42 | 38.29 | 96.71 | 68.20 | 28.51 | Peak | No limit |
| 5 | 5545.0500 | 49.21 | 38.29 | 87.50 | 68.20 | 19.30 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

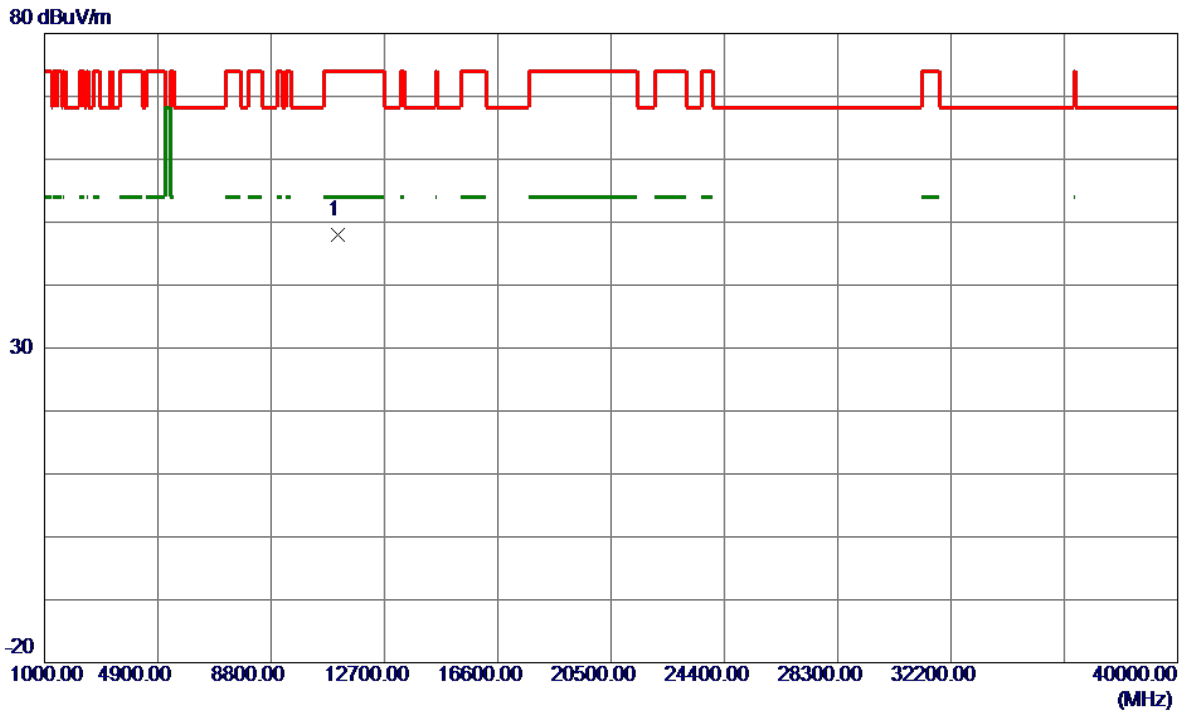


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0000 | 45.93 | 2.15 | 48.08 | 74.00 | -25.92 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

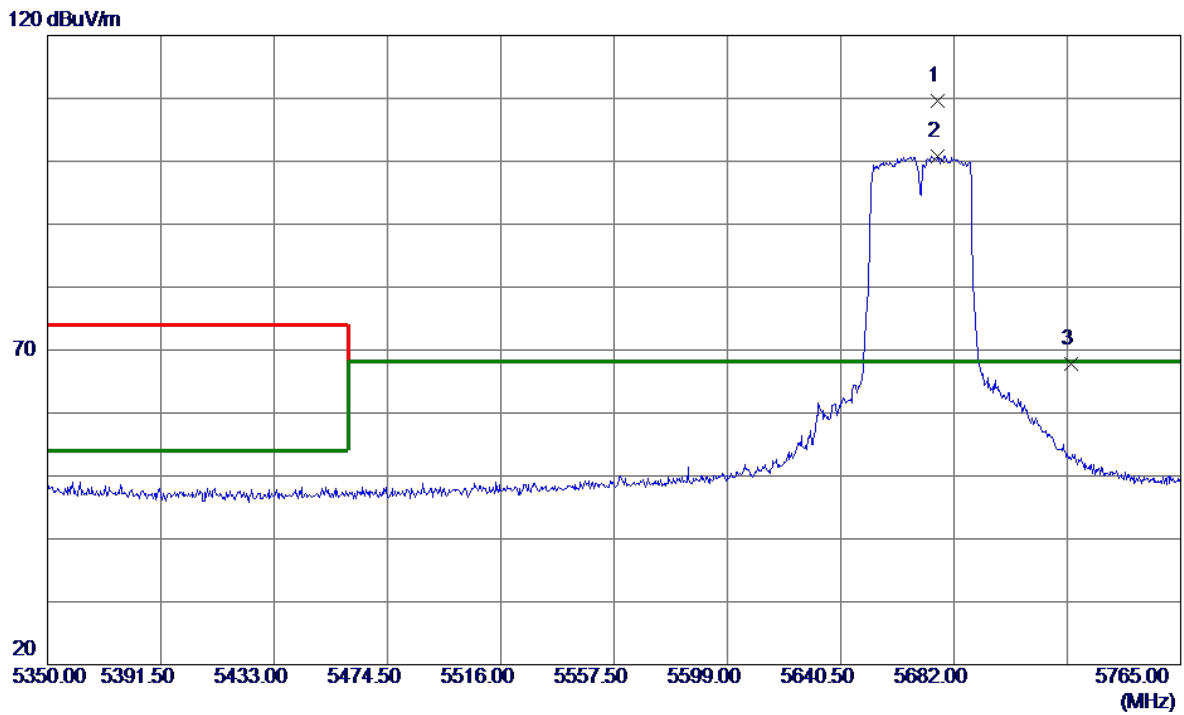


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5676.1900 | 71.12 | 38.39 | 109.51 | 68.20 | 41.31 | Peak | No limit |
| 2 | 5676.1900 | 62.46 | 38.39 | 100.85 | 68.20 | 32.65 | AVG | No limit |
| 3 | 5725.0000 | 29.28 | 38.50 | 67.78 | 68.20 | -0.42 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

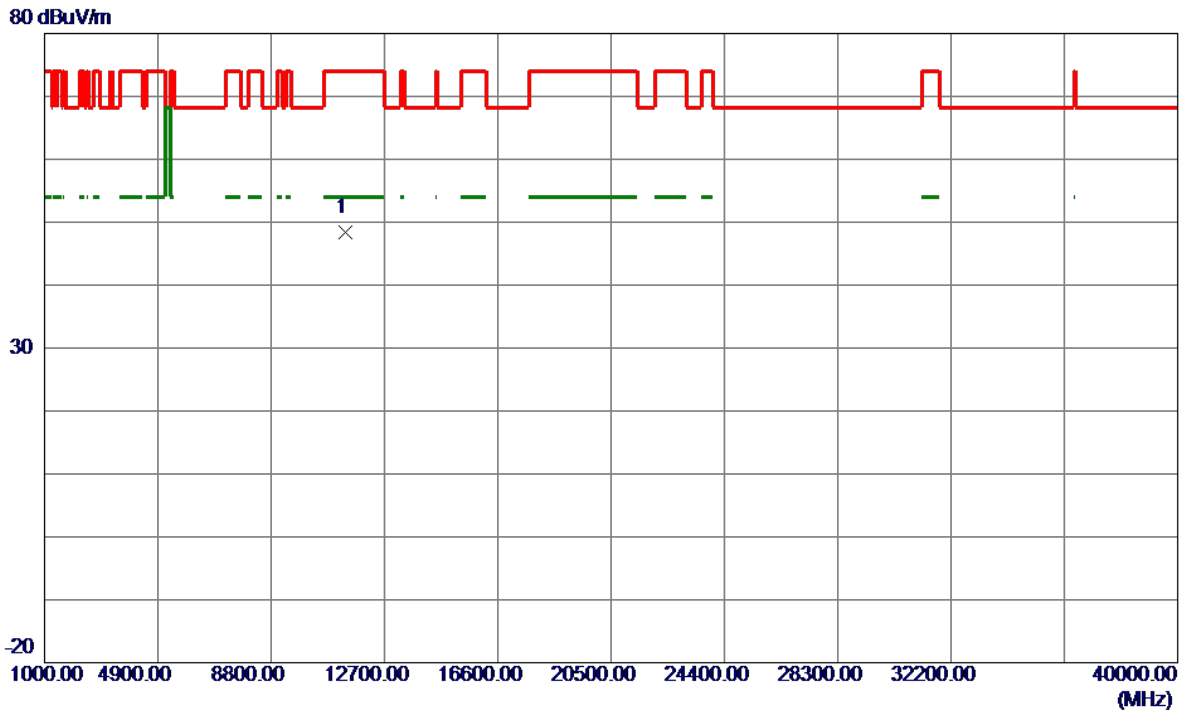


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.0000 | 46.41 | 2.08 | 48.49 | 74.00 | -25.51 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

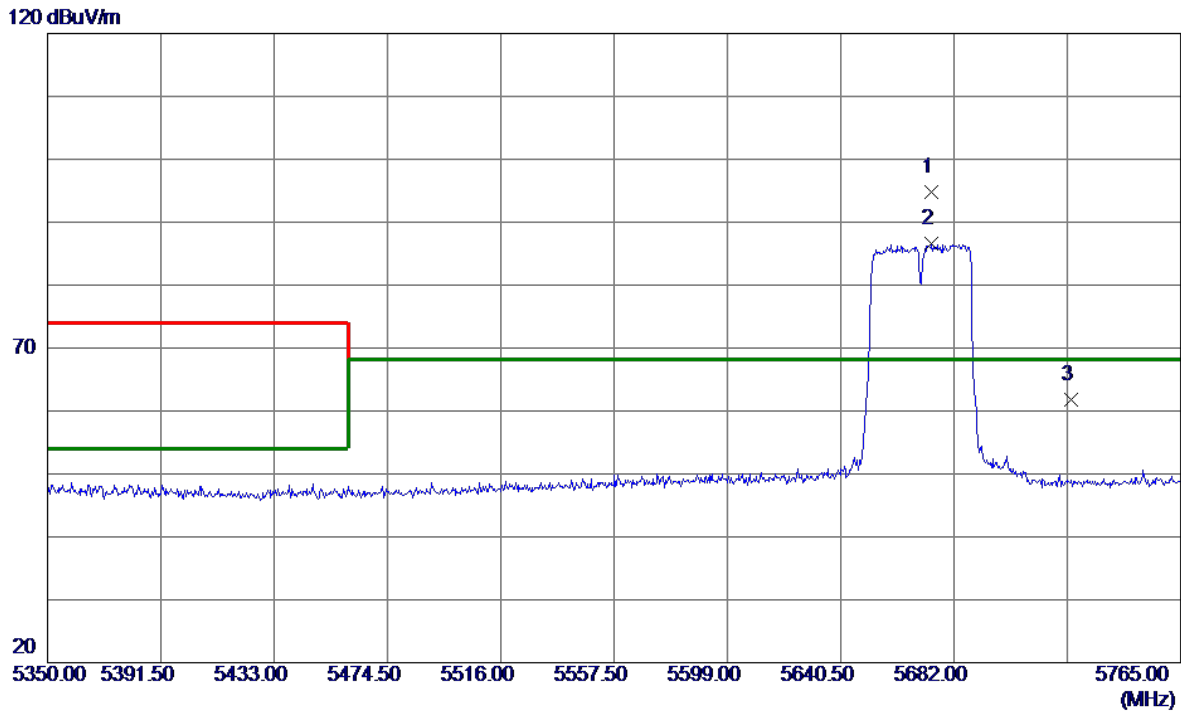


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5673.7000 | 56.33 | 38.39 | 94.72 | 68.20 | 26.52 | Peak | No limit |
| 2 | 5673.7000 | 48.14 | 38.39 | 86.53 | 68.20 | 18.33 | AVG | No limit |
| 3 | 5725.0000 | 23.34 | 38.50 | 61.84 | 68.20 | -6.36 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

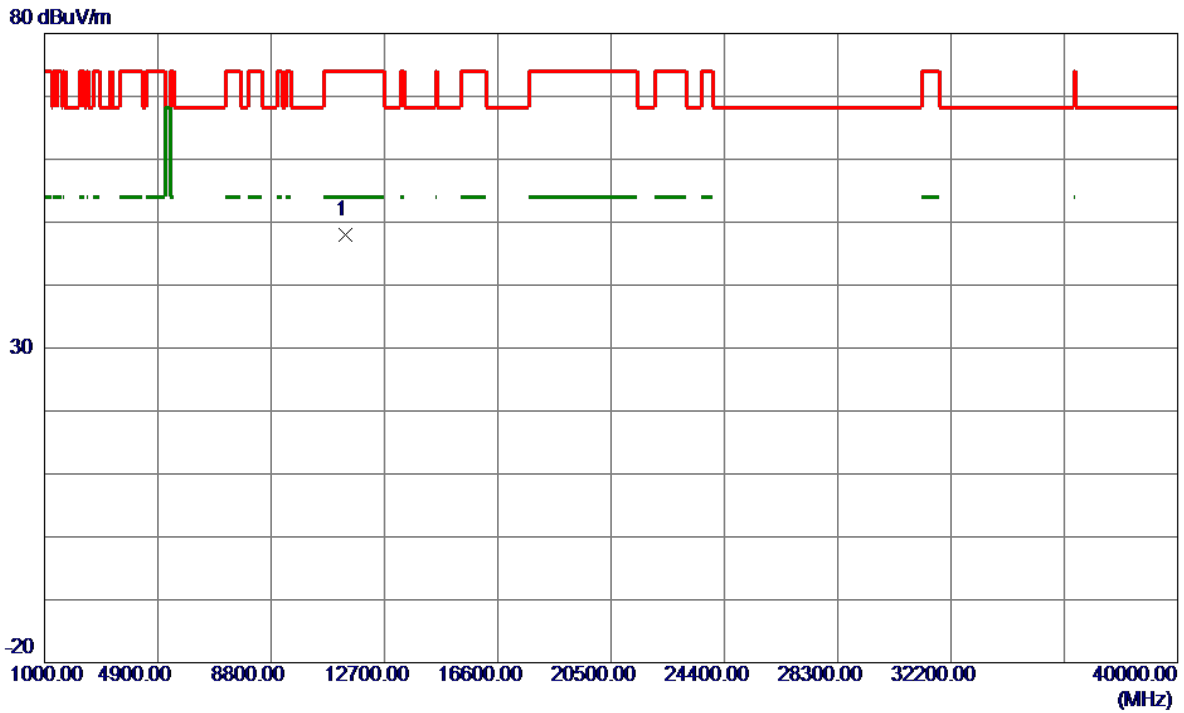


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.0000 | 45.91 | 2.08 | 47.99 | 74.00 | -26.01 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

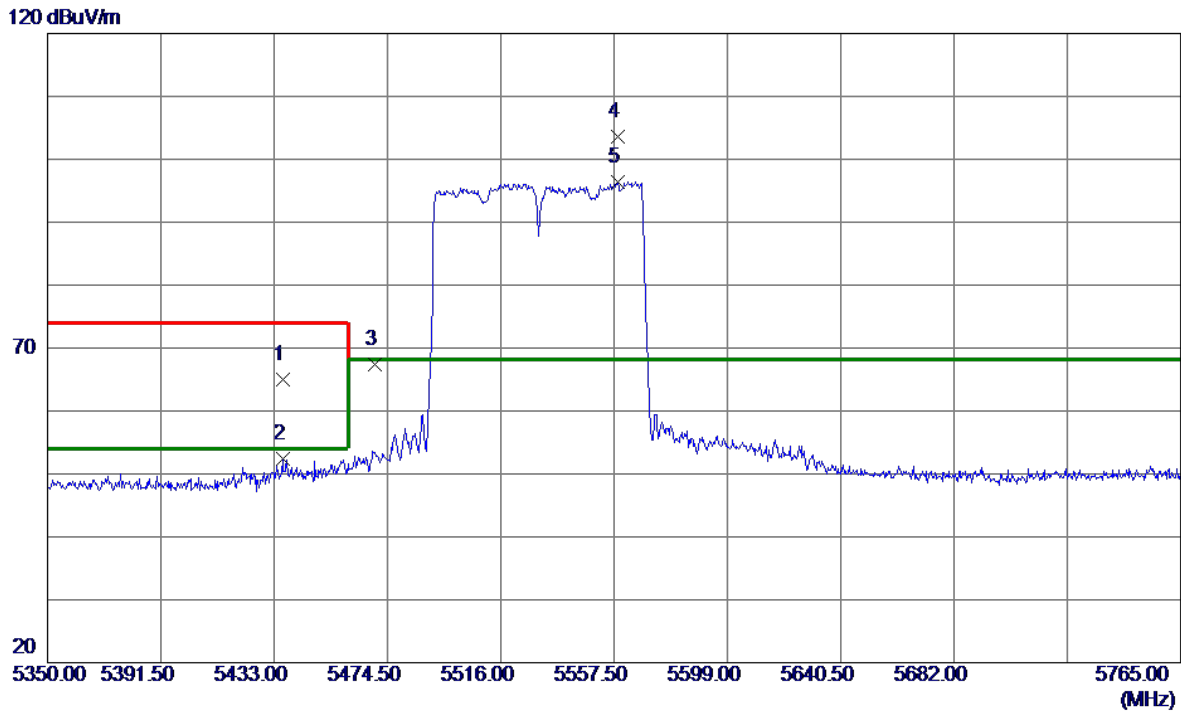


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5436.1130 | 26.89 | 38.05 | 64.94 | 74.00 | -9.06 | Peak | |
| 2 | 5436.1130 | 14.36 | 38.05 | 52.41 | 54.00 | -1.59 | AVG | |
| 3 | 5470.0000 | 29.19 | 38.15 | 67.34 | 68.20 | -0.86 | Peak | |
| 4 * | 5558.9530 | 65.37 | 38.30 | 103.67 | 68.20 | 35.47 | Peak | No limit |
| 5 | 5558.9530 | 58.11 | 38.30 | 96.41 | 68.20 | 28.21 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

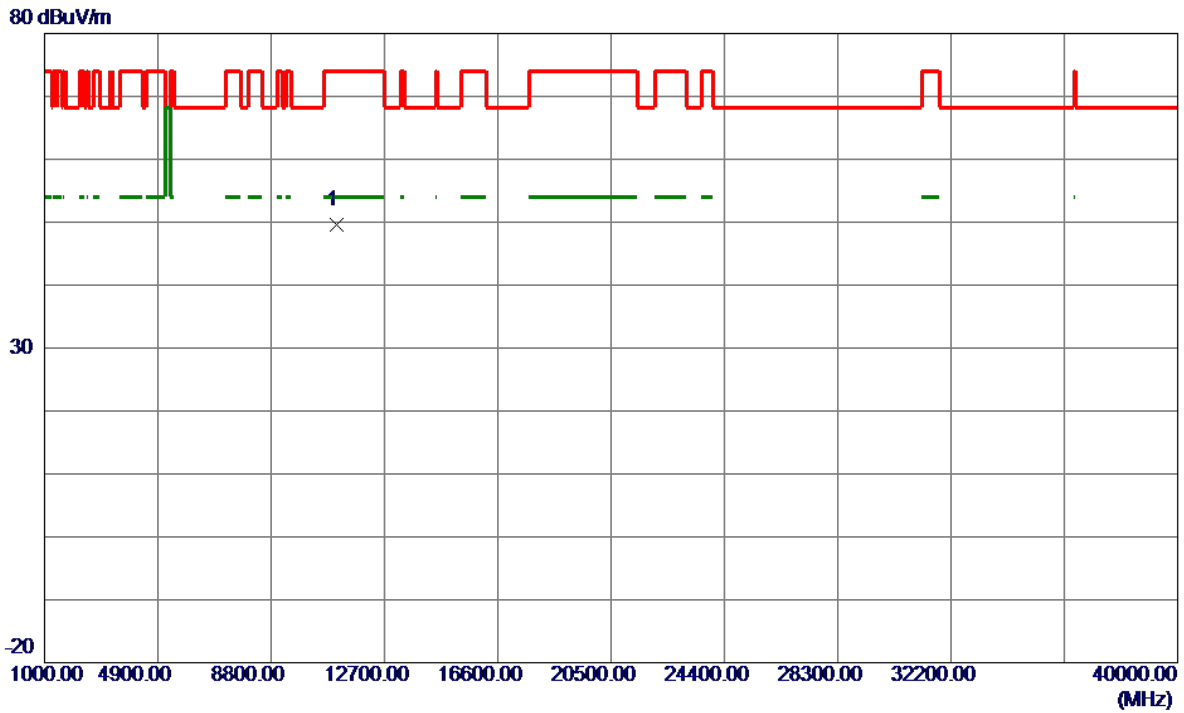


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.0000 | 47.38 | 2.23 | 49.61 | 74.00 | -24.39 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

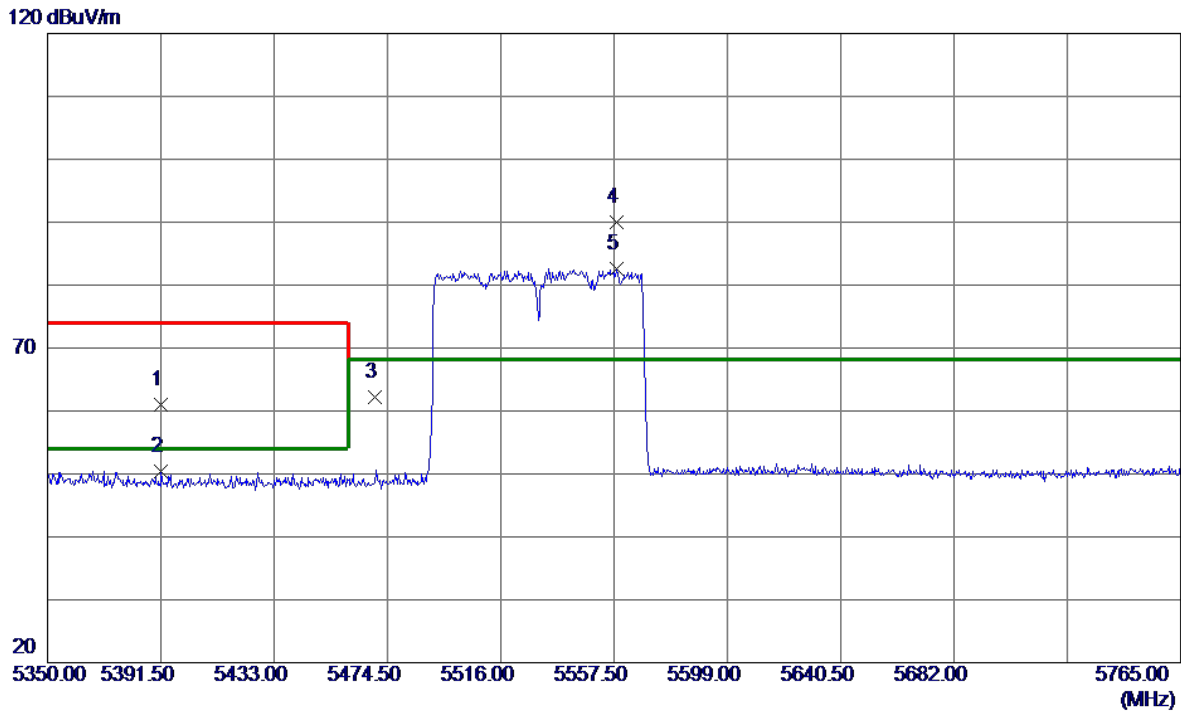


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5391.7080 | 23.10 | 37.91 | 61.01 | 74.00 | -12.99 | Peak | |
| 2 | 5391.7080 | 12.45 | 37.91 | 50.36 | 54.00 | -3.64 | AVG | |
| 3 | 5470.0000 | 24.05 | 38.15 | 62.20 | 68.20 | -6.00 | Peak | |
| 4 * | 5558.5379 | 51.62 | 38.30 | 89.92 | 68.20 | 21.72 | Peak | No limit |
| 5 | 5558.5379 | 44.37 | 38.30 | 82.67 | 68.20 | 14.47 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

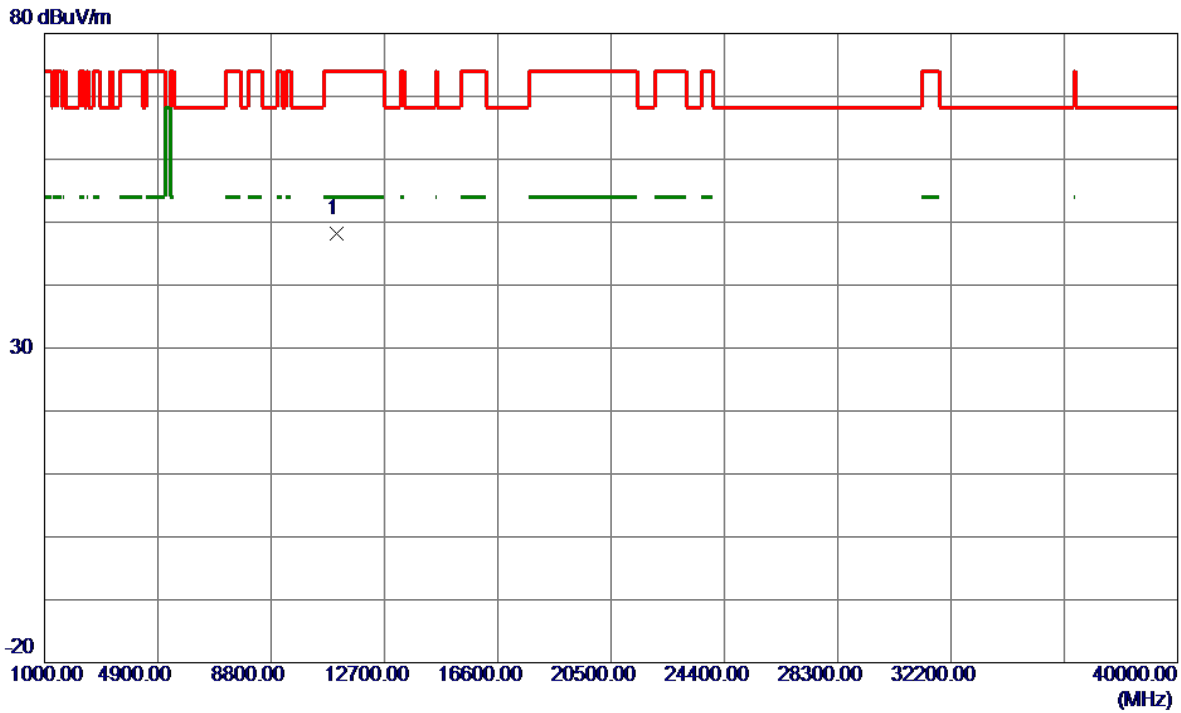


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.0000 | 45.91 | 2.23 | 48.14 | 74.00 | -25.86 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

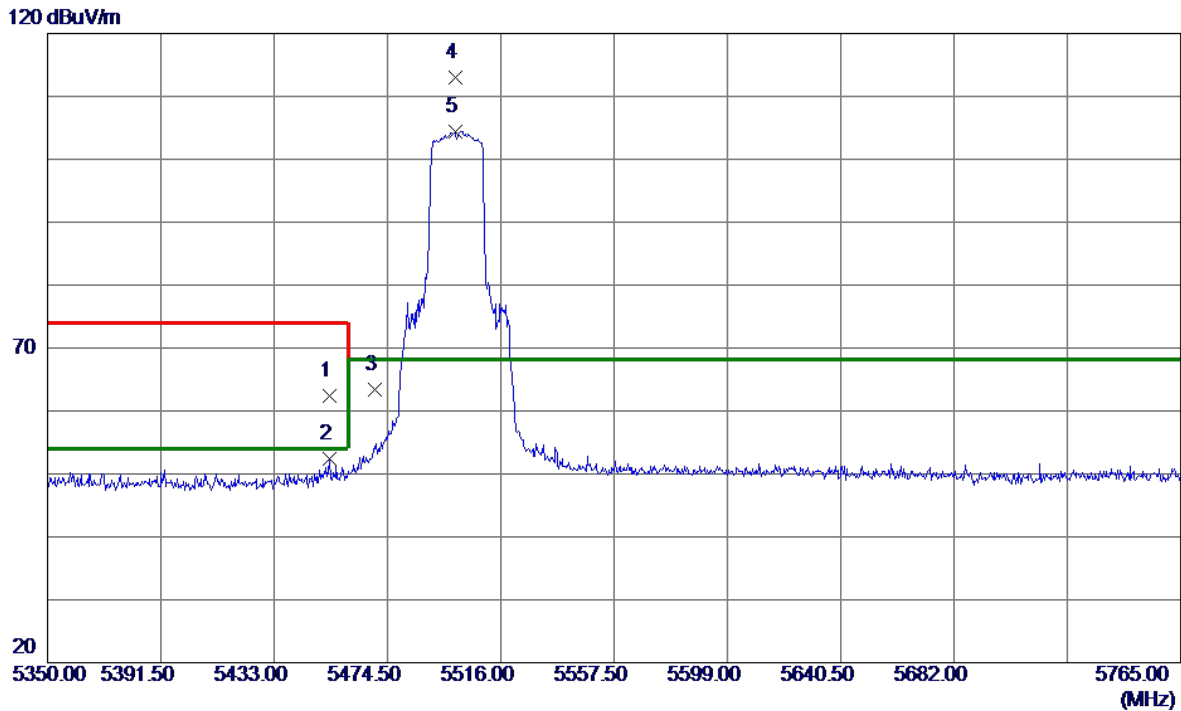


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5453.3350 | 24.25 | 38.10 | 62.35 | 74.00 | -11.65 | Peak | |
| 2 | 5453.3350 | 14.31 | 38.10 | 52.41 | 54.00 | -1.59 | AVG | |
| 3 | 5470.0000 | 25.34 | 38.15 | 63.49 | 68.20 | -4.71 | Peak | |
| 4 * | 5499.1930 | 74.74 | 38.24 | 112.98 | 68.20 | 44.78 | Peak | No limit |
| 5 | 5499.1930 | 66.23 | 38.24 | 104.47 | 68.20 | 36.27 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

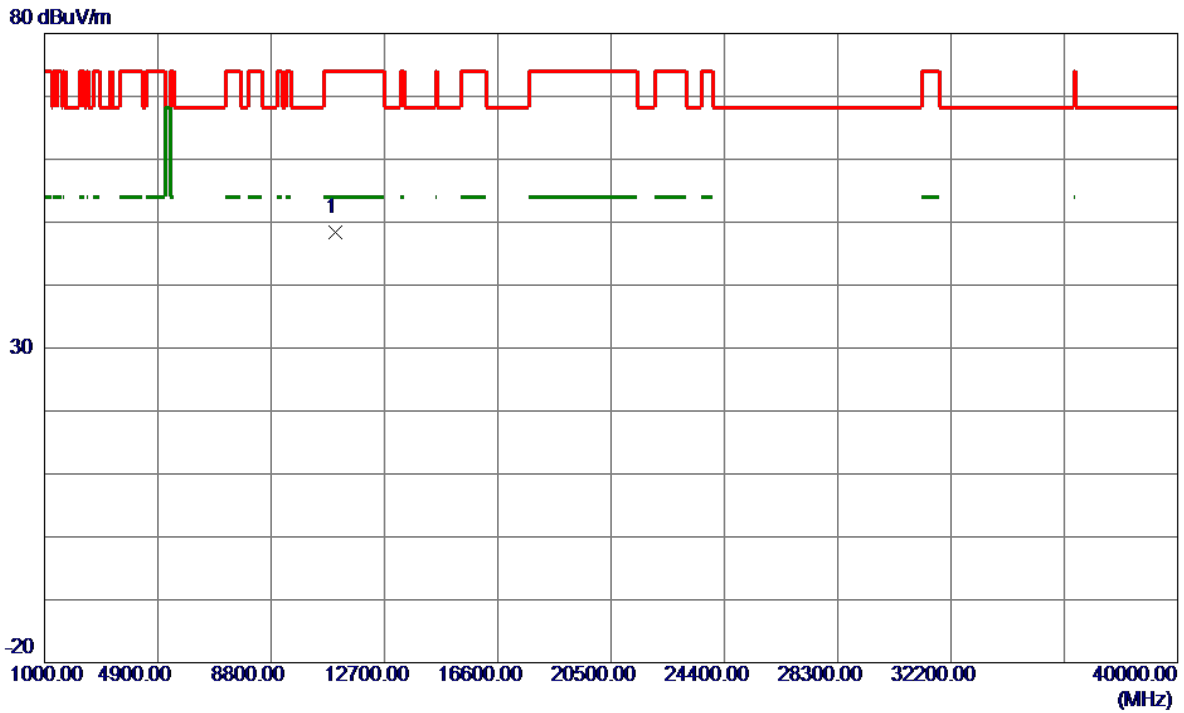


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.0000 | 46.06 | 2.34 | 48.40 | 74.00 | -25.60 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

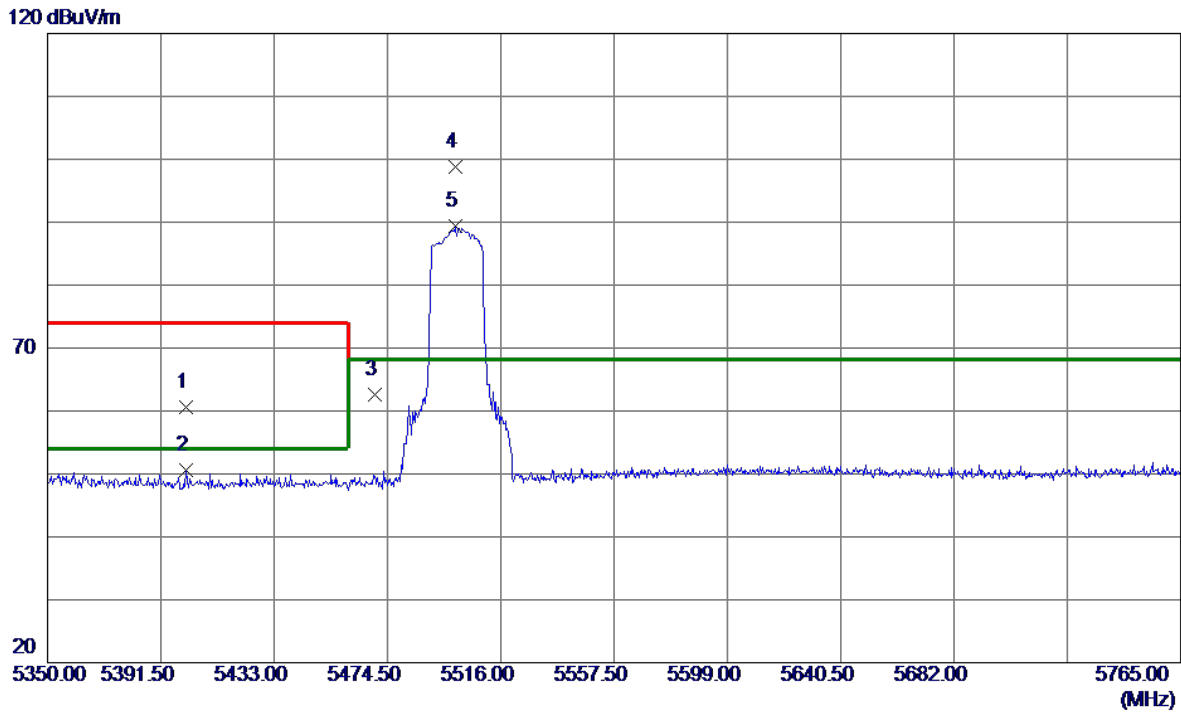


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5400.6300 | 22.61 | 37.94 | 60.55 | 74.00 | -13.45 | Peak | |
| 2 | 5400.6300 | 12.72 | 37.94 | 50.66 | 54.00 | -3.34 | AVG | |
| 3 | 5470.0000 | 24.53 | 38.15 | 62.68 | 68.20 | -5.52 | Peak | |
| 4 * | 5499.1930 | 60.48 | 38.24 | 98.72 | 68.20 | 30.52 | Peak | No limit |
| 5 | 5499.1930 | 51.20 | 38.24 | 89.44 | 68.20 | 21.24 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

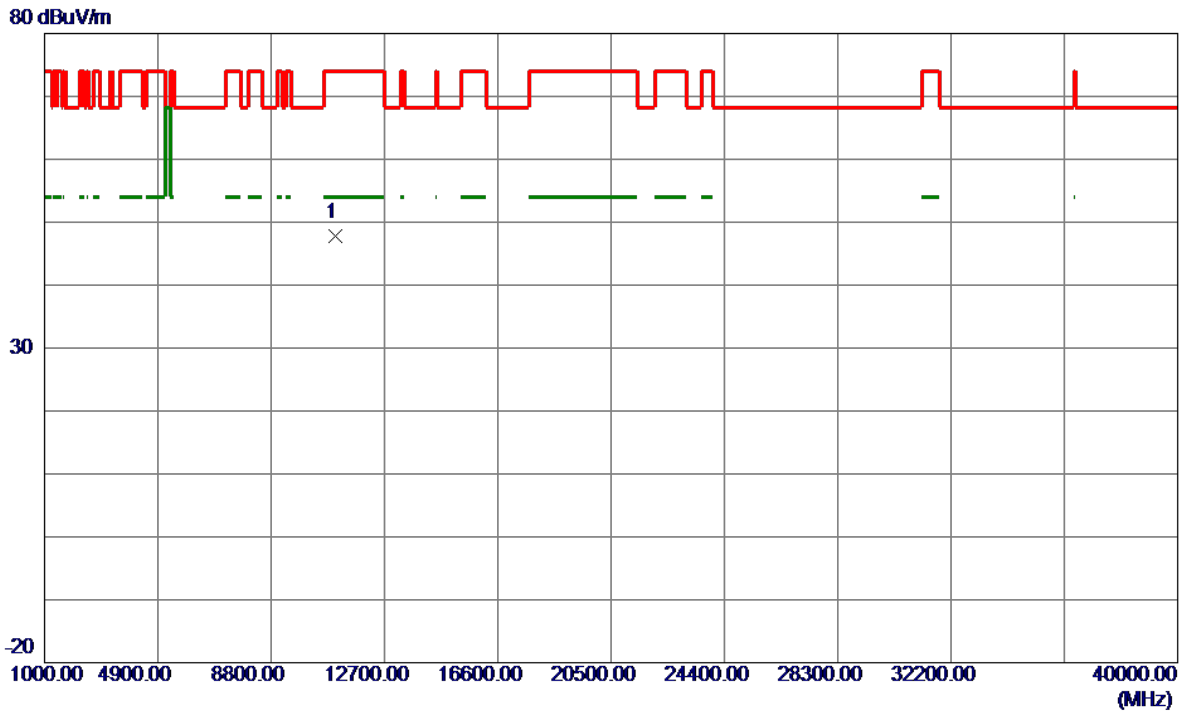


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11000.0000 | 45.36 | 2.34 | 47.70 | 74.00 | -26.30 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

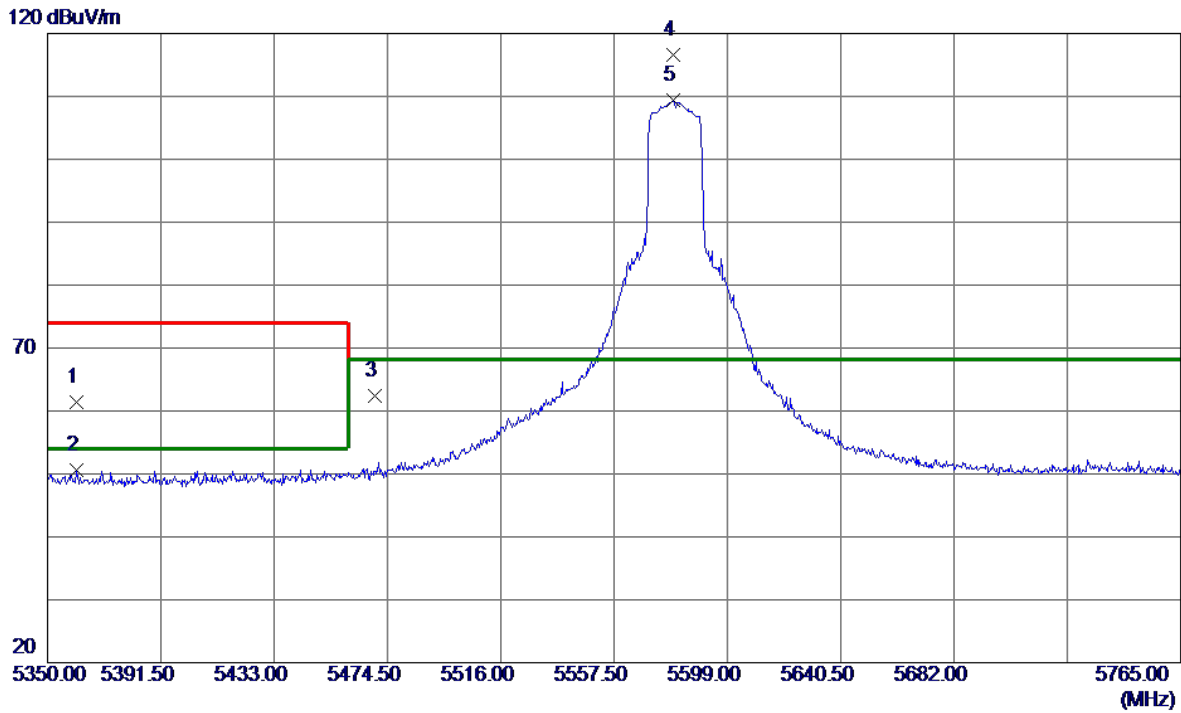

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5360.5830 | 23.53 | 37.78 | 61.31 | 74.00 | -12.69 | Peak | |
| 2 | 5360.5830 | 12.87 | 37.78 | 50.65 | 54.00 | -3.35 | AVG | |
| 3 | 5470.0000 | 24.23 | 38.15 | 62.38 | 68.20 | -5.82 | Peak | |
| 4 * | 5579.0800 | 78.23 | 38.32 | 116.55 | 68.20 | 48.35 | Peak | No limit |
| 5 | 5579.0800 | 71.13 | 38.32 | 109.45 | 68.20 | 41.25 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|




| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11160.0000 | 45.28 | 2.04 | 47.32 | 74.00 | -26.68 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

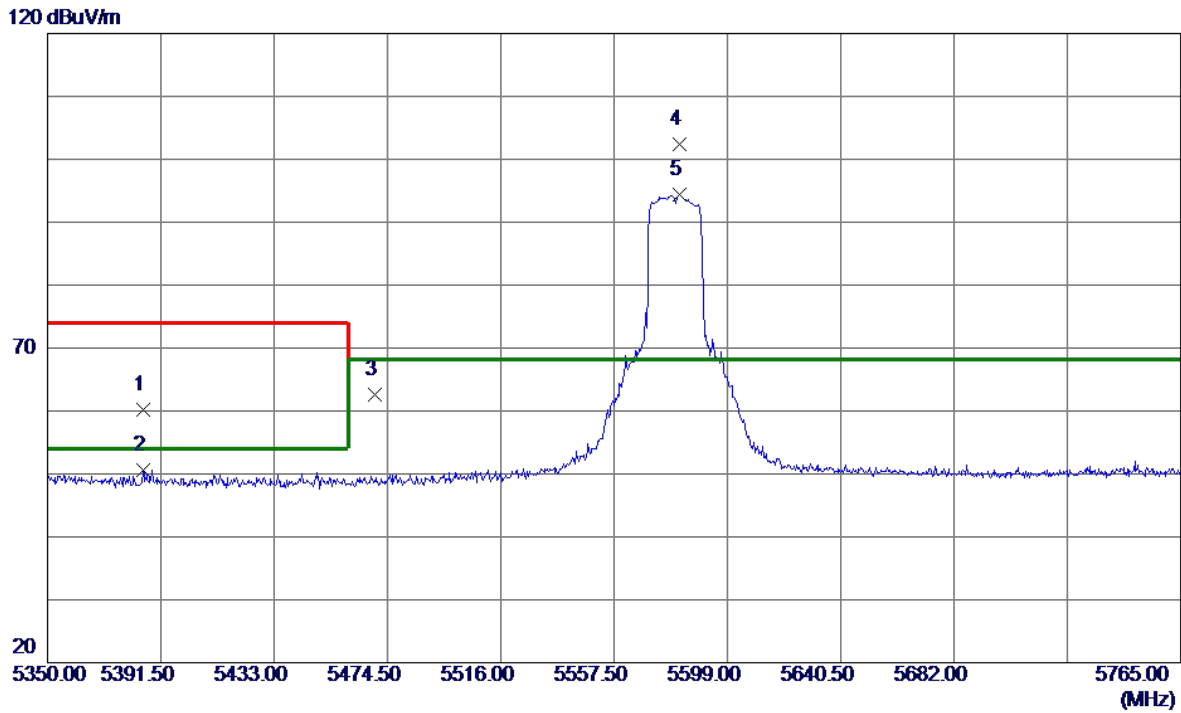


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5385.0680 | 22.41 | 37.88 | 60.29 | 74.00 | -13.71 | Peak | |
| 2 | 5385.0680 | 12.76 | 37.88 | 50.64 | 54.00 | -3.36 | AVG | |
| 3 | 5470.0000 | 24.39 | 38.15 | 62.54 | 68.20 | -5.66 | Peak | |
| 4 * | 5581.5700 | 64.08 | 38.32 | 102.40 | 68.20 | 34.20 | Peak | No limit |
| 5 | 5581.5700 | 56.05 | 38.32 | 94.37 | 68.20 | 26.17 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

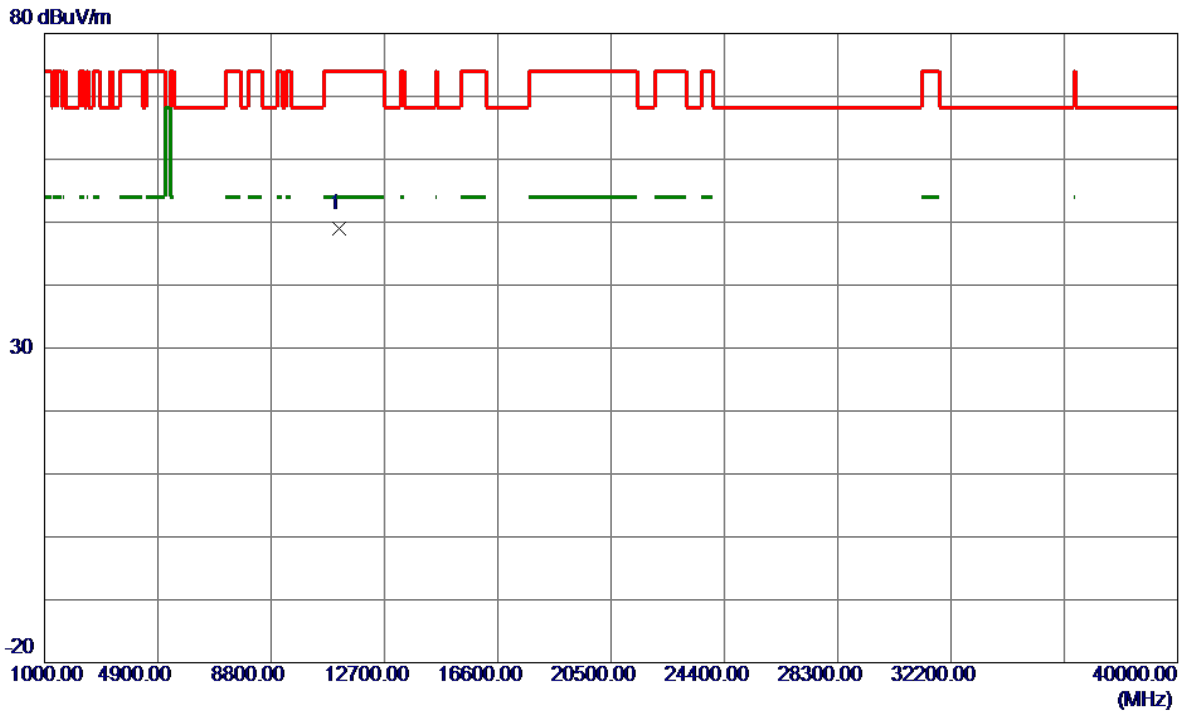


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11160.0000 | 47.00 | 2.04 | 49.04 | 74.00 | -24.96 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

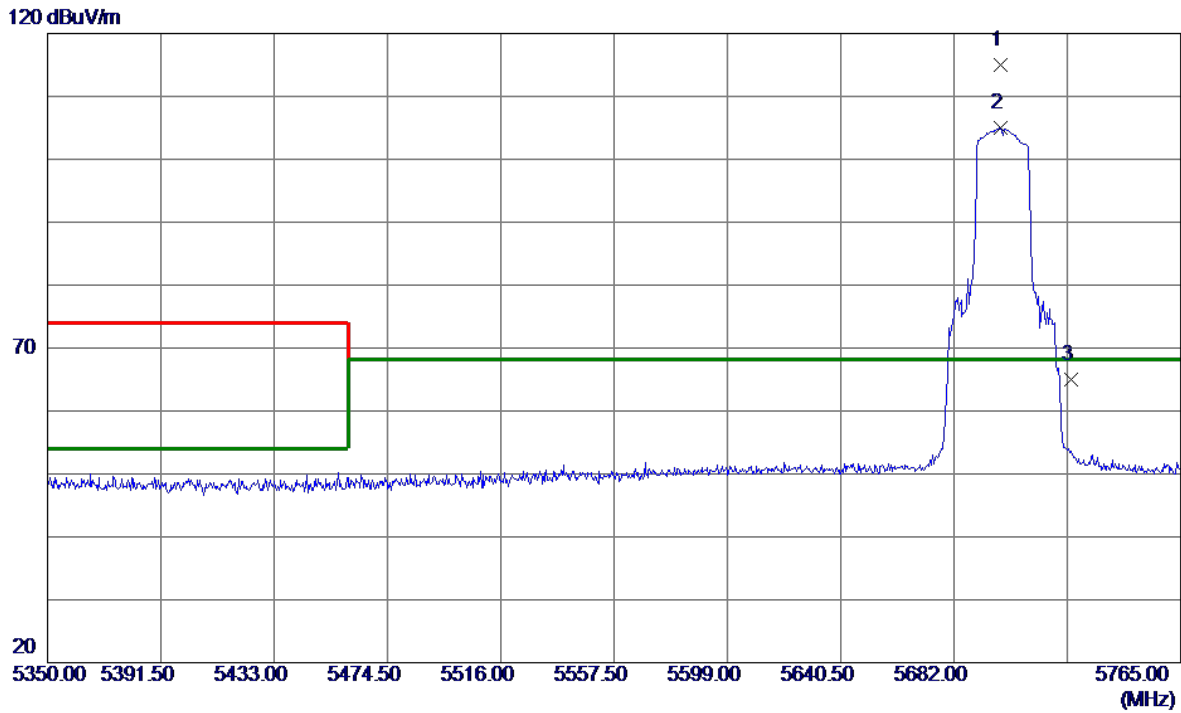


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5699.2220 | 76.51 | 38.40 | 114.91 | 68.20 | 46.71 | Peak | No limit |
| 2 | 5699.2220 | 66.59 | 38.40 | 104.99 | 68.20 | 36.79 | AVG | No limit |
| 3 | 5725.0000 | 26.51 | 38.50 | 65.01 | 68.20 | -3.19 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

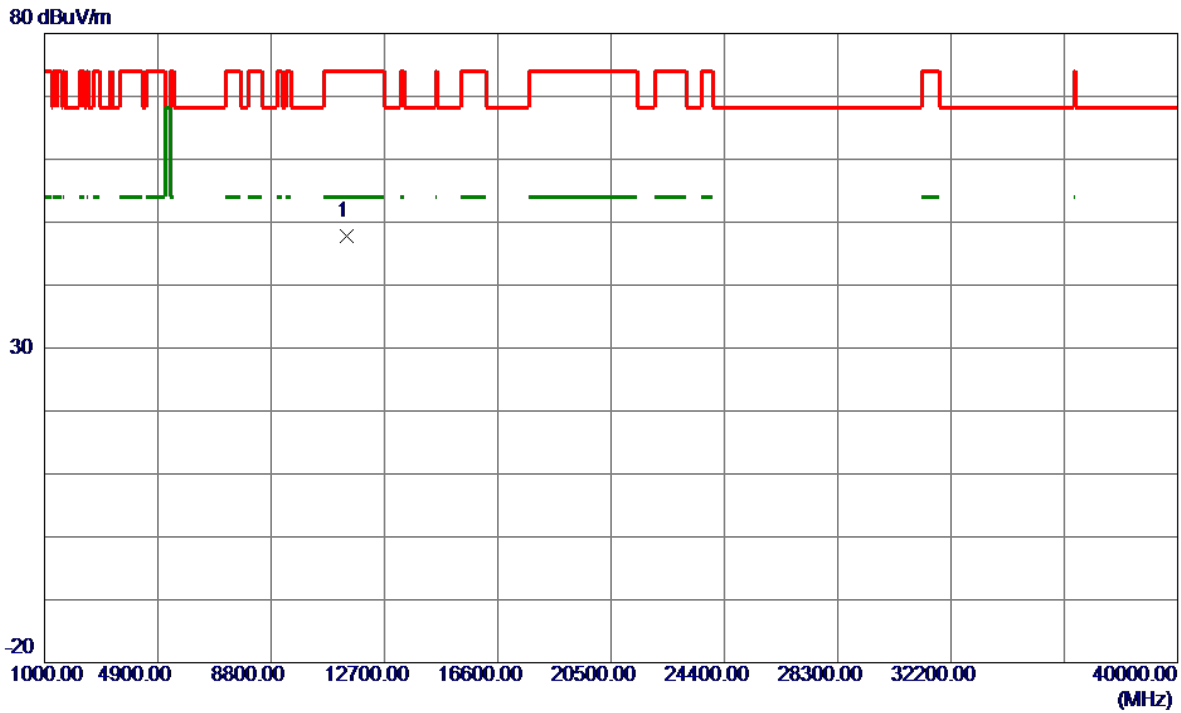


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000 | 45.64 | 2.13 | 47.77 | 74.00 | -26.23 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

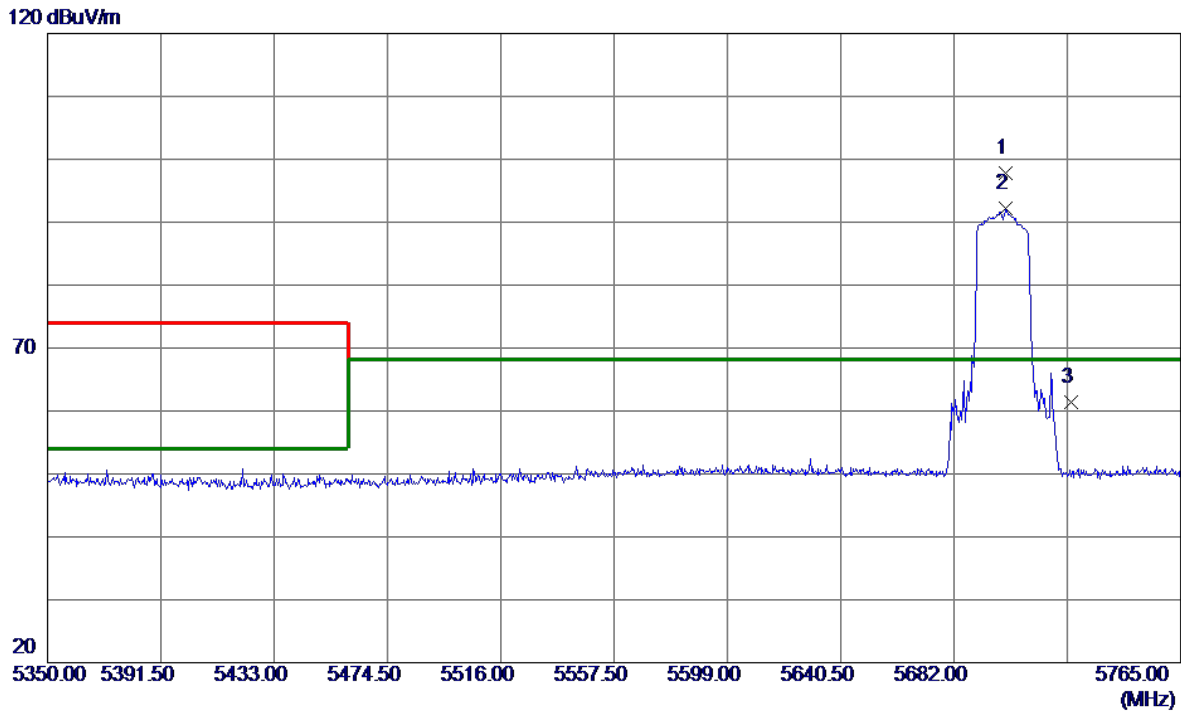


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5701.0900 | 59.48 | 38.41 | 97.89 | 68.20 | 29.69 | Peak | No limit |
| 2 | 5701.0900 | 53.84 | 38.41 | 92.25 | 68.20 | 24.05 | AVG | No limit |
| 3 | 5725.0000 | 22.87 | 38.50 | 61.37 | 68.20 | -6.83 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

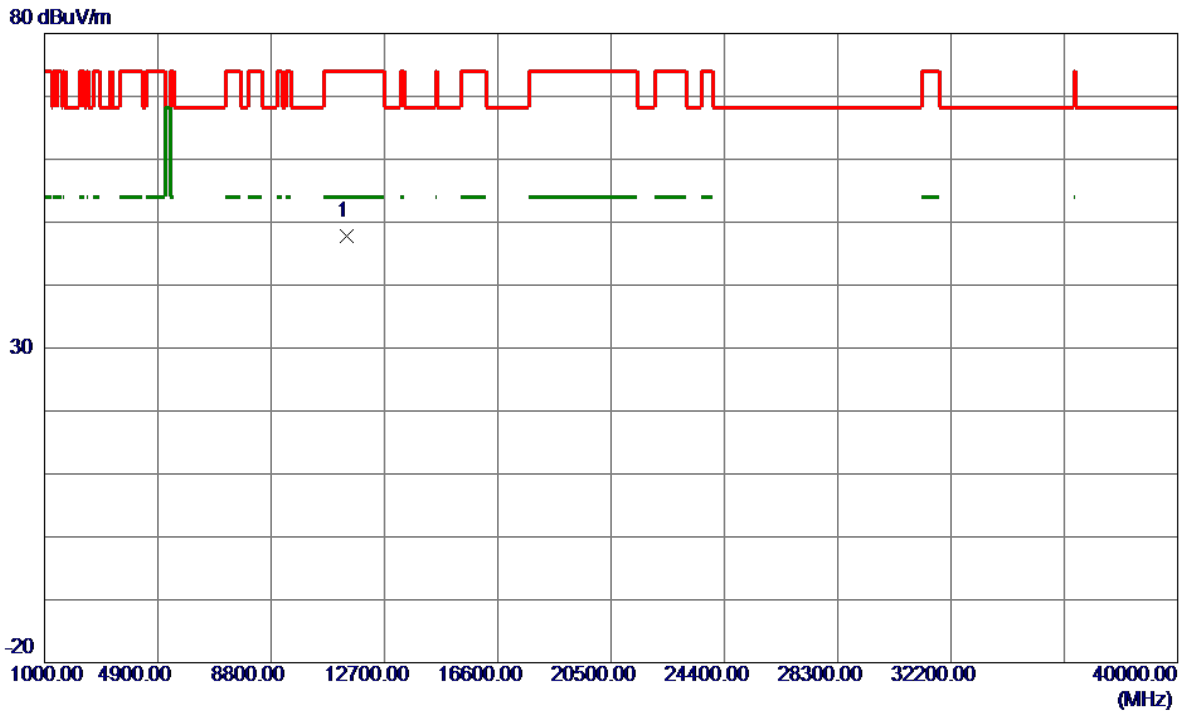


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11400.0000 | 45.72 | 2.13 | 47.85 | 74.00 | -26.15 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

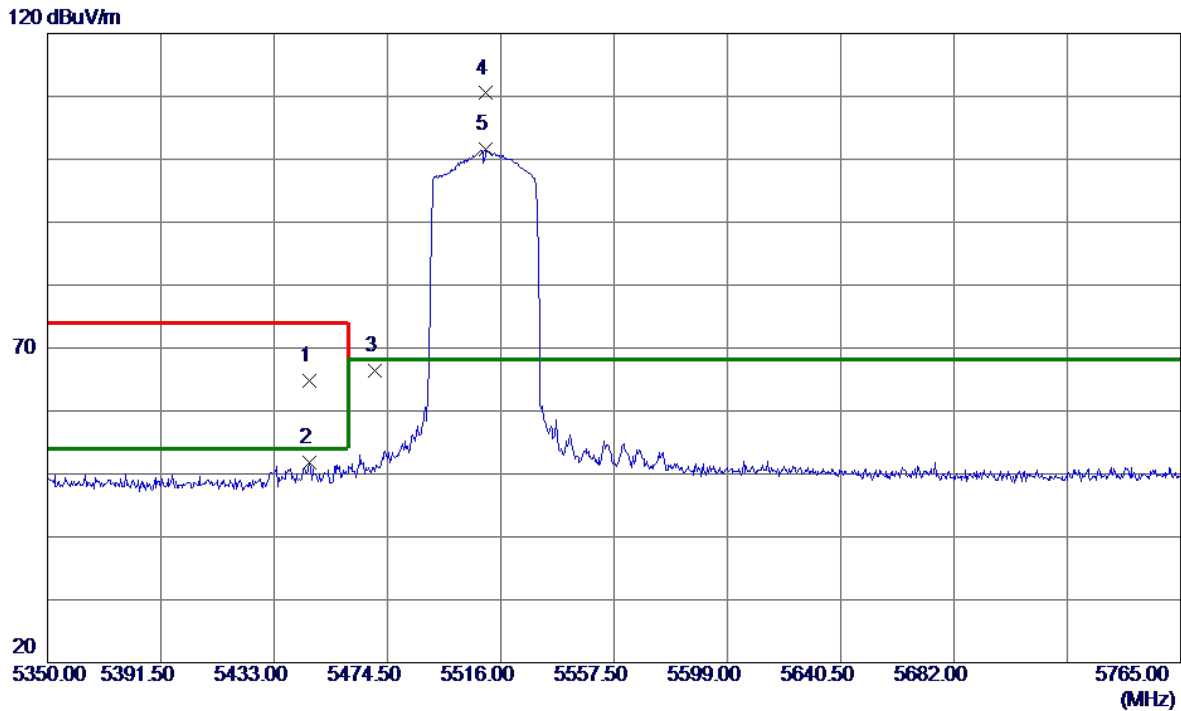


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5445.8650 | 26.67 | 38.08 | 64.75 | 74.00 | -9.25 | Peak | |
| 2 | 5445.8650 | 13.72 | 38.08 | 51.80 | 54.00 | -2.20 | AVG | |
| 3 | 5470.0000 | 28.17 | 38.15 | 66.32 | 68.20 | -1.88 | Peak | |
| 4 * | 5510.6050 | 72.25 | 38.25 | 110.50 | 68.20 | 42.30 | Peak | No limit |
| 5 | 5510.6050 | 63.32 | 38.25 | 101.57 | 68.20 | 33.37 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

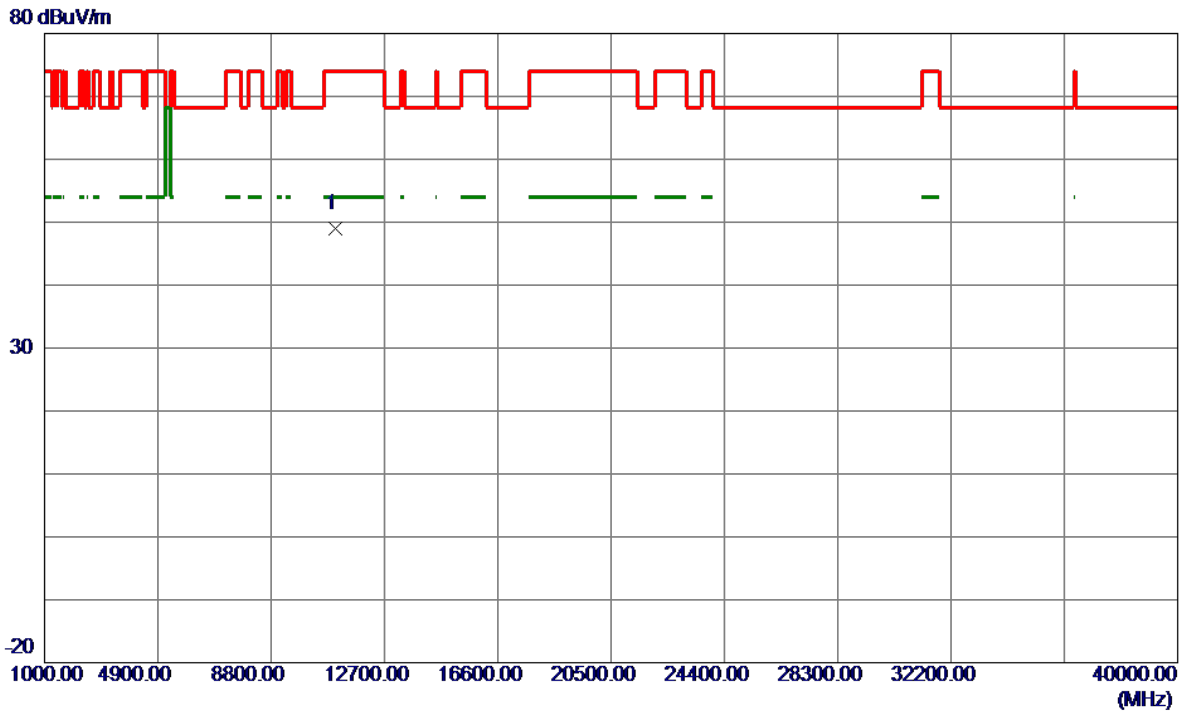


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11020.0000 | 46.77 | 2.30 | 49.07 | 74.00 | -24.93 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

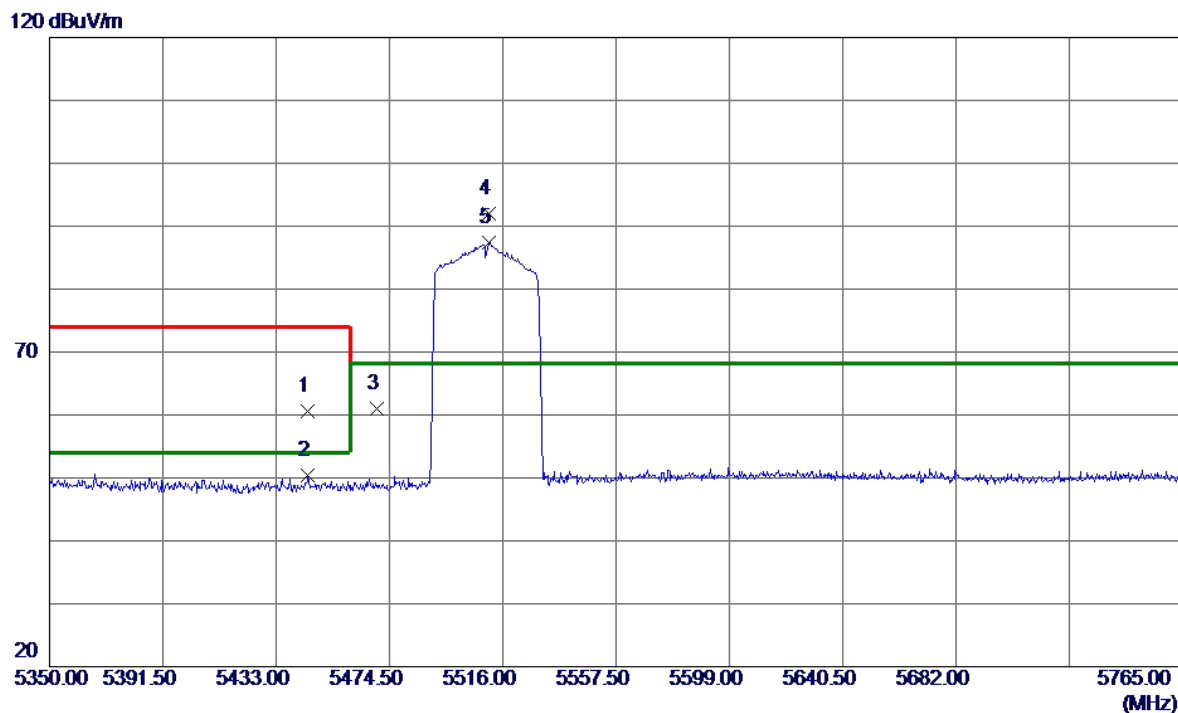


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5444.6200 | 22.62 | 38.07 | 60.69 | 74.00 | -13.31 | Peak | |
| 2 | 5444.6200 | 12.31 | 38.07 | 50.38 | 54.00 | -3.62 | AVG | |
| 3 | 5470.0000 | 22.91 | 38.15 | 61.06 | 68.20 | -7.14 | Peak | |
| 4 * | 5510.8130 | 53.66 | 38.25 | 91.91 | 68.20 | 23.71 | Peak | No limit |
| 5 | 5510.8130 | 49.18 | 38.25 | 87.43 | 68.20 | 19.23 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

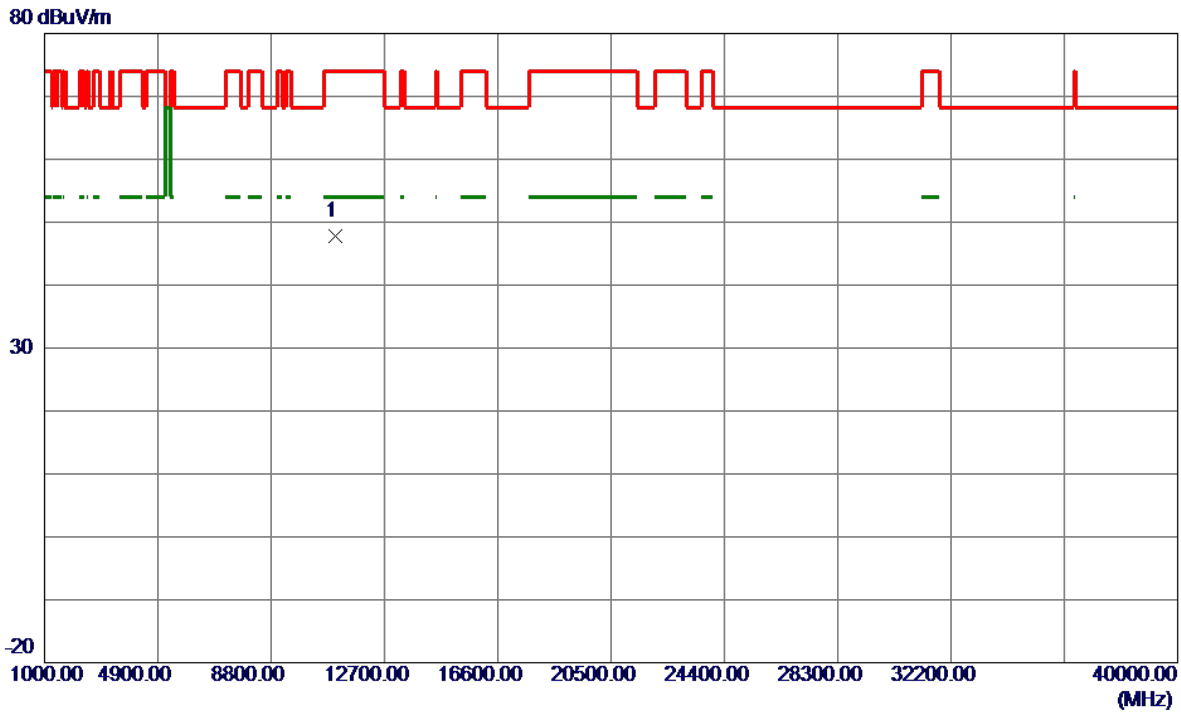


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11020.0000 | 45.46 | 2.30 | 47.76 | 74.00 | -26.24 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

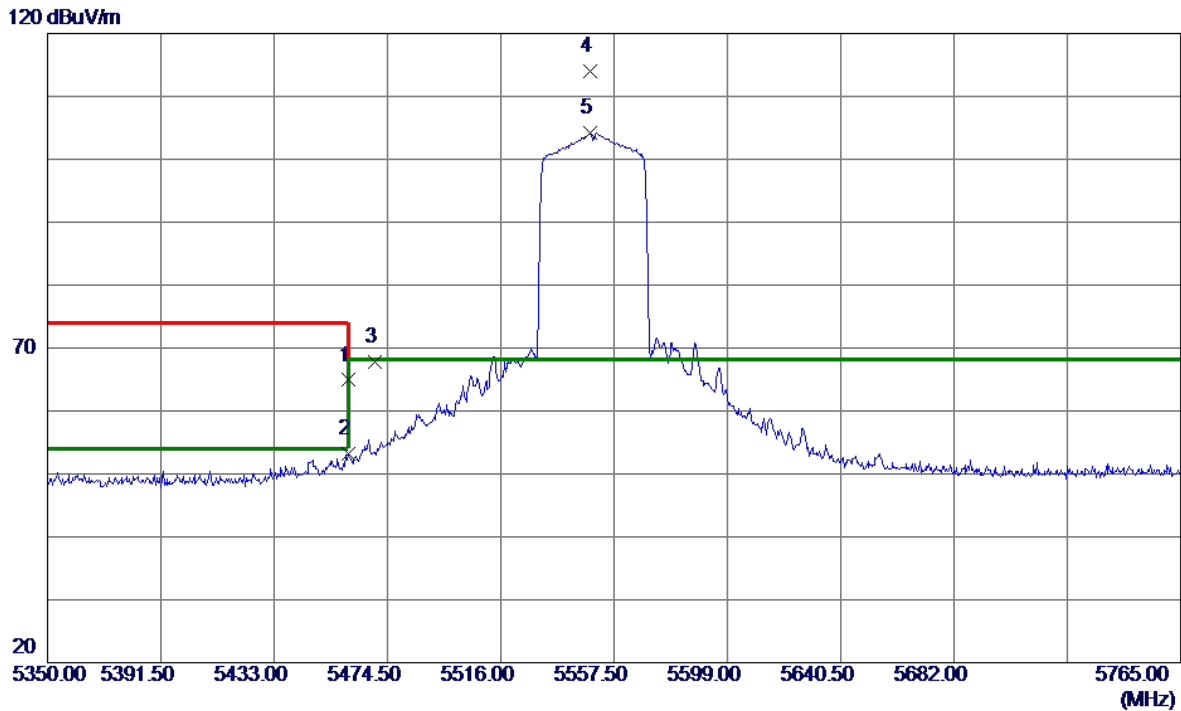


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5460.0000 | 26.78 | 38.12 | 64.90 | 74.00 | -9.10 | Peak | |
| 2 | 5460.0000 | 15.04 | 38.12 | 53.16 | 54.00 | -0.84 | AVG | |
| 3 | 5470.0000 | 29.65 | 38.15 | 67.80 | 68.20 | -0.40 | Peak | |
| 4 * | 5548.7850 | 75.65 | 38.29 | 113.94 | 68.20 | 45.74 | Peak | No limit |
| 5 | 5548.7850 | 65.86 | 38.29 | 104.15 | 68.20 | 35.95 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

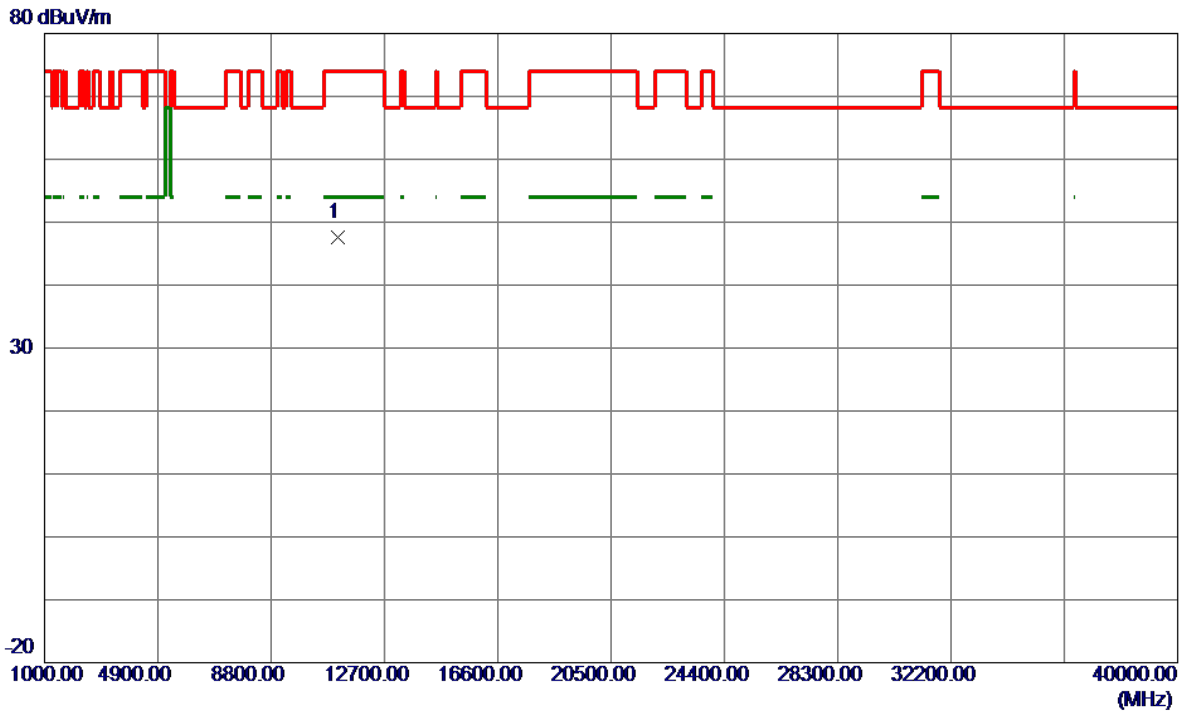


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0000 | 45.36 | 2.15 | 47.51 | 74.00 | -26.49 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

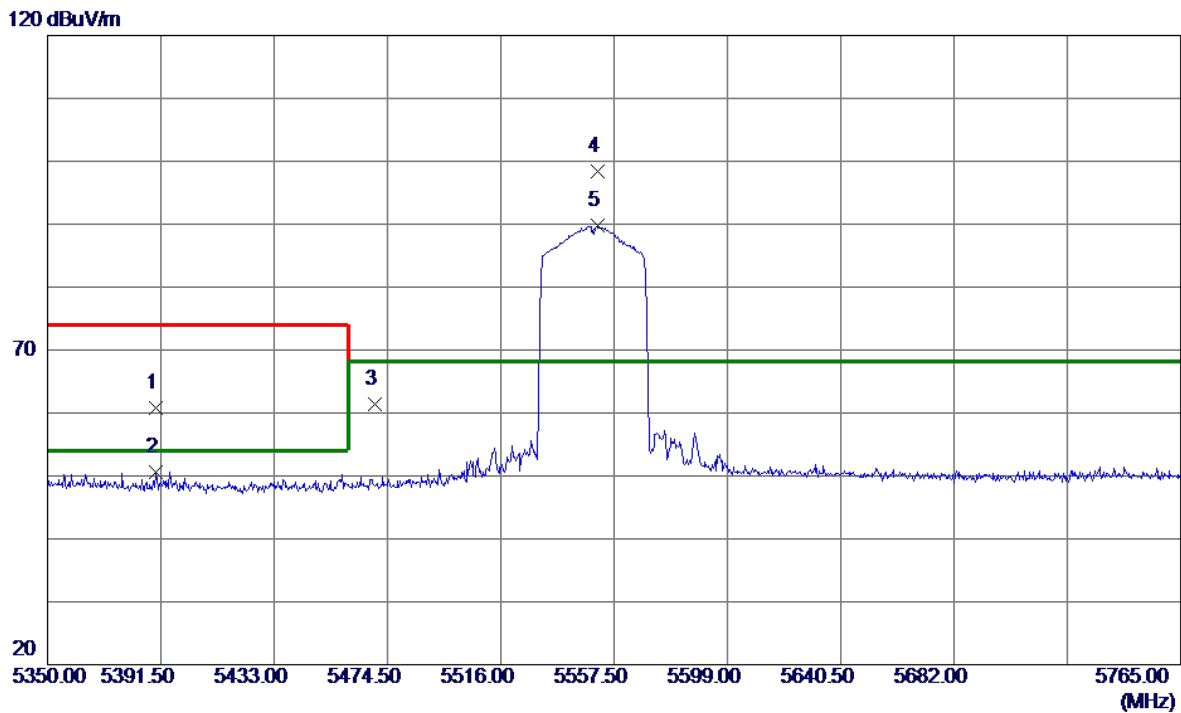


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5389.8400 | 22.81 | 37.90 | 60.71 | 74.00 | -13.29 | Peak | |
| 2 | 5389.8400 | 12.70 | 37.90 | 50.60 | 54.00 | -3.40 | AVG | |
| 3 | 5470.0000 | 23.27 | 38.15 | 61.42 | 68.20 | -6.78 | Peak | |
| 4 * | 5551.4830 | 60.08 | 38.29 | 98.37 | 68.20 | 30.17 | Peak | No limit |
| 5 | 5551.4830 | 51.43 | 38.29 | 89.72 | 68.20 | 21.52 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

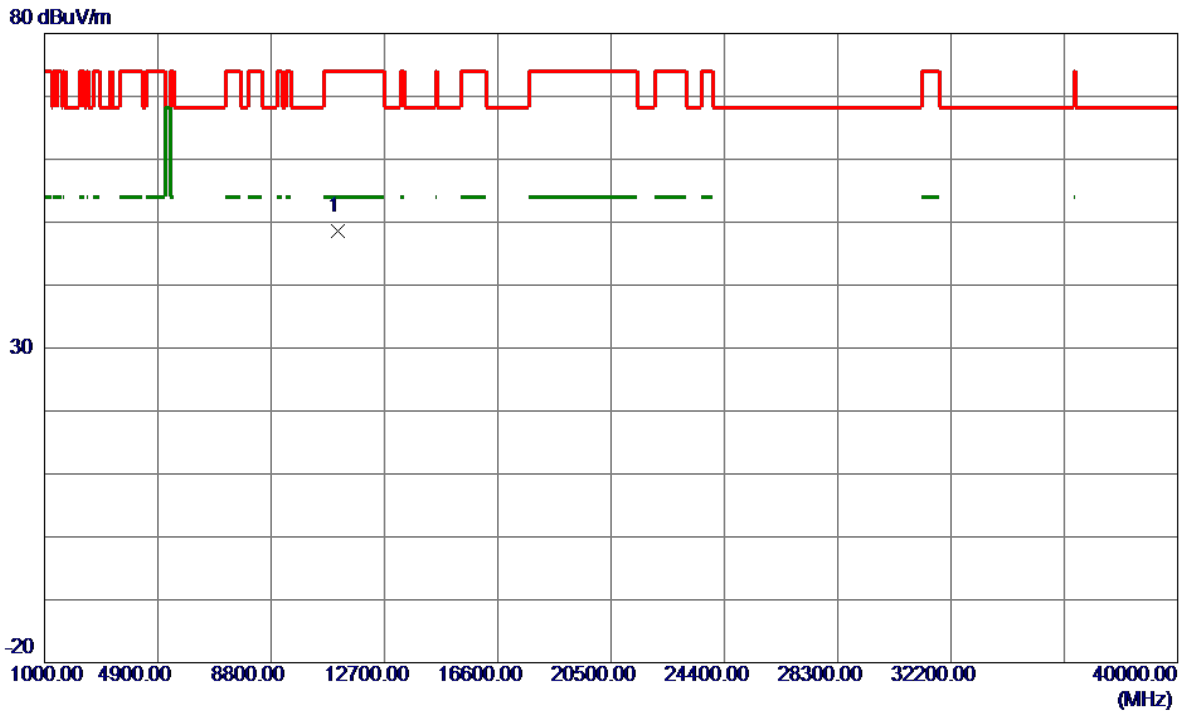


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11100.0000 | 46.40 | 2.15 | 48.55 | 74.00 | -25.45 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE4) Mode 5670 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

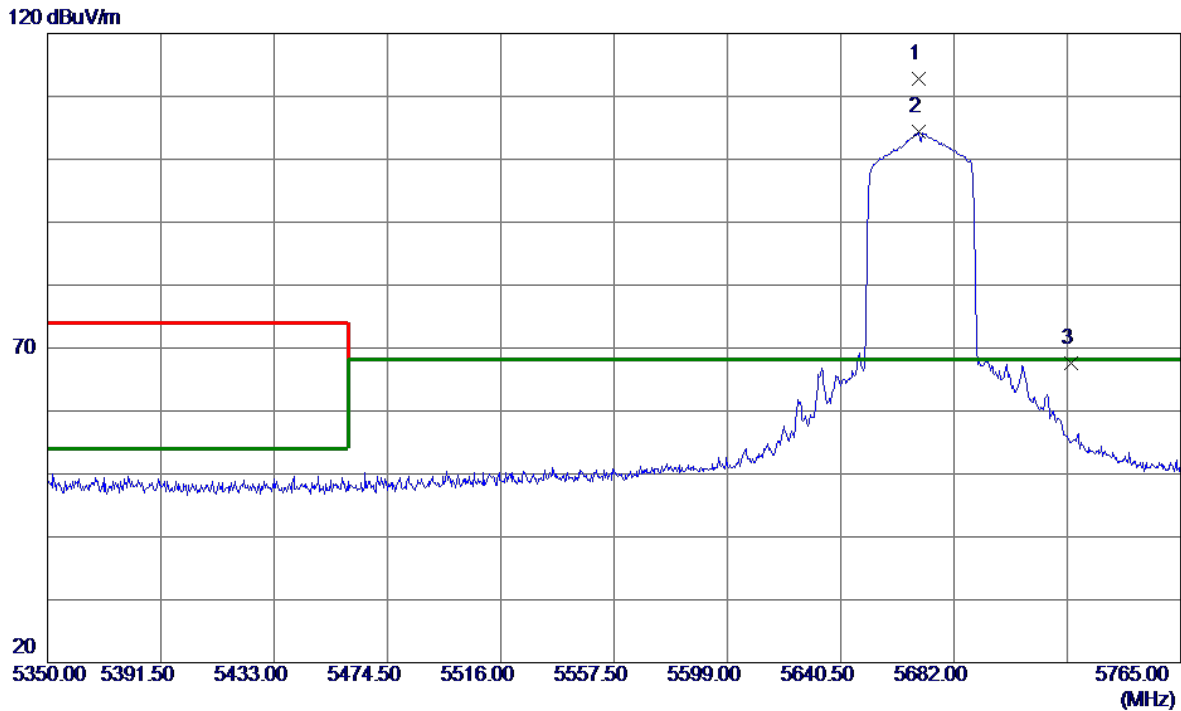


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5669.1349 | 74.38 | 38.38 | 112.76 | 68.20 | 44.56 | Peak | No limit |
| 2 | 5669.1349 | 66.07 | 38.38 | 104.45 | 68.20 | 36.25 | AVG | No limit |
| 3 | 5725.0000 | 29.03 | 38.50 | 67.53 | 68.20 | -0.67 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

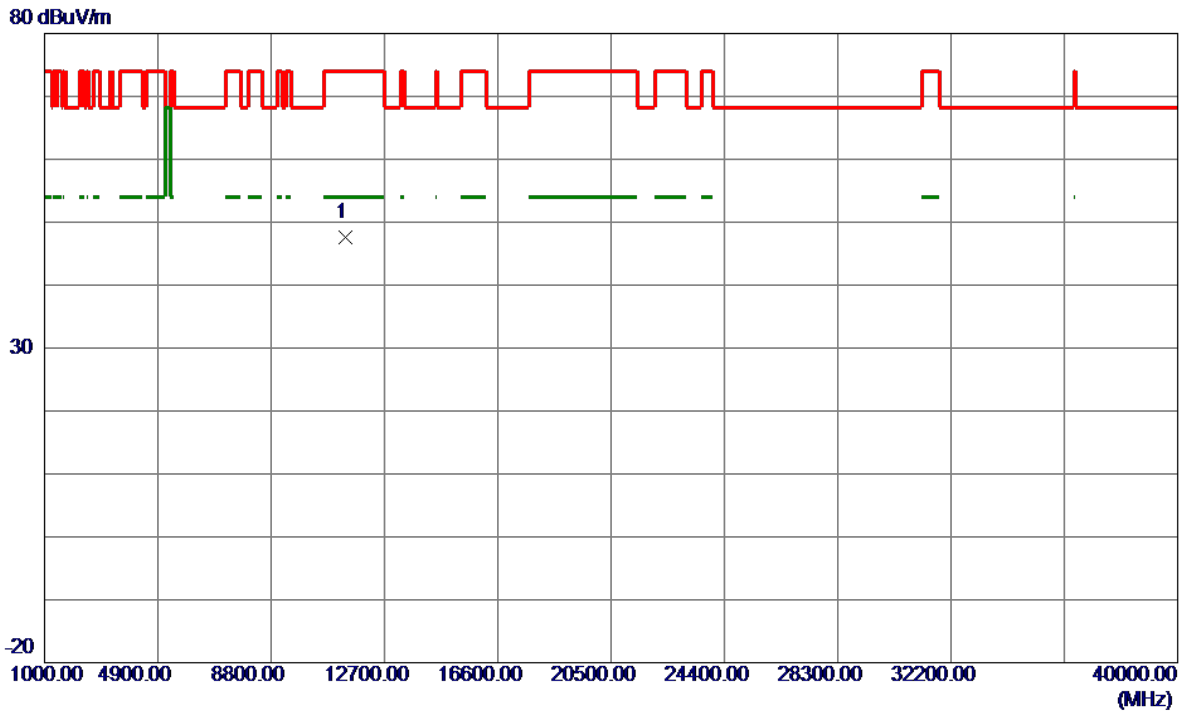


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.0000 | 45.45 | 2.08 | 47.53 | 74.00 | -26.47 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

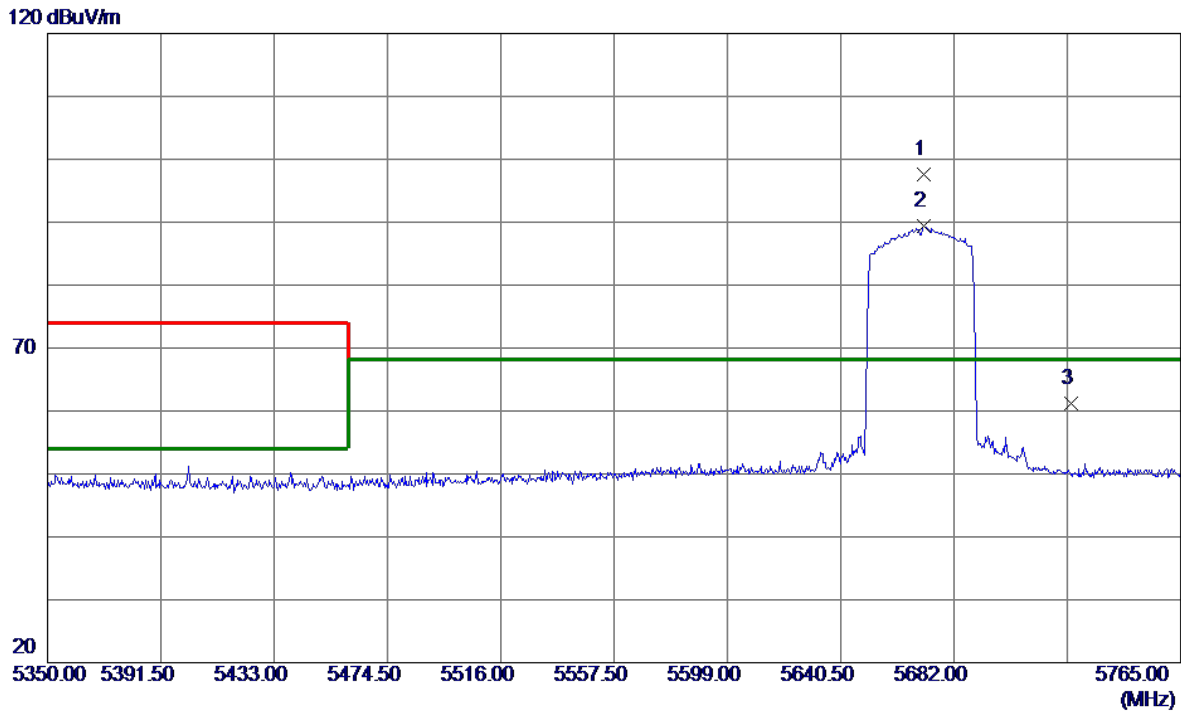


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5670.7950 | 59.30 | 38.39 | 97.69 | 68.20 | 29.49 | Peak | No limit |
| 2 | 5670.7950 | 51.04 | 38.39 | 89.43 | 68.20 | 21.23 | AVG | No limit |
| 3 | 5725.0000 | 22.62 | 38.50 | 61.12 | 68.20 | -7.08 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

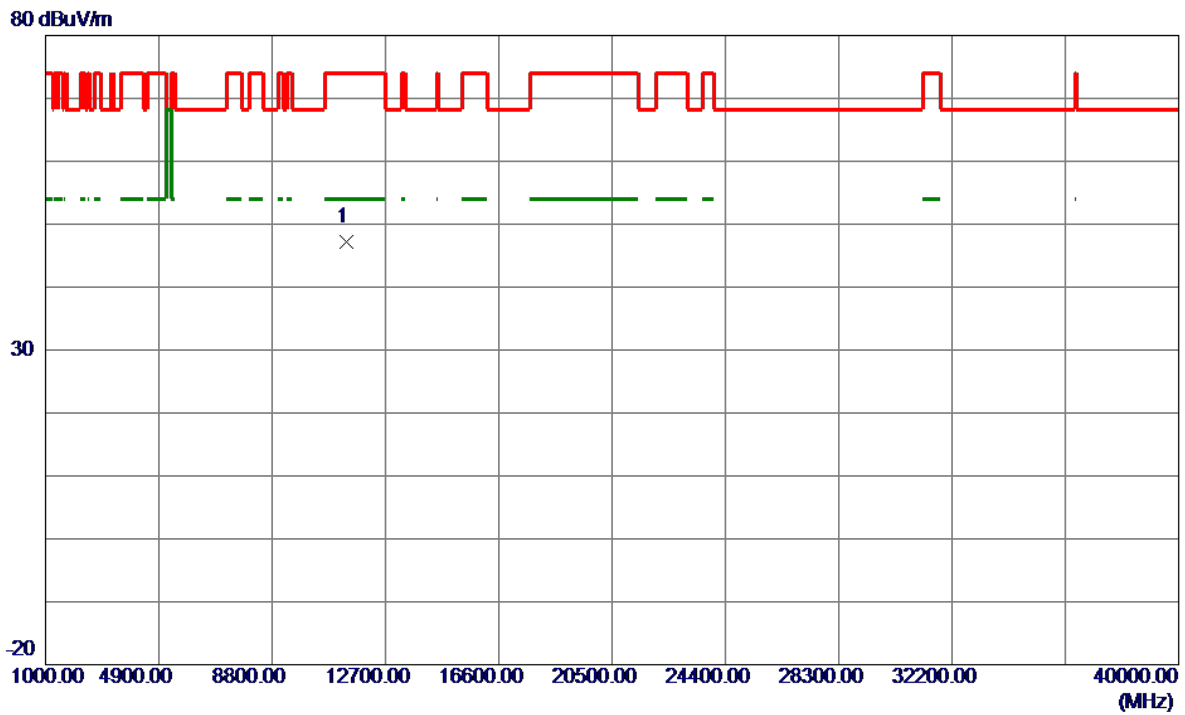


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11340.0000 | 45.13 | 2.08 | 47.21 | 74.00 | -26.79 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

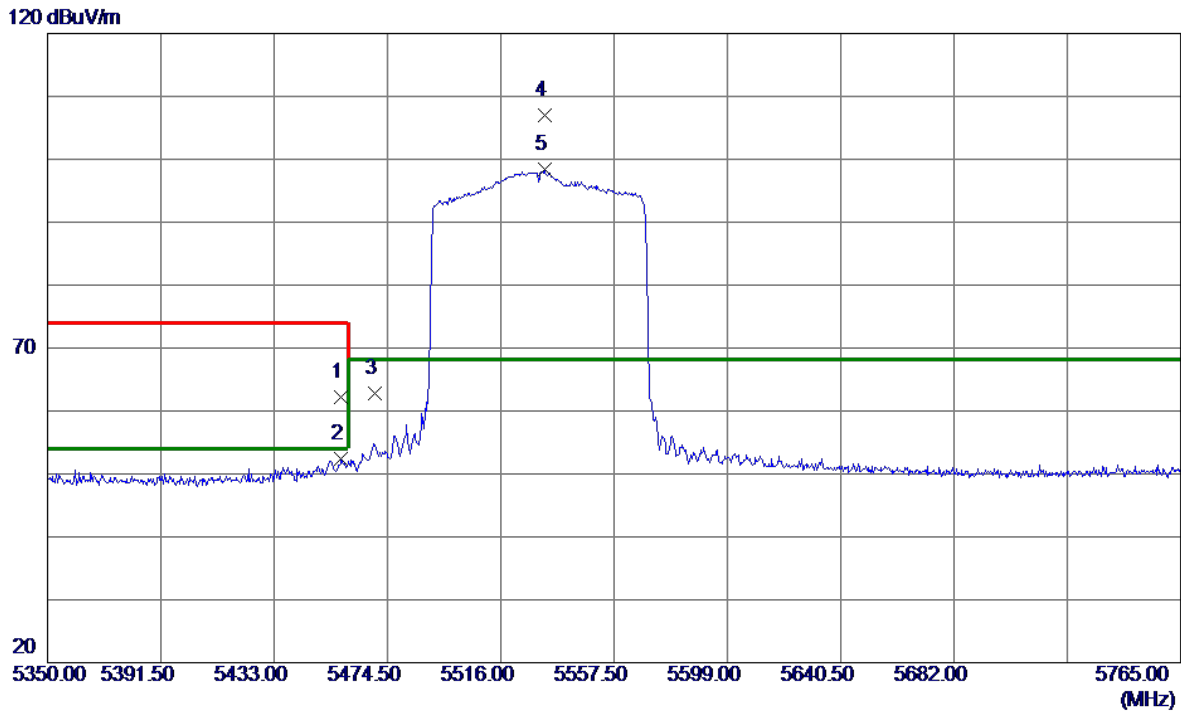


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5457.4850 | 24.01 | 38.11 | 62.12 | 74.00 | -11.88 | Peak | |
| 2 | 5457.4850 | 14.27 | 38.11 | 52.38 | 54.00 | -1.62 | AVG | |
| 3 | 5470.0000 | 24.72 | 38.15 | 62.87 | 68.20 | -5.33 | Peak | |
| 4 * | 5531.9770 | 68.65 | 38.27 | 106.92 | 68.20 | 38.72 | Peak | No limit |
| 5 | 5531.9770 | 60.04 | 38.27 | 98.31 | 68.20 | 30.11 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

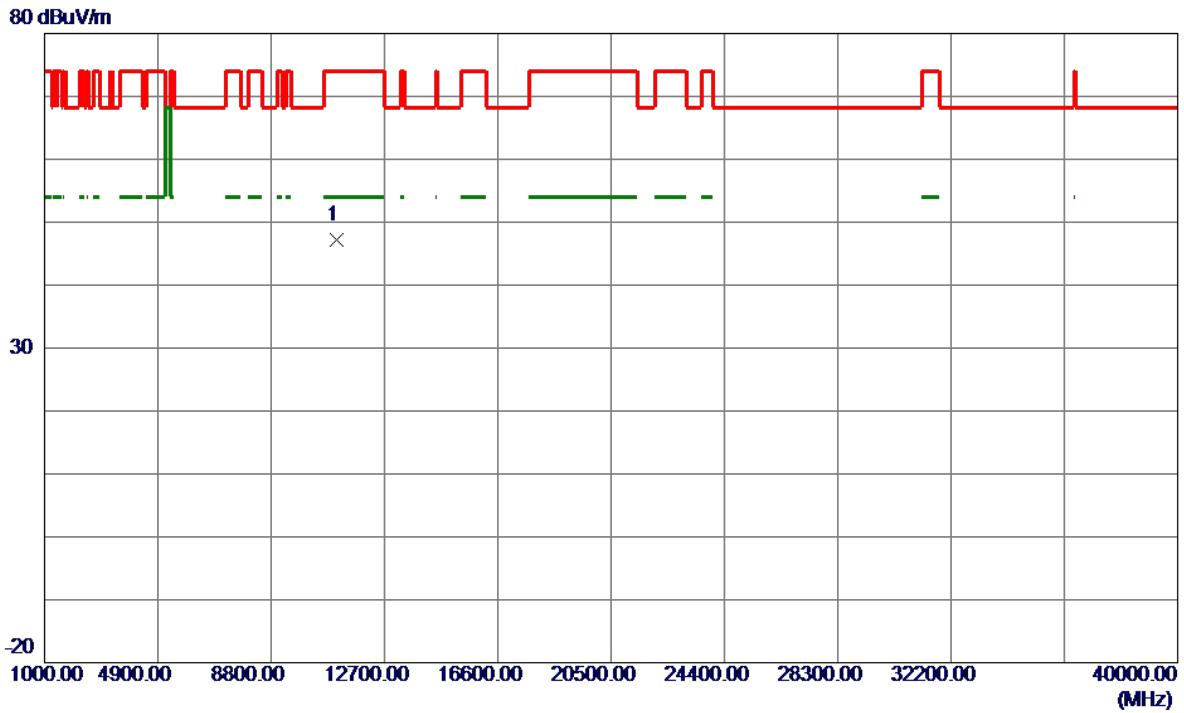


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.0000 | 45.05 | 2.23 | 47.28 | 74.00 | -26.72 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

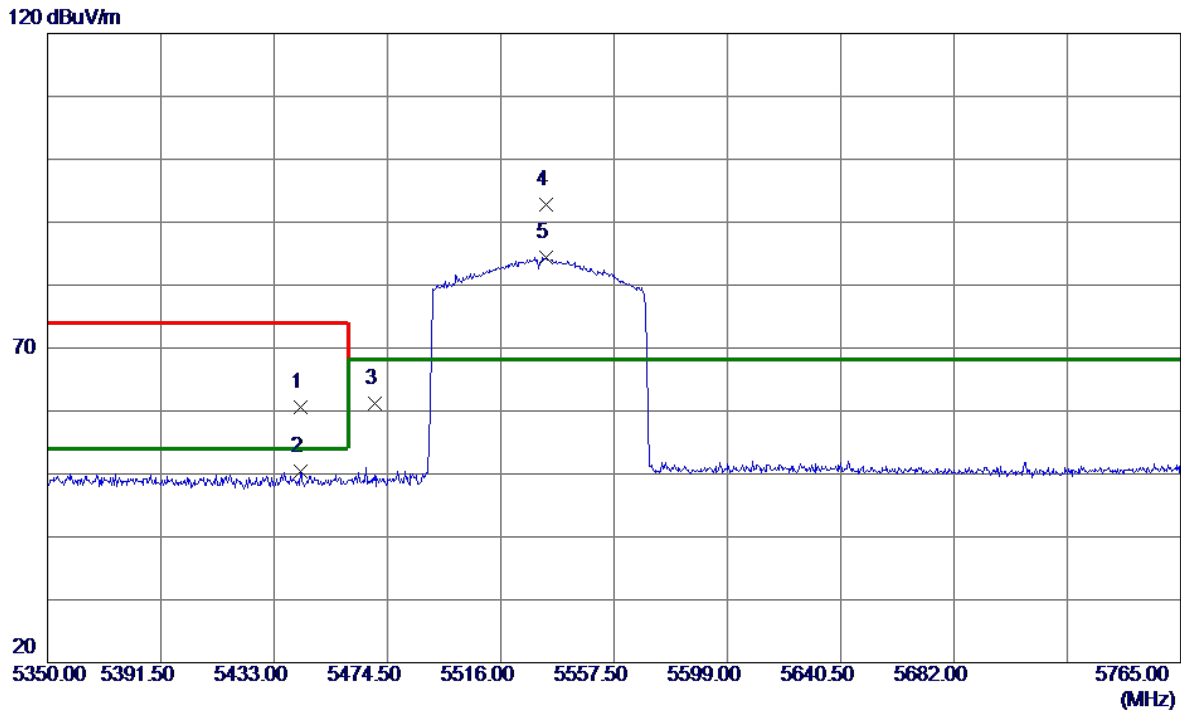


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5442.7519 | 22.44 | 38.07 | 60.51 | 74.00 | -13.49 | Peak | |
| 2 | 5442.7519 | 12.32 | 38.07 | 50.39 | 54.00 | -3.61 | AVG | |
| 3 | 5470.0000 | 22.98 | 38.15 | 61.13 | 68.20 | -7.07 | Peak | |
| 4 * | 5532.6000 | 54.53 | 38.27 | 92.80 | 68.20 | 24.60 | Peak | No limit |
| 5 | 5532.6000 | 46.15 | 38.27 | 84.42 | 68.20 | 16.22 | AVG | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

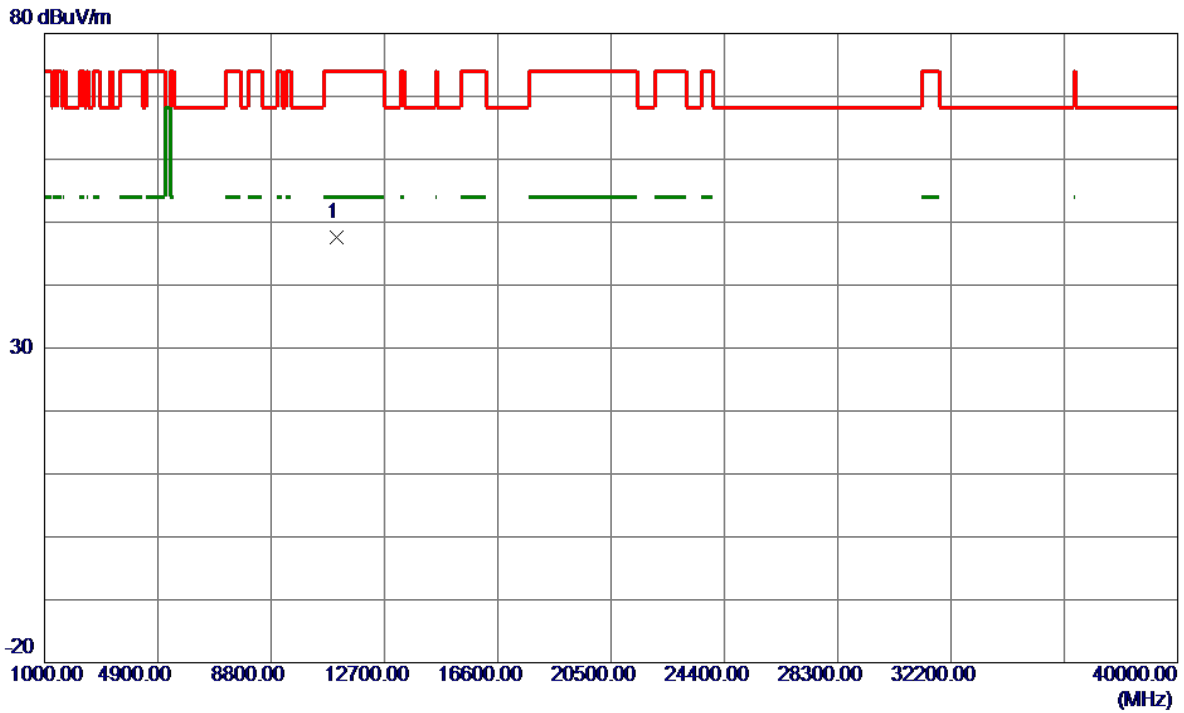


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.0000 | 45.30 | 2.23 | 47.53 | 74.00 | -26.47 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

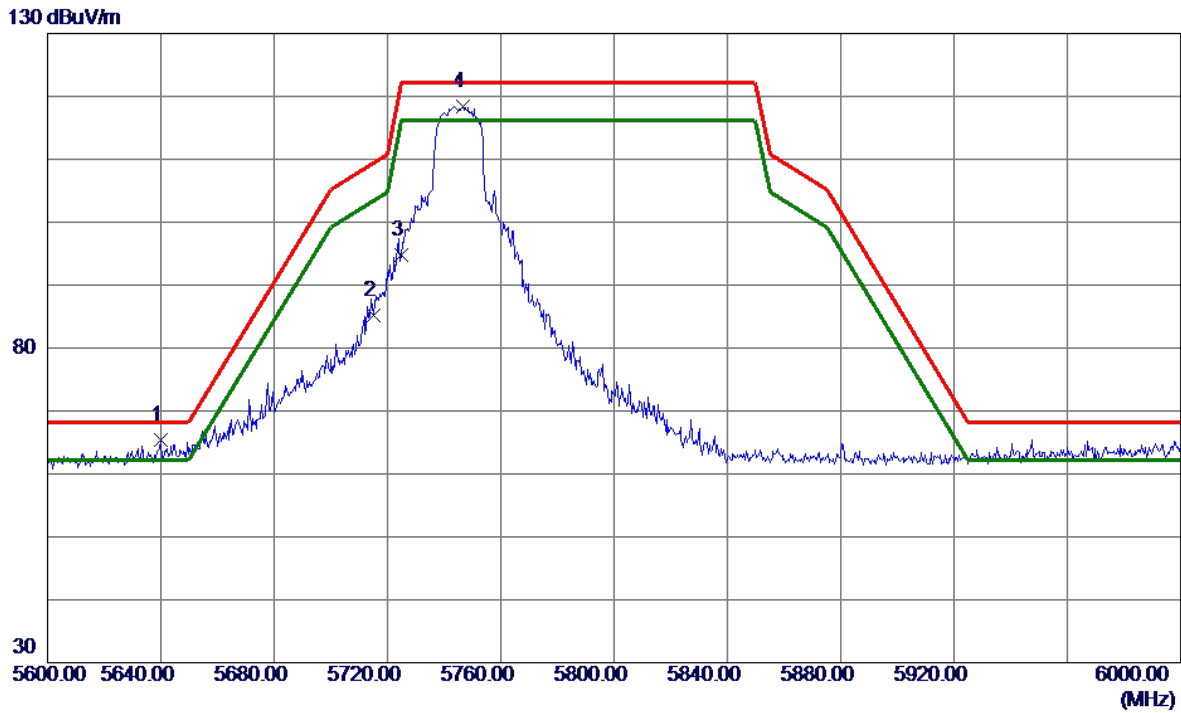


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5639.8000 | 27.02 | 38.37 | 65.39 | 68.20 | -2.81 | Peak | |
| 2 | 5715.0000 | 46.81 | 38.46 | 85.27 | 109.40 | -24.13 | Peak | |
| 3 | 5725.0000 | 56.31 | 38.50 | 94.81 | 122.20 | -27.39 | Peak | |
| 4 | 5746.8000 | 79.90 | 38.58 | 118.48 | 122.20 | -3.72 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

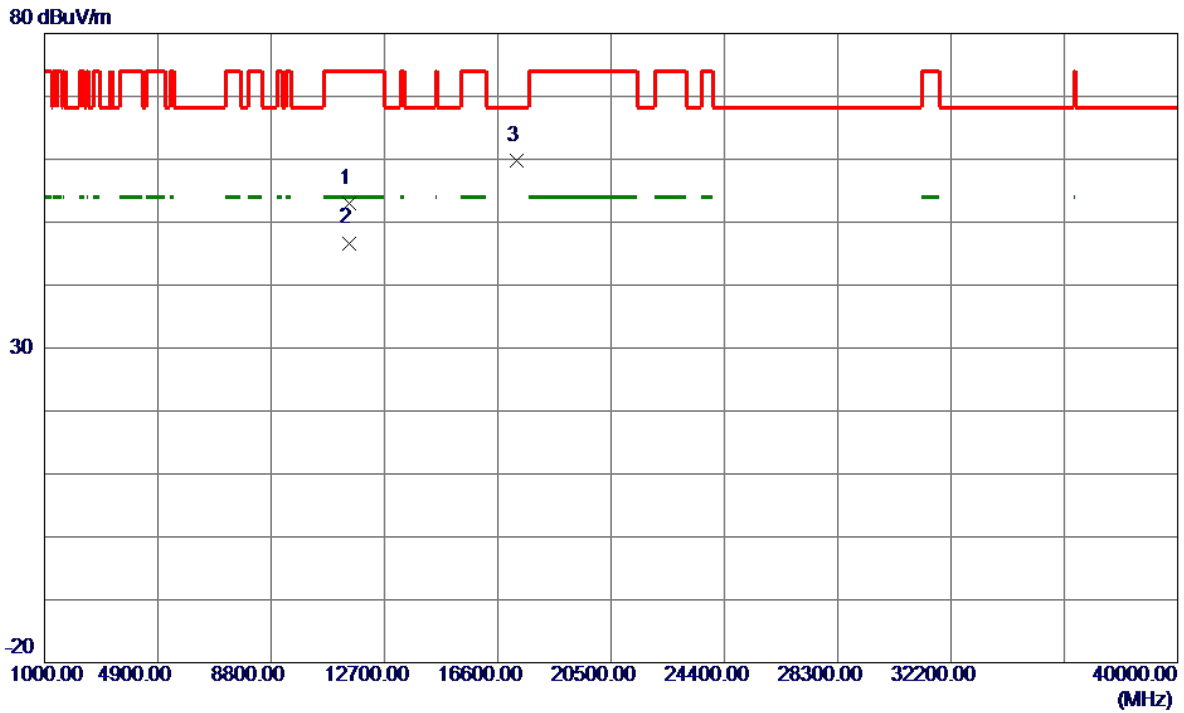


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11487.1000 | 50.85 | 2.20 | 53.05 | 74.00 | -20.95 | Peak | |
| 2 * | 11488.1120 | 44.50 | 2.20 | 46.70 | 54.00 | -7.30 | AVG | |
| 3 | 17235.7000 | 53.13 | 6.63 | 59.76 | 68.20 | -8.44 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

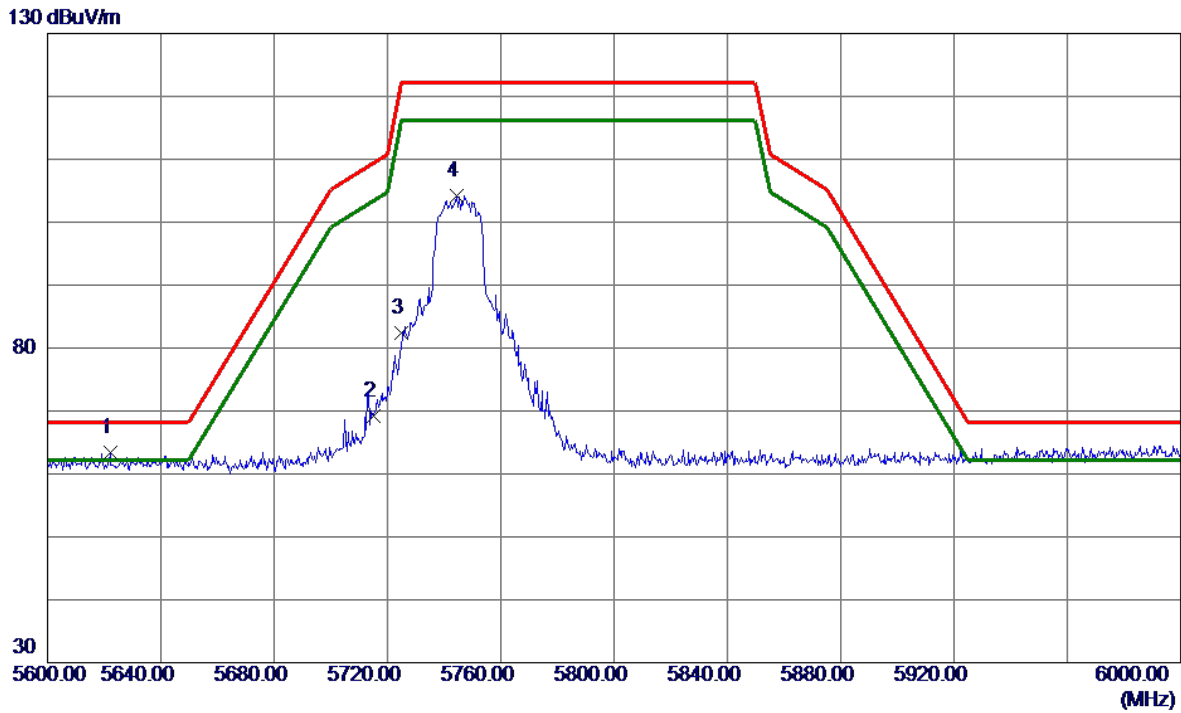


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5622.2000 | 25.04 | 38.35 | 63.39 | 68.20 | -4.81 | Peak | |
| 2 | 5715.0000 | 30.67 | 38.46 | 69.13 | 109.40 | -40.27 | Peak | |
| 3 | 5725.0000 | 43.97 | 38.50 | 82.47 | 122.20 | -39.73 | Peak | |
| 4 | 5744.4000 | 65.69 | 38.57 | 104.26 | 122.20 | -17.94 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

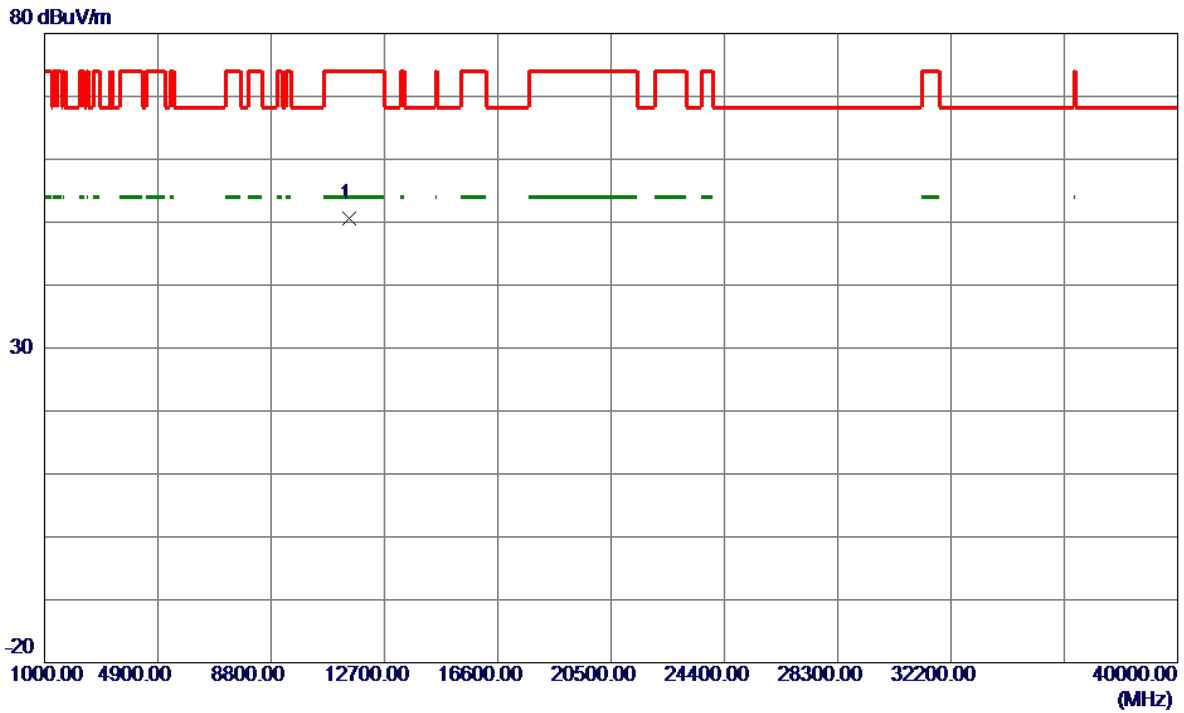


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11487.1000 | 48.44 | 2.20 | 50.64 | 74.00 | -23.36 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

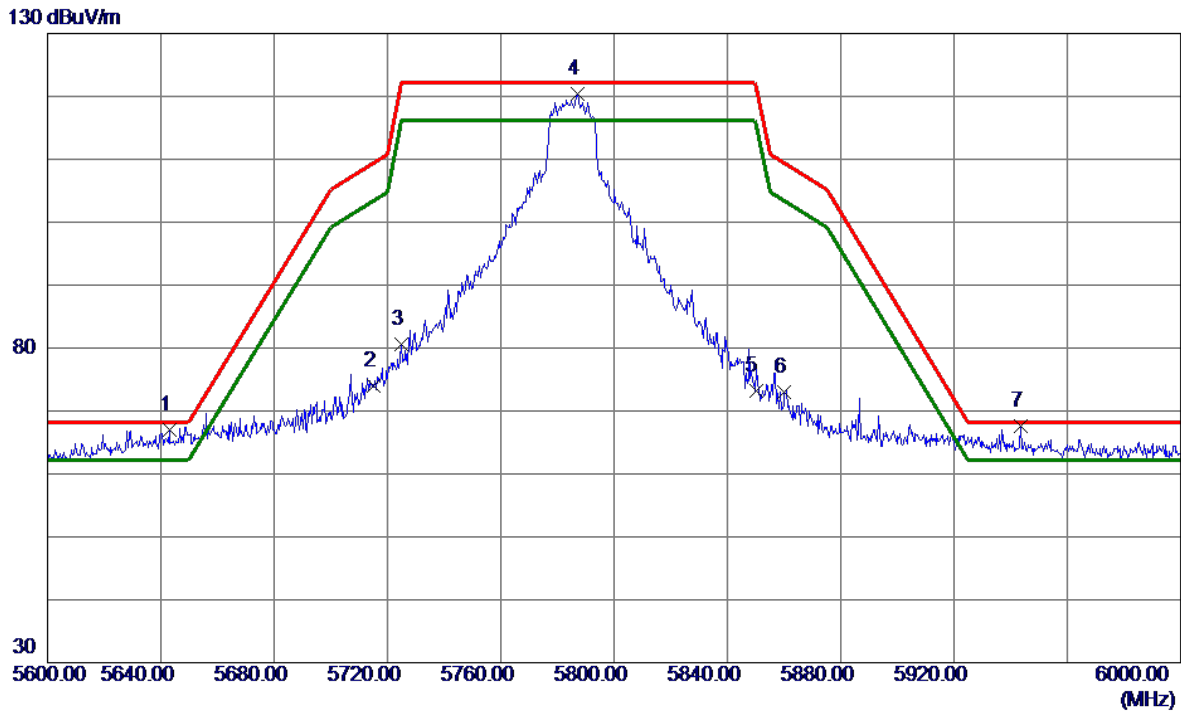


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5643.0000 | 28.68 | 38.37 | 67.05 | 68.20 | -1.15 | Peak | |
| 2 | 5715.0000 | 35.50 | 38.46 | 73.96 | 109.40 | -35.44 | Peak | |
| 3 | 5725.0000 | 42.06 | 38.50 | 80.56 | 122.20 | -41.64 | Peak | |
| 4 | 5787.0000 | 81.76 | 38.73 | 120.49 | 122.20 | -1.71 | Peak | |
| 5 | 5850.0000 | 34.23 | 38.91 | 73.14 | 122.20 | -49.06 | Peak | |
| 6 | 5860.0000 | 34.11 | 38.94 | 73.05 | 109.40 | -36.35 | Peak | |
| 7 * | 5943.6000 | 28.44 | 39.14 | 67.58 | 68.20 | -0.62 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

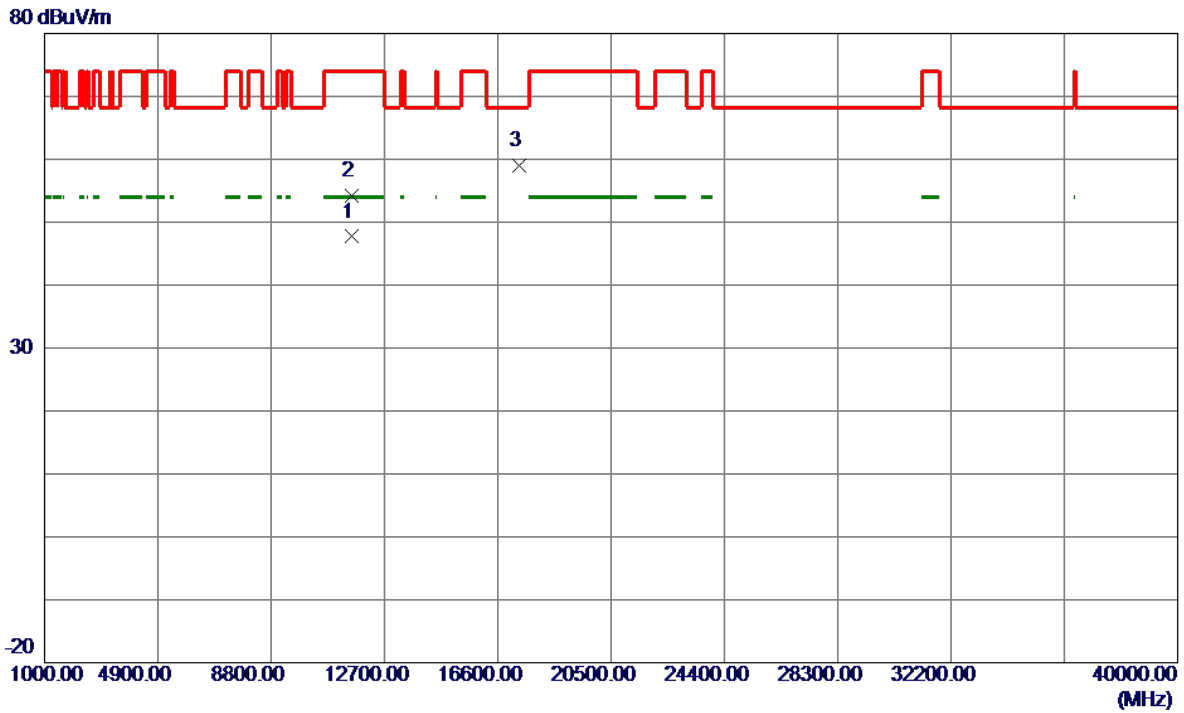


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.7820 | 45.42 | 2.28 | 47.70 | 54.00 | -6.30 | AVG | |
| 2 | 11576.8000 | 52.01 | 2.28 | 54.29 | 74.00 | -19.71 | Peak | |
| 3 | 17350.7500 | 51.70 | 7.36 | 59.06 | 68.20 | -9.14 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

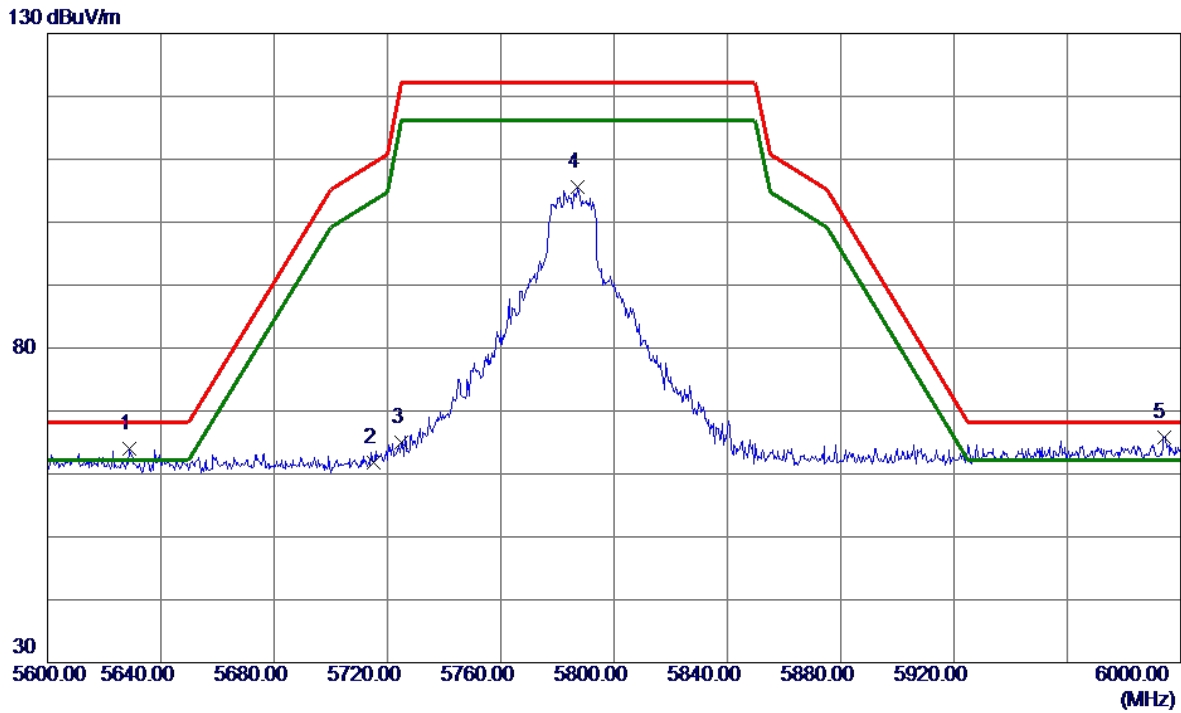


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5629.0000 | 25.57 | 38.36 | 63.93 | 68.20 | -4.27 | Peak | |
| 2 | 5715.0000 | 23.28 | 38.46 | 61.74 | 109.40 | -47.66 | Peak | |
| 3 | 5725.0000 | 26.50 | 38.50 | 65.00 | 122.20 | -57.20 | Peak | |
| 4 | 5787.0000 | 66.78 | 38.73 | 105.51 | 122.20 | -16.69 | Peak | |
| 5 * | 5994.0000 | 26.60 | 39.24 | 65.84 | 68.20 | -2.36 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

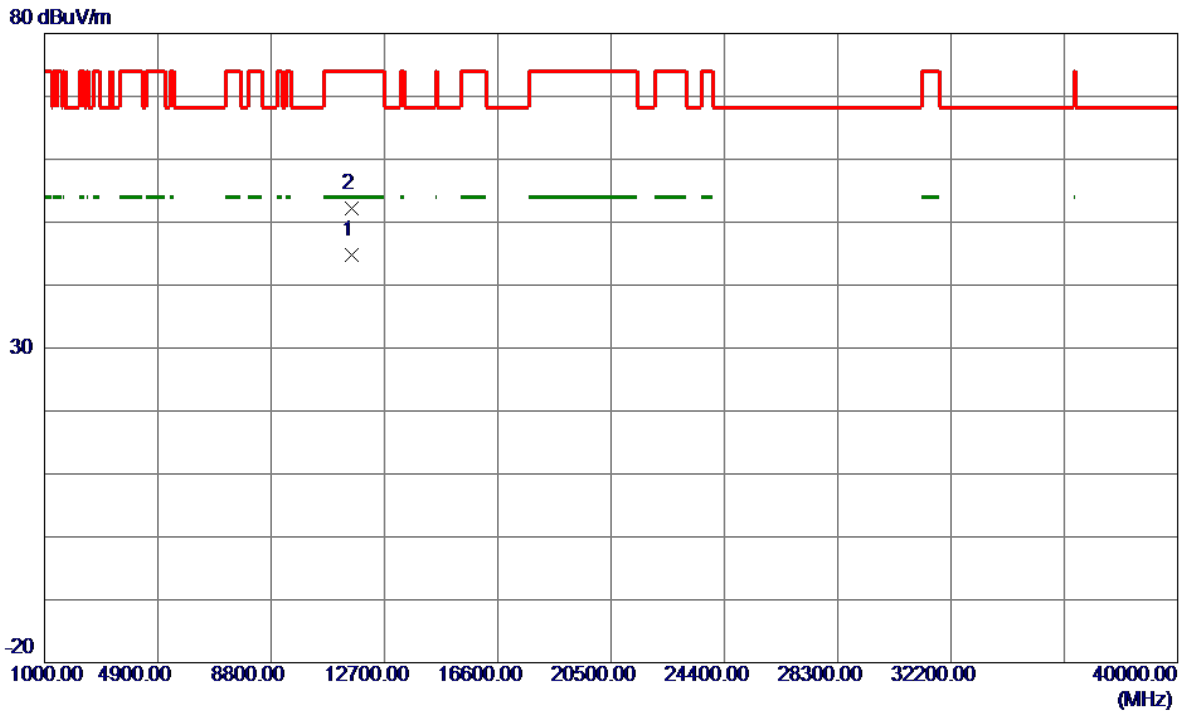


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11568.5140 | 42.49 | 2.27 | 44.76 | 54.00 | -9.24 | AVG | |
| 2 | 11570.9500 | 49.91 | 2.28 | 52.19 | 74.00 | -21.81 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

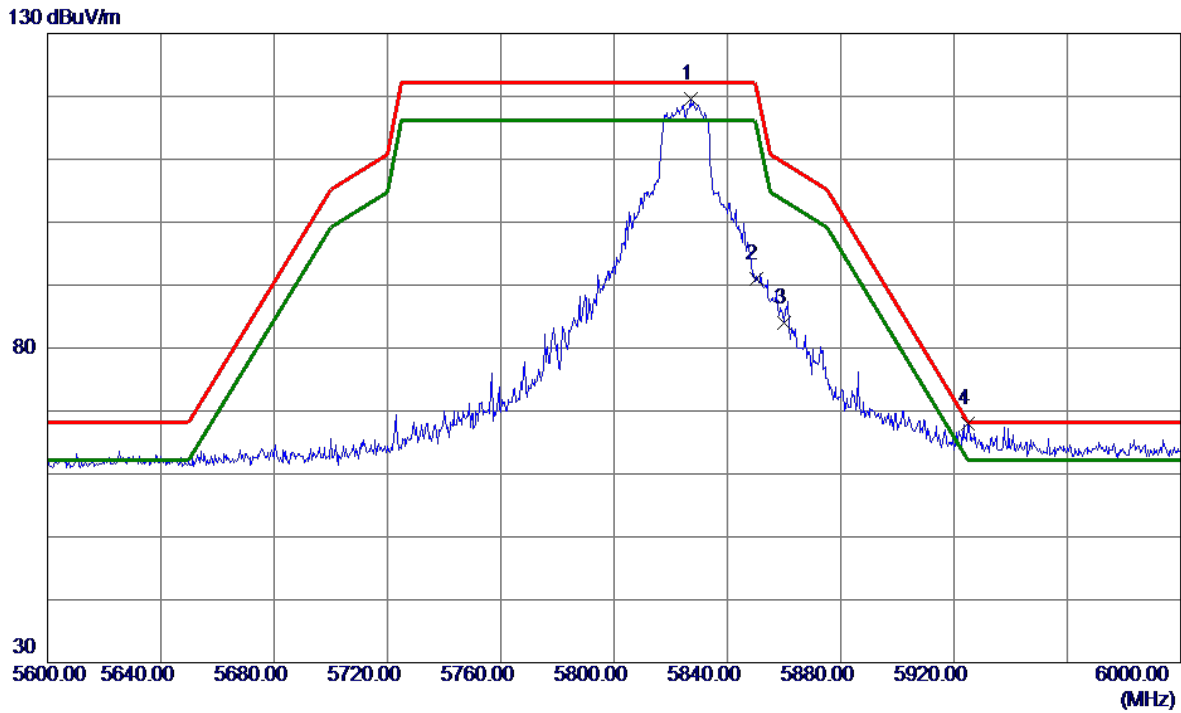


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5827.0000 | 80.73 | 38.85 | 119.58 | 122.20 | -2.62 | Peak | |
| 2 | 5850.0000 | 51.99 | 38.91 | 90.90 | 122.20 | -31.30 | Peak | |
| 3 | 5860.0000 | 44.98 | 38.94 | 83.92 | 109.40 | -25.48 | Peak | |
| 4 * | 5925.0000 | 28.81 | 39.10 | 67.91 | 68.20 | -0.29 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

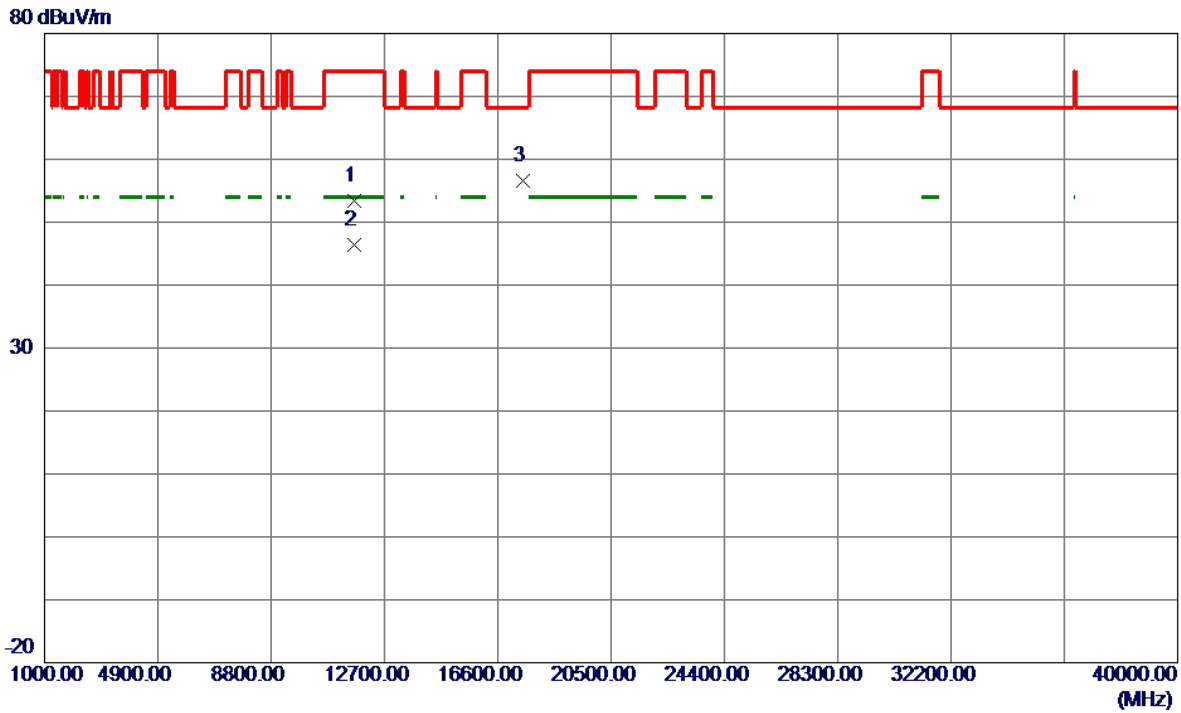


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11647.0000 | 51.26 | 2.12 | 53.38 | 74.00 | -20.62 | Peak | |
| 2 * | 11651.3060 | 44.30 | 2.10 | 46.40 | 54.00 | -7.60 | AVG | |
| 3 | 17475.5500 | 48.66 | 8.03 | 56.69 | 68.20 | -11.51 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

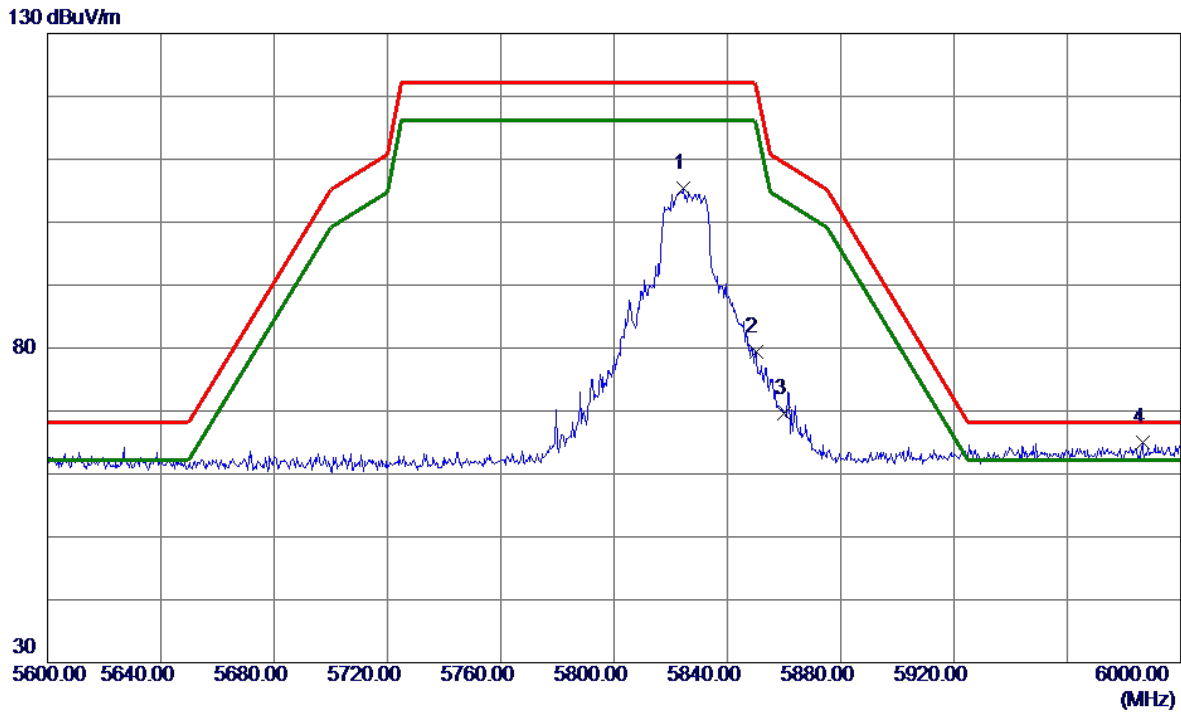


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5824.4000 | 66.51 | 38.85 | 105.36 | 122.20 | -16.84 | Peak | |
| 2 | 5850.0000 | 40.41 | 38.91 | 79.32 | 122.20 | -42.88 | Peak | |
| 3 | 5860.0000 | 30.71 | 38.94 | 69.65 | 109.40 | -39.75 | Peak | |
| 4 * | 5986.6000 | 25.87 | 39.22 | 65.09 | 68.20 | -3.11 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

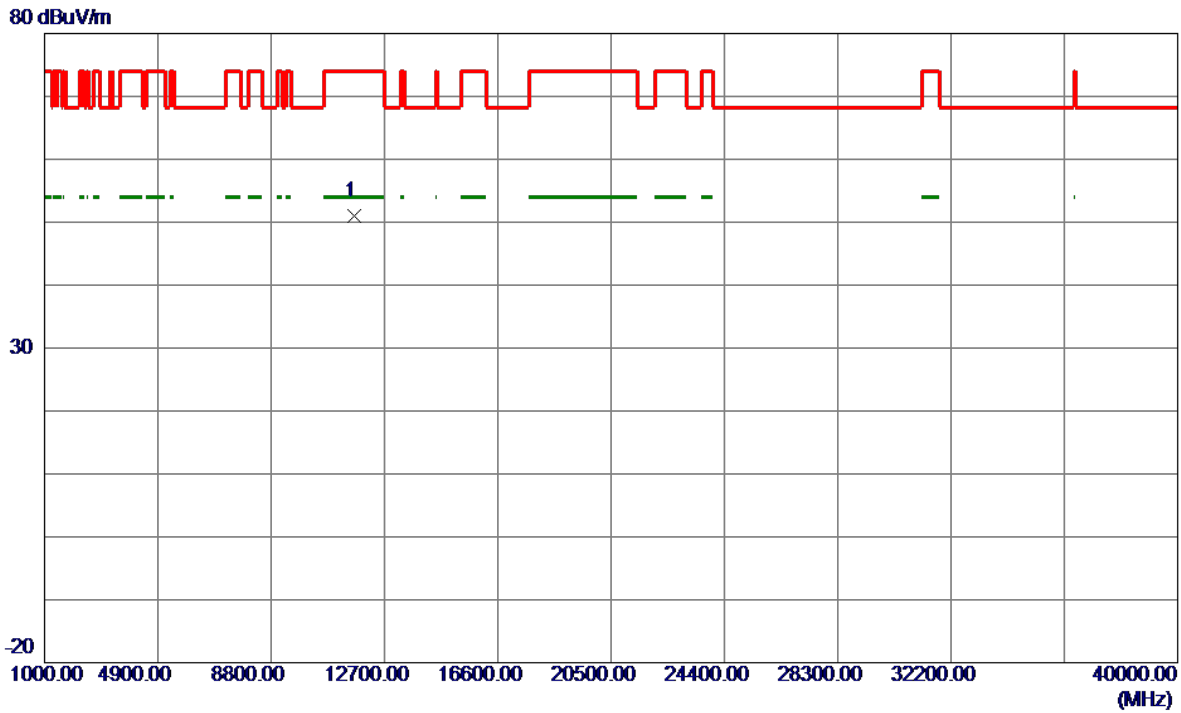


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11652.8500 | 48.85 | 2.09 | 50.94 | 74.00 | -23.06 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

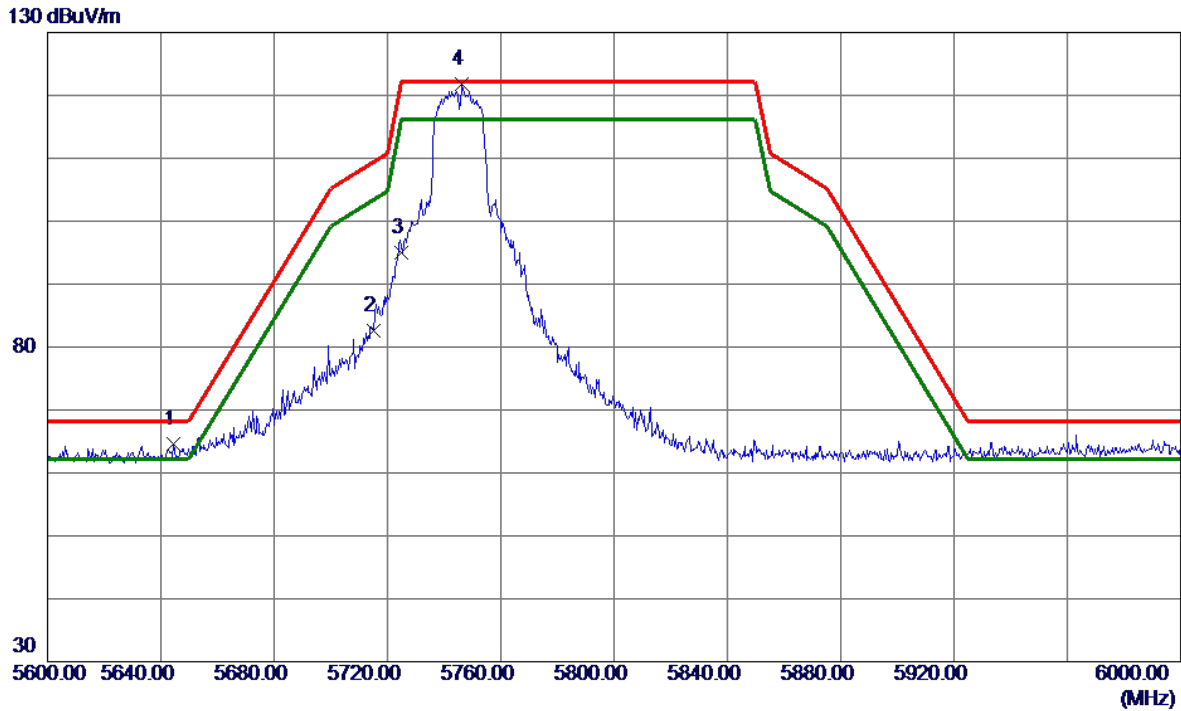

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5644.6000 | 26.19 | 38.37 | 64.56 | 68.20 | -3.64 | Peak | |
| 2 | 5715.0000 | 44.21 | 38.46 | 82.67 | 109.40 | -26.73 | Peak | |
| 3 | 5725.0000 | 56.55 | 38.50 | 95.05 | 122.20 | -27.15 | Peak | |
| 4 * | 5746.4000 | 83.18 | 38.58 | 121.76 | 122.20 | -0.44 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|




| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11489.0500 | 53.17 | 2.21 | 55.38 | 74.00 | -18.62 | Peak | |
| 2 * | 11493.0580 | 47.84 | 2.21 | 50.05 | 54.00 | -3.95 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

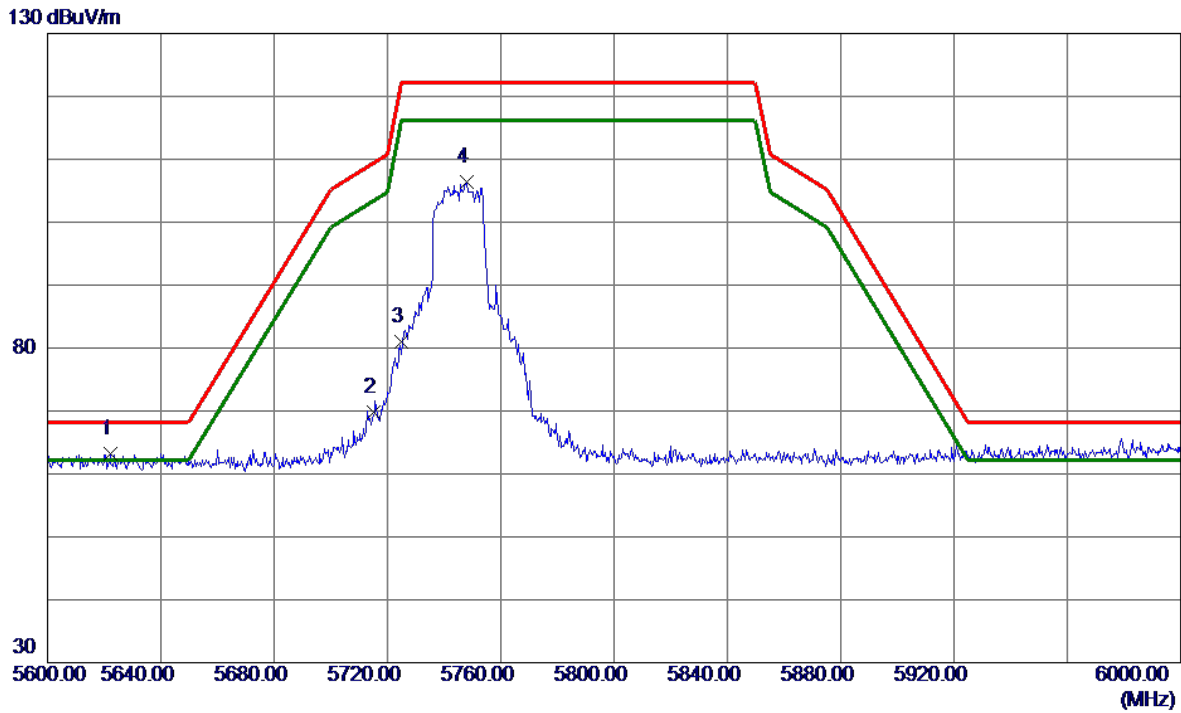


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5622.2000 | 24.92 | 38.35 | 63.27 | 68.20 | -4.93 | Peak | |
| 2 | 5715.0000 | 31.43 | 38.46 | 69.89 | 109.40 | -39.51 | Peak | |
| 3 | 5725.0000 | 42.46 | 38.50 | 80.96 | 122.20 | -41.24 | Peak | |
| 4 | 5748.0000 | 67.73 | 38.58 | 106.31 | 122.20 | -15.89 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

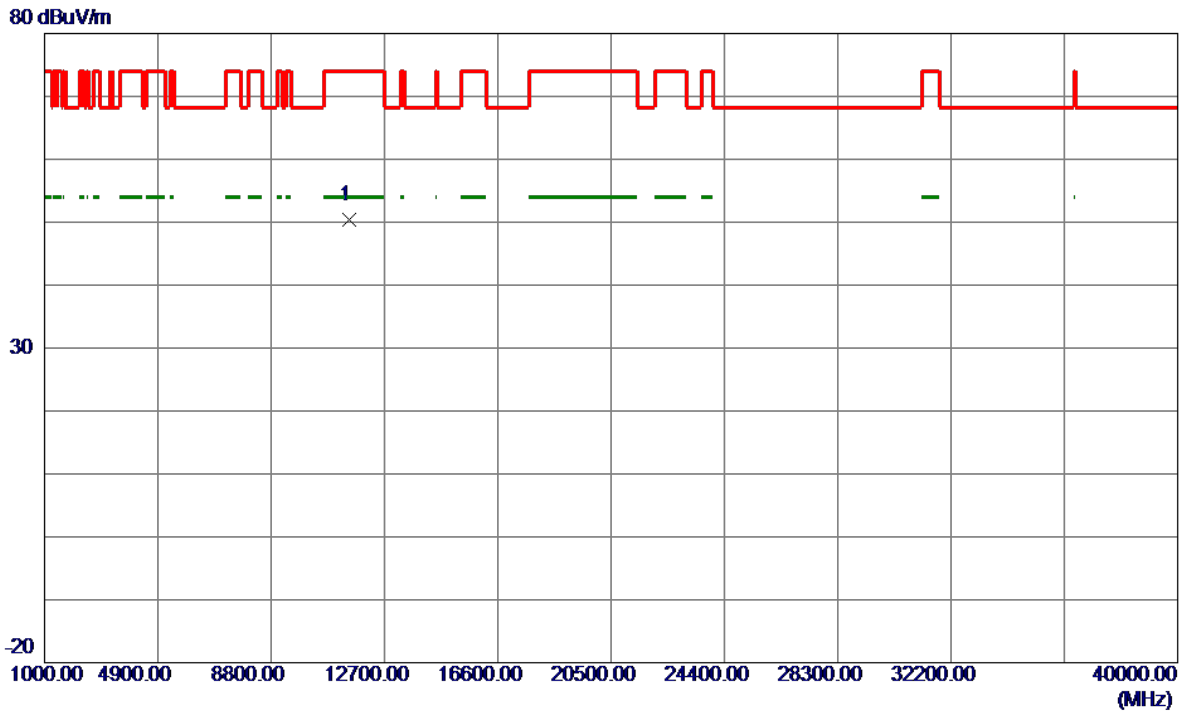


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11496.8500 | 48.23 | 2.21 | 50.44 | 74.00 | -23.56 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

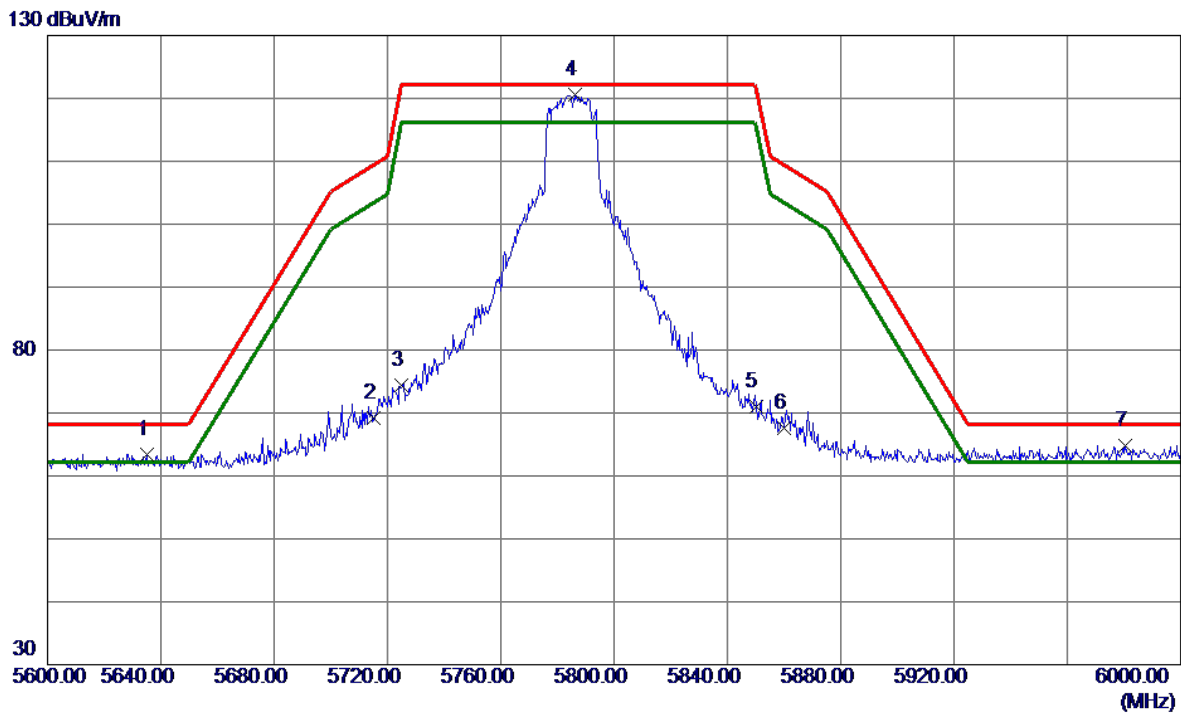


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5635.0000 | 25.11 | 38.36 | 63.47 | 68.20 | -4.73 | Peak | |
| 2 | 5715.0000 | 30.79 | 38.46 | 69.25 | 109.40 | -40.15 | Peak | |
| 3 | 5725.0000 | 35.90 | 38.50 | 74.40 | 122.20 | -47.80 | Peak | |
| 4 * | 5786.4000 | 81.80 | 38.73 | 120.53 | 122.20 | -1.67 | Peak | |
| 5 | 5850.0000 | 32.15 | 38.91 | 71.06 | 122.20 | -51.14 | Peak | |
| 6 | 5860.0000 | 28.62 | 38.94 | 67.56 | 109.40 | -41.84 | Peak | |
| 7 | 5980.4000 | 25.65 | 39.21 | 64.86 | 68.20 | -3.34 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

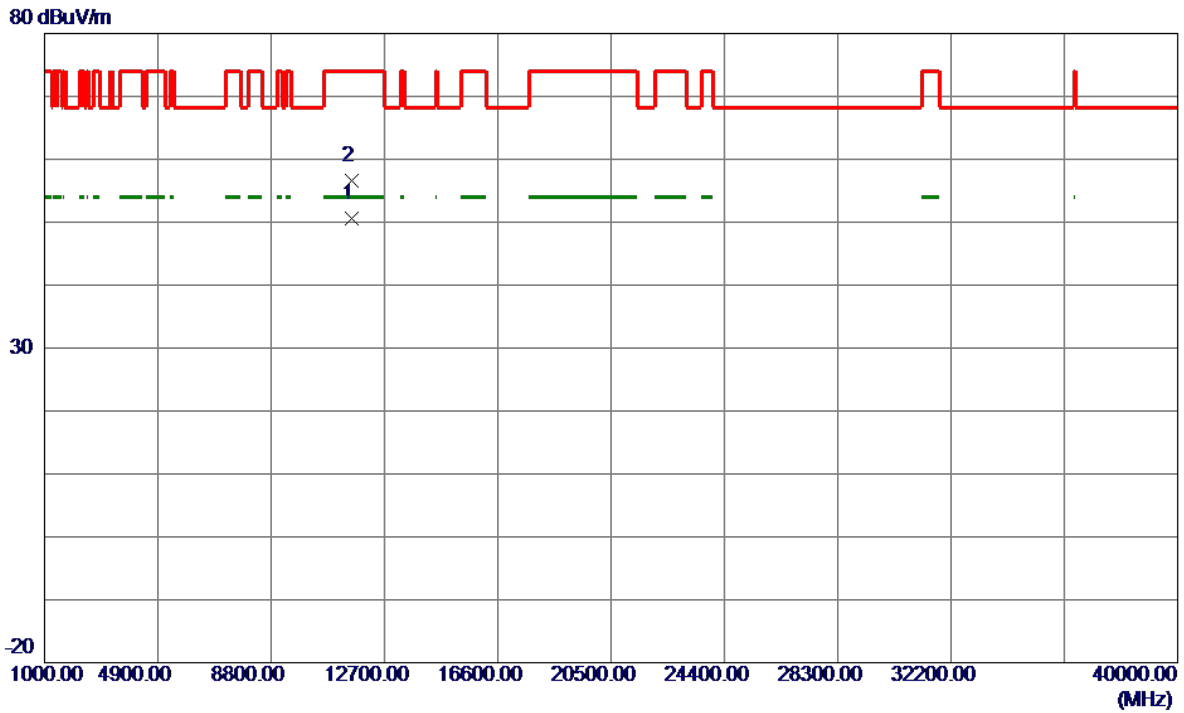


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11567.9950 | 48.33 | 2.27 | 50.60 | 54.00 | -3.40 | AVG | |
| 2 | 11576.8000 | 54.37 | 2.28 | 56.65 | 74.00 | -17.35 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

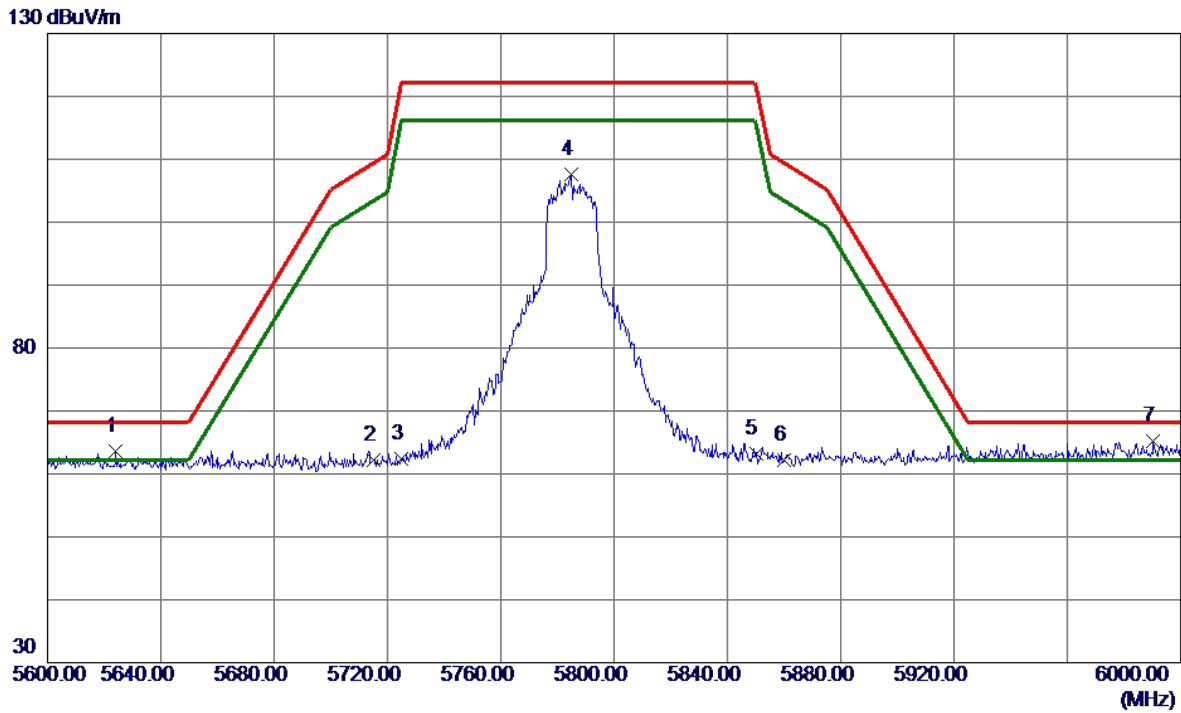


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5624.0000 | 25.21 | 38.36 | 63.57 | 68.20 | -4.63 | Peak | |
| 2 | 5715.0000 | 23.67 | 38.46 | 62.13 | 109.40 | -47.27 | Peak | |
| 3 | 5725.0000 | 23.87 | 38.50 | 62.37 | 122.20 | -59.83 | Peak | |
| 4 | 5784.8000 | 68.86 | 38.72 | 107.58 | 122.20 | -14.62 | Peak | |
| 5 | 5850.0000 | 24.34 | 38.91 | 63.25 | 122.20 | -58.95 | Peak | |
| 6 | 5860.0000 | 23.35 | 38.94 | 62.29 | 109.40 | -47.11 | Peak | |
| 7 * | 5990.4000 | 25.93 | 39.23 | 65.16 | 68.20 | -3.04 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

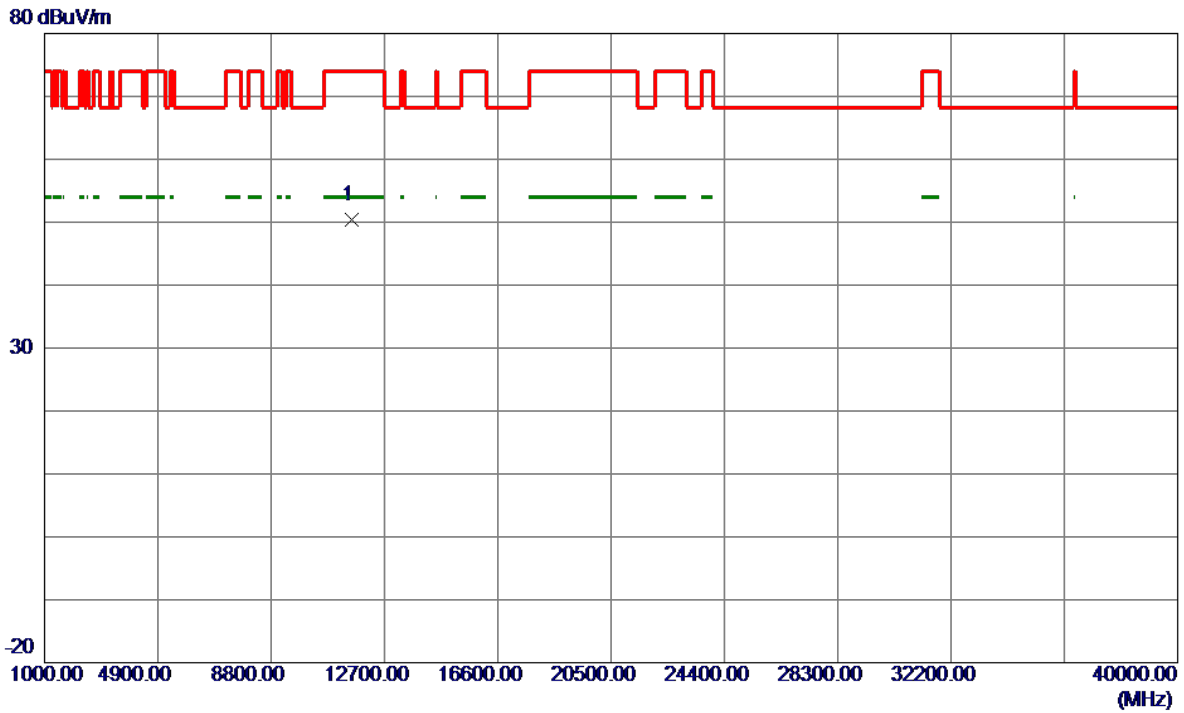


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11565.1000 | 48.19 | 2.27 | 50.46 | 74.00 | -23.54 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

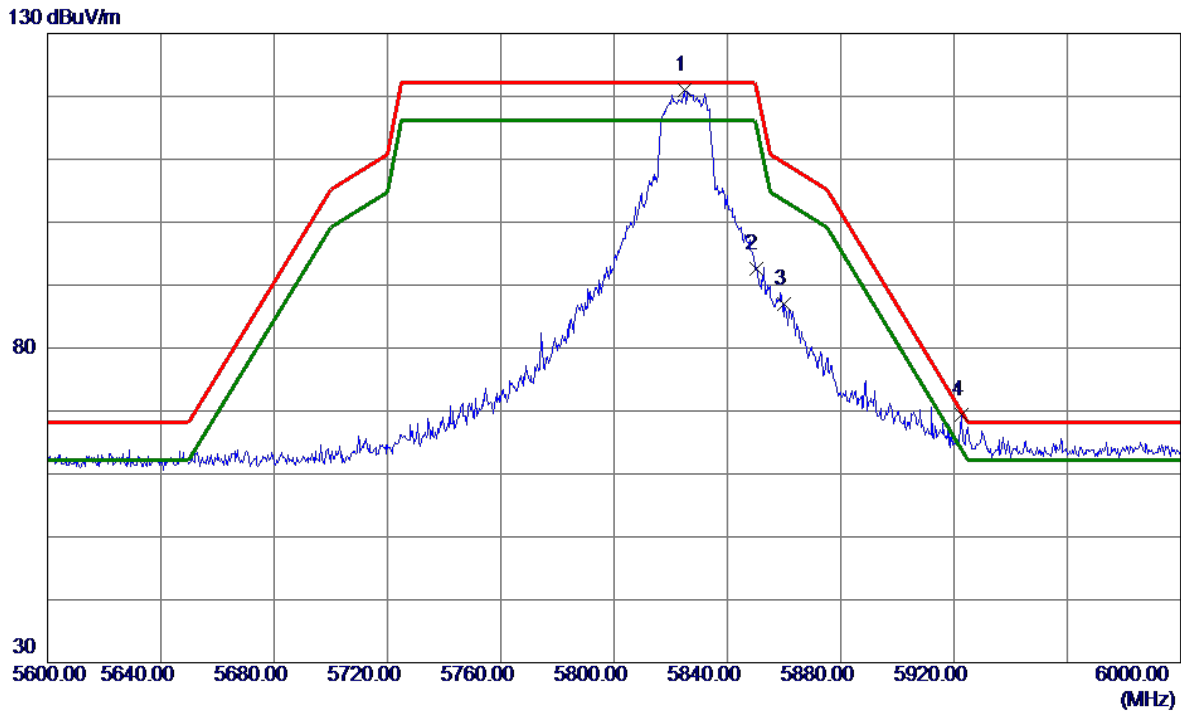


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5824.8000 | 82.10 | 38.85 | 120.95 | 122.20 | -1.25 | Peak | |
| 2 | 5850.0000 | 53.75 | 38.91 | 92.66 | 122.20 | -29.54 | Peak | |
| 3 | 5860.0000 | 48.09 | 38.94 | 87.03 | 109.40 | -22.37 | Peak | |
| 4 * | 5922.6000 | 30.24 | 39.10 | 69.34 | 69.98 | -0.64 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

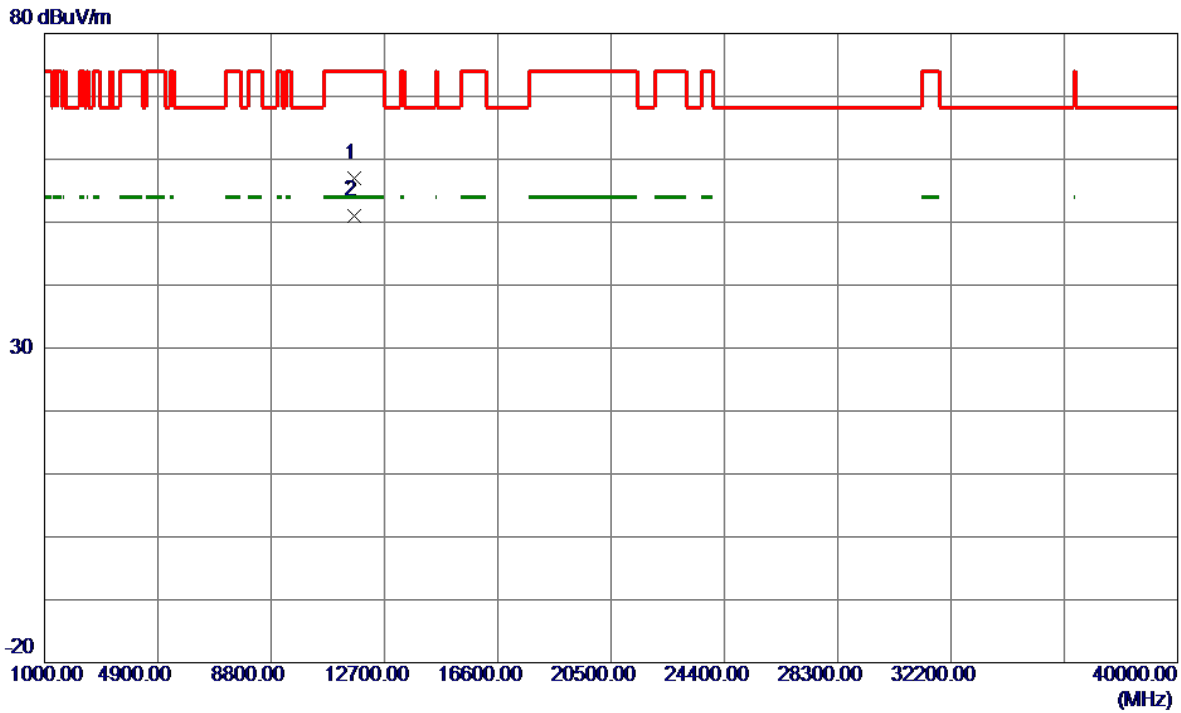


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11648.9500 | 54.96 | 2.11 | 57.07 | 74.00 | -16.93 | Peak | |
| 2 * | 11650.8920 | 49.00 | 2.10 | 51.10 | 54.00 | -2.90 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

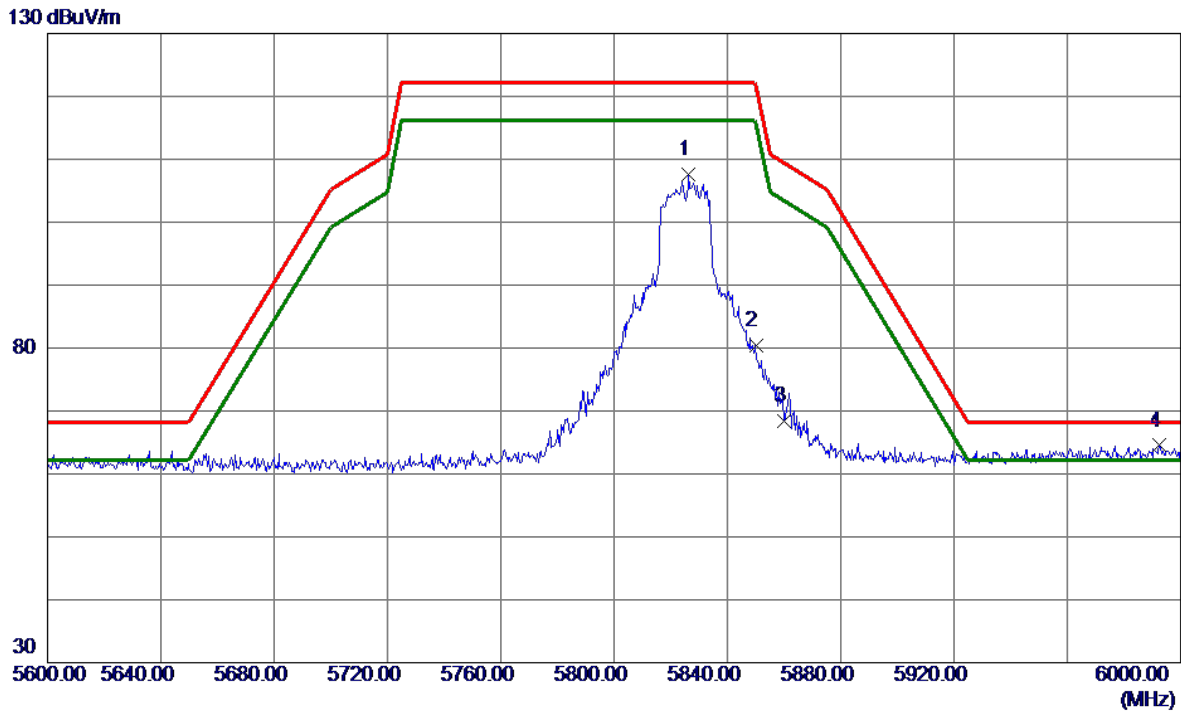


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5826.4000 | 68.70 | 38.85 | 107.55 | 122.20 | -14.65 | Peak | |
| 2 | 5850.0000 | 41.48 | 38.91 | 80.39 | 122.20 | -41.81 | Peak | |
| 3 | 5860.0000 | 29.39 | 38.94 | 68.33 | 109.40 | -41.07 | Peak | |
| 4 * | 5992.6000 | 25.26 | 39.24 | 64.50 | 68.20 | -3.70 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

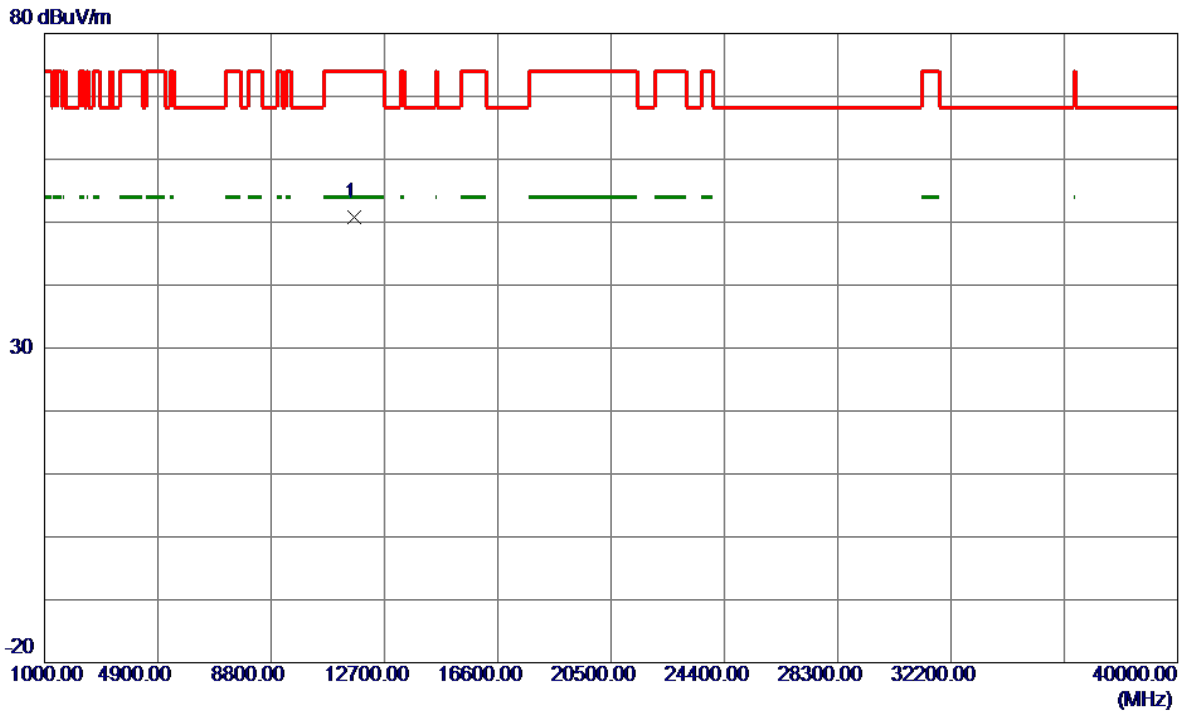


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.9000 | 48.70 | 2.10 | 50.80 | 74.00 | -23.20 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

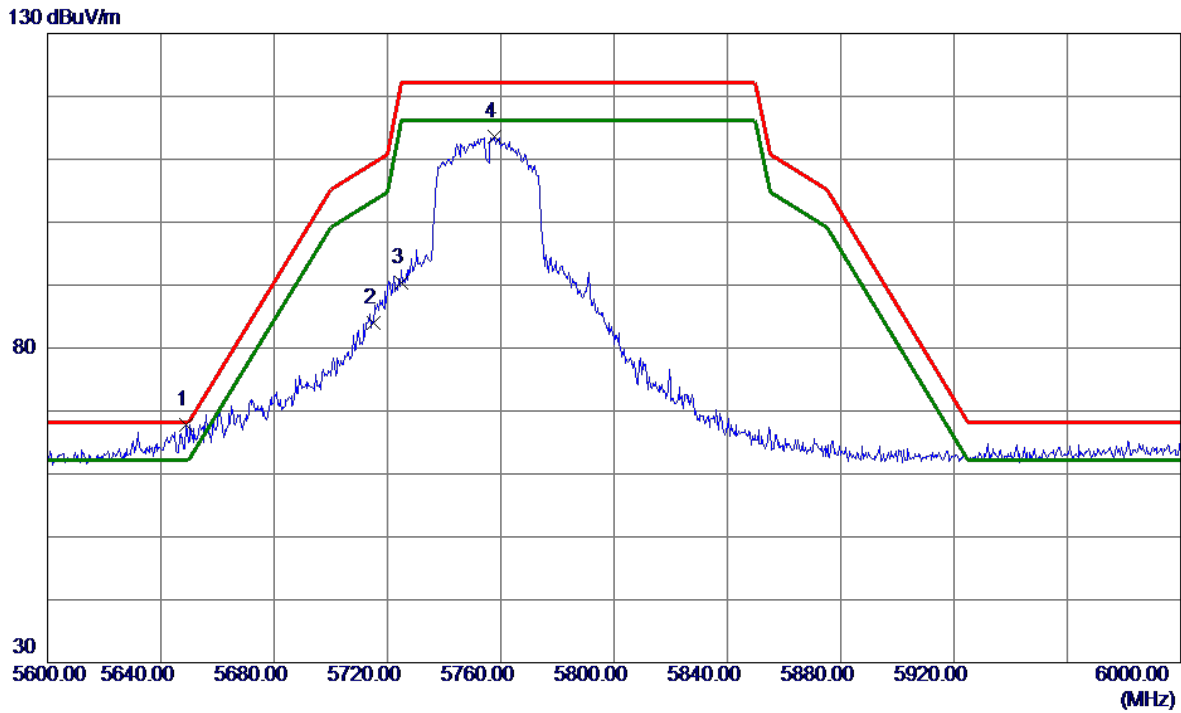


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5649.0000 | 29.49 | 38.37 | 67.86 | 68.20 | -0.34 | Peak | |
| 2 | 5715.0000 | 45.53 | 38.46 | 83.99 | 109.40 | -25.41 | Peak | |
| 3 | 5725.0000 | 51.97 | 38.50 | 90.47 | 122.20 | -31.73 | Peak | |
| 4 | 5757.8000 | 74.93 | 38.62 | 113.55 | 122.20 | -8.65 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

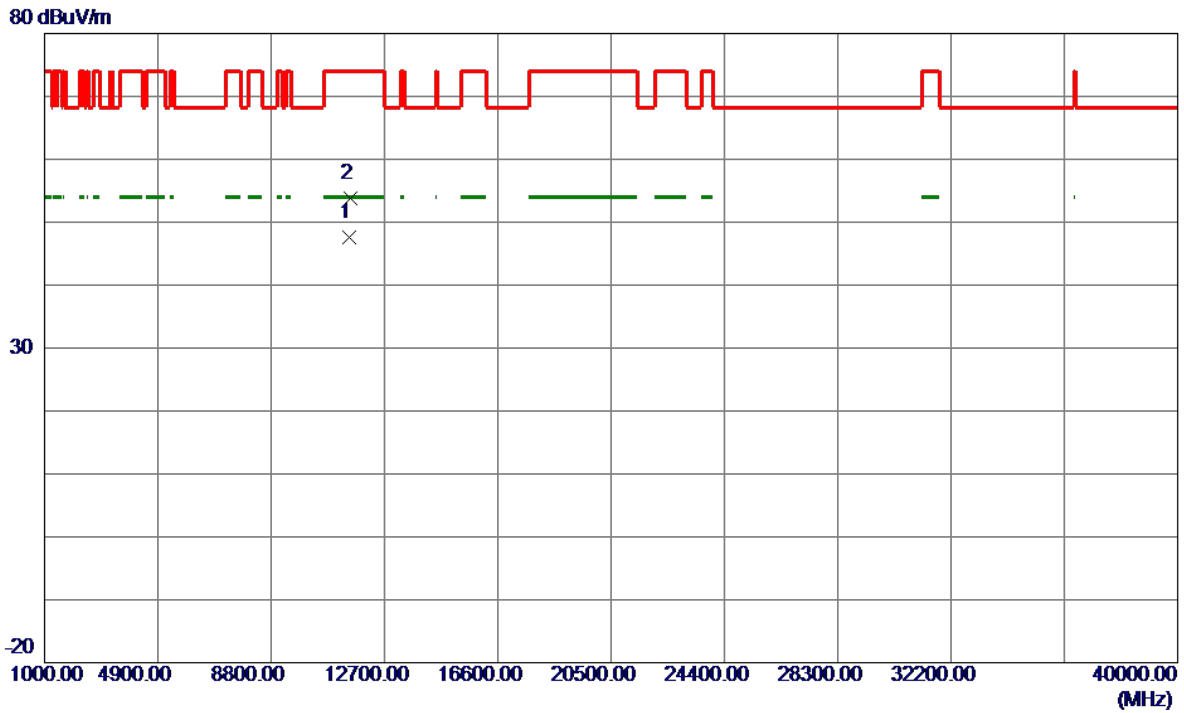


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11506.6560 | 45.40 | 2.22 | 47.62 | 54.00 | -6.38 | AVG | |
| 2 | 11510.5000 | 51.58 | 2.22 | 53.80 | 74.00 | -20.20 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

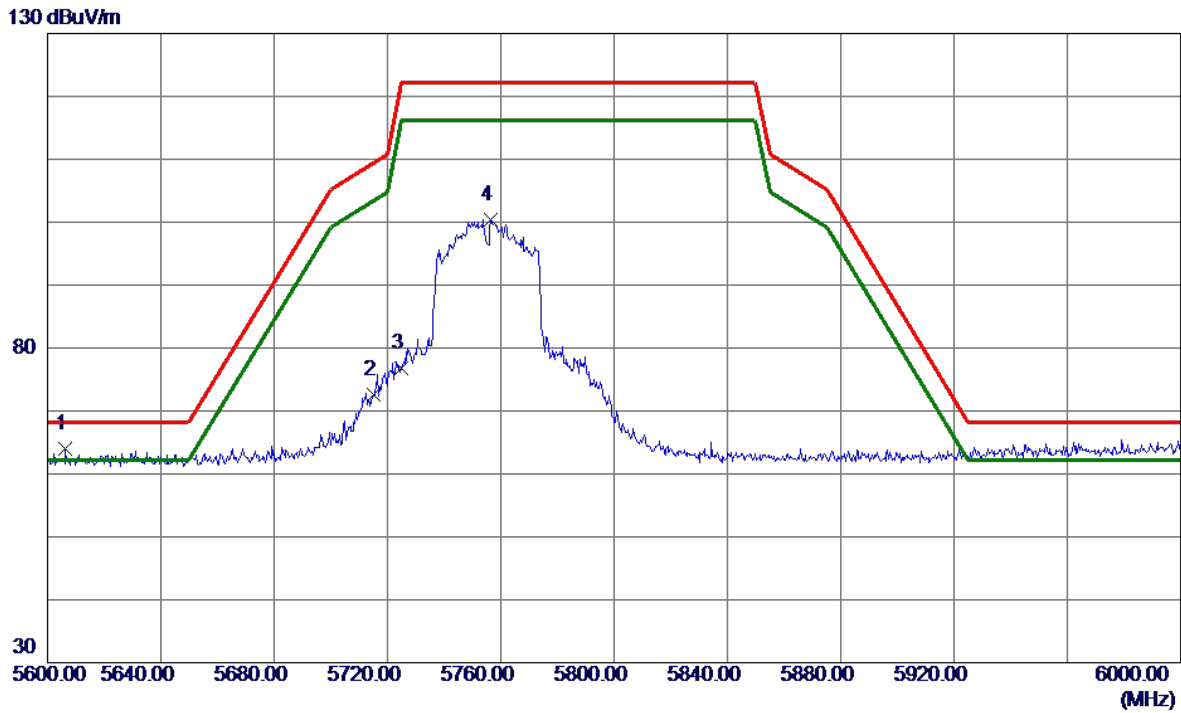


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5606.4000 | 25.58 | 38.34 | 63.92 | 68.20 | -4.28 | Peak | |
| 2 | 5715.0000 | 34.10 | 38.46 | 72.56 | 109.40 | -36.84 | Peak | |
| 3 | 5725.0000 | 38.31 | 38.50 | 76.81 | 122.20 | -45.39 | Peak | |
| 4 | 5756.4000 | 61.77 | 38.62 | 100.39 | 122.20 | -21.81 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

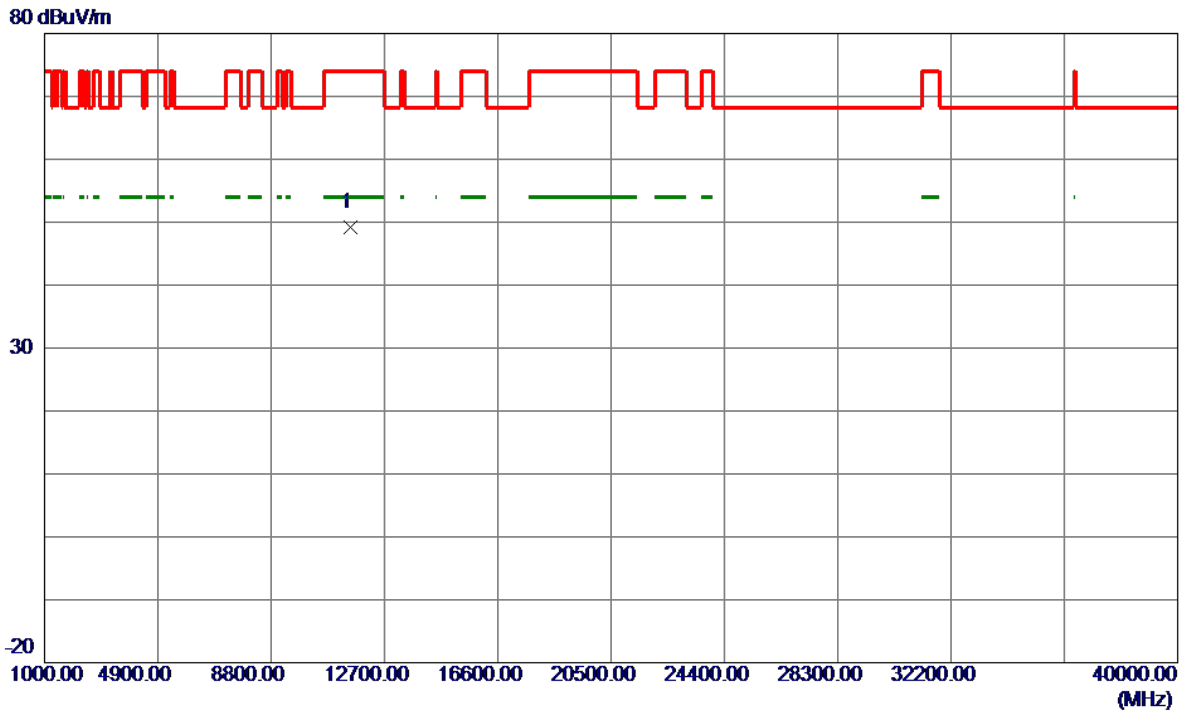


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11510.0000 | 46.96 | 2.22 | 49.18 | 74.00 | -24.82 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

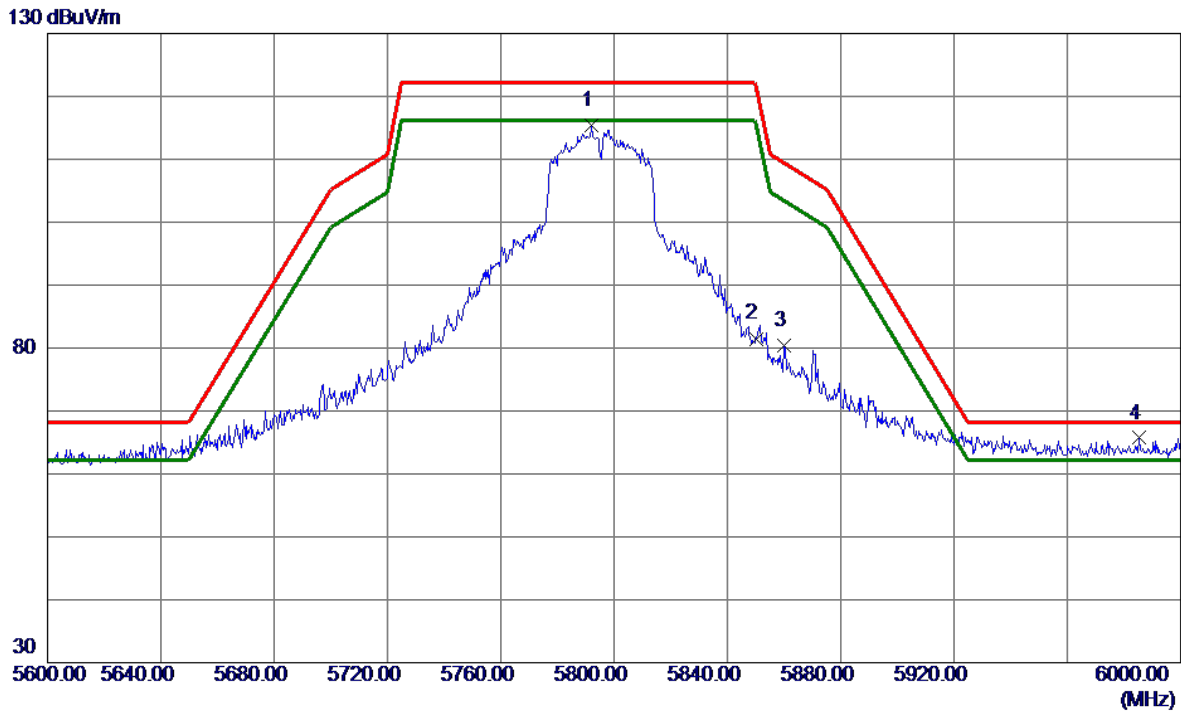


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5792.0000 | 76.70 | 38.75 | 115.45 | 122.20 | -6.75 | Peak | |
| 2 | 5850.0000 | 42.59 | 38.91 | 81.50 | 122.20 | -40.70 | Peak | |
| 3 | 5860.0000 | 41.46 | 38.94 | 80.40 | 109.40 | -29.00 | Peak | |
| 4 * | 5985.4000 | 26.48 | 39.22 | 65.70 | 68.20 | -2.50 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

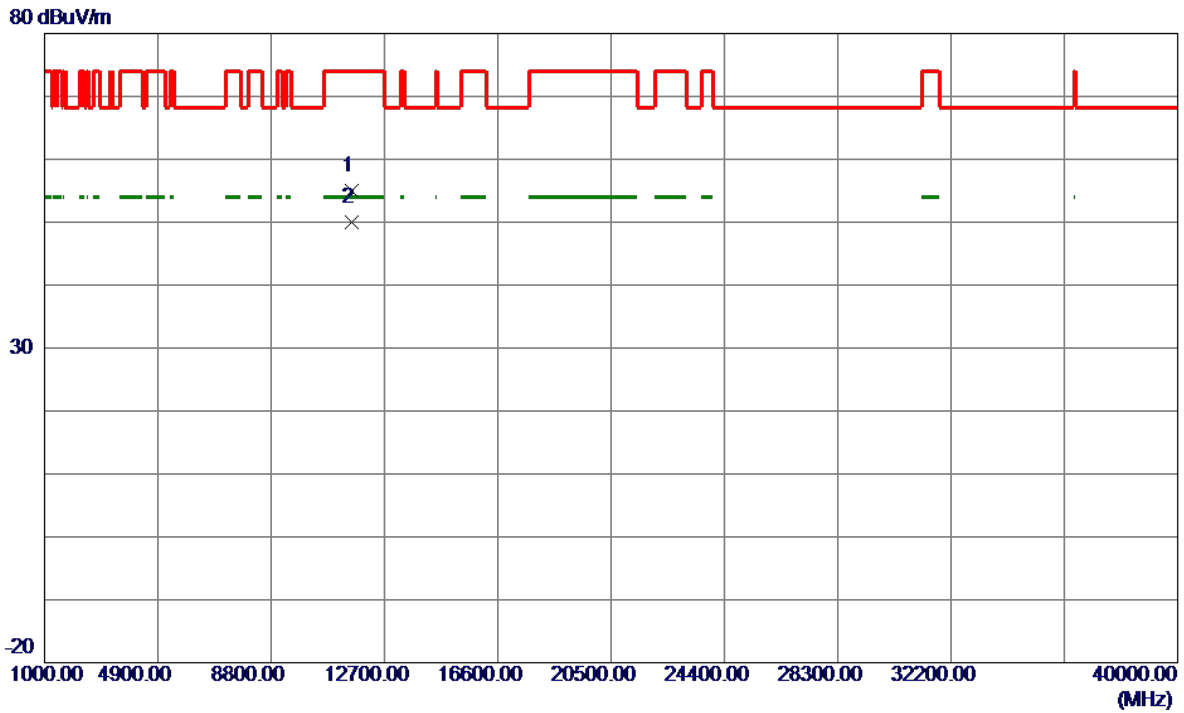


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11590.4500 | 52.79 | 2.29 | 55.08 | 74.00 | -18.92 | Peak | |
| 2 * | 11592.4460 | 47.68 | 2.29 | 49.97 | 54.00 | -4.03 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

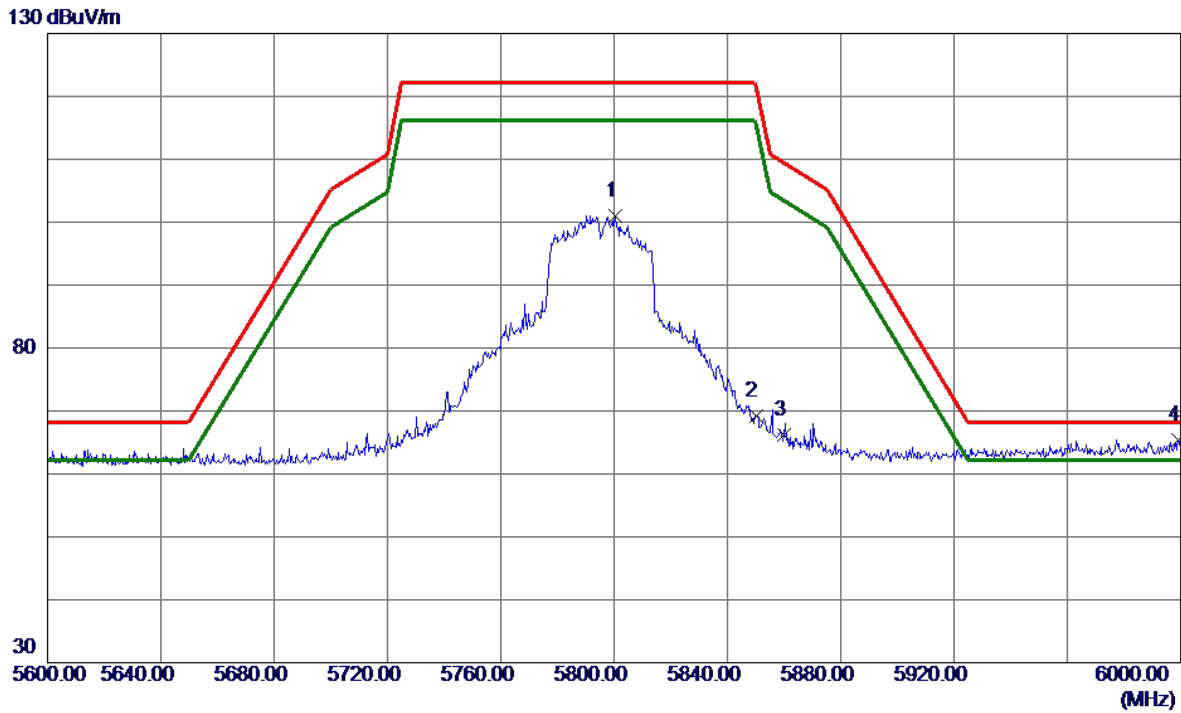


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5800.4000 | 62.23 | 38.78 | 101.01 | 122.20 | -21.19 | Peak | |
| 2 | 5850.0000 | 30.35 | 38.91 | 69.26 | 122.20 | -52.94 | Peak | |
| 3 | 5860.0000 | 27.24 | 38.94 | 66.18 | 109.40 | -43.22 | Peak | |
| 4 * | 5999.2000 | 26.15 | 39.25 | 65.40 | 68.20 | -2.80 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

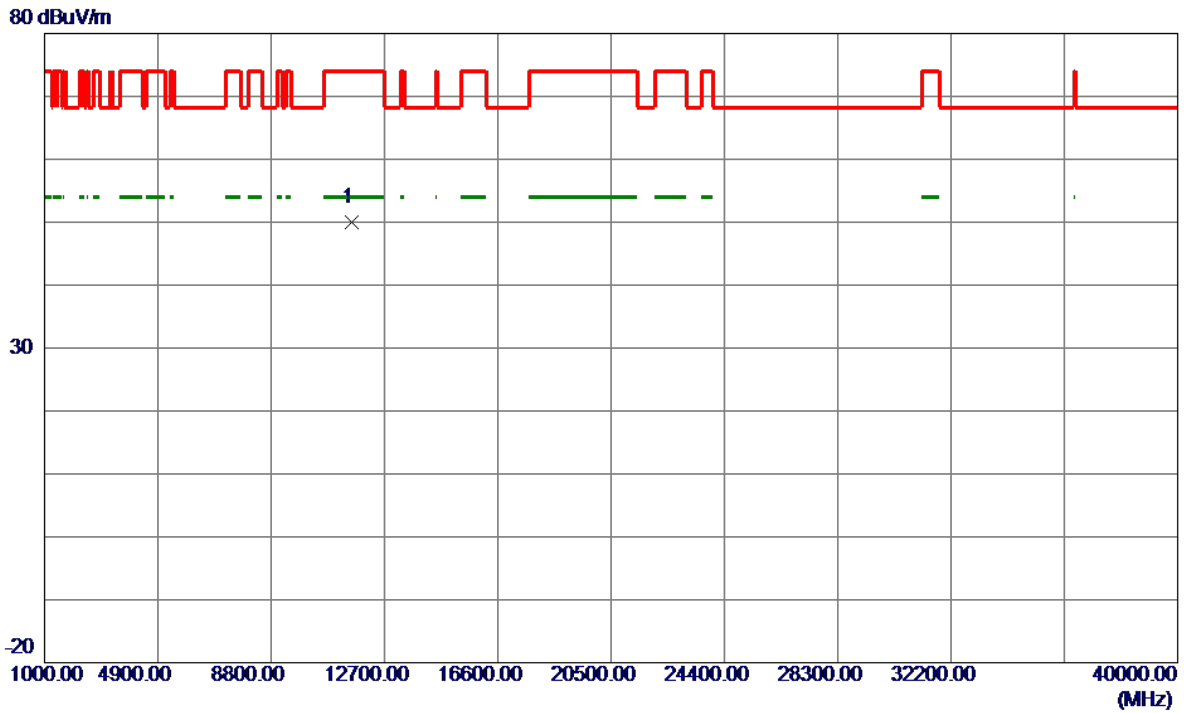


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.0000 | 47.78 | 2.29 | 50.07 | 74.00 | -23.93 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

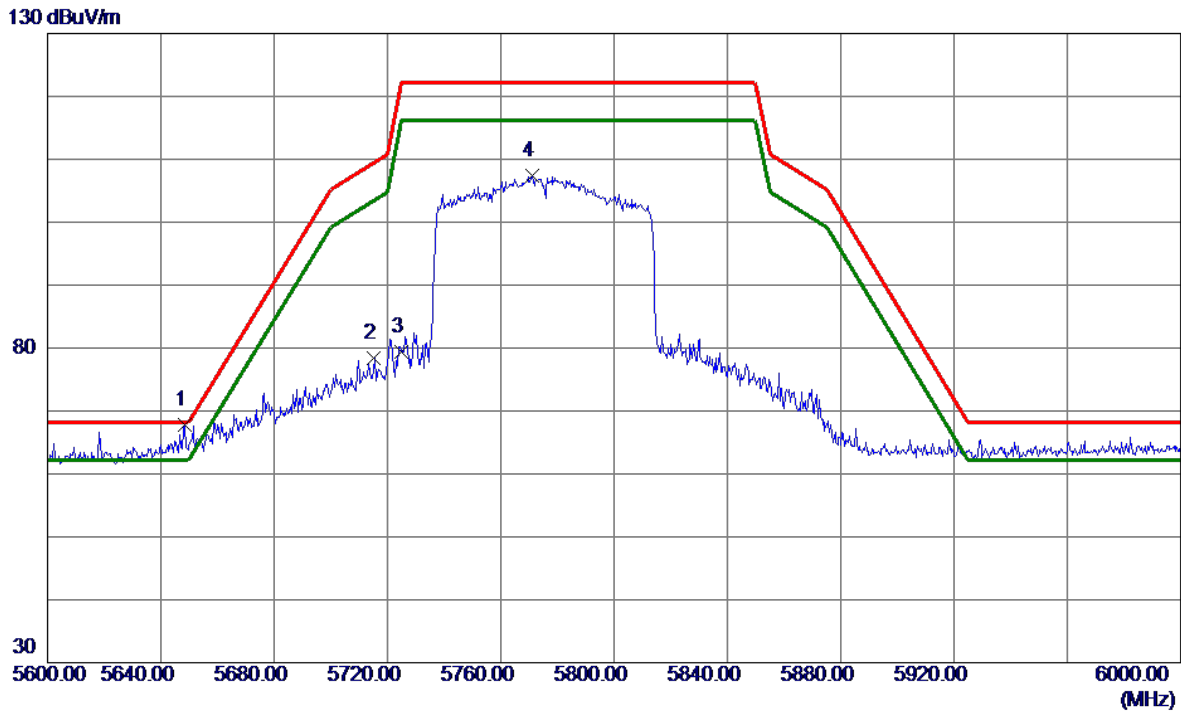


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5648.6000 | 29.49 | 38.37 | 67.86 | 68.20 | -0.34 | Peak | |
| 2 | 5715.0000 | 39.90 | 38.46 | 78.36 | 109.40 | -31.04 | Peak | |
| 3 | 5725.0000 | 40.86 | 38.50 | 79.36 | 122.20 | -42.84 | Peak | |
| 4 | 5771.2000 | 68.76 | 38.67 | 107.43 | 122.20 | -14.77 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

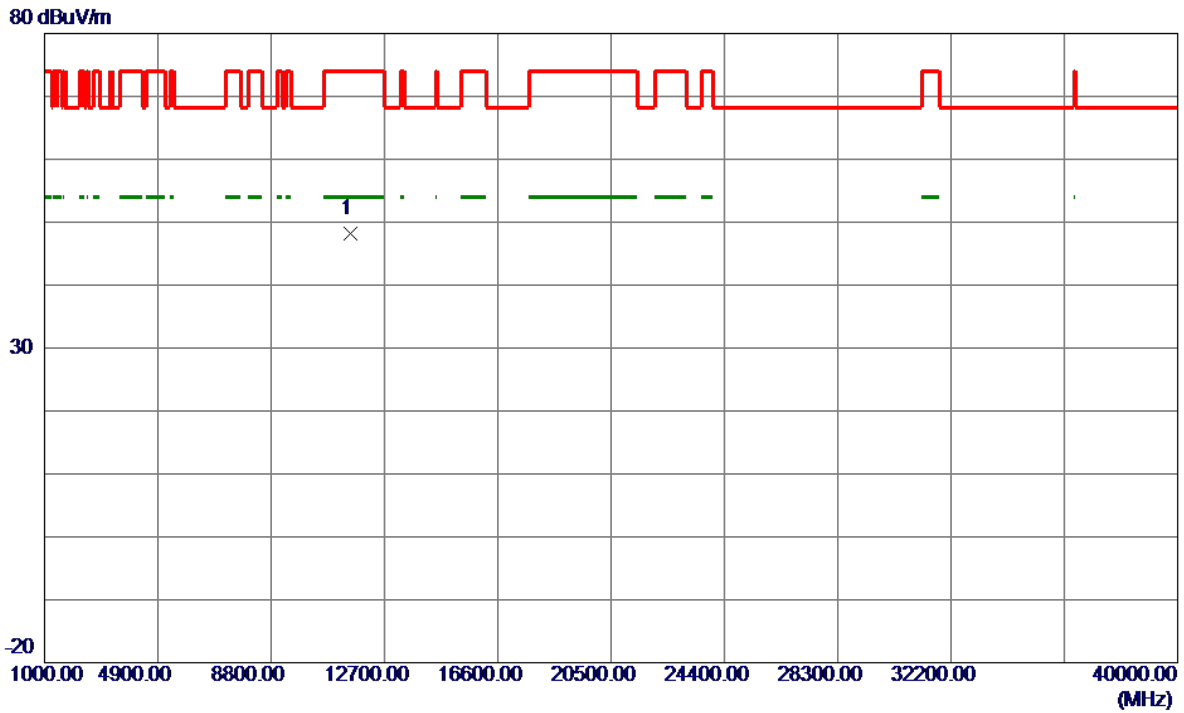


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11550.0000 | 45.99 | 2.26 | 48.25 | 74.00 | -25.75 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

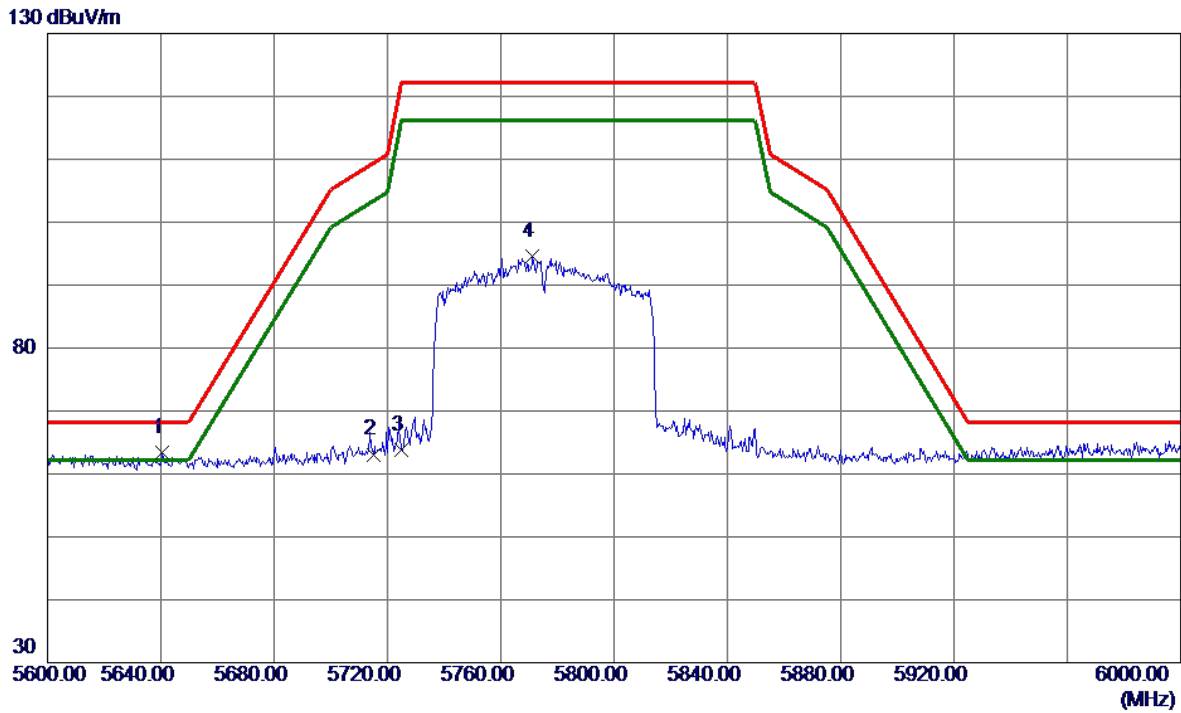


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5640.6000 | 25.03 | 38.37 | 63.40 | 68.20 | -4.80 | Peak | |
| 2 | 5715.0000 | 24.64 | 38.46 | 63.10 | 109.40 | -46.30 | Peak | |
| 3 | 5725.0000 | 25.30 | 38.50 | 63.80 | 122.20 | -58.40 | Peak | |
| 4 | 5771.2000 | 55.99 | 38.67 | 94.66 | 122.20 | -27.54 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

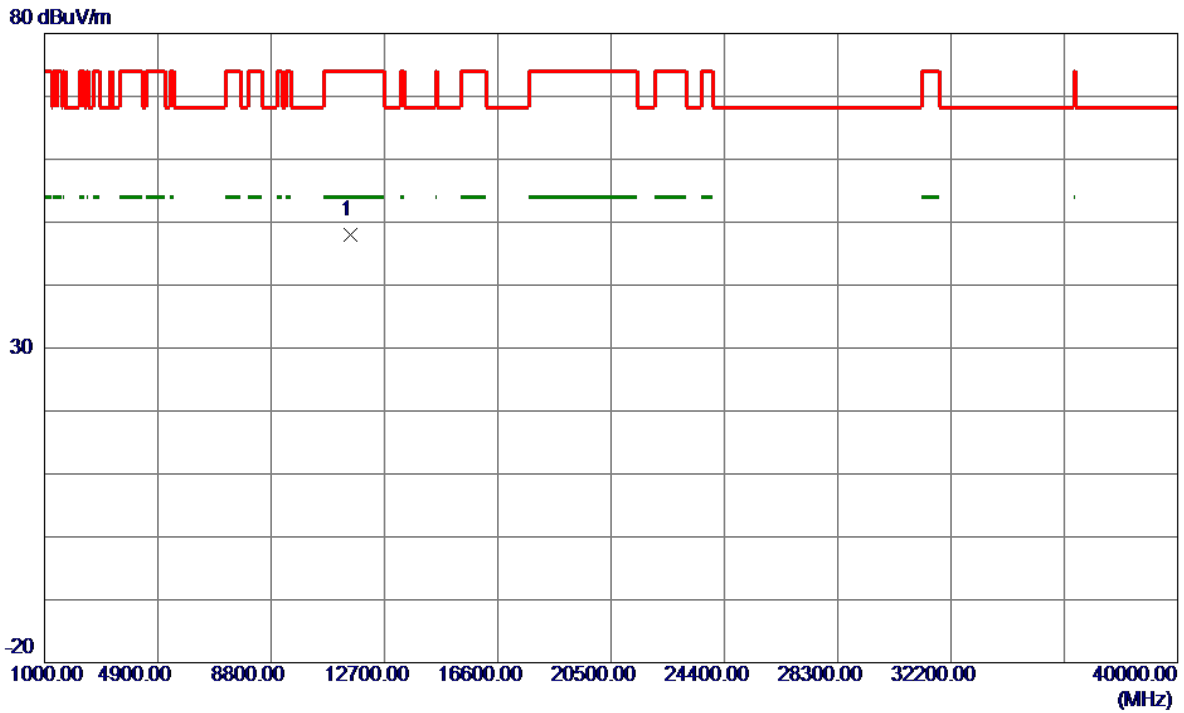


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11550.0000 | 45.78 | 2.26 | 48.04 | 74.00 | -25.96 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

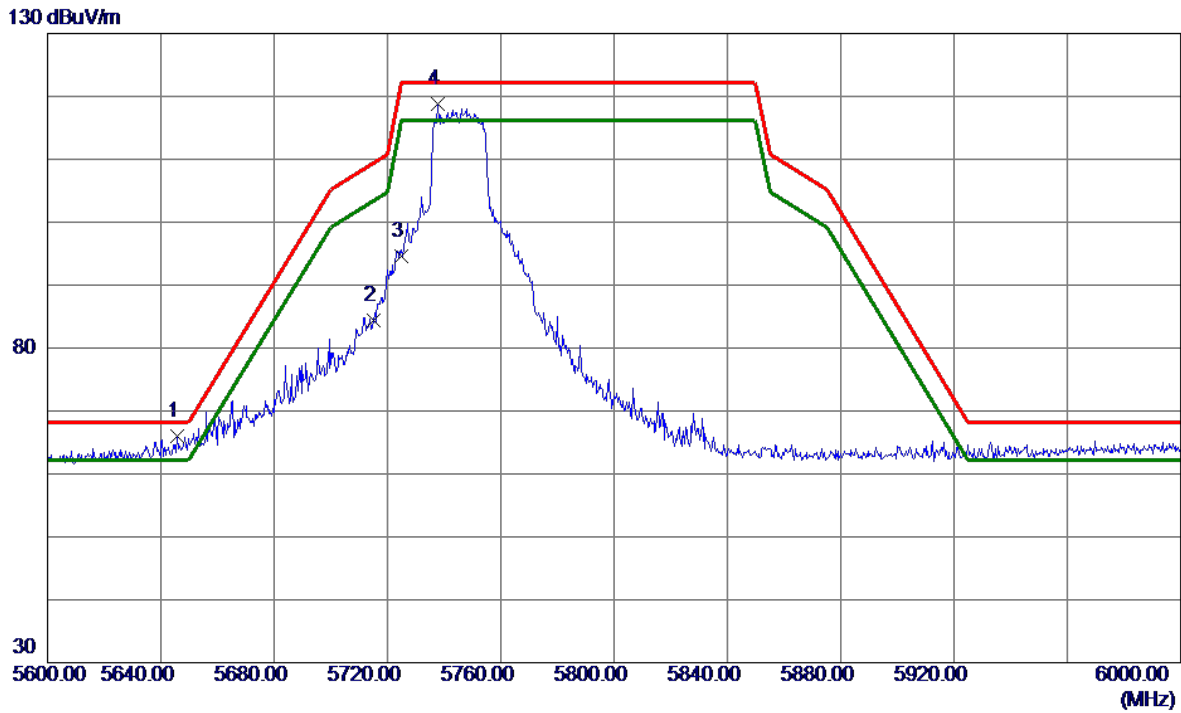


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5645.8000 | 27.67 | 38.37 | 66.04 | 68.20 | -2.16 | Peak | |
| 2 | 5715.0000 | 45.97 | 38.46 | 84.43 | 109.40 | -24.97 | Peak | |
| 3 | 5725.0000 | 56.14 | 38.50 | 94.64 | 122.20 | -27.56 | Peak | |
| 4 | 5737.8000 | 80.33 | 38.55 | 118.88 | 122.20 | -3.32 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

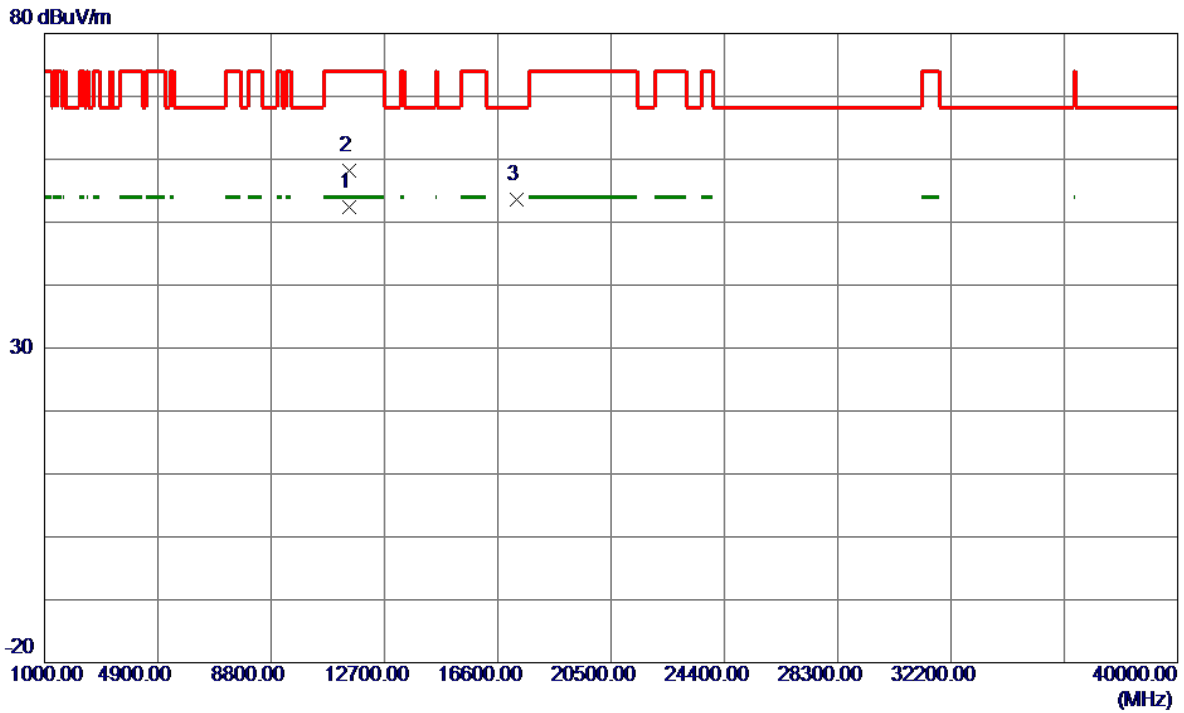


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11490.2720 | 50.15 | 2.21 | 52.36 | 54.00 | -1.64 | AVG | |
| 2 | 11492.9500 | 56.02 | 2.21 | 58.23 | 74.00 | -15.77 | Peak | |
| 3 | 17247.4000 | 46.81 | 6.71 | 53.52 | 68.20 | -14.68 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

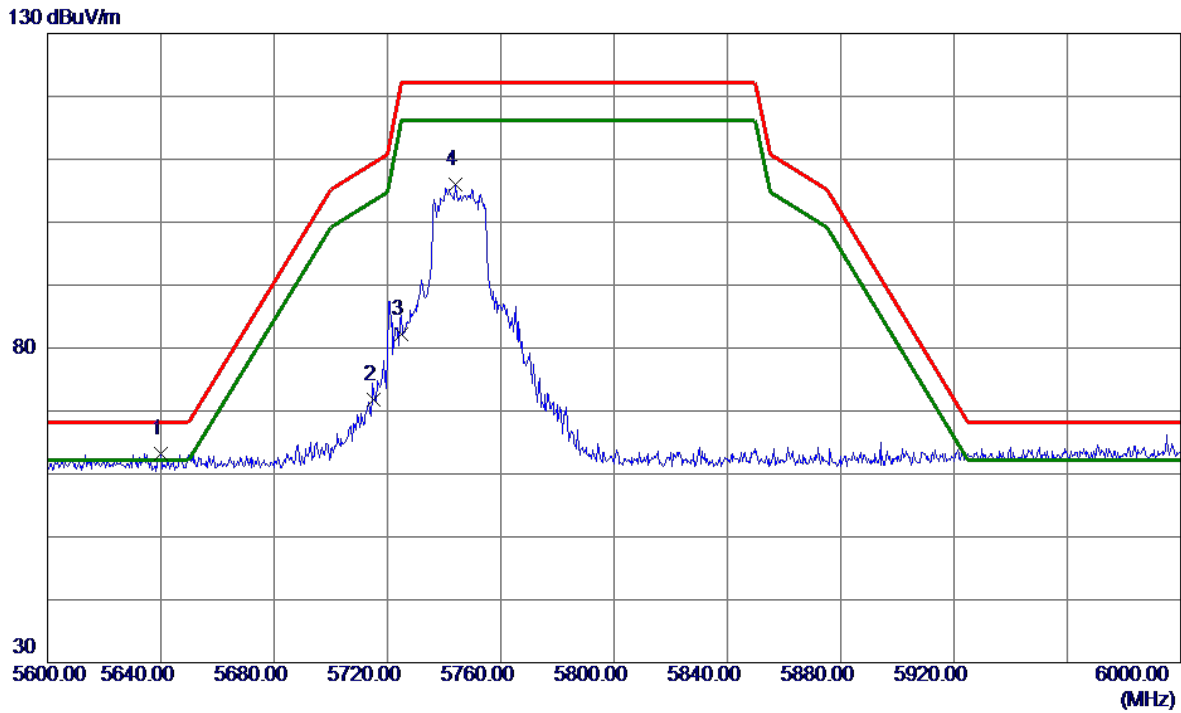


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5640.0000 | 24.86 | 38.37 | 63.23 | 68.20 | -4.97 | Peak | |
| 2 | 5715.0000 | 33.38 | 38.46 | 71.84 | 109.40 | -37.56 | Peak | |
| 3 | 5725.0000 | 43.79 | 38.50 | 82.29 | 122.20 | -39.91 | Peak | |
| 4 | 5744.0000 | 67.49 | 38.57 | 106.06 | 122.20 | -16.14 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

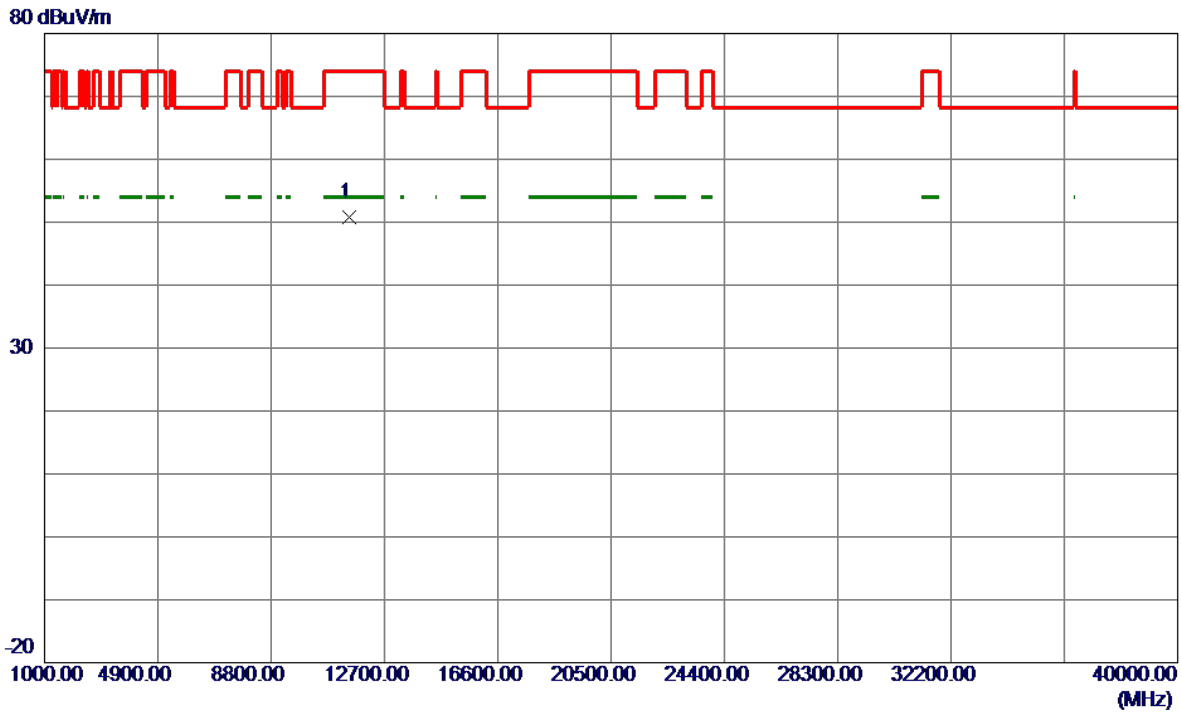


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11485.1500 | 48.56 | 2.20 | 50.76 | 74.00 | -23.24 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

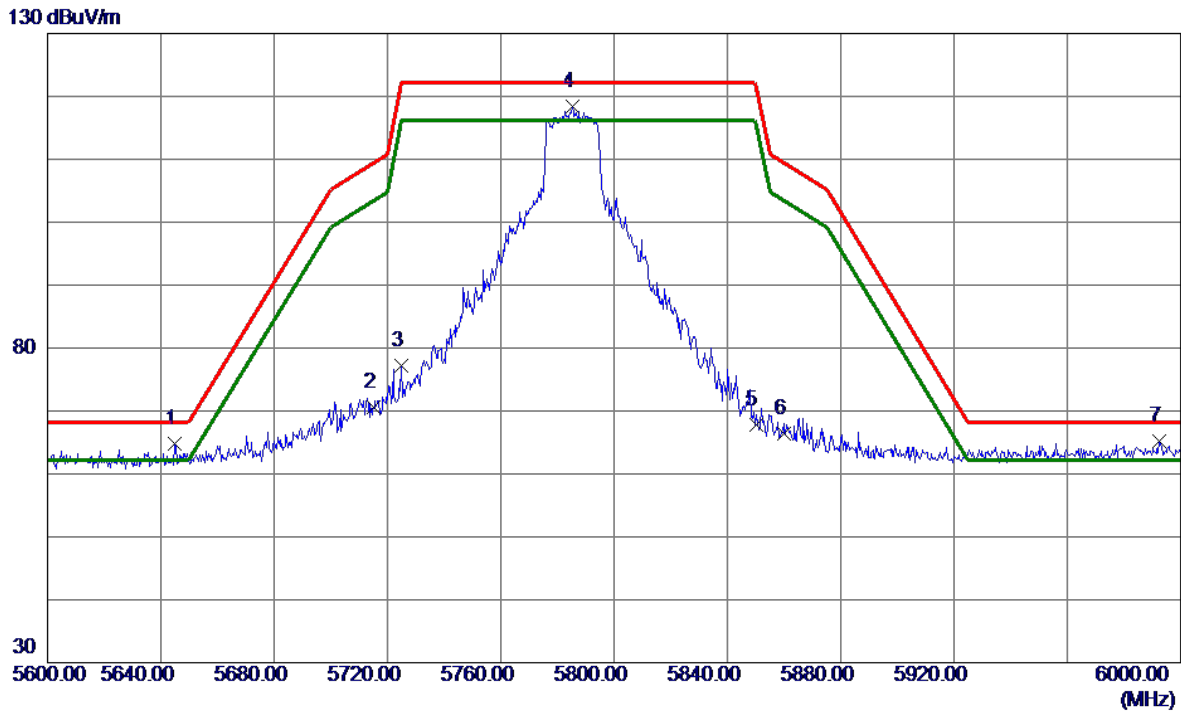


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5645.0000 | 26.37 | 38.37 | 64.74 | 68.20 | -3.46 | Peak | |
| 2 | 5715.0000 | 32.13 | 38.46 | 70.59 | 109.40 | -38.81 | Peak | |
| 3 | 5725.0000 | 38.79 | 38.50 | 77.29 | 122.20 | -44.91 | Peak | |
| 4 | 5785.2000 | 79.68 | 38.72 | 118.40 | 122.20 | -3.80 | Peak | |
| 5 | 5850.0000 | 28.87 | 38.91 | 67.78 | 122.20 | -54.42 | Peak | |
| 6 | 5860.0000 | 27.42 | 38.94 | 66.36 | 109.40 | -43.04 | Peak | |
| 7 * | 5992.6000 | 26.00 | 39.24 | 65.24 | 68.20 | -2.96 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

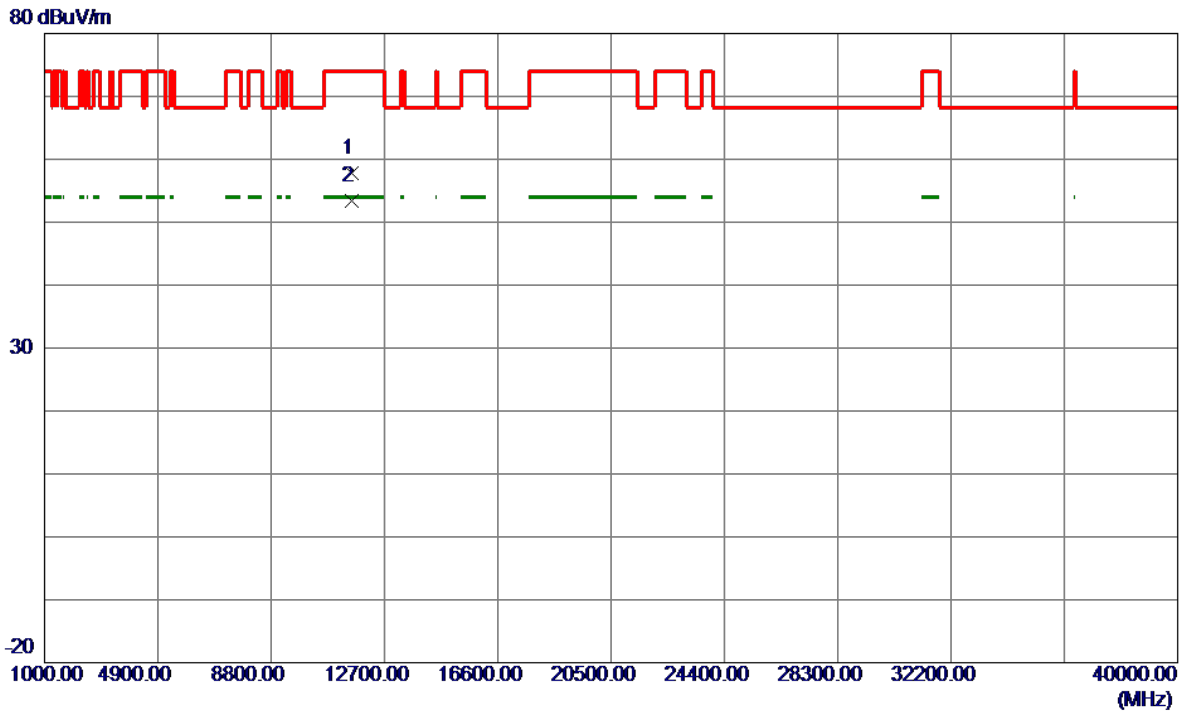


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11565.1000 | 55.56 | 2.27 | 57.83 | 74.00 | -16.17 | Peak | |
| 2 * | 11571.3300 | 51.12 | 2.28 | 53.40 | 54.00 | -0.60 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

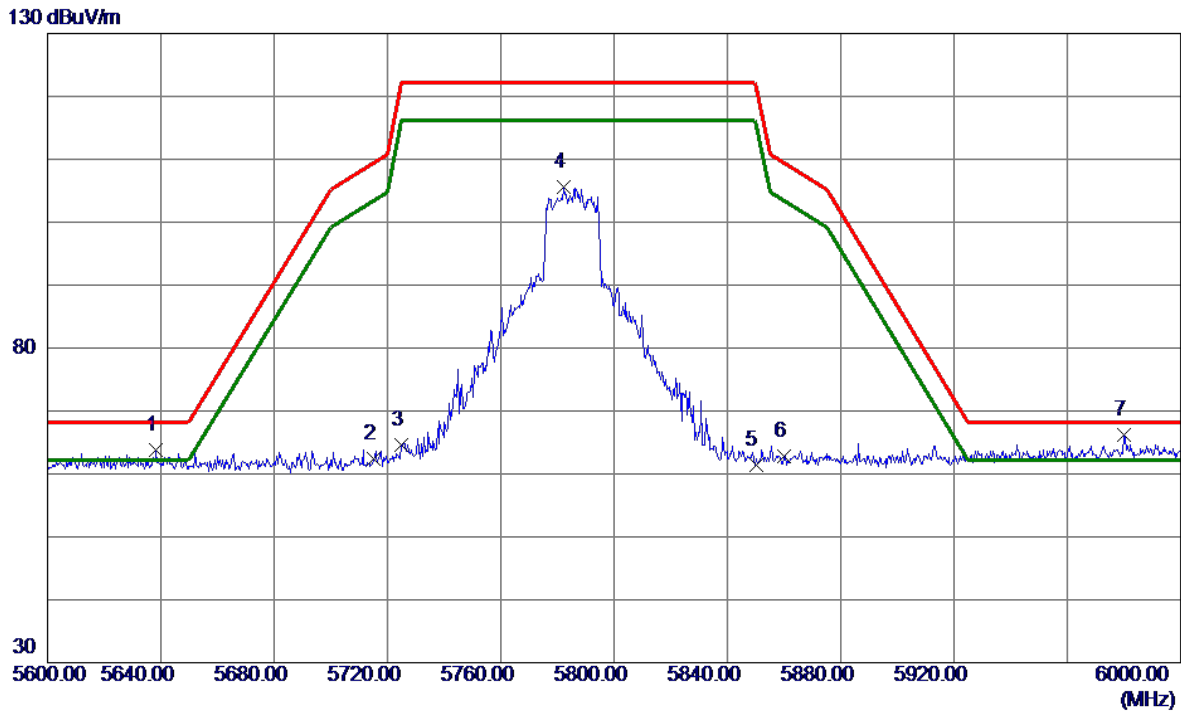


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5638.4000 | 25.44 | 38.36 | 63.80 | 68.20 | -4.40 | Peak | |
| 2 | 5715.0000 | 24.02 | 38.46 | 62.48 | 109.40 | -46.92 | Peak | |
| 3 | 5725.0000 | 26.11 | 38.50 | 64.61 | 122.20 | -57.59 | Peak | |
| 4 | 5782.4000 | 66.81 | 38.71 | 105.52 | 122.20 | -16.68 | Peak | |
| 5 | 5850.0000 | 22.55 | 38.91 | 61.46 | 122.20 | -60.74 | Peak | |
| 6 | 5860.0000 | 23.78 | 38.94 | 62.72 | 109.40 | -46.68 | Peak | |
| 7 * | 5980.2000 | 26.91 | 39.21 | 66.12 | 68.20 | -2.08 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

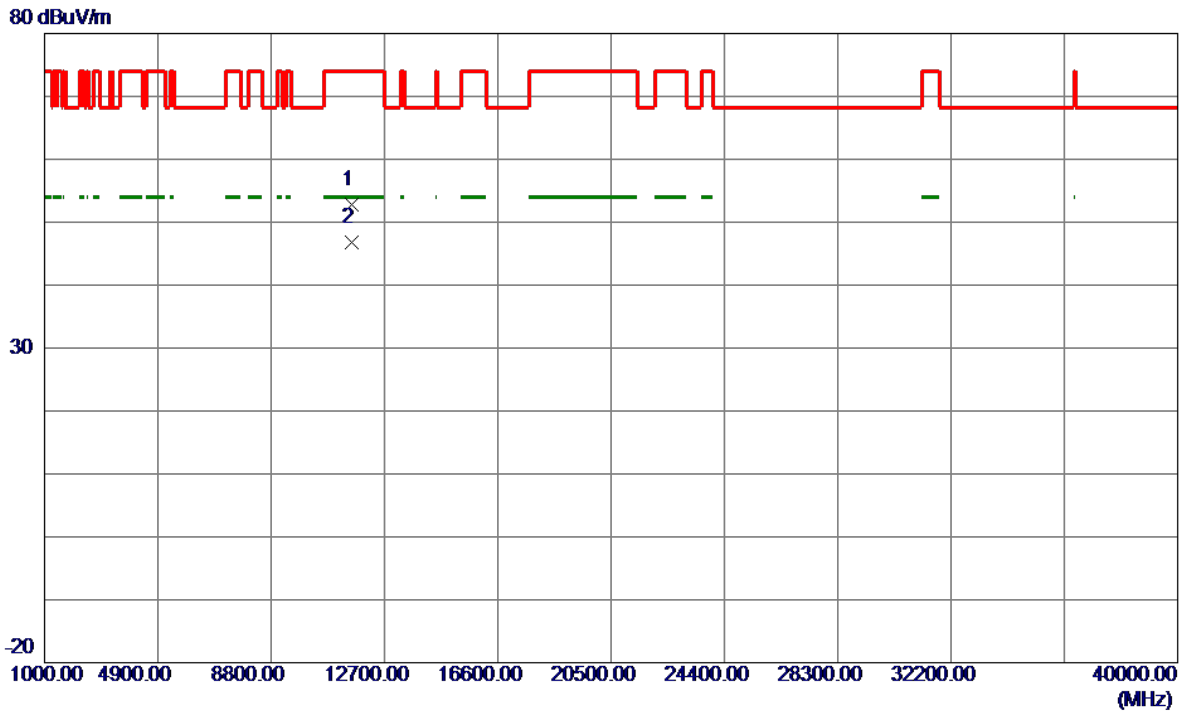


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 11570.9500 | 50.61 | 2.28 | 52.89 | 74.00 | -21.11 | Peak | |
| 2 * | 11576.2670 | 44.52 | 2.28 | 46.80 | 54.00 | -7.20 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

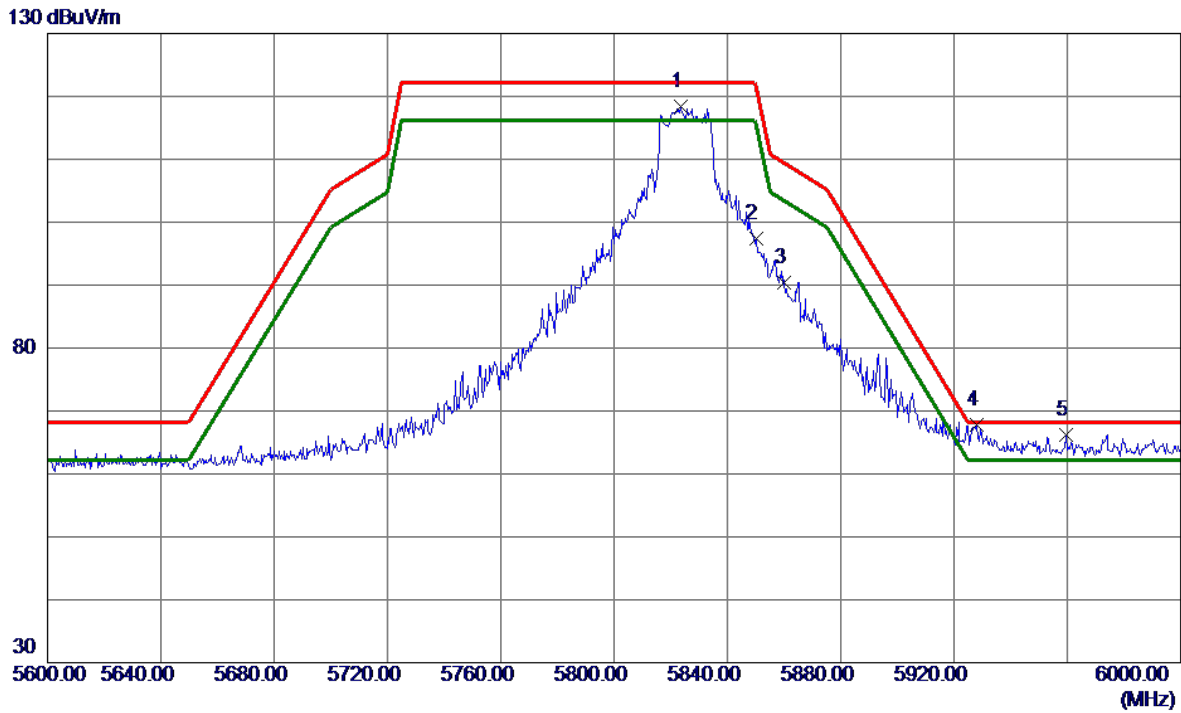


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5823.4000 | 79.52 | 38.84 | 118.36 | 122.20 | -3.84 | Peak | |
| 2 | 5850.0000 | 58.57 | 38.91 | 97.48 | 122.20 | -24.72 | Peak | |
| 3 | 5860.0000 | 51.37 | 38.94 | 90.31 | 109.40 | -19.09 | Peak | |
| 4 * | 5928.2000 | 28.78 | 39.11 | 67.89 | 68.20 | -0.31 | Peak | |
| 5 | 5959.4000 | 27.03 | 39.17 | 66.20 | 68.20 | -2.00 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

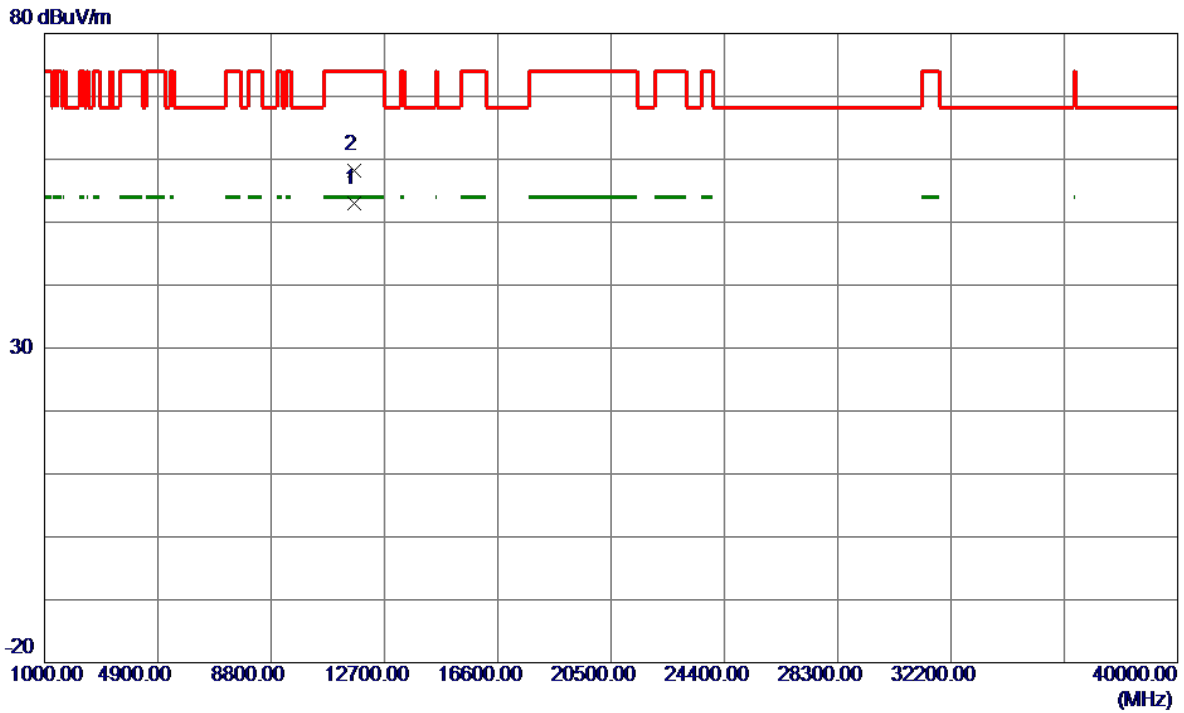


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11650.6950 | 50.83 | 2.10 | 52.93 | 54.00 | -1.07 | AVG | |
| 2 | 11660.6500 | 56.24 | 2.06 | 58.30 | 74.00 | -15.70 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

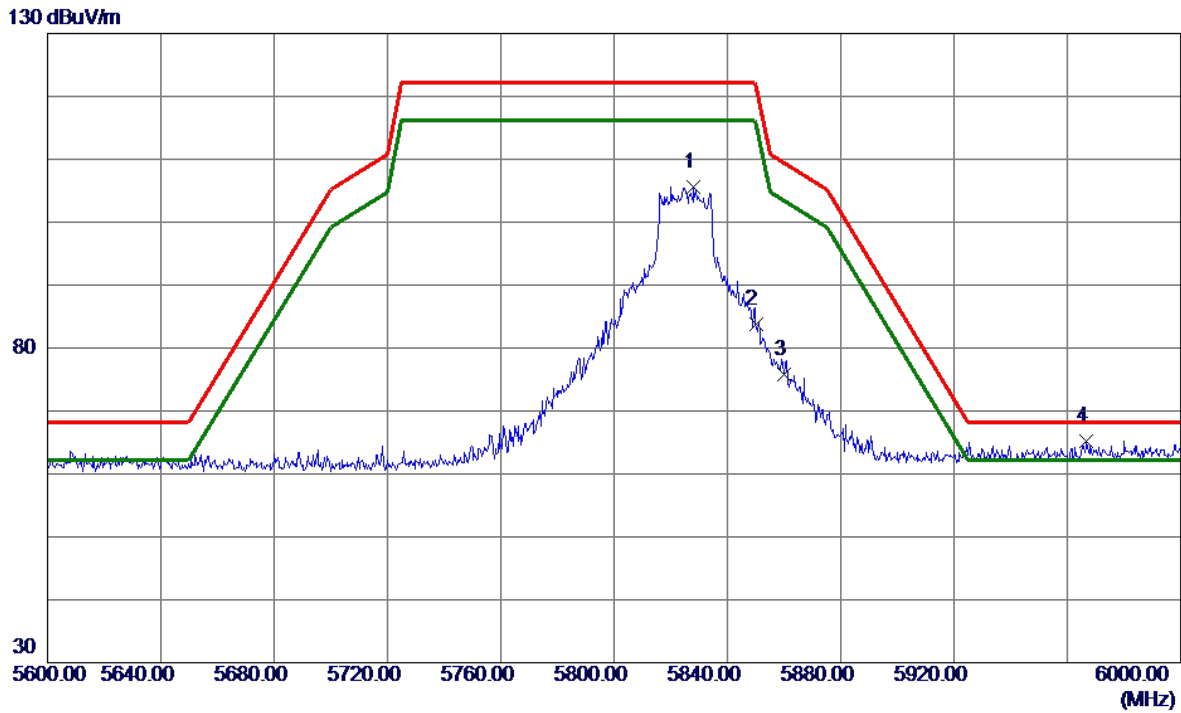


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 | 5828.2000 | 66.67 | 38.86 | 105.53 | 122.20 | -16.67 | Peak | |
| 2 | 5850.0000 | 44.90 | 38.91 | 83.81 | 122.20 | -38.39 | Peak | |
| 3 | 5860.0000 | 36.79 | 38.94 | 75.73 | 109.40 | -33.67 | Peak | No limit |
| 4 * | 5966.8000 | 26.09 | 39.18 | 65.27 | 68.20 | -2.93 | Peak | No limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

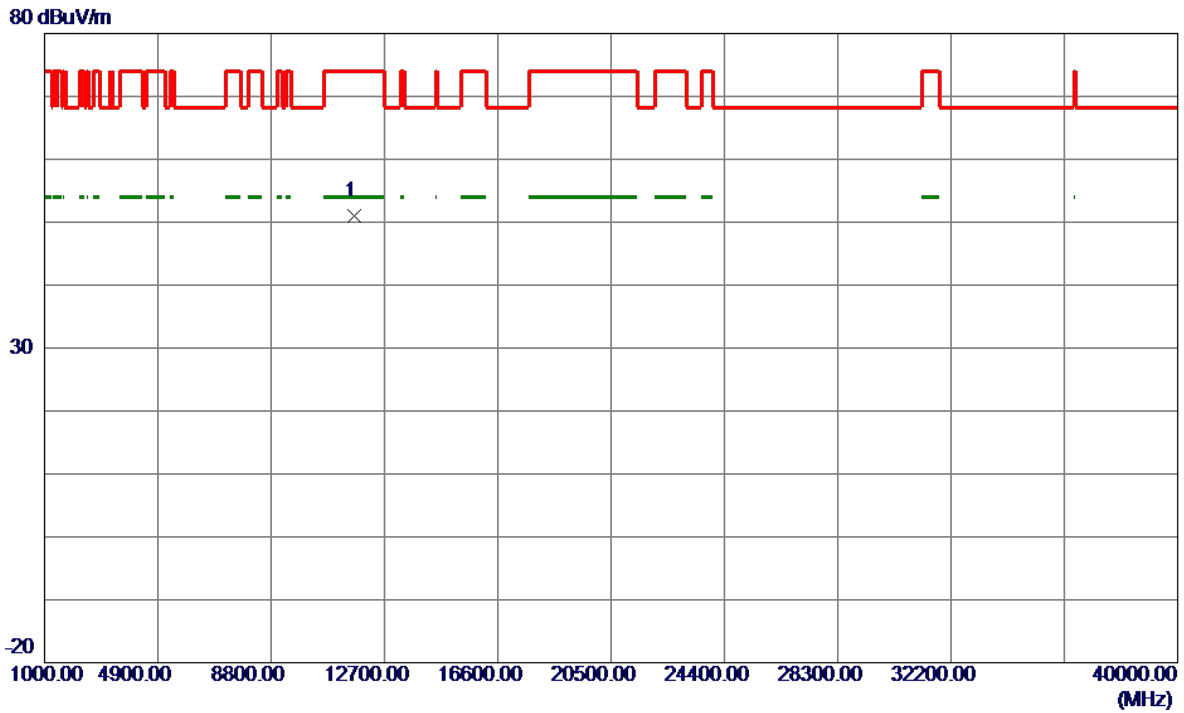


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11654.8000 | 48.86 | 2.09 | 50.95 | 74.00 | -23.05 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

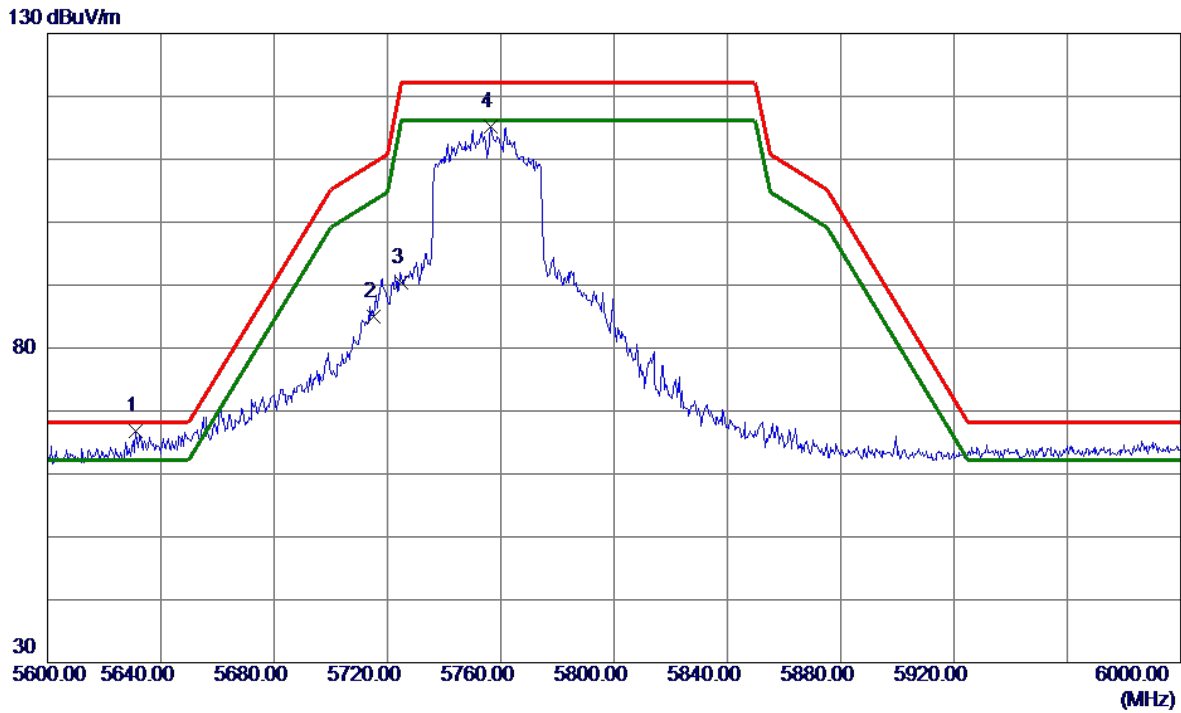


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5631.2000 | 28.43 | 38.36 | 66.79 | 68.20 | -1.41 | Peak | |
| 2 | 5715.0000 | 46.47 | 38.46 | 84.93 | 109.40 | -24.47 | Peak | |
| 3 | 5725.0000 | 51.82 | 38.50 | 90.32 | 122.20 | -31.88 | Peak | |
| 4 | 5756.4000 | 76.54 | 38.62 | 115.16 | 122.20 | -7.04 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

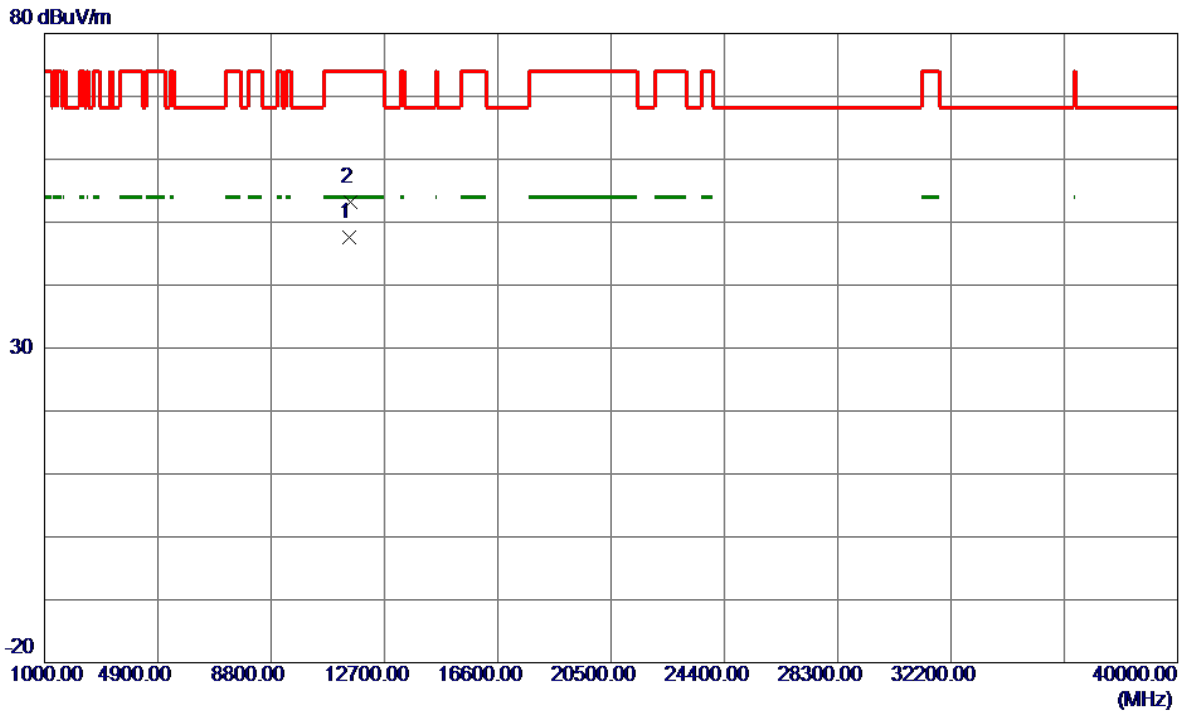


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11507.6060 | 45.40 | 2.22 | 47.62 | 54.00 | -6.38 | AVG | |
| 2 | 11516.3500 | 50.90 | 2.23 | 53.13 | 74.00 | -20.87 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

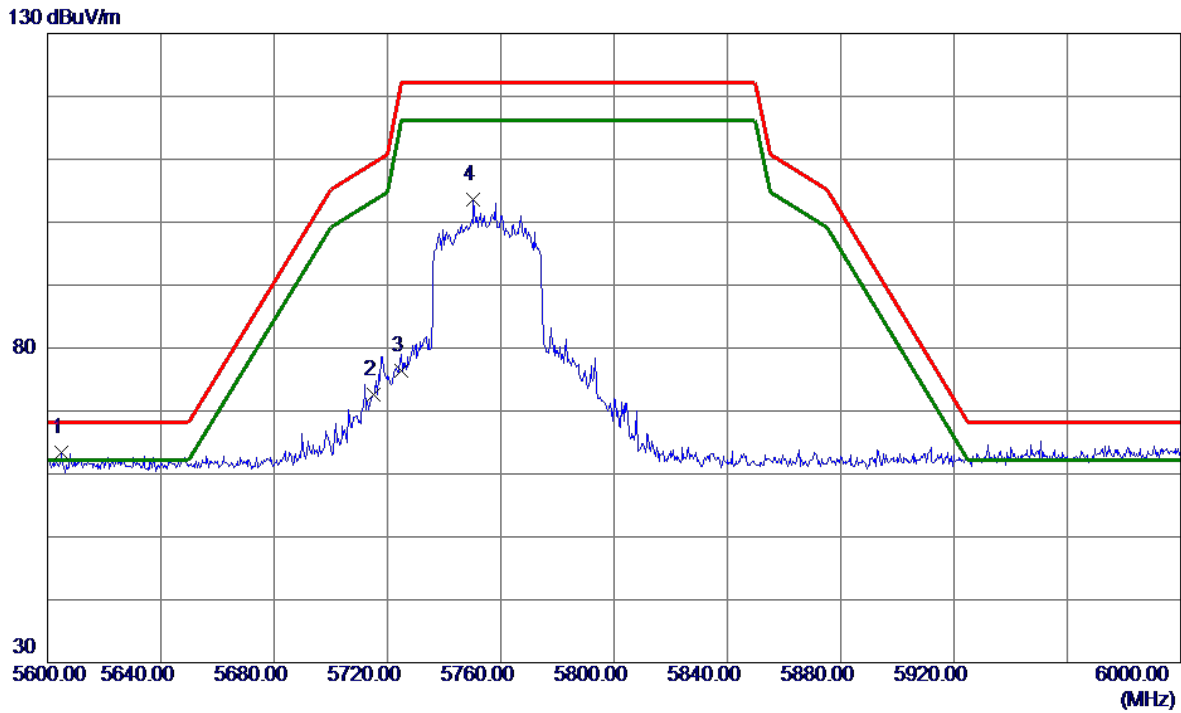


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5605.0000 | 25.03 | 38.34 | 63.37 | 68.20 | -4.83 | Peak | |
| 2 | 5715.0000 | 34.12 | 38.46 | 72.58 | 109.40 | -36.82 | Peak | |
| 3 | 5725.0000 | 37.85 | 38.50 | 76.35 | 122.20 | -45.85 | Peak | |
| 4 | 5750.4000 | 65.00 | 38.59 | 103.59 | 122.20 | -18.61 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

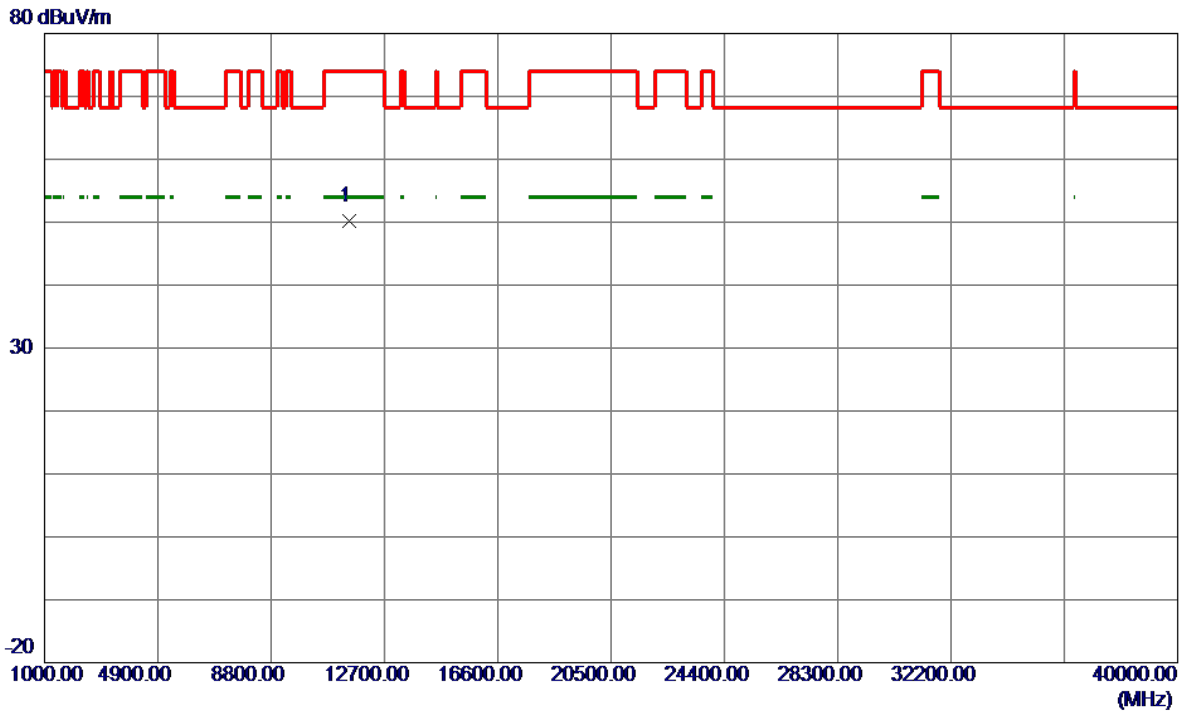


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11502.7000 | 47.96 | 2.22 | 50.18 | 74.00 | -23.82 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

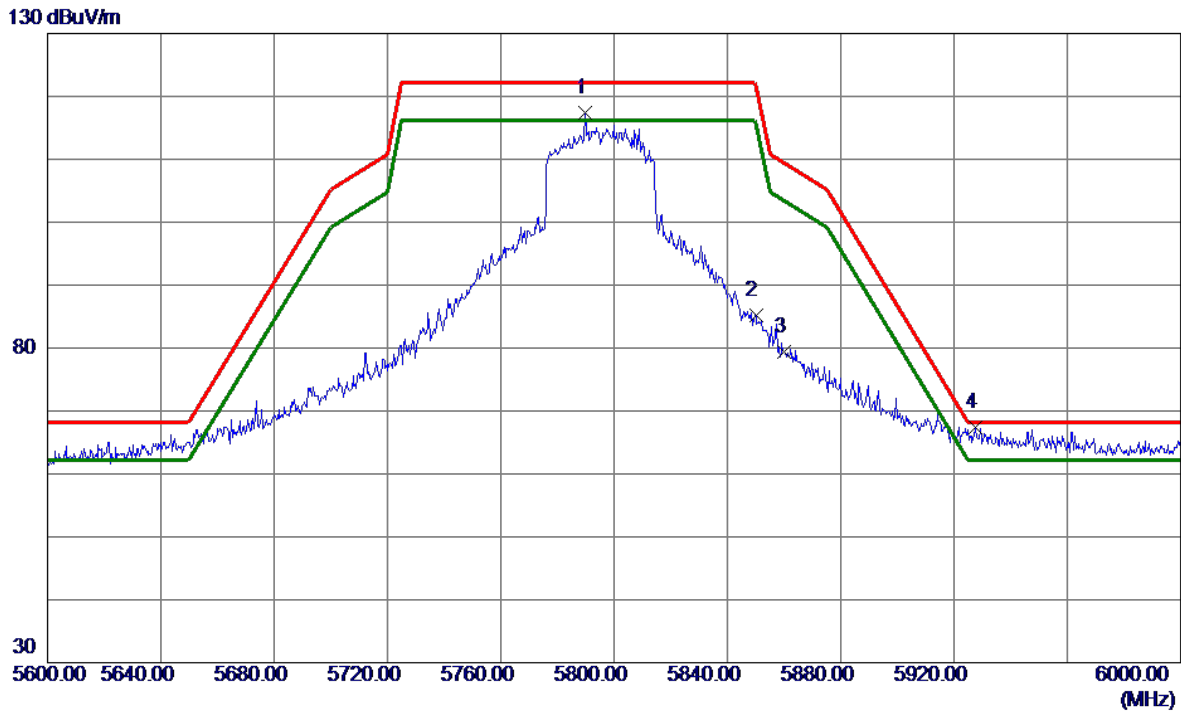


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5789.8000 | 78.58 | 38.74 | 117.32 | 122.20 | -4.88 | Peak | |
| 2 | 5850.0000 | 46.20 | 38.91 | 85.11 | 122.20 | -37.09 | Peak | |
| 3 | 5860.0000 | 40.40 | 38.94 | 79.34 | 109.40 | -30.06 | Peak | |
| 4 * | 5927.6000 | 28.38 | 39.11 | 67.49 | 68.20 | -0.71 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

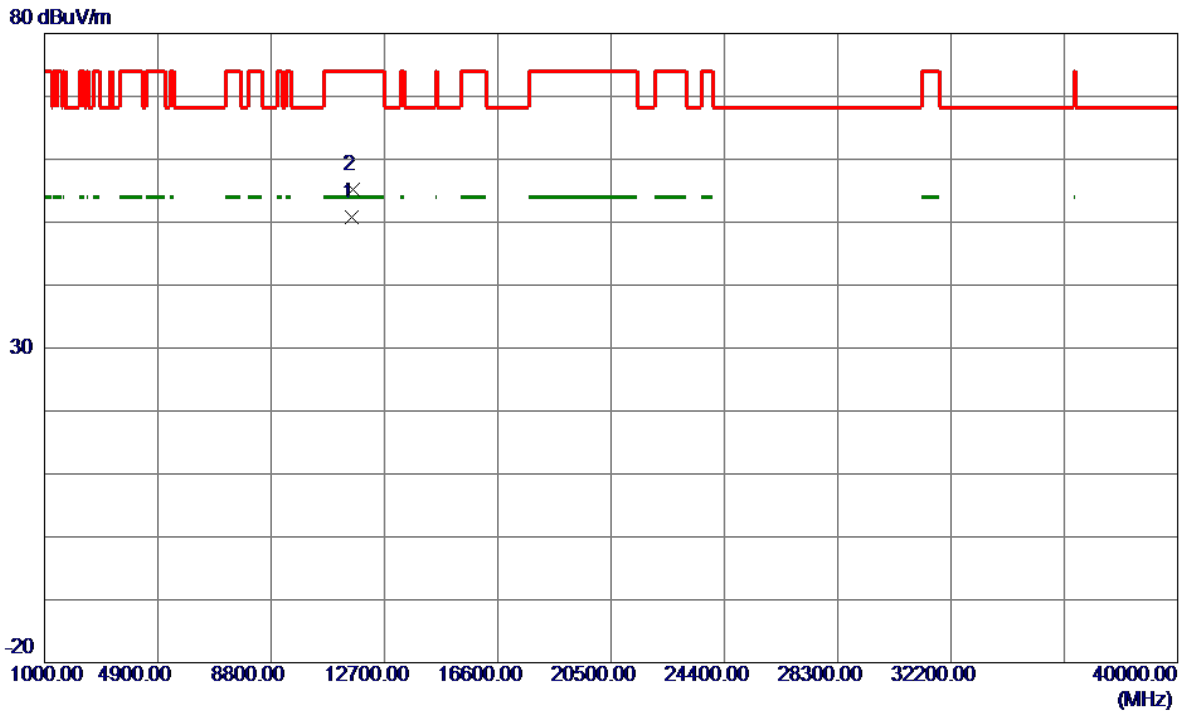


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11589.7900 | 48.53 | 2.29 | 50.82 | 54.00 | -3.18 | AVG | |
| 2 | 11598.2500 | 52.97 | 2.30 | 55.27 | 74.00 | -18.73 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

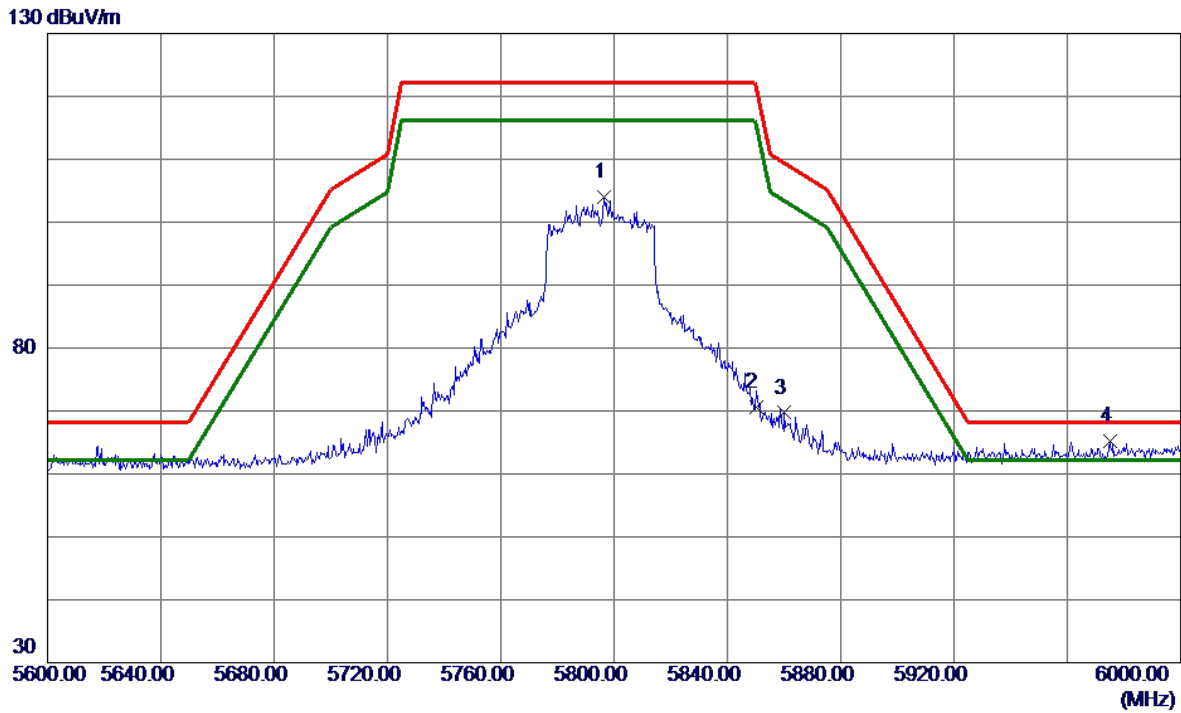


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 | 5796.6000 | 65.15 | 38.77 | 103.92 | 122.20 | -18.28 | Peak | |
| 2 | 5850.0000 | 31.63 | 38.91 | 70.54 | 122.20 | -51.66 | Peak | |
| 3 | 5860.0000 | 30.76 | 38.94 | 69.70 | 109.40 | -39.70 | Peak | |
| 4 * | 5975.0000 | 26.00 | 39.20 | 65.20 | 68.20 | -3.00 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

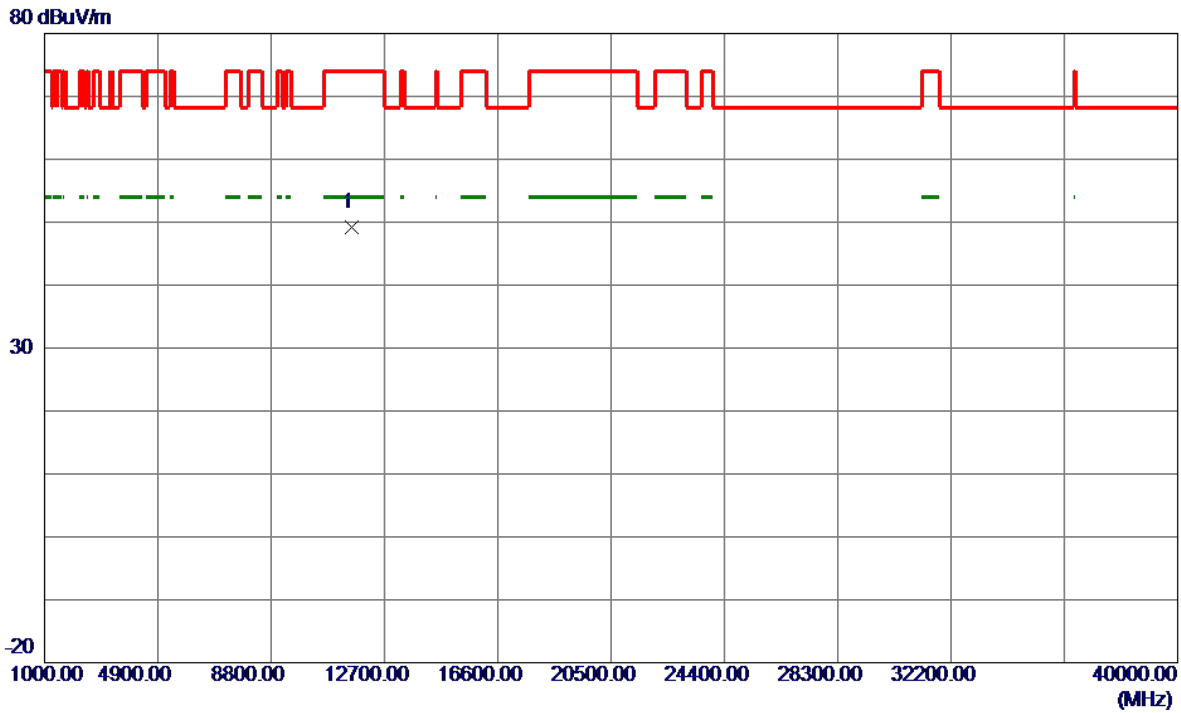


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11590.0000 | 46.91 | 2.29 | 49.20 | 74.00 | -24.80 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

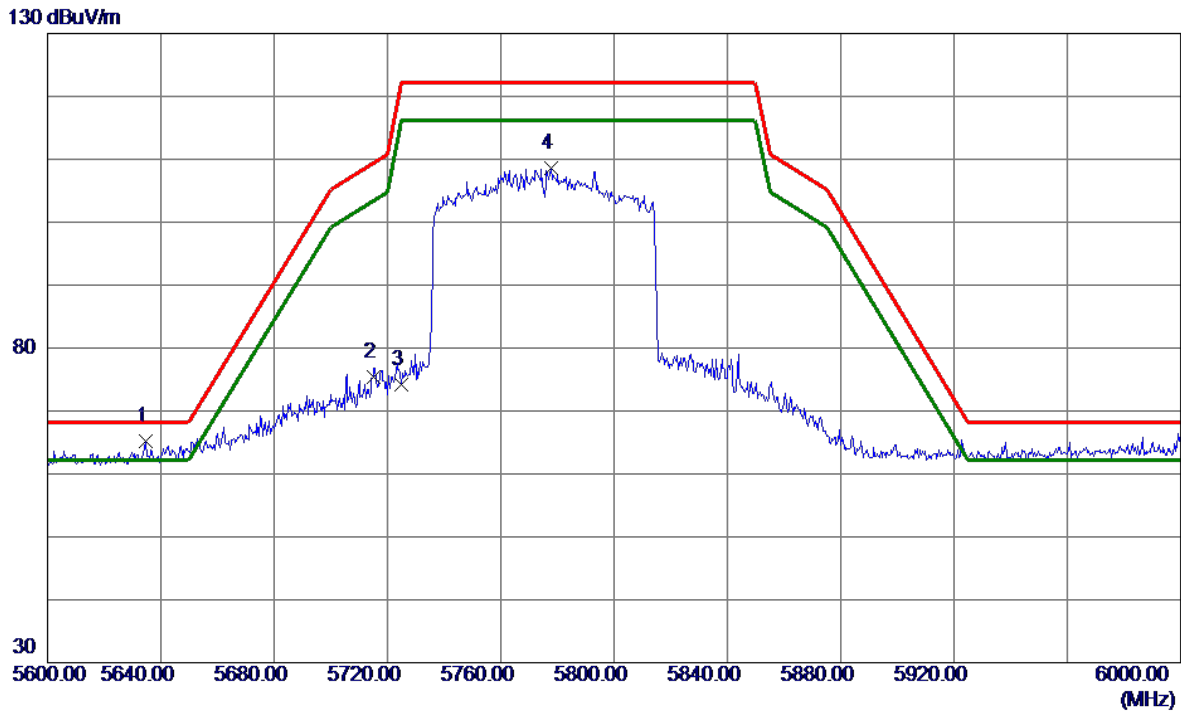


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5634.6000 | 26.92 | 38.36 | 65.28 | 68.20 | -2.92 | Peak | |
| 2 | 5715.0000 | 36.86 | 38.46 | 75.32 | 109.40 | -34.08 | Peak | |
| 3 | 5725.0000 | 35.76 | 38.50 | 74.26 | 122.20 | -47.94 | Peak | |
| 4 | 5777.6000 | 69.85 | 38.70 | 108.55 | 122.20 | -13.65 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

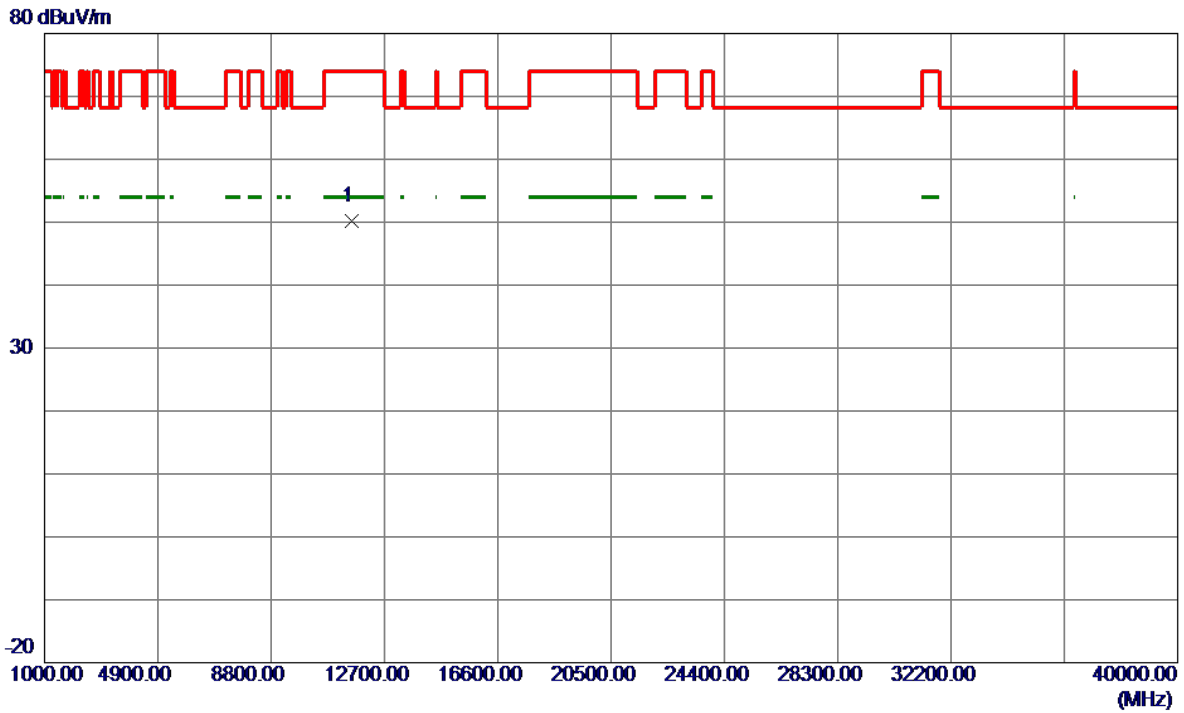


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11567.0500 | 47.95 | 2.27 | 50.22 | 74.00 | -23.78 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

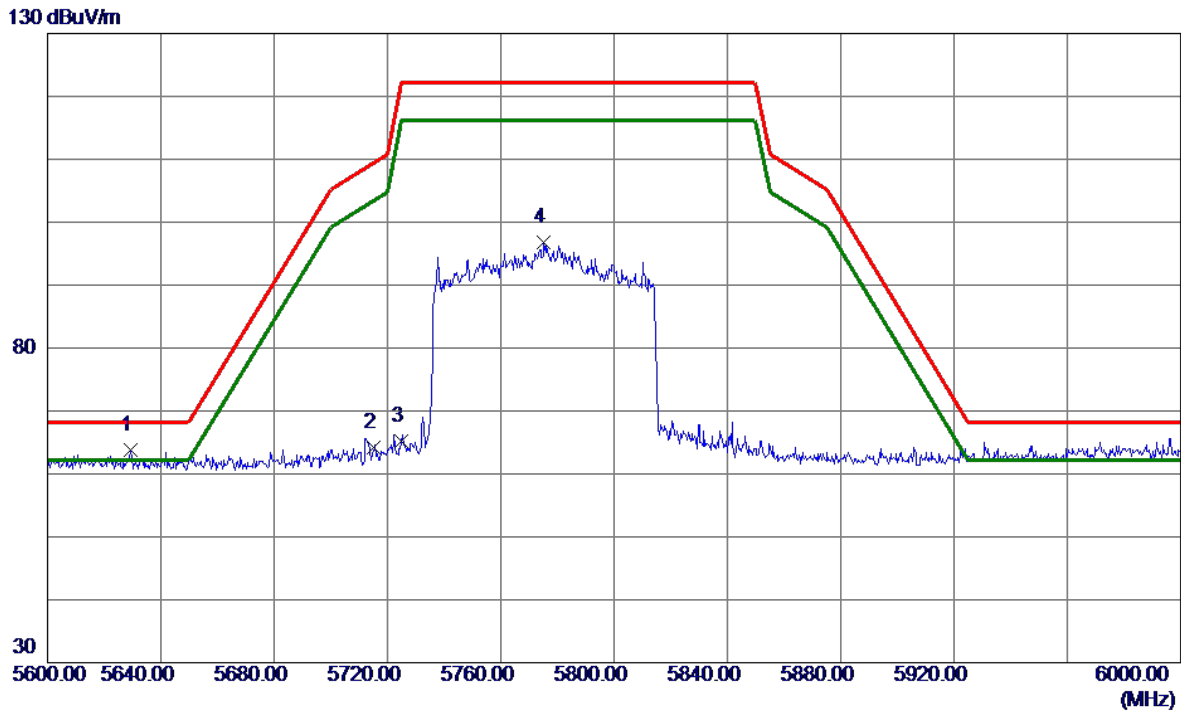


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5629.2000 | 25.47 | 38.36 | 63.83 | 68.20 | -4.37 | Peak | |
| 2 | 5715.0000 | 25.67 | 38.46 | 64.13 | 109.40 | -45.27 | Peak | |
| 3 | 5725.0000 | 26.69 | 38.50 | 65.19 | 122.20 | -57.01 | Peak | |
| 4 | 5775.2000 | 58.02 | 38.69 | 96.71 | 122.20 | -25.49 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

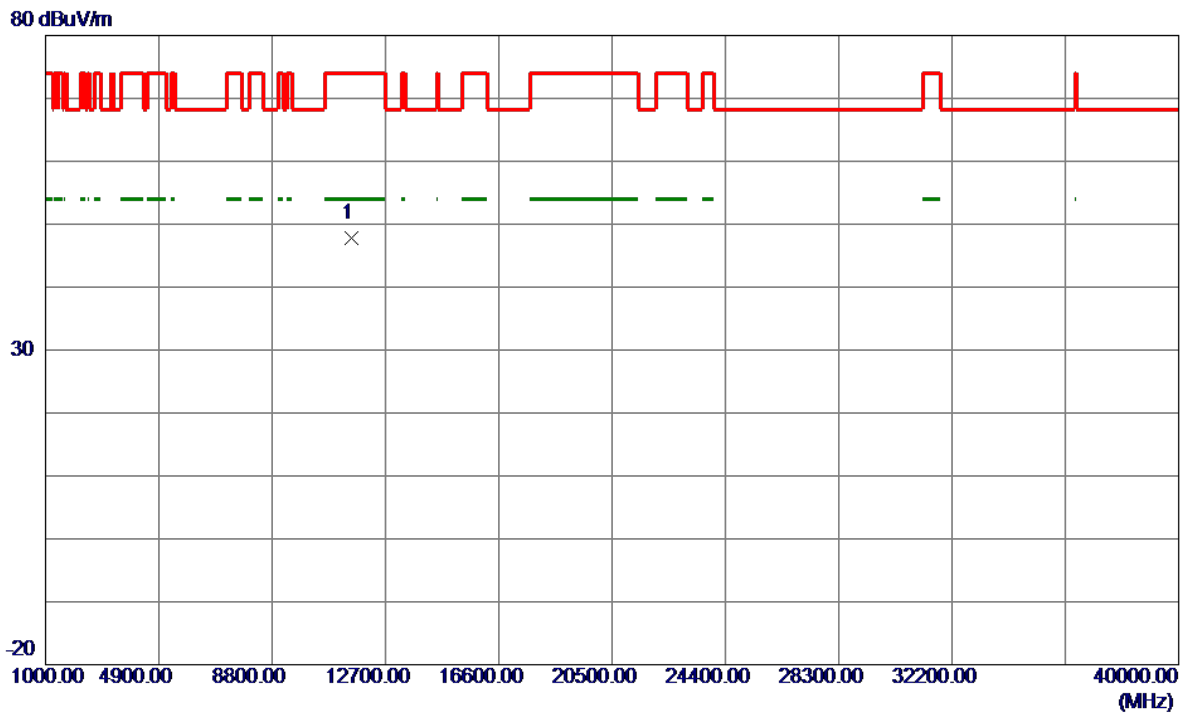

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11550.0000 | 45.54 | 2.26 | 47.80 | 74.00 | -26.20 | Peak | |

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

| | |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36 | 5180 | 20.350 | 17.000 |
| 40 | 5200 | 27.199 | 17.100 |
| 48 | 5240 | 40.489 | 19.300 |

CH36

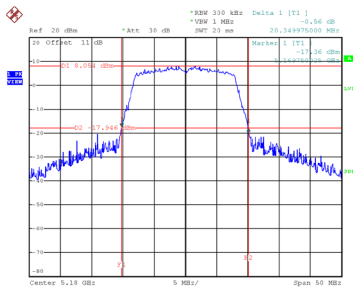


Date: 25.APR.2021 15:33:17

CH40 26 dB Bandwidth

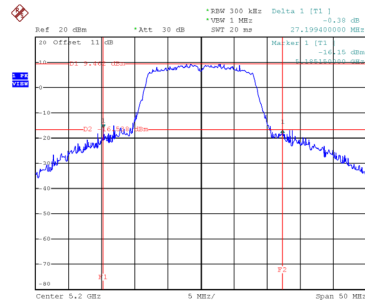


Date: 25.APR.2021 15:35:33

CH48

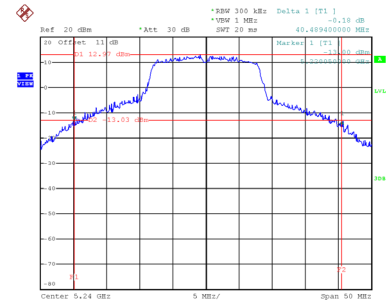


Date: 25.APR.2021 15:37:29


99 % Occupied Bandwidth

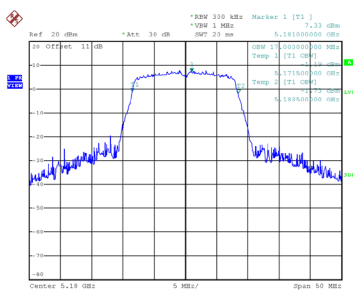

Date: 25.APR.2021 15:32:46

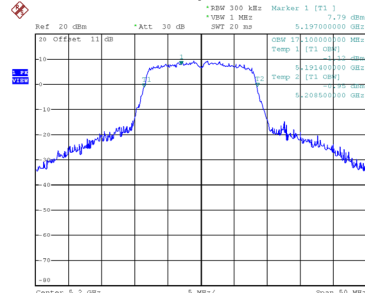

Date: 25.APR.2021 15:35:03

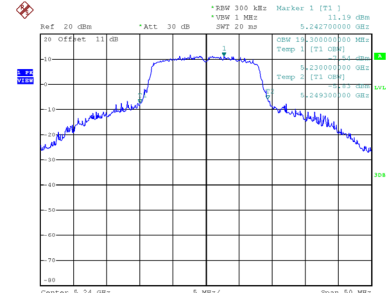


Date: 25.APR.2021 20:39:26

| | |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT20) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36 | 5180 | 20.650 | 17.900 |
| 40 | 5200 | 33.400 | 18.400 |
| 48 | 5240 | 53.554 | 19.500 |


CH36

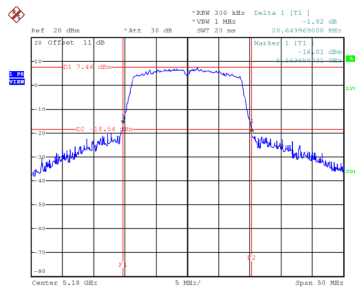

Date: 25.APR.2021 15:58:53


CH40

26 dB Bandwidth

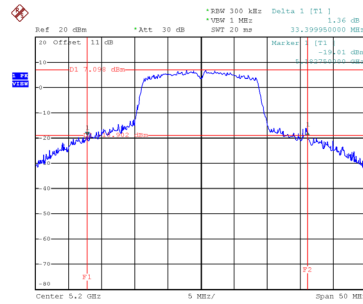


Date: 25.APR.2021 16:07:24

CH48

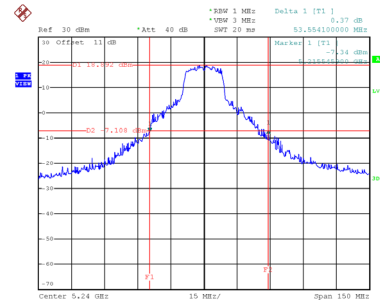


Date: 25.APR.2021 16:13:52


99 % Occupied Bandwidth

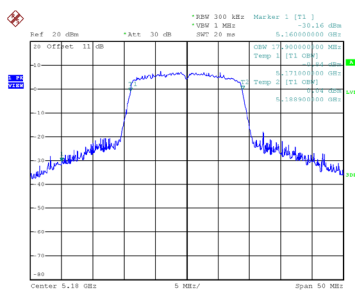

Date: 25.APR.2021 15:58:21

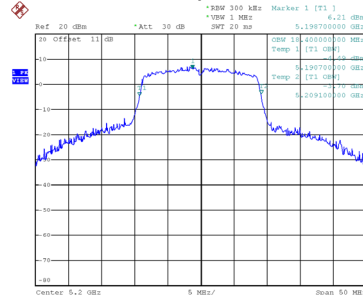

Date: 25.APR.2021 16:07:02

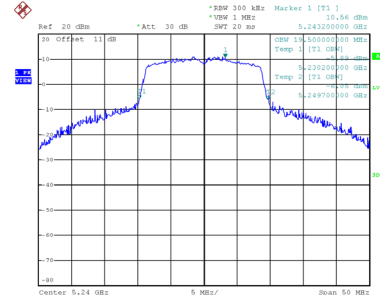


Date: 25.APR.2021 20:43:39

| | |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38 | 5190 | 39.990 | 36.400 |
| 46 | 5230 | 61.984 | 38.000 |

CH38

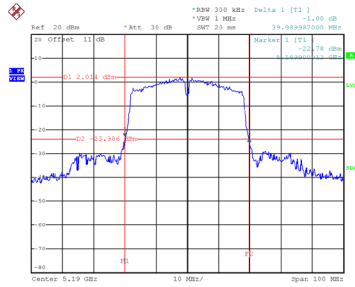


Date: 25.APR.2021 16:12:44

CH46 26 dB Bandwidth

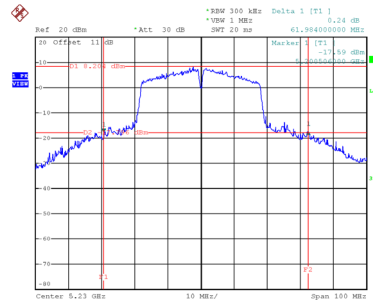


Date: 25.APR.2021 16:25:21

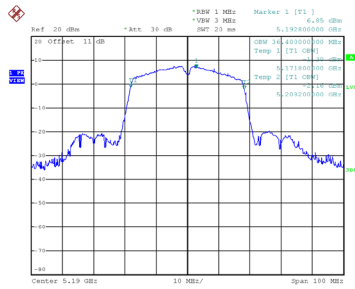

Date: 25.APR.2021 16:21:57

99 % Occupied Bandwidth

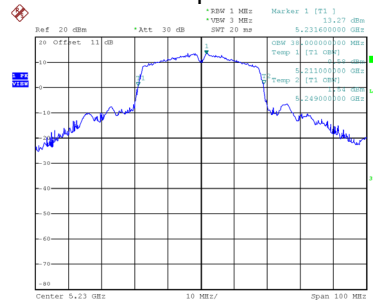


Date: 25.APR.2021 16:24:47

| | |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42 | 5210 | 80.600 | 75.200 |

CH42 26 dB Bandwidth

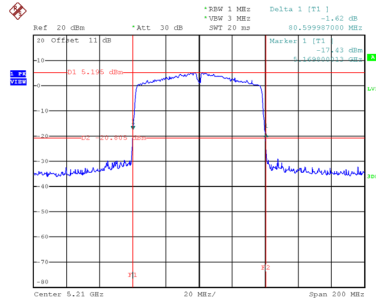

Date: 25.APR.2021 16:33:33

99 % Occupied Bandwidth

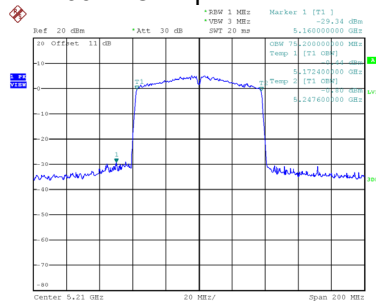


Date: 25.APR.2021 16:32:53

| | |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36 | 5180 | 36.590 | 19.300 |
| 40 | 5200 | 32.890 | 19.400 |
| 48 | 5240 | 46.500 | 26.500 |

CH36




Date: 25.APR.2021 16:36:03

CH40 26 dB Bandwidth

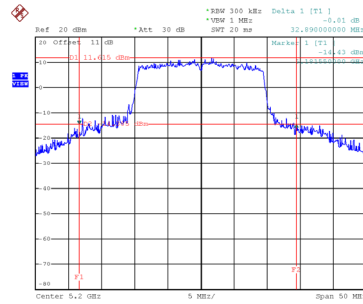


Date: 25.APR.2021 16:47:45

CH48

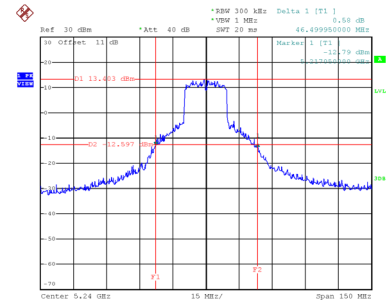


Date: 25.APR.2021 16:50:49


99 % Occupied Bandwidth



Date: 25.APR.2021 16:35:43

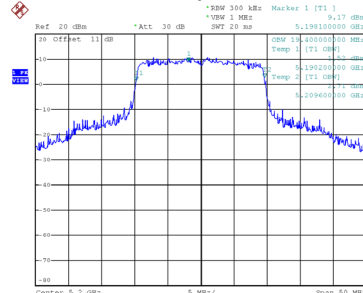

Date: 25.APR.2021 16:47:10

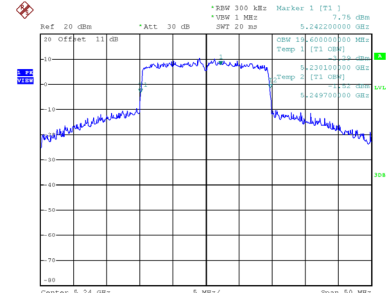


Date: 26.APR.2021 22:52:16

| | |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38 | 5190 | 39.300 | 37.800 |
| 46 | 5230 | 51.396 | 38.200 |

CH38

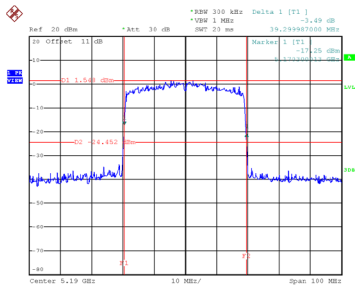


Date: 25.APR.2021 16:55:53

CH46 26 dB Bandwidth

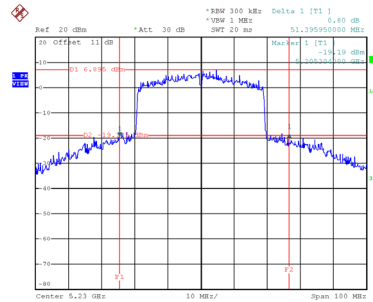


Date: 25.APR.2021 16:57:51

99 % Occupied Bandwidth

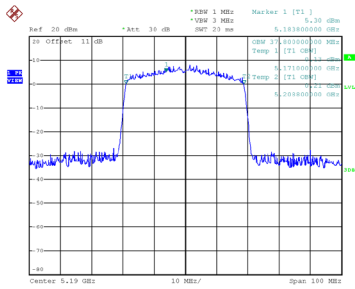

Date: 25.APR.2021 16:55:06

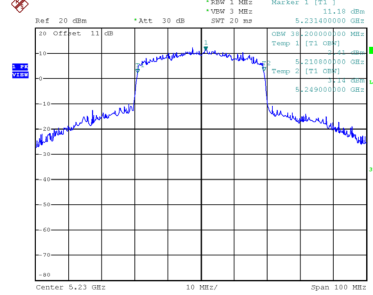


Date: 25.APR.2021 16:57:13

| | |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE80) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42 | 5210 | 81.200 | 77.200 |

CH42 26 dB Bandwidth

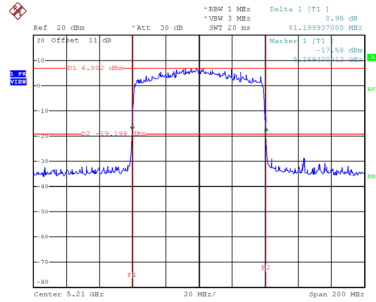

99 % Occupied Bandwidth

