

FCC Radio Test Report

FCC ID: KA2IRX5460A1


This report concerns: Original Grant

Project No. : 2002H005
Equipment : 1) AX5400 Wi-Fi 6 Router
2) AX4800 Wi-Fi 6 Router
Brand Name : D-Link
Test Model : DIR-X5460
Series Model : DIR-X4860
Applicant : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United States 92708
Manufacturer : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United States 92708
Date of Receipt : Feb. 16, 2020
Date of Test : Feb. 16, 2020~Mar. 19, 2020
Issued Date : Apr. 02, 2020
Report Version : R00
Test Sample : Engineering Sample No.: SH2020021330, SH2020021330-1
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Iscaa Min



Approved by : Krain Wu



Certificate # 5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

TEL: +86-021-61765666

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 DUTY CYCLE	17
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
2.6 SUPPORT UNITS	18
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
4 . RADIATED EMISSIONS TEST	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	24
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	25
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	25
4.8 TEST RESULTS - ABOVE 1000 MHZ	25
5 . BANDWIDTH TEST	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	26
5.3 DEVIATION FROM STANDARD	26
5.4 TEST SETUP	26

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	26
5.6 TEST RESULTS	26
6 . MAXIMUM OUTPUT POWER TEST	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . CONDUCTED SPURIOUS EMISSIONS	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY TEST	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . MEASUREMENT INSTRUMENTS LIST	30
10 . EUT TEST PHOTO	32
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	35
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	38
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	39
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	42
APPENDIX E - BANDWIDTH	83
APPENDIX F - MAXIMUM OUTPUT POWER	91
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	104

Table of Contents**Page****APPENDIX H - POWER SPECTRAL DENSITY****119**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 02, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China
 BTL's Test Firm Registration Number for FCC: 476765
 BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
 The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	49%	AC 120V/60Hz	Forest Li
Radiated Emissions-9K-30MHz	21°C	40%	AC 120V/60Hz	Forest Li
Radiated Emissions-30 MHz to 1GHz	21°C	40%	AC 120V/60Hz	Forest Li
Radiated Emissions-Above 1000 MHz	21°C	40%	AC 120V/60Hz	Forest Li
Bandwidth	20°C	52%	AC 120V/60Hz	Forest Li
Maximum output power & e.i.r.p.	20°C	52%	AC 120V/60Hz	Forest Li
Conducted Spurious Emissions	20°C	52%	AC 120V/60Hz	Forest Li
Power Spectral Density	20°C	52%	AC 120V/60Hz	Forest Li

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	1) AX5400 Wi-Fi 6 Router 2) AX4800 Wi-Fi 6 Router
Brand Name	D-Link
Test Model	DIR-X5460
Series Model	DIR-X4860
Model Difference(s)	Only the model name and the product name are different.
Software Version	1
Hardware Version	A1
Power Source	DC Voltage supplied from AC/DC adapter: Model:S24B72-120A200-0K
Power Rating	I/P: 100-240V ~ 50/60Hz Max. 0.8A O/P: 12V --- 2A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	OFDM,OFDMA
Bit Rate of Transmitter	Up to 574Mbps
Maximum Avg Output Power Non-Beamforming	IEEE 802.11ax (HE20): 27.44 dBm (0.5546 W) IEEE 802.11ax (HE40): 23.37 dBm (0.2173 W)
Maximum Avg Output Power Beamforming	IEEE 802.11ax (HE20): 27.16 dBm (0.5200 W) IEEE 802.11ax (HE40): 23.15 dBm (0.2065 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for IEEE 802.11ax (HE20) CH03 - CH09 for IEEE 802.11ax (HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. RU configuration

Operating Mode	Resource Unit	52 Tone(4M)
IEEE 802.11ax (HE20)	Specific Resource Unit	37
		38
		39
		40
	Resource Unit	106 Tone(8M)
	Specific Resource Unit	53
		54
	Resource Unit	242 Tone(20M)
Specific Resource Unit	61	
Operating Mode	Resource Unit	52 Tone(4M)
IEEE 802.11ax (HE40)	Specific Resource Unit	37
		38
		39
		40
		41
		42
		43
		44
	Resource Unit	106 Tone(8M)
	Specific Resource Unit	53
		54
		55
		56
	Resource Unit	242 Tone(20M)
	Specific Resource Unit	61
		62
Resource Unit	484 Tone(40M)	
Specific Resource Unit	65	

For 2T2R
4. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Dipole	IPEX	3	N/A
2	N/A	N/A	Dipole	IPEX	3	N/A

Note:

- (1) Antenna Gain=3 dBi. For 2.4G, this EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $G_{Ant.} + 10\log(N)$ dBi, that is Directional gain= $3 + 10\log(2)$ dBi=6.01. So output power limit is $30 - 6.01 + 6 = 29.99$, the power spectral density limit is $8 - 6.01 + 6 = 7.99$.

5. Table for Antenna Configuration:

Operating Mode / TX Mode	Ant. 1	Ant. 2	Ant. 1 + Ant. 2
IEEE 802.11ax (HE20)	✓	✓	✓
IEEE 802.11ax (HE40)	✓	✓	✓

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX AX-20 Mode Channel 01/06/11
Mode 2	TX AX-40 Mode Channel 01/06/11
Mode 3	TX AX-20 Mode Channel 06

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode:	Description
Mode 5	TX AX-20 Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode:	Description
Mode 5	TX AX-20 Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode:	Description
Mode 1	TX AX-20 Mode Channel 01/06/11
Mode 2	TX AX-40 Mode Channel 01/06/11

Conducted test	
Final Test Mode:	Description
Mode 1	TX AX-20 Mode Channel 01/06/11
Mode 2	TX AX-40 Mode Channel 01/06/11

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11n HT20 mode : BPSK (13 Mbps)
802.11n HT40 mode : BPSK (27 Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated emission below 1 GHz test, the IEEE 802.11ax20 Channel 06 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE
Non-Beamforming

2TX				
Test Software	accessMTool			
Operating Mode	Test Frequency (MHz)	Resource Unit	Specific Resource Unit	Parameters of Test Software
IEEE 802.11ax (HE20)	2412	52 Tone	37	74
			38	74
			40	74
		106 Tone	53	70
			54	70
			61	67
	2437	52 Tone	37	85
			38	86
			40	86
		106 Tone	53	84
			54	84
			61	82
	2462	52 Tone	37	74
			38	74
			40	74
		106 Tone	53	72
			54	72
			61	67

2TX				
Test Software	accessMTool			
Operating Mode	Test Frequency (MHz)	Resource Unit	Specific Resource Unit	Parameters of Test Software
IEEE 802.11ax (HE40)	2422	52 Tone	37	63
			40	63
			44	63
		106 Tone	53	62
			54	62
			56	62
		242 Tone	61	64
			62	64
		484 Tone	65	64
	2437	52 Tone	37	72
			40	72
			44	72
		106 Tone	53	67
			54	67
			56	67
		242 Tone	61	73
			62	73
		484 Tone	65	72
	2452	52 Tone	37	68
			40	68
			44	68
		106 Tone	53	68
			54	68
			56	68
242 Tone		61	66	
		62	66	
484 Tone		65	68	

Beamforming


2TX				
Test Software	accessMTool			
Operating Mode	Test Frequency (MHz)	Resource Unit	Specific Resource Unit	Parameters of Test Software
IEEE 802.11ax (HE20)	2412	52 Tone	37	74
			38	74
			40	74
		106 Tone	53	70
			54	70
			61	67
	2437	52 Tone	37	85
			38	86
			40	86
		106 Tone	53	84
			54	84
			61	82
	2462	52 Tone	37	74
			38	74
			40	74
		106 Tone	53	72
			54	72
			61	67

2TX				
Test Software	accessMTool			
Operating Mode	Test Frequency (MHz)	Resource Unit	Specific Resource Unit	Parameters of Test Software
IEEE 802.11ax (HE40)	2422	52 Tone	37	63
			40	63
			44	63
		106 Tone	53	62
			54	62
			56	62
		242 Tone	61	64
			62	64
		484 Tone	65	64
	2437	52 Tone	37	72
			40	72
			44	72
		106 Tone	53	67
			54	67
			56	67
		242 Tone	61	73
			62	73
		484 Tone	65	72
	2452	52 Tone	37	68
			40	68
			44	68
		106 Tone	53	68
			54	68
			56	68
242 Tone		61	66	
		62	66	
484 Tone		65	68	


2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.

IEEE 802.11ax (HE20)

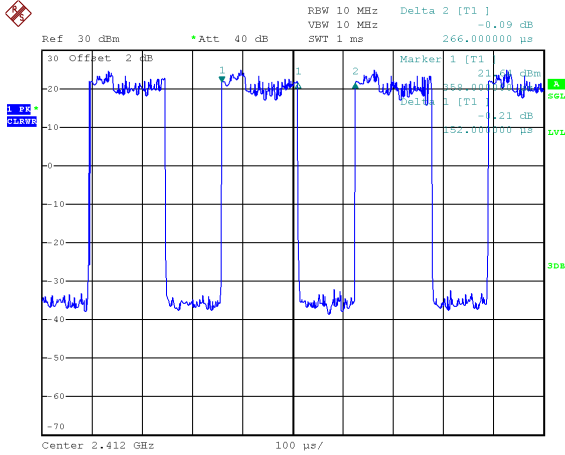

IEEE 802.11ax (HE40)

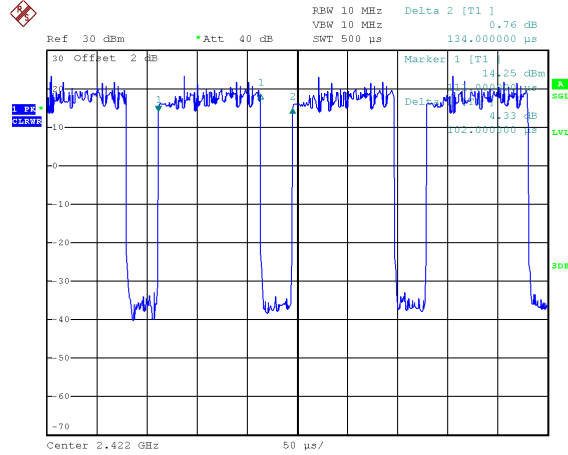

Date: 16.MAR.2020 15:23:33

Date: 16.MAR.2020 15:31:54


Duty cycle = $0.152 \text{ ms} / 0.266 \text{ ms} = 57.14\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 2.43$,

Duty cycle = $0.102 \text{ ms} / 0.134 \text{ ms} = 76.12\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 1.19$

NOTE:

For IEEE 802.11ax (HE20) and IEEE 802.11ax (HE40):
 For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 kHz (Duty cycle $< 98\%$).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

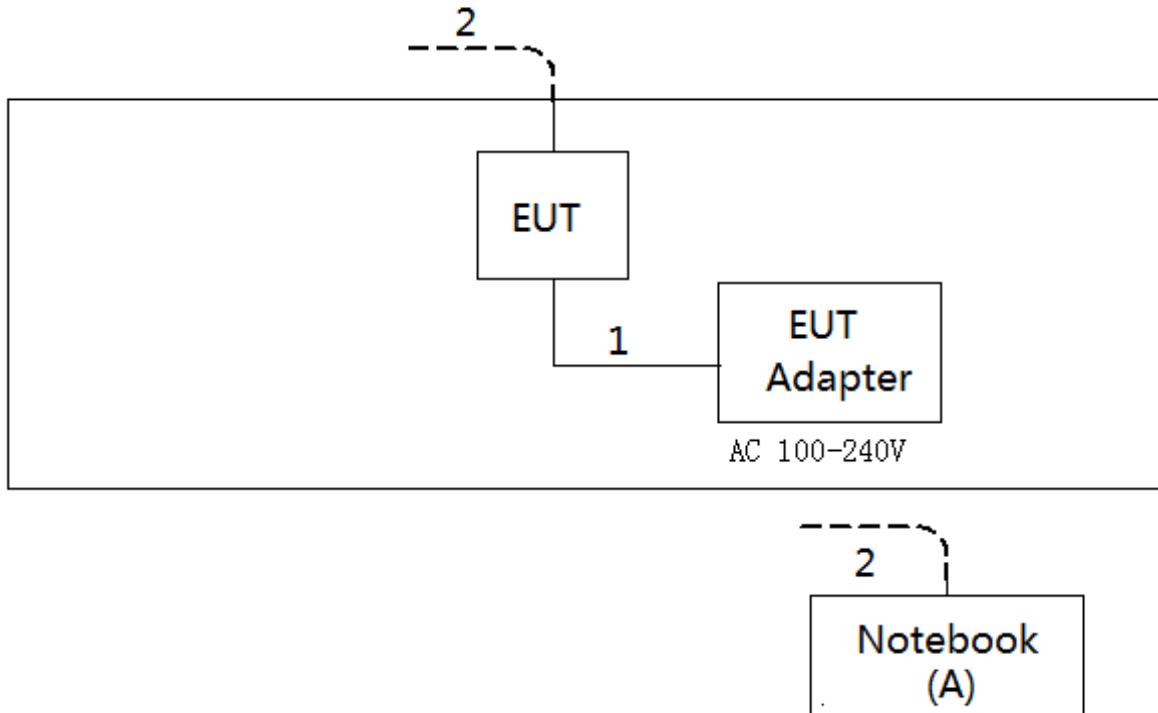

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model/Type No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC	N/A	N/A	1m
2	RJ45 Cable	N/A	N/A	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

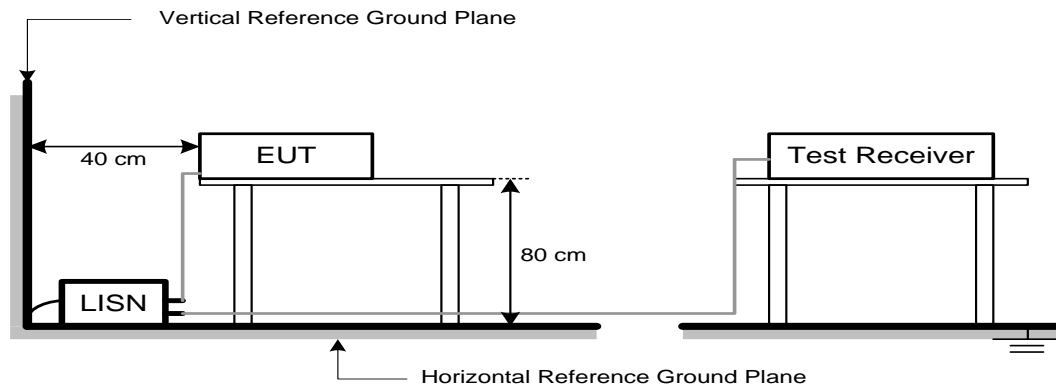

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB μ V/m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


9 kHz-30 MHz

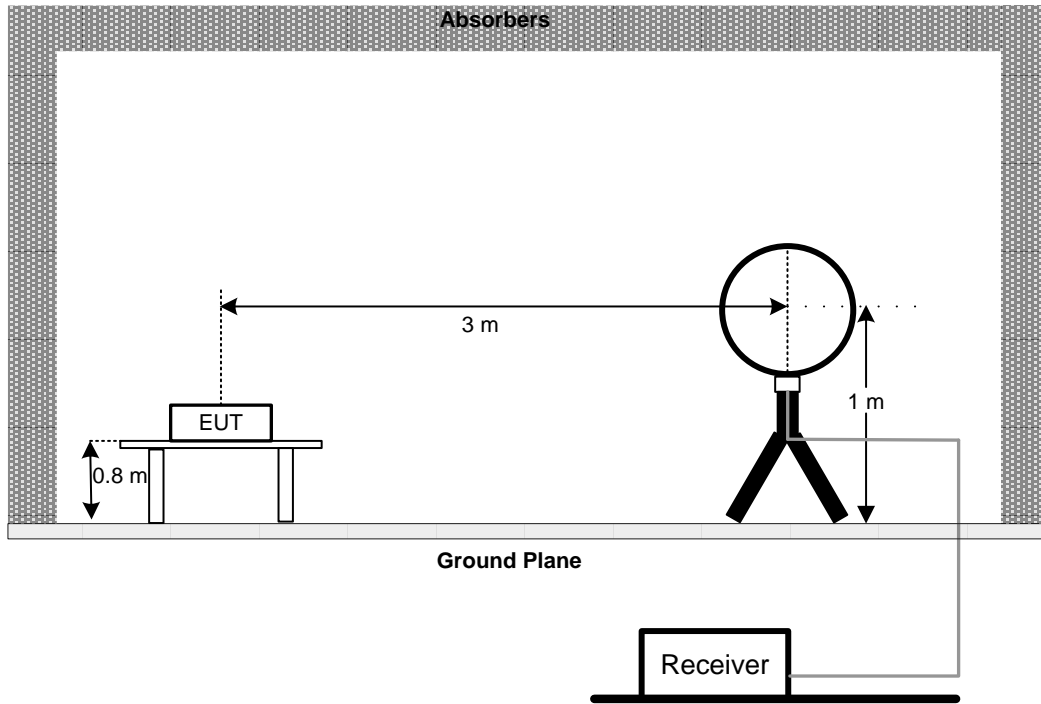


30 MHz to 1 GHz

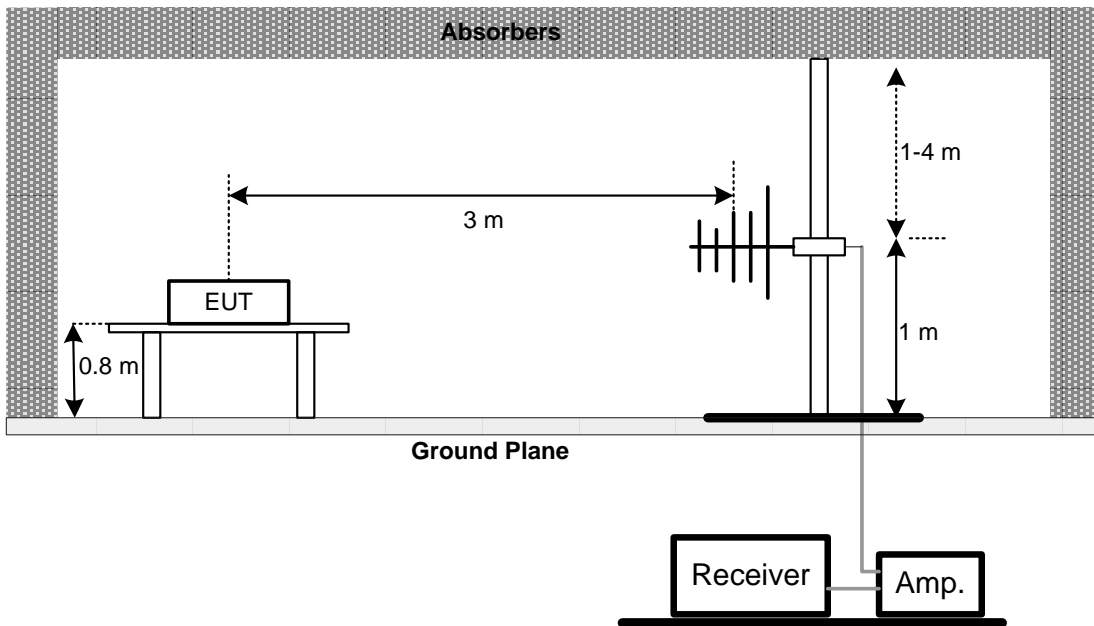

Above 1 GHz Band edge

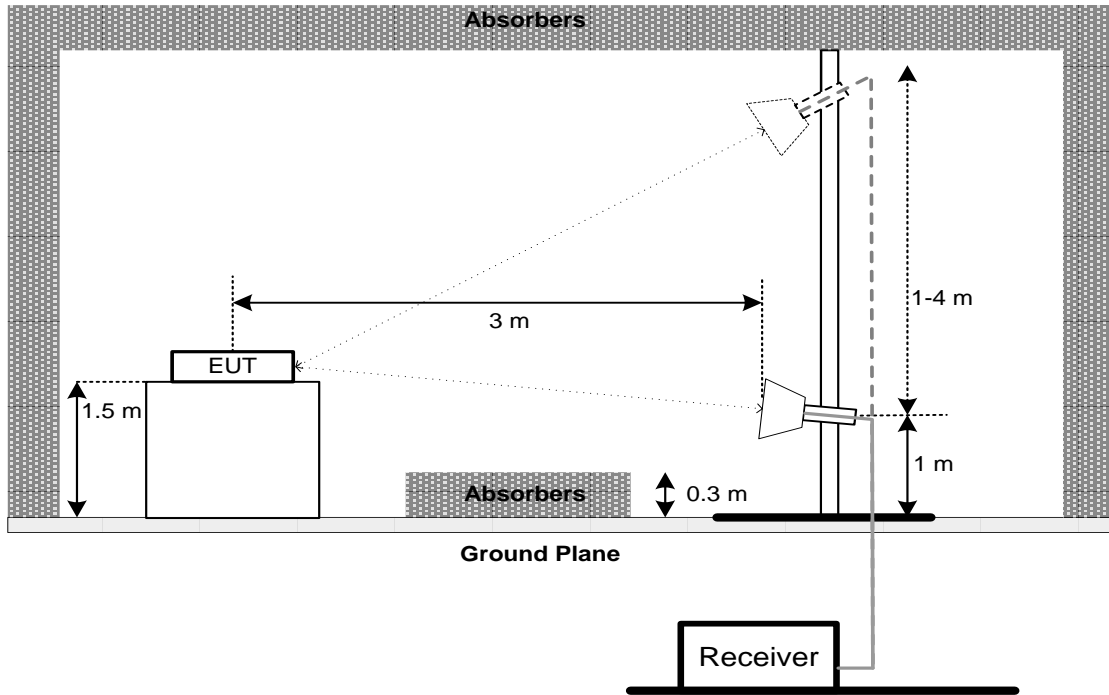

Harmonic

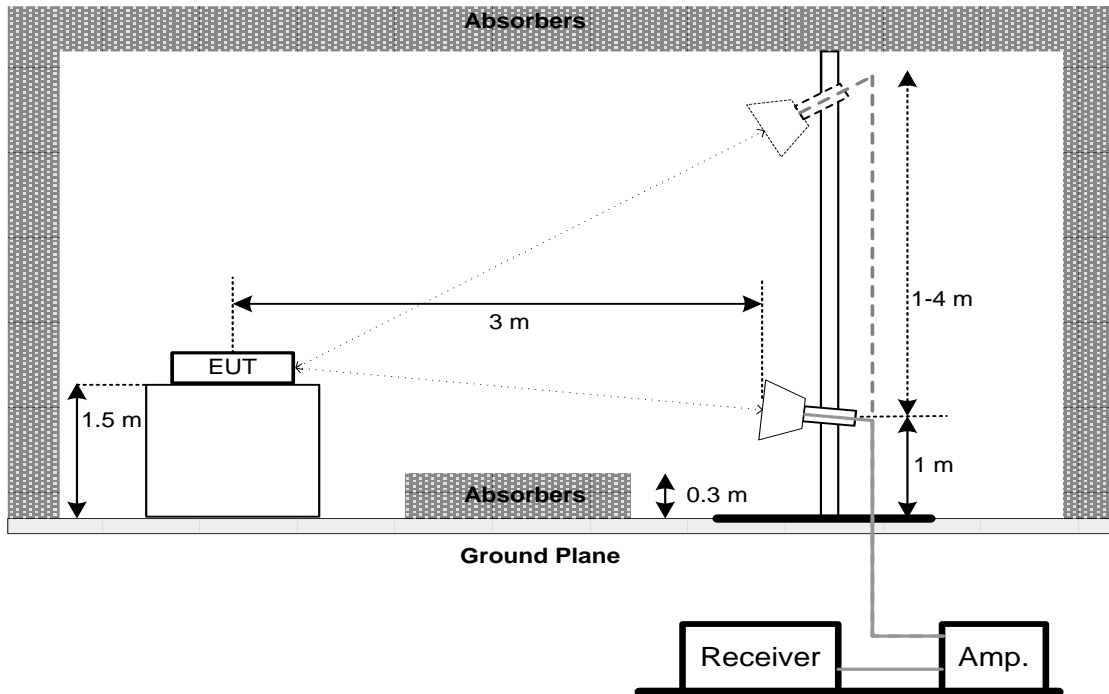

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
 - For 6 dB Bandwidth : RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
 - For 99% Emission Bandwidth B/G/N-20 Mode: RBW= 300 KHz, VBW=1 MHz, Sweep time = 2.5 ms.
 - For 99% Emission Bandwidth N-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- c. The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.1.3 (for peak power) or 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

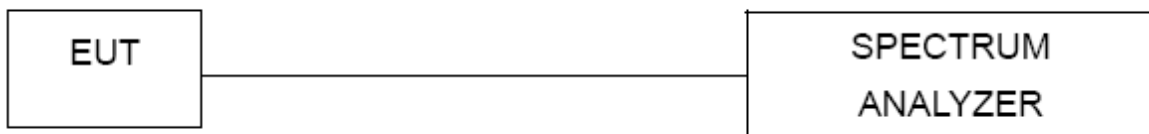

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)


8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 29, 2020
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	Apr. 17, 2020
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 29, 2020
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 29, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 29, 2020
2	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 29, 2020
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 29, 2020
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
9	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Mar. 29, 2020
10	Pre-Amplifier	emci	EMC184045SE	980409	Mar. 29, 2020
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 29, 2020
12	Test Cable	emci	EMC102-KM-KM-800	170654	Apr. 17, 2020
13	Test Cable	emci	Super Reliable-40G-SS11-7000	W0030860001	Apr. 17, 2020
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020


Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 29, 2020
2	Wideband Power Sensor	Keysight	N9123A	MY58310003	Mar. 29, 2020



Antenna Conducted Spurious Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020



Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

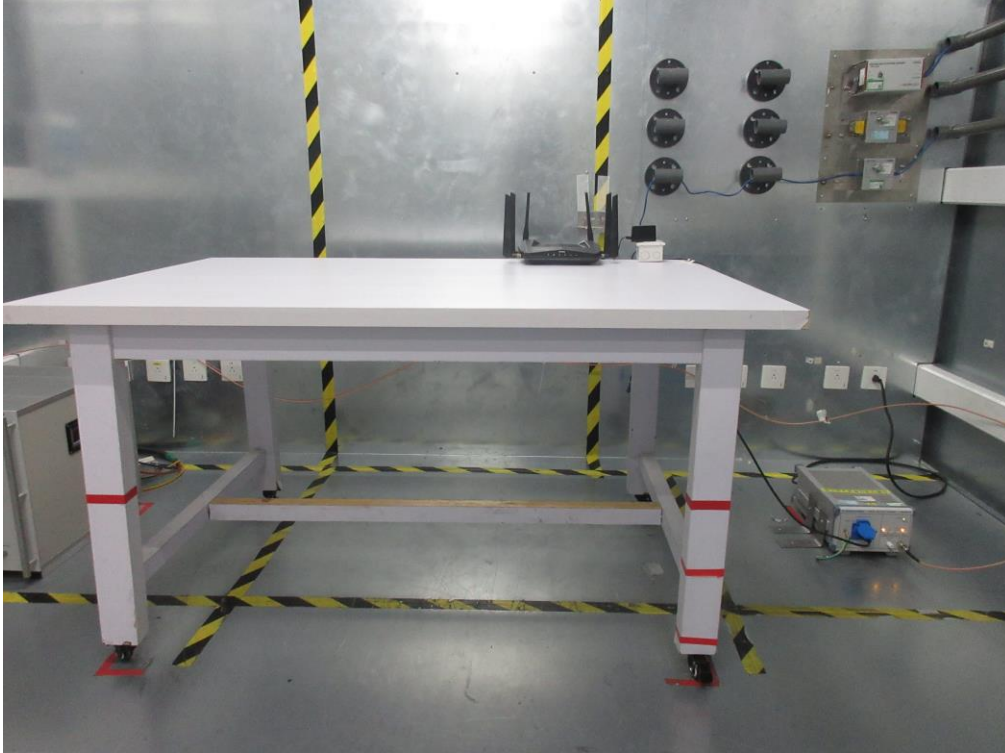10. EUT TEST PHOTO**Conducted Emissions Test Photos**

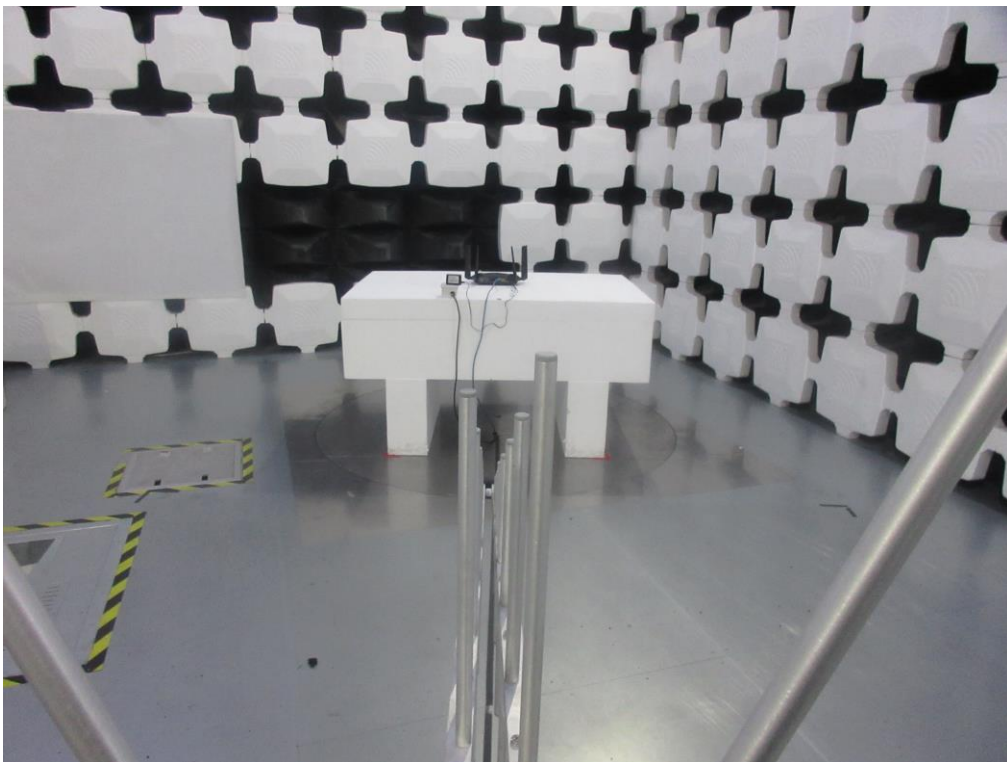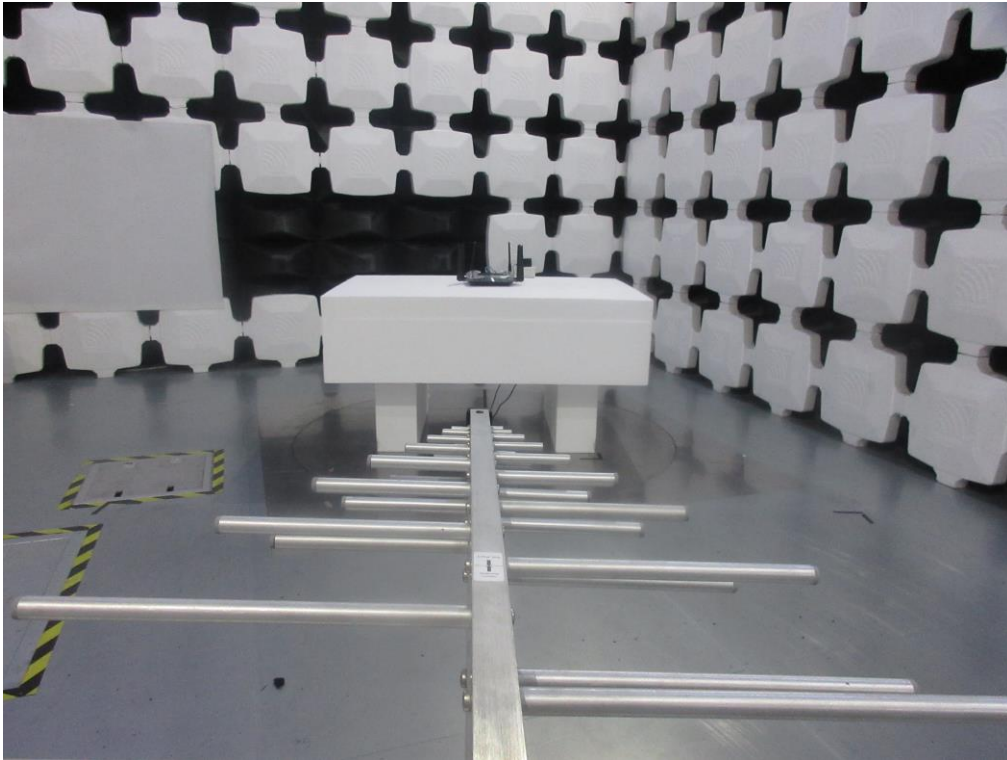
Radiated Emissions Test Photos**30 MHz to 1 GHz**

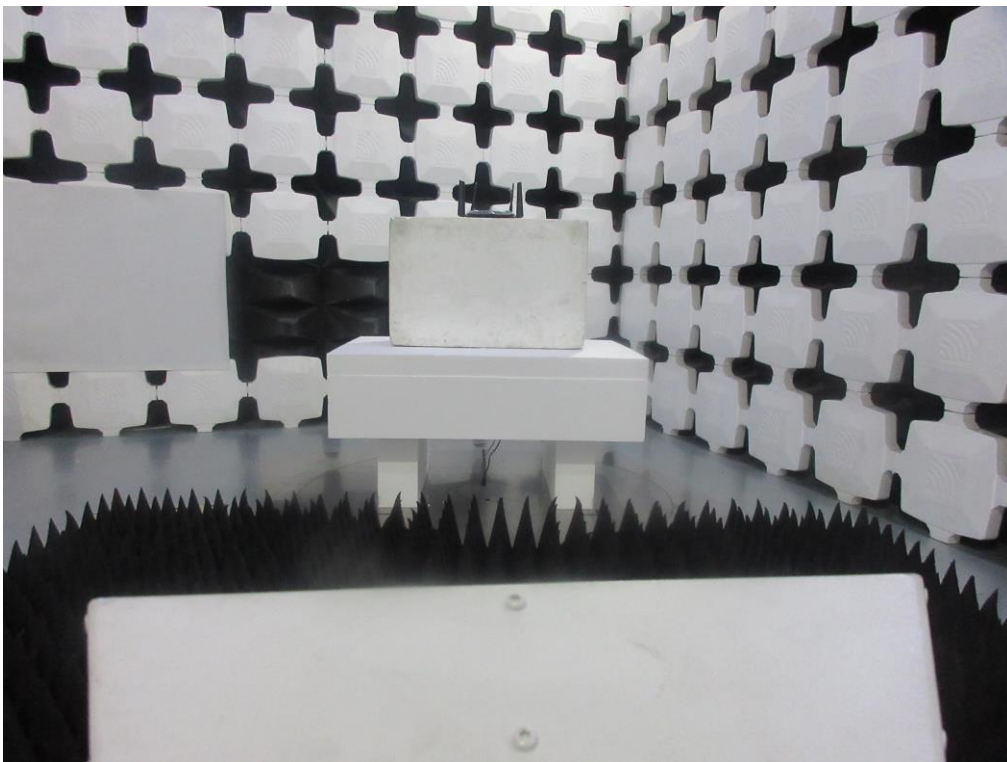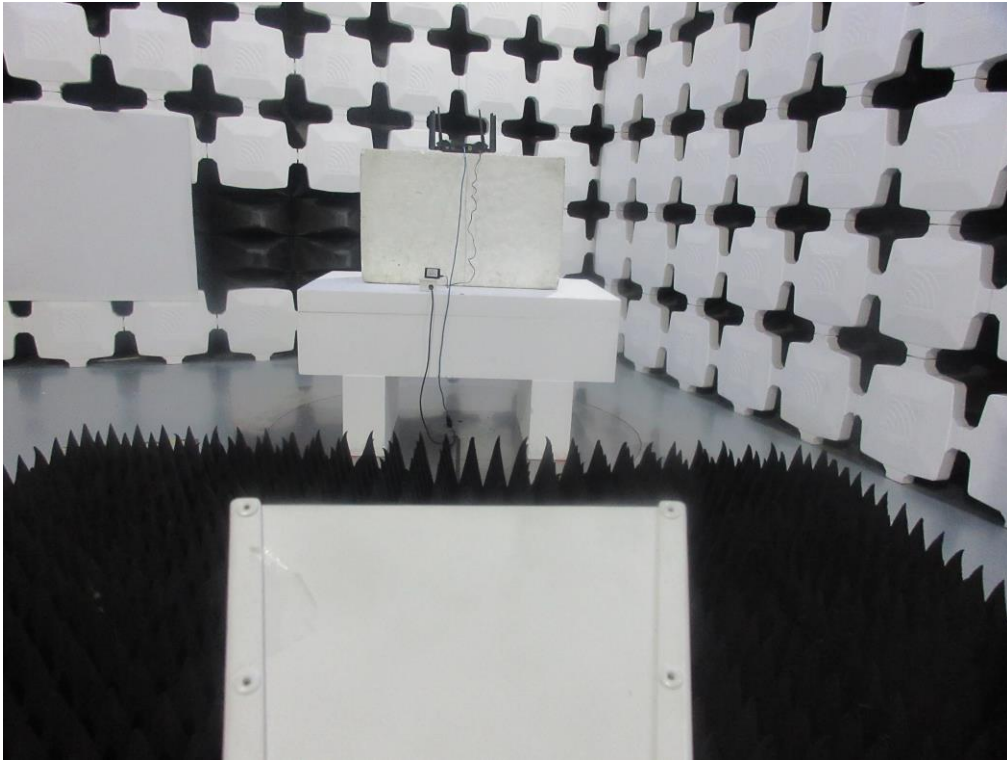Radiated Emissions Test Photos**Above 1 GHz**

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX AX-20 Mode Channel 06

Line

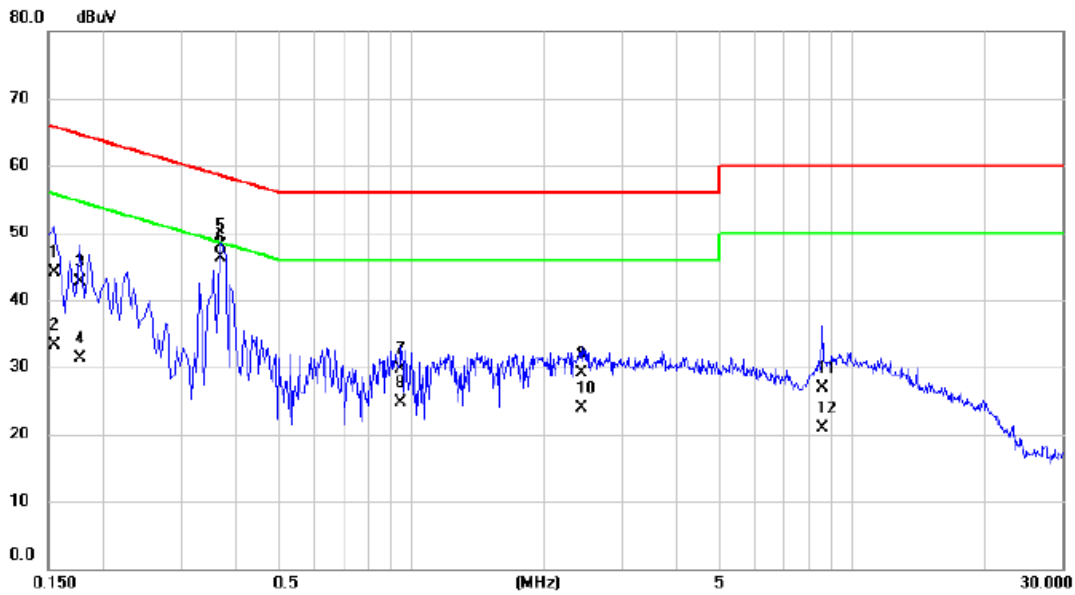


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	34.40	9.73	44.13	65.75	-21.62	QP	
2		0.1545	23.50	9.73	33.23	55.75	-22.52	AVG	
3		0.1770	33.00	9.76	42.76	64.63	-21.87	QP	
4		0.1770	21.50	9.76	31.26	54.63	-23.37	AVG	
5		0.3704	38.20	9.85	48.05	58.49	-10.44	QP	
6	*	0.3704	36.40	9.85	46.25	48.49	-2.24	AVG	
7		0.9465	20.00	9.76	29.76	56.00	-26.24	QP	
8		0.9465	15.00	9.76	24.76	46.00	-21.24	AVG	
9		2.4315	19.30	9.82	29.12	56.00	-26.88	QP	
10		2.4315	14.10	9.82	23.92	46.00	-22.08	AVG	
11		8.5470	16.70	10.15	26.85	60.00	-33.15	QP	
12		8.5470	10.70	10.15	20.85	50.00	-29.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 06

Neutral

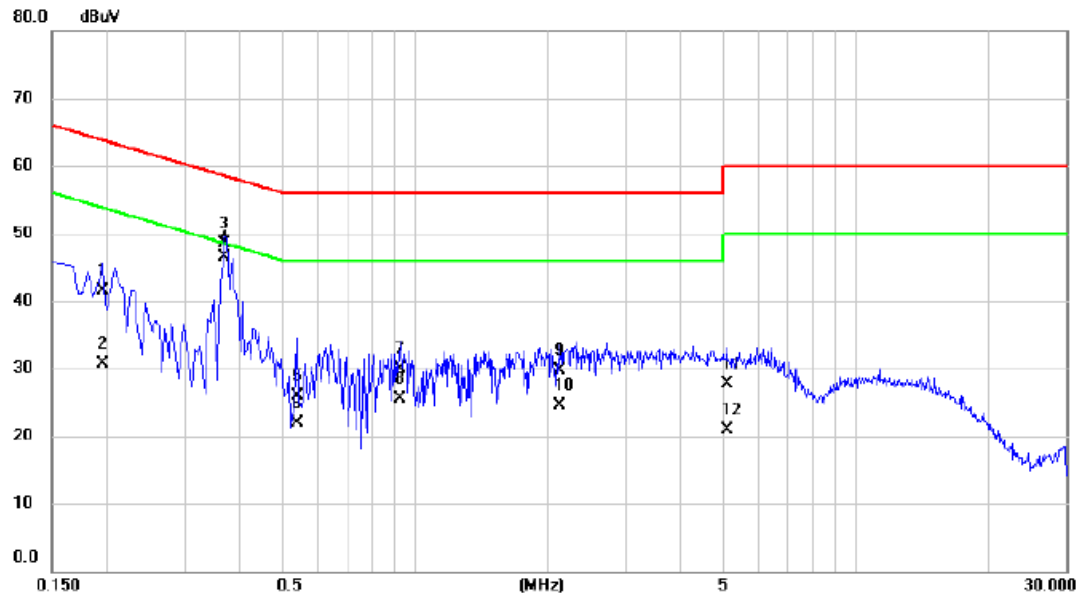

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1950	31.80	9.63	41.43	63.82	-22.39	QP	
2		0.1950	21.00	9.63	30.63	53.82	-23.19	AVG	
3		0.3704	38.80	9.67	48.47	58.49	-10.02	QP	
4	*	0.3704	36.90	9.67	46.57	48.49	-1.92	AVG	
5		0.5415	16.20	9.69	25.89	56.00	-30.11	QP	
6		0.5415	12.20	9.69	21.89	46.00	-24.11	AVG	
7		0.9240	20.10	9.72	29.82	56.00	-26.18	QP	
8		0.9240	15.70	9.72	25.42	46.00	-20.58	AVG	
9		2.1255	20.00	9.79	29.79	56.00	-26.21	QP	
10		2.1255	14.70	9.79	24.49	46.00	-21.51	AVG	
11		5.1000	17.80	9.94	27.74	60.00	-32.26	QP	
12		5.1000	11.00	9.94	20.94	50.00	-29.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Note: Below 30MHz, The measured value have enough margin over 20dB than the limit,
therefore they are not reported

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX AX-20 Mode Channel 06

Vertical

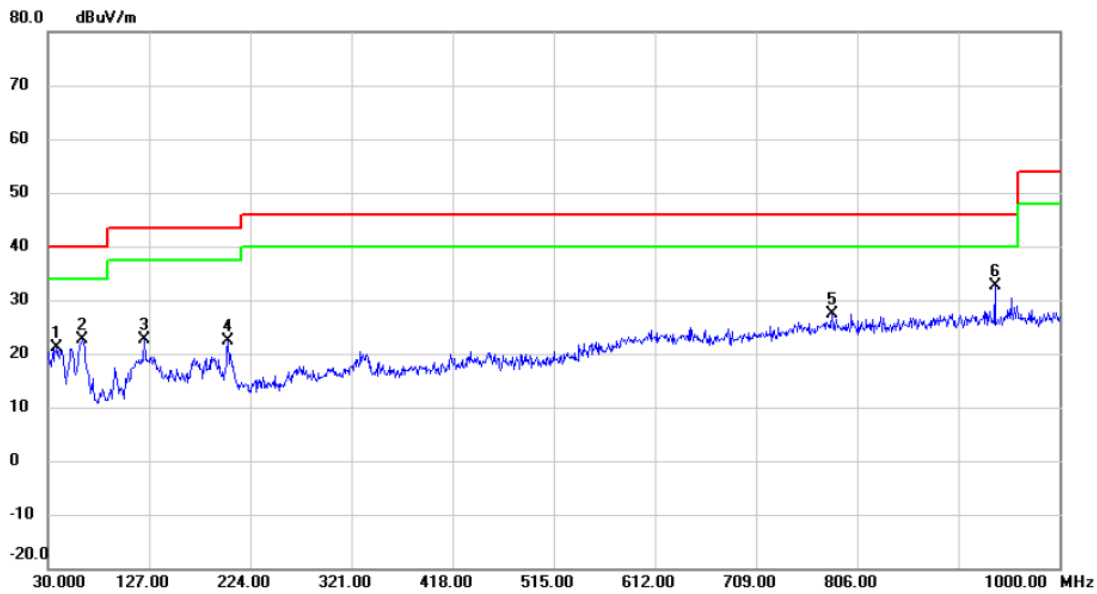


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.7300	37.67	-16.44	21.23	40.00	-18.77	peak	
2		63.4650	41.13	-18.48	22.65	40.00	-17.35	peak	
3		122.1500	39.68	-17.03	22.65	43.50	-20.85	peak	
4		202.6600	41.12	-18.77	22.35	43.50	-21.15	peak	
5		781.7500	33.96	-6.54	27.42	46.00	-18.58	peak	
6	*	938.4050	37.91	-5.20	32.71	46.00	-13.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20 Mode Channel 06

Horizontal

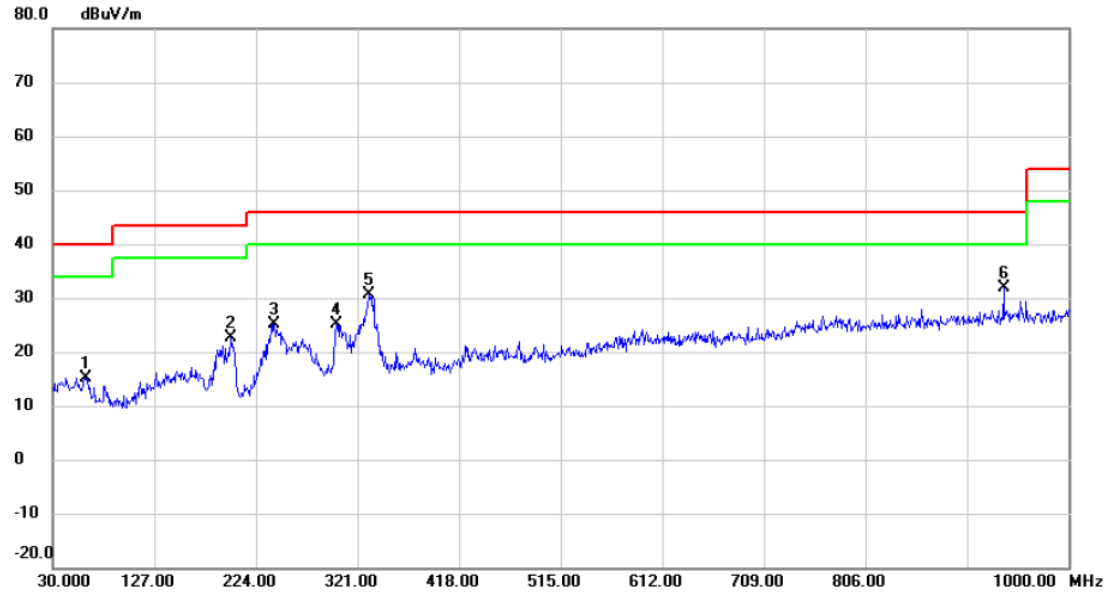

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		61.5250	33.23	-17.98	15.25	40.00	-24.75	peak	
2		199.7500	41.47	-18.92	22.55	43.50	-20.95	peak	
3		241.9450	42.01	-16.91	25.10	46.00	-20.90	peak	
4		301.1150	39.47	-14.30	25.17	46.00	-20.83	peak	
5		332.1550	44.52	-13.86	30.66	46.00	-15.34	peak	
6	*	937.9200	37.16	-5.20	31.96	46.00	-14.04	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	52/37
------------	----------------------------	------------------	-------

Vertical

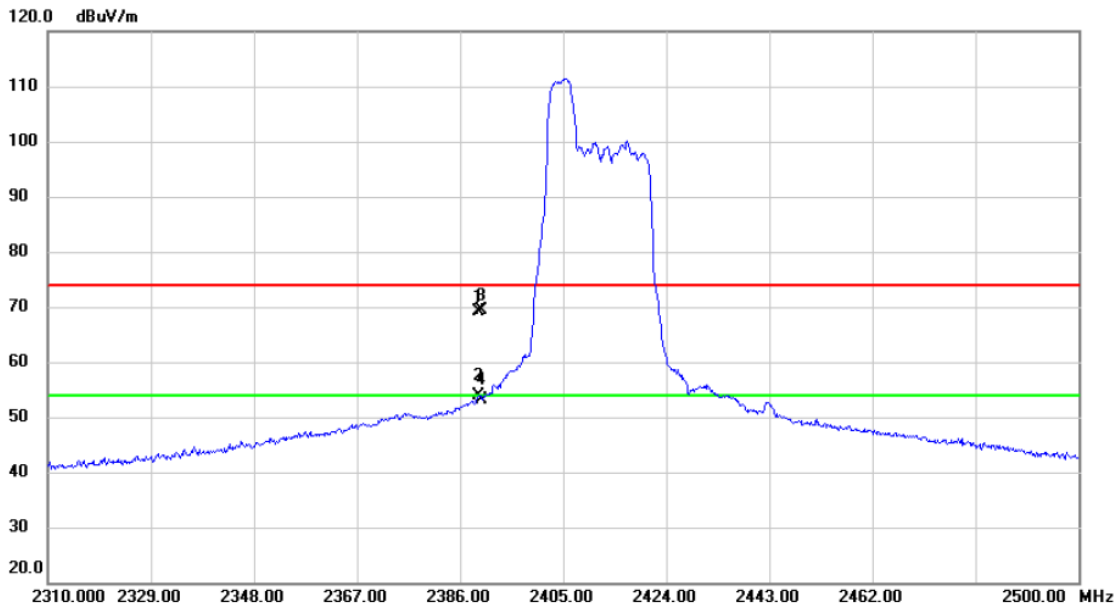


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.420	36.79	32.39	69.18	74.00	-4.82	peak	
2 *	2389.420	21.56	32.39	53.95	54.00	-0.05	AVG	
3	2390.000	36.93	32.39	69.32	74.00	-4.68	peak	
4	2390.000	20.63	32.39	53.02	54.00	-0.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Vertical

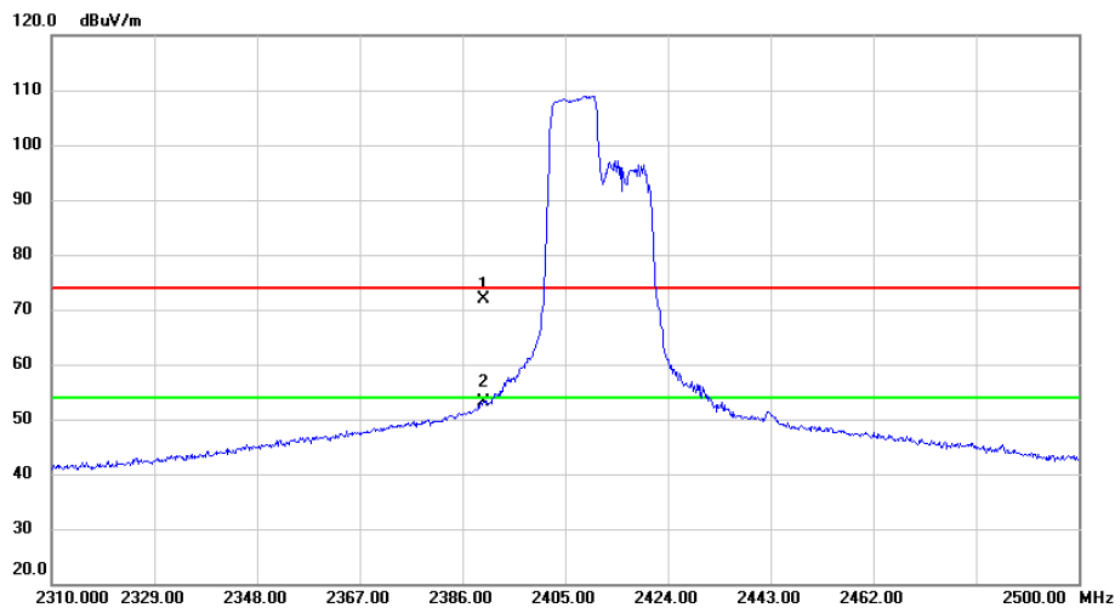


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	39.56	32.39	71.95	74.00	-2.05	peak	
2	*	2390.000	20.71	32.39	53.10	54.00	-0.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Vertical

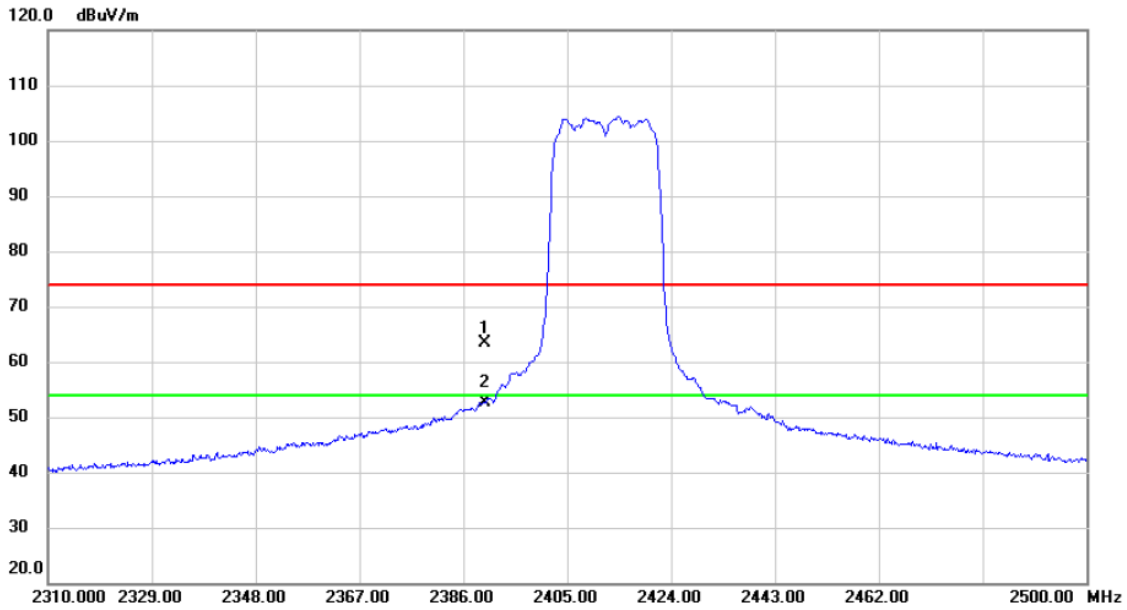


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	31.11	32.39	63.50	74.00	-10.50	peak	
2	*	2390.000	20.34	32.39	52.73	54.00	-1.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Vertical

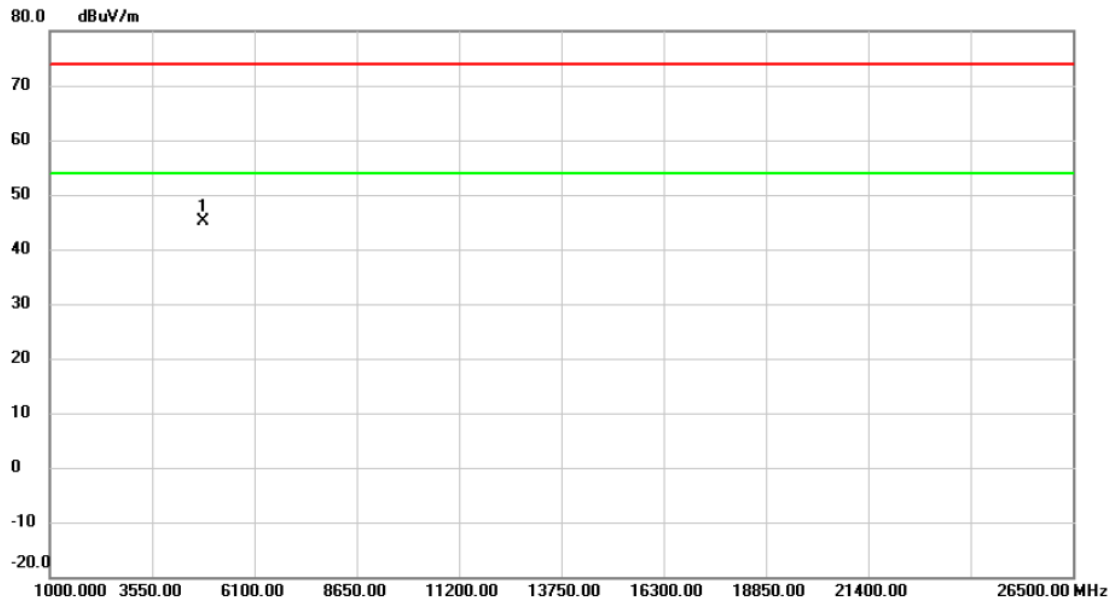


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4814.800	55.18	-9.95	45.23	74.00	-28.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	52/37
------------	----------------------------	------------------	-------

Horizontal

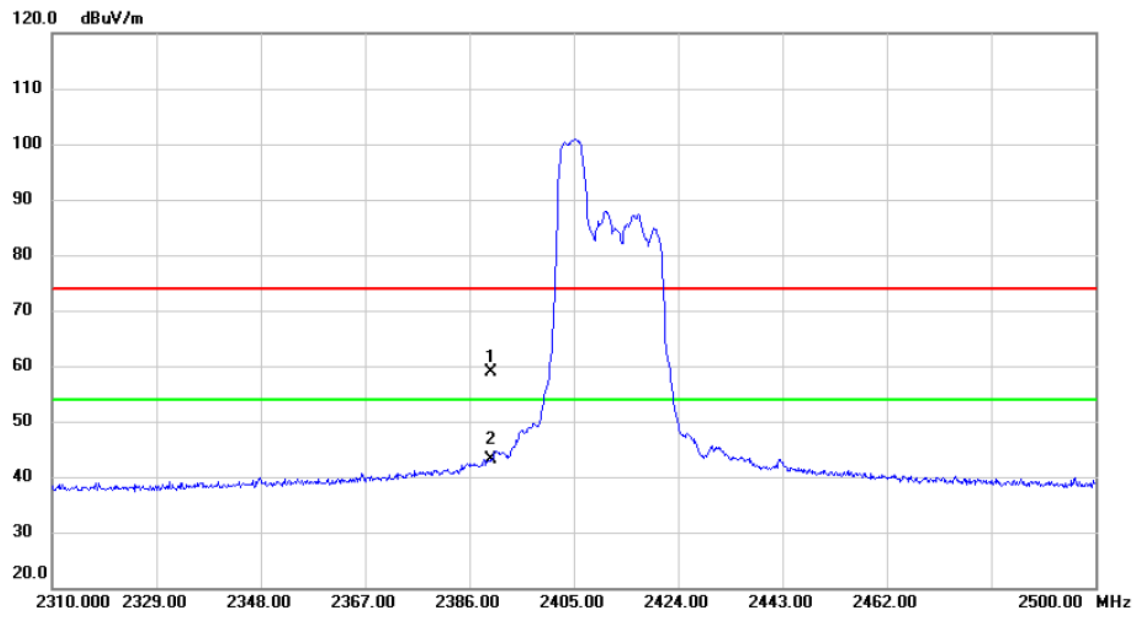


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	26.43	32.39	58.82	74.00	-15.18	peak	
2	*	2390.000	10.67	32.39	43.06	54.00	-10.94	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Horizontal

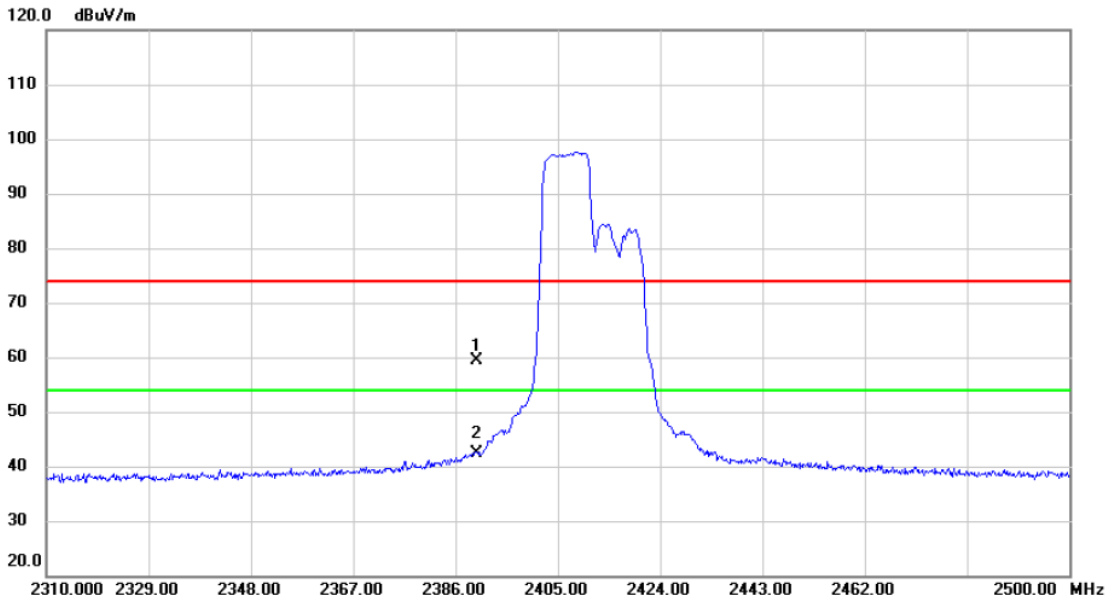


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	27.04	32.39	59.43	74.00	-14.57	peak	
2	*	2390.000	10.05	32.39	42.44	54.00	-11.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Horizontal

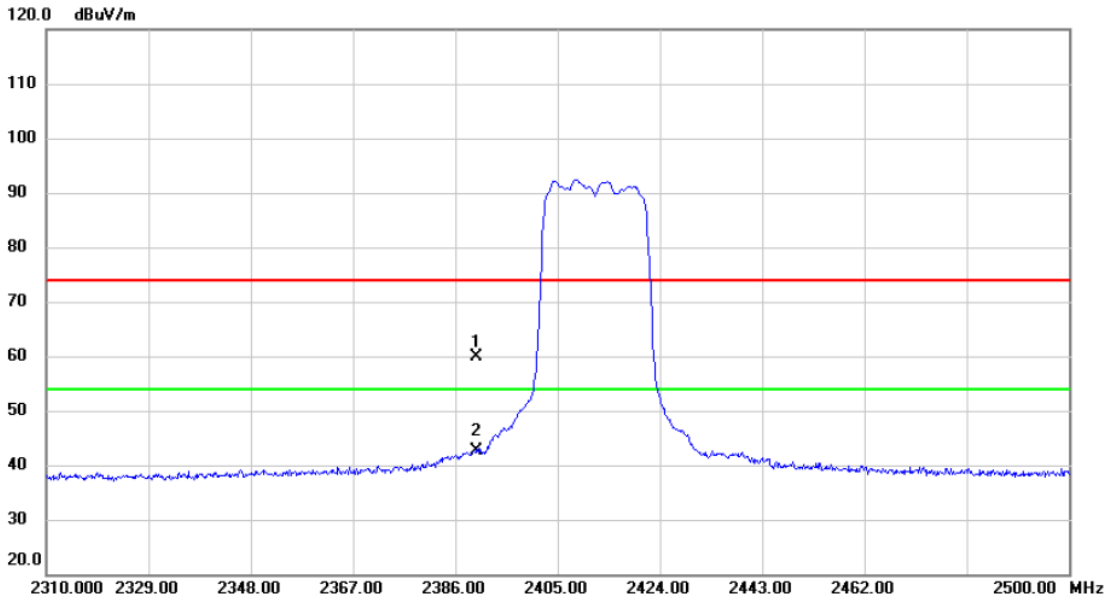


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	27.40	32.39	59.79	74.00	-14.21	peak	
2 *	2390.000	10.21	32.39	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2412 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Horizontal

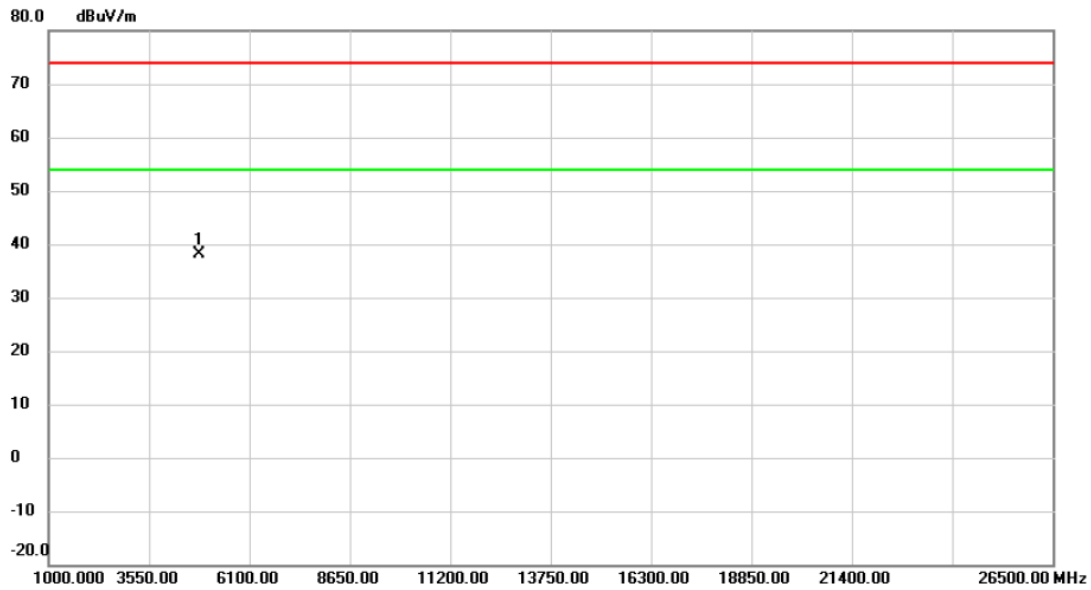


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4812.250	48.21	-9.96	38.25	74.00	-35.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2437 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Vertical

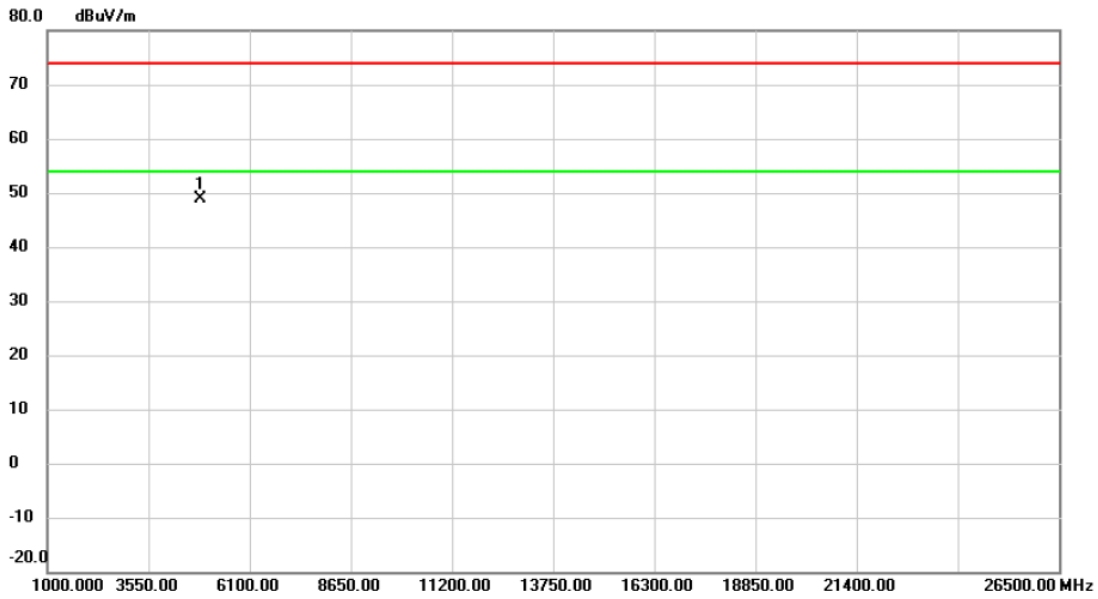


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	4865.800	58.58	-9.78	48.80	74.00	-25.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2437 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Horizontal

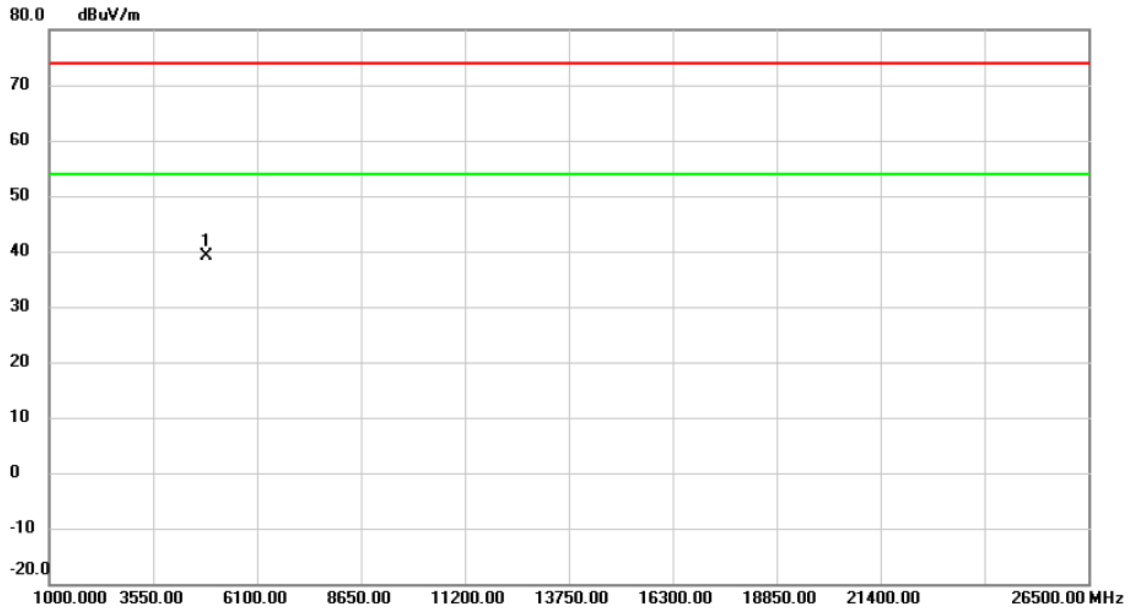


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4863.250	48.89	-9.79	39.10	74.00	-34.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Vertical

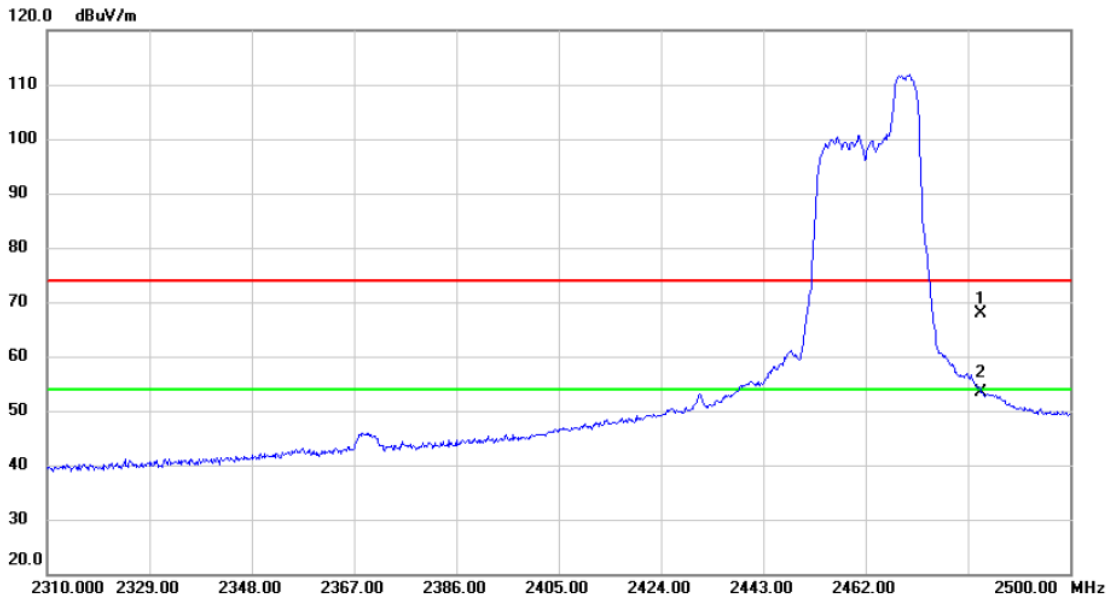


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	35.13	32.66	67.79	74.00	-6.21	peak	
2	*	2483.500	20.65	32.66	53.31	54.00	-0.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Vertical

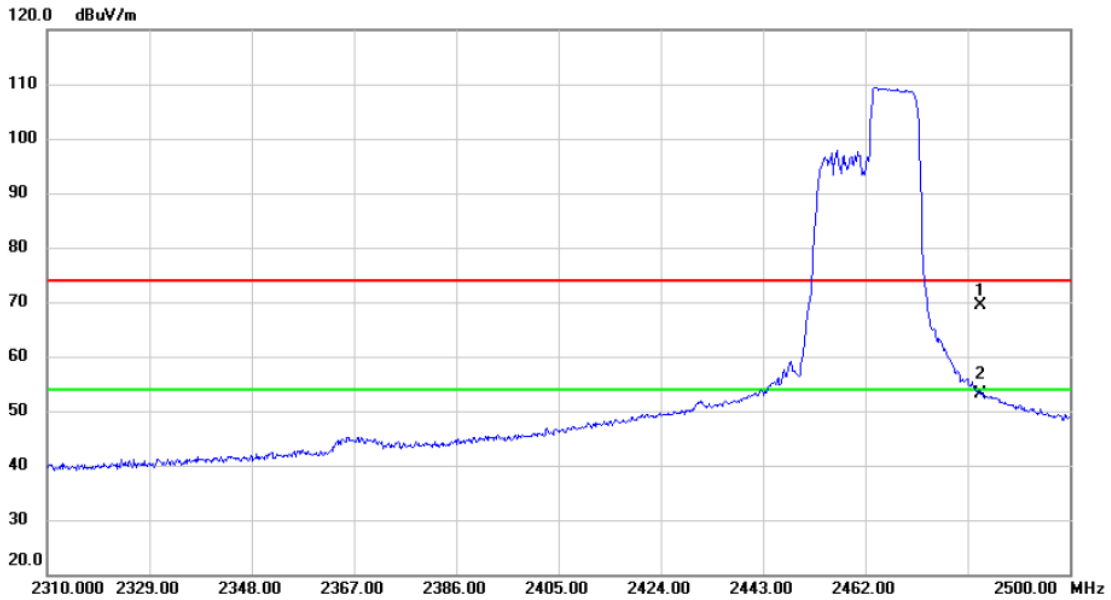

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	36.68	32.66	69.34	74.00	-4.66	peak	
2	*	2483.500	20.59	32.66	53.25	54.00	-0.75	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Vertical

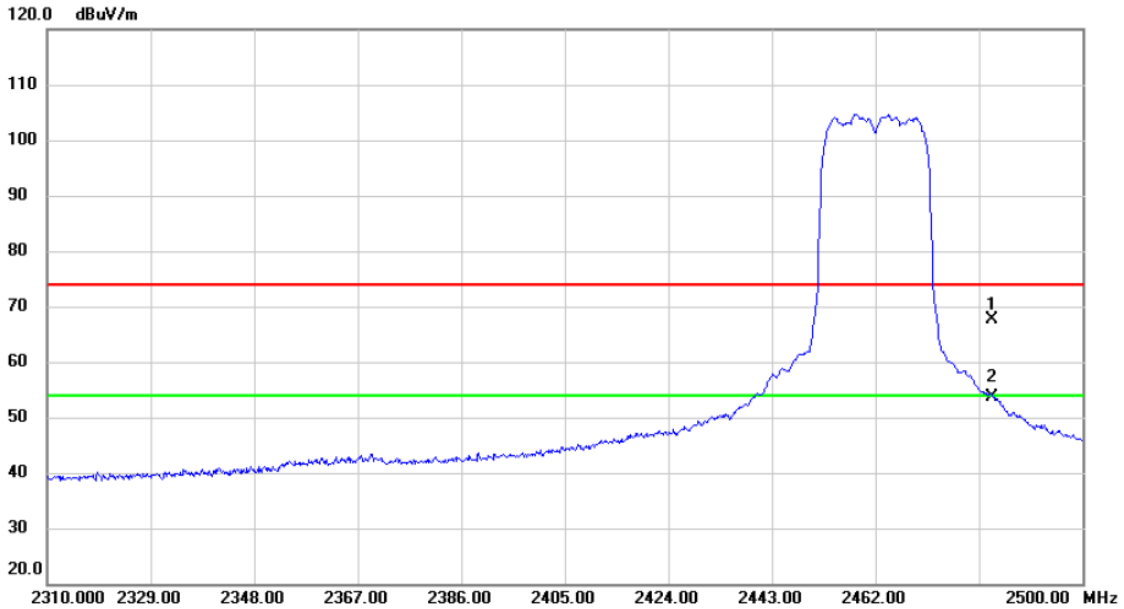

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	34.98	32.66	67.64	74.00	-6.36	peak	
2	*	2483.500	20.90	32.66	53.56	54.00	-0.44	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Vertical

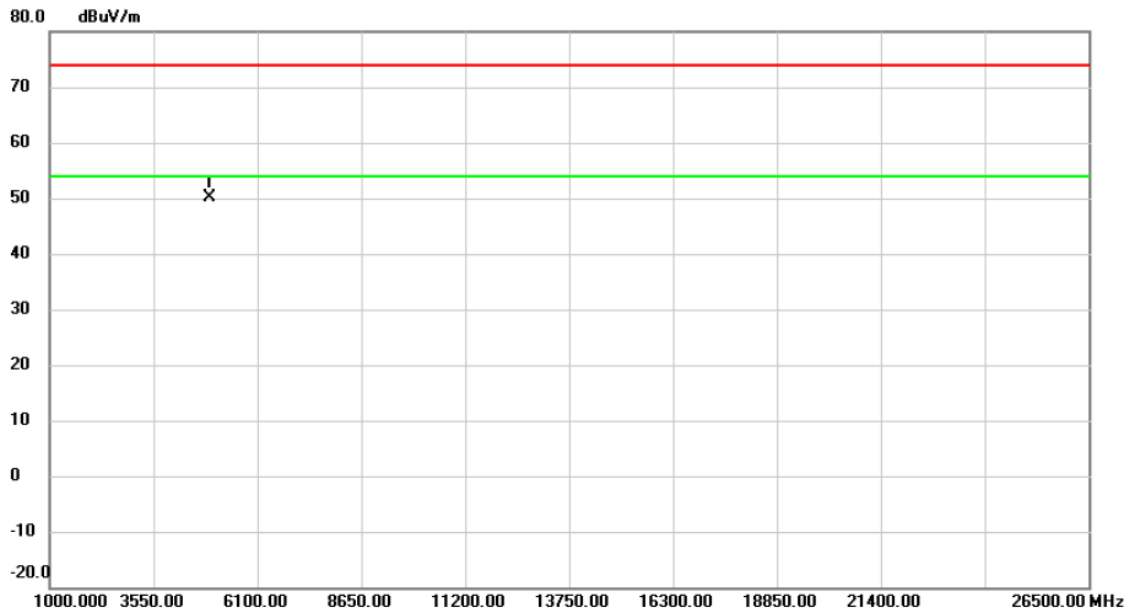


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4914.250	59.65	-9.61	50.04	74.00	-23.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Horizontal

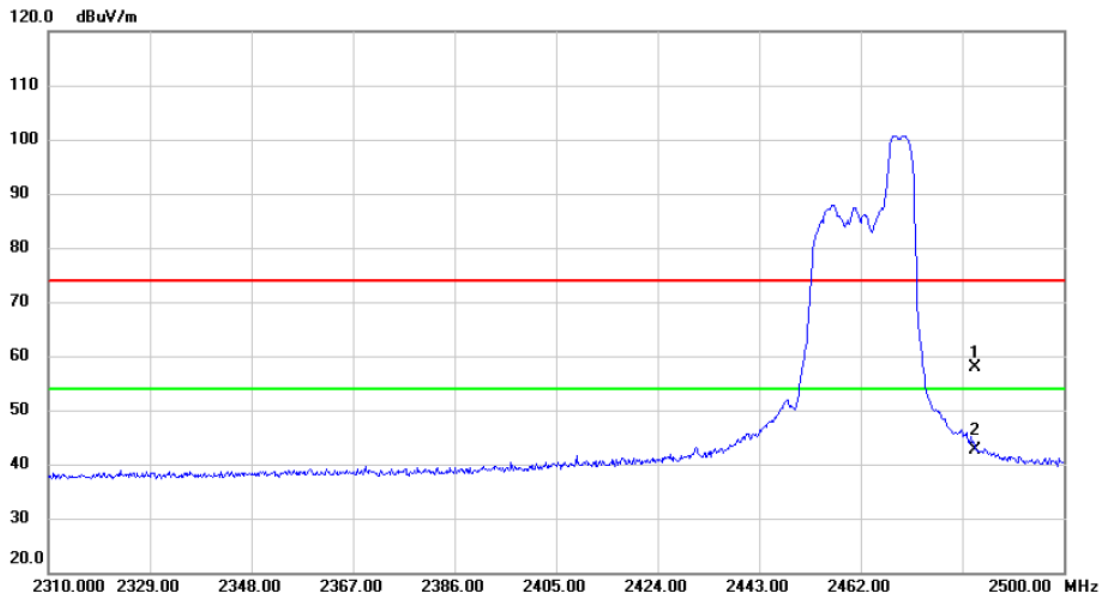


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	25.22	32.66	57.88	74.00	-16.12	peak	
2	*	2483.500	10.08	32.66	42.74	54.00	-11.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Horizontal

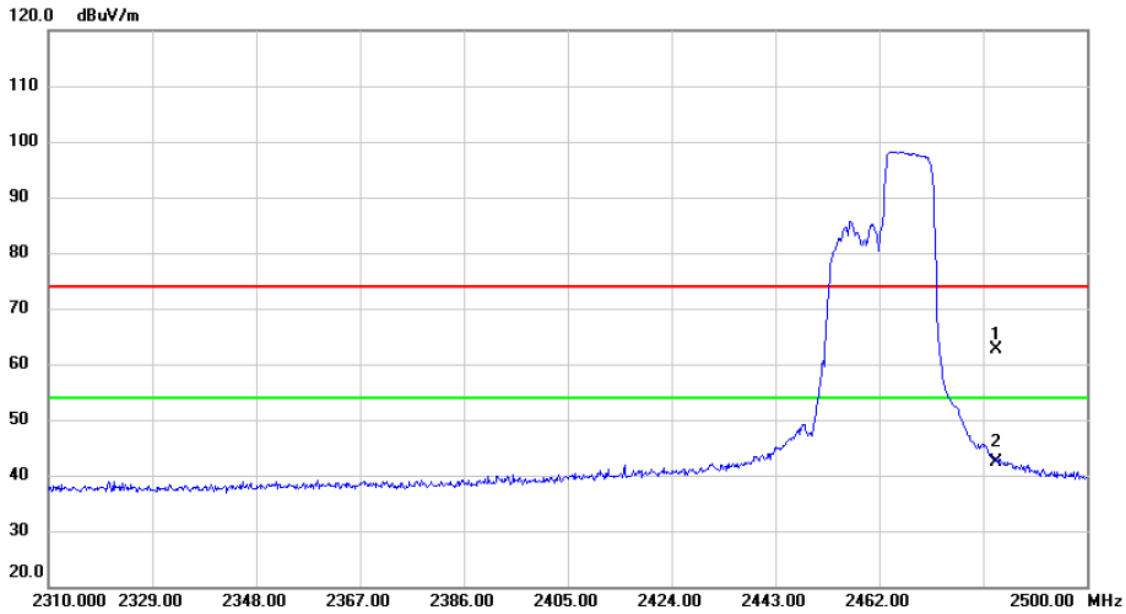

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2483.500	30.00	32.66	62.66	74.00	-11.34	peak	
2		2483.500	9.83	32.66	42.49	54.00	-11.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Horizontal

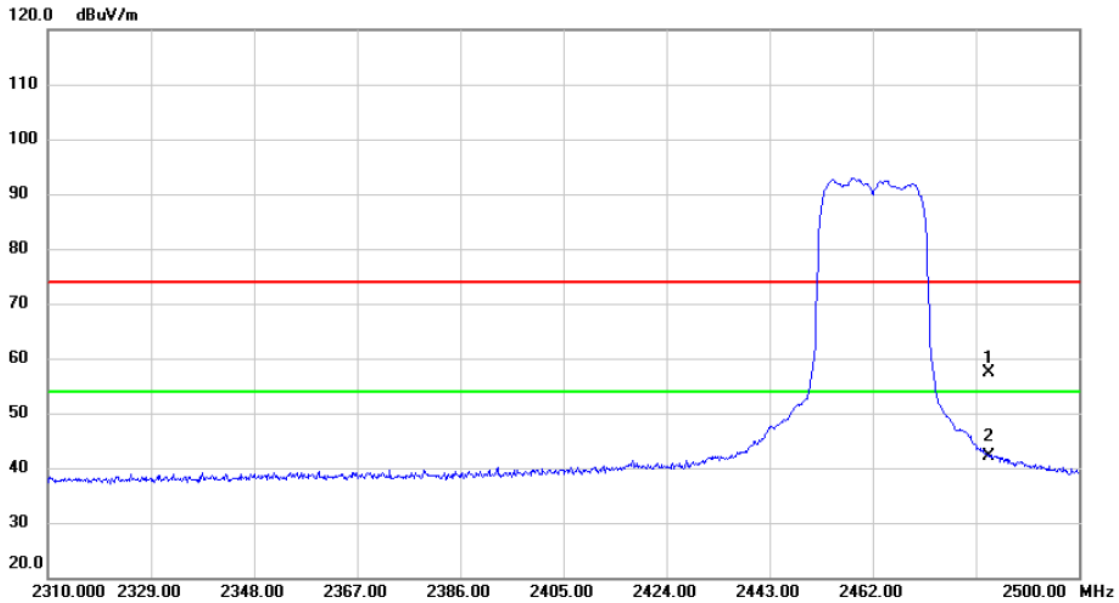

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	2483.500	24.79	32.66	57.45	74.00	-16.55	peak	
2 *	2483.500	9.52	32.66	42.18	54.00	-11.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE20) Mode 2462 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Horizontal

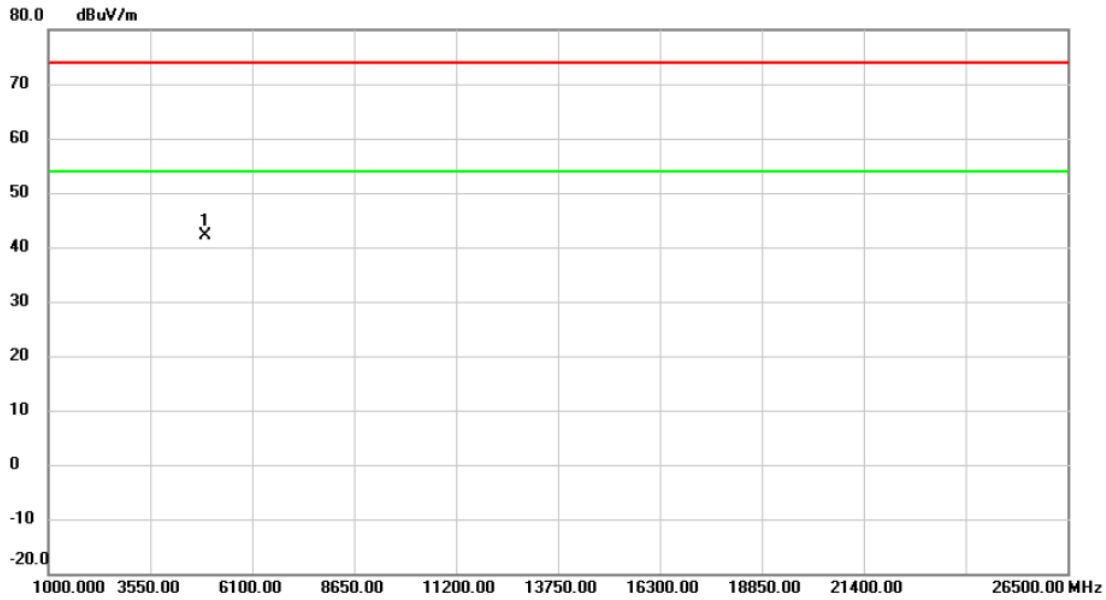


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4914.250	51.66	-9.61	42.05	74.00	-31.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	52/37
------------	----------------------------	------------------	-------

Vertical

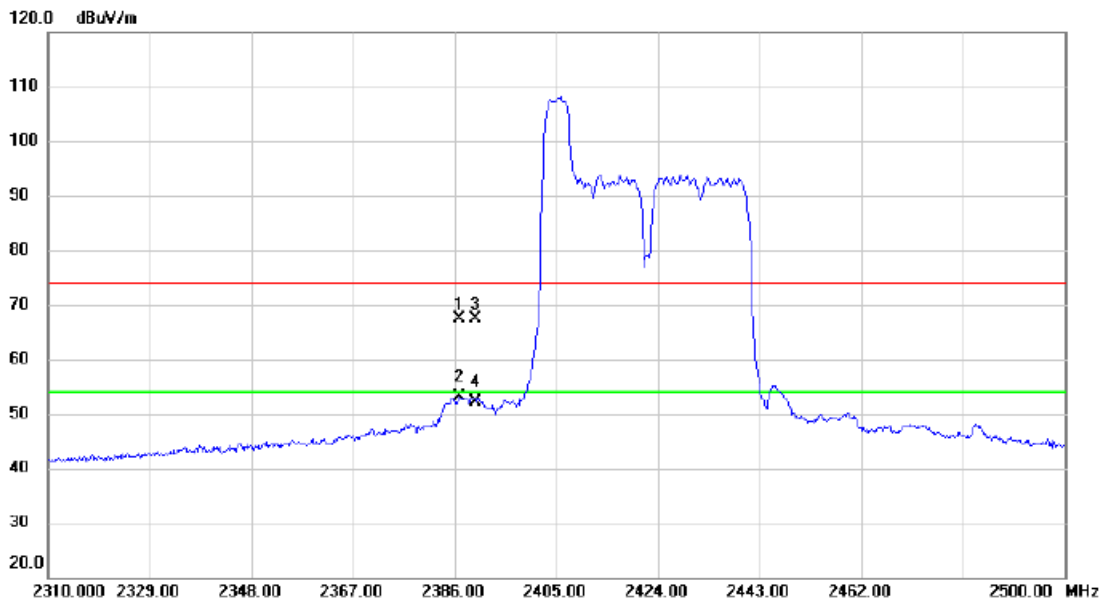


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2386.950	35.11	32.39	67.50	74.00	-6.50	peak	
2	*	2386.950	20.64	32.39	53.03	54.00	-0.97	AVG	
3		2390.000	34.91	32.39	67.30	74.00	-6.70	peak	
4		2390.000	19.82	32.39	52.21	54.00	-1.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Vertical

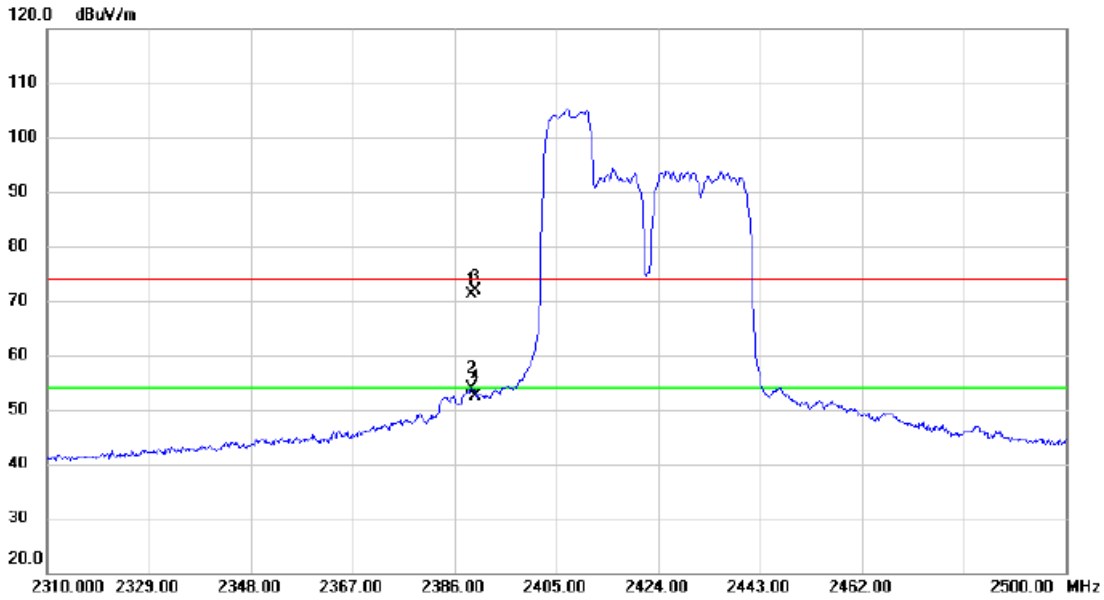


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.230	38.71	32.39	71.10	74.00	-2.90	peak	
2	*	2389.230	21.38	32.39	53.77	54.00	-0.23	AVG	
3		2390.000	39.45	32.39	71.84	74.00	-2.16	peak	
4		2390.000	19.90	32.39	52.29	54.00	-1.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Vertical

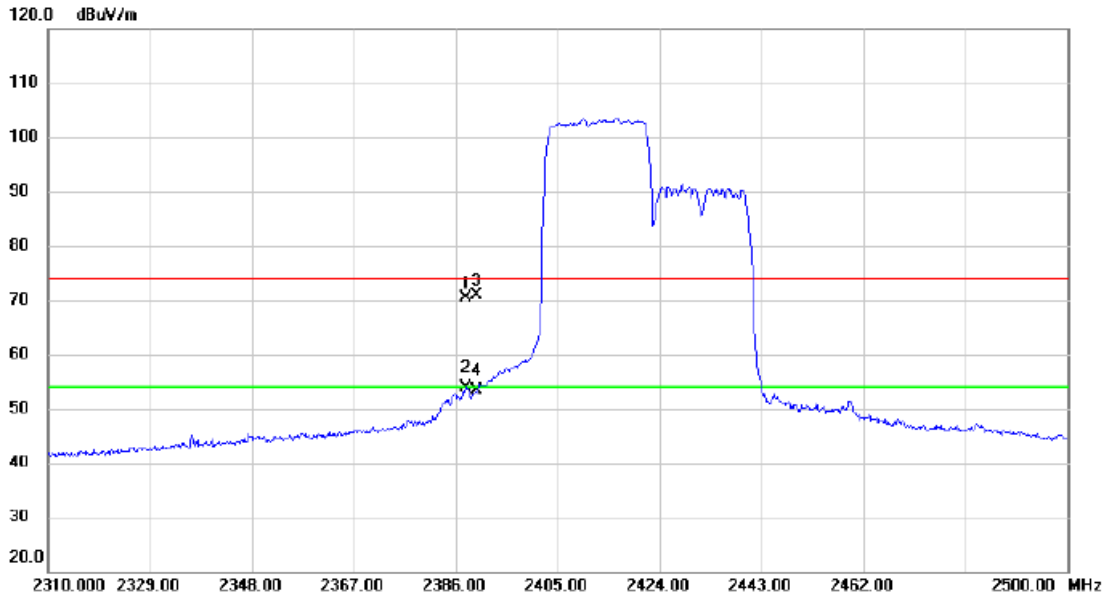


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2387.900	37.90	32.39	70.29	74.00	-3.71	peak	
2 *	2387.900	21.41	32.39	53.80	54.00	-0.20	AVG	
3	2390.000	38.44	32.39	70.83	74.00	-3.17	peak	
4	2390.000	20.94	32.39	53.33	54.00	-0.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Vertical

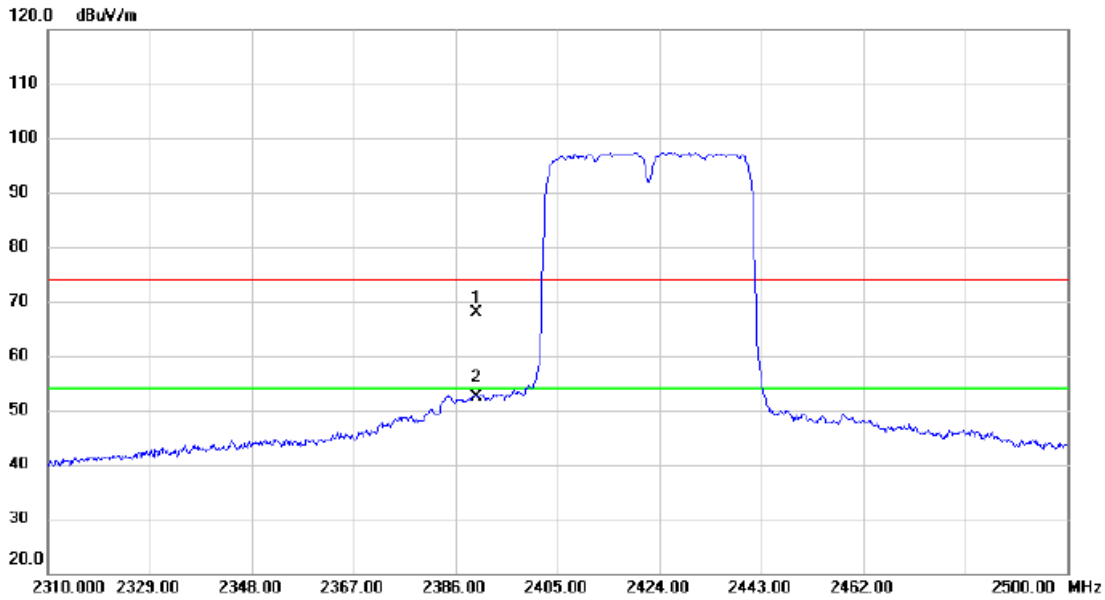

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	35.49	32.39	67.88	74.00	-6.12	peak	
2	*	2390.000	19.98	32.39	52.37	54.00	-1.63	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Vertical

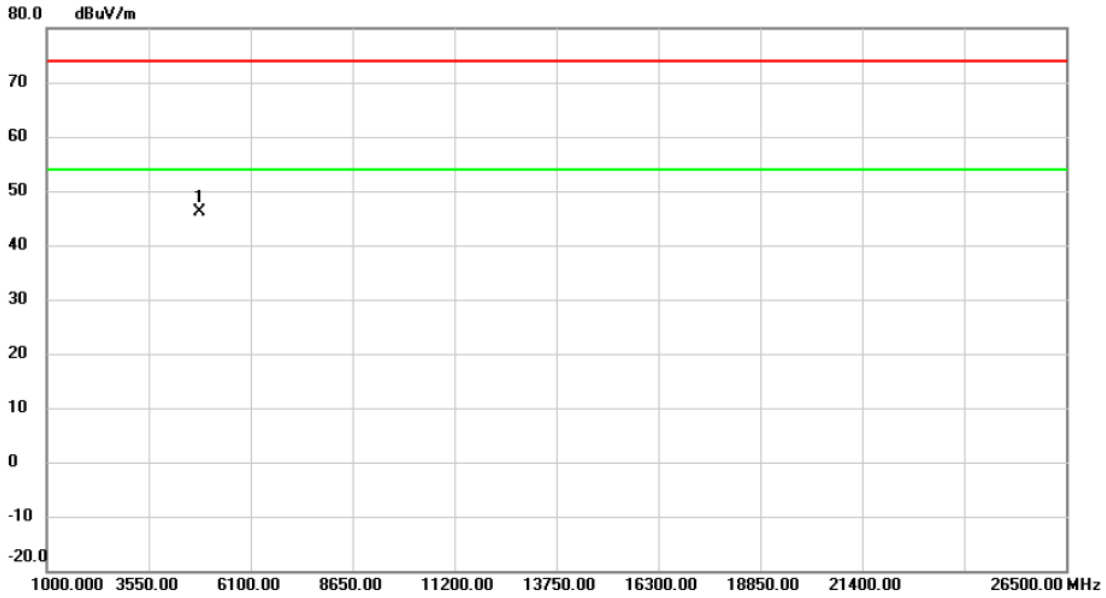


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4835.200	56.13	-9.88	46.25	74.00	-27.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	52/37
------------	----------------------------	------------------	-------

Horizontal

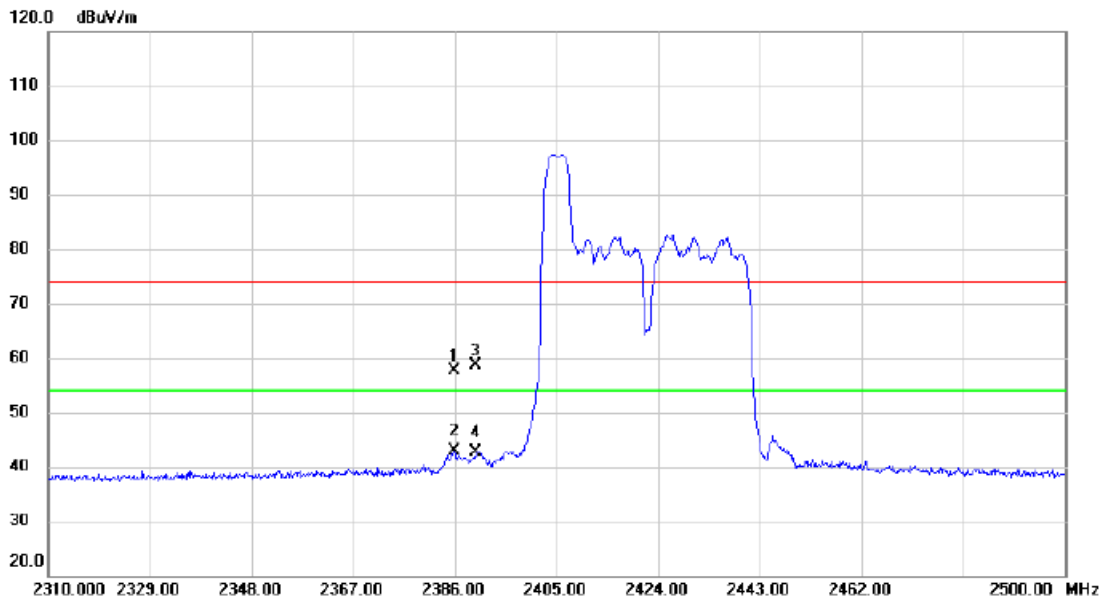


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2385.810	25.13	32.38	57.51	74.00	-16.49	peak	
2	*	2385.810	10.42	32.38	42.80	54.00	-11.20	AVG	
3		2390.000	26.35	32.39	58.74	74.00	-15.26	peak	
4		2390.000	10.17	32.39	42.56	54.00	-11.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	106/53
------------	----------------------------	------------------	--------

Horizontal

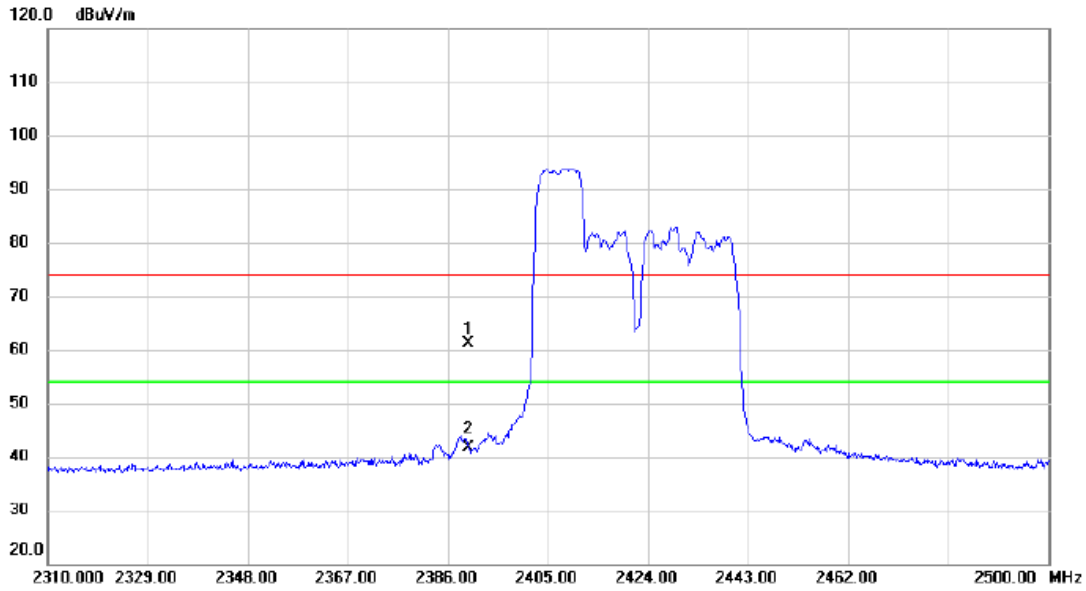


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	28.79	32.39	61.18	74.00	-12.82	peak	
2 *	2390.000	9.31	32.39	41.70	54.00	-12.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Horizontal

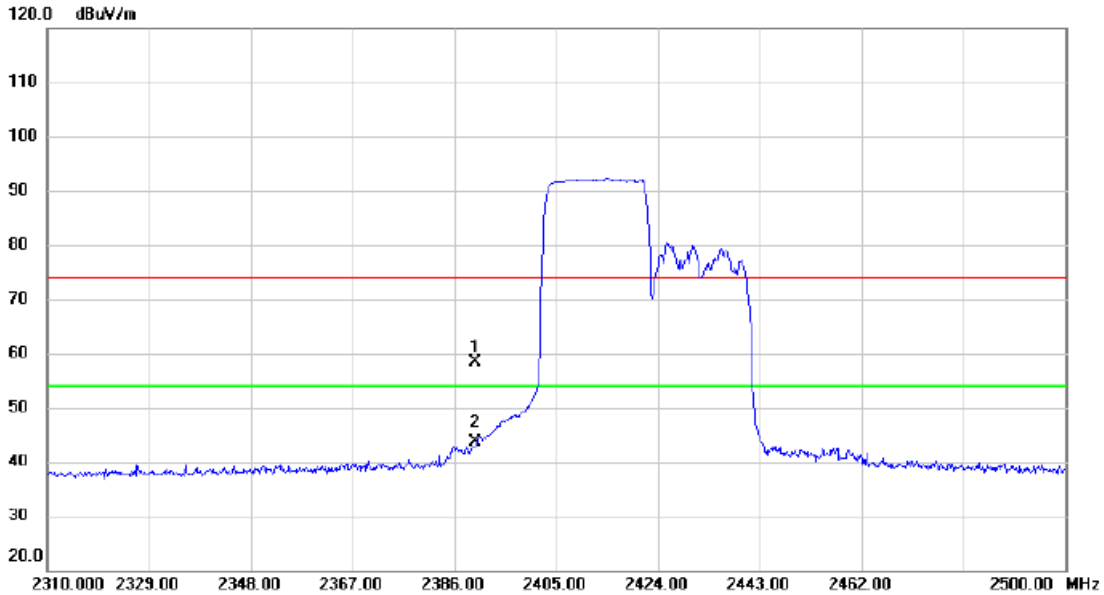


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	26.00	32.39	58.39	74.00	-15.61	peak	
2	*	2390.000	11.14	32.39	43.53	54.00	-10.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Horizontal

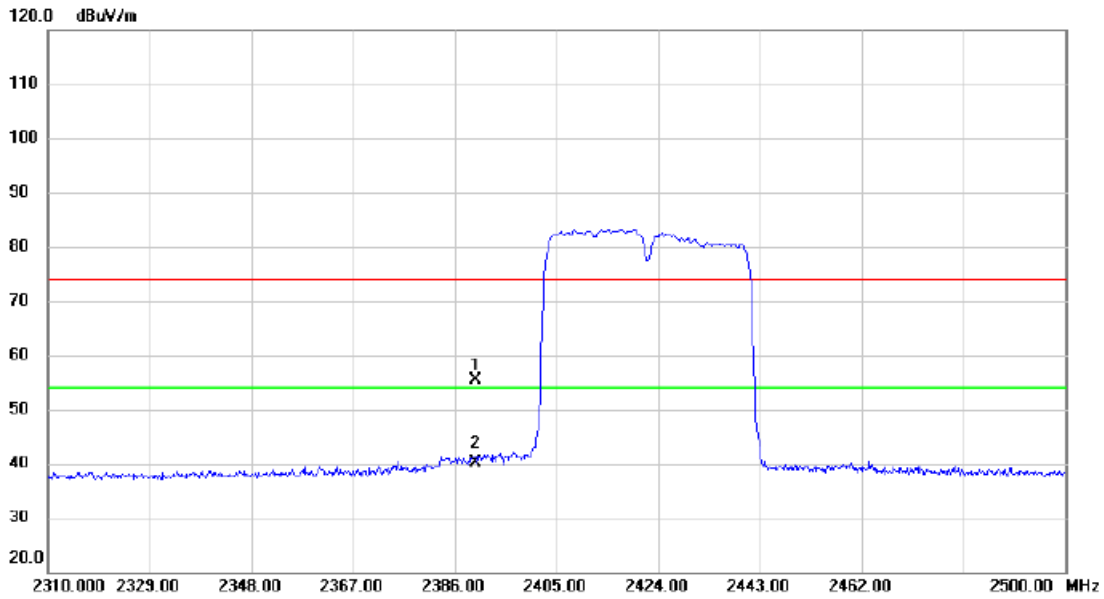


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	22.89	32.39	55.28	74.00	-18.72	peak	
2	*	2390.000	7.71	32.39	40.10	54.00	-13.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2422 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Horizontal

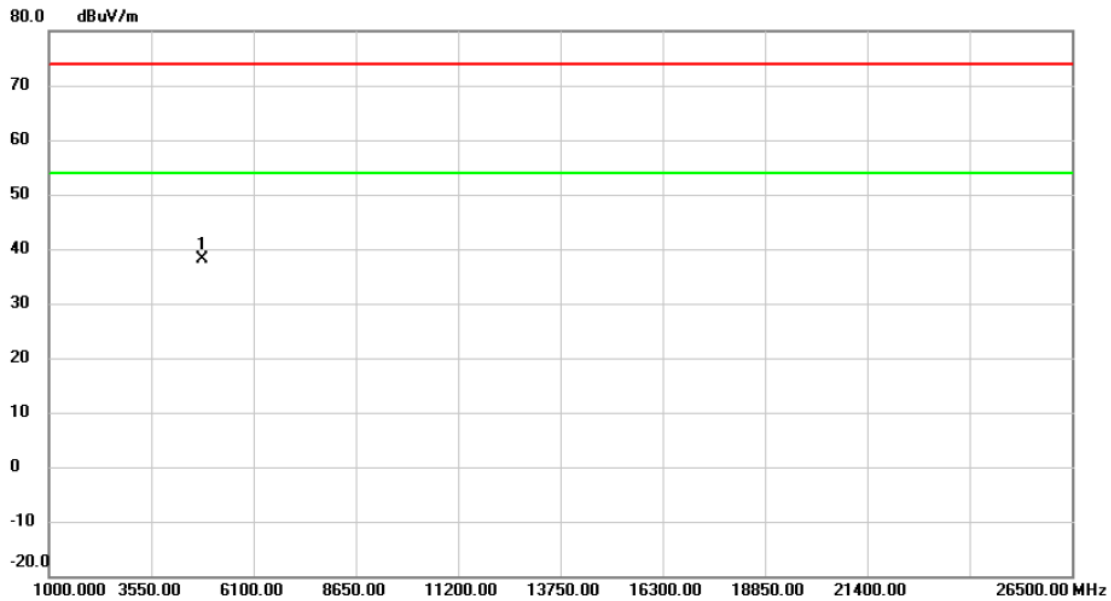


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4837.750	47.98	-9.87	38.11	74.00	-35.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2437 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Vertical

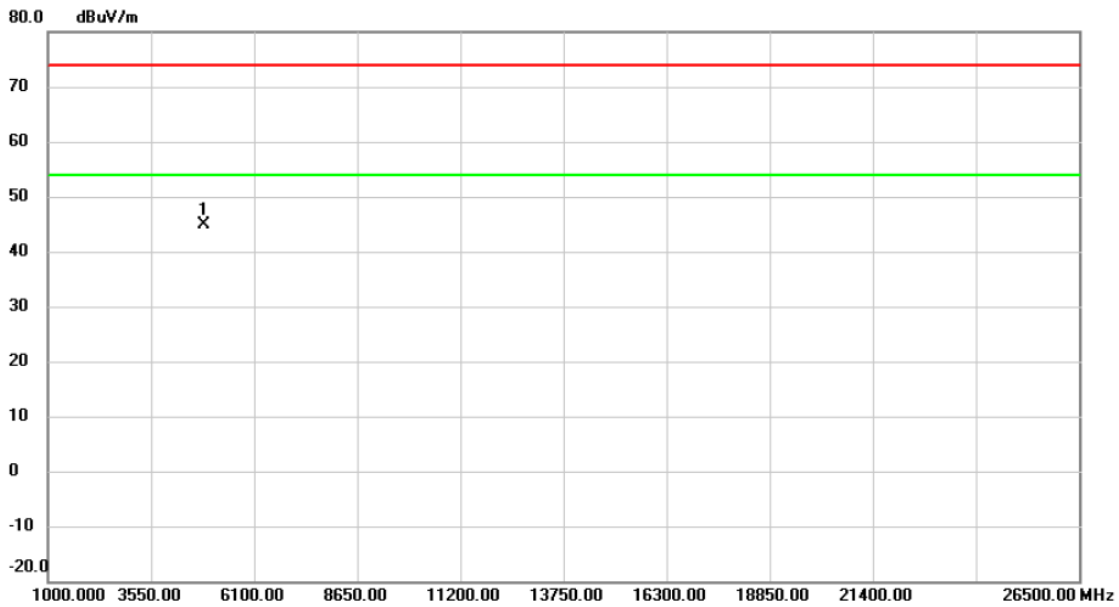


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4858.150	54.65	-9.80	44.85	74.00	-29.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2437 MHz	RU configuration	242/61
------------	----------------------------	------------------	--------

Horizontal

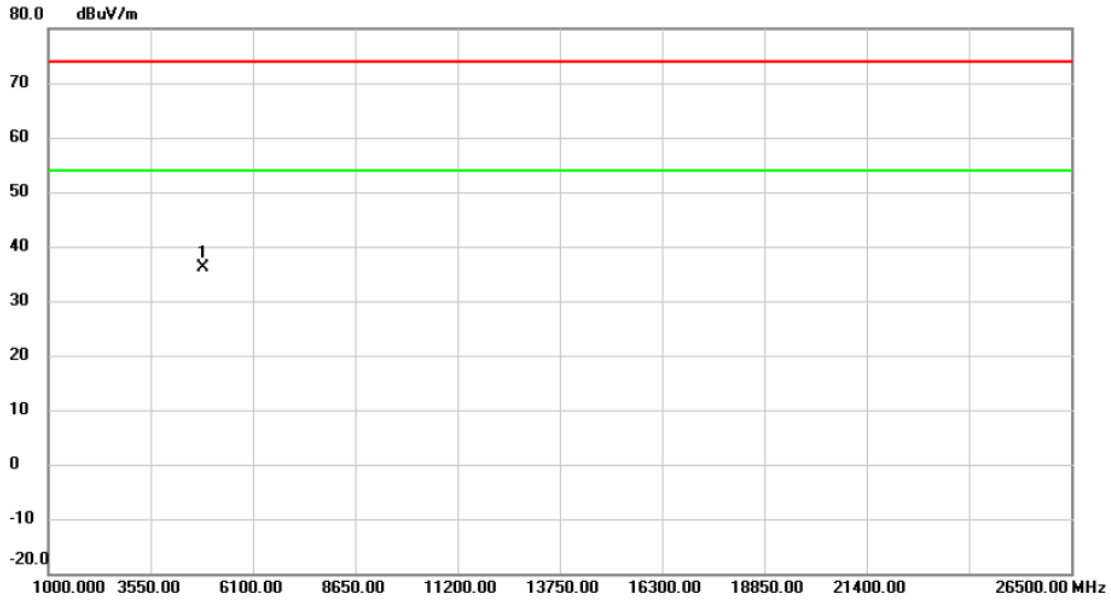


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4874.000	45.83	-9.75	36.08	74.00	-37.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/44
------------	----------------------------	------------------	-------

Vertical

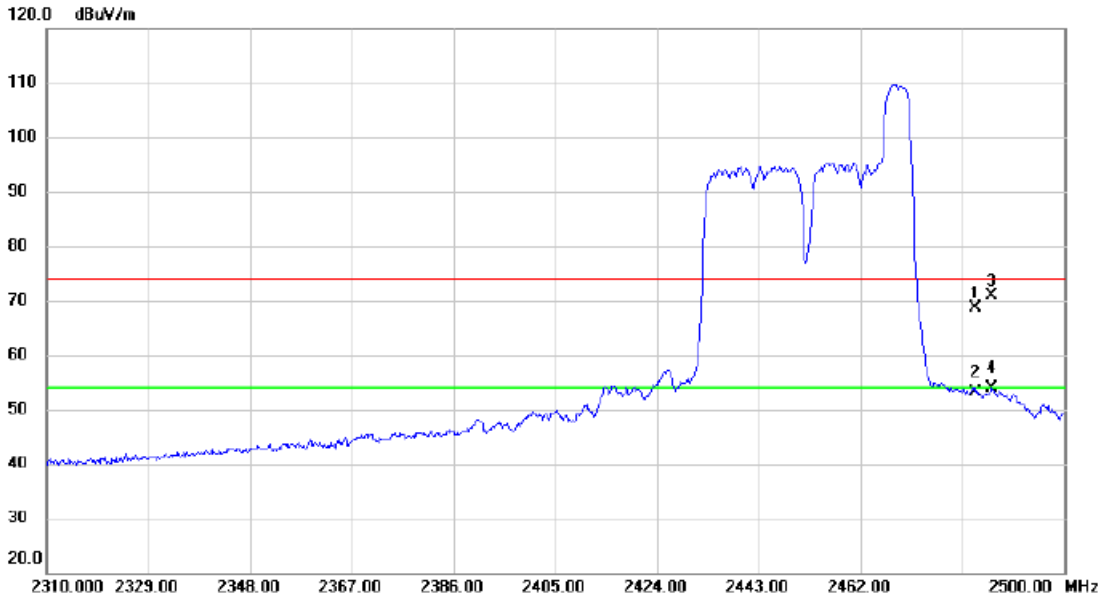


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	36.06	32.66	68.72	74.00	-5.28	peak	
2		2483.500	20.43	32.66	53.09	54.00	-0.91	AVG	
3		2486.510	38.11	32.67	70.78	74.00	-3.22	peak	
4	*	2486.510	21.10	32.67	53.77	54.00	-0.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/56
------------	----------------------------	------------------	--------

Vertical

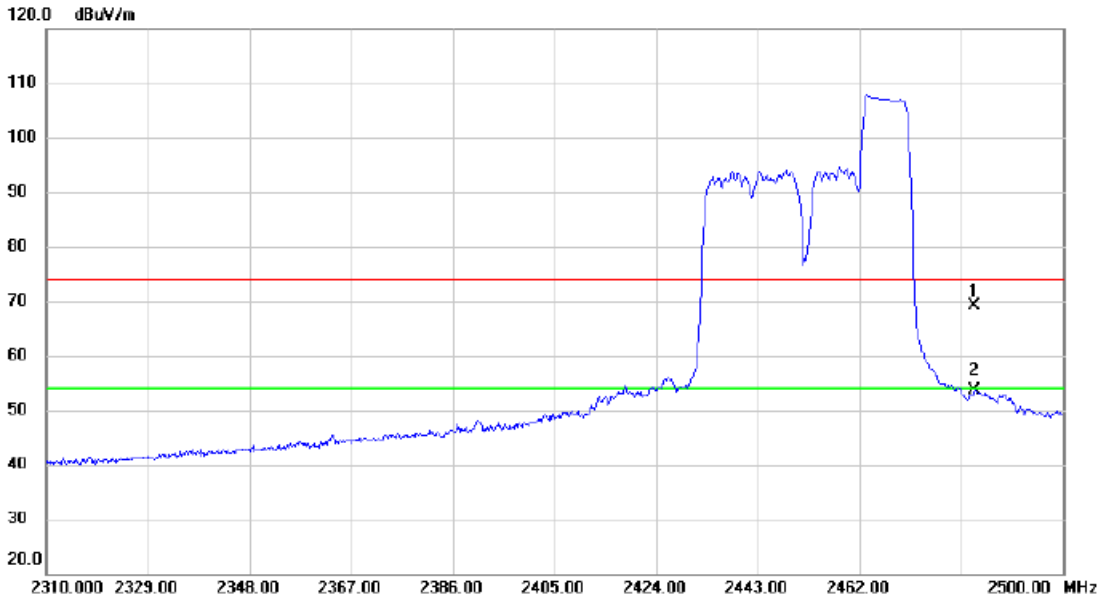

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2483.500	36.51	32.66	69.17	74.00	-4.83	peak	
2 *	2483.500	20.95	32.66	53.61	54.00	-0.39	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Vertical

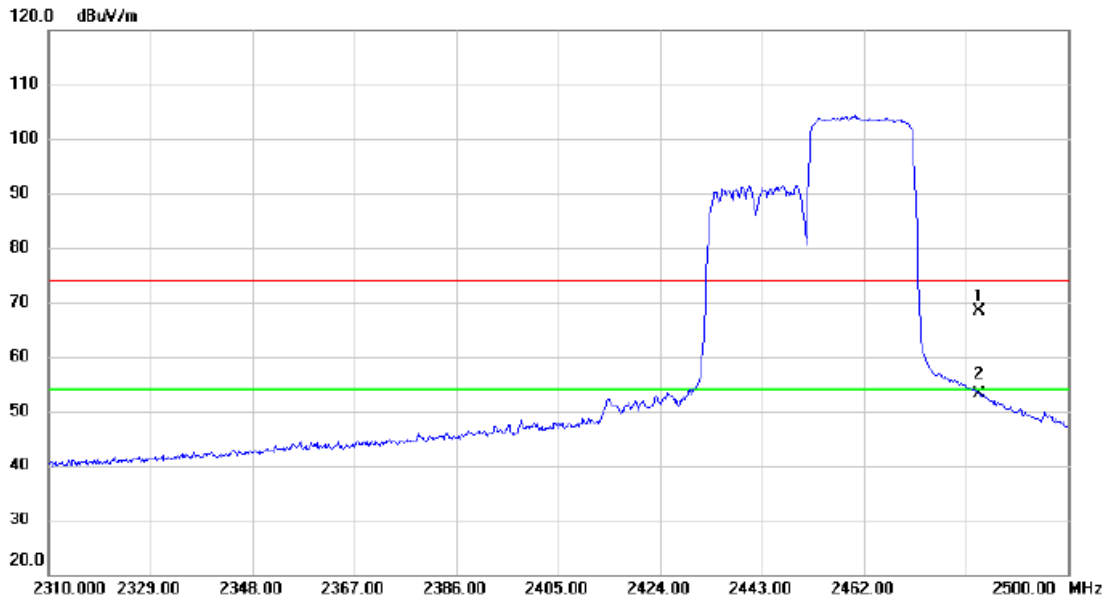


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	35.79	32.66	68.45	74.00	-5.55	peak	
2	*	2483.500	20.46	32.66	53.12	54.00	-0.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Vertical

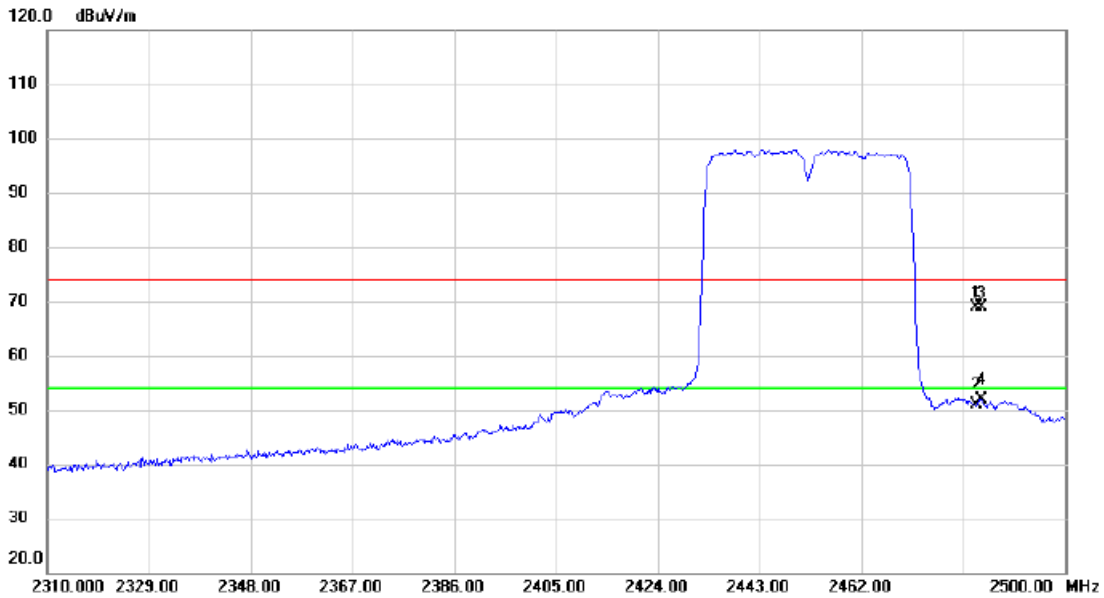


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	36.27	32.66	68.93	74.00	-5.07	peak	
2		2483.500	18.14	32.66	50.80	54.00	-3.20	AVG	
3		2484.420	36.31	32.67	68.98	74.00	-5.02	peak	
4	*	2484.420	19.22	32.67	51.89	54.00	-2.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Vertical

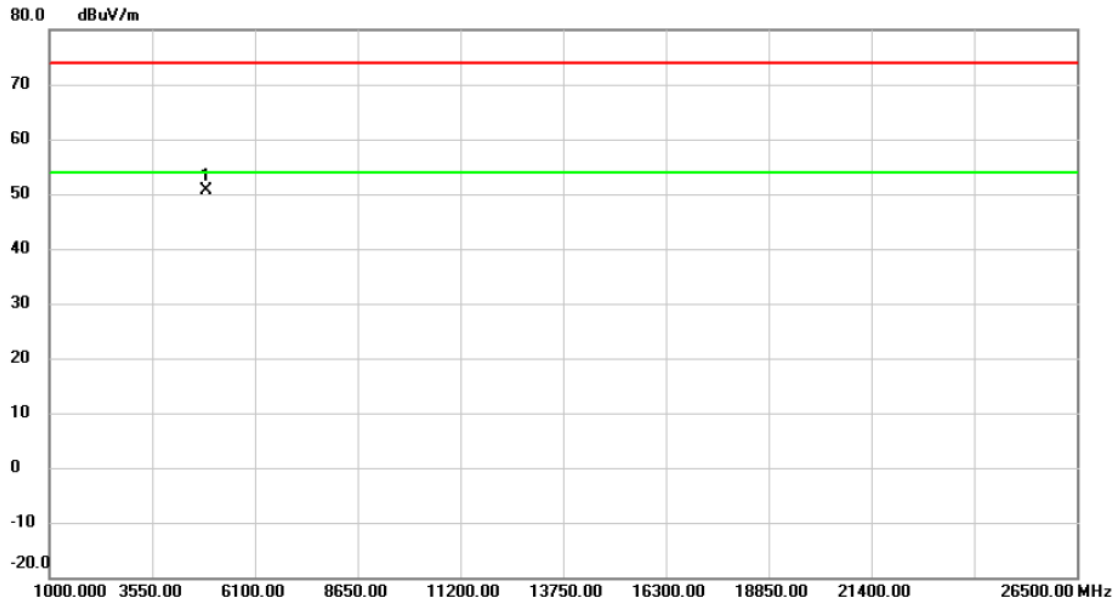


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4901.500	60.34	-9.66	50.68	74.00	-23.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/44
------------	----------------------------	------------------	-------

Horizontal

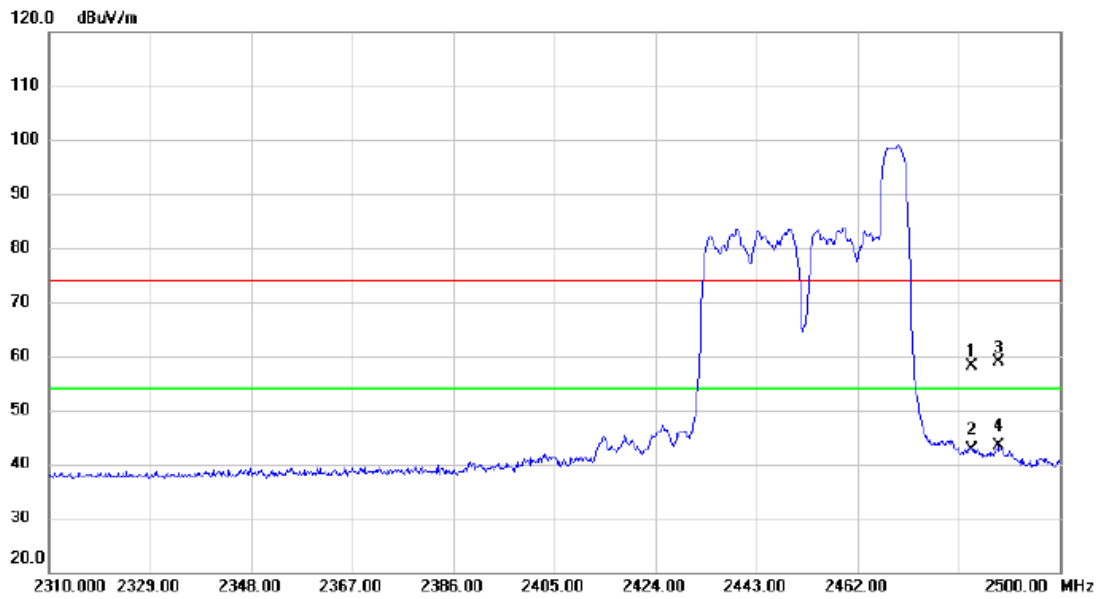


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	25.39	32.66	58.05	74.00	-15.95	peak	
2		2483.500	9.95	32.66	42.61	54.00	-11.39	AVG	
3		2488.600	26.21	32.68	58.89	74.00	-15.11	peak	
4	*	2488.600	10.82	32.68	43.50	54.00	-10.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/56
------------	----------------------------	------------------	--------

Horizontal

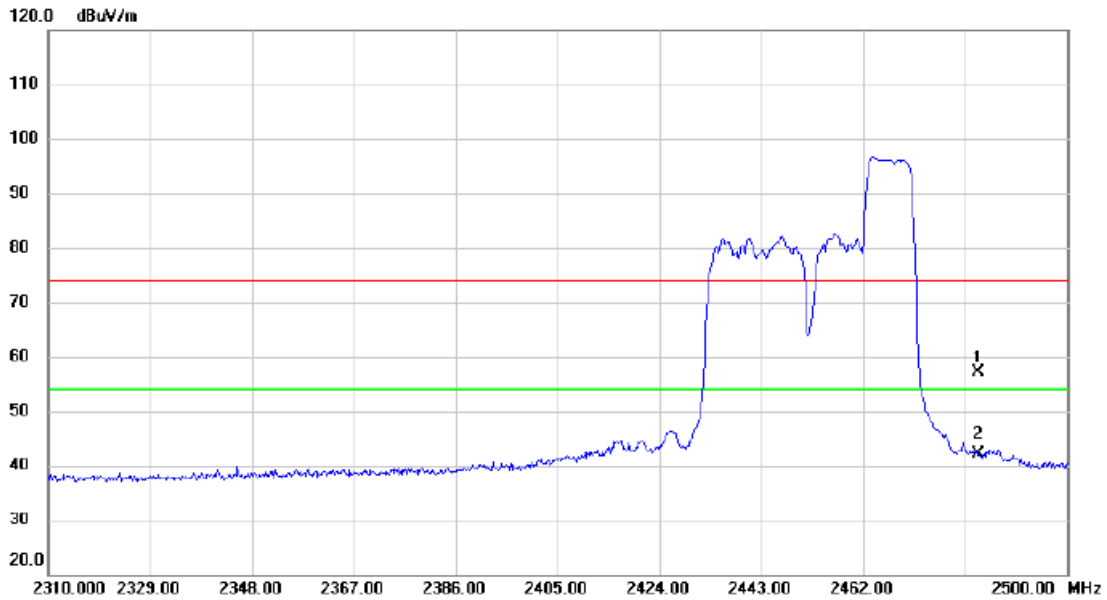

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	24.44	32.66	57.10	74.00	-16.90	peak	
2	*	2483.500	9.37	32.66	42.03	54.00	-11.97	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Horizontal

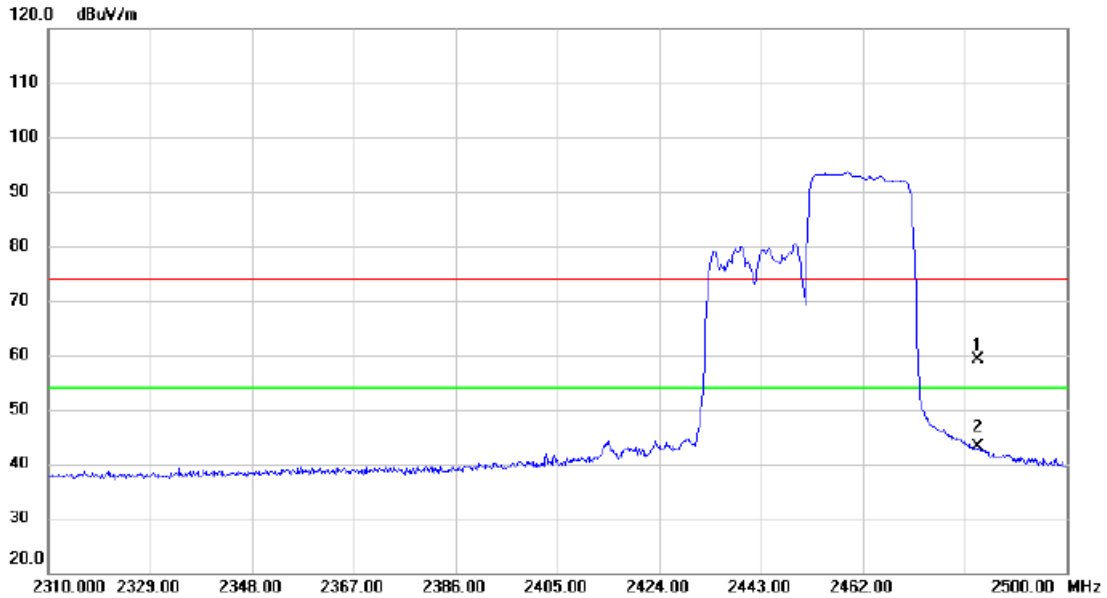


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	26.47	32.66	59.13	74.00	-14.87	peak	
2	*	2483.500	10.41	32.66	43.07	54.00	-10.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Horizontal

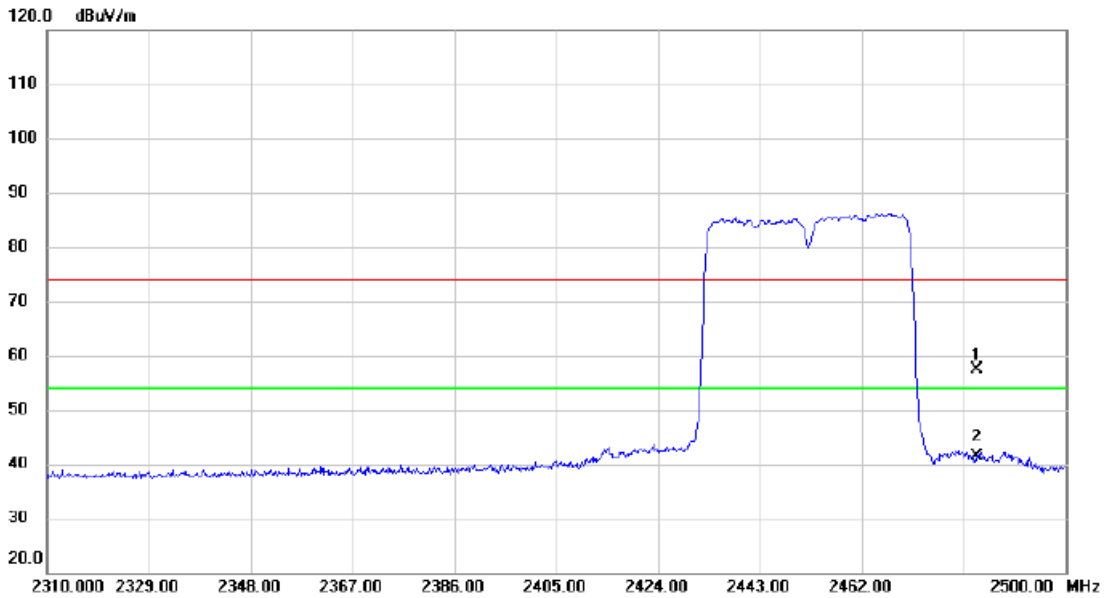

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2483.500	24.68	32.66	57.34	74.00	-16.66	peak	
2 *	2483.500	8.71	32.66	41.37	54.00	-12.63	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Horizontal

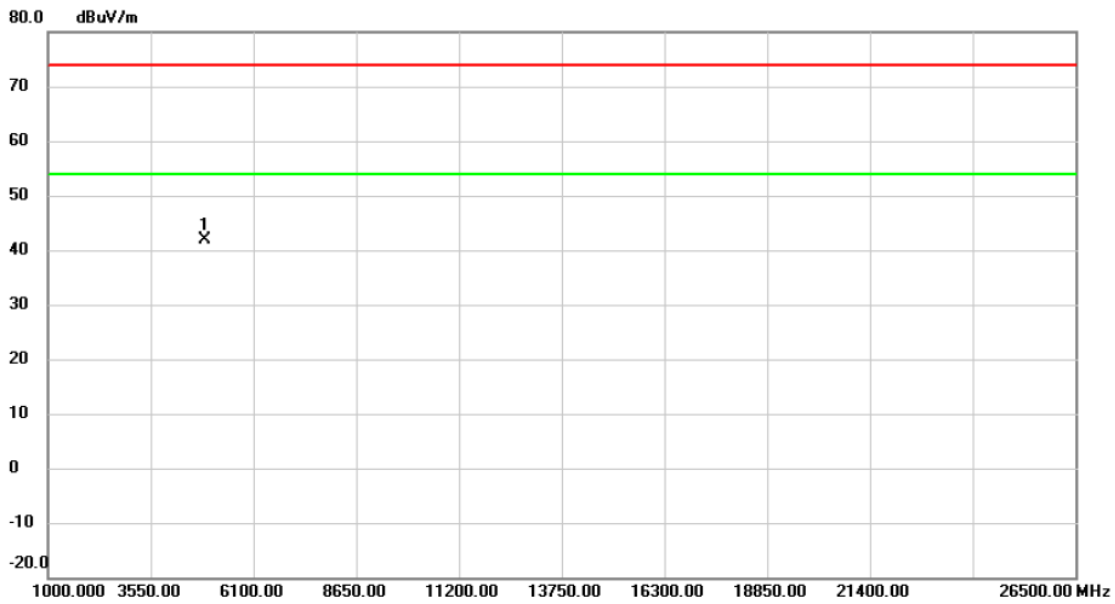

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4901.500	51.63	-9.66	41.97	74.00	-32.03	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Non-Beamforming

Test Mode	TX AX (HE20) Mode	RU configuration	52/37
-----------	-------------------	------------------	-------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.10	500	Complies
06	2437	17.08	500	Complies
11	2462	17.10	500	Complies

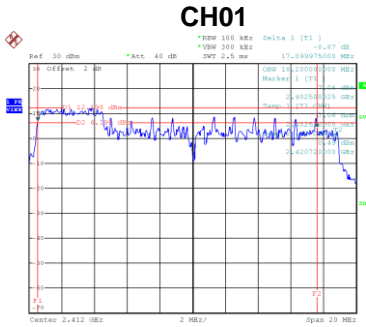

Date: 17_MAR_2020 19:11:40

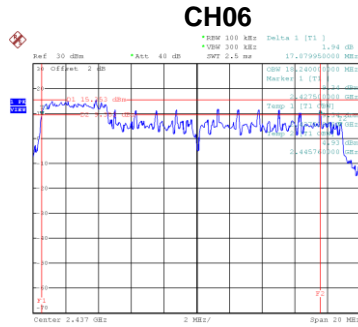


Date: 17_MAR_2020 19:11:13

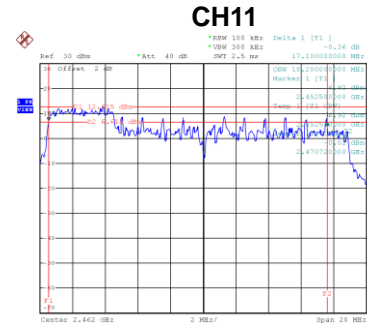


Date: 17_MAR_2020 19:11:20


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
01	2412	18.40
06	2437	18.56
11	2462	18.40

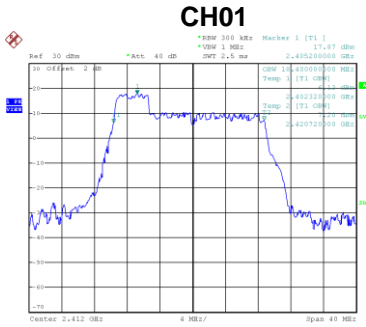

Date: 17_MAR_2020 19:11:47

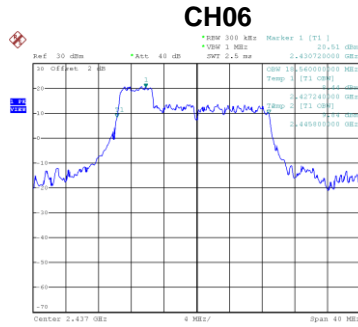


Date: 17_MAR_2020 19:11:20

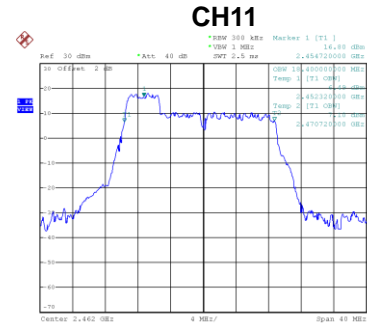


Date: 17_MAR_2020 19:11:27

Test Mode	TX AX (HE20) Mode	RU configuration	106/53
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	15.68	500	Complies
06	2437	13.69	500	Complies
11	2462	10.32	500	Complies

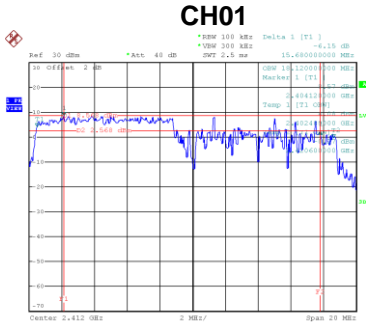

Date: 17_MAR_2020 19:25:32

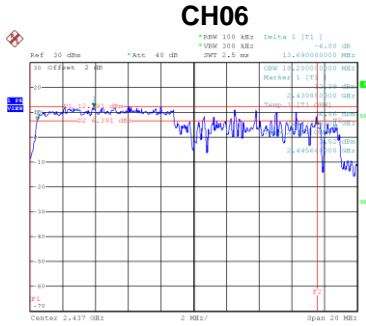


Date: 17_MAR_2020 19:26:42

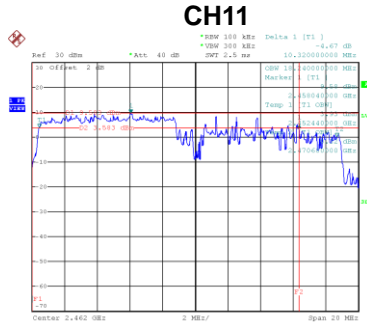


Date: 17_MAR_2020 19:27:43


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
01	2412	18.40
06	2437	18.40
11	2462	18.40

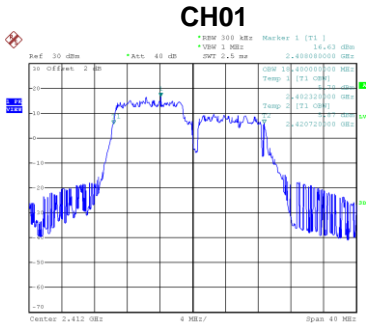

Date: 17_MAR_2020 19:25:39

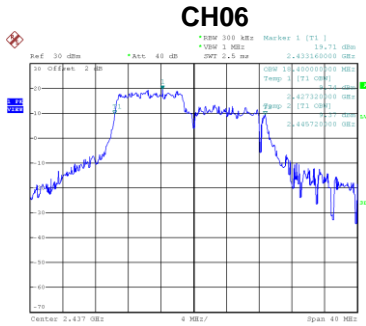


Date: 17_MAR_2020 19:26:49

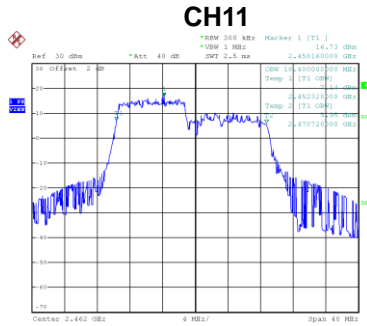


Date: 17_MAR_2020 19:27:50

Test Mode	TX AX (HE20) Mode	RU configuration	242/61
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.87	500	Complies
06	2437	17.87	500	Complies
11	2462	17.84	500	Complies

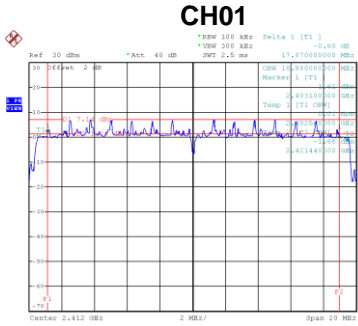

Date: 17_MAR_2020 19:32:42

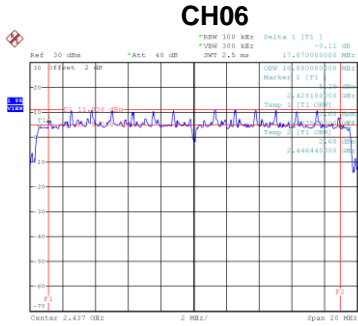


Date: 17_MAR_2020 19:35:51

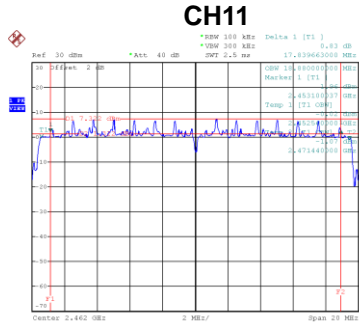


Date: 17_MAR_2020 19:36:59


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
01	2412	19.20
06	2437	19.20
11	2462	19.20

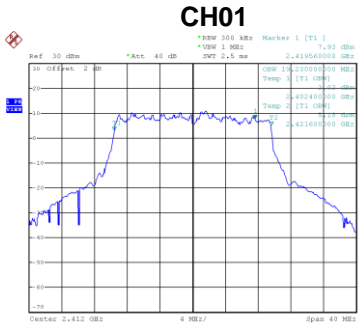

Date: 17_MAR_2020 19:32:48

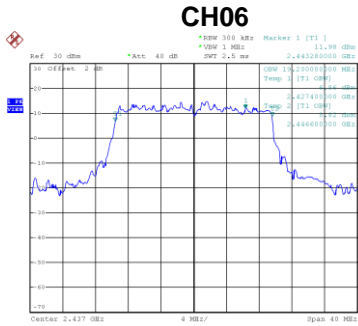


Date: 17_MAR_2020 19:35:56

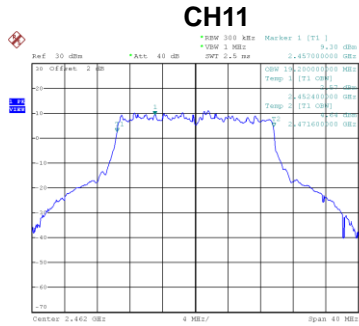


Date: 17_MAR_2020 19:37:06

Test Mode	TX AX (HE40) Mode	RU configuration	52/37
-----------	-------------------	------------------	-------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	19.00	500	Complies
06	2437	19.00	500	Complies
09	2452	19.00	500	Complies

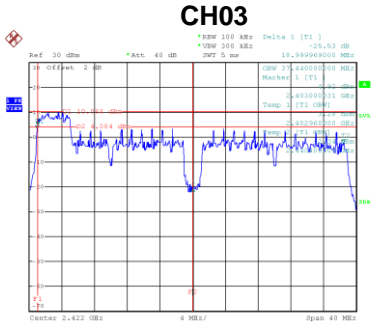

Date: 18.MAR.2020 15:132103

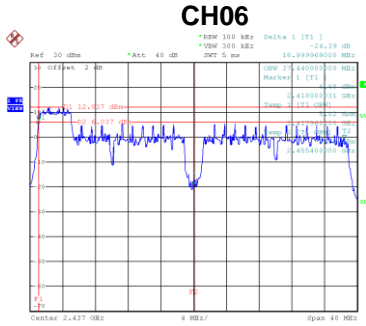


Date: 18.MAR.2020 15:133150

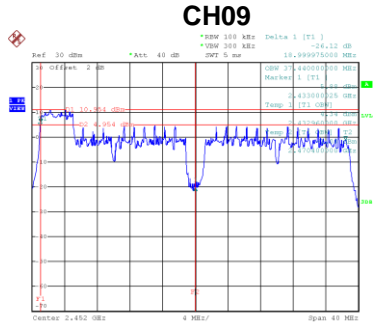


Date: 18.MAR.2020 15:136134


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	38.08
06	2437	38.08
09	2452	38.08

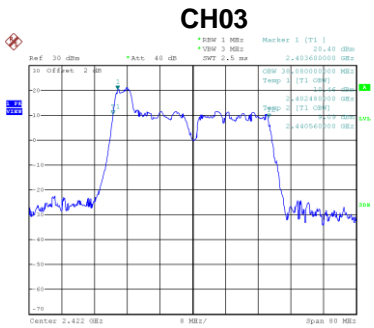

Date: 18.MAR.2020 15:132110

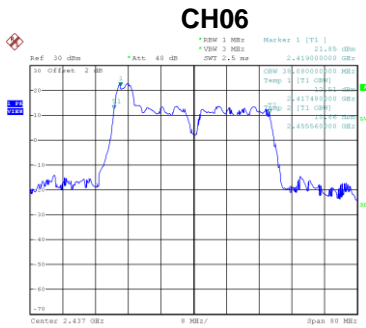


Date: 18.MAR.2020 15:133157

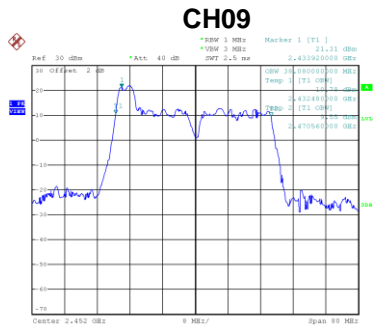


Date: 18.MAR.2020 15:136141

Test Mode	TX AX (HE40) Mode	RU configuration	106/53
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.68	500	Complies
06	2437	36.72	500	Complies
09	2452	36.72	500	Complies

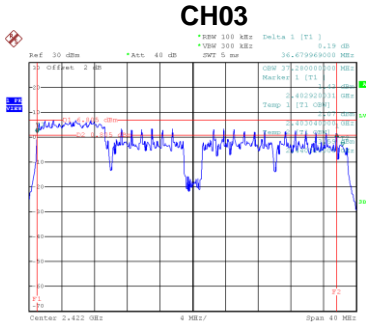

Date: 18.MAR.2020 16:01:33

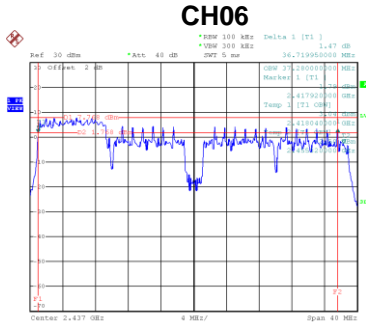


Date: 18.MAR.2020 16:02:11

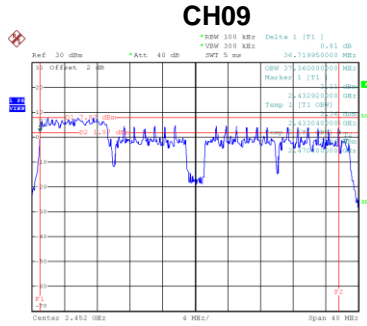


Date: 18.MAR.2020 16:03:23


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	37.92
06	2437	37.92
09	2452	38.08

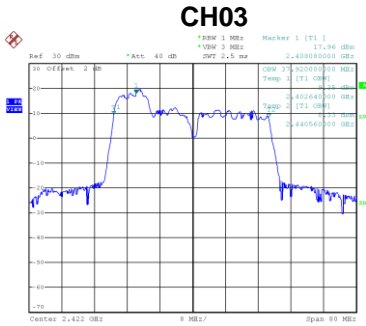

Date: 18.MAR.2020 16:01:41

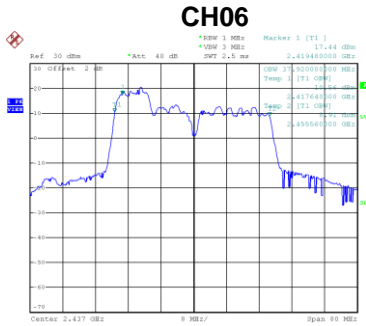




Date: 18.MAR.2020 16:02:17

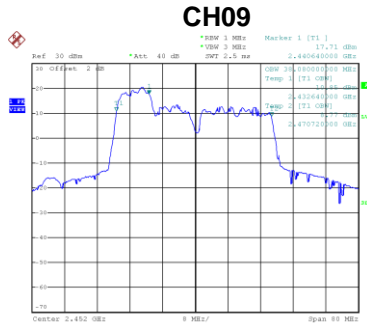

Date: 18.MAR.2020 16:03:29

Test Mode	TX AX (HE40) Mode	RU configuration	242/61
-----------	-------------------	------------------	--------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.72	500	Complies
06	2437	36.79	500	Complies
09	2452	36.76	500	Complies

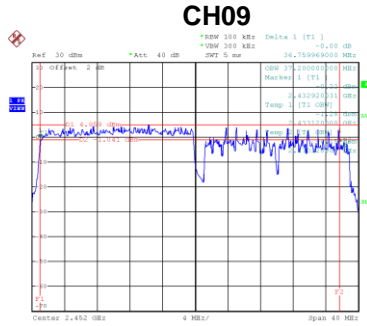
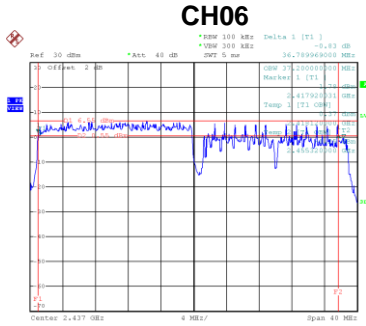
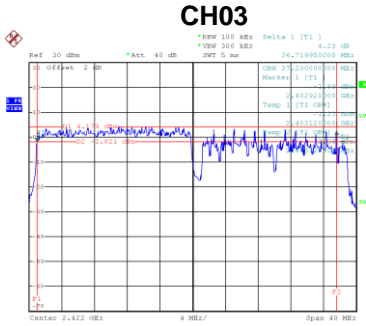


Date: 18.MAR.2020 16:11:58

Date: 18.MAR.2020 16:13:07

Date: 18.MAR.2020 16:14:54

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	37.28
06	2437	37.44
09	2452	37.28

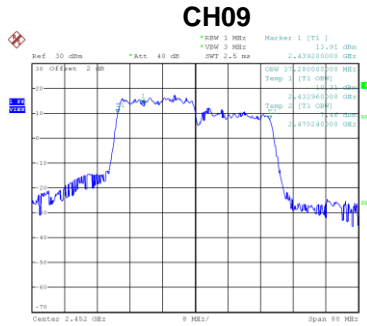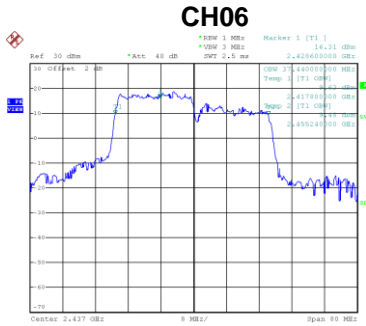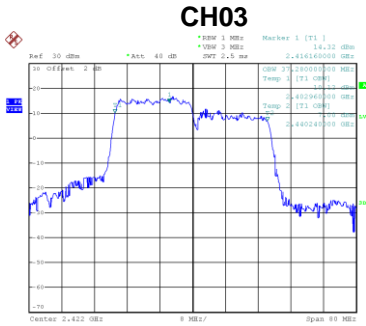


Date: 18.MAR.2020 16:12:05

Date: 18.MAR.2020 16:13:13


Date: 18.MAR.2020 16:15:01

Test Mode	TX AX (HE40) Mode	RU configuration	484/65
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.79	500	Complies
06	2437	36.80	500	Complies
09	2452	36.88	500	Complies

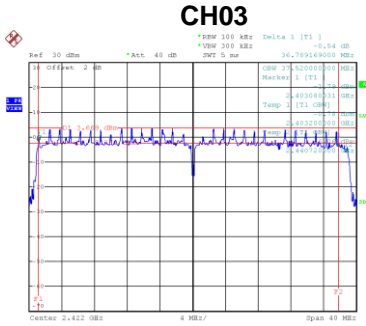

Date: 18.MAR.2020 16:12:19

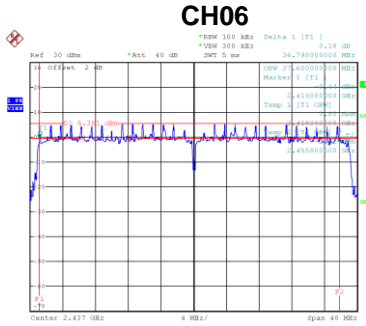


Date: 18.MAR.2020 16:12:14

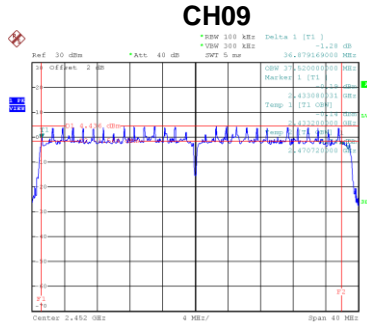


Date: 18.MAR.2020 16:12:16


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	38.08
06	2437	38.40
09	2452	38.24

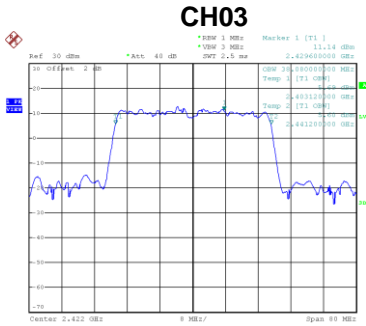

Date: 18.MAR.2020 16:12:126

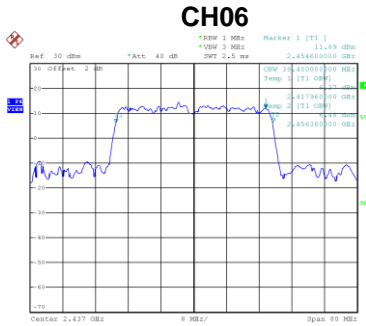

Date: 18.MAR.2020 16:12:6101

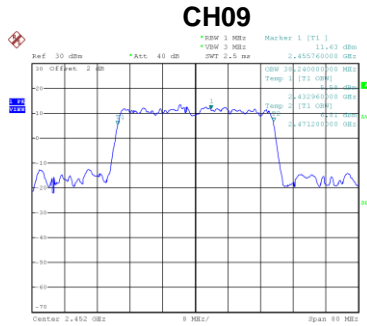

Date: 18.MAR.2020 16:12:6153