

DFS Test Report

Applicant : D-Link Corporation

Product Name : AX6000 Dual-Band Wi-Fi 6 Router (Single pack)
AX6000 Dual-Band Wi-Fi 6 Mesh System (Multi-pack)

Trade Name : D-Link

Model Number : M60

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Dec. 27, 2022

Test Period : May 31 ~ Jul. 25, 2023

Issued Date : Sep. 18, 2023

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm Registration Number: 226252 (Bade test site)
Test Firm Registration Number: 191812 (Wugu test site)

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issued Date	Revisions	Revised By
00	Aug. 23, 2023	Initial Issue	Nicole Chu
01	Sep. 18, 2023	Delete Traffic (P.20, P.24, P.28)	Nicole Chu

Verification of Compliance

Applicant : D-Link Corporation

Product Name : AX6000 Dual-Band Wi-Fi 6 Router (Single pack)
AX6000 Dual-Band Wi-Fi 6 Mesh System (Multi-pack)

Trade Name : D-Link

Model Number : M60

FCC ID : KA2M60A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	5
2	EUT Description.....	6
3	Test Methodology.....	8
4	Dynamic Frequency Selection	8
4.1.	Limits	8
4.2.	Test and Measurement System	12
4.3.	Test Instruments	15
5	Test Methodology.....	15
5.1.	Mode of Operation.....	15
5.2.	EUT Test Step	16
5.3.	Test Site Environment.....	16
6	Test Results	17
6.1.	Radar Waveforms and Traffic	17
6.2.	Channel Loading	33
6.3.	Channel Availability Check Time.....	37
6.4.	Channel Move Time and Channel Closing Transmission Time.....	40
6.5.	Non-Occupancy Period	43
6.6.	U-NII Detection Bandwidth	44
6.7.	Statistical Performance check	47

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Manufacturer	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Product Name	AX6000 Dual-Band Wi-Fi 6 Router (Single pack) AX6000 Dual-Band Wi-Fi 6 Mesh System (Multi-pack)				
Trade Name	D-Link				
Model Number	M60				
FCC ID	KA2M60A1				
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels	
	802.11a	U-NII Band 2-A	5260 – 5320	4	
		U-NII Band 2-C	5500 – 5700	11	
	802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 2-A	5260 – 5320	4	
		U-NII Band 2-C	5500 – 5700	11	
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 2-A	5270 – 5310	2	
		U-NII Band 2-C	5510 – 5670	5	
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 2-A	5290	1	
		U-NII Band 2-C	5530 – 5610	2	
	802.11ac VHT160 / 802.11ax HE160	U-NII Band 2-A	5250	1	
U-NII Band 2-C		5570	1		
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	ANT-0 (5G1 WLAN Antenna)	5G1	PCB Antenna	U-NII Band 2-A	3.38
				U-NII Band 2-C	3.34
	ANT-1 (5G2 WLAN Antenna)	5G2	PCB Antenna	U-NII Band 2-A	3.40
				U-NII Band 2-C	3.42
	ANT-2 (5G3 WLAN Antenna)	5G3	PCB Antenna	U-NII Band 2-A	3.33
U-NII Band 2-C				3.33	
ANT-3 (5G4 WLAN Antenna)	5G4	PCB Antenna	U-NII Band 2-A	3.24	
			U-NII Band 2-C	3.44	
Antenna Delivery	4TX				
Operate Temp. Range	0 ~ 40 °C				
EUT Power Rating	12 V, 2.5 A				

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600 ~ 5650 MHz)	<input checked="" type="checkbox"/> With 5600 ~ 5650 MHz	<input type="checkbox"/> Without 5600 ~ 5650 MHz
Beamforming Function	<input checked="" type="checkbox"/> With Beamforming	<input type="checkbox"/> Without Beamforming
Equipment Type	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input checked="" type="checkbox"/> Client devices	
Operating mode	<input checked="" type="checkbox"/> Master	
	<input type="checkbox"/> Client with radar detection	
	<input checked="" type="checkbox"/> Client without radar detection	
	<input type="checkbox"/> Ad-Hoc	
	<input type="checkbox"/> Bridge	
	<input type="checkbox"/> MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
 Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues	
Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\{ \begin{array}{l} \left(\frac{1}{360} \right) \cdot \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A		
Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066


Table 6 – Long Pulse Radar Test Signal							
Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30

Table 7 – Frequency Hopping Radar Test Signal							
Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

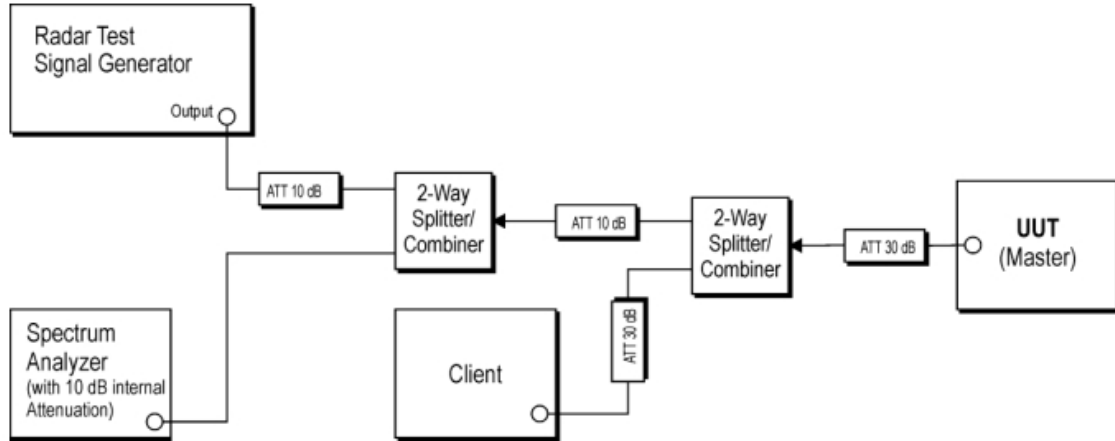


Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	ID
1 Notebook	Lenovo Information Products (ShenZhen) Co., Ltd.	TP00120F2	FCC : RR-LVK- TP00120F

4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

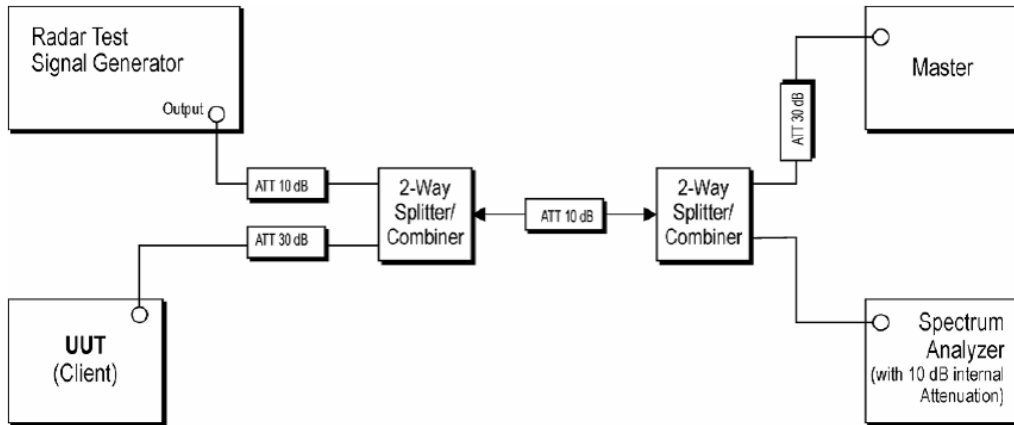

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1	AX6000 Dual-Band Wi-Fi 6 Router (Single pack) AX6000 Dual-Band Wi-Fi 6 Mesh System (Multi-pack)	D-Link	M60	FCC : KA2M60A1

4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.5. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

4.3. Test Instruments

For Conducted

Test Period: May 31 ~ Jul. 25, 2023

Testing Engineer: An Wu

Test Site		RF01-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2022	1 year
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMM100A	101740	Feb. 10, 2023	1 year

Note: N.C.R. = No Calibration Request.

5 Test Methodology

5.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80
802.11ax HE160

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5500 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5510 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5530 MHz.

802.11ax HE160:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5250 MHz.

5.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.


5.3. Test Site Environment


Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


(*)The measurement ambient temperature is within this range.


6 Test Results


6.1. Radar Waveforms and Traffic

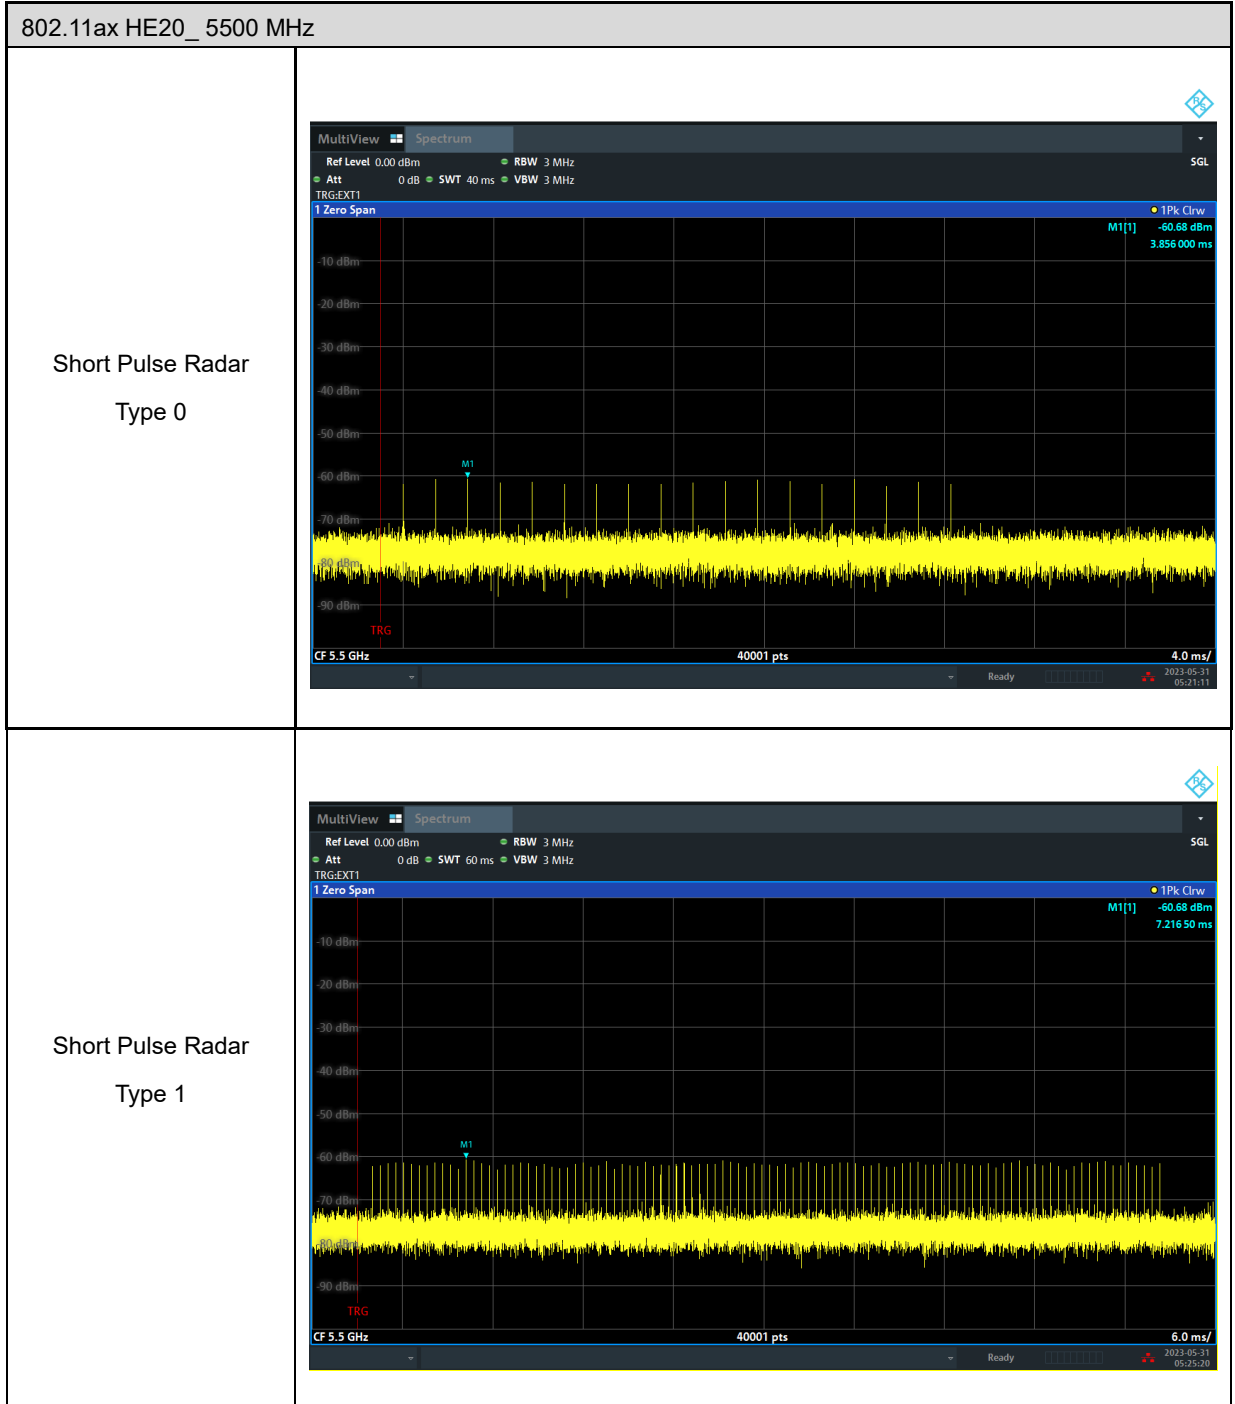


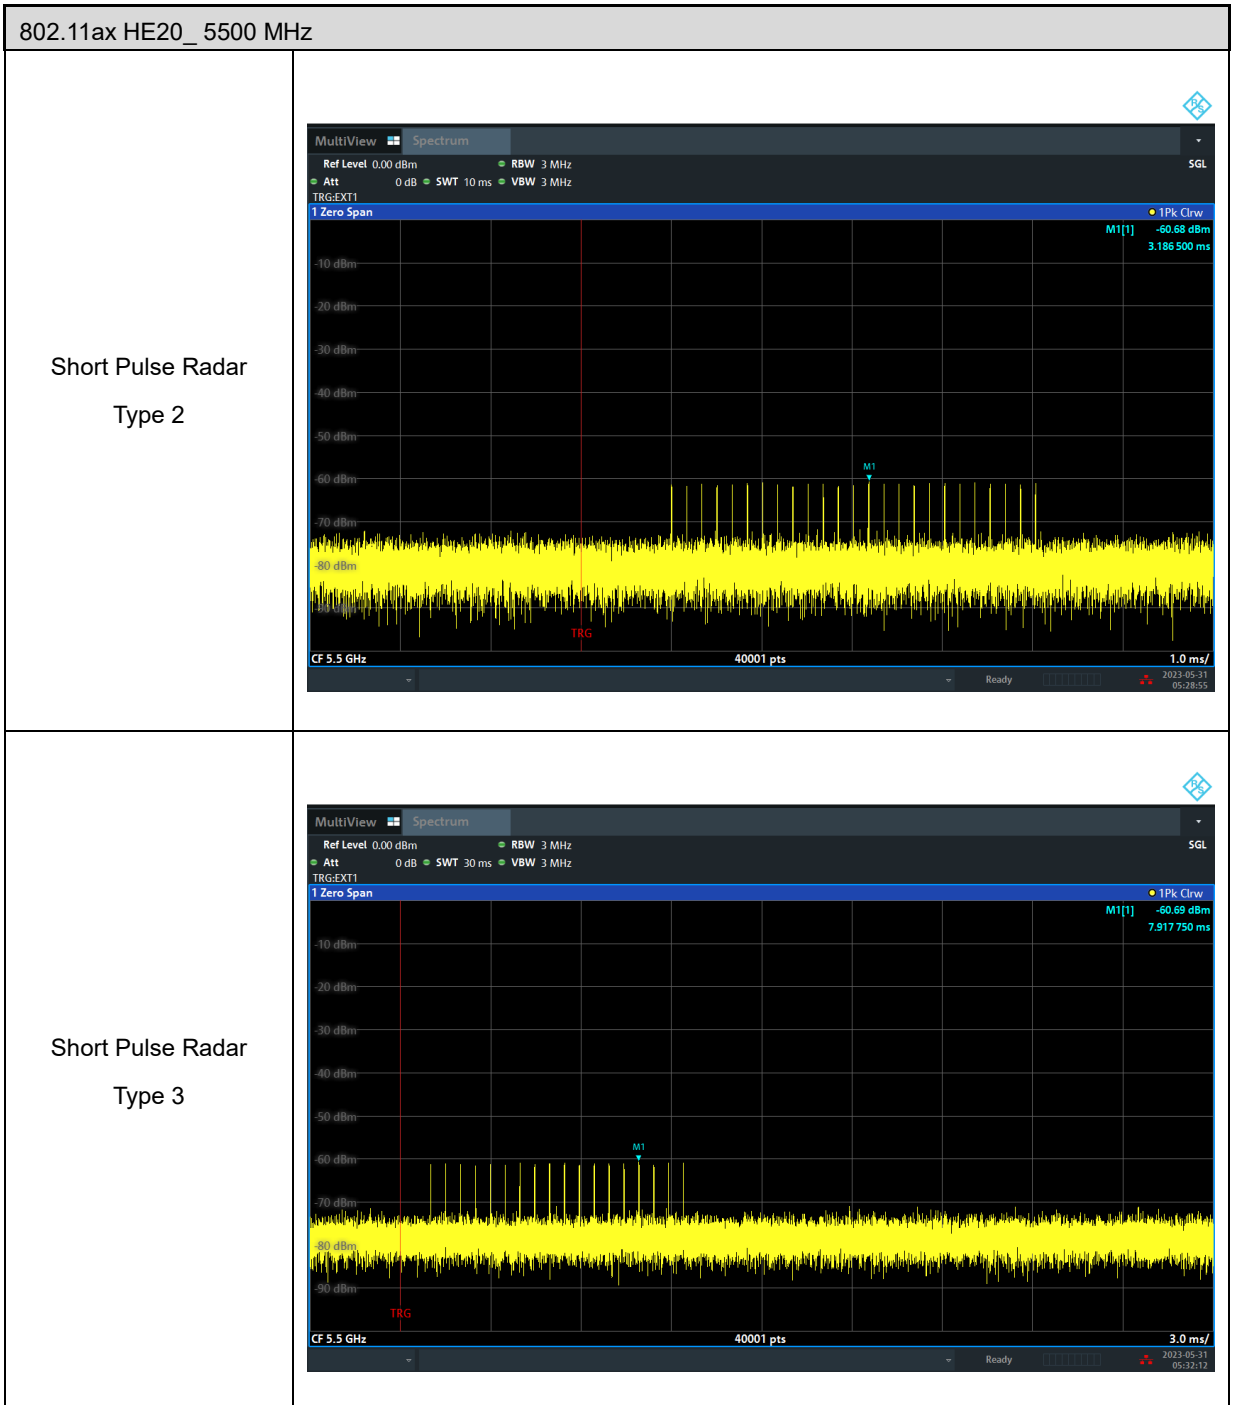


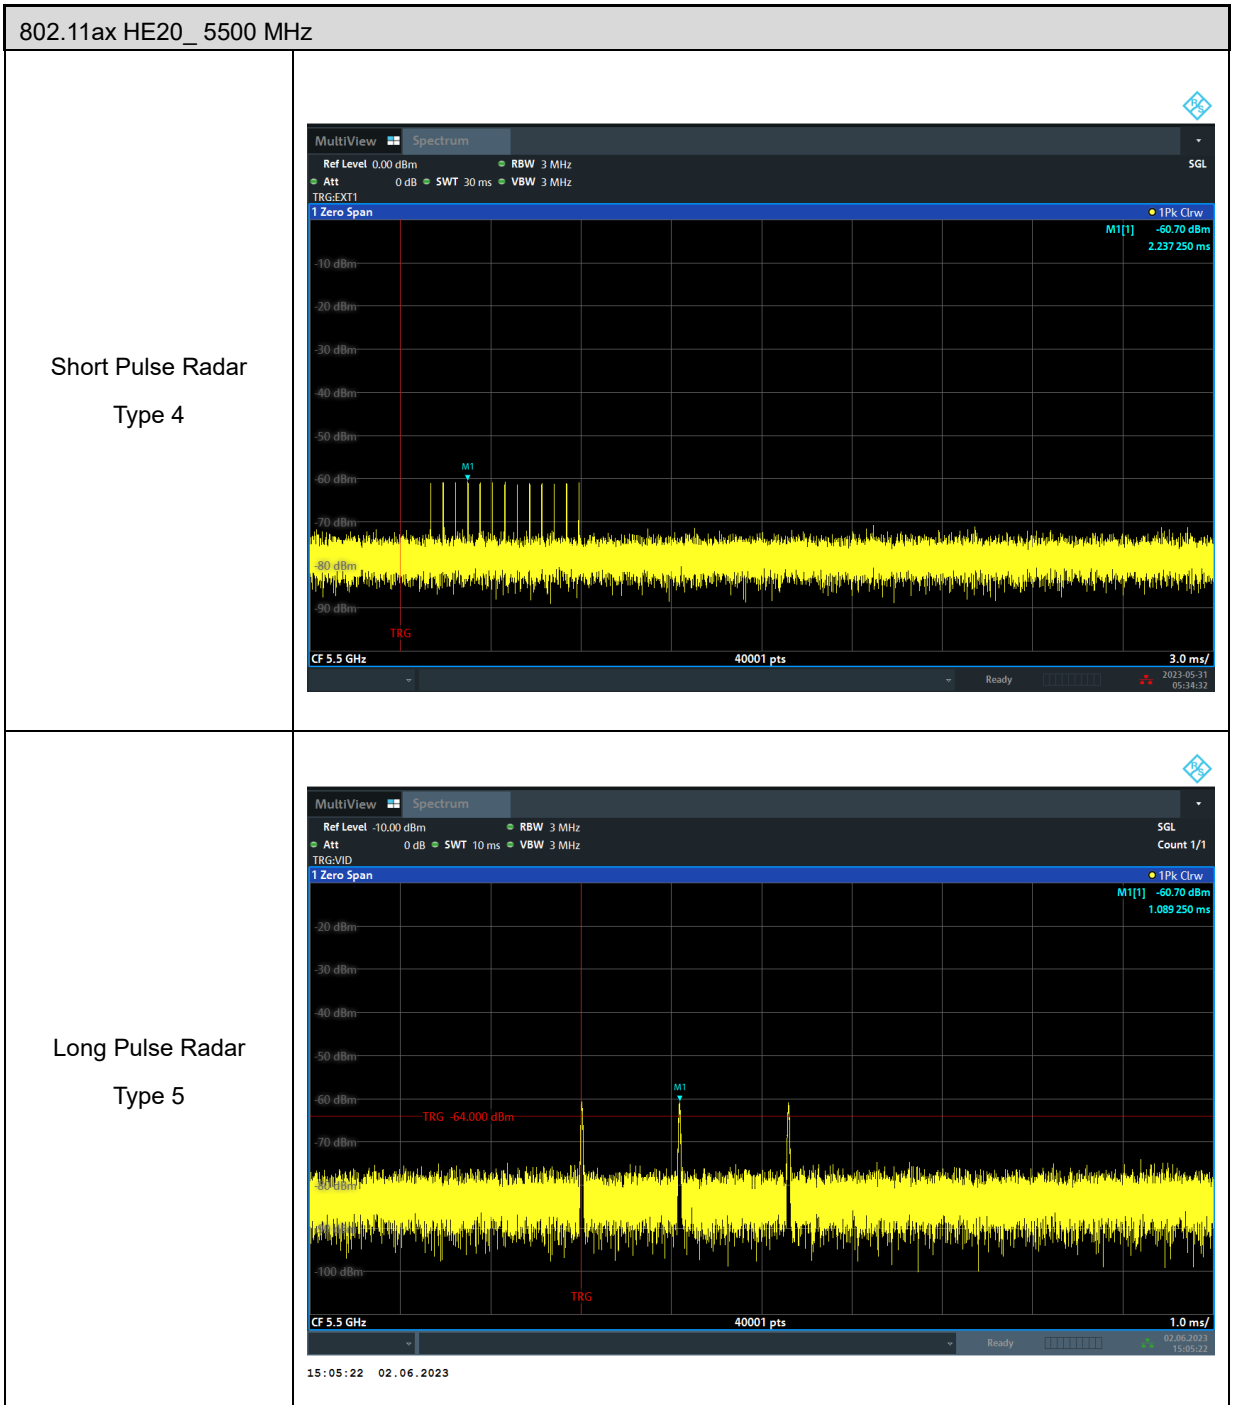


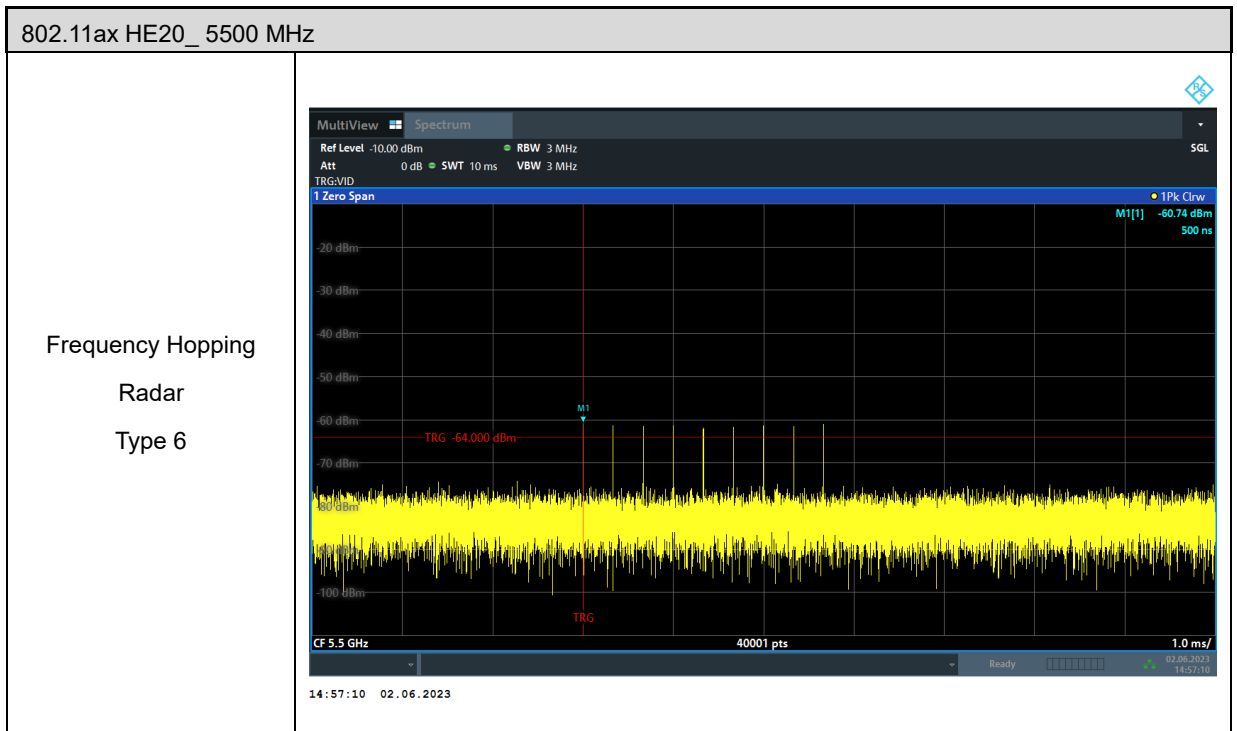


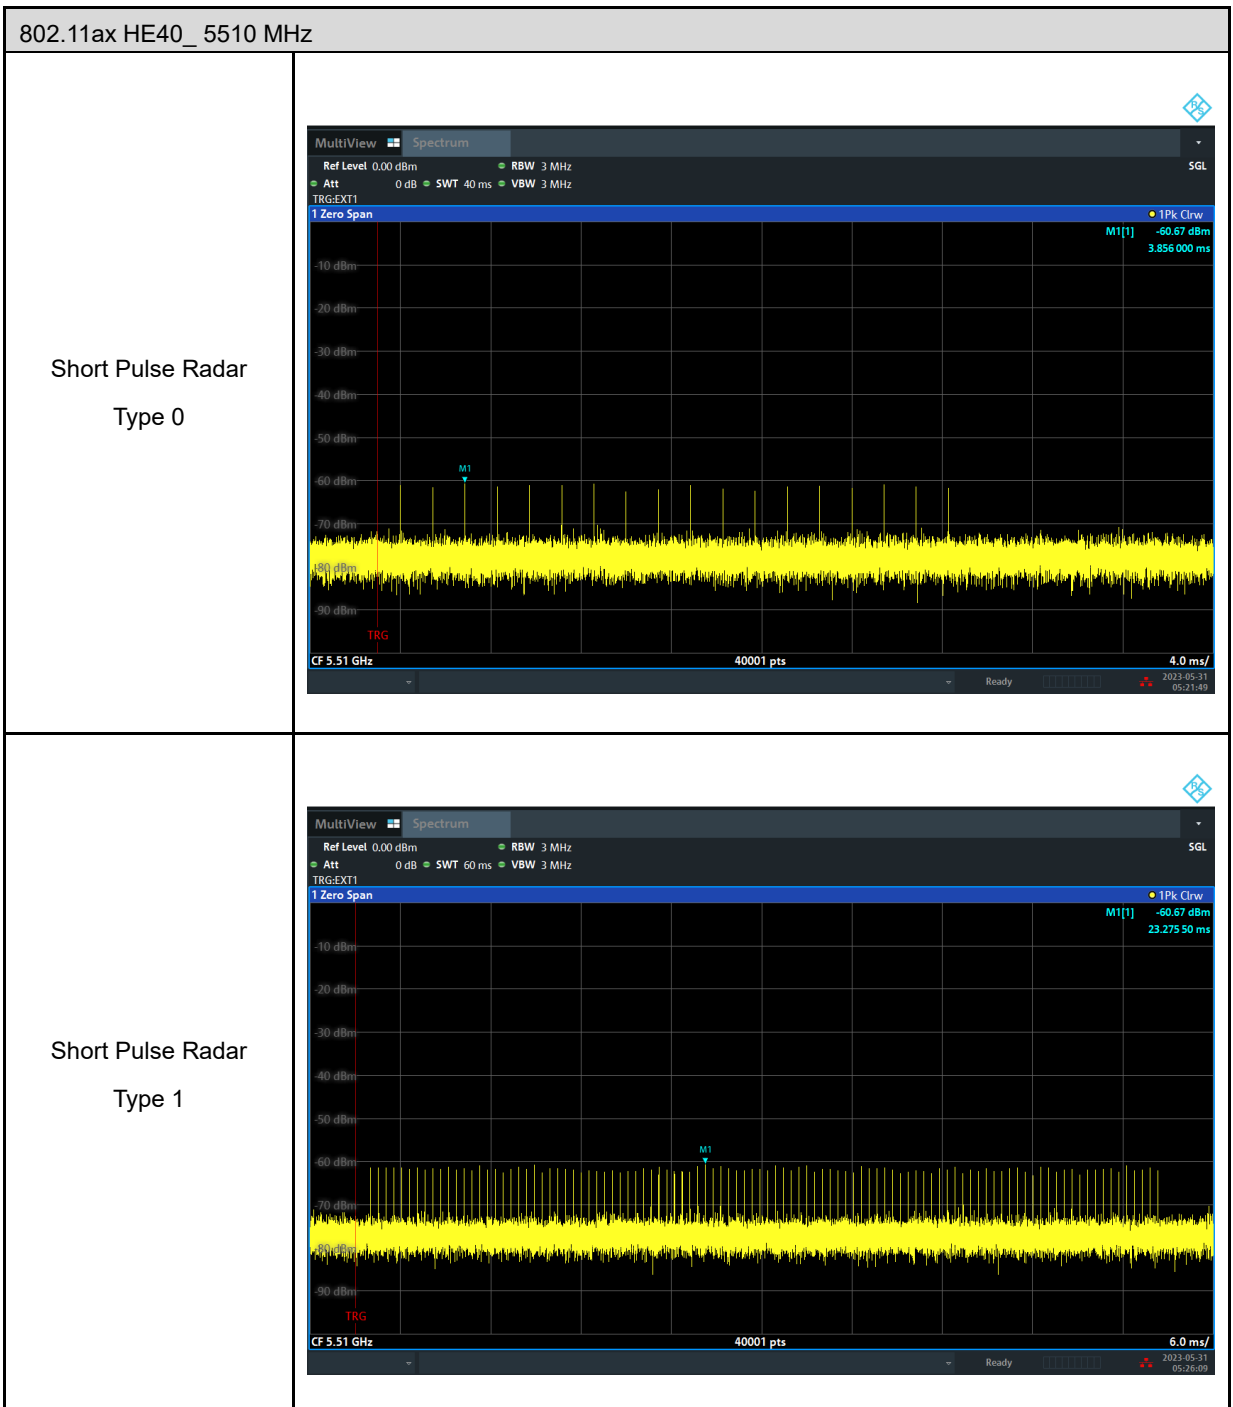


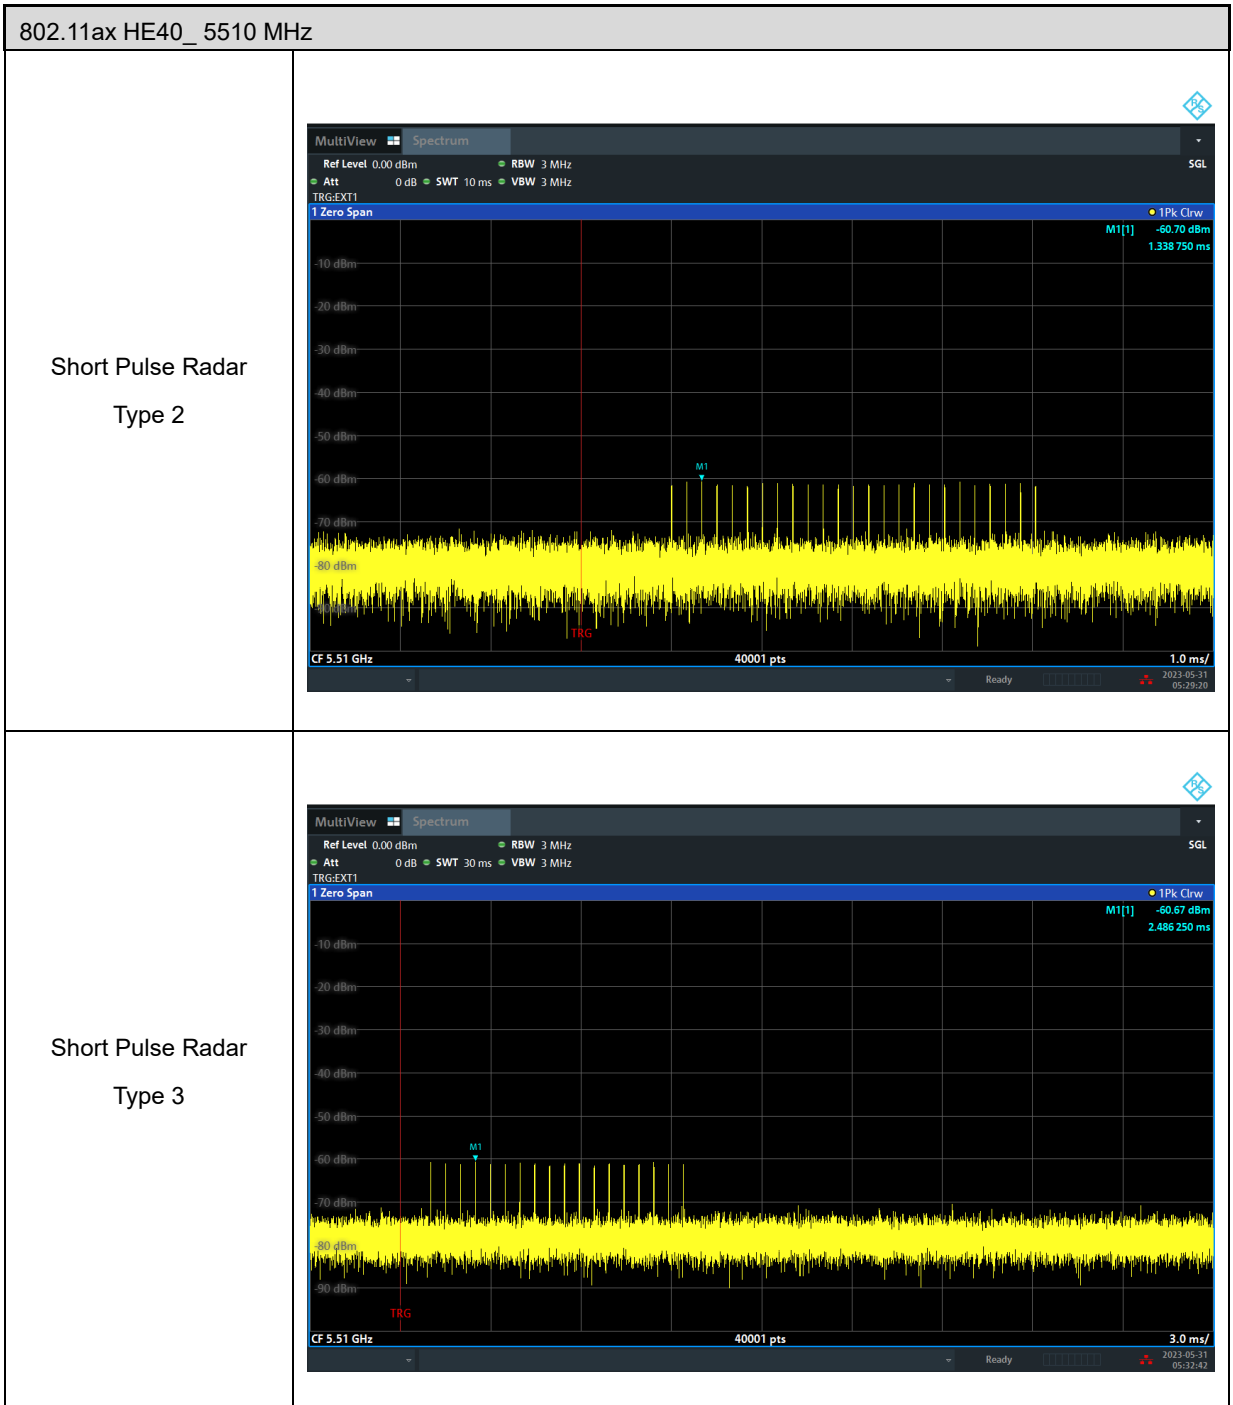


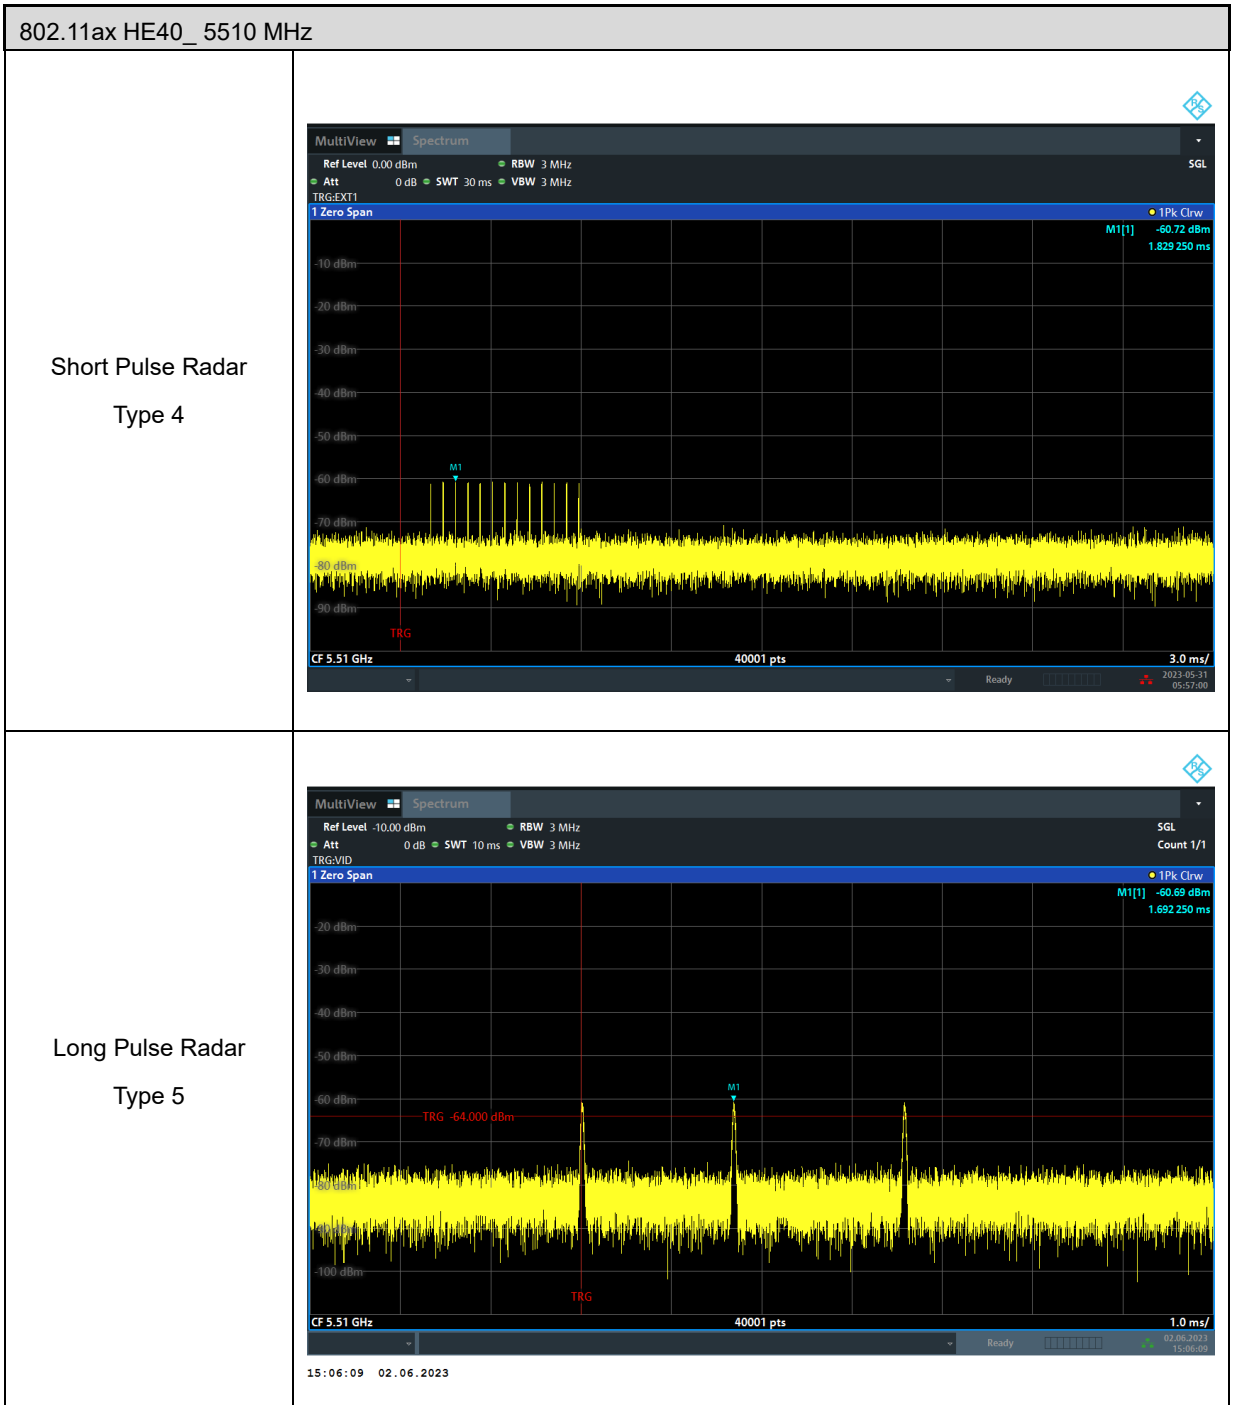

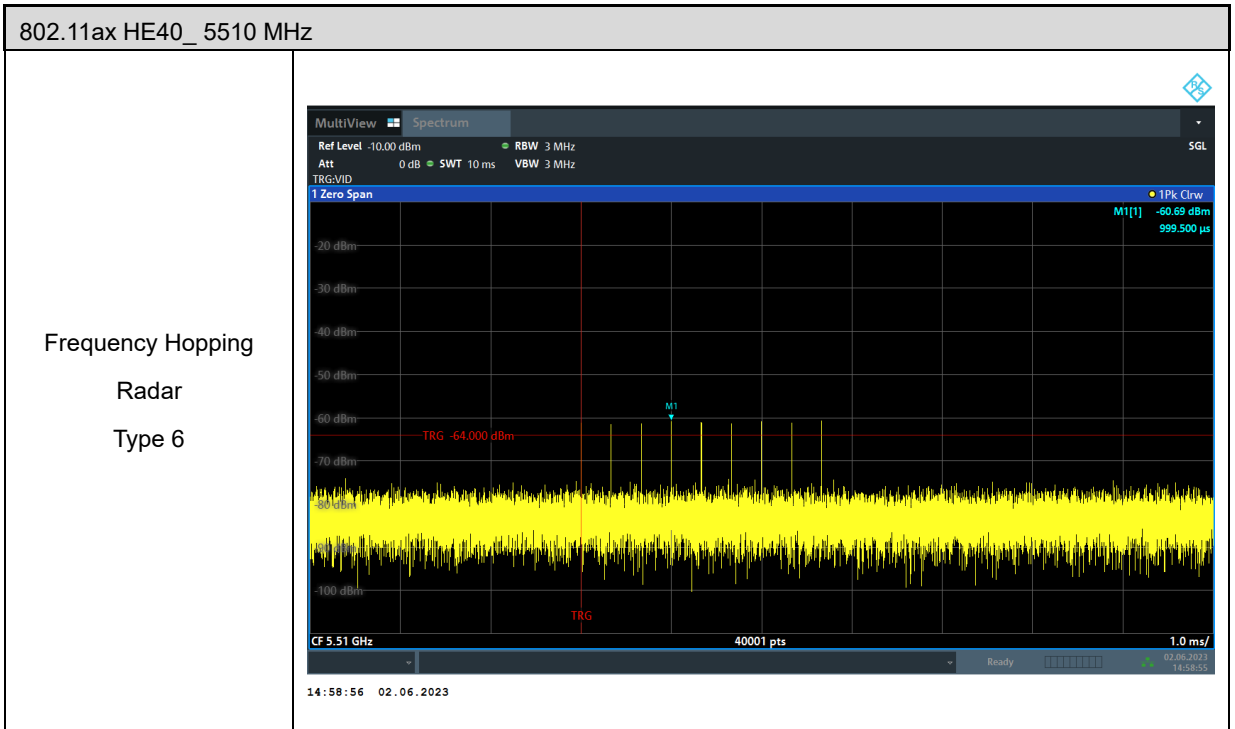


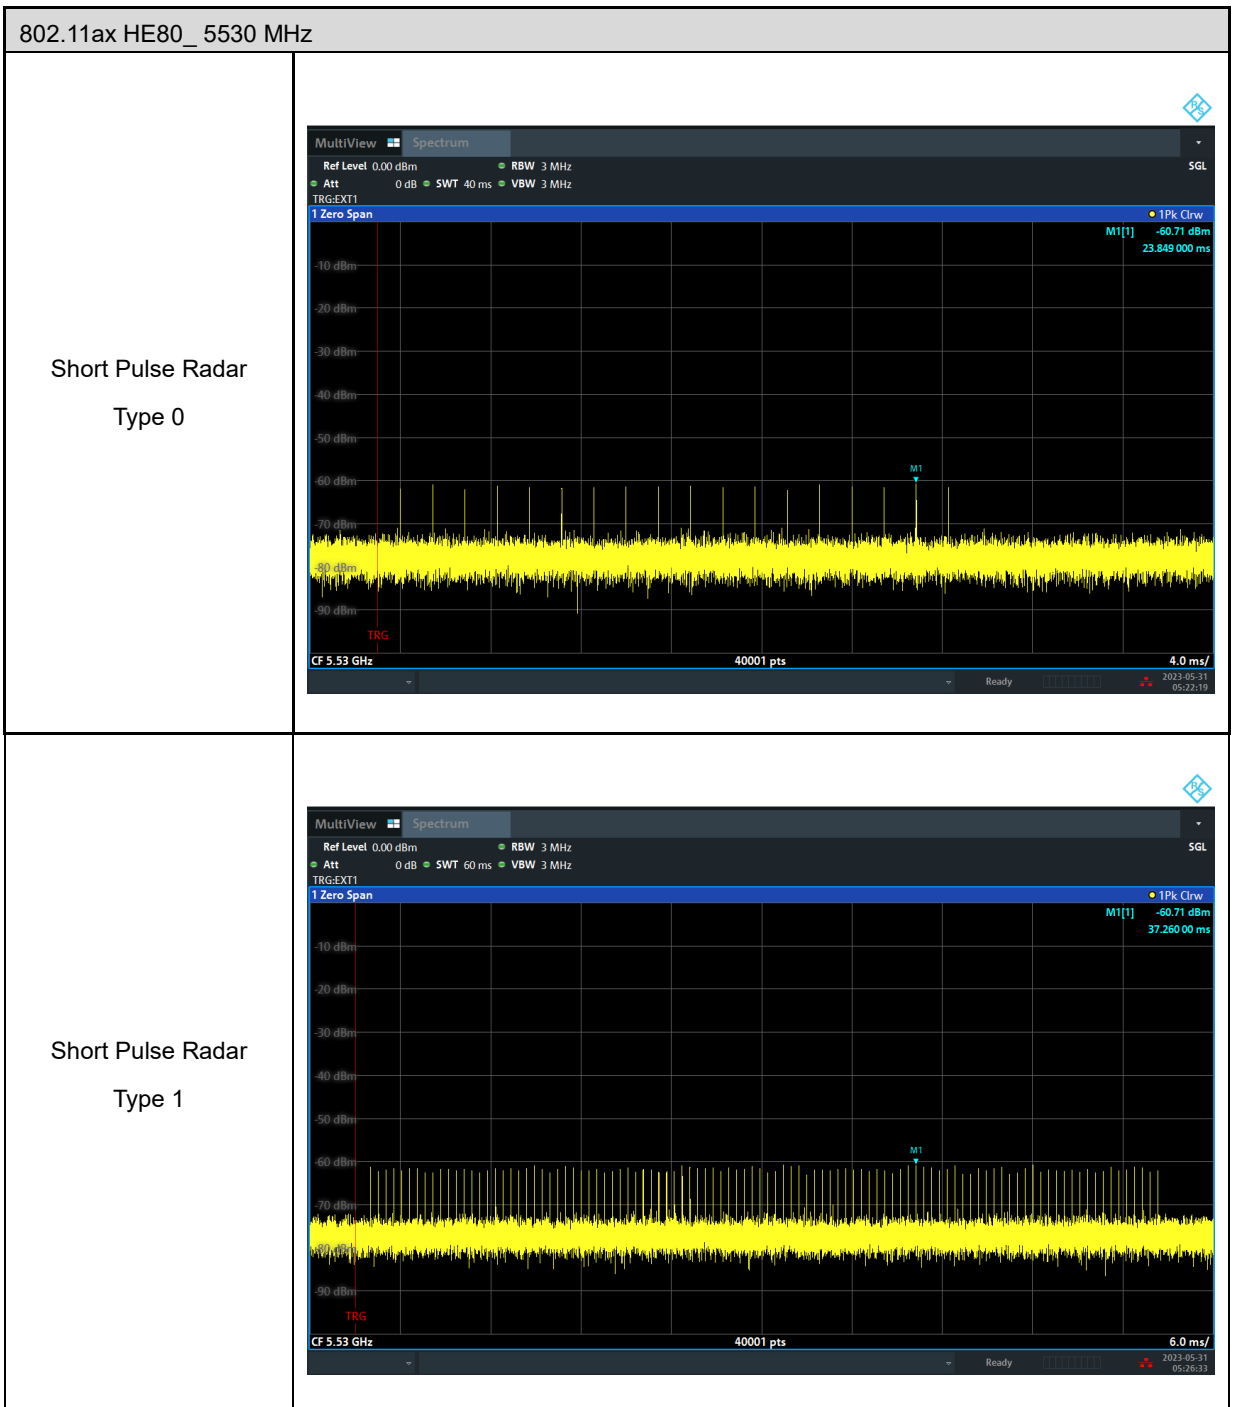


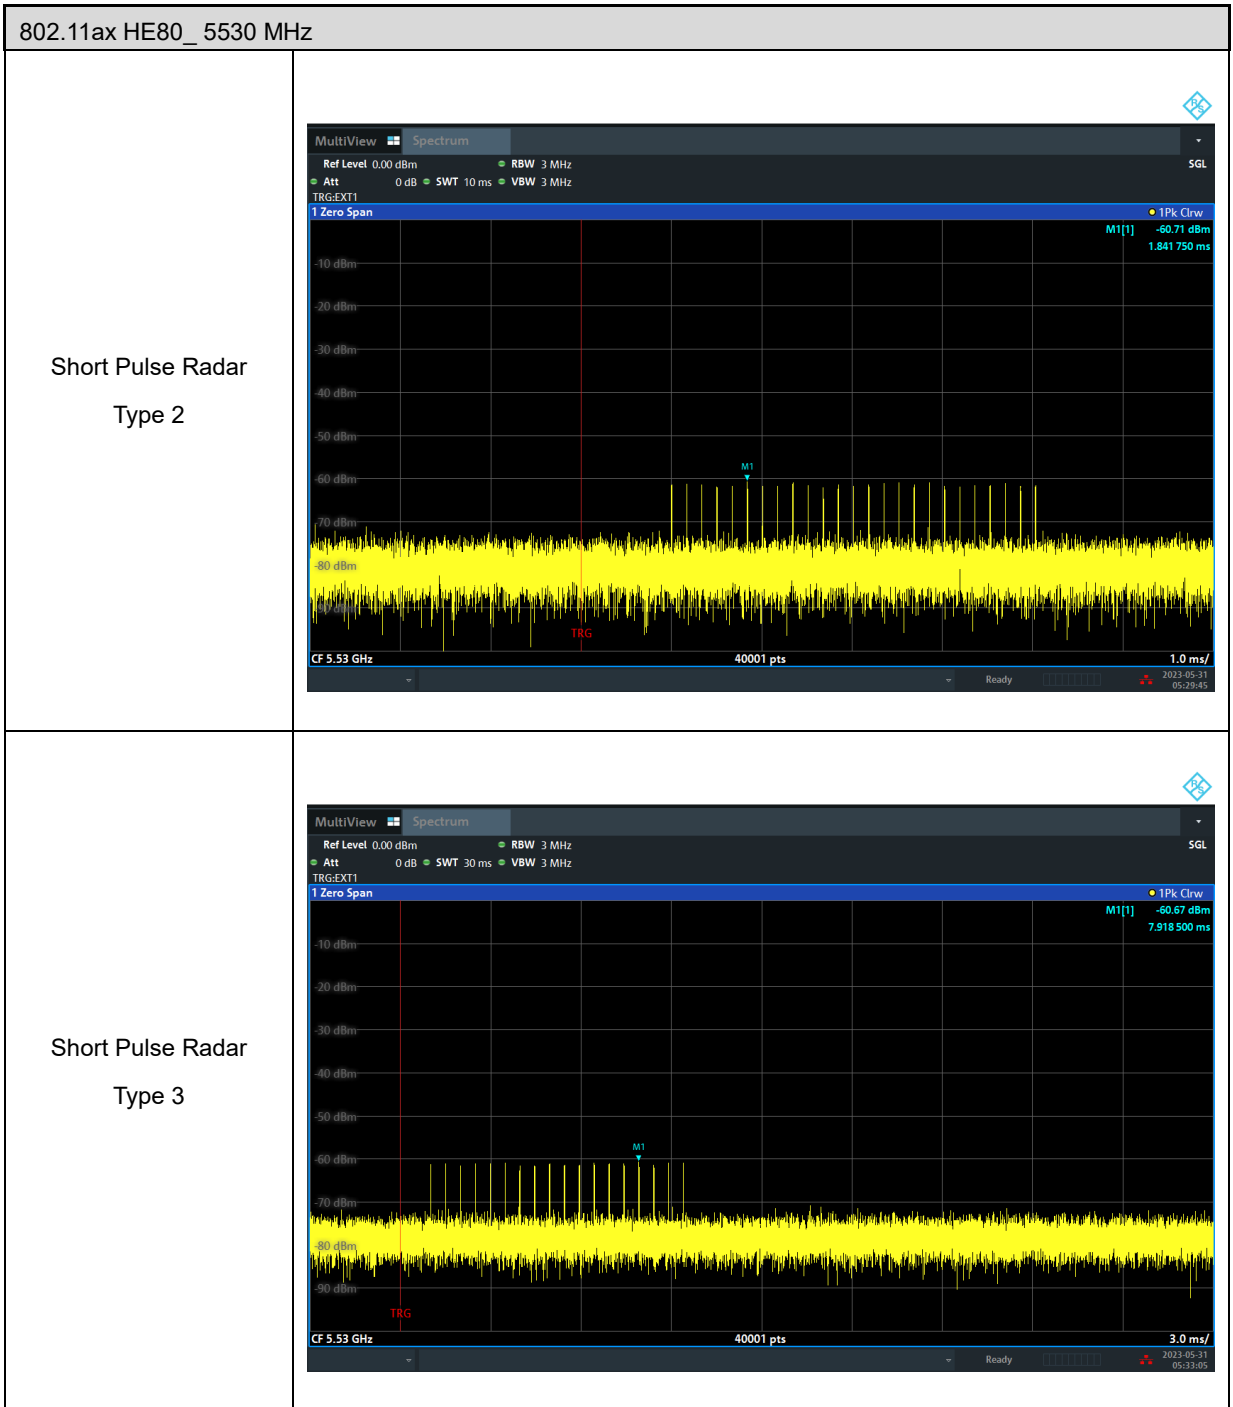



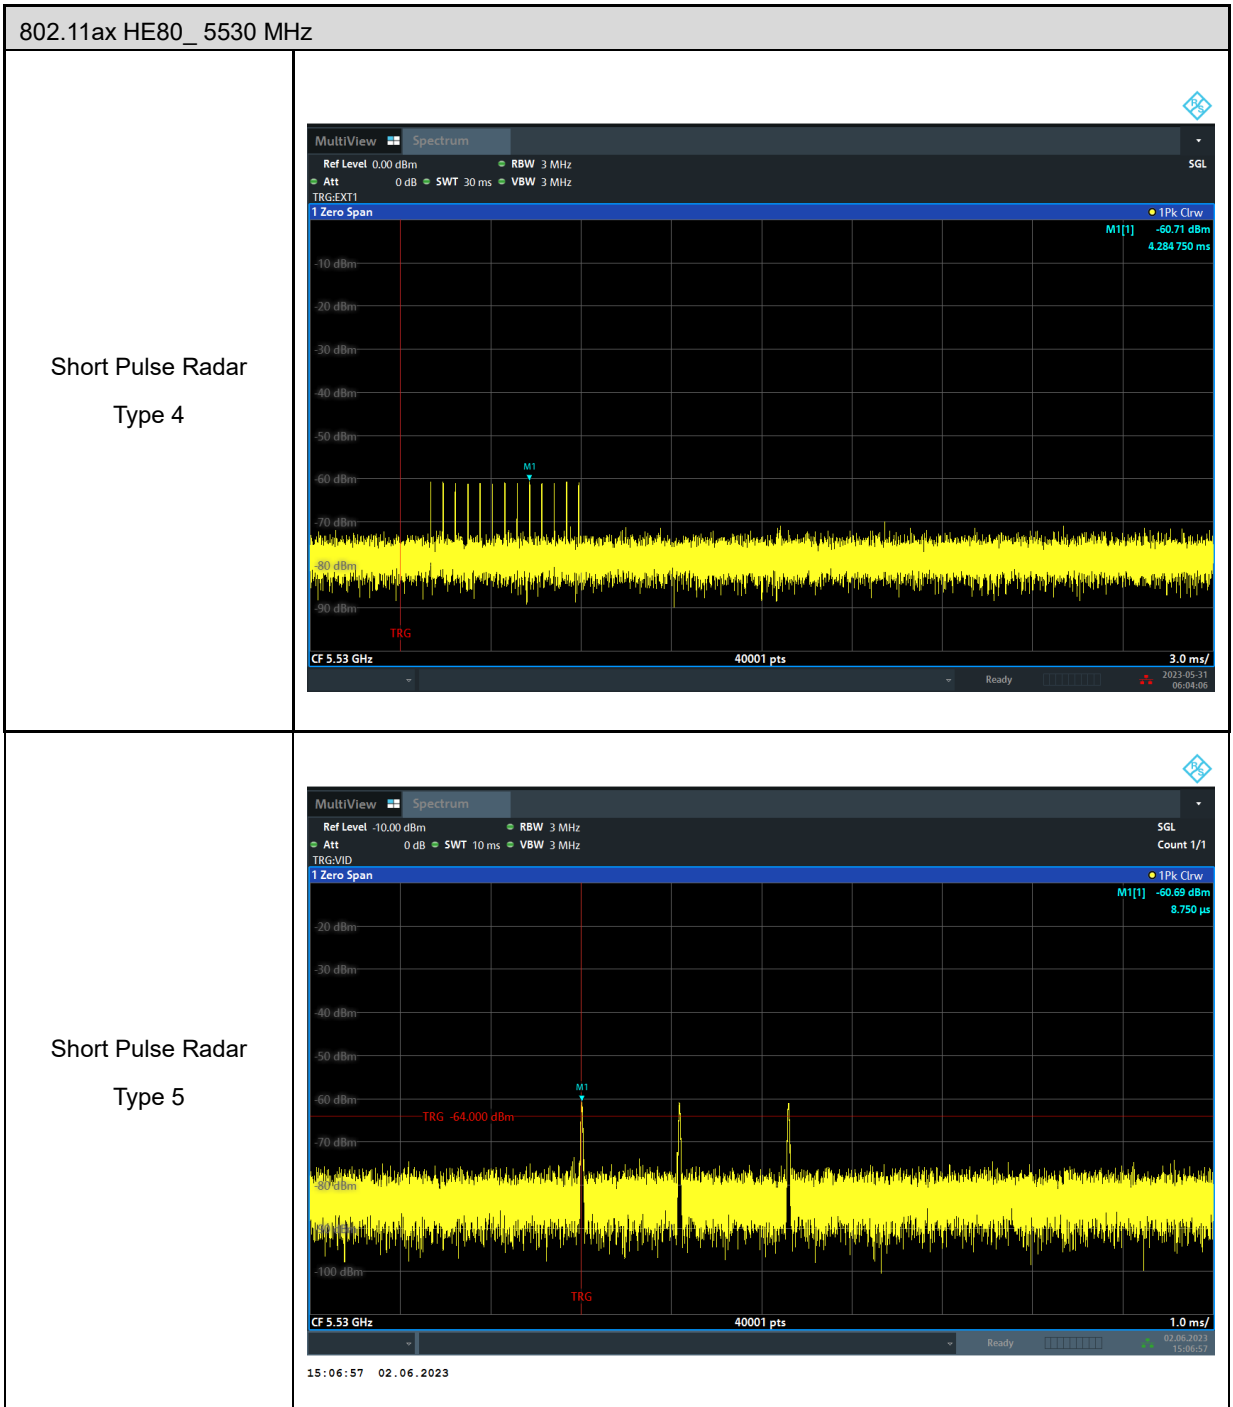




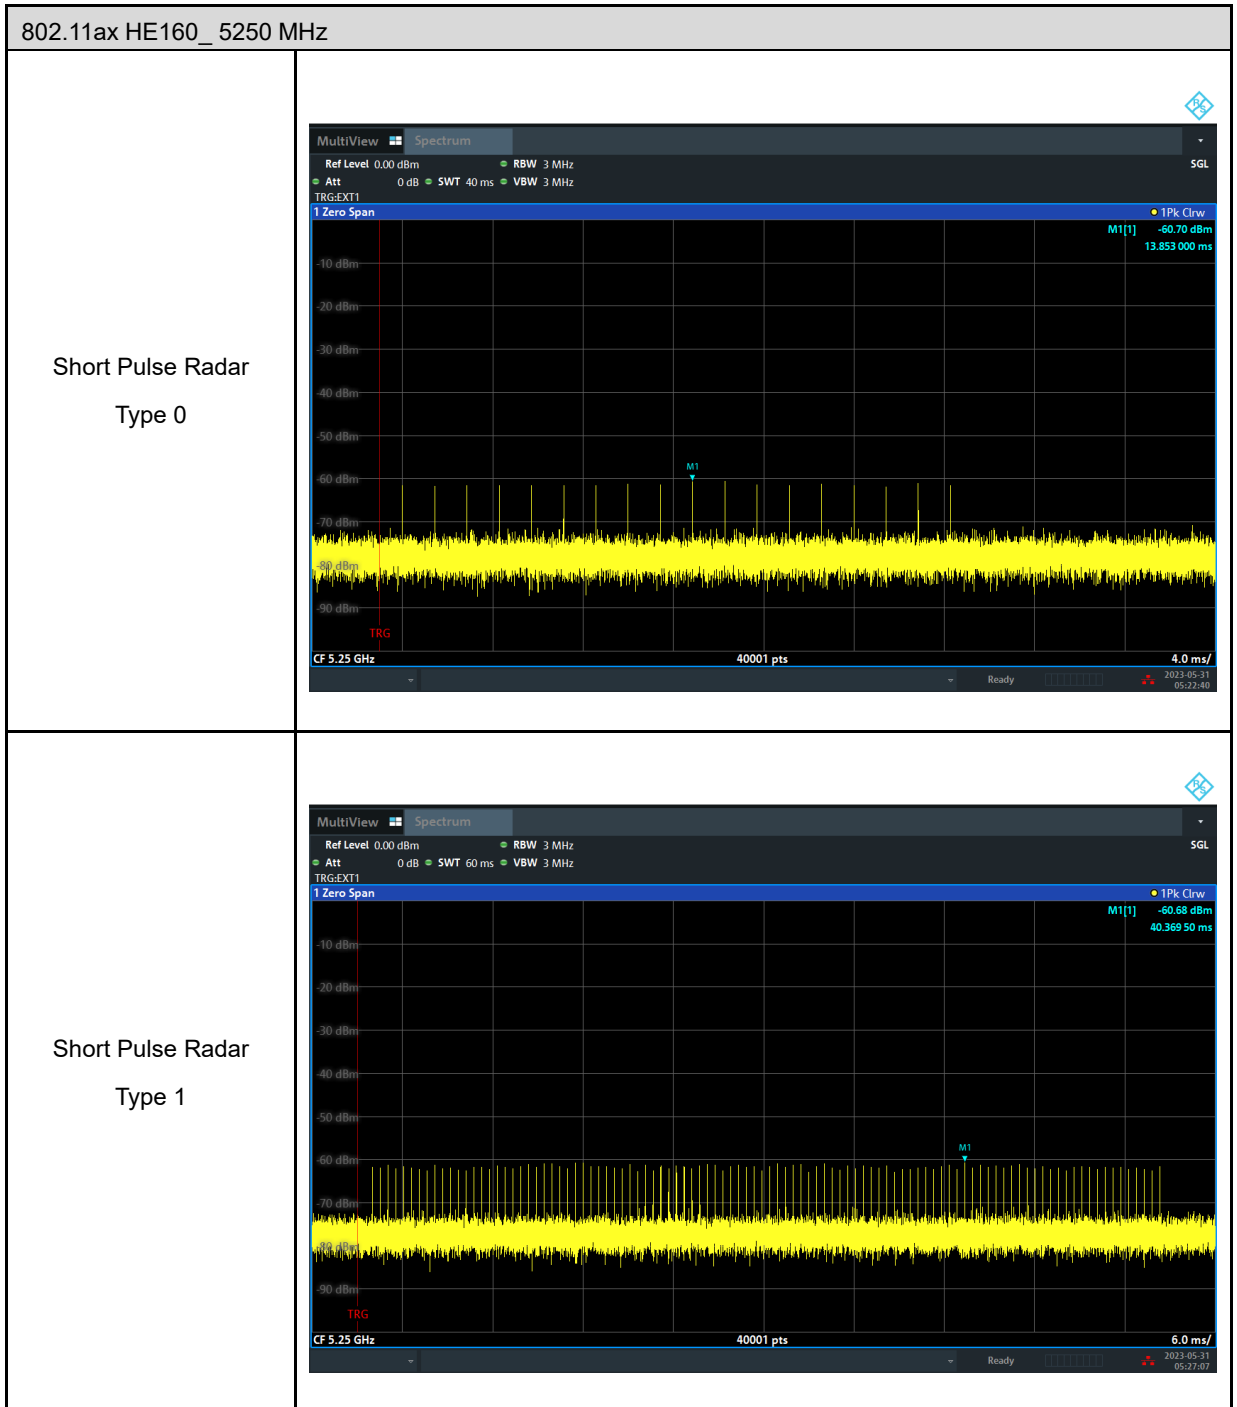

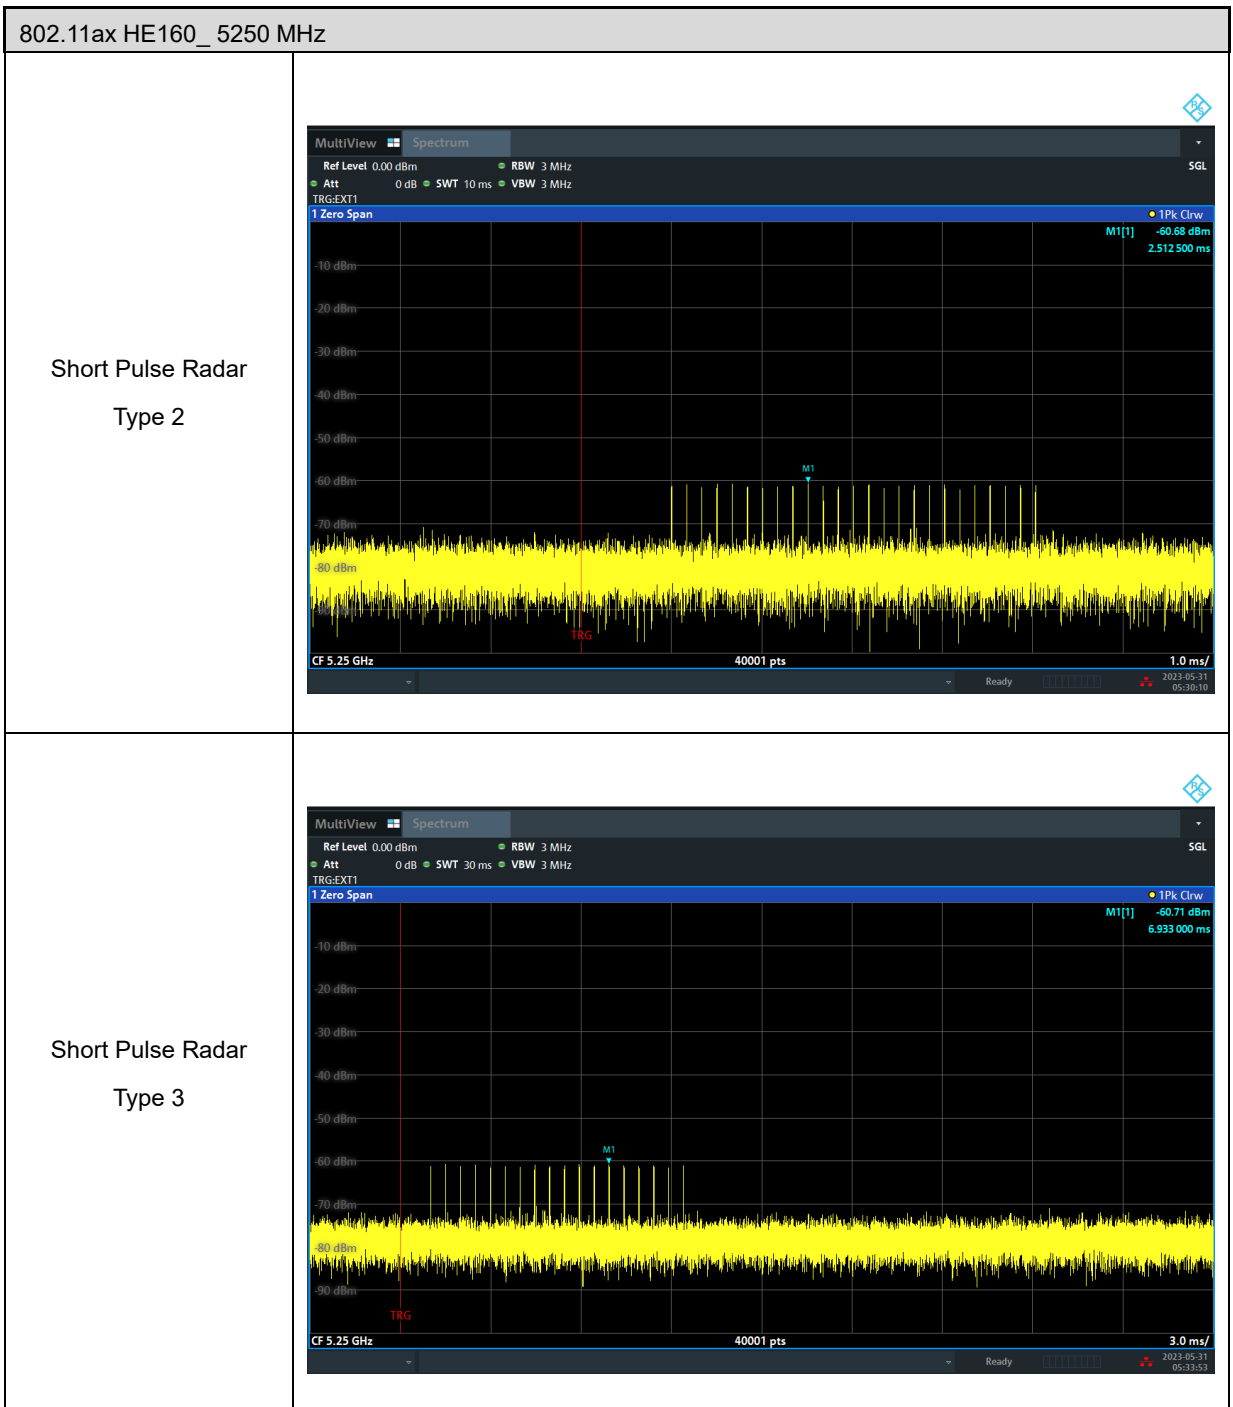

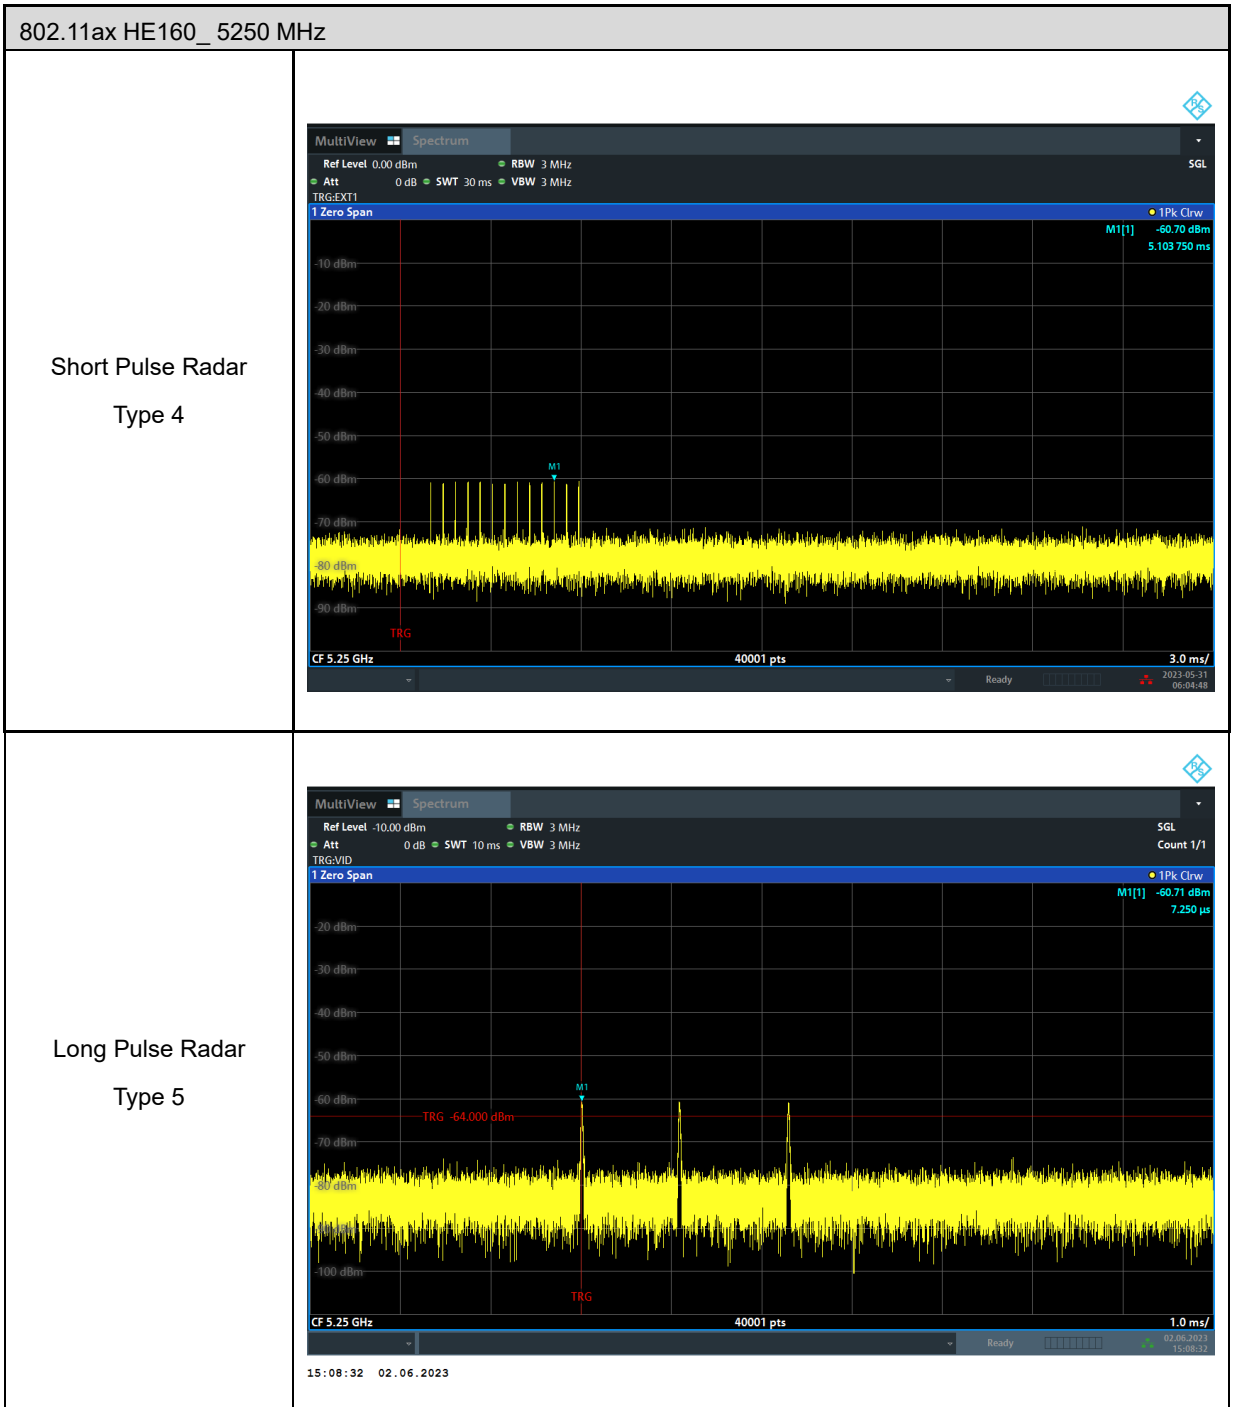


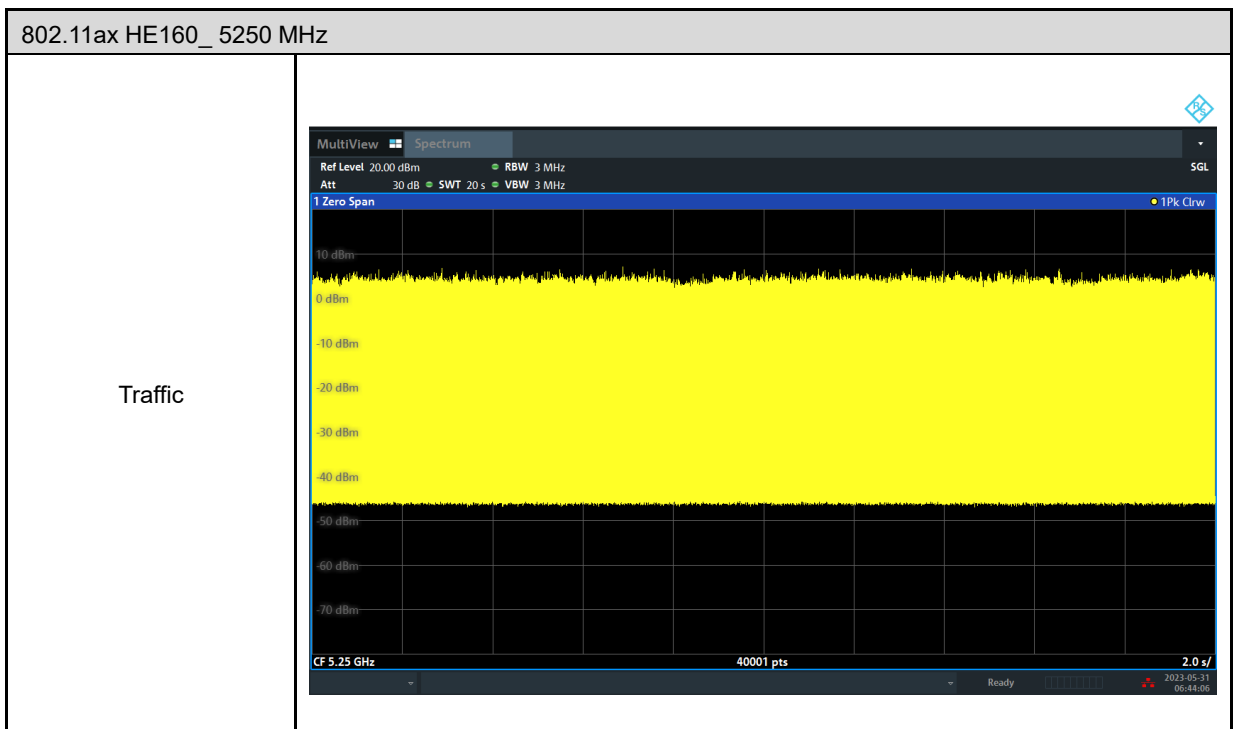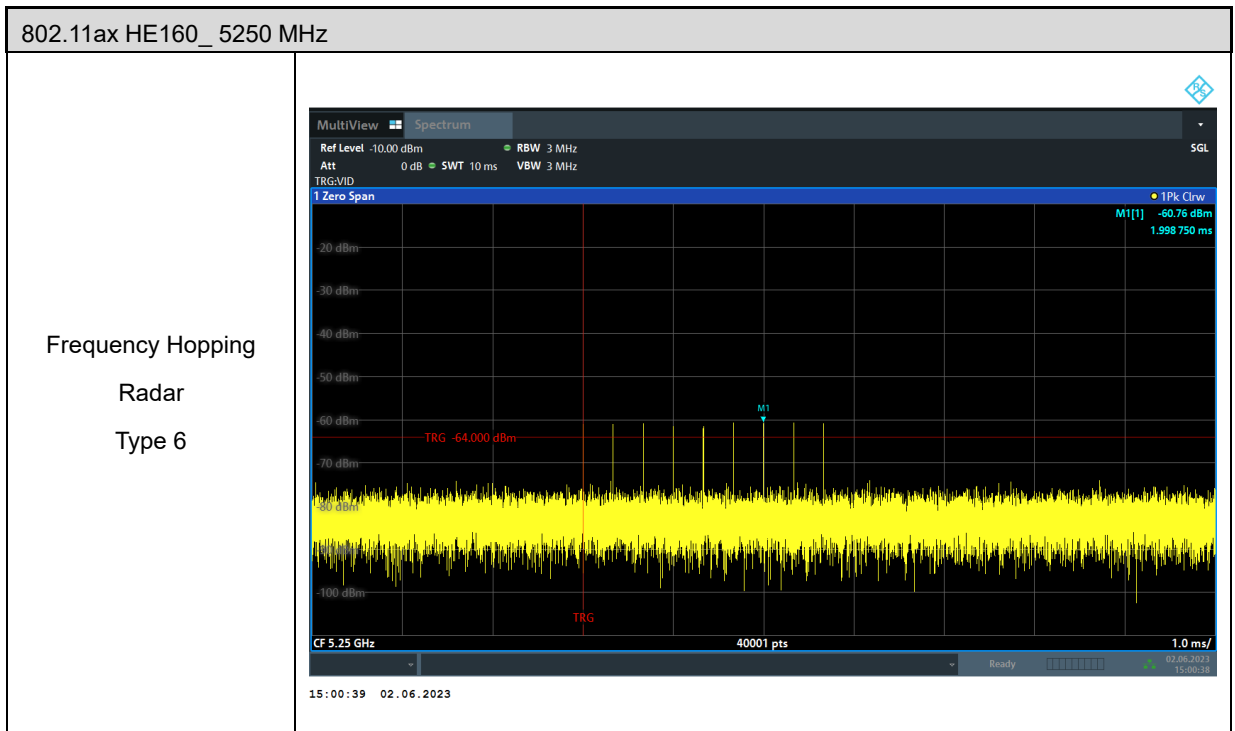

6.2. Channel Loading

■ Duty cycle $\geq 17\%$


802.11ax HE20

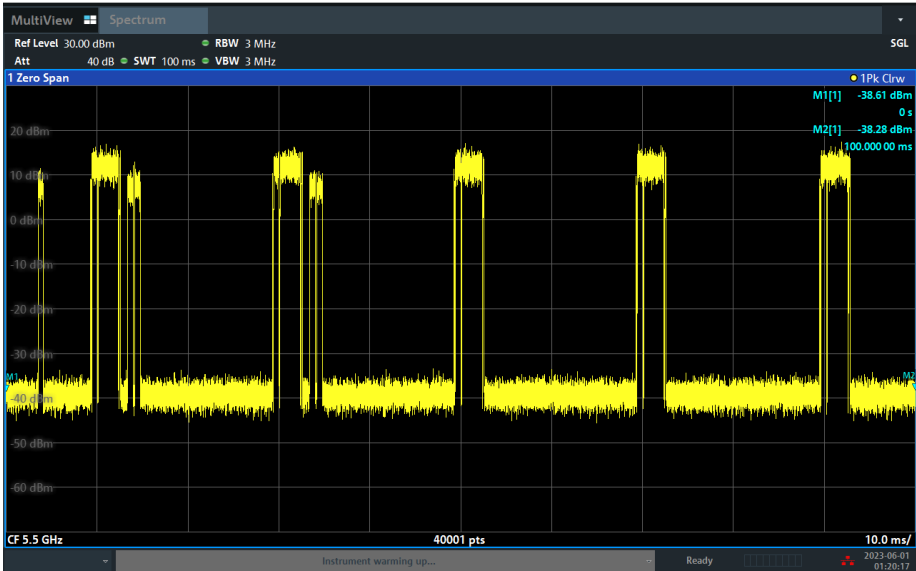


The spectrum analyzer shows a signal with a peak level of -38.61 dBm and a minimum level of -38.28 dBm. The signal is periodic, with a sweep time of 100.00000 ms and a sweep point of 40001. The duty cycle is 18.84%.

DFS and Adaptivity

Device	Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
	-25	0	100.00ms	100.00ms
		On Time Point:	Total Point:	Sum of On Time(s):
		7537	40000	18.84ms
		Sweep Time(s):	Sweep Point:	Duty Cycle(%):
		100.00ms	40001	18.84%



802.11ax HE40

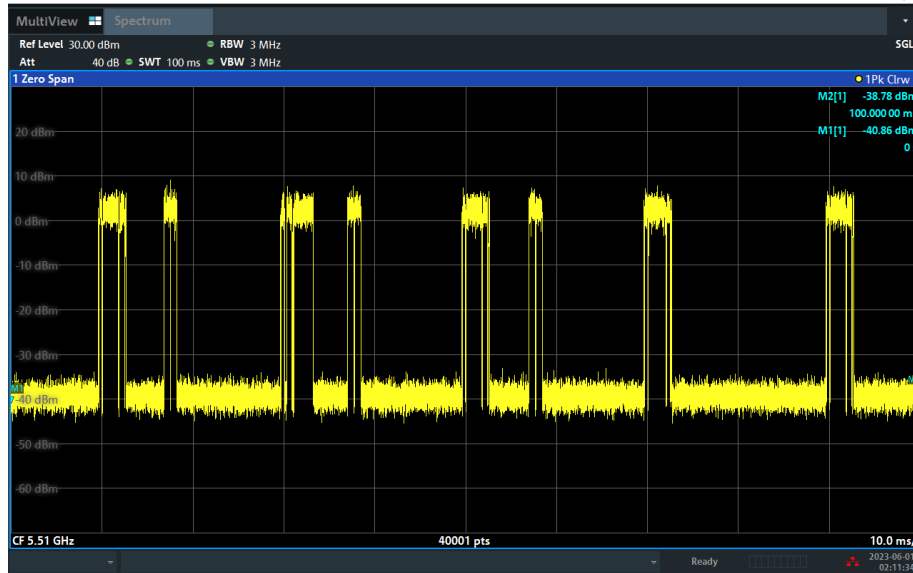


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-25	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
7356	40000	18.39ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
100.00ms	40001	18.39%	

euofins

RUN

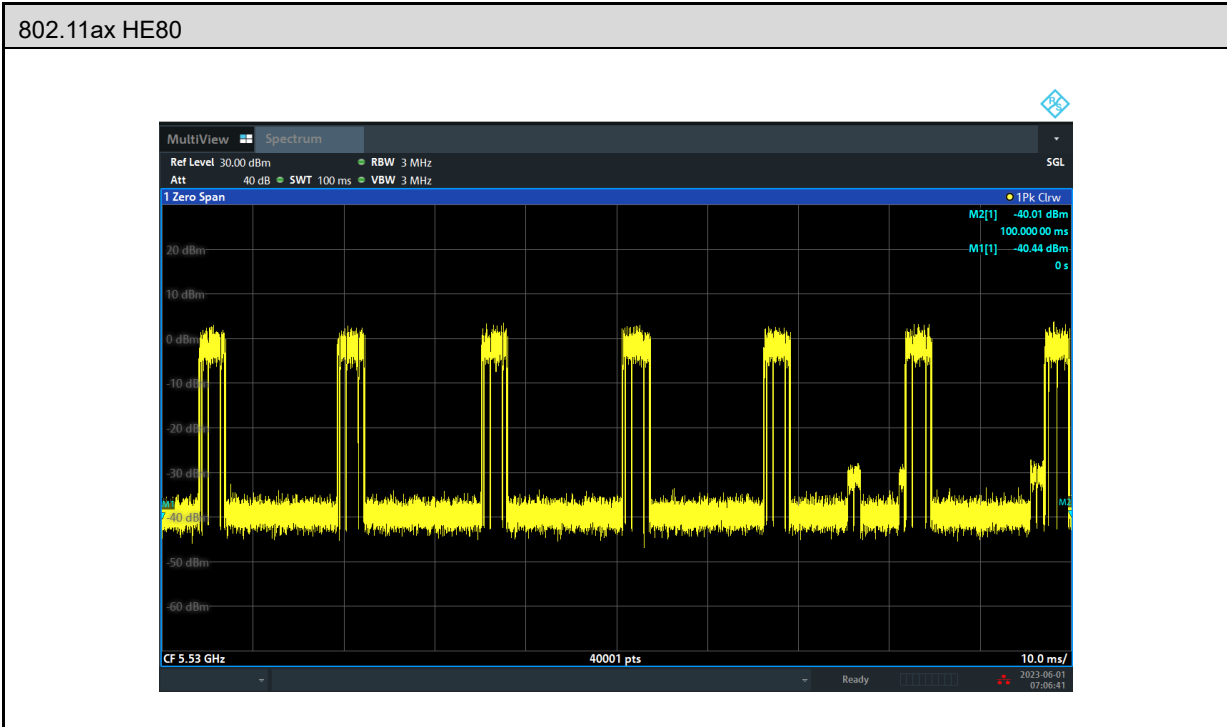


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-25	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
7496	40000	18.74ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
100.00ms	40001	18.74%	

euofins

RUN

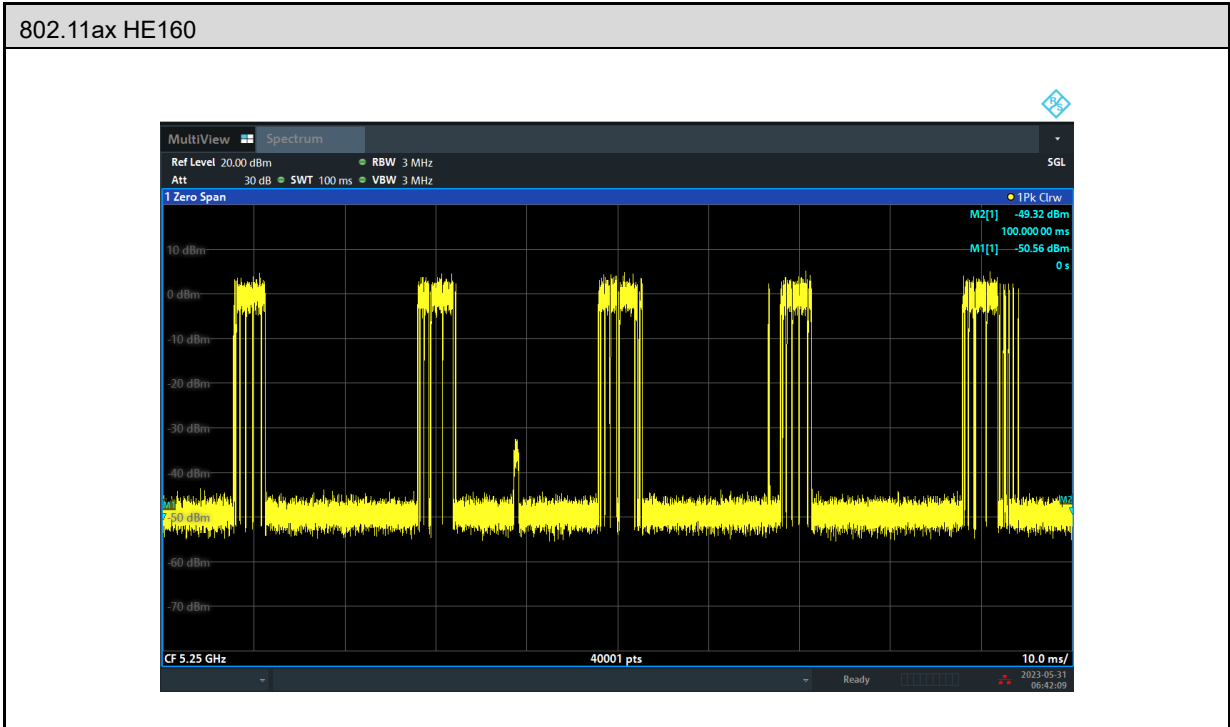

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
<input type="text" value="-40"/>	<input type="text" value="0"/>	<input type="text" value="100.00ms"/>	<input type="text" value="100.00ms"/>
On Time Point:		Total Point:	Sum of On Time(s):
<input type="text" value="7416"/>		<input type="text" value="40000"/>	<input type="text" value="18.54ms"/>
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
<input type="text" value="100.00ms"/>	<input type="text" value="40001"/>	<input type="text" value="18.54%"/>	

euofins

6.3. Channel Availability Check Time

6.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

6.3.2. Procedure for Timing Of Radar Burst


With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

6.3.3. Qualitative Results

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel



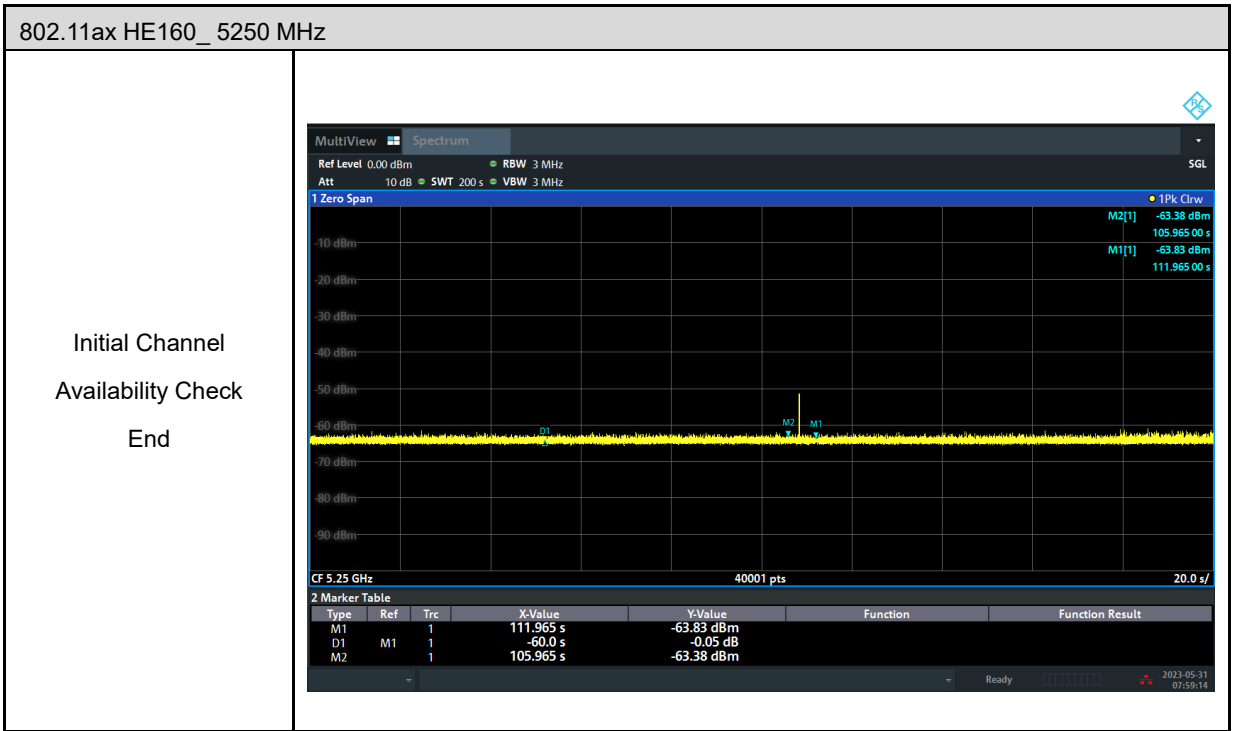

6.4. Channel Move Time and Channel Closing Transmission Time

6.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Results


Frequency (MHz)	Radar Type	Channel Move Time (msec)		Limit (sec)
		Master	Client	
5250	Type 0	1.2310	1.3125	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)		Limit (msec)
		Master	Client	
5250	Type 0	12.5	0.018	60

Master :

802.11ax HE160_ 5250 MHz

Channel Move and Closing Time

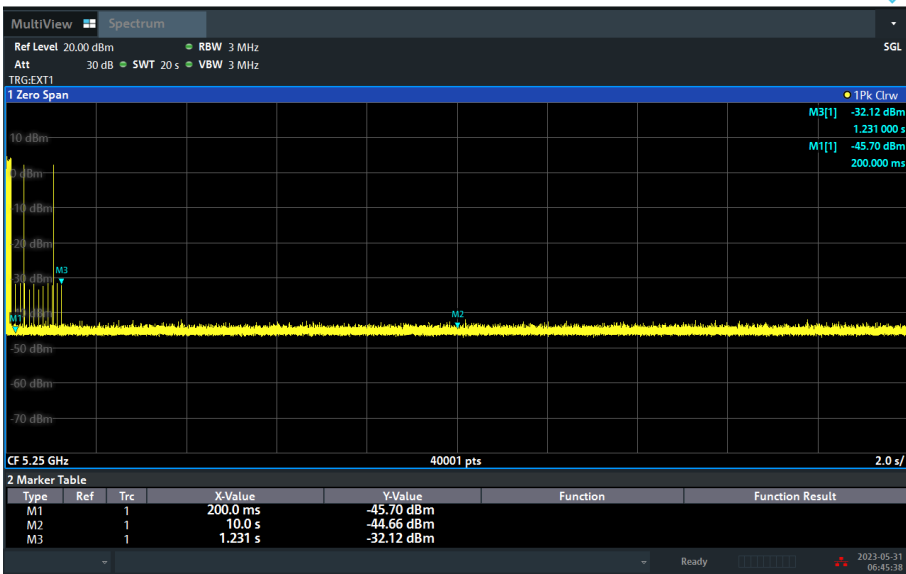

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		200.0 ms	-45.70 dBm		
M2	1		10.0 s	-44.66 dBm		
M3	1		1.231 s	-32.12 dBm		

DFS and Adaptivity
— □ ×


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
<input type="text" value="-40"/>	<input type="text" value="200.00ms"/>	<input type="text" value="10000.00ms"/>	<input type="text" value="9800.00ms"/>
On Time Point:		Total Point:	Sum of On Time(s):
<input type="text" value="25"/>		<input type="text" value="19600"/>	<input type="text" value="12.50ms"/>
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
<input type="text" value="20000.00ms"/>	<input type="text" value="40001"/>	<input type="text" value="0.13%"/>	

Client :

802.11ax HE160_ 5250 MHz

Channel Move and Closing Time

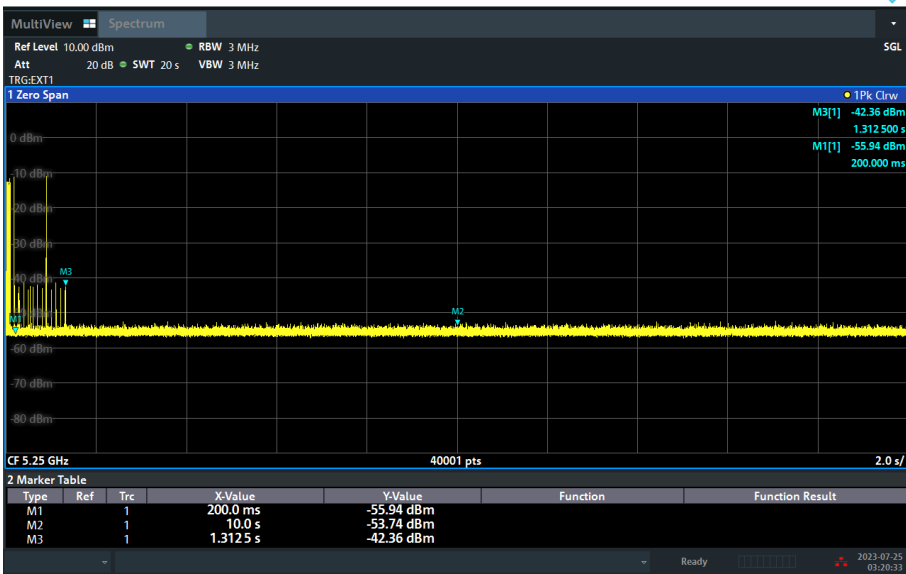


Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		200.0 ms	-55.94 dBm		
M2	1		10.0 s	-53.74 dBm		
M3	1		1.3125 s	-42.36 dBm		

DFS and Adaptivity
— □ ×

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
<input type="text" value="-50"/>	<input type="text" value="200.00ms"/>	<input type="text" value="10000.00ms"/>	<input type="text" value="9800.00ms"/>
On Time Point:		Total Point:	Sum of On Time(s):
<input type="text" value="36"/>		<input type="text" value="19600"/>	<input type="text" value="18.00ms"/>
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
<input type="text" value="20000.00ms"/>	<input type="text" value="40001"/>	<input type="text" value="0.18%"/>	

6.5. Non-Occupancy Period

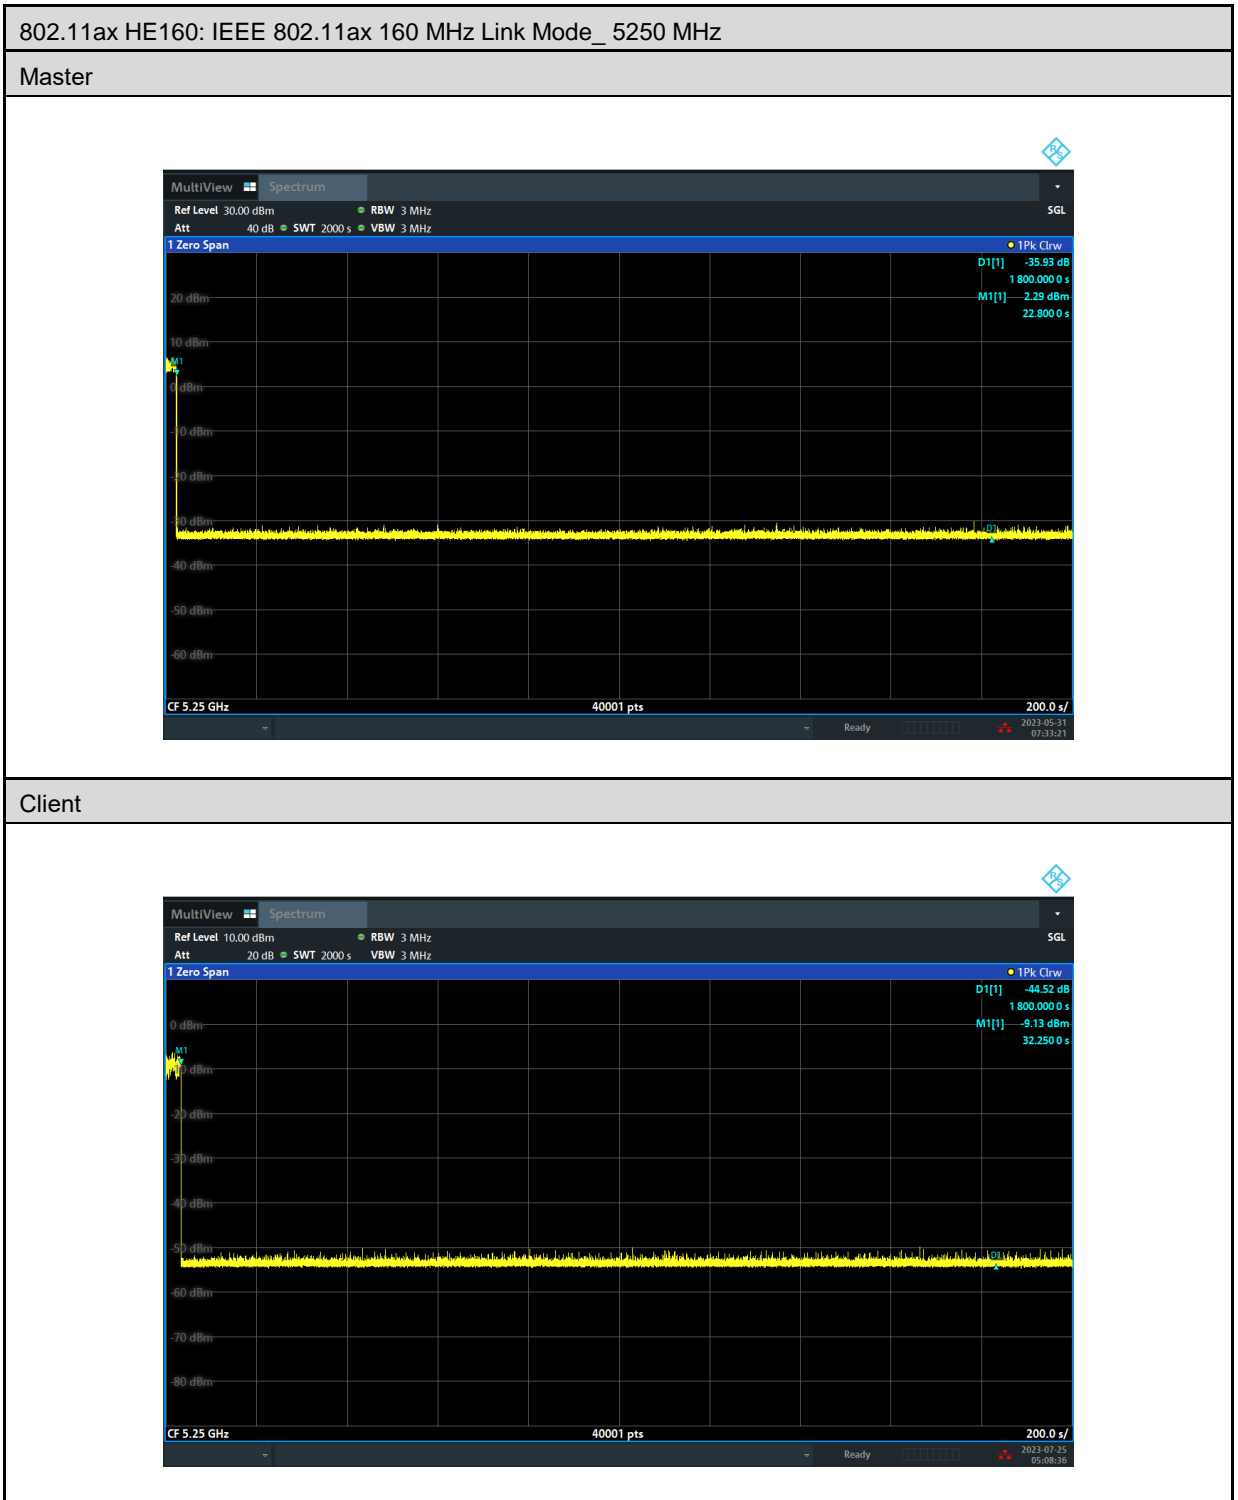

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

6.6. U-NII Detection Bandwidth

■ Test Results



Test Mode		802.11ax HE20				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5500	5490	5510	20	19.064	104.91	≥ 100



Test Mode		802.11ax HE40				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5510	5530	5570	40	37.868	105.63	≥ 100

Test Mode		802.11ax HE80				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5530	5490	5570	80	77.629	103.05	≥ 100

Test Mode		802.11ax HE160				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5251	5329	78	77.332	100.86	≥ 100

■ Test Graphs

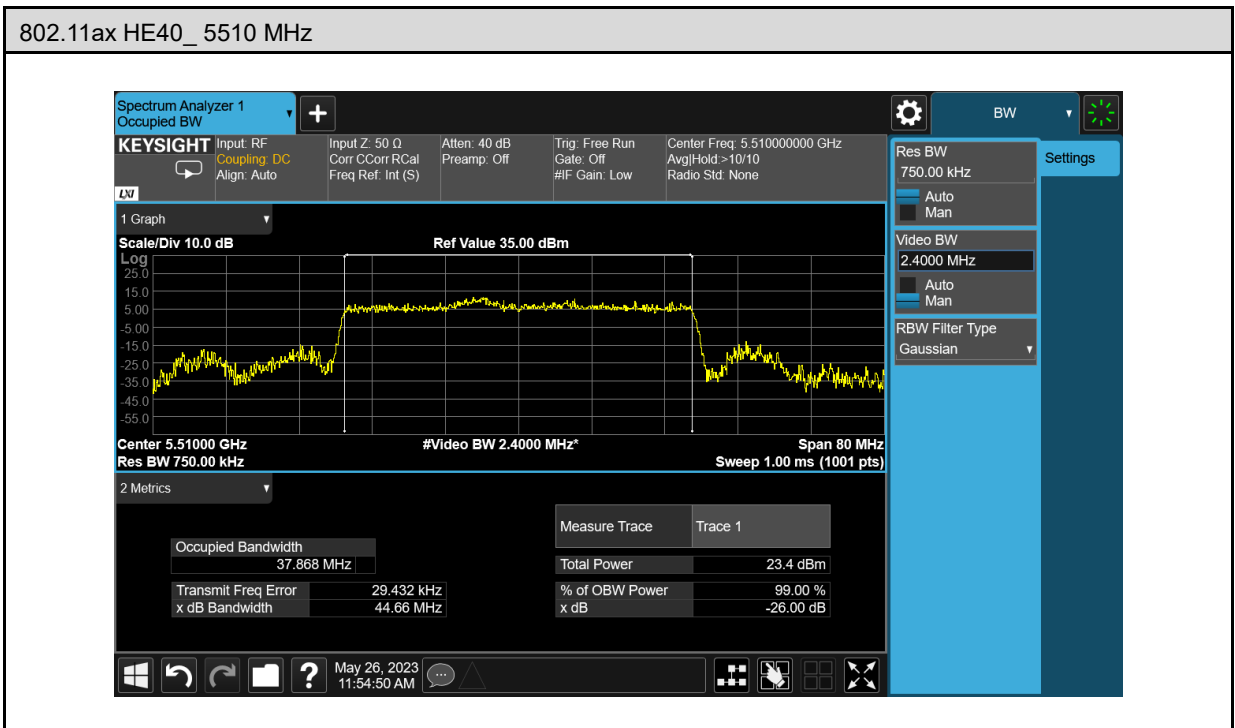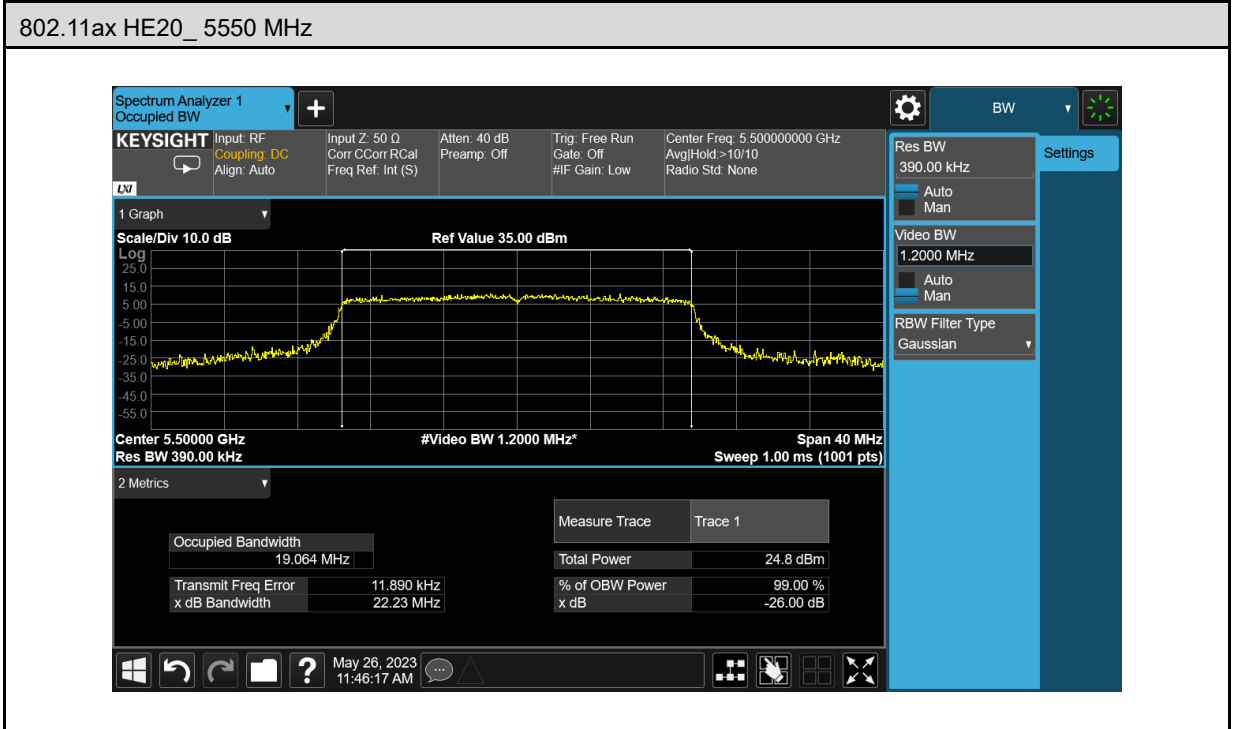

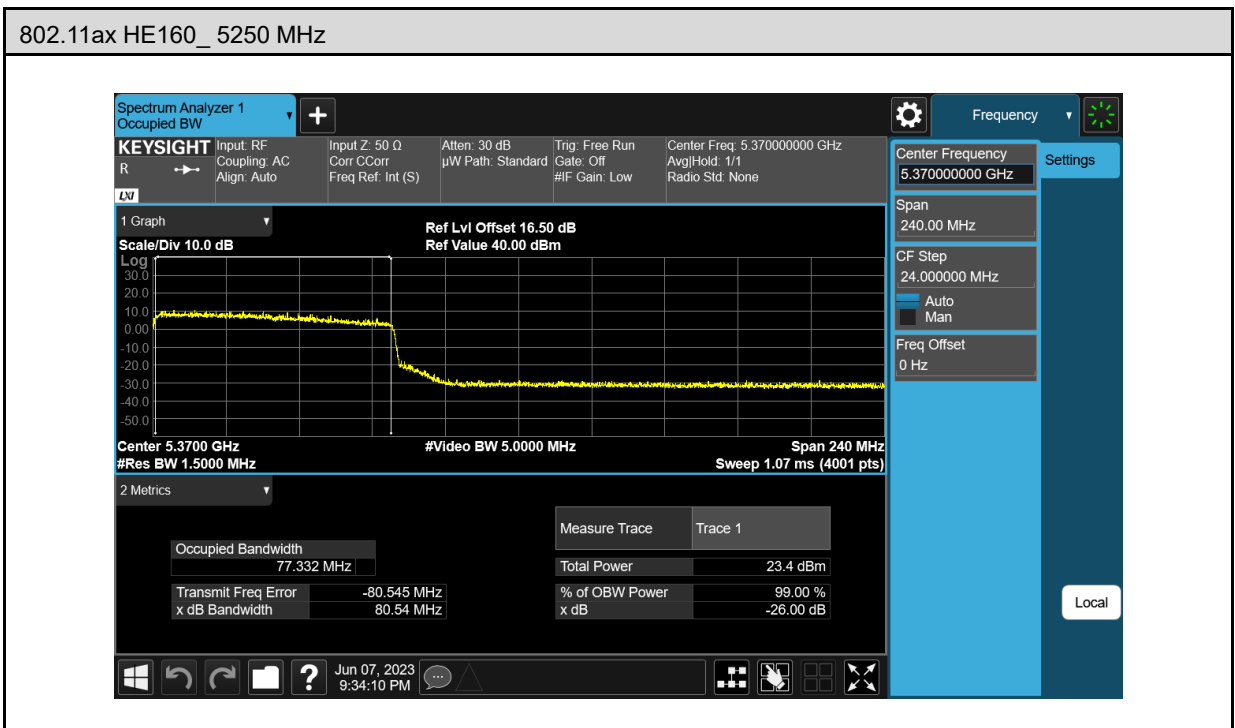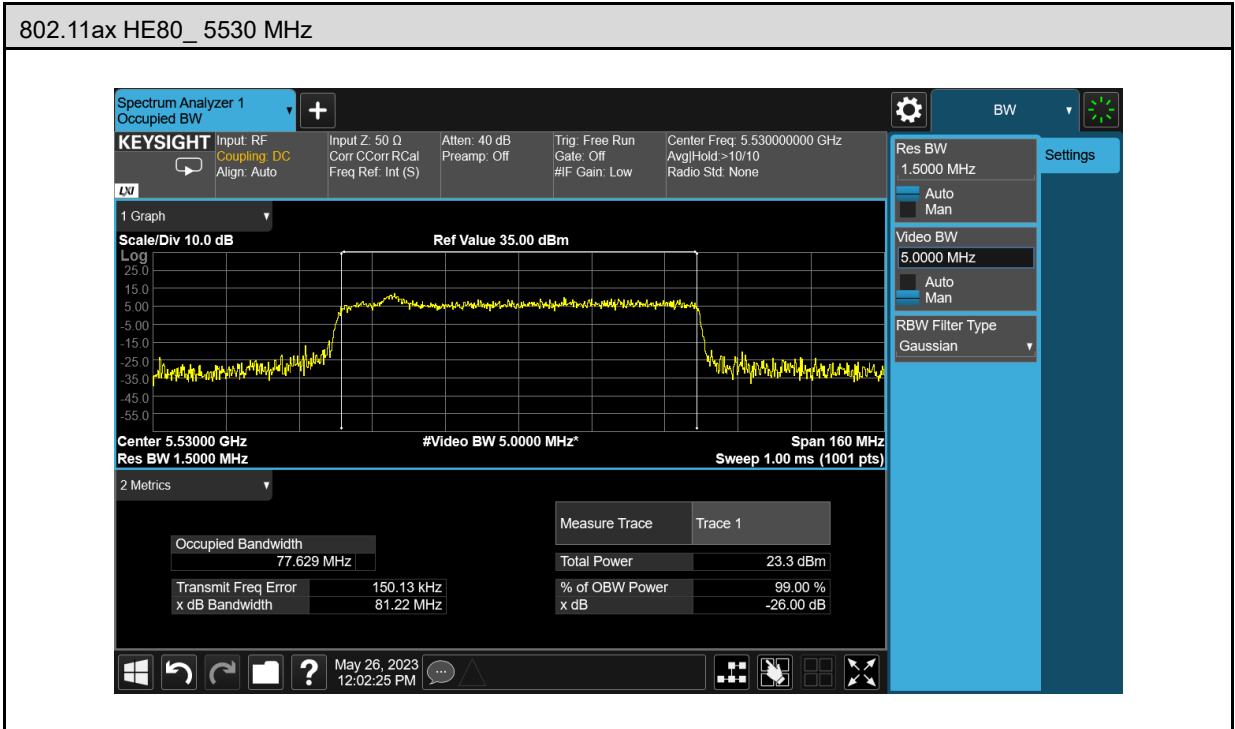

6.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5500	Type1	Table 5a	1	30	0	100.00 %	≥ 60 %
	Type2	Random	Random	30	0	100.00 %	≥ 60 %
	Type3	Random	Random	30	0	100.00 %	≥ 60 %
	Type4	Random	Random	30	0	100.00 %	≥ 60 %
	Type1~4					100.00 %	≥ 80 %
	Type5	Random	Random	30	0	100.00 %	≥ 80 %
	Type6	Hopping	1	30	0	100.00 %	≥ 70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5510	Type1	Table 5a	1	30	0	100.00 %	≥ 60 %
	Type2	Random	Random	30	0	100.00 %	≥ 60 %
	Type3	Random	Random	30	0	100.00 %	≥ 60 %
	Type4	100.00 %	Random	30	0	100.00 %	≥ 60 %
	Type1~4					100.00 %	≥ 80 %
	Type5	Random	Random	30	0	100.00 %	≥ 80 %
	Type6	Hopping	1	30	0	100.00 %	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μ s)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	30	0	100.00 %	≥ 60 %
	Type2	Random	Random	30	0	100.00 %	≥ 60 %
	Type3	Random	Random	30	0	100.00 %	≥ 60 %
	Type4	Random	Random	30	0	100.00 %	≥ 60 %
	Type1~4					100.00 %	≥ 80 %
	Type5	Random	Random	30	0	100.00 %	≥ 80 %
	Type6	Hopping	1	30	0	100.00 %	≥ 70 %

Test Mode		802.11ax HE160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μ s)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	30	0	100.00 %	≥ 60 %
	Type2	Random	Random	30	0	100.00 %	≥ 60 %
	Type3	Random	Random	30	0	100.00 %	≥ 60 %
	Type4	Random	Random	30	0	100.00 %	≥ 60 %
	Type1~4					100.00 %	≥ 80 %
	Type5	Random	Random	30	0	100.00 %	≥ 80 %
	Type6	Hopping	1	30	0	100.00 %	≥ 70 %

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	1	558	95	1792	1
2	5500	1	698	76	1433	1
3	5500	1	3066	18	326	1
4	5500	1	598	89	1672	1
5	5500	1	878	61	1139	1
6	5500	1	558	95	1792	1
7	5500	1	938	57	1066	1
8	5500	1	918	58	1089	1
9	5500	1	578	92	1730	1
10	5500	1	538	99	1859	1
11	5500	1	678	78	1475	1
12	5500	1	898	59	1114	1
13	5500	1	778	68	1285	1
14	5500	1	718	74	1393	1
15	5500	1	698	76	1433	1
16	5500	1	2557	21	391	1
17	5500	1	2319	23	431	1
18	5500	1	1806	30	554	1
19	5500	1	2036	26	491	1
20	5500	1	1345	40	743	1
21	5500	1	3012	18	332	1
22	5500	1	2434	22	411	1
23	5500	1	2366	23	423	1
24	5500	1	2673	20	374	1
25	5500	1	2683	20	373	1
26	5500	1	1975	27	506	1
27	5500	1	2757	20	363	1
28	5500	1	1444	37	693	1
29	5500	1	2373	23	421	1
30	5500	1	2483	22	403	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	1.80	225.60	29	4433	1
2	5500	3.50	204.60	24	4888	1
3	5500	1.10	173.40	24	5767	1
4	5500	2.90	160.40	24	6234	1
5	5500	2.50	219.30	29	4560	1
6	5500	5.00	214.80	27	4655	1
7	5500	2.80	189.80	24	5269	1
8	5500	3.50	179.60	27	5568	1
9	5500	5.00	171.20	24	5841	1
10	5500	4.10	204.20	24	4897	1
11	5500	1.70	167.20	29	5981	1
12	5500	1.90	214.50	23	4662	1
13	5500	4.50	218.30	28	4581	1
14	5500	1.30	194.70	25	5136	1
15	5500	3.80	185.40	28	5394	1
16	5500	1.40	202.00	29	4950	1
17	5500	3.20	228.90	29	4369	1
18	5500	3.20	195.90	23	5105	1
19	5500	1.30	169.20	29	5910	1
20	5500	1.20	210.00	26	4762	1
21	5500	3.50	178.10	24	5615	1
22	5500	2.00	221.80	28	4509	1
23	5500	4.50	222.80	29	4488	1
24	5500	2.70	173.80	26	5754	1
25	5500	4.10	206.90	23	4833	1
26	5500	4.70	217.60	28	4596	1
27	5500	3.20	200.80	23	4980	1
28	5500	3.10	158.00	24	6329	1
29	5500	4.60	199.60	23	5010	1
30	5500	4.30	180.00	23	5556	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	6.10	409.80	17	2440.21	1
2	5500	9.90	333.00	16	3003.00	1
3	5500	6.50	308.50	18	3241.49	1
4	5500	9.30	369.90	18	2703.43	1
5	5500	7.00	475.90	18	2101.28	1
6	5500	8.10	256.50	17	3898.64	1
7	5500	7.20	413.00	16	2421.31	1
8	5500	8.30	280.00	18	3571.43	1
9	5500	7.80	322.00	16	3105.59	1
10	5500	7.60	413.30	18	2419.55	1
11	5500	9.10	227.60	18	4393.67	1
12	5500	7.50	363.30	16	2752.55	1
13	5500	6.90	318.80	17	3136.76	1
14	5500	6.40	384.80	18	2598.75	1
15	5500	7.50	310.00	16	3225.81	1
16	5500	9.00	461.90	17	2164.97	1
17	5500	7.90	362.30	16	2760.14	1
18	5500	6.60	386.80	17	2585.32	1
19	5500	6.90	334.00	16	2994.01	1
20	5500	8.70	247.60	17	4038.77	1
21	5500	8.20	331.40	17	3017.50	1
22	5500	9.30	329.80	16	3032.14	1
23	5500	8.50	314.50	17	3179.65	1
24	5500	7.10	386.90	18	2584.65	1
25	5500	9.80	443.40	17	2255.30	1
26	5500	8.90	372.70	17	2683.12	1
27	5500	9.00	403.60	16	2477.70	1
28	5500	7.30	250.80	18	3987.24	1
29	5500	9.90	452.60	18	2209.46	1
30	5500	7.70	259.90	17	3847.63	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	17.50	315.00	13	3175	1
2	5500	16.10	466.40	16	2144	1
3	5500	16.80	220.10	14	4543	1
4	5500	18.10	454.10	15	2202	1
5	5500	19.20	230.50	13	4338	1
6	5500	18.70	397.70	13	2514	1
7	5500	11.60	450.80	12	2218	1
8	5500	19.20	237.50	16	4211	1
9	5500	17.50	323.60	13	3090	1
10	5500	12.40	480.30	14	2082	1
11	5500	18.40	399.60	14	2503	1
12	5500	17.80	436.00	15	2294	1
13	5500	18.90	321.20	16	3113	1
14	5500	19.20	240.80	13	4153	1
15	5500	19.70	357.40	14	2798	1
16	5500	12.80	274.80	12	3639	1
17	5500	12.50	227.10	16	4403	1
18	5500	12.60	361.90	14	2763	1
19	5500	11.60	230.20	13	4344	1
20	5500	11.80	313.60	14	3189	1
21	5500	16.60	424.00	14	2358	1
22	5500	13.30	284.50	13	3515	1
23	5500	17.60	489.70	14	2042	1
24	5500	17.10	468.20	12	2136	1
25	5500	14.00	262.00	15	3817	1
26	5500	16.20	233.50	13	4283	1
27	5500	12.60	485.10	16	2061	1
28	5500	12.20	284.10	13	3520	1
29	5500	14.90	396.00	12	2525	1
30	5500	17.60	211.30	13	4733	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5497	1	59.3	17	1688.7	2	1
	5497	2	56.4	17	1151.2	2	
	5493	3	69.3	7	1633.1	2	
	5497	4	58.4	18	1171.7	1	
	5493	5	60.3	8	1738.0	2	
	5493	6	73.7	8	1355.2	3	
	5495	7	79.2	13	1298.4	2	
	5494	8	78.6	11	1908.1	3	
	5496	9	73.9	16	1472.3	1	
	5494	10	84.9	9	1625.0	2	
	5494	11	51.9	10	1357.2	2	
2	5494	1	54.1	10	1429.0	2	1
	5494	2	69.4	11	1885.0	2	
	5494	3	74.7	9	1209.7	1	
	5492	4	84.8	5	1744.9	2	
	5498	5	83.6	19	1305.9	1	
	5495	6	68.2	13	1144.9	3	
	5495	7	52.0	13	1156.4	1	
	5494	8	59.9	9	1101.5	3	
	5495	9	69.5	13	1778.3	2	
	5494	10	50.9	11	1312.1	2	
	5493	11	81.9	7	1196.5	3	
	5498	12	76.2	19	1985.9	2	
3	5494	1	58.2	11	1704.3	1	1
	5492	2	88.4	6	1963.1	2	
	5497	3	58.0	18	1150.1	2	
	5496	4	94.2	15	1883.6	2	
	5496	5	88.3	16	1262.4	2	
	5498	6	69.4	20	1437.5	2	
	5492	7	87.6	6	1600.1	2	
	5494	8	57.5	11	1241.3	1	
	5497	9	75.7	17	1151.4	1	
	5493	10	74.2	7	1197.7	1	
	5496	11	57.6	16	1835.5	2	
	5494	12	95.2	11	1759.1	2	
	5495	13	68.1	13	1708.5	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5493	1	78.8	7	1744.8	3	1
	5494	2	77.9	9	1564.9	1	
	5493	3	91.8	7	1978.8	2	
	5493	4	58.8	8	1670.0	2	
	5493	5	69.7	7	1535.9	3	
	5495	6	60.7	13	1732.5	2	
	5495	7	93.1	12	1876.7	1	
	5492	8	99.8	6	1308.5	2	
	5498	9	97.5	19	1719.6	3	
5	5497	1	97.9	17	1306.7	2	1
	5496	2	88.3	14	1642.9	2	
	5494	3	52.0	10	1887.1	2	
	5493	4	78.1	8	1586.8	2	
	5496	5	56.5	15	1878.4	2	
	5495	6	55.0	12	1400.5	2	
	5495	7	55.2	13	1332.8	1	
	5494	8	75.7	9	1120.7	3	
	5496	9	73.6	16	1729.5	3	
	5498	10	68.3	20	1041.1	1	
	5495	11	60.9	13	1810.0	3	
	5498	12	87.0	20	1913.8	2	
	5492	13	53.5	5	1517.0	3	
	5493	14	73.7	7	1321.9	3	
	5494	15	60.5	9	1988.4	1	
6	5497	1	66.2	17	1141.8	3	1
	5498	2	99.9	19	1147.4	1	
	5493	3	94.0	8	1369.4	3	
	5493	4	85.4	7	1783.6	2	
	5494	5	87.8	11	1564.9	2	
	5496	6	95.3	15	1018.4	1	
	5493	7	91.3	8	1005.6	2	
	5493	8	63.1	7	1526.3	3	
	5494	9	80.3	10	1834.2	1	
	5493	10	85.6	8	1452.5	1	
	5494	11	87.6	10	1728.1	3	
	5496	12	62.3	15	1421.8	2	
	5494	13	53.5	9	1260.0	3	
	5494	14	93.5	9	1089.6	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5497	1	65.1	18	1913.4	3	1
	5492	2	84.8	6	1508.5	3	
	5498	3	71.0	20	1320.1	2	
	5498	4	70.9	19	1221.1	3	
	5496	5	60.3	14	1516.5	2	
	5497	6	64.0	18	1911.1	2	
	5498	7	64.2	19	1923.0	2	
	5498	8	87.4	19	1321.0	2	
	5498	9	84.0	19	1252.9	2	
	5494	10	62.1	10	1253.8	3	
	5495	11	55.7	13	1613.4	2	
	5495	12	88.6	12	1435.9	2	
	5494	13	63.5	10	1382.9	1	
	5492	14	64.8	5	1570.3	1	
	5496	15	82.1	15	1714.4	1	
	5496	16	86.7	14	1560.9	1	
	5495	17	99.6	13	1859.9	1	
8	5492	1	59.4	5	1984.7	2	1
	5494	2	57.4	11	1911.8	1	
	5495	3	89.6	13	1810.1	3	
	5496	4	73.9	14	1735.5	2	
	5496	5	89.4	16	1702.9	3	
	5495	6	60.4	12	1404.5	3	
	5494	7	94.1	9	1965.4	1	
	5496	8	70.6	16	1335.4	1	
	5492	9	55.2	6	1100.4	1	
	5496	10	95.8	16	1045.2	2	
	5496	11	52.1	16	1044.1	3	
	5494	12	98.4	11	1917.2	1	
	5494	13	73.6	11	1339.8	1	
	5497	14	86.0	17	1955.6	2	
	5494	15	55.9	11	1088.8	1	
	5496	16	89.8	16	1100.0	3	
	5494	17	95.0	10	1014.3	3	
	5494	18	63.4	10	1900.8	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5492	1	81.9	6	1787.1	3	1
	5493	2	53.7	7	1337.1	2	
	5495	3	72.8	12	1691.2	2	
	5493	4	53.9	7	1367.0	1	
	5493	5	59.4	7	1682.6	2	
	5494	6	71.4	10	1994.8	1	
	5496	7	77.3	15	1711.2	2	
	5492	8	71.0	5	1925.6	3	
	5497	9	69.0	17	1951.0	1	
	5496	10	97.4	15	1960.2	3	
	5496	11	65.0	16	1848.0	3	
	5498	12	68.0	19	1405.6	1	
	5493	13	53.0	7	1369.6	2	
	5493	14	61.4	8	1100.4	1	
	5494	15	77.3	11	1519.1	1	
	5496	16	61.0	15	1608.1	2	
	5496	17	72.6	16	1785.7	1	
	5493	18	71.3	7	1287.4	2	
	5496	19	52.8	15	1848.0	1	
10	5494	1	61.4	9	1507.7	2	1
	5497	2	65.4	18	1128.7	3	
	5495	3	61.0	12	1306.6	1	
	5495	4	87.5	12	1829.2	2	
	5496	5	66.8	14	1426.5	2	
	5495	6	54.2	13	1573.5	3	
	5496	7	86.2	16	1520.7	2	
	5493	8	73.4	8	1126.7	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5500	1	89.1	9	1058.1	2	1
	5500	2	89.2	15	1143.0	1	
	5500	3	55.0	14	1507.7	2	
	5500	4	93.1	13	1563.0	3	
	5500	5	83.9	7	1315.7	3	
	5500	6	97.5	14	1742.4	1	
	5500	7	68.0	11	1950.4	1	
	5500	8	91.0	7	1040.1	2	
	5500	9	86.4	18	1450.8	1	
	5500	10	93.9	17	1101.7	3	
	5500	11	95.8	11	1623.8	3	
	5500	12	90.5	19	1146.1	3	
	5500	13	77.0	8	1628.5	2	
	5500	14	55.1	19	1973.7	1	
	5500	15	84.0	12	1118.7	3	
	5500	16	98.5	13	1210.2	2	
12	5500	1	65.8	6	1549.0	1	1
	5500	2	54.8	7	1195.3	2	
	5500	3	82.7	8	1764.6	2	
	5500	4	88.4	8	1122.9	2	
	5500	5	67.7	11	1923.6	3	
	5500	6	82.4	17	1149.9	3	
	5500	7	91.7	20	1295.9	3	
	5500	8	52.1	5	1011.2	3	
	5500	9	53.3	19	1166.1	2	
	5500	10	75.9	13	1744.2	1	
	5500	11	83.4	6	1824.8	3	
	5500	12	55.8	18	1701.6	1	
	5500	13	76.2	17	1385.5	2	
	5500	14	65.6	5	1147.2	3	
	5500	15	76.8	6	1125.8	1	
	5500	16	72.0	16	1208.5	2	
	5500	17	93.7	11	1167.8	1	
	5500	18	72.4	15	1440.3	1	
	5500	19	67.1	10	1485.4	1	
	5500	20	96.2	17	1352.1	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5500	1	64.7	14	1511.9	3	1
	5500	2	88.4	8	1361.6	3	
	5500	3	70.6	10	1777.7	2	
	5500	4	97.5	11	1262.2	2	
	5500	5	83.7	8	1729.6	1	
	5500	6	97.6	15	1273.5	1	
	5500	7	81.5	18	1558.4	1	
	5500	8	63.6	13	1906.7	2	
	5500	9	56.8	13	1618.4	1	
	5500	10	65.5	8	1312.1	3	
14	5500	1	78.3	19	1735.2	2	1
	5500	2	57.5	11	1653.5	3	
	5500	3	90.4	11	1414.5	2	
	5500	4	72.9	8	1456.4	1	
	5500	5	69.4	16	1420.7	2	
	5500	6	78.9	17	1177.8	3	
	5500	7	99.7	12	1727.3	2	
	5500	8	78.8	6	1673.0	2	
	5500	9	86.1	12	1104.7	1	
	5500	10	84.7	8	1717.0	3	
	5500	11	79.8	16	1595.5	3	
	5500	12	52.7	16	1480.9	3	
	5500	13	90.4	19	1469.1	1	
	5500	14	63.6	9	1814.5	1	
	5500	15	77.5	6	1446.9	3	
	5500	16	52.7	6	1755.3	3	
	5500	17	69.1	7	1680.3	1	
	5500	18	92.0	8	1727.3	2	
	5500	19	52.4	17	1100.9	3	
	5500	20	90.7	20	1244.1	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5500	1	73.0	18	1705.7	1	1
	5500	2	92.3	12	1450.8	3	
	5500	3	64.8	18	1193.1	2	
	5500	4	74.3	17	1085.7	1	
	5500	5	57.8	6	1172.0	2	
	5500	6	95.6	13	1827.7	3	
	5500	7	54.5	20	1110.8	2	
	5500	8	71.3	18	1636.6	3	
	5500	9	79.5	12	1288.6	1	
	5500	10	61.8	9	1585.4	3	
	5500	11	87.7	17	1291.8	2	
	5500	12	92.0	13	1259.5	3	
	5500	13	85.6	9	1675.0	2	
	5500	14	92.1	13	1132.8	2	
	5500	15	62.9	11	1222.4	3	
	5500	16	72.8	7	1634.0	3	
	5500	17	80.7	7	1637.1	1	
	5500	18	83.7	12	1003.5	2	
	5500	19	98.4	12	1793.8	1	
16	5500	1	89.8	17	1667.1	1	1
	5500	2	64.6	9	1922.6	1	
	5500	3	78.5	20	1747.8	3	
	5500	4	82.9	15	1478.5	2	
	5500	5	67.5	17	1972.0	2	
	5500	6	55.7	7	1546.3	2	
	5500	7	69.3	13	1225.6	2	
	5500	8	94.7	5	1996.4	2	
	5500	9	75.5	11	1621.4	3	
	5500	10	86.5	13	1233.0	1	
	5500	11	75.0	8	1114.3	2	
	5500	12	69.1	14	1796.3	3	
	5500	13	60.6	16	1004.7	2	
	5500	14	82.9	17	1086.4	3	
	5500	15	66.2	16	1683.0	2	
	5500	16	76.6	8	1611.2	1	
	5500	17	60.7	5	1854.8	3	
	5500	18	56.1	17	1390.6	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5500	1	71.6	14	1816.2	2	1
	5500	2	91.8	13	1283.0	1	
	5500	3	84.2	18	1871.1	3	
	5500	4	64.3	9	1919.0	2	
	5500	5	68.1	18	1725.2	1	
	5500	6	85.8	19	1379.1	3	
	5500	7	60.3	8	1574.8	2	
	5500	8	80.0	13	1673.8	1	
	5500	9	62.0	9	1417.3	2	
	5500	10	95.8	13	1720.9	1	
	5500	11	98.5	7	1541.3	1	
	5500	12	87.8	11	1618.8	1	
	5500	13	55.8	19	1048.5	1	
	5500	14	85.3	16	1773.8	3	
	5500	15	76.3	18	1059.6	1	
	5500	16	75.2	19	1203.8	1	
	5500	17	73.9	19	1273.5	3	
18	5500	1	74.4	8	1408.0	2	1
	5500	2	59.9	15	1542.1	2	
	5500	3	99.8	9	1744.5	3	
	5500	4	70.4	19	1195.3	3	
	5500	5	99.6	17	1642.5	2	
	5500	6	69.6	18	1164.0	1	
	5500	7	97.3	13	1133.5	3	
	5500	8	58.3	5	1033.4	1	
	5500	9	88.1	19	1427.7	1	
	5500	10	78.5	15	1439.0	1	
	5500	11	86.1	14	1424.0	1	
	5500	12	83.3	14	1537.0	3	
	5500	13	86.3	11	1515.6	2	
	5500	14	90.1	12	1124.4	2	
	5500	15	65.4	11	1861.3	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5500	1	97.4	12	1493.7	2	1
	5500	2	76.0	19	1816.2	2	
	5500	3	62.7	20	1283.0	1	
	5500	4	75.3	15	1459.9	2	
	5500	5	65.8	13	1859.9	2	
	5500	6	95.1	6	1574.4	1	
	5500	7	63.5	11	1716.5	2	
	5500	8	89.9	8	1112.6	2	
	5500	9	70.7	13	1652.5	2	
	5500	10	70.7	10	1095.6	1	
	5500	11	75.7	13	1645.2	1	
	5500	12	71.8	11	1038.6	3	
	5500	13	63.9	20	1736.4	3	
	5500	14	97.5	8	1374.8	2	
20	5500	1	62.0	19	1404.8	2	1
	5500	2	73.3	10	1348.6	1	
	5500	3	83.8	19	1179.4	2	
	5500	4	62.8	9	1949.8	1	
	5500	5	76.3	17	1657.0	2	
	5500	6	83.6	6	1732.1	3	
	5500	7	85.4	16	1012.0	2	
	5500	8	66.8	10	1681.3	2	
	5500	9	69.8	13	1631.8	3	
	5500	10	83.2	7	1097.0	3	
21	5504	1	65.3	14	1717.1	3	1
	5505	2	57.1	13	1668.4	2	
	5505	3	60.4	12	1824.0	1	
	5506	4	97.0	11	1337.6	2	
	5504	5	62.4	16	1105.8	3	
	5504	6	95.4	15	1502.9	3	
	5504	7	85.7	15	1044.4	3	
	5507	8	93.7	7	1389.1	2	
	5504	9	58.7	16	1565.2	3	
	5504	10	56.8	15	1235.9	1	
	5508	11	80.6	5	1505.4	1	
	5506	12	80.7	10	1253.0	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5508	1	74.4	5	1735.1	1	1
	5504	2	95.1	16	1193.3	3	
	5507	3	69.2	7	1900.0	2	
	5504	4	72.0	16	1621.0	2	
	5508	5	55.2	5	1913.7	1	
	5507	6	50.3	7	1586.3	2	
	5506	7	63.8	10	1081.5	2	
	5503	8	96.3	17	1526.0	1	
	5506	9	92.7	11	1109.6	3	
23	5506	1	98.3	10	1939.9	3	1
	5504	2	69.6	14	1898.8	1	
	5504	3	83.3	14	1101.1	2	
	5505	4	78.5	12	1135.8	3	
	5504	5	73.5	15	1510.5	2	
	5506	6	94.7	9	1166.8	3	
	5505	7	80.7	13	1656.2	3	
	5504	8	66.6	16	1062.6	1	
	5508	9	59.0	6	1089.2	2	
	5502	10	94.9	19	1627.1	2	
	5504	11	58.1	15	1469.7	1	
	5503	12	56.2	17	1218.3	2	
	5506	13	53.2	11	1006.3	3	
	5502	14	50.1	19	1248.8	3	
	5504	15	66.0	14	1599.5	2	
24	5507	1	60.6	8	1979.4	1	1
	5504	2	96.8	14	1684.5	3	
	5507	3	58.9	7	1914.2	2	
	5505	4	79.2	13	1400.9	2	
	5505	5	70.6	13	1379.1	3	
	5504	6	96.3	16	1692.0	2	
	5506	7	77.3	10	1522.2	1	
	5507	8	74.2	8	1097.2	3	
	5504	9	71.7	15	1022.0	1	
	5504	10	94.1	15	1383.0	3	
	5503	11	71.8	18	1271.5	3	
	5506	12	95.6	11	1342.2	1	
	5506	13	95.5	10	1354.3	2	
	5507	14	78.9	7	1114.3	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5506	1	97.4	10	1708.3	1	1
	5505	2	97.5	12	1302.6	3	
	5507	3	90.8	7	1012.7	3	
	5506	4	67.2	9	1888.0	1	
	5508	5	98.8	5	1807.8	1	
	5503	6	70.5	17	1993.9	2	
	5506	7	52.4	10	1990.3	3	
	5506	8	93.0	11	1597.0	3	
	5505	9	96.5	13	1806.7	2	
	5506	10	96.8	11	1750.4	1	
	5505	11	64.3	13	1564.0	1	
	5507	12	86.0	7	1918.7	3	
	5503	13	98.1	17	1297.3	1	
	5508	14	82.6	5	1688.8	1	
	5507	15	88.9	7	1627.6	2	
	5505	16	82.6	13	1682.4	1	
	5507	17	50.4	7	1811.8	1	
	5506	18	90.7	9	1572.3	3	
26	5502	1	90.8	19	1479.7	3	1
	5504	2	82.1	14	1008.2	2	
	5508	3	51.0	6	1062.6	3	
	5506	4	52.6	11	1122.3	1	
	5502	5	52.1	19	1594.1	3	
	5506	6	82.0	9	1085.7	3	
	5503	7	76.4	17	1177.1	3	
	5507	8	69.4	7	1247.9	2	
	5508	9	99.1	5	1102.3	1	
	5505	10	70.8	13	1170.9	1	
	5503	11	97.1	17	1354.6	2	
	5506	12	85.5	10	1544.9	1	
	5505	13	77.4	13	1720.0	1	
	5507	14	74.5	7	1038.1	1	
	5506	15	68.4	11	1016.5	2	
	5507	16	53.6	8	1397.8	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5504	1	54.7	15	1481.3	3	1
	5507	2	83.5	7	1814.6	2	
	5504	3	79.9	14	1540.6	1	
	5504	4	96.8	15	1408.9	1	
	5506	5	68.1	10	1451.2	3	
	5508	6	75.7	5	1981.5	3	
	5508	7	84.9	5	1025.5	3	
	5506	8	71.3	11	1012.0	3	
	5503	9	72.6	18	1368.6	3	
	5503	10	80.3	17	1129.3	1	
	5508	11	84.6	6	1723.2	3	
	5506	12	99.9	9	1055.8	1	
	5503	13	88.4	17	1965.6	1	
	5508	14	65.8	5	1911.7	1	
	5503	15	76.1	17	1815.7	1	
	5502	16	50.2	19	1143.2	1	
	5502	17	72.6	19	1477.7	3	
	5506	18	94.6	11	1175.6	3	
	5503	19	70.9	17	1761.6	1	
	5503	20	84.8	17	1472.8	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5506	1	91.3	11	1092.9	3	1
	5504	2	57.3	15	1582.1	3	
	5508	3	52.4	5	1486.6	2	
	5503	4	53.2	17	1428.3	1	
	5505	5	53.6	12	1081.0	3	
	5506	6	63.3	10	1143.5	2	
	5507	7	70.4	8	1643.9	3	
	5502	8	93.2	20	1276.2	2	
	5504	9	82.1	14	1312.4	1	
	5507	10	87.7	8	1761.4	1	
	5507	11	98.2	7	1203.4	2	
	5506	12	63.8	9	1929.3	3	
	5508	13	99.7	6	1438.3	1	
	5508	14	92.4	5	1262.3	2	
	5505	15	76.4	13	1980.5	2	
	5507	16	55.1	8	1303.5	1	
	5508	17	52.7	5	1344.4	2	
	5504	18	89.9	15	1939.4	2	
	5504	19	95.6	14	1541.5	3	
	5507	20	99.0	8	1007.2	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5506	1	70.2	9	1364.9	2	1
	5506	2	68.5	9	1624.2	1	
	5507	3	82.4	7	1903.3	2	
	5506	4	68.0	11	1009.6	3	
	5503	5	63.5	17	1460.4	1	
	5508	6	78.9	6	1188.7	2	
	5503	7	81.9	18	1881.5	2	
	5504	8	78.3	16	1850.9	1	
	5503	9	79.9	18	1194.3	2	
	5507	10	94.8	8	1763.8	1	
	5506	11	58.9	11	1477.1	1	
	5506	12	71.2	9	1338.2	2	
	5503	13	97.5	18	1738.1	3	
	5504	14	52.1	14	1411.4	3	
	5506	15	70.9	9	1589.1	2	
	5502	16	76.5	19	1006.1	2	
	5508	17	61.6	6	1697.8	2	
30	5502	1	53.5	19	1273.3	3	1
	5508	2	74.4	6	1919.1	2	
	5506	3	87.8	9	1968.7	2	
	5503	4	50.4	17	1034.5	1	
	5505	5	82.9	12	1038.4	3	
	5505	6	71.5	12	1026.1	2	
	5503	7	83.0	17	1674.9	3	
	5508	8	95.3	6	1896.6	3	
	5506	9	66.1	11	1046.3	1	
	5507	10	80.1	8	1686.7	1	
	5506	11	77.6	11	1874.8	2	
	5507	12	53.8	7	1600.4	1	
	5508	13	71.0	5	1377.2	2	
	5505	14	87.5	12	1223.6	1	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	1	718	74	1393	1
2	5510	1	778	68	1285	1
3	5510	1	658	81	1520	1
4	5510	1	858	62	1166	1
5	5510	1	778	68	1285	1
6	5510	1	618	86	1618	1
7	5510	1	658	81	1520	1
8	5510	1	618	86	1618	1
9	5510	1	678	78	1475	1
10	5510	1	758	70	1319	1
11	5510	1	578	92	1730	1
12	5510	1	558	95	1792	1
13	5510	1	838	63	1193	1
14	5510	1	658	81	1520	1
15	5510	1	638	83	1567	1
16	5510	1	1090	49	917	1
17	5510	1	2836	19	353	1
18	5510	1	2985	18	335	1
19	5510	1	820	65	1220	1
20	5510	1	2261	24	442	1
21	5510	1	1905	28	525	1
22	5510	1	1975	27	506	1
23	5510	1	1350	40	741	1
24	5510	1	1305	41	766	1
25	5510	1	1899	28	527	1
26	5510	1	1977	27	506	1
27	5510	1	1434	37	697	1
28	5510	1	1471	36	680	1
29	5510	1	1164	46	859	1
30	5510	1	2901	19	345	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	3.10	226.90	27	4407	1
2	5510	3.00	208.50	29	4796	1
3	5510	2.70	159.00	27	6289	1
4	5510	1.10	151.90	26	6583	1
5	5510	2.10	187.10	27	5345	1
6	5510	2.20	198.10	27	5048	1
7	5510	1.70	175.70	28	5692	1
8	5510	3.90	192.30	26	5200	1
9	5510	2.00	220.00	23	4545	1
10	5510	1.00	201.70	26	4958	1
11	5510	2.20	214.80	24	4655	1
12	5510	4.90	205.10	29	4876	1
13	5510	4.30	220.10	27	4543	1
14	5510	4.20	204.20	24	4897	1
15	5510	1.70	176.20	29	5675	1
16	5510	4.80	154.20	27	6485	1
17	5510	4.00	212.00	27	4717	1
18	5510	2.10	196.20	26	5097	1
19	5510	4.60	157.90	23	6333	1
20	5510	1.40	189.20	26	5285	1
21	5510	3.90	210.50	23	4751	1
22	5510	1.50	169.20	23	5910	1
23	5510	1.60	203.90	29	4904	1
24	5510	3.60	193.40	26	5171	1
25	5510	1.80	179.80	23	5562	1
26	5510	1.80	180.00	28	5556	1
27	5510	2.00	165.10	29	6057	1
28	5510	1.20	224.00	25	4464	1
29	5510	1.60	204.00	24	4902	1
30	5510	4.70	175.40	24	5701	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	8.10	433.40	17	2307.34	1
2	5510	7.20	389.90	18	2564.76	1
3	5510	8.30	392.90	18	2545.18	1
4	5510	6.30	250.90	16	3985.65	1
5	5510	6.10	436.60	16	2290.43	1
6	5510	9.30	250.40	17	3993.61	1
7	5510	7.70	201.50	17	4962.78	1
8	5510	9.50	371.10	16	2694.69	1
9	5510	8.70	395.60	18	2527.81	1
10	5510	8.50	483.50	18	2068.25	1
11	5510	7.90	205.70	17	4861.45	1
12	5510	6.30	217.70	18	4593.48	1
13	5510	7.80	410.70	16	2434.87	1
14	5510	9.50	453.30	18	2206.04	1
15	5510	9.60	481.00	17	2079.00	1
16	5510	8.50	212.00	16	4716.98	1
17	5510	9.90	211.10	18	4737.09	1
18	5510	8.90	430.40	16	2323.42	1
19	5510	6.80	299.50	18	3338.90	1
20	5510	7.10	471.10	17	2122.69	1
21	5510	7.10	309.50	17	3231.02	1
22	5510	8.00	352.50	17	2836.88	1
23	5510	6.30	219.40	18	4557.89	1
24	5510	9.30	363.80	18	2748.76	1
25	5510	8.70	415.70	17	2405.58	1
26	5510	10.00	277.10	18	3608.81	1
27	5510	10.00	312.00	17	3205.13	1
28	5510	6.20	435.50	17	2296.21	1
29	5510	6.10	341.50	16	2928.26	1
30	5510	9.50	271.40	16	3684.60	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	11.00	259.20	14	3858	1
2	5510	18.90	460.70	15	2171	1
3	5510	11.10	234.10	15	4272	1
4	5510	16.00	298.20	14	3353	1
5	5510	17.40	413.20	14	2420	1
6	5510	19.60	497.50	16	2010	1
7	5510	17.20	464.30	15	2154	1
8	5510	12.80	420.40	15	2379	1
9	5510	11.30	483.40	12	2069	1
10	5510	16.10	447.10	16	2237	1
11	5510	16.60	299.40	12	3340	1
12	5510	18.90	388.60	13	2573	1
13	5510	19.10	257.40	13	3885	1
14	5510	16.30	317.30	15	3152	1
15	5510	15.00	398.70	14	2508	1
16	5510	11.60	418.90	15	2387	1
17	5510	14.30	354.90	15	2818	1
18	5510	18.40	419.30	14	2385	1
19	5510	13.50	436.80	12	2289	1
20	5510	15.60	284.30	15	3517	1
21	5510	20.00	267.90	16	3733	1
22	5510	18.90	371.20	12	2694	1
23	5510	16.20	268.10	16	3730	1
24	5510	15.90	349.30	15	2863	1
25	5510	17.60	328.70	15	3042	1
26	5510	19.20	349.10	14	2865	1
27	5510	16.40	383.60	12	2607	1
28	5510	17.20	206.40	15	4845	1
29	5510	14.90	289.20	12	3458	1
30	5510	12.30	384.80	12	2599	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5495	1	55.8	9	1266.5	3	1
	5497	2	86.7	14	1354.7	3	
	5497	3	84.6	14	1997.9	1	
	5498	4	72.0	17	1656.8	2	
	5497	5	51.3	15	1403.1	3	
	5497	6	97.6	15	1796.7	1	
	5499	7	63.4	19	1777.7	3	
	5498	8	52.5	18	1360.1	1	
	5497	9	97.5	14	1301.8	1	
	5496	10	57.4	13	1224.9	1	
	5495	11	77.2	10	1322.7	1	
2	5496	1	56.9	13	1238.1	2	1
	5498	2	83.8	17	1578.4	2	
	5495	3	63.4	9	1066.0	3	
	5498	4	68.8	17	1293.4	2	
	5497	5	72.2	16	1960.4	1	
	5495	6	65.5	11	1188.7	2	
	5493	7	54.6	6	1902.8	3	
	5493	8	68.6	6	1119.1	3	
	5494	9	58.0	7	1957.8	3	
	5495	10	64.0	11	1516.5	2	
	5497	11	68.9	15	1230.2	1	
	5499	12	73.0	20	1355.2	3	
3	5493	1	90.1	6	1048.7	2	1
	5494	2	73.7	8	1181.8	2	
	5493	3	79.2	5	1148.6	1	
	5498	4	96.5	18	1483.7	1	
	5499	5	83.0	19	1784.2	3	
	5496	6	94.2	13	1674.3	3	
	5495	7	72.8	11	1730.0	1	
	5497	8	80.4	16	1209.4	1	
	5493	9	50.9	6	1649.8	2	
	5495	10	62.0	10	1395.9	3	
	5498	11	50.3	17	1569.1	2	
	5495	12	81.8	10	1064.6	3	
	5495	13	93.5	11	1119.0	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5497	1	57.1	16	1782.5	1	1
	5499	2	78.2	20	1141.3	2	
	5495	3	84.6	11	1403.2	2	
	5499	4	59.6	19	1840.2	3	
	5498	5	91.9	17	1251.9	3	
	5495	6	67.4	11	1679.7	2	
	5497	7	69.2	14	1642.1	1	
	5493	8	81.1	6	1602.8	3	
	5493	9	79.3	6	1860.5	1	
5	5494	1	73.5	8	1665.6	2	1
	5495	2	73.6	10	1271.5	3	
	5495	3	51.2	9	1248.2	2	
	5495	4	73.5	10	1663.0	1	
	5497	5	70.9	16	1126.4	1	
	5497	6	53.3	16	1041.6	2	
	5499	7	70.4	20	1288.6	2	
	5494	8	76.6	7	1095.3	1	
	5498	9	87.8	18	1296.7	1	
	5497	10	56.7	16	1310.4	2	
	5495	11	55.2	9	1996.8	1	
	5499	12	94.8	19	1407.2	2	
	5494	13	67.1	8	1760.8	2	
	5498	14	91.5	17	1155.3	2	
	5494	15	68.4	8	1425.6	1	
6	5499	1	79.4	19	1858.1	3	1
	5497	2	78.9	14	1217.4	2	
	5495	3	59.6	10	1175.9	1	
	5496	4	61.1	12	1094.6	1	
	5494	5	53.3	7	1935.7	3	
	5499	6	55.1	19	1308.0	3	
	5493	7	64.7	6	1415.7	3	
	5495	8	61.6	11	1889.9	1	
	5496	9	97.3	13	1316.4	1	
	5493	10	79.8	5	1197.6	2	
	5496	11	58.3	13	1952.2	1	
	5496	12	57.3	13	1623.2	2	
	5493	13	87.8	6	1612.6	1	
	5497	14	98.5	14	1238.8	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5498	1	54.2	17	1952.0	3	1
	5498	2	57.4	17	1126.9	2	
	5493	3	60.7	5	1133.3	3	
	5498	4	84.0	17	1282.7	1	
	5495	5	85.5	9	1759.9	1	
	5495	6	51.9	9	1162.6	3	
	5497	7	81.7	15	1176.2	2	
	5494	8	83.5	7	1437.5	1	
	5497	9	99.6	14	1310.4	3	
	5498	10	88.7	18	1385.2	2	
	5493	11	53.7	5	1954.0	3	
	5499	12	65.0	19	1714.5	1	
	5494	13	61.8	8	1960.3	3	
	5498	14	62.2	17	1623.1	2	
	5494	15	69.5	7	1412.5	2	
	5493	16	54.9	6	1505.8	2	
	5495	17	79.9	9	1186.1	3	
8	5495	1	91.0	10	1779.2	1	1
	5497	2	52.4	14	1118.6	2	
	5495	3	64.0	10	1847.6	3	
	5497	4	78.2	15	1982.3	1	
	5495	5	79.3	11	1235.6	3	
	5496	6	76.3	13	1661.5	2	
	5496	7	63.8	13	1437.7	1	
	5495	8	69.1	11	1922.5	2	
	5497	9	68.3	15	1880.7	2	
	5495	10	51.0	9	1542.2	2	
	5498	11	52.4	18	1568.9	2	
	5495	12	80.7	11	1018.0	3	
	5498	13	69.8	18	1350.5	1	
	5494	14	82.2	8	1637.5	3	
	5495	15	90.0	9	1186.2	1	
	5499	16	56.6	19	1325.9	1	
	5493	17	80.0	5	1054.5	1	
	5495	18	74.4	9	1097.4	1	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5498	1	61.8	17	1088.3	1	1
	5497	2	52.2	14	1217.8	2	
	5497	3	56.7	14	1378.7	3	
	5497	4	72.3	15	1845.9	3	
	5497	5	62.2	15	1832.4	1	
	5494	6	75.9	8	1604.3	2	
	5495	7	99.2	10	1101.0	1	
	5497	8	61.3	14	1832.0	1	
	5496	9	93.8	13	1881.0	2	
	5498	10	65.7	17	1183.3	1	
	5493	11	89.6	6	1156.6	1	
	5497	12	84.8	16	1978.9	2	
	5493	13	76.2	5	1279.0	1	
	5496	14	76.0	12	1738.9	3	
	5498	15	53.2	17	1853.6	2	
	5493	16	68.8	6	1792.3	1	
	5497	17	74.1	15	1058.8	3	
	5495	18	61.4	10	1938.9	3	
	5496	19	72.2	12	1270.8	3	
10	5494	1	62.4	8	1750.0	1	1
	5497	2	67.6	14	1039.4	1	
	5494	3	51.2	8	1155.8	1	
	5498	4	69.8	17	1777.6	3	
	5499	5	61.6	20	1748.5	2	
	5497	6	97.6	16	1313.4	3	
	5494	7	89.7	8	1639.3	1	
	5498	8	89.6	17	1734.3	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5510	1	83.0	13	1433.6	1	1
	5510	2	93.0	14	1064.0	2	
	5510	3	52.4	11	1492.0	3	
	5510	4	93.2	9	1748.0	1	
	5510	5	60.2	7	1579.1	3	
	5510	6	82.9	10	1598.0	3	
	5510	7	51.0	5	1685.2	1	
	5510	8	76.5	18	1429.9	2	
	5510	9	80.4	11	1561.3	1	
	5510	10	72.6	7	1211.9	3	
	5510	11	89.3	8	1321.9	2	
	5510	12	88.0	10	1735.3	3	
	5510	13	75.2	15	1036.3	1	
	5510	14	98.1	19	1637.5	3	
	5510	15	94.4	7	1982.0	2	
	5510	16	65.2	6	1046.7	2	
12	5510	1	82.4	10	1123.7	2	1
	5510	2	53.8	14	1917.2	1	
	5510	3	59.0	10	1873.7	2	
	5510	4	59.0	5	1501.9	3	
	5510	5	53.7	16	1555.4	3	
	5510	6	98.9	12	1279.3	1	
	5510	7	78.1	7	1548.1	3	
	5510	8	58.6	20	1229.8	2	
	5510	9	61.4	7	1123.1	1	
	5510	10	80.2	19	1601.9	2	
	5510	11	92.7	9	1649.3	2	
	5510	12	60.2	19	1629.8	3	
	5510	13	68.5	15	1796.5	3	
	5510	14	89.4	18	1598.6	1	
	5510	15	86.9	14	1180.6	1	
	5510	16	72.4	8	1188.8	1	
	5510	17	62.3	18	1920.2	1	
	5510	18	61.9	7	1530.3	2	
	5510	19	71.1	12	1874.4	3	
	5510	20	90.0	12	1047.8	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5510	1	66.3	12	1657.0	1	1
	5510	2	68.9	20	1012.7	2	
	5510	3	61.1	6	1808.0	1	
	5510	4	60.6	7	1488.4	3	
	5510	5	95.4	17	1723.9	3	
	5510	6	84.7	8	1799.8	3	
	5510	7	91.1	19	1354.3	2	
	5510	8	94.9	19	1480.2	2	
	5510	9	70.5	7	1974.5	2	
	5510	10	94.4	15	1658.1	3	
14	5510	1	53.8	9	1506.7	2	1
	5510	2	66.2	11	1083.8	3	
	5510	3	80.6	8	1311.5	3	
	5510	4	98.9	7	1163.9	1	
	5510	5	95.7	9	1914.1	2	
	5510	6	89.4	13	1355.4	3	
	5510	7	57.2	15	1097.1	1	
	5510	8	99.3	11	1394.3	3	
	5510	9	85.2	9	1428.4	3	
	5510	10	81.4	18	1189.0	1	
	5510	11	80.6	16	1705.9	1	
	5510	12	86.8	7	1202.1	3	
	5510	13	90.1	11	1453.9	3	
	5510	14	72.7	9	1954.2	1	
	5510	15	61.9	16	1877.5	1	
	5510	16	60.5	20	1068.3	3	
	5510	17	66.0	20	1753.6	3	
	5510	18	69.8	13	1487.6	2	
	5510	19	66.5	10	1044.9	2	
	5510	20	62.6	15	1685.4	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5510	1	90.4	7	1770.4	2	1
	5510	2	85.9	16	1478.5	3	
	5510	3	86.0	16	1000.3	1	
	5510	4	56.8	10	1603.6	2	
	5510	5	90.8	16	1210.1	3	
	5510	6	84.1	15	1191.2	1	
	5510	7	82.3	17	1068.8	2	
	5510	8	91.5	12	1677.6	3	
	5510	9	66.3	15	1941.1	2	
	5510	10	87.2	9	1358.6	3	
	5510	11	79.8	15	1779.6	1	
	5510	12	72.9	6	1629.1	2	
	5510	13	63.0	12	1929.8	2	
	5510	14	60.3	18	1818.7	3	
	5510	15	62.4	18	1857.4	3	
	5510	16	92.2	16	1782.6	2	
	5510	17	99.7	8	1646.9	2	
	5510	18	81.5	18	1842.1	1	
	5510	19	94.9	17	1808.2	2	
16	5510	1	85.1	6	1586.0	1	1
	5510	2	96.6	13	1917.5	3	
	5510	3	69.2	16	1445.2	2	
	5510	4	59.1	12	1127.8	1	
	5510	5	82.3	12	1719.4	1	
	5510	6	85.2	8	1013.4	3	
	5510	7	51.3	9	1989.8	1	
	5510	8	66.0	9	1268.7	1	
	5510	9	80.1	9	1778.4	2	
	5510	10	88.9	14	1663.4	1	
	5510	11	81.3	17	1339.5	2	
	5510	12	91.3	9	1121.8	3	
	5510	13	79.7	13	1153.6	1	
	5510	14	96.1	17	1220.0	1	
	5510	15	93.4	9	1064.1	3	
	5510	16	91.6	6	1299.9	2	
	5510	17	69.4	7	1947.5	1	
	5510	18	96.0	7	1715.8	1	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5510	1	79.0	16	1394.8	1	1
	5510	2	74.9	10	1073.8	3	
	5510	3	52.5	5	1941.4	1	
	5510	4	98.5	18	1232.3	1	
	5510	5	95.9	19	1955.8	2	
	5510	6	82.1	15	1958.2	2	
	5510	7	93.7	19	1247.4	1	
	5510	8	70.1	7	1091.2	2	
	5510	9	84.3	8	1935.8	2	
	5510	10	51.0	9	1882.5	3	
	5510	11	79.4	6	1222.7	1	
	5510	12	66.3	11	1849.8	2	
	5510	13	80.5	7	1767.4	3	
	5510	14	62.9	17	1219.5	1	
	5510	15	78.2	19	1300.6	2	
	5510	16	90.2	15	1803.8	2	
	5510	17	95.5	10	1427.9	3	
18	5510	1	84.4	16	1924.6	1	1
	5510	2	61.7	7	1688.6	3	
	5510	3	78.5	20	1230.6	1	
	5510	4	63.9	16	1691.1	1	
	5510	5	96.8	20	1244.2	1	
	5510	6	90.4	16	1727.4	3	
	5510	7	54.4	6	1090.9	3	
	5510	8	69.8	15	1362.4	1	
	5510	9	68.6	7	1706.2	3	
	5510	10	60.1	15	1086.6	2	
	5510	11	68.2	8	1871.5	2	
	5510	12	84.6	7	1776.2	2	
	5510	13	89.4	14	1188.4	3	
	5510	14	62.4	5	1279.2	1	
	5510	15	55.9	5	1227.7	1	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5510	1	90.8	10	1856.5	3	1
	5510	2	97.5	8	1804.6	1	
	5510	3	63.1	18	1018.7	1	
	5510	4	77.0	12	1875.1	1	
	5510	5	64.1	10	1901.4	3	
	5510	6	95.8	14	1262.5	3	
	5510	7	94.5	18	1589.5	2	
	5510	8	97.1	17	1773.7	2	
	5510	9	54.5	12	1131.0	1	
	5510	10	52.8	10	1860.5	3	
	5510	11	54.0	15	1736.3	3	
	5510	12	76.4	6	1803.6	1	
	5510	13	93.5	11	1013.1	2	
	5510	14	98.8	5	1638.9	2	
20	5510	1	71.6	17	1804.6	2	1
	5510	2	72.0	11	1778.5	2	
	5510	3	88.2	8	1740.9	2	
	5510	4	77.1	9	1565.1	2	
	5510	5	51.1	15	1341.4	1	
	5510	6	80.7	7	1805.6	3	
	5510	7	70.8	5	1281.1	2	
	5510	8	85.2	14	1155.9	3	
	5510	9	91.5	15	1150.7	1	
	5510	10	81.1	9	1419.6	1	
21	5522	1	75.6	17	1478.6	1	1
	5524	2	92.2	13	1770.3	3	
	5527	3	94.8	6	1348.5	1	
	5526	4	73.9	8	1428.2	1	
	5526	5	60.2	8	1539.3	2	
	5521	6	84.6	19	1364.1	3	
	5523	7	96.6	14	1239.0	3	
	5526	8	94.1	7	1387.8	2	
	5521	9	88.2	19	1762.1	2	
	5523	10	99.7	16	1279.4	3	
	5523	11	72.4	14	1790.3	2	
	5522	12	67.9	17	1015.4	1	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5526	1	99.4	8	1523.8	3	1
	5525	2	66.7	9	1975.6	3	
	5522	3	96.2	18	1126.3	1	
	5526	4	53.2	8	1960.0	1	
	5527	5	90.8	5	1763.1	2	
	5525	6	60.3	11	1236.2	3	
	5523	7	64.4	15	1819.5	2	
	5523	8	71.5	15	1907.0	2	
	5524	9	82.2	13	1000.1	3	
23	5524	1	84.3	12	1655.9	1	1
	5521	2	85.2	19	1561.3	3	
	5526	3	52.0	8	1819.8	3	
	5523	4	56.0	14	1271.6	1	
	5521	5	81.4	19	1735.8	2	
	5524	6	78.9	12	1061.7	2	
	5525	7	61.0	10	1532.4	2	
	5521	8	62.1	20	1275.5	3	
	5522	9	62.8	18	1125.1	1	
	5521	10	62.6	19	1868.0	1	
	5527	11	91.1	5	1470.8	3	
	5527	12	65.2	6	1488.2	3	
	5525	13	62.4	11	1242.5	2	
	5523	14	77.7	16	1208.1	3	
	5523	15	58.5	15	1658.5	3	
24	5525	1	58.1	10	1952.7	2	1
	5521	2	66.9	19	1141.9	1	
	5525	3	59.2	11	1886.8	3	
	5524	4	78.4	12	1921.8	1	
	5526	5	97.2	7	1335.2	1	
	5524	6	96.3	13	1303.9	1	
	5521	7	74.7	19	1605.9	3	
	5522	8	90.9	18	1176.1	2	
	5525	9	68.9	11	1579.9	1	
	5523	10	68.2	16	1550.6	1	
	5523	11	82.4	15	1208.5	2	
	5522	12	62.9	17	1150.2	2	
	5525	13	86.8	11	1787.0	3	
	5525	14	92.8	10	1519.6	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5522	1	53.6	18	1138.5	2	1
	5526	2	51.5	8	1204.5	3	
	5521	3	86.1	19	1003.9	3	
	5526	4	73.5	7	1219.3	3	
	5522	5	94.7	18	1041.4	2	
	5522	6	70.8	17	1495.8	1	
	5524	7	86.1	12	1221.0	2	
	5523	8	75.7	16	1089.0	3	
	5525	9	89.3	9	1421.7	2	
	5523	10	89.1	14	1204.8	2	
	5523	11	95.4	14	1907.3	1	
	5526	12	70.5	8	1180.2	2	
	5527	13	65.7	6	1091.0	2	
	5526	14	66.0	7	1838.6	1	
	5526	15	50.8	8	1890.0	1	
	5527	16	85.3	6	1226.2	3	
	5524	17	82.8	13	1187.8	2	
	5527	18	67.2	6	1044.9	2	
26	5525	1	69.6	11	1954.2	1	1
	5523	2	51.6	15	1852.4	2	
	5526	3	57.8	8	1273.7	1	
	5525	4	90.1	11	1860.2	2	
	5525	5	84.2	10	1298.2	2	
	5523	6	87.1	15	1536.3	2	
	5526	7	98.0	8	1619.6	2	
	5523	8	64.9	16	1877.6	1	
	5523	9	87.9	16	1942.8	3	
	5526	10	69.4	7	1294.6	3	
	5523	11	53.7	14	1548.8	3	
	5525	12	94.9	9	1393.3	3	
	5522	13	58.8	17	1857.4	2	
	5523	14	55.4	14	1011.5	1	
	5522	15	79.8	18	1255.7	1	
	5525	16	84.7	11	1453.4	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5524	1	71.0	13	1192.3	3	1
	5521	2	97.9	20	1211.3	3	
	5524	3	75.6	12	1088.2	2	
	5523	4	76.2	14	1929.1	3	
	5523	5	58.7	14	1430.1	2	
	5522	6	70.0	17	1682.0	2	
	5523	7	92.4	15	1482.2	2	
	5524	8	57.3	13	1735.0	2	
	5527	9	83.7	6	1157.2	1	
	5521	10	75.0	19	1168.6	3	
	5522	11	71.5	17	1466.3	2	
	5525	12	70.2	9	1889.6	2	
	5527	13	89.6	6	1764.2	3	
	5524	14	63.7	12	1788.7	3	
	5523	15	80.6	15	1408.1	3	
	5525	16	65.8	9	1181.1	3	
	5524	17	79.5	12	1753.3	1	
	5523	18	68.4	16	1792.2	1	
	5527	19	71.4	6	1679.1	3	
	5524	20	89.9	13	1765.8	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5523	1	92.6	16	1922.1	1	1
	5526	2	68.2	8	1792.3	1	
	5522	3	99.5	17	1345.9	1	
	5525	4	98.9	10	1381.9	2	
	5527	5	71.8	5	1904.0	3	
	5523	6	95.1	14	1352.6	2	
	5521	7	93.4	19	1736.1	1	
	5523	8	83.4	15	1160.7	2	
	5525	9	87.5	9	1145.1	1	
	5525	10	70.7	10	1800.4	1	
	5525	11	69.5	10	1105.2	1	
	5525	12	86.3	11	1203.3	3	
	5525	13	84.5	10	1869.9	1	
	5523	14	64.4	14	1472.7	3	
	5525	15	86.5	10	1411.0	3	
	5523	16	74.3	14	1676.8	2	
	5521	17	62.9	20	1341.1	3	
	5526	18	65.7	7	1236.0	1	
	5523	19	56.8	15	1087.1	1	
	5521	20	90.1	20	1190.5	1	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5523	1	73.6	16	1562.1	1	1
	5525	2	75.1	9	1906.6	3	
	5527	3	87.4	5	1681.5	2	
	5525	4	94.3	11	1059.8	1	
	5523	5	72.4	16	1672.5	1	
	5525	6	66.8	9	1520.7	1	
	5526	7	64.0	7	1034.4	2	
	5521	8	62.9	20	1582.9	1	
	5527	9	82.2	6	1719.4	2	
	5523	10	97.5	15	1145.6	1	
	5523	11	54.9	15	1928.7	3	
	5524	12	91.5	13	1494.0	3	
	5526	13	63.0	7	1485.2	2	
	5526	14	75.5	7	1845.6	3	
	5525	15	60.0	11	1955.6	1	
	5524	16	53.9	13	1928.5	1	
	5523	17	71.9	16	1682.4	3	
30	5527	1	63.6	6	1230.5	3	1
	5524	2	67.8	13	1969.7	1	
	5525	3	94.3	10	1614.1	1	
	5522	4	80.5	17	1359.7	3	
	5526	5	59.5	7	1321.8	3	
	5527	6	55.6	5	1596.2	2	
	5524	7	92.2	13	1159.7	2	
	5523	8	83.5	16	1527.5	3	
	5524	9	90.6	13	1510.3	2	
	5521	10	61.0	19	1595.1	3	
	5525	11	77.1	9	1406.7	2	
	5523	12	53.5	16	1373.5	1	
	5521	13	63.3	20	1217.8	1	
	5526	14	78.8	8	1230.0	3	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	1	798	67	1253	1
2	5530	1	658	81	1520	1
3	5530	1	778	68	1285	1
4	5530	1	538	99	1859	1
5	5530	1	758	70	1319	1
6	5530	1	778	68	1285	1
7	5530	1	518	102	1931	1
8	5530	1	618	86	1618	1
9	5530	1	698	76	1433	1
10	5530	1	778	68	1285	1
11	5530	1	578	92	1730	1
12	5530	1	838	63	1193	1
13	5530	1	518	102	1931	1
14	5530	1	878	61	1139	1
15	5530	1	698	76	1433	1
16	5530	1	1697	32	589	1
17	5530	1	602	88	1661	1
18	5530	1	1357	39	737	1
19	5530	1	1736	31	576	1
20	5530	1	1166	46	858	1
21	5530	1	2248	24	445	1
22	5530	1	728	73	1374	1
23	5530	1	1159	46	863	1
24	5530	1	2509	22	399	1
25	5530	1	1245	43	803	1
26	5530	1	942	57	1062	1
27	5530	1	782	68	1279	1
28	5530	1	917	58	1091	1
29	5530	1	1291	41	775	1
30	5530	1	2365	23	423	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	3.60	159.90	23	6254	1
2	5530	3.70	215.00	26	4651	1
3	5530	3.80	190.50	29	5249	1
4	5530	4.50	151.80	26	6588	1
5	5530	1.60	200.60	27	4985	1
6	5530	2.90	170.60	28	5862	1
7	5530	2.10	215.60	29	4638	1
8	5530	4.90	227.90	28	4388	1
9	5530	4.60	172.60	24	5794	1
10	5530	3.50	187.80	26	5325	1
11	5530	2.20	211.70	27	4724	1
12	5530	4.60	204.70	26	4885	1
13	5530	3.90	201.10	28	4973	1
14	5530	1.70	158.80	27	6297	1
15	5530	3.60	213.90	28	4675	1
16	5530	1.90	178.50	23	5602	1
17	5530	1.40	213.60	29	4682	1
18	5530	2.20	157.10	25	6365	1
19	5530	1.20	224.60	27	4452	1
20	5530	1.40	170.20	27	5875	1
21	5530	3.00	221.60	29	4513	1
22	5530	4.80	203.20	23	4921	1
23	5530	3.30	189.20	26	5285	1
24	5530	4.60	201.40	27	4965	1
25	5530	1.80	205.00	25	4878	1
26	5530	3.60	207.70	25	4815	1
27	5530	2.30	164.10	25	6094	1
28	5530	1.50	191.30	26	5227	1
29	5530	2.30	192.20	23	5203	1
30	5530	1.30	176.00	24	5682	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	7.70	205.50	18	4866.18	1
2	5530	7.10	340.60	18	2936.00	1
3	5530	9.60	235.50	16	4246.28	1
4	5530	7.70	220.00	18	4545.45	1
5	5530	8.20	356.50	16	2805.05	1
6	5530	9.30	412.70	18	2423.07	1
7	5530	7.60	442.60	18	2259.38	1
8	5530	6.80	246.30	16	4060.09	1
9	5530	7.20	292.40	16	3419.97	1
10	5530	7.90	387.40	16	2581.31	1
11	5530	8.40	409.20	18	2443.79	1
12	5530	7.30	231.20	17	4325.26	1
13	5530	9.90	270.40	18	3698.22	1
14	5530	8.00	425.90	18	2347.97	1
15	5530	7.10	213.70	16	4679.46	1
16	5530	8.40	232.60	17	4299.23	1
17	5530	7.90	497.40	16	2010.45	1
18	5530	7.60	362.80	18	2756.34	1
19	5530	7.20	336.60	16	2970.89	1
20	5530	8.80	290.40	17	3443.53	1
21	5530	8.80	388.00	18	2577.32	1
22	5530	9.80	430.60	18	2322.34	1
23	5530	6.80	427.40	18	2339.73	1
24	5530	6.40	260.80	16	3834.36	1
25	5530	9.80	280.30	16	3567.61	1
26	5530	6.20	460.10	16	2173.44	1
27	5530	6.40	229.10	16	4364.91	1
28	5530	6.30	491.10	17	2036.25	1
29	5530	7.00	388.80	18	2572.02	1
30	5530	8.10	410.40	16	2436.65	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	16.80	236.20	12	4234	1
2	5530	18.20	241.60	12	4139	1
3	5530	17.70	437.20	12	2287	1
4	5530	11.60	431.40	13	2318	1
5	5530	12.90	328.00	12	3049	1
6	5530	12.70	305.90	12	3269	1
7	5530	16.40	274.40	15	3644	1
8	5530	14.90	214.80	15	4655	1
9	5530	19.70	496.00	14	2016	1
10	5530	11.90	331.20	12	3019	1
11	5530	17.40	463.90	15	2156	1
12	5530	18.90	495.90	16	2017	1
13	5530	15.40	327.80	14	3051	1
14	5530	18.10	462.60	15	2162	1
15	5530	14.80	407.10	16	2456	1
16	5530	12.60	286.50	14	3490	1
17	5530	17.60	395.40	13	2529	1
18	5530	19.90	234.40	13	4266	1
19	5530	12.40	327.50	14	3053	1
20	5530	14.40	378.50	16	2642	1
21	5530	17.20	288.90	14	3461	1
22	5530	16.80	209.60	12	4771	1
23	5530	11.40	274.20	14	3647	1
24	5530	15.70	436.70	16	2290	1
25	5530	12.70	406.70	13	2459	1
26	5530	12.90	256.60	13	3897	1
27	5530	15.70	243.20	16	4112	1
28	5530	19.90	449.60	16	2224	1
29	5530	11.70	378.00	15	2646	1
30	5530	12.90	415.90	15	2404	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5496	1	60.4	13	1490.2	2	1
	5496	2	84.6	13	1211.6	1	
	5496	3	54.2	12	1823.9	2	
	5495	4	76.1	10	1151.6	3	
	5499	5	94.7	20	1211.6	3	
	5495	6	63.0	11	1370.3	3	
	5499	7	71.5	19	1973.7	1	
	5498	8	63.1	17	1111.5	3	
	5495	9	89.9	10	1049.1	1	
	5498	10	84.9	17	1408.1	1	
	5497	11	90.7	14	1047.0	1	
2	5495	1	74.8	9	1374.9	2	1
	5493	2	86.2	5	1357.5	3	
	5497	3	78.1	14	1228.9	2	
	5493	4	93.7	6	1668.8	1	
	5495	5	68.9	10	1398.6	3	
	5494	6	75.1	7	1016.2	3	
	5497	7	79.5	16	1336.2	2	
	5497	8	86.9	16	1191.8	1	
	5498	9	85.3	17	1768.1	1	
	5495	10	76.1	10	1150.9	2	
	5497	11	89.4	16	1868.2	2	
	5499	12	60.6	20	1525.7	3	
3	5495	1	72.4	10	1780.0	3	1
	5497	2	90.2	14	1864.3	1	
	5495	3	61.3	10	1936.8	3	
	5498	4	74.7	17	1990.1	2	
	5494	5	78.0	8	1162.2	3	
	5497	6	89.3	16	1436.5	1	
	5495	7	59.4	10	1736.7	1	
	5494	8	60.7	8	1090.8	1	
	5499	9	92.8	20	1229.8	3	
	5497	10	77.9	15	1044.1	3	
	5494	11	83.1	7	1629.3	2	
	5499	12	96.7	19	1242.5	1	
	5494	13	74.6	8	1491.9	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5499	1	98.8	19	1737.2	1	1
	5498	2	82.1	17	1554.2	3	
	5493	3	58.9	5	1821.8	1	
	5494	4	56.5	8	1940.2	2	
	5499	5	65.5	19	1742.4	1	
	5494	6	68.6	8	1144.9	2	
	5494	7	56.7	7	1550.3	1	
	5497	8	61.6	16	1316.1	2	
	5497	9	57.7	16	1469.2	1	
5	5498	1	62.3	17	1371.0	2	1
	5495	2	84.6	9	1062.5	2	
	5498	3	81.6	17	1190.5	2	
	5495	4	58.5	11	1705.2	1	
	5498	5	70.9	17	1134.5	1	
	5497	6	64.2	16	1759.0	1	
	5494	7	79.6	7	1996.3	1	
	5499	8	76.6	19	1094.2	1	
	5497	9	82.6	16	1395.6	3	
	5493	10	65.2	6	1895.1	2	
	5495	11	57.9	10	1115.2	1	
	5497	12	50.4	15	1496.3	2	
	5499	13	72.6	19	1706.6	2	
	5498	14	100.0	18	1005.6	1	
	5497	15	62.6	16	1611.7	1	
6	5496	1	69.3	13	1655.6	2	1
	5497	2	95.8	16	1893.0	1	
	5498	3	66.9	18	1261.0	1	
	5498	4	66.9	17	1277.2	2	
	5493	5	65.2	6	1764.0	2	
	5493	6	77.4	5	1904.4	2	
	5497	7	96.2	16	1356.6	3	
	5498	8	68.5	17	1272.5	3	
	5493	9	97.4	5	1588.2	1	
	5496	10	87.0	13	1441.4	3	
	5498	11	58.2	18	1456.9	1	
	5496	12	60.9	13	1054.9	3	
	5499	13	79.3	19	1490.2	2	
	5496	14	75.7	12	1149.4	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5495	1	82.6	11	1554.1	1	1
	5499	2	91.5	20	1233.7	3	
	5494	3	62.0	8	1400.4	3	
	5495	4	94.9	10	1826.2	2	
	5496	5	99.7	13	1172.2	1	
	5495	6	75.5	11	1203.8	2	
	5496	7	59.4	13	1934.9	1	
	5497	8	78.6	16	1081.6	2	
	5496	9	95.2	12	1042.6	2	
	5498	10	68.5	18	1993.6	1	
	5498	11	96.6	18	1847.1	3	
	5496	12	84.9	13	1083.2	1	
	5497	13	97.0	15	1483.0	3	
	5497	14	96.0	16	1557.4	1	
	5495	15	89.9	10	1976.6	3	
	5493	16	71.2	6	1055.9	2	
	5496	17	62.9	12	1168.2	1	
8	5498	1	97.1	18	1206.4	1	1
	5497	2	90.0	15	1833.7	2	
	5498	3	93.6	18	1665.2	2	
	5497	4	97.9	16	1987.0	1	
	5495	5	55.6	11	1782.1	1	
	5493	6	75.6	6	1126.8	3	
	5495	7	53.9	11	1453.9	1	
	5494	8	50.9	8	1772.4	2	
	5499	9	65.6	20	1273.0	1	
	5498	10	77.8	18	1677.9	2	
	5499	11	92.0	19	1261.4	2	
	5495	12	69.4	10	1813.1	3	
	5496	13	93.9	13	1185.9	3	
	5498	14	56.2	18	1936.4	2	
	5498	15	93.9	17	1083.6	1	
	5493	16	96.0	5	1966.6	2	
	5496	17	65.2	13	1487.5	2	
	5494	18	58.4	7	1530.1	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5496	1	69.4	13	1172.0	3	1
	5497	2	52.9	15	1615.8	2	
	5496	3	83.1	12	1138.8	1	
	5496	4	84.1	12	1825.1	3	
	5493	5	97.1	6	1391.1	2	
	5498	6	77.1	18	1886.8	1	
	5493	7	94.8	6	1427.5	3	
	5495	8	61.7	11	1570.0	1	
	5497	9	88.5	14	1897.9	3	
	5499	10	51.6	19	1605.3	2	
	5497	11	95.2	16	1314.0	2	
	5495	12	98.3	11	1301.3	2	
	5496	13	77.6	12	1539.6	3	
	5493	14	78.0	5	1141.4	3	
	5495	15	78.4	9	1650.9	2	
	5498	16	67.8	17	1151.9	2	
	5497	17	65.4	15	1799.1	3	
	5493	18	90.3	6	1119.7	1	
	5494	19	87.0	8	1481.5	2	
10	5497	1	95.7	14	1913.6	2	1
	5496	2	74.9	12	1769.4	3	
	5497	3	55.1	16	1945.7	3	
	5498	4	63.2	17	1361.5	3	
	5494	5	94.3	7	1428.8	2	
	5497	6	50.3	16	1561.5	3	
	5497	7	52.5	16	1205.2	1	
	5497	8	60.6	15	1682.0	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5530	1	53.0	10	1807.0	1	1
	5530	2	82.3	18	1020.5	1	
	5530	3	87.1	6	1768.7	2	
	5530	4	77.1	17	1791.9	2	
	5530	5	70.4	11	1626.8	2	
	5530	6	61.1	13	1251.6	2	
	5530	7	73.5	8	1013.7	2	
	5530	8	61.9	16	1245.3	2	
	5530	9	71.6	5	1584.9	3	
	5530	10	52.8	14	1384.6	1	
	5530	11	55.9	16	1058.2	3	
	5530	12	57.2	16	1979.9	1	
	5530	13	84.8	7	1429.7	1	
	5530	14	93.3	8	1496.1	2	
	5530	15	89.8	19	1316.1	1	
	5530	16	83.7	8	1558.3	1	
12	5530	1	66.1	14	1686.4	1	1
	5530	2	86.1	8	1755.7	1	
	5530	3	66.3	6	1758.6	3	
	5530	4	57.4	9	1049.5	3	
	5530	5	97.7	9	1966.9	1	
	5530	6	84.8	5	1868.0	3	
	5530	7	84.3	11	1333.1	2	
	5530	8	77.3	19	1265.9	2	
	5530	9	91.8	15	1635.9	1	
	5530	10	87.3	6	1342.7	2	
	5530	11	92.8	20	1431.0	2	
	5530	12	56.0	6	1135.6	3	
	5530	13	64.2	8	1639.6	2	
	5530	14	91.0	9	1329.7	2	
	5530	15	73.3	12	1104.0	1	
	5530	16	54.1	14	1585.7	3	
	5530	17	72.5	17	1294.8	1	
	5530	18	73.1	14	1099.7	1	
	5530	19	94.8	13	1038.5	3	
	5530	20	98.3	11	1853.1	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5530	1	96.9	7	1891.9	1	1
	5530	2	90.7	18	1396.8	3	
	5530	3	77.6	10	1711.3	2	
	5530	4	85.8	8	1083.6	3	
	5530	5	70.2	15	1294.1	2	
	5530	6	51.1	6	1741.6	1	
	5530	7	72.7	15	1647.7	3	
	5530	8	76.0	18	1932.7	1	
	5530	9	58.1	7	1093.0	2	
	5530	10	76.5	19	1612.5	1	
14	5530	1	95.5	19	1420.1	1	1
	5530	2	97.4	5	1018.4	2	
	5530	3	56.1	8	1099.8	3	
	5530	4	97.0	20	1404.9	3	
	5530	5	97.0	10	1517.1	2	
	5530	6	67.5	15	1851.4	1	
	5530	7	72.7	7	1129.1	3	
	5530	8	55.4	20	1087.4	3	
	5530	9	94.3	19	1437.8	3	
	5530	10	93.6	5	1573.6	3	
	5530	11	51.1	5	1106.4	2	
	5530	12	99.4	10	1997.0	3	
	5530	13	91.1	5	1398.2	2	
	5530	14	95.6	15	1214.2	1	
	5530	15	83.3	13	1537.1	3	
	5530	16	72.7	8	1736.1	3	
	5530	17	82.1	19	1458.4	3	
	5530	18	55.3	15	1450.8	2	
	5530	19	91.3	19	1732.6	2	
	5530	20	70.0	12	1185.5	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5530	1	73.4	7	1077.2	1	1
	5530	2	57.7	18	1669.6	1	
	5530	3	64.2	16	1994.9	1	
	5530	4	56.3	17	1415.3	1	
	5530	5	86.9	10	1455.1	3	
	5530	6	77.5	10	1995.7	3	
	5530	7	87.1	13	1268.0	1	
	5530	8	58.8	14	1373.8	3	
	5530	9	79.1	19	1285.4	2	
	5530	10	98.0	17	1845.2	1	
	5530	11	88.1	5	1392.5	3	
	5530	12	69.2	6	1755.5	3	
	5530	13	57.7	17	1495.1	3	
	5530	14	84.5	14	1198.8	1	
	5530	15	57.1	9	1205.9	2	
	5530	16	57.0	20	1250.4	2	
	5530	17	72.5	10	1932.5	2	
	5530	18	91.0	13	1620.8	3	
	5530	19	61.4	7	1985.8	1	
16	5530	1	80.5	19	1272.2	3	1
	5530	2	56.4	11	1244.2	2	
	5530	3	65.5	19	1174.1	3	
	5530	4	70.4	14	1409.4	2	
	5530	5	95.9	9	1923.4	1	
	5530	6	98.0	13	1158.2	1	
	5530	7	89.4	16	1657.2	3	
	5530	8	54.1	12	1643.5	1	
	5530	9	60.6	18	1241.9	3	
	5530	10	72.1	13	1167.1	3	
	5530	11	50.2	19	1694.4	3	
	5530	12	93.6	14	1643.0	1	
	5530	13	78.2	9	1542.0	2	
	5530	14	68.1	9	1164.5	3	
	5530	15	88.4	18	1486.1	1	
	5530	16	84.4	9	1506.7	3	
	5530	17	80.0	8	1204.2	2	
	5530	18	77.3	19	1749.4	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5530	1	88.3	11	1824.3	3	1
	5530	2	67.6	6	1480.0	3	
	5530	3	75.1	13	1983.0	2	
	5530	4	72.7	12	1834.9	1	
	5530	5	78.9	9	1982.5	3	
	5530	6	79.0	9	1877.9	2	
	5530	7	85.5	19	1281.6	2	
	5530	8	76.9	10	1849.5	2	
	5530	9	97.8	16	1976.1	1	
	5530	10	61.9	14	1375.8	1	
	5530	11	88.5	7	1274.7	3	
	5530	12	85.3	6	1249.2	2	
	5530	13	77.3	19	1697.4	2	
	5530	14	54.5	5	1656.5	1	
	5530	15	63.5	17	1993.2	1	
	5530	16	56.0	5	1787.7	3	
	5530	17	87.3	11	1784.5	2	
18	5530	1	81.0	15	1518.3	1	1
	5530	2	90.7	5	1355.6	3	
	5530	3	67.6	16	1622.5	2	
	5530	4	71.2	17	1485.2	1	
	5530	5	84.9	11	1136.2	3	
	5530	6	91.2	15	1723.0	2	
	5530	7	78.9	17	1679.7	3	
	5530	8	81.7	5	1946.1	1	
	5530	9	57.5	12	1738.6	2	
	5530	10	94.1	7	1319.7	1	
	5530	11	67.1	10	1319.5	2	
	5530	12	66.8	13	1203.1	2	
	5530	13	56.3	17	1756.2	1	
	5530	14	87.7	12	1965.3	3	
	5530	15	84.9	15	1864.9	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5530	1	52.0	17	1321.1	3	1
	5530	2	85.8	10	1327.2	2	
	5530	3	79.9	14	1930.0	2	
	5530	4	89.8	14	1556.9	3	
	5530	5	72.0	9	1848.2	2	
	5530	6	81.3	14	1117.3	1	
	5530	7	72.2	7	1286.7	2	
	5530	8	80.0	18	1974.8	3	
	5530	9	66.3	6	1232.8	3	
	5530	10	73.3	9	1718.6	1	
	5530	11	94.8	14	1672.4	1	
	5530	12	59.5	10	1869.4	1	
	5530	13	98.9	17	1992.8	1	
	5530	14	83.1	8	1409.7	3	
20	5530	1	73.9	17	1747.8	1	1
	5530	2	85.5	9	1041.4	2	
	5530	3	56.4	19	1093.7	3	
	5530	4	64.9	8	1825.6	3	
	5530	5	92.1	13	1932.5	3	
	5530	6	85.4	7	1076.5	3	
	5530	7	63.7	6	1386.4	2	
	5530	8	90.9	8	1329.7	3	
	5530	9	97.3	5	1325.6	1	
	5530	10	68.5	16	1393.7	2	
21	5563	1	80.2	15	1385.9	3	1
	5563	2	98.9	16	1599.0	1	
	5565	3	93.0	11	1690.4	1	
	5564	4	94.9	12	1100.5	3	
	5565	5	72.9	11	1702.7	3	
	5562	6	78.4	18	1490.8	1	
	5563	7	73.8	15	1217.7	1	
	5562	8	58.3	17	1629.5	2	
	5565	9	74.8	10	1171.8	3	
	5565	10	86.5	10	1336.6	2	
	5566	11	94.8	7	1863.7	2	
	5562	12	52.7	17	1416.1	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5563	1	67.1	16	1567.0	3	1
	5563	2	86.6	14	1663.1	2	
	5566	3	59.1	8	1315.9	1	
	5565	4	50.2	10	1515.3	1	
	5562	5	87.0	17	1894.5	2	
	5563	6	78.8	15	1805.8	3	
	5562	7	76.6	17	1326.2	1	
	5563	8	92.8	16	1412.3	2	
	5562	9	72.2	17	1927.9	3	
23	5565	1	71.3	10	1965.4	2	1
	5562	2	68.1	17	1269.4	1	
	5561	3	88.0	20	1565.9	2	
	5562	4	96.4	18	1520.2	3	
	5566	5	72.9	7	1108.0	3	
	5567	6	91.0	6	1485.3	1	
	5566	7	57.4	7	1509.3	2	
	5566	8	75.7	8	1029.3	3	
	5567	9	65.4	6	1921.2	1	
	5563	10	71.9	14	1806.6	2	
	5564	11	87.8	13	1835.2	2	
	5565	12	95.8	10	1502.3	2	
	5565	13	87.5	9	1364.1	3	
	5562	14	53.8	17	1052.5	2	
	5563	15	64.0	15	1513.3	3	
24	5564	1	50.8	13	1011.6	3	1
	5563	2	72.7	16	1781.5	1	
	5564	3	80.5	13	1556.9	2	
	5561	4	50.5	19	1449.4	3	
	5565	5	60.5	10	1383.9	1	
	5563	6	96.6	15	1050.2	3	
	5562	7	99.9	17	1984.9	1	
	5564	8	61.2	12	1650.1	3	
	5565	9	52.7	11	1247.2	3	
	5563	10	65.1	14	1604.6	2	
	5562	11	81.9	17	1207.5	2	
	5565	12	55.2	10	1623.9	1	
	5565	13	72.9	9	1353.0	3	
	5562	14	73.3	17	1623.4	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5564	1	86.8	12	1680.5	1	1
	5563	2	64.2	14	1496.2	3	
	5566	3	85.1	8	1346.2	3	
	5565	4	95.1	11	1452.1	2	
	5567	5	99.9	6	1614.4	2	
	5562	6	88.4	17	1005.6	3	
	5562	7	75.2	17	1019.7	3	
	5564	8	85.4	13	1445.8	2	
	5564	9	53.3	13	1906.5	3	
	5566	10	66.7	8	1235.4	2	
	5564	11	89.4	13	1140.3	1	
	5562	12	65.1	17	1263.7	1	
	5564	13	70.1	13	1353.9	1	
	5561	14	89.7	19	1665.4	3	
	5566	15	51.2	8	1208.3	1	
	5565	16	99.8	11	1620.8	2	
	5566	17	80.7	7	1315.5	3	
	5565	18	63.6	9	1536.8	3	
26	5565	1	51.7	11	1231.2	2	1
	5567	2	90.1	5	1299.6	2	
	5566	3	65.7	8	1157.0	2	
	5562	4	53.1	17	1712.7	2	
	5563	5	90.6	15	1104.1	3	
	5565	6	57.9	10	1368.1	2	
	5565	7	77.4	11	1275.7	2	
	5562	8	50.3	17	1963.0	1	
	5563	9	66.7	15	1416.6	2	
	5564	10	80.0	13	1718.2	3	
	5565	11	66.6	10	1664.6	2	
	5564	12	75.0	12	1280.4	1	
	5563	13	94.0	16	1242.1	1	
	5565	14	98.8	9	1531.8	2	
	5562	15	82.0	18	1109.8	3	
	5565	16	59.0	9	1269.7	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5566	1	93.6	8	1158.0	2	1
	5561	2	74.2	19	1015.7	2	
	5563	3	86.1	16	1786.2	3	
	5565	4	58.1	10	1667.0	2	
	5566	5	63.3	8	1867.6	1	
	5561	6	94.5	20	1130.2	2	
	5565	7	65.7	10	1146.2	3	
	5564	8	93.2	12	1637.1	1	
	5565	9	51.7	9	1330.2	3	
	5567	10	60.7	6	1931.4	1	
	5567	11	60.6	5	1584.4	1	
	5565	12	75.3	10	1138.1	3	
	5564	13	50.1	12	1269.5	1	
	5566	14	82.4	8	1857.5	3	
	5564	15	53.1	12	1402.2	2	
	5564	16	68.8	12	1093.5	1	
	5566	17	65.5	7	1537.7	3	
	5563	18	87.1	14	1211.7	3	
	5563	19	54.3	15	1643.1	2	
	5563	20	52.1	16	1221.7	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5562	1	95.9	17	1515.0	2	1
	5565	2	78.3	11	1130.2	1	
	5567	3	90.3	6	1070.0	2	
	5564	4	64.8	12	1186.4	2	
	5564	5	86.7	12	1254.1	3	
	5563	6	85.1	16	1141.7	3	
	5563	7	88.7	15	1496.2	3	
	5563	8	72.3	16	1452.6	2	
	5563	9	68.1	14	1651.7	1	
	5562	10	77.0	17	1078.2	3	
	5562	11	76.7	18	1645.6	1	
	5566	12	63.5	7	1144.1	3	
	5565	13	53.2	10	1714.6	3	
	5566	14	64.9	7	1508.8	3	
	5566	15	71.4	7	1947.6	2	
	5564	16	68.5	12	1698.7	2	
	5567	17	85.4	5	1078.2	1	
	5567	18	97.8	6	1777.9	1	
	5563	19	57.5	15	1337.4	3	
	5564	20	75.8	12	1281.5	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5562	1	66.5	17	1087.5	2	1
	5565	2	59.7	10	1193.6	1	
	5562	3	76.3	17	1876.6	3	
	5566	4	88.8	8	1930.7	1	
	5564	5	89.9	13	1905.3	2	
	5565	6	59.6	10	1146.1	1	
	5566	7	72.7	8	1235.1	2	
	5566	8	57.6	7	1679.9	3	
	5567	9	85.4	5	1523.6	3	
	5566	10	73.4	8	1731.0	3	
	5565	11	72.5	11	1652.9	2	
	5567	12	73.0	5	1656.4	3	
	5565	13	86.4	11	1653.8	2	
	5562	14	70.1	18	1858.4	1	
	5567	15	66.8	5	1572.5	1	
	5565	16	58.3	11	1799.2	3	
	5563	17	68.1	14	1270.8	3	
30	5566	1	89.7	7	1417.6	1	1
	5563	2	84.9	14	1564.6	2	
	5561	3	81.2	19	1140.2	1	
	5562	4	90.4	18	1983.4	2	
	5567	5	96.7	6	1789.8	3	
	5566	6	89.4	7	1731.2	1	
	5564	7	77.4	12	1297.8	1	
	5564	8	98.6	13	1422.7	3	
	5562	9	70.8	18	1299.0	3	
	5562	10	52.1	18	1062.7	2	
	5566	11	60.0	7	1226.3	3	
	5562	12	91.7	17	1548.6	1	
	5561	13	89.8	19	1365.8	3	
	5565	14	70.1	11	1989.9	2	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5570	1	558	95	1792	1
2	5570	1	598	89	1672	1
3	5570	1	678	78	1475	1
4	5570	1	918	58	1089	1
5	5570	1	538	99	1859	1
6	5570	1	558	95	1792	1
7	5570	1	758	70	1319	1
8	5570	1	898	59	1114	1
9	5570	1	898	59	1114	1
10	5570	1	778	68	1285	1
11	5570	1	758	70	1319	1
12	5570	1	698	76	1433	1
13	5570	1	798	67	1253	1
14	5570	1	878	61	1139	1
15	5570	1	838	63	1193	1
16	5570	1	2822	19	354	1
17	5570	1	1438	37	695	1
18	5570	1	1475	36	678	1
19	5570	1	1166	46	858	1
20	5570	1	627	85	1595	1
21	5570	1	2915	19	343	1
22	5570	1	835	64	1198	1
23	5570	1	1761	30	568	1
24	5570	1	2256	24	443	1
25	5570	1	1995	27	501	1
26	5570	1	714	74	1401	1
27	5570	1	2441	22	410	1
28	5570	1	1907	28	524	1
29	5570	1	2017	27	496	1
30	5570	1	2705	20	370	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5570	4.90	204.80	25	4883	1
2	5570	2.60	184.10	29	5432	1
3	5570	1.60	205.40	23	4869	1
4	5570	3.20	177.40	29	5637	1
5	5570	5.00	160.90	24	6215	1
6	5570	2.80	179.20	28	5580	1
7	5570	3.10	221.80	24	4509	1
8	5570	2.50	229.40	28	4359	1
9	5570	3.80	156.60	26	6386	1
10	5570	3.00	180.30	26	5546	1
11	5570	1.70	197.30	23	5068	1
12	5570	2.80	216.30	26	4623	1
13	5570	2.40	225.50	24	4435	1
14	5570	3.60	195.10	23	5126	1
15	5570	3.20	173.50	24	5764	1
16	5570	4.90	154.80	27	6460	1
17	5570	3.40	205.30	29	4871	1
18	5570	4.60	201.50	23	4963	1
19	5570	1.20	184.60	25	5417	1
20	5570	3.30	218.00	29	4587	1
21	5570	3.90	190.30	24	5255	1
22	5570	3.20	219.60	27	4554	1
23	5570	2.00	188.90	26	5294	1
24	5570	1.30	175.30	28	5705	1
25	5570	1.40	206.10	29	4852	1
26	5570	2.10	182.10	23	5491	1
27	5570	2.40	161.50	29	6192	1
28	5570	3.60	186.50	28	5362	1
29	5570	2.00	194.80	28	5133	1
30	5570	4.20	196.10	29	5099	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5570	9.90	339.90	18	2942.04	1
2	5570	8.10	211.10	18	4737.09	1
3	5570	6.90	346.60	17	2885.17	1
4	5570	8.30	213.80	18	4677.27	1
5	5570	7.20	329.50	17	3034.90	1
6	5570	7.20	430.50	16	2322.88	1
7	5570	7.50	320.40	17	3121.10	1
8	5570	9.70	367.60	16	2720.35	1
9	5570	8.80	334.20	16	2992.22	1
10	5570	9.70	325.50	16	3072.20	1
11	5570	6.20	459.40	16	2176.75	1
12	5570	7.20	248.20	18	4029.01	1
13	5570	9.10	332.50	16	3007.52	1
14	5570	6.80	245.90	16	4066.69	1
15	5570	9.10	431.20	17	2319.11	1
16	5570	6.00	294.80	16	3392.13	1
17	5570	8.80	388.60	18	2573.34	1
18	5570	8.10	365.80	18	2733.73	1
19	5570	6.50	254.90	18	3923.11	1
20	5570	7.00	284.30	16	3517.41	1
21	5570	8.60	492.30	16	2031.28	1
22	5570	7.30	378.10	16	2644.80	1
23	5570	8.30	493.90	17	2024.70	1
24	5570	9.20	364.70	17	2741.98	1
25	5570	7.00	249.30	18	4011.23	1
26	5570	7.90	245.60	17	4071.66	1
27	5570	7.20	468.40	16	2134.93	1
28	5570	8.60	282.10	17	3544.84	1
29	5570	9.10	420.30	16	2379.25	1
30	5570	9.00	200.60	16	4985.04	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5570	14.60	469.10	12	2132	1
2	5570	13.70	362.90	14	2756	1
3	5570	11.50	373.20	13	2680	1
4	5570	14.40	253.90	13	3939	1
5	5570	15.40	397.20	14	2518	1
6	5570	16.70	240.40	16	4160	1
7	5570	12.20	318.90	16	3136	1
8	5570	11.40	418.20	12	2391	1
9	5570	13.10	429.20	13	2330	1
10	5570	16.60	408.60	14	2447	1
11	5570	12.40	282.60	12	3539	1
12	5570	13.20	280.00	16	3571	1
13	5570	18.00	289.10	16	3459	1
14	5570	11.80	329.30	12	3037	1
15	5570	15.30	464.20	12	2154	1
16	5570	11.20	260.10	16	3845	1
17	5570	14.60	363.10	13	2754	1
18	5570	19.10	364.90	14	2740	1
19	5570	19.30	358.10	16	2793	1
20	5570	13.40	325.90	16	3068	1
21	5570	19.60	335.60	15	2980	1
22	5570	16.00	270.00	16	3704	1
23	5570	12.30	357.90	13	2794	1
24	5570	13.20	435.80	14	2295	1
25	5570	12.40	243.30	13	4110	1
26	5570	16.80	315.90	13	3166	1
27	5570	18.60	294.50	14	3396	1
28	5570	11.40	270.60	15	3695	1
29	5570	15.90	242.50	15	4124	1
30	5570	19.30	351.70	13	2843	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5493.5	1	52.8	6	1893.2	3	1
	5499.5	2	70.4	19	1651.3	2	
	5494.5	3	52.4	8	1295.9	1	
	5497.5	4	69.9	14	1884.2	1	
	5496.5	5	59.1	12	1299.5	1	
	5494.5	6	86.5	8	1906.0	2	
	5493.5	7	96.8	5	1468.9	3	
	5496.5	8	80.4	12	1085.3	2	
	5497.5	9	82.6	16	1865.5	1	
	5498.5	10	89.4	17	1631.7	3	
	5499.5	11	93.7	19	1092.0	3	
2	5497.5	1	66.9	14	1522.1	1	1
	5496.5	2	97.7	13	1932.6	3	
	5498.5	3	73.4	17	1213.7	3	
	5496.5	4	91.8	13	1238.1	1	
	5494.5	5	59.5	8	1291.4	2	
	5494.5	6	98.1	7	1416.2	3	
	5499.5	7	99.0	19	1659.0	1	
	5496.5	8	89.5	12	1326.7	3	
	5495.5	9	74.1	11	1408.1	2	
	5494.5	10	56.1	8	1684.3	2	
	5498.5	11	65.5	18	1666.2	1	
	5496.5	12	85.2	13	1097.8	1	
3	5496.5	1	93.6	13	1604.1	3	1
	5495.5	2	59.3	9	1939.8	2	
	5498.5	3	61.2	18	1201.4	1	
	5493.5	4	82.9	5	1577.9	1	
	5495.5	5	79.4	9	1176.1	2	
	5499.5	6	57.3	20	1755.4	1	
	5494.5	7	94.9	8	1437.9	3	
	5494.5	8	60.0	8	1842.2	2	
	5494.5	9	80.9	7	1765.7	2	
	5496.5	10	51.9	12	1384.8	2	
	5497.5	11	88.0	14	1573.4	1	
	5494.5	12	62.8	7	1211.1	1	
	5497.5	13	61.8	15	1122.0	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5495.5	1	89.3	9	1025.3	1	1
	5496.5	2	57.0	12	1817.5	3	
	5494.5	3	63.1	7	1140.9	2	
	5493.5	4	67.9	5	1978.3	2	
	5498.5	5	97.9	18	1665.6	3	
	5494.5	6	83.9	8	1285.3	3	
	5499.5	7	57.8	19	1605.0	2	
	5499.5	8	70.0	19	1482.7	1	
	5499.5	9	99.4	20	1726.9	3	
5	5495.5	1	63.8	11	1127.2	1	1
	5495.5	2	63.8	11	1224.5	1	
	5496.5	3	62.1	12	1833.6	1	
	5498.5	4	68.4	18	1448.0	3	
	5496.5	5	71.3	13	1794.5	1	
	5495.5	6	96.8	10	1998.7	1	
	5497.5	7	82.4	15	1507.0	2	
	5498.5	8	70.5	18	1376.7	3	
	5494.5	9	92.7	7	1106.7	2	
	5495.5	10	59.8	9	1403.3	2	
	5495.5	11	71.5	10	1432.2	2	
	5497.5	12	97.0	14	1289.3	3	
	5495.5	13	80.4	10	1093.9	1	
	5498.5	14	79.5	17	1341.4	1	
	5497.5	15	78.1	16	1581.8	2	
6	5495.5	1	59.0	11	1582.2	1	1
	5493.5	2	76.0	6	1086.8	1	
	5496.5	3	53.2	13	1282.4	1	
	5494.5	4	56.1	8	1758.6	1	
	5493.5	5	68.0	6	1244.7	2	
	5493.5	6	98.4	5	1829.0	2	
	5494.5	7	58.7	7	1582.4	2	
	5493.5	8	52.0	6	1540.9	2	
	5493.5	9	87.5	5	1905.6	2	
	5494.5	10	80.9	7	1464.9	2	
	5494.5	11	74.6	8	1911.3	1	
	5497.5	12	82.9	16	1912.4	2	
	5499.5	13	69.6	19	1089.4	2	
	5494.5	14	73.3	8	1082.1	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5496.5	1	93.0	13	1149.8	2	1
	5493.5	2	91.9	6	1970.0	2	
	5499.5	3	73.5	19	1265.9	2	
	5495.5	4	69.3	10	1226.1	1	
	5493.5	5	78.8	5	1128.1	3	
	5495.5	6	76.8	11	1625.7	2	
	5495.5	7	51.0	9	1324.4	1	
	5496.5	8	86.1	12	1244.1	1	
	5495.5	9	94.4	10	1925.7	1	
	5495.5	10	95.8	11	1141.1	2	
	5495.5	11	60.0	10	1439.4	1	
	5493.5	12	80.3	5	1661.4	2	
	5494.5	13	84.3	7	1499.1	3	
	5498.5	14	65.5	17	1466.0	3	
	5496.5	15	92.1	13	1803.4	3	
	5498.5	16	91.2	17	1915.4	2	
	5496.5	17	69.2	13	1568.9	2	
8	5494.5	1	78.2	8	1534.7	2	1
	5494.5	2	86.3	7	1791.8	2	
	5499.5	3	57.7	19	1589.8	3	
	5499.5	4	60.3	19	1876.1	1	
	5497.5	5	88.8	14	1575.4	3	
	5499.5	6	52.9	20	1433.7	3	
	5495.5	7	73.5	11	1543.9	2	
	5497.5	8	69.2	14	1641.2	3	
	5493.5	9	84.2	6	1684.8	2	
	5498.5	10	76.9	18	1730.9	1	
	5493.5	11	84.7	5	1886.6	3	
	5493.5	12	75.1	6	1307.6	1	
	5493.5	13	99.9	6	1931.2	1	
	5496.5	14	81.3	13	1711.0	1	
	5499.5	15	59.0	19	1336.7	2	
	5497.5	16	53.5	15	1789.5	2	
	5498.5	17	53.8	17	1862.8	2	
	5494.5	18	59.9	8	1861.7	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5499.5	1	66.5	19	1754.0	2	1
	5494.5	2	52.3	8	1160.5	3	
	5495.5	3	95.9	9	1123.7	2	
	5496.5	4	52.9	13	1327.2	2	
	5497.5	5	85.5	14	1536.7	1	
	5498.5	6	84.7	18	1300.5	2	
	5495.5	7	51.6	10	1156.2	3	
	5496.5	8	68.2	12	1243.8	2	
	5497.5	9	76.3	15	1235.7	2	
	5494.5	10	56.0	8	1285.3	3	
	5495.5	11	86.2	9	1931.2	3	
	5497.5	12	57.2	15	1265.6	1	
	5497.5	13	56.4	16	1241.9	1	
	5494.5	14	79.9	8	1356.0	2	
	5498.5	15	82.3	17	1627.3	2	
	5497.5	16	75.8	14	1417.5	2	
	5499.5	17	69.8	19	1843.6	2	
	5494.5	18	62.3	8	1682.8	3	
	5495.5	19	79.2	9	1449.6	1	
10	5495.5	1	57.0	9	1616.2	2	1
	5493.5	2	55.4	6	1975.9	2	
	5494.5	3	86.9	8	1903.2	3	
	5497.5	4	63.3	14	1527.5	3	
	5499.5	5	86.9	19	1238.7	2	
	5497.5	6	58.9	14	1108.7	1	
	5499.5	7	55.3	19	1821.3	3	
	5496.5	8	74.2	13	1303.8	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5570	1	61.5	14	1852.6	1	1
	5570	2	95.1	18	1131.0	2	
	5570	3	63.2	6	1166.8	1	
	5570	4	64.9	14	1684.7	1	
	5570	5	61.4	10	1735.3	3	
	5570	6	85.4	7	1559.7	3	
	5570	7	54.4	6	1204.3	1	
	5570	8	94.4	14	1363.8	1	
	5570	9	79.4	19	1005.0	3	
	5570	10	80.8	18	1900.9	2	
	5570	11	93.7	15	1190.4	1	
	5570	12	58.5	11	1137.4	3	
	5570	13	62.8	11	1639.3	3	
	5570	14	92.7	18	1579.8	3	
	5570	15	62.8	17	1729.0	1	
	5570	16	89.0	9	1354.0	2	
12	5570	1	65.9	18	1233.8	2	1
	5570	2	53.8	9	1919.2	3	
	5570	3	89.9	12	1357.3	1	
	5570	4	61.4	7	1372.8	2	
	5570	5	98.2	15	1231.1	1	
	5570	6	97.1	20	1742.7	3	
	5570	7	84.8	12	1141.9	1	
	5570	8	78.6	6	1088.8	2	
	5570	9	79.1	9	1179.9	3	
	5570	10	96.2	8	1073.9	2	
	5570	11	74.8	18	1789.7	1	
	5570	12	62.3	13	1163.6	3	
	5570	13	66.8	19	1201.2	3	
	5570	14	62.3	10	1596.1	3	
	5570	15	89.5	13	1143.1	2	
	5570	16	64.8	16	1000.5	2	
	5570	17	91.1	20	1662.7	1	
	5570	18	90.1	10	1986.3	1	
	5570	19	88.6	15	1345.4	3	
	5570	20	79.3	7	1912.4	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5570	1	78.3	5	1051.7	3	1
	5570	2	77.5	15	1997.3	3	
	5570	3	94.9	13	1132.9	2	
	5570	4	54.6	20	1157.5	1	
	5570	5	76.8	16	1285.9	1	
	5570	6	71.3	8	1046.8	1	
	5570	7	79.7	12	1716.4	2	
	5570	8	92.8	18	1864.1	2	
	5570	9	70.4	11	1659.4	3	
	5570	10	94.5	11	1398.9	2	
14	5570	1	50.4	11	1653.8	3	1
	5570	2	60.4	20	1220.4	3	
	5570	3	84.0	10	1137.6	2	
	5570	4	73.0	11	1620.9	2	
	5570	5	80.3	8	1573.7	1	
	5570	6	77.6	18	1057.2	2	
	5570	7	63.3	6	1655.8	2	
	5570	8	62.7	13	1746.5	2	
	5570	9	52.2	7	1673.7	2	
	5570	10	98.9	18	1307.8	3	
	5570	11	69.6	17	1971.7	1	
	5570	12	53.8	18	1289.8	2	
	5570	13	66.7	11	1654.2	2	
	5570	14	97.4	16	1312.1	3	
	5570	15	60.4	20	1905.4	1	
	5570	16	60.0	7	1613.6	3	
	5570	17	51.9	19	1584.2	1	
	5570	18	89.2	13	1845.8	1	
	5570	19	83.8	19	1656.3	3	
	5570	20	88.3	20	1371.0	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5570	1	56.4	13	1994.4	3	1
	5570	2	91.6	12	1279.4	3	
	5570	3	60.8	6	1056.3	2	
	5570	4	58.0	12	1340.3	1	
	5570	5	88.1	9	1540.1	2	
	5570	6	61.3	18	1853.1	1	
	5570	7	98.0	8	1101.6	3	
	5570	8	59.1	12	1843.0	1	
	5570	9	64.1	19	1933.9	2	
	5570	10	59.7	11	1602.4	3	
	5570	11	54.5	17	1148.5	3	
	5570	12	85.0	13	1044.6	3	
	5570	13	88.2	19	1210.9	2	
	5570	14	74.2	6	1144.1	3	
	5570	15	64.6	16	1672.3	2	
	5570	16	61.4	16	1554.0	2	
	5570	17	98.6	7	1745.7	3	
	5570	18	74.1	14	1172.3	1	
	5570	19	58.0	8	1411.8	1	
16	5570	1	80.9	16	1881.8	3	1
	5570	2	93.8	18	1112.8	3	
	5570	3	70.3	13	1677.8	2	
	5570	4	87.9	8	1128.6	1	
	5570	5	51.1	6	1832.9	2	
	5570	6	83.4	6	1448.1	2	
	5570	7	63.8	6	1025.7	1	
	5570	8	91.7	11	1964.9	1	
	5570	9	50.7	14	1189.0	3	
	5570	10	98.3	8	1755.8	1	
	5570	11	67.9	7	1900.0	3	
	5570	12	75.4	6	1506.2	1	
	5570	13	70.0	14	1837.8	3	
	5570	14	99.5	7	1700.3	1	
	5570	15	87.1	5	1499.9	1	
	5570	16	56.8	13	1689.1	3	
	5570	17	69.0	15	1583.7	3	
	5570	18	91.8	8	1340.4	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5570	1	72.3	18	1491.5	1	1
	5570	2	85.1	17	1949.8	2	
	5570	3	68.1	8	1044.3	2	
	5570	4	79.1	15	1562.7	2	
	5570	5	90.7	19	1374.4	3	
	5570	6	68.9	13	1232.8	1	
	5570	7	68.6	13	1856.3	3	
	5570	8	97.6	11	1338.9	2	
	5570	9	98.5	17	1877.7	3	
	5570	10	71.5	7	1879.1	3	
	5570	11	59.4	17	1384.2	2	
	5570	12	95.4	9	1877.4	1	
	5570	13	52.2	16	1319.7	1	
	5570	14	88.4	17	1440.1	1	
	5570	15	98.4	5	1495.8	2	
	5570	16	55.2	19	1505.4	2	
	5570	17	92.0	12	1638.6	2	
18	5570	1	54.7	11	1521.0	2	1
	5570	2	67.3	12	1008.0	2	
	5570	3	83.7	19	1030.6	1	
	5570	4	62.6	9	1574.8	3	
	5570	5	83.6	14	1514.6	1	
	5570	6	62.9	8	1965.4	1	
	5570	7	61.4	14	1375.7	2	
	5570	8	72.4	12	1565.3	3	
	5570	9	78.4	5	1652.2	2	
	5570	10	75.8	12	1653.0	1	
	5570	11	80.7	11	1139.5	1	
	5570	12	72.1	10	1968.6	2	
	5570	13	67.0	6	1279.7	1	
	5570	14	89.3	13	1788.3	2	
	5570	15	69.8	15	1513.4	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5570	1	55.4	9	1965.1	3	1
	5570	2	66.7	17	1441.8	1	
	5570	3	91.3	18	1987.1	3	
	5570	4	94.7	11	1657.5	1	
	5570	5	89.7	14	1023.5	2	
	5570	6	91.6	10	1214.0	2	
	5570	7	79.2	12	1903.5	2	
	5570	8	75.2	19	1119.9	2	
	5570	9	77.9	13	1743.0	3	
	5570	10	96.8	15	1468.9	3	
	5570	11	62.2	19	1613.3	1	
	5570	12	90.2	20	1403.1	1	
	5570	13	87.2	11	1228.5	3	
	5570	14	96.5	11	1554.6	1	
20	5570	1	60.4	16	1629.9	2	1
	5570	2	61.9	11	1640.4	1	
	5570	3	95.6	6	1244.1	3	
	5570	4	92.8	15	1422.9	2	
	5570	5	85.6	11	1096.8	2	
	5570	6	87.0	6	1915.3	2	
	5570	7	82.5	9	1809.4	2	
	5570	8	82.0	6	1760.5	3	
	5570	9	60.4	19	1029.0	1	
	5570	10	70.3	13	1676.5	2	
21	5643.5	1	55.8	13	1334.9	1	1
	5645.5	2	84.7	7	1251.3	3	
	5645.5	3	54.6	7	1814.2	1	
	5645.5	4	68.1	7	1832.2	3	
	5643.5	5	93.4	12	1706.0	3	
	5642.5	6	58.0	14	1664.4	1	
	5643.5	7	63.1	12	1566.8	3	
	5644.5	8	68.2	11	1113.1	3	
	5640.5	9	65.6	19	1875.3	1	
	5643.5	10	83.9	12	1657.0	1	
	5642.5	11	62.4	15	1372.3	2	
	5642.5	12	71.8	15	1958.7	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5643.5	1	85.1	12	1088.8	1	1
	5640.5	2	72.3	19	1570.9	3	
	5640.5	3	81.2	20	1970.3	3	
	5642.5	4	62.5	15	1673.3	3	
	5643.5	5	52.5	12	1997.2	3	
	5640.5	6	88.0	19	1309.4	1	
	5641.5	7	65.2	17	1622.9	1	
	5646.5	8	56.1	5	1067.2	2	
	5645.5	9	69.7	8	1375.8	3	
23	5642.5	1	85.7	16	1999.6	3	1
	5640.5	2	83.3	19	1873.0	3	
	5645.5	3	88.5	8	1051.4	3	
	5645.5	4	81.0	7	1356.0	2	
	5641.5	5	88.5	17	1007.9	1	
	5646.5	6	73.5	6	1426.4	3	
	5642.5	7	94.9	14	1968.3	3	
	5644.5	8	53.1	10	1071.9	3	
	5641.5	9	75.7	17	1627.6	1	
	5643.5	10	81.8	12	1835.2	3	
	5644.5	11	95.6	11	1346.8	1	
	5646.5	12	52.4	6	1035.4	3	
	5644.5	13	96.7	9	1779.2	3	
	5645.5	14	90.0	7	1796.8	2	
	5640.5	15	65.5	19	1831.7	2	
24	5643.5	1	66.8	12	1020.8	3	1
	5643.5	2	95.1	13	1203.1	3	
	5643.5	3	62.9	13	1857.3	3	
	5646.5	4	73.7	6	1084.5	3	
	5640.5	5	79.9	20	1869.2	2	
	5641.5	6	75.9	17	1621.3	2	
	5641.5	7	97.4	18	1640.0	3	
	5643.5	8	53.7	12	1932.2	2	
	5640.5	9	74.2	20	1399.0	1	
	5644.5	10	57.0	10	1801.6	1	
	5643.5	11	75.8	12	1729.2	3	
	5643.5	12	91.1	13	1340.0	3	
	5646.5	13	65.0	6	1201.1	2	
	5640.5	14	71.9	19	1334.9	1	

Test Mode		802.11ax HE160					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5644.5	1	95.5	10	1076.4	3	1
	5645.5	2	89.7	8	1440.9	2	
	5645.5	3	90.3	8	1107.2	3	
	5645.5	4	55.1	7	1828.2	2	
	5644.5	5	85.6	10	1674.8	1	
	5641.5	6	94.7	18	1550.6	1	
	5642.5	7	56.0	14	1277.9	3	
	5645.5	8	81.2	8	1197.3	3	
	5644.5	9	65.6	11	1189.0	2	
	5644.5	10	96.6	11	1685.5	3	
	5646.5	11	61.7	6	1151.9	1	
	5641.5	12	56.6	17	1221.2	1	
	5640.5	13	75.0	19	1170.2	1	
	5646.5	14	58.9	6	1358.9	1	
	5643.5	15	78.3	12	1221.3	2	
	5641.5	16	81.7	17	1996.3	2	
	5645.5	17	66.7	7	1421.6	3	
	5642.5	18	69.4	14	1602.0	2	
26	5642.5	1	64.4	15	1371.9	1	1
	5646.5	2	73.4	6	1303.6	1	
	5644.5	3	80.4	10	1467.0	2	
	5646.5	4	77.5	6	1734.8	2	
	5644.5	5	76.9	11	1624.5	3	
	5643.5	6	59.0	13	1420.9	1	
	5641.5	7	55.5	17	1936.5	3	
	5645.5	8	87.2	7	1349.7	1	
	5645.5	9	84.6	8	1804.1	3	
	5645.5	10	78.9	7	1955.9	1	
	5643.5	11	67.9	12	1756.8	3	
	5640.5	12	80.2	19	1079.4	3	
	5644.5	13	85.5	11	1379.9	3	
	5645.5	14	73.9	7	1004.8	2	
	5642.5	15	91.1	16	1074.0	2	
	5644.5	16	56.7	10	1099.3	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5644.5	1	61.5	10	1430.7	3	1
	5641.5	2	94.4	18	1927.3	1	
	5643.5	3	62.6	12	1565.0	2	
	5641.5	4	90.7	17	1733.8	2	
	5646.5	5	83.8	6	1852.4	2	
	5641.5	6	99.6	18	1431.3	2	
	5643.5	7	53.5	12	1613.7	1	
	5645.5	8	65.1	7	1650.7	2	
	5642.5	9	74.3	16	1670.3	3	
	5642.5	10	55.4	15	1958.6	1	
	5644.5	11	71.6	10	1637.9	2	
	5646.5	12	72.0	6	1576.5	2	
	5641.5	13	73.5	17	1730.2	3	
	5644.5	14	95.9	11	1034.3	2	
	5643.5	15	78.3	13	1703.0	3	
	5641.5	16	56.7	17	1137.2	1	
	5646.5	17	98.2	6	1765.9	1	
	5640.5	18	77.6	19	1584.6	2	
	5640.5	19	86.1	19	1307.6	1	
	5644.5	20	62.0	9	1808.8	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5642.5	1	64.4	16	1279.6	2	1
	5642.5	2	61.6	15	1726.1	2	
	5645.5	3	80.3	8	1481.6	1	
	5641.5	4	75.3	18	1508.4	2	
	5642.5	5	72.7	14	1144.0	2	
	5644.5	6	84.5	9	1223.9	2	
	5642.5	7	52.8	15	1111.1	2	
	5646.5	8	76.8	6	1516.6	3	
	5642.5	9	80.3	15	1105.0	2	
	5641.5	10	94.7	17	1669.2	3	
	5646.5	11	53.3	6	1592.0	2	
	5641.5	12	93.2	18	1585.9	2	
	5643.5	13	90.5	12	1292.9	3	
	5641.5	14	75.4	17	1769.0	1	
	5645.5	15	73.5	8	1644.2	3	
	5641.5	16	88.1	18	1242.3	3	
	5644.5	17	91.5	9	1831.2	1	
	5644.5	18	54.1	9	1331.2	2	
	5642.5	19	94.9	16	1070.0	2	
	5641.5	20	92.0	18	1892.9	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5642.5	1	66.7	15	1326.1	1	1
	5643.5	2	84.9	13	1889.7	3	
	5640.5	3	79.0	20	1756.7	1	
	5643.5	4	50.7	13	1705.6	3	
	5644.5	5	83.4	9	1726.7	2	
	5643.5	6	74.3	12	1807.5	2	
	5645.5	7	99.9	8	1551.0	2	
	5643.5	8	67.6	12	1894.1	3	
	5640.5	9	96.8	19	1652.0	3	
	5642.5	10	96.9	16	1705.9	3	
	5641.5	11	79.0	18	1721.9	3	
	5640.5	12	88.8	20	1227.7	2	
	5644.5	13	58.0	10	1253.0	1	
	5640.5	14	96.9	19	1221.8	1	
	5644.5	15	67.9	10	1484.2	1	
	5643.5	16	57.3	12	1197.6	1	
	5645.5	17	67.7	7	1140.9	1	
30	5646.5	1	83.9	5	1816.6	1	1
	5644.5	2	77.8	11	1981.7	2	
	5646.5	3	86.0	5	1613.1	2	
	5646.5	4	92.1	6	1248.8	3	
	5643.5	5	67.0	13	1086.2	3	
	5643.5	6	65.0	13	1381.3	2	
	5646.5	7	52.1	6	1988.1	1	
	5645.5	8	57.9	7	1805.4	1	
	5646.5	9	77.6	6	1778.6	1	
	5645.5	10	73.7	8	1004.6	3	
	5641.5	11	85.2	17	1682.2	3	
	5644.5	12	54.5	11	1426.3	3	
	5643.5	13	64.8	13	1588.8	1	
	5644.5	14	51.7	11	1860.3	2	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---