



TEST REPORT

APPLICANT : YINUOLINK CO.,LTD
PRODUCT NAME : AC1300 Mini Wireless USB
LAN Card
MODEL NAME : Y9
BRAND NAME : YINUO-LINK
FCC ID : 2A66J-Y9
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2024-04-07
TEST DATE : 2024-04-16 to 2024-05-06
ISSUE DATE : 2024-05-15



Edited by: Peng Mi
Peng Mi (Rapporteur)
Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Summary of Test Result 4
 - 1.1. Testing Applied Standards 5
 - 1.2. Test Equipment List 6
 - 1.3. Measurement Uncertainty 8
 - 1.4. Testing Laboratory 8
- 2. General Description 9
 - 2.1. Information of Applicant and Manufacturer 9
 - 2.2. Information of EUT 9
 - 2.3. Channel List of EUT 10
 - 2.4. Test Configuration of EUT 11
 - 2.5. Test Conditions 11
 - 2.6. Test Setup Layout Diagram 12
- 3. Test Results 15
 - 3.1. Antenna Requirement 15
 - 3.2. Duty Cycle of Test Signal 16
 - 3.3. Maximum Conducted Output Power 17
 - 3.4. Emission Bandwidth 19
 - 3.5. Peak Power Spectral Density 21
 - 3.6. Frequency Stability 22
 - 3.7. Conducted Emission 23
 - 3.8. Restricted Frequency Bands 24
 - 3.9. Radiated Emission 26
- Annex A Test Data and Result 28



Change History		
Version	Date	Reason for change
1.0	2024-05-15	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Apr. 18, 2024	He Yuyang	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Apr. 18, 2024	He Yuyang	PASS	No deviation
4	15.407(a) (e)	Emission Bandwidth	Apr. 18, 2024	He Yuyang	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Apr. 18, 2024	He Yuyang	PASS	No deviation
6	15.407(g)	Frequency Stability	Apr. 18, 2024	He Yuyang	PASS	No deviation
7	15.207	Conducted Emission	Apr. 16, 2024	Wang Deyong	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	May 03 to 06, 2024	Su Zhan	PASS	No deviation
9	15.407(b)	Radiated Emission	Apr. 29, 2024 to May 03, 2024	Su Zhan	PASS	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB 789033 D02 v02r01.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Temperature Chamber	12108015	DTL-003S 101	YOMA	2023.09.19	2024.09.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Attenuator	MTJ6004-10	10dB	MTJ cooperation	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-5150-5350	Wainwright	N/A	N/A
Notch Filter	N/A	WRCG-5470-5725	Wainwright	N/A	N/A
Notch Filter	N/A	WRCG-5725-5850	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	YINUOLINK CO.,LTD
Applicant Address	301,Bldg 6, Gaoxinjian Industrial Park, Fuyuan 1st Road, Heping, Fuhai, Bao'an, Shenzhen, China
Manufacturer	YINUOLINK CO.,LTD
Manufacturer Address	301,Bldg 6, Gaoxinjian Industrial Park, Fuyuan 1st Road, Heping, Fuhai, Bao'an, Shenzhen, China

2.2. Information of EUT

Product Name:	AC1300 Mini Wireless USB LAN Card
Sample No.:	1#
Hardware Version:	2.1
Software Version:	N/A
Modulation Technology:	OFDM, OFDMA
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)
Operating Frequency Range:	5180MHz-5240MHz; 5745MHz-5825MHz
Antenna Type:	PCB Antenna
Antenna Gain:	ANT 1: 3.94dBi; ANT 2: 3.94dBi
Directional Gain:	6.95dBi <i>Note 2</i>

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n, 802.11ac modulation mode.

Modulation Mode:	TX Function
802.11a	1TX
802.11n	2TX
802.11ac	2TX

Note 2: According to KDB 662911 D01, the directional gain = $10\log[(10^{G0/20}+10^{G1/20})^2/2] = 4.64\text{dBi}$.

Note 3: All radiation test items for 802.11n, 802.11ac modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT 1) in this report.

Note 4: We use the dedicated software to control the EUT continuous transmission.

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11a	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		
802.11ac	20/40/80 (VHT20/40/80)	OFDM	BPSK	MCS0~MCS9	N/A
			QPSK		
			16QAM		
			64QAM		
			256QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

For power item that BW below 80MHz system:



For power item that BW equal or above 80MHz and other items:

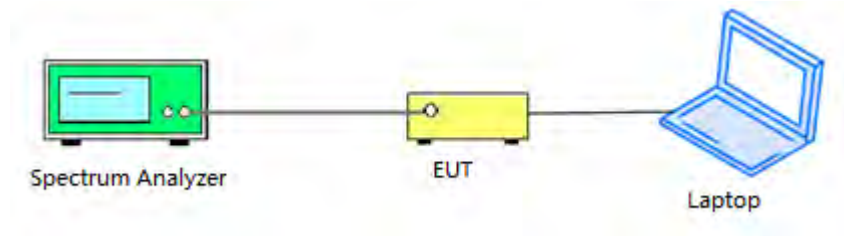

2.6.2. Conducted Emission Measurement




2.6.3. Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz



2) For radiated emissions from 30MHz to 1GHz

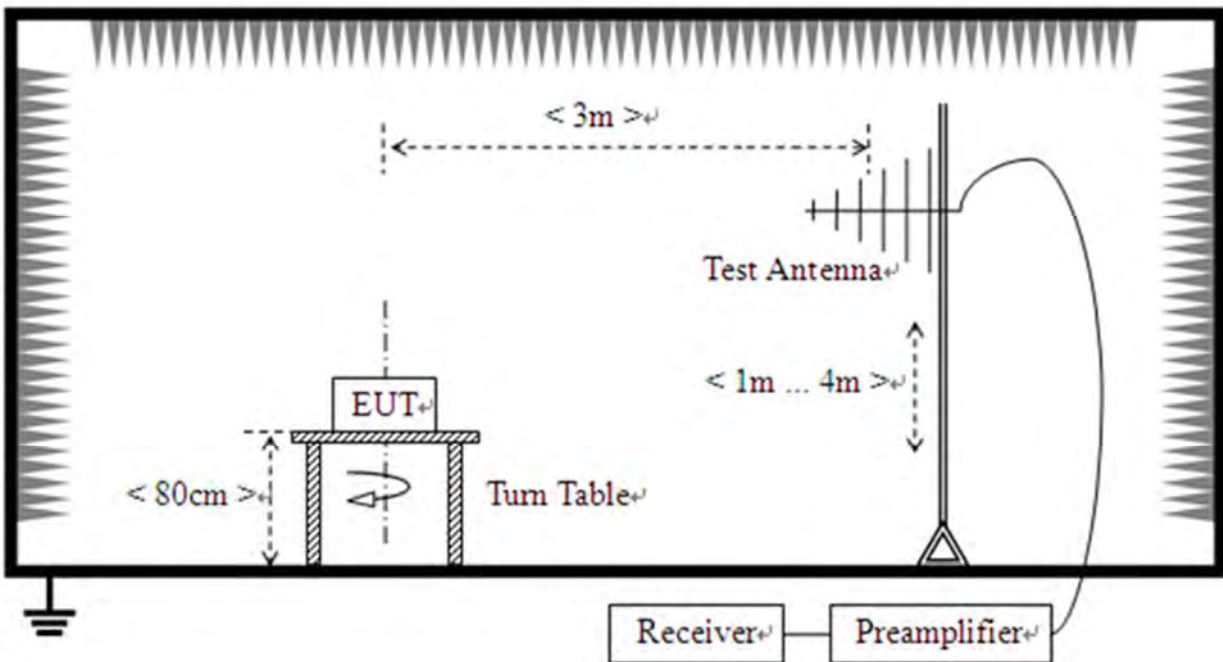

3) For radiated emissions above 1GHz

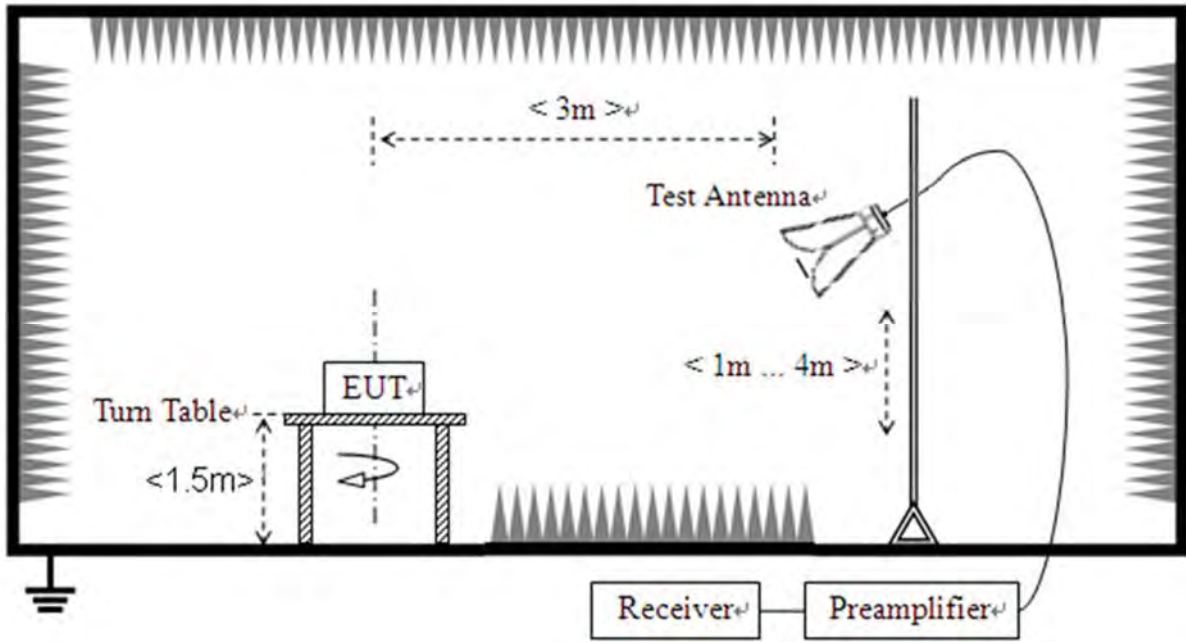



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Conducted Output Power

3.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Emission Bandwidth

3.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.4.1. Test Procedures

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for theband5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

 - a) Set RBW = 100 kHz.
 - b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.4.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3. Test Result

Refer to Annex A.3 in this report.





3.5. Peak Power Spectral Density

3.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.5.2. Test Procedures

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW \geq 3MHz
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold

Record the max value

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.4 in this report.



3.6. Frequency Stability

3.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2. Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

3.6.3. Test Result

Refer to Annex A.5 in this report.



3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.6 in this report.



3.8. Restricted Frequency Bands

3.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m



Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.7 in this report.



3.9. Radiated Emission

3.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{\frac{30P}{3}} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a SISO	5180	Ant1	96.45	0.16	0.74
NVNT	a SISO	5220	Ant1	96.45	0.16	0.74
NVNT	a SISO	5240	Ant1	96.45	0.16	0.74
NVNT	a SISO	5745	Ant1	96.45	0.16	0.74
NVNT	a SISO	5785	Ant1	95.77	0.19	0.74
NVNT	a SISO	5825	Ant1	96.45	0.16	0.74
NVNT	a SISO	5180	Ant2	95.77	0.19	0.74
NVNT	a SISO	5220	Ant2	96.45	0.16	0.74
NVNT	a SISO	5240	Ant2	95.77	0.19	0.74
NVNT	a SISO	5745	Ant2	96.45	0.16	0.74
NVNT	a SISO	5785	Ant2	96.45	0.16	0.74
NVNT	a SISO	5825	Ant2	96.45	0.16	0.74
NVNT	n20 SISO	5180	Ant1	95.49	0.2	0.79
NVNT	n20 SISO	5220	Ant1	96.21	0.17	0.79
NVNT	n20 SISO	5240	Ant1	96.24	0.17	0.78
NVNT	n20 SISO	5745	Ant1	95.49	0.2	0.79
NVNT	n20 SISO	5785	Ant1	95.49	0.2	0.79
NVNT	n20 SISO	5825	Ant1	96.21	0.17	0.79
NVNT	n20 SISO	5180	Ant2	96.21	0.17	0.79
NVNT	n20 SISO	5220	Ant2	96.21	0.17	0.79
NVNT	n20 SISO	5240	Ant2	95.49	0.2	0.79
NVNT	n20 SISO	5745	Ant2	95.49	0.2	0.79
NVNT	n20 SISO	5785	Ant2	96.21	0.17	0.79
NVNT	n20 SISO	5825	Ant2	96.21	0.17	0.79
NVNT	n20 MIMO	5180	Sum	96.24	0.17	0.78
NVNT	n20 MIMO	5220	Sum	96.24	0.17	0.78
NVNT	n20 MIMO	5240	Sum	96.21	0.17	0.79
NVNT	n20 MIMO	5745	Sum	96.21	0.17	0.79
NVNT	n20 MIMO	5785	Sum	95.49	0.2	0.79
NVNT	n20 MIMO	5825	Sum	96.21	0.17	0.79
NVNT	n40 SISO	5190	Ant1	92.65	0.33	1.59
NVNT	n40 SISO	5230	Ant1	92.75	0.33	1.56



NVNT	n40 SISO	5755	Ant1	92.75	0.33	1.56
NVNT	n40 SISO	5795	Ant1	92.65	0.33	1.59
NVNT	n40 SISO	5190	Ant2	92.65	0.33	1.59
NVNT	n40 SISO	5230	Ant2	91.3	0.4	1.59
NVNT	n40 SISO	5755	Ant2	92.65	0.33	1.59
NVNT	n40 SISO	5795	Ant2	92.65	0.33	1.59
NVNT	n40 MIMO	5190	Sum	91.3	0.4	1.59
NVNT	n40 MIMO	5230	Sum	92.75	0.33	1.56
NVNT	n40 MIMO	5755	Sum	91.3	0.4	1.59
NVNT	n40 MIMO	5795	Sum	92.65	0.33	1.59
NVNT	ac20 SISO	5180	Ant1	96.24	0.17	0.78
NVNT	ac20 SISO	5220	Ant1	96.24	0.17	0.78
NVNT	ac20 SISO	5240	Ant1	96.24	0.17	0.78
NVNT	ac20 SISO	5745	Ant1	96.24	0.17	0.78
NVNT	ac20 SISO	5785	Ant1	96.24	0.17	0.78
NVNT	ac20 SISO	5825	Ant1	96.21	0.17	0.79
NVNT	ac20 SISO	5180	Ant2	95.49	0.2	0.79
NVNT	ac20 SISO	5220	Ant2	96.24	0.17	0.78
NVNT	ac20 SISO	5240	Ant2	95.49	0.2	0.79
NVNT	ac20 SISO	5745	Ant2	96.24	0.17	0.78
NVNT	ac20 SISO	5785	Ant2	96.24	0.17	0.78
NVNT	ac20 SISO	5825	Ant2	95.49	0.2	0.79
NVNT	ac20 MIMO	5180	Sum	96.24	0.17	0.78
NVNT	ac20 MIMO	5220	Sum	96.24	0.17	0.78
NVNT	ac20 MIMO	5240	Sum	96.24	0.17	0.78
NVNT	ac20 MIMO	5745	Sum	95.49	0.2	0.79
NVNT	ac20 MIMO	5785	Sum	96.24	0.17	0.78
NVNT	ac20 MIMO	5825	Sum	95.49	0.2	0.79
NVNT	ac40 SISO	5190	Ant1	91.3	0.4	1.59
NVNT	ac40 SISO	5230	Ant1	91.3	0.4	1.59
NVNT	ac40 SISO	5755	Ant1	92.65	0.33	1.59
NVNT	ac40 SISO	5795	Ant1	92.75	0.33	1.56
NVNT	ac40 SISO	5190	Ant2	91.3	0.4	1.59
NVNT	ac40 SISO	5230	Ant2	91.3	0.4	1.59
NVNT	ac40 SISO	5755	Ant2	92.75	0.33	1.56
NVNT	ac40 SISO	5795	Ant2	92.65	0.33	1.59
NVNT	ac40 MIMO	5190	Sum	92.65	0.33	1.59
NVNT	ac40 MIMO	5230	Sum	92.75	0.33	1.56




NVNT	ac40 MIMO	5755	Sum	92.75	0.33	1.56
NVNT	ac40 MIMO	5795	Sum	91.3	0.4	1.59
NVNT	ac80 SISO	5210	Ant1	83.78	0.77	3.23
NVNT	ac80 SISO	5775	Ant1	86.49	0.63	3.13
NVNT	ac80 SISO	5210	Ant2	86.11	0.65	3.23
NVNT	ac80 SISO	5775	Ant2	86.49	0.63	3.12
NVNT	ac80 MIMO	5210	Sum	86.49	0.63	3.13
NVNT	ac80 MIMO	5775	Sum	86.49	0.63	3.13




Test Graphs

Duty Cycle NVNT a 5180MHz Ant1 SISO

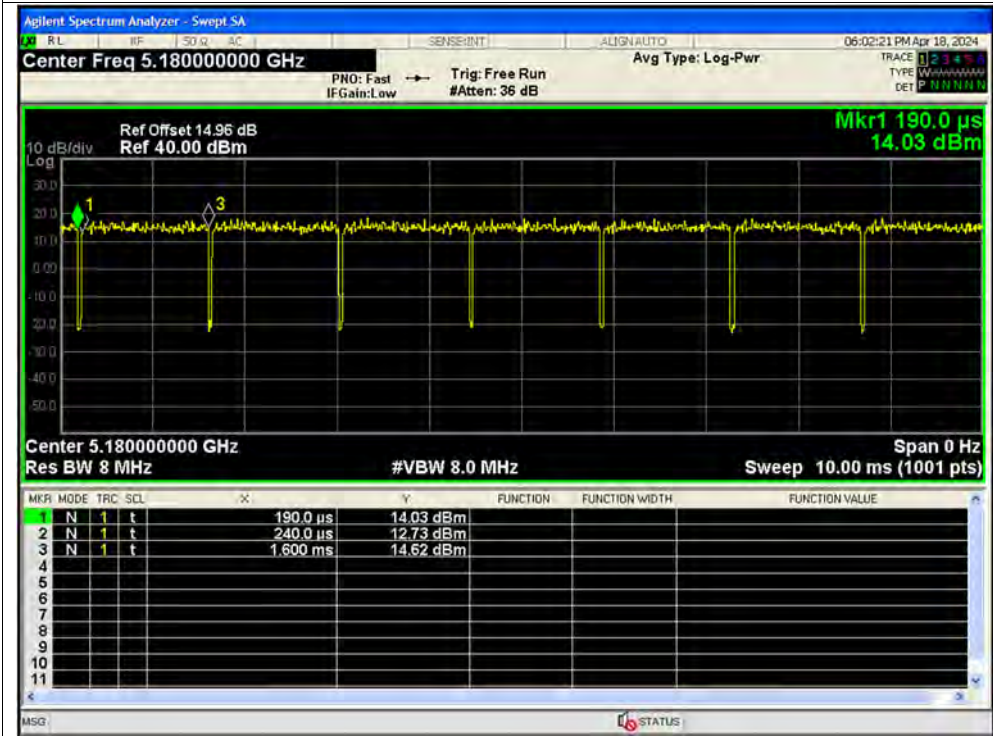


Duty Cycle NVNT a 5220MHz Ant1 SISO

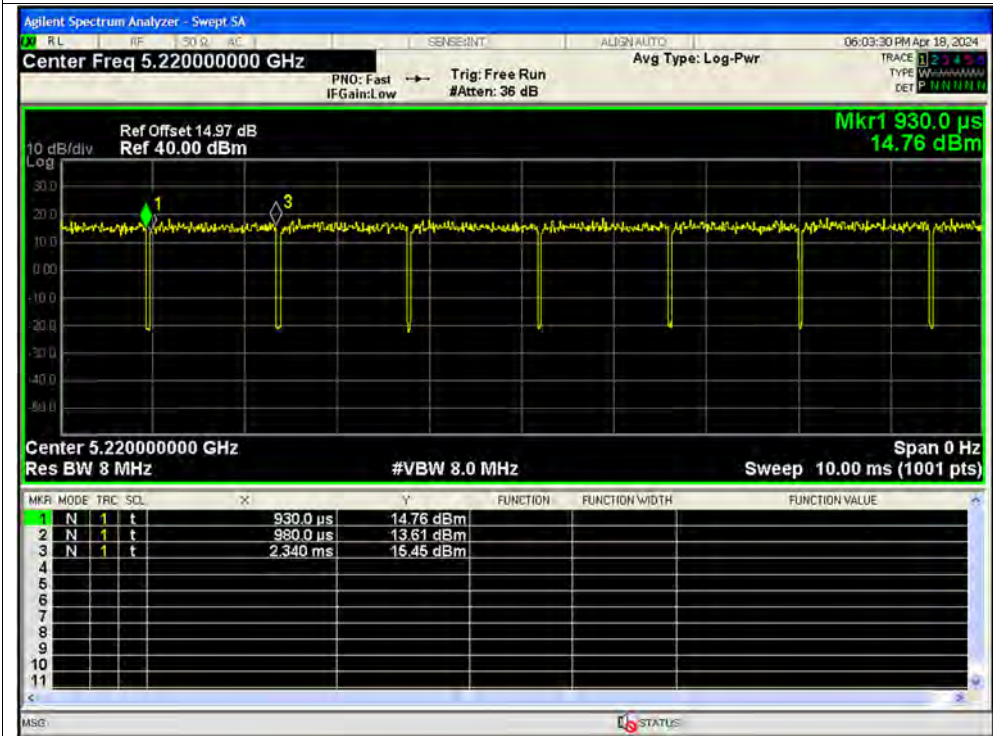




Duty Cycle NVNT a 5240MHz Ant1 SISO

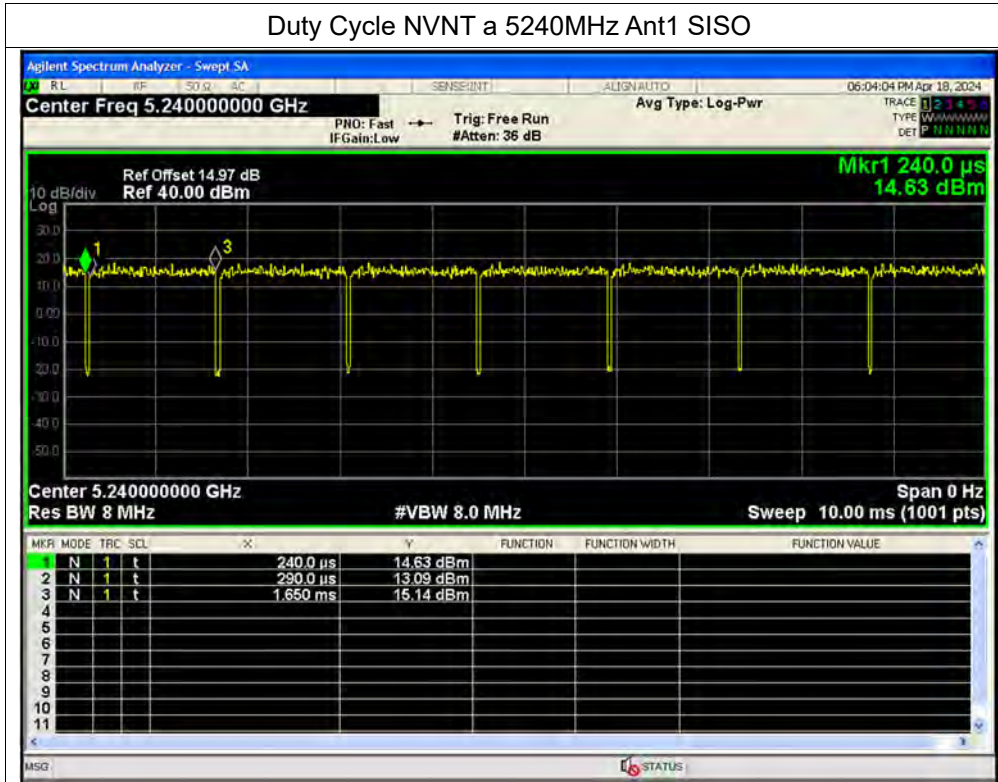


Duty Cycle NVNT a 5745MHz Ant1 SISO

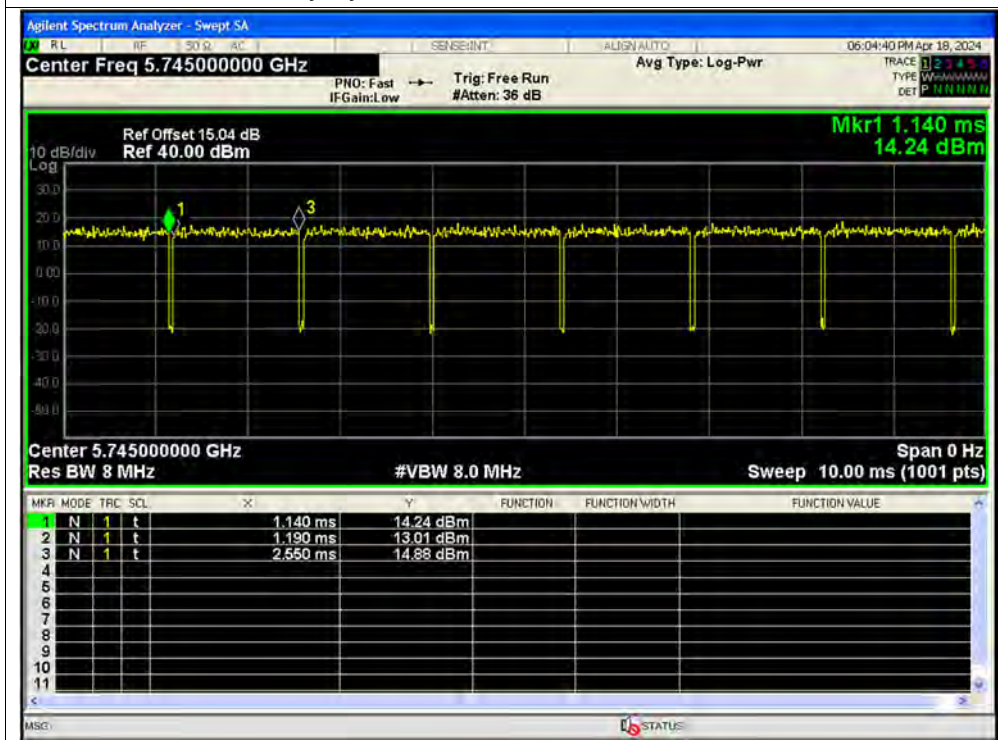




Duty Cycle NVNT a 5785MHz Ant1 SISO

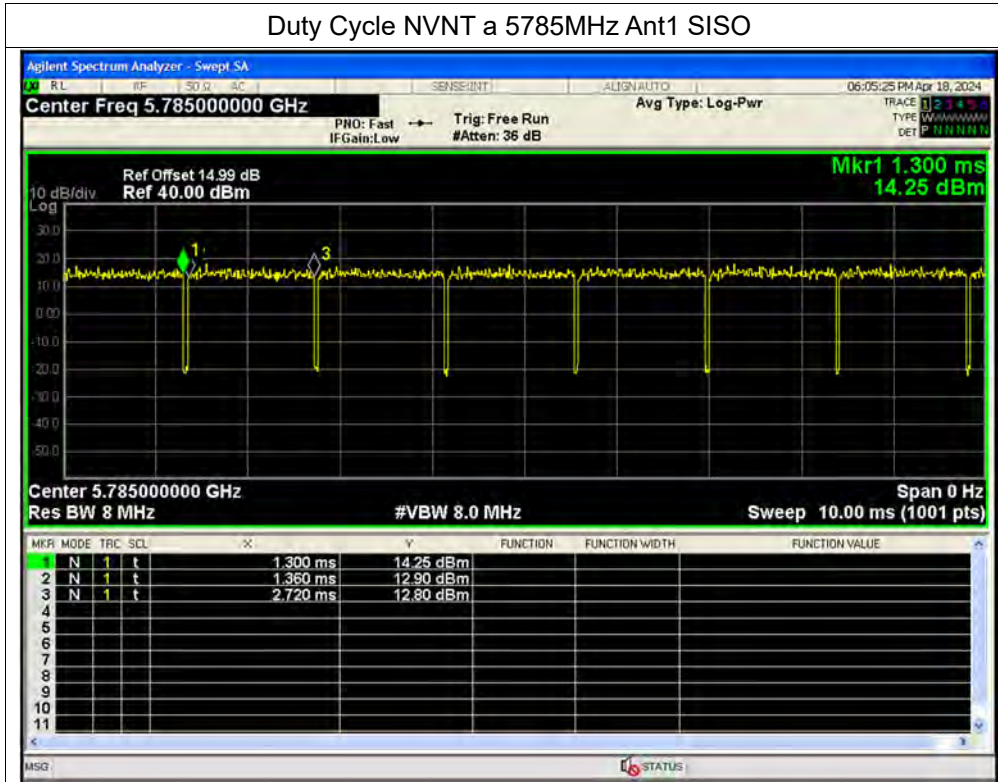


Duty Cycle NVNT a 5825MHz Ant1 SISO

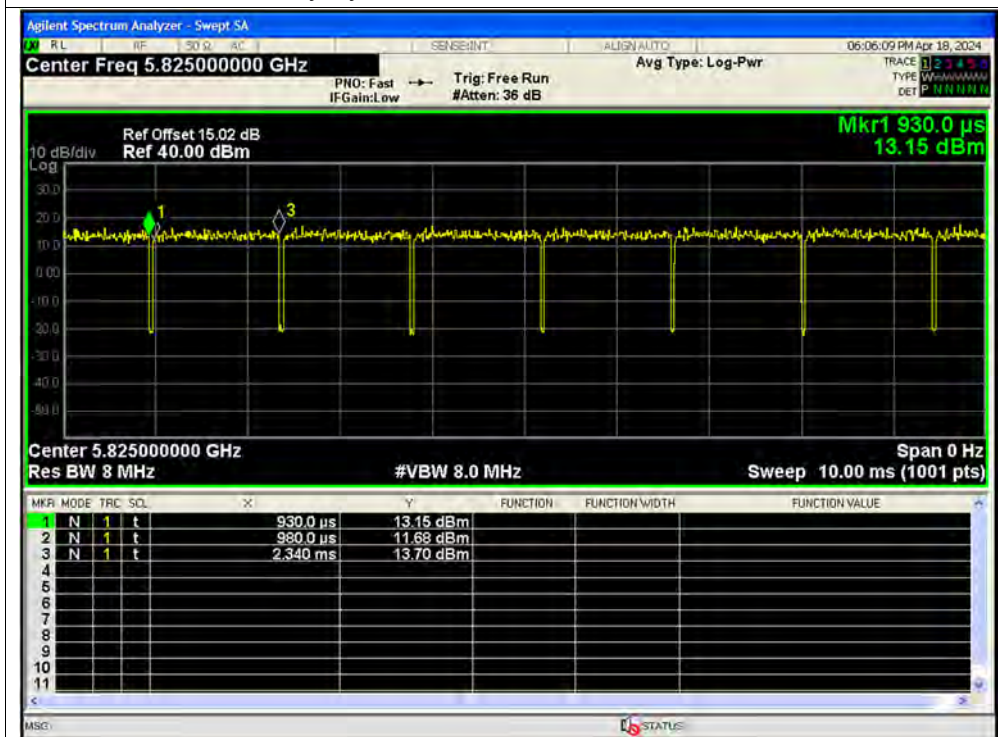




Duty Cycle NVNT a 5180MHz Ant2 SISO

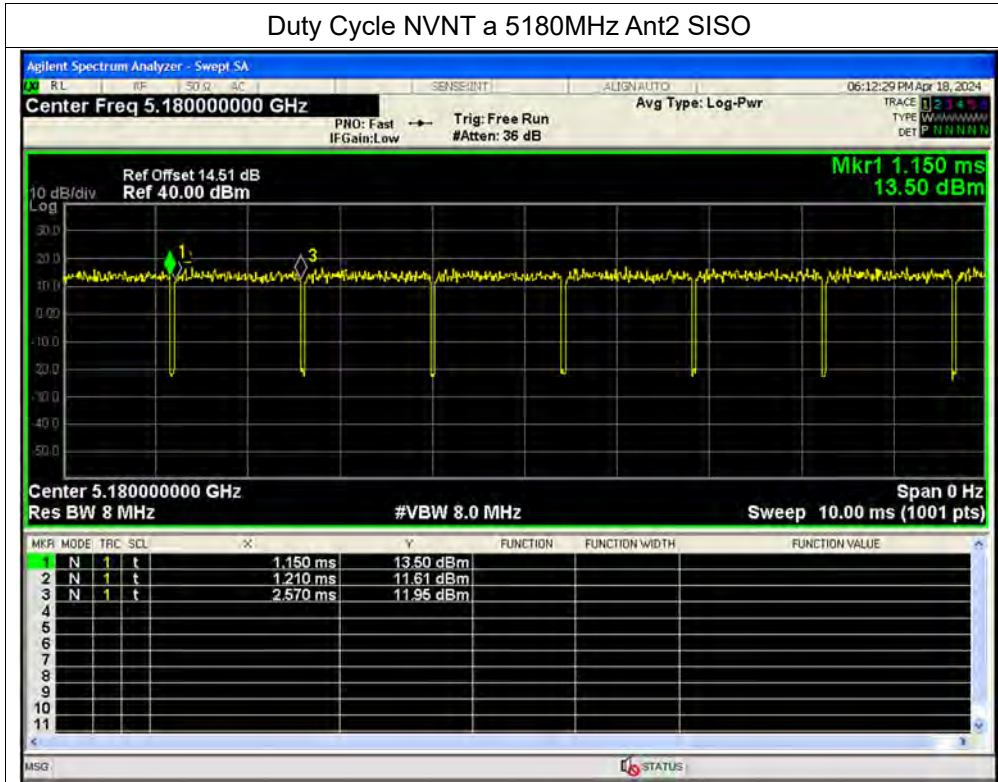


Duty Cycle NVNT a 5220MHz Ant2 SISO

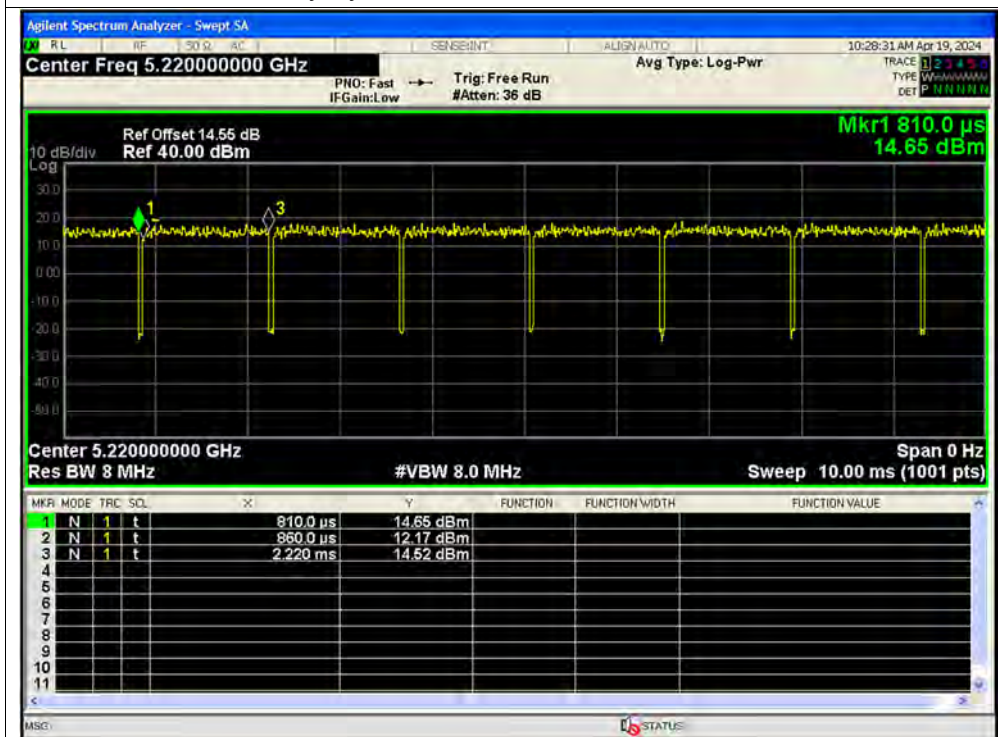




Duty Cycle NVNT a 5240MHz Ant2 SISO

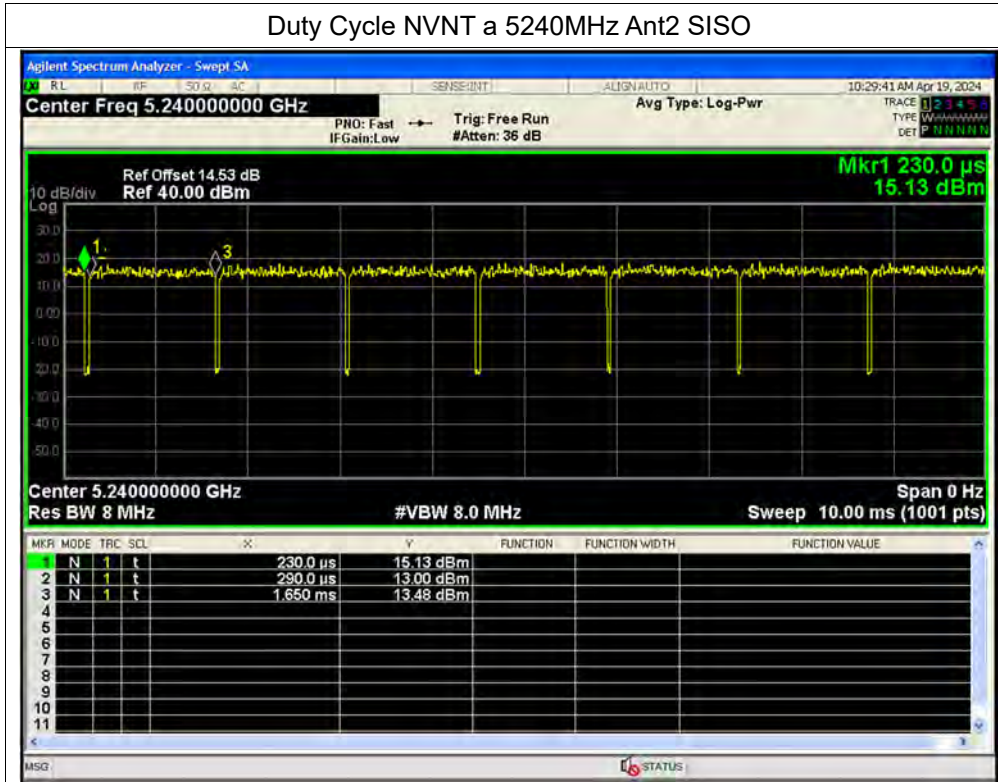


Duty Cycle NVNT a 5745MHz Ant2 SISO

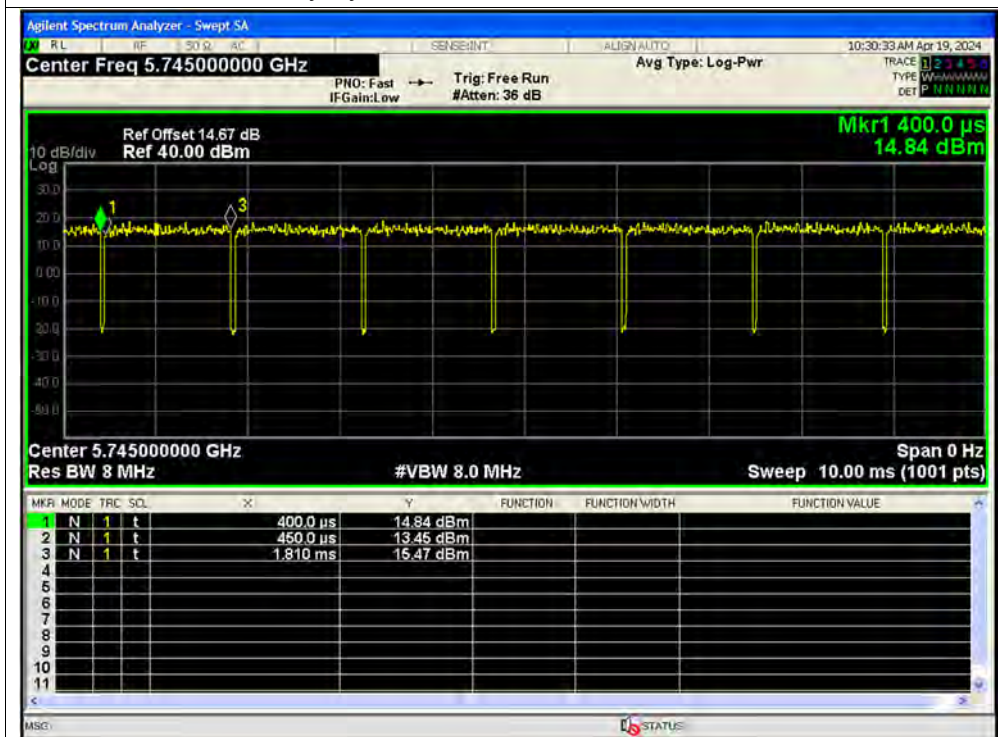




Duty Cycle NVNT a 5785MHz Ant2 SISO

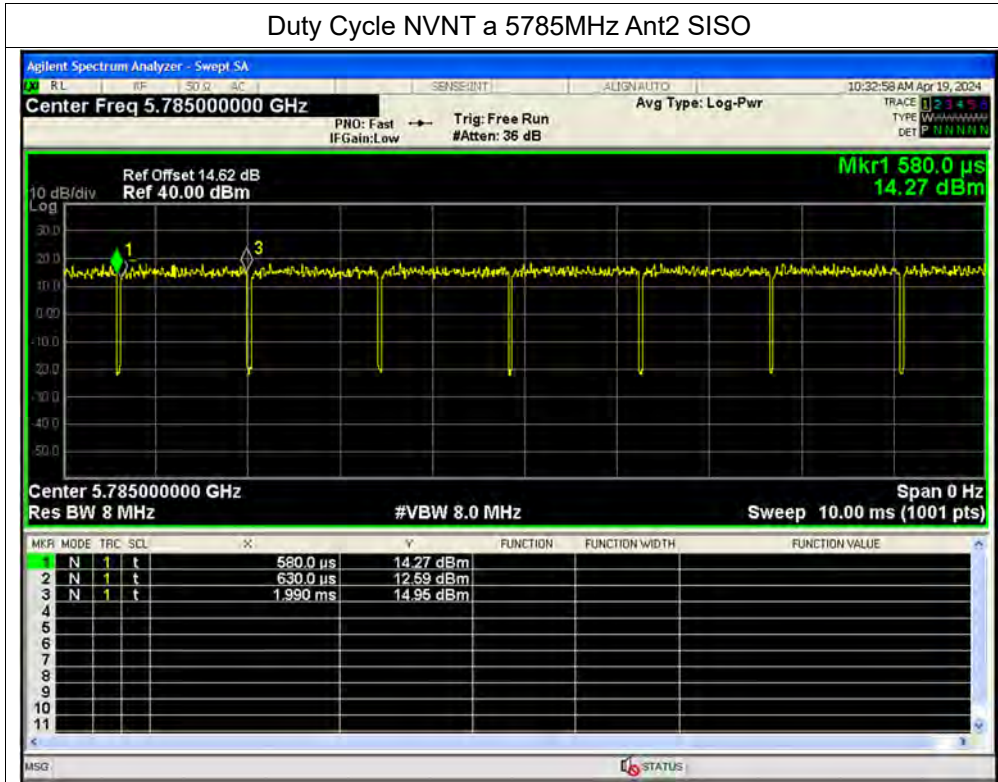


Duty Cycle NVNT a 5825MHz Ant2 SISO

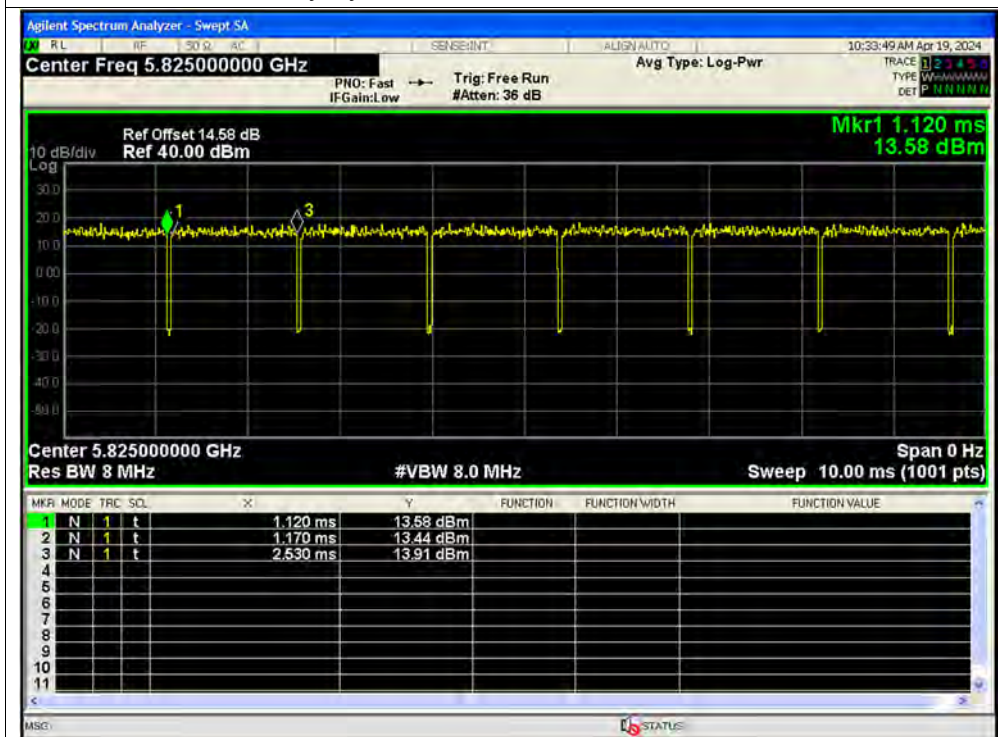




Duty Cycle NVNT n20 5180MHz Ant1 SISO

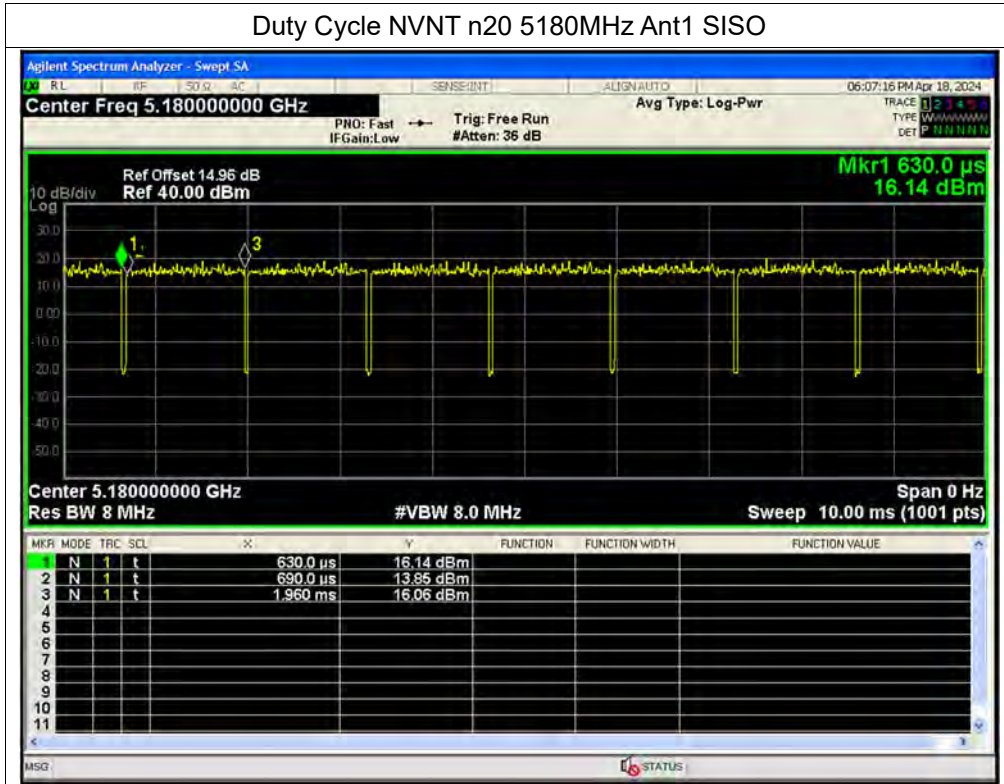


Duty Cycle NVNT n20 5220MHz Ant1 SISO

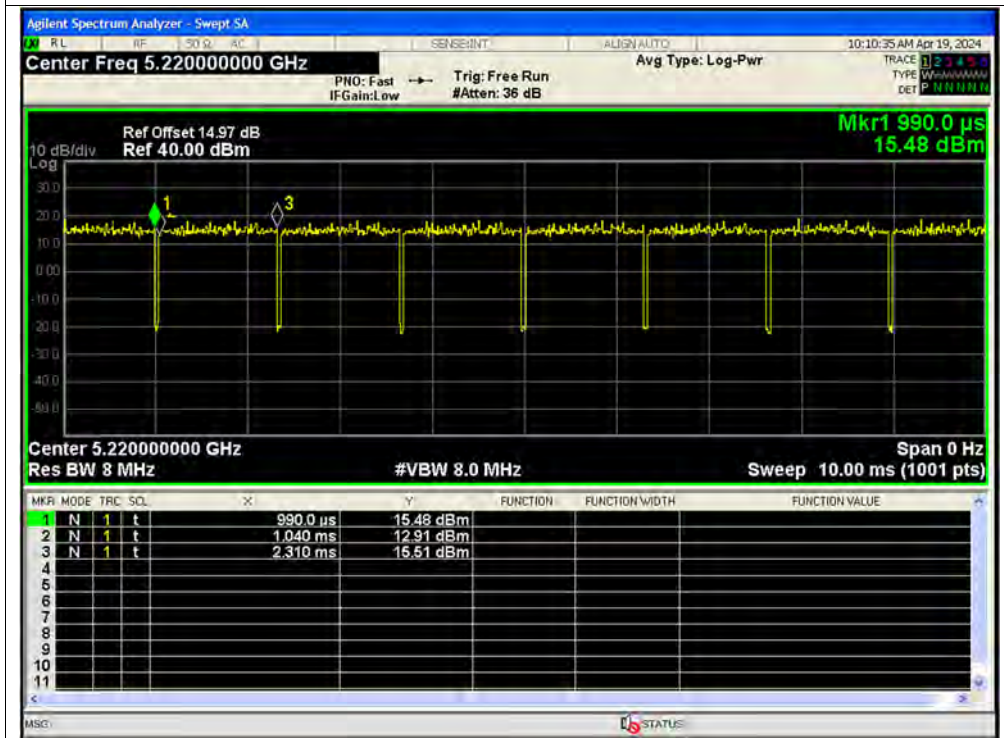




Duty Cycle NVNT n20 5240MHz Ant1 SISO

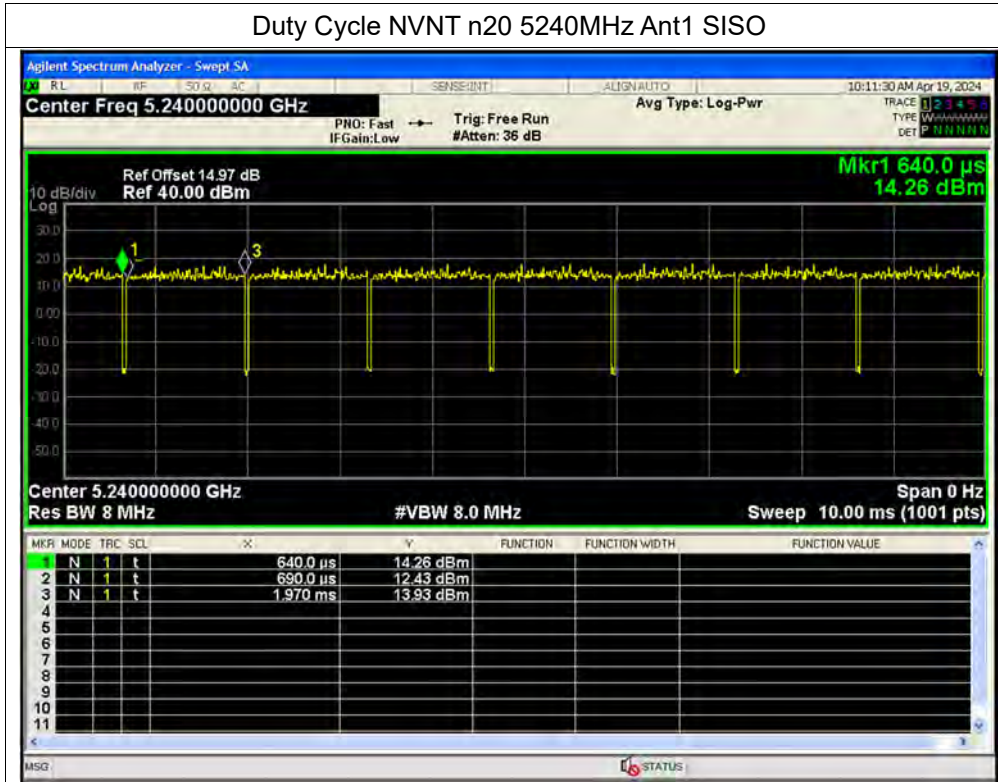


Duty Cycle NVNT n20 5745MHz Ant1 SISO

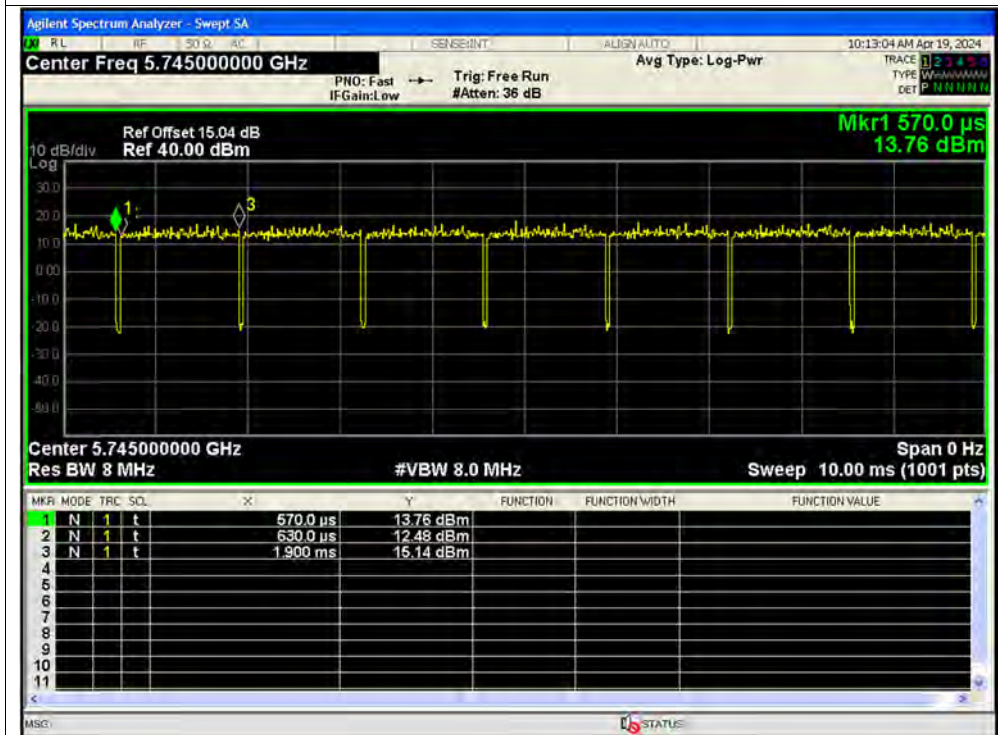




Duty Cycle NVNT n20 5785MHz Ant1 SISO

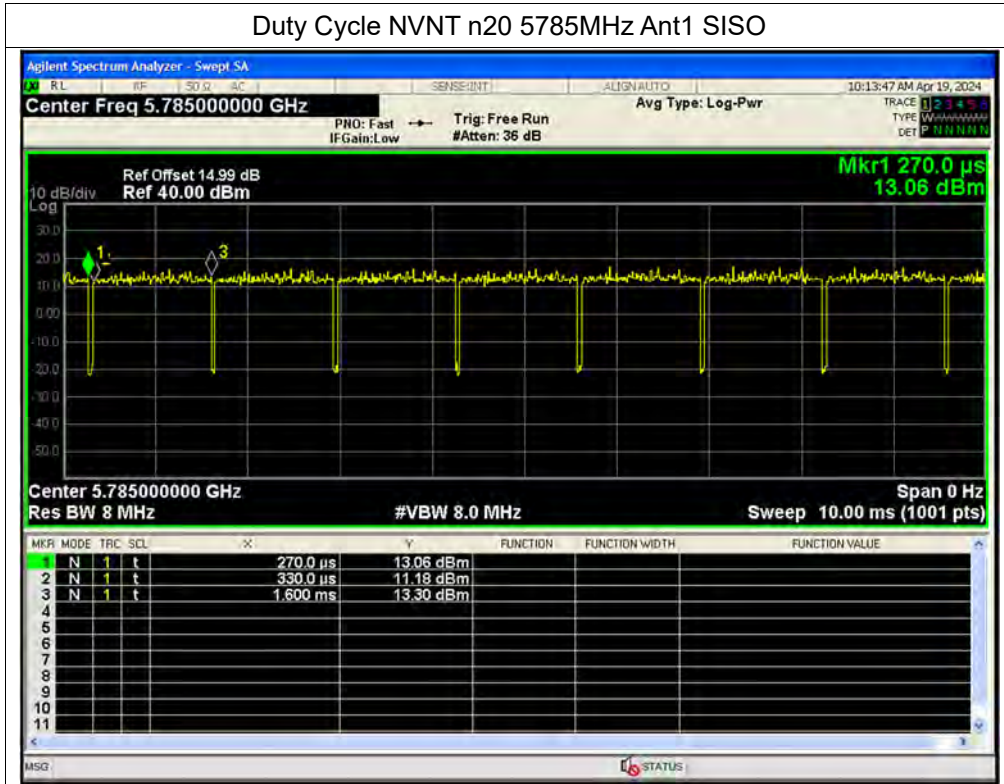


Duty Cycle NVNT n20 5825MHz Ant1 SISO

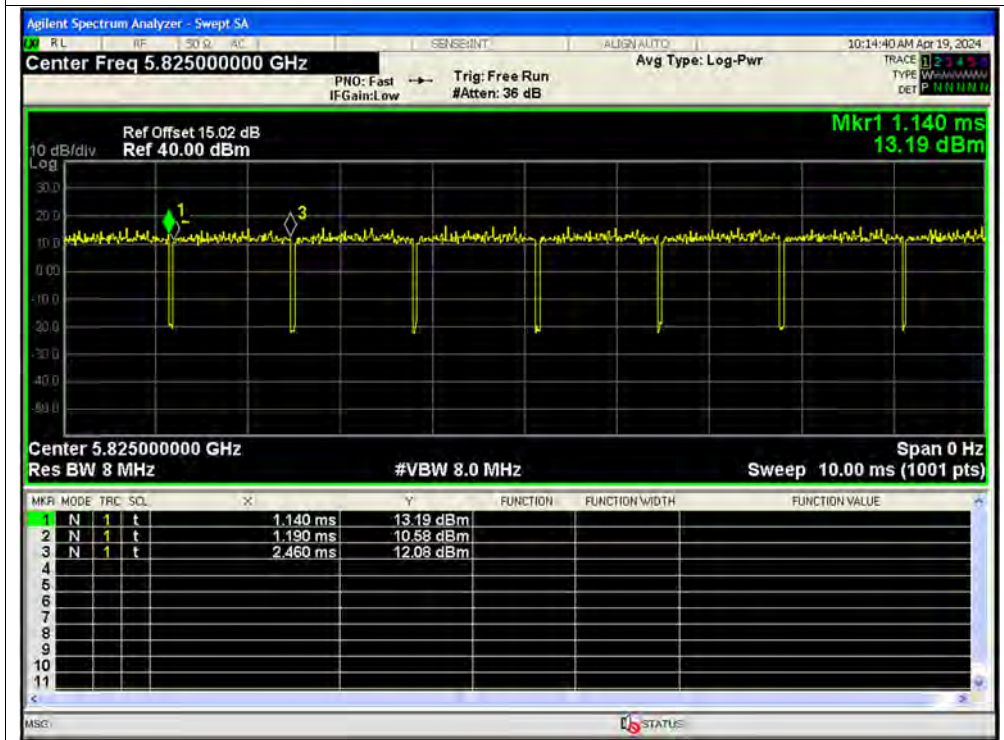




Duty Cycle NVNT n20 5180MHz Ant2 SISO

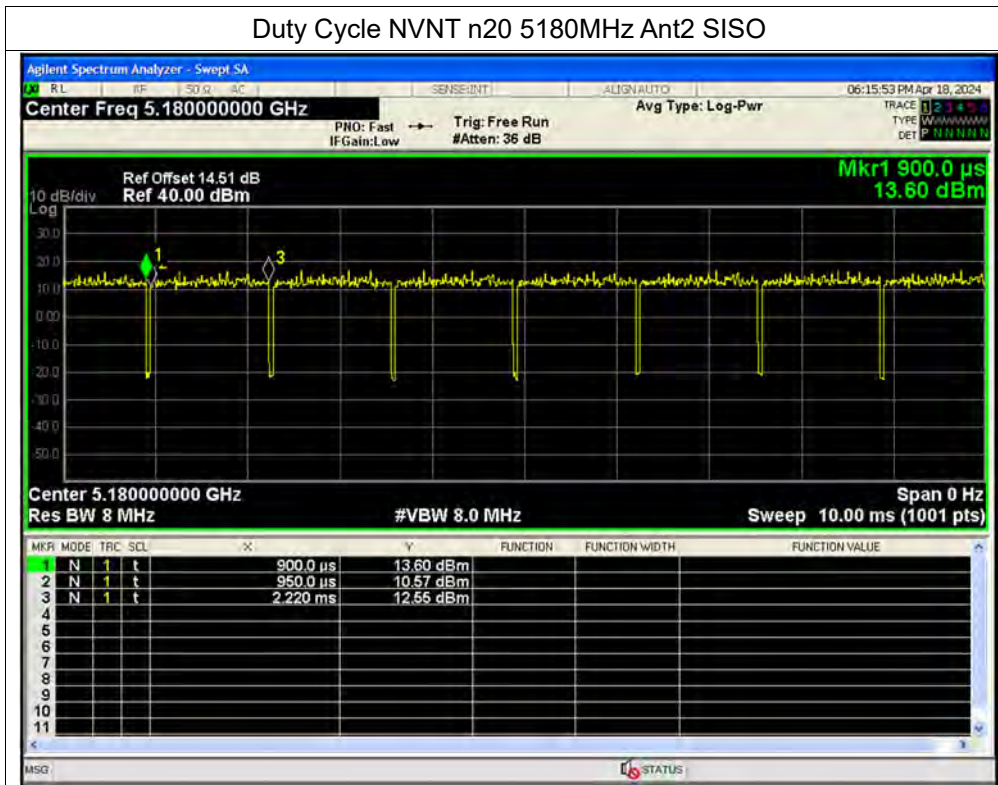


Duty Cycle NVNT n20 5220MHz Ant2 SISO

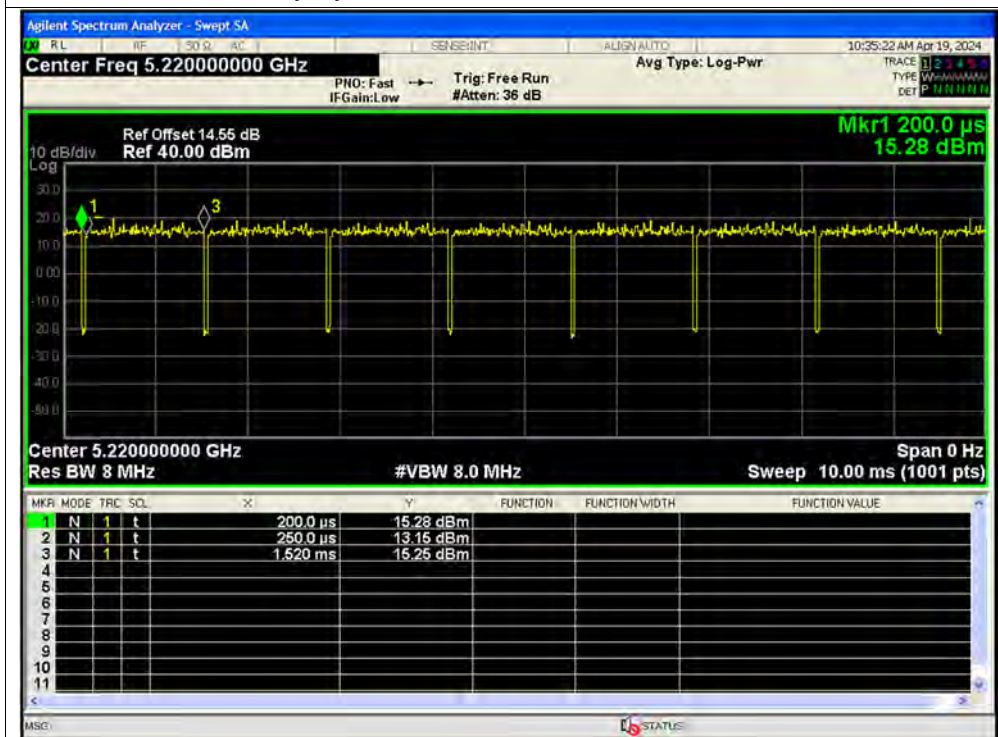




Duty Cycle NVNT n20 5240MHz Ant2 SISO

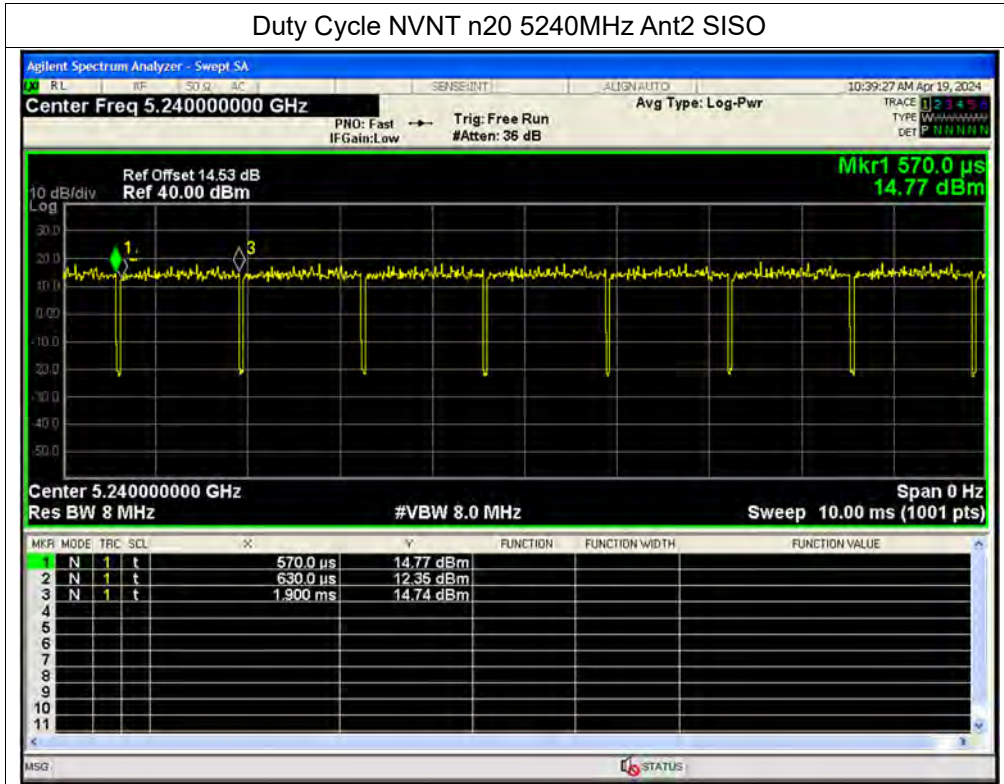


Duty Cycle NVNT n20 5745MHz Ant2 SISO

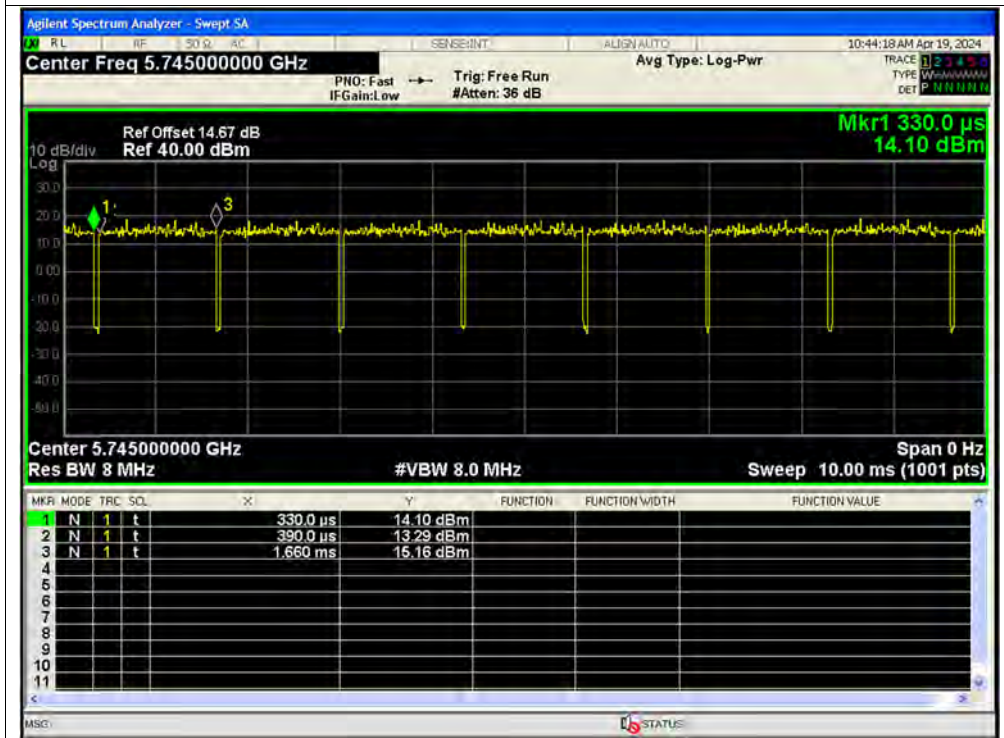




Duty Cycle NVNT n20 5785MHz Ant2 SISO

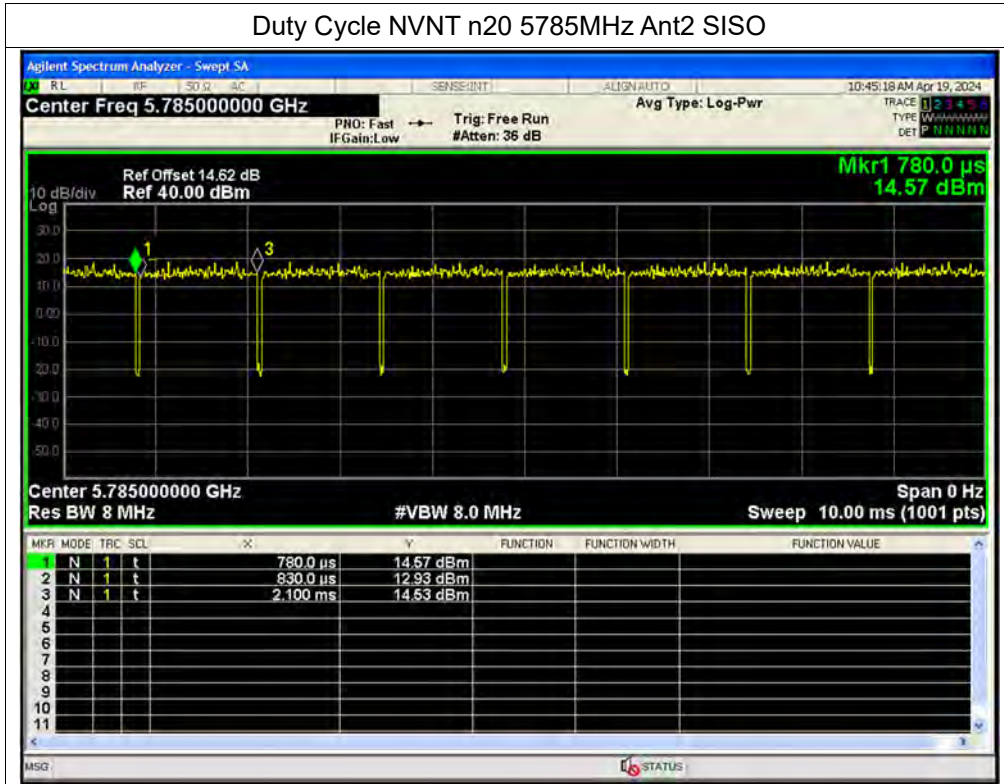


Duty Cycle NVNT n20 5825MHz Ant2 SISO

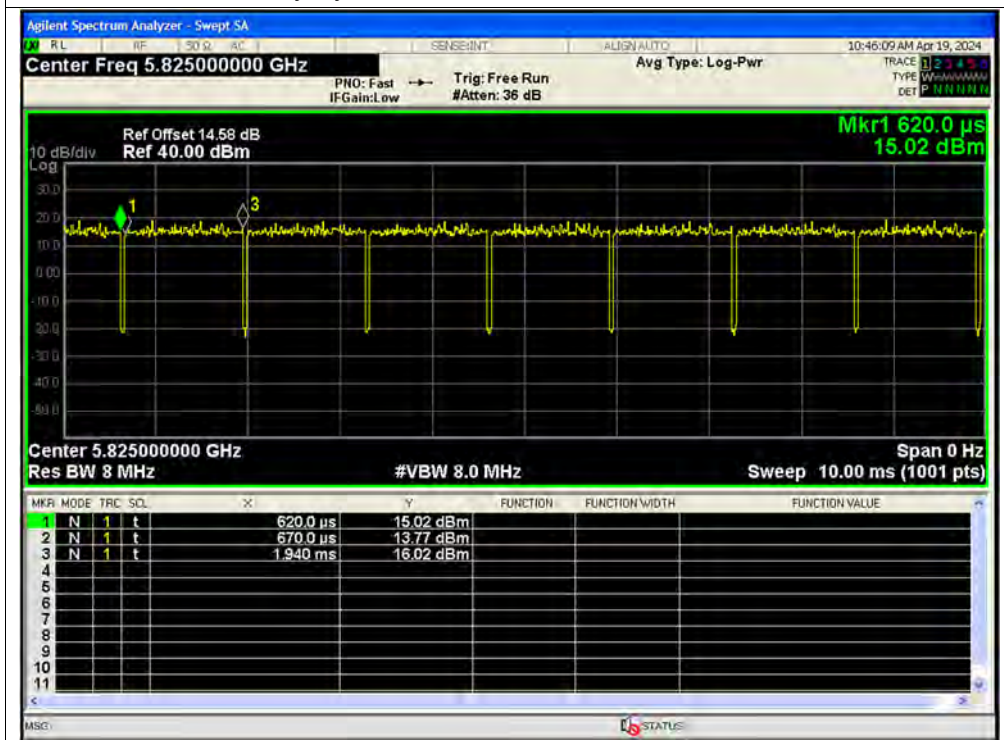




Duty Cycle NVNT n20 5180MHz Sum MIMO

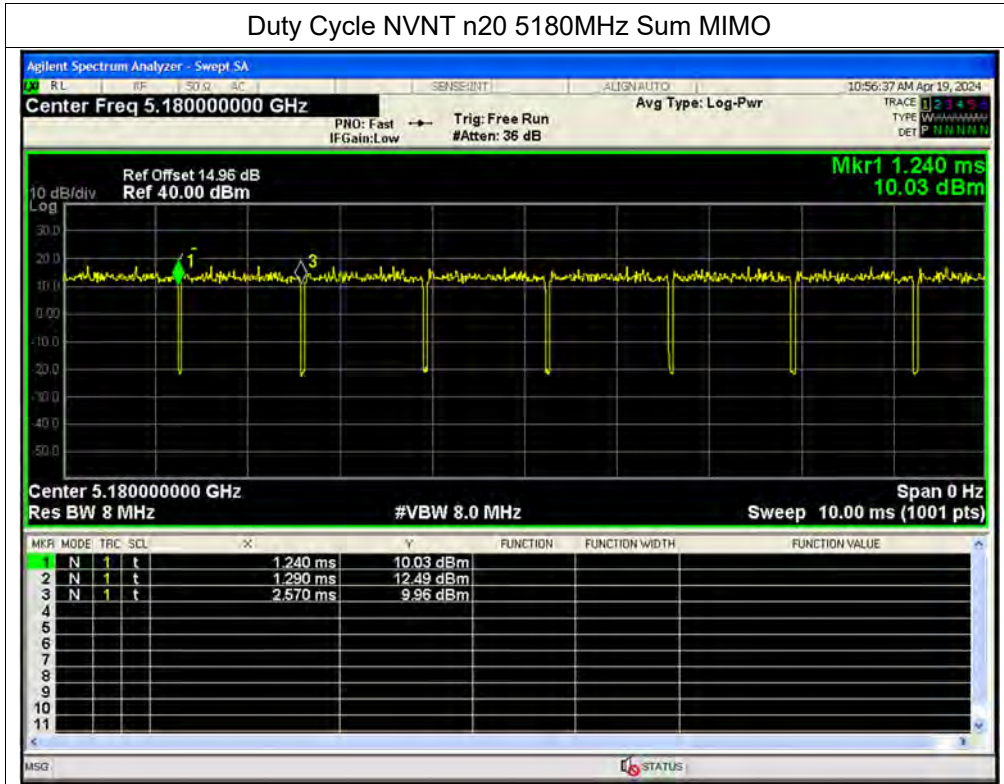


Duty Cycle NVNT n20 5220MHz Sum MIMO

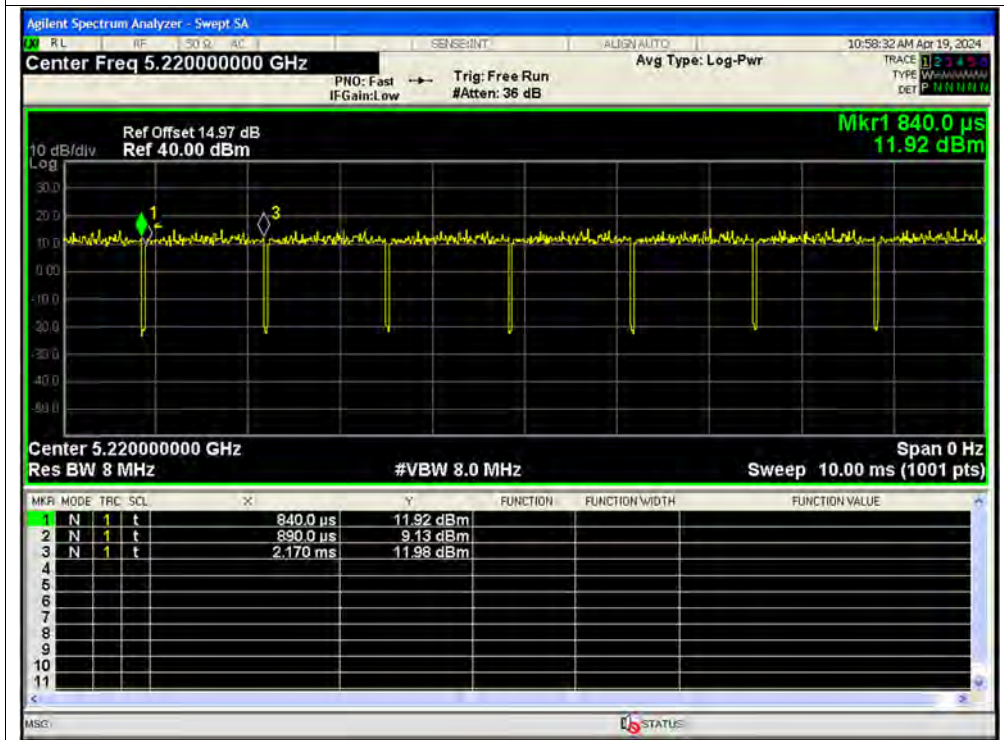




Duty Cycle NVNT n20 5240MHz Sum MIMO

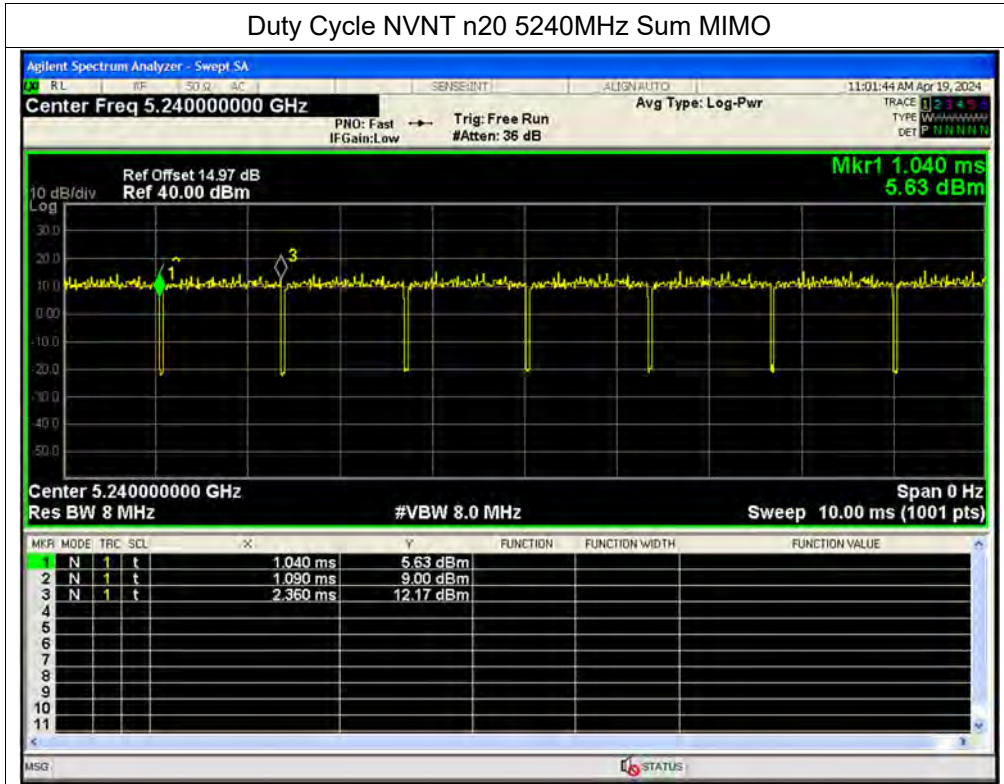


Duty Cycle NVNT n20 5745MHz Sum MIMO

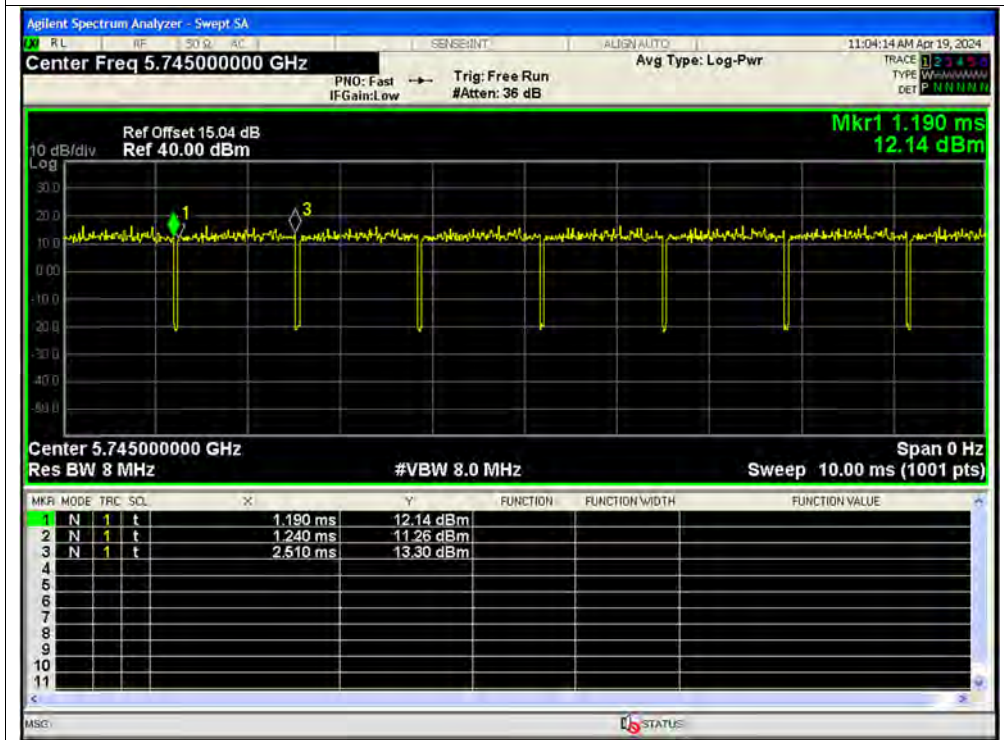




Duty Cycle NVNT n20 5785MHz Sum MIMO

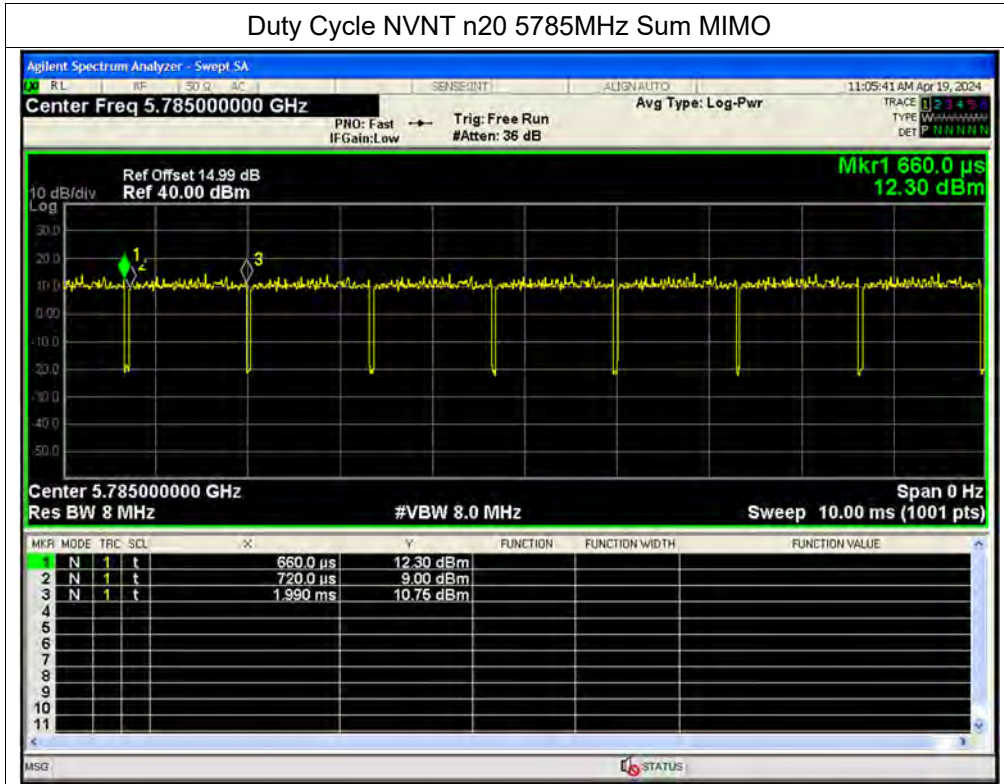


Duty Cycle NVNT n20 5825MHz Sum MIMO

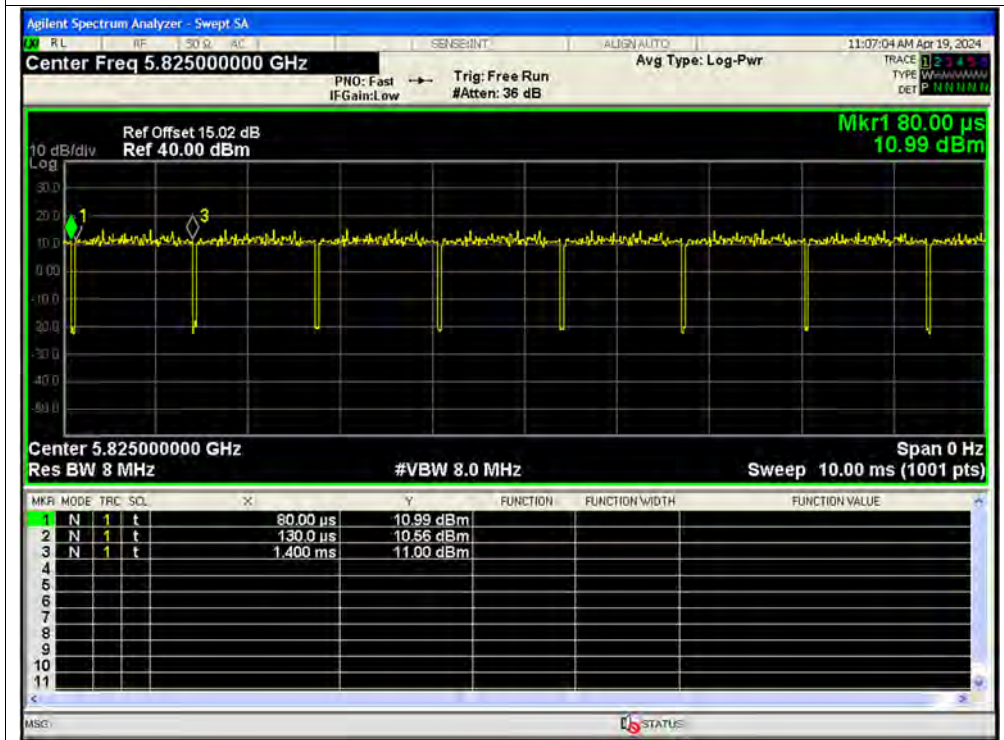




Duty Cycle NVNT n40 5190MHz Ant1 SISO

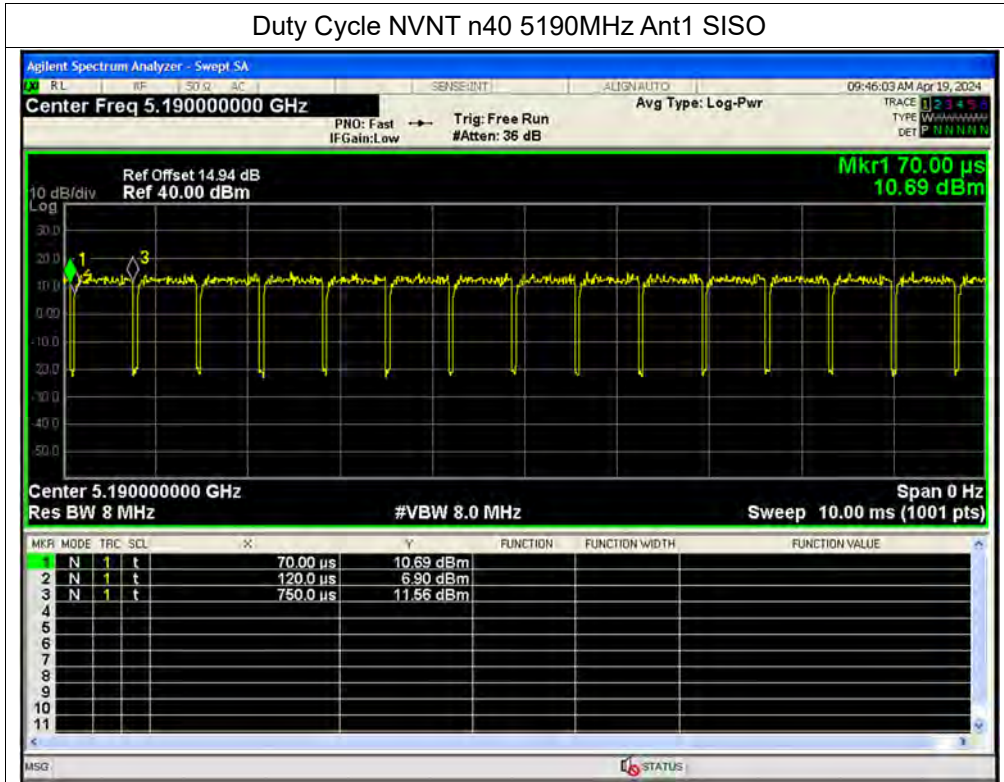


Duty Cycle NVNT n40 5230MHz Ant1 SISO

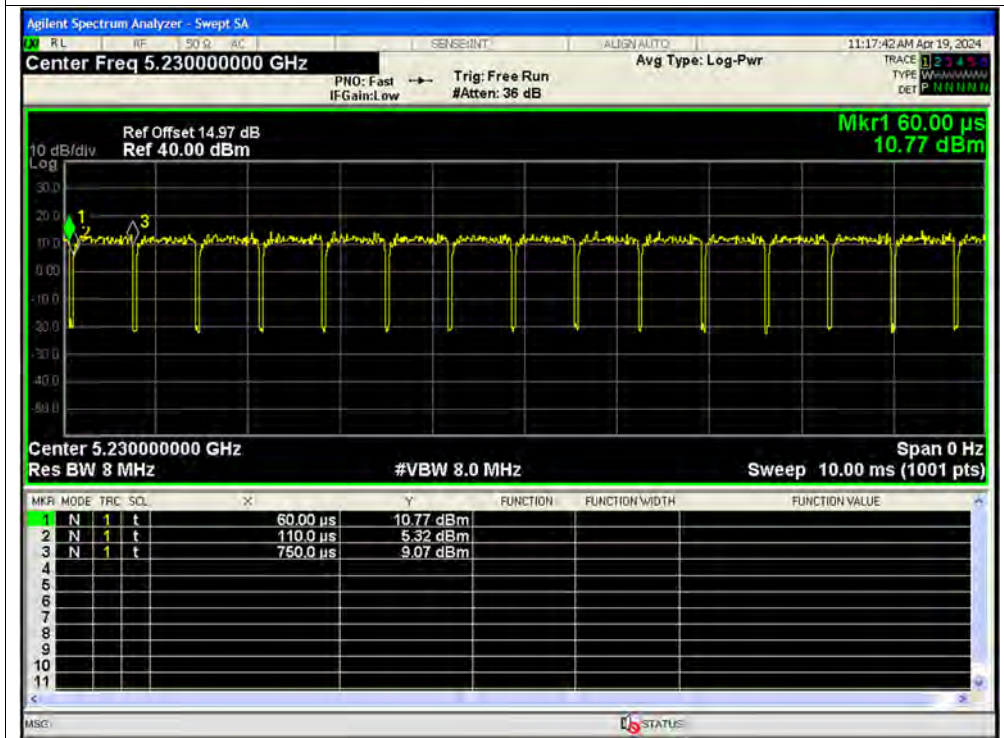




Duty Cycle NVNT n40 5755MHz Ant1 SISO

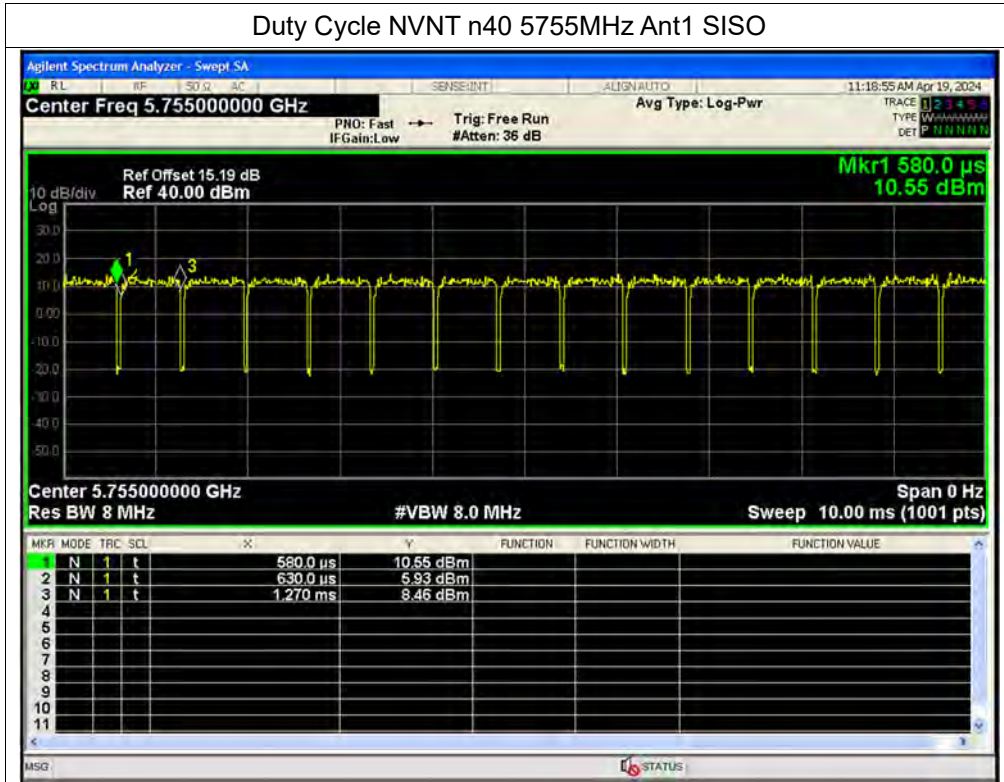


Duty Cycle NVNT n40 5795MHz Ant1 SISO

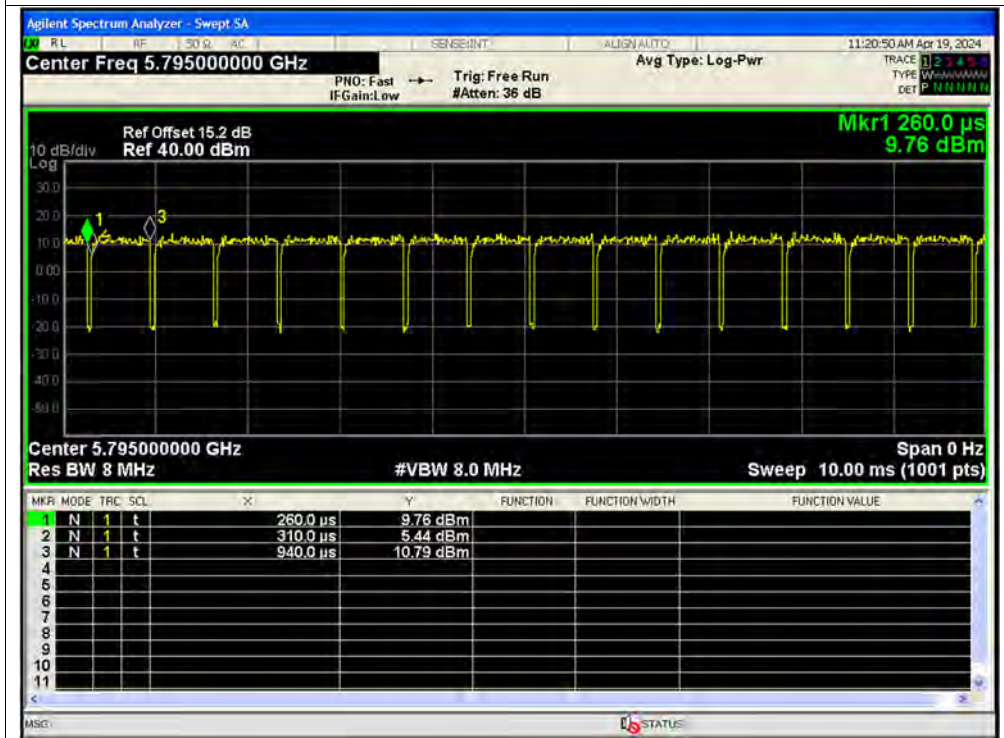




Duty Cycle NVNT n40 5190MHz Ant2 SISO

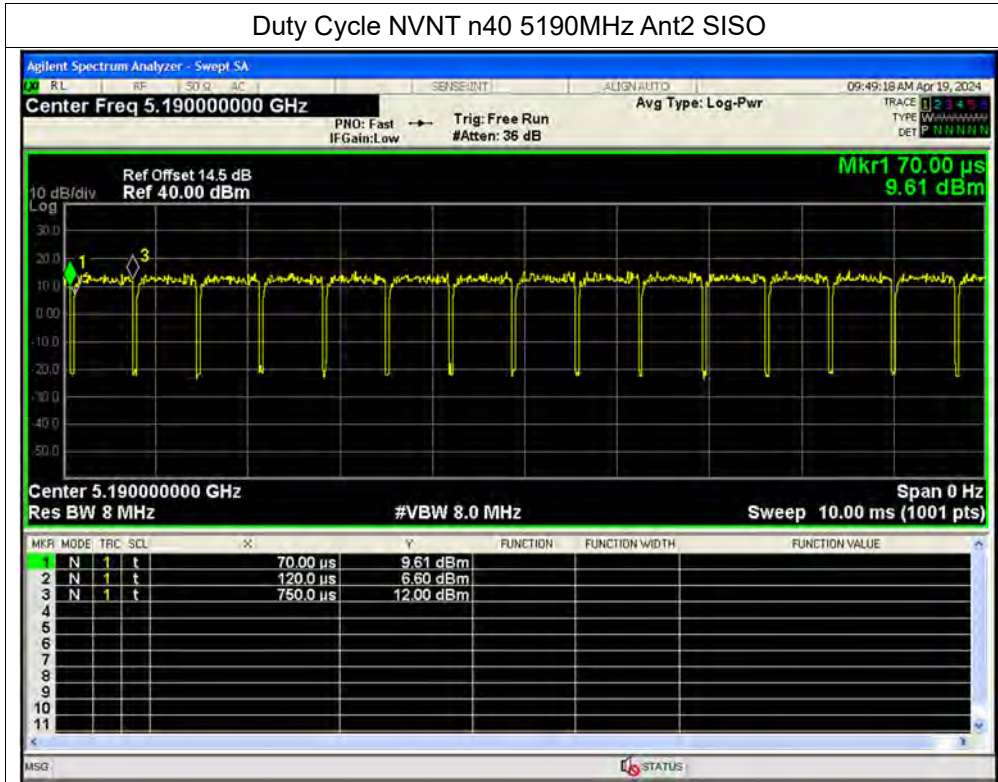


Duty Cycle NVNT n40 5230MHz Ant2 SISO

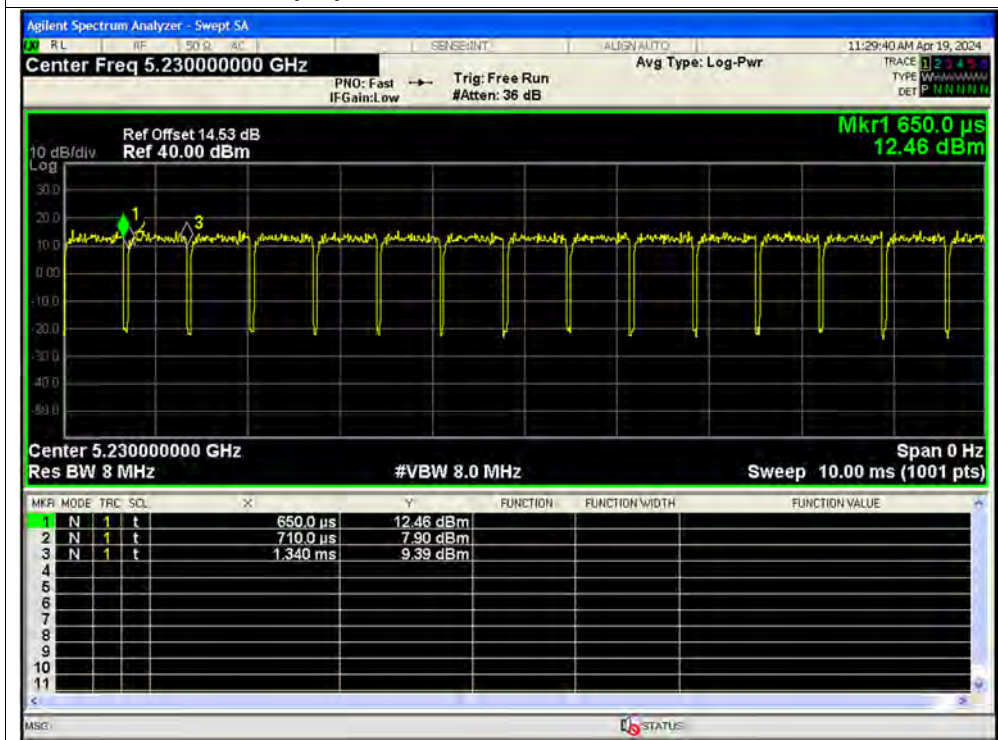




Duty Cycle NVNT n40 5755MHz Ant2 SISO

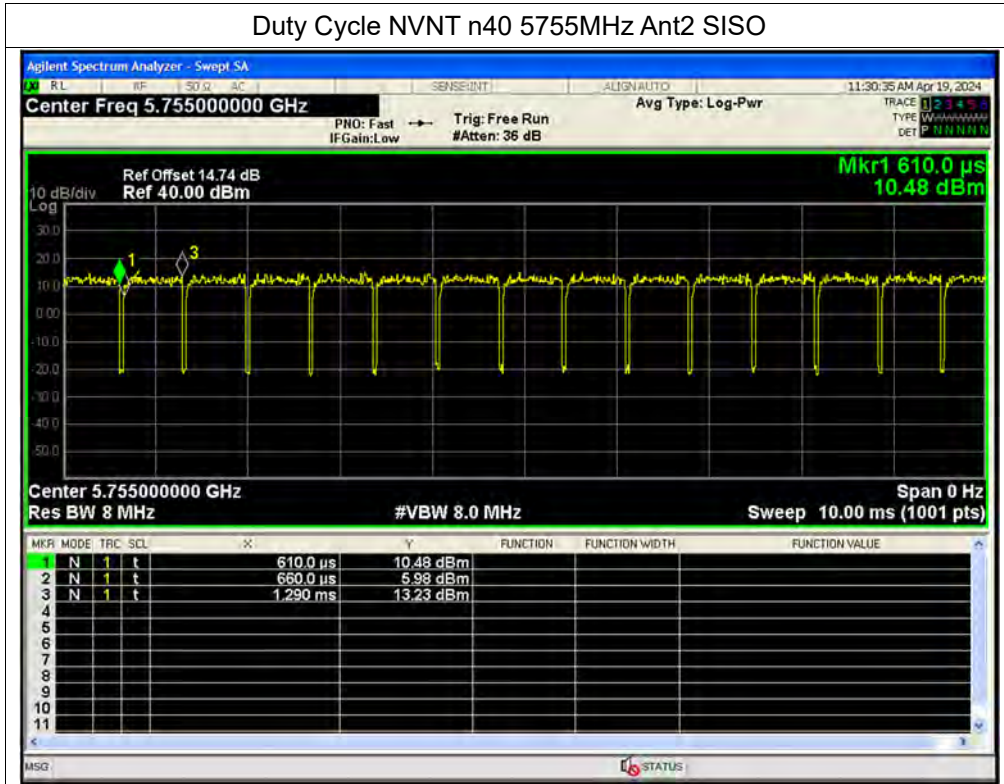


Duty Cycle NVNT n40 5795MHz Ant2 SISO

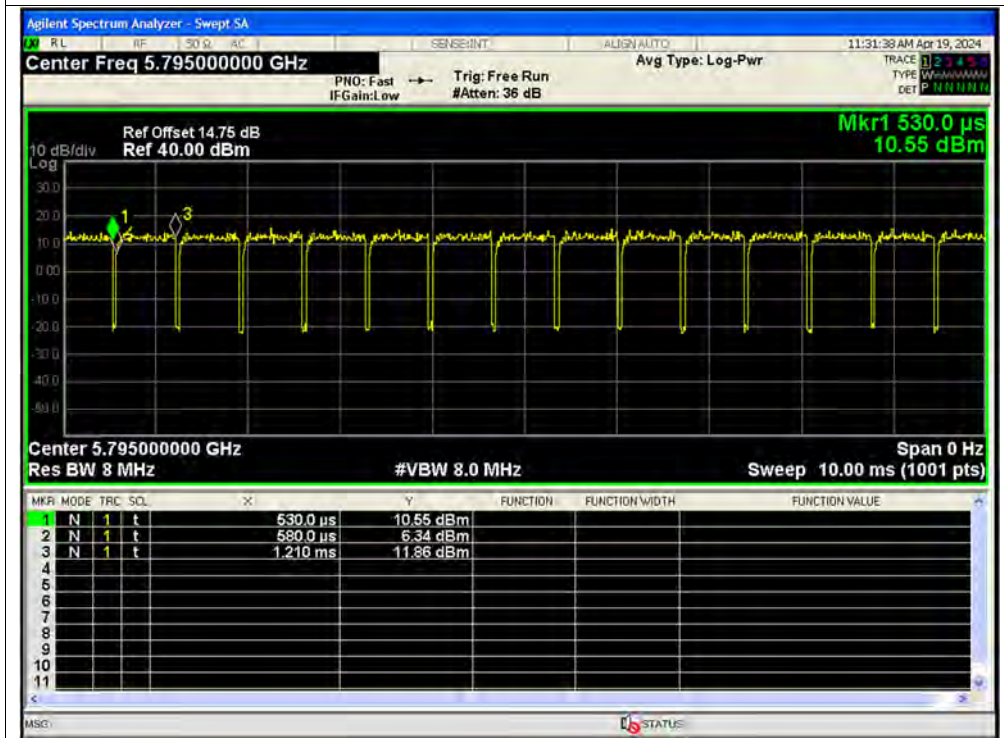




Duty Cycle NVNT n40 5190MHz Sum MIMO

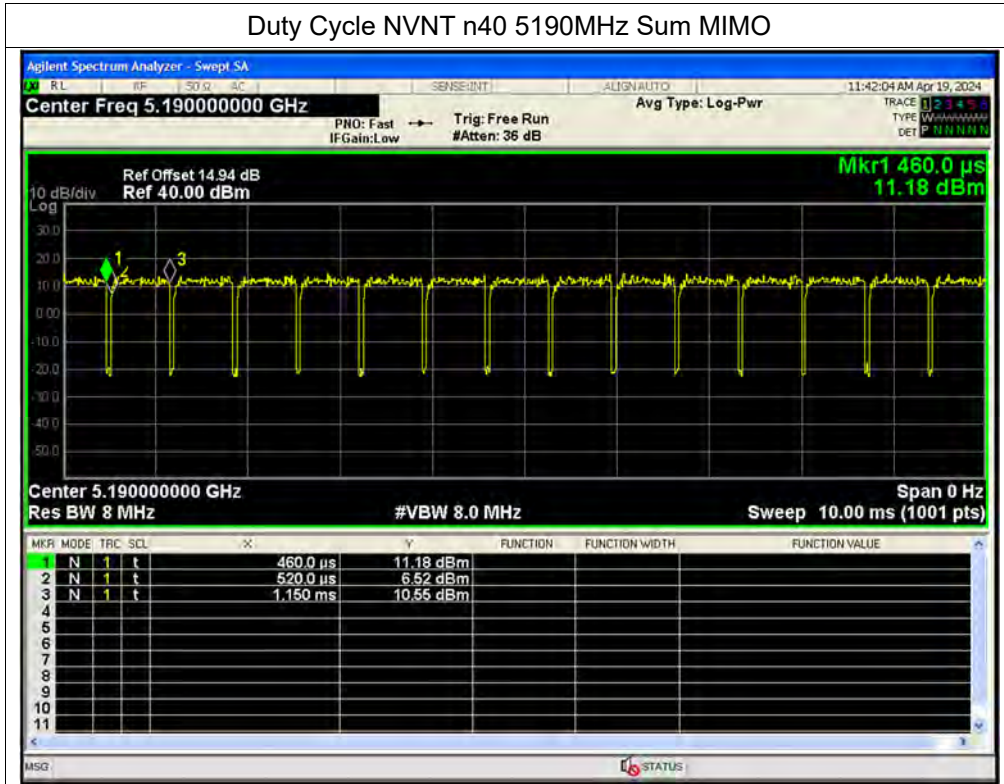


Duty Cycle NVNT n40 5230MHz Sum MIMO

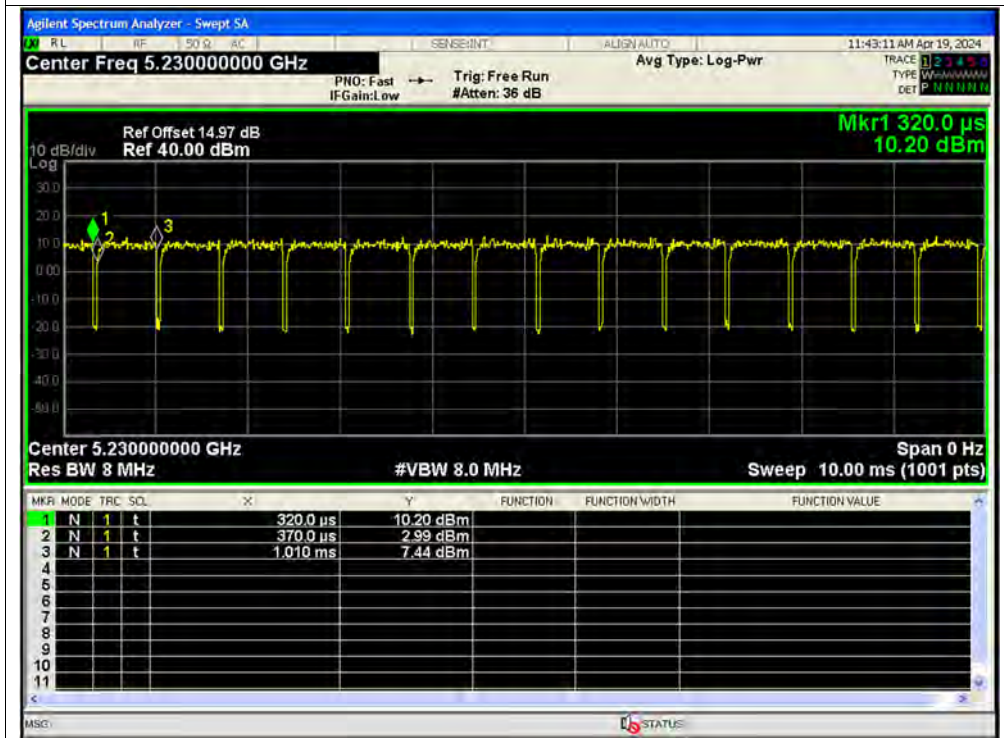




Duty Cycle NVNT n40 5755MHz Sum MIMO

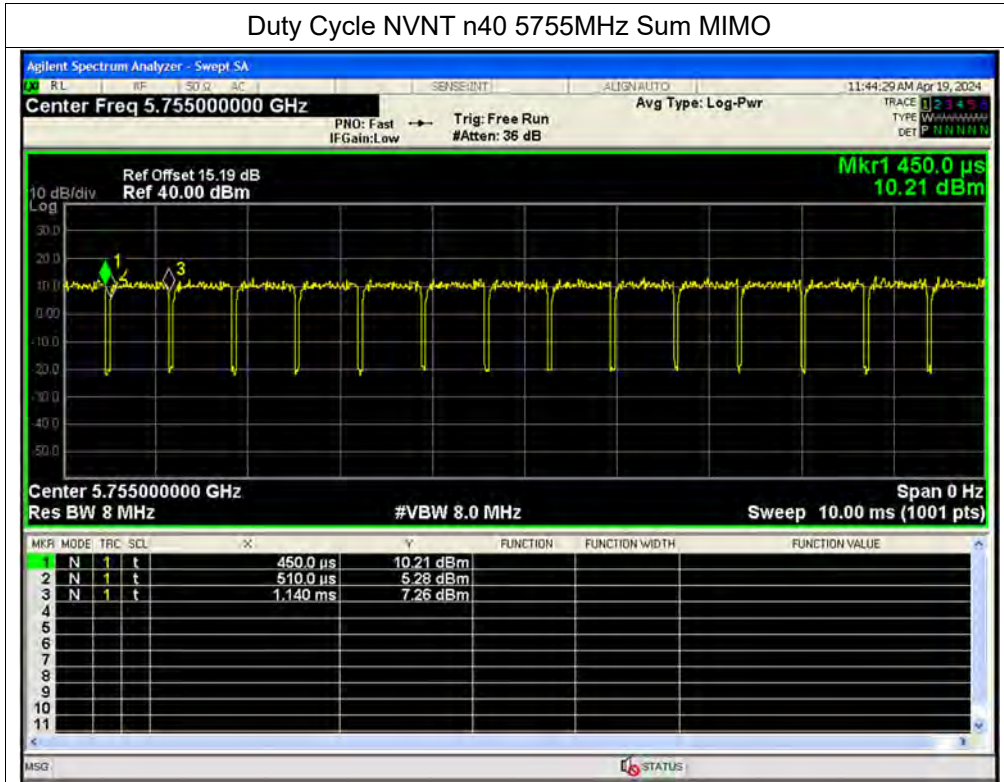


Duty Cycle NVNT n40 5795MHz Sum MIMO

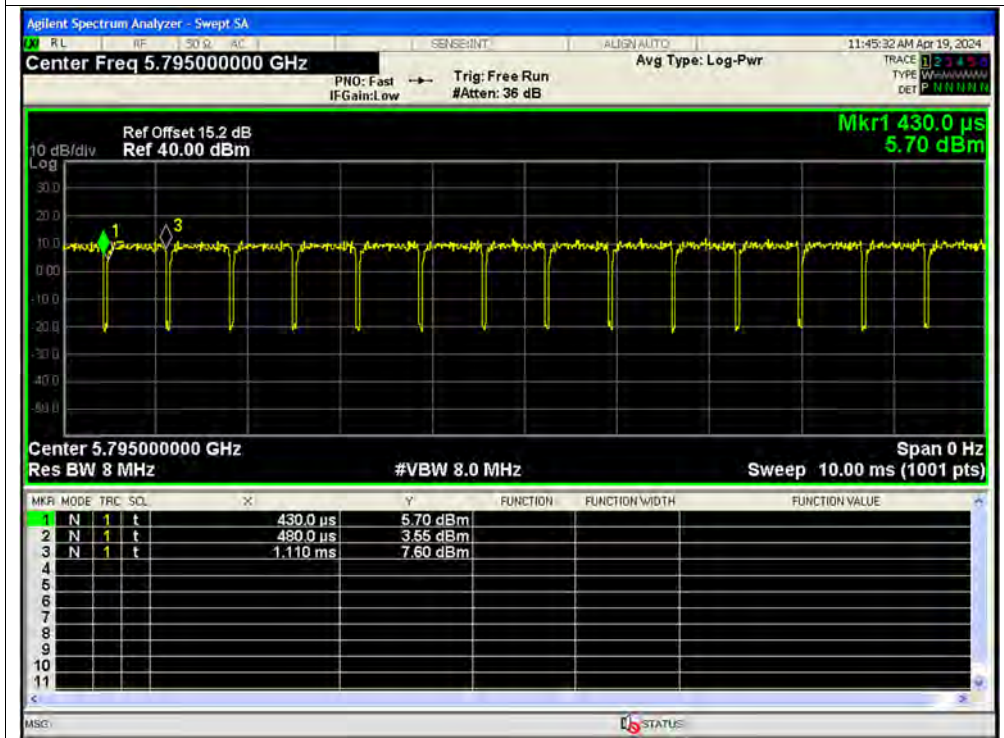




Duty Cycle NVNT ac20 5180MHz Ant1 SISO

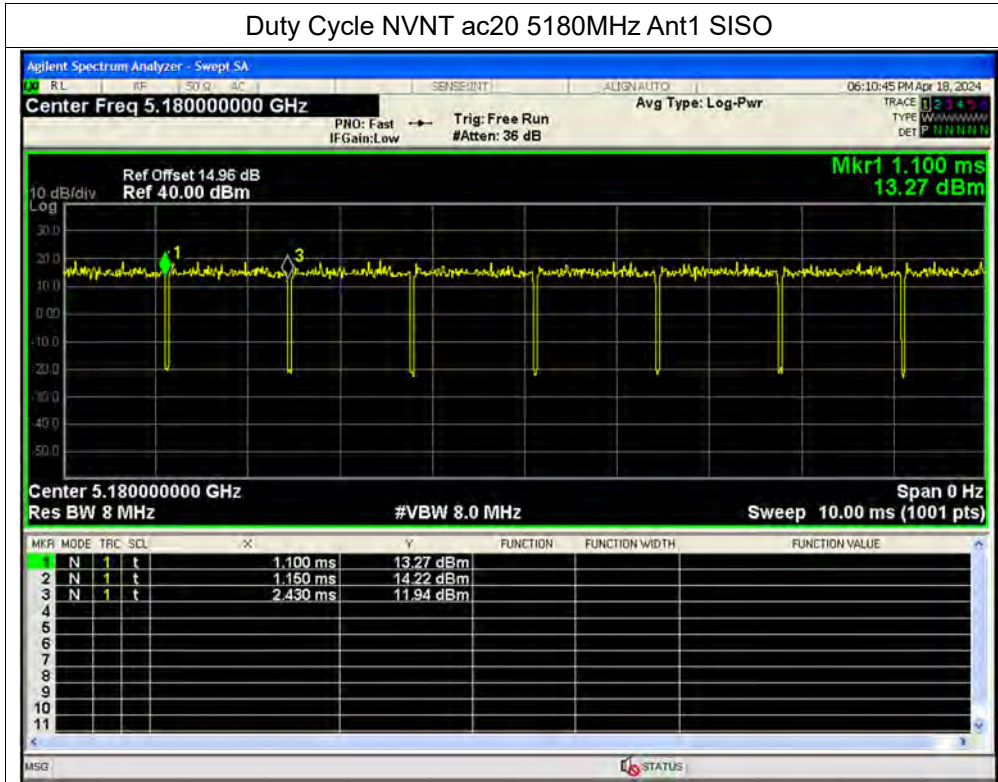


Duty Cycle NVNT ac20 5220MHz Ant1 SISO

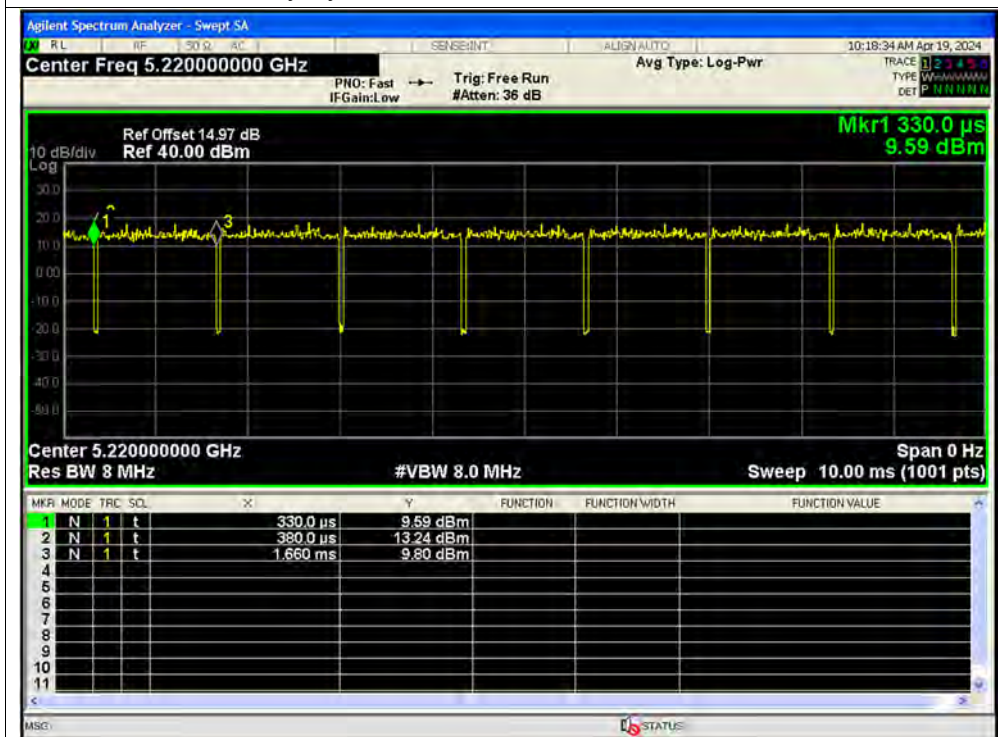




Duty Cycle NVNT ac20 5240MHz Ant1 SISO

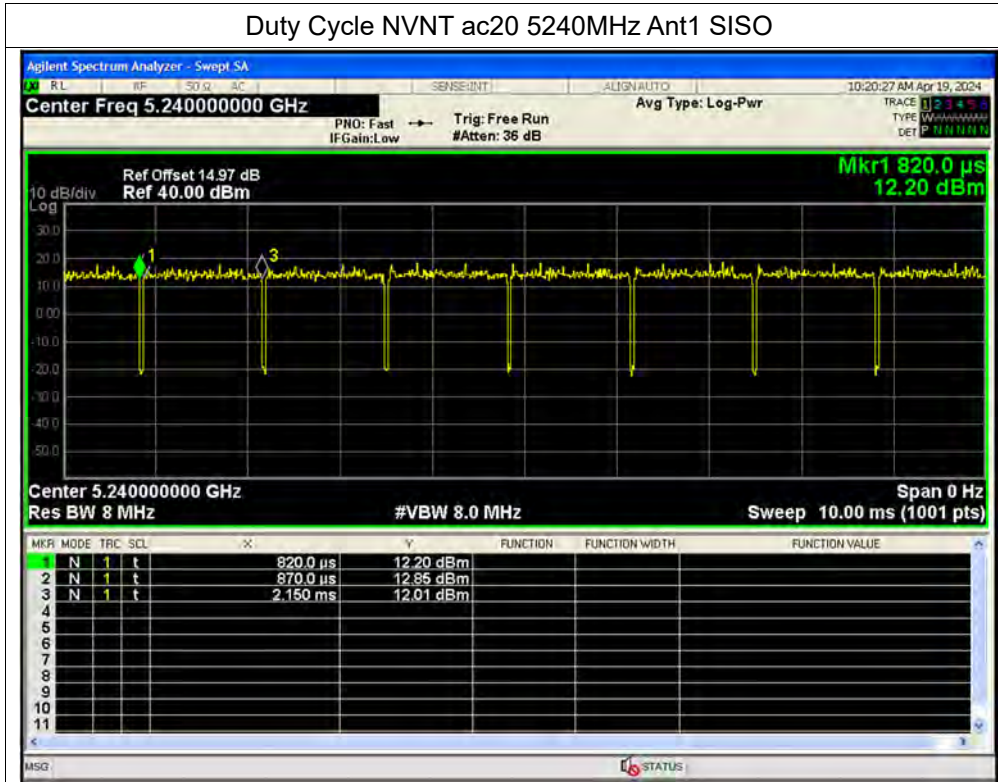


Duty Cycle NVNT ac20 5745MHz Ant1 SISO

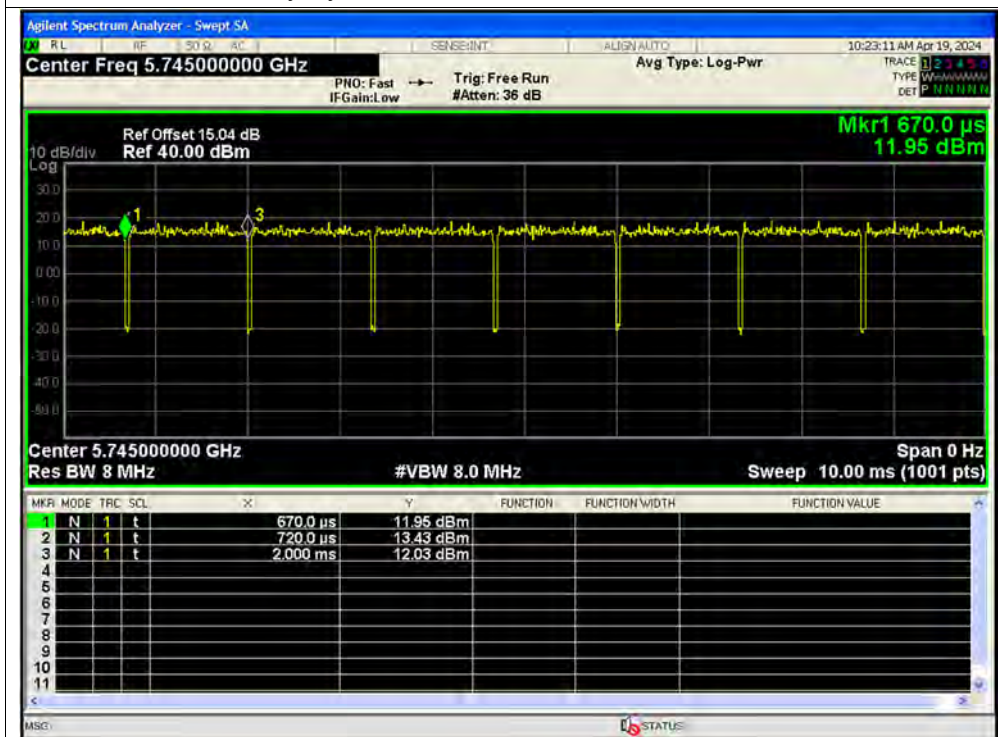




Duty Cycle NVNT ac20 5785MHz Ant1 SISO

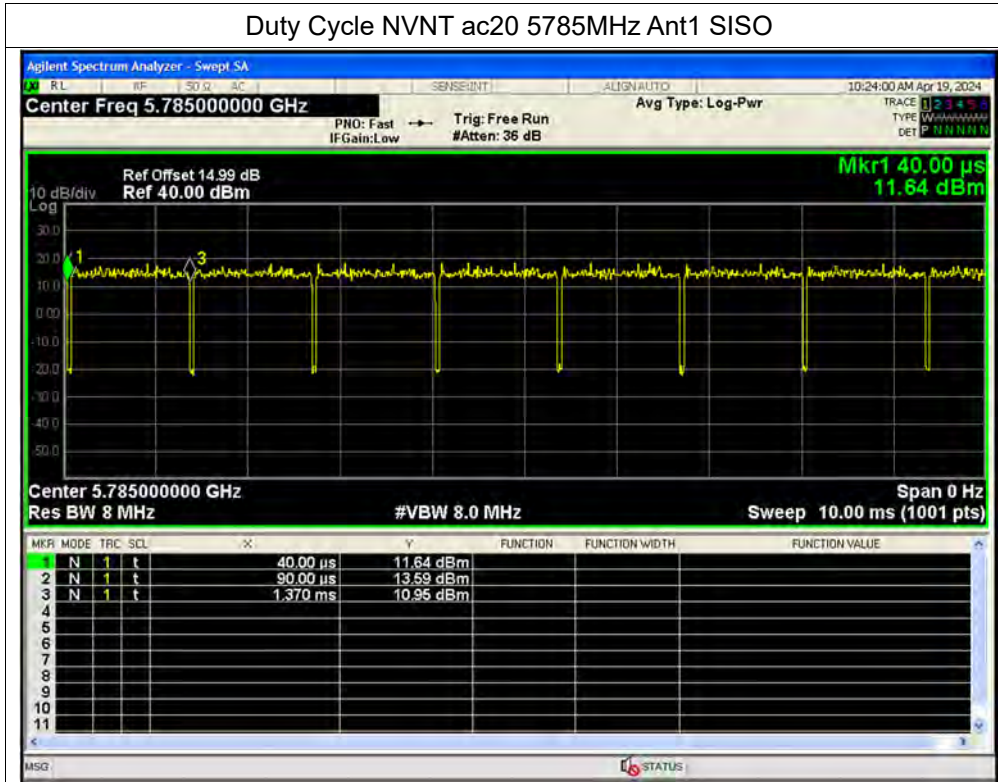


Duty Cycle NVNT ac20 5825MHz Ant1 SISO

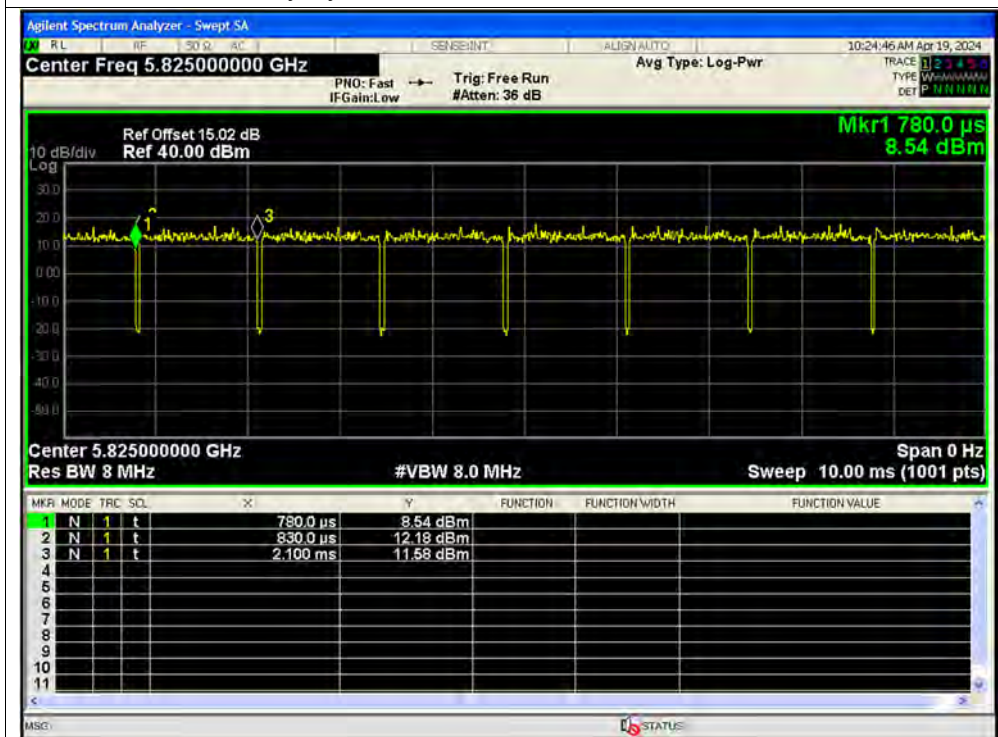




Duty Cycle NVNT ac20 5180MHz Ant2 SISO

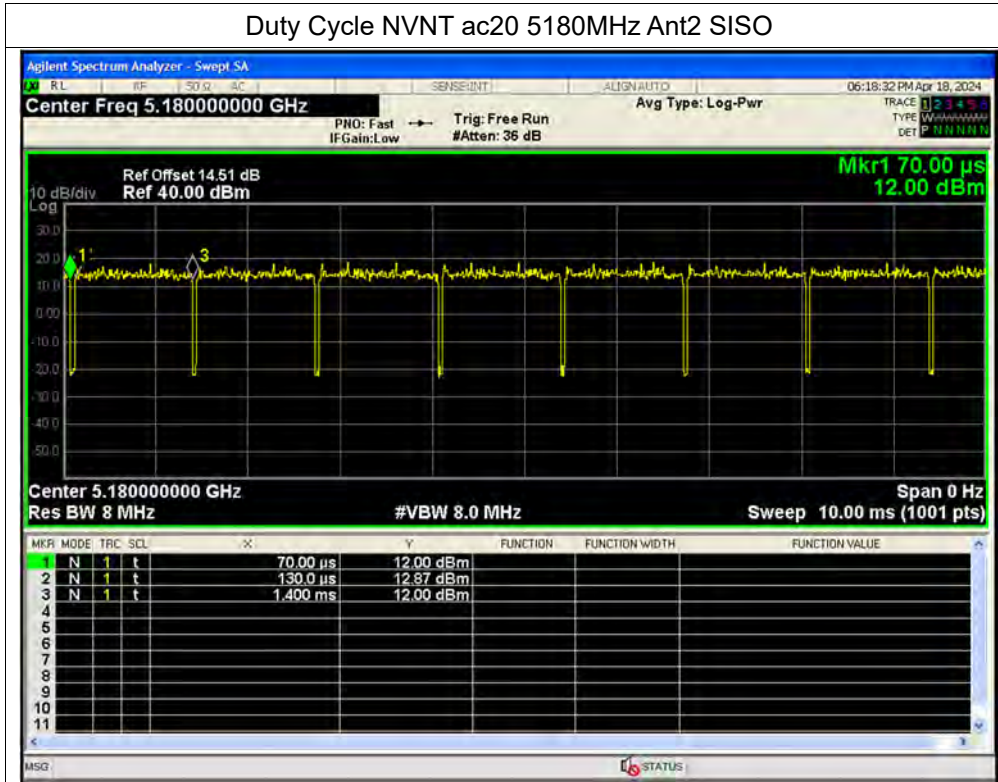


Duty Cycle NVNT ac20 5220MHz Ant2 SISO

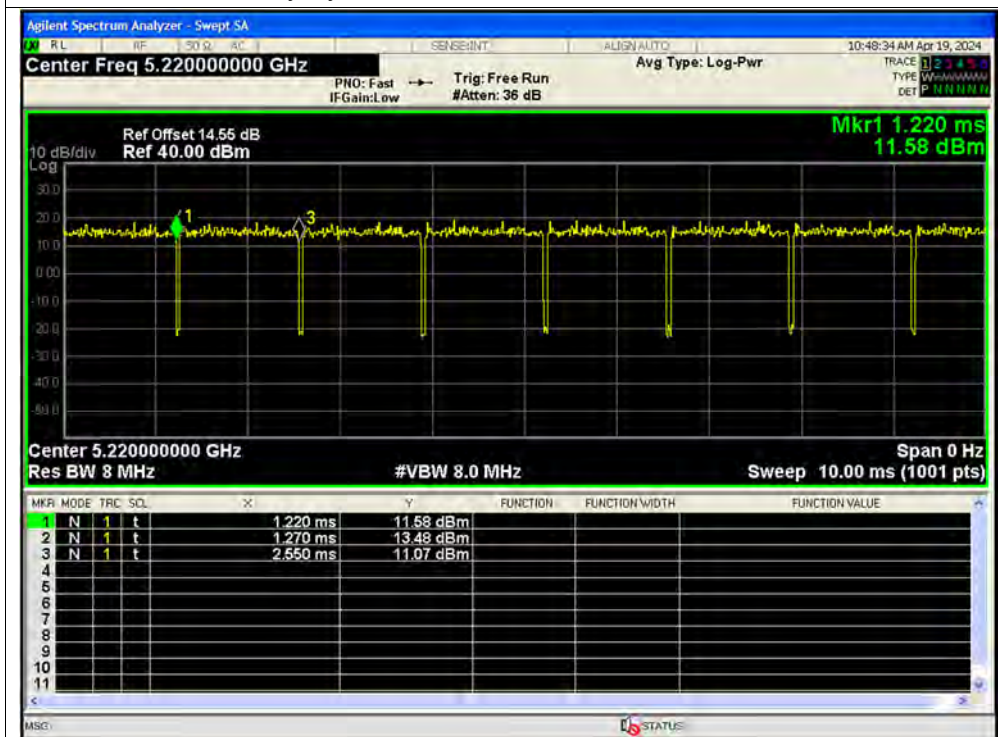




Duty Cycle NVNT ac20 5240MHz Ant2 SISO

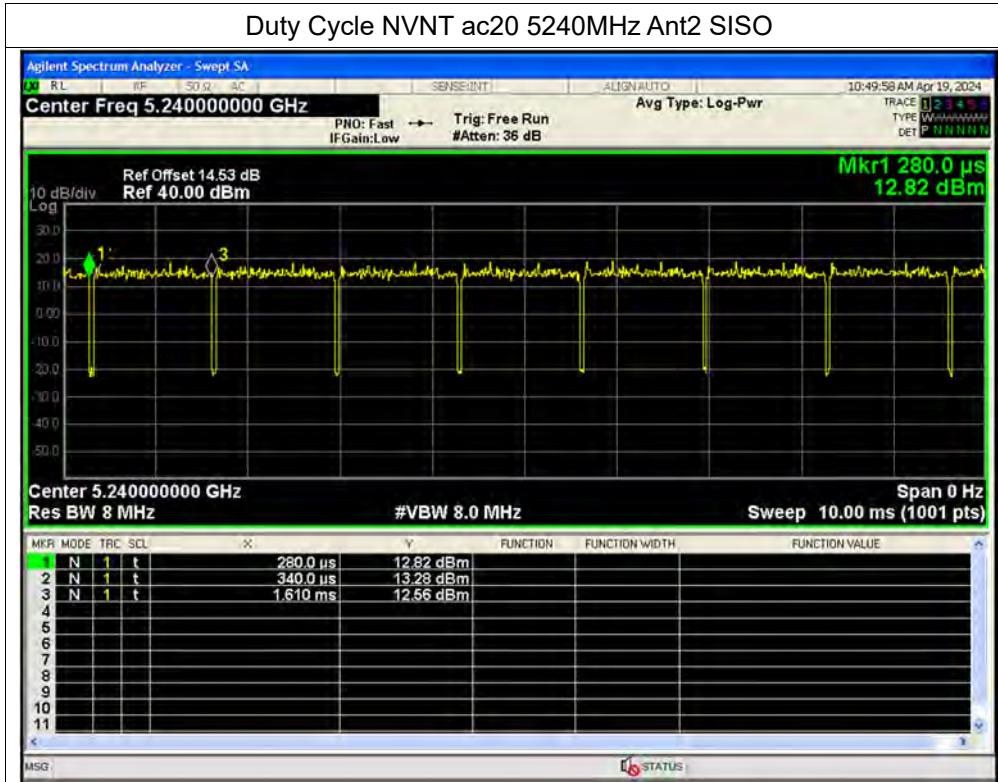


Duty Cycle NVNT ac20 5745MHz Ant2 SISO

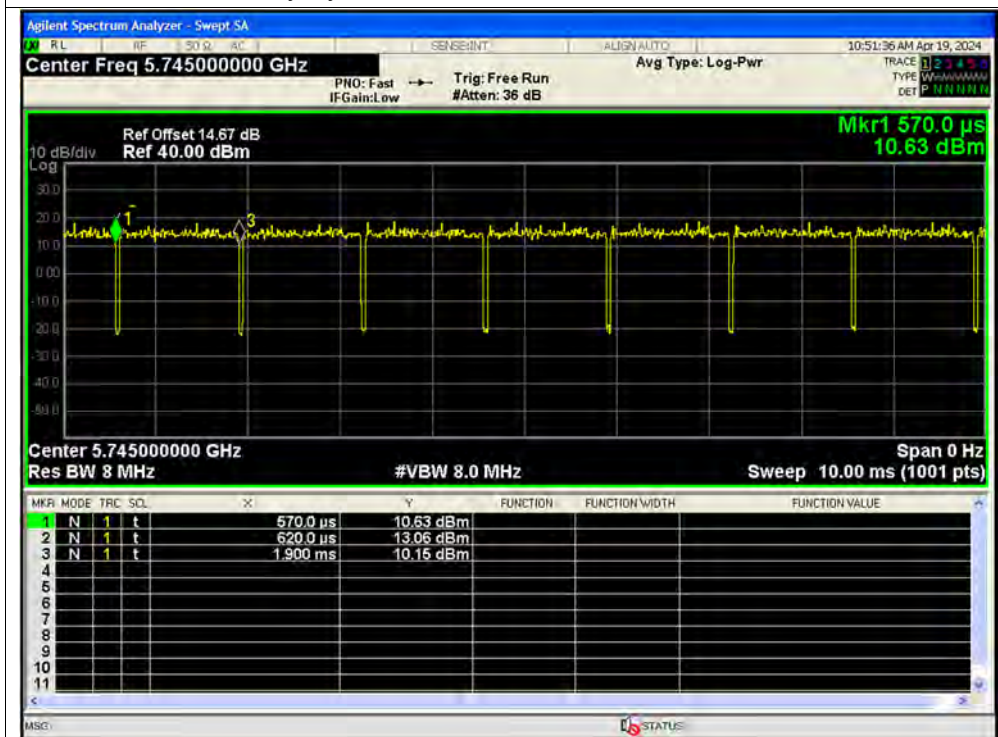




Duty Cycle NVNT ac20 5785MHz Ant2 SISO

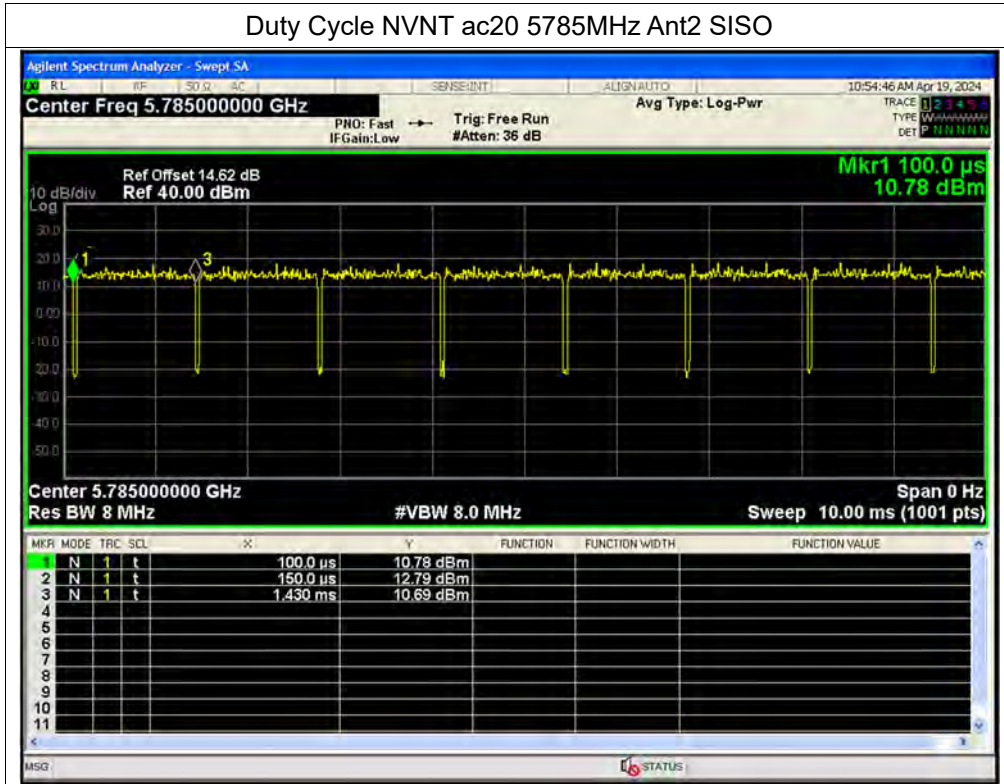


Duty Cycle NVNT ac20 5825MHz Ant2 SISO

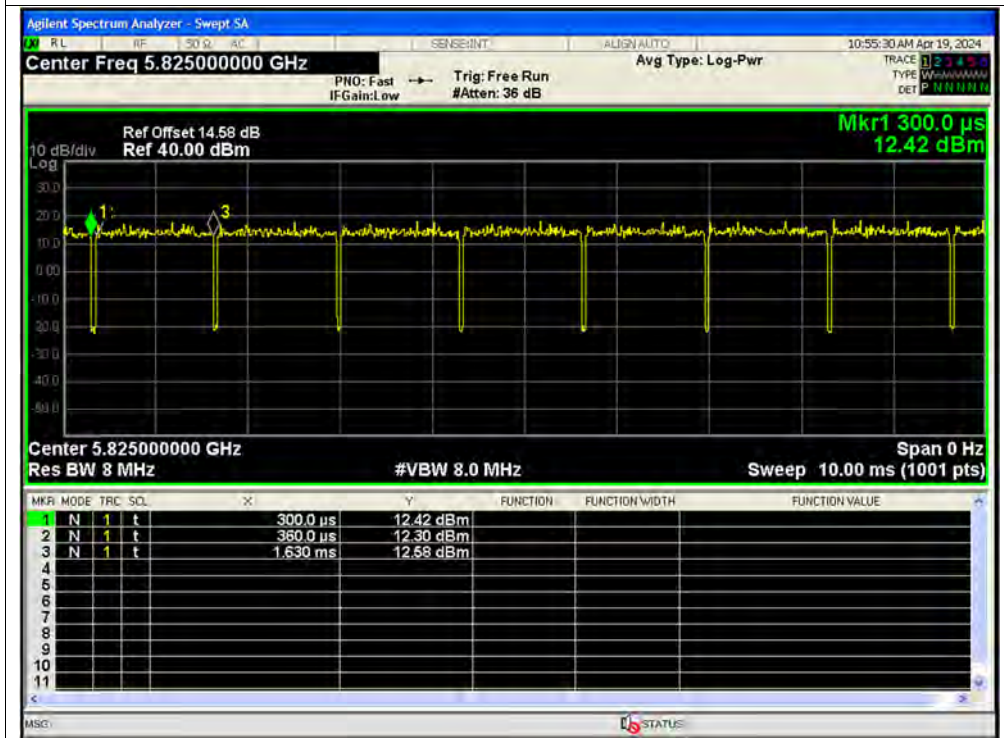




Duty Cycle NVNT ac20 5180MHz Sum MIMO

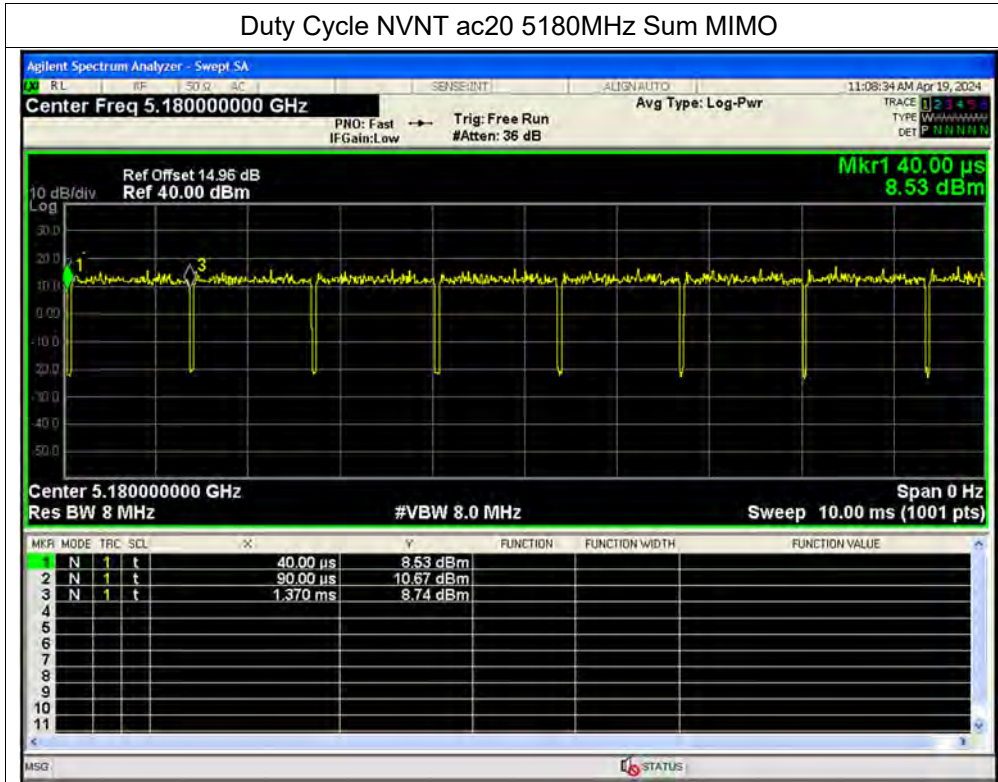


Duty Cycle NVNT ac20 5220MHz Sum MIMO

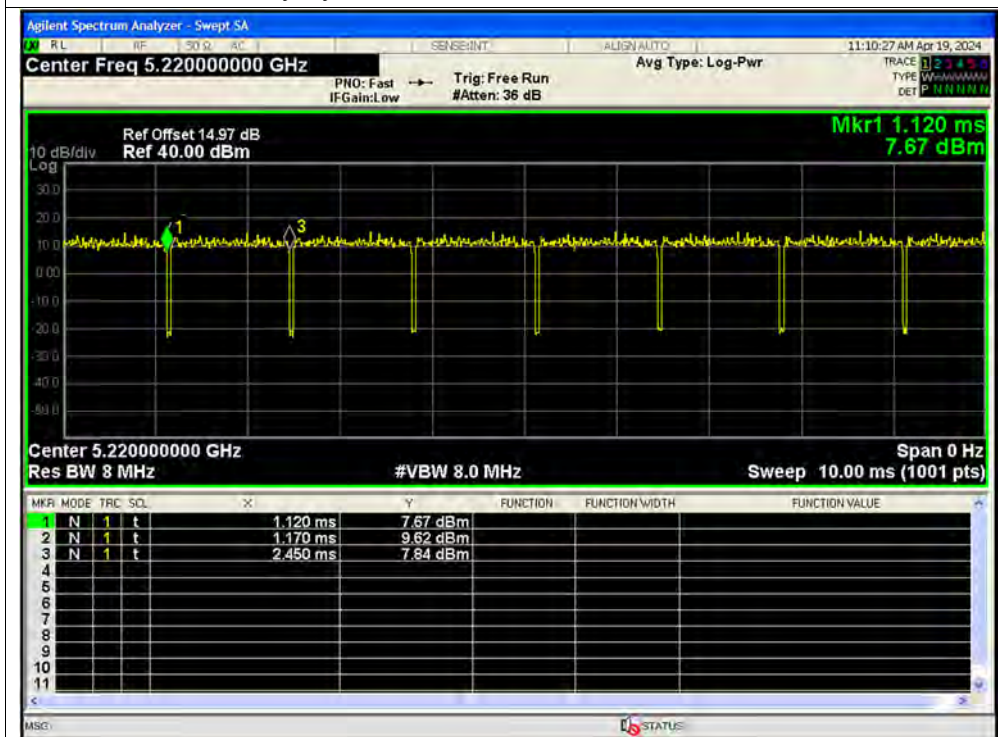




Duty Cycle NVNT ac20 5240MHz Sum MIMO

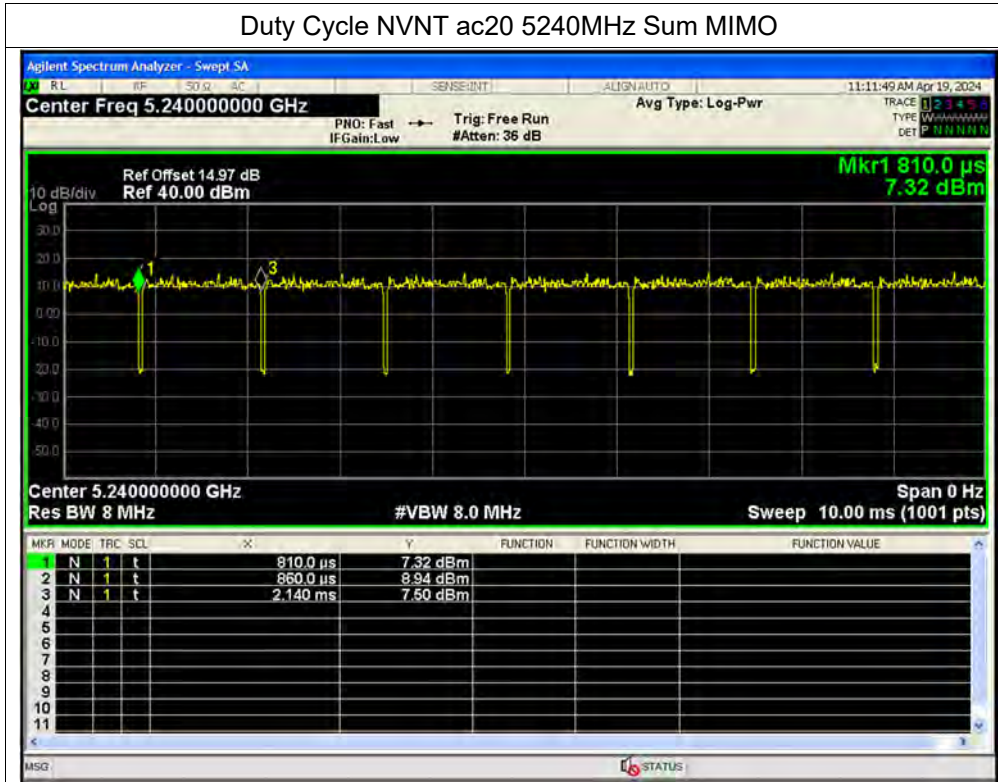


Duty Cycle NVNT ac20 5745MHz Sum MIMO

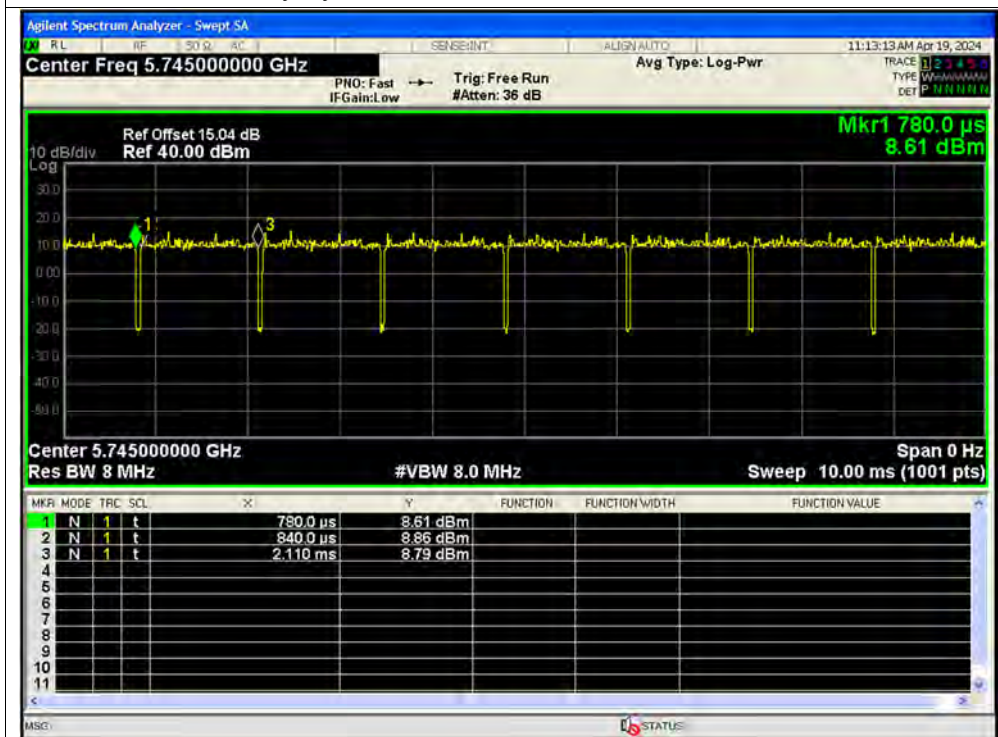




Duty Cycle NVNT ac20 5785MHz Sum MIMO

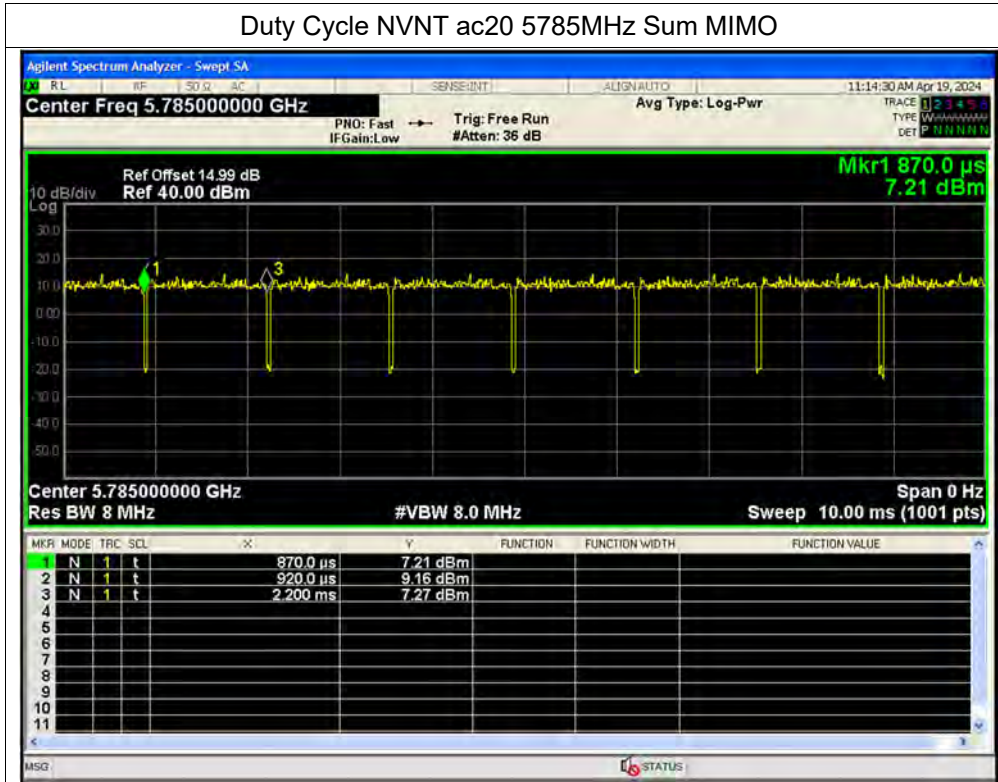


Duty Cycle NVNT ac20 5825MHz Sum MIMO

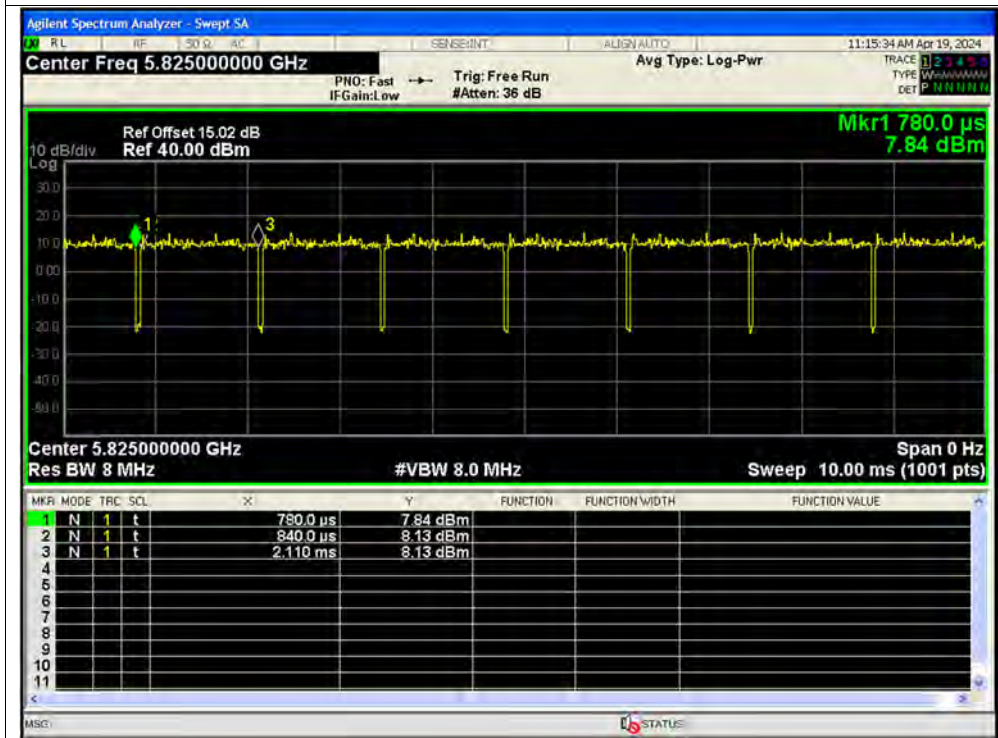




Duty Cycle NVNT ac40 5190MHz Ant1 SISO

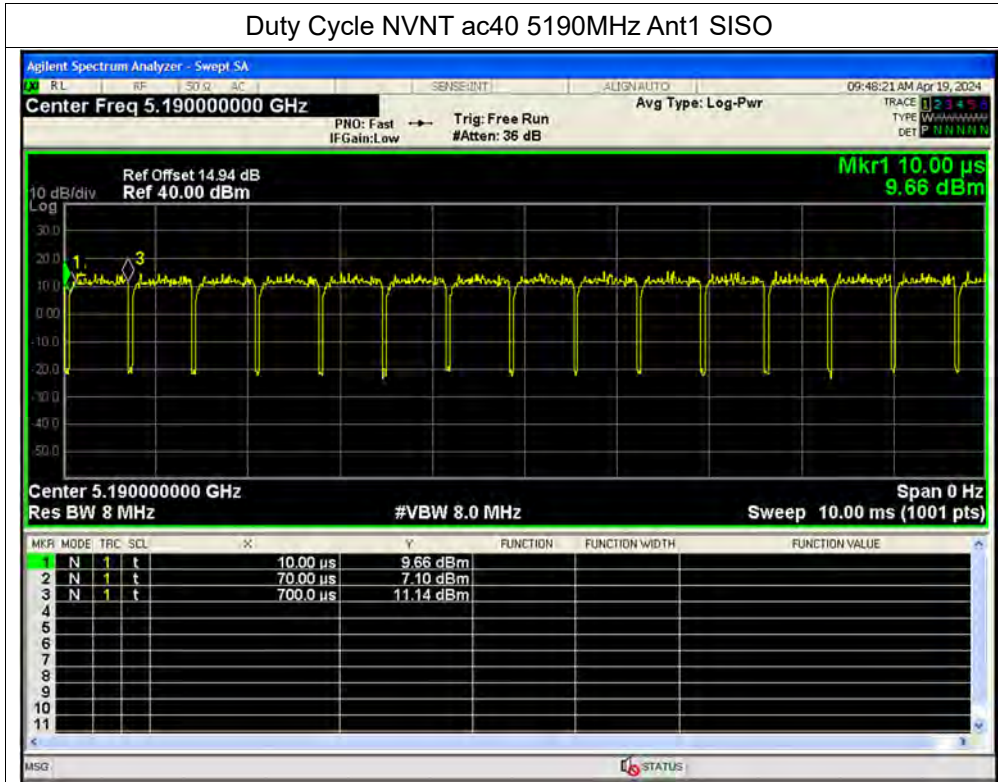


Duty Cycle NVNT ac40 5230MHz Ant1 SISO

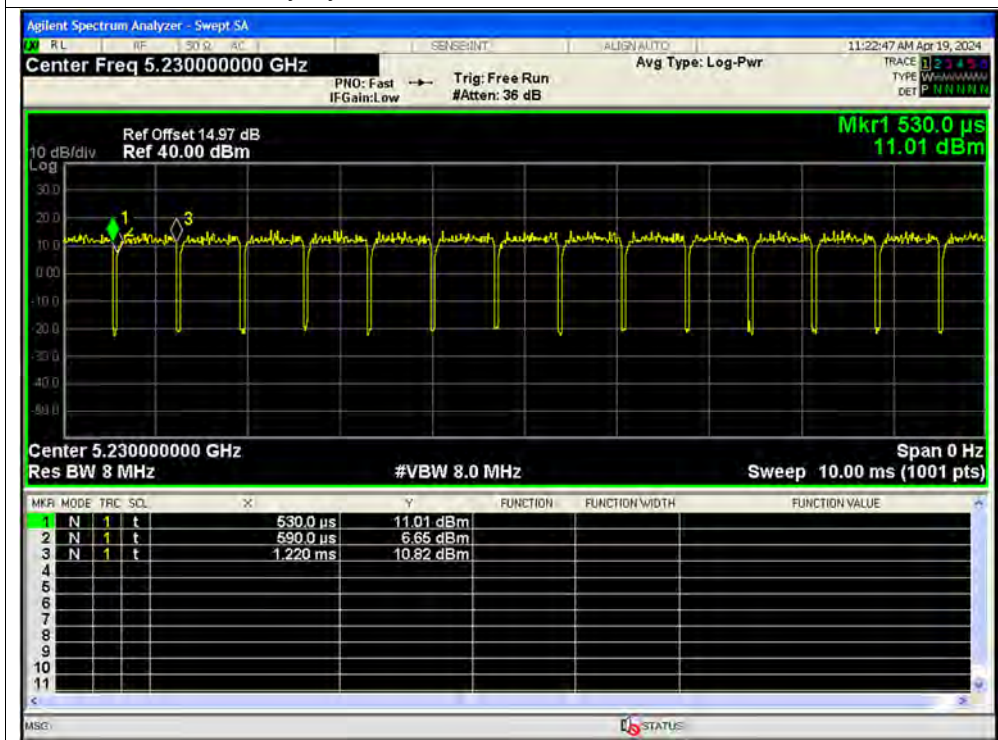




Duty Cycle NVNT ac40 5755MHz Ant1 SISO

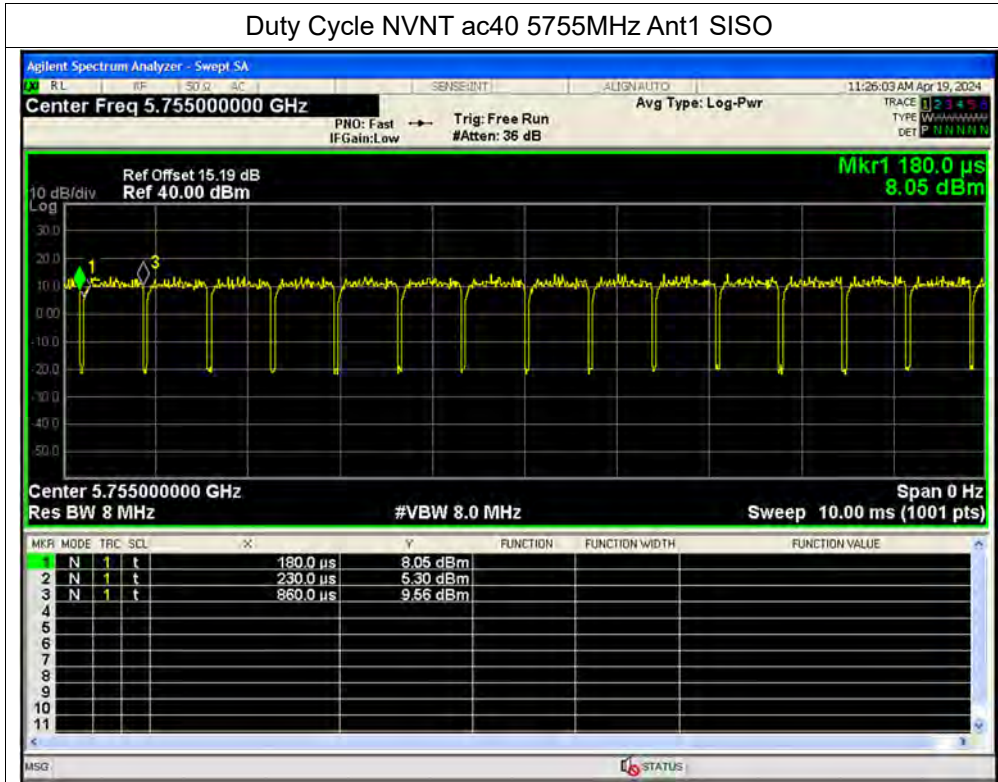


Duty Cycle NVNT ac40 5795MHz Ant1 SISO

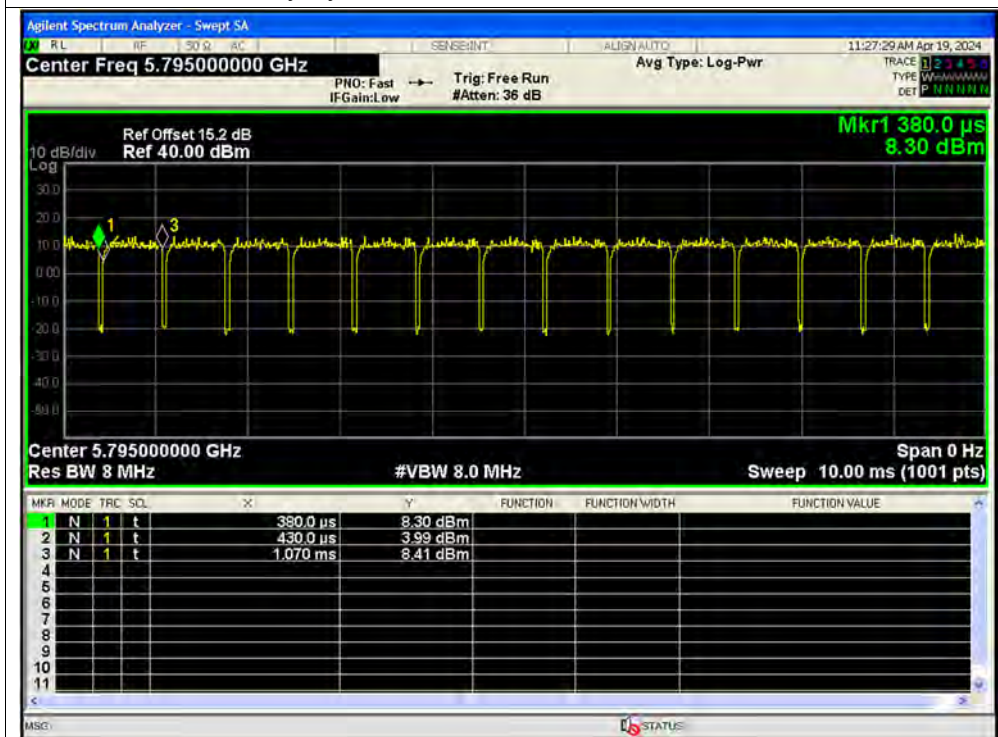




Duty Cycle NVNT ac40 5190MHz Ant2 SISO

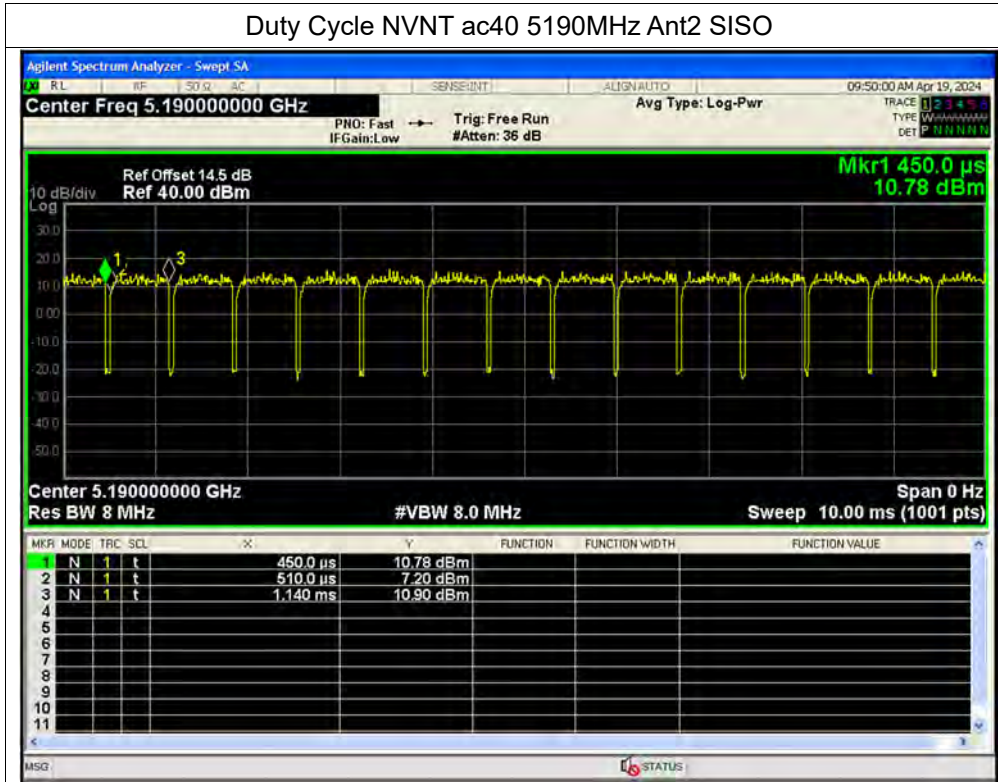


Duty Cycle NVNT ac40 5230MHz Ant2 SISO

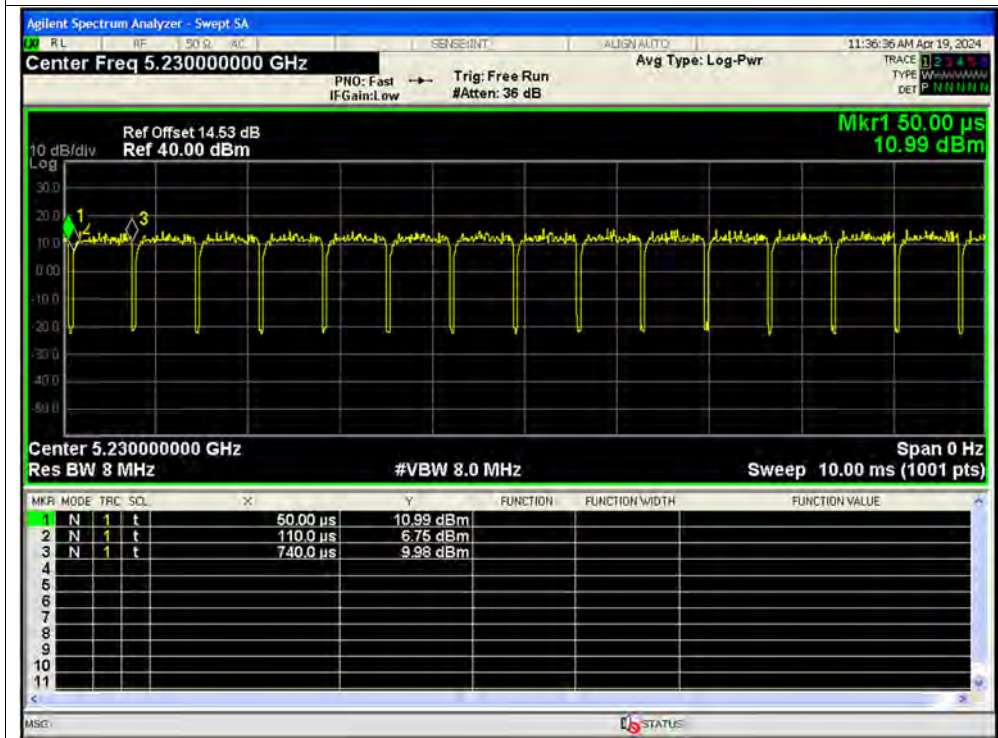




Duty Cycle NVNT ac40 5755MHz Ant2 SISO

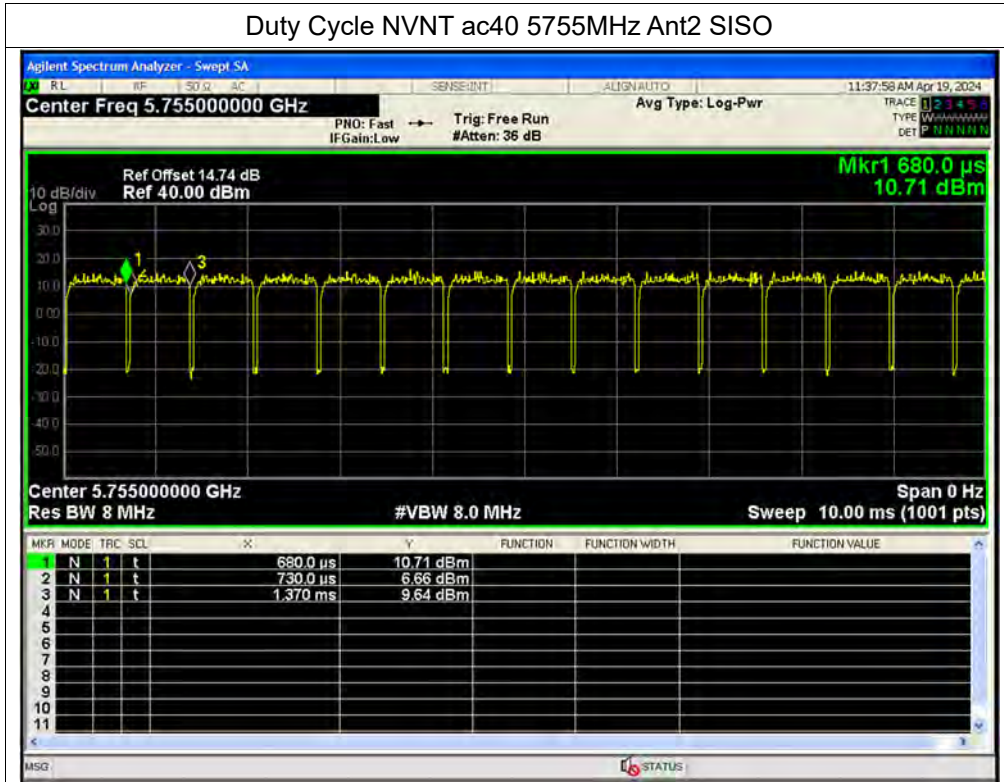


Duty Cycle NVNT ac40 5795MHz Ant2 SISO

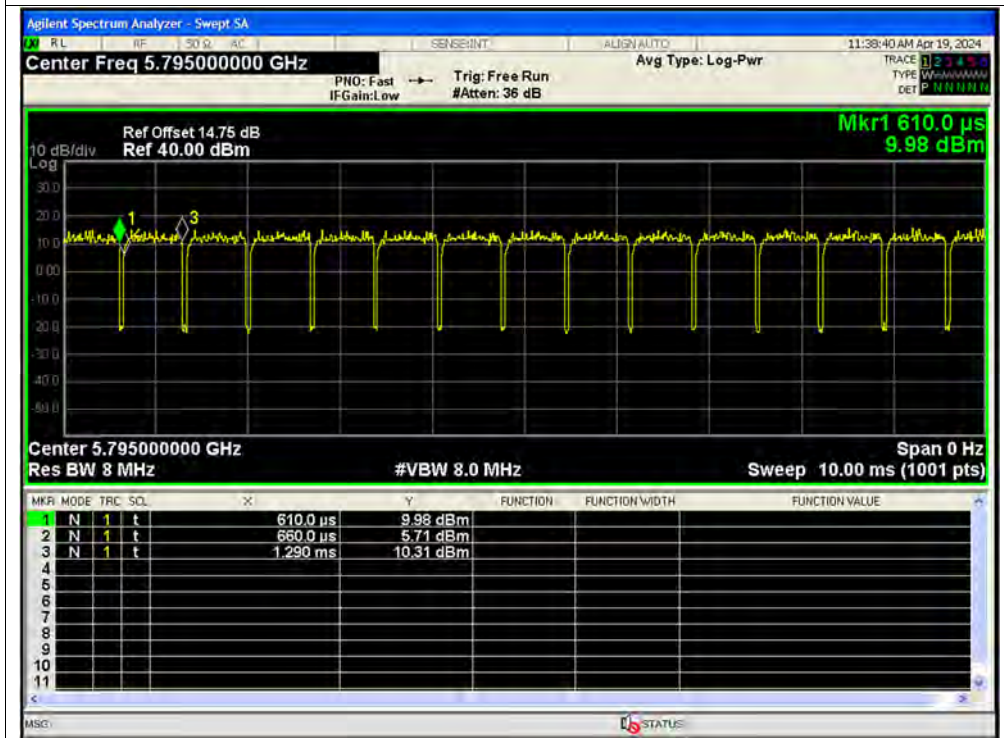




Duty Cycle NVNT ac40 5190MHz Sum MIMO

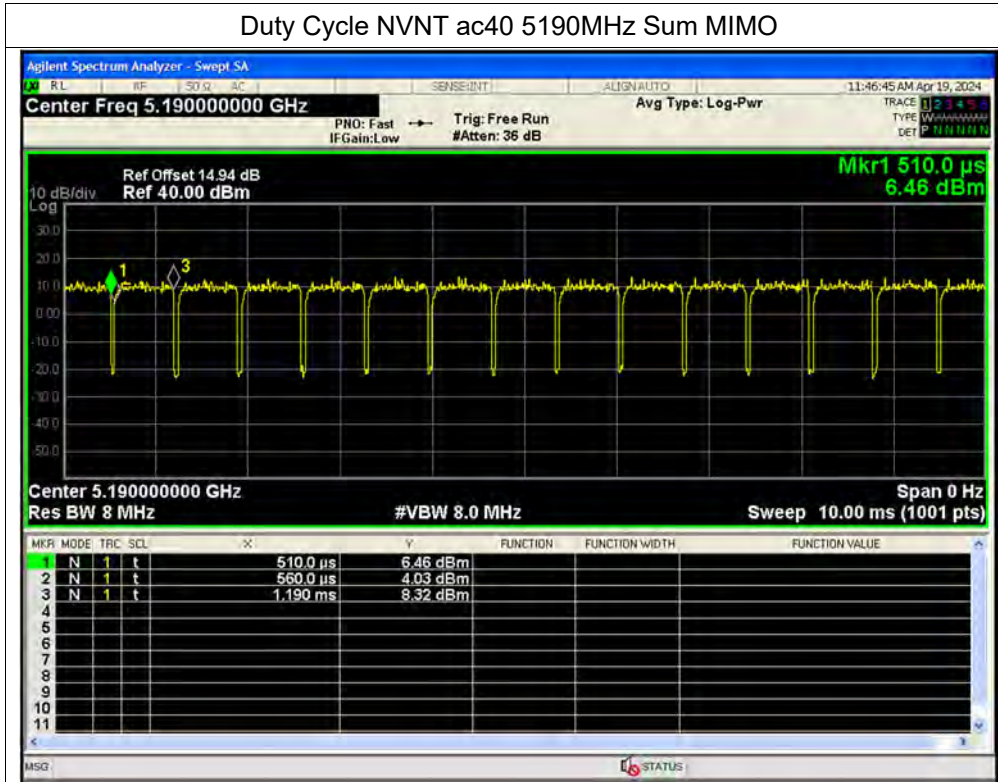


Duty Cycle NVNT ac40 5230MHz Sum MIMO

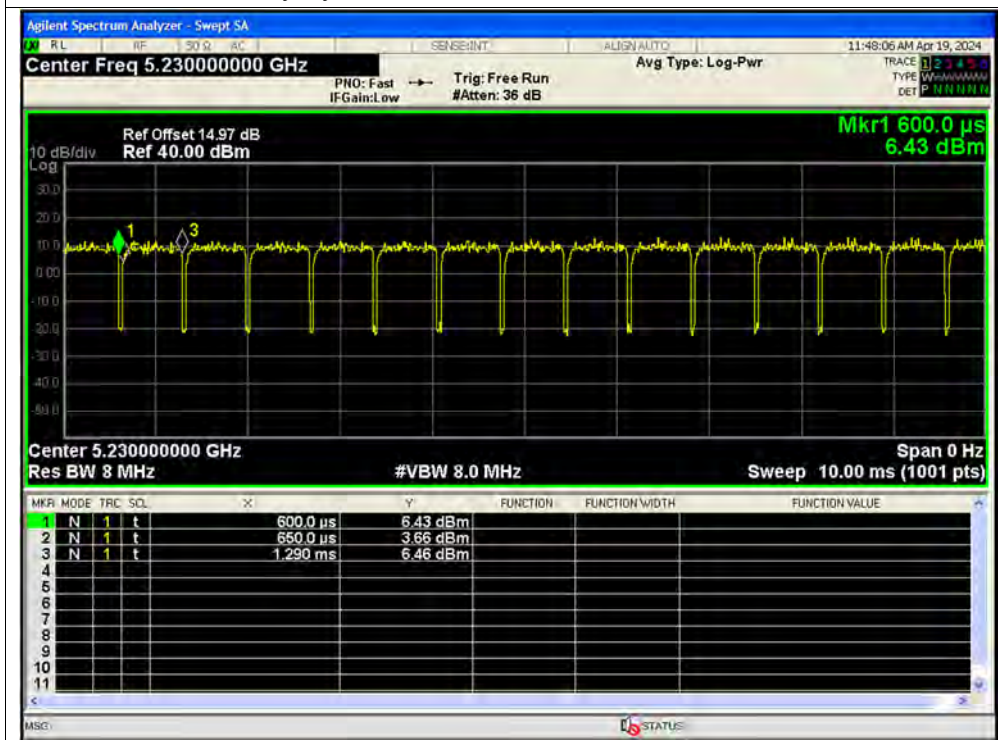




Duty Cycle NVNT ac40 5755MHz Sum MIMO

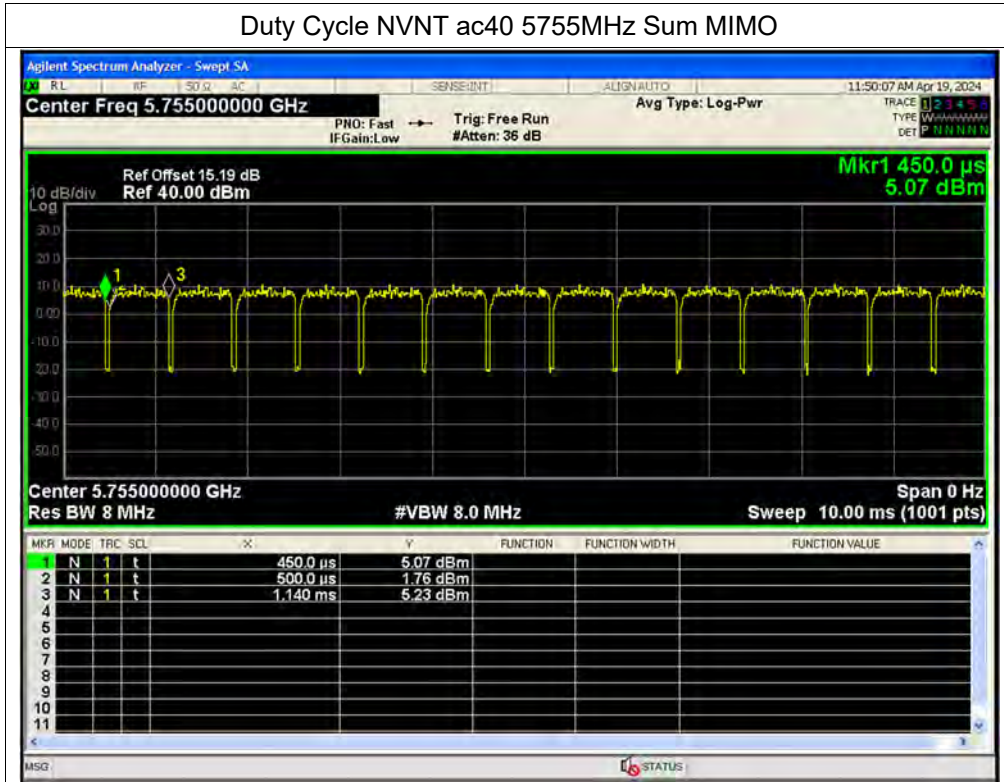


Duty Cycle NVNT ac40 5795MHz Sum MIMO

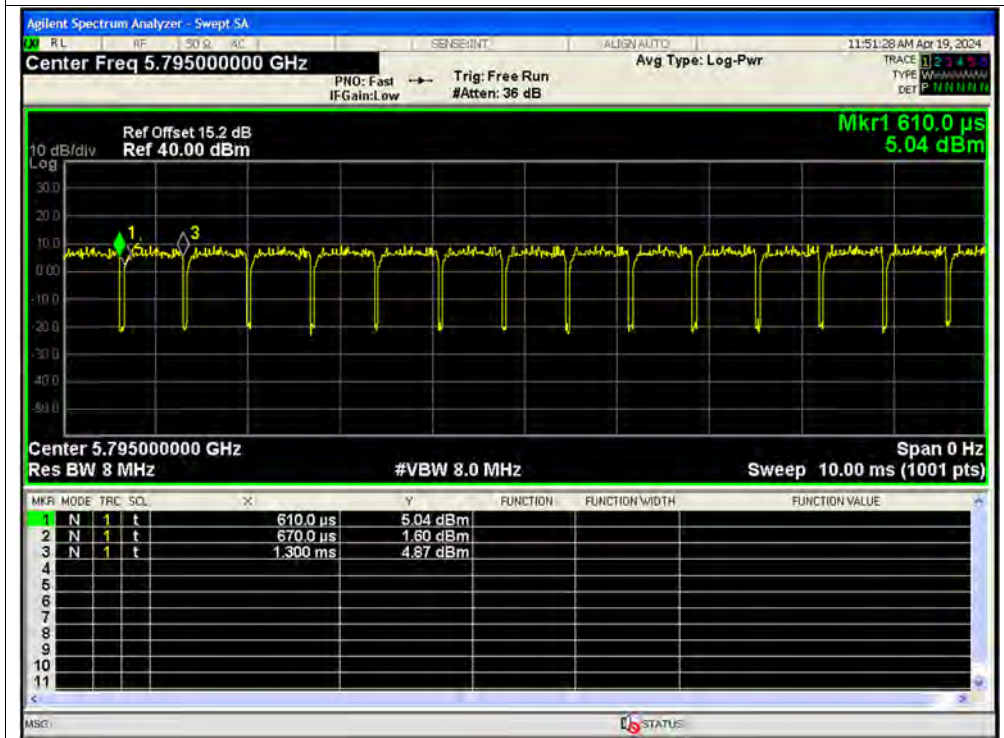




Duty Cycle NVNT ac80 5210MHz Ant1 SISO

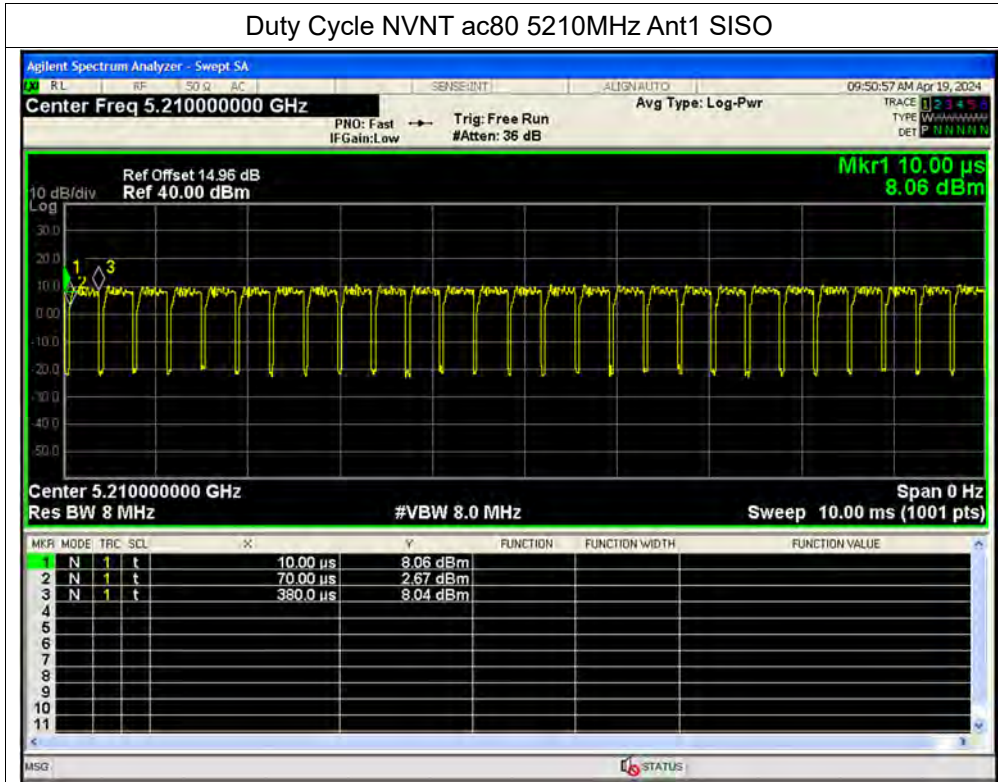


Duty Cycle NVNT ac80 5775MHz Ant1 SISO

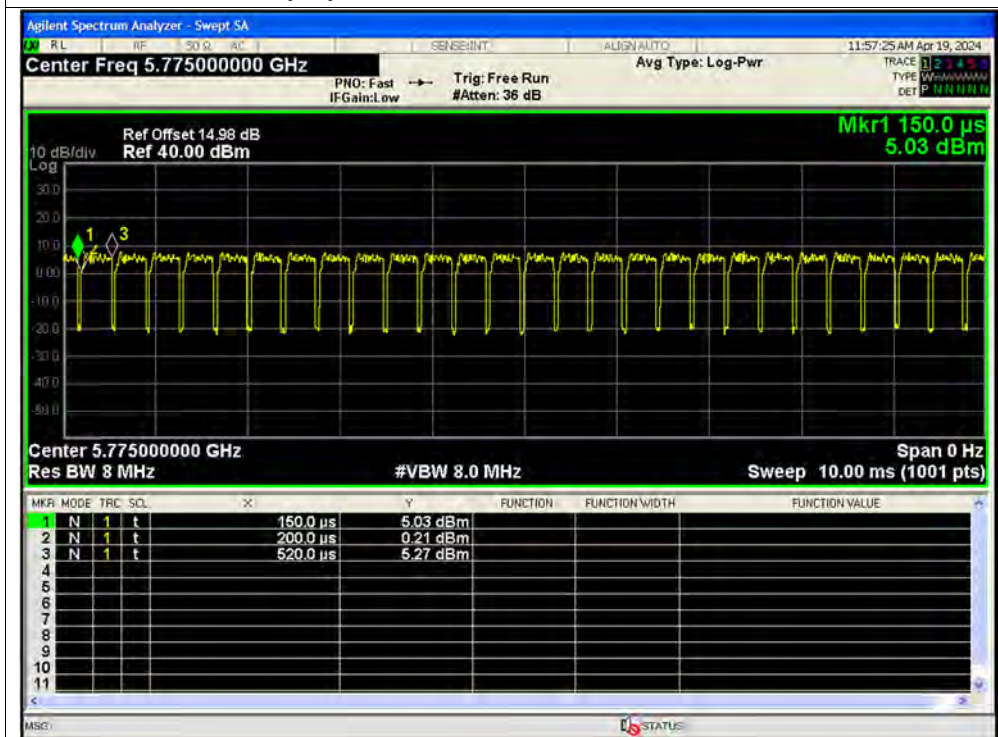




Duty Cycle NVNT ac80 5210MHz Ant2 SISO

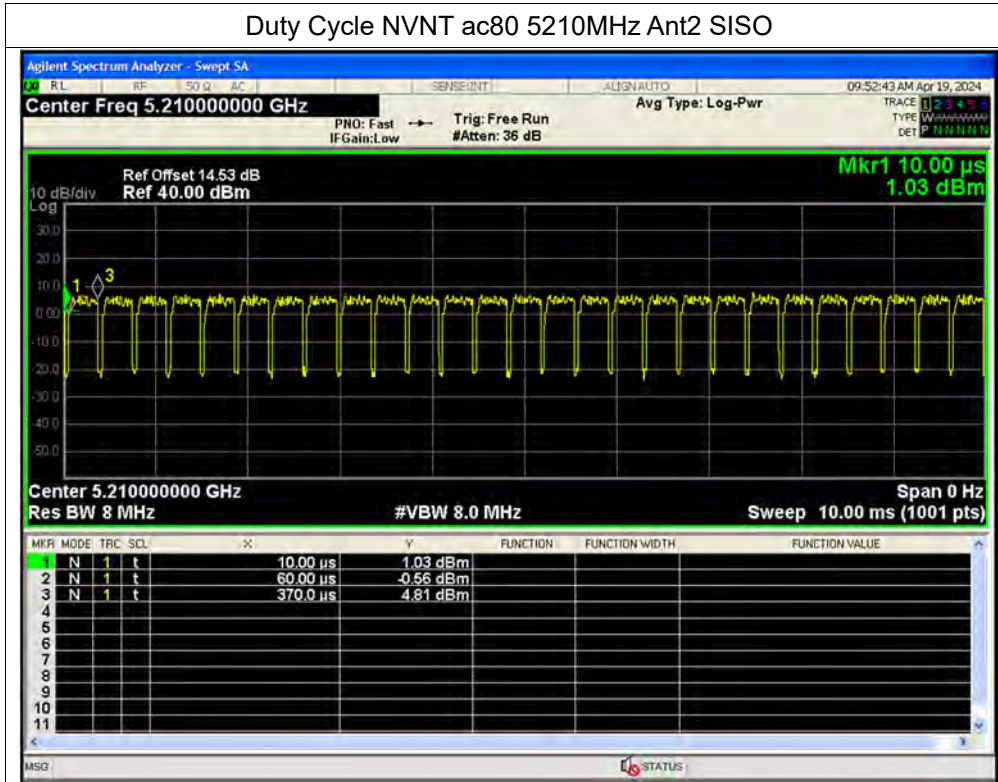


Duty Cycle NVNT ac80 5775MHz Ant2 SISO

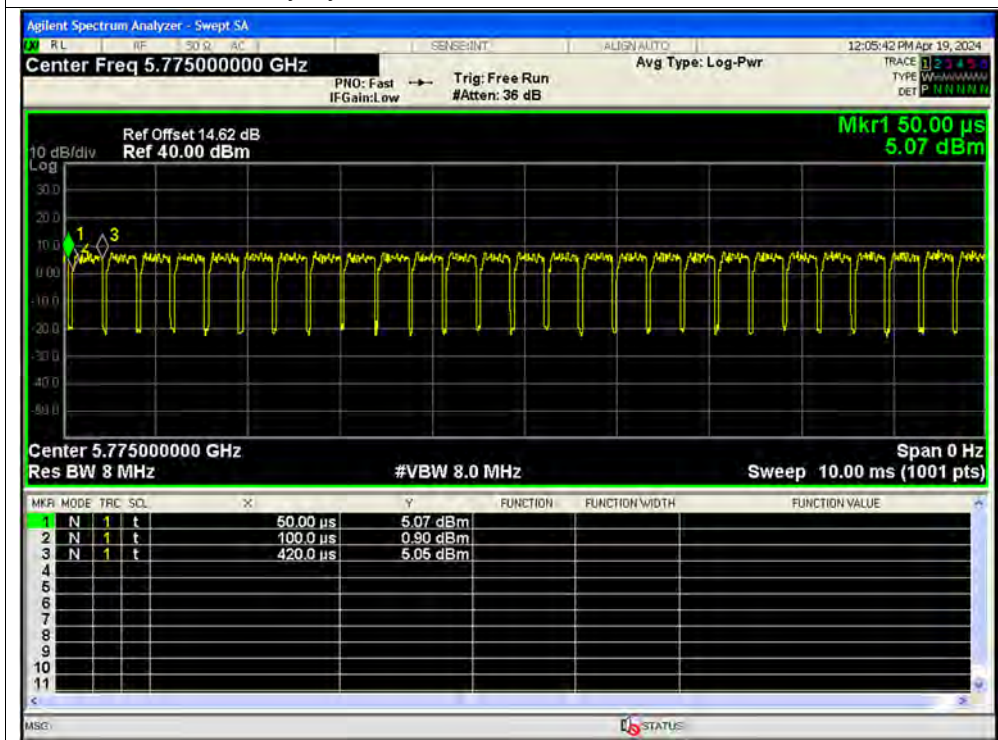




Duty Cycle NVNT ac80 5210MHz Sum MIMO

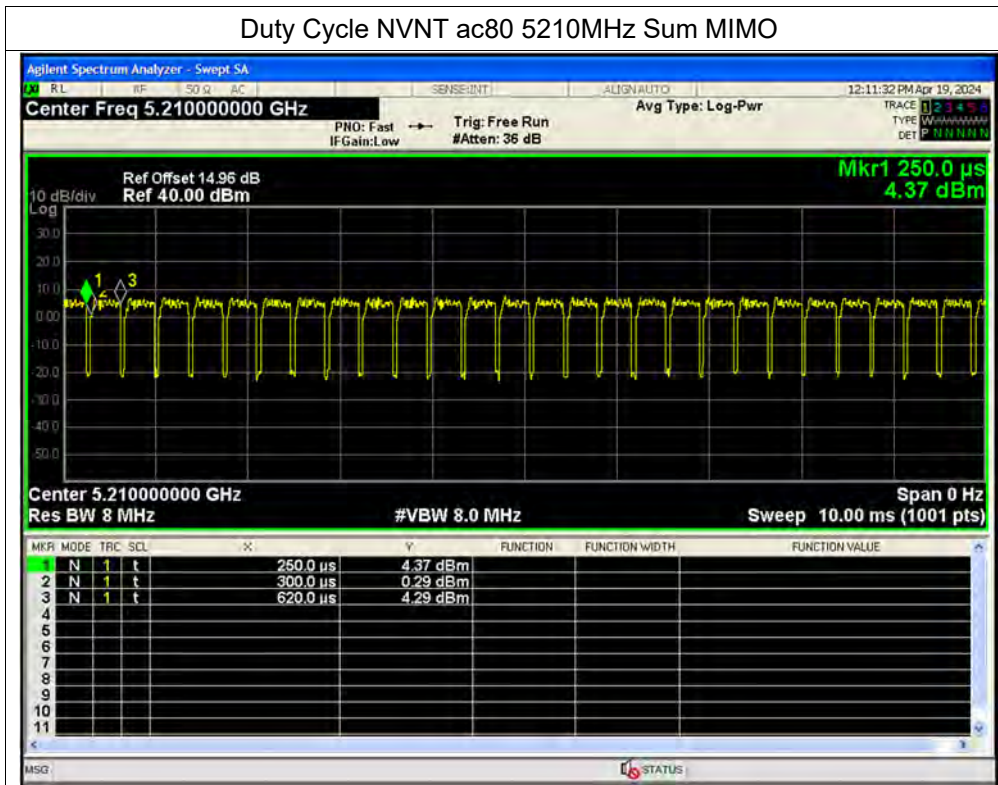

Duty Cycle NVNT ac80 5775MHz Sum MIMO

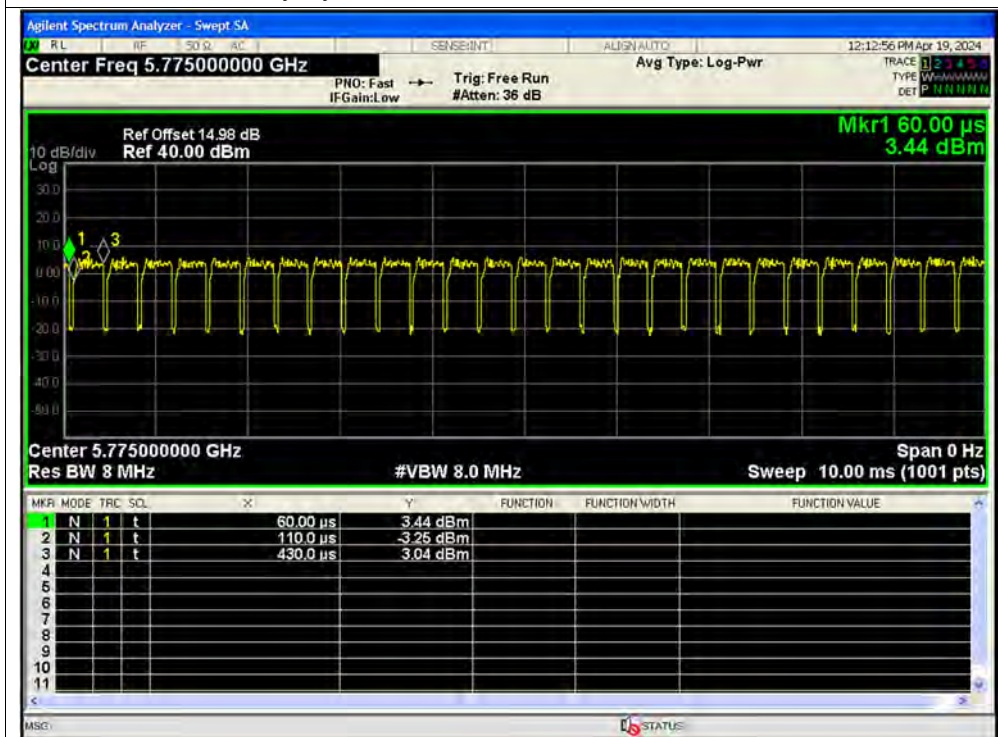



A.2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	a SISO	5180	Ant1	13.03	0.02009	24	Pass
NVNT	a SISO	5220	Ant1	13.51	0.02244	24	Pass
NVNT	a SISO	5240	Ant1	12.81	0.0191	24	Pass
NVNT	a SISO	5745	Ant1	13.03	0.02009	30	Pass
NVNT	a SISO	5785	Ant1	13.09	0.02037	30	Pass
NVNT	a SISO	5825	Ant1	13.35	0.02163	30	Pass
NVNT	a SISO	5180	Ant2	13.55	0.02265	24	Pass
NVNT	a SISO	5220	Ant2	13.37	0.02173	24	Pass
NVNT	a SISO	5240	Ant2	13.16	0.0207	24	Pass
NVNT	a SISO	5745	Ant2	13.28	0.02128	30	Pass
NVNT	a SISO	5785	Ant2	13.35	0.02163	30	Pass
NVNT	a SISO	5825	Ant2	13.87	0.02438	30	Pass
NVNT	n20 SISO	5180	Ant1	13.37	0.02173	24	Pass
NVNT	n20 SISO	5220	Ant1	13.17	0.02075	24	Pass
NVNT	n20 SISO	5240	Ant1	12.94	0.01968	24	Pass
NVNT	n20 SISO	5745	Ant1	13.76	0.02377	30	Pass
NVNT	n20 SISO	5785	Ant1	12.99	0.01991	30	Pass
NVNT	n20 SISO	5825	Ant1	13.33	0.02153	30	Pass
NVNT	n20 SISO	5180	Ant2	13.35	0.02163	24	Pass
NVNT	n20 SISO	5220	Ant2	13.24	0.02109	24	Pass
NVNT	n20 SISO	5240	Ant2	13.05	0.02018	24	Pass
NVNT	n20 SISO	5745	Ant2	13.75	0.02371	30	Pass
NVNT	n20 SISO	5785	Ant2	13.68	0.02333	30	Pass
NVNT	n20 SISO	5825	Ant2	13.92	0.02466	30	Pass
NVNT	n20 MIMO	5180	Ant1	12.18	0.01652	24	Pass
NVNT	n20 MIMO	5180	Ant2	12.18	0.01652	24	Pass
NVNT	n20 MIMO	5180	Sum	15.19	0.03304	23.05	Pass
NVNT	n20 MIMO	5220	Ant1	11.96	0.0157	24	Pass
NVNT	n20 MIMO	5220	Ant2	11.92	0.01556	24	Pass
NVNT	n20 MIMO	5220	Sum	14.95	0.03126	23.05	Pass
NVNT	n20 MIMO	5240	Ant1	11.65	0.01462	24	Pass
NVNT	n20 MIMO	5240	Ant2	11.67	0.01469	24	Pass
NVNT	n20 MIMO	5240	Sum	14.67	0.02931	23.05	Pass



NVNT	n20 MIMO	5745	Ant1	11.44	0.01393	30	Pass
NVNT	n20 MIMO	5745	Ant2	11.58	0.01439	30	Pass
NVNT	n20 MIMO	5745	Sum	14.52	0.02832	29.27	Pass
NVNT	n20 MIMO	5785	Ant1	11.21	0.01321	30	Pass
NVNT	n20 MIMO	5785	Ant2	11.69	0.01476	30	Pass
NVNT	n20 MIMO	5785	Sum	14.47	0.02797	29.27	Pass
NVNT	n20 MIMO	5825	Ant1	11.25	0.01334	30	Pass
NVNT	n20 MIMO	5825	Ant2	12.04	0.016	30	Pass
NVNT	n20 MIMO	5825	Sum	14.67	0.02933	29.27	Pass
NVNT	n40 SISO	5190	Ant1	13.81	0.02404	24	Pass
NVNT	n40 SISO	5230	Ant1	13.49	0.02234	24	Pass
NVNT	n40 SISO	5755	Ant1	13.25	0.02113	30	Pass
NVNT	n40 SISO	5795	Ant1	13.08	0.02032	30	Pass
NVNT	n40 SISO	5190	Ant2	13.33	0.02153	24	Pass
NVNT	n40 SISO	5230	Ant2	13.22	0.02099	24	Pass
NVNT	n40 SISO	5755	Ant2	13.32	0.02148	30	Pass
NVNT	n40 SISO	5795	Ant2	13.52	0.02249	30	Pass
NVNT	n40 MIMO	5190	Ant1	12.54	0.01795	24	Pass
NVNT	n40 MIMO	5190	Ant2	12.17	0.01648	24	Pass
NVNT	n40 MIMO	5190	Sum	15.37	0.03443	23.05	Pass
NVNT	n40 MIMO	5230	Ant1	12.19	0.01656	24	Pass
NVNT	n40 MIMO	5230	Ant2	11.92	0.01556	24	Pass
NVNT	n40 MIMO	5230	Sum	15.07	0.03212	23.05	Pass
NVNT	n40 MIMO	5755	Ant1	12.41	0.01742	30	Pass
NVNT	n40 MIMO	5755	Ant2	12.53	0.01791	30	Pass
NVNT	n40 MIMO	5755	Sum	15.48	0.03532	29.27	Pass
NVNT	n40 MIMO	5795	Ant1	11.7	0.01479	30	Pass
NVNT	n40 MIMO	5795	Ant2	12.26	0.01683	30	Pass
NVNT	n40 MIMO	5795	Sum	15	0.03162	29.27	Pass
NVNT	ac20 SISO	5180	Ant1	13.86	0.02432	24	Pass
NVNT	ac20 SISO	5220	Ant1	13.57	0.02275	24	Pass
NVNT	ac20 SISO	5240	Ant1	13.24	0.02109	24	Pass
NVNT	ac20 SISO	5745	Ant1	12.98	0.01986	30	Pass
NVNT	ac20 SISO	5785	Ant1	13	0.01995	30	Pass
NVNT	ac20 SISO	5825	Ant1	13.29	0.02133	30	Pass
NVNT	ac20 SISO	5180	Ant2	13.62	0.02301	24	Pass
NVNT	ac20 SISO	5220	Ant2	13.43	0.02203	24	Pass
NVNT	ac20 SISO	5240	Ant2	13.21	0.02094	24	Pass



NVNT	ac20 SISO	5745	Ant2	13.41	0.02193	30	Pass
NVNT	ac20 SISO	5785	Ant2	13.45	0.02213	30	Pass
NVNT	ac20 SISO	5825	Ant2	13.94	0.02477	30	Pass
NVNT	ac20 MIMO	5180	Ant1	11.5	0.01413	24	Pass
NVNT	ac20 MIMO	5180	Ant2	12.07	0.01611	24	Pass
NVNT	ac20 MIMO	5180	Sum	14.8	0.03023	23.05	Pass
NVNT	ac20 MIMO	5220	Ant1	11.84	0.01528	24	Pass
NVNT	ac20 MIMO	5220	Ant2	11.39	0.01377	24	Pass
NVNT	ac20 MIMO	5220	Sum	14.63	0.02905	23.05	Pass
NVNT	ac20 MIMO	5240	Ant1	11.76	0.015	24	Pass
NVNT	ac20 MIMO	5240	Ant2	11.45	0.01396	24	Pass
NVNT	ac20 MIMO	5240	Sum	14.62	0.02896	23.05	Pass
NVNT	ac20 MIMO	5745	Ant1	11.91	0.01552	30	Pass
NVNT	ac20 MIMO	5745	Ant2	12.77	0.01892	30	Pass
NVNT	ac20 MIMO	5745	Sum	15.37	0.03445	29.27	Pass
NVNT	ac20 MIMO	5785	Ant1	11.35	0.01365	30	Pass
NVNT	ac20 MIMO	5785	Ant2	12.4	0.01738	30	Pass
NVNT	ac20 MIMO	5785	Sum	14.92	0.03102	29.27	Pass
NVNT	ac20 MIMO	5825	Ant1	11.33	0.01358	30	Pass
NVNT	ac20 MIMO	5825	Ant2	12.63	0.01832	30	Pass
NVNT	ac20 MIMO	5825	Sum	15.04	0.03191	29.27	Pass
NVNT	ac40 SISO	5190	Ant1	12.54	0.01795	24	Pass
NVNT	ac40 SISO	5230	Ant1	12.21	0.01663	24	Pass
NVNT	ac40 SISO	5755	Ant1	12.55	0.01799	30	Pass
NVNT	ac40 SISO	5795	Ant1	12.41	0.01742	30	Pass
NVNT	ac40 SISO	5190	Ant2	12.88	0.01941	24	Pass
NVNT	ac40 SISO	5230	Ant2	12.73	0.01875	24	Pass
NVNT	ac40 SISO	5755	Ant2	12.44	0.01754	30	Pass
NVNT	ac40 SISO	5795	Ant2	12.54	0.01795	30	Pass
NVNT	ac40 MIMO	5190	Ant1	11.47	0.01403	24	Pass
NVNT	ac40 MIMO	5190	Ant2	11.75	0.01496	24	Pass
NVNT	ac40 MIMO	5190	Sum	14.62	0.02899	23.05	Pass
NVNT	ac40 MIMO	5230	Ant1	11.74	0.01493	24	Pass
NVNT	ac40 MIMO	5230	Ant2	12.19	0.01656	24	Pass
NVNT	ac40 MIMO	5230	Sum	14.98	0.03149	23.05	Pass
NVNT	ac40 MIMO	5755	Ant1	11.97	0.01574	30	Pass
NVNT	ac40 MIMO	5755	Ant2	11.64	0.01459	30	Pass
NVNT	ac40 MIMO	5755	Sum	14.82	0.03033	29.27	Pass



NVNT	ac40 MIMO	5795	Ant1	11.27	0.0134	30	Pass
NVNT	ac40 MIMO	5795	Ant2	11.03	0.01268	30	Pass
NVNT	ac40 MIMO	5795	Sum	14.16	0.02607	29.27	Pass
NVNT	ac80 SISO	5210	Ant1	11.37	0.01371	24	Pass
NVNT	ac80 SISO	5775	Ant1	11.48	0.01406	30	Pass
NVNT	ac80 SISO	5210	Ant2	11.56	0.01432	24	Pass
NVNT	ac80 SISO	5775	Ant2	11.72	0.01486	30	Pass
NVNT	ac80 MIMO	5210	Ant1	10.39	0.01094	24	Pass
NVNT	ac80 MIMO	5210	Ant2	10.64	0.01159	24	Pass
NVNT	ac80 MIMO	5210	Sum	13.53	0.02253	23.05	Pass
NVNT	ac80 MIMO	5775	Ant1	10.29	0.01069	30	Pass
NVNT	ac80 MIMO	5775	Ant2	10.77	0.01194	30	Pass
NVNT	ac80 MIMO	5775	Sum	13.55	0.02263	29.27	Pass

Note: Directional gain = $3.94\text{dBi} + 10\log(2) = 6.95\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24 - (6.95 - 6) = 23.05\text{dBm}$ for 5.18-5.24GHz and reduced to $30 - (6.95 - 6) = 29.27\text{dBm}$ for 5.745-5.825GHz band.

**A.3. Emission Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a SISO	5180	Ant1	21.036	0.5	Pass
NVNT	a SISO	5220	Ant1	21.421	0.5	Pass
NVNT	a SISO	5240	Ant1	21.351	0.5	Pass
NVNT	a SISO	5180	Ant2	20.889	0.5	Pass
NVNT	a SISO	5220	Ant2	20.771	0.5	Pass
NVNT	a SISO	5240	Ant2	20.896	0.5	Pass
NVNT	n20 SISO	5180	Ant1	21.297	0.5	Pass
NVNT	n20 SISO	5220	Ant1	21.636	0.5	Pass
NVNT	n20 SISO	5240	Ant1	21.377	0.5	Pass
NVNT	n20 SISO	5180	Ant2	21.157	0.5	Pass
NVNT	n20 SISO	5220	Ant2	21.218	0.5	Pass
NVNT	n20 SISO	5240	Ant2	21.097	0.5	Pass
NVNT	n20 MIMO	5180	Ant1	21.826	0.5	Pass
NVNT	n20 MIMO	5180	Ant2	21.2	0.5	Pass
NVNT	n20 MIMO	5220	Ant1	21.258	0.5	Pass
NVNT	n20 MIMO	5220	Ant2	21.188	0.5	Pass
NVNT	n20 MIMO	5240	Ant1	21.617	0.5	Pass
NVNT	n20 MIMO	5240	Ant2	21.177	0.5	Pass
NVNT	n40 SISO	5190	Ant1	44.463	0.5	Pass
NVNT	n40 SISO	5230	Ant1	44.488	0.5	Pass
NVNT	n40 SISO	5190	Ant2	44.167	0.5	Pass
NVNT	n40 SISO	5230	Ant2	44.047	0.5	Pass
NVNT	n40 MIMO	5190	Ant1	44.23	0.5	Pass
NVNT	n40 MIMO	5190	Ant2	43.542	0.5	Pass
NVNT	n40 MIMO	5230	Ant1	44.657	0.5	Pass
NVNT	n40 MIMO	5230	Ant2	43.807	0.5	Pass
NVNT	ac20 SISO	5180	Ant1	21.774	0.5	Pass
NVNT	ac20 SISO	5220	Ant1	21.591	0.5	Pass
NVNT	ac20 SISO	5240	Ant1	21.561	0.5	Pass
NVNT	ac20 SISO	5180	Ant2	21.317	0.5	Pass
NVNT	ac20 SISO	5220	Ant2	21.218	0.5	Pass
NVNT	ac20 SISO	5240	Ant2	21.324	0.5	Pass
NVNT	ac20 MIMO	5180	Ant1	21.56	0.5	Pass
NVNT	ac20 MIMO	5180	Ant2	20.803	0.5	Pass



NVNT	ac20 MIMO	5220	Ant1	21.659	0.5	Pass
NVNT	ac20 MIMO	5220	Ant2	21.048	0.5	Pass
NVNT	ac20 MIMO	5240	Ant1	21.553	0.5	Pass
NVNT	ac20 MIMO	5240	Ant2	21.359	0.5	Pass
NVNT	ac40 SISO	5190	Ant1	44.511	0.5	Pass
NVNT	ac40 SISO	5230	Ant1	44.718	0.5	Pass
NVNT	ac40 SISO	5190	Ant2	43.661	0.5	Pass
NVNT	ac40 SISO	5230	Ant2	43.781	0.5	Pass
NVNT	ac40 MIMO	5190	Ant1	44.48	0.5	Pass
NVNT	ac40 MIMO	5190	Ant2	43.816	0.5	Pass
NVNT	ac40 MIMO	5230	Ant1	44.885	0.5	Pass
NVNT	ac40 MIMO	5230	Ant2	43.821	0.5	Pass
NVNT	ac80 SISO	5210	Ant1	83.141	0.5	Pass
NVNT	ac80 SISO	5210	Ant2	83.591	0.5	Pass
NVNT	ac80 MIMO	5210	Ant1	83.572	0.5	Pass
NVNT	ac80 MIMO	5210	Ant2	82.738	0.5	Pass



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a SISO	5745	Ant1	16.342	0.5	Pass
NVNT	a SISO	5785	Ant1	16.322	0.5	Pass
NVNT	a SISO	5825	Ant1	16.333	0.5	Pass
NVNT	a SISO	5745	Ant2	16.332	0.5	Pass
NVNT	a SISO	5785	Ant2	16.108	0.5	Pass
NVNT	a SISO	5825	Ant2	16.312	0.5	Pass
NVNT	n20 SISO	5745	Ant1	17.537	0.5	Pass
NVNT	n20 SISO	5785	Ant1	17.532	0.5	Pass
NVNT	n20 SISO	5825	Ant1	17.033	0.5	Pass
NVNT	n20 SISO	5745	Ant2	16.748	0.5	Pass
NVNT	n20 SISO	5785	Ant2	16.789	0.5	Pass
NVNT	n20 SISO	5825	Ant2	17.126	0.5	Pass
NVNT	n20 MIMO	5745	Ant1	17.299	0.5	Pass
NVNT	n20 MIMO	5745	Ant2	16.551	0.5	Pass
NVNT	n20 MIMO	5785	Ant1	17.03	0.5	Pass
NVNT	n20 MIMO	5785	Ant2	16.959	0.5	Pass
NVNT	n20 MIMO	5825	Ant1	17.114	0.5	Pass
NVNT	n20 MIMO	5825	Ant2	17.016	0.5	Pass
NVNT	n40 SISO	5755	Ant1	36.027	0.5	Pass
NVNT	n40 SISO	5795	Ant1	36.034	0.5	Pass
NVNT	n40 SISO	5755	Ant2	35.595	0.5	Pass
NVNT	n40 SISO	5795	Ant2	35.757	0.5	Pass
NVNT	n40 MIMO	5755	Ant1	36.058	0.5	Pass
NVNT	n40 MIMO	5755	Ant2	35.378	0.5	Pass
NVNT	n40 MIMO	5795	Ant1	36.056	0.5	Pass
NVNT	n40 MIMO	5795	Ant2	35.839	0.5	Pass
NVNT	ac20 SISO	5745	Ant1	17.048	0.5	Pass
NVNT	ac20 SISO	5785	Ant1	17.535	0.5	Pass
NVNT	ac20 SISO	5825	Ant1	16.956	0.5	Pass
NVNT	ac20 SISO	5745	Ant2	16.65	0.5	Pass
NVNT	ac20 SISO	5785	Ant2	16.804	0.5	Pass
NVNT	ac20 SISO	5825	Ant2	16.771	0.5	Pass
NVNT	ac20 MIMO	5745	Ant1	17.38	0.5	Pass
NVNT	ac20 MIMO	5745	Ant2	16.388	0.5	Pass
NVNT	ac20 MIMO	5785	Ant1	17.048	0.5	Pass



NVNT	ac20 MIMO	5785	Ant2	16.727	0.5	Pass
NVNT	ac20 MIMO	5825	Ant1	17.527	0.5	Pass
NVNT	ac20 MIMO	5825	Ant2	17.014	0.5	Pass
NVNT	ac40 SISO	5755	Ant1	36.058	0.5	Pass
NVNT	ac40 SISO	5795	Ant1	35.9	0.5	Pass
NVNT	ac40 SISO	5755	Ant2	35.528	0.5	Pass
NVNT	ac40 SISO	5795	Ant2	36.009	0.5	Pass
NVNT	ac40 MIMO	5755	Ant1	36.285	0.5	Pass
NVNT	ac40 MIMO	5755	Ant2	35.75	0.5	Pass
NVNT	ac40 MIMO	5795	Ant1	35.925	0.5	Pass
NVNT	ac40 MIMO	5795	Ant2	36.052	0.5	Pass
NVNT	ac80 SISO	5775	Ant1	75.144	0.5	Pass
NVNT	ac80 SISO	5775	Ant2	75.126	0.5	Pass
NVNT	ac80 MIMO	5775	Ant1	75.156	0.5	Pass
NVNT	ac80 MIMO	5775	Ant2	75.11	0.5	Pass




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1 SISO



-26dB Bandwidth NVNT a 5220MHz Ant1 SISO

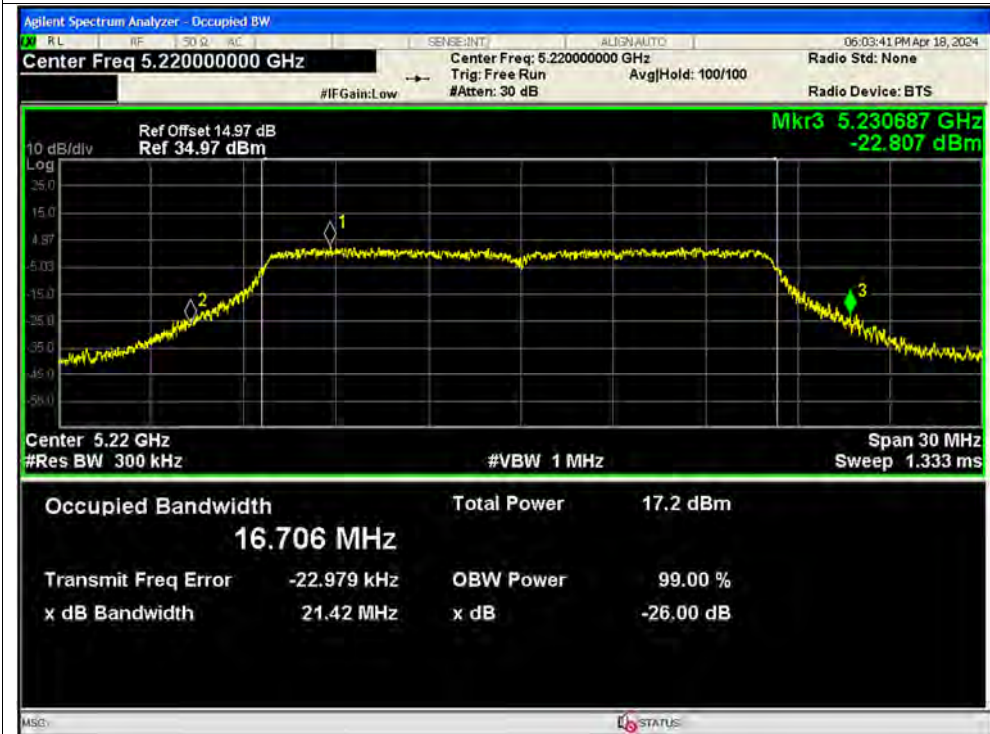




-26dB Bandwidth NVNT a 5240MHz Ant1 SISO



-26dB Bandwidth NVNT a 5180MHz Ant2 SISO

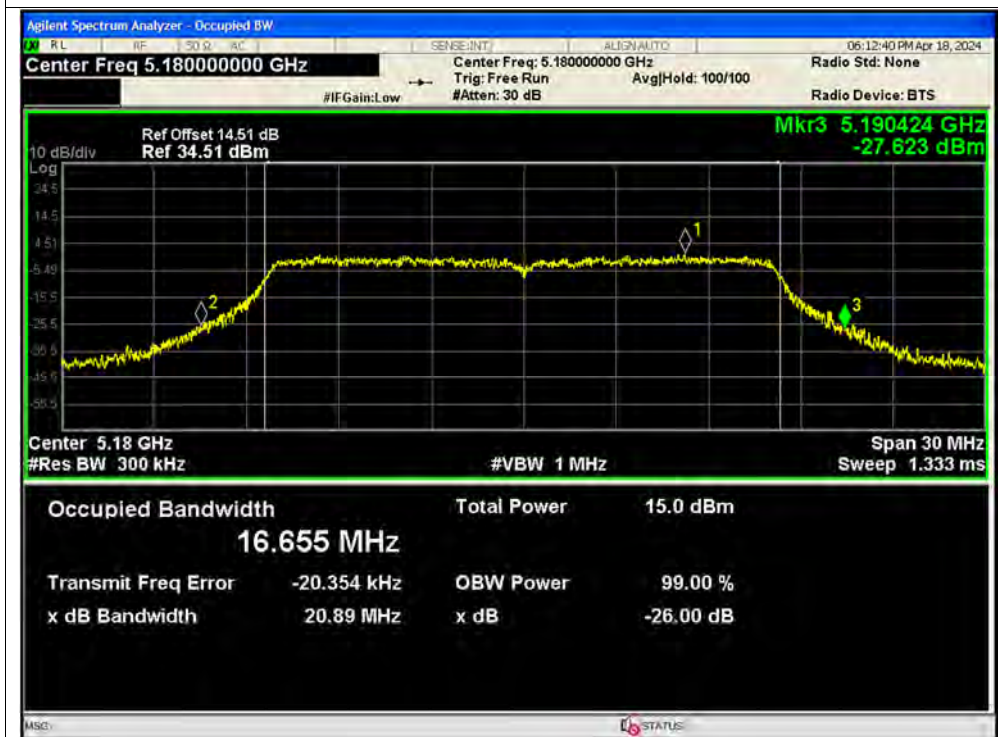




-26dB Bandwidth NVNT a 5220MHz Ant2 SISO



-26dB Bandwidth NVNT a 5240MHz Ant2 SISO

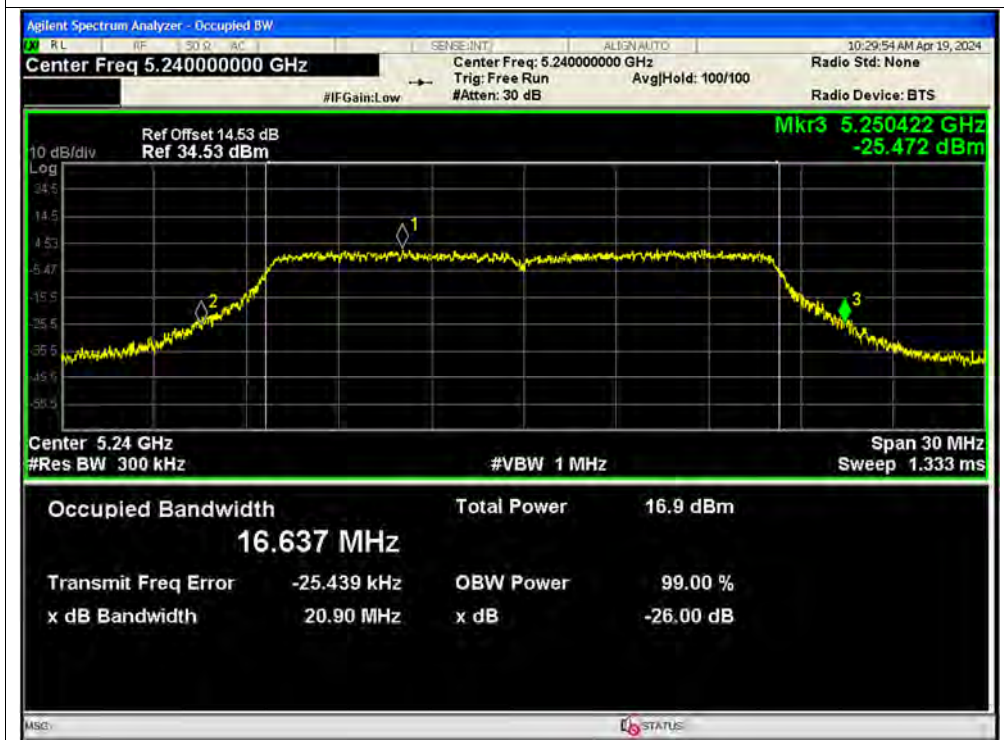



-26dB Bandwidth NVNT n20 5180MHz Ant1 SISO




-26dB Bandwidth NVNT n20 5220MHz Ant1 SISO





-26dB Bandwidth NVNT n20 5240MHz Ant1 SISO

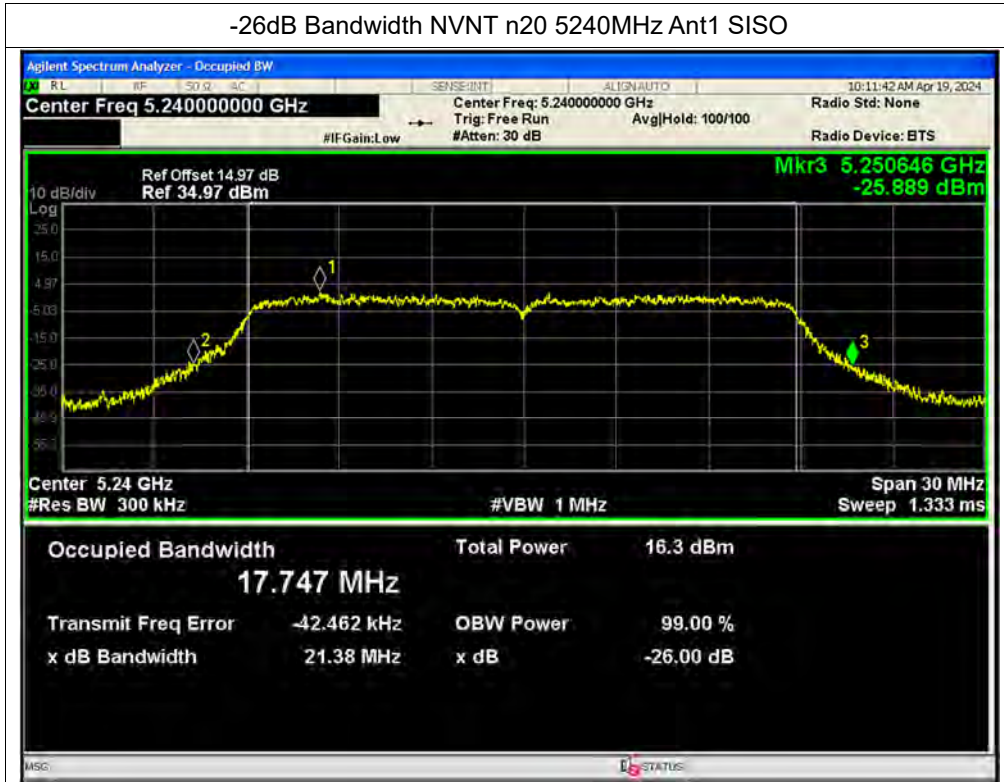

-26dB Bandwidth NVNT n20 5180MHz Ant2 SISO





-26dB Bandwidth NVNT n20 5220MHz Ant2 SISO




-26dB Bandwidth NVNT n20 5240MHz Ant2 SISO






-26dB Bandwidth NVNT n20 5180MHz Ant1 MIMO

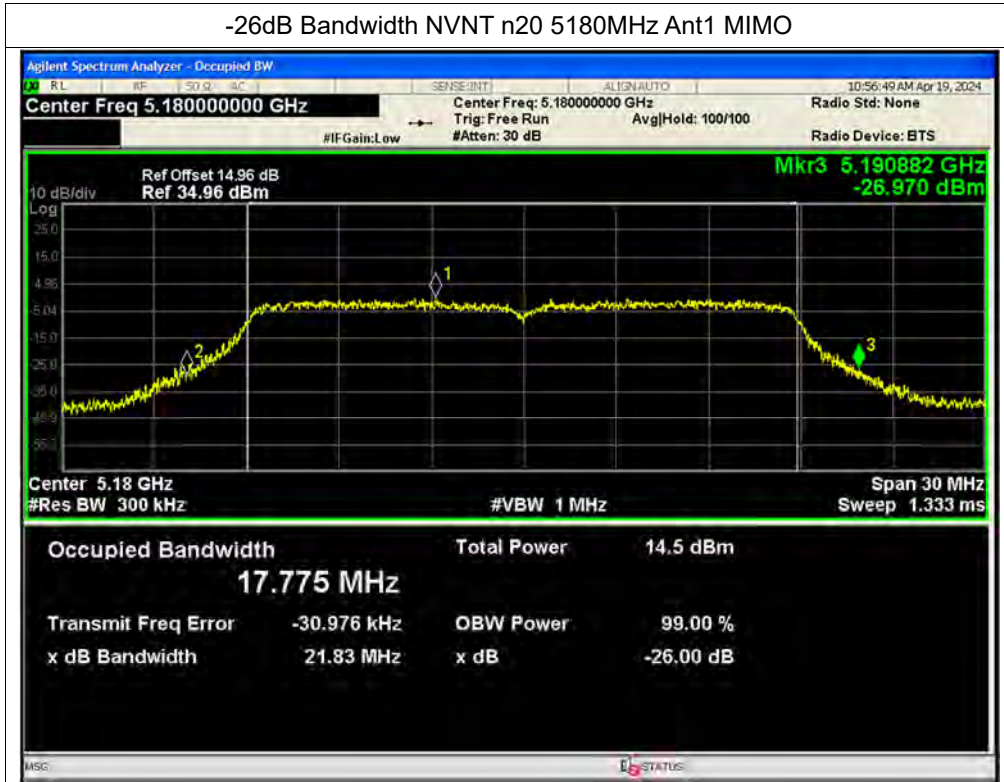

-26dB Bandwidth NVNT n20 5180MHz Ant2 MIMO

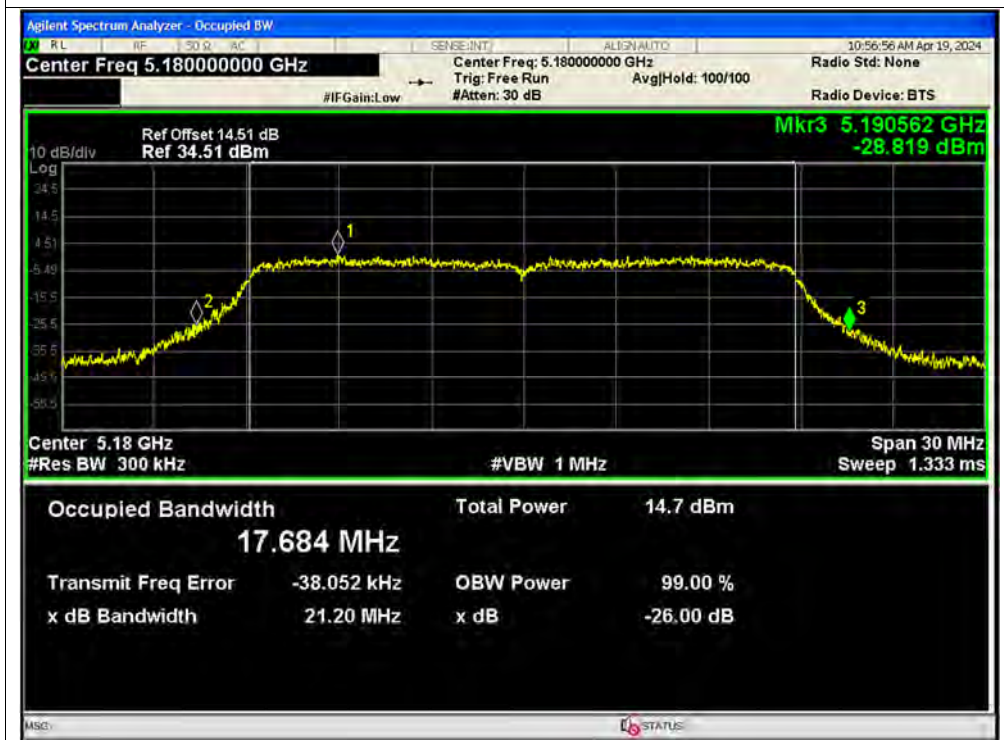



-26dB Bandwidth NVNT n20 5220MHz Ant1 MIMO




-26dB Bandwidth NVNT n20 5220MHz Ant2 MIMO





-26dB Bandwidth NVNT n20 5240MHz Ant1 MIMO

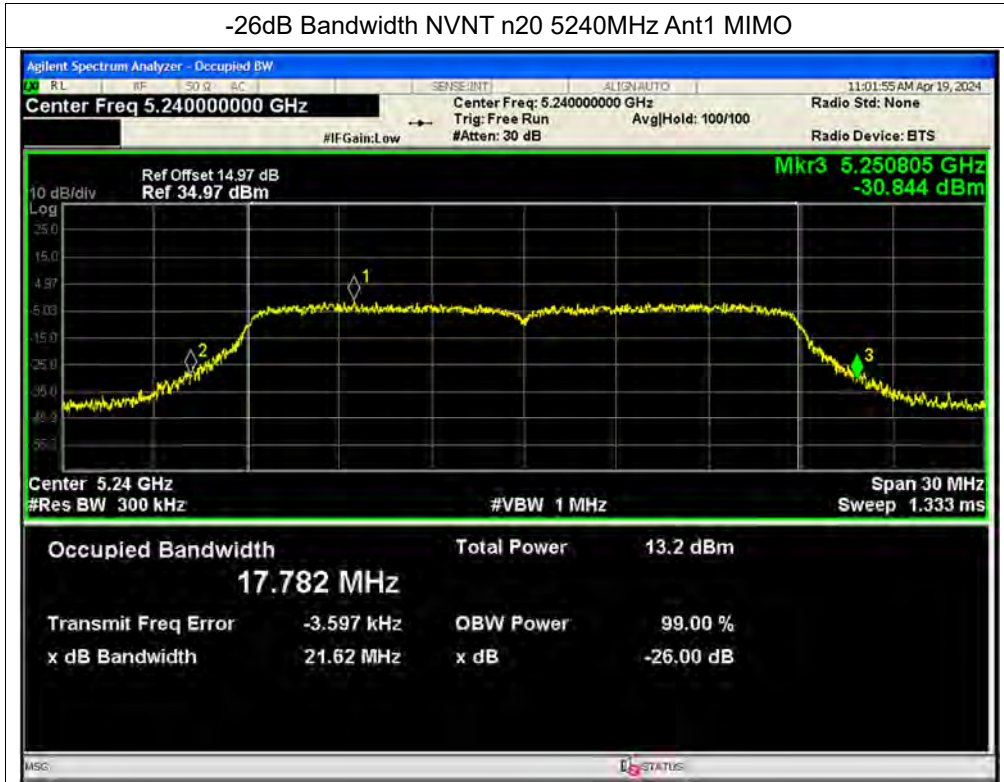

-26dB Bandwidth NVNT n20 5240MHz Ant2 MIMO





-26dB Bandwidth NVNT n40 5190MHz Ant1 SISO



-26dB Bandwidth NVNT n40 5230MHz Ant1 SISO






-26dB Bandwidth NVNT n40 5190MHz Ant2 SISO




-26dB Bandwidth NVNT n40 5230MHz Ant2 SISO

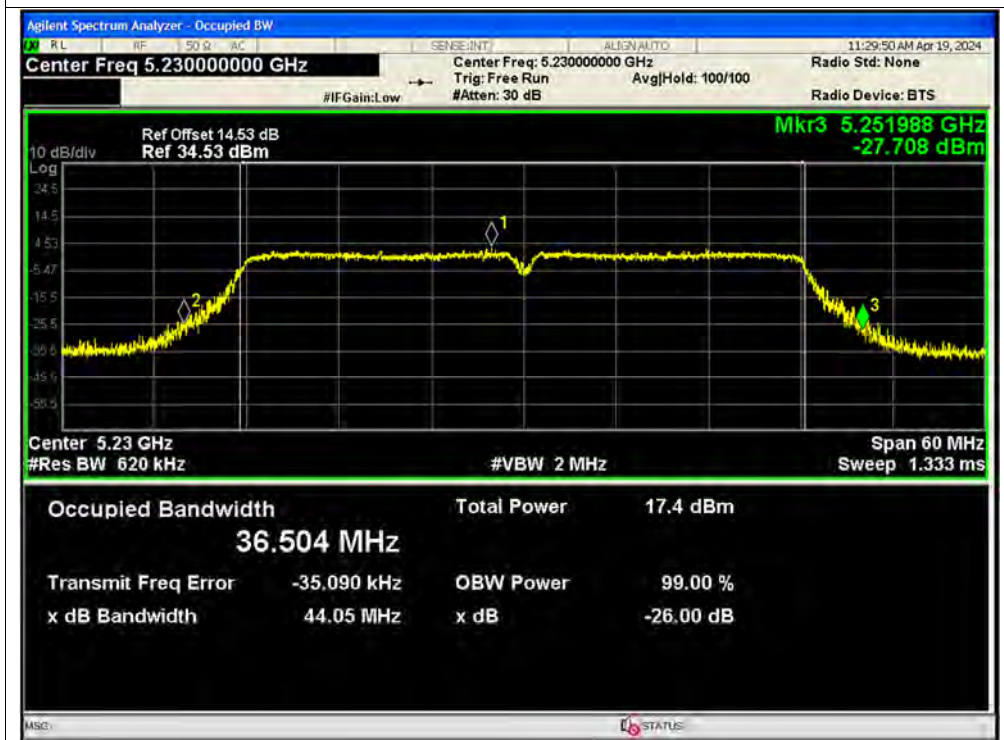



-26dB Bandwidth NVNT n40 5190MHz Ant1 MIMO

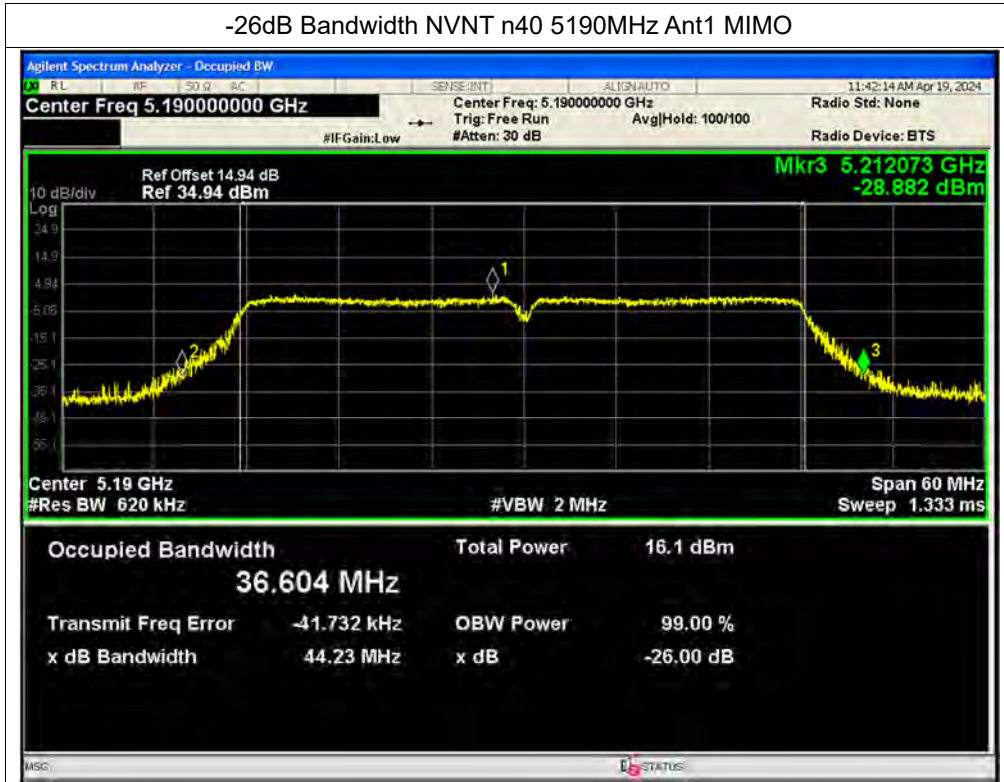

-26dB Bandwidth NVNT n40 5190MHz Ant2 MIMO





-26dB Bandwidth NVNT n40 5230MHz Ant1 MIMO



-26dB Bandwidth NVNT n40 5230MHz Ant2 MIMO





-26dB Bandwidth NVNT ac20 5180MHz Ant1 SISO




-26dB Bandwidth NVNT ac20 5220MHz Ant1 SISO






-26dB Bandwidth NVNT ac20 5240MHz Ant1 SISO

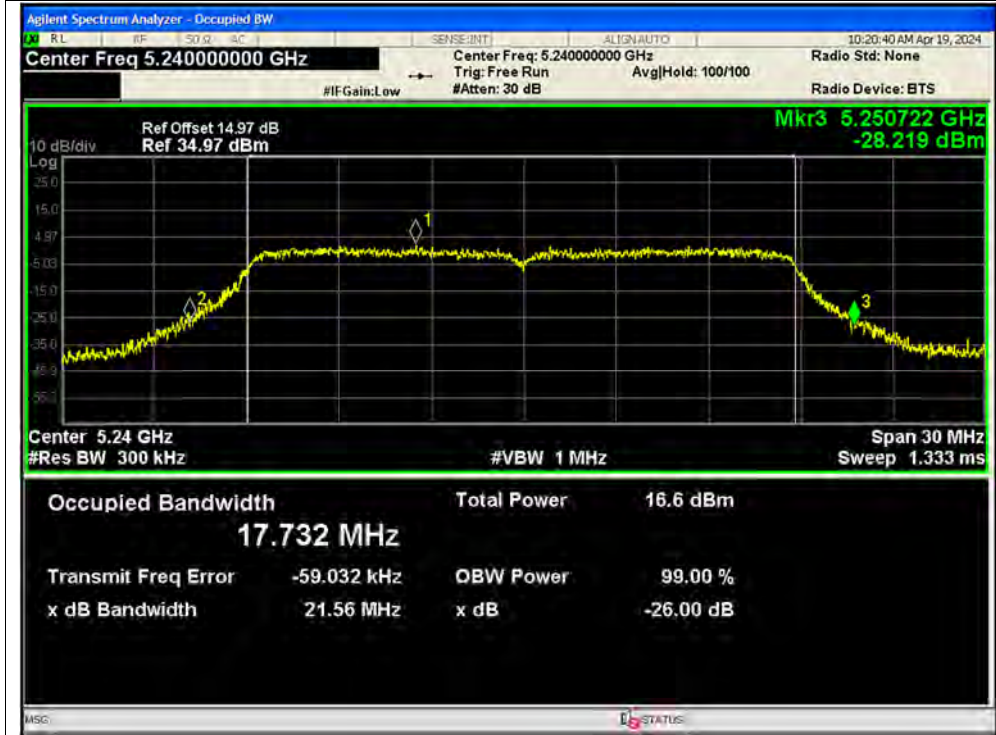

-26dB Bandwidth NVNT ac20 5180MHz Ant2 SISO

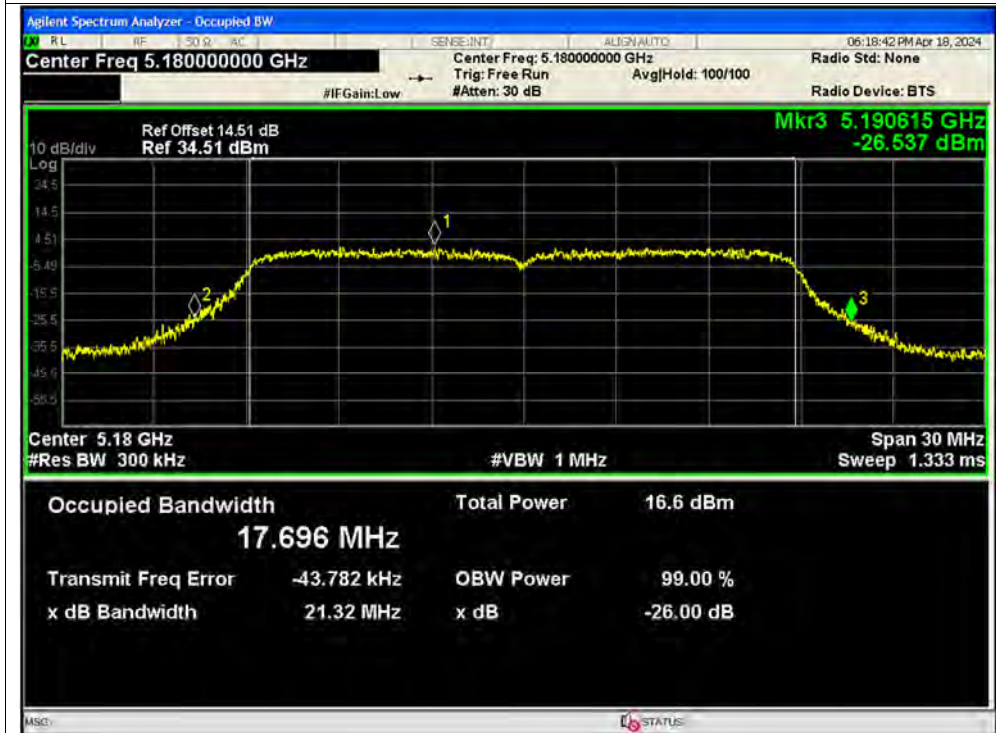



-26dB Bandwidth NVNT ac20 5220MHz Ant2 SISO




-26dB Bandwidth NVNT ac20 5240MHz Ant2 SISO






-26dB Bandwidth NVNT ac20 5180MHz Ant1 MIMO

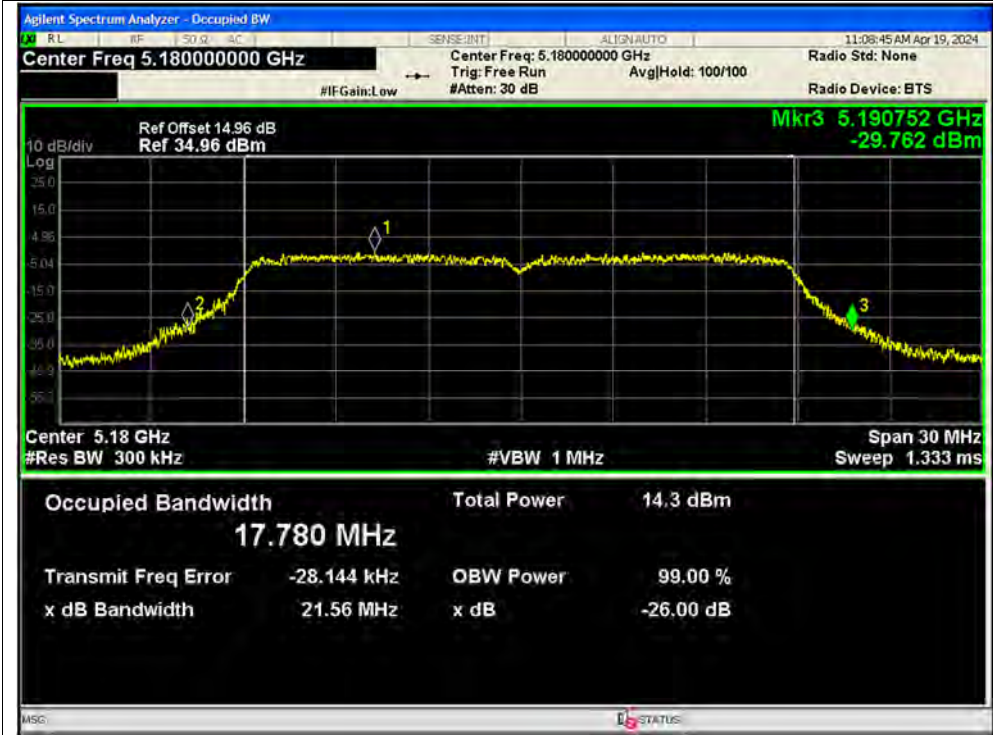

-26dB Bandwidth NVNT ac20 5180MHz Ant2 MIMO

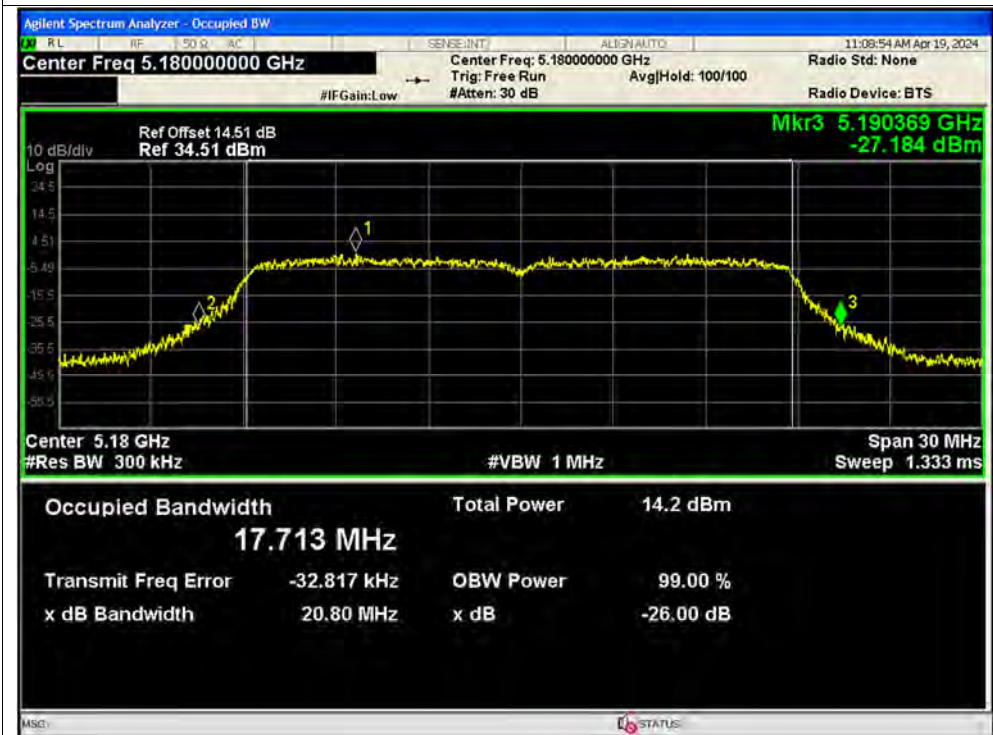



-26dB Bandwidth NVNT ac20 5220MHz Ant1 MIMO




-26dB Bandwidth NVNT ac20 5220MHz Ant2 MIMO





-26dB Bandwidth NVNT ac20 5240MHz Ant1 MIMO

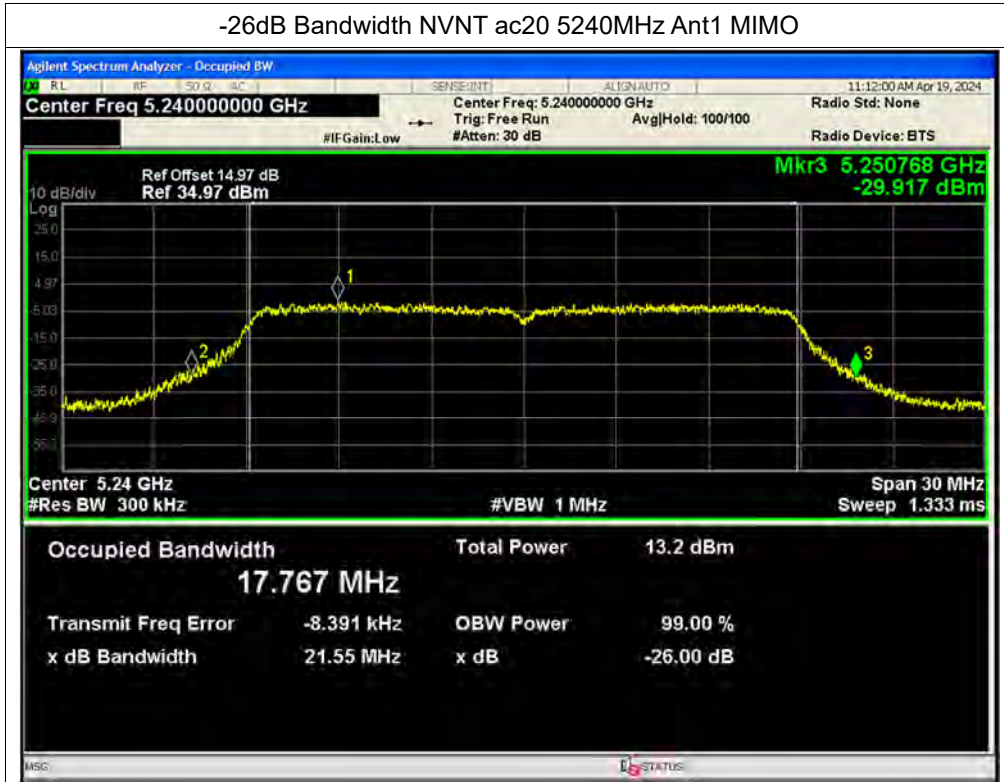

-26dB Bandwidth NVNT ac20 5240MHz Ant2 MIMO






-26dB Bandwidth NVNT ac40 5190MHz Ant1 SISO




-26dB Bandwidth NVNT ac40 5230MHz Ant1 SISO

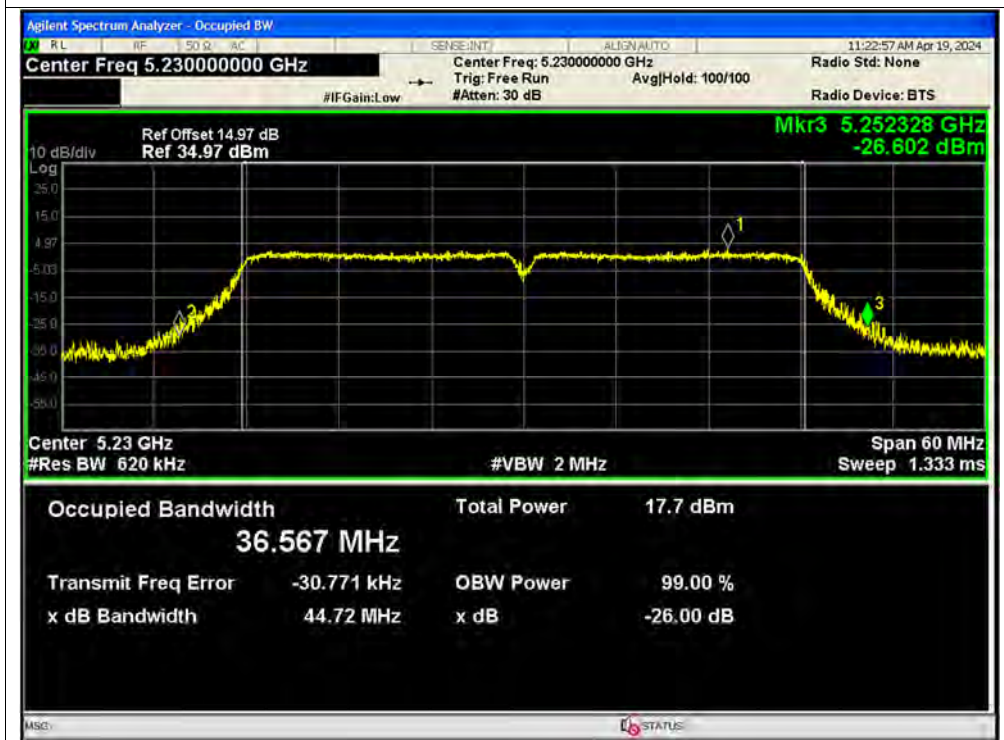




-26dB Bandwidth NVNT ac40 5190MHz Ant2 SISO

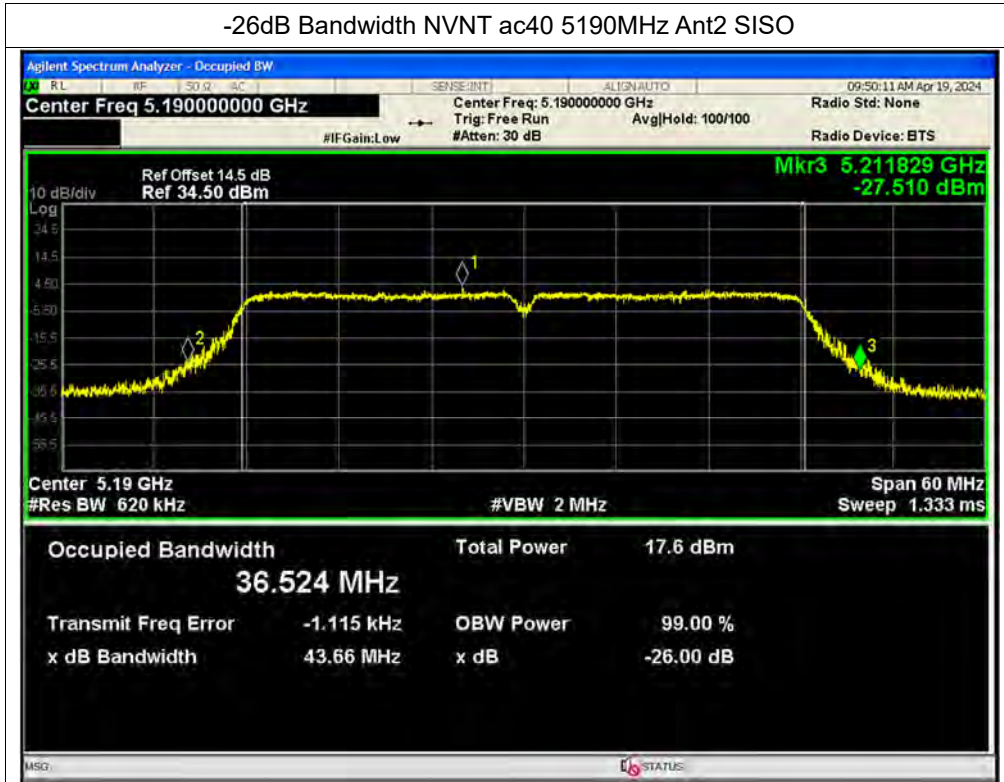

-26dB Bandwidth NVNT ac40 5230MHz Ant2 SISO

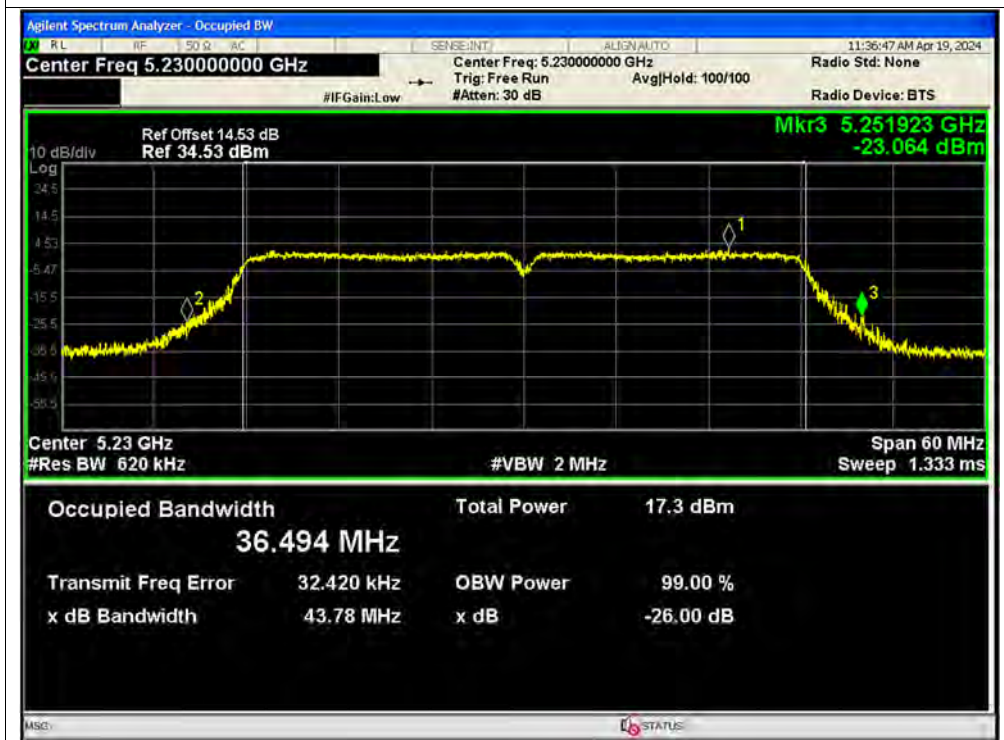



-26dB Bandwidth NVNT ac40 5190MHz Ant1 MIMO




-26dB Bandwidth NVNT ac40 5190MHz Ant2 MIMO






-26dB Bandwidth NVNT ac40 5230MHz Ant1 MIMO

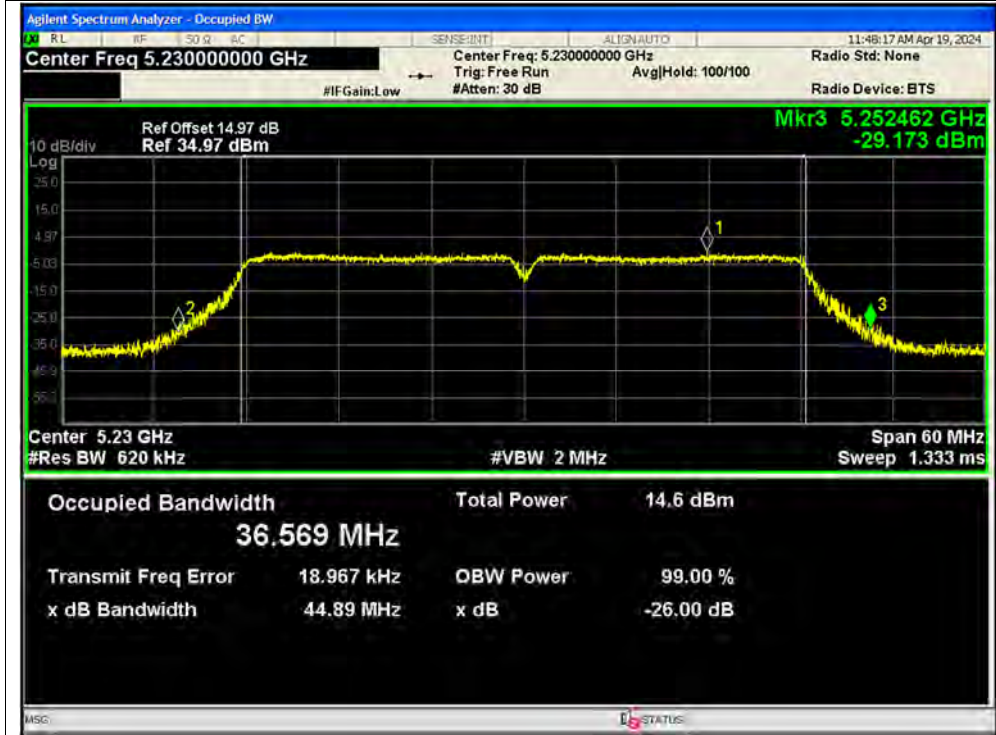


-26dB Bandwidth NVNT ac40 5230MHz Ant2 MIMO

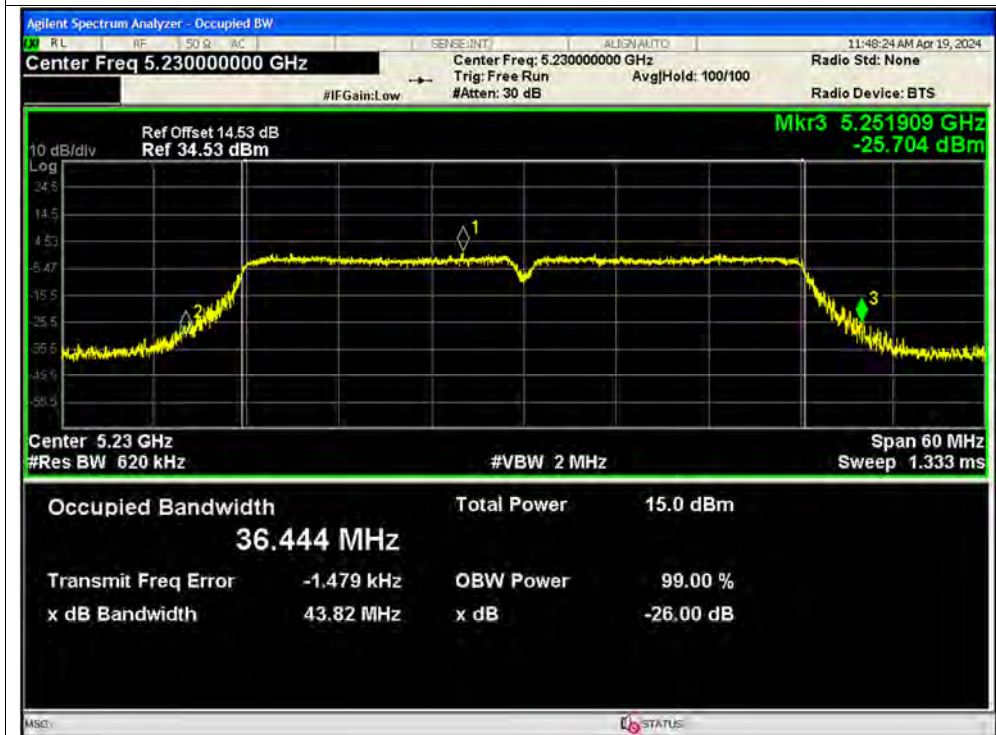




-26dB Bandwidth NVNT ac80 5210MHz Ant1 SISO

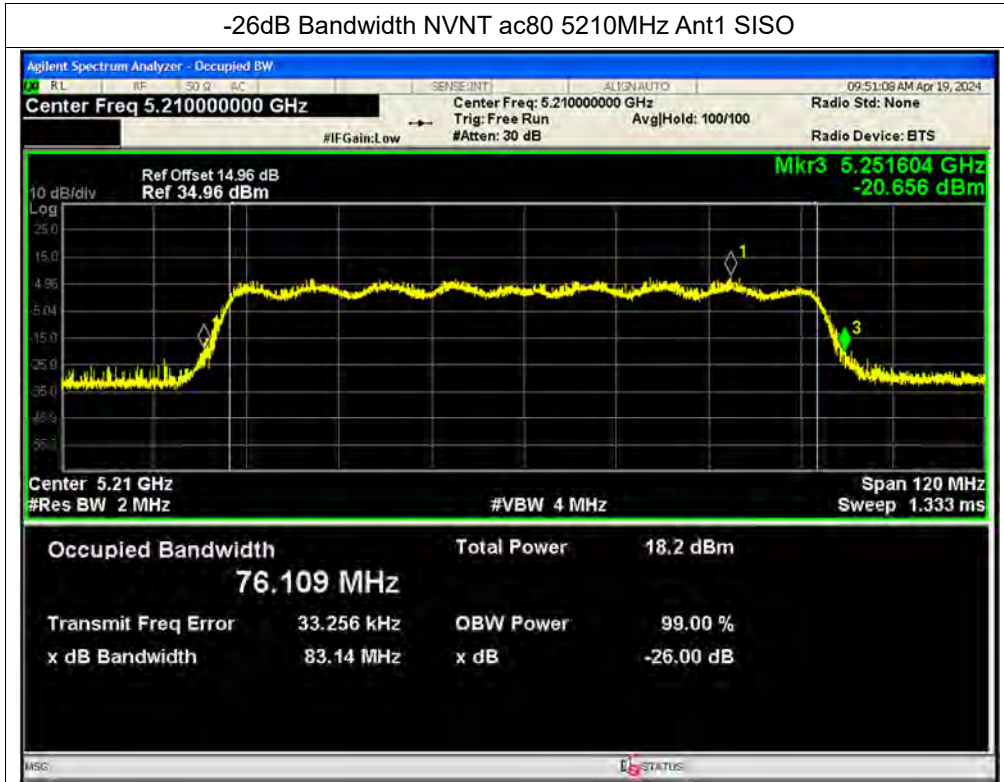

-26dB Bandwidth NVNT ac80 5210MHz Ant2 SISO

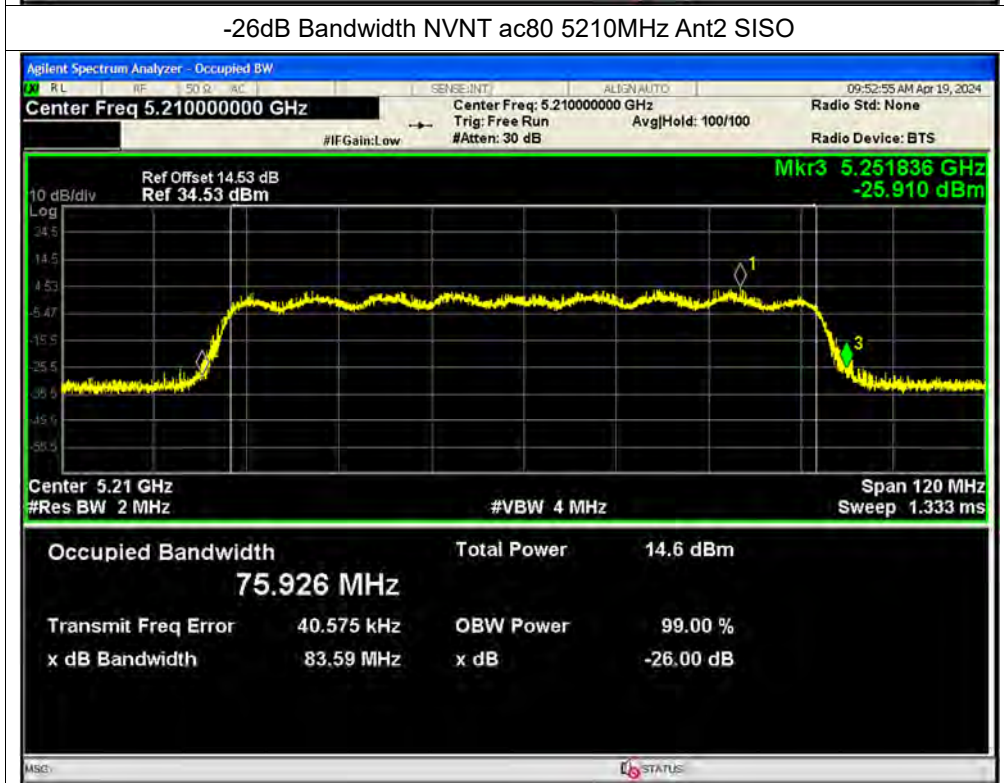




-26dB Bandwidth NVNT ac80 5210MHz Ant1 MIMO




-26dB Bandwidth NVNT ac80 5210MHz Ant2 MIMO

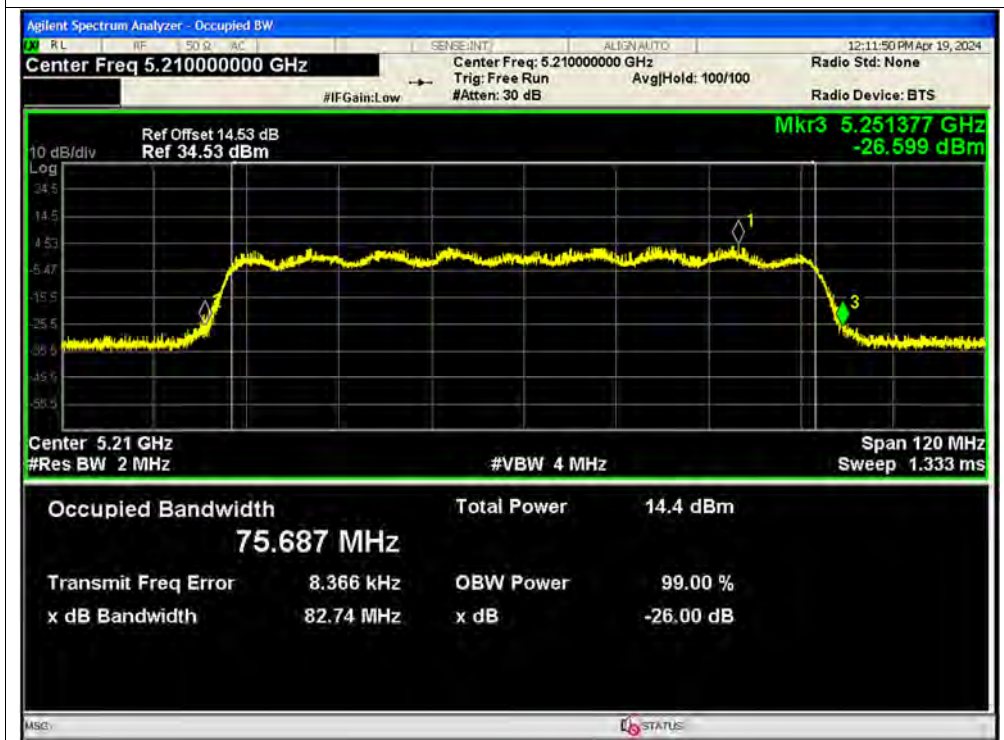



Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1 SISO

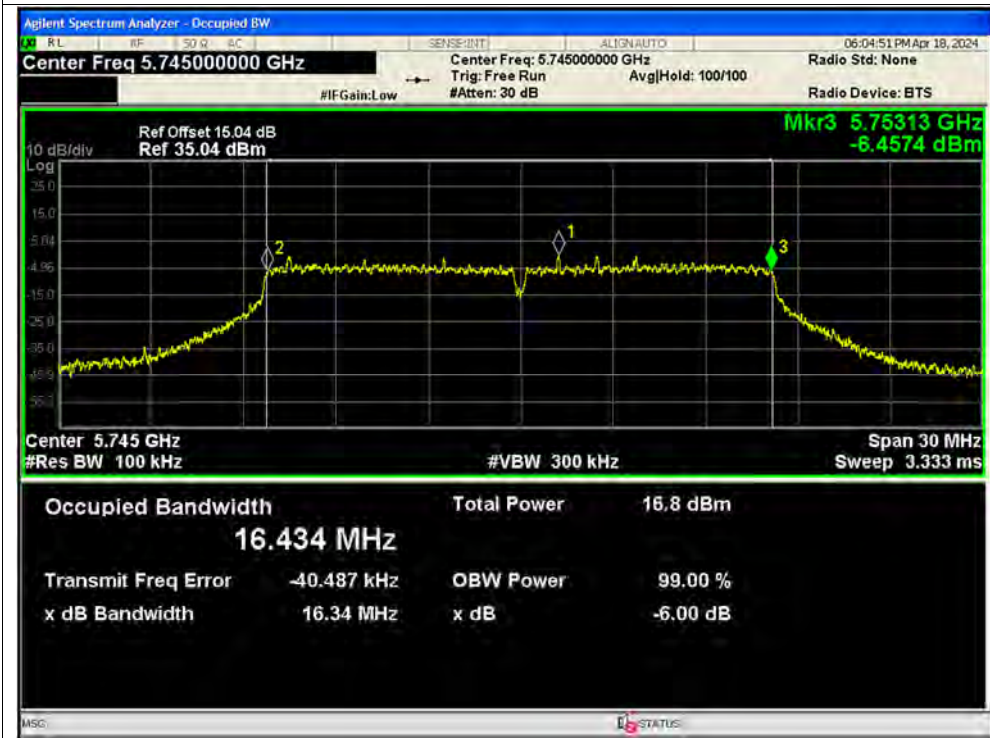


-6dB Bandwidth NVNT a 5785MHz Ant1 SISO






-6dB Bandwidth NVNT a 5825MHz Ant1 SISO

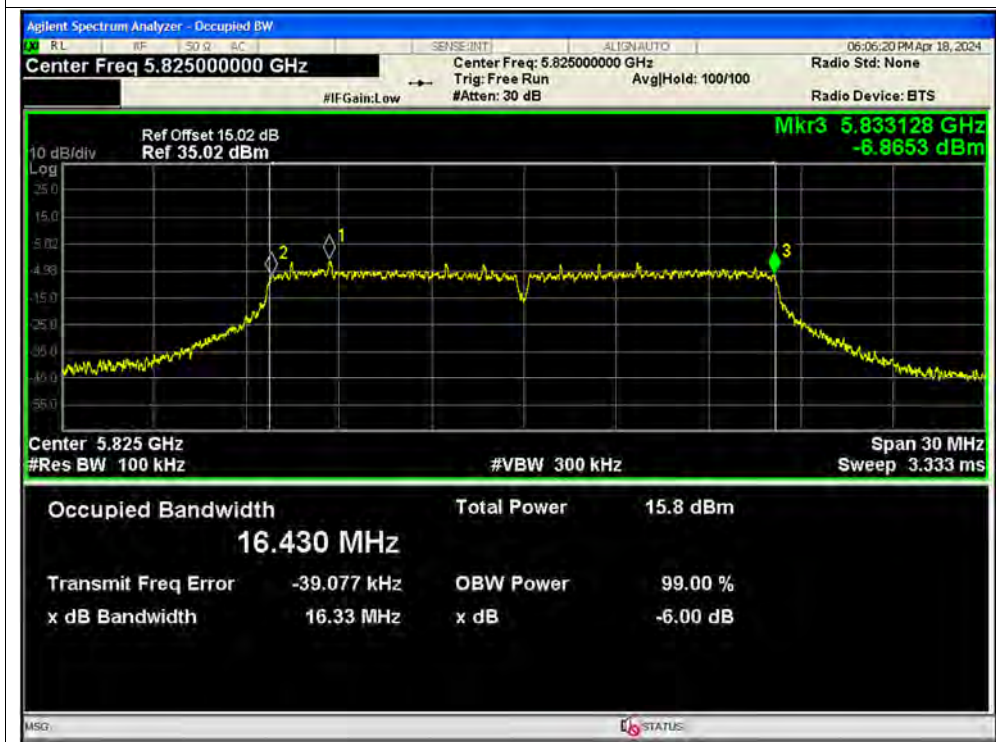


-6dB Bandwidth NVNT a 5745MHz Ant2 SISO

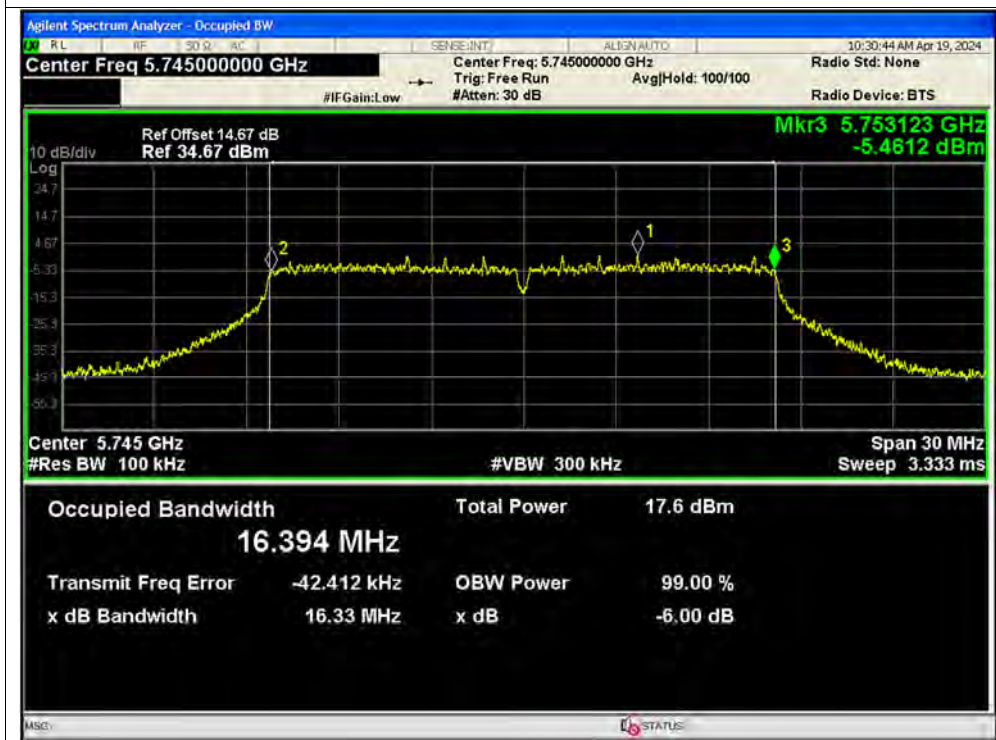




-6dB Bandwidth NVNT a 5785MHz Ant2 SISO

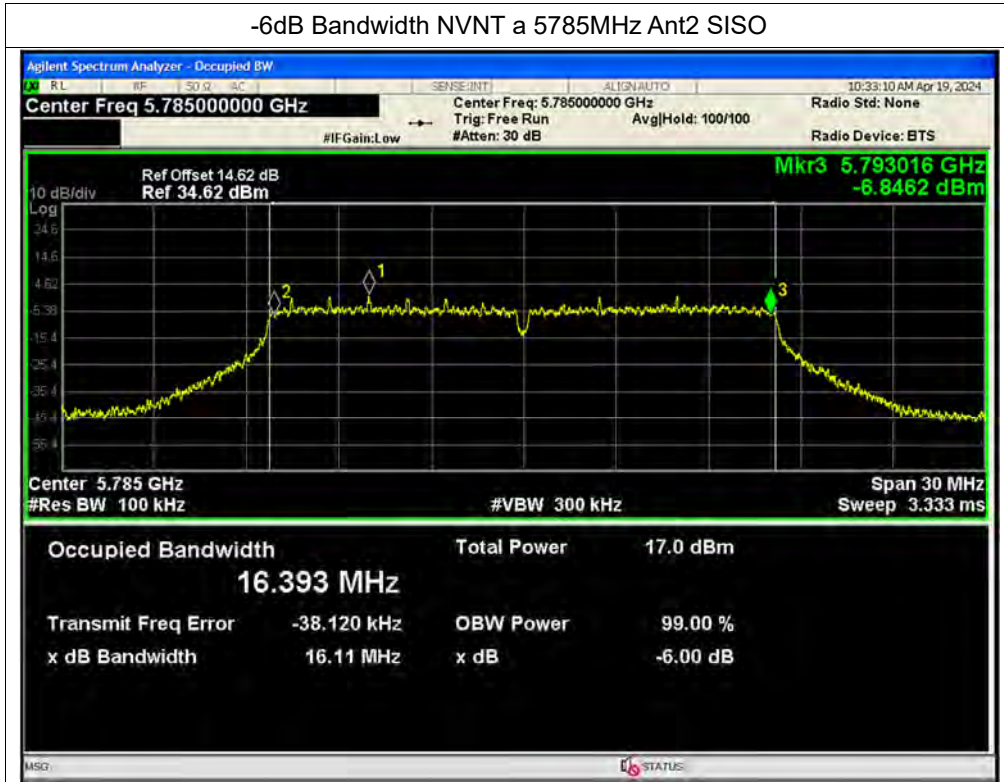


-6dB Bandwidth NVNT a 5825MHz Ant2 SISO

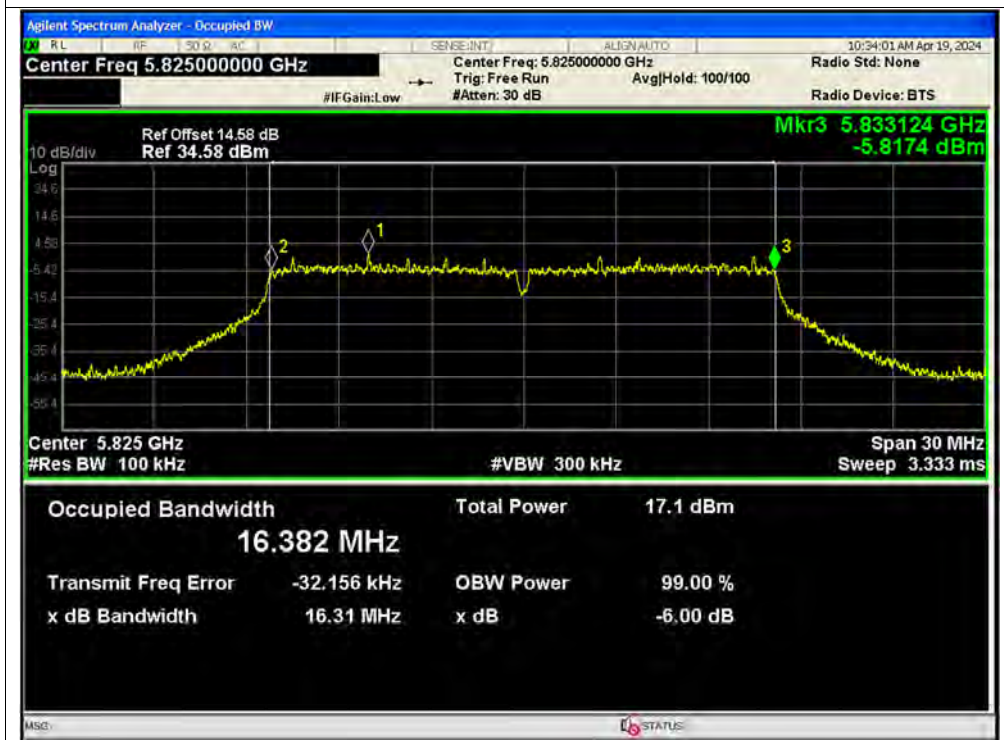




-6dB Bandwidth NVNT n20 5745MHz Ant1 SISO

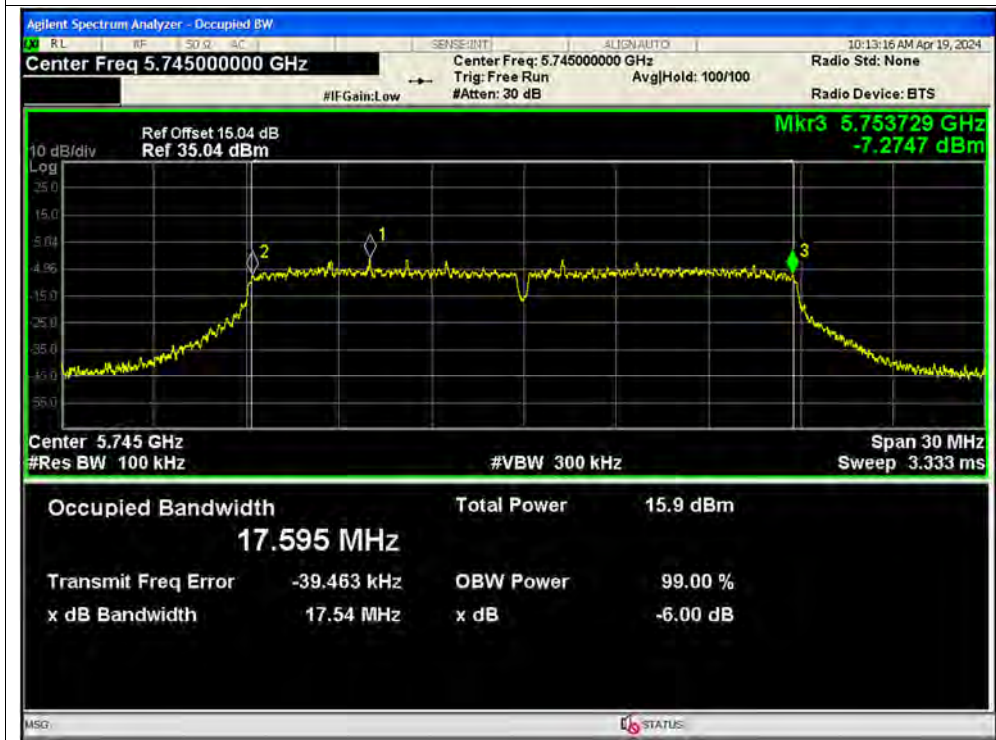


-6dB Bandwidth NVNT n20 5785MHz Ant1 SISO

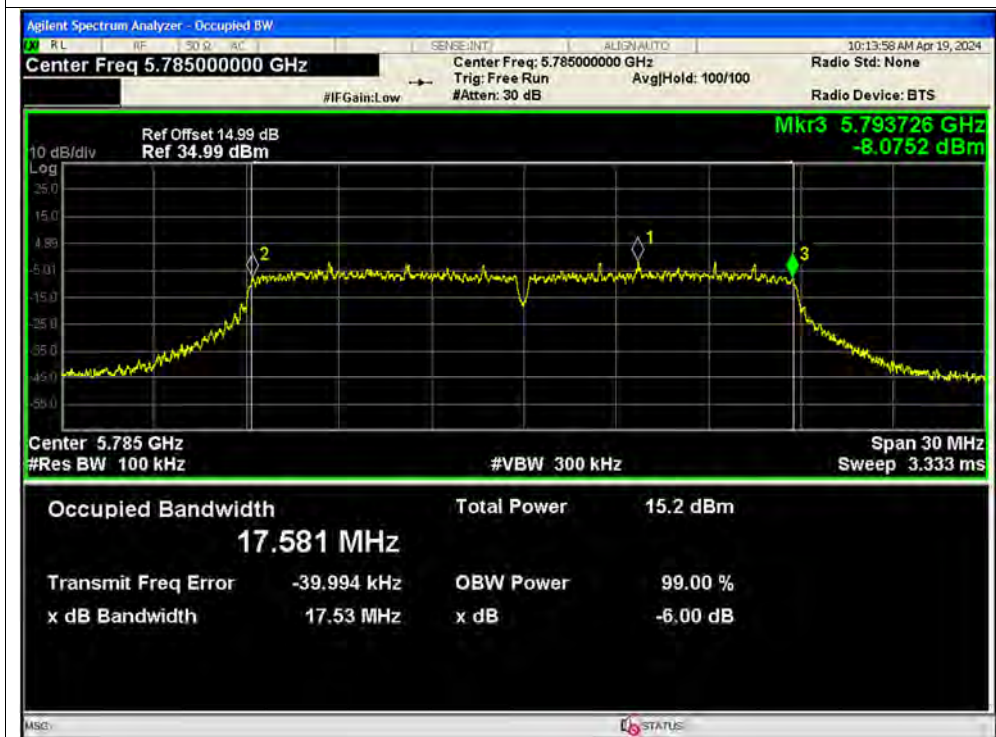




-6dB Bandwidth NVNT n20 5825MHz Ant1 SISO

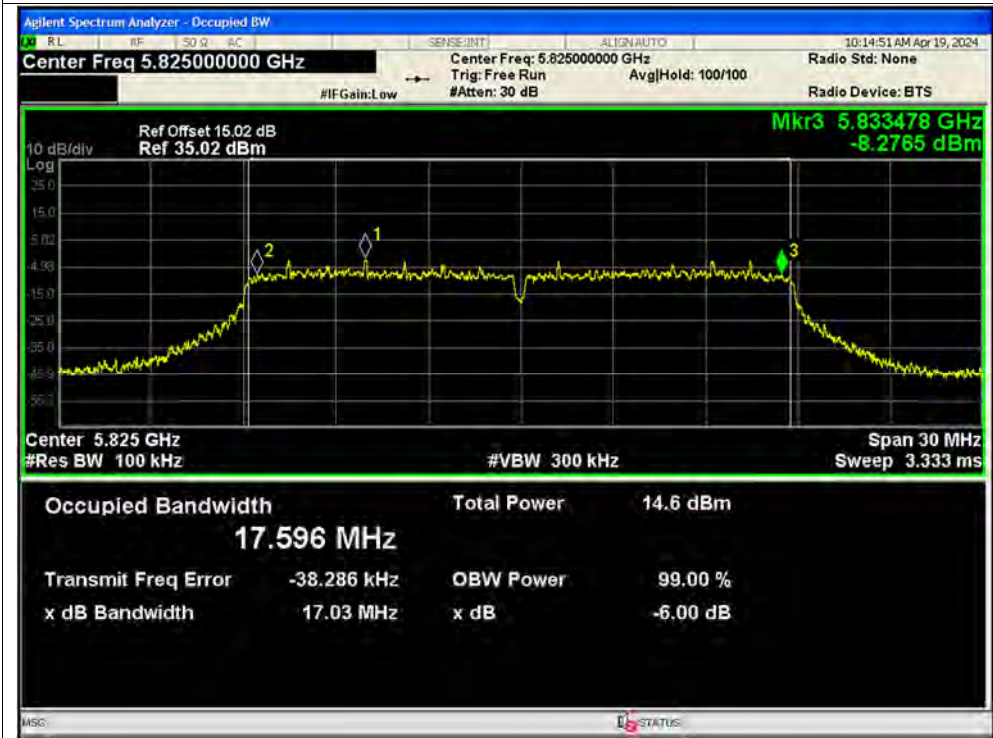


-6dB Bandwidth NVNT n20 5745MHz Ant2 SISO

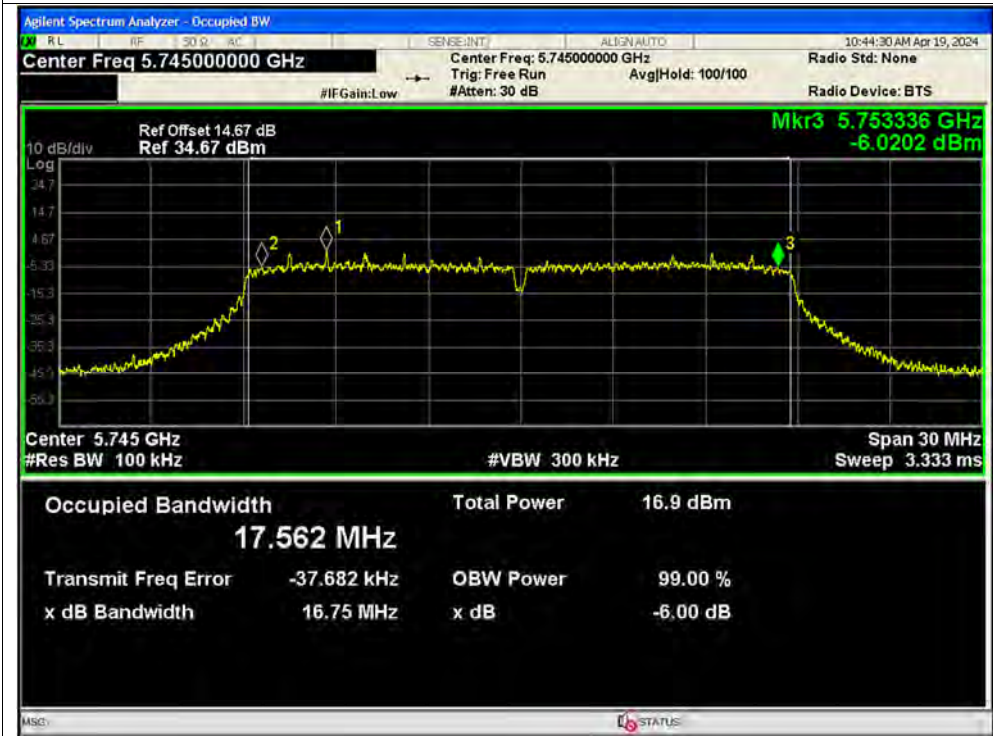



-6dB Bandwidth NVNT n20 5785MHz Ant2 SISO

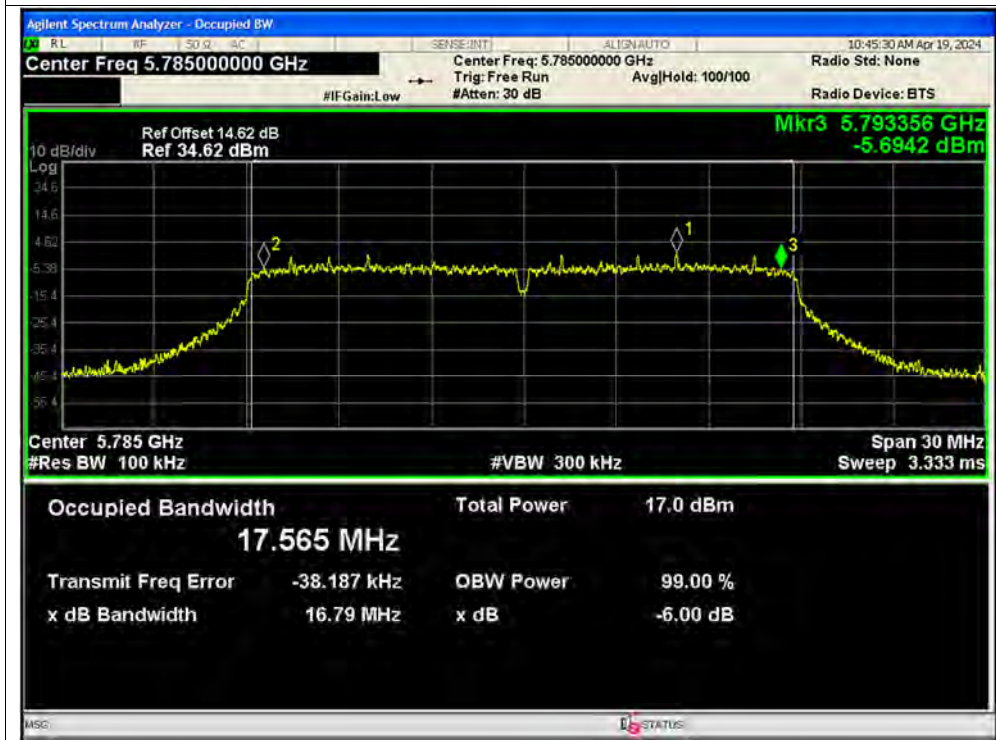

-6dB Bandwidth NVNT n20 5825MHz Ant2 SISO

