| Test Mode | IEEE 802.11ax (HEW80+80)_External Antenna | Test Date | 2020/2/26 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz | Polarization | Vertical |

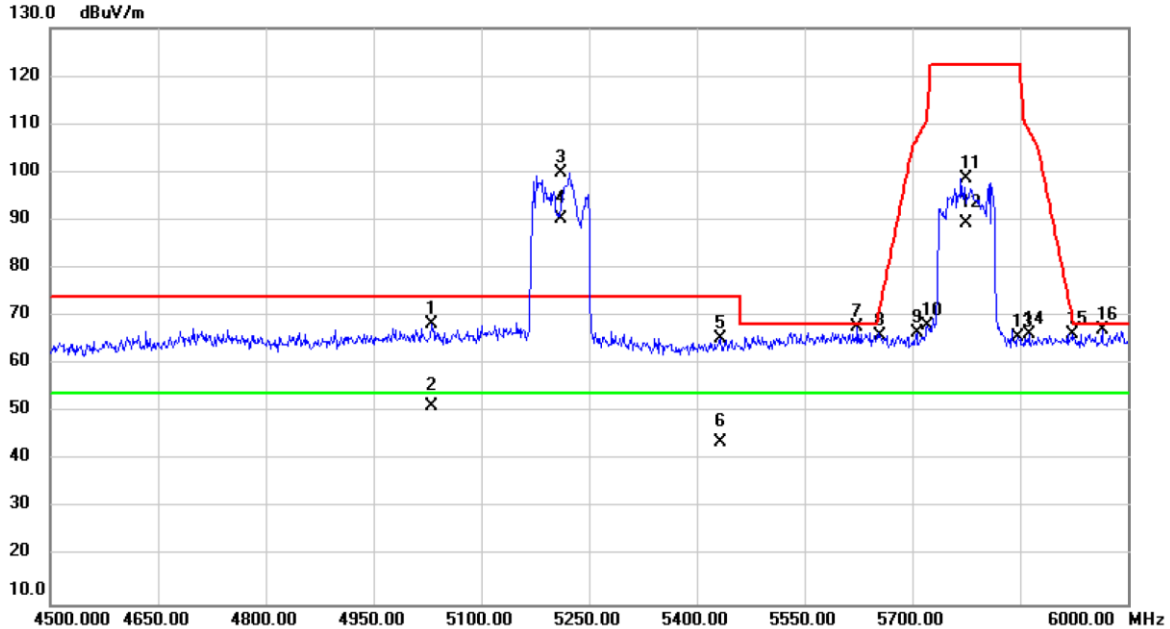


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 5031.000 | 30.65 | 37.66 | 68.31 | 74.00 | -5.69 | peak | |
| 2 | | 5031.000 | 13.59 | 37.66 | 51.25 | 54.00 | -2.75 | AVG | |
| 3 | X | 5210.000 | 62.01 | 37.87 | 99.88 | 74.00 | 25.88 | peak | No Limit |
| 4 | * | 5210.000 | 52.29 | 37.87 | 90.16 | 54.00 | 36.16 | AVG | No Limit |
| 5 | | 5433.000 | 27.17 | 38.13 | 65.30 | 74.00 | -8.70 | peak | |
| 6 | | 5433.000 | 5.76 | 38.13 | 43.89 | 54.00 | -10.11 | AVG | |
| 7 | | 5623.500 | 29.48 | 38.30 | 67.78 | 68.20 | -0.42 | peak | |
| 8 | | 5655.000 | 27.66 | 38.33 | 65.99 | 71.90 | -5.91 | peak | |
| 9 | | 5706.000 | 28.21 | 38.36 | 66.57 | 106.88 | -40.31 | peak | |
| 10 | | 5721.000 | 29.56 | 38.37 | 67.93 | 113.08 | -45.15 | peak | |
| 11 | | 5775.000 | 60.11 | 38.41 | 98.52 | 122.20 | -23.68 | peak | No Limit |
| 12 | X | 5775.000 | 50.85 | 38.41 | 89.26 | 54.00 | 35.26 | AVG | No Limit |
| 13 | | 5847.000 | 27.11 | 38.47 | 65.58 | 122.20 | -56.62 | peak | |
| 14 | | 5862.000 | 27.76 | 38.48 | 66.24 | 108.84 | -42.60 | peak | |
| 15 | | 5923.500 | 27.82 | 38.52 | 66.34 | 69.31 | -2.97 | peak | |
| 16 | | 5964.000 | 28.59 | 38.55 | 67.14 | 68.20 | -1.06 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz | Polarization | Vertical |

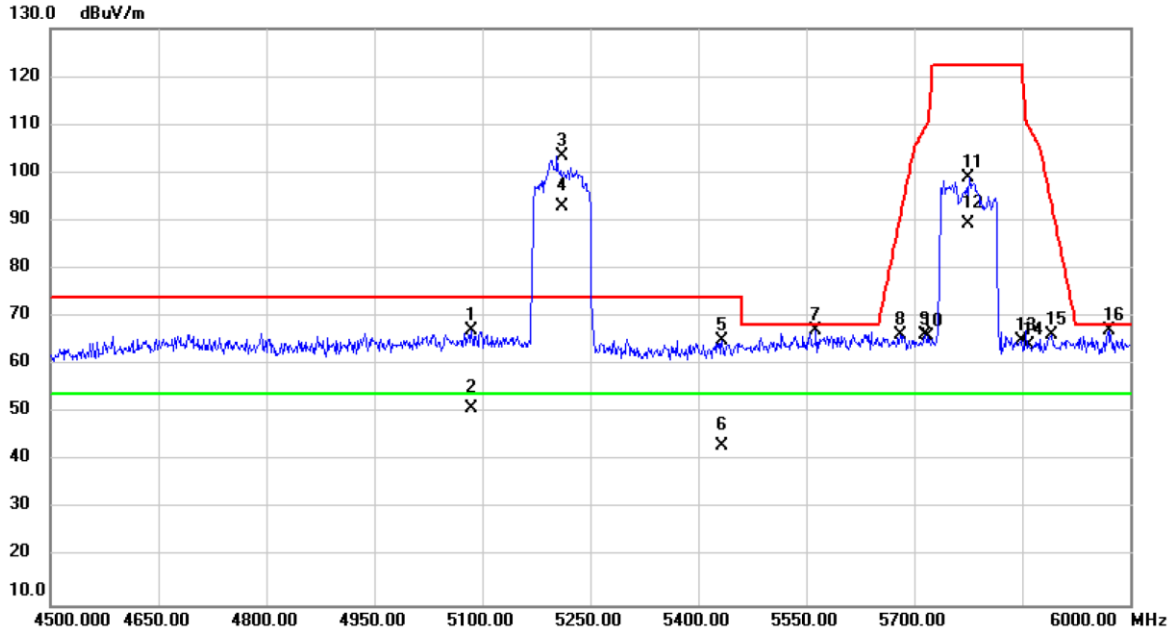


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 5085.000 | 29.37 | 37.72 | 67.09 | 74.00 | -6.91 | peak | |
| 2 | | 5085.000 | 13.38 | 37.72 | 51.10 | 54.00 | -2.90 | AVG | |
| 3 | X | 5210.000 | 65.56 | 37.87 | 103.43 | 74.00 | 29.43 | peak | No Limit |
| 4 | * | 5210.000 | 54.94 | 37.87 | 92.81 | 54.00 | 38.81 | AVG | No Limit |
| 5 | | 5433.000 | 26.91 | 38.13 | 65.04 | 74.00 | -8.96 | peak | |
| 6 | | 5433.000 | 5.10 | 38.13 | 43.23 | 54.00 | -10.77 | AVG | |
| 7 | | 5563.500 | 28.87 | 38.26 | 67.13 | 68.20 | -1.07 | peak | |
| 8 | | 5680.500 | 27.81 | 38.34 | 66.15 | 90.77 | -24.62 | peak | |
| 9 | | 5715.000 | 27.91 | 38.37 | 66.28 | 109.40 | -43.12 | peak | |
| 10 | | 5719.500 | 27.56 | 38.38 | 65.94 | 110.66 | -44.72 | peak | |
| 11 | | 5775.000 | 60.48 | 38.41 | 98.89 | 122.20 | -23.31 | peak | No Limit |
| 12 | X | 5775.000 | 50.84 | 38.41 | 89.25 | 54.00 | 35.25 | AVG | No Limit |
| 13 | | 5848.500 | 26.45 | 38.47 | 64.92 | 122.20 | -57.28 | peak | |
| 14 | | 5859.000 | 25.74 | 38.47 | 64.21 | 109.68 | -45.47 | peak | |
| 15 | | 5890.500 | 27.88 | 38.50 | 66.38 | 93.73 | -27.35 | peak | |
| 16 | | 5970.000 | 28.48 | 38.56 | 67.04 | 68.20 | -1.16 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/11/29 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Vertical |

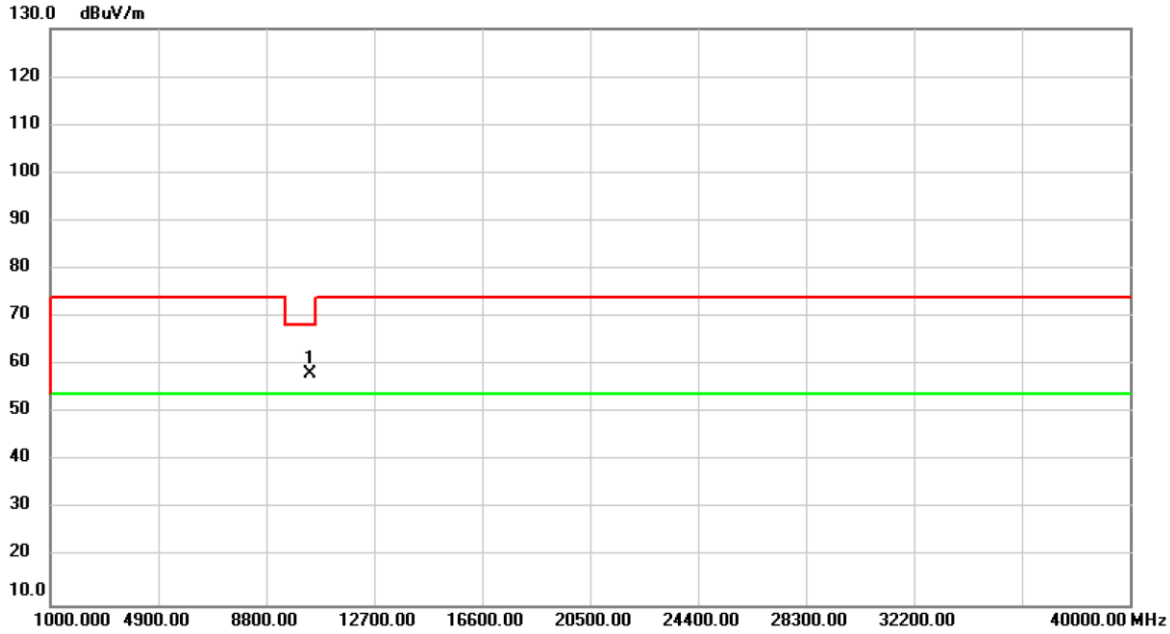


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 55.24 | 2.83 | 58.07 | 68.20 | -10.13 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/11/29 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Horizontal |

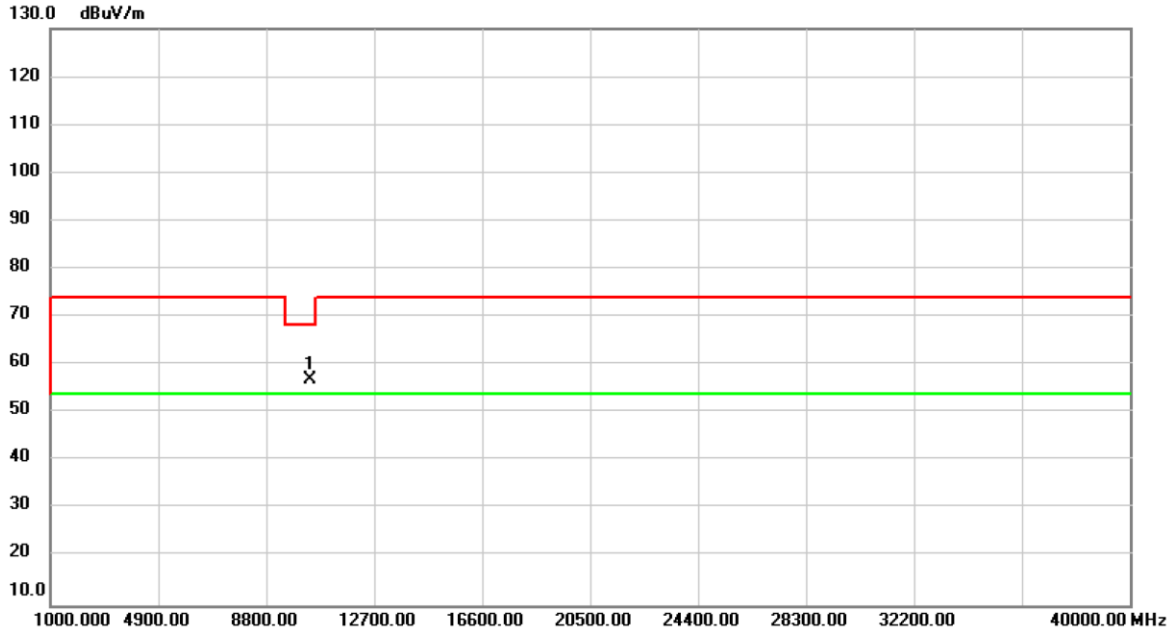


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 54.11 | 2.83 | 56.94 | 68.20 | -11.26 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/11/29 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Vertical |

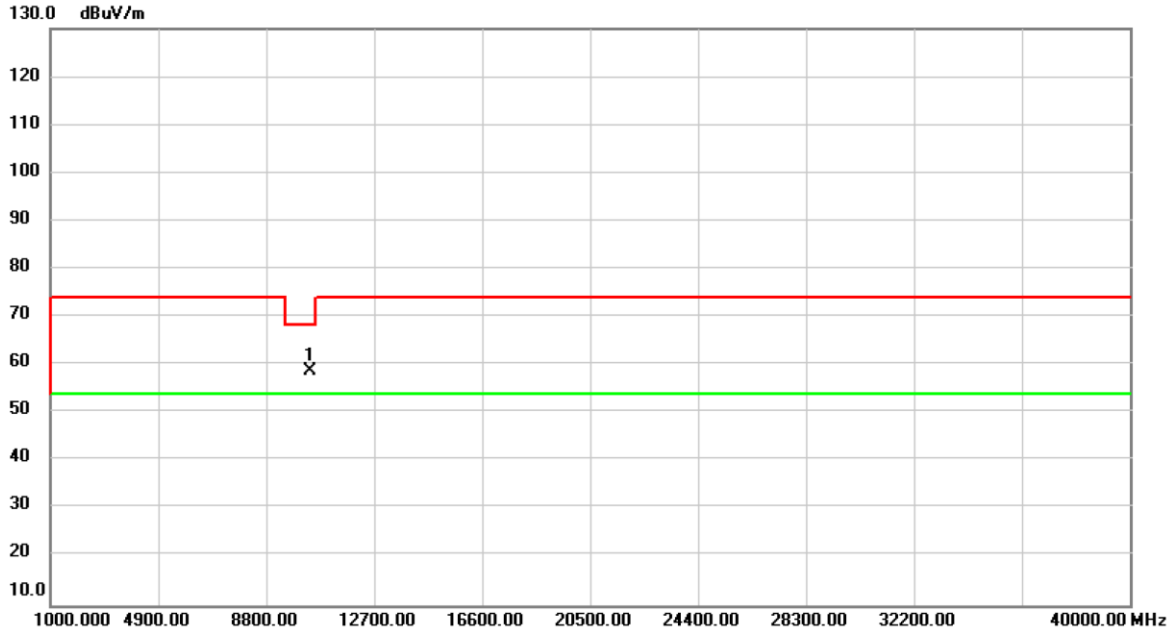


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 55.74 | 2.89 | 58.63 | 68.20 | -9.57 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/11/29 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Horizontal |

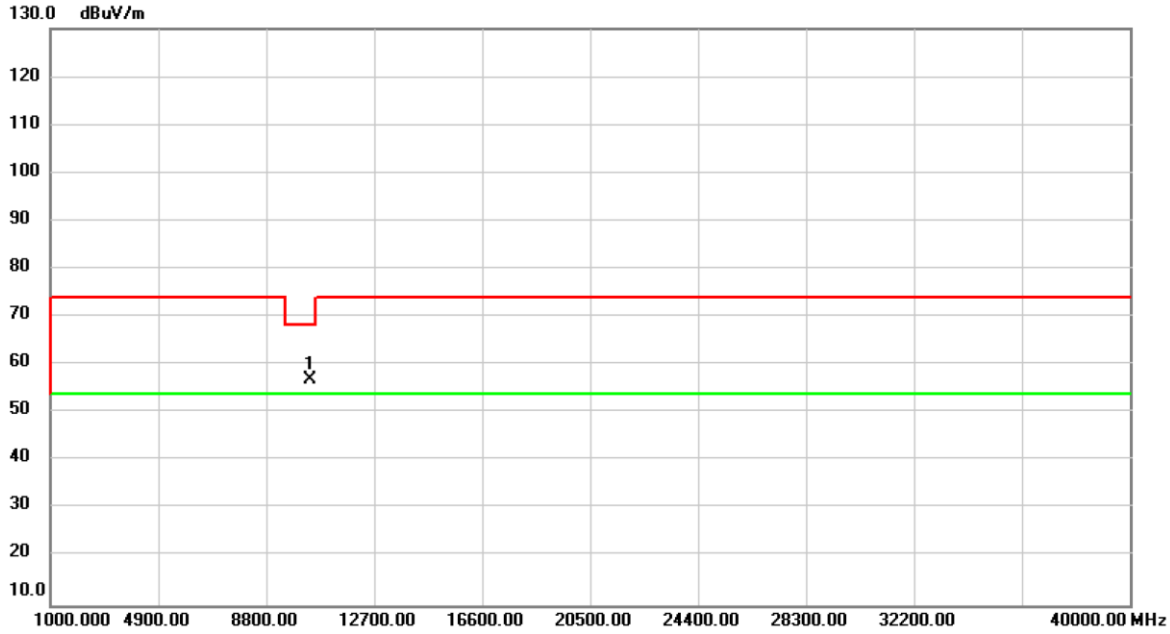


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 54.10 | 2.89 | 56.99 | 68.20 | -11.21 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Vertical |

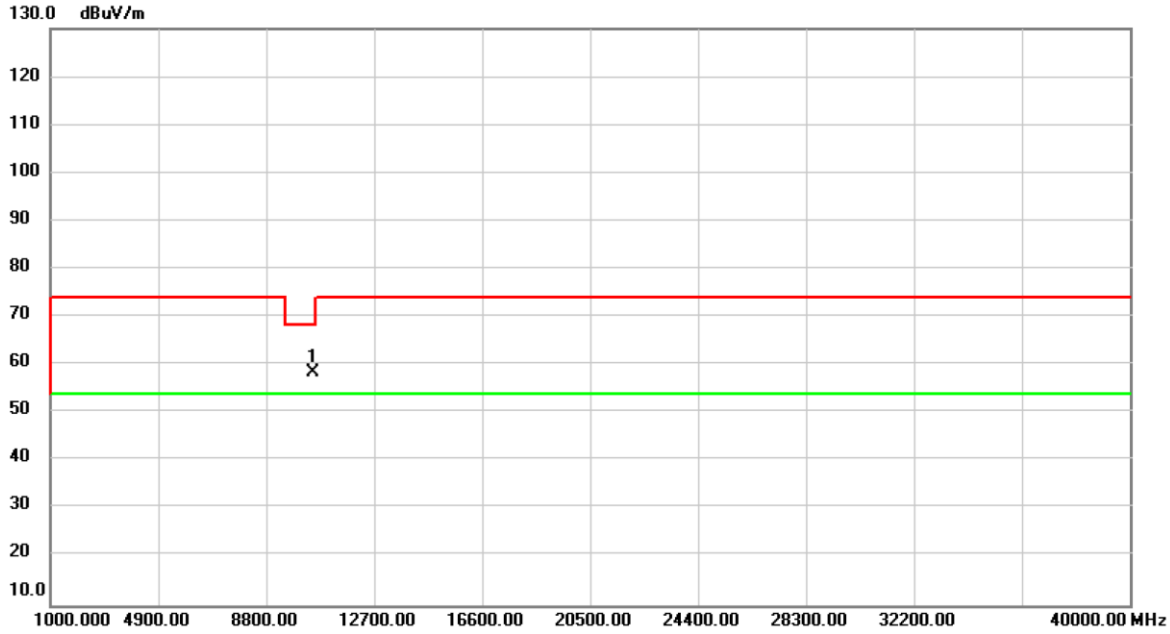


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 55.53 | 3.00 | 58.53 | 68.20 | -9.67 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Horizontal |

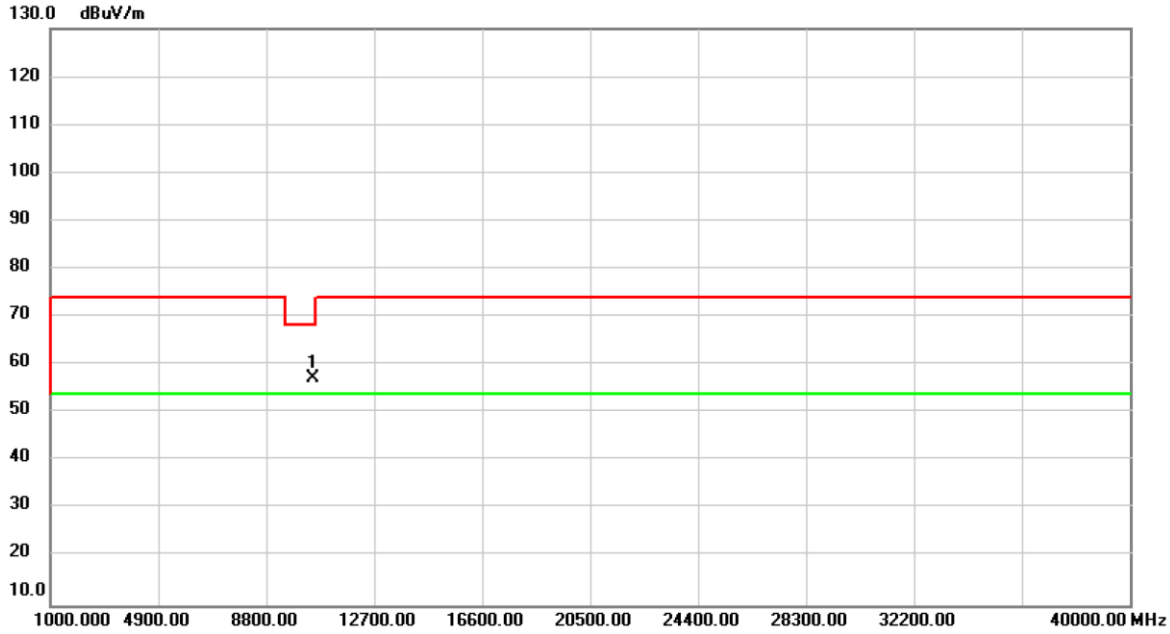


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 54.16 | 3.00 | 57.16 | 68.20 | -11.04 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Vertical |

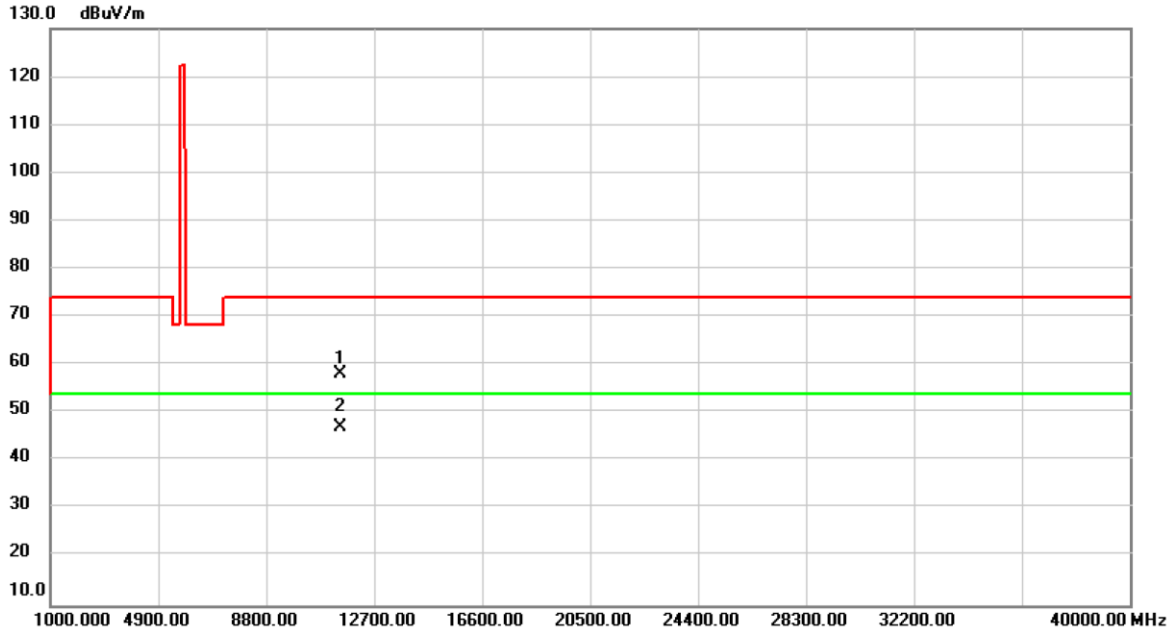


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 54.31 | 3.89 | 58.20 | 74.00 | -15.80 | peak | |
| 2 | * | 11490.00 | 43.22 | 3.89 | 47.11 | 54.00 | -6.89 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Horizontal |

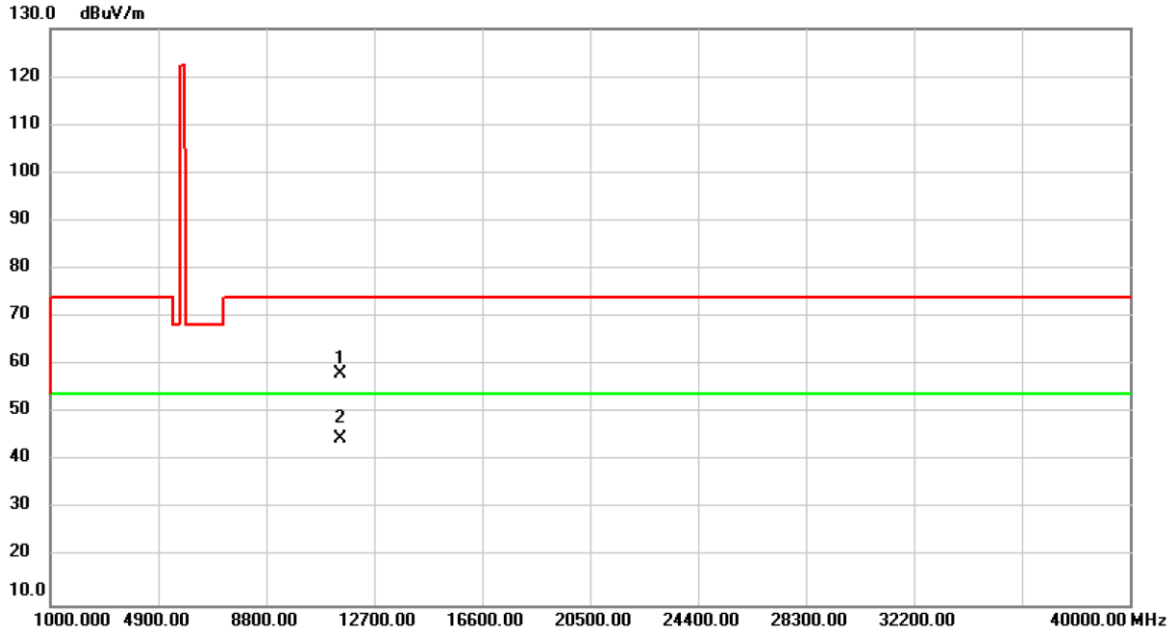


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 54.16 | 3.89 | 58.05 | 74.00 | -15.95 | peak | |
| 2 | * | 11490.00 | 40.91 | 3.89 | 44.80 | 54.00 | -9.20 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Vertical |

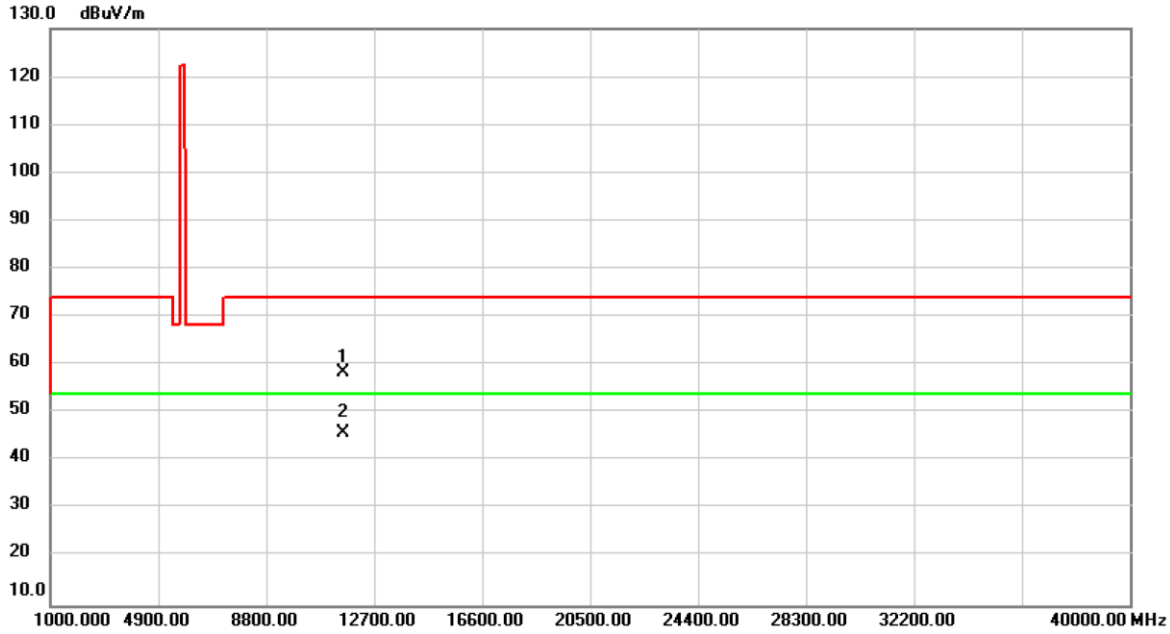


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 54.78 | 3.57 | 58.35 | 74.00 | -15.65 | peak | |
| 2 | * | 11570.00 | 42.40 | 3.57 | 45.97 | 54.00 | -8.03 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Horizontal |

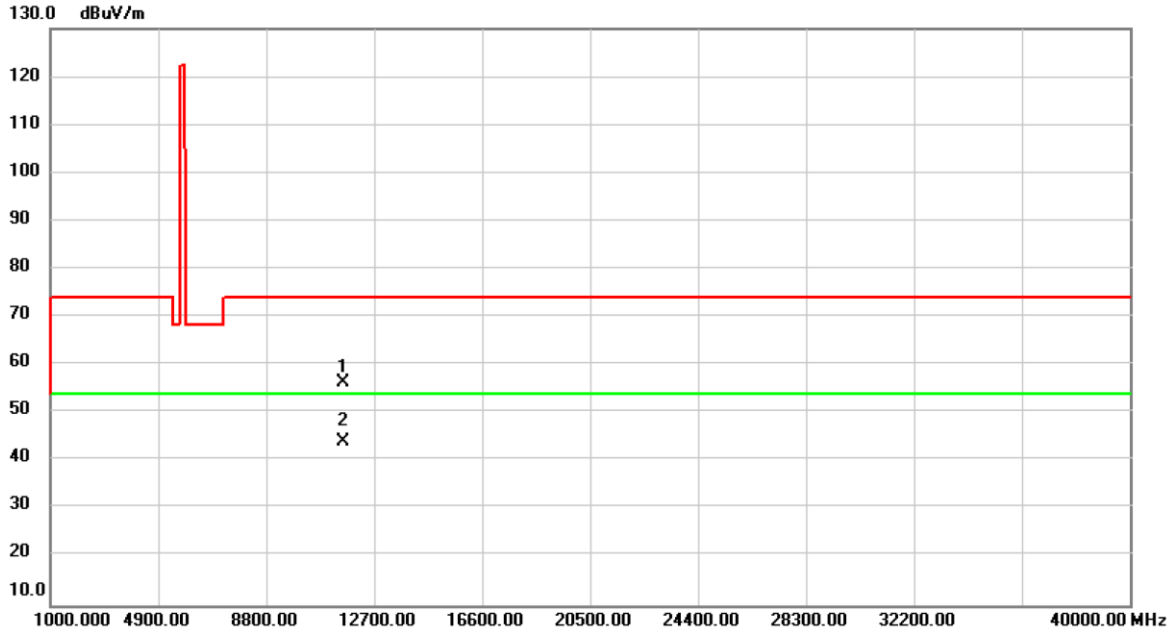


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 52.92 | 3.57 | 56.49 | 74.00 | -17.51 | peak | |
| 2 | * | 11570.00 | 40.38 | 3.57 | 43.95 | 54.00 | -10.05 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Vertical |

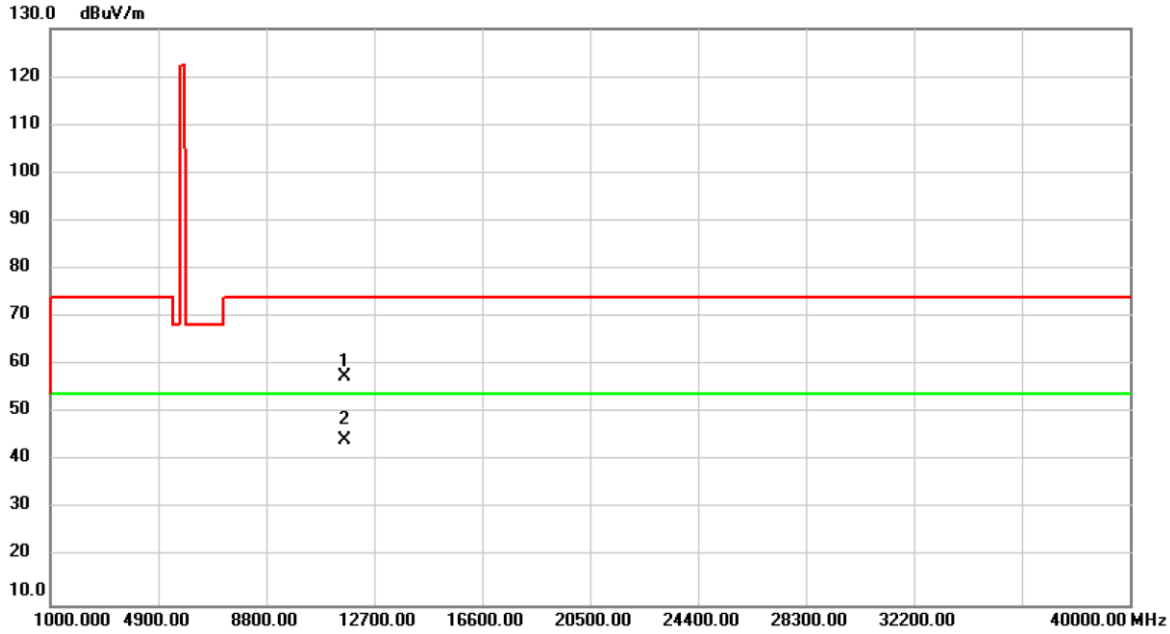


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 54.40 | 3.18 | 57.58 | 74.00 | -16.42 | peak | |
| 2 | * | 11650.00 | 41.24 | 3.18 | 44.42 | 54.00 | -9.58 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11a_External Antenna | Test Date | 2019/12/2 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Horizontal |

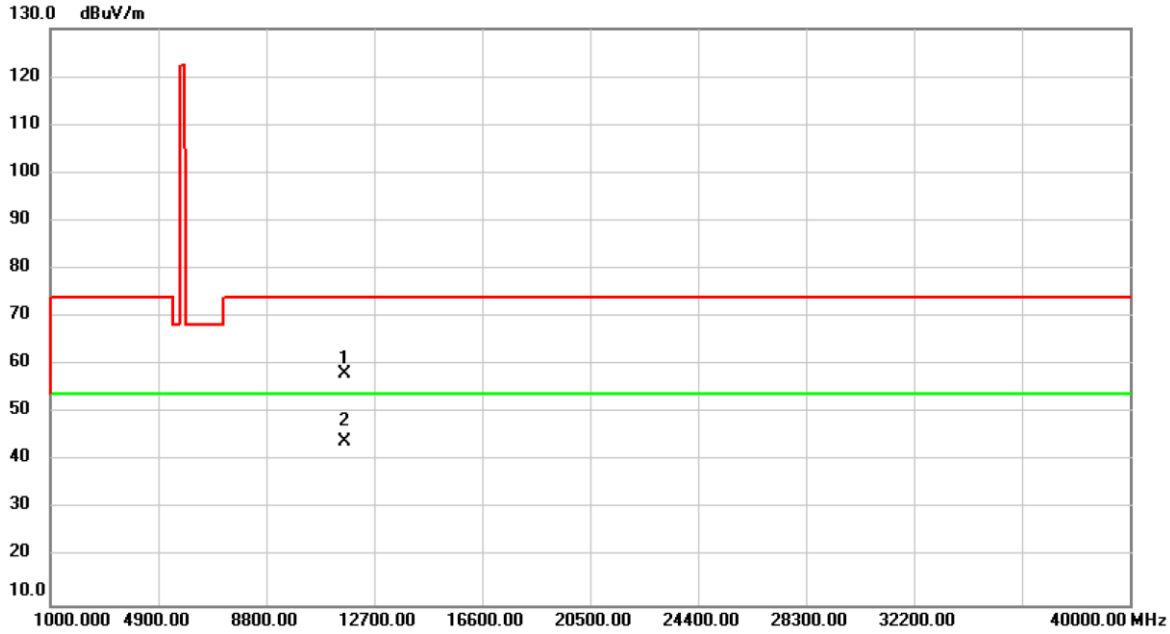


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 54.88 | 3.18 | 58.06 | 74.00 | -15.94 | peak | |
| 2 | * | 11650.00 | 40.85 | 3.18 | 44.03 | 54.00 | -9.97 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Vertical |

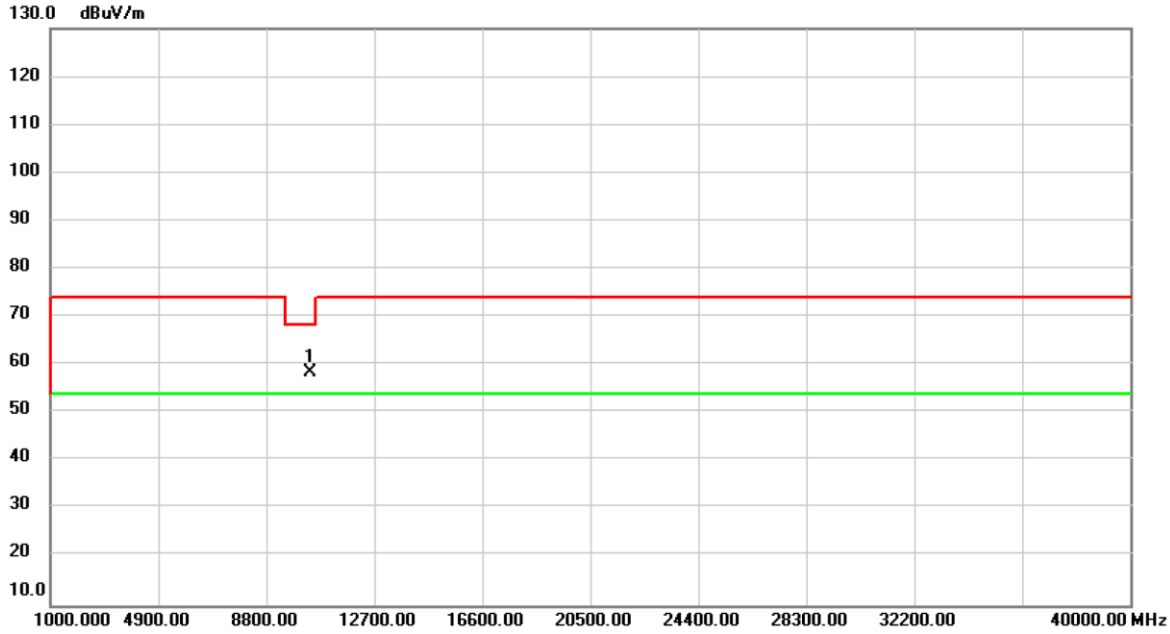


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 55.55 | 2.83 | 58.38 | 68.20 | -9.82 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Horizontal |

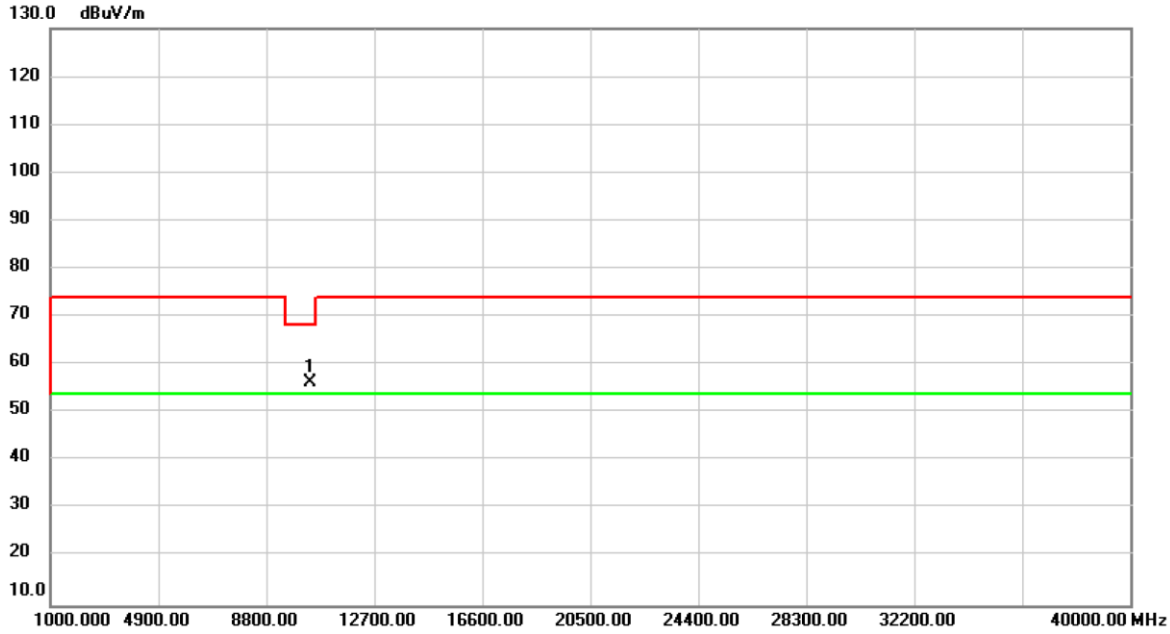


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 53.59 | 2.83 | 56.42 | 68.20 | -11.78 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Vertical |

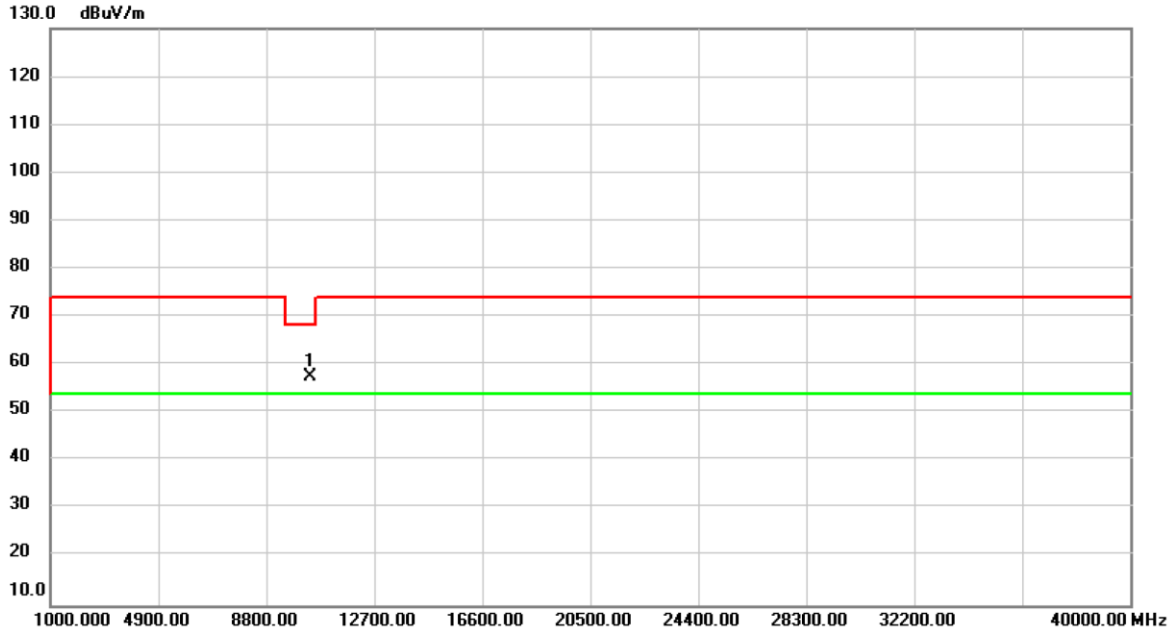


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 54.75 | 2.89 | 57.64 | 68.20 | -10.56 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Horizontal |

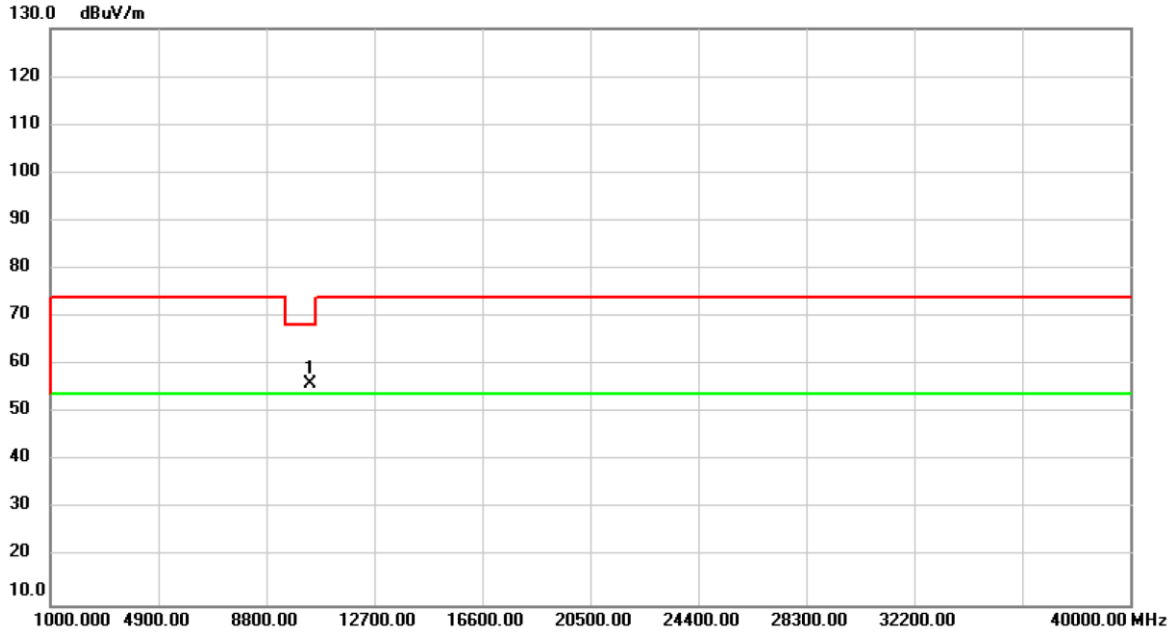


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 53.23 | 2.89 | 56.12 | 68.20 | -12.08 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Vertical |

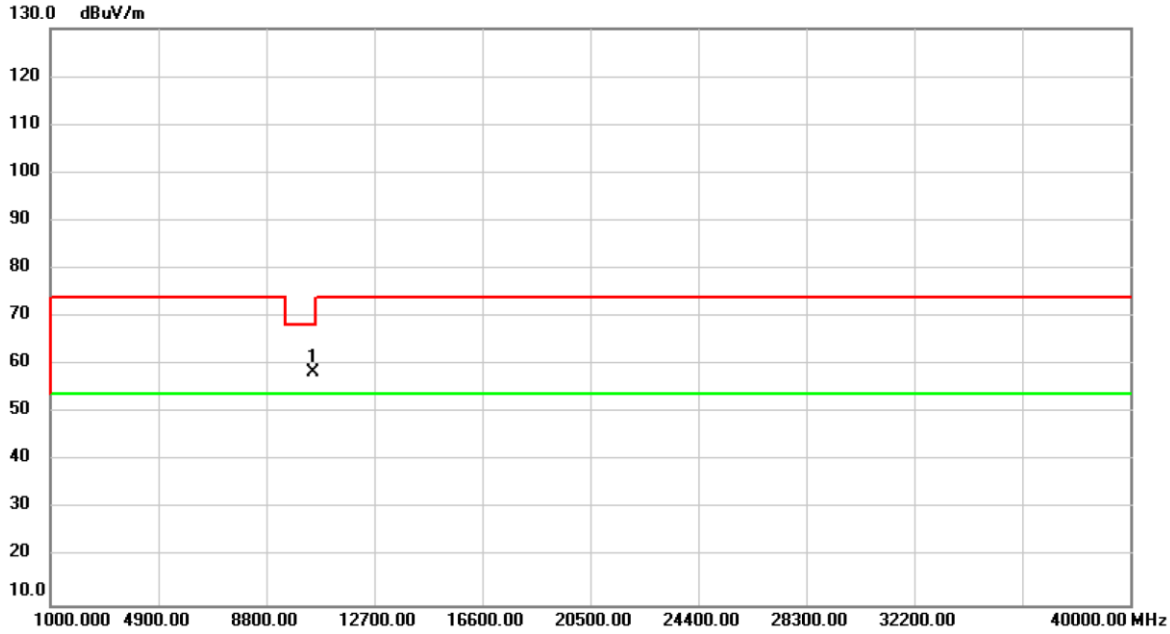


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 55.42 | 3.00 | 58.42 | 68.20 | -9.78 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Horizontal |

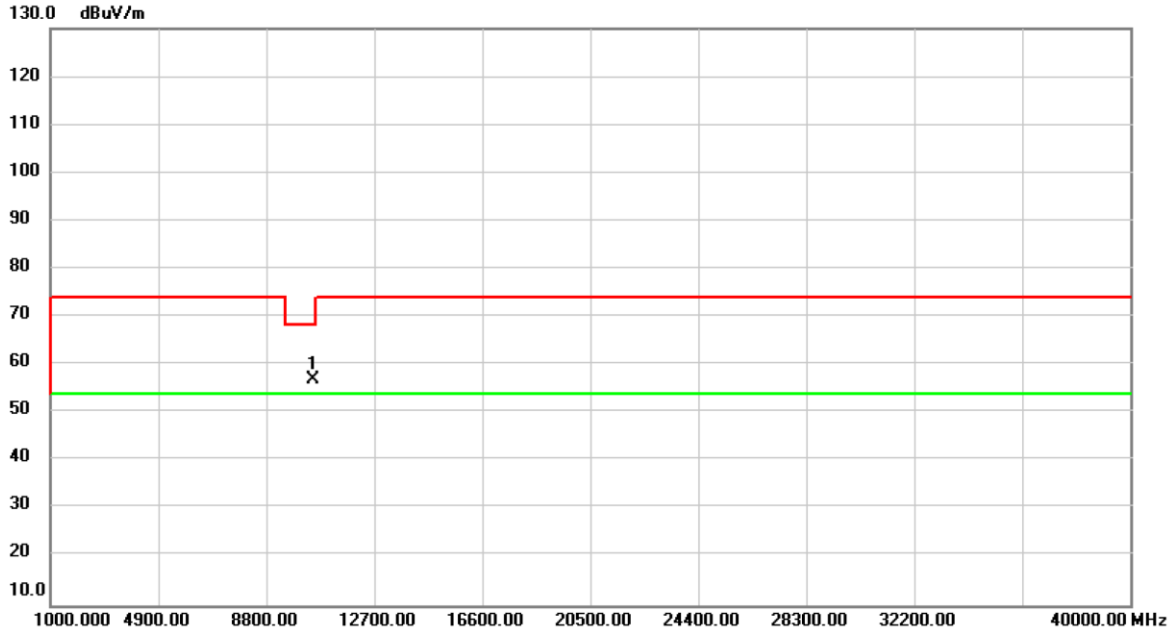


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 53.96 | 3.00 | 56.96 | 68.20 | -11.24 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Vertical |

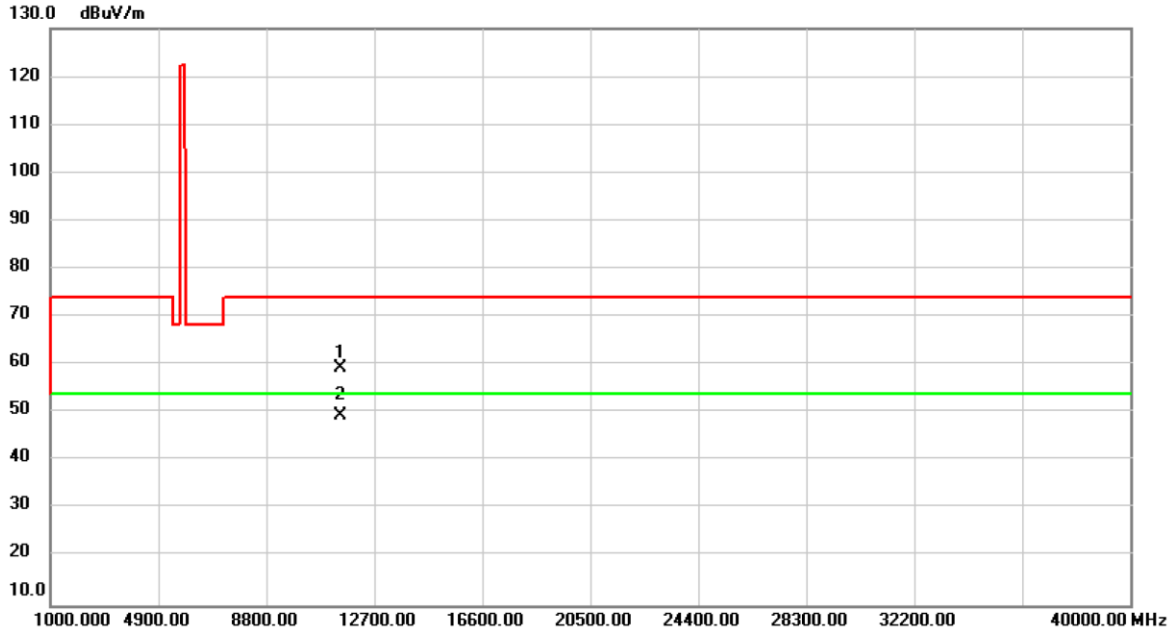


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 55.34 | 3.89 | 59.23 | 74.00 | -14.77 | peak | |
| 2 | * | 11490.00 | 45.49 | 3.89 | 49.38 | 54.00 | -4.62 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Horizontal |

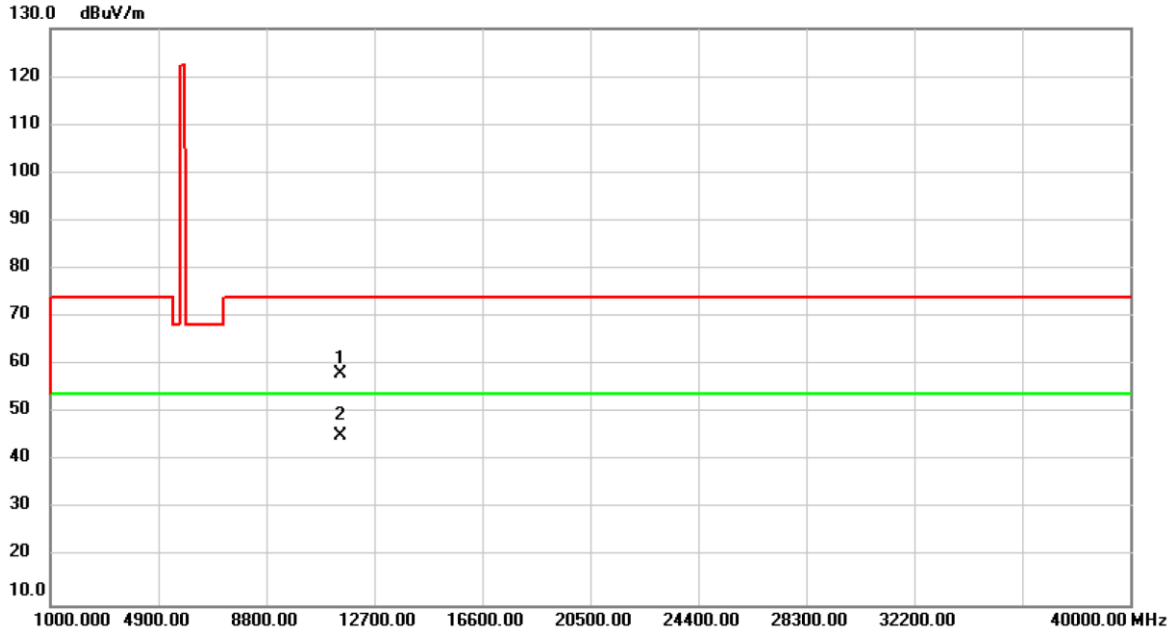


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 54.27 | 3.89 | 58.16 | 74.00 | -15.84 | peak | |
| 2 | * | 11490.00 | 41.31 | 3.89 | 45.20 | 54.00 | -8.80 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Vertical |

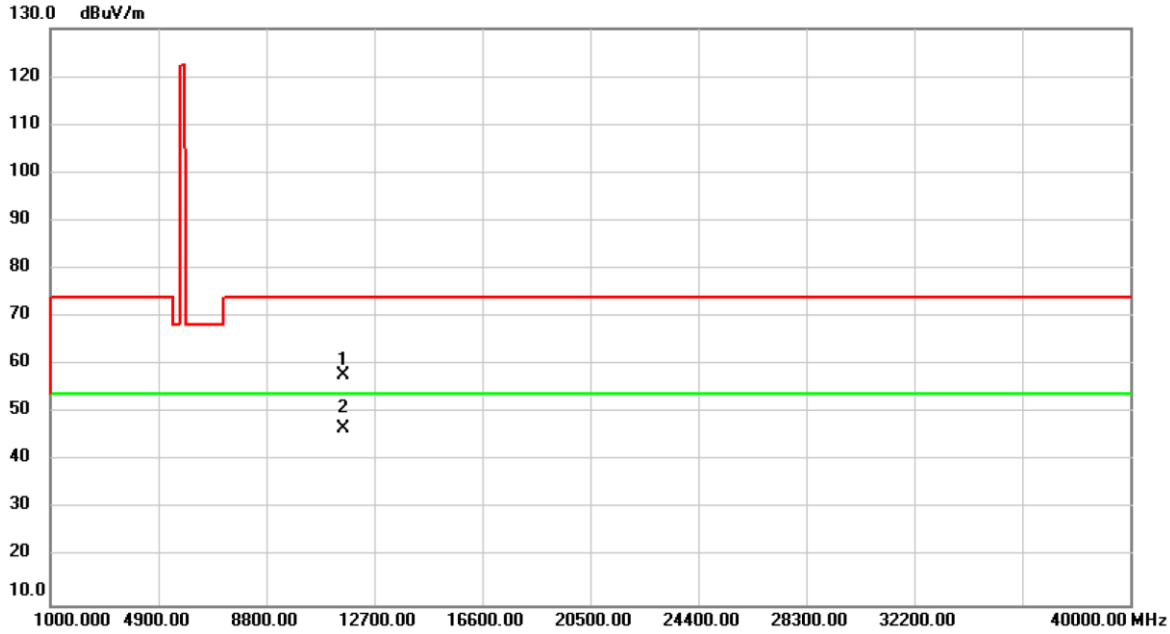


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 54.37 | 3.57 | 57.94 | 74.00 | -16.06 | peak | |
| 2 | * | 11570.00 | 43.09 | 3.57 | 46.66 | 54.00 | -7.34 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Horizontal |

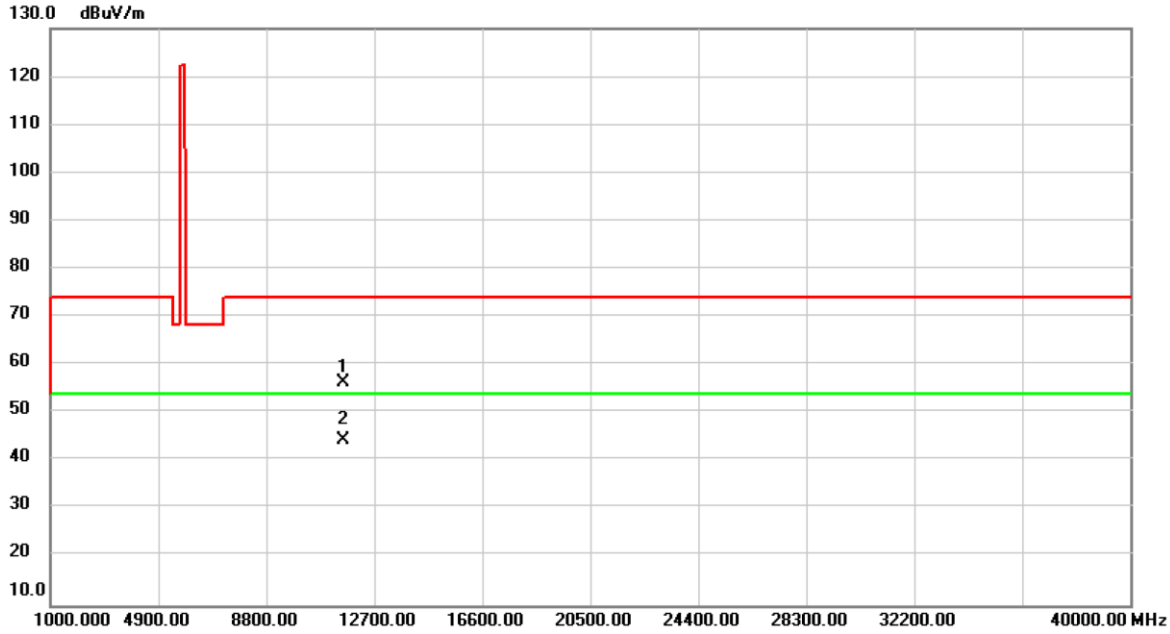


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 52.93 | 3.57 | 56.50 | 74.00 | -17.50 | peak | |
| 2 | * | 11570.00 | 40.90 | 3.57 | 44.47 | 54.00 | -9.53 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Vertical |

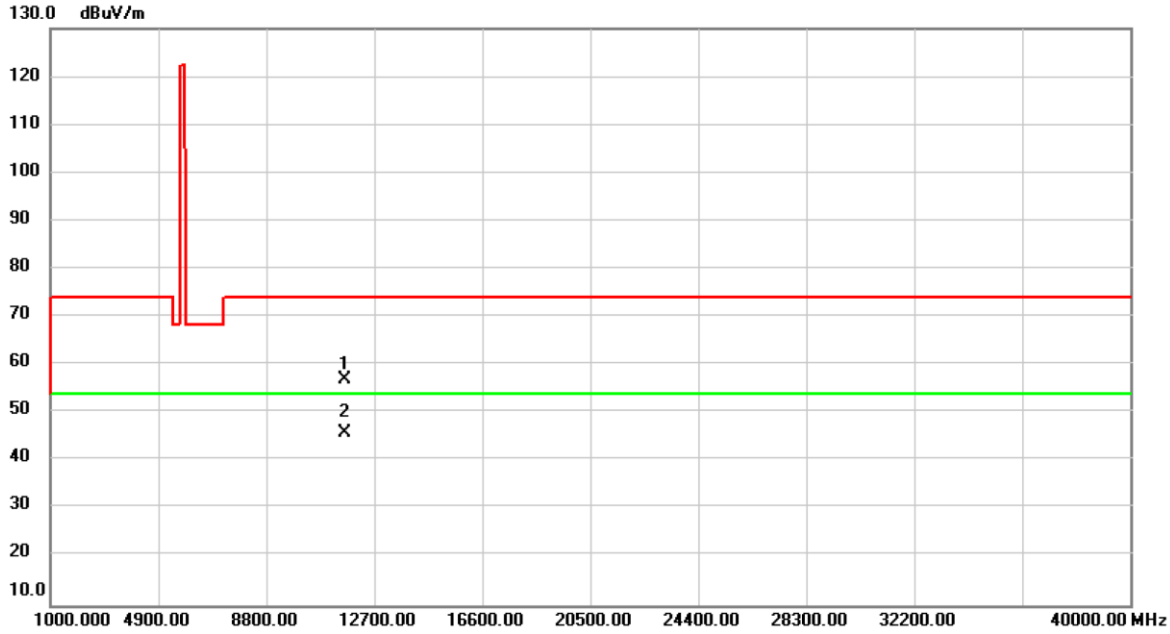


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 53.91 | 3.18 | 57.09 | 74.00 | -16.91 | peak | |
| 2 | * | 11650.00 | 42.78 | 3.18 | 45.96 | 54.00 | -8.04 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT20)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Horizontal |

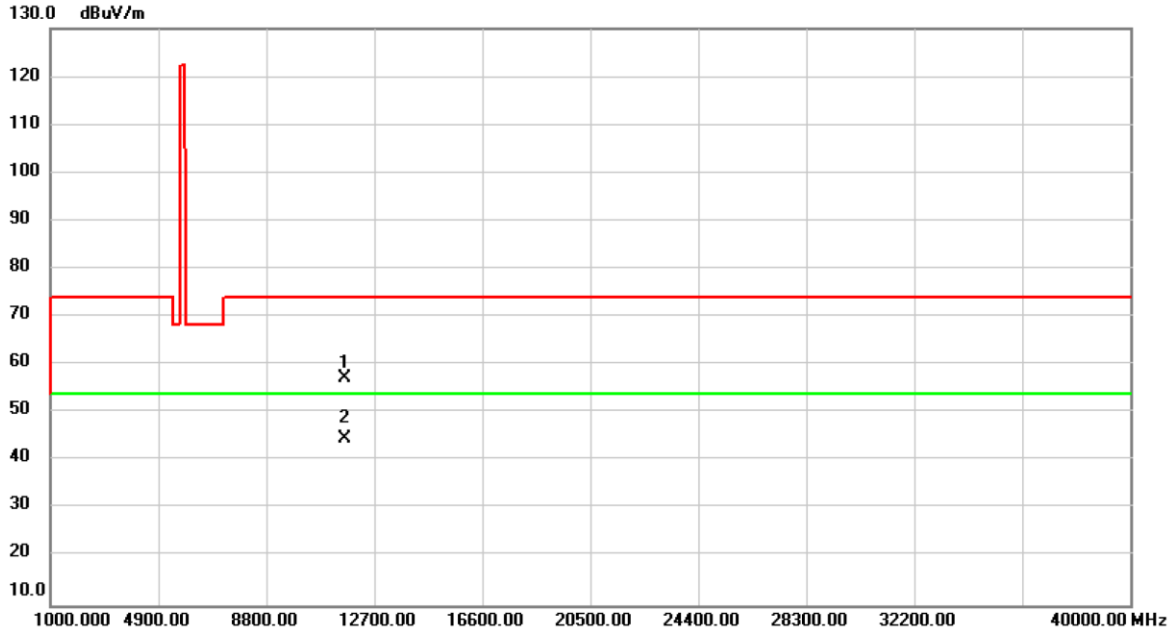


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 53.95 | 3.18 | 57.13 | 74.00 | -16.87 | peak | |
| 2 | * | 11650.00 | 41.58 | 3.18 | 44.76 | 54.00 | -9.24 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH38: 5190 MHz | Polarization | Vertical |

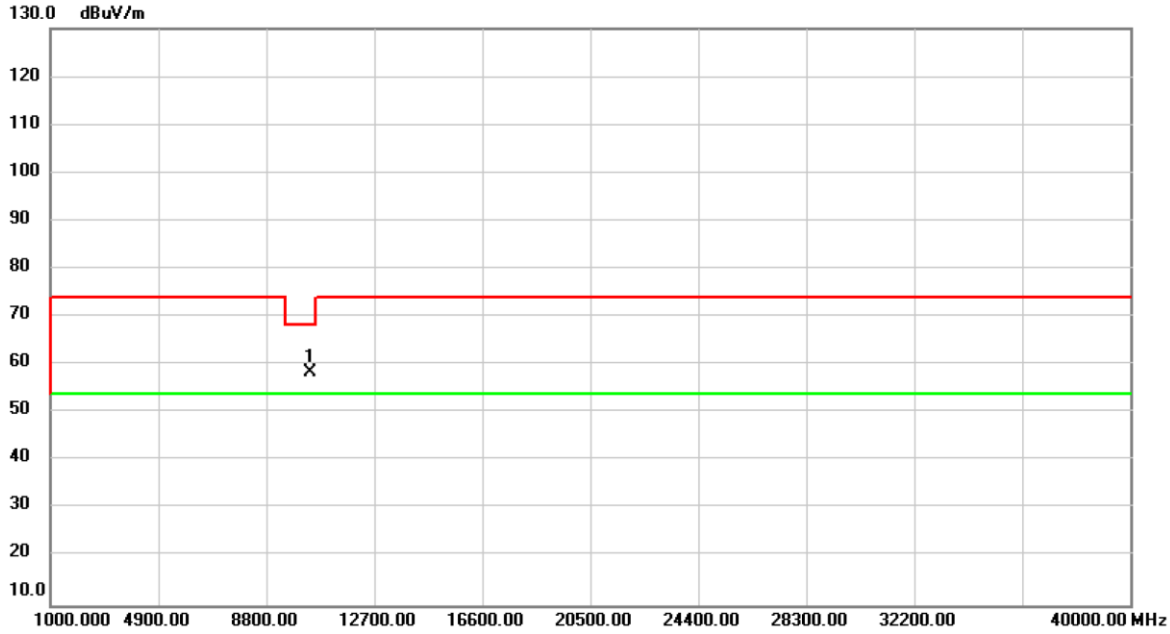


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10380.00 | 55.56 | 2.85 | 58.41 | 68.20 | -9.79 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH38: 5190 MHz | Polarization | Horizontal |

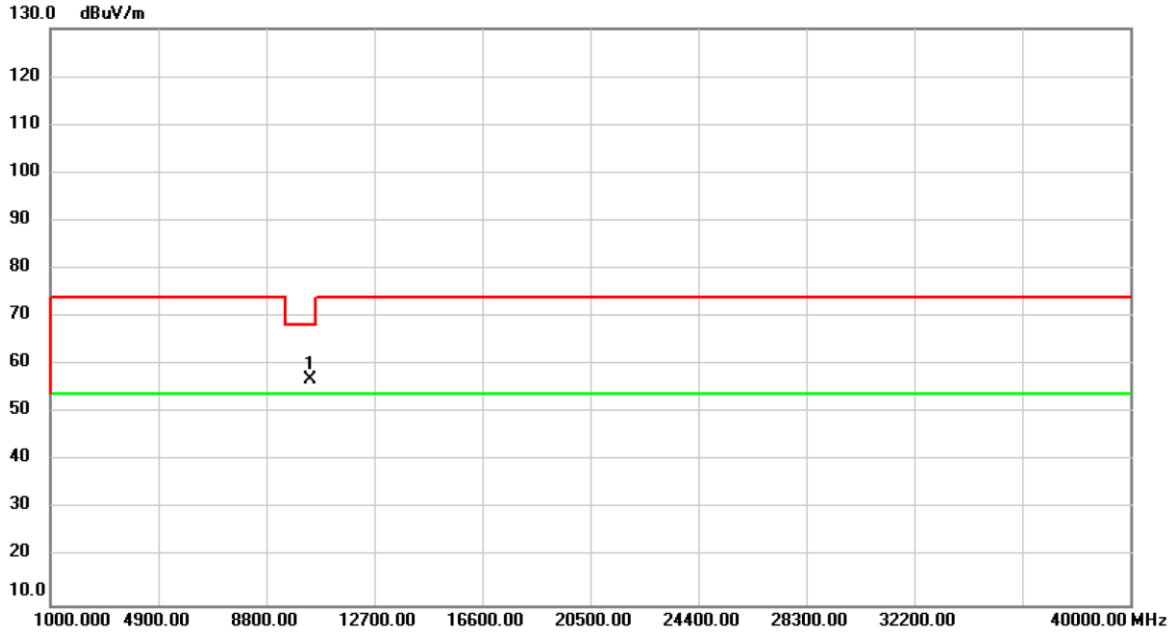


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10380.00 | 54.15 | 2.85 | 57.00 | 68.20 | -11.20 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH46: 5230 MHz | Polarization | Vertical |

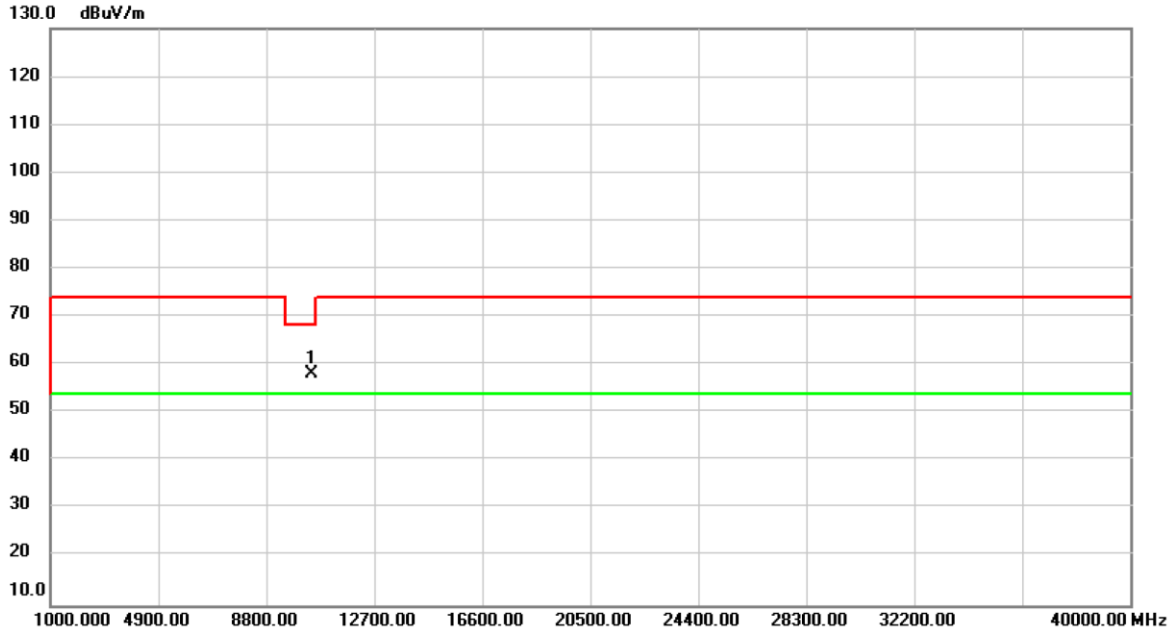


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10460.00 | 55.21 | 2.98 | 58.19 | 68.20 | -10.01 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH46: 5230 MHz | Polarization | Horizontal |

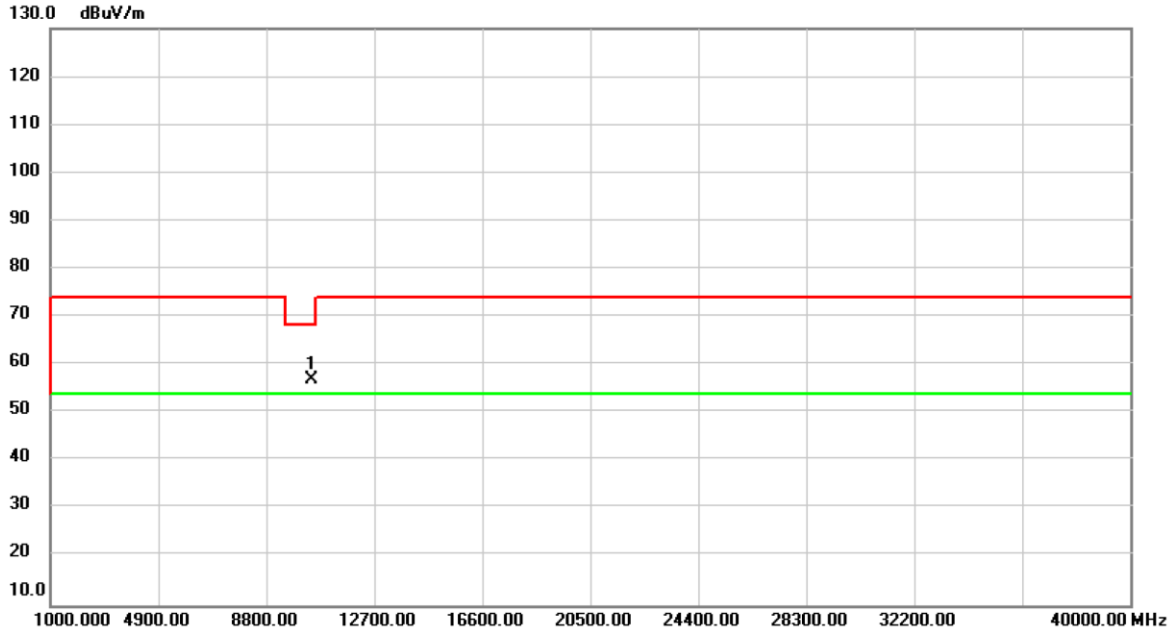


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10460.00 | 53.86 | 2.98 | 56.84 | 68.20 | -11.36 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH151: 5755 MHz | Polarization | Vertical |

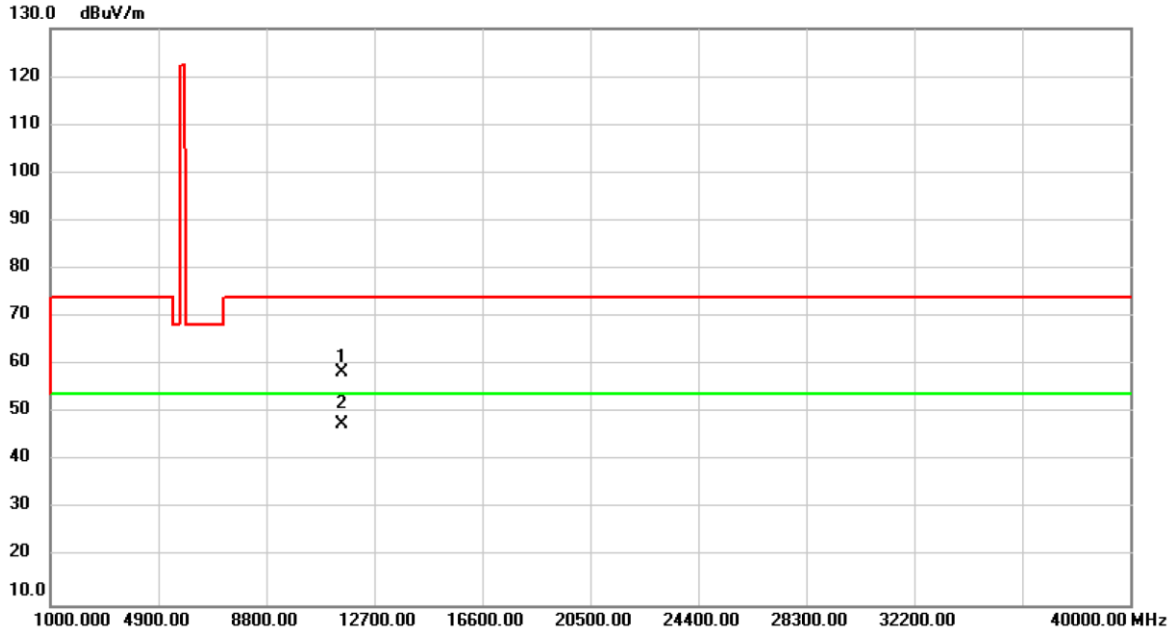


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11510.00 | 54.52 | 3.86 | 58.38 | 74.00 | -15.62 | peak | |
| 2 | * | 11510.00 | 43.77 | 3.86 | 47.63 | 54.00 | -6.37 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH151: 5755 MHz | Polarization | Horizontal |

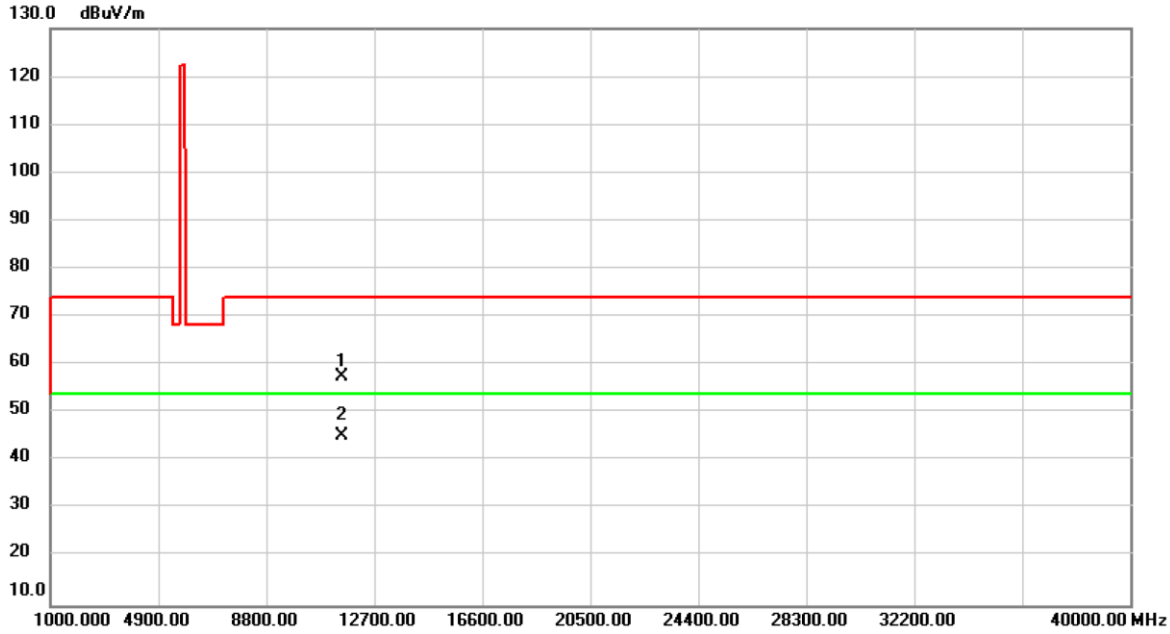


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11510.00 | 53.79 | 3.86 | 57.65 | 74.00 | -16.35 | peak | |
| 2 | * | 11510.00 | 41.25 | 3.86 | 45.11 | 54.00 | -8.89 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH159: 5795 MHz | Polarization | Vertical |

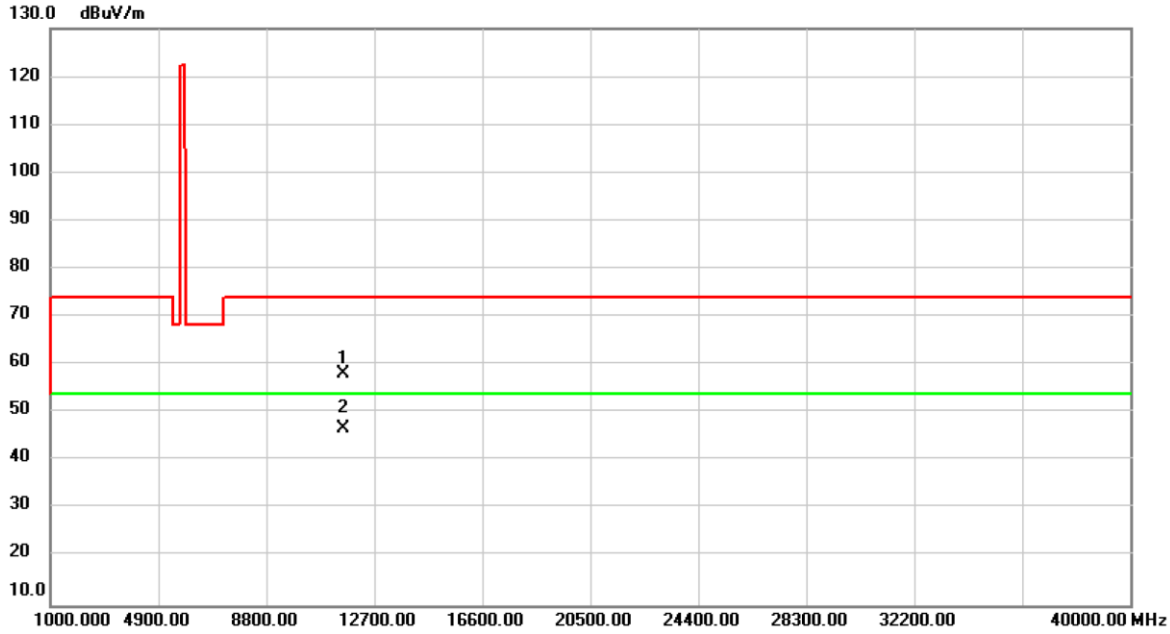


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11590.00 | 54.72 | 3.47 | 58.19 | 74.00 | -15.81 | peak | |
| 2 | * | 11590.00 | 43.33 | 3.47 | 46.80 | 54.00 | -7.20 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11n (HT40)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH159: 5795 MHz | Polarization | Horizontal |

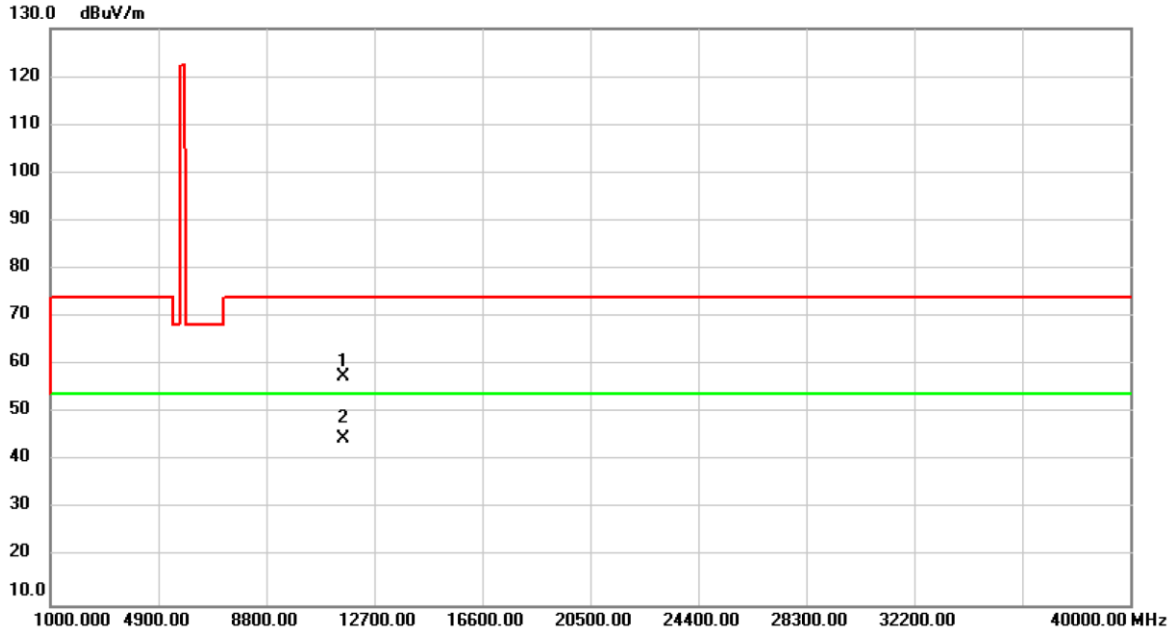


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11590.00 | 54.15 | 3.47 | 57.62 | 74.00 | -16.38 | peak | |
| 2 | * | 11590.00 | 41.32 | 3.47 | 44.79 | 54.00 | -9.21 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz | Polarization | Vertical |

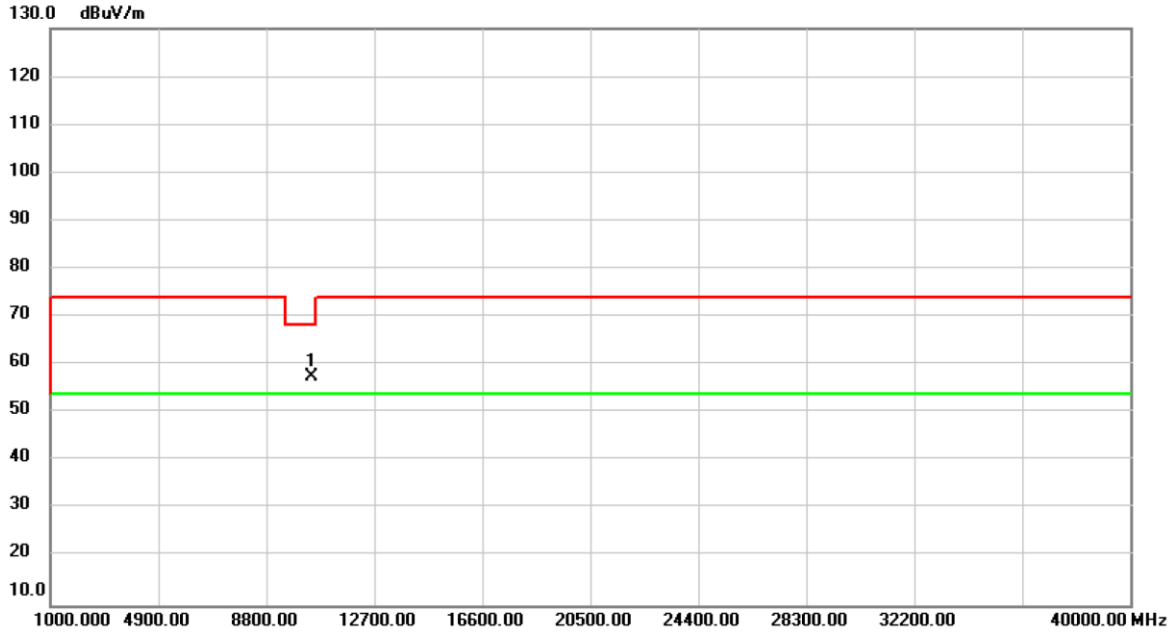


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10420.00 | 54.58 | 2.91 | 57.49 | 68.20 | -10.71 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz | Polarization | Horizontal |

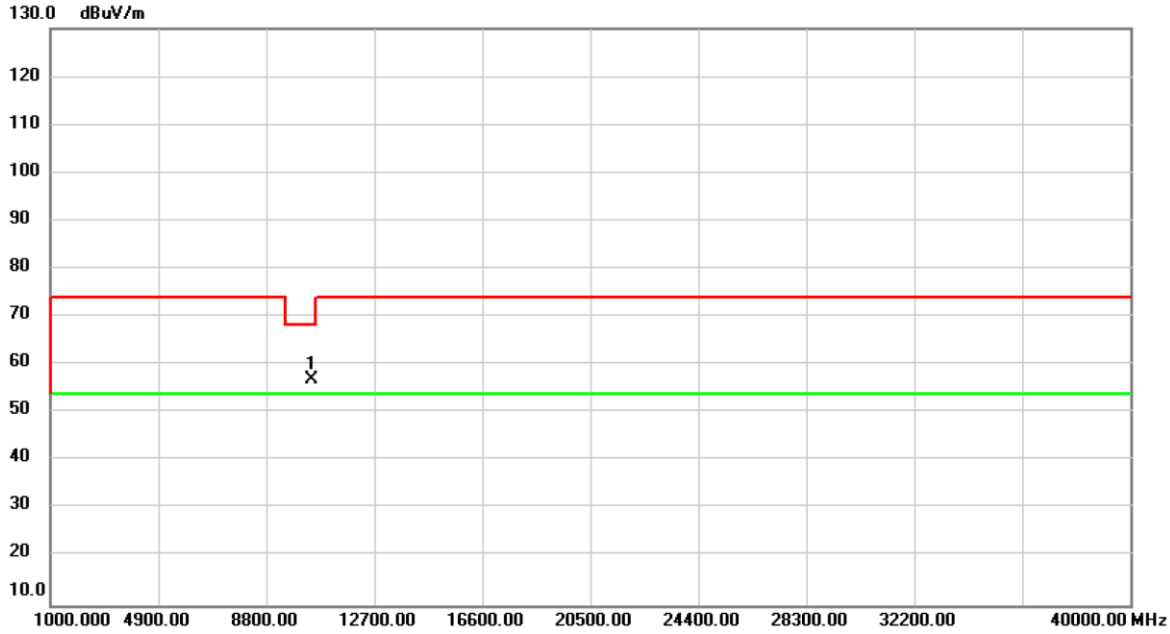


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10420.00 | 54.10 | 2.91 | 57.01 | 68.20 | -11.19 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz | Polarization | Vertical |

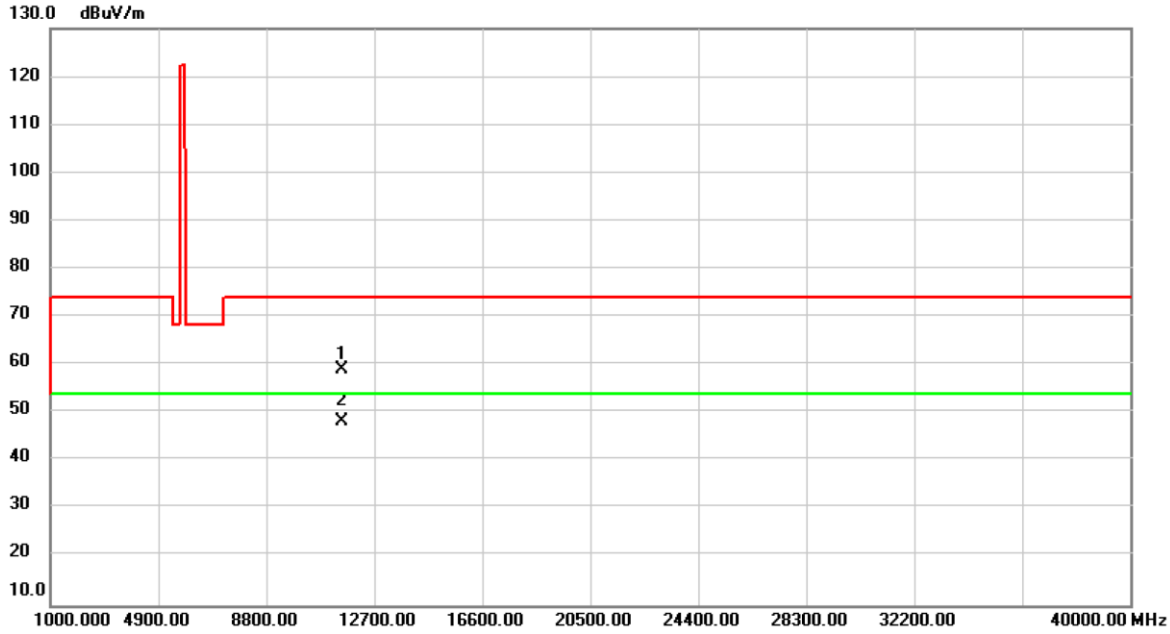


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11550.00 | 55.36 | 3.67 | 59.03 | 74.00 | -14.97 | peak | |
| 2 | * | 11550.00 | 44.56 | 3.67 | 48.23 | 54.00 | -5.77 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80)_External Antenna | Test Date | 2019/11/28 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz | Polarization | Horizontal |

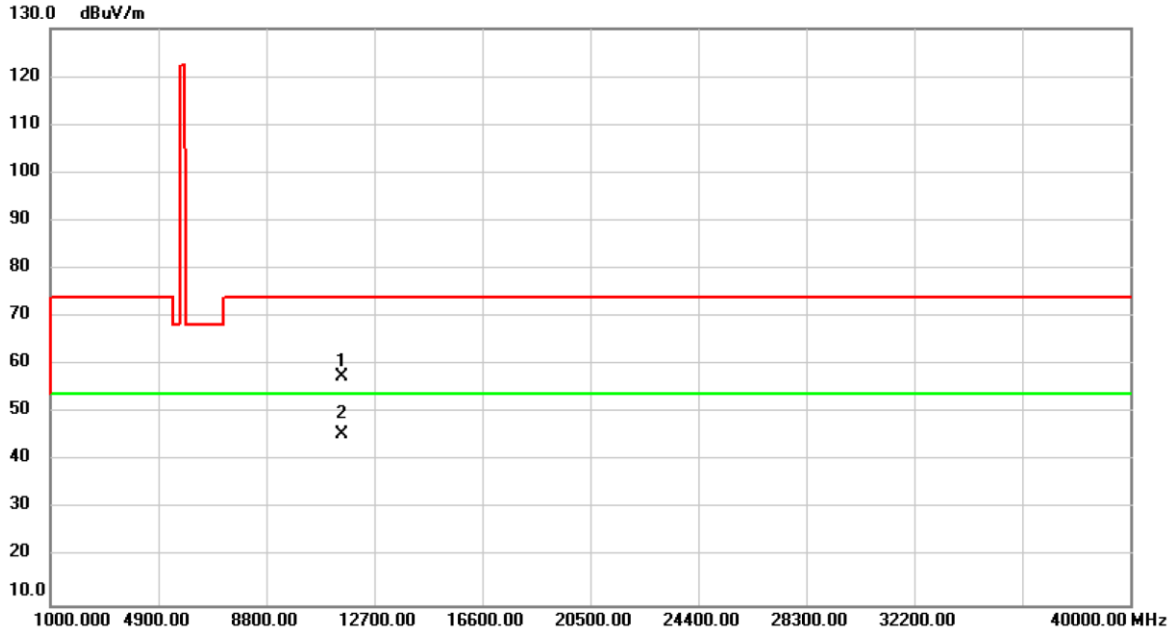


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11550.00 | 53.83 | 3.67 | 57.50 | 74.00 | -16.50 | peak | |
| 2 | * | 11550.00 | 41.85 | 3.67 | 45.52 | 54.00 | -8.48 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Vertical |

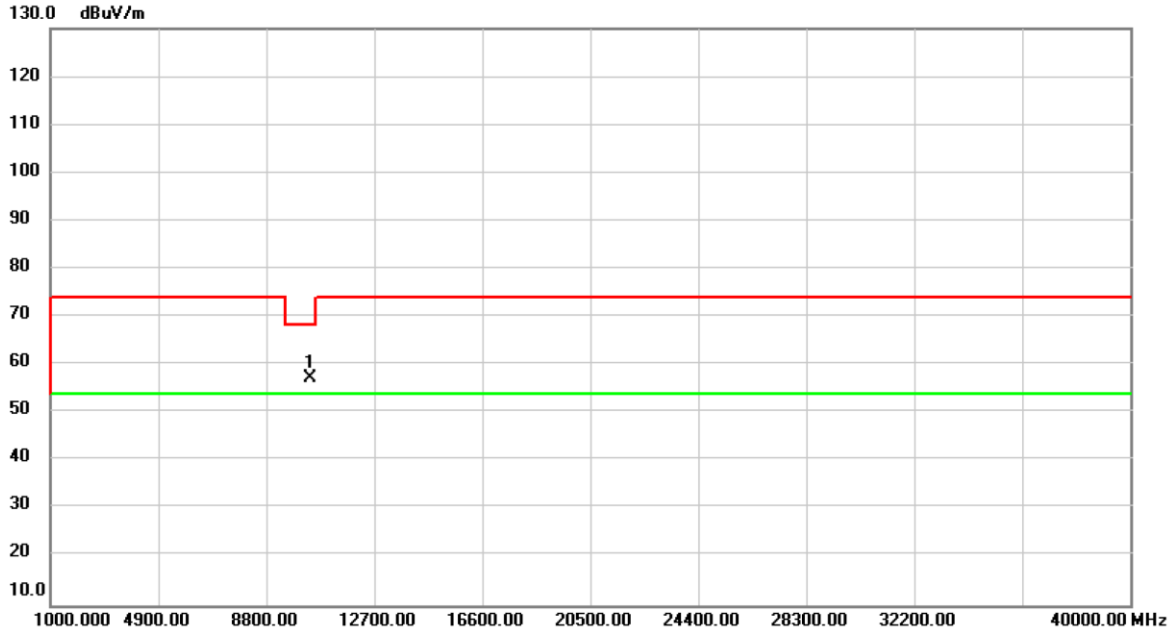


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 54.49 | 2.83 | 57.32 | 68.20 | -10.88 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH36: 5180 MHz | Polarization | Horizontal |

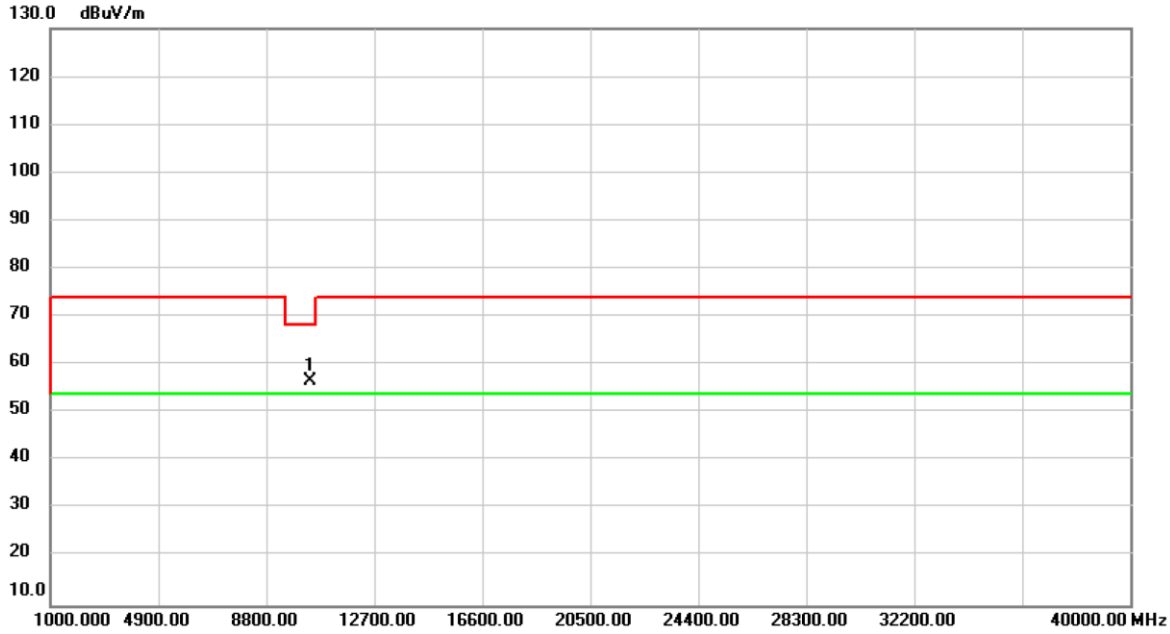


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10360.00 | 53.91 | 2.83 | 56.74 | 68.20 | -11.46 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Vertical |

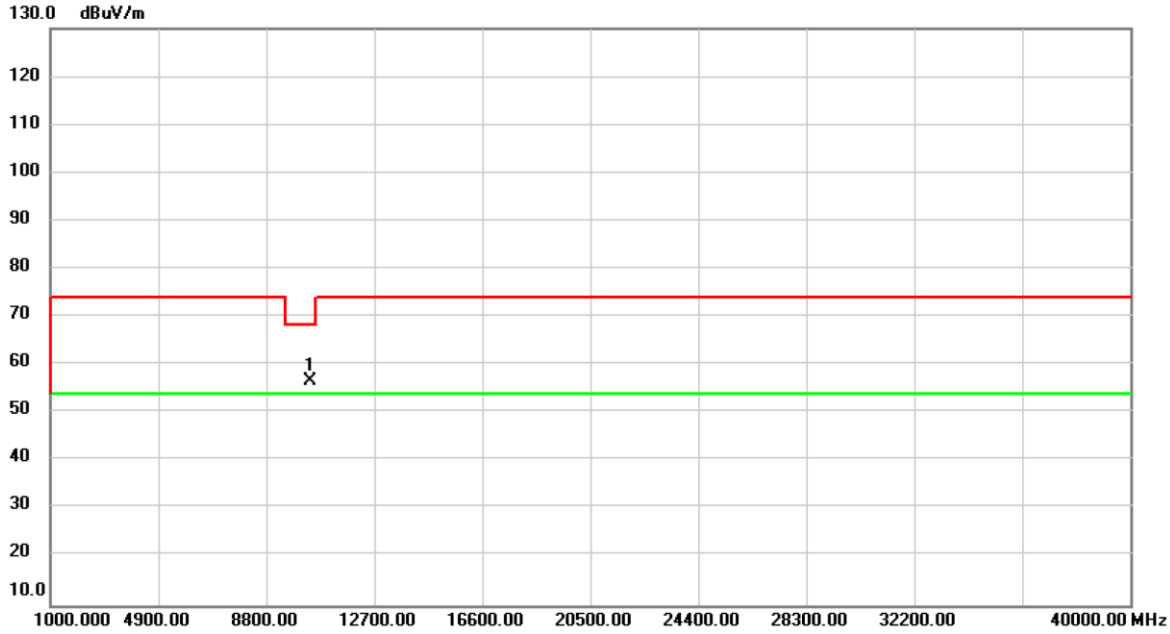


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 53.71 | 2.89 | 56.60 | 68.20 | -11.60 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH40: 5200 MHz | Polarization | Horizontal |

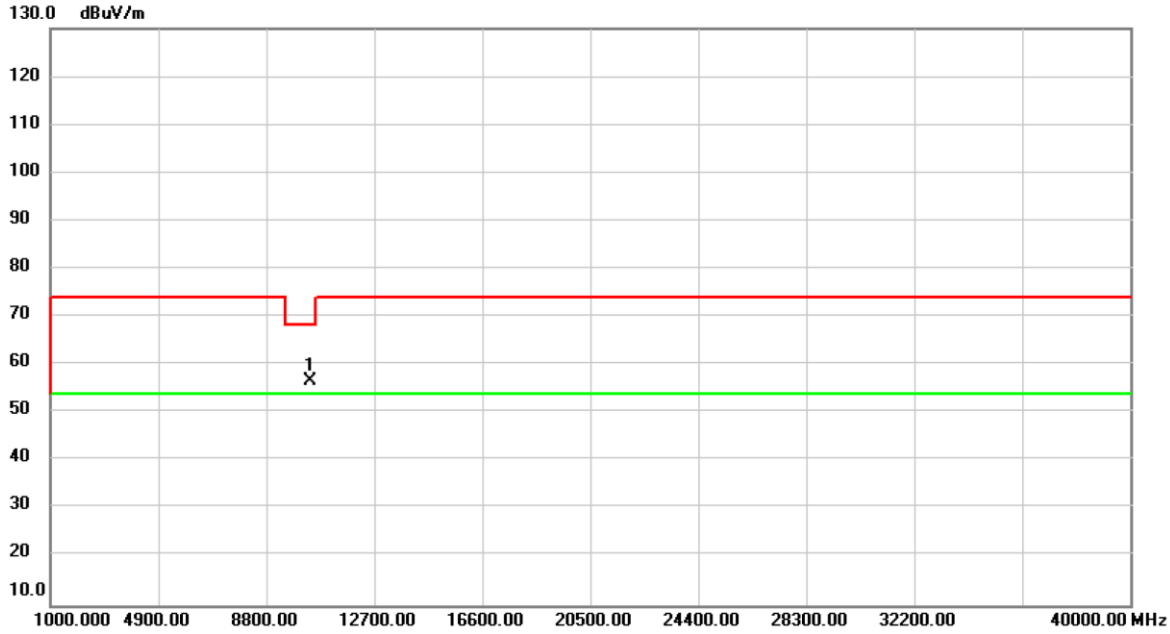


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10400.00 | 53.79 | 2.89 | 56.68 | 68.20 | -11.52 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Vertical |

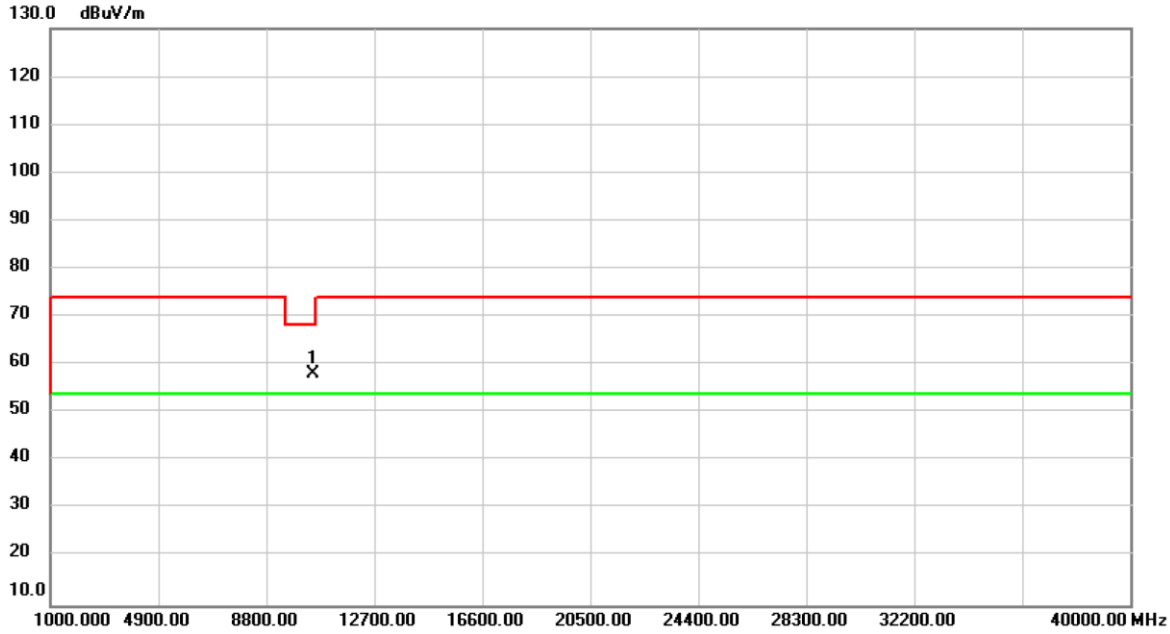


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 55.27 | 3.00 | 58.27 | 68.20 | -9.93 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH48: 5240 MHz | Polarization | Horizontal |

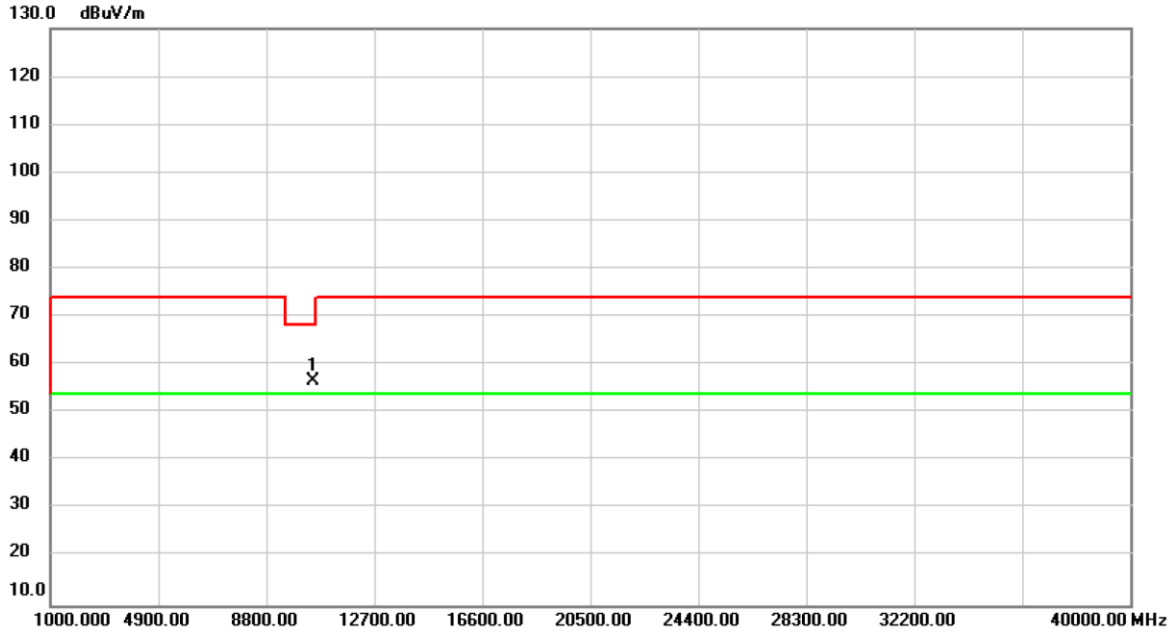


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10480.00 | 53.77 | 3.00 | 56.77 | 68.20 | -11.43 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Vertical |

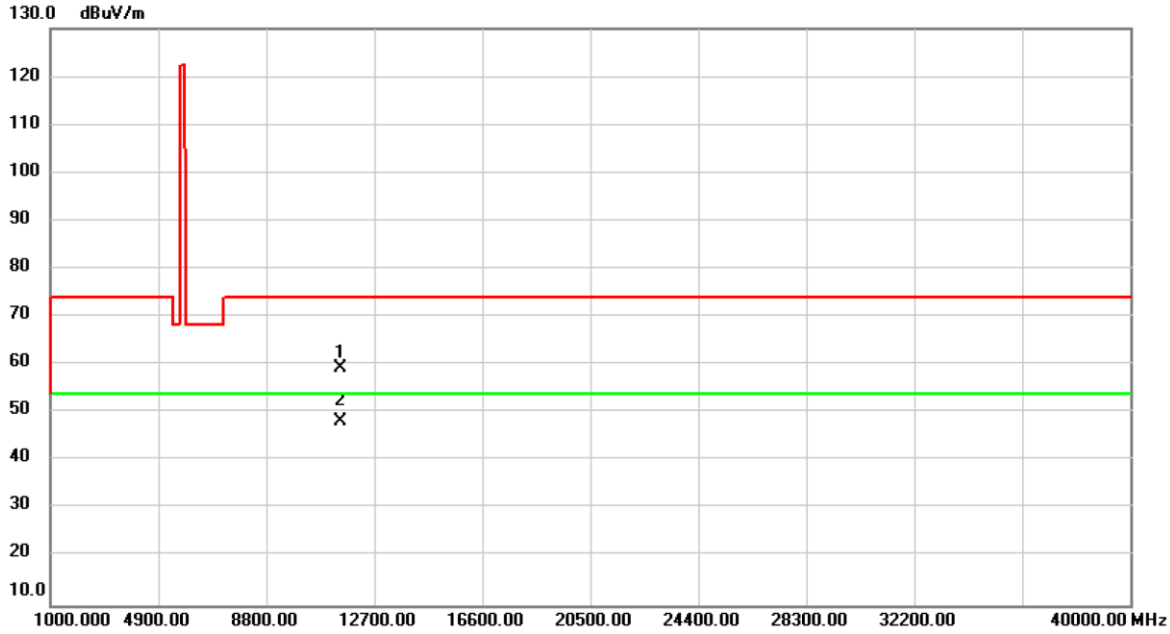


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 55.40 | 3.89 | 59.29 | 74.00 | -14.71 | peak | |
| 2 | * | 11490.00 | 44.40 | 3.89 | 48.29 | 54.00 | -5.71 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH149: 5745 MHz | Polarization | Horizontal |

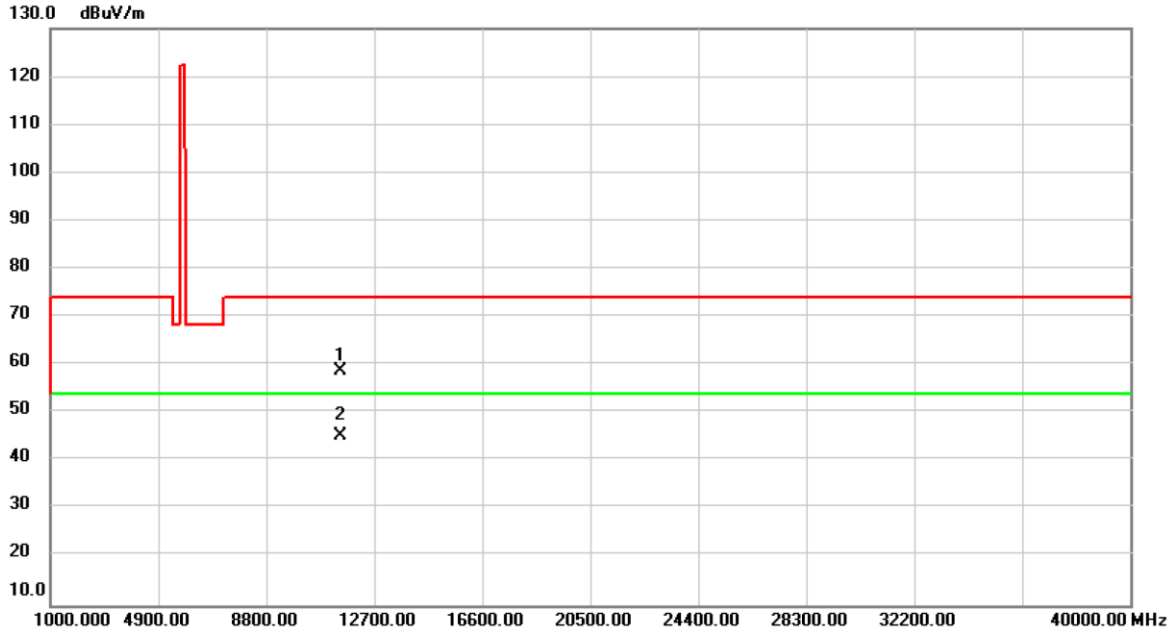


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11490.00 | 54.73 | 3.89 | 58.62 | 74.00 | -15.38 | peak | |
| 2 | * | 11490.00 | 41.39 | 3.89 | 45.28 | 54.00 | -8.72 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Vertical |

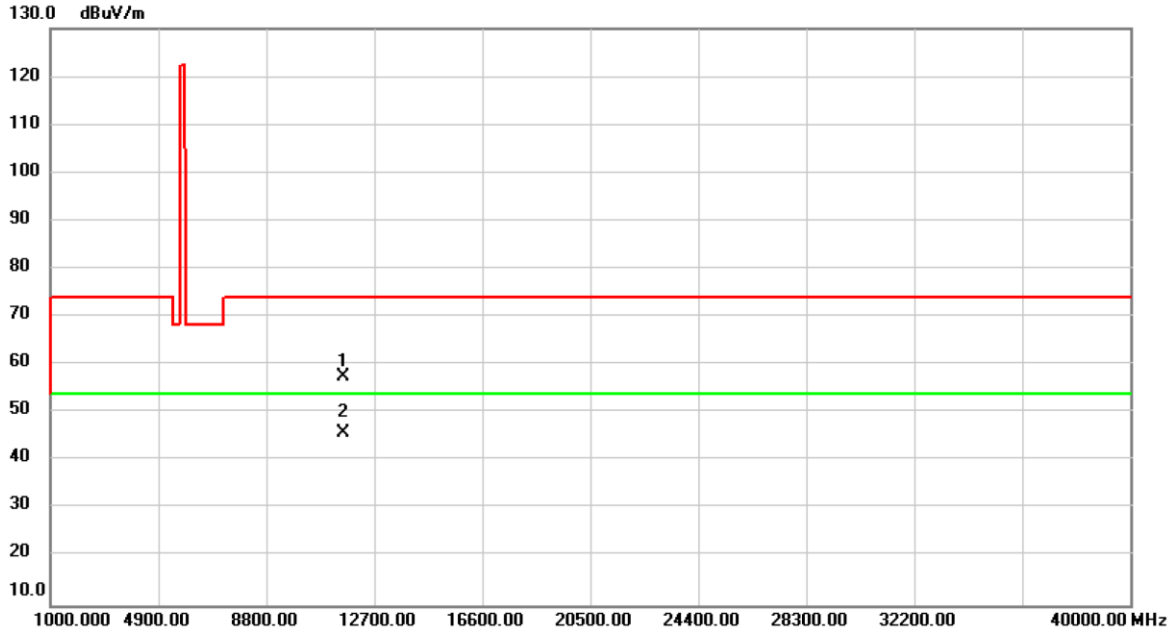


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 54.02 | 3.57 | 57.59 | 74.00 | -16.41 | peak | |
| 2 | * | 11570.00 | 42.22 | 3.57 | 45.79 | 54.00 | -8.21 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH157: 5785 MHz | Polarization | Horizontal |

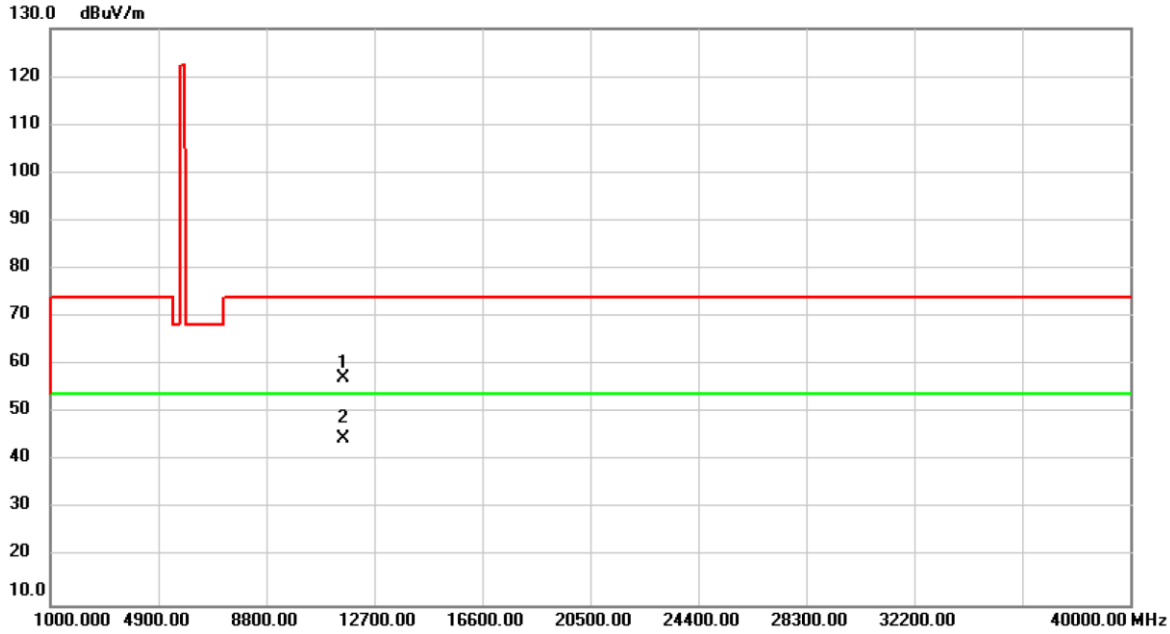


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11570.00 | 53.70 | 3.57 | 57.27 | 74.00 | -16.73 | peak | |
| 2 | * | 11570.00 | 40.98 | 3.57 | 44.55 | 54.00 | -9.45 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Vertical |

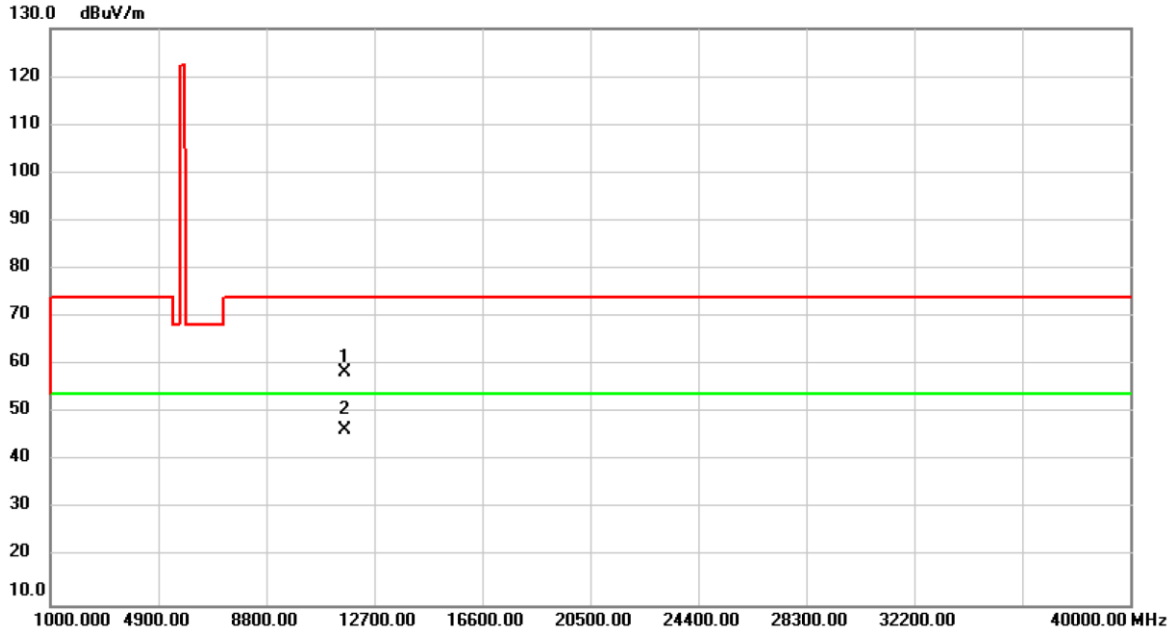


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 55.26 | 3.18 | 58.44 | 74.00 | -15.56 | peak | |
| 2 | * | 11650.00 | 43.17 | 3.18 | 46.35 | 54.00 | -7.65 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW20)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH165: 5825 MHz | Polarization | Horizontal |

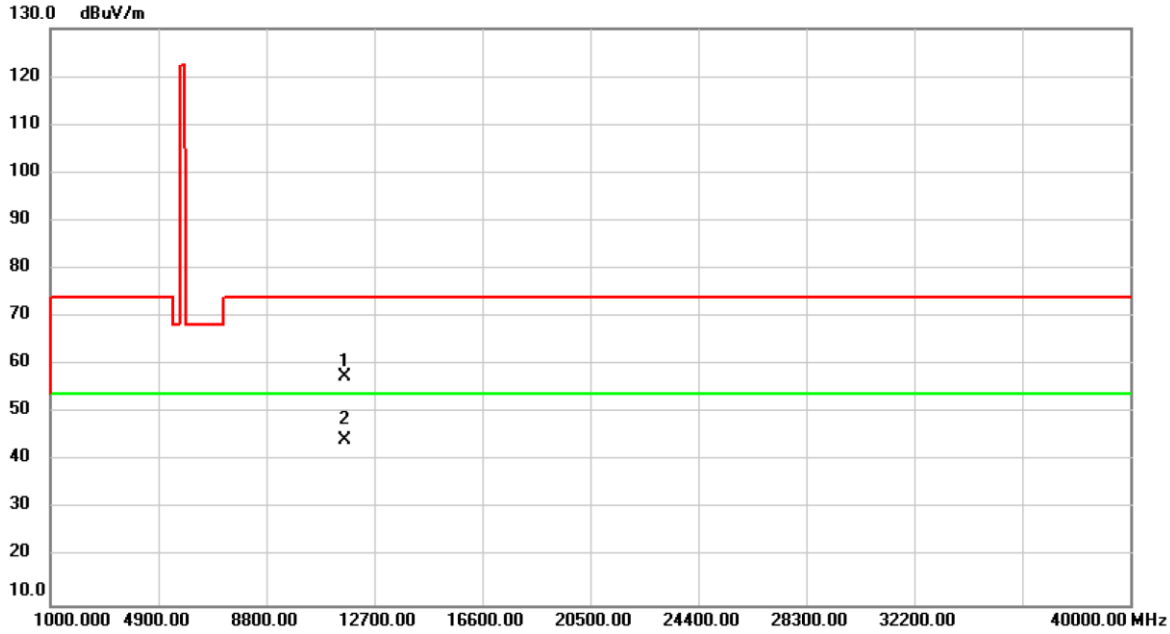


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11650.00 | 54.28 | 3.18 | 57.46 | 74.00 | -16.54 | peak | |
| 2 | * | 11650.00 | 41.27 | 3.18 | 44.45 | 54.00 | -9.55 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH38: 5190 MHz | Polarization | Vertical |

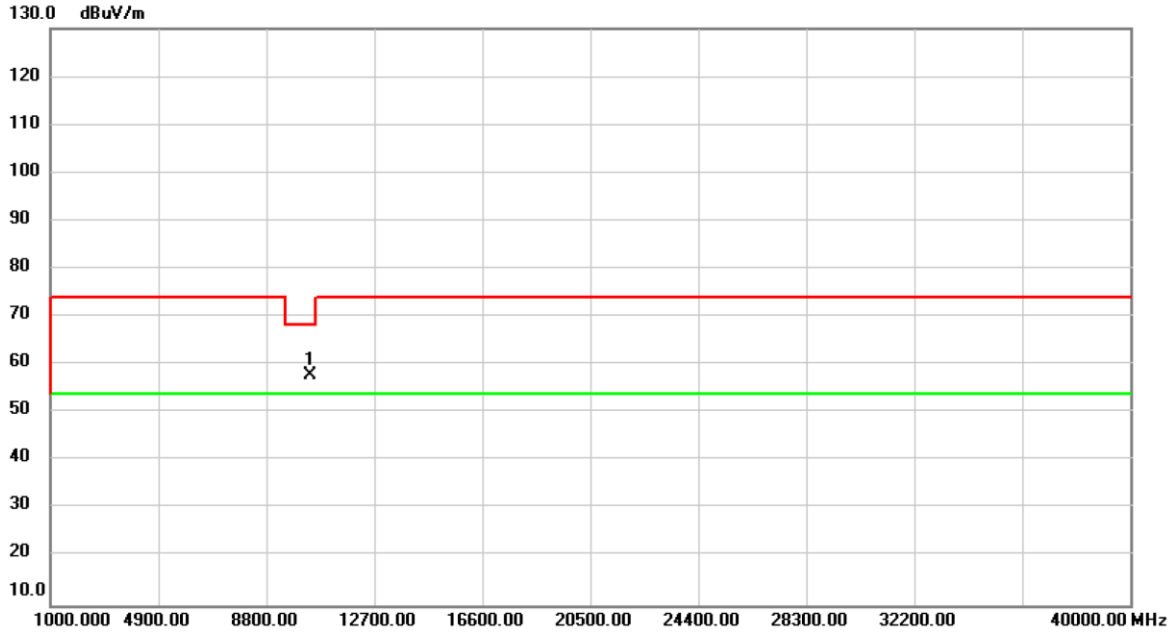


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10380.00 | 54.99 | 2.85 | 57.84 | 68.20 | -10.36 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH38: 5190 MHz | Polarization | Horizontal |

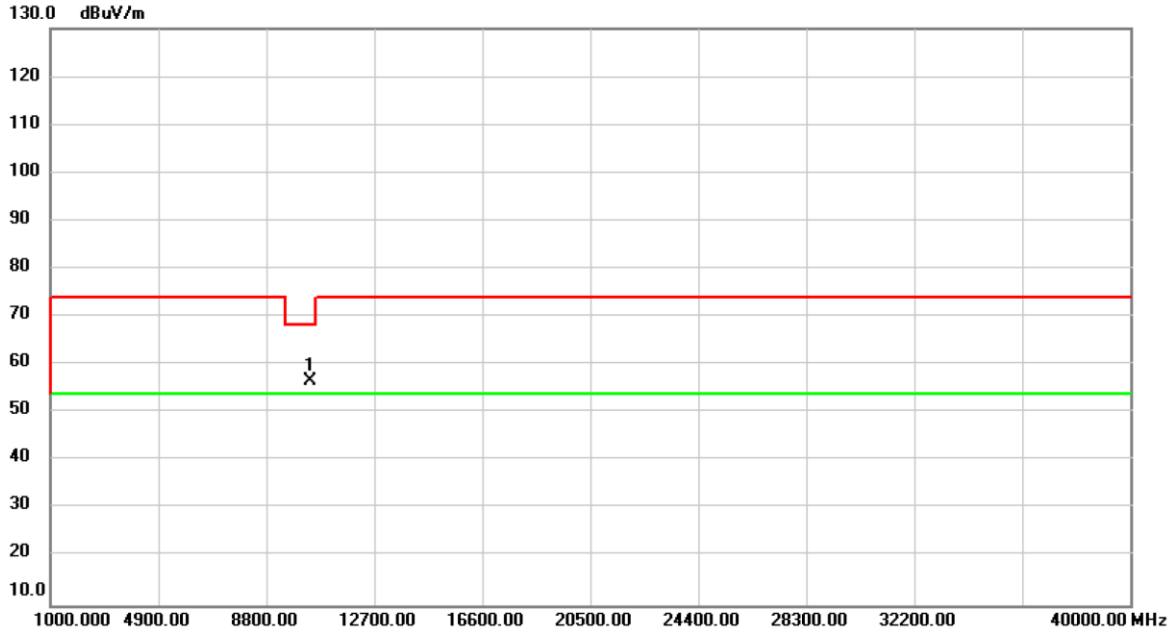


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10380.00 | 53.81 | 2.85 | 56.66 | 68.20 | -11.54 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH46: 5230 MHz | Polarization | Vertical |

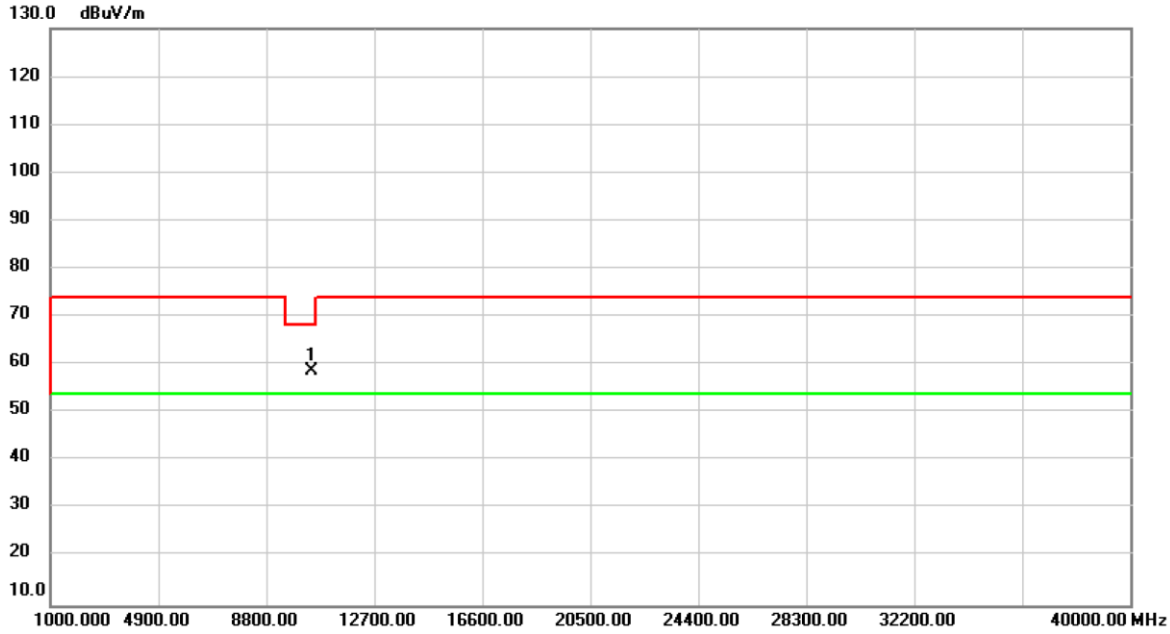


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10460.00 | 55.88 | 2.98 | 58.86 | 68.20 | -9.34 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH46: 5230 MHz | Polarization | Horizontal |

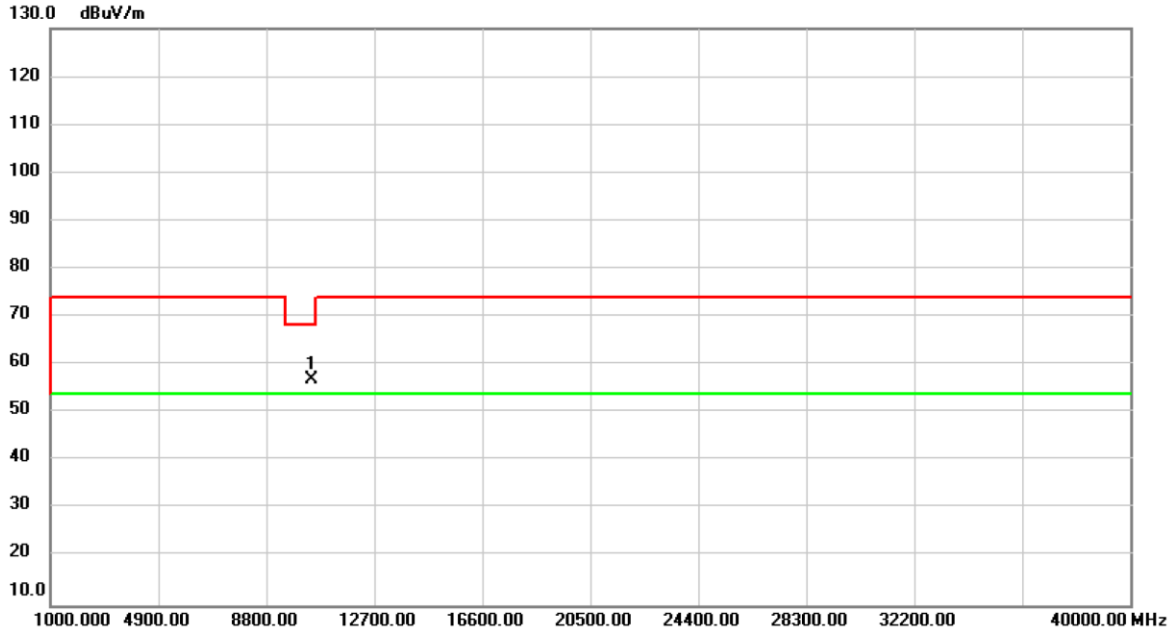


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10460.00 | 54.03 | 2.98 | 57.01 | 68.20 | -11.19 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH151: 5755 MHz | Polarization | Vertical |

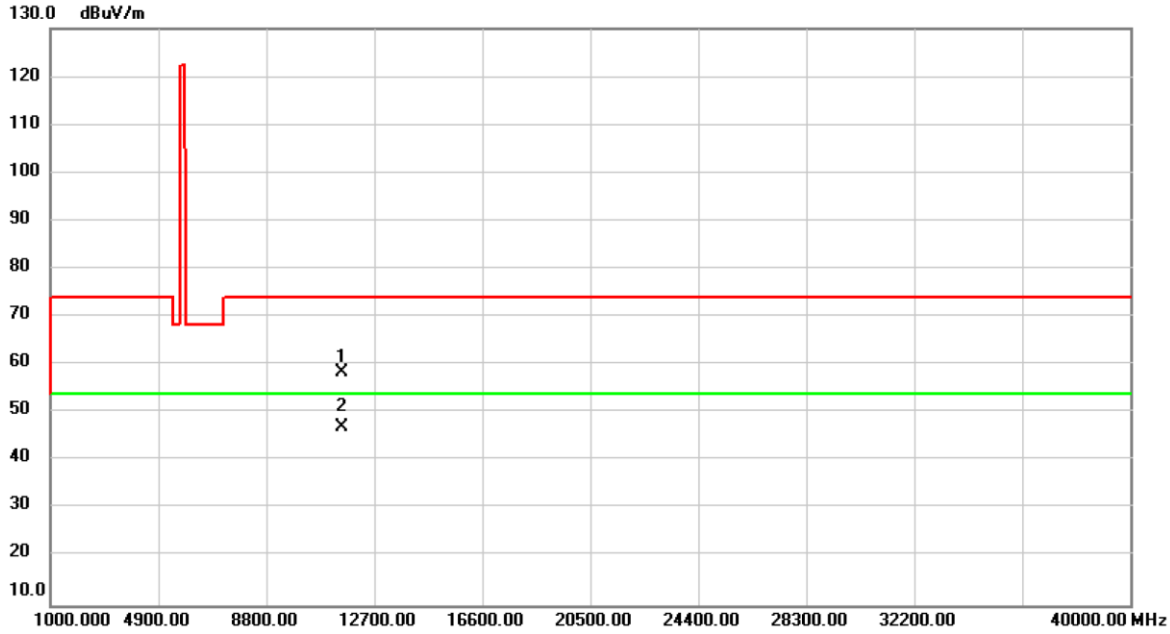


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11510.00 | 54.45 | 3.86 | 58.31 | 74.00 | -15.69 | peak | |
| 2 | * | 11510.00 | 43.21 | 3.86 | 47.07 | 54.00 | -6.93 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH151: 5755 MHz | Polarization | Horizontal |

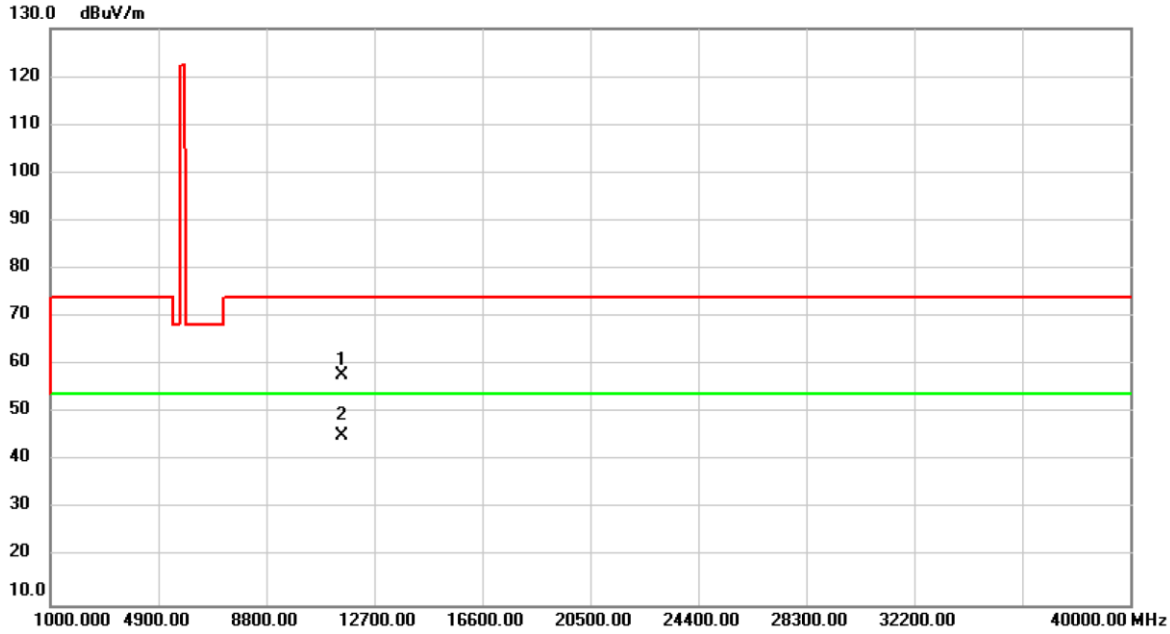


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11510.00 | 53.99 | 3.86 | 57.85 | 74.00 | -16.15 | peak | |
| 2 | * | 11510.00 | 41.37 | 3.86 | 45.23 | 54.00 | -8.77 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH159: 5795 MHz | Polarization | Vertical |

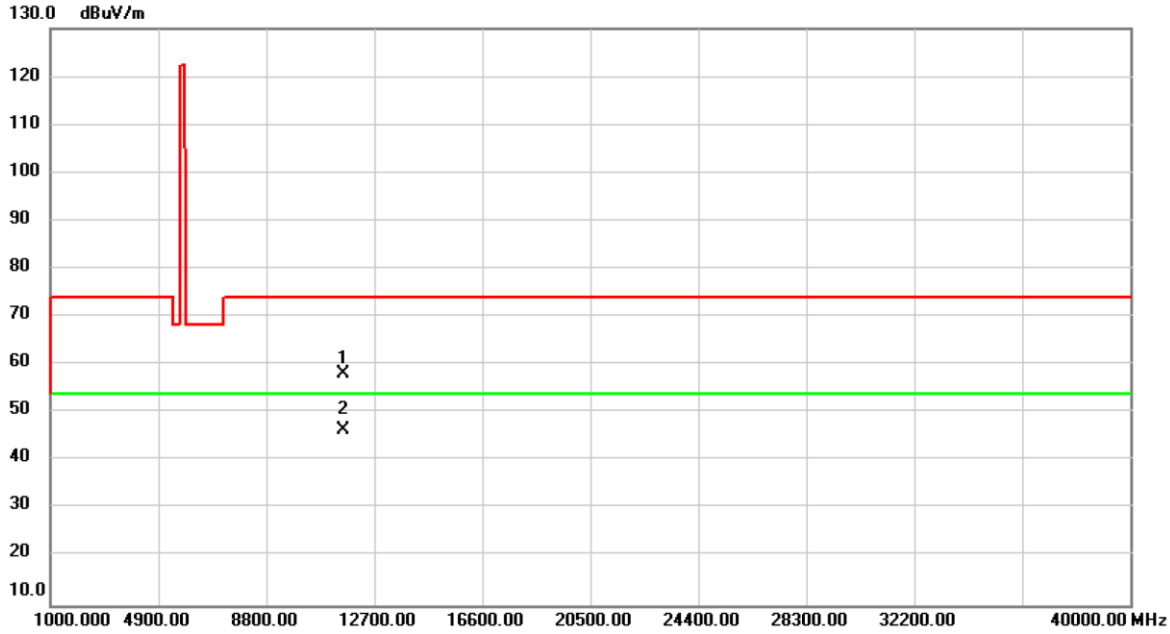


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11590.00 | 54.62 | 3.47 | 58.09 | 74.00 | -15.91 | peak | |
| 2 | * | 11590.00 | 42.89 | 3.47 | 46.36 | 54.00 | -7.64 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW40)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH159: 5795 MHz | Polarization | Horizontal |

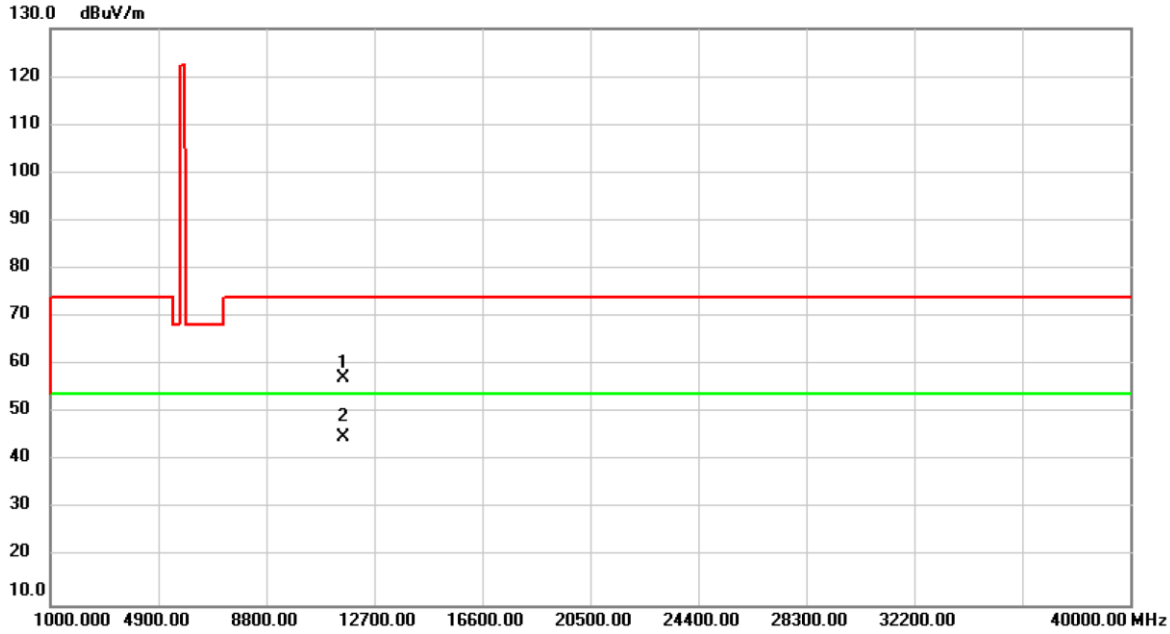


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11590.00 | 53.74 | 3.47 | 57.21 | 74.00 | -16.79 | peak | |
| 2 | * | 11590.00 | 41.44 | 3.47 | 44.91 | 54.00 | -9.09 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz | Polarization | Vertical |

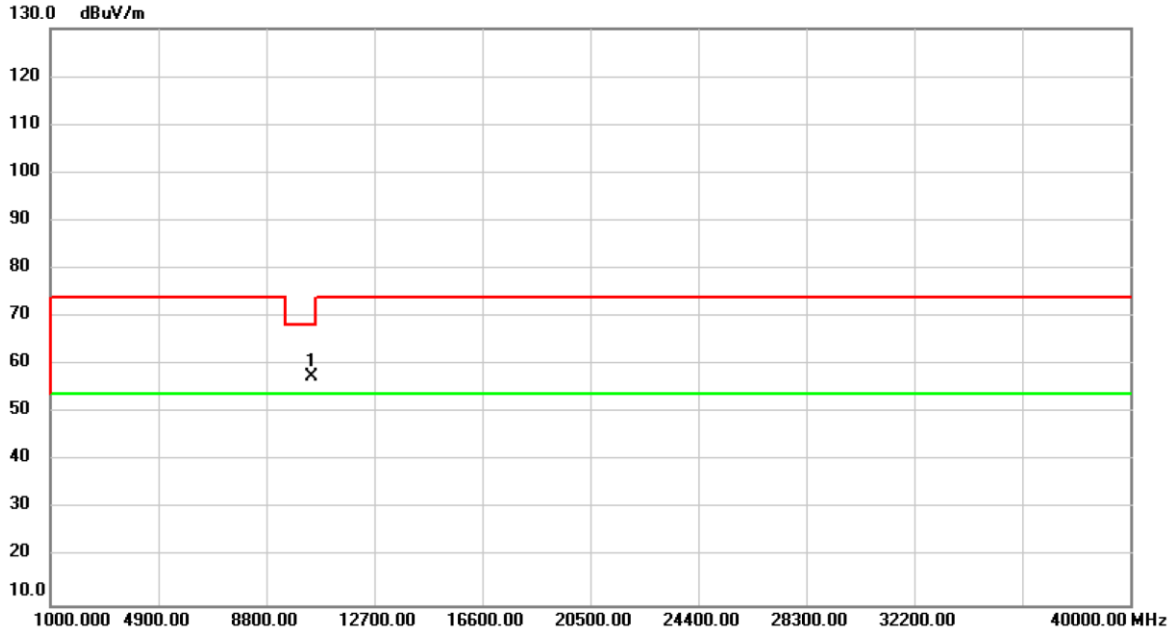


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10420.00 | 54.66 | 2.91 | 57.57 | 68.20 | -10.63 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz | Polarization | Horizontal |

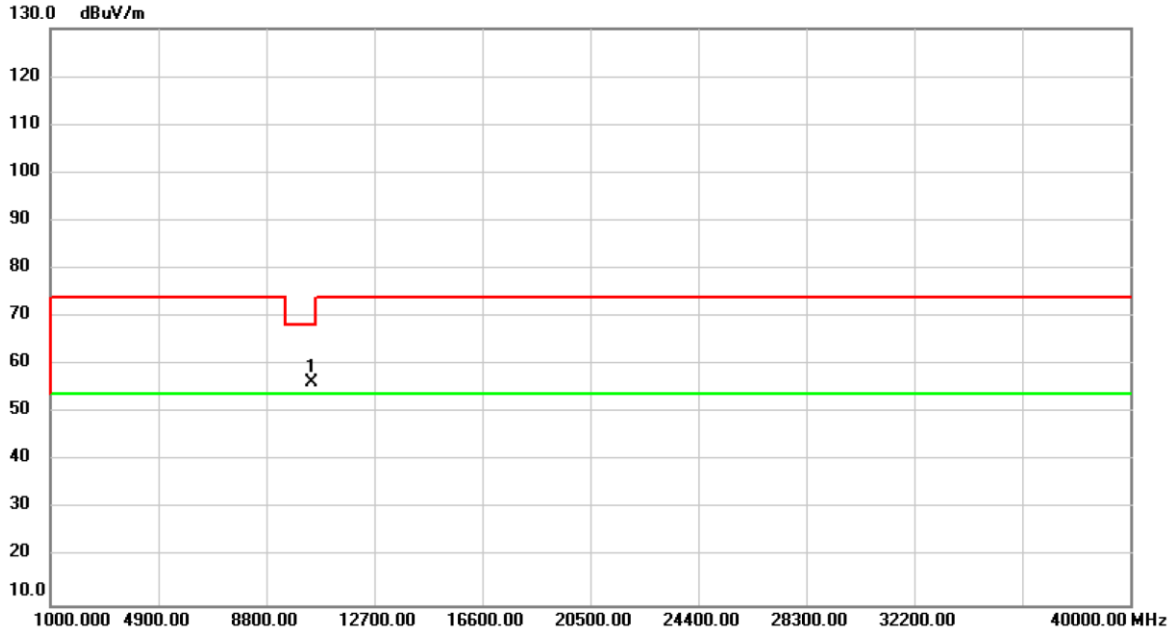


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10420.00 | 53.50 | 2.91 | 56.41 | 68.20 | -11.79 | peak | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz | Polarization | Vertical |

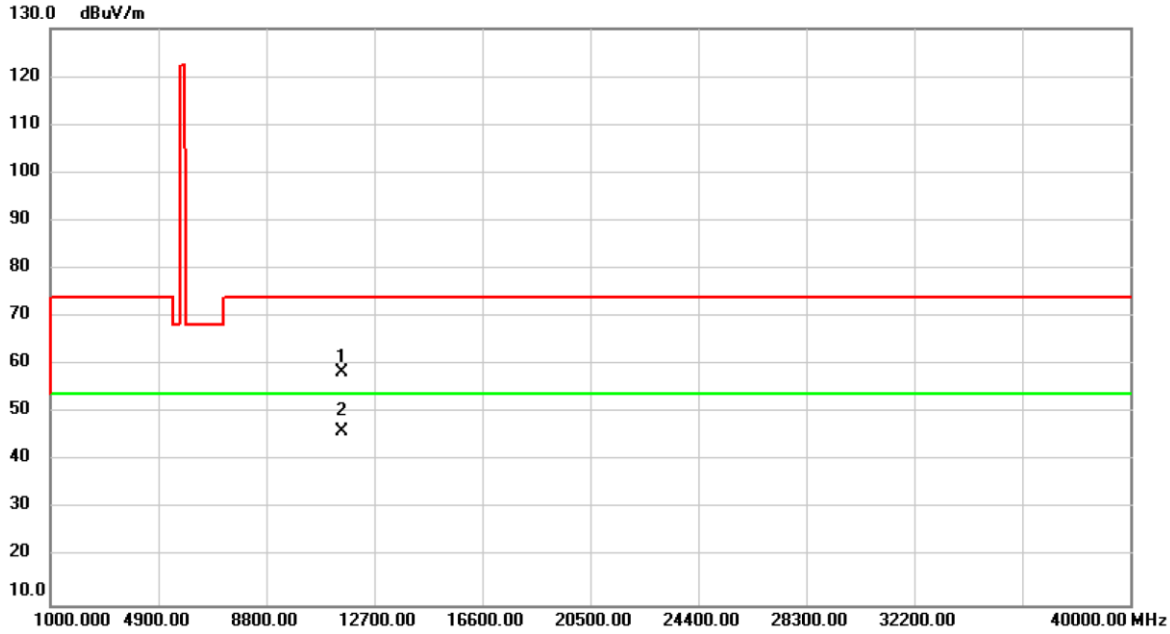


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11550.00 | 54.83 | 3.67 | 58.50 | 74.00 | -15.50 | peak | |
| 2 | * | 11550.00 | 42.56 | 3.67 | 46.23 | 54.00 | -7.77 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80)_External Antenna | Test Date | 2019/12/11 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz | Polarization | Horizontal |

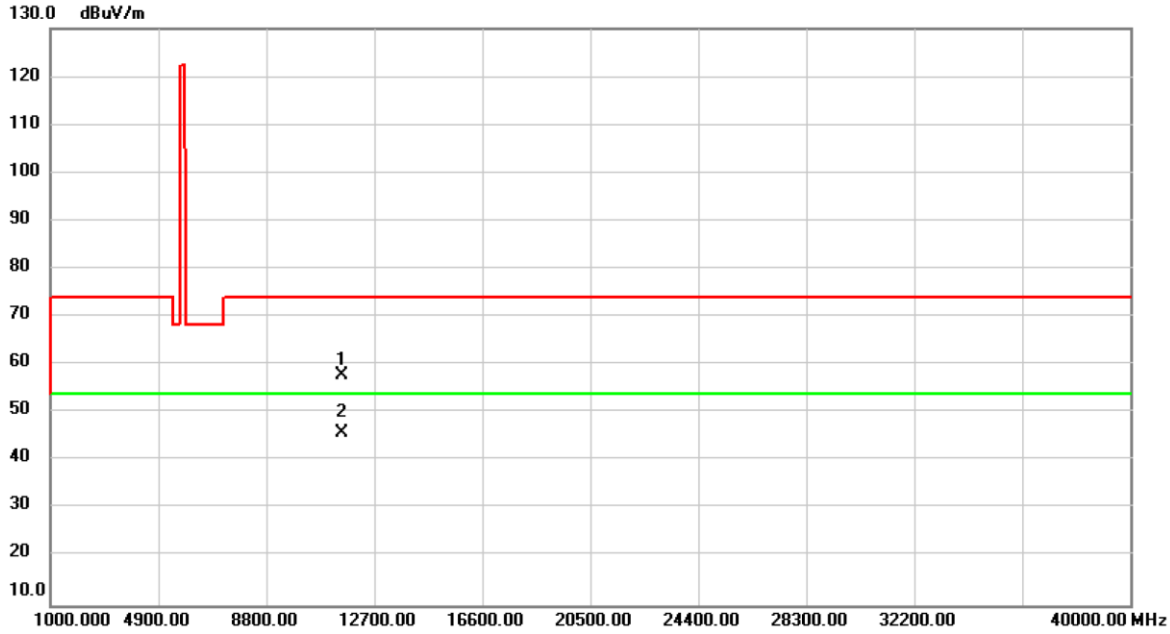


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 11550.00 | 54.19 | 3.67 | 57.86 | 74.00 | -16.14 | peak | |
| 2 | * | 11550.00 | 42.07 | 3.67 | 45.74 | 54.00 | -8.26 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz | Polarization | Vertical |

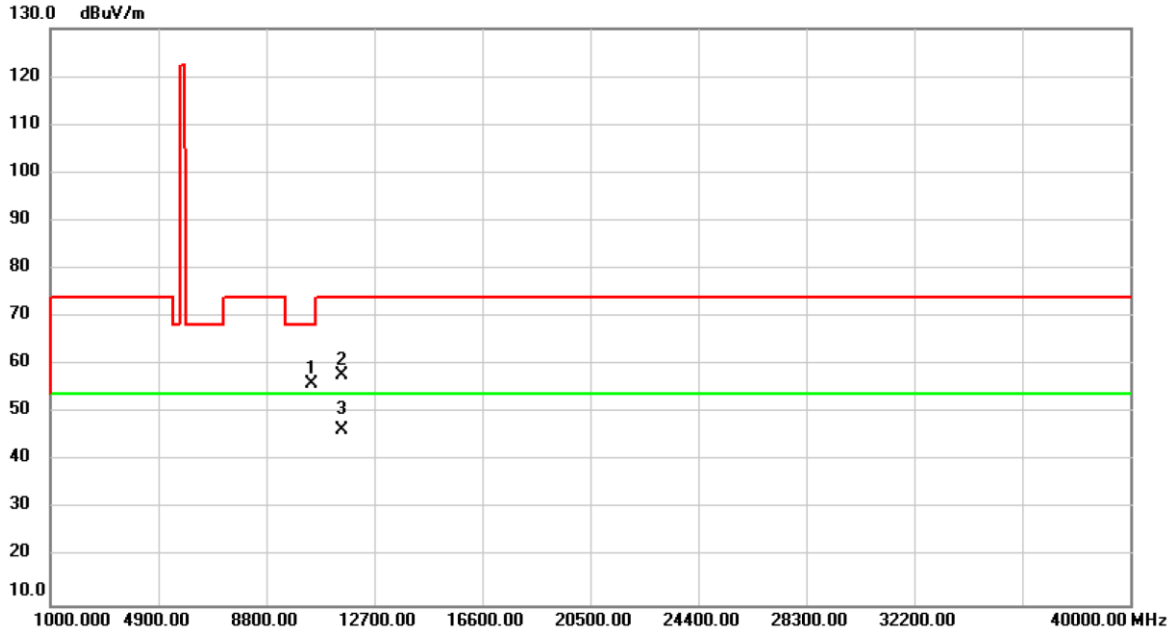


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 10420.00 | 53.28 | 2.91 | 56.19 | 68.20 | -12.01 | peak | |
| 2 | | 11550.00 | 54.29 | 3.67 | 57.96 | 74.00 | -16.04 | peak | |
| 3 | * | 11550.00 | 42.74 | 3.67 | 46.41 | 54.00 | -7.59 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz | Polarization | Horizontal |

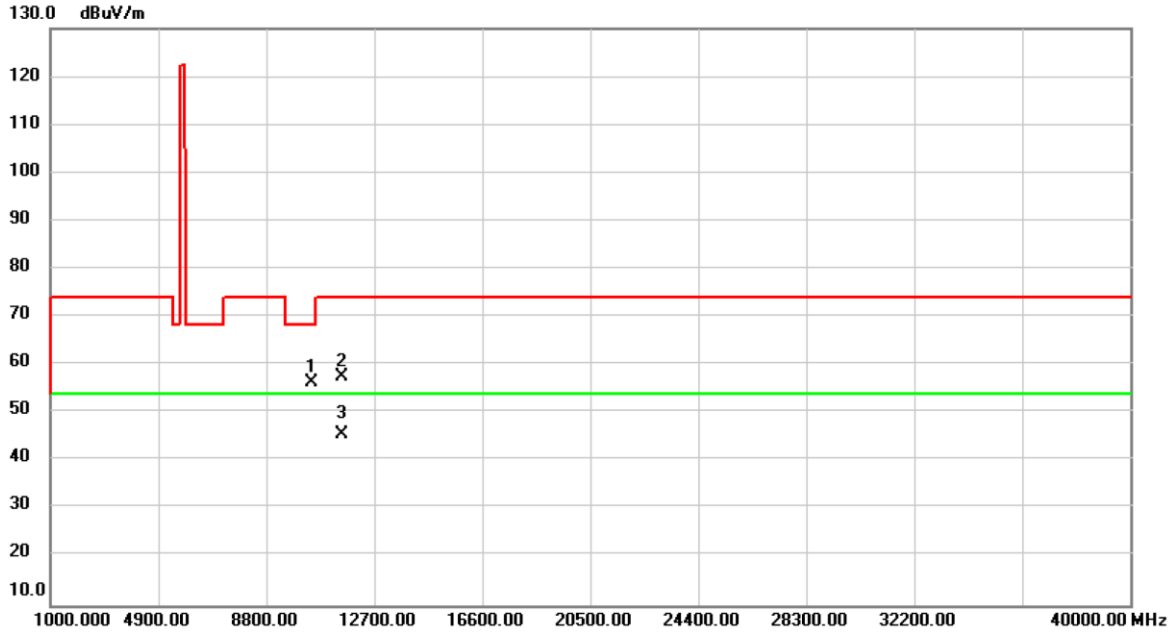


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 10420.00 | 53.29 | 2.91 | 56.20 | 68.20 | -12.00 | peak | |
| 2 | | 11550.00 | 53.76 | 3.67 | 57.43 | 74.00 | -16.57 | peak | |
| 3 | * | 11550.00 | 41.92 | 3.67 | 45.59 | 54.00 | -8.41 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz | Polarization | Vertical |

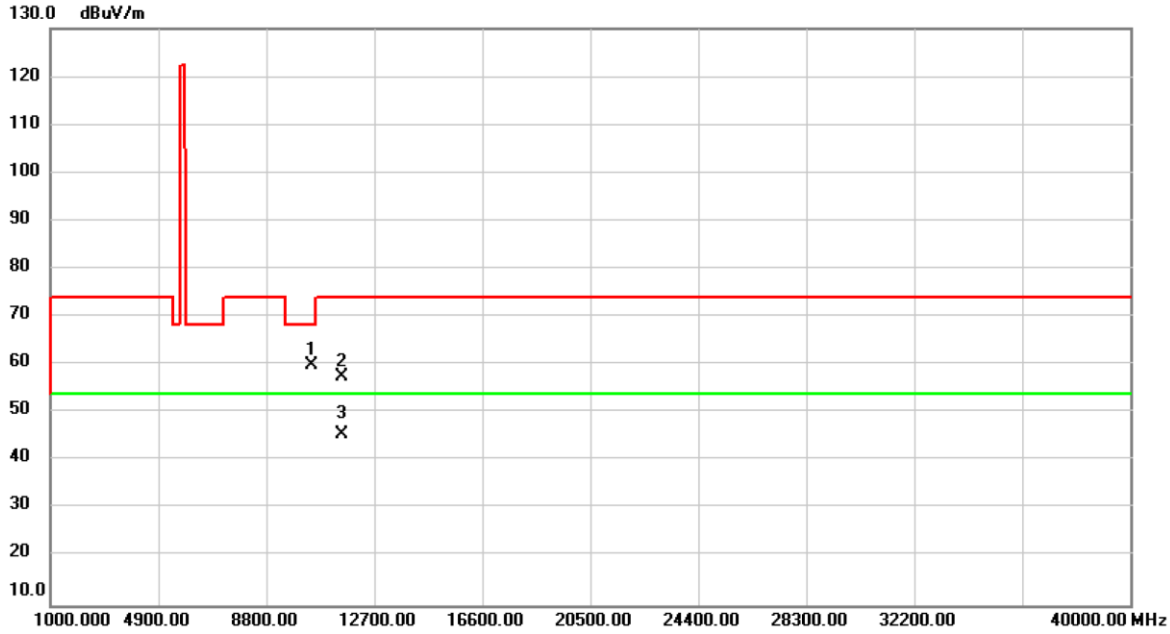


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 10420.00 | 57.15 | 2.91 | 60.06 | 68.20 | -8.14 | peak | |
| 2 | | 11550.00 | 53.90 | 3.67 | 57.57 | 74.00 | -16.43 | peak | |
| 3 | | 11550.00 | 41.94 | 3.67 | 45.61 | 54.00 | -8.39 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ac (VHT80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH155: 5775 MHz + CH42: 5210 MHz | Polarization | Horizontal |

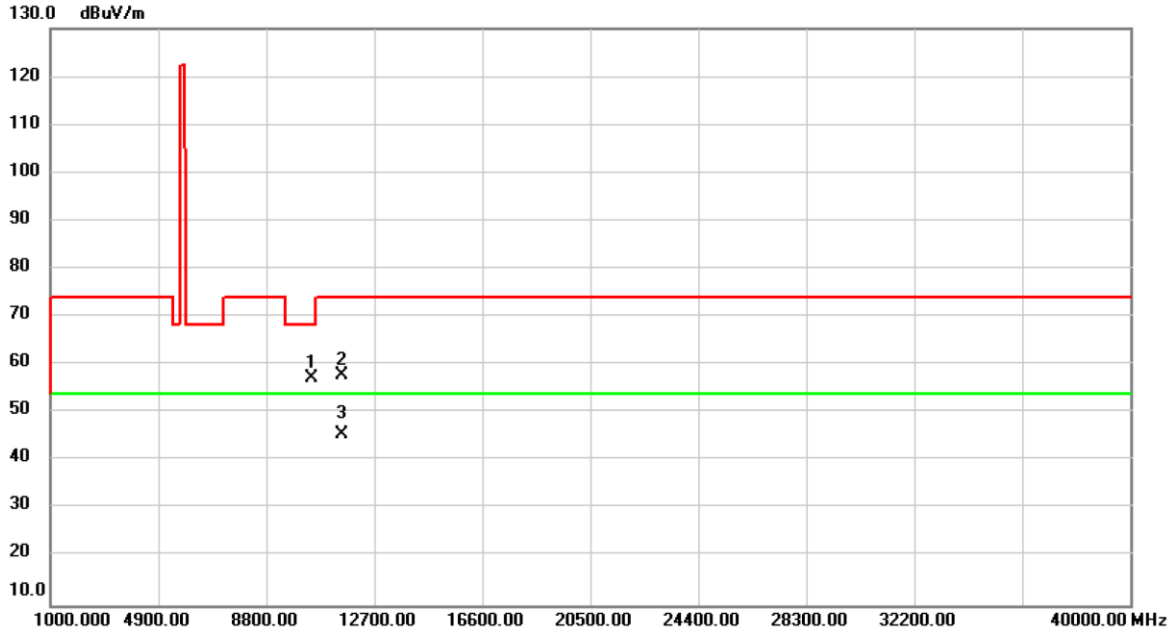


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 10420.00 | 54.35 | 2.91 | 57.26 | 68.20 | -10.94 | peak | |
| 2 | | 11550.00 | 54.14 | 3.67 | 57.81 | 74.00 | -16.19 | peak | |
| 3 | * | 11550.00 | 41.82 | 3.67 | 45.49 | 54.00 | -8.51 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| Test Mode | IEEE 802.11ax (HEW80+80)_External Antenna | Test Date | 2019/12/30 |
|---|---|---|---|
| Test Frequency | CH42: 5210 MHz + CH155: 5775 MHz | Polarization | Vertical |

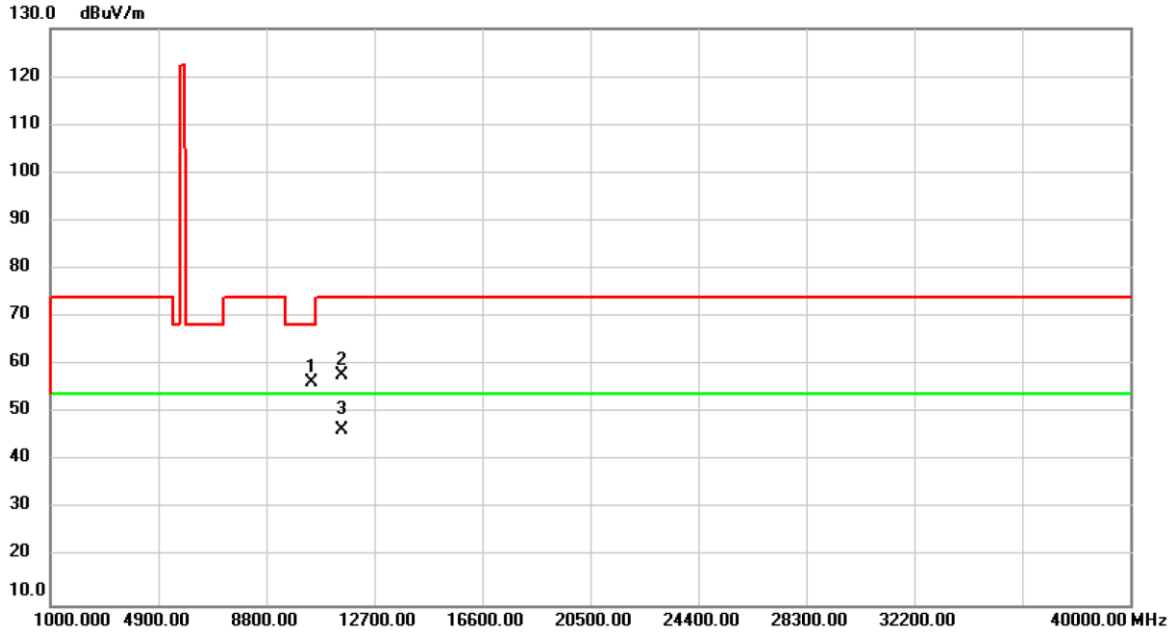


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Margin | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 10420.00 | 53.41 | 2.91 | 56.32 | 68.20 | -11.88 | peak | |
| 2 | | 11550.00 | 54.08 | 3.67 | 57.75 | 74.00 | -16.25 | peak | |
| 3 | * | 11550.00 | 42.71 | 3.67 | 46.38 | 54.00 | -7.62 | AVG | |

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.