

|                  |                       |
|------------------|-----------------------|
| Test Report S/N: | 021104-473KBC         |
| Test Date(s):    | March 05 & 08, 2004   |
| Test Type:       | FCC/IC SAR Evaluation |

## APPENDIX C - SYSTEM VALIDATION

**Client**      **Celltech Labs**

**CALIBRATION CERTIFICATE**

**Object(s)**      **D1800V2 - SN.247**

**Calibration procedure(s)**      **QA CAL-05.v2**  
**Calibration procedure for dipole validation kits**

**Calibration date:**      **June 4, 2003**

**Condition of the calibrated item**      **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

**Calibration Equipment used (M&TE critical for calibration)**

| Model Type                | ID #       | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|---------------------------|------------|---|------------------------|
| RF generator R&S SML-03   | 100698     | 27-Mar-2002 (R&S, No. 20-92389)           | In house check: Mar-05 |
| Power sensor HP 8481A     | MY41092317 | 18-Oct-02 (Agilent, No. 20021018)         | Oct-04                 |
| Power sensor HP 8481A     | US37292783 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Power meter EPM E442      | GB37480704 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (Agilent, No. 24BR1033101)      | In house check: Oct 03 |

|                | Name           | Function   | Signature            |
|----------------|----------------|------------|----------------------|
| Calibrated by: | Judith Mueller | Technician | <i>J. F. Besselt</i> |

|              |               |                     |                      |
|--------------|---------------|---------------------|----------------------|
| Approved by: | Katja Pokovic | Laboratory Director | <i>Katja Pokovic</i> |
|--------------|---------------|---------------------|----------------------|

Date issued: June 4, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

# DASY

## Dipole Validation Kit

Type: D1800V2

Serial: 247

Manufactured: August 25, 1999

Calibrated: June 4, 2003

## 1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with **head simulating solution** of the following electrical parameters at 1800 MHz:

|                        |                   |           |
|------------------------|-------------------|-----------|
| Relative Dielectricity | <b>39.2</b>       | $\pm 5\%$ |
| Conductivity           | <b>1.36 mho/m</b> | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 5.3 at 1800 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance spacer was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was  $250\text{mW} \pm 3\%$ . The results are normalized to 1W input power.

## 2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

|  |  |
|--|--|
| averaged over $1\text{ cm}^3$ (1 g) of tissue:   | <b>39.6 mW/g</b> $\pm 16.8\%$ (k=2) <sup>1</sup> |
| averaged over $10\text{ cm}^3$ (10 g) of tissue: | <b>20.9 mW/g</b> $\pm 16.2\%$ (k=2) <sup>1</sup> |

---

<sup>1</sup> validation uncertainty

### 3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:           **1.190 ns**   (one direction)  
Transmission factor:       **0.998**       (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance spacer was in place during impedance measurements.

Feedpoint impedance at 1800 MHz:            $\text{Re}\{Z\} = 48.5 \Omega$

$\text{Im}\{Z\} = -6.5 \Omega$

Return Loss at 1800 MHz                    **-23.3 dB**

### 4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

### 5. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

### 6. Power Test

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Date/Time: 06/04/03 14:55:26

Test Laboratory: SPEAG, Zurich, Switzerland  
 File Name: SN247\_SN1507\_HSL1800\_040603.da4

**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN247**  
**Program: Dipole Calibration**

Communication System: CW-1800; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: HSL 1800 MHz ( $\sigma = 1.36$  mho/m,  $\epsilon_r = 39.22$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.3, 5.3, 5.3); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASy4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 96 V/m

Power Drift = -0.004 dB

Maximum value of SAR = 11 mW/g

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.22 mW/g

Reference Value = 96 V/m

Power Drift = -0.004 dB

Maximum value of SAR = 11.1 mW/g

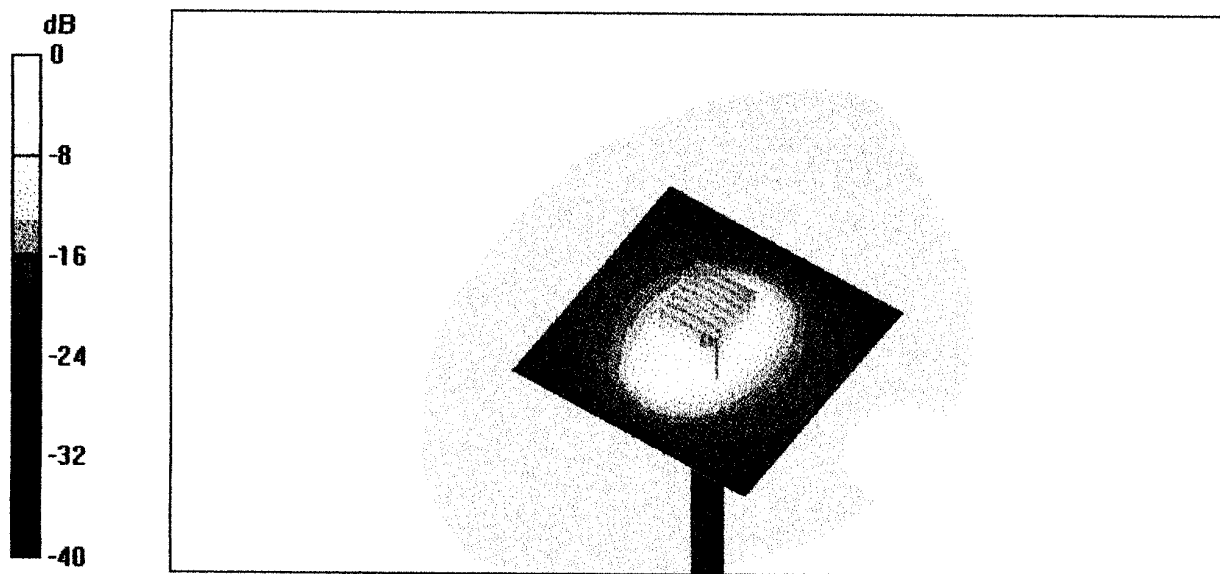

0 dB = 11.1mW/g


4 Jun 2003 10:48:36

[CH1] S11 1 U FS 1: 48.520  $\omega$  -6.5293  $\omega$  13.542 pF 1 800.000 000 MHz

De1


Cor

Avg  
16

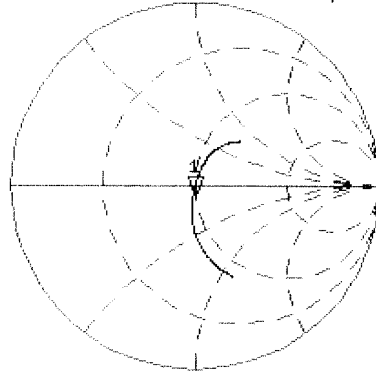

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.337 dB 1 800.000 000 MHz

Cor

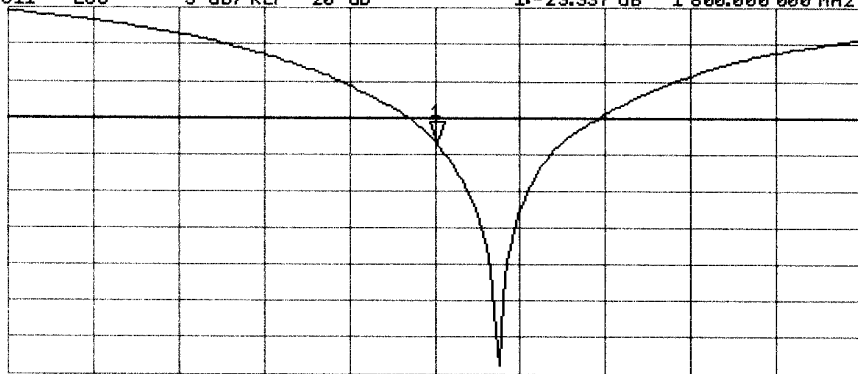

CENTER 1 800.000 000 MHz

SPAN 400.000 000 MHz

**Client**

**Celltech Labs**

**CALIBRATION CERTIFICATE**



**Object(s)** **D900V2 - SN:054**  
**Calibration procedure(s)** **QA CAL-05 v2**  
**Calibration procedure for dipole validation kits**  
**Calibration date:** **June 3, 2003**  
**Condition of the calibrated item** **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type                | ID #       | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|---------------------------|------------|---|------------------------|
| RF generator R&S SML-03   | 100698     | 27-Mar-2002 (R&S, No. 20-92389)           | In house check: Mar-05 |
| Power sensor HP 8481A     | MY41092317 | 18-Oct-02 (Agilent, No. 20021018)         | Oct-04                 |
| Power sensor HP 8481A     | US37292783 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Power meter EPM E442      | GB37480704 | 30-Oct-02 (METAS, No. 252-0236)           | Oct-03                 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (Agilent, No. 24BR1033101)      | In house check: Oct 03 |

|                | Name           | Function            | Signature   |
|----------------|----------------|---------------------|---|
| Calibrated by: | Judith Mueller | Technician          |  |
| Approved by:   | Katja Pokovic  | Laboratory Director |  |

Date issued: June 3, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.



# DASY

## Dipole Validation Kit

Type: D900V2

Serial: 054

Manufactured: August 25, 1999

Calibrated: June 3, 2003

## 1. Measurement Conditions

The measurements were performed in the flat section of the SAM twin phantom filled with head simulating solution of the following electrical parameters at 900 MHz:

|                        |                   |           |
|------------------------|-------------------|-----------|
| Relative Dielectricity | <b>42.1</b>       | $\pm 5\%$ |
| Conductivity           | <b>0.95 mho/m</b> | $\pm 5\%$ |

The DASY4 System with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.6 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 7x7x7 fine cube was chosen for cube integration.

The dipole input power (forward power) was  $250 \text{ mW} \pm 3 \%$ . The results are normalized to 1W input power.

## 2. SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

|   |   |
|---|---|
| averaged over $1 \text{ cm}^3$ (1 g) of tissue:   | <b>10.6 mW/g <math>\pm 16.8 \%</math> (k=2)<sup>1</sup></b> |
| averaged over $10 \text{ cm}^3$ (10 g) of tissue: | <b>6.84 mW/g <math>\pm 16.2 \%</math> (k=2)<sup>1</sup></b> |

---

<sup>1</sup> validation uncertainty



Date/Time: 06/03/03 12:00:32

Test Laboratory: SPEAG, Zurich, Switzerland  
 File Name: SN054\_SN1507\_HSL900\_030603.da4

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN054**  
**Program: Dipole Calibration**

Communication System: CW-900; Frequency: 900 MHz; Duty Cycle: 1:1  
 Medium: HSL 900 MHz ( $\sigma = 0.95$  mho/m,  $\epsilon_r = 42.07$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.6, 6.6, 6.6); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASYS4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Pin = 250 mW; d = 15 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 56.9 V/m

Power Drift = 0.0004 dB

Maximum value of SAR = 2.84 mW/g

**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 2.66 mW/g; SAR(10 g) = 1.71 mW/g

Reference Value = 56.9 V/m

Power Drift = 0.0004 dB

Maximum value of SAR = 2.85 mW/g

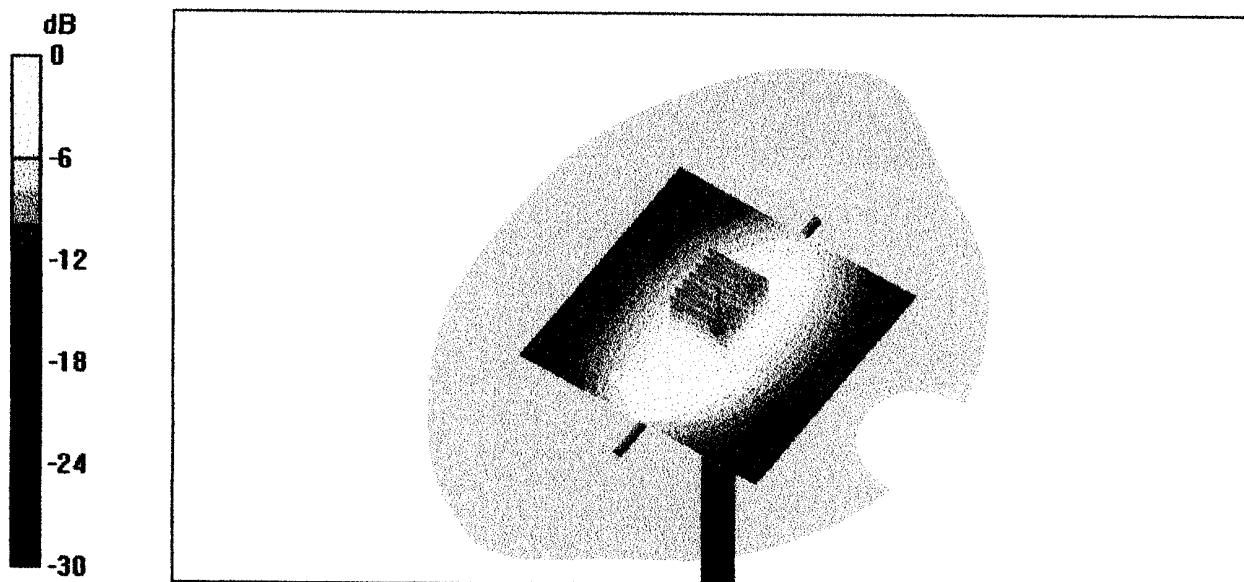


0 dB = 2.85mW/g

054


3 Jun 2003 09:29:44

CH1 S11 1 U FS 1: 49.906  $\Omega$  -2.0137  $\Omega$  87.819 pF 900.000 000 MHz

De1  
PRm  
Cor  
Avg  
16  
↑

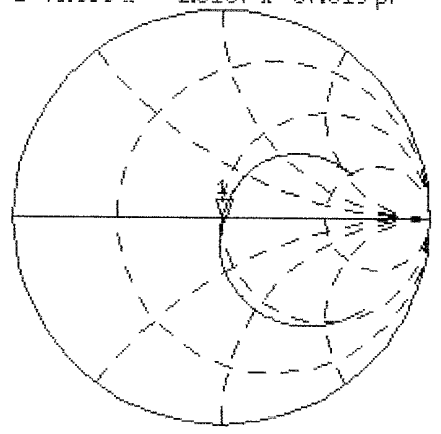

CH2 S11 LOG 5 dB/REF -20 dB 1: -33.939 dB 900.000 000 MHz

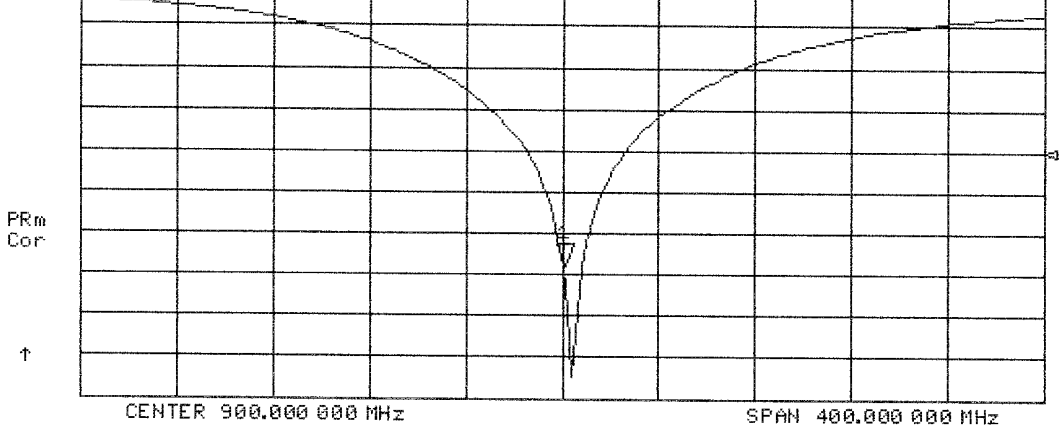

PRm  
Cor  
↑