
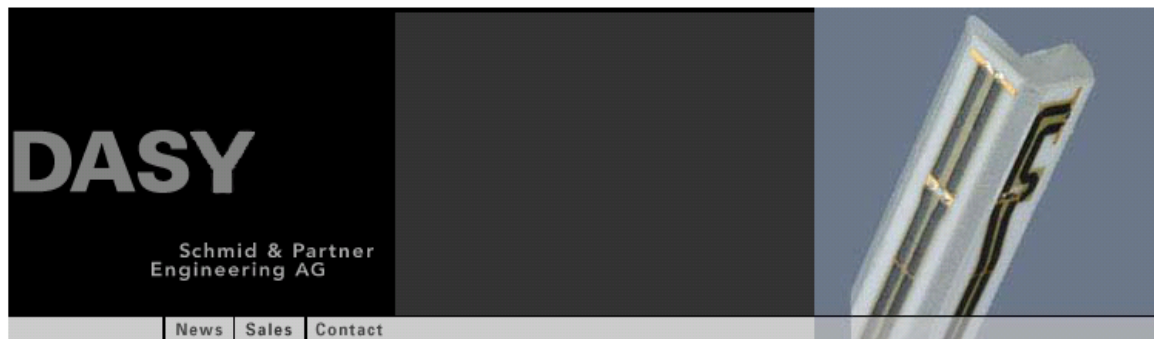
	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		1(25)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Mar. 22-23, Apr. 28 , 2011	RTS-3933-1104-55A RTS-2580-1106-36	L6ARDU70CW L6ARDE70UW

Annex B: Probe and dipole description and calibration certificates

B.1 Probe, measurement chain description, specification and calibration certificate

	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 2(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG




- Applications**
- Support & Downloads**
- Products**
 - DASY4 Packages
 - EASY4
 - Probes
 - ET3DV6 - Isotropic Dos-Probe
 - ES3DV3 - Isotropic Dos-Probe
 - EX3DV4 - Isotropic Dos-Probe
 - ET1DV3 - D-Probe
 - EUV3 - Universal Vector E-Probe
 - H3DV6 - Isotropic H-Probe
 - HUV4 - Universal Vector H-Probe
 - T1V3 - Temp-Probe
 - DP1 - Dummy-Probe
 - Data Acquisition System
 - Software
 - Phantoms
 - Robots
 - Validation Kits & Calibration Dipoles
 - Hearing Aid Compatibility (HAC) Ext
 - Tissue Simulating Liquids
- SPEAG Home**

ER3DV6 ISOTROPIC E-FIELD PROBE FOR GENERAL NEAR-FIELD MEASUREMENTS


 [Download Product Flyer \(PDF, 192kB\)](#)

- Construction** One dipole parallel, two dipoles normal to probe axis
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
- Calibration** In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
- Frequency** 100 MHz to > 6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz)
- Directivity** ± 0.2 dB in air (rotation around probe axis)
 ± 0.4 dB in air (rotation normal to probe axis)
- Dynamic Range** 2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
- Dimensions** Overall length: 330 mm (Tip: 16 mm)
Tip diameter: 8 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.5 mm
- Application** General near-field measurements up to 6 GHz
Field component measurements
Fast automatic scanning in phantoms

<http://www.dasy4.com/er3.htm>

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		3(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

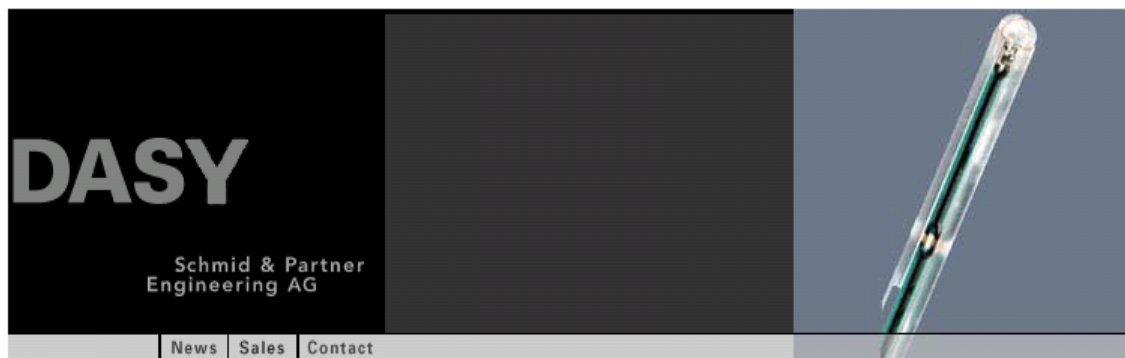


Applications
Support & Downloads
Products
▪ DASY4 Packages
▪ EASY4
▪ Probes
ET3DV6 - Isotropic Dos-Probe
ES3DV3 - Isotropic Dos-Probe
EX3DV4 - Isotropic Dos-Probe
ET1DV3 - D-Probe
ER3DV6 - Isotropic E-Probe
EUV3 - Universal Vector E-Probe
HUV4 - Universal Vector H-Probe
T1V3 - Temp-Probe
DP1 - Dummy-Probe
▪ Data Acquisition System
▪ Software
▪ Phantoms
▪ Robots
▪ Validation Kits & Calibration Dipoles
▪ Hearing Aid Compatibility (HAC) Ext
▪ Tissue Simulating Liquids
SPEAG Home

H3DV6 3-DIMENSIONAL H-FIELD PROBE FOR SMALL BAND APPLICATIONS

 [Download Product Flyer \(PDF, 192kB\)](#)

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, $k=2$); Output linearized
Directivity	± 0.25 dB (spherical isotropy error)
Dynamic Range	10 mA/m to 2 A/m at 1 GHz
E-Field Interference	< 10% at 3 GHz (for plane wave)
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
Application	General magnetic near-field measurements up to 3 GHz Field component measurements Surface current measurements Measurements in air or liquids Low interaction with the measured field

<http://www.dasy4.com/h3d.htm>


	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 4(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36

All measurements were performed to the nearest element point as per the C63.19 standard. Offset distances were entered in the DASY4 software so that the measurement was to the nearest element.



Figures 1 and 2, provided by the manufacturer, illustrate detail of the probe tip and its dimensions.


ER3DV6 E-Field probe: The distances from the probe tip to the closest points on the dipole sensors are 1.45mm for X and Y and 1.25mm for Z. From the probe tip to the center of the sensors is 2.5mm.

H3DV6 H-Field probe: The distance from the probe tip to the closest point of the X, Y and Z loop sensors is 1.1mm. From the probe tip to the center of the sensor is 3.00mm.

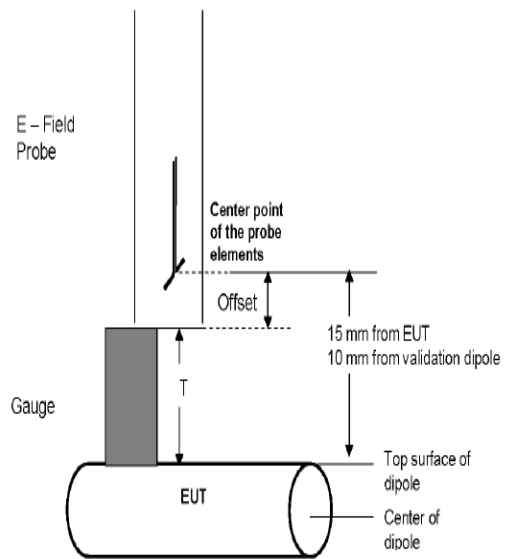


E-Field Probe (ER3DV6)

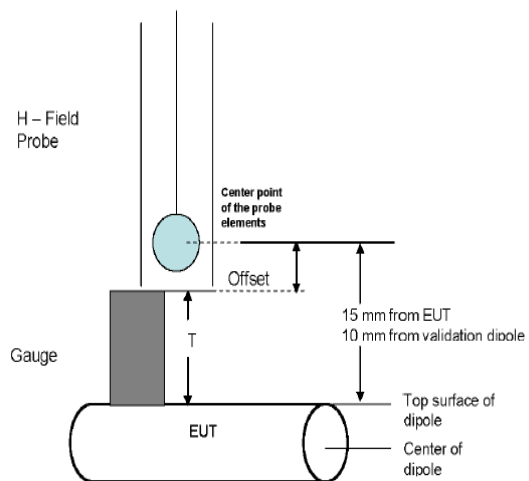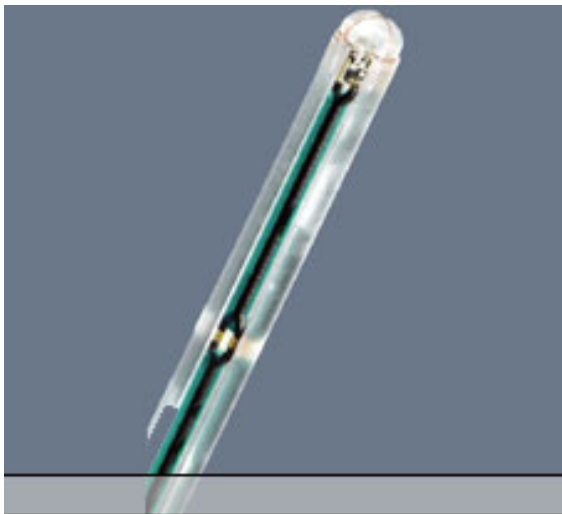

	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 5(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28 , 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW

H-Field Probe (H3DV6)

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		6(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW

The following information is from the system manufacturer user manual describing the process chain:

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i} \quad (20.1)$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 $\mu V/(V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m


The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2} \quad (20.2)$$

The measurement / integration time per point is > 500 ms, as per the system manufacturer:

The time response of the field probes has been assessed by exposing the probe to a well-controlled field producing signals larger than HAC E- and H-fields of class M4. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of <5 ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		7(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW

Calibration Laboratory of Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates



Accreditation No.: **SCS 108**


Client **RTS (RIM Testing Services)**

Certificate No: **ER-2286_Jan11**

CALIBRATION CERTIFICATE	
Object	ER3DV6 - SN:2286
Calibration procedure(s)	QA CAL-02.v6, QA CAL-25.v3 Calibration procedure for E-field probes optimized for close near field evaluations in air
Calibration date:	January 14, 2011
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.	
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.	
Calibration Equipment used (M&TE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ER3DV6	SN: 2328	4-Oct-10 (No. ER3-2328_Oct10)	Oct-11
D4E4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Marcel Fehr	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
			Issued: January 15, 2011
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		8(25)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Mar. 22-23, Apr. 28, 2011	RTS-3933-1104-55A RTS-2580-1106-36	L6ARDU70CW L6ARDE70UW

Calibration Laboratory of Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:


NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ψ	ψ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ψ = 0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization ψ = 0 for XY sensors and ψ = 90 for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart).
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}*: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		9(25)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Mar. 22-23, Apr. 28 , 2011	RTS-3933-1104-55A RTS-2580-1106-36	L6ARDU70CW L6ARDE70UW

ER3DV6 – SN:2286

January 14, 2011


Probe ER3DV6

SN:2286

Manufactured: September 18, 2002
 Calibrated: January 14, 2011

Calibrated for DASY/EASY Systems
 (Note: non-compatible with DASY2 system!)

—
—

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		10(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW

ER3DV6- SN:2286

January 14, 2011

DASY/EASY - Parameters of Probe: ER3DV6 - SN:2286

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$)	2.23	1.48	1.51	$\pm 10.1\%$
DCP (mV) ^b	97.6	98.4	97.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	179.3	$\pm 3.0\%$
			Y	0.00	0.00	1.00	145.0	
			Z	0.00	0.00	1.00	180.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^b Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011


Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**

ER3DV6- SN:2286

January 14, 2011

Frequency Response of E-Field
 (TEM-Cell:ifi110 EXX, Waveguide: R22)

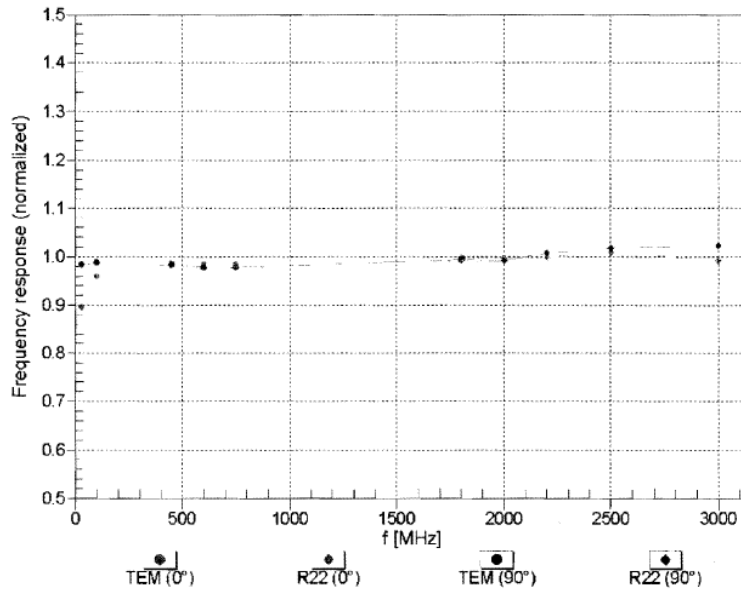

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011


Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**


ER3DV6- SN:2286

January 14, 2011

Receiving Pattern (ϕ), $\theta = 0^\circ$

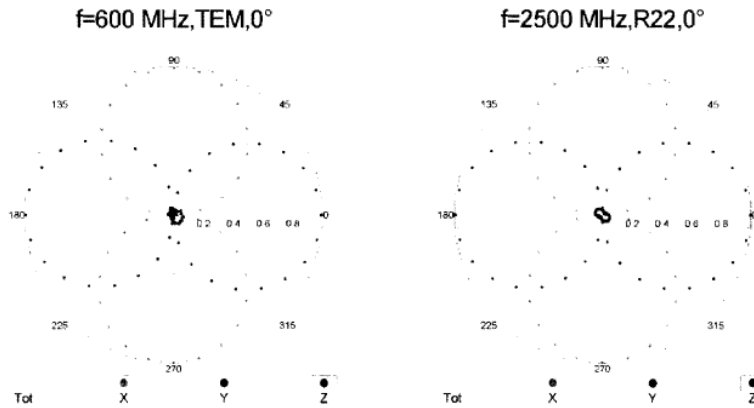

Receiving Pattern (ϕ), $\theta = 90^\circ$

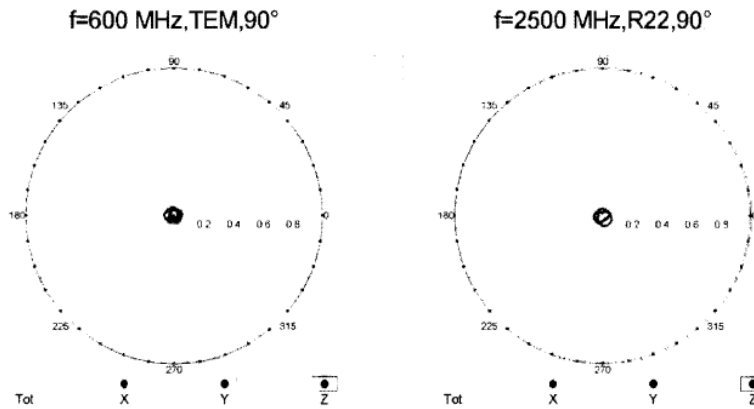

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011


Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**

ER3DV6- SN:2286


January 14, 2011

Receiving Pattern (ϕ), $\theta = 0^\circ$

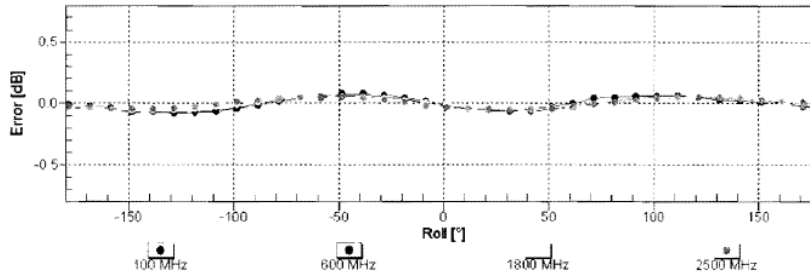

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 90^\circ$

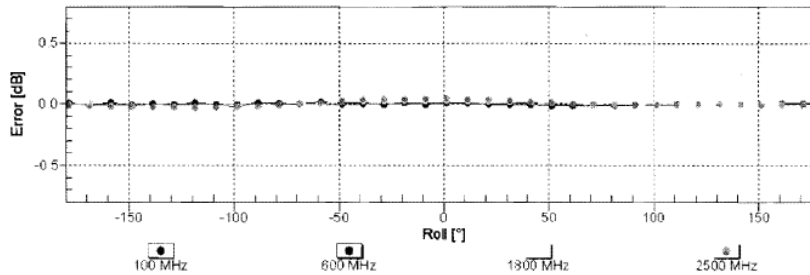

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011



Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**


ER3DV6- SN:2286

January 14, 2011

Dynamic Range f(E-field) (TEM cell , f = 900 MHz)

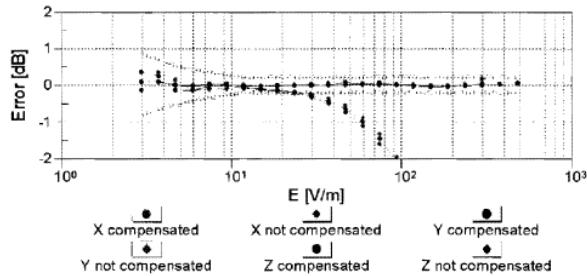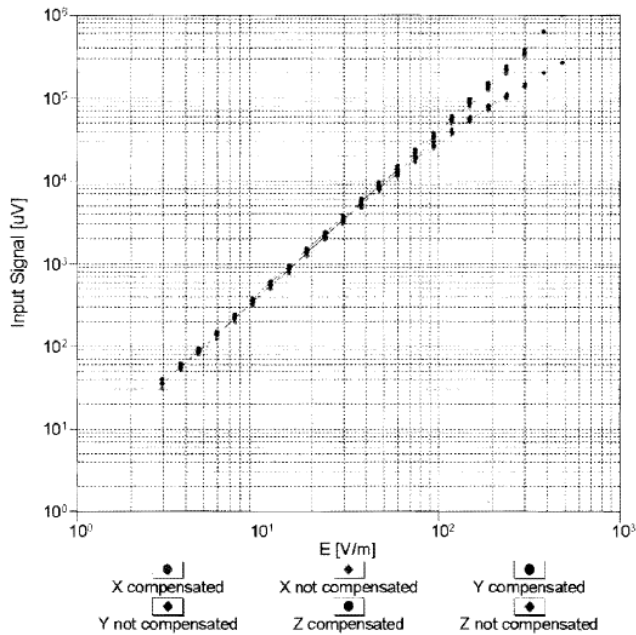



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 15(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36


ER3DV6- SN:2286

January 14, 2011

Deviation from Isotropy in Air
Error (ϕ , θ), $f = 900$ MHz

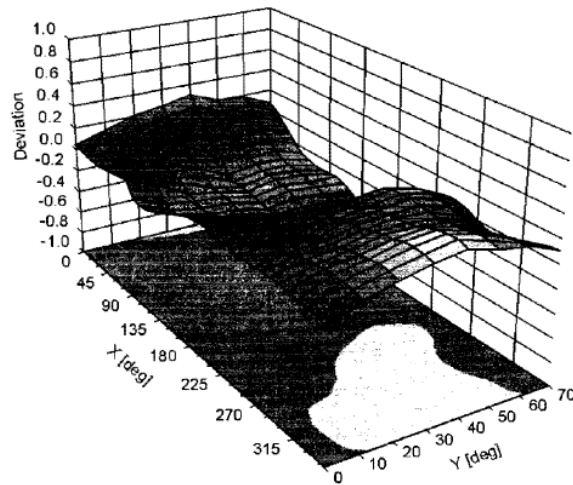

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		16(25)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Mar. 22-23, Apr. 28, 2011	RTS-3933-1104-55A RTS-2580-1106-36	L6ARDU70CW L6ARDE70UW

Calibration Laboratory of Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No.: **H3-6105_Nov10**

CALIBRATION CERTIFICATE



Object	H3DV6 - SN:6105
Calibration procedure(s)	QA CAL-03.v5, QA CAL-25.v2 Calibration procedure for H-field probes optimized for close near field evaluations in air
Calibration date	November 18, 2010


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	10-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	10-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	10-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe H3DV6	SN: 6182	4-Oct-10 (No. H3-6182_Oct10)	Oct-11
DAE4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP B648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Jocin Kostralj	Function	Laboratory Technician	 
Approved by:	Katja Pokovic	Function	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.				Issued: November 19, 2010

	Document		Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		17(25)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Mar. 22-23, Apr. 28, 2011	RTS-3933-1104-55A RTS-2580-1106-36	L6ARDU70CW L6ARDE70UW

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:


NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ for XY sensors and $\theta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- X, Y, Z(f) $a_0 a_1 a_2 = X, Y, Z, a_0 a_1 a_2$ frequency_response** (see Frequency Response Chart).
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the X_ $a_0 a_1 a_2$ (no uncertainty required).

	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 18(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28 , 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36

H3DV6 – SN:6105


November 18, 2010

Probe H3DV6

SN:6105

Manufactured: January 5, 2002
Calibrated: November 18, 2010

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

	Document			Page
	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW			19(25)
Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36	FCC ID L6ARDU70CW L6ARDE70UW	

H3DV6-- SN:6105

November 18, 2010

DASY/EASY - Parameters of Probe: H3DV6 - SN:6105

Basic Calibration Parameters

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / $\sqrt{\text{mV}}$)	a0	2.94E-003	2.71E-003	3.01E-003	± 5.1 %
Norm (A/m / $\sqrt{\text{mV}}$)	a1	2.83E-005	2.25E-005	-8.45E-005	± 5.1 %
Norm (A/m / $\sqrt{\text{mV}}$)	a2	-1.08E-005	2.19E-006	6.61E-006	± 5.1 %
DCP (mV) ^B		90.4	91.6	92.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	211.2	±2.96 %
			Y	0.00	0.00	1.00	233.0	
			Z	0.00	0.00	1.00	239.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Numerical linearization parameter: uncertainty not required

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011


Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**

H3DV6- SN:6105

November 18, 2010

Frequency Response of H-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

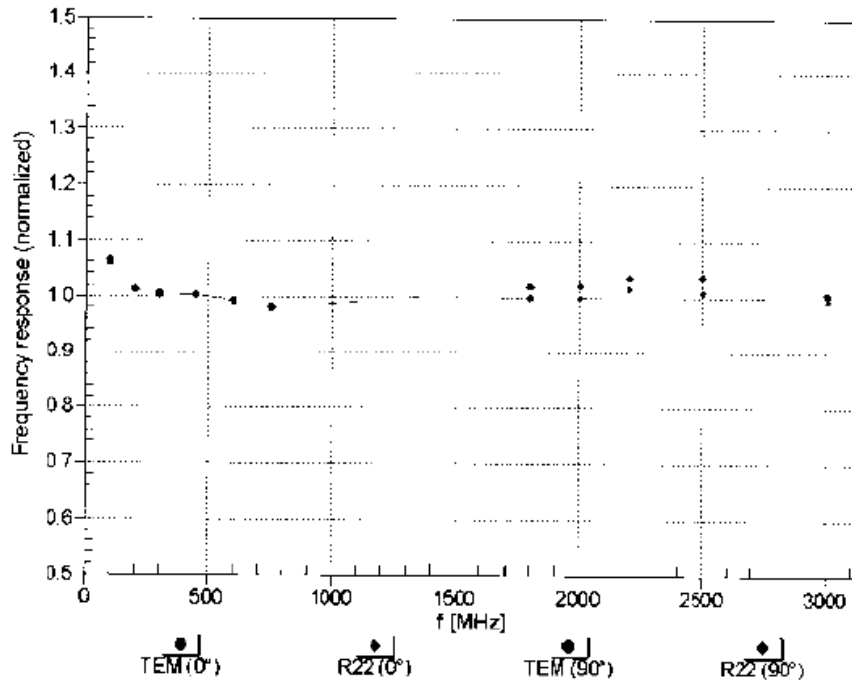

Uncertainty of Frequency Response of H-field: $\pm 6.3\%$ (k=2)

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011

Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**


FCC ID
**L6ARDU70CW
 L6ARDE70UW**

H3DV6- SN:6105


November 18, 2010

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM,0°

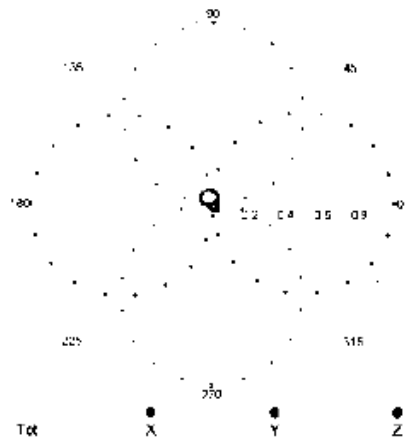


f=2500 MHz,R22,0°

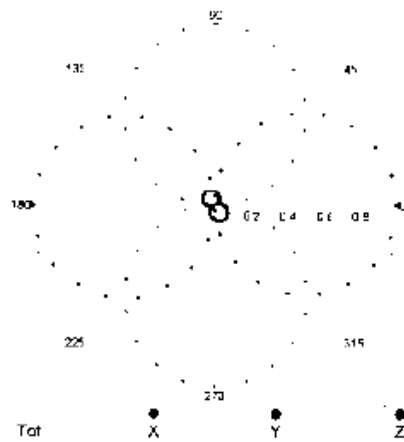


Receiving Pattern (ϕ), $\theta = 90^\circ$

f=600 MHz,TEM,90°

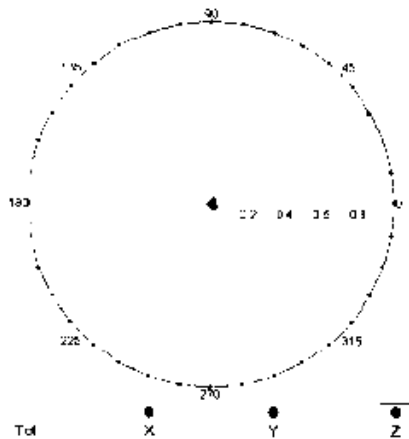

f=2500 MHz,R22,90°

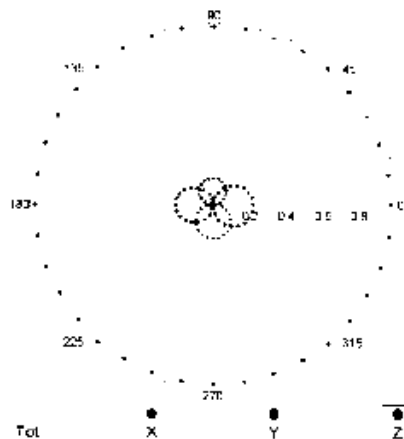

yes

Author Data
Daoud Attayi

Dates of Test
Mar. 22-23, Apr. 28, 2011


Report No
**RTS-3933-1104-55A
 RTS-2580-1106-36**

FCC ID
**L6ARDU70CW
 L6ARDE70UW**

H3DV6- SN:6105


November 18, 2010

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

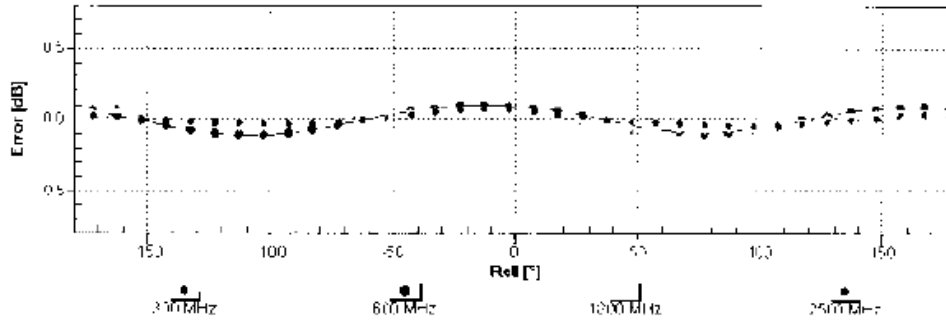

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$


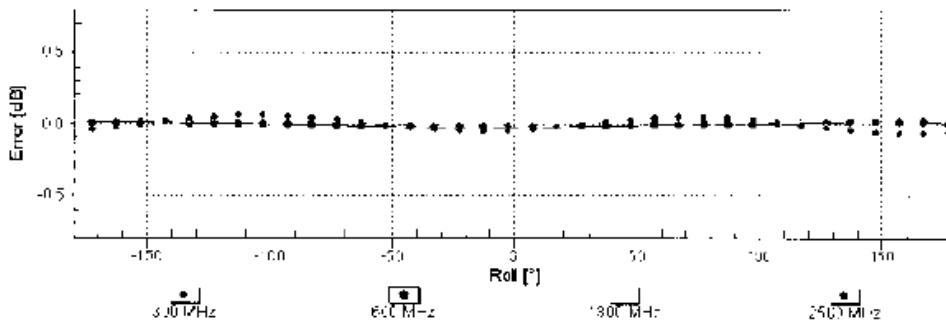


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)


H3DV6- SN:6105

November 18, 2010

Dynamic Range f(H-field) (TEM cell, f = 900 MHz)

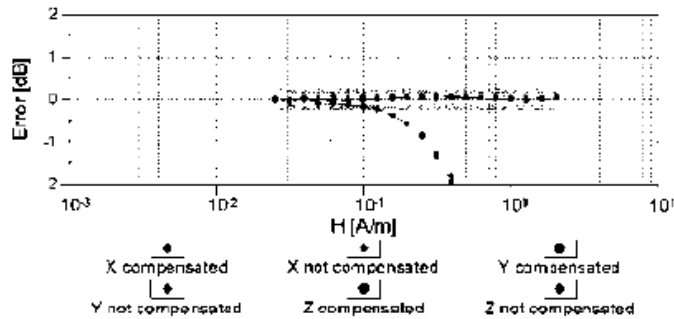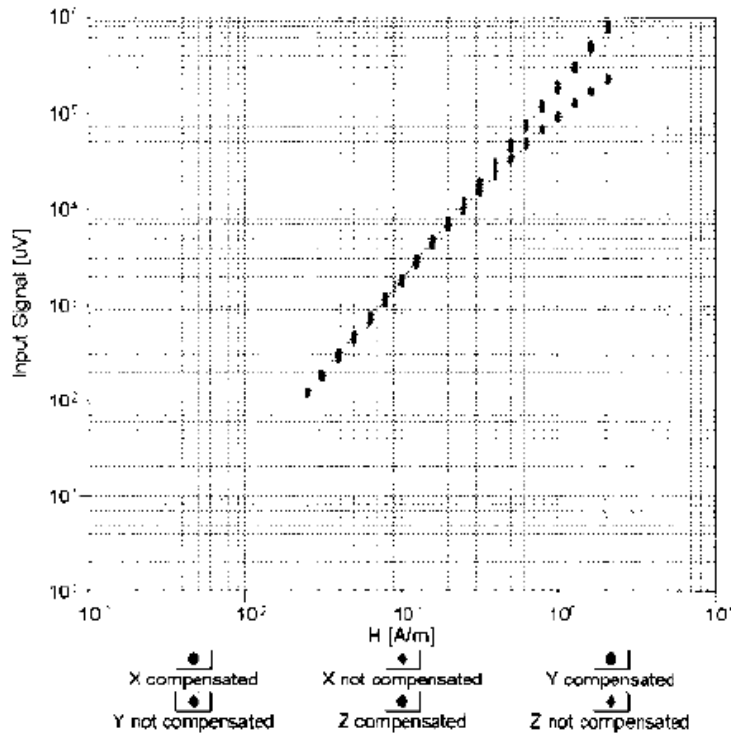

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)



	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 24(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36

H3DV6-SN.6105


November 18, 2010

Deviation from Isotropy in Air

Error (ϕ , θ), $f = 900$ MHz

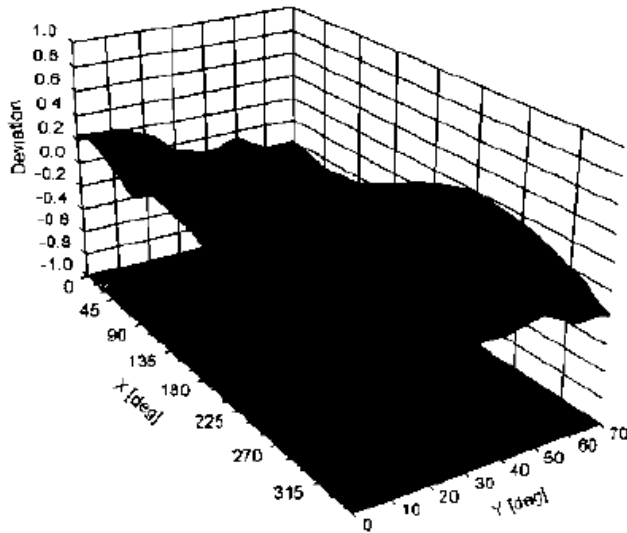

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDU71CW/RDE71UW		Page 25(25)
	Author Data Daoud Attayi	Dates of Test Mar. 22-23, Apr. 28, 2011	Report No RTS-3933-1104-55A RTS-2580-1106-36

H3DV6- SN:6105

November 18, 2010

DASY/EASY - Parameters of Probe: H3DV6 - SN:6105

Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (°)	-62.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm