	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 1(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

Hearing Aid Compatibility RF Emissions Test Report

Testing Lab:	RIM Testing Services 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	Applicant:	Research In Motion Ltd. 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.blackberry.com
---------------------	---	-------------------	--

Statement of Compliance: RIM Testing Services (RTS) declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

This Blackberry® Smartphone is a wireless portable device and has been shown to be in compliance with FCC 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handset, FCC Report and FCC Report and Order, DA 12-550, April 2012 and FCC Guidance KDB 285076 D01, V03r01, April 2013.

Andrew Becker
SAR & HAC Compliance Specialist
(Verification of the Test Report)

Daoud Attayi
Compliance Manager (SAR/HAC)
(Author of the Test report)

Masud S. Attayi
Manager, Regulatory Compliance
(Approval for the Test Report)


**RTS is accredited
according to
EN ISO/IEC 17025 by:**




592

Report issue date: June 07, 2013

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
Copyright 2005-2013, RIM Testing Services, a division of Research In Motion Limited

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 2(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

Note: According to the hardware similarity document, BlackBerry model: RFR101LW has a same design/PCB as RFS121LW, except RFR101LW also supports LTE Bands 2,4,5,17 and UMTS Band IV. Due to this similarity, only HAC measurements were performed on the worst case GSM 1900 and the new UMTS band IV band.

	Document		Page
	Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		3(22)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Feb. 17, June 28, 2012 March 22-June 04, 2013	RTS-6036-1304-53	L6ARFR100LW

CONTENTS

1.0 Introduction	4
2.0 Applicable references	5
3.0 Equipment unit tested	6
3.1 Picture of device	6
3.2 Device description	6
3.3 Battery	10
3.4 Antenna description	10
4.0 List of test equipment	10
5.0 Measurement procedures	11
5.1 System Validation	11
5.1.1 Dipole Validation	11
5.1.2 RF Field Probe Modulation Factor	12
5.2 Near-Field RF Emission	15
6.0 Summary of results	18
6.1 Conclusion	20
7.0 Measurement uncertainty	21
7.1 Site-Specific Uncertainty	22


Annex A: Measurement plots and data

- A.1 Spectrum analyser plots: CW, 80% AM and GSM/WDMA signals
- A.2 Dipole validation and probe modulation factor plots
- A.3 RF emission field plots

Annex B: Probe and dipole descriptions and calibration certificates

- B.1 Probe and measurement chain description and specifications
- B.2 Probe and dipole calibration certificates

Annex C: Test set up photos

	Document		Page
	Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		4(22)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Feb. 17, June 28, 2012 March 22-June 04, 2013	RTS-6036-1304-53	L6ARFR100LW

1.0 Introduction

This test report documents the measurement of the near electric and magnetic fields generated by a wireless communication device in the region where a hearing aid would be used. The measurement procedures of ANSI C63.19-2007 were followed along with the guidance provided by the FCC.

The electric and magnetic fields from a wireless device are scanned using a SPEAG DASY5 automated system with HAC extension and free-space probes (ER3DVx and H3DVx) in a 5cm x 5cm area, 15mm above the wireless device's acoustic output and the centre point of the probe element. The area is divided into 9 sub-grids and the maximum values of the electrical and a magnetic field scans are evaluated automatically according to the rules defined in the standard and the device is assigned a certain category. Should the wireless device's maximum T-Coil output occur in a location other than the centre of acoustic output, then the RF field scans are repeated with the measurement area centered on the maximum T-Coil output location.

The DASY5 HAC Extension consists of the following parts: the Test Arch phantom, three validation dipoles, dipole and DUT holders, magnetic and electric field probes and DASY5 software. The field probes and measurement electronics are described in Annex B.1.


The specially designed Test Arch allows high precision positioning of both the device and any of the validation dipoles. The broadband dipoles are calibrated at a single frequency and are used for system performance checks.

In order to correlate the usability of a hearing aid with a wireless device (WD), the WD's radio frequency (RF) and audio band emissions are measured. ANSI C63.19 requires:

- Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD in the vicinity of the audio output to categorize these emissions for correlation with the RF immunity of the microphone mode of operation of a hearing aid.
- Audio frequency magnetic field measurements of a WD emitted in the vicinity of the audio output to categorize these emissions for correlation with the T-Coil mode of operation of a hearing aid.


Hence, the following measurements are made for the WDs:

1. RF E-Field emissions.
2. RF H-Field emissions.
3. T-Coil mode, magnetic signal strength in the audio band.
4. T-Coil mode, magnetic signal and noise articulation index.
5. T-Coil mode, magnetic signal frequency response through the audio band.
6. RF T-Coil environment: The worst case M rating from E or H field 5x5 cm scan centered at the axial T-coil highest peak location.

		Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW	Page 5(22)
Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53	FCC ID L6ARFR100LW

2.0 Applicable references

- 1] ANSI C63.19-2007, American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.
- [2] FCC 47CFR § 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handsets.
- [3] SPEAG DASY5 user manual, December 2012.
- [4] Equipment Authorization Guidance on Hearing Aid Compatibility, KDB 285076 D01 HAC Guidance v03 R01, April, 2013.
- [5] FCC Report and Order, DA 12-550, April 2012.

	Document		Page
	Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		6(22)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Feb. 17, June 28, 2012 March 22-June 04, 2013	RTS-6036-1304-53	L6ARFR100LW

3.0 Equipment unit tested

3.1 Picture of device

Please refer to Annex C.

Figure 3.1-1. BlackBerry® smartphone

3.2 Device description

Device Model	RFS121LW			
FCC ID	L6ARFS120LW			
PIN	Radiated: 2AB02A54 (Rev1), 2AB02A49 (Rev1), 2AB04D29 (Rev2) , 2FFF9A72 (Rev3) Conducted: 2AB02A62 (Rev1), 2AB02A6B (Rev1), 2AB04D16 (Rev2), 2FFF9A91 (Rev3)			
Hardware Rev	Rev1-906-00/01, Rev2-906-00/01, Rev3-x09-01/02			
Software Version	127.0.1.4081, 10.1.0.1666			
Prototype or Production Unit	Production			
Mode(s) of Operation	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
Nominal Maximum conducted RF Output Power (dBm)	33.5 29.0	31.5 28.0	30.5 25.0	28.0 24.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:8	2:8	3:8	4:8
Transmitting Frequency Range (MHz)	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
Mode(s) of Operation	802.11b	802.11g	802.11n	Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	16.5	15.5	12.5	10.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	2402-2483
Mode(s) of Operation	HSPA ⁺ / WCDMA / UMTS FDD V (850)	HSPA ⁺ / WCDMA / UMTS FDD II (1900)	NFC	
Nominal Maximum conducted RF Output Power (dBm)	23.5	22.5	N/A	
Tolerance in Power Setting	± 0.5	± 0.5	N/A	



Document

Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW

Page

7(22)

Author Data

Daoud Attayi

Dates of Test

**Feb. 17, June 28, 2012
March 22-June 04, 2013**

Report No

RTS-6036-1304-53

FCC ID

L6ARFR100LW

on centre channel (dB)				
Duty Cycle	1:1	1:1	N/A	
Transmitting Frequency Range (MHz)	824.6 – 846.6	1852.4 – 1907.6	13.56	

Table 3.2-1 Test device characterization for U.S. wireless operating modes/bands for model RFS121LW

Device Model	RFR101LW			
FCC ID	L6ARFR100LW			
PIN	Radiated: 2AB035D0(Rev1), 2AB035B7(Rev1), 2FFFB6AF (Rev2) Conducted: 2AB035BB (Rev1), 2AB035B8 (Rev1)			
Hardware Rev	Rev1-906-00/01, Rev2-x06-01/05			
Software Version	127.0.1.3901/4081, 10.1.0.1411			
Prototype or Production Unit	Production			
Mode(s) of Operation	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
Nominal Maximum conducted RF Output Power (dBm)	33.5 29.0	31.5 28.0	30.5 25.0	28.0 24.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5
Duty Cycle	1:8	2:8	3:8	4:8
Transmitting Frequency Range (MHz)	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
Mode(s) of Operation	802.11b	802.11g	802.11n	Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	16.5	15.5	12.5	10.5
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	2402-2483
Mode(s) of Operation	HSPA+ / WCDMA / UMTS FDD V (850)	WCDMA / UMTS FDD IV (1700)	HSPA+ / WCDMA / UMTS FDD II (1900)	NFC
Nominal Maximum conducted RF Output Power (dBm)	23.5	23.0	22.5	N/A
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:1	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	824.6 – 846.6	1712.4-1752.6	1852.4 – 1907.6	13.56



	Document		Page
	Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		8(22)
Author Data	Dates of Test	Report No	FCC ID
Daoud Attayi	Feb. 17, June 28, 2012 March 22-June 04, 2013	RTS-6036-1304-53	L6ARFR100LW

Table 3.2-2 Test device characterization for U.S. wireless operating modes/bands for model RFR101LW

Note 1: BT and NFC are not activated during test because it is not held-to-ear service.

Note 2: Wi-Fi is not activated during test because ANSI C63.19-2007 standard does not cover this technology.

Device Model	RFR101LW		
FCC ID	L6ARFR100LW		
PIN	Radiated: 2AB035D0(Rev1), 2AB035B7(Rev1), 2FFFB6AF (Rev2) Conducted: 2AB035BB (Rev1), 2AB035B8 (Rev1)		
Hardware Rev	Rev1-906-00/01, Rev2-x06-01/05		
Software Version	127.0.1.3901/4081, 10.1.0.1411		
Prototype or Production Unit	Production		
Transmission channel bandwidth	Band 17: 5 MHz, 10 MHz Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15MHz, 20MHz Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15MHz, 20MHz		
Transmission channel number and frequencies			
	LTE band 17		LTE band 5
	Chan.	f (MHz)	Chan. f (MHz)
L	23780	709.0	20450 829.0
M	23790	710.0	20525 836.5
H	23800	711.0	20600 844.0
	LTE band 4		LTE band 2
	Chan.	f (MHz)	Chan. f (MHz)
L	20050	1720.0	18700 1860.0
M	20175	1732.5	18900 1880.0
H	20300	1745.0	19100 1900.0
UE Category	Category 3		
Modulation supported in uplink	QPSK, 16QAM		
Description of LTE antenna	1 Tx/Rx Ant, Sharing with GSM/UMTS; 2 Rx Ant, one separate and one sharing with CDMA		
LTE voice available/supported	No		
Hotspot with LTE+WiFi	Yes		
Hotspot with LTE+WiFi active with GSM/WCDMA voice	No		
LTE MPR permanently built-in by design	Yes		
LTE A-MPR	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500		
LTE maximum average power (dBm)	Band 17: 22.89 dBm Band 5: 23.45 dBm Band 4: 22.79 dBm Band 2: 22.83 dBm		
Other non-LTE U.S. wireless operating modes/bands	GSM/WCDMA/HSPA+	835 MHz GSM/UMTS 1700 MHz UMTS 1900 MHz GSM/UMTS	
	WiFi and BT	2.4 GHz Wi-Fi 2.4 GHz BT	

		Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW	Page 9(22)
Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53	FCC ID L6ARFR100LW


Simultaneous Tx conditions	Please refer to section 1.9: Highlights of the FCC OET SAR Evaluation Considerations for Handsets with Multiple Transmitters/ Antennas & GSM/GPRS/EDGE Procedure.
Power reduction applied for SAR compliance	No

Table 3.2-3 Test device characterization all U.S. wireless operating modes/bands

Note 3: LTE is not activated during test because ANSI C63.19-2007 standard does not cover this technology.

Note 4: As per 3GPP TS 36.521-1 V10.0.0 (2011-12):

“The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.”...5.4.4

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 10(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

3.3 Battery

- 1) BAT-51585-00x

3.4 Antenna description

Type	Internal fixed antenna
Location	Bottom back centre (main licensed transmitter)
Configuration	Internal fixed antenna


Table 3.4-1. Antenna description

4.0 List of test equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Calibration Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE4)	DAE4 V1	881	01/14/2014
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3	472	03/06/2014
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3	473	01/15/2014
SCHMID & Partner Engineering AG	3-Dimensional E-Field Probe for Near-Field	ER3DV6	2286	01/11/2014
SCHMID & Partner Engineering AG	3-Dimensional H-Field Probe for Near-Field	H3DV6	6105	11/09/2013
Rohde & Schwarz	Base Station Simulator	CMU200	109747	11/19/2013
Rohde & Schwarz	Spectrum Analyzer	ESP 30	100884	12/02/2013
Agilent Technologies	Signal generator	8648C	4037U03155	09/23/2013
Agilent Technologies	Power meter	E4419B	GB40202821	09/23/2013
Agilent Technologies	Power sensor	8481A	MY41095417	09/26/2013
Agilent Technologies	Power meter	N1911A	MY45100905	05/17/2013 *
Agilent Technologies	Power sensor	N1921A	SG45240281	06/12/2013
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
SCHMID & Partner Engineering AG	Validation Dipole	CD835V3	1011	11/08/2013
SCHMID & Partner Engineering AG	Validation Dipole	CD1880V3	1008	11/08/2013

Table 4.1-1 List of test equipment

*Equipment was sent for calibration before due date.

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 11(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

5.0 Measurement procedures

5.1 System Validation

The test setup should be validated when first configured and verified periodically thereafter to ensure proper function. The procedure consists of two parts: dipole validation and determination of probe modulation factor.

5.1.1 Dipole Validation

The HAC validation dipole antenna serves as a known source for an electrical and magnetic RF output.

1. The dipole antenna was placed in the position normally occupied by the WD.
2. The dipole was energized with a 20 dBm un-modulated continuous-wave signal.
3. The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements.
4. The length of the dipole was scanned with both E-field and H-field probes and the maximum value for each scan was recorded.
5. The readings were compared with the values provided by the probe manufacturer and were found to agree within tolerance of +/- 10%. Please refer to Annex A.2 for Dipole Validation Plots.

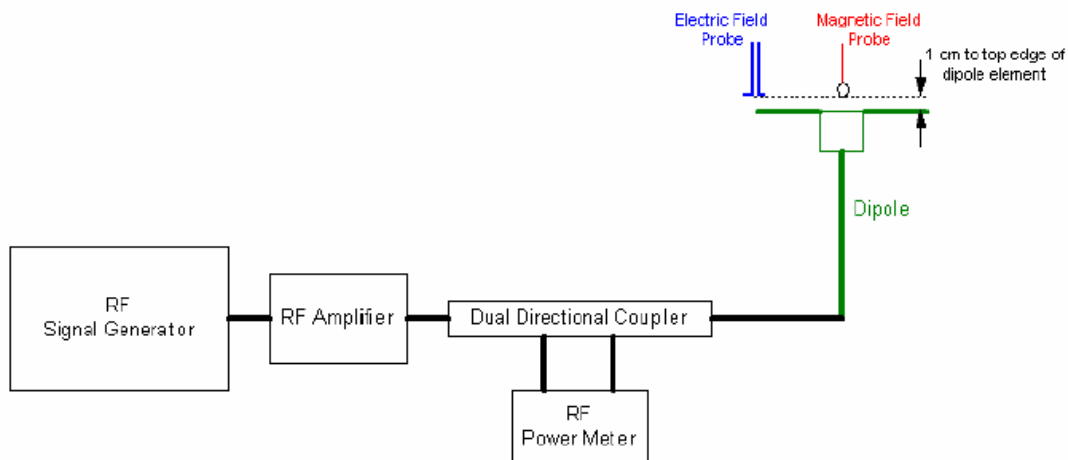



Figure 5.1-1: Dipole validation procedure

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 12(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

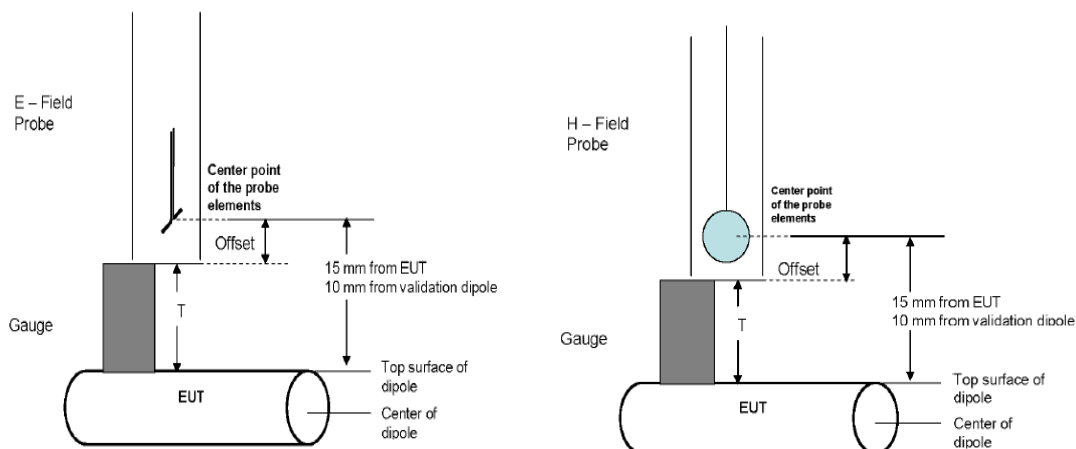


Figure 5.1-2: Gauge Block with E-Field & H-Field probes

5.1.2 RF Field Probe Modulation Factor

The Probe Modulation Factor (PMF) characterizes the responses of the E-field and H-field probes and their instrumentation chain to a modulated signal. The PMF is the ratio of the responses to fields produced by CW and modulated signals having equal peak amplitude.

Three test cases are recommended. The real or emulated WD (Wireless device) modulated signal, an unmodulated (CW) and an 80% AM RF signal shall be used for each relevant frequency band. Each of the test cases below shall be measured with both E_ and H_Field probe.

a) Measurement of real and emulated signal

- Set a WD or emulated signal source to apply full power into the reference dipole.
- Measure both the peak and average input power applied to the antenna and record the values using the following test instructions for measuring the RF interference of a modulated signal.

Spectrum analyzer set up:

RBW \geq emission bandwidth

Video Bandwidth \geq 20 KHz


Span: Zero

Center Frequency: Nominal center of frequency channel

Amplitude: Linear (logarithmic scale may be used)

Detection: Peak detection

Trigger: Video or IF trigger

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 13(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

Sweep rate: sufficiently rapid to permit the complete pulse to be resolved accurately.

- Using near-field measurement system, scan the antenna over the appropriately sized area and record the greatest average power reading observed.

b) Measurement of CW and AM

- Set the RF signal generator for CW or 80 % AM and set the output power so the peak power applied to the antenna is equal to that recorded for the real or emulated signal using the WD modulation format.
- Measure both the peak and average input power applied to the antenna and record these values. Calculate the peak to average power ratio (PAR). The PAR for the CW signal should be 0.0 dB and 3.9 dB for the AM signal with 80% modulation depth from each other and the peak should be that amount above the target values.

The PMF was calculated for the following signals: 80% AM and the modulated signal produced by the WD. The PMF measurement was performed with the field probe and instrumentation that will be used together during RF emissions measurements. Once calculated, the PMF was entered into the DASY5 software and applied to the measured modulated fields of the specified type.

ANSI C63.19 outlines the following alternate procedure as one method for determining probe modulation factor:

1. Fix the field probe in a set location relative to a field generating device, such as the reference dipole antenna.
2. Illuminate the probe using the wireless device connected to the reference dipole with a test signal at the intended measurement frequency, Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10 dB above the probe system noise floor but within the systems operating range.
3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna.
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The ratio, in linear units, of the probe reading in step 6 to the reading in step 3 is the E-field modulation factor.
8. Repeat the above using the H-field probe, except locate the probe at the center of the dipole.

Please refer to Annex A.1 for 0 Hz-span spectrum analyzer plots. The signal generator was used to generate the CW and AM signals. The WD was used to generate the modulated signal.

Please refer to Annex A.2 for probe modulation factor measurement plots.

Author Data
Daoud Attayi

Dates of Test
Feb. 17, June 28, 2012
March 22-June 04, 2013


Report No
RTS-6036-1304-53

FCC ID
L6ARFR100LW

f (MHz)	Signal Type	Peak Power (dBm)	Measured E-Field (V/m)	Target E-Field (V/m)	Delta (%)	PMF
835	CW (Validation)	20.00	168.2	159.7	+5.32	
835	GSM 850	20.47	54.25			3.00
835	CW	20.49	162.8			
835	80 % AM	20.52	102.0			
835	WCDMA band V	12.59	64.41			1.07
835	CW	12.60	68.64			
835	80 % AM	12.59	45.21			
1880	CW (Validation)	20.00	131.0	135.3	-3.18	
1880	CW (Validation)	20.00	128.7	135.3	-4.88	
1733	WCDMA band IV	10.32	45.31			1.03
1733	CW	10.39	46.45			
1733	80 % AM	10.32	29.45			
1880	GSM 1900	16.78	29.81			2.85
1880	CW	16.80	84.89			
1880	80 % AM	16.77	53.60			
1880	WCDMA band II	10.60	42.43			1.00
1880	CW	10.61	42.41			
1880	80 % AM	10.63	27.40			
f (MHz)	Signal Type	Peak Power (dBm)	Measured H-Field (A/m)	Target H-Field (A/m)	Delta (%)	PMF
835	CW (Validation)	20.00	0.474	0.462	+2.81	
835	GSM 850	20.47	0.163			2.89
835	CW	20.49	0.471			
835	80 % AM	20.52	0.304			
835	WCDMA band V	12.59	0.181			1.09
835	CW	12.60	0.197			
835	80 % AM	12.59	0.127			
1880	CW (Validation)	20.00	0.485	0.456	+6.36	
1880	CW (Validation)	20.00	0.446	0.456	-2.19	
1733	WCDMA band IV	10.32	0.157			1.00
1733	CW	10.39	0.157			
1733	80 % AM	10.32	0.100			
1880	GSM 1900	16.78	0.105			2.86
1880	CW	16.80	0.300			
1880	80 % AM	16.77	0.194			
1880	WCDMA band II	10.60	0.150			1.00
1880	CW	10.61	0.149			
1880	80 % AM	10.63	0.096			

Table 5.1-1: Dipole Validation and Modulation Factors

Probe Modulation Factor = Measured E or H-Field (CW)/Measured E or H-Field (Modulated)

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 15(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

5.2 Near-Field RF Emission

The following procedure was used to measure RF near E-field and H-field emissions:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. The WD was oriented in its intended test position with the reference plane in the horizontal plane and was secured in the device holder to maintain position accuracy.
3. A CMU 200 Base Station Simulator was used to place a normal voice call to the WD on the desired channel and to transmit at maximum power.
4. The DASY5 system measures power drift as part of each scan. If the power during a scan drifted by more than 0.20 dB, the scan was repeated. Power drift measurements for the worst-case scans are included in Annex A.3. A fully charged battery was used for each test.
5. The 5cm x 5cm measurement grid was centered on the center of the acoustic output or the T-Coil output, as appropriate. The field probe was located at the initial position at the center of the measurement grid.
6. A surface verification was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane.
7. The electric field probe, and separately the magnetic field probe, was used to measure the highest field strength in the 5cm x 5cm reference plane. The center point of the probe measurement element(s) shall be held 15 mm from the WD reference plane.
8. The entire 5cm x 5cm region was scanned with a 5mm step size. The reading was recorded at each measurement location. Justification of the step size and interpolation used is provided at the end of Annex A.2.
9. Around the center sub-grid, five contiguous sub-grids were identified with the lowest maximum field strength readings. Please note that a maximum of five sub-grids can be excluded for both E- and H-field measurements.
10. The highest field reading was identified within the non-excluded sub-grids
11. The highest field reading was converted from average to peak V/m or A/m, as appropriate. This conversion was done by the DASY5 SEMCAD processor after entering correct PMF.
12. Once the worst-case configuration was determined, the WD was tested with second source battery.
13. The highest peak reading was compared to the categories defined in C63.19 using the appropriate AWF.

- If a WD has more than one antenna position, it is necessary to test the WD only in the condition of maximum antenna efficiency, i.e. antenna extended.
- The WD's backlight shuts off automatically a short time after a call is established.


Category	Telephone RF Parameters < 960 MHz				
	Near Field	AWF	E-Field Emissions		H-Field Emissions
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m

Category	Telephone RF Parameters > 960 MHz				
	Near Field	AWF	E-Field Emissions		H-Field Emissions
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	<63.1	V/m	<0.19	A/m
	-5	<47.3	V/m	<0.14	A/m

Table 5.1-2: Wireless Device near-field categories

Standard	Technology	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50 Hz)	0
J-STD-007	GSM (217)	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0
iDEN™	TDMA (22 and 11 Hz)	0

Table 5.1-3: Articulation Weighting Factor (AWF)

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 17(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

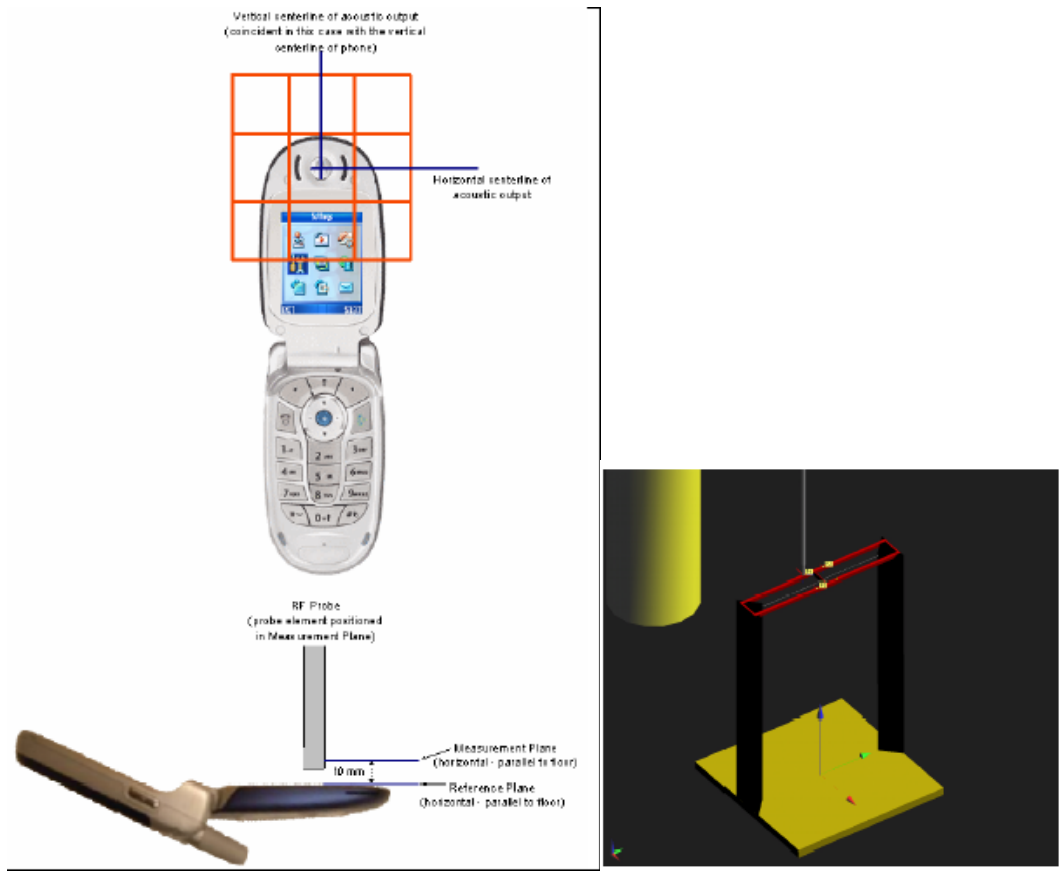



Figure 5.1-3: WD reference plane for RF emission measurements Figure 5.1-4: HAC Phantom/Test Arch

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 18(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

6.0 Summary of results

RF Emissions Test					
Mode	f (MHz)	Cond. Pwr. (dBm)	Peak E-Field (V/m)	Center of Speaker or Telecoil	M-Rating
GSM 850	824.2	34.0	194.1	Speaker	3
	836.8	33.9	222.8	Speaker	3
	848.8	33.7	220.8	Speaker	3
	836.8	33.9	191.6	Telecoil	3
WCDMA band V 850	826.4	23.9	67.52	Speaker	4
	836.4	24.0	73.49	Speaker	4
	846.6	23.7	73.36	Speaker	4
	836.4	24.0	63.99	Telecoil	4
WCDMA band IV 1700	1712.4	23.0	16.49	Speaker	4
	1732.6	23.1	16.36	Speaker	4
	1752.6	22.9	17.20	Speaker	4
	1752.6	22.9	16.38	Telecoil	4
GSM 1900	1850.2	29.4	57.93	Speaker	3
	1880.0	29.2	56.98	Speaker	3
	1909.8	29.4	61.05	Speaker	3
	1850.2	29.4	62.98	Telecoil	3
WCDMA band II 1900	1852.4	22.5	35.99	Speaker	4
	1880.0	22.4	32.50	Speaker	4
	1907.6	22.4	33.47	Speaker	4
	1852.4	22.5	37.35	Telecoil	4
Overall M-Rating:					3

Table 6.1–E-Field Data Summary



Document

Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW

Page

19(22)

Author Data

Daoud Attayi

Dates of Test

**Feb. 17, June 28, 2012
March 22-June 04, 2013**

Report No


RTS-6036-1304-53

FCC ID

L6ARFR100LW

RF Emissions Test					
Mode	f (MHz)	Cond. Pwr. (dBm)	Peak H- Field (A/m)	Center of Speaker or Telecoil	M-Rating
GSM 850	824.2	34.0	0.489	Speaker	3
	836.8	33.9	0.496	Speaker	3
	848.8	33.7	0.516	Speaker	3
	848.8	33.7	0.496	Telecoil	3
WCDMA band V 850	826.4	23.9	0.177	Speaker	4
	836.4	24.0	0.179	Speaker	4
	846.6	23.7	0.186	Speaker	4
	846.6	23.7	0.189	Telecoil	4
WCDMA band IV 1700	1712.4	23.0	0.039	Speaker	4
	1732.6	23.1	0.048	Speaker	4
	1752.6	22.9	0.055	Speaker	4
	1752.6	22.9	0.055	Telecoil	4
GSM 1900	1850.2	29.4	0.171	Speaker	3
	1880.0	29.2	0.176	Speaker	3
	1909.8	29.4	0.198	Speaker	3
	1909.8	29.4	0.193	Telecoil	3
WCDMA band II 1900	1852.4	22.5	0.108	Speaker	4
	1880.0	22.4	0.102	Speaker	4
	1907.6	22.4	0.107	Speaker	4
	1907.6	22.4	0.100	Telecoil	4
Overall M-Rating:					3

Table 6.2– H--Field Data Summary

		Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW	Page 20(22)
Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53	FCC ID L6ARFR100LW

6.1 Conclusion

The BlackBerry® Smartphone Model: **RFR101LW** is categorized to be **M3T4** based on HAC RF Emission and ABM T-Coil performance in accordance with ANSI C63.19-2007: American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.


Therefore, the device is found to be in compliance with the requirements of FCC 20.19 (10-1-07 Edition) Hearing Aid-Compatible Mobile Handsets and FCC Report and Order, DA 12-550 (April, 2012).

7.0 Measurement uncertainty

HAC Uncertainty Budget According to ANSI C63.19 [1]							
Error Description	Uncertainty value	Prob. Dist.	Div.	(c ₁) E	(c ₂) H	Std. Unc. E	Std. Unc. H
Measurement System							
Probe Calibration	±5.1 %	N	1	1	1	±5.1 %	±5.1 %
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %
Sensor Displacement	±16.5 %	R	$\sqrt{3}$	1	0.145	±9.5 %	±1.4 %
Boundary Effects	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %
Scaling to Peak Envelope Power	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %
System Detection Limit	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %
RF Ambient Conditions	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %
RF Reflections	±12.0 %	R	$\sqrt{3}$	1	1	±6.9 %	±6.9 %
Probe Positioner	±1.2 %	R	$\sqrt{3}$	1	0.67	±0.7 %	±0.5 %
Probe Positioning	±4.7 %	R	$\sqrt{3}$	1	0.67	±2.7 %	±1.8 %
Extrap. and Interpolation	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Test Sample Related							
Device Positioning Vertical	±4.7 %	R	$\sqrt{3}$	1	0.67	±2.7 %	±1.8 %
Device Positioning Lateral	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Device Holder and Phantom	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %
Phantom and Setup Related							
Phantom Thickness	±2.4 %	R	$\sqrt{3}$	1	0.67	±1.4 %	±0.9 %
Combined Std. Uncertainty						±14.7 %	±10.9 %
Expanded Std. Uncertainty on Power						±29.4 %	±21.8 %
Expanded Std. Uncertainty on Field						±14.7 %	±10.9 %

Table 7.1. Worst-Case uncertainty budget for HAC free field assessment according to ANSI C63.19.

[1] The budget is valid for the frequency range 800 MHz - 3 GHz and represents a worst-case analysis.

	Document Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFR101LW		Page 22(22)
	Author Data Daoud Attayi	Dates of Test Feb. 17, June 28, 2012 March 22-June 04, 2013	Report No RTS-6036-1304-53

7.1 Site-Specific Uncertainty

RF Reflections

Section 4.2 of ANSI C63.19 requires that any RF reflecting objects are a minimum distance of 2 wavelengths away from the WD under test. For this WD, the longest wavelength occurs when the WD is transmitting at 824.7MHz. The wavelength is:

$$\lambda = \frac{c}{f} = \frac{3 \cdot 10^8 \text{ m/s}}{824.7 \text{ MHz}} = 0.364 \text{ m}$$

Therefore, 2 wavelengths result in a distance of 0.73m. Tests are performed in an RF shielded chamber. The distance to the nearest wall is > 1m and the distance to the robot's safety guardrail is ~1.0m, both satisfying the requirement. In addition, RF absorbing cones are placed at the base of the robot to further reduce reflections. The HAC phantom arch is made of low dielectric constant plastic and should not be a source of reflections.

Environmental Conditions

During measurements, the temperature of the test lab was kept between 21°C and 25°C and relative humidity was maintained between 20% and 55%.

Ambient Noise

ANSI C63.19 standard requires RF ambient noise to be at least 20dB below the measurement level. Scans of RF ambient noise fields were previously performed for verification and was determined to be < 20 dB than the measured WD RF field levels.