



RADIO TEST REPORT

FCC ID : LDK-9160S2578
Equipment : Catalyst Wireless 9166I Wi-Fi 6E Series Access Point ,
Catalyst Wireless 9164I Wi-Fi 6E Series Access Point
Brand Name : CISCO
Model Name : CW9166I-B, CW9164I-B, CW9166I-MR, CW9164I-MR
Applicant : Cisco Systems Inc
125 West Tasman Drive San Jose California United
States 95134-1706
Manufacturer : Cisco Systems Inc
125 West Tasman Drive San Jose California United
States 95134-1706
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 28, 2021, and testing was started from Jan. 22, 2022 and completed on May 16, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....4

Summary of Test Result.....5

1 General Description6

1.1 Information.....6

1.2 Applicable Standards13

1.3 Testing Location Information.....13

1.4 Measurement Uncertainty14

2 Test Configuration of EUT15

2.1 Test Channel Mode15

2.2 The Worst Case Measurement Configuration.....26

2.3 EUT Operation during Test30

2.4 Accessories30

2.5 Support Equipment.....30

2.6 Test Setup Diagram32

3 Transmitter Test Result35

3.1 AC Power-line Conducted Emissions35

3.2 Emission Bandwidth.....37

3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)38

3.4 Peak Power Spectral Density (E.I.R.P.).....40

3.5 Unwanted Emissions.....43

3.6 Contention Based Protocol.....49

3.7 Frequency Stability.....50

4 Test Equipment and Calibration Data51

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of Emission Bandwidth

Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)

Appendix E. Test Results of Unwanted Emissions

Appendix F. Test Results of Contention-Based Protocol

Appendix G. Test Results of Frequency Stability



Appendix H. Test Photos

Photographs of EUT v01



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|-----------------|--|--------------------|--------|
| 1.1.2 | 15.203 | Antenna Requirement | PASS | - |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | PASS | - |
| 3.2 | 15.407(a) | Emission Bandwidth | PASS | - |
| 3.3 | 15.407(a) | Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) | PASS | - |
| 3.4 | 15.407(a) | Peak Power Spectral Density (E.I.R.P.) | PASS | - |
| 3.5 | 15.407(b) | Unwanted Emissions | PASS | - |
| 3.6 | 15.407(d) | Contention-Based Protocol | PASS | - |
| 3.7 | 15.407(g) | Frequency Stability | PASS | - |

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11 | Ch. Frequency (MHz) | Channel Number |
|-----------------------|------------------|---------------------|----------------|
| 5925-7125 | ax (HEW20) | 5955-7115 | 1-233 [59] |
| 5925-7125 | ax (HEW40) | 5965-7085 | 3-227 [29] |
| 5925-7125 | ax (HEW80) | 5985-7025 | 7-215 [14] |
| 5925-7125 | ax (HEW160) | 6025-6985 | 15-207 [7] |

<Radio 2>

| Band | Mode | BWch (MHz) | Nant |
|--------------|--------------------|------------|---------|
| 5925-7125GHz | 802.11ax HEW20 | 20 | 1, 2, 4 |
| 5925-7125GHz | 802.11ax HEW20-BF | 20 | 2, 4 |
| 5925-7125GHz | 802.11ax HEW40 | 40 | 1, 2, 4 |
| 5925-7125GHz | 802.11ax HEW40-BF | 40 | 2, 4 |
| 5925-7125GHz | 802.11ax HEW80 | 80 | 1, 2, 4 |
| 5925-7125GHz | 802.11ax HEW80-BF | 80 | 2, 4 |
| 5925-7125GHz | 802.11ax HEW160 | 160 | 1, 2, 4 |
| 5925-7125GHz | 802.11ax HEW160-BF | 160 | 2, 4 |

<Radio 3>

| Band | Mode | BWch (MHz) | Nant |
|--------------|----------------|------------|------|
| 5925-7125GHz | 802.11ax HEW20 | 20 | 1 |

Note:

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ The channel defined in the IEEE Standard P802.11ax™/D6.1.



1.1.2 Antenna Information

| Ant. | Port | | | | | | Brand | Model Name | Ant. Type | Connector | Gain (dBi) |
|------|-----------------|------------------------|-------------------------|------------------------|--|-----------|-------|--------------|-------------------|-----------|------------|
| | R1: WLAN 2.4GHz | R1: WLAN 5GHz UNII 1~3 | R2: WLAN 5GHz UNII 2C~3 | R2: WLAN 6GHz UNII 5~8 | R3: WLAN 2.4GHz /5GHz UNII 1~3/6GHz UNII 5~8 | Bluetooth | | | | | |
| 1 | 3 | 4 | - | - | - | - | CISCO | 95XEAJ15.G04 | Folded | I-PEX | Note2 |
| 2 | 4 | 3 | - | - | - | - | CISCO | 95XEAJ15.G03 | Folded | I-PEX | |
| 3 | 2 | 2 | - | - | - | - | CISCO | 95XEAJ15.G05 | Folded | I-PEX | |
| 4 | 1 | 1 | - | - | - | - | CISCO | 95XEAJ15.G06 | Folded | I-PEX | |
| 5 | - | - | 4 | 4 | - | - | CISCO | 95XEAJ15.G12 | H-POL Alford loop | I-PEX | |
| 6 | - | - | 3 | 3 | - | - | CISCO | 95XEAJ15.G11 | H-POL Alford loop | I-PEX | |
| 7 | - | - | 1 | 1 | - | - | CISCO | 95XEAJ15.G09 | H-POL Alford loop | I-PEX | |
| 8 | - | - | 2 | 2 | - | - | CISCO | 95XEAJ15.G10 | H-POL Alford loop | I-PEX | |
| 9 | - | - | - | - | 1 | - | CISCO | 95XEAJ15.G07 | PIFA | I-PEX | |
| 10 | - | - | - | - | 2 | - | CISCO | 95XEAJ15.G08 | PIFA | I-PEX | |
| 11 | - | - | - | - | - | 1 | CISCO | 95XEAJ15.G13 | PIFA | I-PEX | |

Note1: R means Radio.

Note2:

| Ant. | Antenna Gain (dBi) | | | | | | | | | | Bluetooth | Remark |
|------|--------------------|------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|-----|-----------|---------|
| | WLAN 2.4GHz | WLAN 5GHz UNII 1 | WLAN 5GHz UNII 2A | WLAN 5GHz UNII 2C | WLAN 5GHz UNII 3 | WLAN 6GHz UNII 5 | WLAN 6GHz UNII 6 | WLAN 6GHz UNII 7 | WLAN 6GHz UNII 8 | | | |
| 1 | 2.79 | 4.27 | 3.94 | 1.88 | 2.57 | - | - | - | - | - | - | Radio 1 |
| 2 | 2.43 | 5.09 | 5.16 | 2.89 | 2.72 | - | - | - | - | - | - | Radio 1 |
| 3 | 2.79 | 2.78 | 2.74 | 2.66 | 1.91 | - | - | - | - | - | - | Radio 1 |
| 4 | 2.62 | 5.24 | 5.46 | 4.26 | 3.94 | - | - | - | - | - | - | Radio 1 |
| 5 | - | - | - | 2.98 | 4.19 | 2.4 | 2.41 | 1.39 | 0.77 | - | - | Radio 2 |
| 6 | - | - | - | 3.46 | 4.94 | 2.95 | 1.96 | 1.32 | 0.87 | - | - | Radio 2 |
| 7 | - | - | - | 3.42 | 4.36 | 2.95 | 2.31 | 0.99 | 0.61 | - | - | Radio 2 |
| 8 | - | - | - | 3.67 | 4.23 | 2.91 | 3.96 | 1.59 | 0.33 | - | - | Radio 2 |
| 9 | 3.3 | 4.0 | | | | 5.3 | | | | - | - | Radio 3 |
| 10 | 3.3 | 4.0 | | | | 5.3 | | | | - | - | Radio 3 |
| 11 | - | - | - | - | - | - | - | - | - | 3.8 | - | Radio 4 |



Note3:

| Item | Directional Gain (dBi) | | | | | | | | | Remark |
|------|------------------------|------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|---------|
| | WLAN 2.4GHz | WLAN 5GHz UNII 1 | WLAN 5GHz UNII 2A | WLAN 5GHz UNII 2C | WLAN 5GHz UNII 3 | WLAN 6GHz UNII 5 | WLAN 6GHz UNII 6 | WLAN 6GHz UNII 7 | WLAN 6GHz UNII 8 | |
| 2T1S | 4.29 | 5.39 | 5.26 | 4.69 | 4.16 | - | - | - | - | Radio 1 |
| 2T2S | 1.28 | 2.99 | 2.99 | 2.02 | 1.65 | - | - | - | - | |
| 4T1S | 6.92 | 6.99 | 7.25 | 6.62 | 5.97 | - | - | - | - | |
| 4T2S | 3.92 | 5.24 | 5.46 | 4.26 | 3.94 | - | - | - | - | |
| 4T4S | 0.93 | 1.09 | 1.55 | 0.94 | 0.27 | - | - | - | - | |
| 2T1S | - | - | - | 5.82 | 5.21 | 5.38 | 4.47 | 4.13 | 3.08 | Radio 2 |
| 2T2S | - | - | - | 2.82 | 2.53 | 2.37 | 1.59 | 1.12 | 0.09 | |
| 4T1S | - | - | - | 8.6 | 7.96 | 7.45 | 6.03 | 6.05 | 4.51 | |
| 4T2S | - | - | - | 5.6 | 4.96 | 4.45 | 3.96 | 3.05 | 1.51 | |
| 4T4S | - | - | - | 2.59 | 2.12 | 1.51 | 0.27 | 0.07 | -1.19 | |

Note4: The above information (except gain of Radio 1 and Radio 2) was declared by manufacturer.

Note5: Radio 1 (WLAN 2.4/5GHz UNII 1~3), Radio 2 (5GHz UNII 2C~3/6GHz UNII 5~8): The directional gain is measured which follows the procedure of KDB 662911 D03. The antenna report is provided in the operational description for this application.

Note6: The EUT has eleven antennas.

For WLAN 2.4GHz function (Radio 1):

For IEEE 802.11b/g/n/VHT/ax mode (1TX,2TX,4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Only Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For WLAN 5GHz function (Radio 1 and Radio 2):

For IEEE 802.11a/n/ac/ax mode (1TX,2TX,4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Only Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For 6GHz function (Radio 2):

For IEEE 802.11ax mode (1TX,2TX,4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Only Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX



Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Scanning Radio 3:

For WLAN 2.4GHz function

For 802.11b/g/n/VHT/ax mode (1TX/2RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2RX

Port 1 and Port 2 can be used as receiving antennas.

Port 1 and Port 2 could receive simultaneously.

For WLAN 5GHz function

For IEEE 802.11a/n/ac/ax mode (1TX/2RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2RX

Port 1 and Port 2 can be used as receiving antennas.

Port 1 and Port 2 could receive simultaneously.

For 6GHz function:

For IEEE 802.11ax mode (1TX/2RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2RX

Port 1 and Port 2 can be used as receiving antennas.

Port 1 and Port 2 could receive simultaneously.

For Bluetooth function (Radio 4):

For Bluetooth mode (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.



1.1.3 Mode Test Duty Cycle

F or Radio 2:

For 1T1S:

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|-----------------|-------|---------|--------|---------------|
| 802.11ax HEW20 | 0.913 | 0.4 | 5.445m | 300 |
| 802.11ax HEW40 | 0.945 | 0.25 | 5.445m | 300 |
| 802.11ax HEW80 | 0.94 | 0.27 | 5.445m | 300 |
| 802.11ax HEW160 | 0.917 | 0.38 | 5.445m | 300 |

For 2T1S:

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|-----------------|-------|---------|--------|---------------|
| 802.11ax HEW20 | 0.933 | 0.3 | 5.446m | 300 |
| 802.11ax HEW40 | 0.91 | 0.41 | 5.445m | 300 |
| 802.11ax HEW80 | 0.944 | 0.25 | 5.445m | 300 |
| 802.11ax HEW160 | 0.931 | 0.31 | 5.445m | 300 |

For 4T1S:

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|-----------------|-------|---------|--------|---------------|
| 802.11ax HEW20 | 0.932 | 0.31 | 5.446m | 300 |
| 802.11ax HEW40 | 0.91 | 0.41 | 5.445m | 300 |
| 802.11ax HEW80 | 0.944 | 0.25 | 5.445m | 300 |
| 802.11ax HEW160 | 0.931 | 0.31 | 5.445m | 300 |

For Radio 3:

For 1T1S:

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|----------------|-------|---------|--------|---------------|
| 802.11ax HEW20 | 0.913 | 0.4 | 5.445m | 300 |

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.



1.1.4 EUT Operational Condition

| | | |
|--|--|--|
| EUT Power Type | From Power Adapter or PoE | |
| Beamforming Function | <input checked="" type="checkbox"/> With beamforming | <input type="checkbox"/> Without beamforming |
| | The product has beamforming function for n/VHT/ax in Radio1-2.4GHz, n/ac/ax in Radio1, 2-5GHz and ax in Radio2-6GHz. | |
| Device Type | <input checked="" type="checkbox"/> Indoor Access Point | <input type="checkbox"/> Subordinate |
| | <input type="checkbox"/> Indoor Client | <input type="checkbox"/> Standard Power Access Point |
| | <input type="checkbox"/> Dual Client | <input type="checkbox"/> Standard Client |
| | <input type="checkbox"/> Fixed Client | |
| Test Software Version | Tera team 4.75 | |
| Software / Firmware Version for CBP | For R2/R3 Cisco FW: 8.8.1.10 For R2-Meraki FW: 28-fighters-202203162120-Gb4ec68dd-L2137ec6c-jenkins-rel-lipstick For R3-Meraki FW: 29-202204120129-G14516ee2-rel-offramp | |

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

| Equipment Name | Model Name | SW | R1: 2.4GHz | R1: 5GHz Low Band or R1: 5GHz Full Band | R2: 5GHz High band or R2: 6GHz | R3: 2.4GHz/ 5GHz/ 6GHz | R4: Bluetooth |
|--|------------|--------|---------------------|--|--------------------------------|------------------------|---------------|
| Catalyst Wireless 9166I Wi-Fi 6E Series Access Point | CW9166I-B | Cisco | V (1/2/4TX +4RX) | V (With 80+80MHz) | V | V | V |
| | CW9166I-MR | Meraki | V (1/2/4TX +4RX) | V (Without 80+80MHz) | V | V | V |
| Catalyst Wireless 9164I Wi-Fi 6E Series Access Point | CW9164I-B | Cisco | V (1/2TX +2RX) | V (5GHz Full Band only, with 80+80MHz) | V (6GHz only) | V | V |
| | CW9164I-MR | Meraki | V (1/2TX +2RX) | V (5GHz Full Band only, without 80+80MHz) | V (6GHz only) | V | V |

Note1: From the above models, model: CW9166I-B(all tests), CW9166I-MR(Contention-Based Protocol test only) was selected as representative model for the test and its data was recorded in this report for all tests.

Note2: The above information was declared by manufacturer.



1.1.6 Table for Radio function

| Function Radio | WLAN 2.4GHz | WLAN 5GHz UNII 1~2A | WLAN 5GHz UNII 2C~3 | WLAN 6GHz UNII 5~8 | Bluetooth |
|-----------------------|-------------|------------------------|------------------------|-----------------------|-----------|
| 1 (Iron Radio) | V | V | V | - | - |
| 2 (Pine Radio) | - | - | V | V | - |
| 3 (Scanning Radio) | V | V | V | V | - |
| 4 | - | - | - | - | V |

Note1 : The above information was declared by manufacturer and

Note2 : The Radio 2 and Radio 3 can't operate simultaneously.

1.1.7 Table for EUT Operation Function

| Mode | Operation Function |
|------|--|
| 1 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth |
| 2 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 5GHz+R4: Bluetooth |
| 3 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 6GHz+R4: Bluetooth |
| 4 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 2.4GHz+R4: Bluetooth |
| 5 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 5GHz+R4: Bluetooth |
| 6 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 6GHz+R4: Bluetooth |

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15.407
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 987594 D02 v01r01
- ◆ FCC KDB 662911 D03 v01
- ◆ FCC KDB 412172 D01 v01r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

| Testing Location Information | |
|---|--|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory | |
| Hsinchu | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) |
| (TAF: 3787) | TEL: 886-3-656-9065 FAX: 886-3-656-9085 |
| | Test site Designation No. TW3787 with FCC. |
| | Conformity Assessment Body Identifier (CABID) TW3787 with ISED. |

| Test Condition | Test Site No. | Test Engineer | Test Environment (°C / %) | Test Date |
|---|---------------|---------------|---------------------------|---------------------------------|
| RF Conducted (others test) | TH01-CB | Owen Hsu | 20.3~20.7 / 60~62 | Jan. 22, 2022~ May 13, 2022 |
| Radiated for below 1GHz | 03CH05-CB | Eason Chen | 23.3-24.4 / 57-59 | Mar. 14, 2022~ Apr. 27, 2022 |
| Radiated for Harmonic and bandedge-7115MHz / <Non-Beamforming Mode> | 03CH04-CB | Simmon Cheng | 23.8-24.9 / 55-58 | Feb. 26, 2022~ Apr. 29, 2022 |
| Radiated for Harmonic and bandedge-7115MHz / <Beamforming Mode> | 03CH03-CB | Simmon Cheng | 23.5-24.6 / 55-59 | Feb. 26, 2022~ Apr. 29, 2022 |
| Radiated for cabinet | 03CH02-CB | Simmon Cheng | 24.2-26.1 / 55-58 | Feb. 26, 2022~ Apr. 29, 2022 |
| AC Conduction | CO01-CB | Joe Chu | 20~22 / 60~62 | Apr. 06, 2022~ Apr. 07, 2022 |
| RF Conducted (Contention-Based Protocol test for R2-Cisco FW) | DF02-CB | Jeff Wu | 21.6~23.4 / 67~70 | Apr. 09, 2022 |
| RF Conducted (Contention-Based Protocol test for R2-Meraki FW) | DF02-CB | Jeff Wu | 22.1~24.1 / 58~63 | Mar. 04, 2022~ May 16, 2022 |
| RF Conducted (Contention-Based Protocol test for R3-Cisco FW) | DF02-CB | Jeff Wu | 21.5~23 / 65~67 | May 05, 2022 |
| RF Conducted (Contention-Based Protocol test for R3-Meraki FW) | DF02-CB | Jeff Wu | 22.1~23.7 / 68~72 | May 11, 2022 |



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items | Uncertainty | Remark |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 3.4 dB | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz) | 4.2 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 5.5 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 4.7 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 4.2 dB | Confidence levels of 95% |
| Conducted Emission | 2.5 dB | Confidence levels of 95% |
| Output Power Measurement | 1.3 dB | Confidence levels of 95% |
| Power Density Measurement | 2.5 dB | Confidence levels of 95% |
| Bandwidth Measurement | 0.9% | Confidence levels of 95% |



2 Test Configuration of EUT

2.1 Test Channel Mode

For Radio 2:

<Non-Beamforming Mode>

For 1T1S:

| Mode | Power Setting |
|---------------------------------|---------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - |
| 5955MHz | 14 |
| 6175MHz | 14 |
| 6415MHz | 14 |
| 6435MHz | 15 |
| 6475MHz | 15 |
| 6515MHz | 15 |
| 6535MHz | 16 |
| 6695MHz | 16 |
| 6855MHz | 16 |
| 6875MHz Straddle 6.525-6.875GHz | 16 |
| 6895MHz | 16 |
| 6995MHz | 16 |
| 7095MHz | 16 |
| 7115MHz | 12.5 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | - |
| 5965MHz | 15 |
| 6165MHz | 16 |
| 6405MHz | 16 |
| 6445MHz | 16 |
| 6485MHz | 16 |
| 6525MHz Straddle 6.425-6.525GHz | 16 |
| 6565MHz | 16 |
| 6685MHz | 16 |
| 6845MHz | 16 |
| 6885MHz Straddle 6.525-6.875GHz | 16 |
| 6925MHz | 16 |
| 7005MHz | 16 |
| 7085MHz | 16 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | - |
| 5985MHz | 15 |
| 6145MHz | 16 |
| 6385MHz | 16 |



| Mode | Power Setting |
|---------------------------------|---------------|
| 6465MHz | 16 |
| 6545MHz Straddle 6.425-6.525GHz | 16 |
| 6625MHz | 16 |
| 6705MHz | 16 |
| 6785MHz | 16 |
| 6865MHz Straddle 6.525-6.875GHz | 16 |
| 6945MHz | 16 |
| 7025MHz | 16 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | - |
| 6025MHz | 15 |
| 6185MHz | 16 |
| 6345MHz | 16 |
| 6505MHz Straddle 6.425-6.525GHz | 16 |
| 6665MHz | 16 |
| 6825MHz Straddle 6.525-6.875GHz | 16 |
| 6985MHz | 16 |



For 2T1S:

| Mode | Power Setting |
|---------------------------------|---------------|
| 802.11ax HEW20_Nss1,(MCS0)_2TX | - |
| 5955MHz | 9 |
| 6175MHz | 9 |
| 6415MHz | 9 |
| 6435MHz | 10 |
| 6475MHz | 10 |
| 6515MHz | 10 |
| 6535MHz | 10 |
| 6695MHz | 10 |
| 6855MHz | 10 |
| 6875MHz Straddle 6.525-6.875GHz | 10 |
| 6895MHz | 11 |
| 6995MHz | 11 |
| 7095MHz | 11 |
| 7115MHz | 8.5 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | - |
| 5965MHz | 12 |
| 6165MHz | 12 |
| 6405MHz | 12 |
| 6445MHz | 13 |
| 6485MHz | 13 |
| 6525MHz Straddle 6.425-6.525GHz | 13 |
| 6565MHz | 13.5 |
| 6685MHz | 14 |
| 6845MHz | 13.5 |
| 6885MHz Straddle 6.525-6.875GHz | 13.5 |
| 6925MHz | 15 |
| 7005MHz | 14.5 |
| 7085MHz | 15 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | - |
| 5985MHz | 14.5 |
| 6145MHz | 15 |
| 6385MHz | 15 |
| 6465MHz | 16 |
| 6545MHz Straddle 6.425-6.525GHz | 16 |
| 6625MHz | 16 |
| 6705MHz | 16 |
| 6785MHz | 16 |



| Mode | Power Setting |
|---------------------------------|----------------------|
| 6865MHz Straddle 6.525-6.875GHz | 16 |
| 6945MHz | 16 |
| 7025MHz | 16 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | - |
| 6025MHz | 15 |
| 6185MHz | 16 |
| 6345MHz | 16 |
| 6505MHz Straddle 6.425-6.525GHz | 16 |
| 6665MHz | 16 |
| 6825MHz Straddle 6.525-6.875GHz | 16 |
| 6985MHz | 16 |



For 4T1S:

| Mode | Power Setting |
|---------------------------------|---------------|
| 802.11ax HEW20_Nss1,(MCS0)_4TX | - |
| 5955MHz | 3.5 |
| 6175MHz | 4 |
| 6415MHz | 3.5 |
| 6435MHz | 5 |
| 6475MHz | 5 |
| 6515MHz | 5.5 |
| 6535MHz | 5.5 |
| 6695MHz | 6 |
| 6855MHz | 6 |
| 6875MHz Straddle 6.525-6.875GHz | 6 |
| 6895MHz | 7 |
| 6995MHz | 7 |
| 7095MHz | 8 |
| 7115MHz | 7 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | - |
| 5965MHz | 7 |
| 6165MHz | 7 |
| 6405MHz | 7 |
| 6445MHz | 8.5 |
| 6485MHz | 9 |
| 6525MHz Straddle 6.425-6.525GHz | 9 |
| 6565MHz | 8.5 |
| 6685MHz | 9 |
| 6845MHz | 9 |
| 6885MHz Straddle 6.525-6.875GHz | 9 |
| 6925MHz | 11 |
| 7005MHz | 11 |
| 7085MHz | 11 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | - |
| 5985MHz | 10 |
| 6145MHz | 10.5 |
| 6385MHz | 10 |
| 6465MHz | 12 |
| 6545MHz Straddle 6.425-6.525GHz | 12 |
| 6625MHz | 12 |
| 6705MHz | 12 |
| 6785MHz | 12 |



| Mode | Power Setting |
|---------------------------------|----------------------|
| 6865MHz Straddle 6.525-6.875GHz | 12 |
| 6945MHz | 14 |
| 7025MHz | 14 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | - |
| 6025MHz | 13 |
| 6185MHz | 13 |
| 6345MHz | 13 |
| 6505MHz Straddle 6.425-6.525GHz | 14.5 |
| 6665MHz | 15 |
| 6825MHz Straddle 6.525-6.875GHz | 15 |
| 6985MHz | 16 |



<Beamforming Mode>

For 2T1S:

| Mode | Power Setting |
|-----------------------------------|---------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | - |
| 5955MHz | 9 |
| 6175MHz | 9 |
| 6415MHz | 9 |
| 6435MHz | 10 |
| 6475MHz | 10 |
| 6515MHz | 10 |
| 6535MHz | 10 |
| 6695MHz | 10 |
| 6855MHz | 10 |
| 6875MHz Straddle 6.525-6.875GHz | 10 |
| 6895MHz | 11 |
| 6995MHz | 11 |
| 7095MHz | 11 |
| 7115MHz | 7.5 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | - |
| 5965MHz | 12 |
| 6165MHz | 12 |
| 6405MHz | 12 |
| 6445MHz | 13 |
| 6485MHz | 13 |
| 6525MHz Straddle 6.425-6.525GHz | 13 |
| 6565MHz | 13.5 |
| 6685MHz | 14 |
| 6845MHz | 13.5 |
| 6885MHz Straddle 6.525-6.875GHz | 13.5 |
| 6925MHz | 15 |
| 7005MHz | 14.5 |
| 7085MHz | 15 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | - |
| 5985MHz | 14.5 |
| 6145MHz | 15 |
| 6385MHz | 15 |
| 6465MHz | 16 |
| 6545MHz Straddle 6.425-6.525GHz | 16 |
| 6625MHz | 16 |
| 6705MHz | 16 |



| Mode | Power Setting |
|------------------------------------|----------------------|
| 6785MHz | 16 |
| 6865MHz Straddle 6.525-6.875GHz | 16 |
| 6945MHz | 16 |
| 7025MHz | 16 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | - |
| 6025MHz | 15 |
| 6185MHz | 16 |
| 6345MHz | 16 |
| 6505MHz Straddle 6.425-6.525GHz | 16 |
| 6665MHz | 16 |
| 6825MHz Straddle 6.525-6.875GHz | 16 |
| 6985MHz | 16 |



For 4T1S:

| Mode | Power Setting |
|-----------------------------------|---------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | - |
| 5955MHz | 3.5 |
| 6175MHz | 4 |
| 6415MHz | 3.5 |
| 6435MHz | 5 |
| 6475MHz | 5 |
| 6515MHz | 5.5 |
| 6535MHz | 5.5 |
| 6695MHz | 6 |
| 6855MHz | 6 |
| 6875MHz Straddle 6.525-6.875GHz | 6 |
| 6895MHz | 7 |
| 6995MHz | 7 |
| 7095MHz | 8 |
| 7115MHz | 6.5 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | - |
| 5965MHz | 7 |
| 6165MHz | 7 |
| 6405MHz | 7 |
| 6445MHz | 8.5 |
| 6485MHz | 9 |
| 6525MHz Straddle 6.425-6.525GHz | 9 |
| 6565MHz | 8.5 |
| 6685MHz | 9 |
| 6845MHz | 9 |
| 6885MHz Straddle 6.525-6.875GHz | 9 |
| 6925MHz | 11 |
| 7005MHz | 11 |
| 7085MHz | 11 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | - |
| 5985MHz | 10 |
| 6145MHz | 10.5 |
| 6385MHz | 10 |
| 6465MHz | 12 |
| 6545MHz Straddle 6.425-6.525GHz | 12 |
| 6625MHz | 12 |
| 6705MHz | 12 |
| 6785MHz | 12 |



| Mode | Power Setting |
|------------------------------------|----------------------|
| 6865MHz Straddle 6.525-6.875GHz | 12 |
| 6945MHz | 14 |
| 7025MHz | 14 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | - |
| 6025MHz | 13 |
| 6185MHz | 13 |
| 6345MHz | 13 |
| 6505MHz Straddle 6.425-6.525GHz | 14.5 |
| 6665MHz | 15 |
| 6825MHz Straddle 6.525-6.875GHz | 15 |
| 6985MHz | 16 |



**For Radio 3:
For 1T1S:**

| Mode | Power Setting |
|---------------------------------|---------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - |
| 5955MHz | 12 |
| 6175MHz | 11 |
| 6415MHz | 11 |
| 6435MHz | 11 |
| 6475MHz | 12 |
| 6515MHz | 12 |
| 6535MHz | 12 |
| 6695MHz | 12 |
| 6855MHz | 12 |
| 6875MHz Straddle 6.525-6.875GHz | 12 |
| 6895MHz | 12 |
| 6995MHz | 11 |
| 7095MHz | 12 |
| 7115MHz | 10 |

Note1: Evaluated HEW20/HEW40/HEW80/HEW160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160 mode are the same or lower than HEW20/HEW40/HEW80/HEW160.

Note2: The EUT supports beamforming and CDD modes, and in the CDD mode the band edge , Harmonic, and PSD will be considered array gain. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power and the power is the same as CDD mode.



2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|--|---|
| Tests Item | AC power-line conducted emissions |
| Condition | AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz |
| Operating Mode | Normal Link(WLAN), CTX(Bluetooth) |
| 1 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+Adapter |
| 2 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 5GHz+R4: Bluetooth+Adapter |
| 3 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 6GHz+R4: Bluetooth+Adapter |
| 4 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 2.4GHz+R4: Bluetooth+Adapter |
| 5 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 5GHz+R4: Bluetooth+Adapter |
| 6 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 6GHz+R4: Bluetooth+Adapter |
| Mode 1 has been evaluated to be the worst case among Mode 1~6, thus measurement for Mode 7 ~ 11 will follow this same test mode. | |
| 7 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE1 |
| 8 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE2 |
| 9 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE3 |
| 10 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE4 |
| 11 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE5 |
| For operating mode 7 is the worst case and it was record in this test report. | |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) |
| Test Condition | Conducted measurement at transmit chains |
| 1 | R2: 1T1S |
| 2 | R2: 2T1S |
| 3 | R2: 4T1S |
| 4 | R3: 1T1S |

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | Frequency Stability |
| Test Condition | Conducted measurement at transmit chains |
| 1 | R2: 4T1S |
| 2 | R3: 1T1S |



| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | Contention Based Protocol |
| Test Condition | Conducted measurement at transmit chains |
| 1 | R2-Cisco FW |
| 2 | R2-Meraki FW |
| 3 | R3-Cisco FW |
| 4 | R3-Meraki FW |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Unwanted Emissions |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| Operating Mode < 1GHz | Normal Link(WLAN), CTX(Bluetooth) |
| 1 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+Adapter |
| 2 | EUT in Y axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+Adapter |
| 3 | EUT in X axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+Adapter |
| Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 ~8 will follow this same test mode. | |
| 4 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 5GHz+R4: Bluetooth+Adapter |
| 5 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 6GHz+R4: Bluetooth+Adapter |
| 6 | EUT in Z axis-R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 2.4GHz+R4: Bluetooth+Adapter |
| 7 | EUT in Z axis-R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 5GHz+R4: Bluetooth+Adapter |
| 8 | EUT in Z axis-R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 6GHz+R4: Bluetooth+Adapter |
| Mode 1 has been evaluated to be the worst case among Mode 1~8, thus measurement for Mode 9 ~13 will follow this same test mode. | |
| 9 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE1 |
| 10 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE2 |



| | |
|---|---|
| 11 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE3 |
| 12 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE4 |
| 13 | EUT in Z axis-R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth+PoE5 |
| For operating mode 1 is the worst case and it was record in this test report. | |

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | Unwanted Emissions |
| Test Condition | Conducted measurement at transmit chains |
| Operating Mode > 1GHz | CTX(Harmonic and bandedge) for other frequencies |
| 1 | R2: 1T1S |
| 2 | R2: 2T1S |
| 3 | R2: 4T1S |
| 4 | R3: 1T1S |

| The Worst Case Mode for Following Conformance Tests | |
|--|---|
| Tests Item | Unwanted Emissions |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| Operating Mode > 1GHz | CTX(Cabinet) CTX(Harmonic and bandedge for 7115MHz) |
| The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found as below. So the measurement will follow this same test configuration. | |
| 1 | For R2:1T1S_EUT in Z axis |
| 2 | For R2:2T1S_EUT in Z axis |
| 3 | For R2:4T1S_EUT in Y axis |
| 4 | For R3:1T1S_EUT in X axis |



| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | Emission MASK |
| Test Condition | Conducted measurement at transmit chains |
| 1 | R2: 1T1S |
| 2 | R2: 2T1S |
| 3 | R2: 4T1S |
| 4 | R3: 1T1S |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| Operating Mode | |
| 1 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 2.4GHz+R4: Bluetooth |
| 2 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 5GHz+R4: Bluetooth |
| 3 | R1: 2.4GHz/5GHz Low Band+R2: 5GHz High band+R3: 6GHz+R4: Bluetooth |
| 4 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 2.4GHz+R4: Bluetooth |
| 5 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 5GHz+R4: Bluetooth |
| 6 | R1: 2.4GHz/5GHz Full Band+R2: 6GHz+R3: 6GHz+R4: Bluetooth |
| Refer to Sporton Test Report No.: FA1D2822-01 for Co-location RF Exposure Evaluation. | |

Note: The Adapter and PoEs are for measurement only, would not be marketed.

Adapter and PoEs information as below:

| Power | Brand | Model |
|---------|-----------|-----------------|
| Adapter | UMEC | MA-PWR-50WAC |
| PoE 1 | PHIHONG | POEA33U-1ATE |
| PoE 2 | PHIHONG | POE60U-1BT-X |
| PoE 3 | Delta | ADH-65AR B |
| PoE 4 | Microchip | PD-9001GR/AT/AC |
| PoE 5 | PHIHONG | POE29U-1AT |



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Wall-mounted rack*1

2.5 Support Equipment

For AC Conduction:

| Support Equipment | | | | |
|-------------------|---------------|------------|--------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | LAN PC | DELL | T3400 | N/A |
| B | 2.4G NB | DELL | E6430 | N/A |
| C | Iron 5G NB | DELL | E6430 | N/A |
| D | Pine NB | DELL | E6430 | N/A |
| E | Flash disk3.0 | Transcend | JetFlash-700 | N/A |
| F | PoE 1 | PHIHONG | POEA33U-1ATE | N/A |

For Radiated (below 1GHz):

| Support Equipment | | | | |
|-------------------|------------------|---------------|--------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | LAN PC | DELL | T3400 | N/A |
| B | NB | DELL | E4300 | N/A |
| C | 2.4G WiFi NB | DELL | E4300 | N/A |
| D | 5G(Iron) WiFi NB | DELL | E4300 | N/A |
| E | 5G(Pine) WiFi NB | DELL | E4300 | N/A |
| F | Flash disk3.0 | Silicon Power | B06 | N/A |
| D | Adapter | UMEC | MA-PWR-50WAC | N/A |



For Radiated (above 1GHz):

For cabinet and Harmonic, bandedge for 7115MHz:

| Support Equipment | | | | |
|-------------------|-----------|------------|--------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | NB | DELL | E4300 | N/A |
| B | PoE 1 | PHIHONG | POEA33U-1ATE | N/A |


For RF Conducted(Other test items):

| Support Equipment | | | | |
|-------------------|-----------|------------|--------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | NB | DELL | E4300 | N/A |
| B | PoE 1 | PHIHONG | POEA33U-1ATE | N/A |


For RF Conducted (Contention-Based Protocol test):

| Support Equipment | | | | |
|-------------------|-------------|------------|--------------|------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | NB | DELL | E4300 | N/A |
| B | NB | DELL | E4300 | N/A |
| C | WLAN module | Intel | AX210NGW | PD9AX210NG |
| D | Adapter | UMEC | MA-PWR-50WAC | N/A |

2.6 Test Setup Diagram

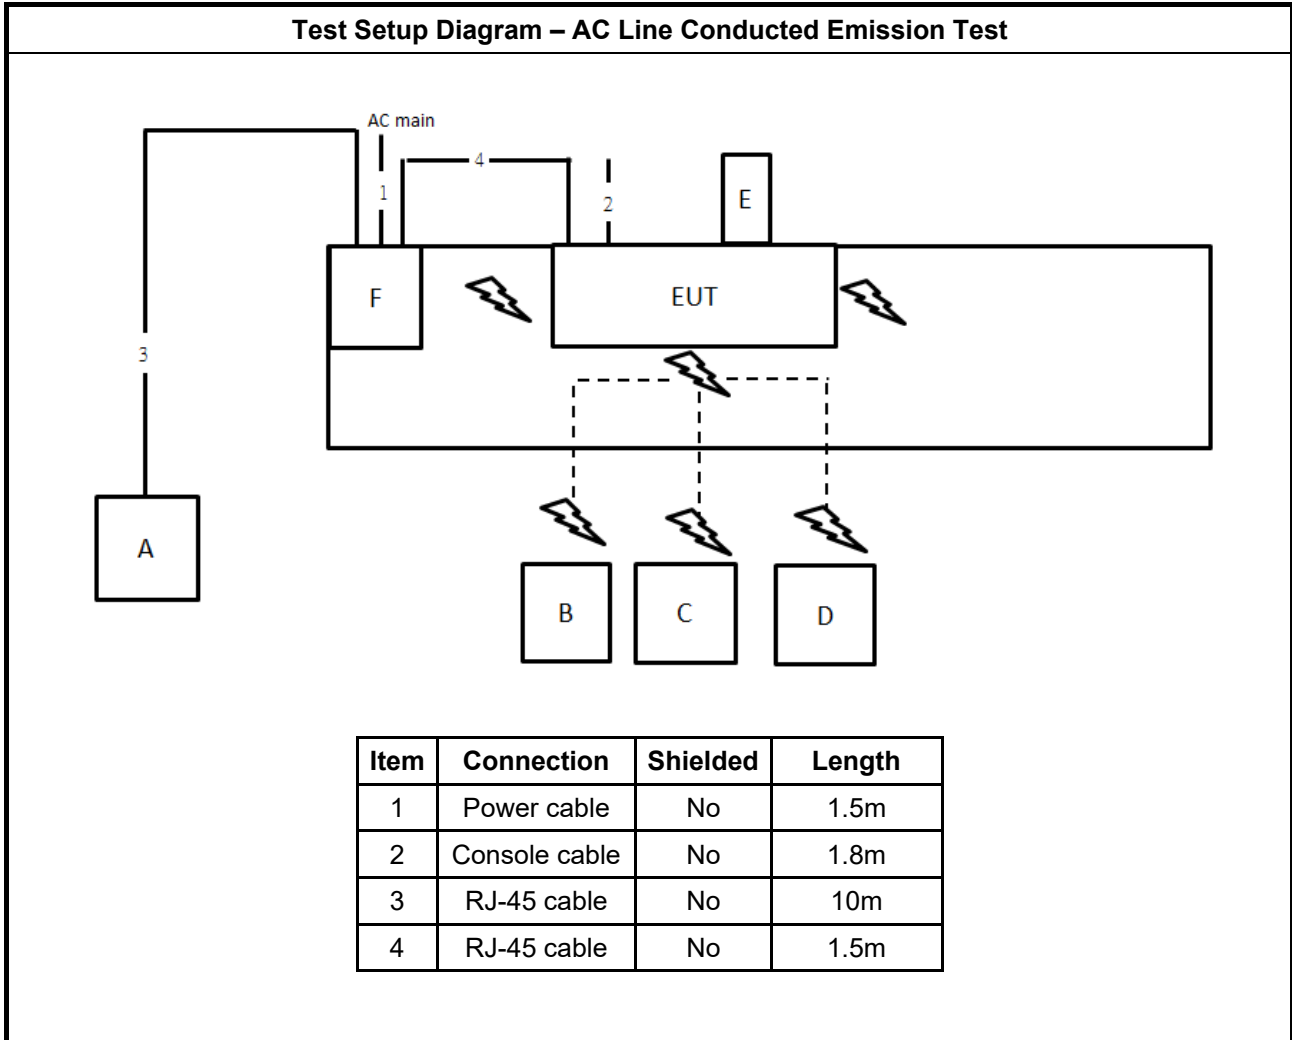


Test Setup Diagram - Radiated Test < 1GHz

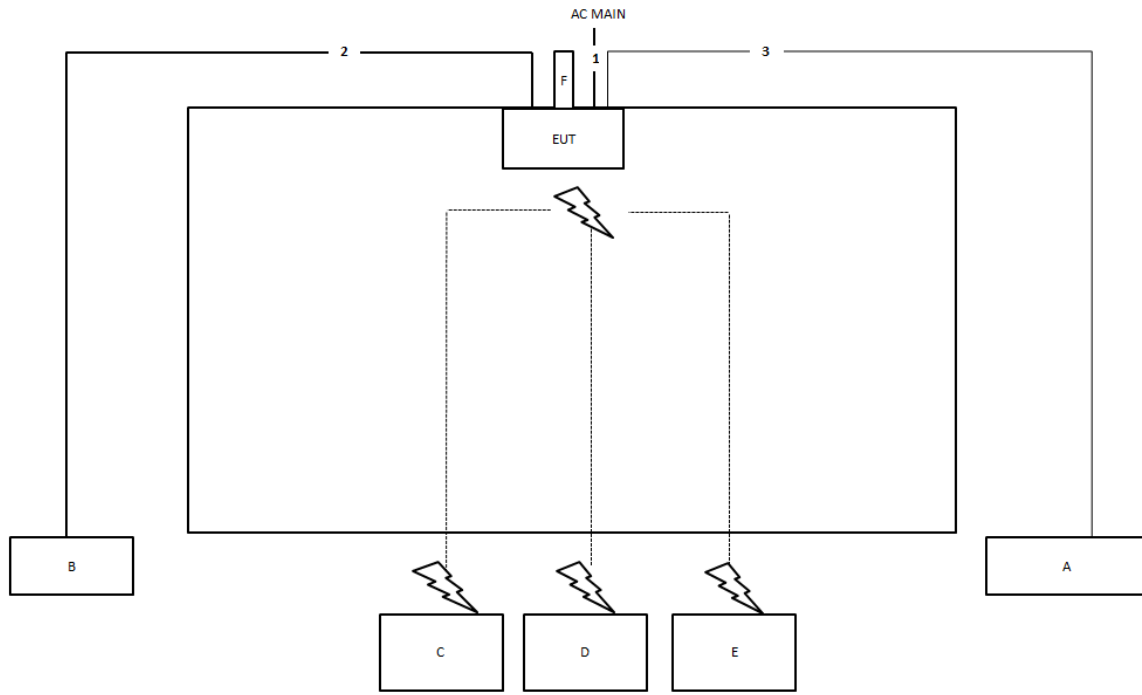

| Item | Connection | Shielded | Length |
|------|-------------|----------|--------|
| 1 | Power cable | No | 1.5m |
| 2 | RJ-45 cable | No | 10m |
| 3 | RJ-45 cable | No | 10m |

Test Setup Diagram - Radiated Test > 1GHz

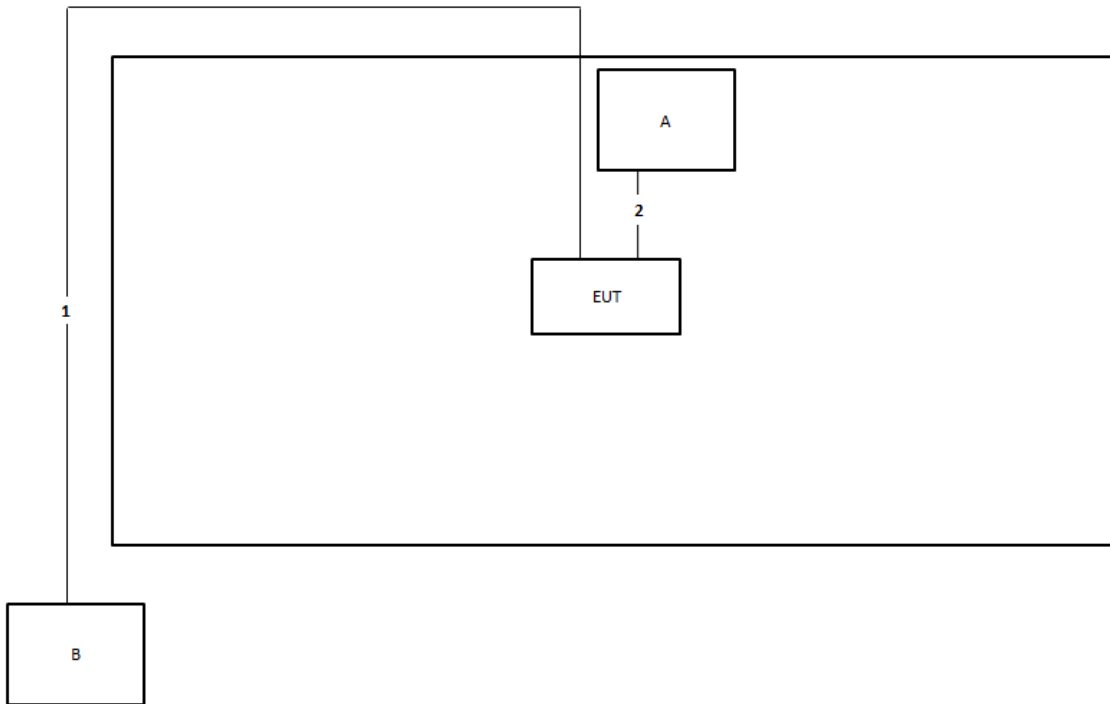

| Item | Connection | Shielded | Length |
|------|------------------------------------|----------|--------|
| 1 | RJ-45 cable | No | 10m |
| 2 | Console cable (RS-232 to RJ-45) | No | 0.5m |



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|------------|-----------|
| Frequency Emission (MHz) | Quasi-Peak | Average |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

| Test Method |
|--|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

3.1.4 Test Setup

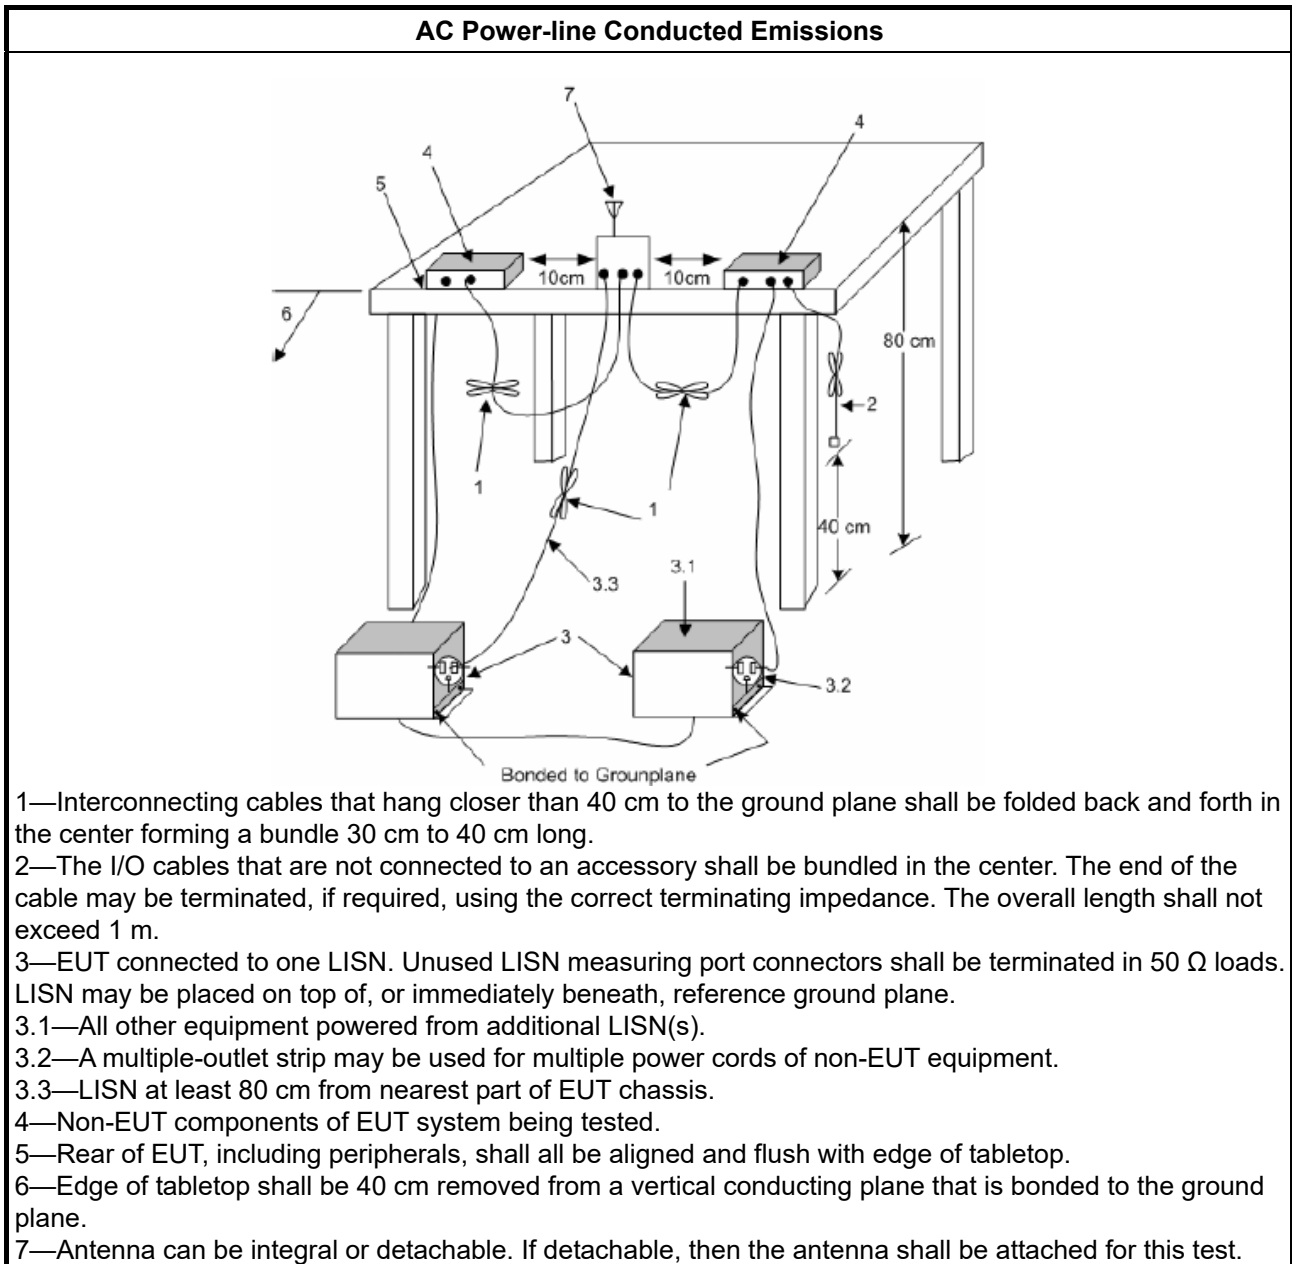

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- b. Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit | |
|-------------------------------------|---------------------------------|
| UNII Devices | |
| <input checked="" type="checkbox"/> | For the 5925-6425 GHz band, N/A |
| <input checked="" type="checkbox"/> | For the 6425-6525 GHz band, N/A |
| <input checked="" type="checkbox"/> | For the 6525-6875 GHz band, N/A |
| <input checked="" type="checkbox"/> | For the 6875-7125 GHz band, N/A |
| RLAN Devices | |
| <input type="checkbox"/> | For the 5925-6425 GHz band, N/A |
| <input type="checkbox"/> | For the 6425-6525 GHz band, N/A |
| <input type="checkbox"/> | For the 6525-6875 GHz band, N/A |
| <input type="checkbox"/> | For the 6875-7125 GHz band, N/A |


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| Test Method | |
|--|--|
| <ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: | |
| <input checked="" type="checkbox"/> | According to KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/> | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing. |
| <input type="checkbox"/> | Refer as IC RSS-Gen, clause 4.6 for bandwidth testing. |

3.2.4 Test Setup

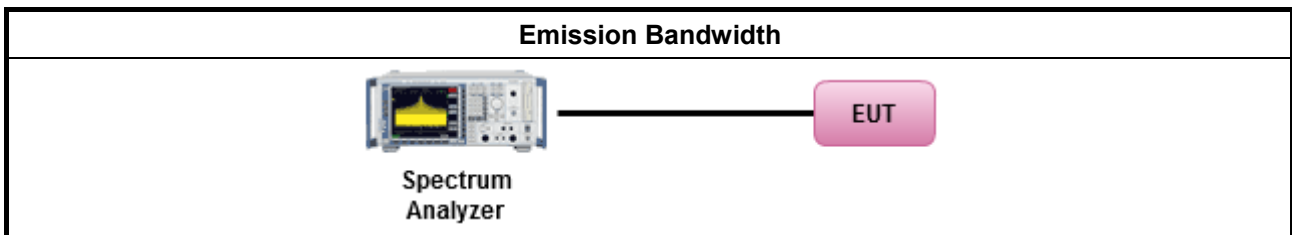

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

| Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit | |
|--|---|
| UNII Devices | |
| <input checked="" type="checkbox"/> | For the 5.925 ~ 6.425 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| <input checked="" type="checkbox"/> | For the 6.425 ~ 6.525 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| <input checked="" type="checkbox"/> | For the 6.525 ~ 6.875 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| <input checked="" type="checkbox"/> | For the 6.875 ~ 7.125 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. |
| RLAN Devices | |
| <input type="checkbox"/> | For the 5.925 ~ 7.125 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For RLAN devices(Indoor) other than client devices < 30 dBm / occupied bandwidth. ▪ For client devices(Indoor) < 24 dBm / occupied bandwidth. |


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

| Test Method | |
|--|---|
| <ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033. | |
| Average over on/off periods with duty factor | |
| <input type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100. |
| <input type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed) |
| Wideband RF power meter and average over on/off periods with duty factor | |
| <input checked="" type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter). |
| <input checked="" type="checkbox"/> | For conducted measurement. |
| <ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. | |
| <ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ | |
| <input type="checkbox"/> | For radiated measurement. |
| <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation. | |

3.3.4 Test Setup

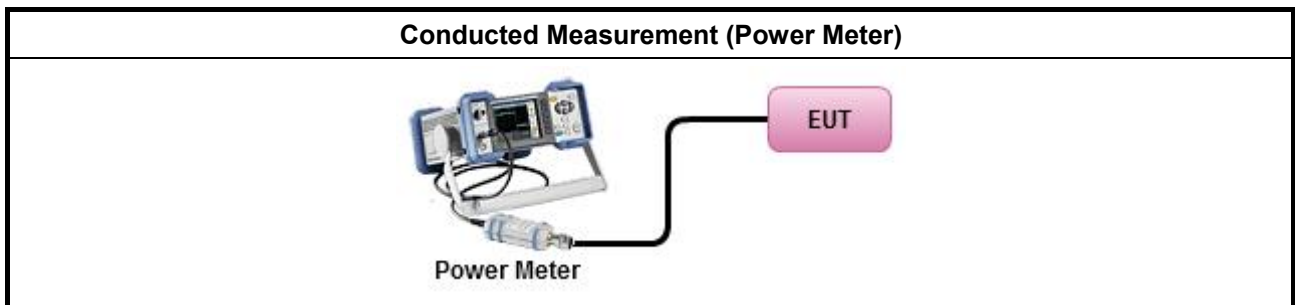

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

| Peak Power Spectral Density (E.I.R.P.) Limit | |
|--|--|
| UNII Devices | |
| <input checked="" type="checkbox"/> | For the 5.925 ~ 6.425 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| <input checked="" type="checkbox"/> | For the 6.425 ~ 6.525 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| <input checked="" type="checkbox"/> | For the 6.525 ~ 6.875 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz. ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| <input checked="" type="checkbox"/> | For the 6.875 ~ 7.125 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz. ▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz. |
| RLAN Devices | |
| <input type="checkbox"/> | For the 5.925 ~ 7.125 GHz band: |
| <input type="checkbox"/> | <ul style="list-style-type: none"> ▪ For RLAN devices(Indoor) other than client devices < 5 dBm / MHz. ▪ For client devices(Indoor) < -1 dBm / MHz. |

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

| Test Method | |
|--|--|
| <ul style="list-style-type: none"> ▪ According to KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options: | |
| <input type="checkbox"/> | Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth |
| [duty cycle ≥ 98% or external video / power trigger] | |
| <input checked="" type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging). |
| <input type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed) |
| duty cycle < 98% and average over on/off periods with duty factor | |
| <input checked="" type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). |
| <input type="checkbox"/> | Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed) |
| <input checked="" type="checkbox"/> | For conducted measurement. |
| <ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$ | |
| <input type="checkbox"/> | For radiated measurement. |
| <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. | |

Test Method

- Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup**Conducted Measurement**Spectrum
Analyzer

EUT

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit | | | |
|---|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
 EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

| Un-restricted band emissions above 1GHz Limit | |
|---|--|
| Frequency | Limit |
| Any outside the 5.945 – 7.125 GHz emission | e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$. Note 2:-27 dBm EIRP OBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit. |
| Frequency | Emission MASK Limit |

5.945 – 7.125 GHz

Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

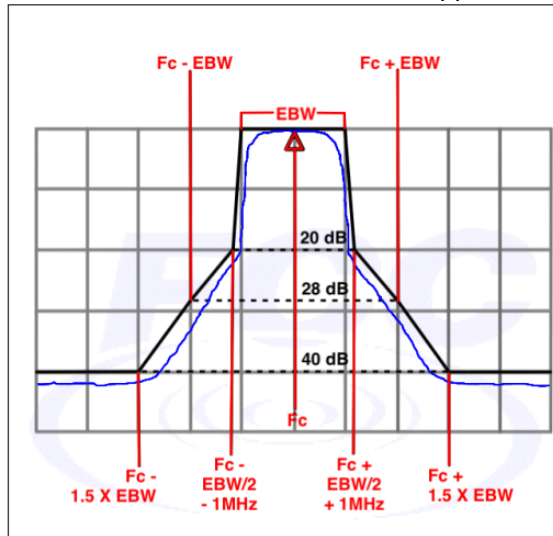



3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.


3.5.3 Test Procedures



| Test Method | |
|---|---|
| <ul style="list-style-type: none"> ▪ According to KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). | |
| <ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. | |
| <ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: | |
| | <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. |
| | <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. |
| | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement) |
| | <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW). |
| | <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.(For restricted band average measurement) |
| | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. |
| | <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit. |
| | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit. |
| <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements. | |
| <ul style="list-style-type: none"> ▪ For emission MASK shall be measured using following options below: | |
| | <input checked="" type="checkbox"/> Refer as FCC draft KDB 987594 D02, J) In-Band Emissions |
| <ul style="list-style-type: none"> ▪ For radiated measurement. | |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. |
| <ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. | |
| <ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. | |

| Test Method | |
|--|---|
| <ul style="list-style-type: none"> ▪ For conducted and cabinet radiation measurement, refer as FCC KDB 789033 D02, clause G)3). | |
| | <ul style="list-style-type: none"> ▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ if the measurements are made relative to the in-band emissions on the individual outputs. |
| | <ul style="list-style-type: none"> ▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB |
| | <ul style="list-style-type: none"> ▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred. |

3.5.4 Test Setup

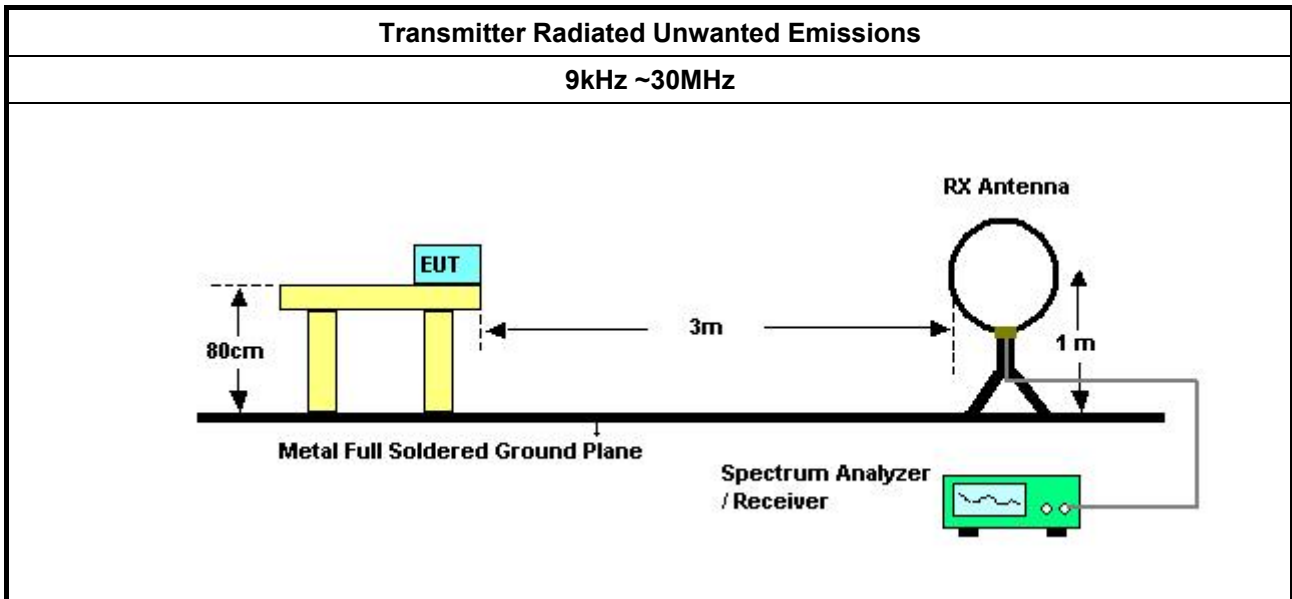

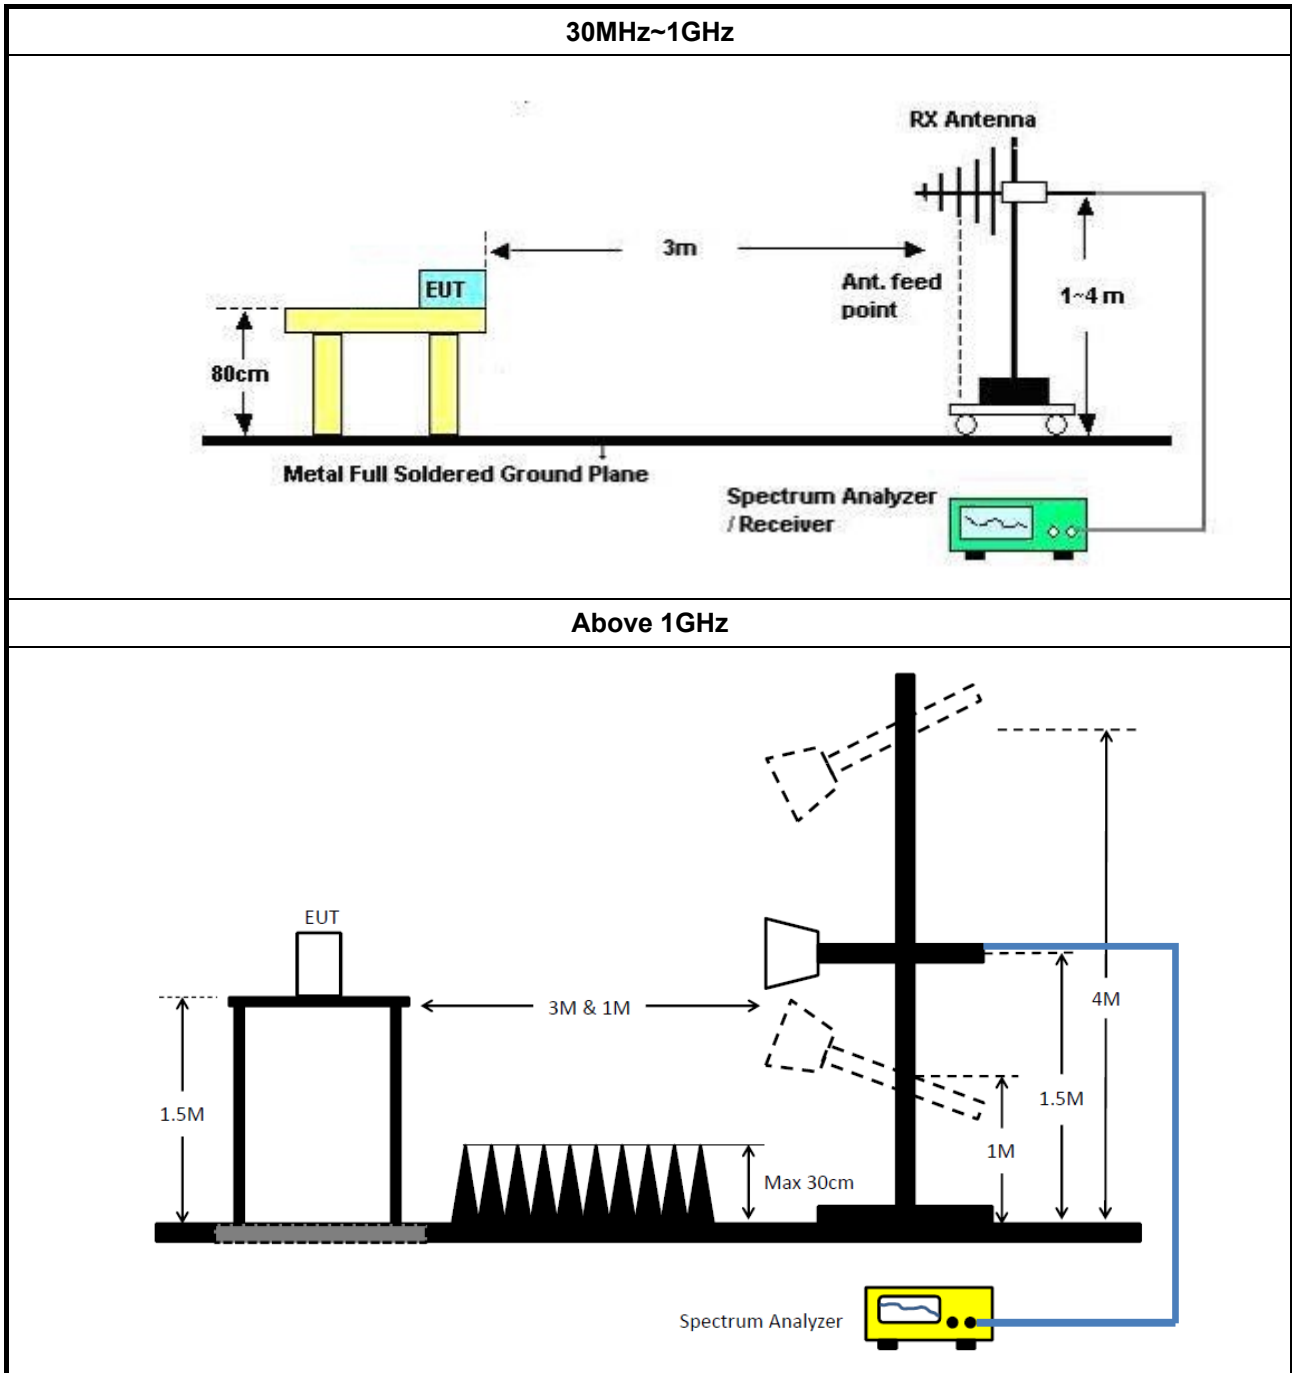

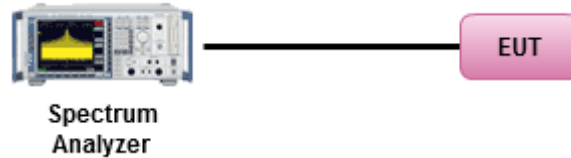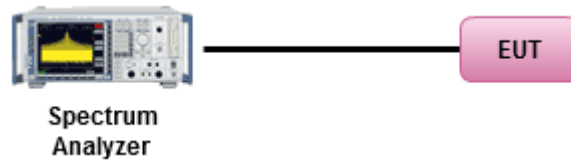Transmitter Conducted Unwanted Emissions**Emission MASK****3.5.5 Measurement Results Calculation**

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

| Test Method | |
|-------------------------------------|--|
| <input type="checkbox"/> | For Contention Based Protocol shall be measured using following options below: |
| <input checked="" type="checkbox"/> | Refer as FCC draft KDB 987594 D02, I) In-Band Emissions |

3.6.4 Test Setup

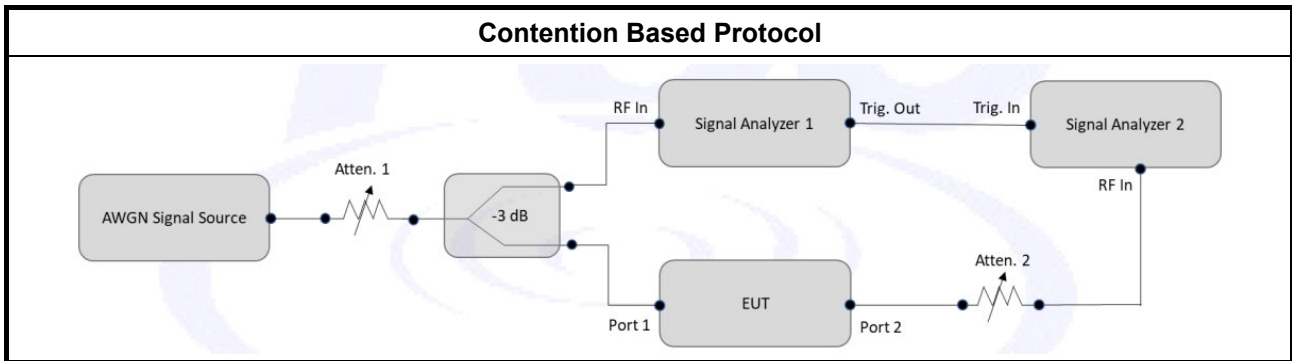

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F

3.7 Frequency Stability

3.7.1 Frequency Stability Limit

| Frequency Stability Limit | |
|---------------------------|---|
| ▪ | In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. |


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

| Test Method | |
|-------------|--|
| ▪ | Refer as ANSI C63.10, clause 6.8 for frequency stability tests |
| ▪ | Frequency stability with respect to ambient temperature |
| ▪ | Frequency stability when varying supply voltage |
| ▪ | Extreme temperature is -30°C~50°C. |

3.7.4 Test Setup

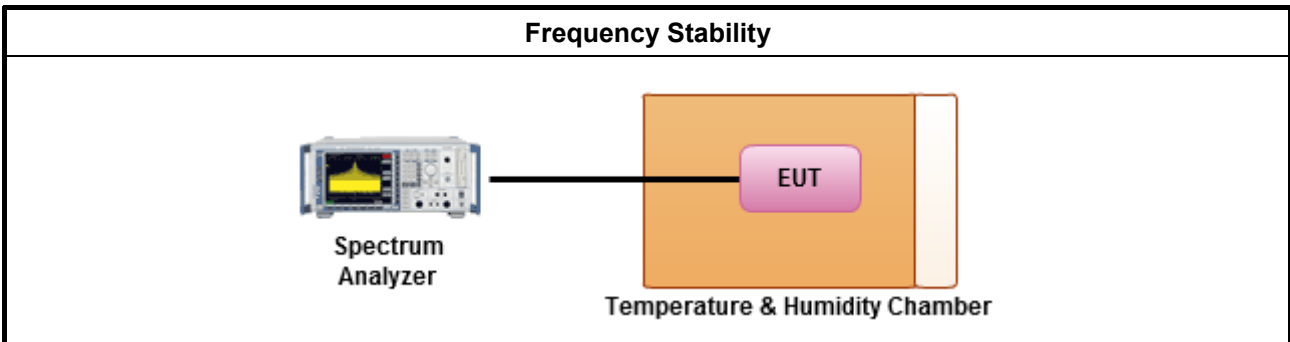

3.7.5 Test Result of Frequency Stability

Refer as Appendix G



4 Test Equipment and Calibration Data

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-----------------------------------|-----------------|--------------------|------------------|-------------------|------------------|----------------------|-----------------------|
| EMI Receiver | Agilent | N9038A | My52260123 | 9kHz ~ 8.4GHz | Feb. 22, 2022 | Feb. 21, 2023 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Feb. 09, 2022 | Feb. 08, 2023 | Conduction (CO01-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127650 | 9kHz ~ 30MHz | Jan. 07, 2022 | Jan. 06, 2023 | Conduction (CO01-CB) |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100430 | 9kHz ~ 30MHz | Feb. 10, 2022 | Feb. 09, 2023 | Conduction (CO01-CB) |
| COND Cable | Woken | Cable | Low cable-CO01 | 9kHz ~ 30MHz | May 19, 2021 | May 18, 2022 | Conduction (CO01-CB) |
| Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conduction (CO01-CB) |
| 3m Semi Anechoic Chamber NSA | TDK | SAC-3M | 03CH05-CB | 30 MHz ~ 1 GHz | Aug. 09, 2021 | Aug. 08, 2022 | Radiation (03CH05-CB) |
| Bilog Antenna with 6dB Attenuator | TESEQ & EMCI | CBL 6112D & N-6-06 | 35236 & AT-N0610 | 30MHz ~ 2GHz | Mar. 26, 2021 | Mar. 25, 2022 | Radiation (03CH05-CB) |
| Bilog Antenna with 6dB Attenuator | TESEQ & EMCI | CBL 6112D & N-6-06 | 35236 & AT-N0610 | 30MHz ~ 2GHz | Mar. 25, 2022 | Mar. 24, 2023 | Radiation (03CH05-CB) |
| Pre-Amplifier | EMCI | EMC330N | 980331 | 20MHz ~ 3GHz | Apr. 27, 2021 | Apr. 26, 2022 | Radiation (03CH05-CB) |
| Pre-Amplifier | EMCI | EMC330N | 980331 | 20MHz ~ 3GHz | Apr. 26, 2022 | Apr. 25, 2023 | Radiation (03CH05-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100304 | 9kHz ~ 40GHz | Mar. 14, 2022 | Mar. 13, 2023 | Radiation (03CH05-CB) |
| Loop Antenna | Teseq | HLA 6120 | 24155 | 9kHz - 30 MHz | Apr. 14, 2021 | Apr. 13, 2022 | Radiation (03CH05-CB) |
| Loop Antenna | Teseq | HLA 6120 | 31244 | 9kHz - 30 MHz | Mar. 18, 2022 | Mar. 17, 2023 | Radiation (03CH05-CB) |
| EMI Test Receiver | R&S | ESCS | 826547/017 | 9kHz ~ 2.75GHz | Jun. 21, 2021 | Jun. 20, 2022 | Radiation (03CH05-CB) |
| RF Cable-low | Woken | RG402 | Low Cable-04+23 | 30MHz~1GHz | Oct. 13, 2021 | Oct. 12, 2022 | Radiation (03CH05-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH03-CB | 1GHz ~18GHz 3m | May 06, 2021 | May 05, 2022 | Radiation (03CH03-CB) |
| Horn Antenna | ETS • Lindgren | 3115 | 6821 | 750MHz~18GHz | Jan. 21, 2022 | Jan. 20, 2023 | Radiation (03CH03-CB) |



| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-------------------------------|----------------|----------------|------------------|------------------|------------------|----------------------|-----------------------|
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Aug. 05, 2021 | Aug. 04, 2022 | Radiation (03CH03-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02097 | 1GHz ~ 26.5GHz | Jul. 02, 2021 | Jul. 01, 2022 | Radiation (03CH03-CB) |
| Pre-Amplifier | MITEQ | TTA1840-35-H G | 1864479 | 18GHz ~ 40GHz | Jul. 13, 2021 | Jul. 12, 2022 | Radiation (03CH03-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100019 | 9kHz ~ 40GHz | Jun. 04, 2021 | Jun. 03, 2022 | Radiation (03CH03-CB) |
| RF Cable-high | Woken | RG402 | High Cable-20+29 | 1GHz ~ 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH03-CB) |
| RF Cable-high | Woken | RG402 | High Cable-29 | 1GHz ~ 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH03-CB) |
| High Cable | Woken | WCA0929M | 40G#5+7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH03-CB) |
| High Cable | Woken | WCA0929M | 40G#5 | 1GHz ~ 40 GHz | Dec. 08, 2021 | Dec. 07, 2022 | Radiation (03CH03-CB) |
| High Cable | Woken | WCA0929M | 40G#7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH03-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH03-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH04-CB | 1GHz ~18GHz 3m | Feb. 24, 2022 | Feb. 23, 2023 | Radiation (03CH04-CB) |
| Horn Antenna | ETS · Lindgren | 3115 | 00143147 | 750MHz~18GHz | Oct. 25, 2021 | Oct. 24, 2022 | Radiation (03CH04-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Aug. 05, 2021 | Aug. 04, 2022 | Radiation (03CH04-CB) |
| Pre-Amplifier | Agilent | 83017A | MY53270063 | 0.5GHz ~ 26.5GHz | Jul. 12, 2021 | Jul. 11, 2022 | Radiation (03CH04-CB) |
| Pre-Amplifier | MITEQ | TTA1840-35-H G | 1864479 | 18GHz ~ 40GHz | Jul. 13, 2021 | Jul. 12, 2022 | Radiation (03CH04-CB) |
| Signal Analyzer | R&S | FSV40 | 101904 | 9kHz ~ 40GHz | Apr. 15, 2021 | Apr. 14, 2022 | Radiation (03CH04-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100142 | 9kHz~40GHz | Mar. 28, 2022 | Mar. 27, 2023 | Radiation (03CH04-CB) |
| RF Cable-high | Woken | RG402 | High Cable-21 | 1GHz - 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH04-CB) |
| RF Cable-high | Woken | RG402 | High Cable-21+67 | 1GHz - 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH04-CB) |
| High Cable | Woken | WCA0929M | 40G#5+7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH04-CB) |



| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-------------------------------|-------------|----------------|------------------|-------------------|------------------|----------------------|-----------------------|
| High Cable | Woken | WCA0929M | 40G#5 | 1GHz ~ 40 GHz | Dec. 08, 2021 | Dec. 07, 2022 | Radiation (03CH04-CB) |
| High Cable | Woken | WCA0929M | 40G#7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH04-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH04-CB) |
| 3m Semi Anechoic Chamber VSWR | RIKEN | SAC-3M | 03CH02-CB | 1GHz ~18GHz 3m | Mar. 27, 2021 | Mar. 26, 2022 | Radiation (03CH02-CB) |
| 3m Semi Anechoic Chamber VSWR | RIKEN | SAC-3M | 03CH02-CB | 1GHz ~18GHz | Mar. 26, 2022 | Mar. 25, 2023 | Radiation (03CH02-CB) |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | BBHA 9120 D 1370 | 1GHz~18GHz | Sep. 14, 2021 | Sep. 13, 2022 | Radiation (03CH02-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Aug. 05, 2021 | Aug. 04, 2022 | Radiation (03CH02-CB) |
| Pre-Amplifier | Agilent | 83017A | MY39501305 | 1GHz ~ 26.5GHz | Jul. 12, 2021 | Jul. 11, 2022 | Radiation (03CH02-CB) |
| Pre-Amplifier | MITEQ | TTA1840-35-H G | 1864479 | 18GHz ~ 40GHz | Jul. 13, 2021 | Jul. 12, 2022 | Radiation (03CH02-CB) |
| Spectrum analyzer | R&S | FSU | 100015 | 9kHz~26GHz | Oct. 25, 2021 | Oct. 24, 2022 | Radiation (03CH02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-18 | 1GHz ~ 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-18+19 | 1GHz ~ 18GHz | Oct. 04, 2021 | Oct. 03, 2022 | Radiation (03CH02-CB) |
| High Cable | Woken | WCA0929M | 40G#5+7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH02-CB) |
| High Cable | Woken | WCA0929M | 40G#5 | 1GHz ~ 40 GHz | Dec. 08, 2021 | Dec. 07, 2022 | Radiation (03CH02-CB) |
| High Cable | Woken | WCA0929M | 40G#7 | 1GHz ~ 40 GHz | Dec. 14, 2021 | Dec. 13, 2022 | Radiation (03CH02-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH02-CB) |
| Spectrum analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | May 21, 2021 | May 20, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-06 | 1 GHz– 26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-07 | 1 GHz– 26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-08 | 1 GHz– 26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-09 | 1 GHz– 26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-10 | 1 GHz– 26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |




| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-------------------------|---------|-----------|---------------|-----------------|------------------|----------------------|---------------------|
| RF Cable-high | Woken | RG402 | High Cable-30 | 1 GHz–26.5 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (TH01-CB) |
| Switch | SPTCB | SP-SWI | SWI-01 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | SWI-01-P1 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | SWI-01-P2 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | SWI-01-P3 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | SWI-01-P4 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | SWI-01-P5 | 1 GHz–26.5 GHz | Dec. 13, 2021 | Dec. 12, 2022 | Conducted (TH01-CB) |
| Power Sensor | Anritsu | MA2411B | 1339408 | 300MHz~40GHz | Sep. 06, 2021 | Sep. 05, 2022 | Conducted (TH01-CB) |
| Power Meter | Anritsu | ML2495A | 1517009 | 300MHz~40GHz | Sep. 06, 2021 | Sep. 05, 2022 | Conducted (TH01-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conducted (TH01-CB) |
| Spectrum Analyzer | R&S | FSV40 | 101025 | 9kHz ~ 40GHz | Nov. 06, 2021 | Nov. 05, 2022 | Conducted (DF02-CB) |
| RF Power Divider | STI | 2 Way | DV-2way -07 | 1GHz ~ 8GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| RF Power Divider | STI | 2 Way | DV-2way -08 | 1GHz ~ 8GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-61 | 1 GHz – 18 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-62 | 1 GHz – 18 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-63 | 1 GHz – 18 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| RF Cable-high | Woken | RG402 | High Cable-66 | 1 GHz – 18 GHz | Oct. 04, 2021 | Oct. 03, 2022 | Conducted (DF02-CB) |
| 100MS/s Digitizer | N.I | USB-5133 | F65206 | N/A | Nov. 25, 2021 | Nov. 24, 2022 | Conducted (DF02-CB) |
| VEKTOR SIGNAL GENERATOR | R&S | SMW200A | 109426 | 100KHz-7.5GHz | Dec. 28, 2021 | Dec. 27, 2022 | Conducted (DF02-CB) |


Note: Calibration Interval of instruments listed above is one year.
NCR means Non-Calibration required.



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Condition |
|--------|--------|------|-----------|--------------|--------------|-------------|-----------|
| Mode 7 | Pass | QP | 154.5k | 62.52 | 65.75 | -3.23 | Line |

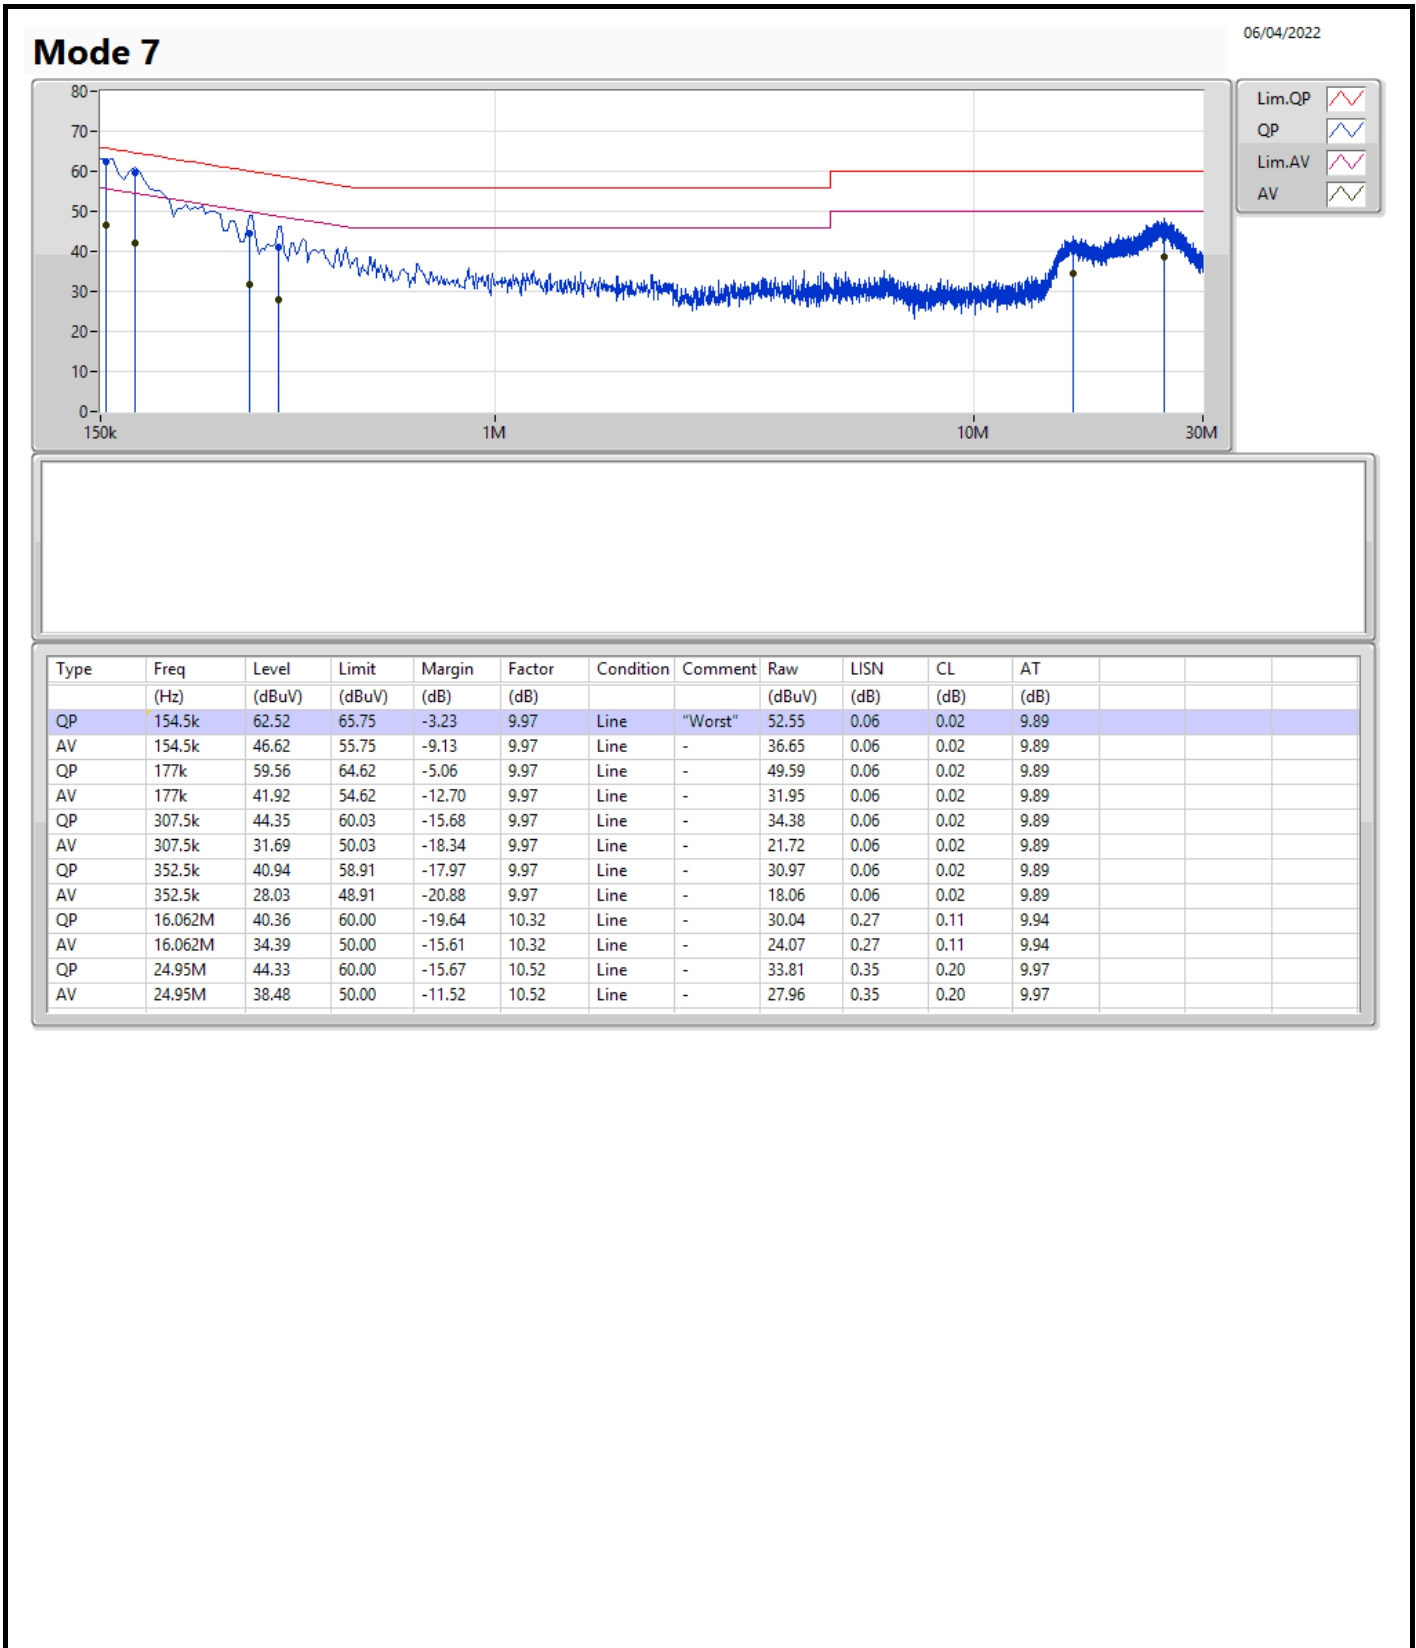

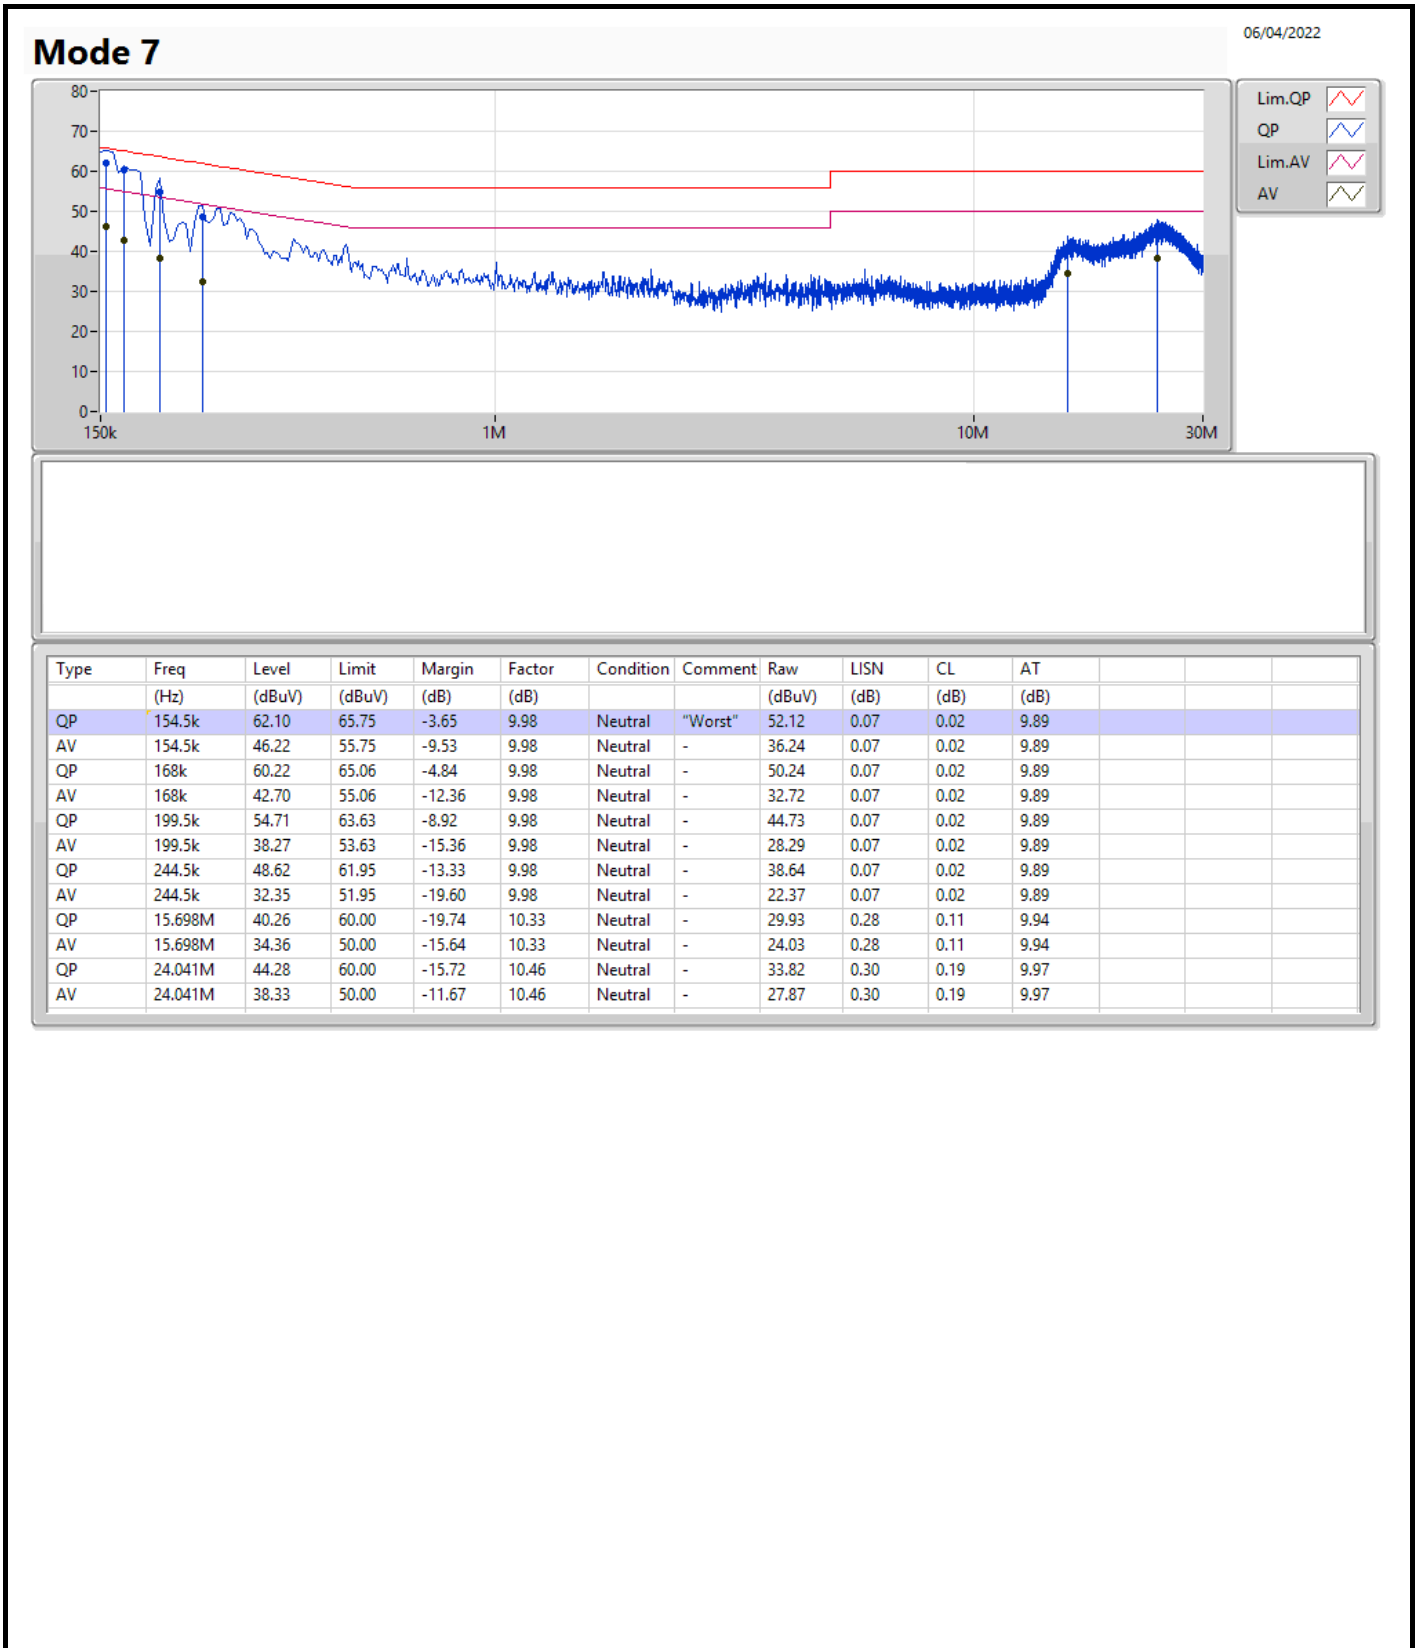

Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 22.08M | 19.13M | 19M1D1D | 21.69M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 40.62M | 37.841M | 37M8D1D | 40.38M | 37.781M |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 93.36M | 77.721M | 77M7D1D | 81.84M | 77.361M |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 168.24M | 155.202M | 155MD1D | 164.88M | 154.483M |
| 6.425-6.525GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 22.05M | 19.13M | 19M1D1D | 21.93M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 40.62M | 37.901M | 37M9D1D | 40.5M | 37.841M |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 82.56M | 77.481M | 77M5D1D | 82.44M | 77.361M |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 164.16M | 154.483M | 154MD1D | 164.16M | 154.483M |
| 6.525-6.875GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 21.9M | 19.13M | 19M1D1D | 21.81M | 19.13M |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 40.68M | 37.841M | 37M8D1D | 40.26M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 82.32M | 77.481M | 77M5D1D | 81.72M | 77.361M |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 164.88M | 155.202M | 155MD1D | 164.64M | 154.963M |
| 6.875-7.125GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 21.93M | 19.13M | 19M1D1D | 21.6M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 40.74M | 37.841M | 37M8D1D | 40.5M | 37.781M |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 83.16M | 77.481M | 77M5D1D | 82.68M | 77.241M |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 163.92M | 154.723M | 155MD1D | 163.92M | 154.723M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - | - | - | - |
| 5955MHz | Pass | Inf | 21.69M | 19.1M |
| 6175MHz | Pass | Inf | 22.08M | 19.13M |
| 6415MHz | Pass | Inf | 21.99M | 19.13M |
| 6435MHz | Pass | Inf | 22.05M | 19.13M |
| 6475MHz | Pass | Inf | 21.96M | 19.1M |
| 6515MHz | Pass | Inf | 21.93M | 19.13M |
| 6535MHz | Pass | Inf | 21.9M | 19.13M |
| 6695MHz | Pass | Inf | 21.84M | 19.13M |
| 6855MHz | Pass | Inf | 21.81M | 19.13M |
| 6875MHz Straddle 6.525-6.875GHz | Pass | Inf | 21.87M | 19.13M |
| 6895MHz | Pass | Inf | 21.78M | 19.1M |
| 6995MHz | Pass | Inf | 21.78M | 19.1M |
| 7095MHz | Pass | Inf | 21.6M | 19.1M |
| 7115MHz | Pass | Inf | 21.93M | 19.13M |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | - | - | - | - |
| 5965MHz | Pass | Inf | 40.62M | 37.841M |
| 6165MHz | Pass | Inf | 40.38M | 37.841M |
| 6405MHz | Pass | Inf | 40.44M | 37.781M |
| 6445MHz | Pass | Inf | 40.62M | 37.901M |
| 6485MHz | Pass | Inf | 40.56M | 37.841M |
| 6525MHz Straddle 6.425-6.525GHz | Pass | Inf | 40.5M | 37.841M |
| 6565MHz | Pass | Inf | 40.26M | 37.781M |
| 6685MHz | Pass | Inf | 40.68M | 37.721M |
| 6845MHz | Pass | Inf | 40.5M | 37.781M |
| 6885MHz Straddle 6.525-6.875GHz | Pass | Inf | 40.56M | 37.841M |
| 6925MHz | Pass | Inf | 40.5M | 37.781M |
| 7005MHz | Pass | Inf | 40.74M | 37.781M |
| 7085MHz | Pass | Inf | 40.62M | 37.841M |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | - | - | - | - |
| 5985MHz | Pass | Inf | 93.36M | 77.721M |
| 6145MHz | Pass | Inf | 82.68M | 77.361M |
| 6385MHz | Pass | Inf | 81.84M | 77.481M |
| 6465MHz | Pass | Inf | 82.44M | 77.481M |
| 6545MHz Straddle 6.425-6.525GHz | Pass | Inf | 82.56M | 77.361M |
| 6625MHz | Pass | Inf | 81.96M | 77.361M |
| 6705MHz | Pass | Inf | 82.32M | 77.481M |
| 6785MHz | Pass | Inf | 82.2M | 77.481M |
| 6865MHz Straddle 6.525-6.875GHz | Pass | Inf | 81.72M | 77.361M |
| 6945MHz | Pass | Inf | 83.16M | 77.241M |
| 7025MHz | Pass | Inf | 82.68M | 77.481M |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | - | - | - | - |
| 6025MHz | Pass | Inf | 168.24M | 154.963M |
| 6185MHz | Pass | Inf | 164.88M | 154.483M |
| 6345MHz | Pass | Inf | 165.36M | 155.202M |
| 6505MHz Straddle 6.425-6.525GHz | Pass | Inf | 164.16M | 154.483M |
| 6665MHz | Pass | Inf | 164.88M | 155.202M |
| 6825MHz Straddle 6.525-6.875GHz | Pass | Inf | 164.64M | 154.963M |
| 6985MHz | Pass | Inf | 163.92M | 154.723M |


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5955MHz

15/02/2022

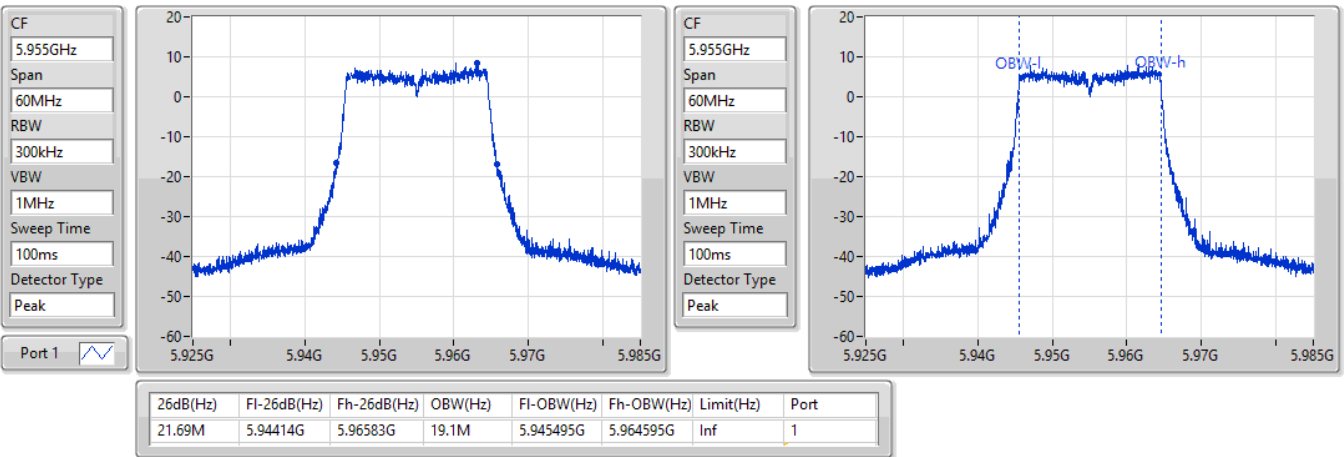


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6175MHz

15/02/2022

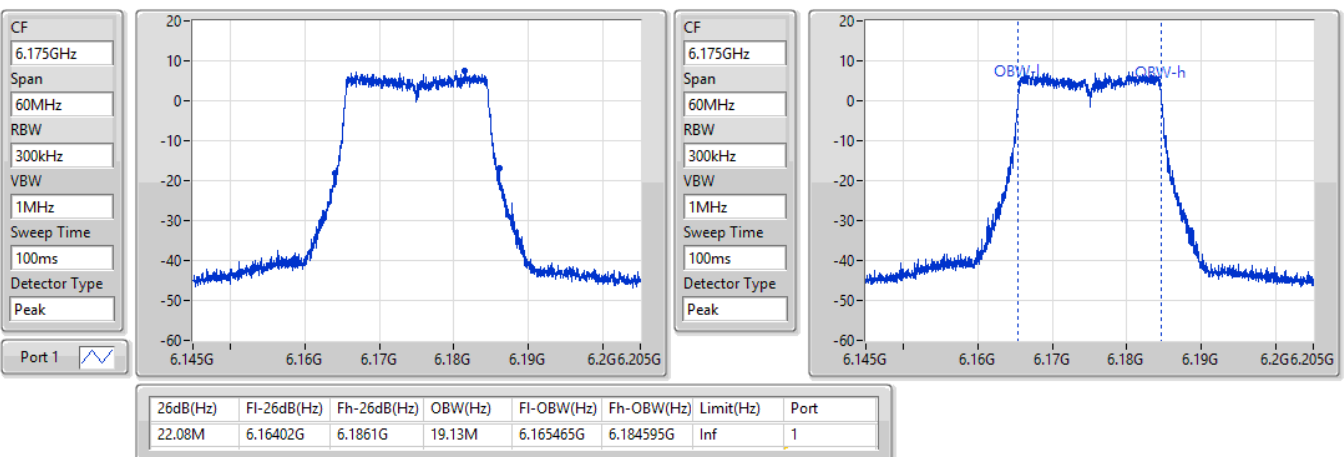


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW


6415MHz

15/02/2022

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

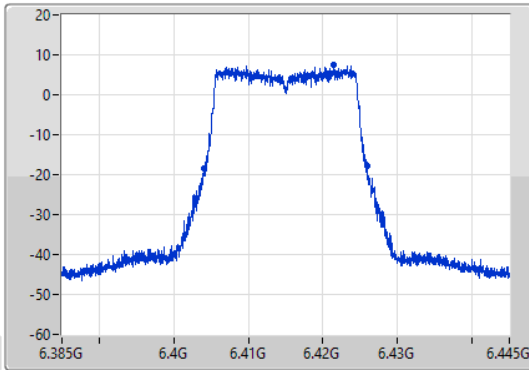

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

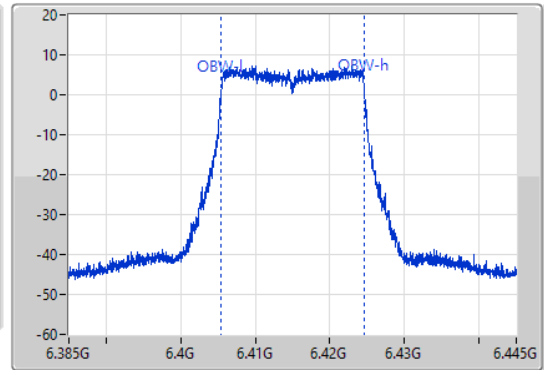

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.99M | 6.40399G | 6.42598G | 19.13M | 6.405465G | 6.424595G | Inf | 1 |


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW


6435MHz

15/02/2022

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

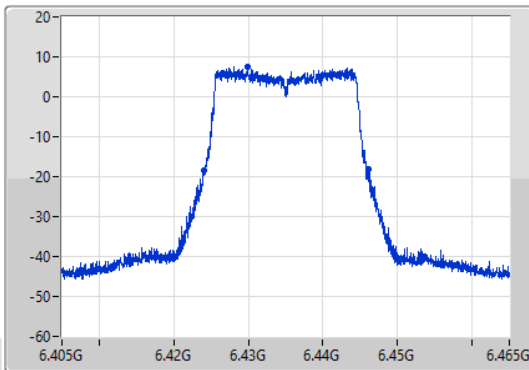

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

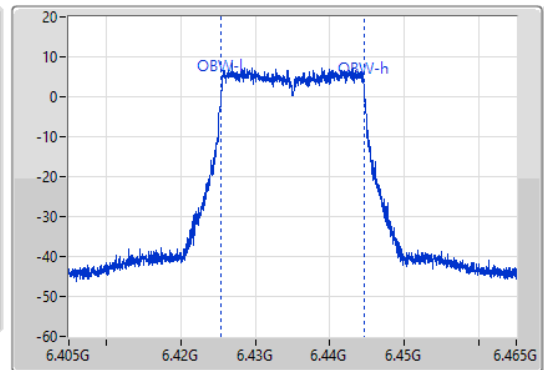


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.05M | 6.42399G | 6.44604G | 19.13M | 6.425465G | 6.444595G | Inf | 1 |

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6475MHz

15/02/2022

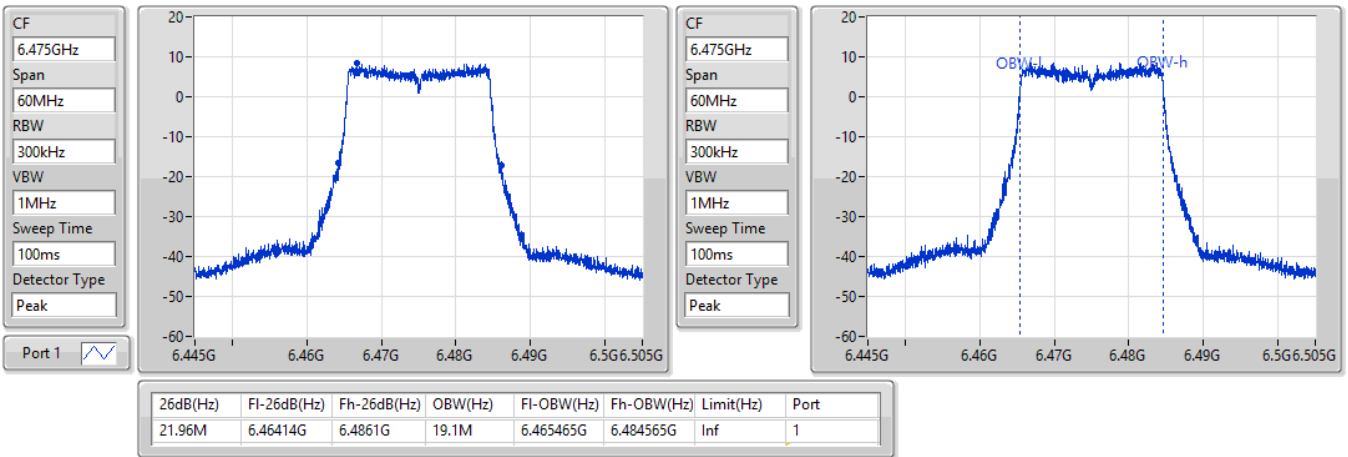


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6515MHz

15/02/2022

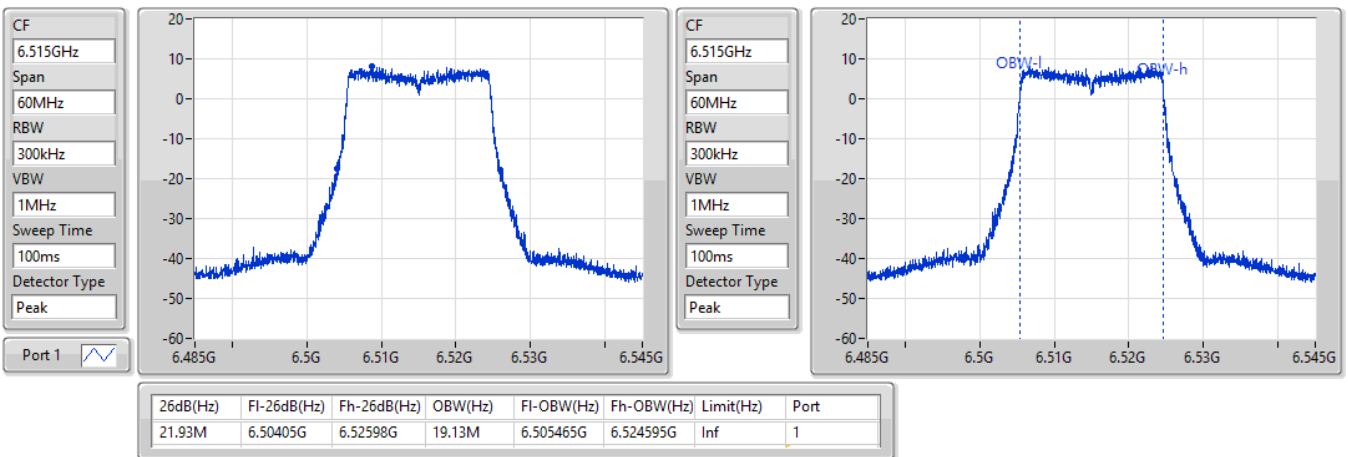


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6535MHz

15/02/2022

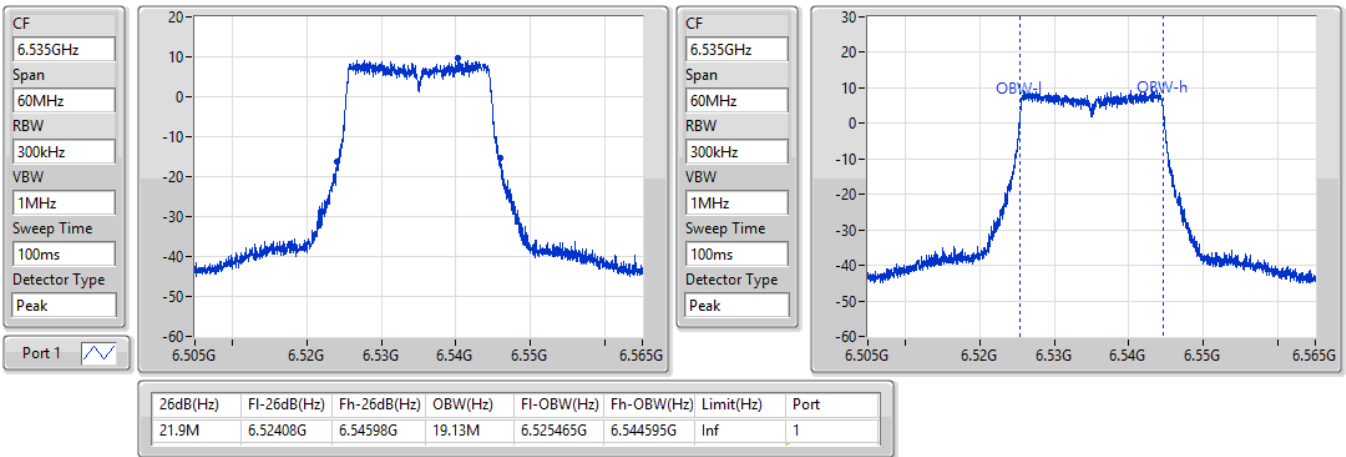


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6695MHz

15/02/2022

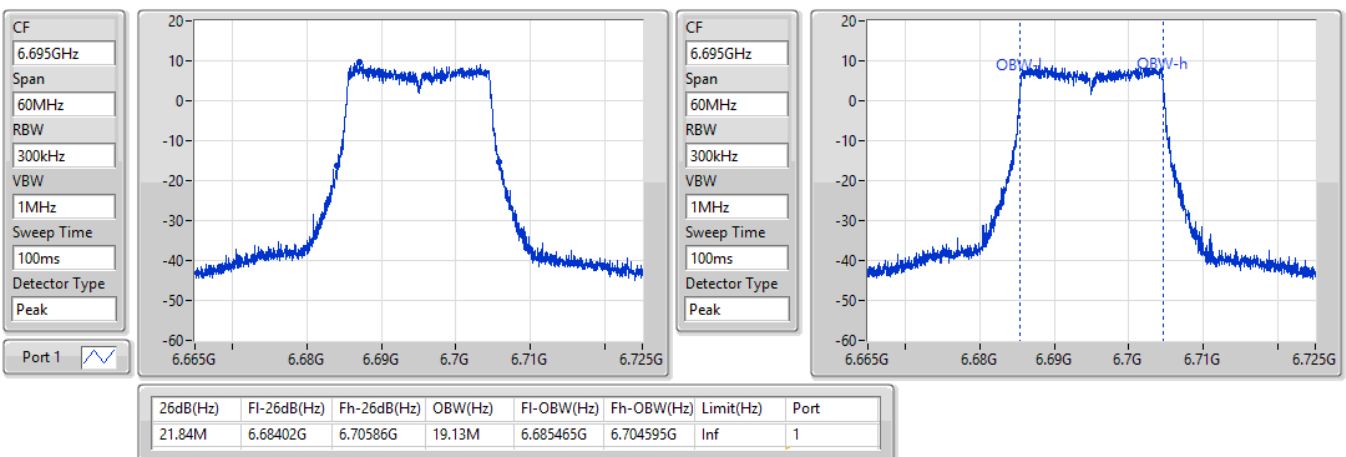


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6855MHz

15/02/2022

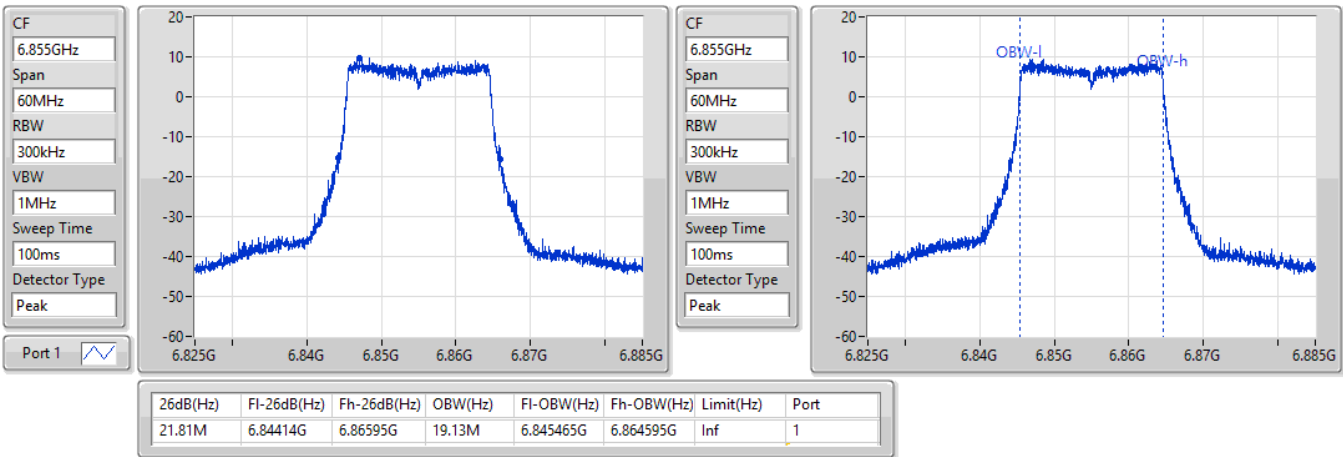


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6875MHz Straddle 6.525-6.875GHz

15/02/2022

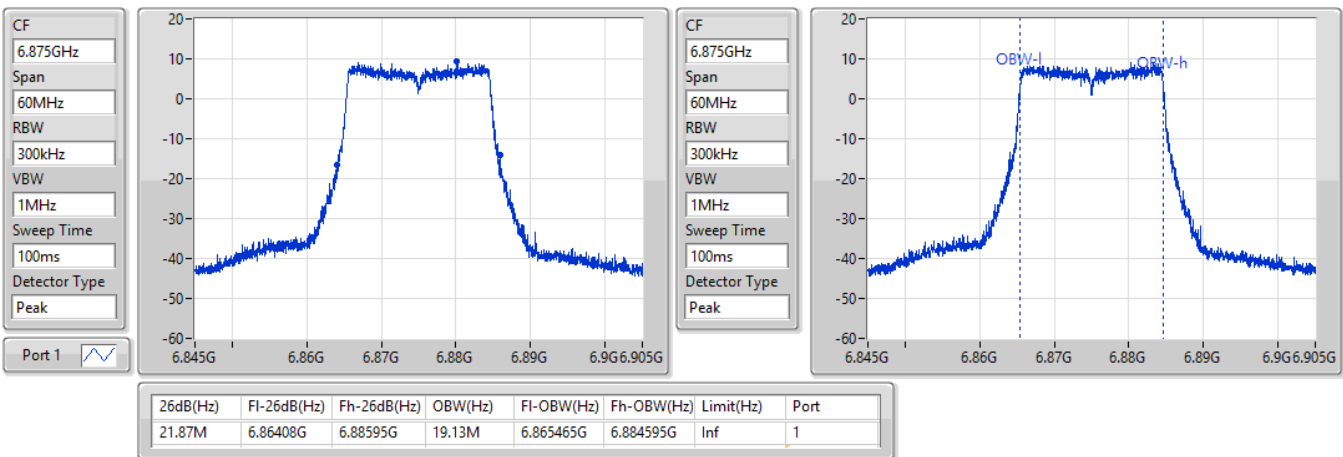


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6895MHz

15/02/2022

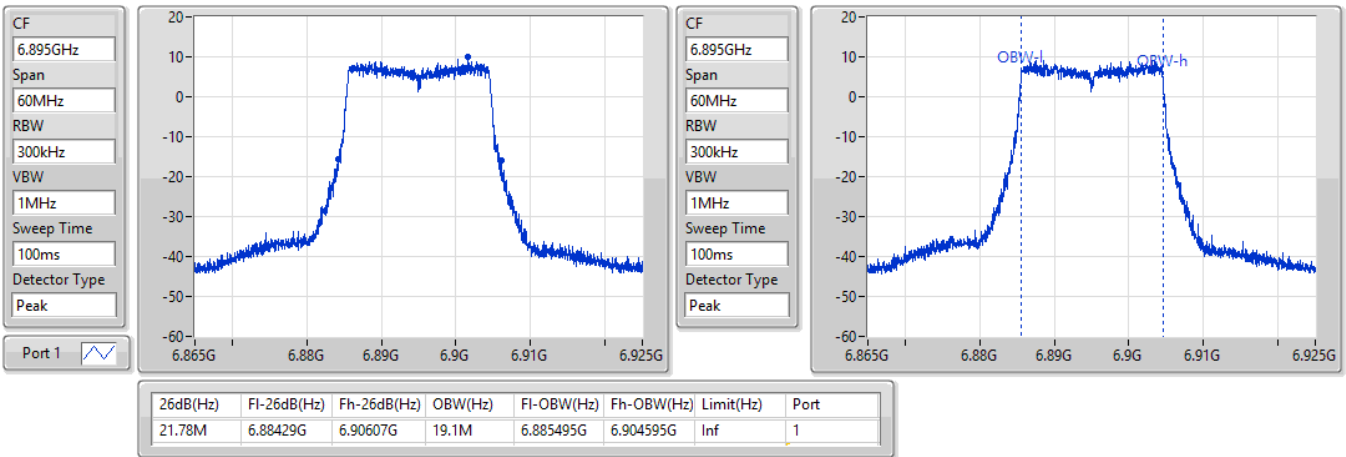


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6995MHz

15/02/2022

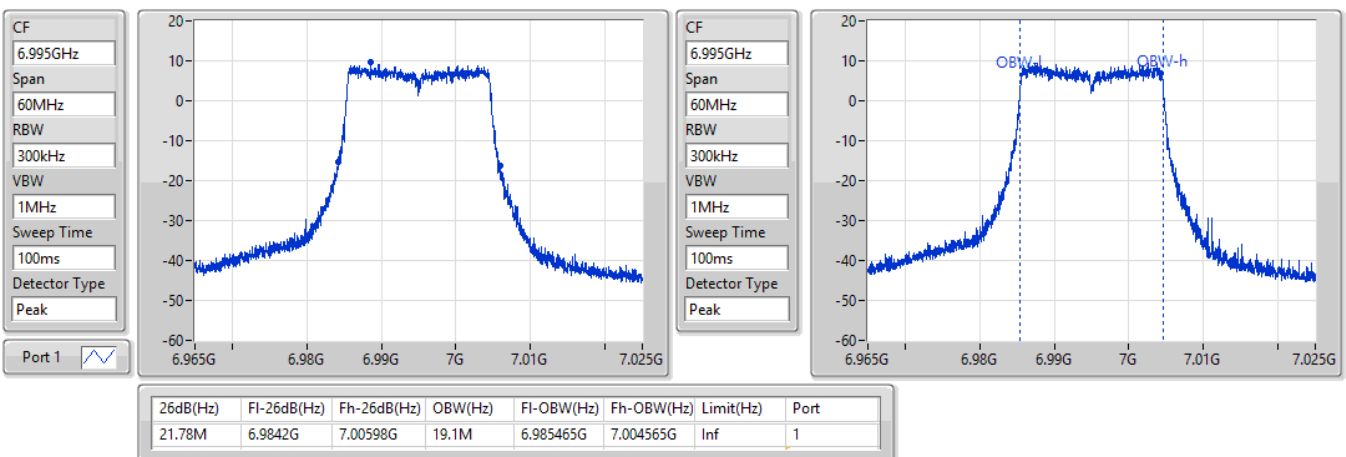


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

7095MHz

15/02/2022

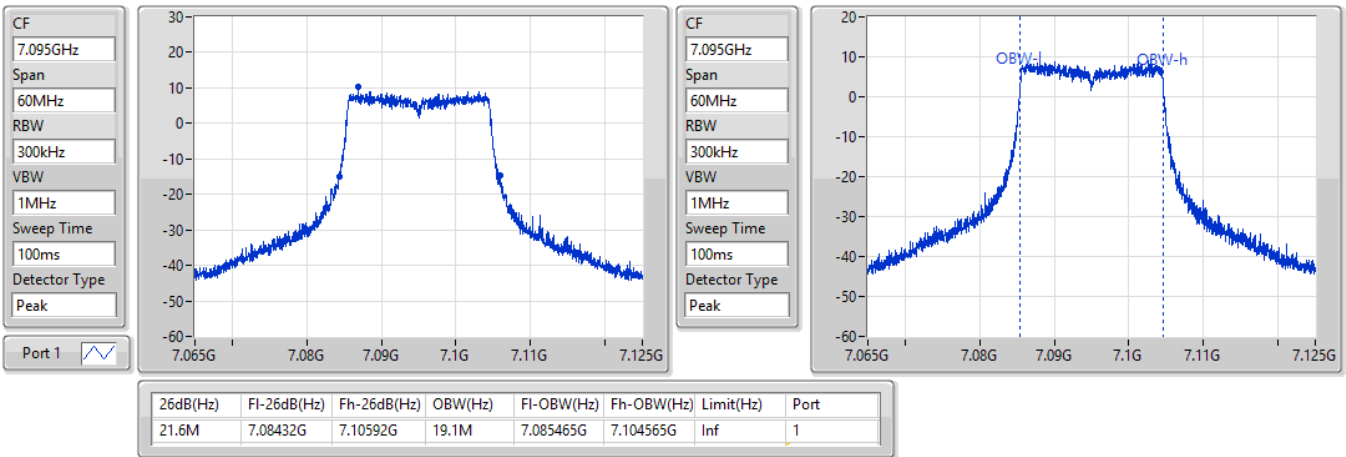


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

7115MHz

28/02/2022

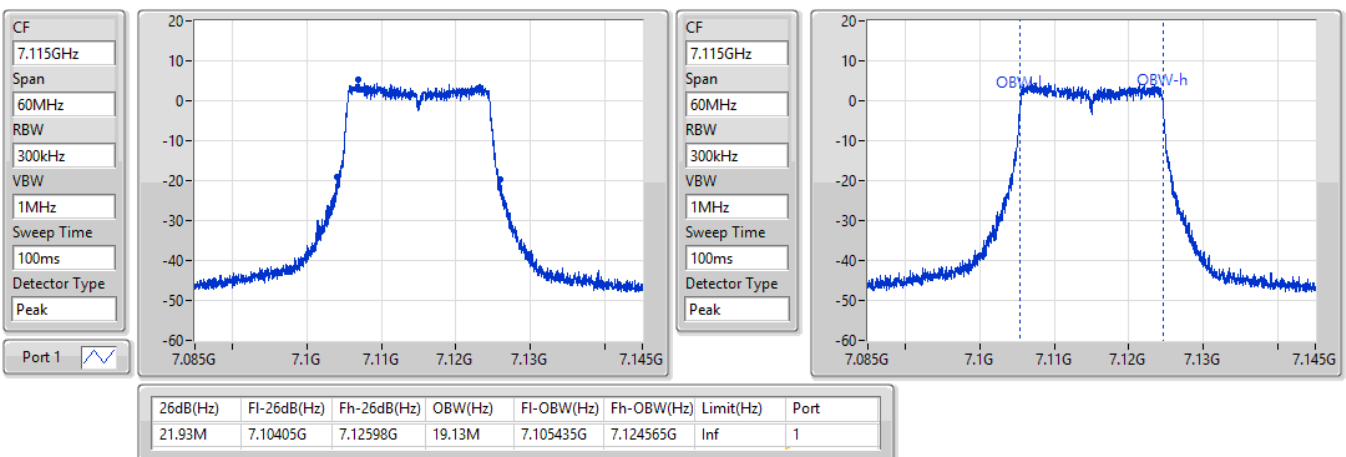


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW


5965MHz

15/02/2022

CF
5.965GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

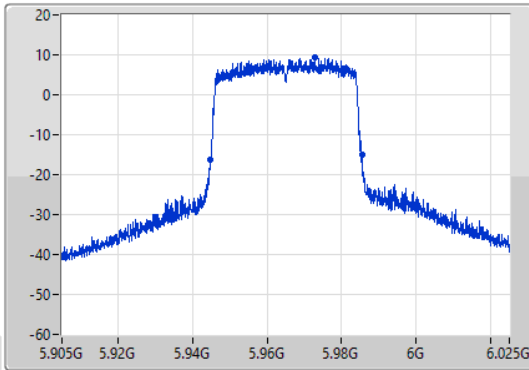

CF
5.965GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

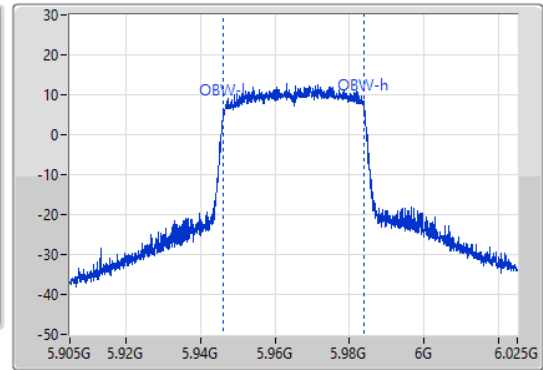

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.62M | 5.94484G | 5.98546G | 37.841M | 5.946169G | 5.98401G | Inf | 1 |


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW


6165MHz

15/02/2022

CF
6.165GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

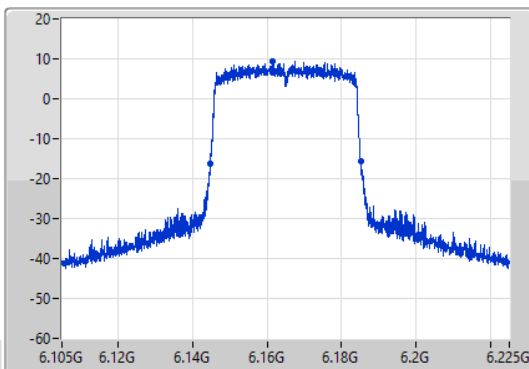

CF
6.165GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

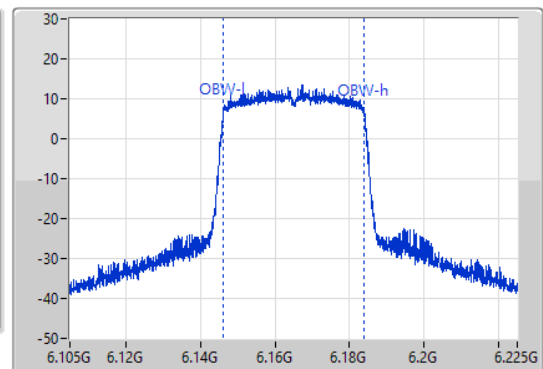

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.38M | 6.14484G | 6.18522G | 37.841M | 6.146109G | 6.183951G | Inf | 1 |


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW


6405MHz

15/02/2022

CF
6.405GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

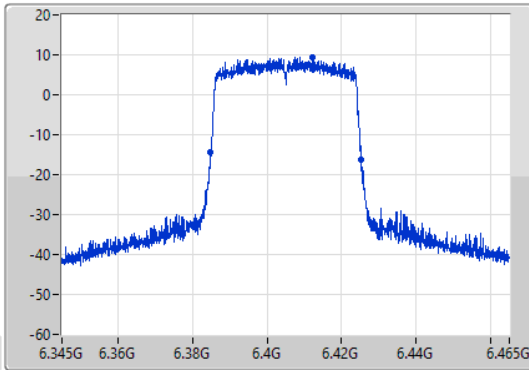

CF
6.405GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

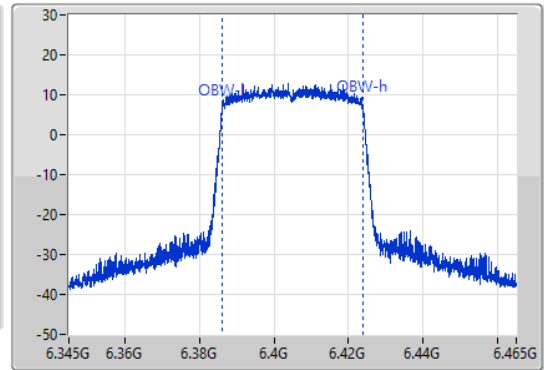

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.44M | 6.38478G | 6.42522G | 37.781M | 6.386109G | 6.423891G | Inf | 1 |


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW


6445MHz

15/02/2022

CF
6.445GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

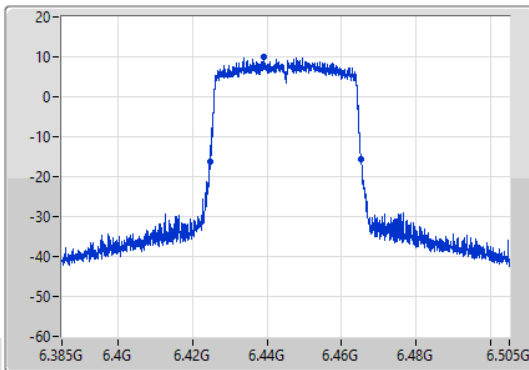

CF
6.445GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

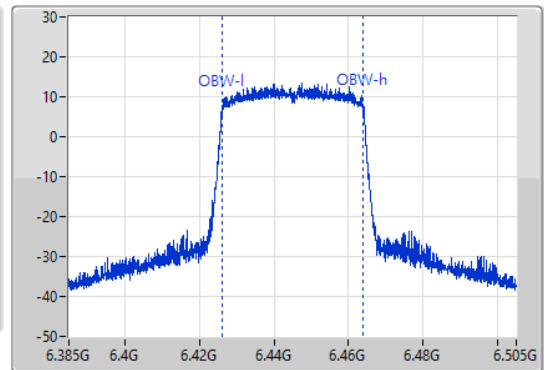


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.62M | 6.42472G | 6.46534G | 37.901M | 6.426109G | 6.46401G | Inf | 1 |

802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6485MHz

15/02/2022

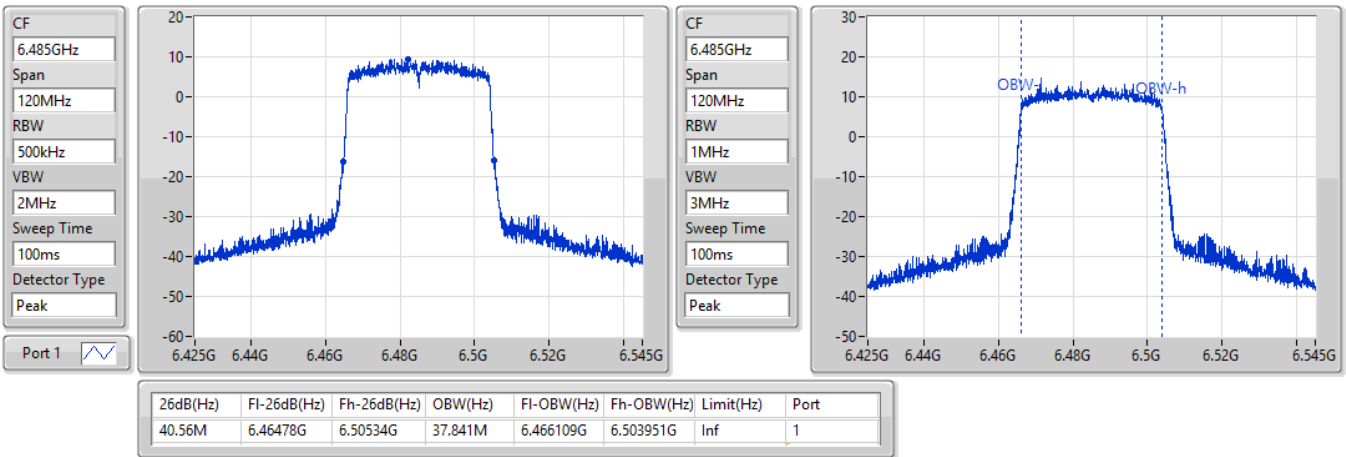


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6525MHz Straddle 6.425-6.525GHz

15/02/2022

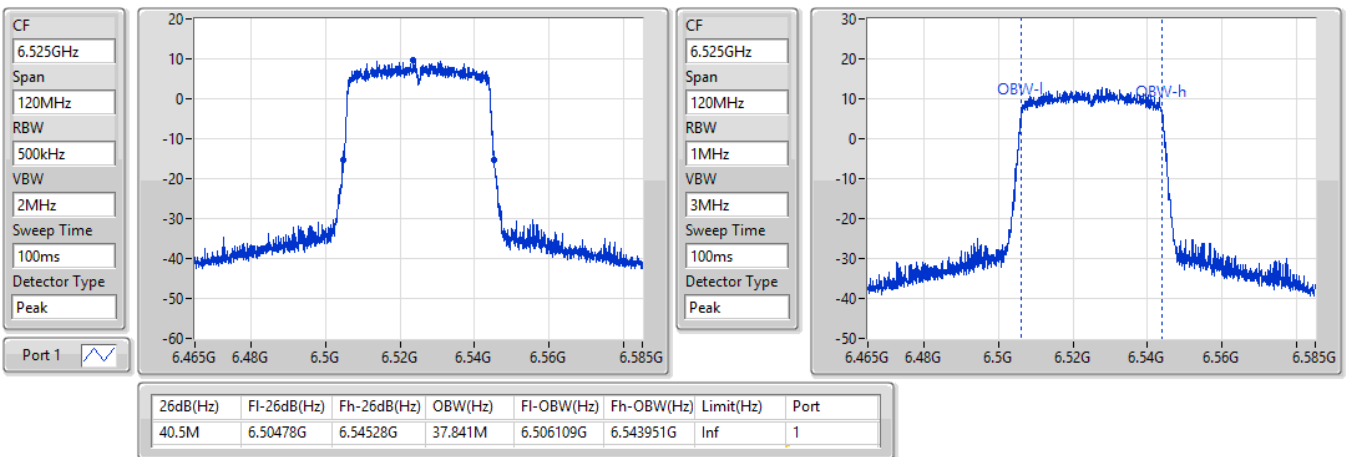


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6565MHz

15/02/2022

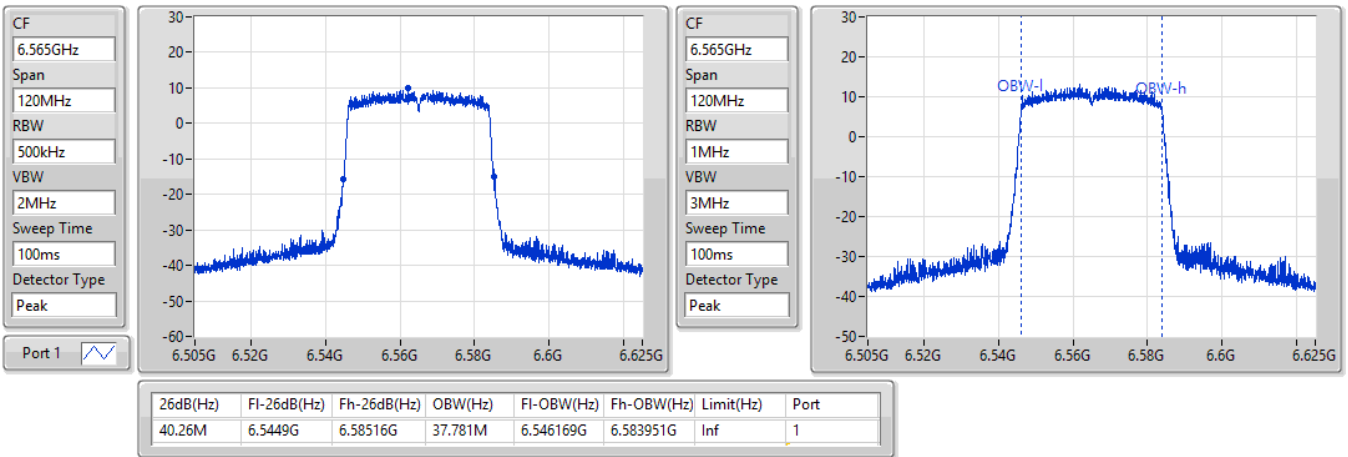


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6685MHz

15/02/2022

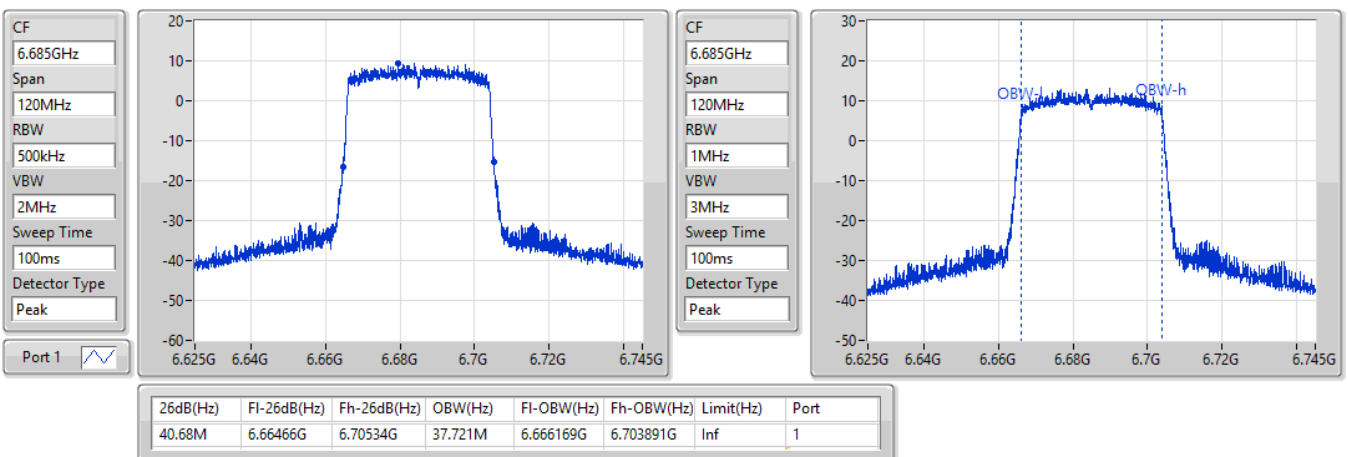


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6845MHz

15/02/2022

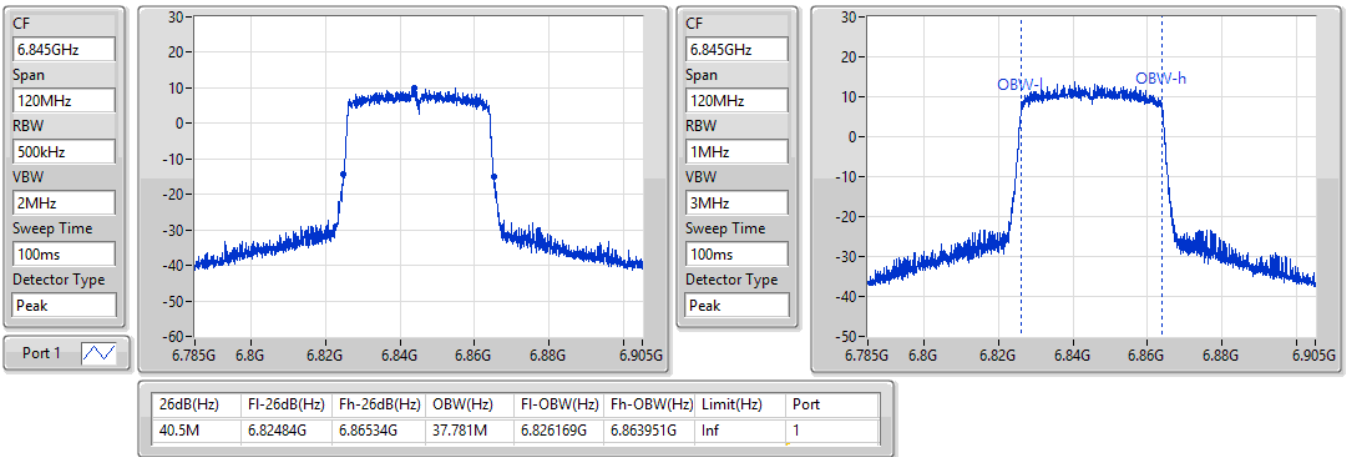


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6885MHz Straddle 6.525-6.875GHz

15/02/2022

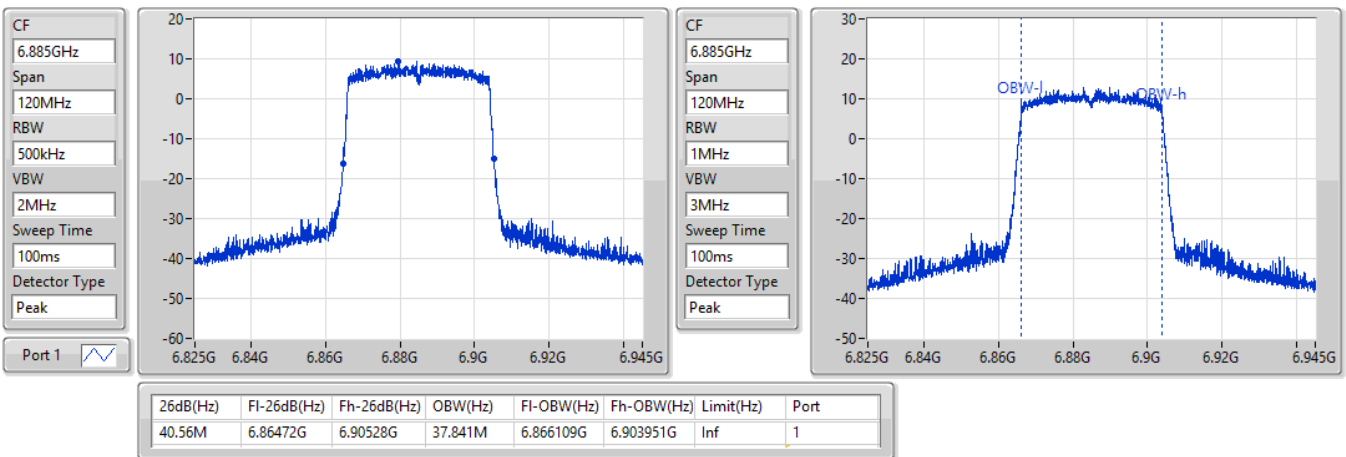


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

6925MHz

15/02/2022

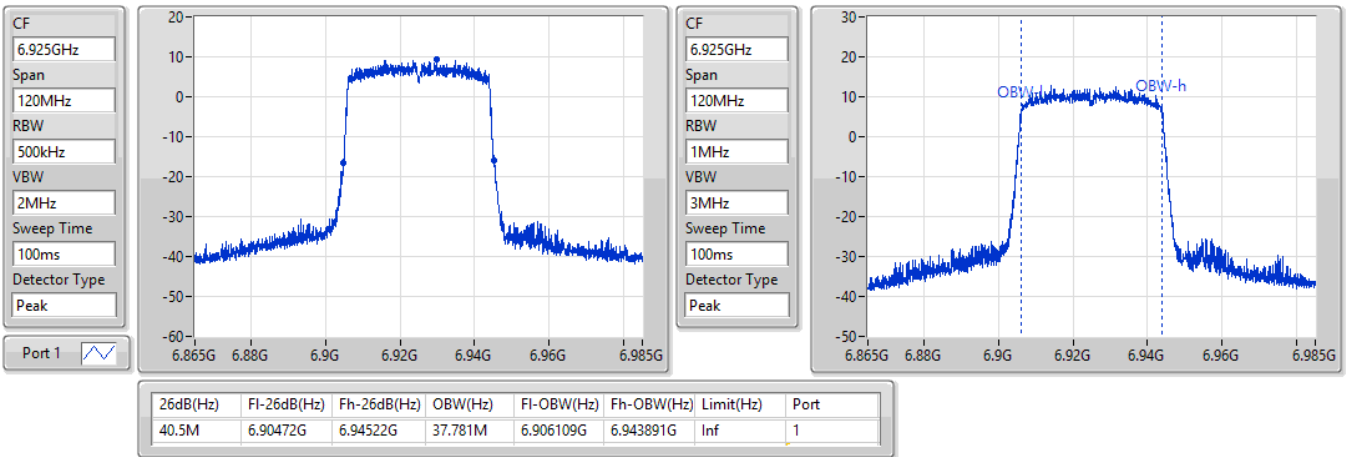


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

7005MHz

15/02/2022

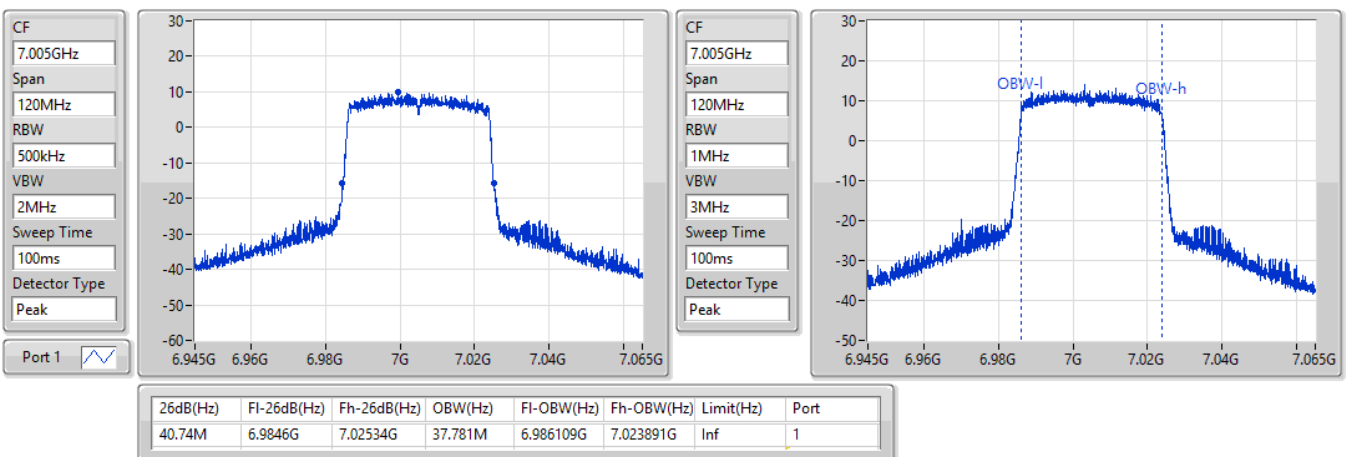


802.11ax HEW40_Nss1,(MCS0)_1TX

EBW


7085MHz

15/02/2022

CF
7.085GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

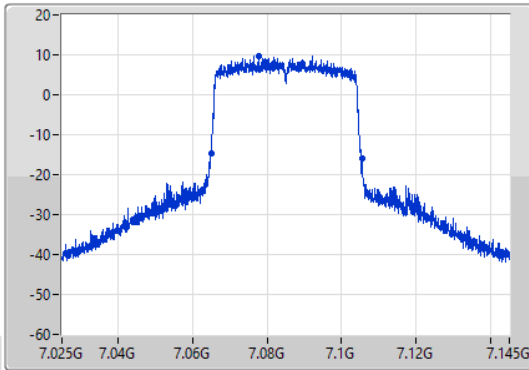

CF
7.085GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

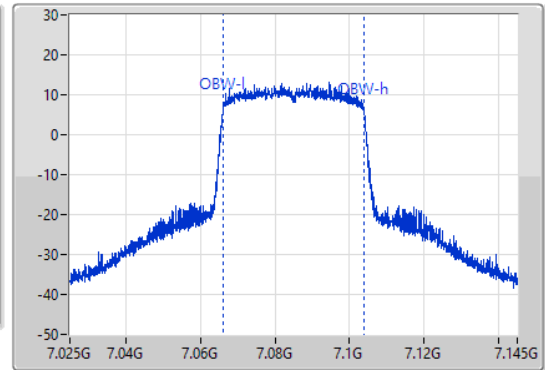

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.62M | 7.06496G | 7.10558G | 37.841M | 7.066049G | 7.103891G | Inf | 1 |


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW


5985MHz

15/02/2022

CF
5.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

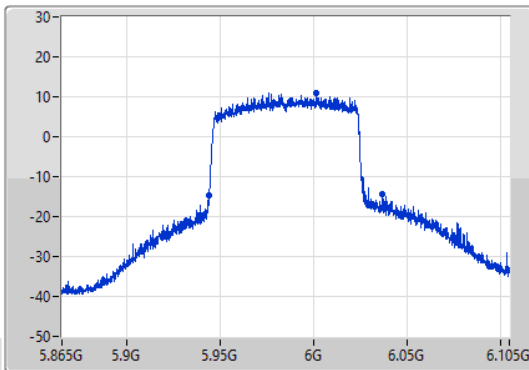

CF
5.985GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

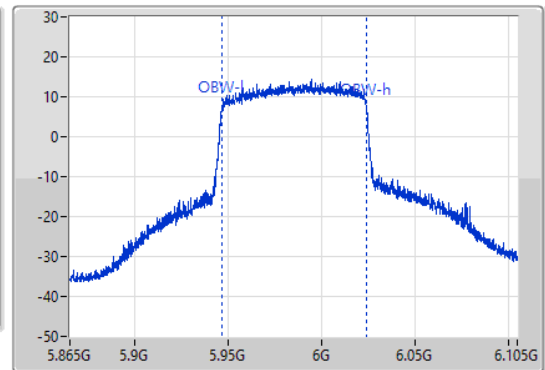


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 93.36M | 5.94372G | 6.03708G | 77.721M | 5.946499G | 6.02422G | Inf | 1 |

802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6145MHz

15/02/2022

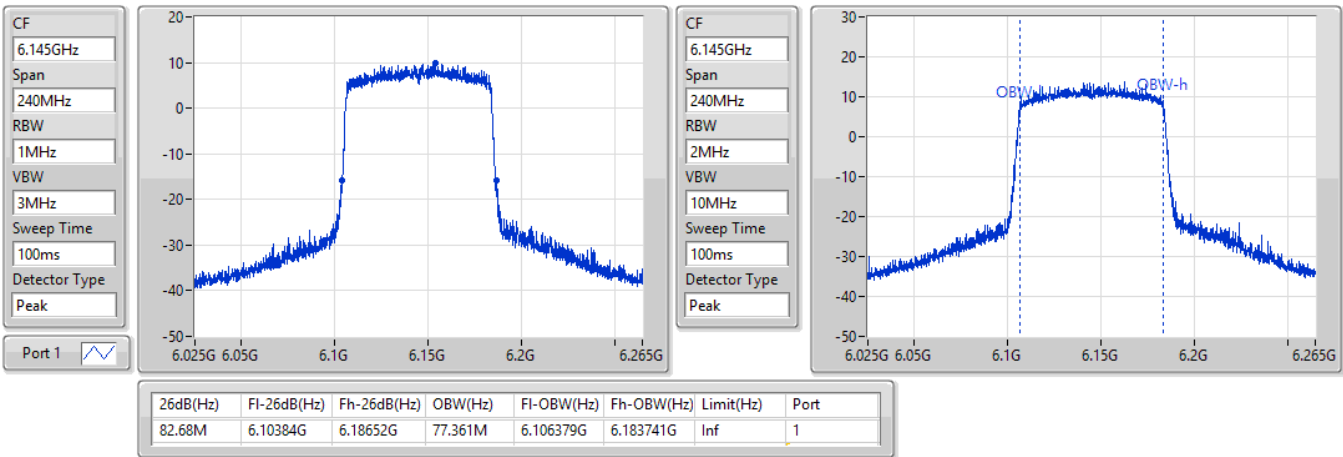


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6385MHz

15/02/2022

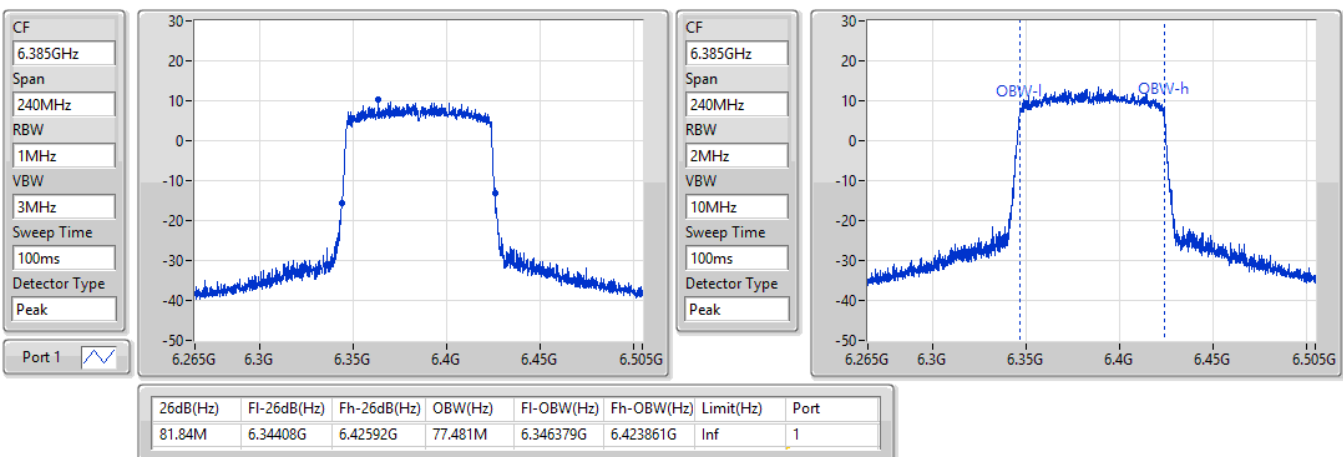


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6465MHz

15/02/2022

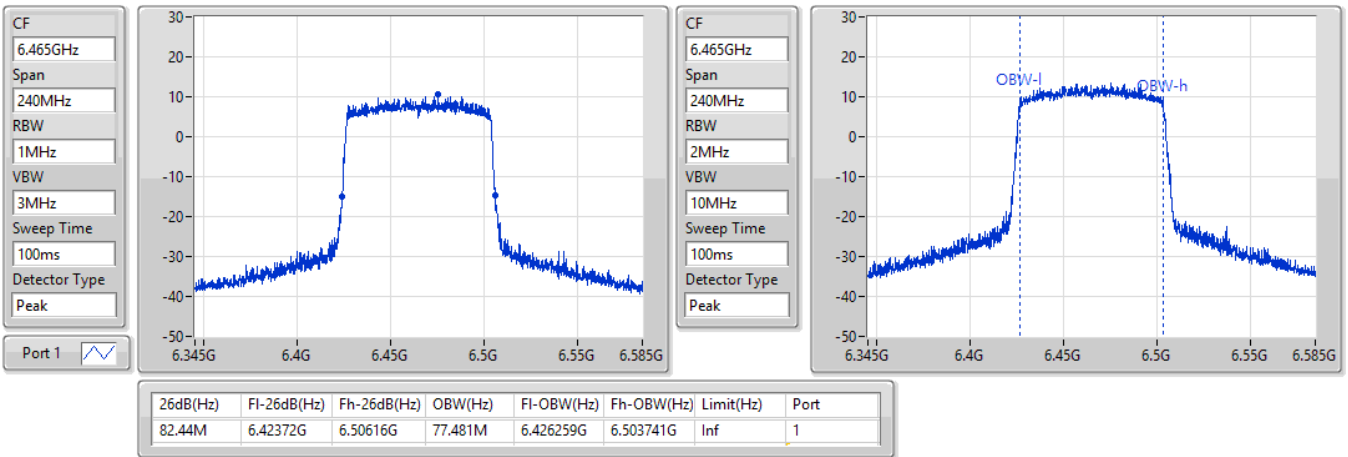


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6545MHz Straddle 6.425-6.525GHz

15/02/2022

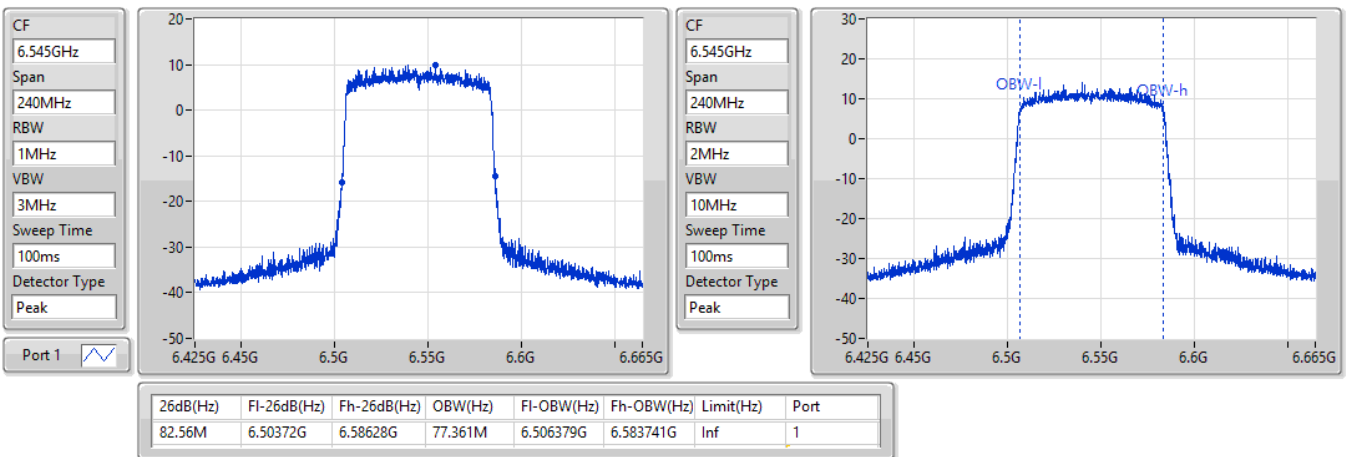


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6625MHz

15/02/2022

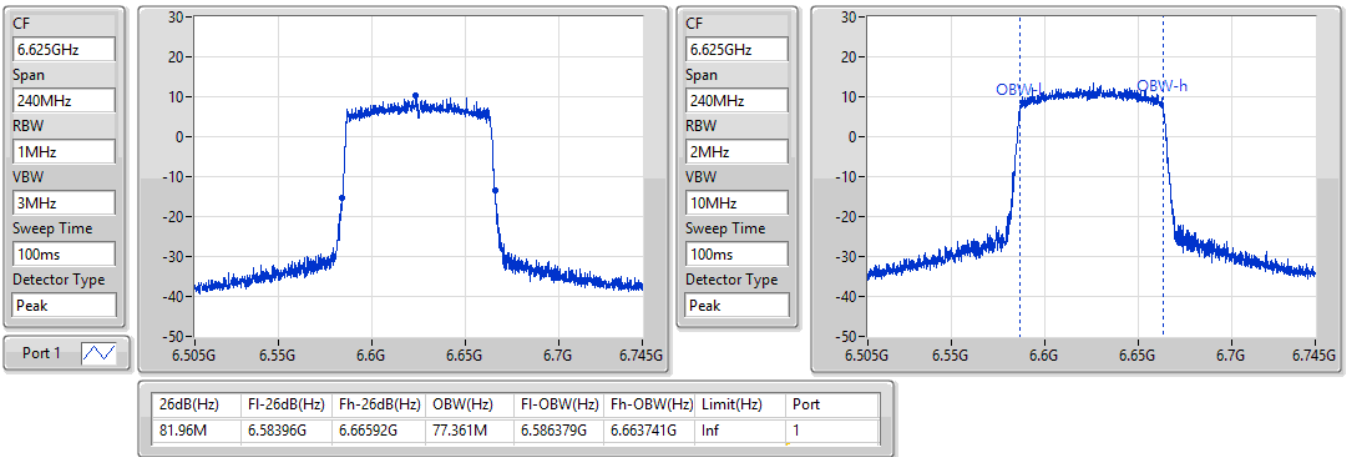


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6705MHz

15/02/2022

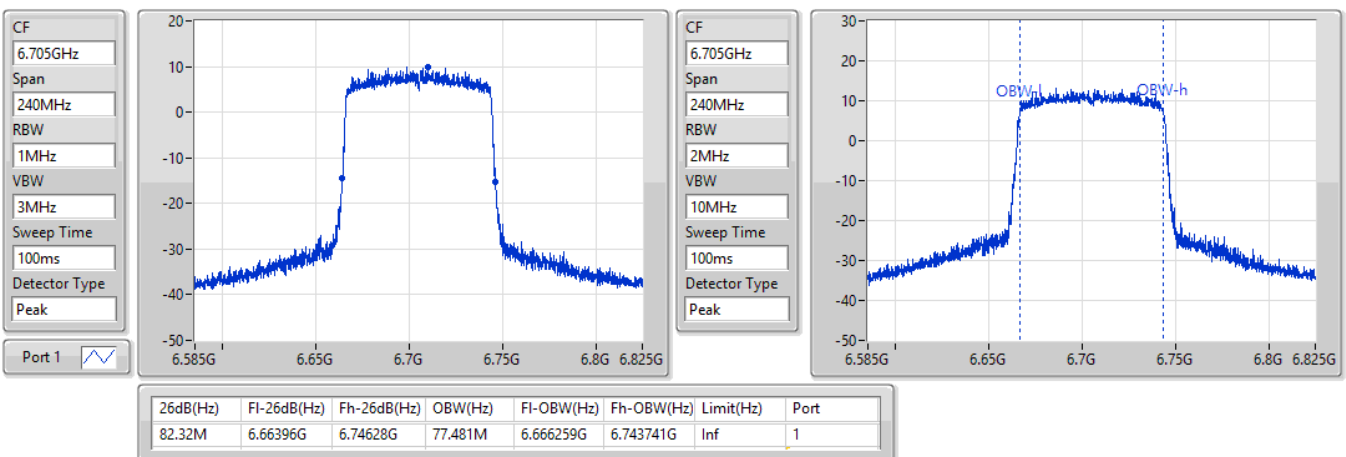


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6785MHz

15/02/2022

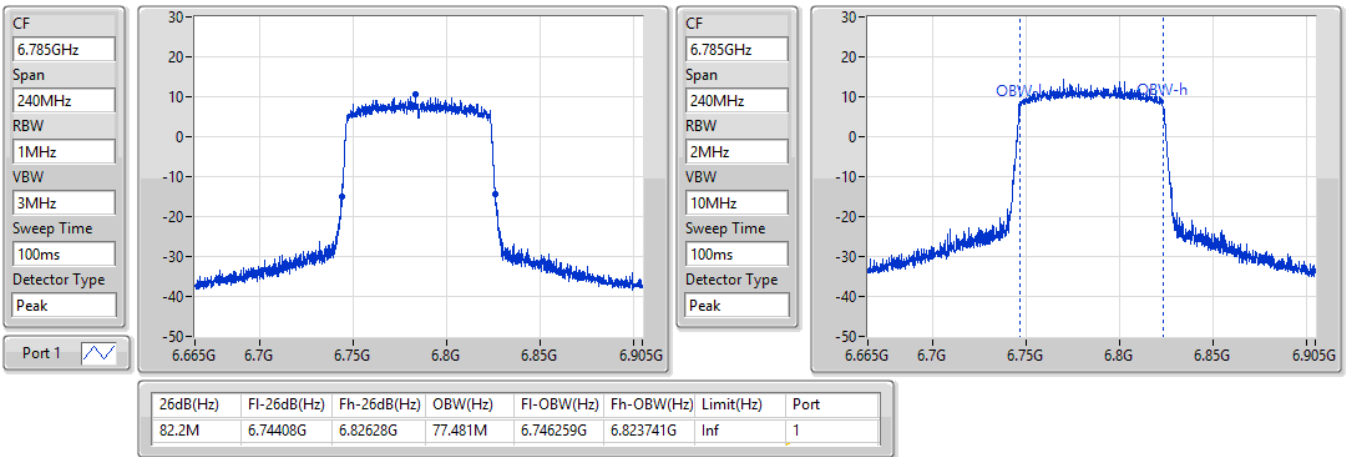


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6865MHz Straddle 6.525-6.875GHz

15/02/2022

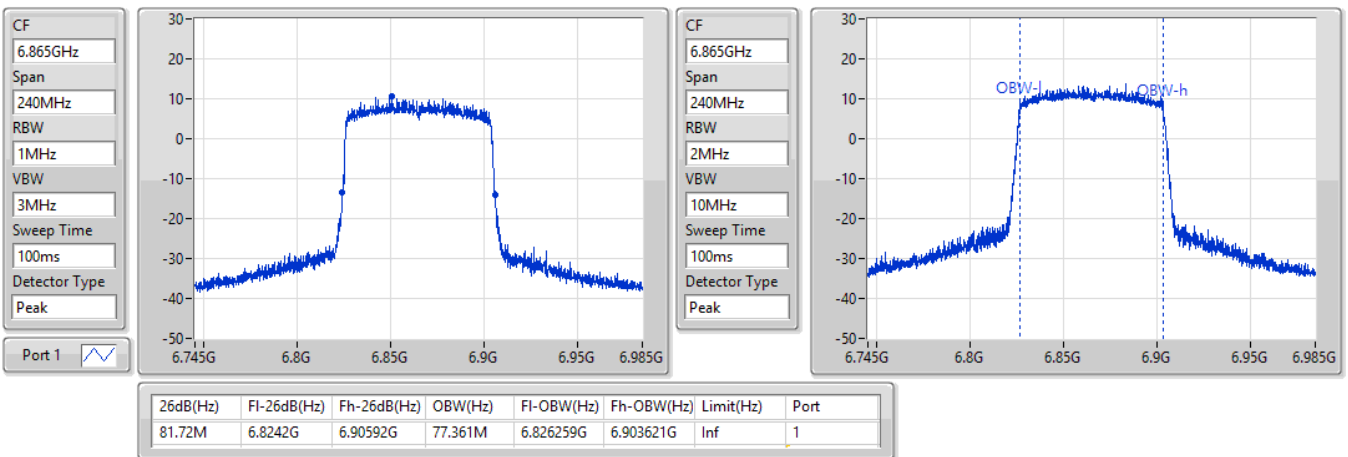


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

6945MHz

15/02/2022

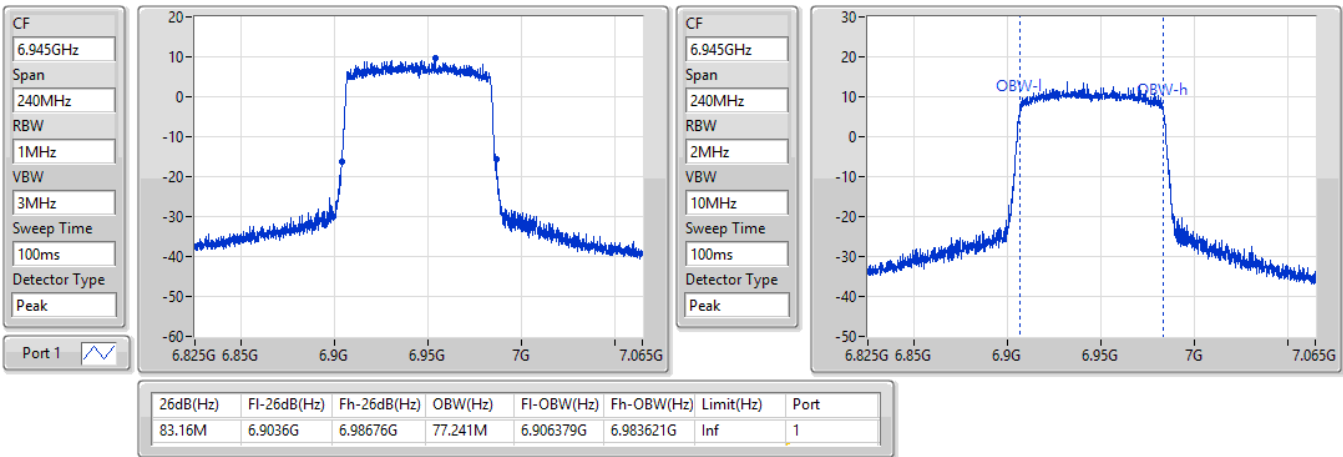


802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

7025MHz

15/02/2022

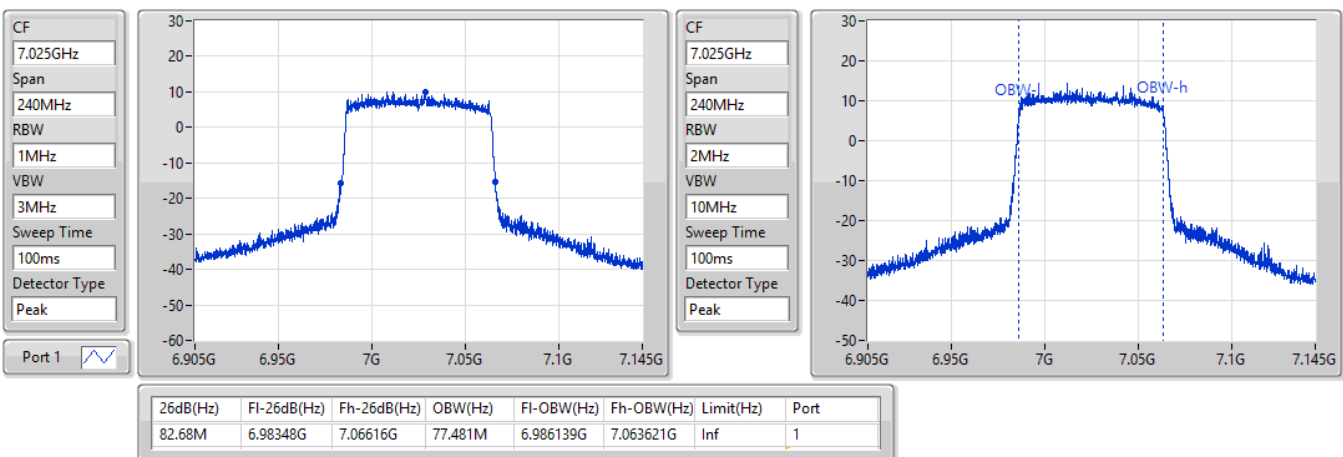


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6025MHz

15/02/2022

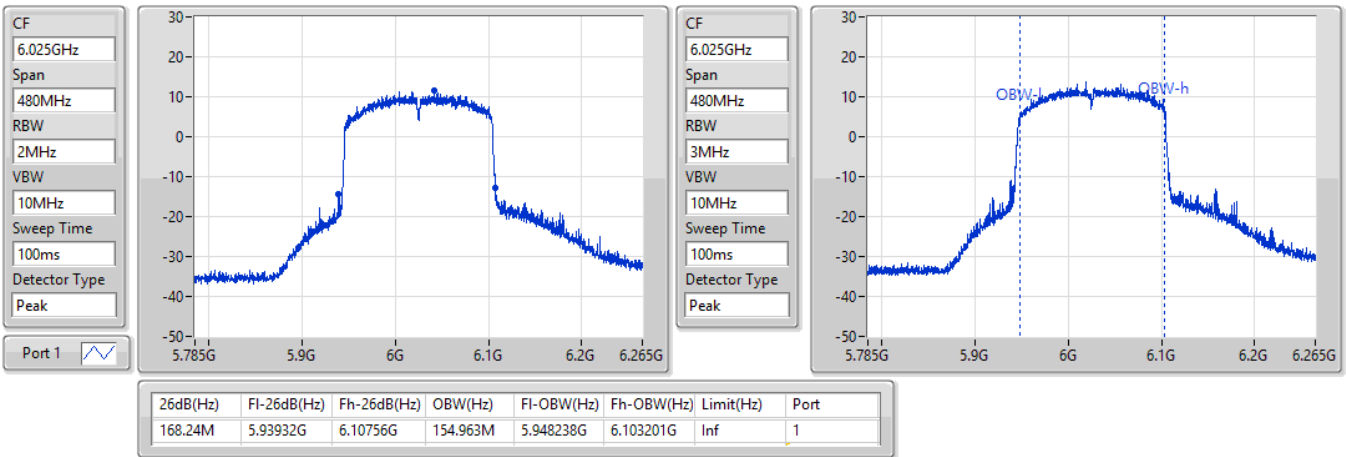


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6185MHz

15/02/2022

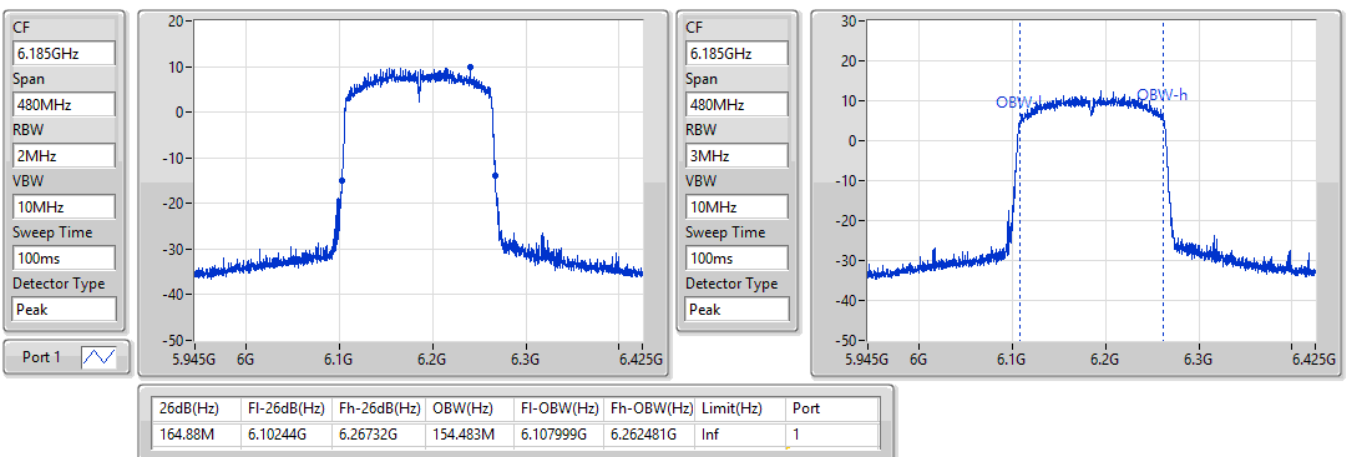


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6345MHz

15/02/2022

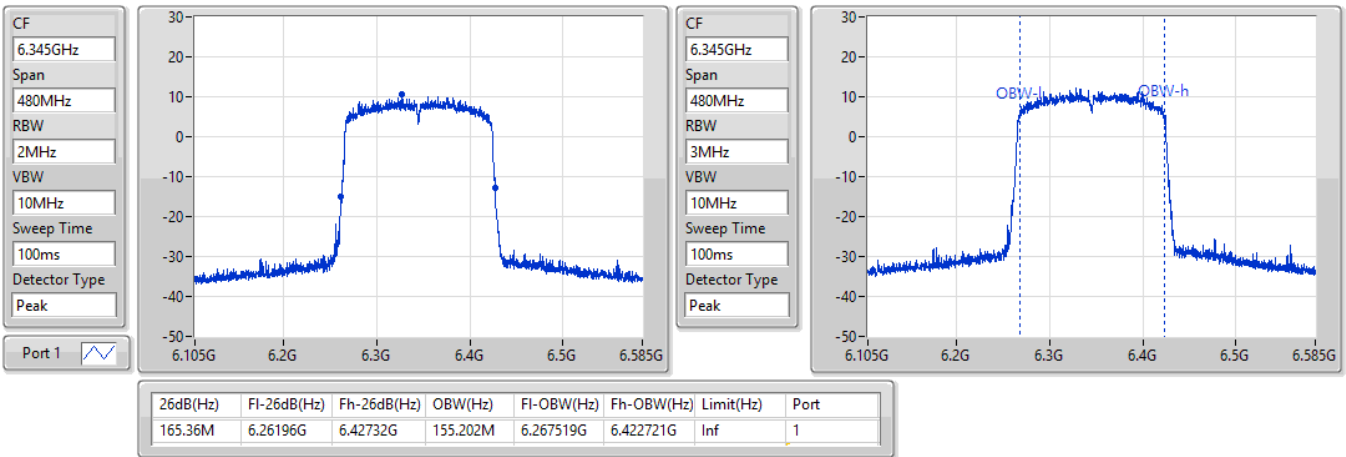


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6505MHz Straddle 6.425-6.525GHz

15/02/2022

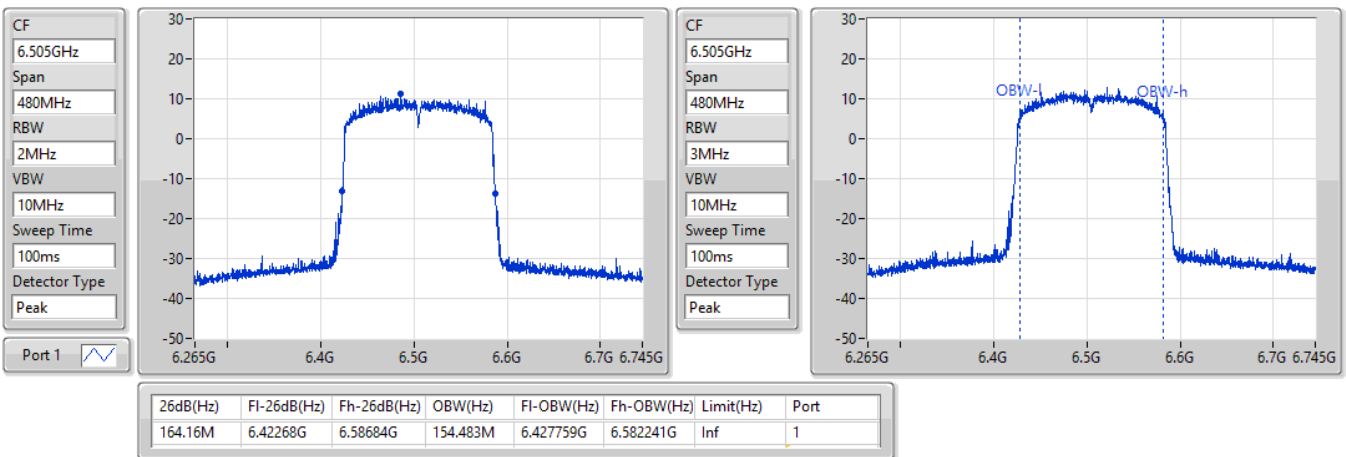


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6665MHz

15/02/2022

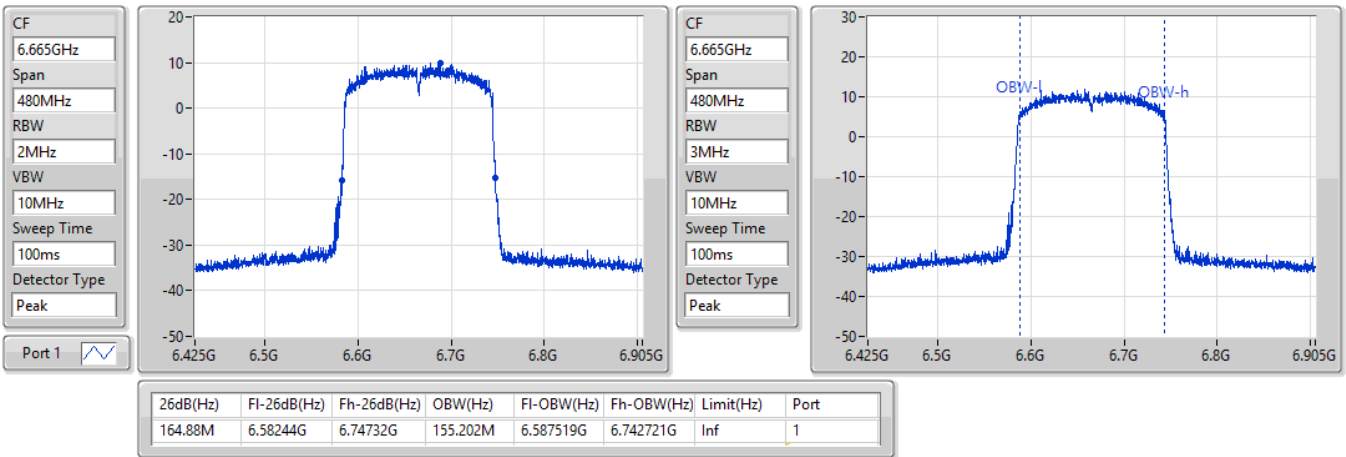


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

6825MHz Straddle 6.525-6.875GHz

15/02/2022

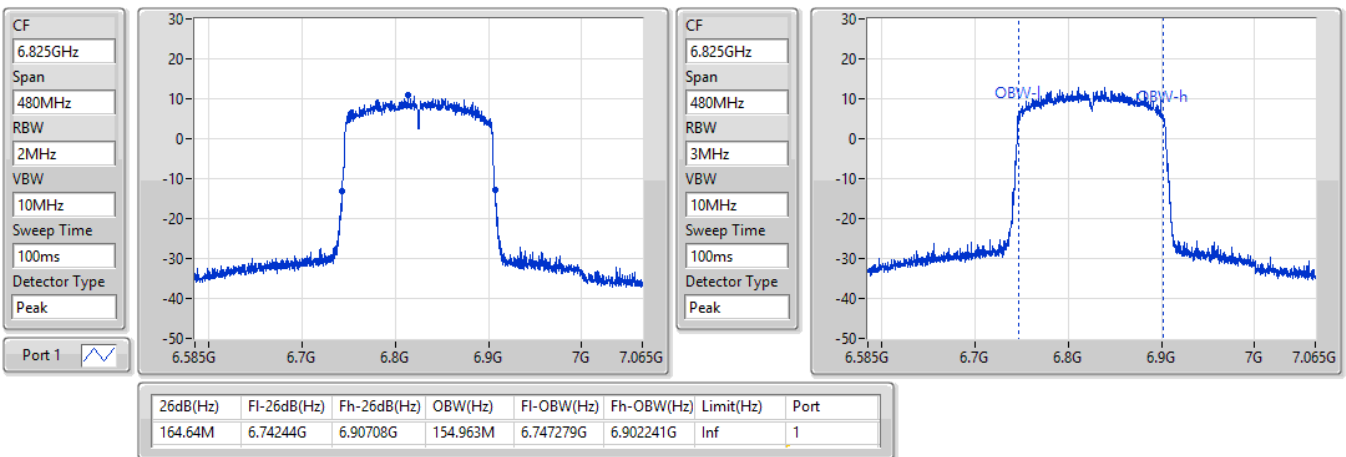


802.11ax HEW160_Nss1,(MCS0)_1TX

EBW


6985MHz

15/02/2022

CF
6.985GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

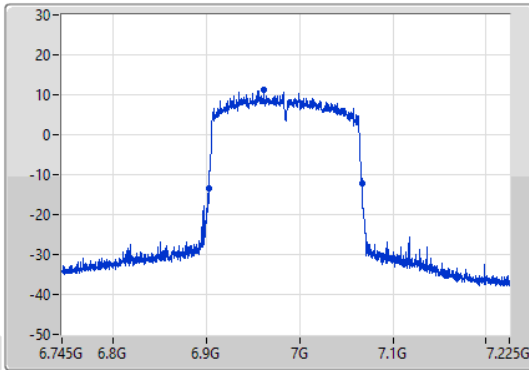

CF
6.985GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

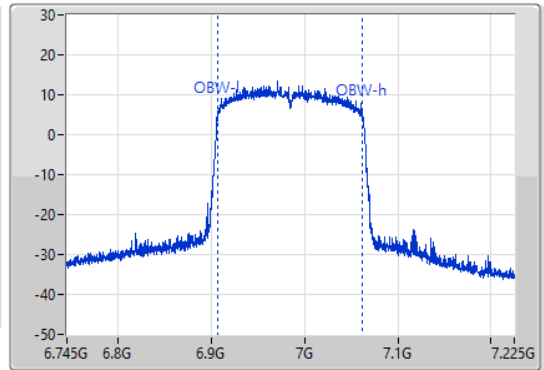

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 163.92M | 6.90292G | 7.06684G | 154.723M | 6.907279G | 7.062001G | Inf | 1 |



Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 22.23M | 19.16M | 19M2D1D | 21.75M | 19.13M |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 40.92M | 37.841M | 37M8D1D | 40.2M | 37.781M |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 82.92M | 77.481M | 77M5D1D | 82.08M | 77.361M |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 164.88M | 154.963M | 155MD1D | 164.16M | 154.243M |
| 6.425-6.525GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 22.08M | 19.1M | 19M1D1D | 21.78M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 40.68M | 37.841M | 37M8D1D | 40.26M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 82.32M | 77.481M | 77M5D1D | 81.84M | 77.241M |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 164.64M | 154.963M | 155MD1D | 164.4M | 154.963M |
| 6.525-6.875GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 22.38M | 19.13M | 19M1D1D | 21.75M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 40.68M | 37.841M | 37M8D1D | 40.2M | 37.781M |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 82.44M | 77.481M | 77M5D1D | 81.6M | 77.241M |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 165.12M | 154.723M | 155MD1D | 163.68M | 154.723M |
| 6.875-7.125GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 22.08M | 19.16M | 19M2D1D | 21.78M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 40.68M | 37.901M | 37M9D1D | 40.26M | 37.841M |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 82.32M | 77.361M | 77M4D1D | 81.84M | 77.241M |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 164.16M | 155.202M | 155MD1D | 163.44M | 154.963M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|
| 802.11ax HEW20_Nss1,(MCS0)_2TX | - | - | - | - | - | - |
| 5955MHz | Pass | Inf | 22.05M | 19.13M | 21.75M | 19.13M |
| 6175MHz | Pass | Inf | 22.05M | 19.16M | 22.2M | 19.16M |
| 6415MHz | Pass | Inf | 22.02M | 19.13M | 22.23M | 19.13M |
| 6435MHz | Pass | Inf | 21.78M | 19.1M | 21.9M | 19.1M |
| 6475MHz | Pass | Inf | 22.05M | 19.1M | 22.05M | 19.1M |
| 6515MHz | Pass | Inf | 22.08M | 19.1M | 21.96M | 19.1M |
| 6535MHz | Pass | Inf | 21.75M | 19.13M | 22.05M | 19.13M |
| 6695MHz | Pass | Inf | 22.38M | 19.1M | 22.05M | 19.13M |
| 6855MHz | Pass | Inf | 21.9M | 19.13M | 22.02M | 19.13M |
| 6875MHz Straddle 6.525-6.875GHz | Pass | Inf | 22.08M | 19.1M | 22.02M | 19.13M |
| 6895MHz | Pass | Inf | 22.02M | 19.13M | 21.99M | 19.1M |
| 6995MHz | Pass | Inf | 21.84M | 19.1M | 21.81M | 19.1M |
| 7095MHz | Pass | Inf | 22.05M | 19.16M | 21.78M | 19.13M |
| 7115MHz | Pass | Inf | 22.08M | 19.16M | 21.99M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 40.2M | 37.781M | 40.44M | 37.781M |
| 6165MHz | Pass | Inf | 40.68M | 37.841M | 40.38M | 37.841M |
| 6405MHz | Pass | Inf | 40.92M | 37.781M | 40.5M | 37.781M |
| 6445MHz | Pass | Inf | 40.26M | 37.781M | 40.5M | 37.781M |
| 6485MHz | Pass | Inf | 40.68M | 37.841M | 40.26M | 37.841M |
| 6525MHz Straddle 6.425-6.525GHz | Pass | Inf | 40.68M | 37.781M | 40.38M | 37.721M |
| 6565MHz | Pass | Inf | 40.38M | 37.781M | 40.5M | 37.781M |
| 6685MHz | Pass | Inf | 40.56M | 37.841M | 40.2M | 37.781M |
| 6845MHz | Pass | Inf | 40.68M | 37.781M | 40.56M | 37.781M |
| 6885MHz Straddle 6.525-6.875GHz | Pass | Inf | 40.32M | 37.781M | 40.44M | 37.841M |
| 6925MHz | Pass | Inf | 40.5M | 37.841M | 40.44M | 37.841M |
| 7005MHz | Pass | Inf | 40.26M | 37.841M | 40.68M | 37.841M |
| 7085MHz | Pass | Inf | 40.44M | 37.841M | 40.62M | 37.901M |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 82.32M | 77.481M | 82.2M | 77.481M |
| 6145MHz | Pass | Inf | 82.44M | 77.361M | 82.08M | 77.481M |
| 6385MHz | Pass | Inf | 82.92M | 77.481M | 82.44M | 77.361M |
| 6465MHz | Pass | Inf | 81.84M | 77.361M | 82.08M | 77.481M |
| 6545MHz Straddle 6.425-6.525GHz | Pass | Inf | 82.32M | 77.241M | 81.96M | 77.361M |
| 6625MHz | Pass | Inf | 82.08M | 77.481M | 82.08M | 77.361M |
| 6705MHz | Pass | Inf | 82.32M | 77.241M | 82.44M | 77.361M |
| 6785MHz | Pass | Inf | 81.6M | 77.481M | 82.08M | 77.361M |
| 6865MHz Straddle 6.525-6.875GHz | Pass | Inf | 82.08M | 77.241M | 82.44M | 77.361M |
| 6945MHz | Pass | Inf | 82.08M | 77.241M | 81.84M | 77.241M |
| 7025MHz | Pass | Inf | 82.08M | 77.361M | 82.32M | 77.361M |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 164.88M | 154.243M | 164.16M | 154.483M |
| 6185MHz | Pass | Inf | 164.4M | 154.963M | 164.88M | 154.483M |
| 6345MHz | Pass | Inf | 164.4M | 154.963M | 164.64M | 154.963M |
| 6505MHz Straddle 6.425-6.525GHz | Pass | Inf | 164.64M | 154.963M | 164.4M | 154.963M |
| 6665MHz | Pass | Inf | 164.88M | 154.723M | 164.16M | 154.723M |
| 6825MHz Straddle 6.525-6.875GHz | Pass | Inf | 165.12M | 154.723M | 163.68M | 154.723M |
| 6985MHz | Pass | Inf | 164.16M | 154.963M | 163.44M | 155.202M |

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


5955MHz

14/02/2022

CF
5.955GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

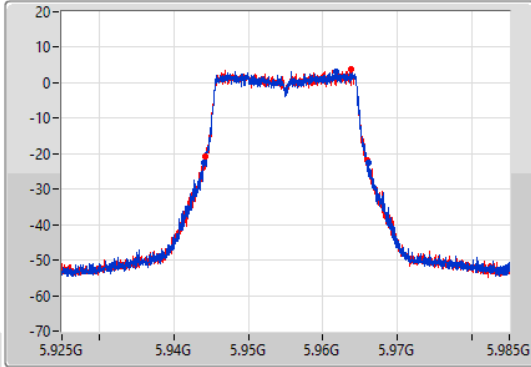

CF
5.955GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

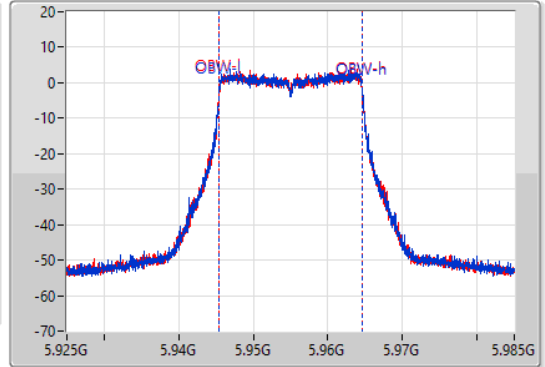

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.05M | 5.94402G | 5.96607G | 19.13M | 5.945465G | 5.964595G | Inf | 1 |
| 21.75M | 5.94417G | 5.96592G | 19.13M | 5.945465G | 5.964595G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6175MHz

14/02/2022

CF
6.175GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

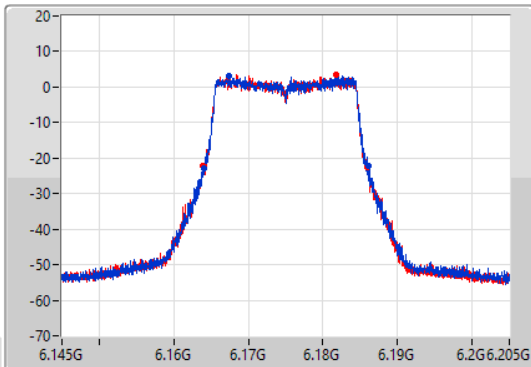

CF
6.175GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

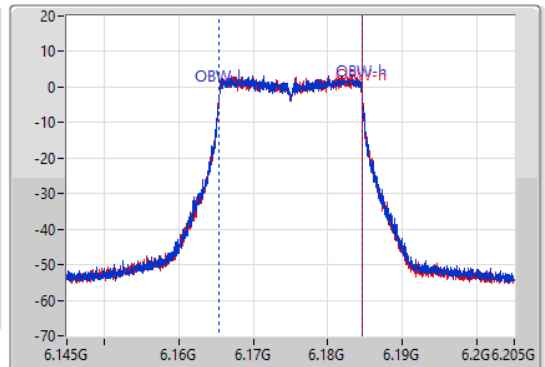

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.05M | 6.16402G | 6.18607G | 19.16M | 6.165435G | 6.184595G | Inf | 1 |
| 22.2M | 6.16381G | 6.18601G | 19.16M | 6.165435G | 6.184595G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6415MHz

14/02/2022

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

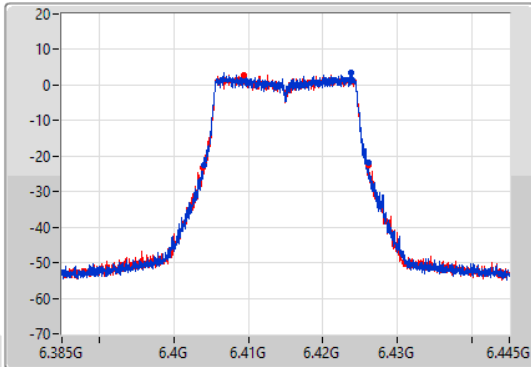

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

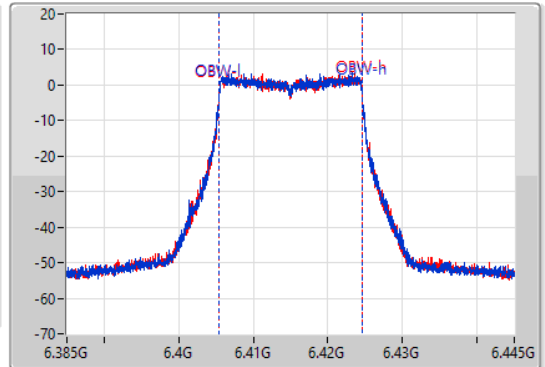

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.02M | 6.40402G | 6.42604G | 19.13M | 6.405435G | 6.424565G | Inf | 1 |
| 22.23M | 6.40387G | 6.4261G | 19.13M | 6.405435G | 6.424565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6435MHz

14/02/2022

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

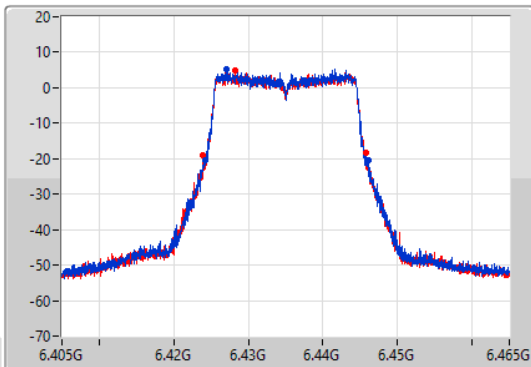

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

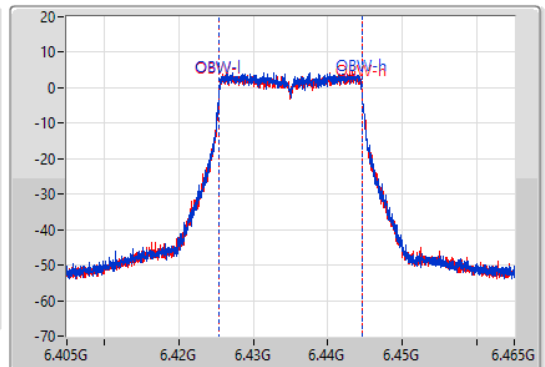

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.78M | 6.42426G | 6.44604G | 19.1M | 6.425465G | 6.444565G | Inf | 1 |
| 21.9M | 6.42393G | 6.44583G | 19.1M | 6.425465G | 6.444565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6475MHz

14/02/2022

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

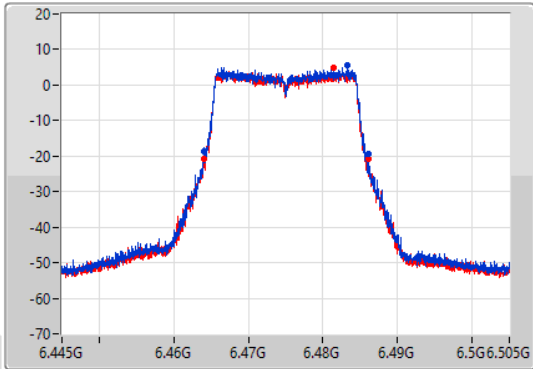

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

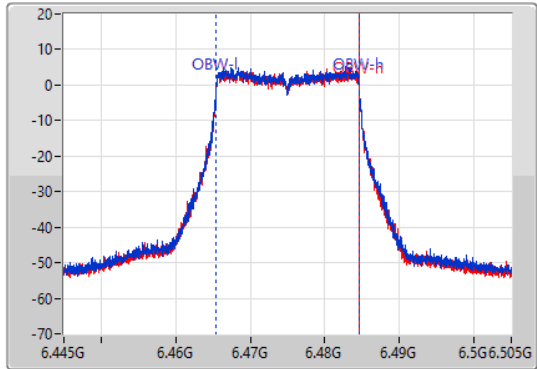

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.05M | 6.46402G | 6.48607G | 19.1M | 6.465465G | 6.484565G | Inf | 1 |
| 22.05M | 6.46405G | 6.4861G | 19.1M | 6.465465G | 6.484565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6515MHz

14/02/2022

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

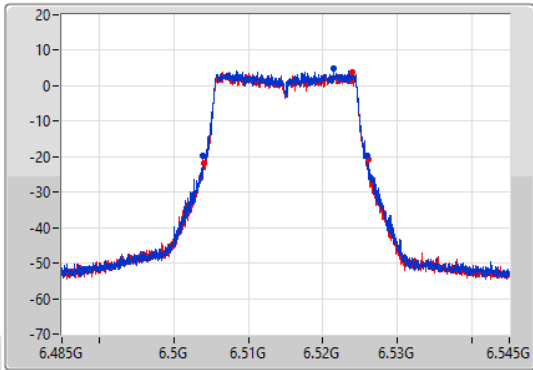

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

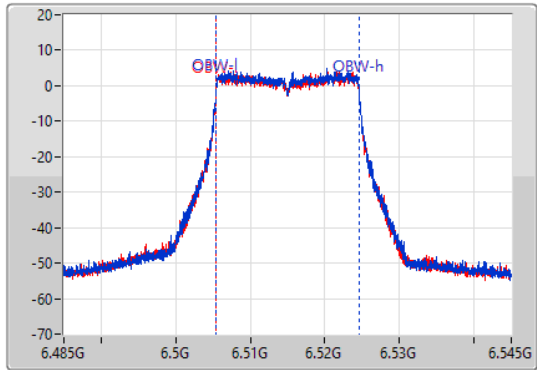

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.08M | 6.50393G | 6.52601G | 19.1M | 6.505465G | 6.524565G | Inf | 1 |
| 21.96M | 6.50411G | 6.52607G | 19.1M | 6.505465G | 6.524565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6535MHz

14/02/2022

CF
6.535GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

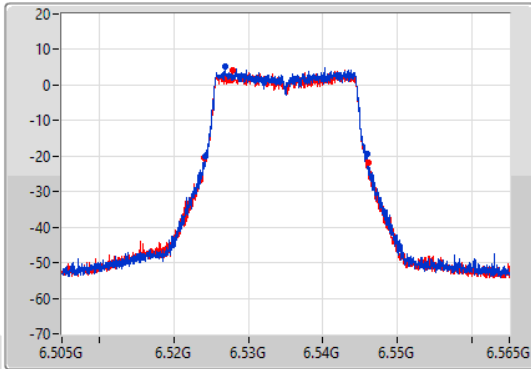

CF
6.535GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

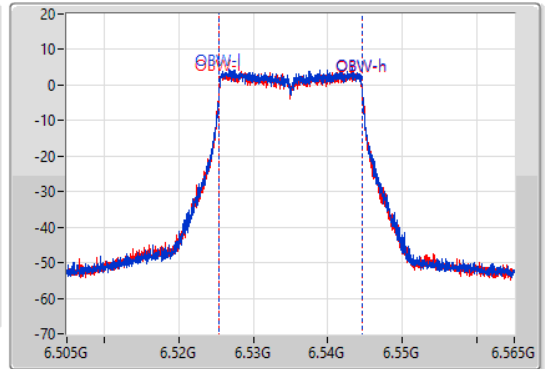

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.75M | 6.52417G | 6.54592G | 19.13M | 6.525465G | 6.544595G | Inf | 1 |
| 22.05M | 6.52405G | 6.5461G | 19.13M | 6.525435G | 6.544565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6695MHz

14/02/2022

CF
6.695GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

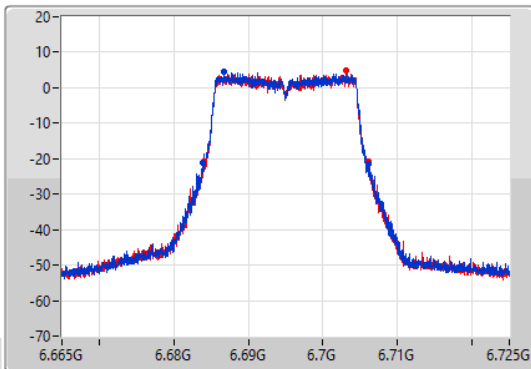

CF
6.695GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

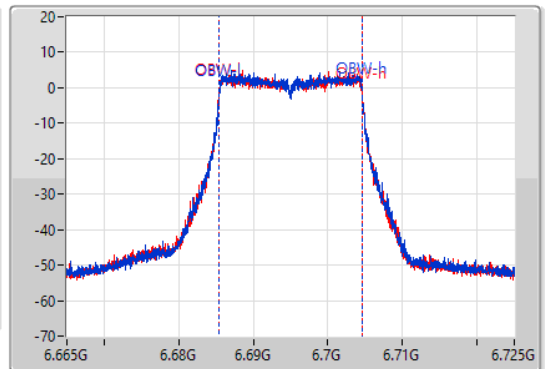

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.38M | 6.68381G | 6.70619G | 19.1M | 6.685465G | 6.704565G | Inf | 1 |
| 22.05M | 6.68408G | 6.70613G | 19.13M | 6.685465G | 6.704595G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6855MHz

14/02/2022

CF
6.855GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

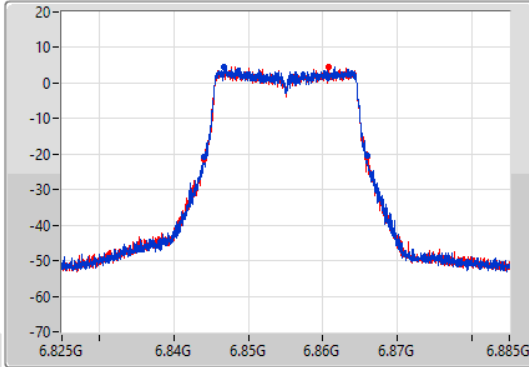

CF
6.855GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

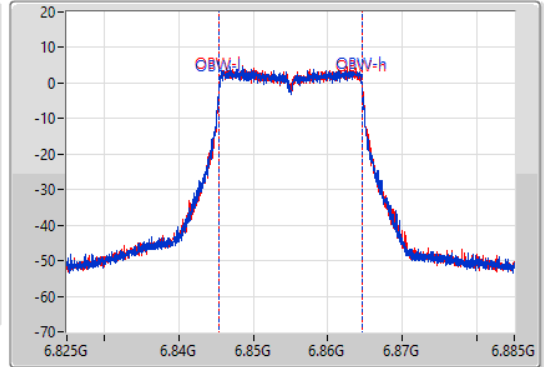

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.9M | 6.84405G | 6.86595G | 19.13M | 6.845435G | 6.864565G | Inf | 1 |
| 22.02M | 6.84399G | 6.86601G | 19.13M | 6.845465G | 6.864595G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6875MHz Straddle 6.525-6.875GHz

14/02/2022

CF
6.875GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

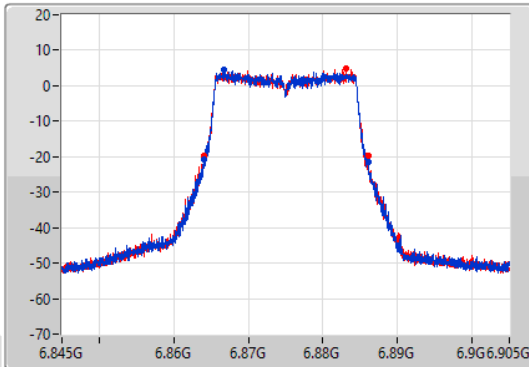

CF
6.875GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

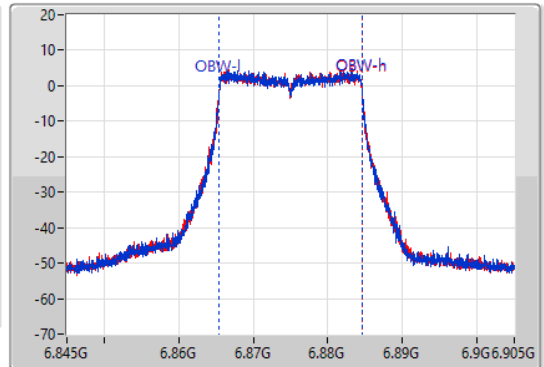

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.08M | 6.86402G | 6.8861G | 19.1M | 6.865465G | 6.884565G | Inf | 1 |
| 22.02M | 6.86402G | 6.88604G | 19.13M | 6.865465G | 6.884595G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6895MHz

14/02/2022

CF
6.895GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

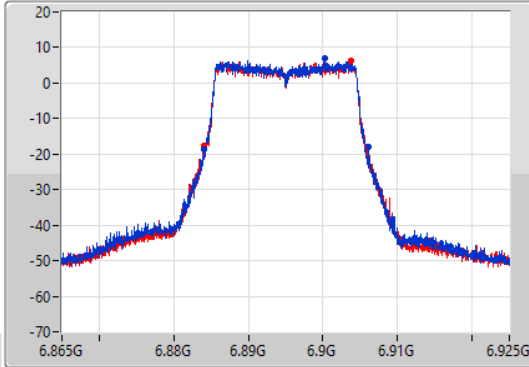

CF
6.895GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

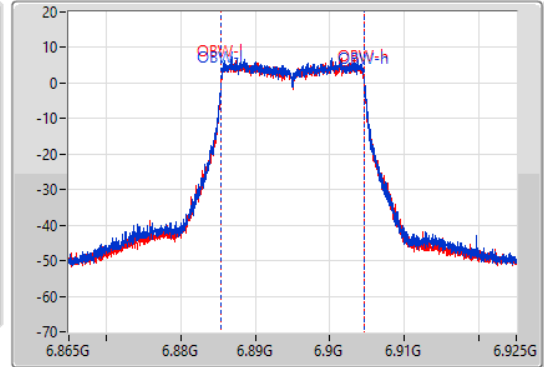

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.02M | 6.88408G | 6.9061G | 19.13M | 6.885465G | 6.904595G | Inf | 1 |
| 21.99M | 6.88399G | 6.90598G | 19.1M | 6.885465G | 6.904565G | Inf | 2 |


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


6995MHz

14/02/2022

CF
6.995GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

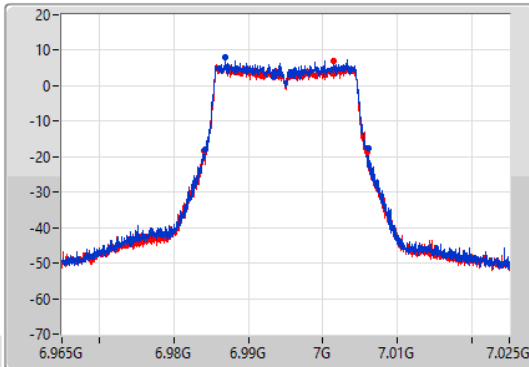

CF
6.995GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

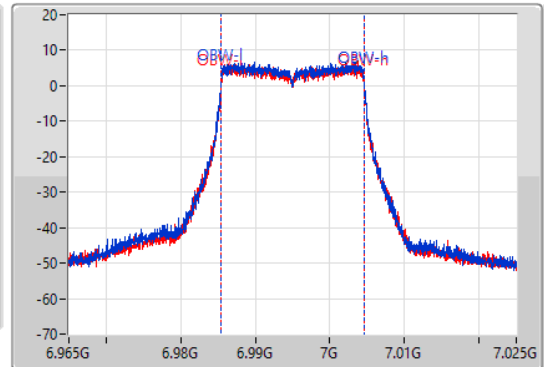


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.84M | 6.9842G | 7.00604G | 19.1M | 6.985465G | 7.004565G | Inf | 1 |
| 21.81M | 6.98408G | 7.00589G | 19.1M | 6.985465G | 7.004565G | Inf | 2 |

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

7095MHz

15/02/2022

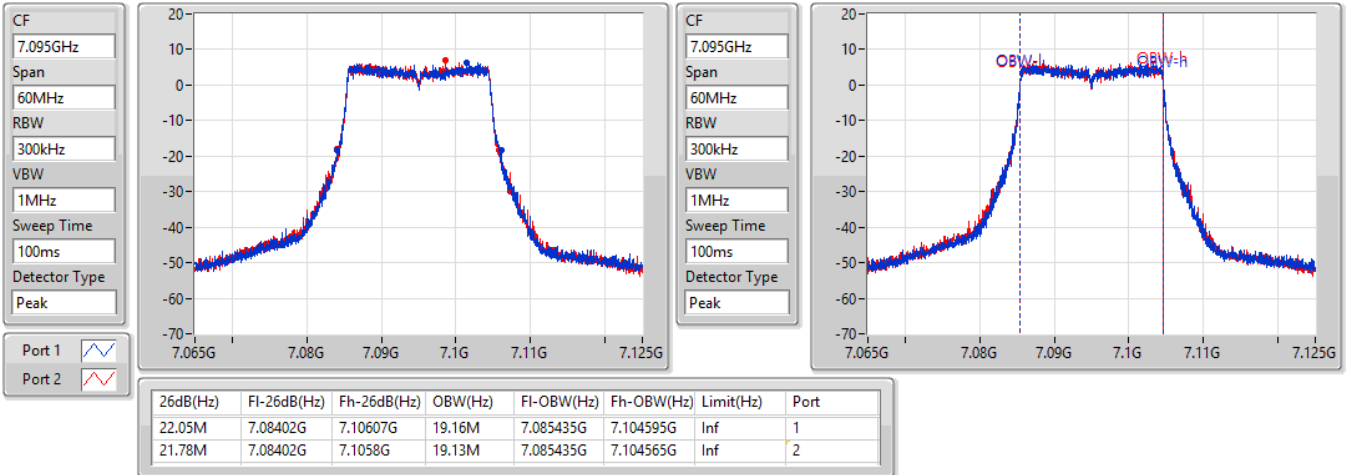


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

7115MHz

28/02/2022

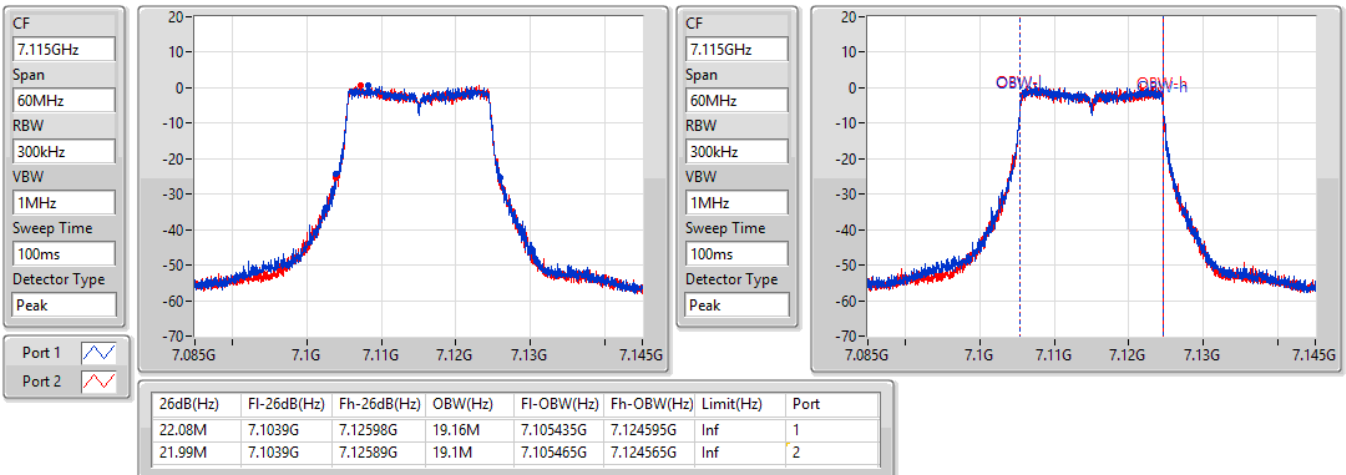


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


5965MHz

15/02/2022

CF
5.965GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

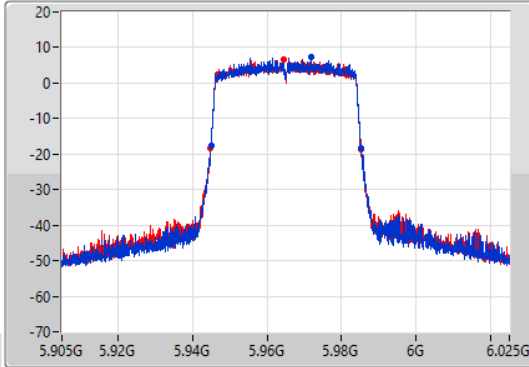

CF
5.965GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

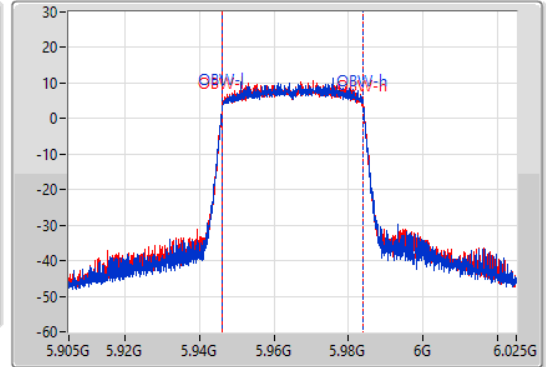

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.2M | 5.94496G | 5.98516G | 37.781M | 5.946169G | 5.983951G | Inf | 1 |
| 40.44M | 5.94484G | 5.98528G | 37.781M | 5.946169G | 5.983951G | Inf | 2 |


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6165MHz

15/02/2022

CF
6.165GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

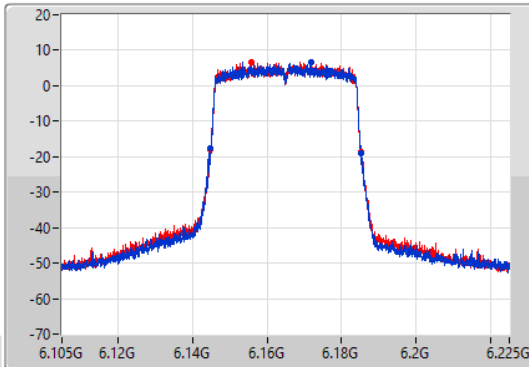

CF
6.165GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

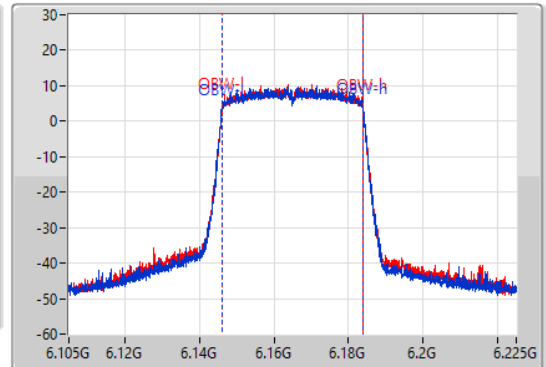


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.68M | 6.14466G | 6.18534G | 37.841M | 6.146109G | 6.183951G | Inf | 1 |
| 40.38M | 6.14484G | 6.18522G | 37.841M | 6.146109G | 6.183951G | Inf | 2 |

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6405MHz

15/02/2022

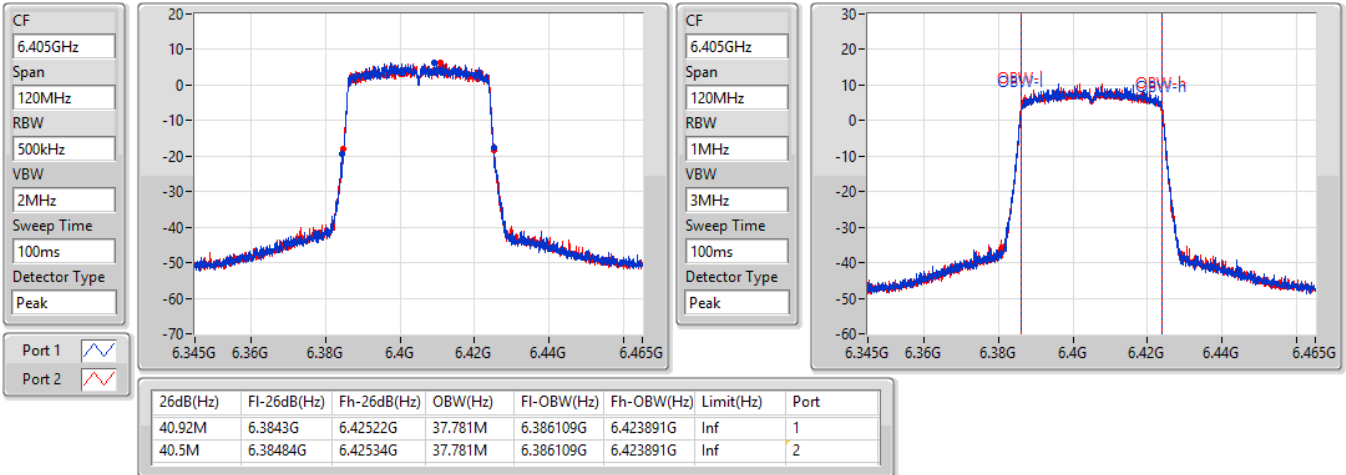


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6445MHz

15/02/2022

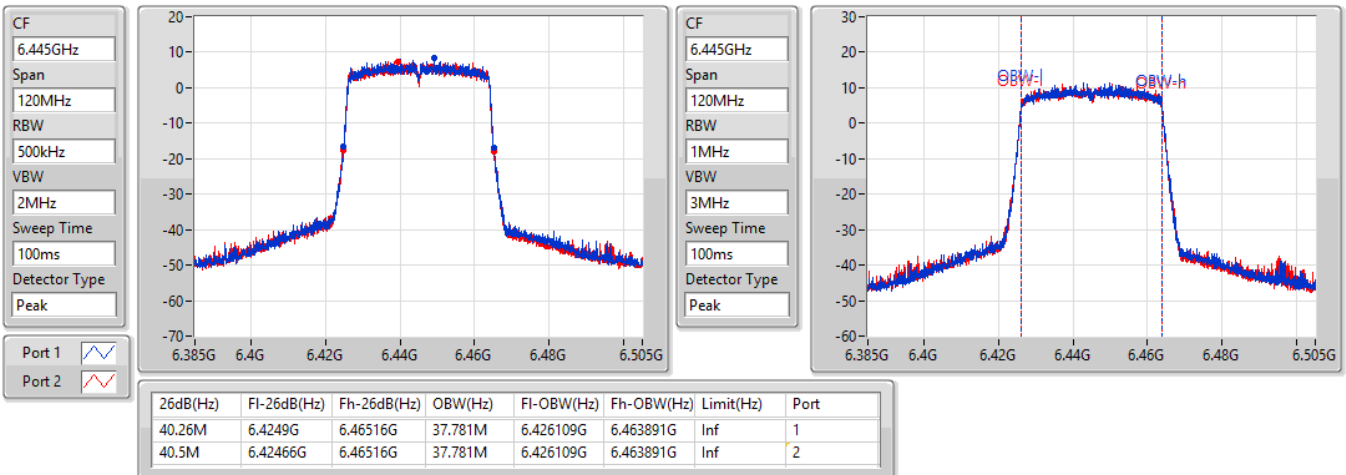


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6485MHz

15/02/2022

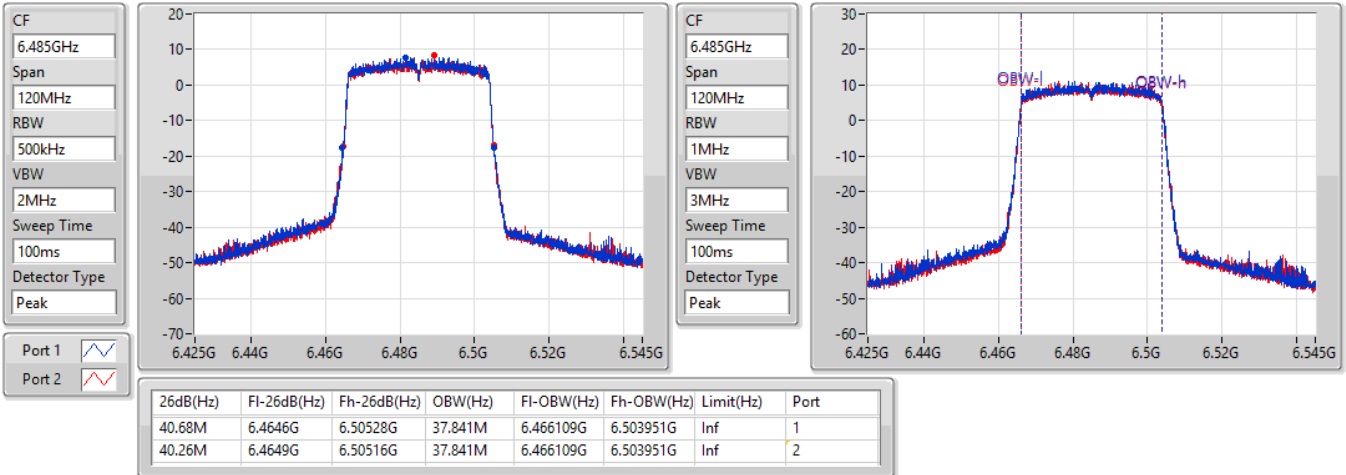


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6525MHz Straddle 6.425-6.525GHz

15/02/2022

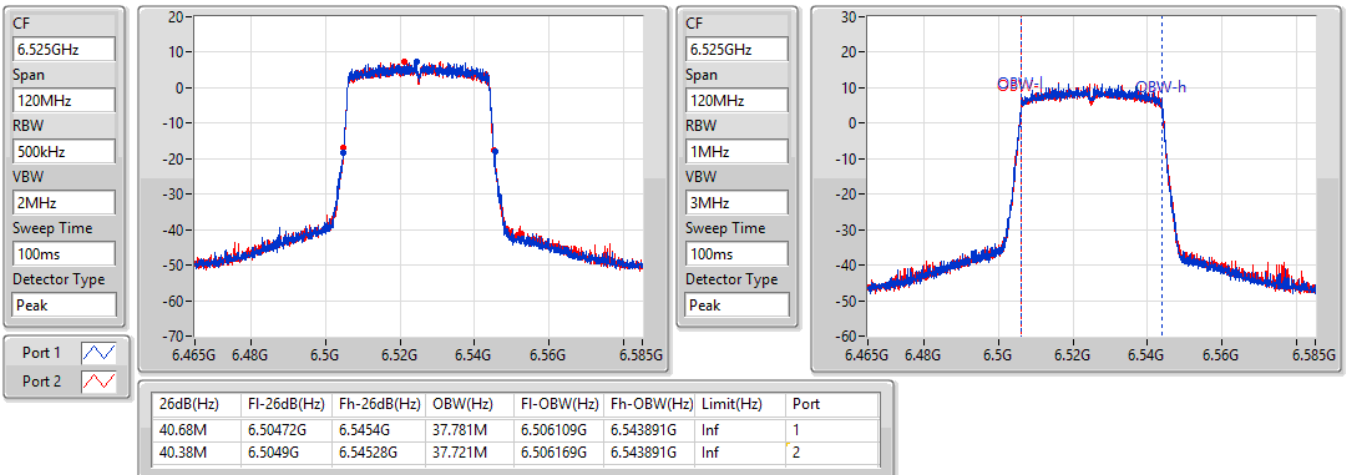


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6565MHz

15/02/2022

CF
6.565GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

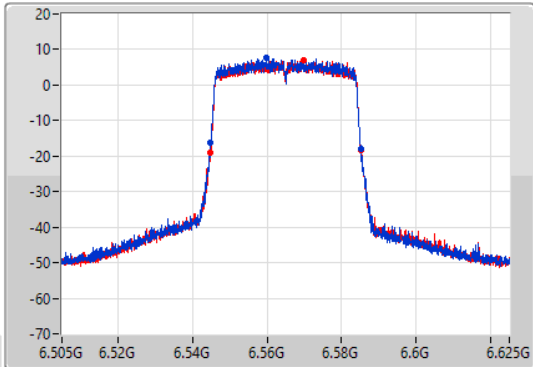

CF
6.565GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

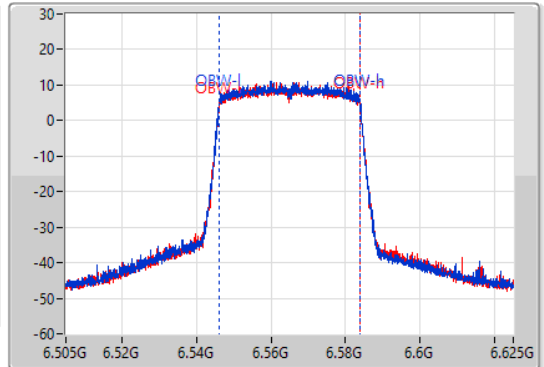

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.38M | 6.54484G | 6.58522G | 37.781M | 6.546109G | 6.583891G | Inf | 1 |
| 40.5M | 6.54484G | 6.58534G | 37.781M | 6.546109G | 6.583891G | Inf | 2 |


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6685MHz

15/02/2022

CF
6.685GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

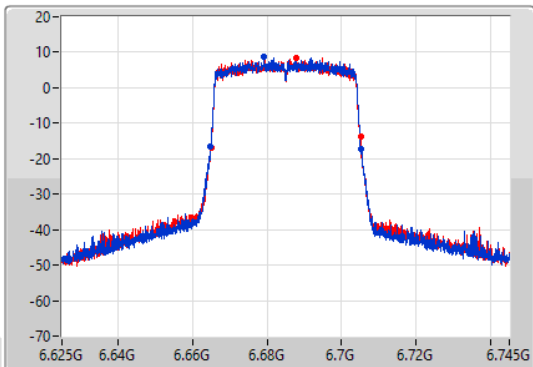

CF
6.685GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

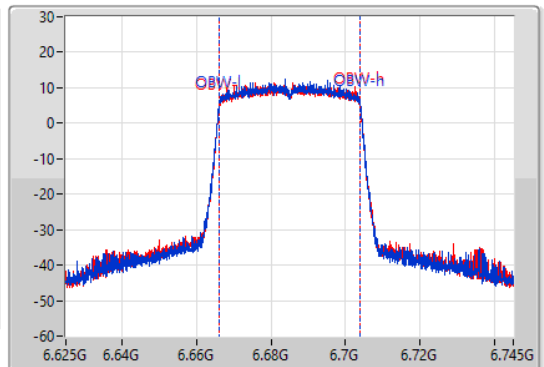

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.56M | 6.66478G | 6.70534G | 37.841M | 6.666109G | 6.703951G | Inf | 1 |
| 40.2M | 6.66496G | 6.70516G | 37.781M | 6.666109G | 6.703891G | Inf | 2 |


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6845MHz

15/02/2022

CF
6.845GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

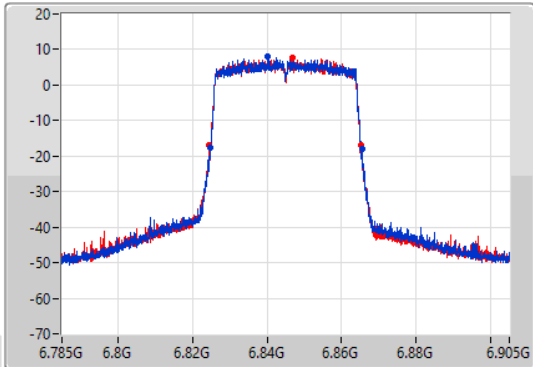

CF
6.845GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

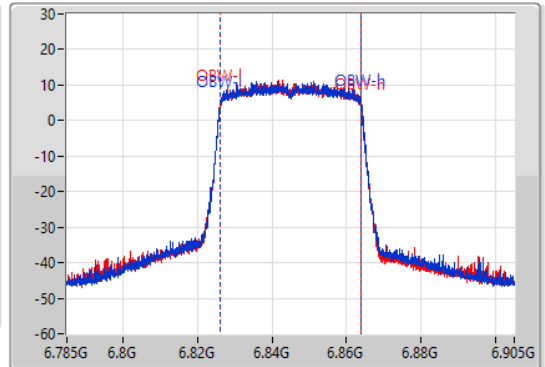

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.68M | 6.82472G | 6.8654G | 37.781M | 6.826109G | 6.863891G | Inf | 1 |
| 40.56M | 6.8246G | 6.86516G | 37.781M | 6.826109G | 6.863891G | Inf | 2 |


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


6885MHz Straddle 6.525-6.875GHz

15/02/2022

CF
6.885GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

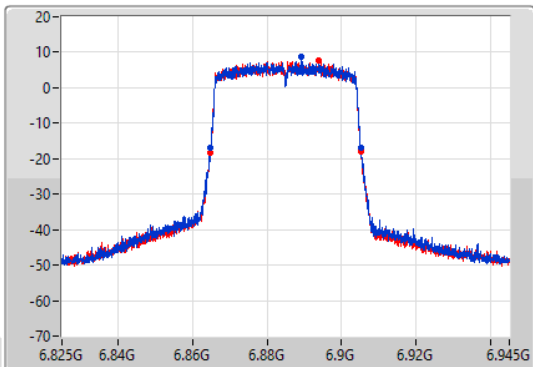

CF
6.885GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

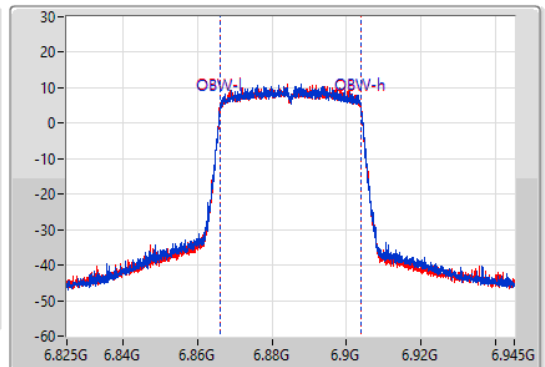


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.32M | 6.86484G | 6.90516G | 37.781M | 6.866109G | 6.903891G | Inf | 1 |
| 40.44M | 6.86478G | 6.90522G | 37.841M | 6.866109G | 6.903951G | Inf | 2 |

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6925MHz

15/02/2022

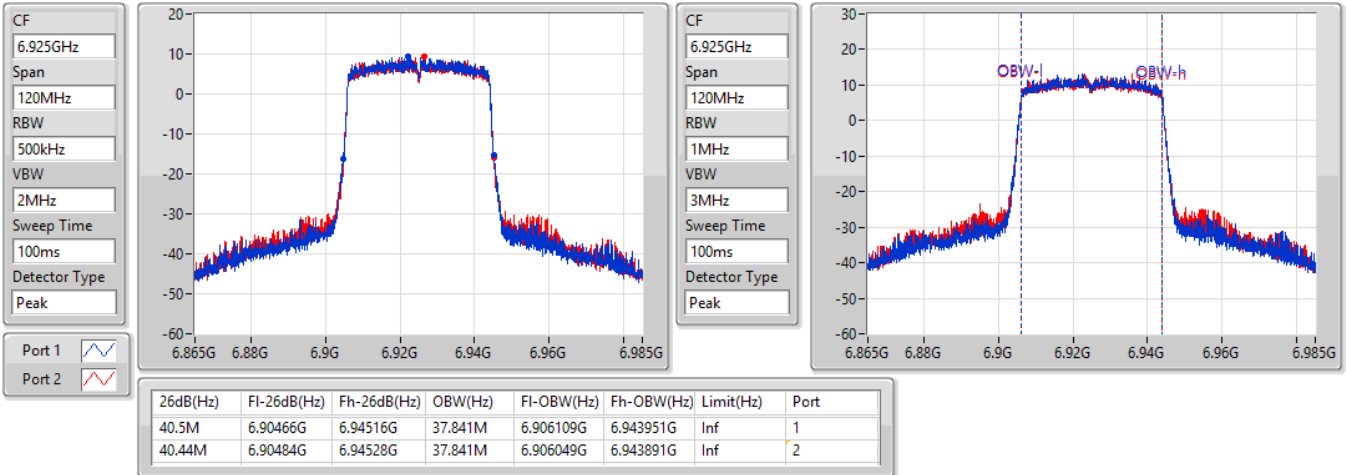


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

7005MHz

15/02/2022

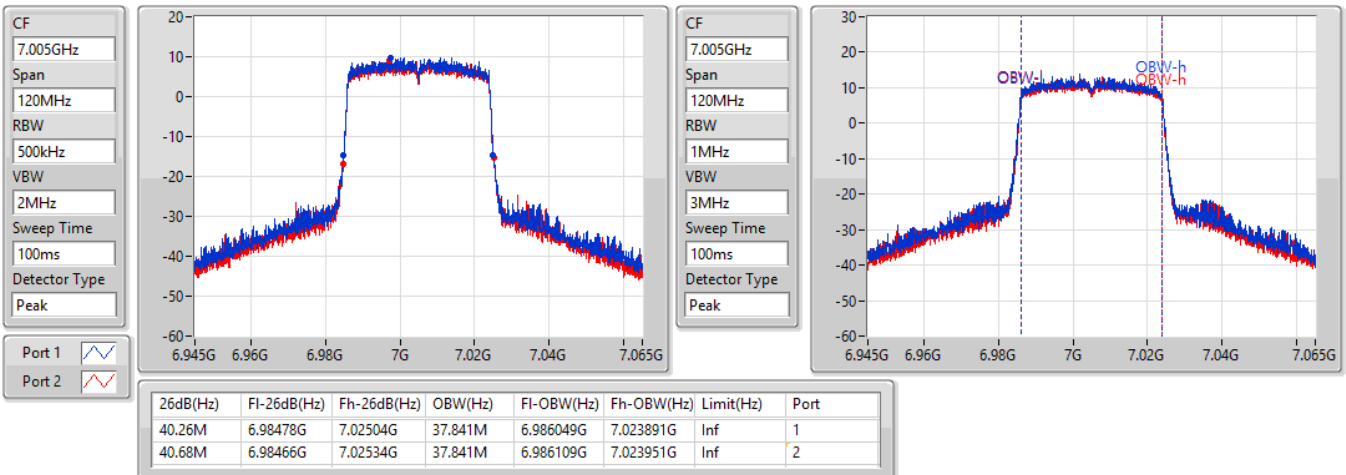


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


7085MHz

15/02/2022

CF
7.085GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

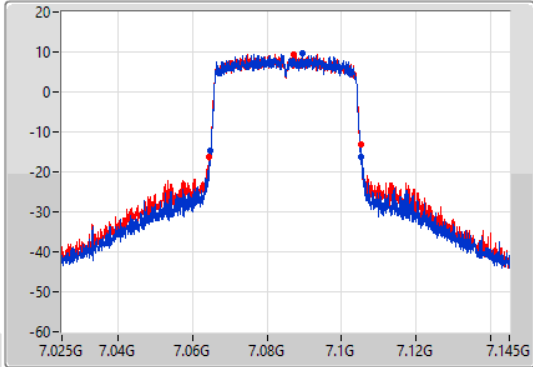

CF
7.085GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

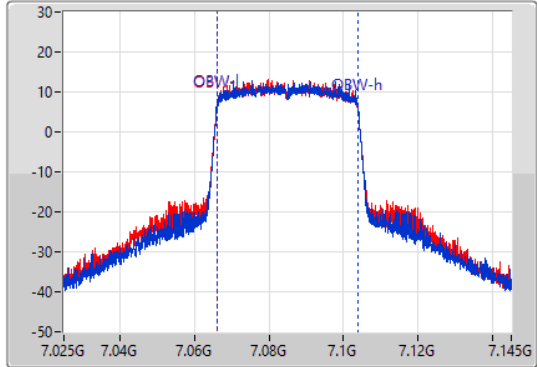

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.44M | 7.06484G | 7.10528G | 37.841M | 7.066049G | 7.103891G | Inf | 1 |
| 40.62M | 7.0646G | 7.10522G | 37.901M | 7.06599G | 7.103891G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


5985MHz

15/02/2022

CF
5.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

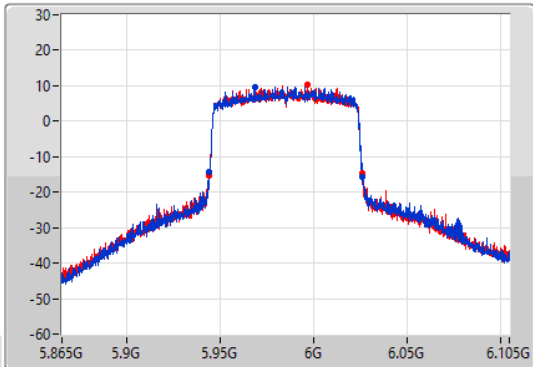

CF
5.985GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

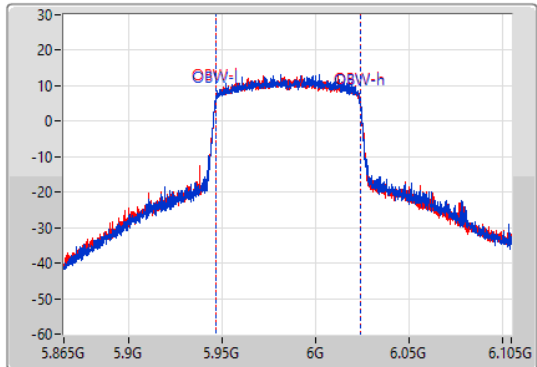

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.32M | 5.94408G | 6.0264G | 77.481M | 5.946379G | 6.023861G | Inf | 1 |
| 82.2M | 5.94384G | 6.02604G | 77.481M | 5.946379G | 6.023861G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6145MHz

15/02/2022

CF
6.145GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

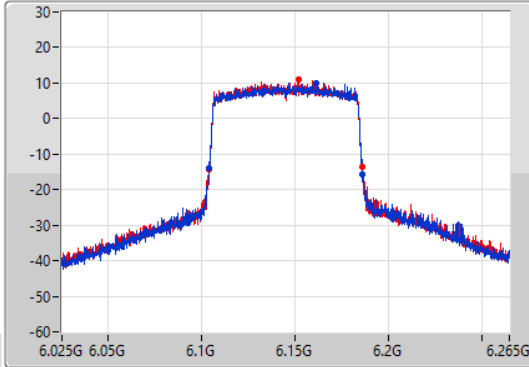

CF
6.145GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

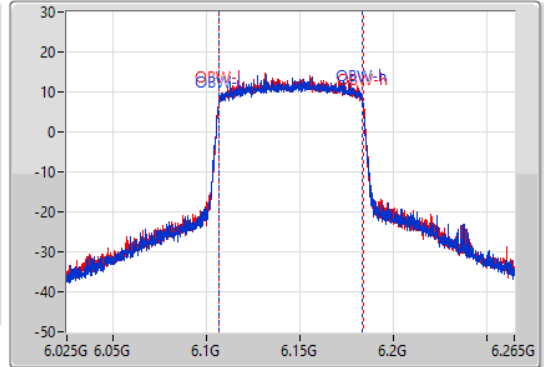

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.44M | 6.10384G | 6.18628G | 77.361M | 6.106379G | 6.183741G | Inf | 1 |
| 82.08M | 6.10396G | 6.18604G | 77.481M | 6.106379G | 6.183861G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6385MHz

15/02/2022

CF
6.385GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

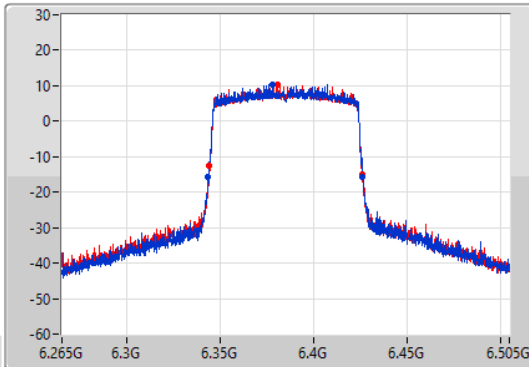

CF
6.385GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

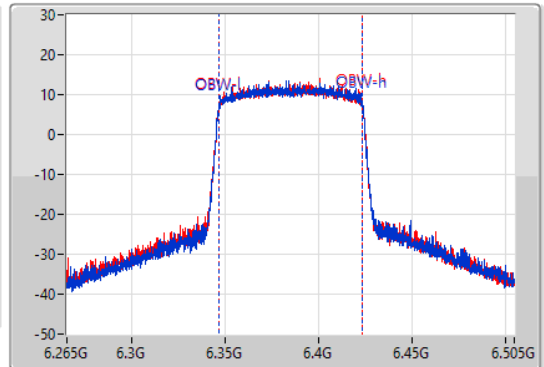

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.92M | 6.34336G | 6.42628G | 77.481M | 6.346259G | 6.423741G | Inf | 1 |
| 82.44M | 6.34396G | 6.4264G | 77.361M | 6.346379G | 6.423741G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6465MHz

15/02/2022

CF
6.465GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

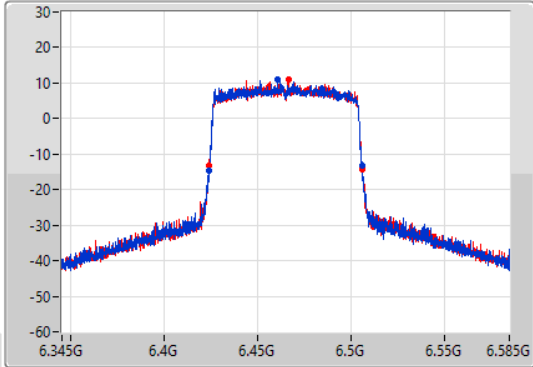

CF
6.465GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

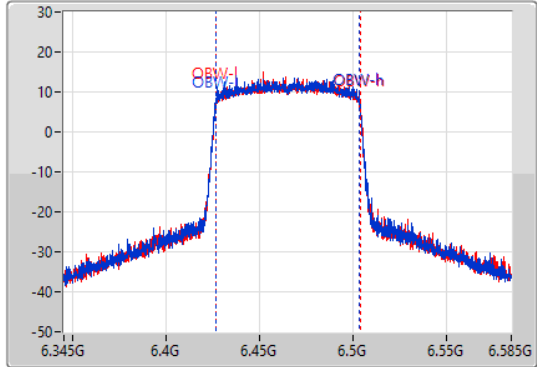

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 81.84M | 6.42408G | 6.50592G | 77.361M | 6.426379G | 6.503741G | Inf | 1 |
| 82.08M | 6.42384G | 6.50592G | 77.481M | 6.426379G | 6.503861G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6545MHz Straddle 6.425-6.525GHz

15/02/2022

CF
6.545GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

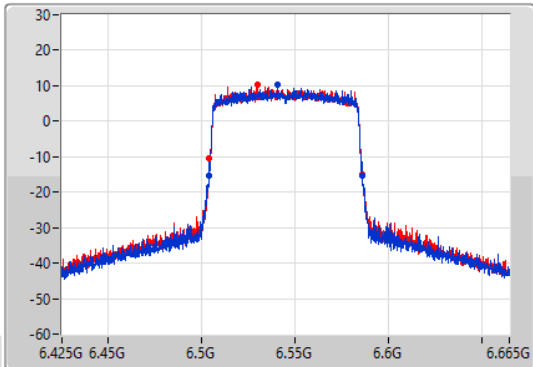

CF
6.545GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

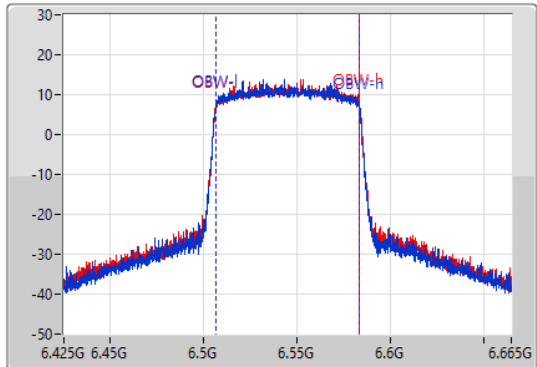

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.32M | 6.50372G | 6.58604G | 77.241M | 6.506379G | 6.583621G | Inf | 1 |
| 81.96M | 6.5042G | 6.58616G | 77.361M | 6.506379G | 6.583741G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6625MHz

15/02/2022

CF
6.625GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

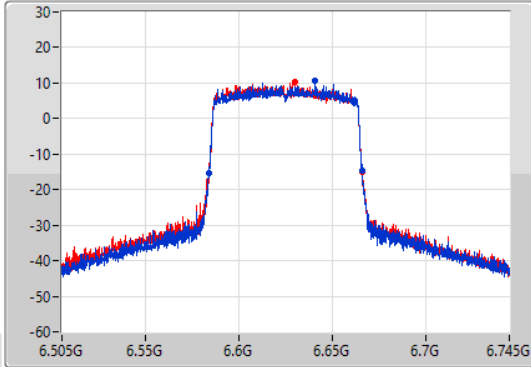

CF
6.625GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

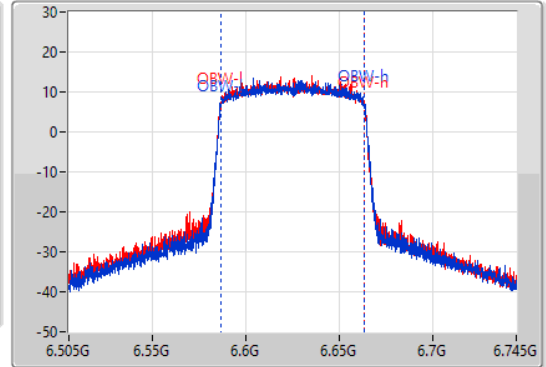

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.08M | 6.58384G | 6.66592G | 77.481M | 6.586259G | 6.663741G | Inf | 1 |
| 82.08M | 6.58384G | 6.66592G | 77.361M | 6.586259G | 6.663621G | Inf | 2 |


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW


6705MHz

15/02/2022

CF
6.705GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

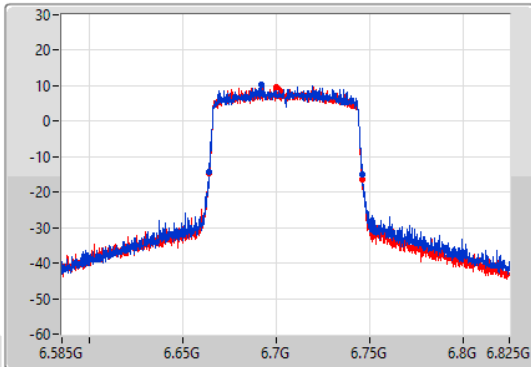

CF
6.705GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

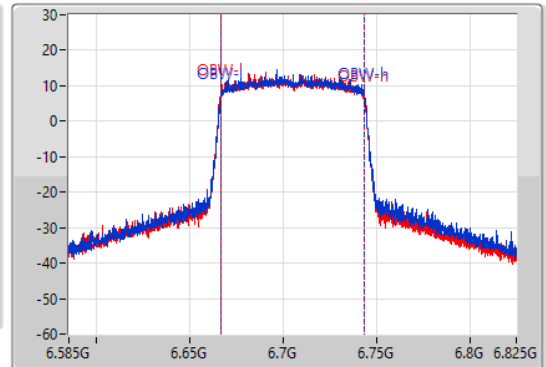


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.32M | 6.66396G | 6.74628G | 77.241M | 6.666379G | 6.743621G | Inf | 1 |
| 82.44M | 6.66372G | 6.74616G | 77.361M | 6.666259G | 6.743621G | Inf | 2 |

802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6785MHz

15/02/2022

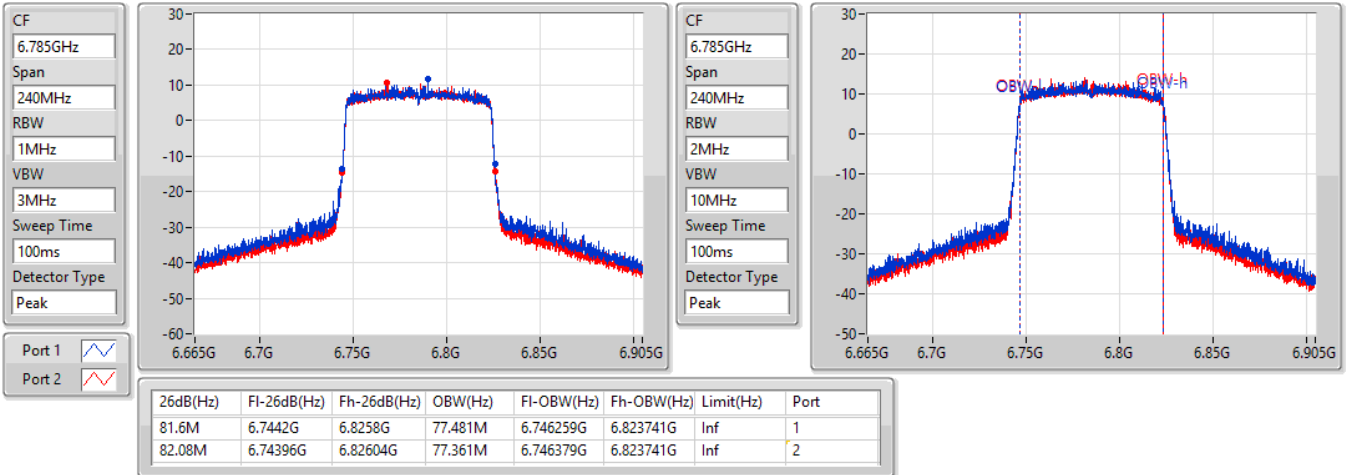


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6865MHz Straddle 6.525-6.875GHz

15/02/2022

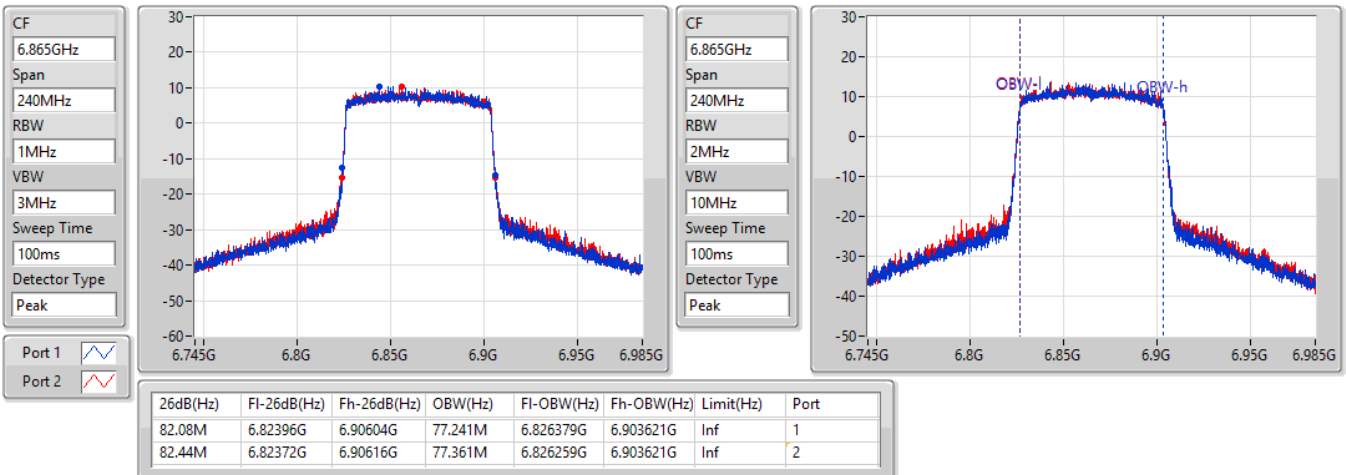


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6945MHz

15/02/2022

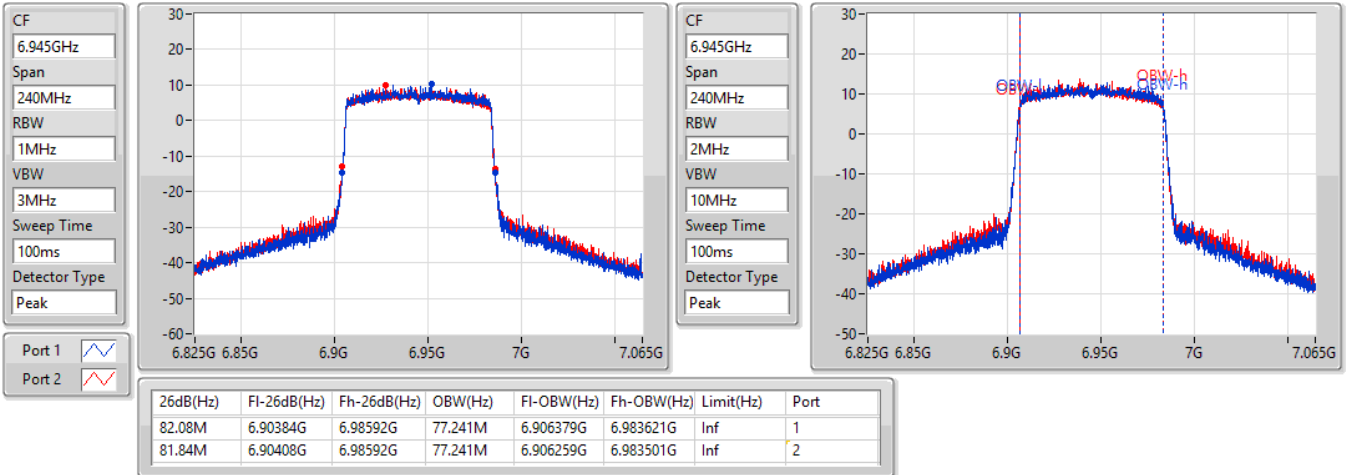


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

7025MHz

15/02/2022

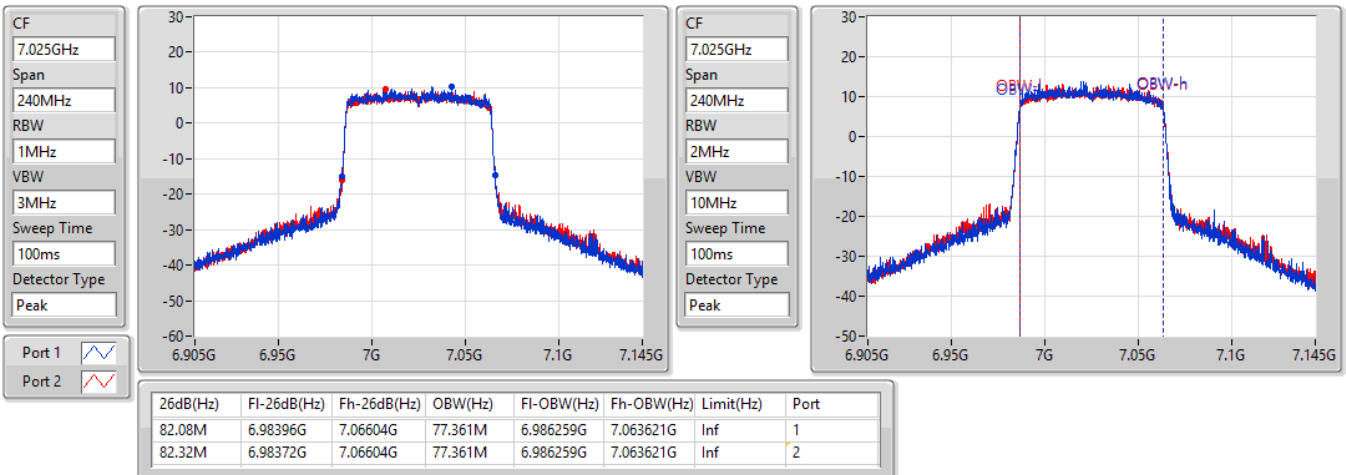


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6025MHz

15/02/2022

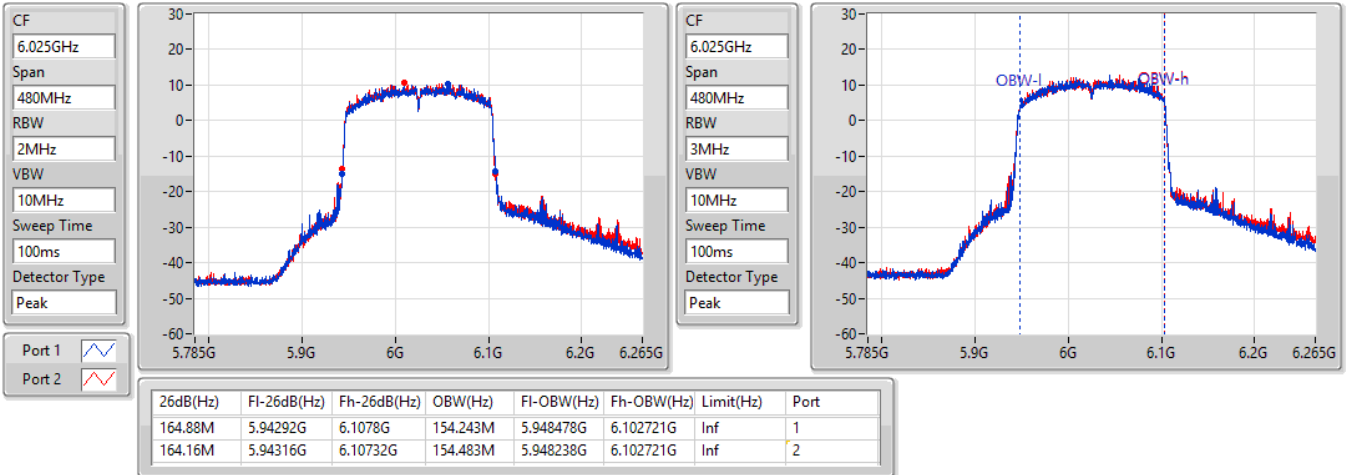


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6185MHz

15/02/2022

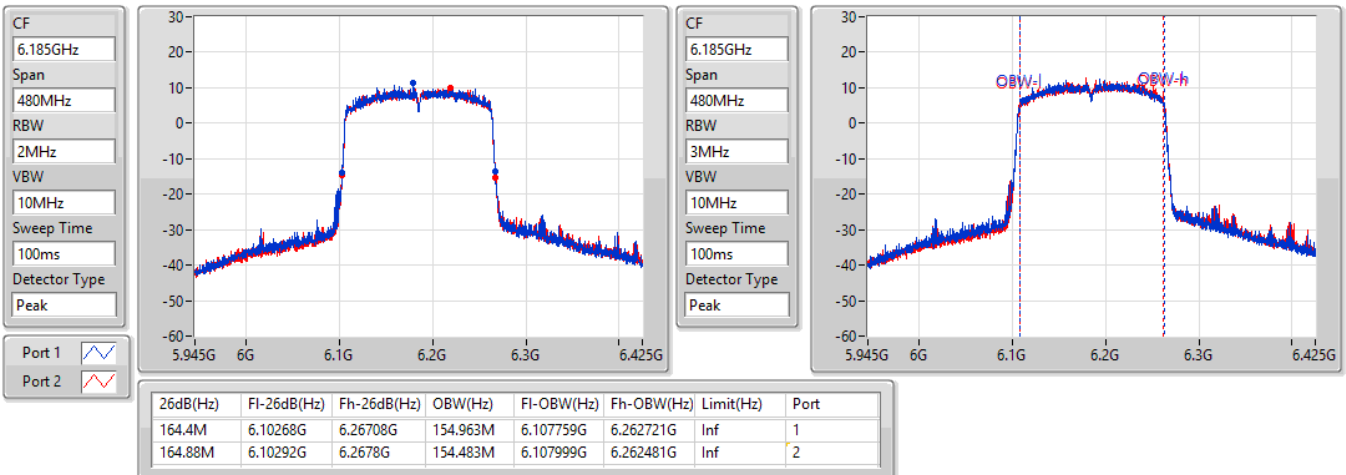


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6345MHz

15/02/2022

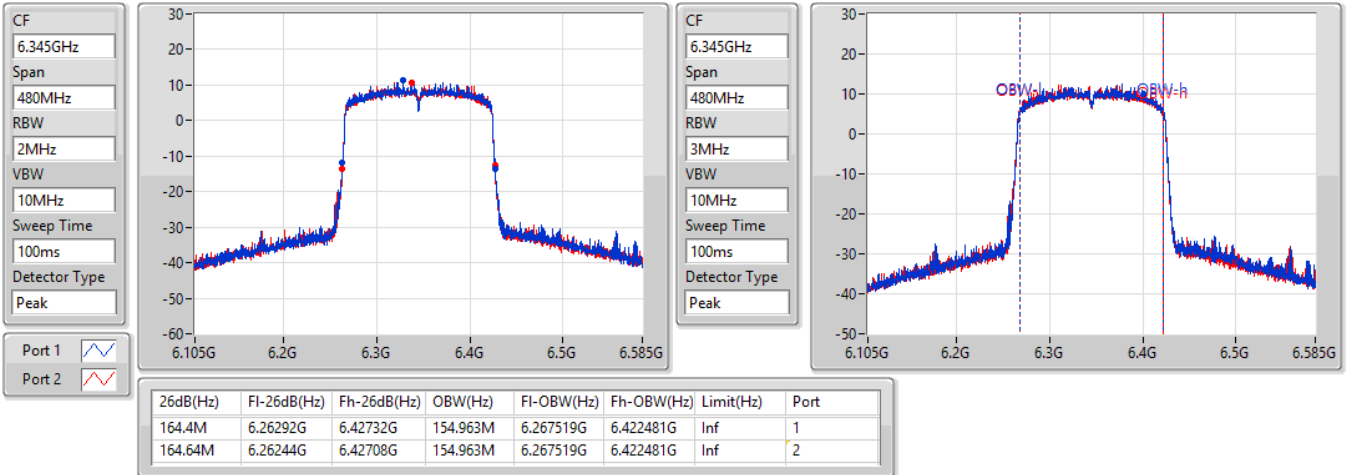


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6505MHz Straddle 6.425-6.525GHz

15/02/2022

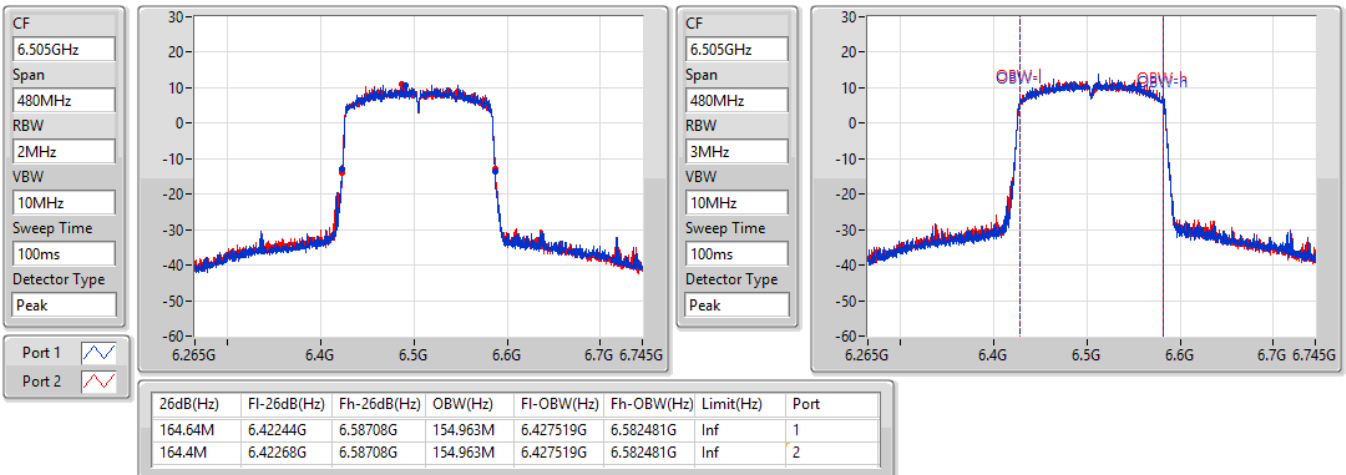


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW


6665MHz

15/02/2022

CF
6.665GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

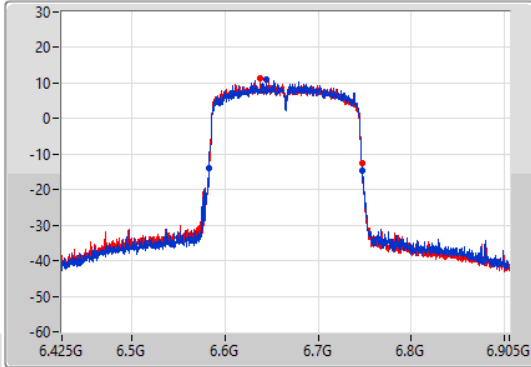

CF
6.665GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

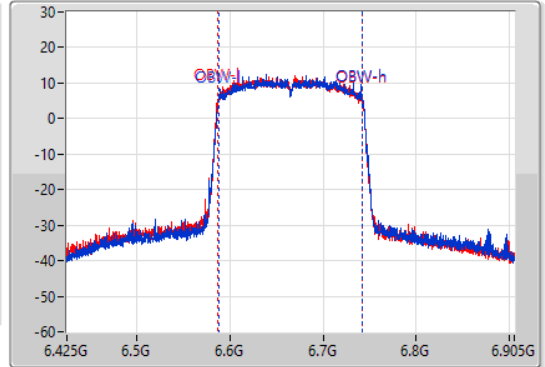

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 164.88M | 6.58268G | 6.74756G | 154.723M | 6.587759G | 6.742481G | Inf | 1 |
| 164.16M | 6.58268G | 6.74684G | 154.723M | 6.587279G | 6.742001G | Inf | 2 |


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW


6825MHz Straddle 6.525-6.875GHz

15/02/2022

CF
6.825GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

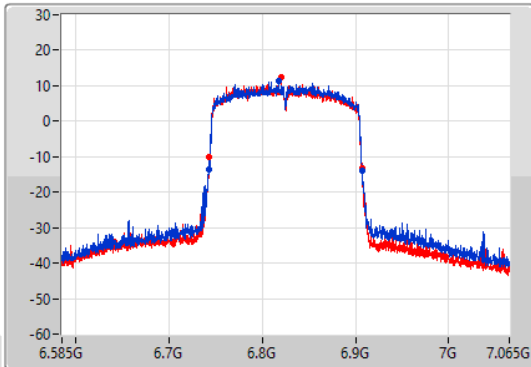

CF
6.825GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

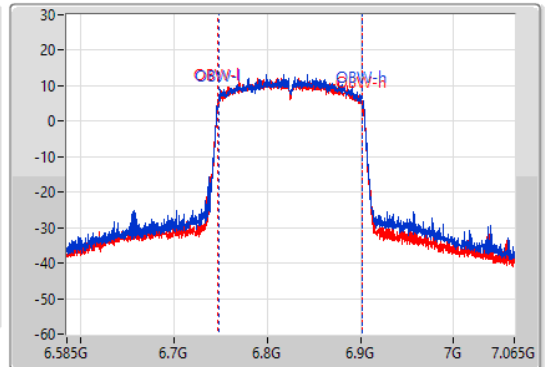

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 165.12M | 6.74244G | 6.90756G | 154.723M | 6.747519G | 6.902241G | Inf | 1 |
| 163.68M | 6.7434G | 6.90708G | 154.723M | 6.747279G | 6.902001G | Inf | 2 |


802.11ax HEW160_Nss1,(MCS0)_2TX

EBW


6985MHz



15/02/2022

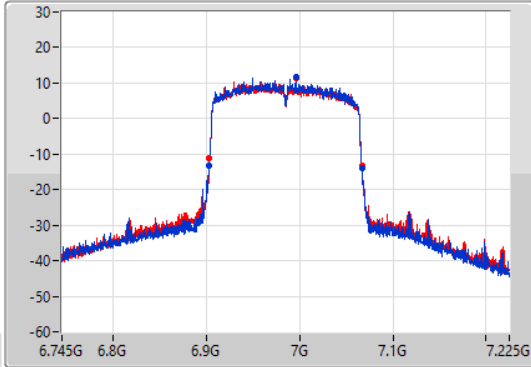CF
6.985GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

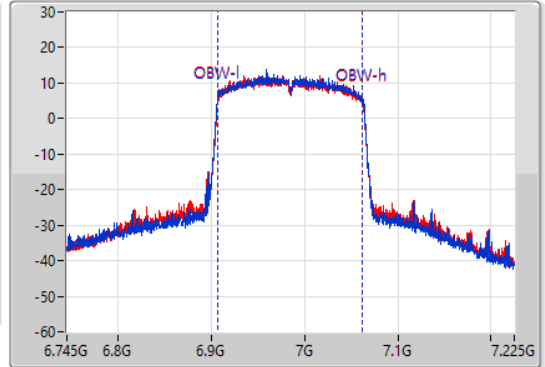

CF
6.985GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak



Port 1 
Port 2 

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 164.16M | 6.90316G | 7.06732G | 154.963M | 6.907279G | 7.062241G | Inf | 1 |
| 163.44M | 6.9034G | 7.06684G | 155.202M | 6.907039G | 7.062241G | Inf | 2 |



Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 22.29M | 19.13M | 19M1D1D | 21.78M | 19.07M |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 40.56M | 37.901M | 37M9D1D | 40.2M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 82.44M | 77.361M | 77M4D1D | 81.84M | 77.121M |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 165.36M | 155.202M | 155MD1D | 163.92M | 154.003M |
| 6.425-6.525GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 22.38M | 19.13M | 19M1D1D | 21.81M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 40.8M | 37.841M | 37M8D1D | 40.32M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 82.44M | 77.361M | 77M4D1D | 81.84M | 77.001M |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 165.12M | 154.963M | 155MD1D | 163.92M | 154.723M |
| 6.525-6.875GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 22.29M | 19.16M | 19M2D1D | 21.57M | 19.07M |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 40.74M | 37.841M | 37M8D1D | 40.26M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 82.68M | 77.361M | 77M4D1D | 81.72M | 77.121M |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 164.64M | 155.202M | 155MD1D | 163.44M | 154.483M |
| 6.875-7.125GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 22.2M | 19.16M | 19M2D1D | 21.69M | 19.1M |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 40.8M | 37.901M | 37M9D1D | 40.08M | 37.661M |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 82.32M | 77.481M | 77M5D1D | 81.96M | 77.121M |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 164.88M | 155.202M | 155MD1D | 164.16M | 154.723M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) | Port 2-N dB (Hz) | Port 2-OBW (Hz) | Port 3-N dB (Hz) | Port 3-OBW (Hz) | Port 4-N dB (Hz) | Port 4-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| 802.11ax HEW20_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | Inf | 22.29M | 19.13M | 21.78M | 19.07M | 22.26M | 19.13M | 21.96M | 19.07M |
| 6175MHz | Pass | Inf | 21.84M | 19.13M | 21.93M | 19.13M | 21.99M | 19.13M | 22.17M | 19.1M |
| 6415MHz | Pass | Inf | 22.05M | 19.1M | 21.81M | 19.1M | 21.99M | 19.1M | 22.17M | 19.13M |
| 6435MHz | Pass | Inf | 22.2M | 19.13M | 22.29M | 19.1M | 21.96M | 19.13M | 21.93M | 19.13M |
| 6475MHz | Pass | Inf | 21.96M | 19.13M | 21.84M | 19.1M | 22.38M | 19.13M | 21.99M | 19.1M |
| 6515MHz | Pass | Inf | 21.99M | 19.1M | 21.87M | 19.1M | 21.81M | 19.13M | 21.93M | 19.1M |
| 6535MHz | Pass | Inf | 21.9M | 19.13M | 21.6M | 19.1M | 22.2M | 19.1M | 21.81M | 19.13M |
| 6695MHz | Pass | Inf | 22.26M | 19.1M | 21.75M | 19.13M | 21.93M | 19.16M | 22.05M | 19.13M |
| 6855MHz | Pass | Inf | 22.14M | 19.07M | 22.08M | 19.16M | 21.57M | 19.1M | 22.29M | 19.1M |
| 6875MHz Straddle 6.525-6.875GHz | Pass | Inf | 22.02M | 19.1M | 21.81M | 19.1M | 21.84M | 19.13M | 21.69M | 19.1M |
| 6895MHz | Pass | Inf | 21.9M | 19.1M | 21.84M | 19.13M | 21.87M | 19.1M | 21.81M | 19.1M |
| 6995MHz | Pass | Inf | 21.75M | 19.13M | 21.96M | 19.13M | 21.96M | 19.1M | 21.69M | 19.13M |
| 7095MHz | Pass | Inf | 21.87M | 19.1M | 21.87M | 19.1M | 21.9M | 19.1M | 21.78M | 19.13M |
| 7115MHz | Pass | Inf | 21.84M | 19.13M | 22.17M | 19.16M | 21.78M | 19.1M | 22.2M | 19.13M |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | Inf | 40.2M | 37.781M | 40.26M | 37.901M | 40.56M | 37.901M | 40.38M | 37.841M |
| 6165MHz | Pass | Inf | 40.44M | 37.721M | 40.26M | 37.781M | 40.26M | 37.841M | 40.32M | 37.781M |
| 6405MHz | Pass | Inf | 40.44M | 37.901M | 40.56M | 37.781M | 40.38M | 37.841M | 40.5M | 37.781M |
| 6445MHz | Pass | Inf | 40.5M | 37.721M | 40.44M | 37.841M | 40.5M | 37.841M | 40.44M | 37.781M |
| 6485MHz | Pass | Inf | 40.44M | 37.781M | 40.38M | 37.781M | 40.38M | 37.781M | 40.32M | 37.721M |
| 6525MHz Straddle 6.425-6.525GHz | Pass | Inf | 40.38M | 37.781M | 40.8M | 37.841M | 40.44M | 37.781M | 40.5M | 37.781M |
| 6565MHz | Pass | Inf | 40.26M | 37.841M | 40.38M | 37.781M | 40.44M | 37.841M | 40.74M | 37.781M |
| 6685MHz | Pass | Inf | 40.26M | 37.841M | 40.44M | 37.781M | 40.5M | 37.781M | 40.5M | 37.721M |
| 6845MHz | Pass | Inf | 40.38M | 37.841M | 40.5M | 37.781M | 40.44M | 37.781M | 40.26M | 37.781M |
| 6885MHz Straddle 6.525-6.875GHz | Pass | Inf | 40.44M | 37.841M | 40.26M | 37.781M | 40.56M | 37.781M | 40.26M | 37.781M |
| 6925MHz | Pass | Inf | 40.2M | 37.781M | 40.38M | 37.841M | 40.26M | 37.841M | 40.5M | 37.661M |
| 7005MHz | Pass | Inf | 40.38M | 37.901M | 40.5M | 37.841M | 40.74M | 37.841M | 40.5M | 37.721M |
| 7085MHz | Pass | Inf | 40.08M | 37.721M | 40.14M | 37.781M | 40.8M | 37.841M | 40.2M | 37.721M |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | Inf | 82.2M | 77.241M | 81.84M | 77.361M | 82.08M | 77.121M | 81.96M | 77.241M |
| 6145MHz | Pass | Inf | 81.84M | 77.361M | 81.96M | 77.241M | 82.2M | 77.241M | 82.32M | 77.241M |
| 6385MHz | Pass | Inf | 82.08M | 77.121M | 82.2M | 77.361M | 82.44M | 77.241M | 82.2M | 77.241M |
| 6465MHz | Pass | Inf | 82.08M | 77.361M | 82.44M | 77.361M | 81.84M | 77.241M | 81.96M | 77.361M |
| 6545MHz Straddle 6.425-6.525GHz | Pass | Inf | 82.32M | 77.361M | 82.08M | 77.361M | 82.08M | 77.361M | 82.32M | 77.001M |
| 6625MHz | Pass | Inf | 82.32M | 77.241M | 82.56M | 77.241M | 82.56M | 77.121M | 82.68M | 77.241M |
| 6705MHz | Pass | Inf | 82.2M | 77.241M | 82.2M | 77.121M | 81.72M | 77.361M | 81.96M | 77.361M |
| 6785MHz | Pass | Inf | 81.84M | 77.241M | 82.08M | 77.241M | 81.96M | 77.361M | 82.2M | 77.361M |
| 6865MHz Straddle 6.525-6.875GHz | Pass | Inf | 82.2M | 77.241M | 82.32M | 77.361M | 82.08M | 77.121M | 82.44M | 77.361M |
| 6945MHz | Pass | Inf | 82.32M | 77.361M | 82.08M | 77.241M | 82.32M | 77.241M | 82.32M | 77.241M |
| 7025MHz | Pass | Inf | 81.96M | 77.361M | 82.32M | 77.241M | 82.2M | 77.481M | 81.96M | 77.121M |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | Inf | 164.4M | 154.483M | 164.88M | 155.202M | 164.16M | 154.483M | 165.36M | 154.003M |
| 6185MHz | Pass | Inf | 163.92M | 154.483M | 163.92M | 154.723M | 164.16M | 154.723M | 164.4M | 154.723M |
| 6345MHz | Pass | Inf | 164.88M | 155.202M | 164.88M | 155.202M | 164.4M | 155.202M | 165.12M | 154.963M |
| 6505MHz Straddle 6.425-6.525GHz | Pass | Inf | 163.92M | 154.723M | 164.64M | 154.963M | 164.4M | 154.723M | 165.12M | 154.723M |
| 6665MHz | Pass | Inf | 164.64M | 154.963M | 164.16M | 154.963M | 163.44M | 154.723M | 164.16M | 154.963M |
| 6825MHz Straddle 6.525-6.875GHz | Pass | Inf | 163.44M | 155.202M | 164.16M | 154.723M | 164.64M | 154.483M | 164.4M | 154.483M |
| 6985MHz | Pass | Inf | 164.64M | 154.723M | 164.4M | 155.202M | 164.16M | 154.963M | 164.88M | 154.963M |


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_4TX

EBW

5955MHz

14/02/2022

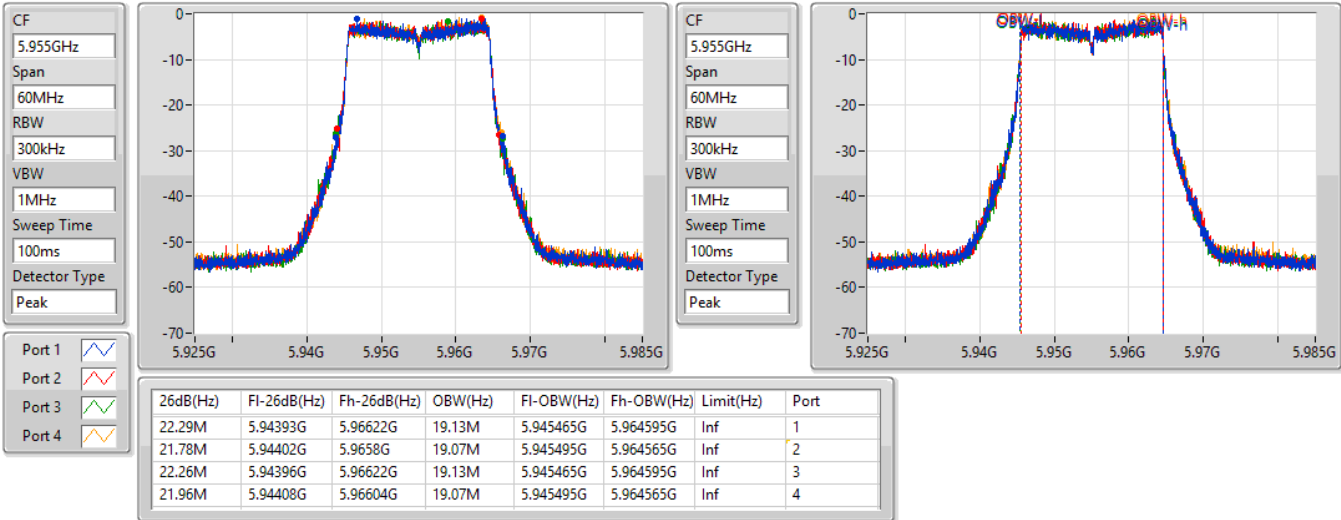


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW

6175MHz

14/02/2022

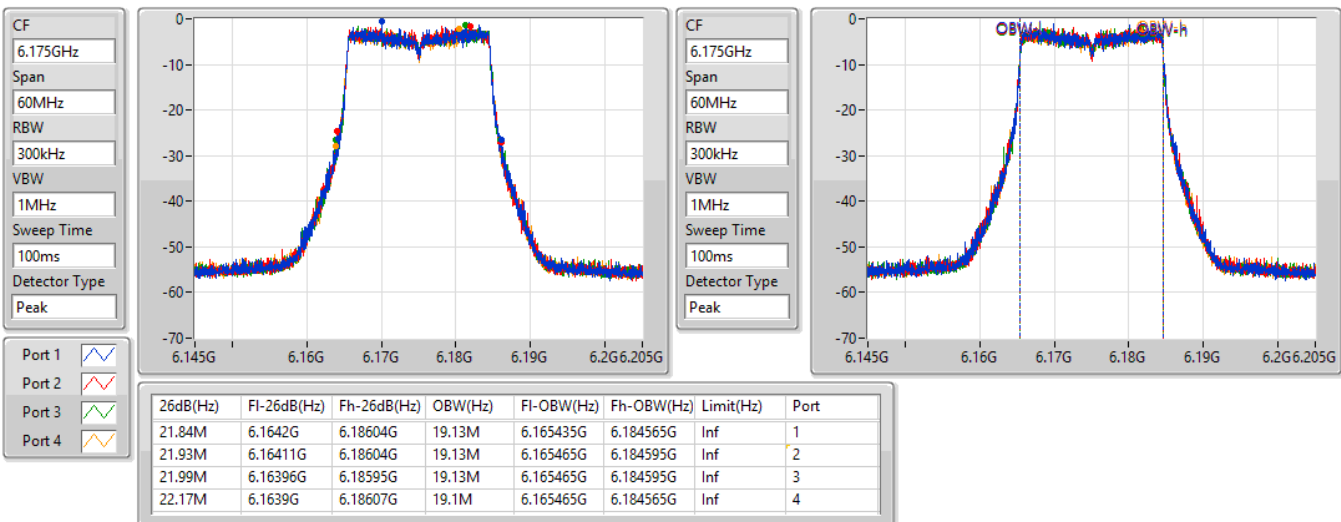


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6415MHz

14/02/2022

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

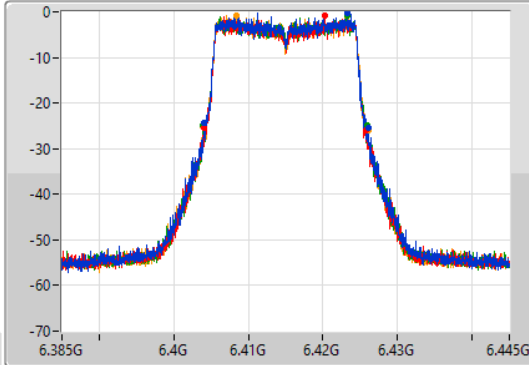

CF
6.415GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

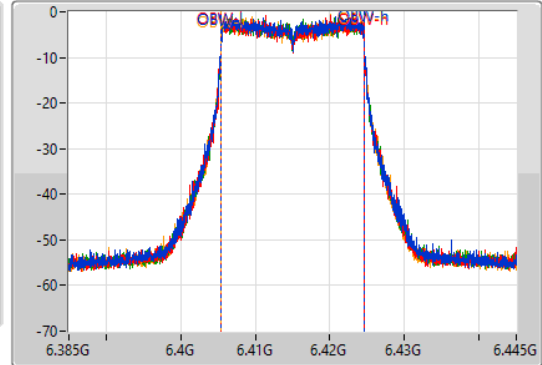

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.05M | 6.40402G | 6.42607G | 19.1M | 6.405465G | 6.424565G | Inf | 1 |
| 21.81M | 6.40405G | 6.42586G | 19.1M | 6.405465G | 6.424565G | Inf | 2 |
| 21.99M | 6.40393G | 6.42592G | 19.1M | 6.405465G | 6.424565G | Inf | 3 |
| 22.17M | 6.40396G | 6.42613G | 19.13M | 6.405435G | 6.424565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6435MHz

14/02/2022

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

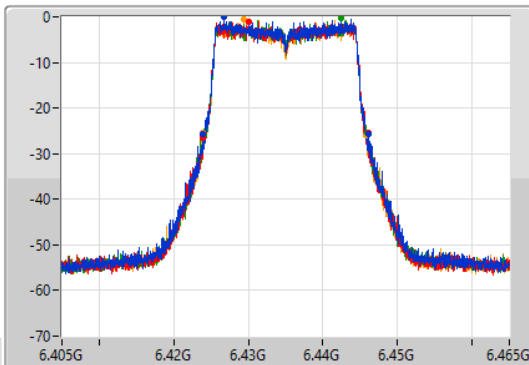

CF
6.435GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

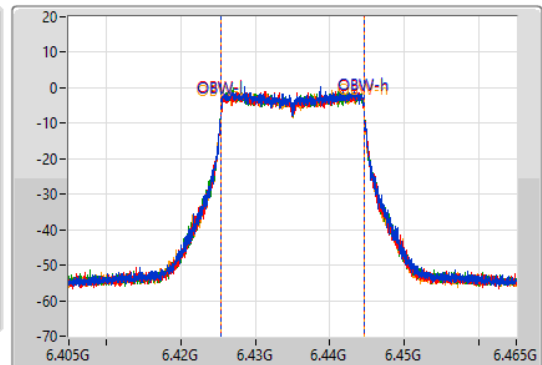

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.2M | 6.42384G | 6.44604G | 19.13M | 6.425435G | 6.444565G | Inf | 1 |
| 22.29M | 6.42384G | 6.44613G | 19.1M | 6.425465G | 6.444565G | Inf | 2 |
| 21.96M | 6.42399G | 6.44595G | 19.13M | 6.425435G | 6.444565G | Inf | 3 |
| 21.93M | 6.42393G | 6.44586G | 19.13M | 6.425435G | 6.444565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6475MHz

14/02/2022

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

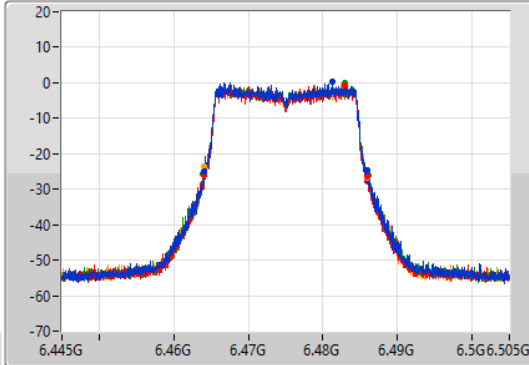

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

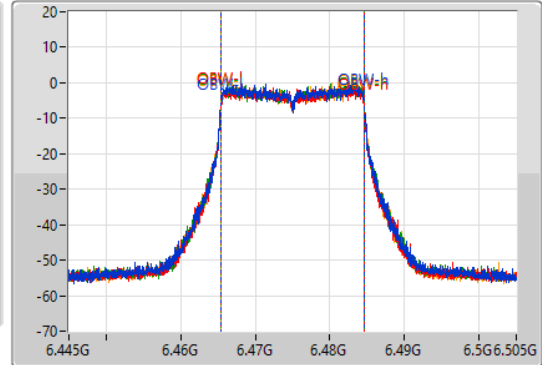

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.96M | 6.46405G | 6.48601G | 19.13M | 6.465435G | 6.484565G | Inf | 1 |
| 21.84M | 6.46411G | 6.48595G | 19.1M | 6.465465G | 6.484565G | Inf | 2 |
| 22.38M | 6.46381G | 6.48619G | 19.13M | 6.465465G | 6.484595G | Inf | 3 |
| 21.99M | 6.46402G | 6.48601G | 19.1M | 6.465465G | 6.484565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6515MHz

14/02/2022

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

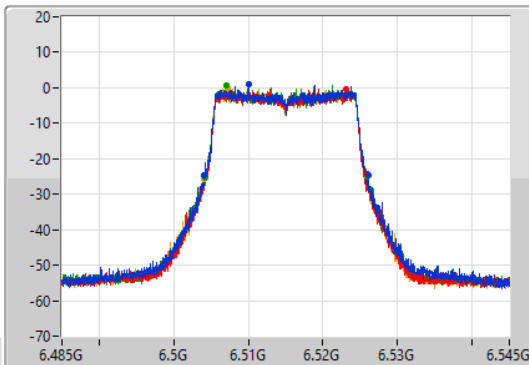

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

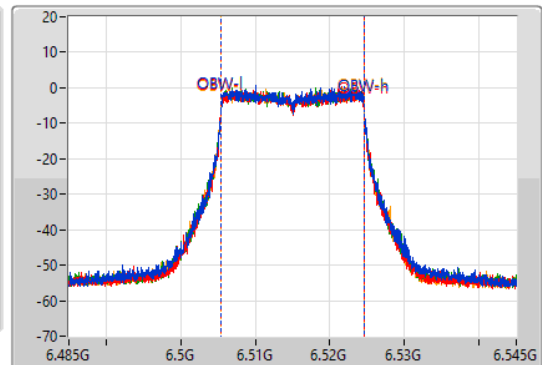

Port 1
Port 2
Port 3
Port 4


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.99M | 6.50405G | 6.52604G | 19.1M | 6.505465G | 6.524565G | Inf | 1 |
| 21.87M | 6.50411G | 6.52598G | 19.1M | 6.505465G | 6.524565G | Inf | 2 |
| 21.81M | 6.50414G | 6.52595G | 19.13M | 6.505465G | 6.524595G | Inf | 3 |
| 21.93M | 6.50402G | 6.52595G | 19.1M | 6.505465G | 6.524565G | Inf | 4 |

802.11ax HEW20_Nss1,(MCS0)_4TX

EBW

6535MHz

14/02/2022

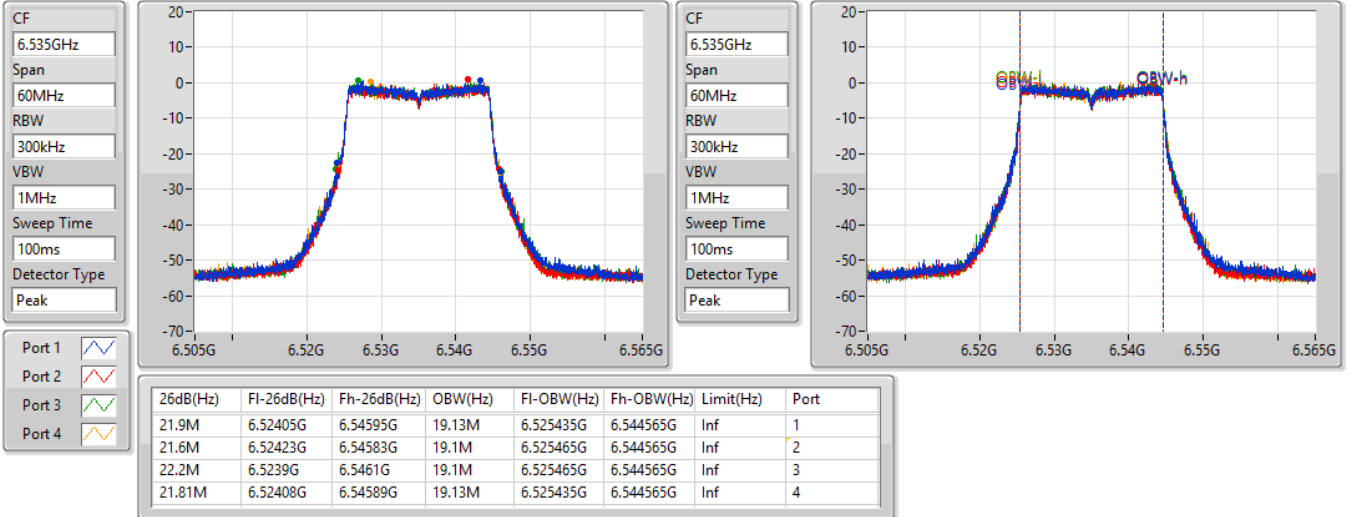


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW

6695MHz

14/02/2022

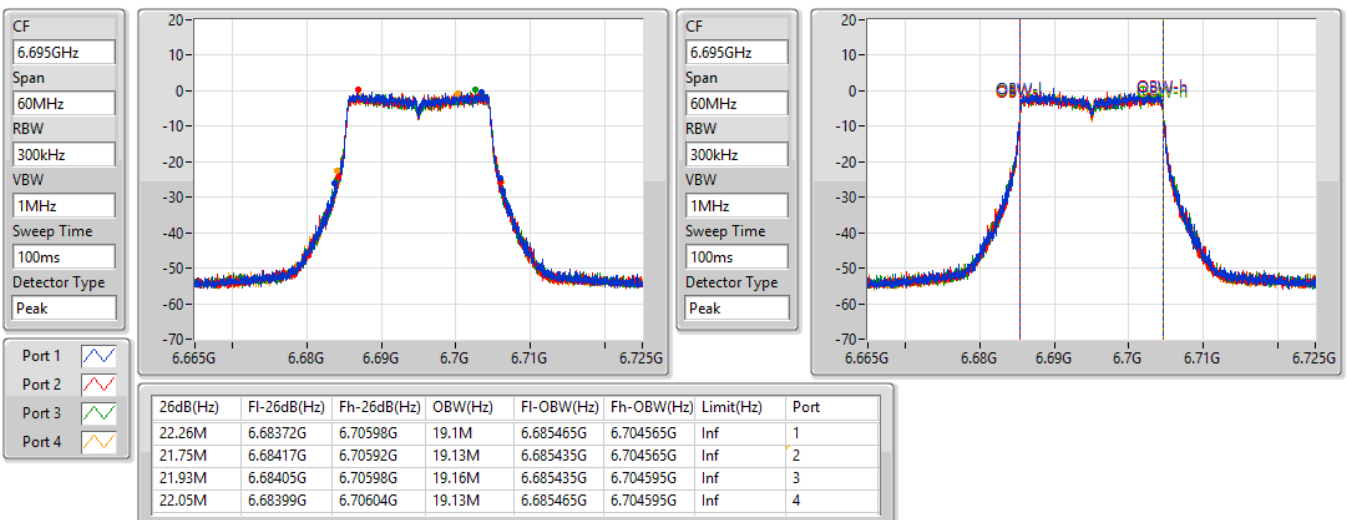


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6855MHz

14/02/2022

CF
6.855GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

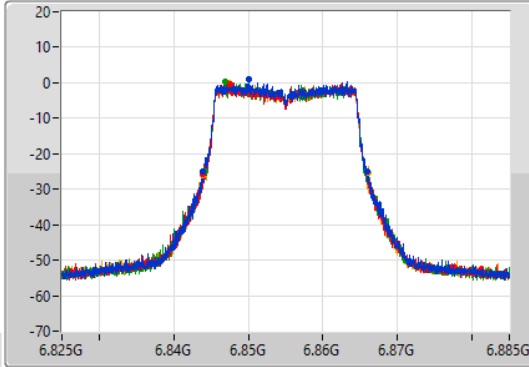

CF
6.855GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

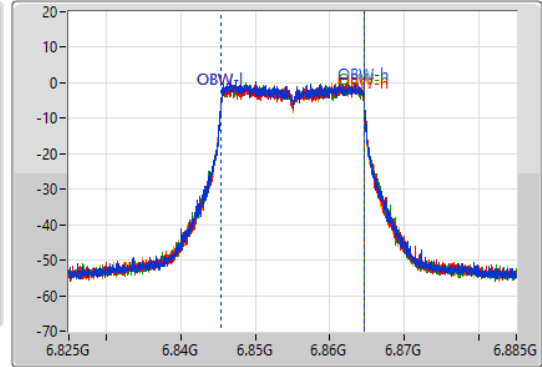

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.14M | 6.84384G | 6.86598G | 19.07M | 6.845465G | 6.864535G | Inf | 1 |
| 22.08M | 6.84384G | 6.86592G | 19.16M | 6.845435G | 6.864595G | Inf | 2 |
| 21.57M | 6.84417G | 6.86574G | 19.1M | 6.845465G | 6.864565G | Inf | 3 |
| 22.29M | 6.84384G | 6.86613G | 19.1M | 6.845465G | 6.864565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6875MHz Straddle 6.525-6.875GHz

14/02/2022

CF
6.875GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

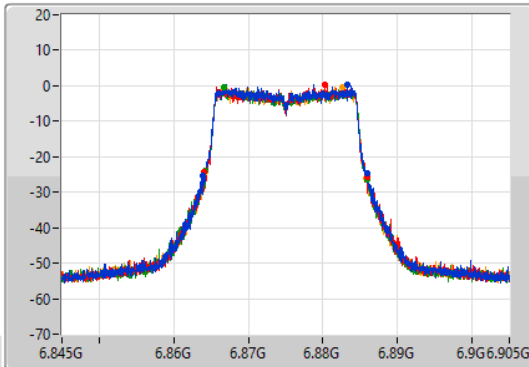

CF
6.875GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

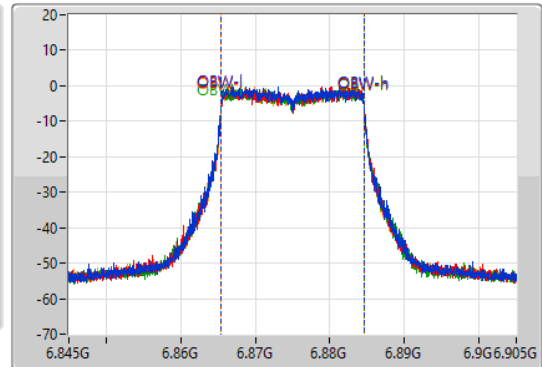

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 22.02M | 6.86396G | 6.88598G | 19.1M | 6.865465G | 6.884565G | Inf | 1 |
| 21.81M | 6.86408G | 6.88589G | 19.1M | 6.865465G | 6.884565G | Inf | 2 |
| 21.84M | 6.86414G | 6.88598G | 19.13M | 6.865435G | 6.884565G | Inf | 3 |
| 21.69M | 6.86408G | 6.88577G | 19.1M | 6.865465G | 6.884565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6895MHz

14/02/2022

CF
6.895GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

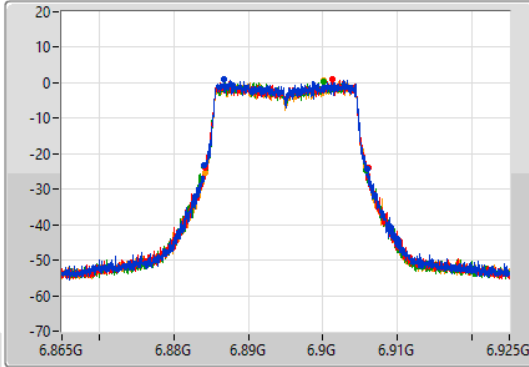

CF
6.895GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

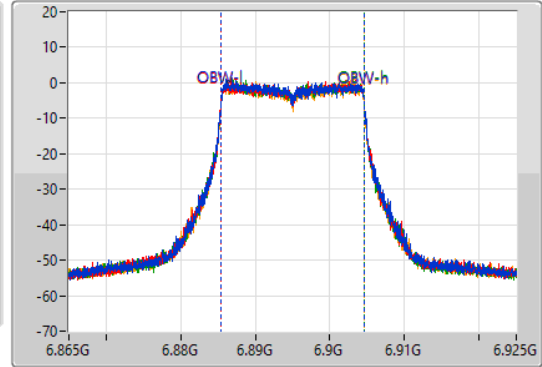

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.9M | 6.88411G | 6.90601G | 19.1M | 6.885465G | 6.904565G | Inf | 1 |
| 21.84M | 6.8842G | 6.90604G | 19.13M | 6.885435G | 6.904565G | Inf | 2 |
| 21.87M | 6.88399G | 6.90586G | 19.1M | 6.885465G | 6.904565G | Inf | 3 |
| 21.81M | 6.88417G | 6.90598G | 19.1M | 6.885465G | 6.904565G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


6995MHz

14/02/2022

CF
6.995GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

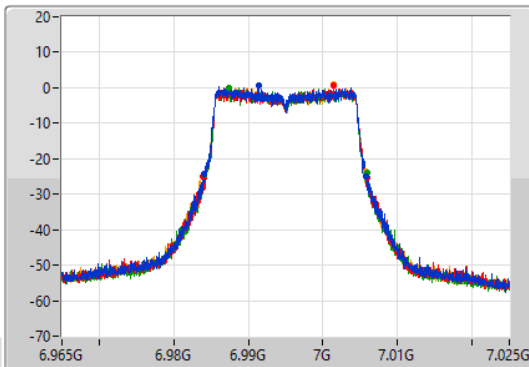

CF
6.995GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

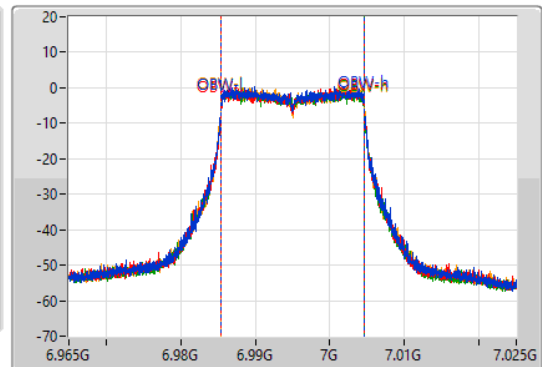

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.75M | 6.98408G | 7.00583G | 19.13M | 6.985435G | 7.004565G | Inf | 1 |
| 21.96M | 6.98393G | 7.00589G | 19.13M | 6.985435G | 7.004565G | Inf | 2 |
| 21.96M | 6.98402G | 7.00598G | 19.1M | 6.985465G | 7.004565G | Inf | 3 |
| 21.69M | 6.98405G | 7.00574G | 19.13M | 6.985465G | 7.004595G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


7095MHz

14/02/2022

CF
7.095GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

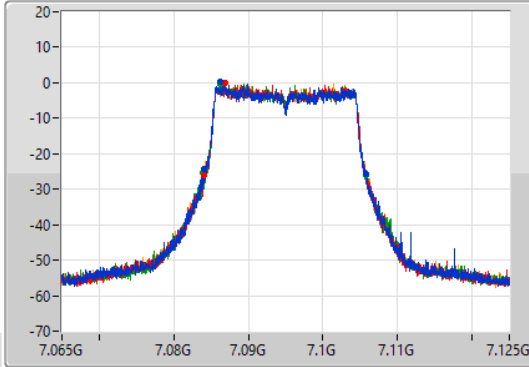

CF
7.095GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

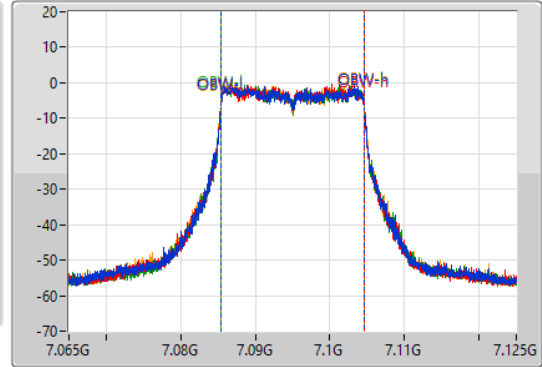

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.87M | 7.08399G | 7.10586G | 19.1M | 7.085435G | 7.104535G | Inf | 1 |
| 21.87M | 7.08399G | 7.10586G | 19.1M | 7.085435G | 7.104535G | Inf | 2 |
| 21.9M | 7.0839G | 7.1058G | 19.1M | 7.085435G | 7.104535G | Inf | 3 |
| 21.78M | 7.08399G | 7.10577G | 19.13M | 7.085405G | 7.104535G | Inf | 4 |


802.11ax HEW20_Nss1,(MCS0)_4TX

EBW


7115MHz

28/02/2022

CF
7.115GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

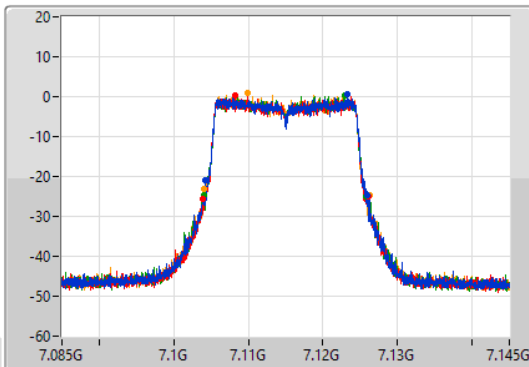

CF
7.115GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

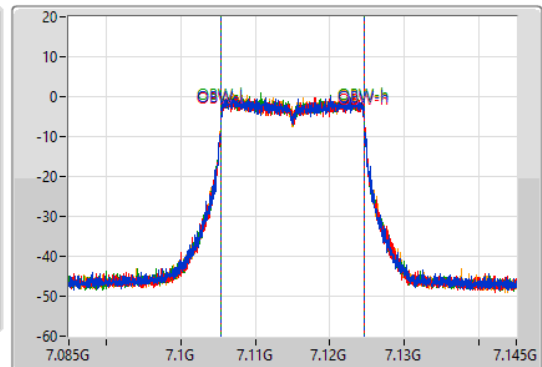

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.84M | 7.10414G | 7.12598G | 19.13M | 7.105435G | 7.124565G | Inf | 1 |
| 22.17M | 7.1039G | 7.12607G | 19.16M | 7.105435G | 7.124595G | Inf | 2 |
| 21.78M | 7.10405G | 7.12583G | 19.1M | 7.105465G | 7.124565G | Inf | 3 |
| 22.2M | 7.10411G | 7.12631G | 19.13M | 7.105435G | 7.124565G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


5965MHz

14/02/2022

CF
5.965GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

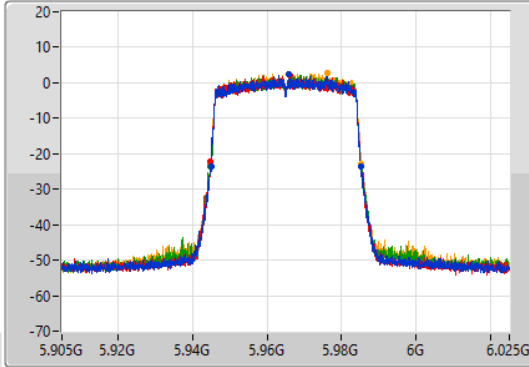

CF
5.965GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

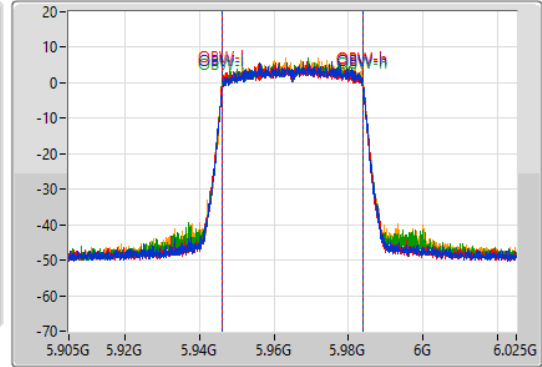

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.2M | 5.94496G | 5.98516G | 37.781M | 5.946169G | 5.983951G | Inf | 1 |
| 40.26M | 5.9449G | 5.98516G | 37.901M | 5.946049G | 5.983951G | Inf | 2 |
| 40.56M | 5.94478G | 5.98534G | 37.901M | 5.946109G | 5.98401G | Inf | 3 |
| 40.38M | 5.94484G | 5.98522G | 37.841M | 5.946169G | 5.98401G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6165MHz

14/02/2022

CF
6.165GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

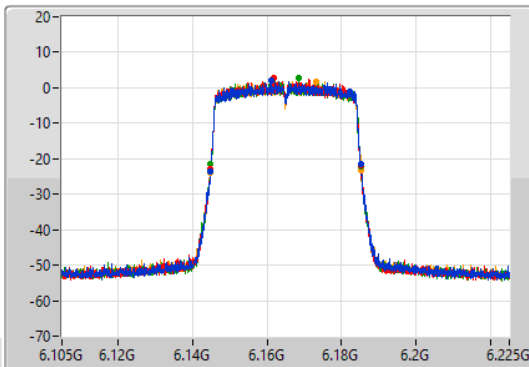

CF
6.165GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

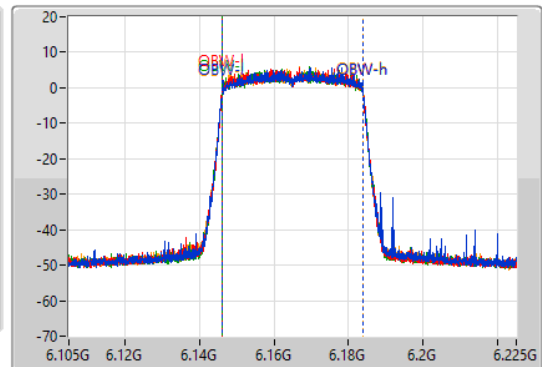

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.44M | 6.14484G | 6.18528G | 37.721M | 6.146169G | 6.183891G | Inf | 1 |
| 40.26M | 6.1449G | 6.18516G | 37.781M | 6.146109G | 6.183891G | Inf | 2 |
| 40.26M | 6.14484G | 6.1851G | 37.841M | 6.146109G | 6.183951G | Inf | 3 |
| 40.32M | 6.14484G | 6.18516G | 37.781M | 6.146109G | 6.183891G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6405MHz

14/02/2022

CF
6.405GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

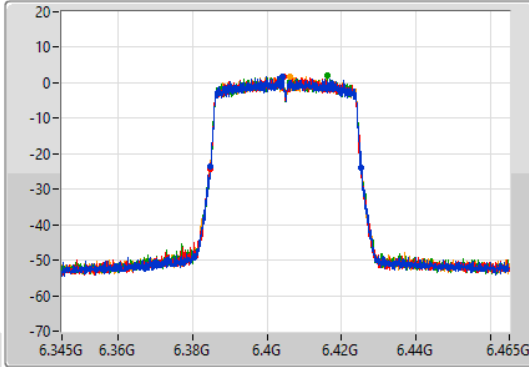

CF
6.405GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

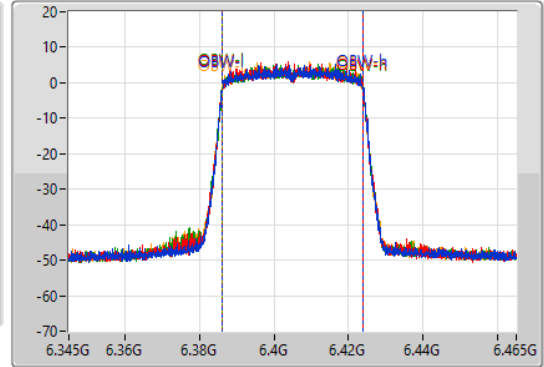

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.44M | 6.38478G | 6.42522G | 37.901M | 6.386109G | 6.42401G | Inf | 1 |
| 40.56M | 6.38472G | 6.42528G | 37.781M | 6.386109G | 6.423891G | Inf | 2 |
| 40.38M | 6.3849G | 6.42528G | 37.841M | 6.386109G | 6.423951G | Inf | 3 |
| 40.5M | 6.38466G | 6.42516G | 37.781M | 6.386109G | 6.423891G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6445MHz

14/02/2022

CF
6.445GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak


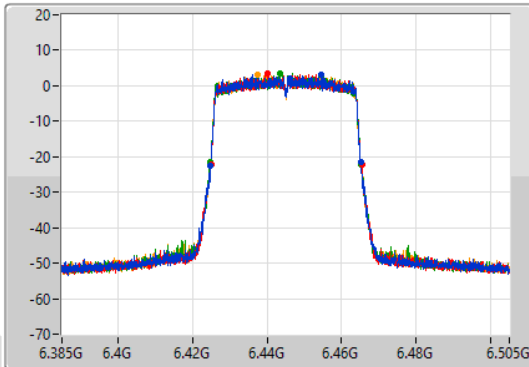




CF
6.445GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

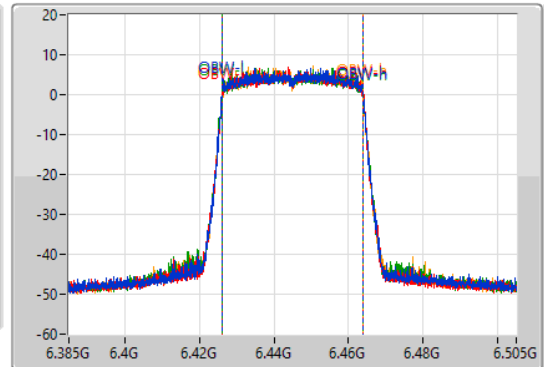

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.5M | 6.42478G | 6.46528G | 37.721M | 6.426169G | 6.463891G | Inf | 1 |
| 40.44M | 6.42496G | 6.4654G | 37.841M | 6.426109G | 6.463951G | Inf | 2 |
| 40.5M | 6.42466G | 6.46516G | 37.841M | 6.426109G | 6.463951G | Inf | 3 |
| 40.44M | 6.42484G | 6.46528G | 37.781M | 6.426109G | 6.463891G | Inf | 4 |

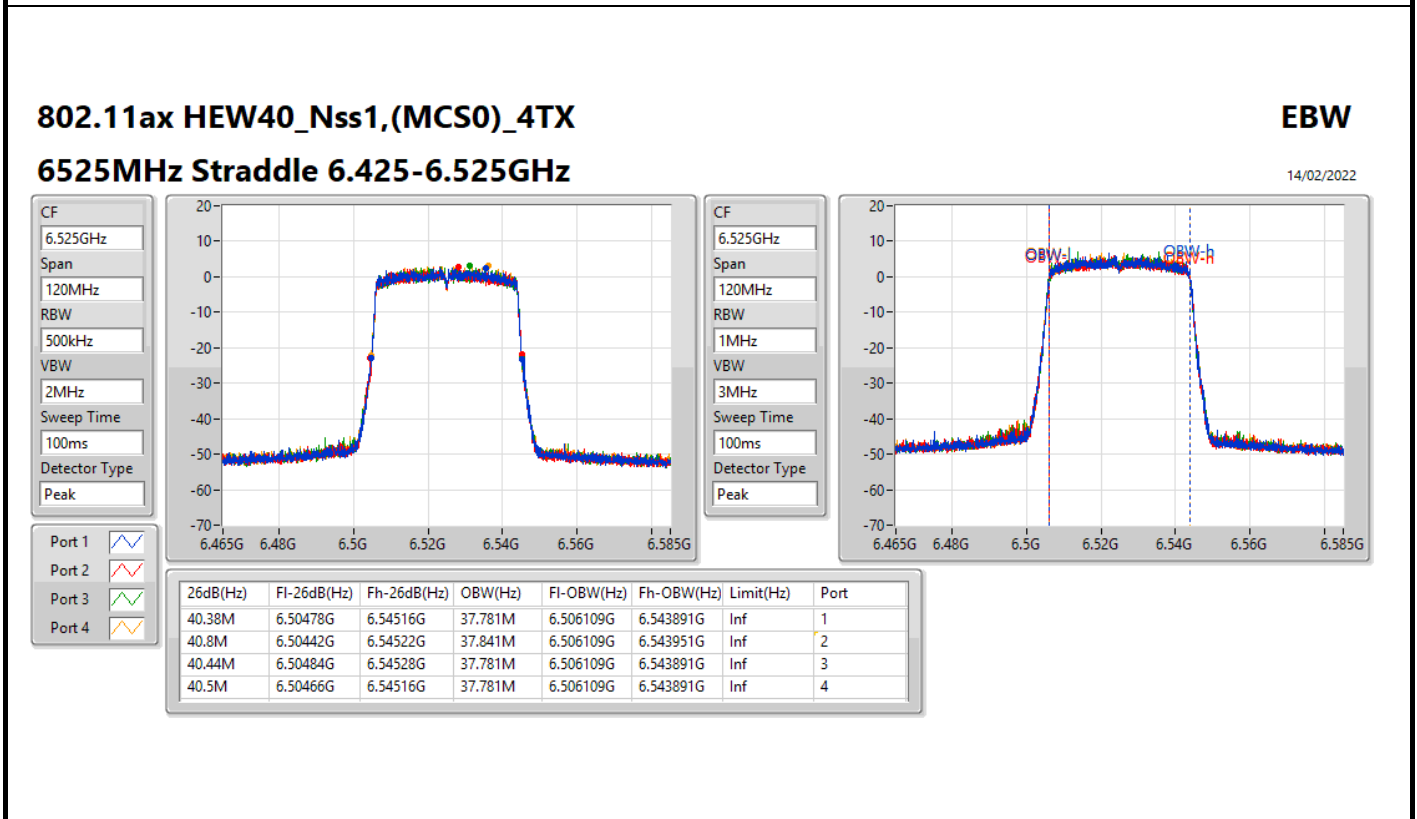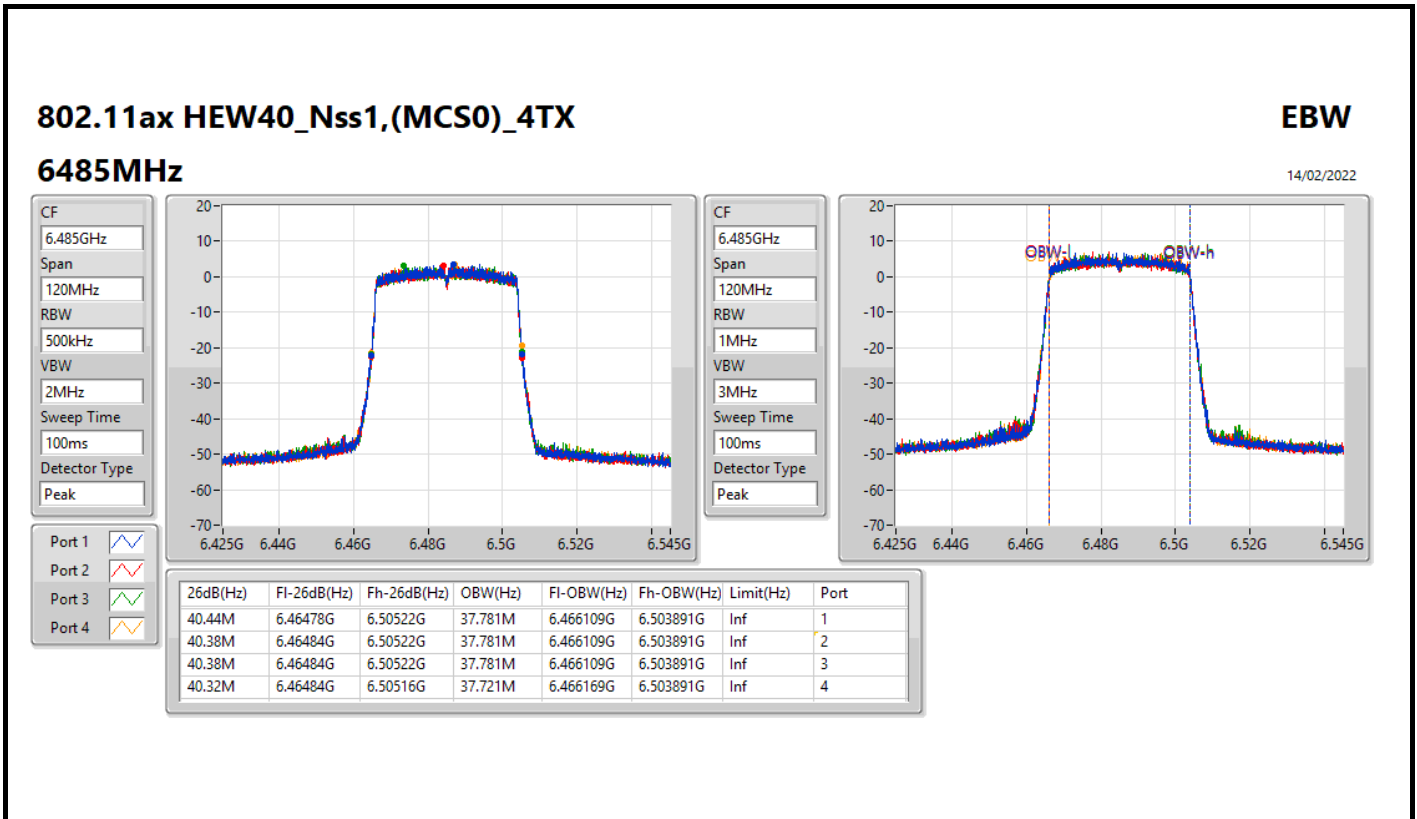

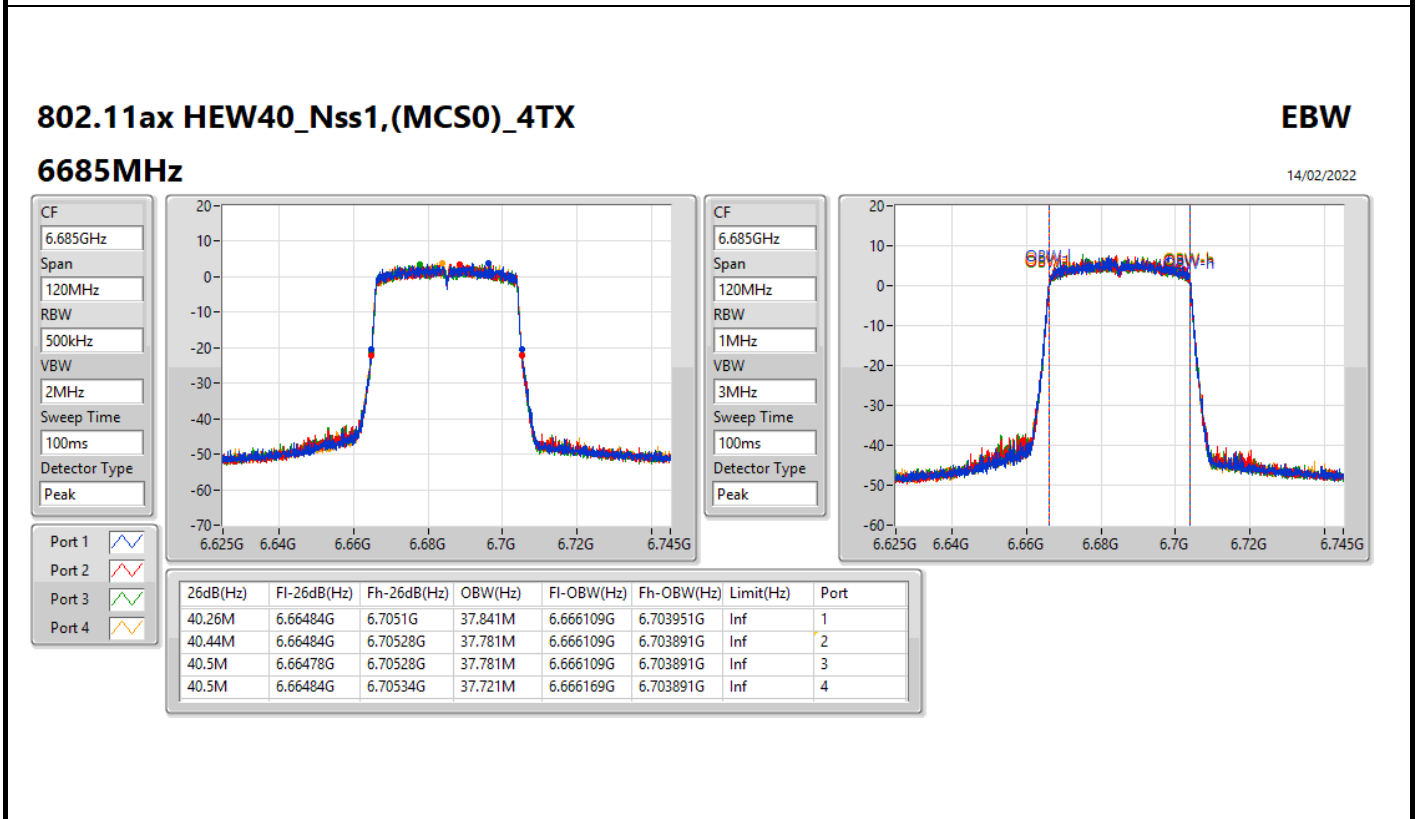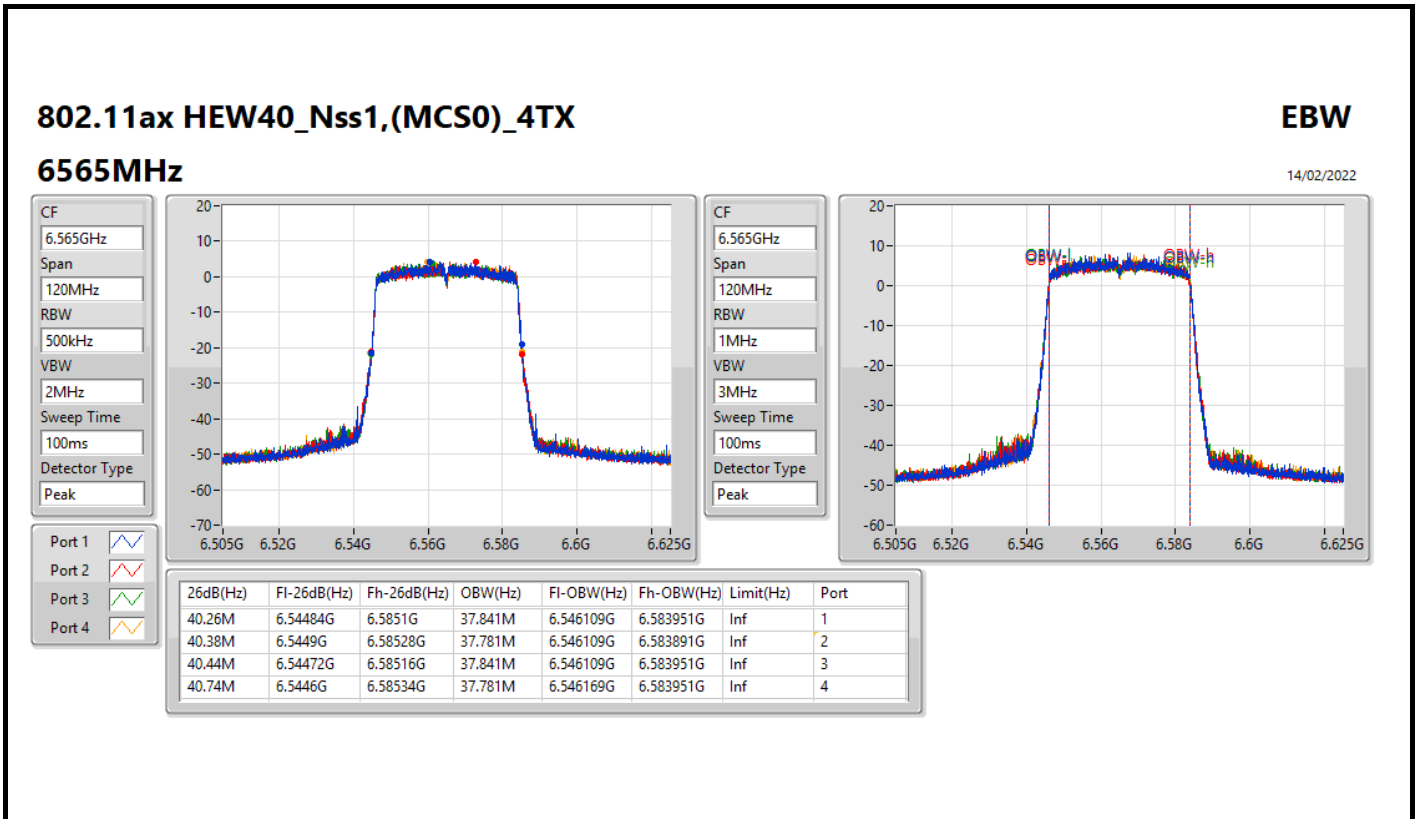


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6845MHz

14/02/2022

CF
6.845GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

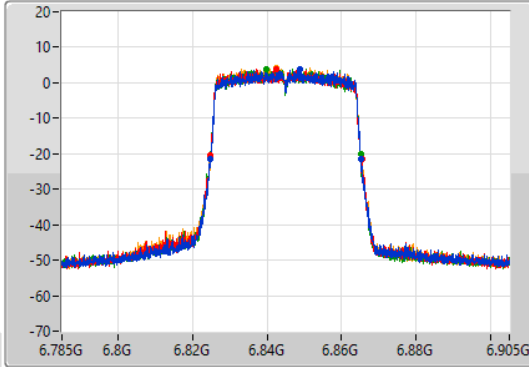

CF
6.845GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

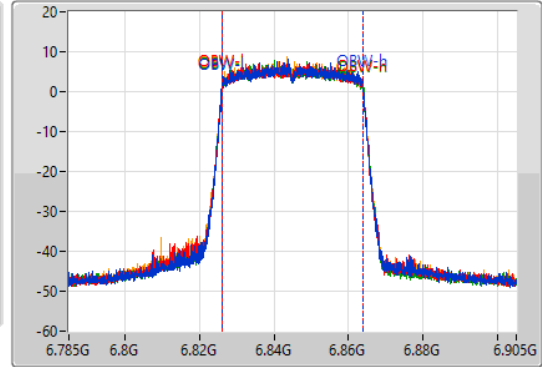

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.38M | 6.8249G | 6.86528G | 37.841M | 6.826109G | 6.863951G | Inf | 1 |
| 40.5M | 6.8249G | 6.8654G | 37.781M | 6.826049G | 6.863831G | Inf | 2 |
| 40.44M | 6.82478G | 6.86522G | 37.781M | 6.826109G | 6.863891G | Inf | 3 |
| 40.26M | 6.8249G | 6.86516G | 37.781M | 6.826109G | 6.863891G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6885MHz Straddle 6.525-6.875GHz

14/02/2022

CF
6.885GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

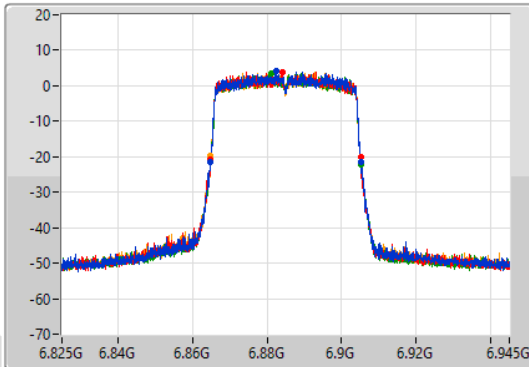

CF
6.885GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

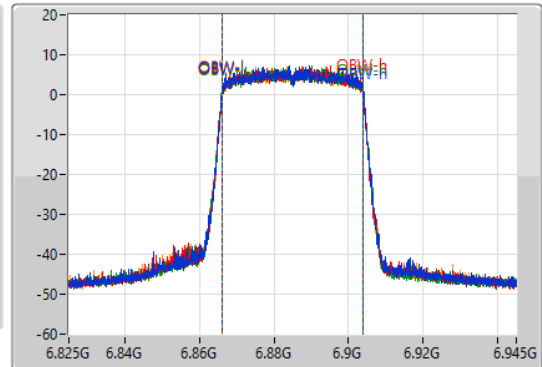

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.44M | 6.8649G | 6.90534G | 37.841M | 6.866109G | 6.903951G | Inf | 1 |
| 40.26M | 6.86484G | 6.9051G | 37.781M | 6.866109G | 6.903891G | Inf | 2 |
| 40.56M | 6.86472G | 6.90528G | 37.781M | 6.866109G | 6.903891G | Inf | 3 |
| 40.26M | 6.86484G | 6.9051G | 37.781M | 6.866109G | 6.903891G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


6925MHz

14/02/2022

CF
6.925GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

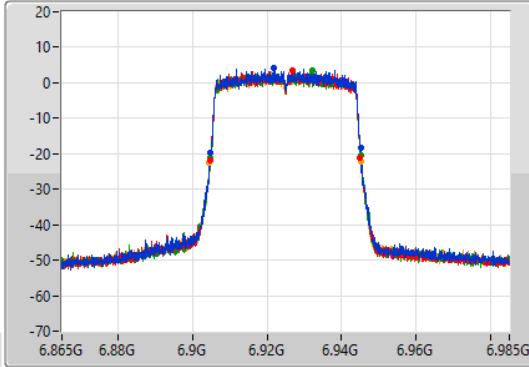

CF
6.925GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

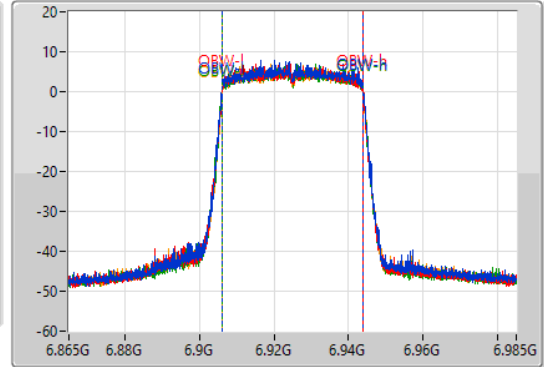

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.2M | 6.9049G | 6.9451G | 37.781M | 6.906169G | 6.943951G | Inf | 1 |
| 40.38M | 6.90466G | 6.94504G | 37.841M | 6.906109G | 6.943951G | Inf | 2 |
| 40.26M | 6.9049G | 6.94516G | 37.841M | 6.906049G | 6.943891G | Inf | 3 |
| 40.5M | 6.9046G | 6.9451G | 37.661M | 6.906169G | 6.943831G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


7005MHz

14/02/2022

CF
7.005GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

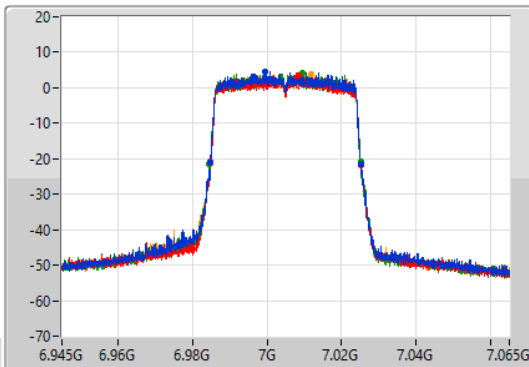

CF
7.005GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

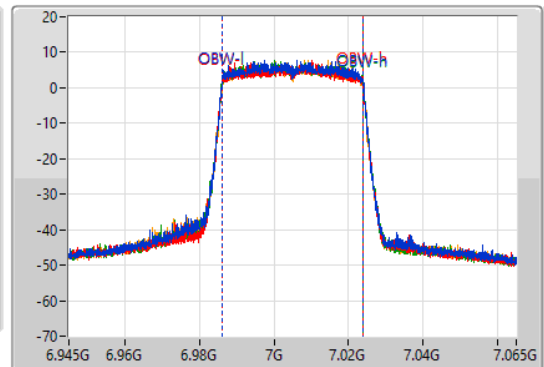

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.38M | 6.98472G | 7.0251G | 37.901M | 6.986049G | 7.023951G | Inf | 1 |
| 40.5M | 6.98478G | 7.02528G | 37.841M | 6.986049G | 7.023891G | Inf | 2 |
| 40.74M | 6.98454G | 7.02528G | 37.841M | 6.986049G | 7.023891G | Inf | 3 |
| 40.5M | 6.98466G | 7.02516G | 37.721M | 6.986169G | 7.023891G | Inf | 4 |


802.11ax HEW40_Nss1,(MCS0)_4TX

EBW


7085MHz

14/02/2022

CF
7.085GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

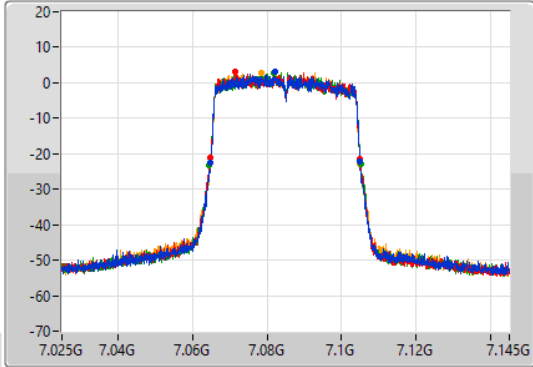

CF
7.085GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

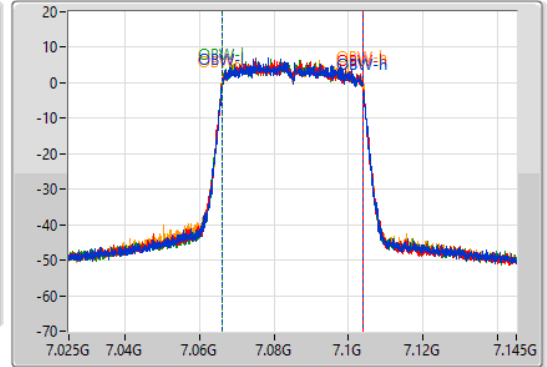

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 40.08M | 7.06484G | 7.10492G | 37.721M | 7.066109G | 7.103831G | Inf | 1 |
| 40.14M | 7.06478G | 7.10492G | 37.781M | 7.06599G | 7.103771G | Inf | 2 |
| 40.8M | 7.06442G | 7.10522G | 37.841M | 7.06599G | 7.103831G | Inf | 3 |
| 40.2M | 7.06478G | 7.10498G | 37.721M | 7.066109G | 7.103831G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


5985MHz

14/02/2022

CF
5.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

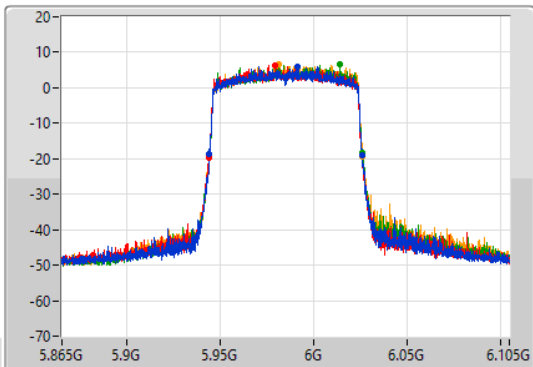

CF
5.985GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

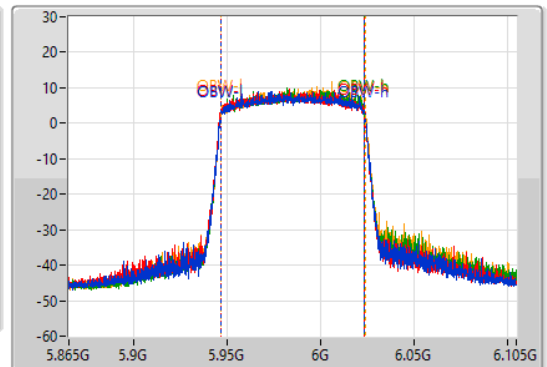

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.2M | 5.94396G | 6.02616G | 77.241M | 5.946499G | 6.023741G | Inf | 1 |
| 81.84M | 5.9442G | 6.02604G | 77.361M | 5.946259G | 6.023621G | Inf | 2 |
| 82.08M | 5.94408G | 6.02616G | 77.121M | 5.946619G | 6.023741G | Inf | 3 |
| 81.96M | 5.9442G | 6.02616G | 77.241M | 5.946619G | 6.023861G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


6145MHz

14/02/2022

CF
6.145GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

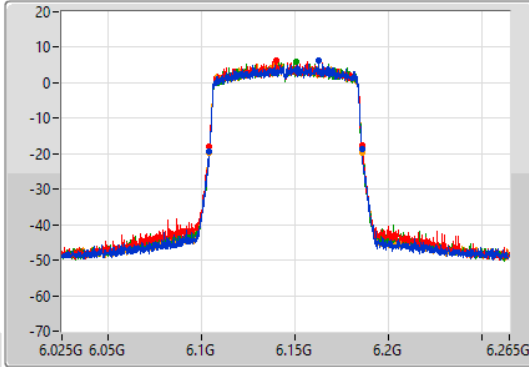

CF
6.145GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

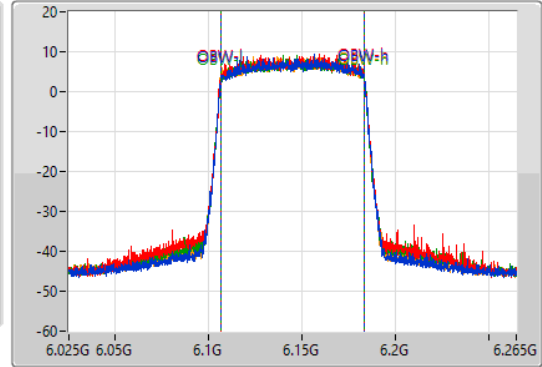

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 81.84M | 6.1042G | 6.18604G | 77.361M | 6.106379G | 6.183741G | Inf | 1 |
| 81.96M | 6.10408G | 6.18604G | 77.241M | 6.106379G | 6.183621G | Inf | 2 |
| 82.2M | 6.10408G | 6.18628G | 77.241M | 6.106499G | 6.183741G | Inf | 3 |
| 82.32M | 6.10384G | 6.18616G | 77.241M | 6.106379G | 6.183621G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


6385MHz

14/02/2022

CF
6.385GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak


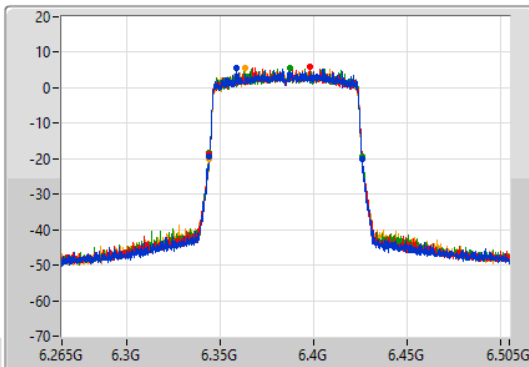


CF
6.385GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

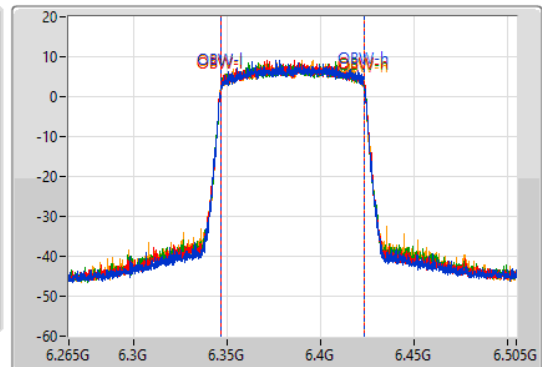

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.08M | 6.34396G | 6.42604G | 77.121M | 6.346499G | 6.423621G | Inf | 1 |
| 82.2M | 6.34396G | 6.42616G | 77.361M | 6.346379G | 6.423741G | Inf | 2 |
| 82.44M | 6.34384G | 6.42628G | 77.241M | 6.346379G | 6.423621G | Inf | 3 |
| 82.2M | 6.34372G | 6.42592G | 77.241M | 6.346379G | 6.423621G | Inf | 4 |

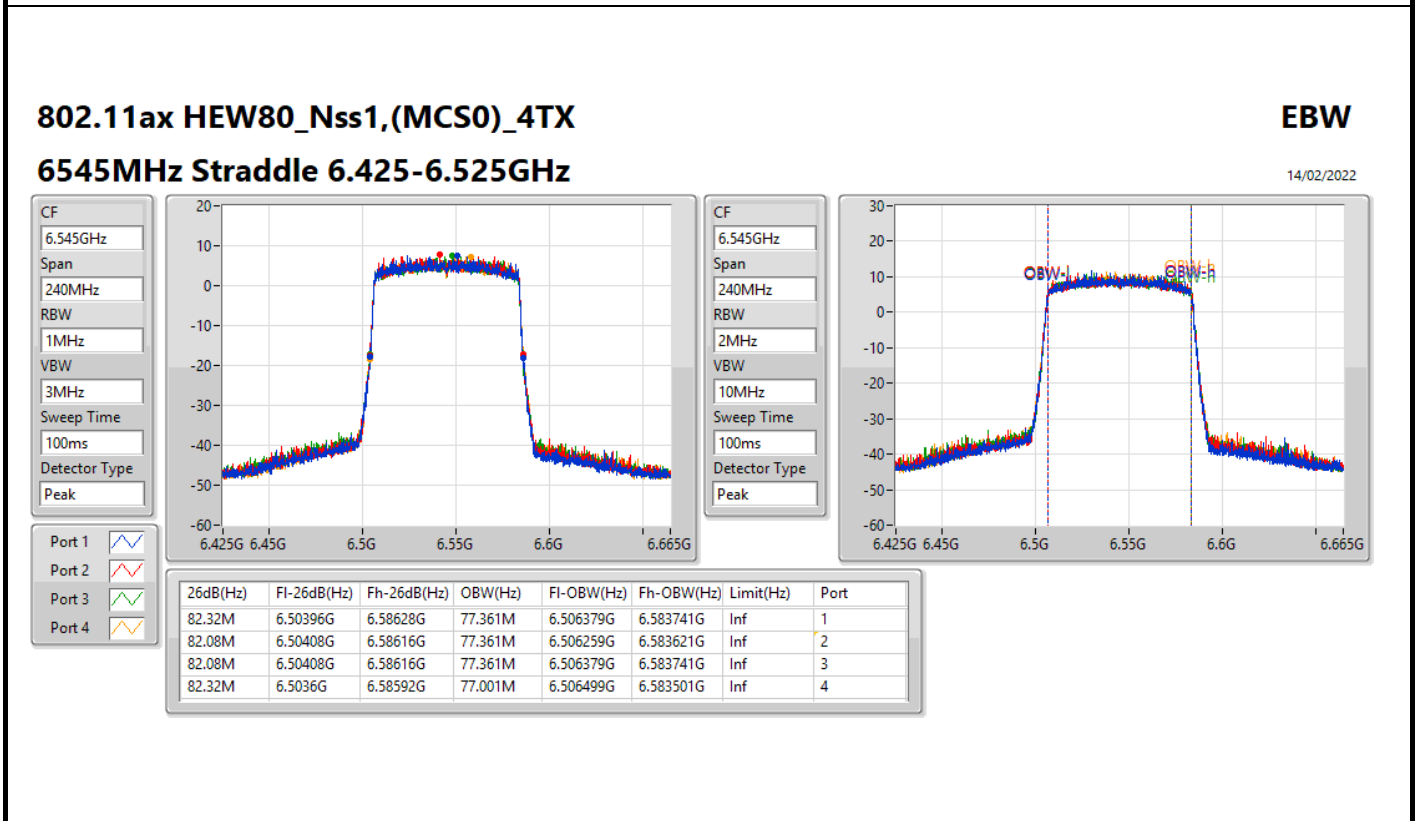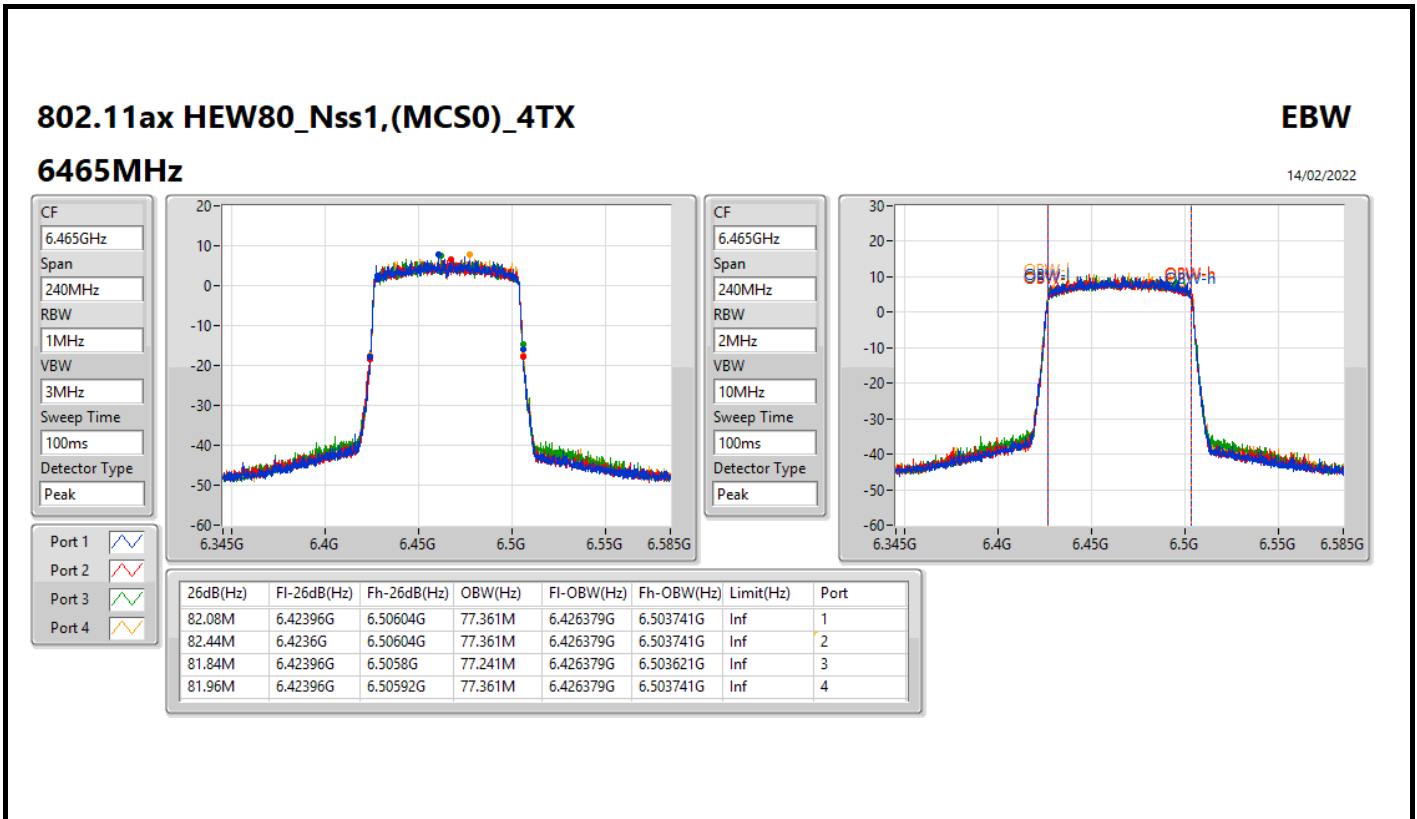


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW

6625MHz

14/02/2022

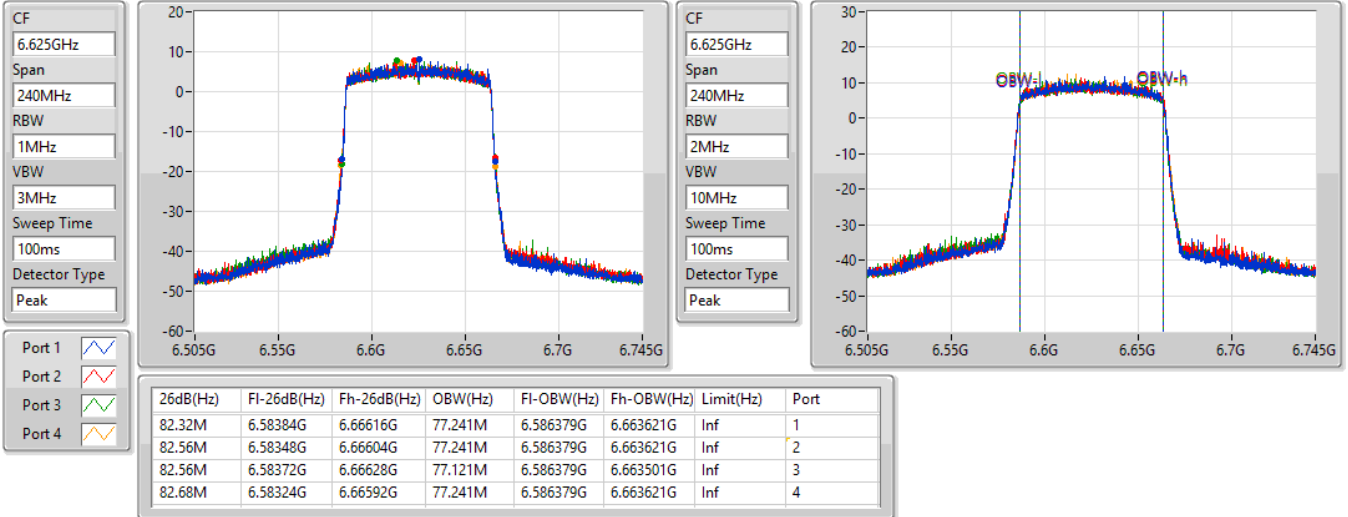


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW

6705MHz

14/02/2022

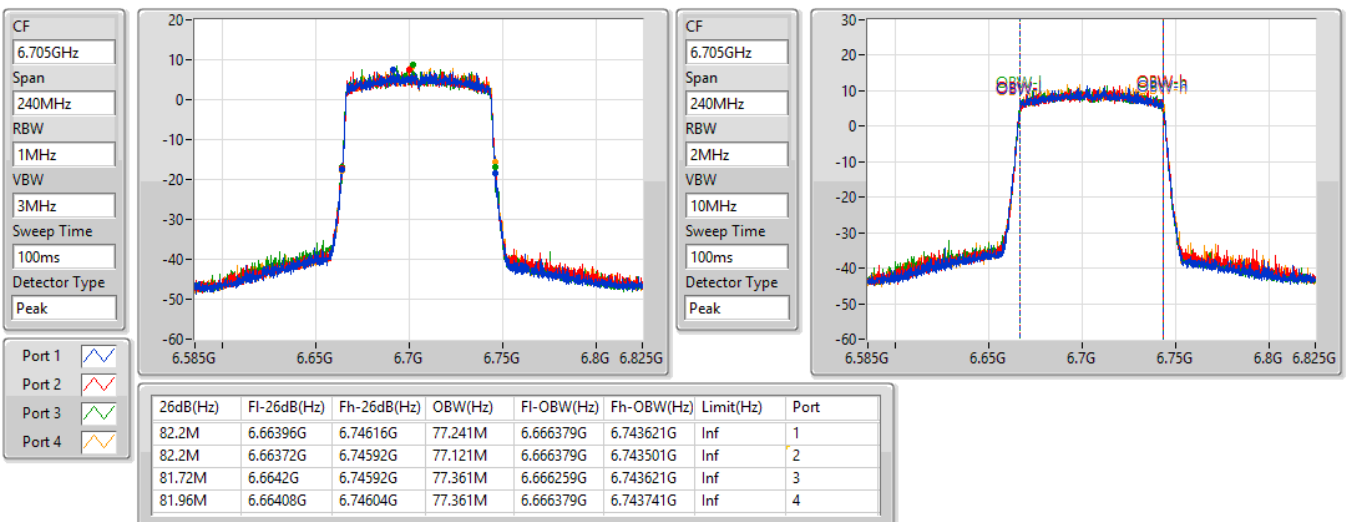


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


6785MHz

14/02/2022

CF
6.785GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

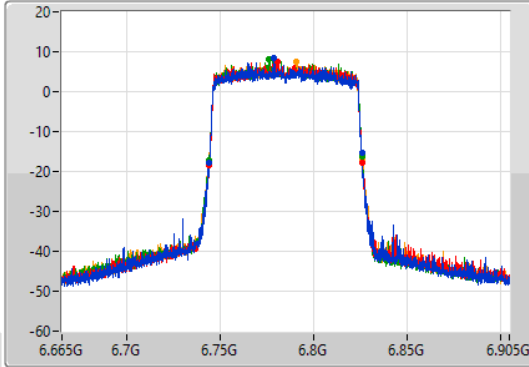

CF
6.785GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

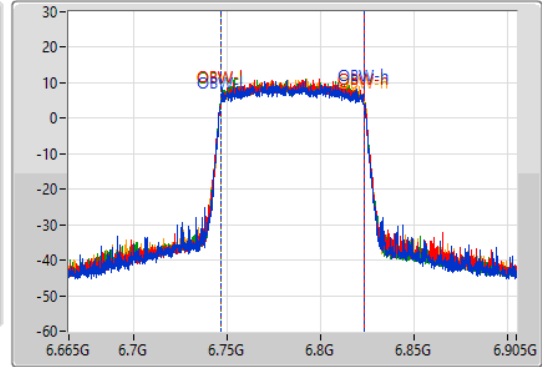

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 81.84M | 6.74396G | 6.8258G | 77.241M | 6.746379G | 6.823621G | Inf | 1 |
| 82.08M | 6.74408G | 6.82616G | 77.241M | 6.746379G | 6.823621G | Inf | 2 |
| 81.96M | 6.74384G | 6.8258G | 77.361M | 6.746259G | 6.823621G | Inf | 3 |
| 82.2M | 6.74372G | 6.82592G | 77.361M | 6.746379G | 6.823741G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


6865MHz Straddle 6.525-6.875GHz

14/02/2022

CF
6.865GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

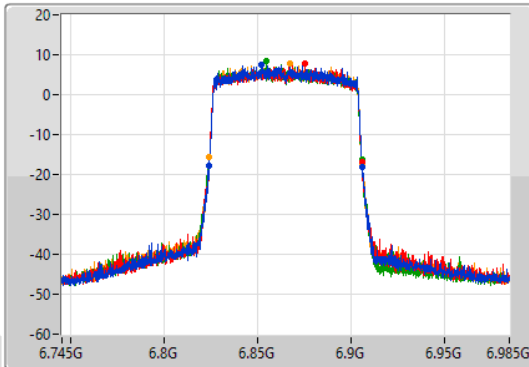

CF
6.865GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

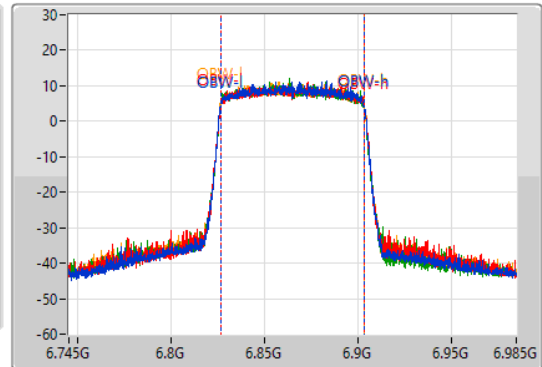

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.2M | 6.82396G | 6.90616G | 77.241M | 6.826379G | 6.903621G | Inf | 1 |
| 82.32M | 6.82384G | 6.90616G | 77.361M | 6.826259G | 6.903621G | Inf | 2 |
| 82.08M | 6.82372G | 6.9058G | 77.121M | 6.826379G | 6.903501G | Inf | 3 |
| 82.44M | 6.82384G | 6.90628G | 77.361M | 6.826259G | 6.903621G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


6945MHz

14/02/2022

CF
6.945GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

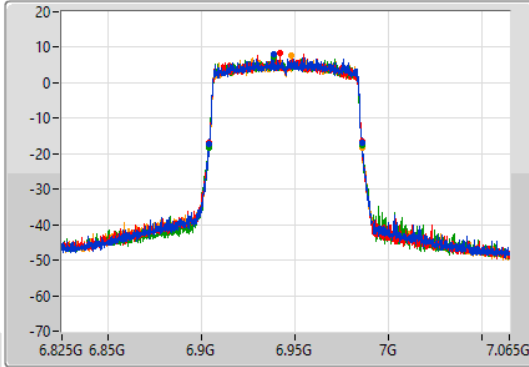

CF
6.945GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

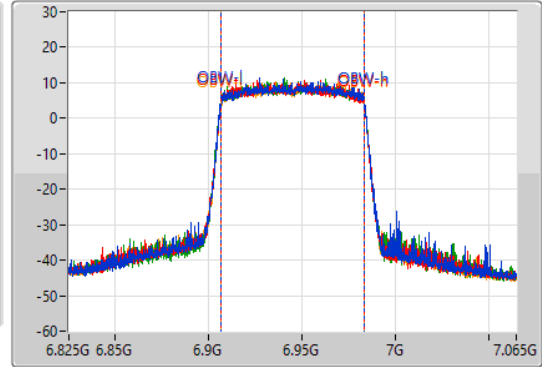

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 82.32M | 6.90384G | 6.98616G | 77.361M | 6.906379G | 6.983741G | Inf | 1 |
| 82.08M | 6.90372G | 6.9858G | 77.241M | 6.906259G | 6.983501G | Inf | 2 |
| 82.32M | 6.90384G | 6.98616G | 77.241M | 6.906259G | 6.983501G | Inf | 3 |
| 82.32M | 6.90396G | 6.98628G | 77.241M | 6.906379G | 6.983621G | Inf | 4 |


802.11ax HEW80_Nss1,(MCS0)_4TX

EBW


7025MHz

14/02/2022

CF
7.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

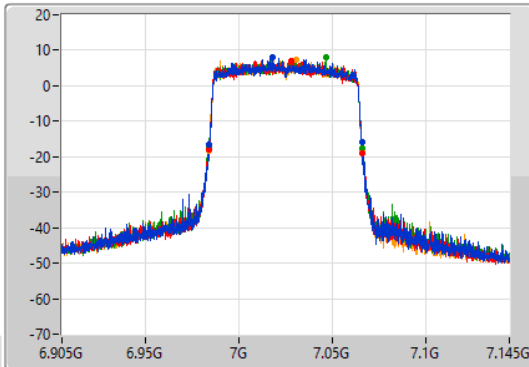

CF
7.025GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

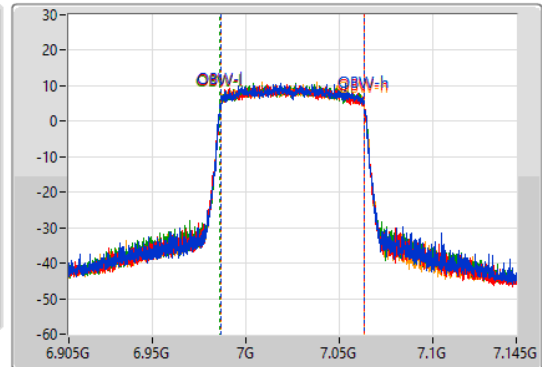

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 81.96M | 6.98396G | 7.06592G | 77.361M | 6.986259G | 7.063621G | Inf | 1 |
| 82.32M | 6.98384G | 7.06616G | 77.241M | 6.986259G | 7.063501G | Inf | 2 |
| 82.2M | 6.98384G | 7.06604G | 77.481M | 6.986139G | 7.063621G | Inf | 3 |
| 81.96M | 6.98396G | 7.06592G | 77.121M | 6.986379G | 7.063501G | Inf | 4 |


802.11ax HEW160_Nss1,(MCS0)_4TX

EBW


6025MHz

14/02/2022

CF
6.025GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

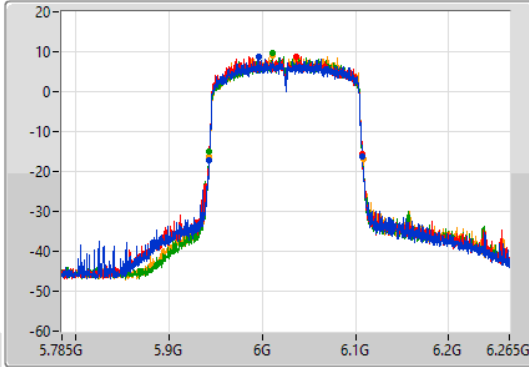

CF
6.025GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

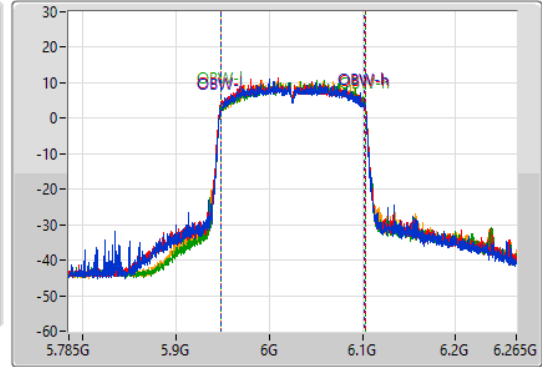

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 164.4M | 5.94292G | 6.10732G | 154.483M | 5.947999G | 6.102481G | Inf | 1 |
| 164.88M | 5.94244G | 6.10732G | 155.202M | 5.947519G | 6.102721G | Inf | 2 |
| 164.16M | 5.94292G | 6.10708G | 154.483M | 5.948238G | 6.102721G | Inf | 3 |
| 165.36M | 5.94268G | 6.10804G | 154.003M | 5.948478G | 6.102481G | Inf | 4 |


802.11ax HEW160_Nss1,(MCS0)_4TX

EBW


6185MHz

14/02/2022

CF
6.185GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

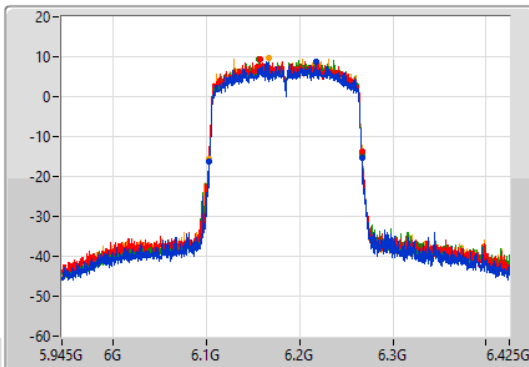

CF
6.185GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

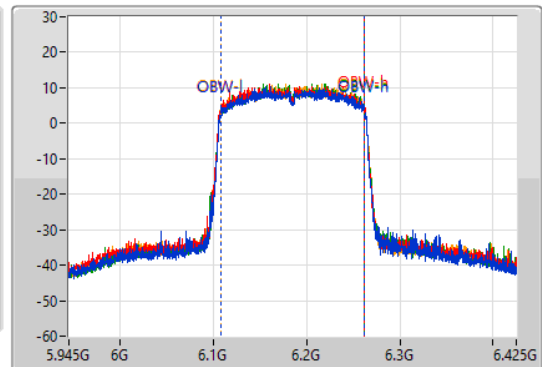

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 163.92M | 6.10292G | 6.26684G | 154.483M | 6.107999G | 6.262481G | Inf | 1 |
| 163.92M | 6.10316G | 6.26708G | 154.723M | 6.107759G | 6.262481G | Inf | 2 |
| 164.16M | 6.10292G | 6.26708G | 154.723M | 6.107759G | 6.262481G | Inf | 3 |
| 164.4M | 6.10292G | 6.26732G | 154.723M | 6.107759G | 6.262481G | Inf | 4 |


802.11ax HEW160_Nss1,(MCS0)_4TX

EBW


6345MHz

14/02/2022

CF
6.345GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

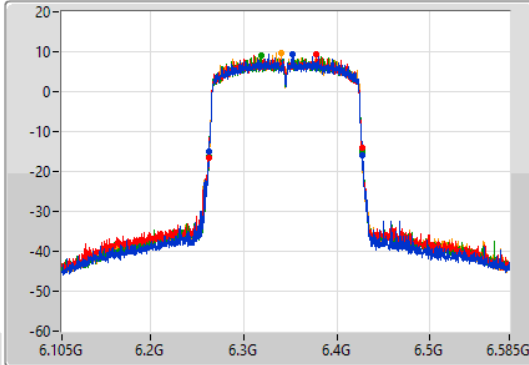

CF
6.345GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

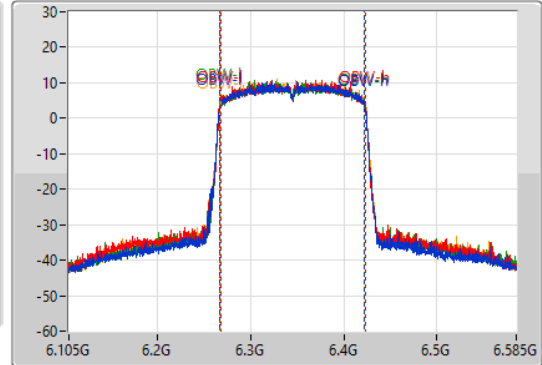

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 164.88M | 6.26292G | 6.4278G | 155.202M | 6.267279G | 6.422481G | Inf | 1 |
| 164.88M | 6.2622G | 6.42708G | 155.202M | 6.267519G | 6.422721G | Inf | 2 |
| 164.4M | 6.26268G | 6.42708G | 155.202M | 6.267279G | 6.422481G | Inf | 3 |
| 165.12M | 6.2622G | 6.42732G | 154.963M | 6.267519G | 6.422481G | Inf | 4 |


802.11ax HEW160_Nss1,(MCS0)_4TX

EBW


6505MHz Straddle 6.425-6.525GHz

14/02/2022

CF
6.505GHz
Span
480MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak


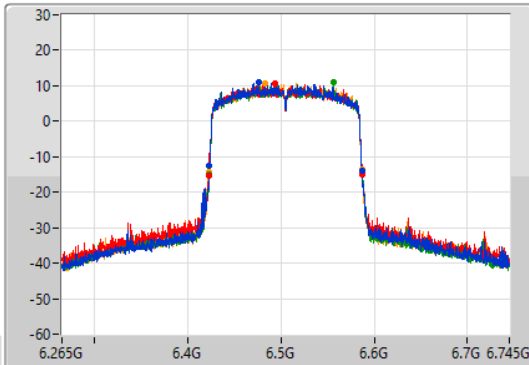



CF
6.505GHz
Span
480MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

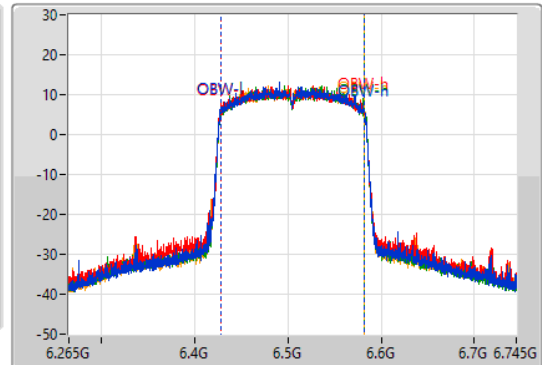

Port 1
Port 2
Port 3
Port 4

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 163.92M | 6.42292G | 6.58684G | 154.723M | 6.427519G | 6.582241G | Inf | 1 |
| 164.64M | 6.42268G | 6.58732G | 154.963M | 6.427519G | 6.582481G | Inf | 2 |
| 164.4M | 6.42292G | 6.58732G | 154.723M | 6.427759G | 6.582481G | Inf | 3 |
| 165.12M | 6.4222G | 6.58732G | 154.723M | 6.427759G | 6.582481G | Inf | 4 |

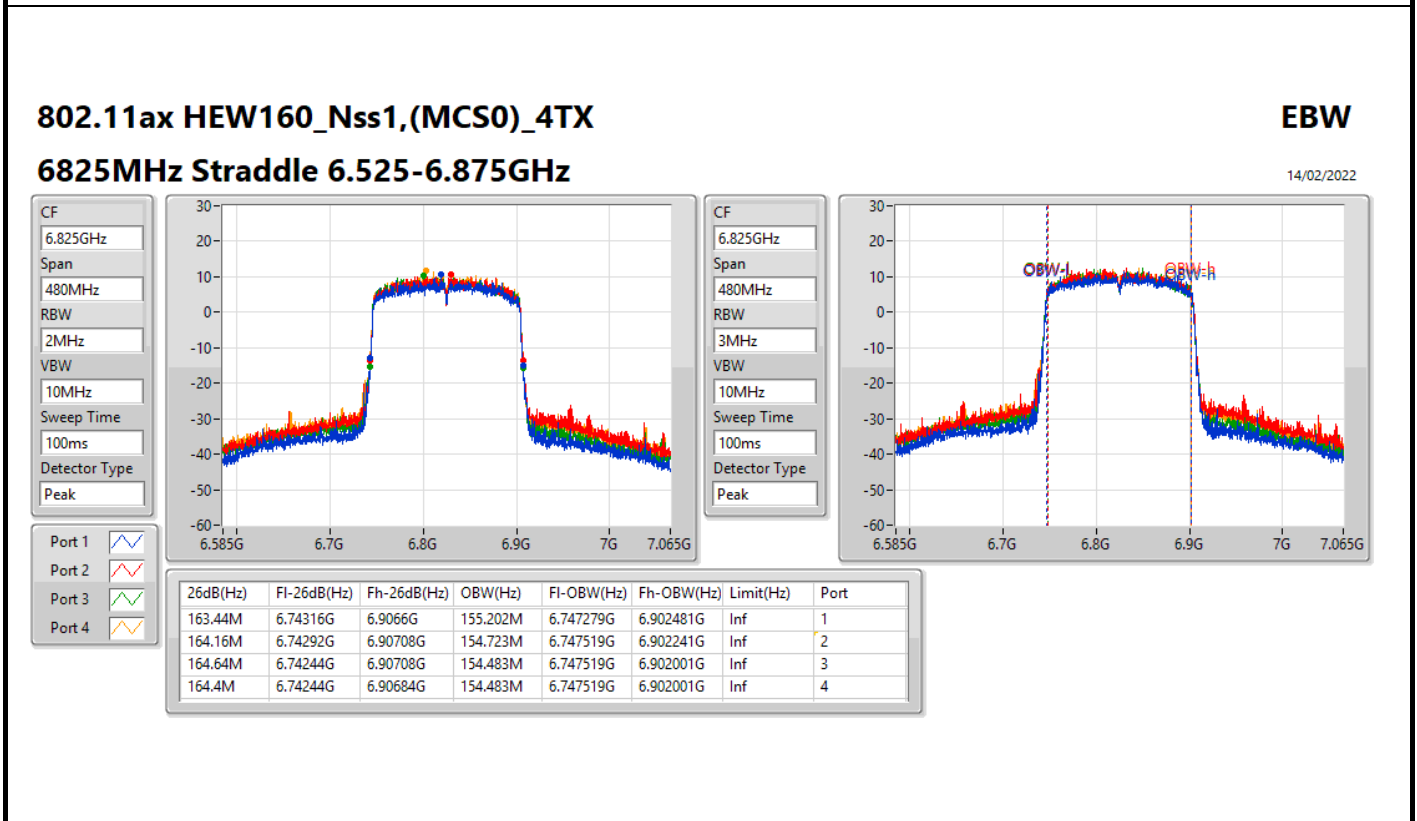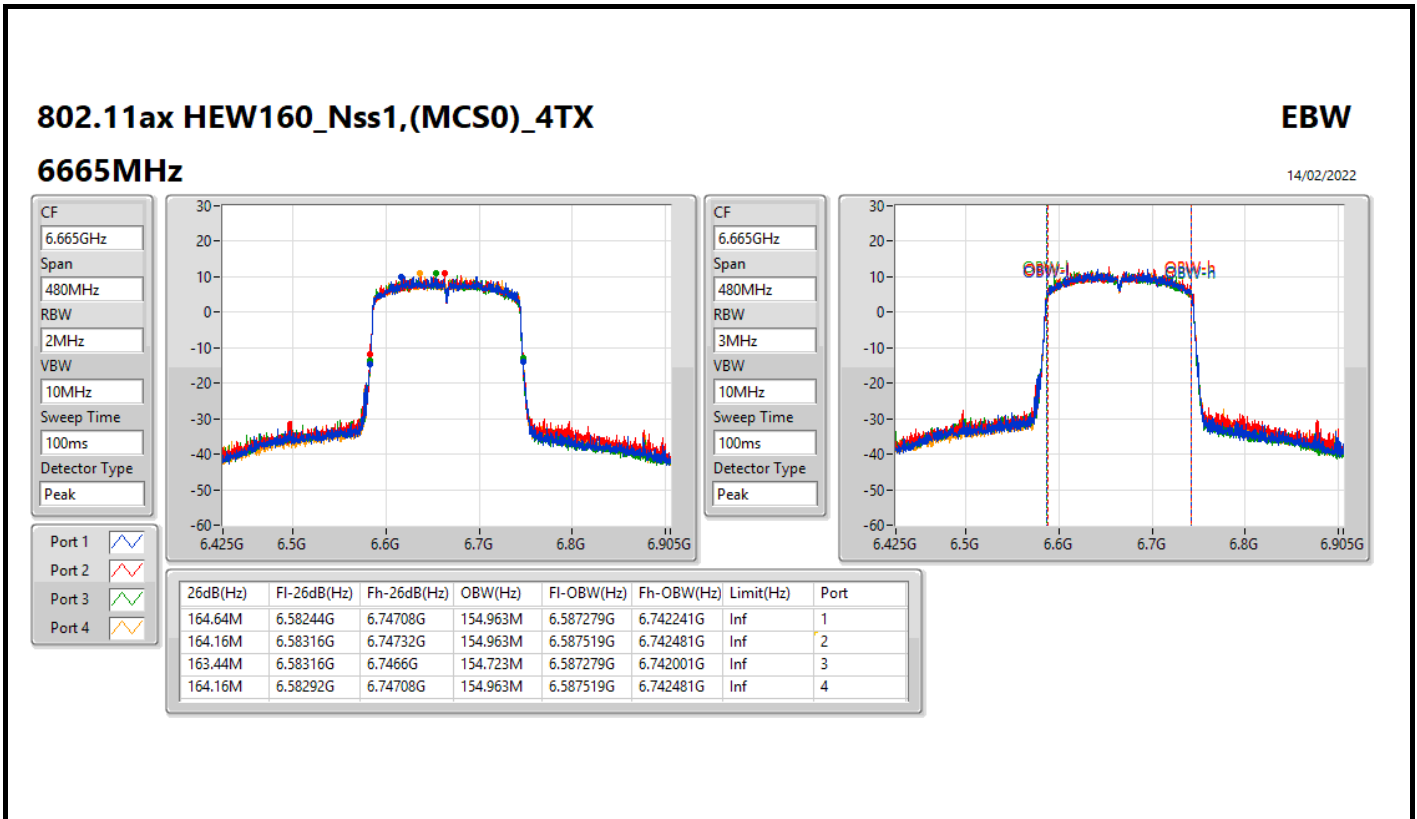

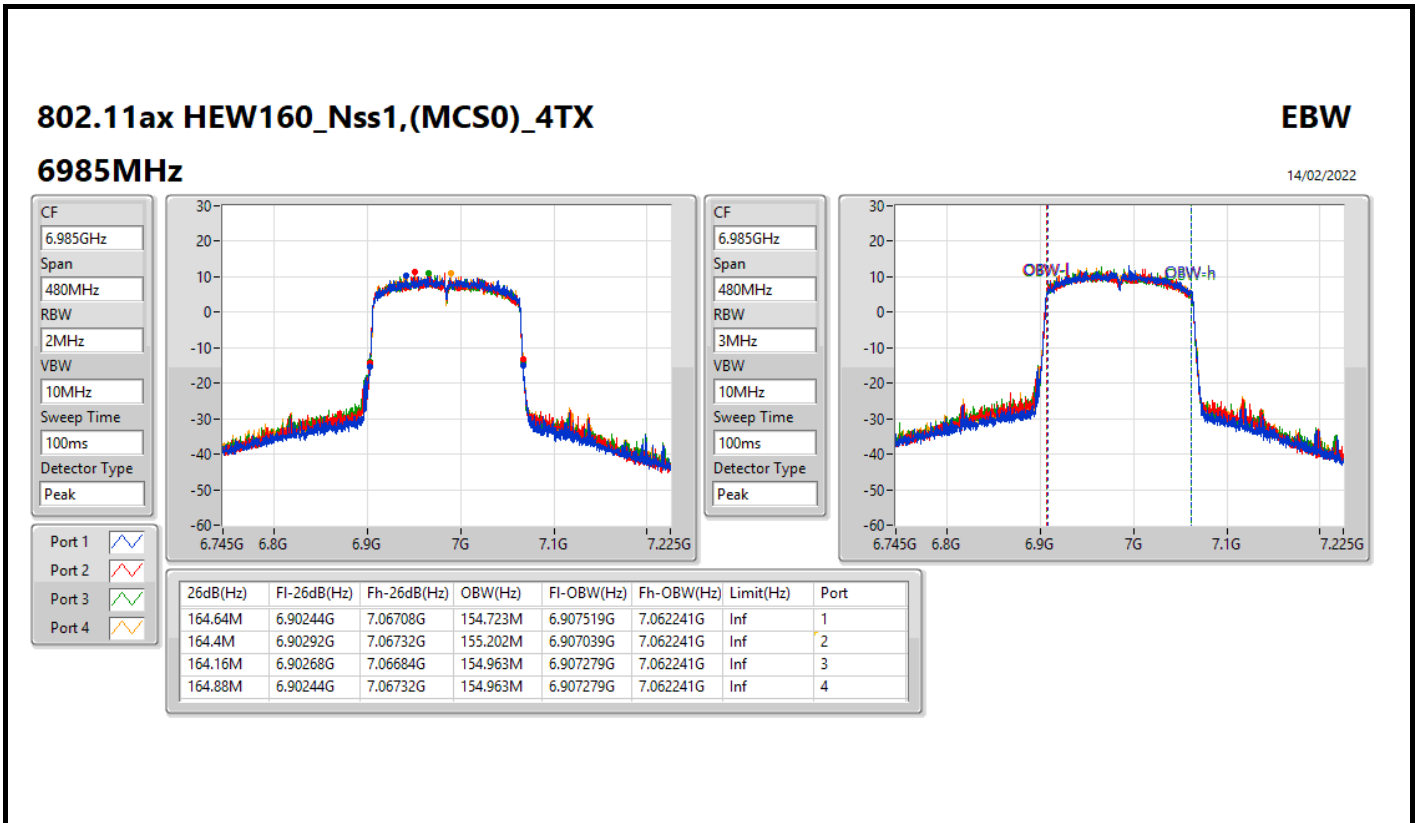



Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|--|------------------|-----------------|----------|------------------|-----------------|
| 5.925-6.425GHz | - | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX 6.425-6.525GHz | 21.99M | 19.13M | 19M1D1D | 21.33M | 19.1M |
| 802.11ax HEW20_Nss1,(MCS0)_1TX 6.525-6.875GHz | 22.11M | 19.13M | 19M1D1D | 21.45M | 19.1M |
| 802.11ax HEW20_Nss1,(MCS0)_1TX 6.875-7.125GHz | 22.11M | 19.13M | 19M1D1D | 21.735M | 19.115M |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 22.23M | 19.13M | 19M1D1D | 21.66M | 19.1M |

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|---------------------------------|--------|------------|------------------|-----------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - | - | - | - |
| 5955MHz | Pass | Inf | 21.99M | 19.13M |
| 6175MHz | Pass | Inf | 21.33M | 19.13M |
| 6415MHz | Pass | Inf | 21.81M | 19.1M |
| 6435MHz | Pass | Inf | 22.11M | 19.13M |
| 6475MHz | Pass | Inf | 21.45M | 19.13M |
| 6515MHz | Pass | Inf | 21.93M | 19.1M |
| 6535MHz | Pass | Inf | 22.11M | 19.13M |
| 6695MHz | Pass | Inf | 21.96M | 19.13M |
| 6855MHz | Pass | Inf | 21.99M | 19.13M |
| 6875MHz Straddle 6.525-6.875GHz | Pass | Inf | 21.735M | 19.115M |
| 6895MHz | Pass | Inf | 22.23M | 19.1M |
| 6995MHz | Pass | Inf | 21.66M | 19.13M |
| 7095MHz | Pass | Inf | 22.2M | 19.13M |
| 7115MHz | Pass | Inf | 21.87M | 19.1M |


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5955MHz

21/04/2022

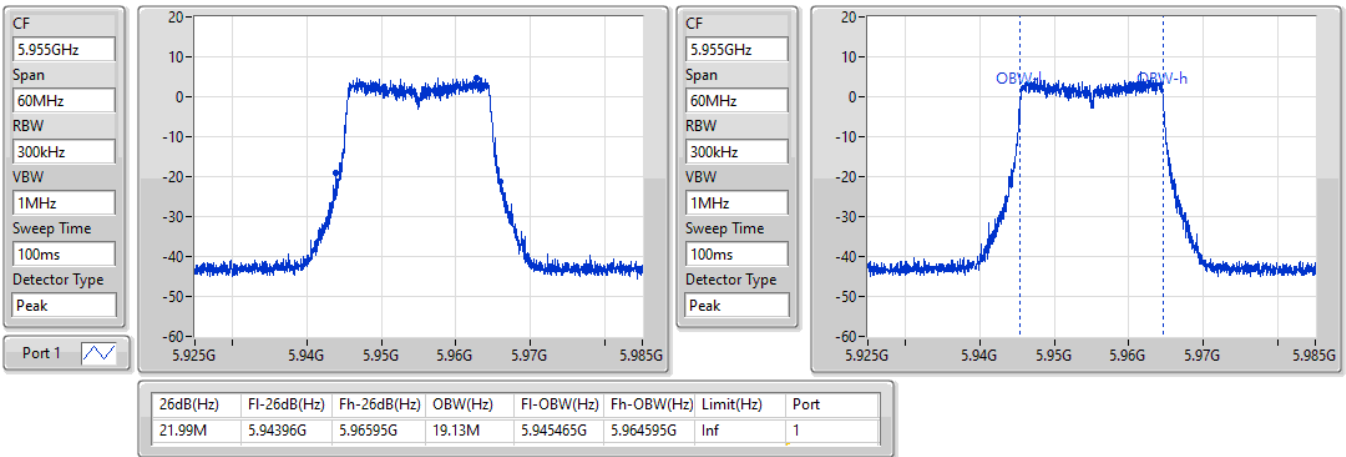


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6175MHz

21/04/2022

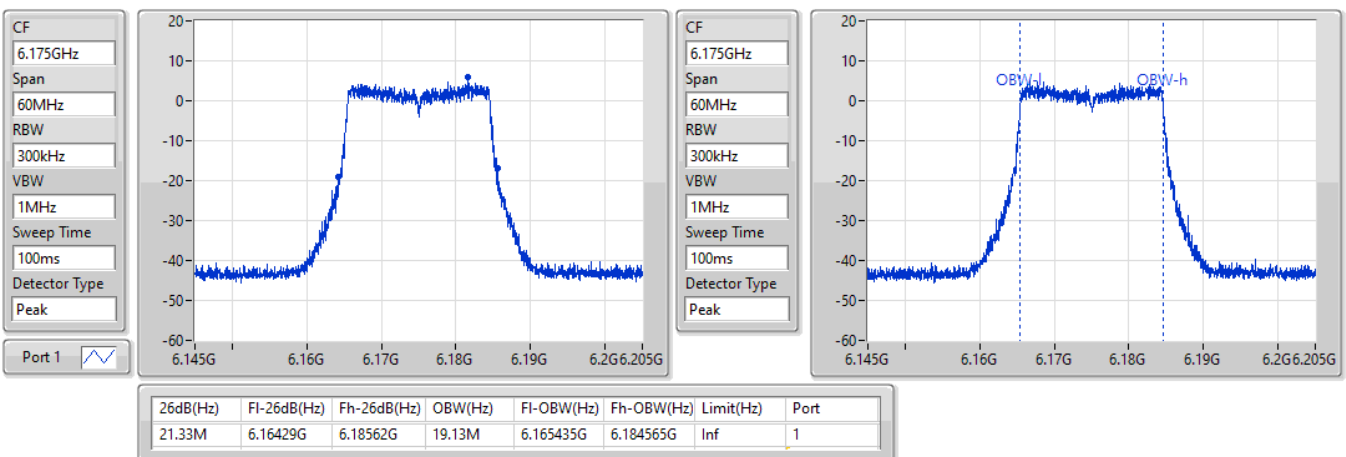


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6415MHz

21/04/2022

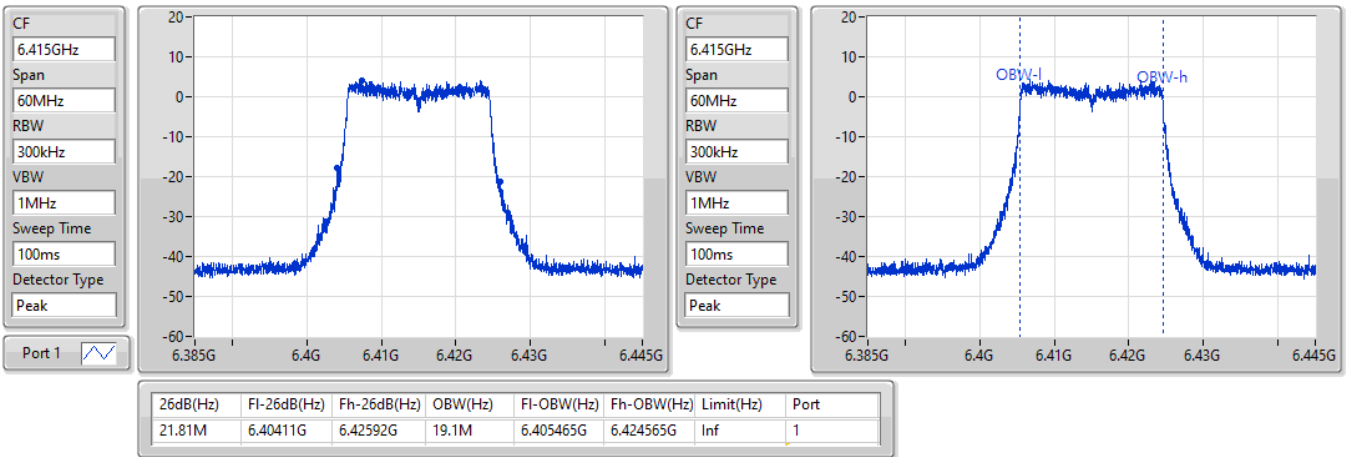


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6435MHz

21/04/2022

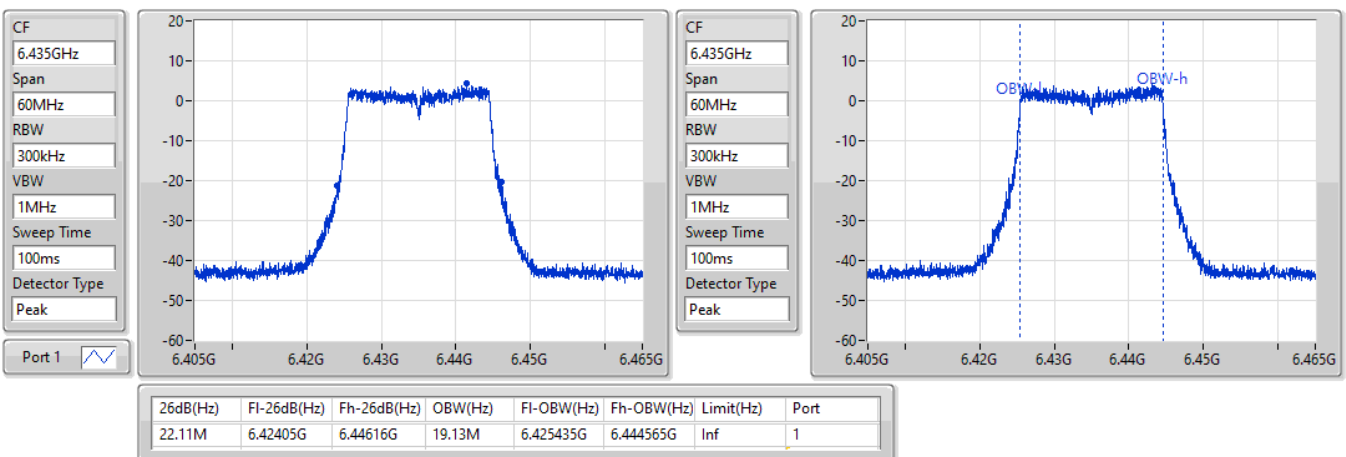


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW


6475MHz

21/04/2022

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

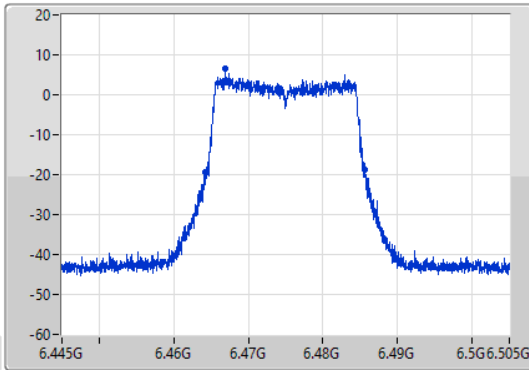

CF
6.475GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

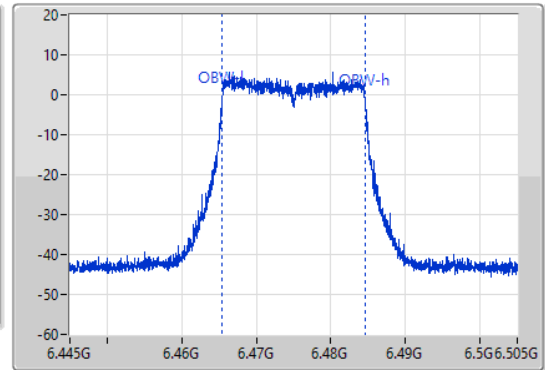

| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.45M | 6.46423G | 6.48568G | 19.13M | 6.465435G | 6.484565G | Inf | 1 |


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW


6515MHz

21/04/2022

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak
Port 1

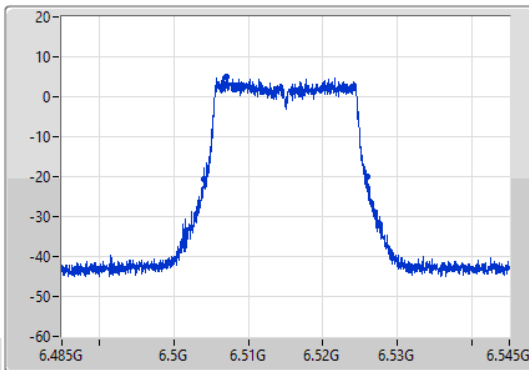

CF
6.515GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

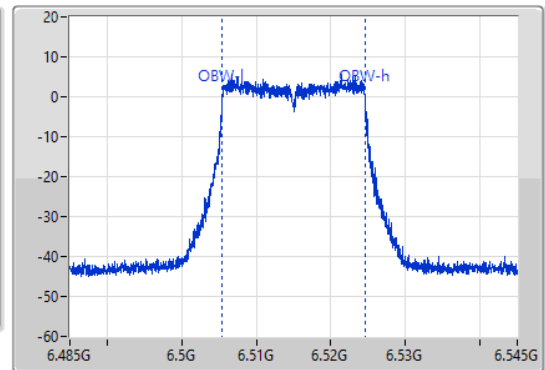


| 26dB(Hz) | Fl-26dB(Hz) | Fh-26dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 21.93M | 6.50402G | 6.52595G | 19.1M | 6.505465G | 6.524565G | Inf | 1 |

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

6535MHz

21/04/2022

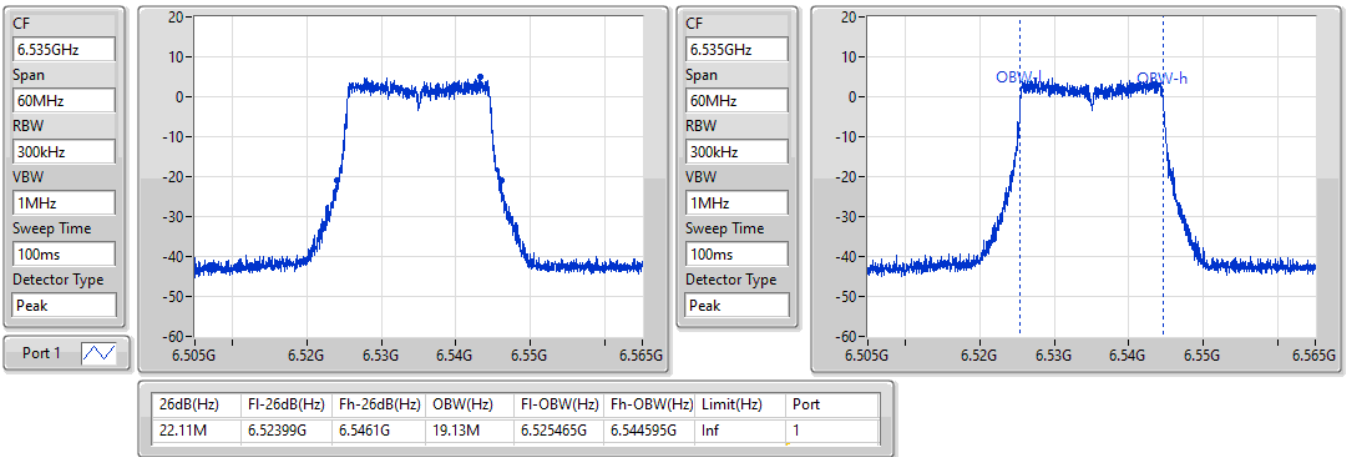




802.11ax HEW20_Nss1,(MCS0)_1TX



EBW

6695MHz

21/04/2022

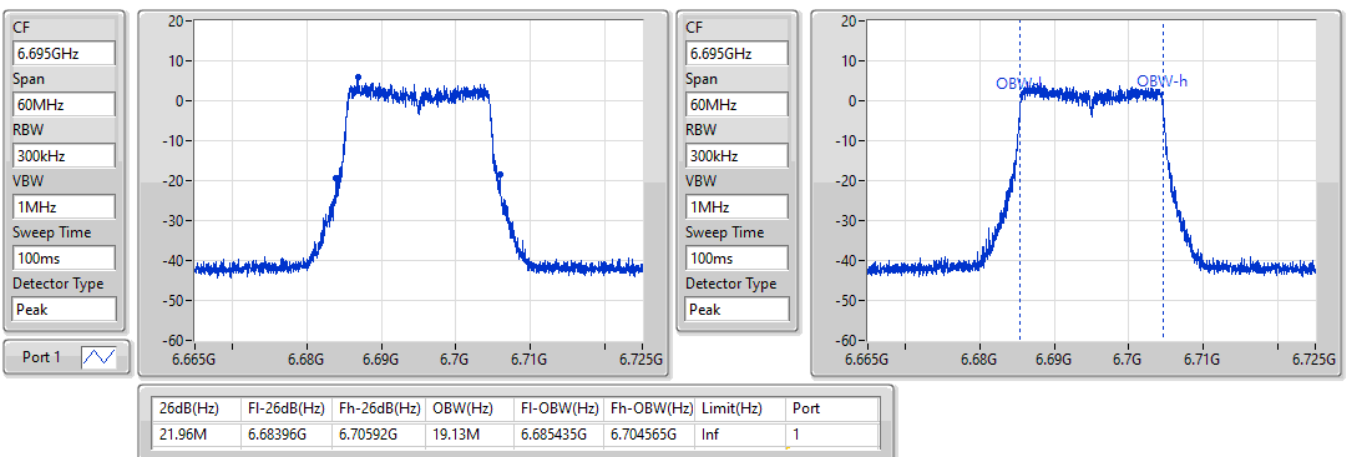

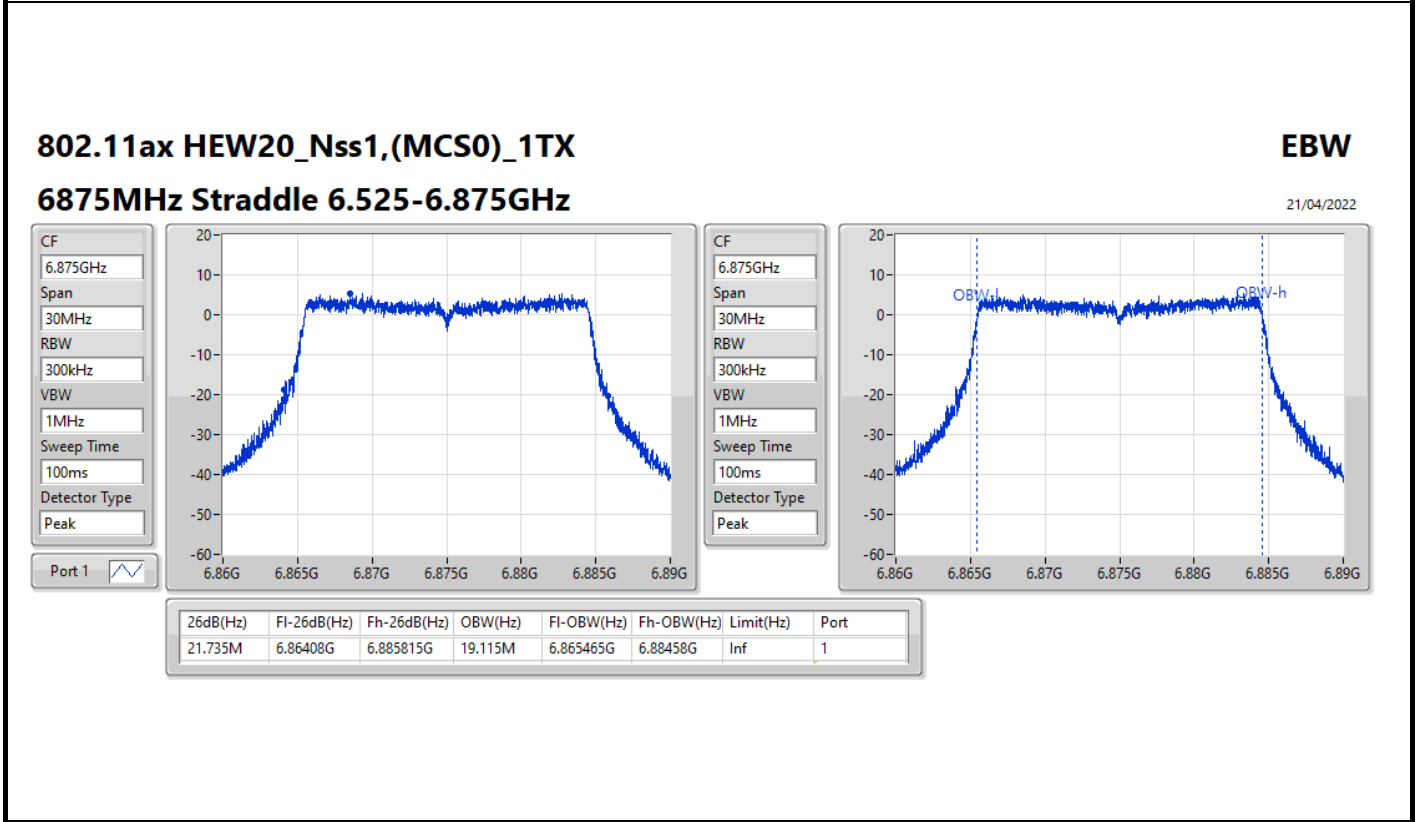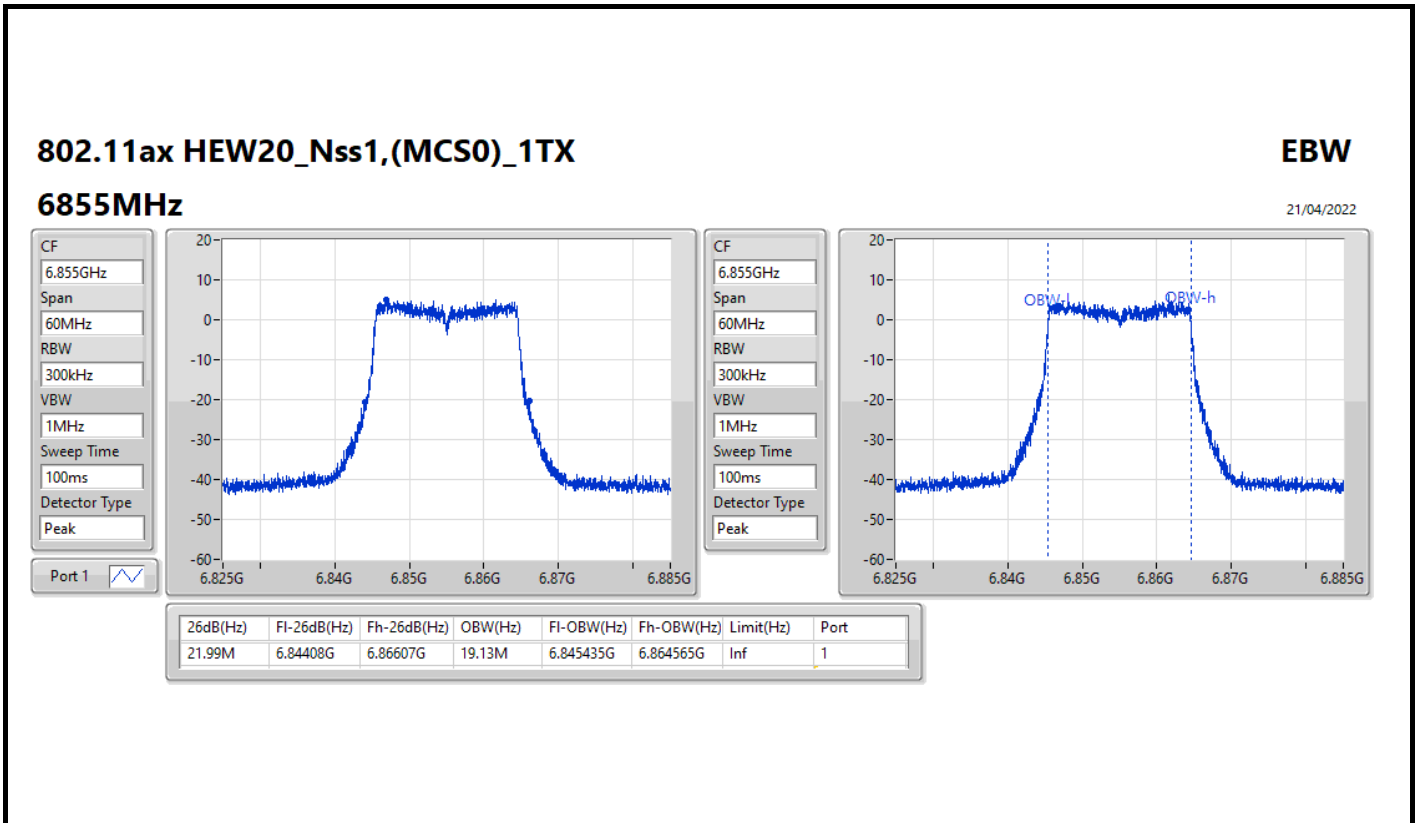

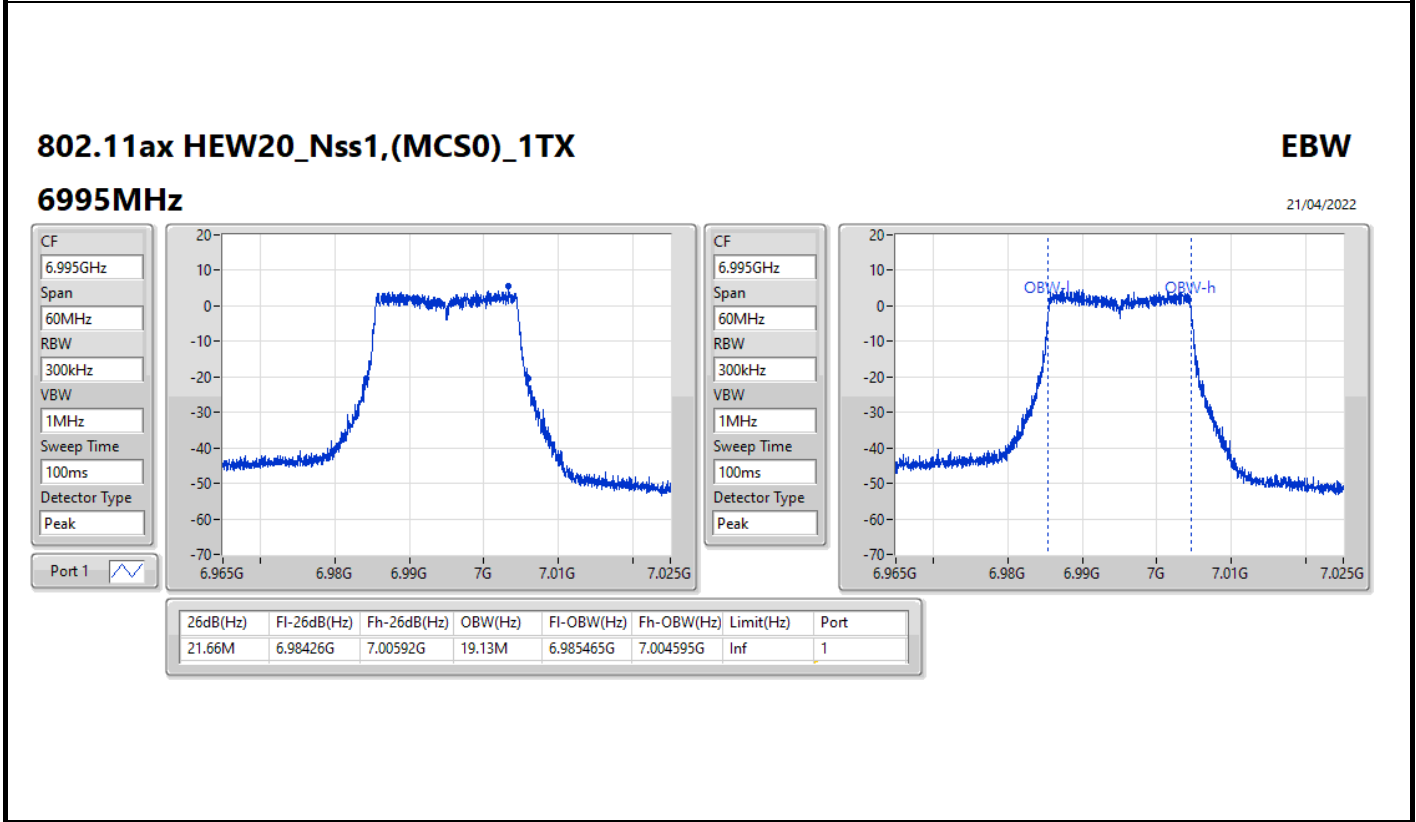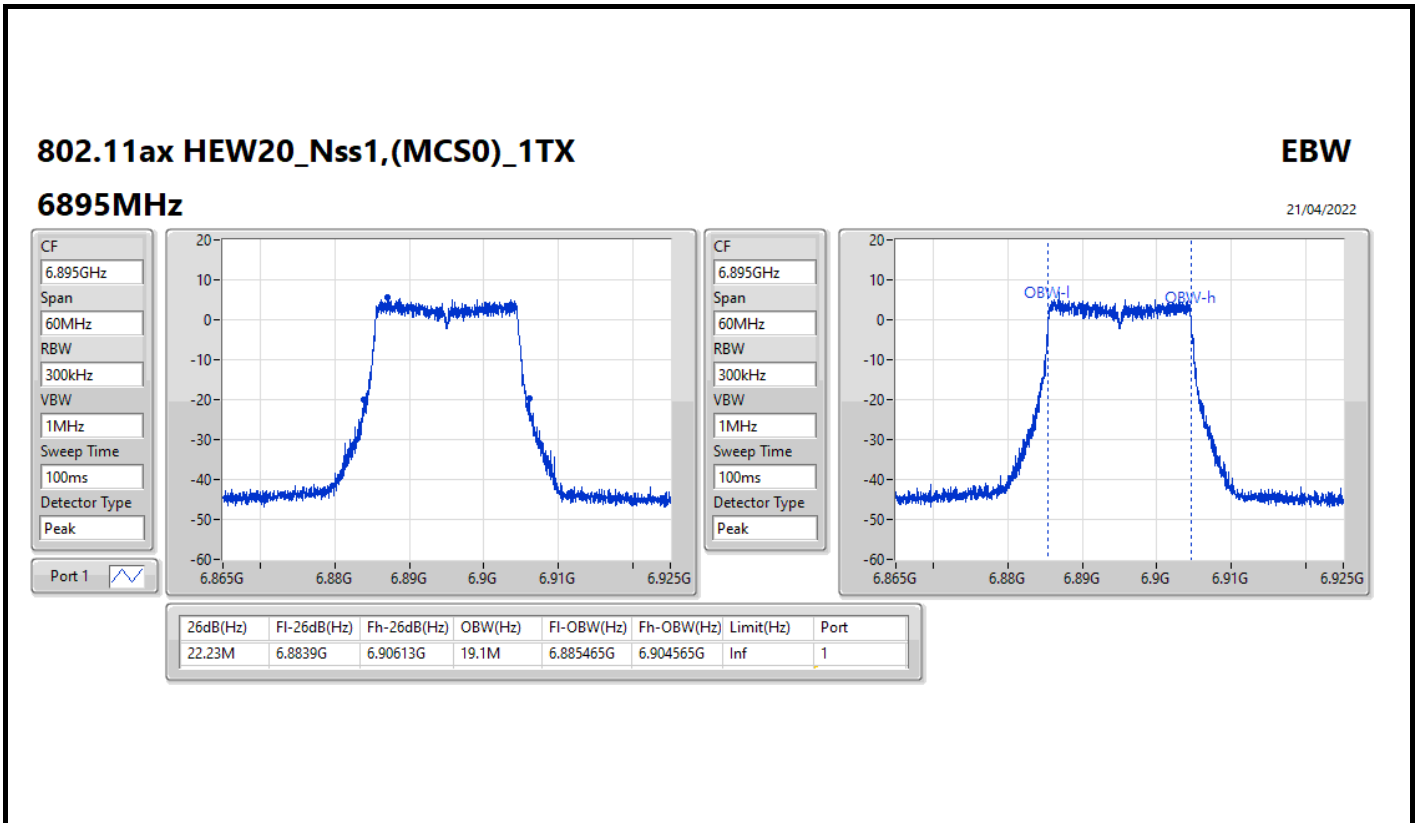


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

7095MHz

21/04/2022

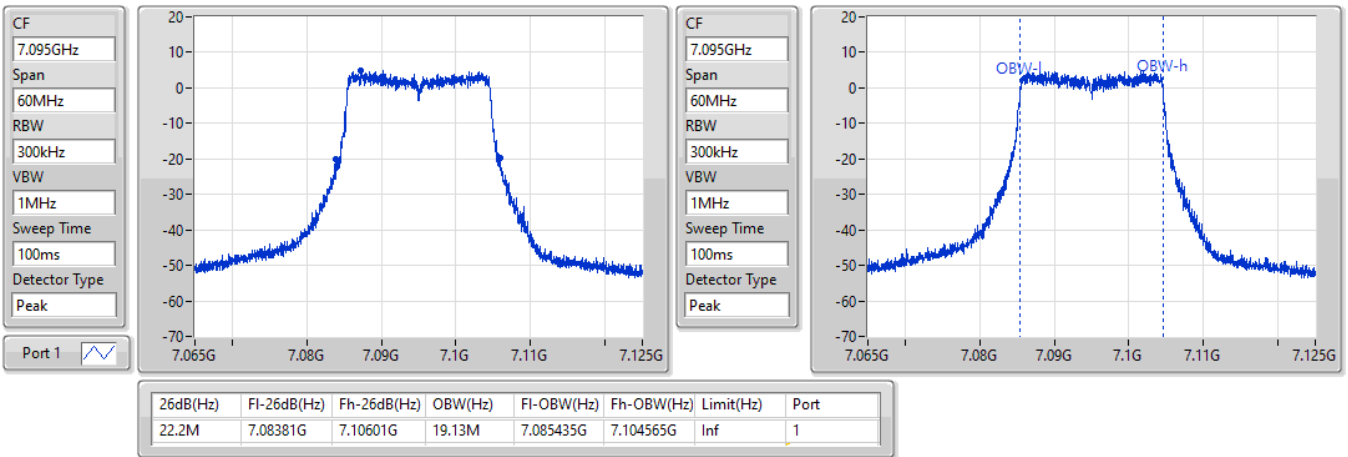


802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

7115MHz

21/04/2022

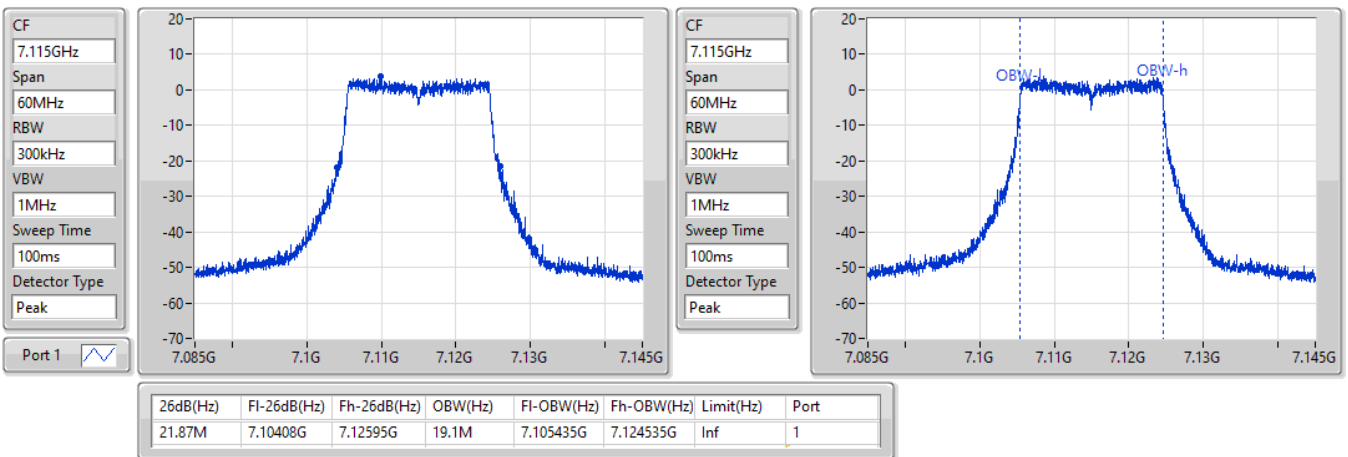



<Non-Beamforming Mode>

Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|---------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 14.61 | 0.02891 | 17.56 | 0.05702 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 16.50 | 0.04467 | 19.45 | 0.08810 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 16.54 | 0.04508 | 19.49 | 0.08892 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 16.52 | 0.04487 | 19.47 | 0.08851 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 15.78 | 0.03784 | 18.09 | 0.06442 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 16.92 | 0.04920 | 19.23 | 0.08375 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 16.89 | 0.04887 | 19.20 | 0.08318 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 16.79 | 0.04775 | 19.10 | 0.08128 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 16.57 | 0.04539 | 17.56 | 0.05702 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 16.90 | 0.04898 | 17.89 | 0.06152 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 16.64 | 0.04613 | 17.63 | 0.05794 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 16.87 | 0.04864 | 17.86 | 0.06109 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 16.64 | 0.04613 | 17.25 | 0.05309 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 16.92 | 0.04920 | 17.53 | 0.05662 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | 16.69 | 0.04667 | 17.30 | 0.05370 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | 16.88 | 0.04875 | 17.49 | 0.05610 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|---------------------------------|--------|----------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5955MHz | Pass | 2.95 | 14.61 | 14.61 | 17.56 | 30.00 |
| 6175MHz | Pass | 2.95 | 14.49 | 14.49 | 17.44 | 30.00 |
| 6415MHz | Pass | 2.95 | 14.46 | 14.46 | 17.41 | 30.00 |
| 6435MHz | Pass | 2.31 | 15.78 | 15.78 | 18.09 | 30.00 |
| 6475MHz | Pass | 2.31 | 15.60 | 15.60 | 17.91 | 30.00 |
| 6515MHz | Pass | 2.31 | 15.38 | 15.38 | 17.69 | 30.00 |
| 6535MHz | Pass | 0.99 | 16.57 | 16.57 | 17.56 | 30.00 |
| 6695MHz | Pass | 0.99 | 16.51 | 16.51 | 17.50 | 30.00 |
| 6855MHz | Pass | 0.99 | 16.51 | 16.51 | 17.50 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 0.99 | 16.18 | 16.18 | 17.17 | 30.00 |
| 6895MHz | Pass | 0.61 | 16.33 | 16.33 | 16.94 | 30.00 |
| 6995MHz | Pass | 0.61 | 16.64 | 16.64 | 17.25 | 30.00 |
| 7095MHz | Pass | 0.61 | 16.14 | 16.14 | 16.75 | 30.00 |
| 7115MHz | Pass | 0.61 | 12.43 | 12.43 | 13.04 | 30.00 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5965MHz | Pass | 2.95 | 16.29 | 16.29 | 19.24 | 30.00 |
| 6165MHz | Pass | 2.95 | 16.50 | 16.50 | 19.45 | 30.00 |
| 6405MHz | Pass | 2.95 | 16.49 | 16.49 | 19.44 | 30.00 |
| 6445MHz | Pass | 2.31 | 16.92 | 16.92 | 19.23 | 30.00 |
| 6485MHz | Pass | 2.31 | 16.79 | 16.79 | 19.10 | 30.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 2.31 | 16.51 | 16.51 | 18.82 | 30.00 |
| 6565MHz | Pass | 0.99 | 16.60 | 16.60 | 17.59 | 30.00 |
| 6685MHz | Pass | 0.99 | 16.61 | 16.61 | 17.60 | 30.00 |
| 6845MHz | Pass | 0.99 | 16.90 | 16.90 | 17.89 | 30.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 0.99 | 16.52 | 16.52 | 17.51 | 30.00 |
| 6925MHz | Pass | 0.61 | 16.43 | 16.43 | 17.04 | 30.00 |
| 7005MHz | Pass | 0.61 | 16.92 | 16.92 | 17.53 | 30.00 |
| 7085MHz | Pass | 0.61 | 16.67 | 16.67 | 17.28 | 30.00 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5985MHz | Pass | 2.95 | 16.37 | 16.37 | 19.32 | 30.00 |
| 6145MHz | Pass | 2.95 | 16.54 | 16.54 | 19.49 | 30.00 |
| 6385MHz | Pass | 2.95 | 16.42 | 16.42 | 19.37 | 30.00 |
| 6465MHz | Pass | 2.31 | 16.89 | 16.89 | 19.20 | 30.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 2.31 | 16.42 | 16.42 | 18.73 | 30.00 |
| 6625MHz | Pass | 0.99 | 16.38 | 16.38 | 17.37 | 30.00 |
| 6705MHz | Pass | 0.99 | 16.54 | 16.54 | 17.53 | 30.00 |
| 6785MHz | Pass | 0.99 | 16.62 | 16.62 | 17.61 | 30.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 0.99 | 16.64 | 16.64 | 17.63 | 30.00 |
| 6945MHz | Pass | 0.61 | 16.39 | 16.39 | 17.00 | 30.00 |
| 7025MHz | Pass | 0.61 | 16.69 | 16.69 | 17.30 | 30.00 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 6025MHz | Pass | 2.95 | 16.37 | 16.37 | 19.32 | 30.00 |
| 6185MHz | Pass | 2.95 | 16.40 | 16.40 | 19.35 | 30.00 |
| 6345MHz | Pass | 2.95 | 16.52 | 16.52 | 19.47 | 30.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 2.31 | 16.79 | 16.79 | 19.10 | 30.00 |
| 6665MHz | Pass | 0.99 | 16.40 | 16.40 | 17.39 | 30.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 0.99 | 16.87 | 16.87 | 17.86 | 30.00 |
| 6985MHz | Pass | 0.61 | 16.88 | 16.88 | 17.49 | 30.00 |

DG = Directional Gain; Port X = Port X output power



<Non-Beamforming Mode>

Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|---------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 12.53 | 0.01791 | 15.48 | 0.03532 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 15.44 | 0.03499 | 18.39 | 0.06902 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 18.59 | 0.07228 | 21.54 | 0.14256 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 19.34 | 0.08590 | 22.29 | 0.16943 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 13.55 | 0.02265 | 17.51 | 0.05636 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 16.56 | 0.04529 | 20.52 | 0.11272 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 19.67 | 0.09268 | 23.63 | 0.23067 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 19.59 | 0.09099 | 23.55 | 0.22646 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 13.39 | 0.02183 | 14.98 | 0.03148 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 16.97 | 0.04977 | 18.56 | 0.07178 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 19.48 | 0.08872 | 21.07 | 0.12794 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 19.57 | 0.09057 | 21.16 | 0.13062 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 14.37 | 0.02735 | 14.98 | 0.03148 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 18.33 | 0.06808 | 18.94 | 0.07834 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 19.58 | 0.09078 | 20.19 | 0.10447 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | 19.67 | 0.09268 | 20.28 | 0.10666 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Port 2 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|---------------------------------|--------|----------|--------------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5955MHz | Pass | 2.95 | 9.57 | 9.46 | 12.53 | 15.48 | 30.00 |
| 6175MHz | Pass | 2.95 | 9.55 | 9.48 | 12.53 | 15.48 | 30.00 |
| 6415MHz | Pass | 2.95 | 9.52 | 9.43 | 12.49 | 15.44 | 30.00 |
| 6435MHz | Pass | 3.96 | 10.42 | 10.56 | 13.50 | 17.46 | 30.00 |
| 6475MHz | Pass | 3.96 | 10.63 | 10.44 | 13.55 | 17.51 | 30.00 |
| 6515MHz | Pass | 3.96 | 10.36 | 10.21 | 13.30 | 17.26 | 30.00 |
| 6535MHz | Pass | 1.59 | 10.58 | 10.16 | 13.39 | 14.98 | 30.00 |
| 6695MHz | Pass | 1.59 | 10.23 | 10.18 | 13.22 | 14.81 | 30.00 |
| 6855MHz | Pass | 1.59 | 10.21 | 10.14 | 13.19 | 14.78 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 10.15 | 10.22 | 13.20 | 14.79 | 30.00 |
| 6895MHz | Pass | 0.61 | 11.29 | 11.42 | 14.37 | 14.98 | 30.00 |
| 6995MHz | Pass | 0.61 | 11.13 | 11.28 | 14.22 | 14.83 | 30.00 |
| 7095MHz | Pass | 0.61 | 11.05 | 11.13 | 14.10 | 14.71 | 30.00 |
| 7115MHz | Pass | 0.61 | 8.45 | 8.40 | 11.44 | 12.05 | 30.00 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5965MHz | Pass | 2.95 | 12.09 | 12.58 | 15.35 | 18.30 | 30.00 |
| 6165MHz | Pass | 2.95 | 12.24 | 12.62 | 15.44 | 18.39 | 30.00 |
| 6405MHz | Pass | 2.95 | 12.41 | 12.18 | 15.31 | 18.26 | 30.00 |
| 6445MHz | Pass | 3.96 | 13.56 | 13.53 | 16.56 | 20.52 | 30.00 |
| 6485MHz | Pass | 3.96 | 13.46 | 13.40 | 16.44 | 20.40 | 30.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 13.12 | 13.34 | 16.24 | 20.20 | 30.00 |
| 6565MHz | Pass | 1.59 | 14.03 | 13.53 | 16.80 | 18.39 | 30.00 |
| 6685MHz | Pass | 1.59 | 14.19 | 13.72 | 16.97 | 18.56 | 30.00 |
| 6845MHz | Pass | 1.59 | 13.86 | 13.63 | 16.76 | 18.35 | 30.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 13.97 | 13.85 | 16.92 | 18.51 | 30.00 |
| 6925MHz | Pass | 0.61 | 15.54 | 15.08 | 18.33 | 18.94 | 30.00 |
| 7005MHz | Pass | 0.61 | 14.95 | 14.74 | 17.86 | 18.47 | 30.00 |
| 7085MHz | Pass | 0.61 | 15.10 | 15.29 | 18.21 | 18.82 | 30.00 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5985MHz | Pass | 2.95 | 15.16 | 14.98 | 18.08 | 21.03 | 30.00 |
| 6145MHz | Pass | 2.95 | 15.35 | 15.79 | 18.59 | 21.54 | 30.00 |
| 6385MHz | Pass | 2.95 | 15.56 | 15.33 | 18.46 | 21.41 | 30.00 |
| 6465MHz | Pass | 3.96 | 16.65 | 16.67 | 19.67 | 23.63 | 30.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 16.19 | 16.27 | 19.24 | 23.20 | 30.00 |
| 6625MHz | Pass | 1.59 | 16.15 | 16.35 | 19.26 | 20.85 | 30.00 |
| 6705MHz | Pass | 1.59 | 16.36 | 16.24 | 19.31 | 20.90 | 30.00 |
| 6785MHz | Pass | 1.59 | 16.49 | 16.44 | 19.48 | 21.07 | 30.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 16.39 | 16.43 | 19.42 | 21.01 | 30.00 |
| 6945MHz | Pass | 0.61 | 16.33 | 16.16 | 19.26 | 19.87 | 30.00 |
| 7025MHz | Pass | 0.61 | 16.61 | 16.53 | 19.58 | 20.19 | 30.00 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 6025MHz | Pass | 2.95 | 16.25 | 16.34 | 19.31 | 22.26 | 30.00 |
| 6185MHz | Pass | 2.95 | 16.38 | 16.26 | 19.33 | 22.28 | 30.00 |
| 6345MHz | Pass | 2.95 | 16.36 | 16.29 | 19.34 | 22.29 | 30.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 16.59 | 16.56 | 19.59 | 23.55 | 30.00 |
| 6665MHz | Pass | 1.59 | 16.25 | 16.37 | 19.32 | 20.91 | 30.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 16.65 | 16.46 | 19.57 | 21.16 | 30.00 |
| 6985MHz | Pass | 0.61 | 16.87 | 16.43 | 19.67 | 20.28 | 30.00 |

DG = Directional Gain; Port X = Port X output power



<Beamforming Mode>

Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|------------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | 12.53 | 0.01791 | 18.49 | 0.07063 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | 15.44 | 0.03499 | 21.40 | 0.13804 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | 18.59 | 0.07228 | 24.55 | 0.28510 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | 19.34 | 0.08590 | 25.30 | 0.33884 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | 13.55 | 0.02265 | 20.52 | 0.11272 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | 16.56 | 0.04529 | 23.53 | 0.22542 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | 19.67 | 0.09268 | 26.64 | 0.46132 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | 19.59 | 0.09099 | 26.56 | 0.45290 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | 13.39 | 0.02183 | 17.99 | 0.06295 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | 16.97 | 0.04977 | 21.57 | 0.14355 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | 19.48 | 0.08872 | 24.08 | 0.25586 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | 19.57 | 0.09057 | 24.17 | 0.26122 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | 14.37 | 0.02735 | 17.99 | 0.06295 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | 18.33 | 0.06808 | 21.95 | 0.15668 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | 19.58 | 0.09078 | 23.20 | 0.20893 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | 19.67 | 0.09268 | 23.29 | 0.21330 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Port 2 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|------------------------------------|--------|----------|--------------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5955MHz | Pass | 5.96 | 9.57 | 9.46 | 12.53 | 18.49 | 30.00 |
| 6175MHz | Pass | 5.96 | 9.55 | 9.48 | 12.53 | 18.49 | 30.00 |
| 6415MHz | Pass | 5.96 | 9.52 | 9.43 | 12.49 | 18.45 | 30.00 |
| 6435MHz | Pass | 6.97 | 10.42 | 10.56 | 13.50 | 20.47 | 30.00 |
| 6475MHz | Pass | 6.97 | 10.63 | 10.44 | 13.55 | 20.52 | 30.00 |
| 6515MHz | Pass | 6.97 | 10.36 | 10.21 | 13.30 | 20.27 | 30.00 |
| 6535MHz | Pass | 4.60 | 10.58 | 10.16 | 13.39 | 17.99 | 30.00 |
| 6695MHz | Pass | 4.60 | 10.23 | 10.18 | 13.22 | 17.82 | 30.00 |
| 6855MHz | Pass | 4.60 | 10.21 | 10.14 | 13.19 | 17.79 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 4.60 | 10.15 | 10.22 | 13.20 | 17.80 | 30.00 |
| 6895MHz | Pass | 3.62 | 11.29 | 11.42 | 14.37 | 17.99 | 30.00 |
| 6995MHz | Pass | 3.62 | 11.13 | 11.28 | 14.22 | 17.84 | 30.00 |
| 7095MHz | Pass | 3.62 | 11.05 | 11.13 | 14.10 | 17.72 | 30.00 |
| 7115MHz | Pass | 3.08 | 7.20 | 7.27 | 10.25 | 13.33 | 30.00 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5965MHz | Pass | 5.96 | 12.09 | 12.58 | 15.35 | 21.31 | 30.00 |
| 6165MHz | Pass | 5.96 | 12.24 | 12.62 | 15.44 | 21.40 | 30.00 |
| 6405MHz | Pass | 5.96 | 12.41 | 12.18 | 15.31 | 21.27 | 30.00 |
| 6445MHz | Pass | 6.97 | 13.56 | 13.53 | 16.56 | 23.53 | 30.00 |
| 6485MHz | Pass | 6.97 | 13.46 | 13.4 | 16.44 | 23.41 | 30.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 6.97 | 13.12 | 13.34 | 16.24 | 23.21 | 30.00 |
| 6565MHz | Pass | 4.60 | 14.03 | 13.53 | 16.80 | 21.40 | 30.00 |
| 6685MHz | Pass | 4.60 | 14.19 | 13.72 | 16.97 | 21.57 | 30.00 |
| 6845MHz | Pass | 4.60 | 13.86 | 13.63 | 16.76 | 21.36 | 30.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 4.60 | 13.97 | 13.85 | 16.92 | 21.52 | 30.00 |
| 6925MHz | Pass | 3.62 | 15.54 | 15.08 | 18.33 | 21.95 | 30.00 |
| 7005MHz | Pass | 3.62 | 14.95 | 14.74 | 17.86 | 21.48 | 30.00 |
| 7085MHz | Pass | 3.62 | 15.1 | 15.29 | 18.21 | 21.83 | 30.00 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 5985MHz | Pass | 5.96 | 15.16 | 14.98 | 18.08 | 24.04 | 30.00 |
| 6145MHz | Pass | 5.96 | 15.35 | 15.79 | 18.59 | 24.55 | 30.00 |
| 6385MHz | Pass | 5.96 | 15.56 | 15.33 | 18.46 | 24.42 | 30.00 |
| 6465MHz | Pass | 6.97 | 16.65 | 16.67 | 19.67 | 26.64 | 30.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 6.97 | 16.19 | 16.27 | 19.24 | 26.21 | 30.00 |
| 6625MHz | Pass | 4.60 | 16.15 | 16.35 | 19.26 | 23.86 | 30.00 |
| 6705MHz | Pass | 4.60 | 16.36 | 16.24 | 19.31 | 23.91 | 30.00 |
| 6785MHz | Pass | 4.60 | 16.49 | 16.44 | 19.48 | 24.08 | 30.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 4.60 | 16.39 | 16.43 | 19.42 | 24.02 | 30.00 |
| 6945MHz | Pass | 3.62 | 16.33 | 16.16 | 19.26 | 22.88 | 30.00 |
| 7025MHz | Pass | 3.62 | 16.61 | 16.53 | 19.58 | 23.20 | 30.00 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - |
| 6025MHz | Pass | 5.96 | 16.25 | 16.34 | 19.31 | 25.27 | 30.00 |
| 6185MHz | Pass | 5.96 | 16.38 | 16.26 | 19.33 | 25.29 | 30.00 |
| 6345MHz | Pass | 5.96 | 16.36 | 16.29 | 19.34 | 25.30 | 30.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 6.97 | 16.59 | 16.56 | 19.59 | 26.56 | 30.00 |
| 6665MHz | Pass | 4.60 | 16.25 | 16.37 | 19.32 | 23.92 | 30.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 4.60 | 16.65 | 16.46 | 19.57 | 24.17 | 30.00 |
| 6985MHz | Pass | 3.62 | 16.87 | 16.43 | 19.67 | 23.29 | 30.00 |

DG = Directional Gain; Port X = Port X output power



<Non-Beamforming Mode>

Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|---------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 10.45 | 0.01109 | 13.40 | 0.02188 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 13.85 | 0.02427 | 16.80 | 0.04786 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 16.77 | 0.04753 | 19.72 | 0.09376 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 19.59 | 0.09099 | 22.54 | 0.17947 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 11.87 | 0.01538 | 15.83 | 0.03828 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 15.38 | 0.03451 | 19.34 | 0.08590 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 18.55 | 0.07161 | 22.51 | 0.17824 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 20.83 | 0.12106 | 24.79 | 0.30130 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 12.25 | 0.01679 | 13.84 | 0.02421 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 15.12 | 0.03251 | 16.71 | 0.04688 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 18.27 | 0.06714 | 19.86 | 0.09683 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 21.13 | 0.12972 | 22.72 | 0.18707 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_4TX | 14.05 | 0.02541 | 14.92 | 0.03105 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | 17.60 | 0.05754 | 18.47 | 0.07031 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | 20.66 | 0.11641 | 21.53 | 0.14223 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | 22.78 | 0.18967 | 23.65 | 0.23174 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Port 2 (dBm) | Port 3 (dBm) | Port 4 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|---------------------------------|--------|----------|--------------|--------------|--------------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | 2.95 | 3.77 | 4.75 | 3.90 | 4.36 | 10.23 | 13.18 | 30.00 |
| 6175MHz | Pass | 2.95 | 3.99 | 4.70 | 4.22 | 4.51 | 10.38 | 13.33 | 30.00 |
| 6415MHz | Pass | 2.95 | 4.54 | 4.31 | 4.33 | 4.55 | 10.45 | 13.40 | 30.00 |
| 6435MHz | Pass | 3.96 | 6.09 | 5.60 | 5.73 | 5.76 | 11.82 | 15.78 | 30.00 |
| 6475MHz | Pass | 3.96 | 6.04 | 5.73 | 5.65 | 5.81 | 11.83 | 15.79 | 30.00 |
| 6515MHz | Pass | 3.96 | 6.27 | 6.08 | 5.55 | 5.45 | 11.87 | 15.83 | 30.00 |
| 6535MHz | Pass | 1.59 | 6.50 | 6.07 | 6.19 | 5.88 | 12.19 | 13.78 | 30.00 |
| 6695MHz | Pass | 1.59 | 6.17 | 5.93 | 6.53 | 6.07 | 12.20 | 13.79 | 30.00 |
| 6855MHz | Pass | 1.59 | 6.34 | 5.85 | 6.41 | 6.04 | 12.19 | 13.78 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 6.45 | 6.28 | 6.07 | 6.12 | 12.25 | 13.84 | 30.00 |
| 6895MHz | Pass | 0.87 | 7.48 | 7.63 | 7.86 | 7.34 | 13.60 | 14.47 | 30.00 |
| 6995MHz | Pass | 0.87 | 7.89 | 7.57 | 7.44 | 7.55 | 13.64 | 14.51 | 30.00 |
| 7095MHz | Pass | 0.87 | 7.99 | 8.10 | 8.09 | 7.94 | 14.05 | 14.92 | 30.00 |
| 7115MHz | Pass | 0.87 | 7.17 | 6.85 | 7.18 | 7.33 | 13.16 | 14.03 | 30.00 |
| 802.11ax HEW40_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | 2.95 | 6.94 | 7.09 | 7.49 | 7.64 | 13.32 | 16.27 | 30.00 |
| 6165MHz | Pass | 2.95 | 7.29 | 7.59 | 7.26 | 7.20 | 13.36 | 16.31 | 30.00 |
| 6405MHz | Pass | 2.95 | 7.93 | 7.79 | 7.96 | 7.63 | 13.85 | 16.80 | 30.00 |
| 6445MHz | Pass | 3.96 | 8.90 | 9.01 | 8.96 | 8.87 | 14.96 | 18.92 | 30.00 |
| 6485MHz | Pass | 3.96 | 9.27 | 9.44 | 9.37 | 9.36 | 15.38 | 19.34 | 30.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 9.07 | 9.31 | 9.20 | 9.08 | 15.19 | 19.15 | 30.00 |
| 6565MHz | Pass | 1.59 | 8.68 | 8.95 | 8.74 | 8.89 | 14.84 | 16.43 | 30.00 |
| 6685MHz | Pass | 1.59 | 9.04 | 9.15 | 9.02 | 9.20 | 15.12 | 16.71 | 30.00 |
| 6845MHz | Pass | 1.59 | 9.12 | 8.94 | 8.98 | 9.06 | 15.05 | 16.64 | 30.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 8.97 | 8.89 | 9.02 | 8.86 | 14.96 | 16.55 | 30.00 |
| 6925MHz | Pass | 0.87 | 11.52 | 11.14 | 10.91 | 10.94 | 17.16 | 18.03 | 30.00 |
| 7005MHz | Pass | 0.87 | 11.89 | 11.23 | 11.71 | 11.46 | 17.60 | 18.47 | 30.00 |
| 7085MHz | Pass | 0.87 | 11.18 | 11.34 | 11.29 | 11.43 | 17.33 | 18.20 | 30.00 |
| 802.11ax HEW80_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | 2.95 | 10.05 | 10.84 | 11.11 | 10.16 | 16.58 | 19.53 | 30.00 |
| 6145MHz | Pass | 2.95 | 11.07 | 10.88 | 10.67 | 10.36 | 16.77 | 19.72 | 30.00 |
| 6385MHz | Pass | 2.95 | 10.48 | 10.81 | 10.73 | 10.67 | 16.69 | 19.64 | 30.00 |
| 6465MHz | Pass | 3.96 | 12.37 | 12.83 | 12.41 | 12.51 | 18.55 | 22.51 | 30.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 11.92 | 12.37 | 12.03 | 12.08 | 18.12 | 22.08 | 30.00 |
| 6625MHz | Pass | 1.59 | 12.04 | 12.25 | 12.23 | 12.36 | 18.24 | 19.83 | 30.00 |
| 6705MHz | Pass | 1.59 | 12.10 | 12.36 | 12.16 | 12.37 | 18.27 | 19.86 | 30.00 |
| 6785MHz | Pass | 1.59 | 12.29 | 12.11 | 12.01 | 12.24 | 18.18 | 19.77 | 30.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 12.17 | 12.04 | 12.12 | 12.09 | 18.13 | 19.72 | 30.00 |
| 6945MHz | Pass | 0.87 | 14.54 | 14.37 | 14.37 | 14.32 | 20.42 | 21.29 | 30.00 |
| 7025MHz | Pass | 0.87 | 14.82 | 14.57 | 14.61 | 14.55 | 20.66 | 21.53 | 30.00 |
| 802.11ax HEW160_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | 2.95 | 12.87 | 13.32 | 13.94 | 13.19 | 19.37 | 22.32 | 30.00 |
| 6185MHz | Pass | 2.95 | 13.45 | 13.55 | 13.86 | 13.06 | 19.51 | 22.46 | 30.00 |
| 6345MHz | Pass | 2.95 | 13.37 | 13.83 | 13.91 | 13.11 | 19.59 | 22.54 | 30.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 3.96 | 14.71 | 14.93 | 14.78 | 14.82 | 20.83 | 24.79 | 30.00 |
| 6665MHz | Pass | 1.59 | 14.87 | 15.31 | 15.01 | 15.24 | 21.13 | 22.72 | 30.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 1.59 | 14.99 | 14.76 | 14.96 | 14.92 | 20.93 | 22.52 | 30.00 |
| 6985MHz | Pass | 0.87 | 16.78 | 16.70 | 16.62 | 16.92 | 22.78 | 23.65 | 30.00 |

DG = Directional Gain; Port X = Port X output power



<Beamforming Mode>

Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|------------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 10.45 | 0.01109 | 17.90 | 0.06166 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 13.85 | 0.02427 | 21.30 | 0.13490 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 16.77 | 0.04753 | 24.22 | 0.26424 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | 19.59 | 0.09099 | 27.04 | 0.50582 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 11.87 | 0.01538 | 17.90 | 0.06166 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 15.38 | 0.03451 | 21.41 | 0.13836 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 18.55 | 0.07161 | 24.58 | 0.28708 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | 20.83 | 0.12106 | 26.86 | 0.48529 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 12.25 | 0.01679 | 18.30 | 0.06761 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 15.12 | 0.03251 | 21.17 | 0.13092 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 18.27 | 0.06714 | 24.32 | 0.27040 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | 21.13 | 0.12972 | 27.18 | 0.52240 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | 14.05 | 0.02541 | 18.56 | 0.07178 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | 17.60 | 0.05754 | 22.11 | 0.16255 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | 20.66 | 0.11641 | 25.17 | 0.32885 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | 22.78 | 0.18967 | 27.29 | 0.53580 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Port 2 (dBm) | Port 3 (dBm) | Port 4 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|------------------------------------|--------|----------|--------------|--------------|--------------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | 7.45 | 3.77 | 4.75 | 3.9 | 4.36 | 10.23 | 17.68 | 30.00 |
| 6175MHz | Pass | 7.45 | 3.99 | 4.7 | 4.22 | 4.51 | 10.38 | 17.83 | 30.00 |
| 6415MHz | Pass | 7.45 | 4.54 | 4.31 | 4.33 | 4.55 | 10.45 | 17.90 | 30.00 |
| 6435MHz | Pass | 6.03 | 6.09 | 5.6 | 5.73 | 5.76 | 11.82 | 17.85 | 30.00 |
| 6475MHz | Pass | 6.03 | 6.04 | 5.73 | 5.65 | 5.81 | 11.83 | 17.86 | 30.00 |
| 6515MHz | Pass | 6.03 | 6.27 | 6.08 | 5.55 | 5.45 | 11.87 | 17.90 | 30.00 |
| 6535MHz | Pass | 6.05 | 6.5 | 6.07 | 6.19 | 5.88 | 12.19 | 18.24 | 30.00 |
| 6695MHz | Pass | 6.05 | 6.17 | 5.93 | 6.53 | 6.07 | 12.20 | 18.25 | 30.00 |
| 6855MHz | Pass | 6.05 | 6.34 | 5.85 | 6.41 | 6.04 | 12.19 | 18.24 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 6.05 | 6.45 | 6.28 | 6.07 | 6.12 | 12.25 | 18.30 | 30.00 |
| 6895MHz | Pass | 4.51 | 7.48 | 7.63 | 7.86 | 7.34 | 13.60 | 18.11 | 30.00 |
| 6995MHz | Pass | 4.51 | 7.89 | 7.57 | 7.44 | 7.55 | 13.64 | 18.15 | 30.00 |
| 7095MHz | Pass | 4.51 | 7.99 | 8.1 | 8.09 | 7.94 | 14.05 | 18.56 | 30.00 |
| 7115MHz | Pass | 4.51 | 6.17 | 6.21 | 6.17 | 6.40 | 12.26 | 16.77 | 30.00 |
| 802.11ax HEW40-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | 7.45 | 6.94 | 7.09 | 7.49 | 7.64 | 13.32 | 20.77 | 30.00 |
| 6165MHz | Pass | 7.45 | 7.29 | 7.59 | 7.26 | 7.2 | 13.36 | 20.81 | 30.00 |
| 6405MHz | Pass | 7.45 | 7.93 | 7.79 | 7.96 | 7.63 | 13.85 | 21.30 | 30.00 |
| 6445MHz | Pass | 6.03 | 8.9 | 9.01 | 8.96 | 8.87 | 14.96 | 20.99 | 30.00 |
| 6485MHz | Pass | 6.03 | 9.27 | 9.44 | 9.37 | 9.36 | 15.38 | 21.41 | 30.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 6.03 | 9.07 | 9.31 | 9.2 | 9.08 | 15.19 | 21.22 | 30.00 |
| 6565MHz | Pass | 6.05 | 8.68 | 8.95 | 8.74 | 8.89 | 14.84 | 20.89 | 30.00 |
| 6685MHz | Pass | 6.05 | 9.04 | 9.15 | 9.02 | 9.2 | 15.12 | 21.17 | 30.00 |
| 6845MHz | Pass | 6.05 | 9.12 | 8.94 | 8.98 | 9.06 | 15.05 | 21.10 | 30.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 6.05 | 8.97 | 8.89 | 9.02 | 8.86 | 14.96 | 21.01 | 30.00 |
| 6925MHz | Pass | 4.51 | 11.52 | 11.14 | 10.91 | 10.94 | 17.16 | 21.67 | 30.00 |
| 7005MHz | Pass | 4.51 | 11.89 | 11.23 | 11.71 | 11.46 | 17.60 | 22.11 | 30.00 |
| 7085MHz | Pass | 4.51 | 11.18 | 11.34 | 11.29 | 11.43 | 17.33 | 21.84 | 30.00 |
| 802.11ax HEW80-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | 7.45 | 10.05 | 10.84 | 11.11 | 10.16 | 16.58 | 24.03 | 30.00 |
| 6145MHz | Pass | 7.45 | 11.07 | 10.88 | 10.67 | 10.36 | 16.77 | 24.22 | 30.00 |
| 6385MHz | Pass | 7.45 | 10.48 | 10.81 | 10.73 | 10.67 | 16.69 | 24.14 | 30.00 |
| 6465MHz | Pass | 6.03 | 12.37 | 12.83 | 12.41 | 12.51 | 18.55 | 24.58 | 30.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 6.03 | 11.92 | 12.37 | 12.03 | 12.08 | 18.12 | 24.15 | 30.00 |
| 6625MHz | Pass | 6.05 | 12.04 | 12.25 | 12.23 | 12.36 | 18.24 | 24.29 | 30.00 |
| 6705MHz | Pass | 6.05 | 12.1 | 12.36 | 12.16 | 12.37 | 18.27 | 24.32 | 30.00 |
| 6785MHz | Pass | 6.05 | 12.29 | 12.11 | 12.01 | 12.24 | 18.18 | 24.23 | 30.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 6.05 | 12.17 | 12.04 | 12.12 | 12.09 | 18.13 | 24.18 | 30.00 |
| 6945MHz | Pass | 4.51 | 14.54 | 14.37 | 14.37 | 14.32 | 20.42 | 24.93 | 30.00 |
| 7025MHz | Pass | 4.51 | 14.82 | 14.57 | 14.61 | 14.55 | 20.66 | 25.17 | 30.00 |
| 802.11ax HEW160-BF_Nss1,(MCS0)_4TX | - | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | 7.45 | 12.87 | 13.32 | 13.94 | 13.19 | 19.37 | 26.82 | 30.00 |
| 6185MHz | Pass | 7.45 | 13.45 | 13.55 | 13.86 | 13.06 | 19.51 | 26.96 | 30.00 |
| 6345MHz | Pass | 7.45 | 13.37 | 13.83 | 13.91 | 13.11 | 19.59 | 27.04 | 30.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 6.03 | 14.71 | 14.93 | 14.78 | 14.82 | 20.83 | 26.86 | 30.00 |
| 6665MHz | Pass | 6.05 | 14.87 | 15.31 | 15.01 | 15.24 | 21.13 | 27.18 | 30.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 6.05 | 14.99 | 14.76 | 14.96 | 14.92 | 20.93 | 26.98 | 30.00 |
| 6985MHz | Pass | 4.51 | 16.78 | 16.7 | 16.62 | 16.92 | 22.78 | 27.29 | 30.00 |

DG = Directional Gain; Port X = Port X output power



Summary

| Mode | Total Power (dBm) | Total Power (W) | EIRP (dBm) | EIRP (W) |
|--------------------------------|-------------------|-----------------|------------|----------|
| 5.925-6.425GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 12.62 | 0.01828 | 17.92 | 0.06194 |
| 6.425-6.525GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 12.51 | 0.01782 | 17.81 | 0.06039 |
| 6.525-6.875GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 12.56 | 0.01803 | 17.86 | 0.06109 |
| 6.875-7.125GHz | - | - | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 12.90 | 0.01950 | 18.20 | 0.06607 |



Result

| Mode | Result | DG (dBi) | Port 1 (dBm) | Total Power (dBm) | EIRP (dBm) | EIRP Limit (dBm) |
|---------------------------------|--------|----------|--------------|-------------------|------------|------------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5955MHz | Pass | 5.30 | 12.62 | 12.62 | 17.92 | 30.00 |
| 6175MHz | Pass | 5.30 | 12.11 | 12.11 | 17.41 | 30.00 |
| 6415MHz | Pass | 5.30 | 11.83 | 11.83 | 17.13 | 30.00 |
| 6435MHz | Pass | 5.30 | 11.65 | 11.65 | 16.95 | 30.00 |
| 6475MHz | Pass | 5.30 | 12.28 | 12.28 | 17.58 | 30.00 |
| 6515MHz | Pass | 5.30 | 12.51 | 12.51 | 17.81 | 30.00 |
| 6535MHz | Pass | 5.30 | 12.41 | 12.41 | 17.71 | 30.00 |
| 6695MHz | Pass | 5.30 | 12.06 | 12.06 | 17.36 | 30.00 |
| 6855MHz | Pass | 5.30 | 12.56 | 12.56 | 17.86 | 30.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 5.30 | 12.49 | 12.49 | 17.79 | 30.00 |
| 6895MHz | Pass | 5.30 | 12.90 | 12.90 | 18.20 | 30.00 |
| 6995MHz | Pass | 5.30 | 11.76 | 11.76 | 17.06 | 30.00 |
| 7095MHz | Pass | 5.30 | 12.59 | 12.59 | 17.89 | 30.00 |
| 7115MHz | Pass | 5.30 | 10.64 | 10.64 | 15.94 | 30.00 |

DG = Directional Gain; Port X = Port X output power



Summary

| Mode | PD (dBm/RBW) | EIRP PD (dBm/RBW) |
|---------------------------------|-----------------|----------------------|
| 5.925-6.425GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 1.88 | 4.83 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 0.13 | 3.08 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | -2.80 | 0.15 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | -5.68 | -2.73 |
| 6.425-6.525GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 2.64 | 4.95 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 0.44 | 2.75 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | -2.51 | -0.20 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | -5.40 | -3.09 |
| 6.525-6.875GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 3.39 | 4.38 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 0.50 | 1.49 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | -2.80 | -1.81 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | -5.24 | -4.25 |
| 6.875-7.125GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_1TX | 3.58 | 4.19 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | 0.32 | 0.93 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | -3.20 | -2.59 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | -5.15 | -4.54 |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

| Mode | Result | DG (dBi) | Port 1 (dBm/RBW) | PD (dBm/RBW) | EIRP PD (dBm/RBW) | EIRP PD Limit (dBm/RBW) |
|---------------------------------|--------|----------|------------------|--------------|-------------------|-------------------------|
| 802.11ax HEW20_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5955MHz | Pass | 2.95 | 1.88 | 1.88 | 4.83 | 5.00 |
| 6175MHz | Pass | 2.95 | 1.41 | 1.41 | 4.36 | 5.00 |
| 6415MHz | Pass | 2.95 | 1.30 | 1.30 | 4.25 | 5.00 |
| 6435MHz | Pass | 2.31 | 2.64 | 2.64 | 4.95 | 5.00 |
| 6475MHz | Pass | 2.31 | 2.40 | 2.40 | 4.71 | 5.00 |
| 6515MHz | Pass | 2.31 | 2.17 | 2.17 | 4.48 | 5.00 |
| 6535MHz | Pass | 0.99 | 3.39 | 3.39 | 4.38 | 5.00 |
| 6695MHz | Pass | 0.99 | 3.26 | 3.26 | 4.25 | 5.00 |
| 6855MHz | Pass | 0.99 | 3.25 | 3.25 | 4.24 | 5.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 0.99 | 3.15 | 3.15 | 4.14 | 5.00 |
| 6895MHz | Pass | 0.61 | 2.99 | 2.99 | 3.60 | 5.00 |
| 6995MHz | Pass | 0.61 | 3.58 | 3.58 | 4.19 | 5.00 |
| 7095MHz | Pass | 0.61 | 3.06 | 3.06 | 3.67 | 5.00 |
| 7115MHz | Pass | 0.61 | -1.09 | -1.09 | -0.48 | 5.00 |
| 802.11ax HEW40_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5965MHz | Pass | 2.95 | -0.12 | -0.12 | 2.83 | 5.00 |
| 6165MHz | Pass | 2.95 | 0.13 | 0.13 | 3.08 | 5.00 |
| 6405MHz | Pass | 2.95 | 0.08 | 0.08 | 3.03 | 5.00 |
| 6445MHz | Pass | 2.31 | 0.44 | 0.44 | 2.75 | 5.00 |
| 6485MHz | Pass | 2.31 | 0.35 | 0.35 | 2.66 | 5.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 2.31 | 0.10 | 0.10 | 2.41 | 5.00 |
| 6565MHz | Pass | 0.99 | 0.14 | 0.14 | 1.13 | 5.00 |
| 6685MHz | Pass | 0.99 | -0.01 | -0.01 | 0.98 | 5.00 |
| 6845MHz | Pass | 0.99 | 0.50 | 0.50 | 1.49 | 5.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 0.99 | -0.03 | -0.03 | 0.96 | 5.00 |
| 6925MHz | Pass | 0.61 | -0.11 | -0.11 | 0.50 | 5.00 |
| 7005MHz | Pass | 0.61 | 0.32 | 0.32 | 0.93 | 5.00 |
| 7085MHz | Pass | 0.61 | 0.25 | 0.25 | 0.86 | 5.00 |
| 802.11ax HEW80_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 5985MHz | Pass | 2.95 | -2.80 | -2.80 | 0.15 | 5.00 |
| 6145MHz | Pass | 2.95 | -2.87 | -2.87 | 0.08 | 5.00 |
| 6385MHz | Pass | 2.95 | -2.96 | -2.96 | -0.01 | 5.00 |
| 6465MHz | Pass | 2.31 | -2.51 | -2.51 | -0.20 | 5.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 2.31 | -3.06 | -3.06 | -0.75 | 5.00 |
| 6625MHz | Pass | 0.99 | -2.98 | -2.98 | -1.99 | 5.00 |
| 6705MHz | Pass | 0.99 | -2.96 | -2.96 | -1.97 | 5.00 |
| 6785MHz | Pass | 0.99 | -3.03 | -3.03 | -2.04 | 5.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 0.99 | -2.80 | -2.80 | -1.81 | 5.00 |
| 6945MHz | Pass | 0.61 | -3.23 | -3.23 | -2.62 | 5.00 |
| 7025MHz | Pass | 0.61 | -3.20 | -3.20 | -2.59 | 5.00 |
| 802.11ax HEW160_Nss1,(MCS0)_1TX | - | - | - | - | - | - |
| 6025MHz | Pass | 2.95 | -5.68 | -5.68 | -2.73 | 5.00 |
| 6185MHz | Pass | 2.95 | -5.72 | -5.72 | -2.77 | 5.00 |
| 6345MHz | Pass | 2.95 | -5.76 | -5.76 | -2.81 | 5.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 2.31 | -5.40 | -5.40 | -3.09 | 5.00 |
| 6665MHz | Pass | 0.99 | -5.91 | -5.91 | -4.92 | 5.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 0.99 | -5.24 | -5.24 | -4.25 | 5.00 |
| 6985MHz | Pass | 0.61 | -5.15 | -5.15 | -4.54 | 5.00 |

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5955MHz

15/02/2022

CF
5.955GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

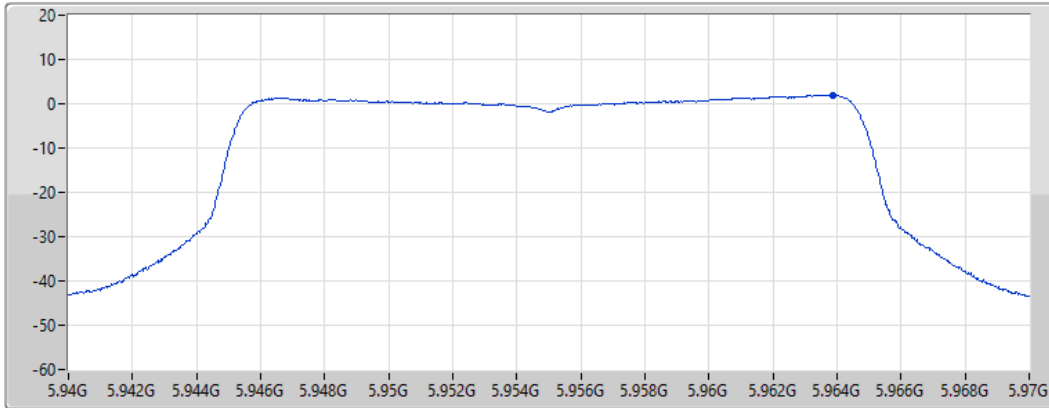

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 1.88 | 1.88 | 1.88 |


802.11ax HEW20_Nss1,(MCS0)_1TX


PSD

6175MHz

15/02/2022

CF
6.175GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

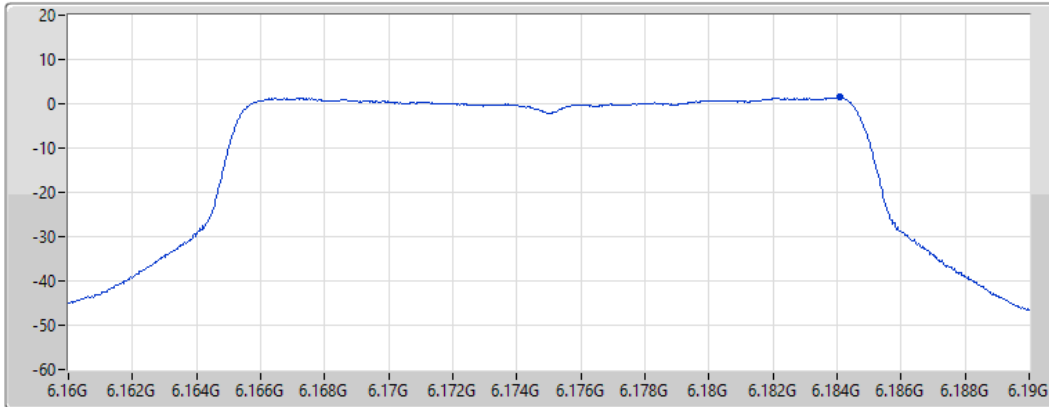

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 1.41 | 1.41 | 1.41 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6415MHz

15/02/2022

CF
6.415GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

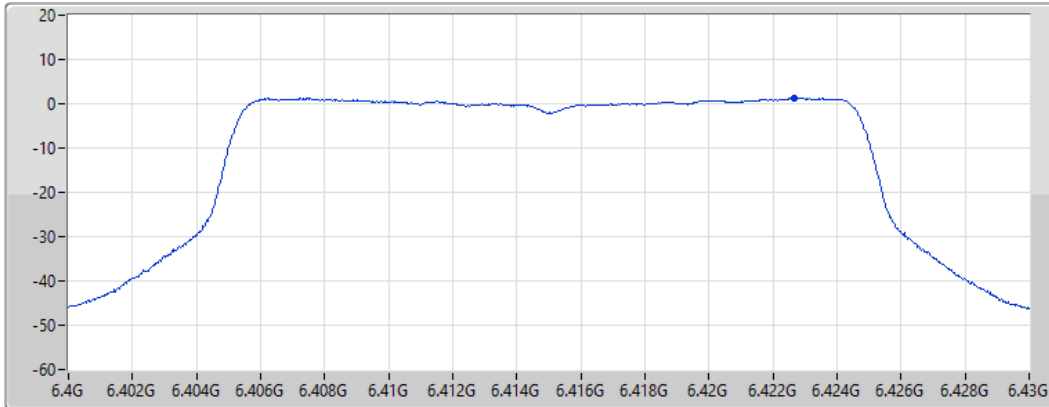

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 1.30 | 1.30 | 1.30 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6435MHz

15/02/2022

CF
6.435GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

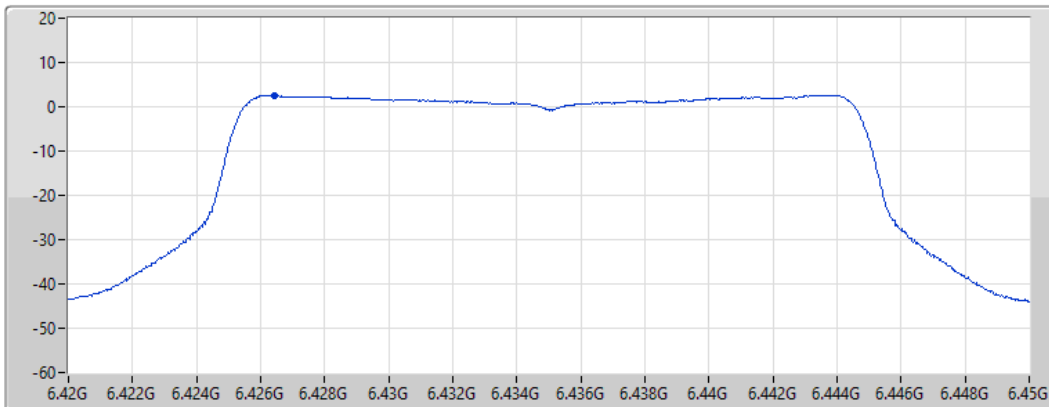

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 2.64 | 2.64 | 2.64 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6475MHz

15/02/2022

CF
6.475GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

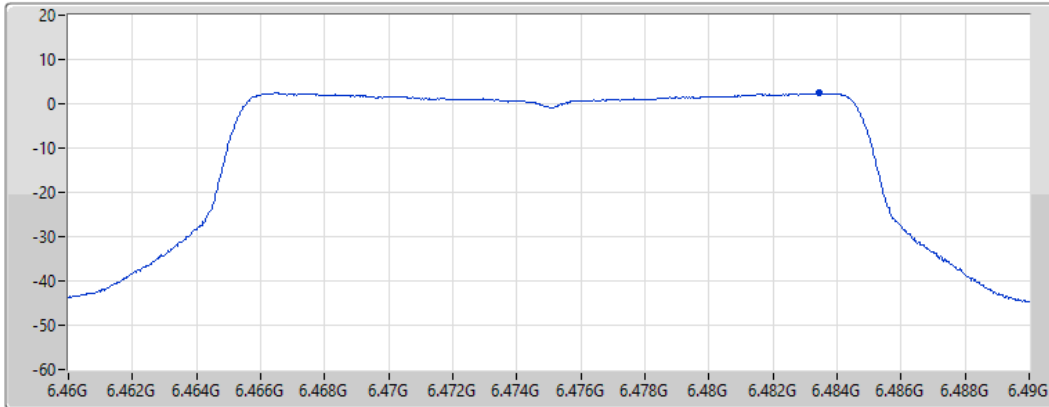

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 2.40 | 2.40 | 2.40 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6515MHz

15/02/2022

CF
6.515GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

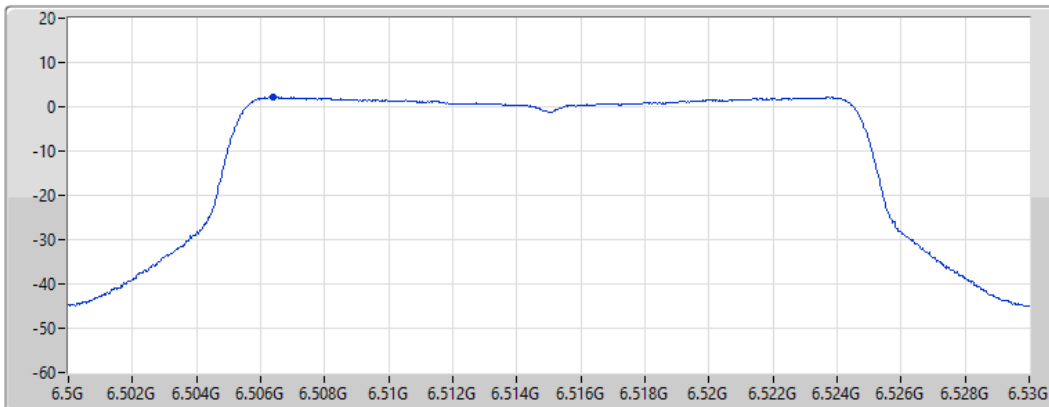

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 2.17 | 2.17 | 2.17 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6535MHz

15/02/2022

CF
6.535GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

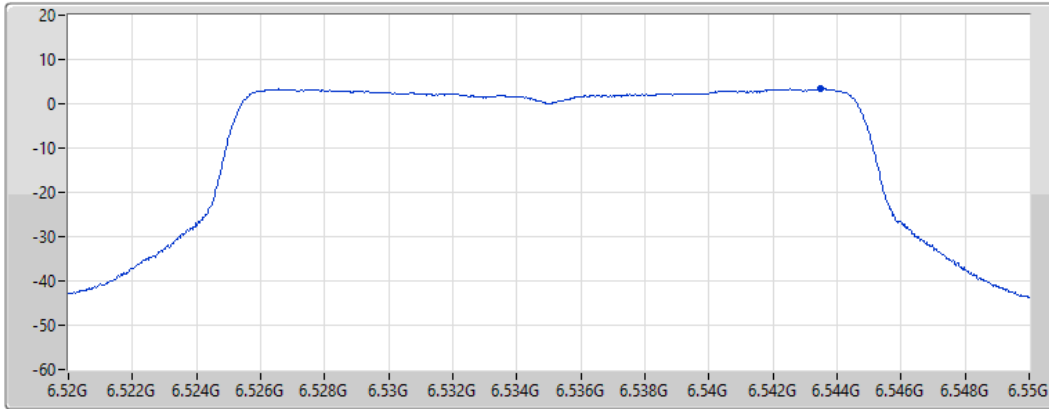

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.39 | 3.39 | 3.39 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6695MHz

15/02/2022

CF
6.695GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

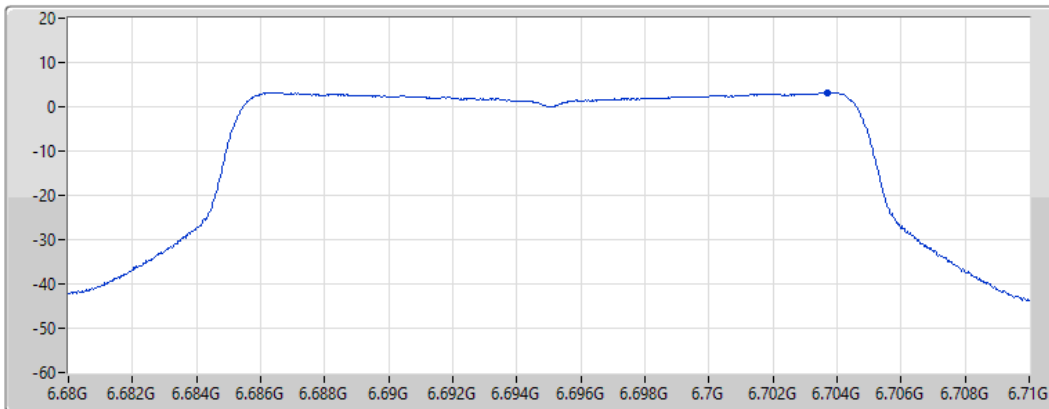

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.26 | 3.26 | 3.26 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6855MHz

15/02/2022

CF
6.855GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

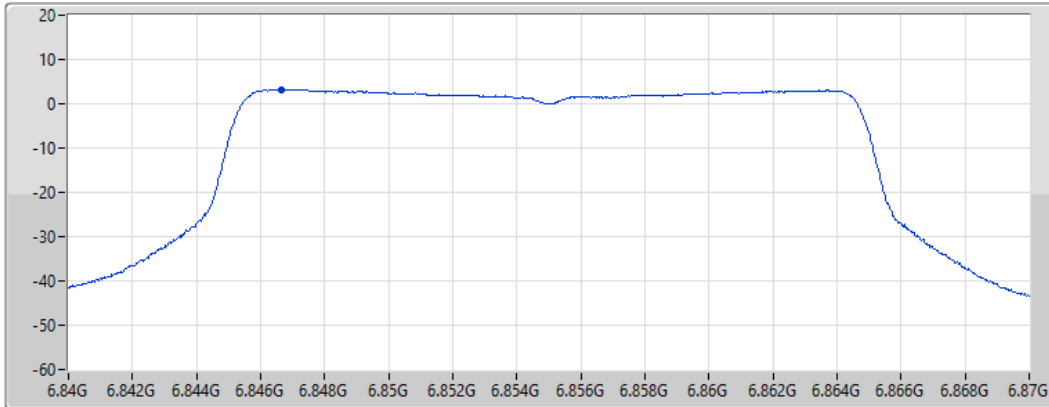

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.25 | 3.25 | 3.25 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6875MHz Straddle 6.525-6.875GHz

15/02/2022

CF
6.875GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

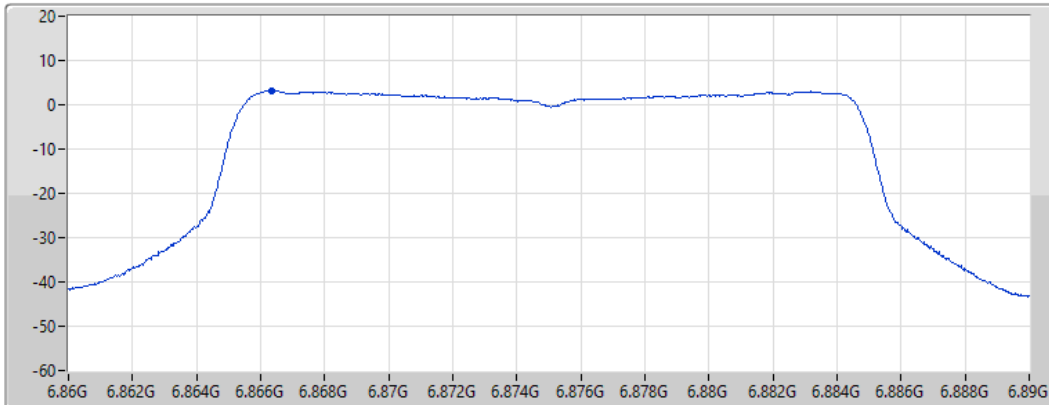

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.15 | 3.15 | 3.15 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6895MHz

15/02/2022

CF
6.895GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

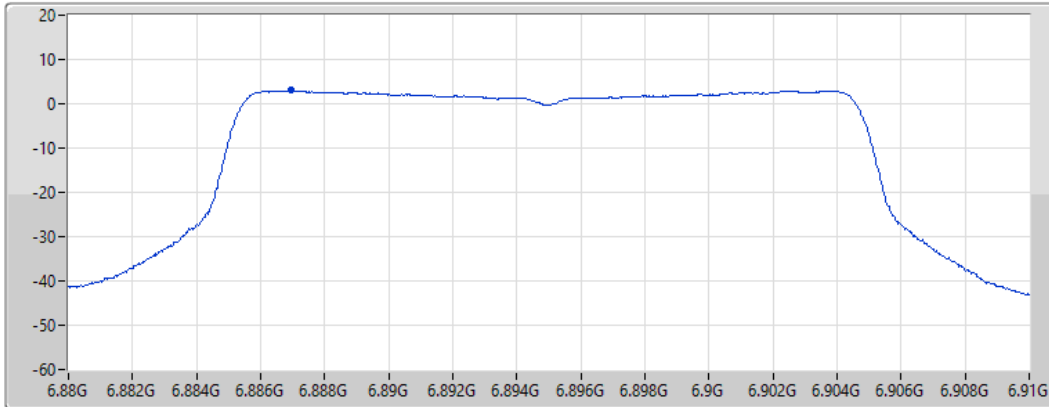

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 2.99 | 2.99 | 2.99 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6995MHz

15/02/2022

CF
6.995GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

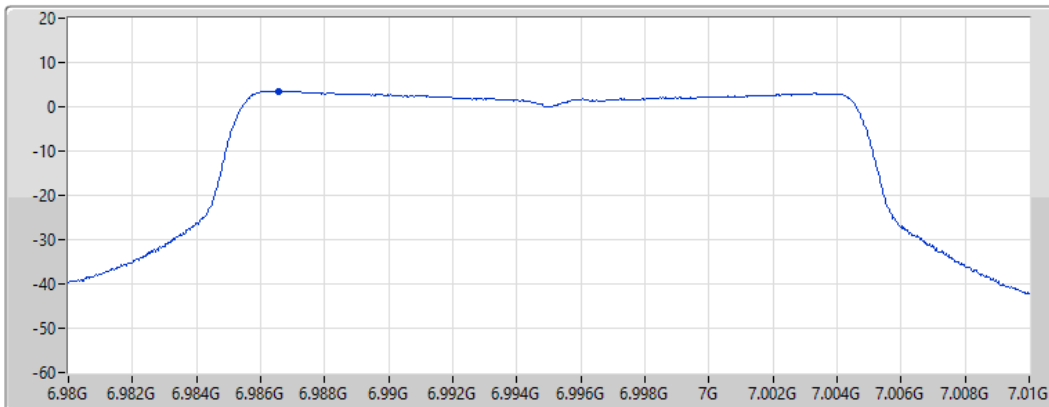

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.58 | 3.58 | 3.58 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

7095MHz

15/02/2022

CF
7.095GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

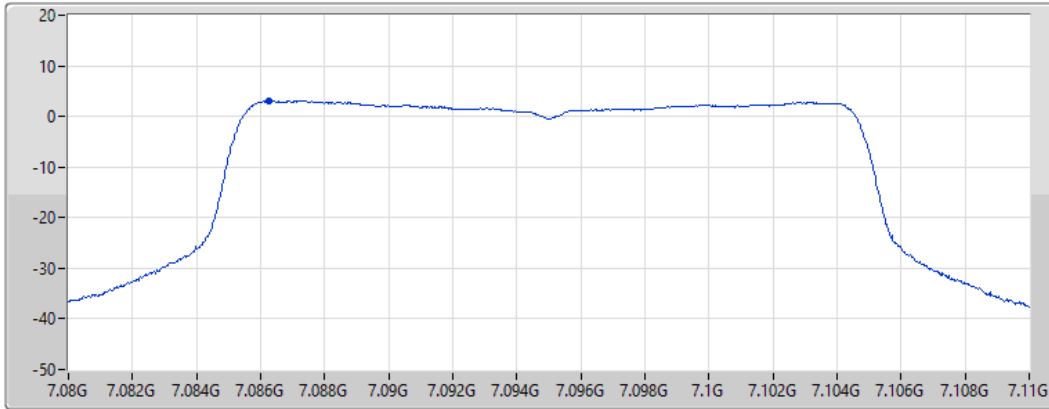

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 3.06 | 3.06 | 3.06 |

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

7115MHz

28/02/2022

CF
7.115GHz


Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

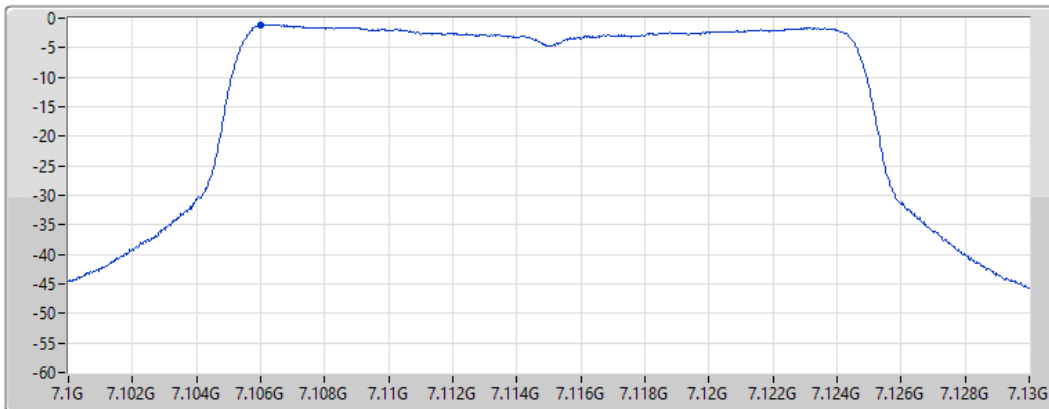

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -1.09 | -1.09 | -1.09 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5965MHz

15/02/2022

CF
5.965GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

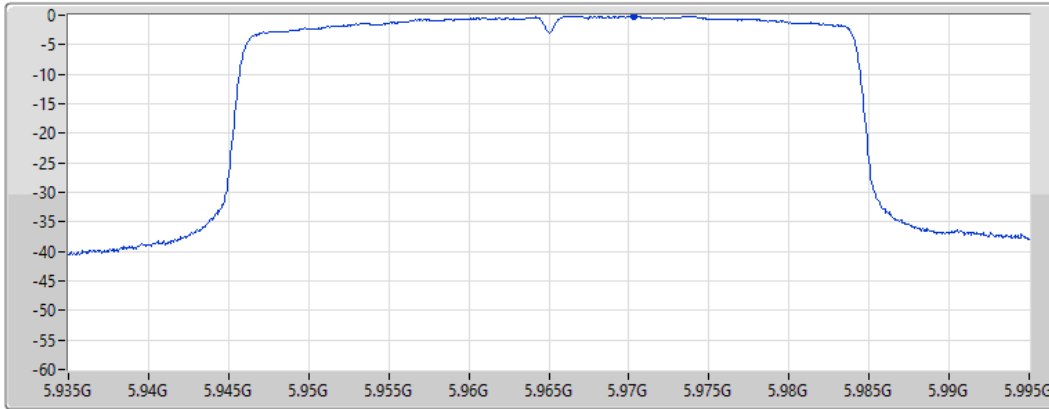

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.12 | -0.12 | -0.12 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6165MHz

15/02/2022

CF
6.165GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

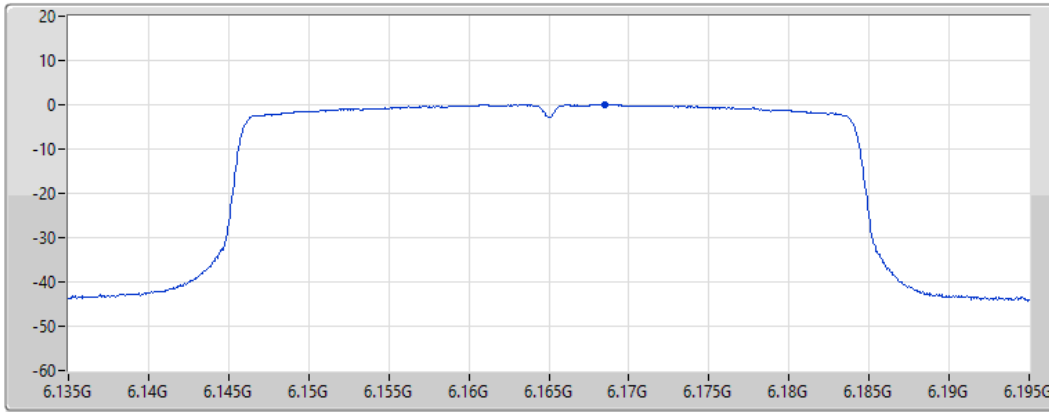

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.13 | 0.13 | 0.13 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6405MHz

15/02/2022

CF
6.405GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

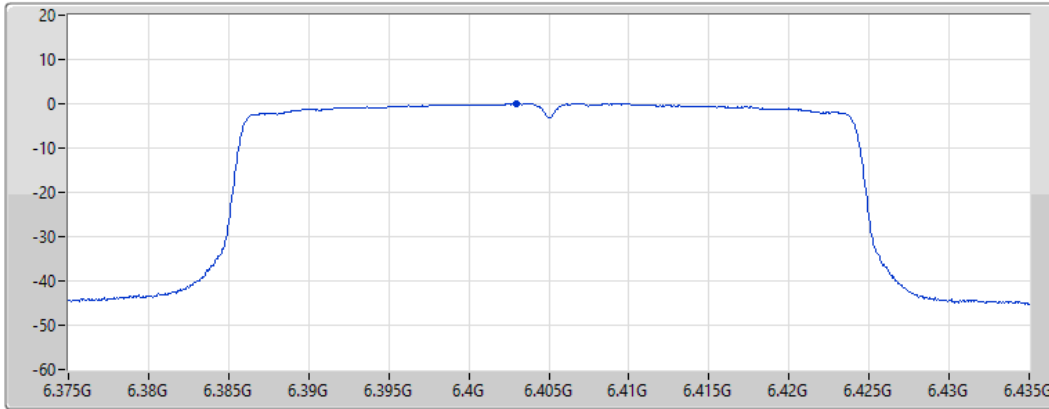

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.08 | 0.08 | 0.08 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6445MHz

15/02/2022

CF
6.445GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

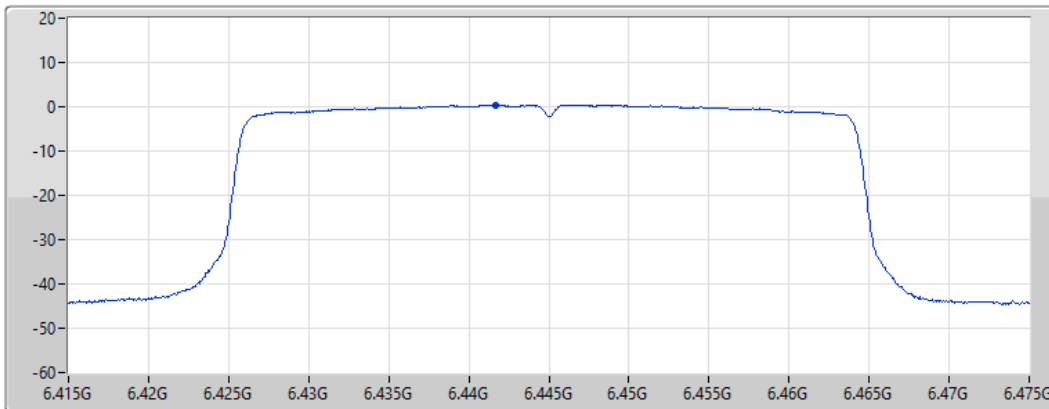

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.44 | 0.44 | 0.44 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6485MHz

15/02/2022

CF
6.485GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

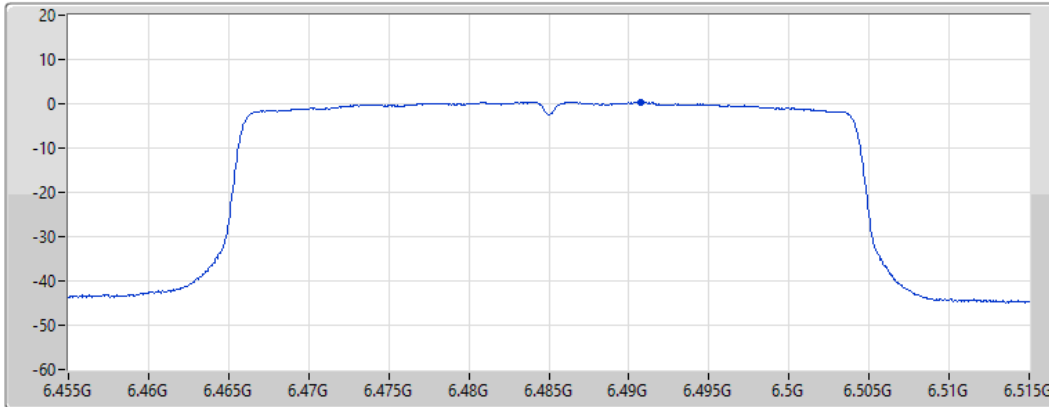

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.35 | 0.35 | 0.35 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6525MHz Straddle 6.425-6.525GHz

15/02/2022

CF
6.525GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

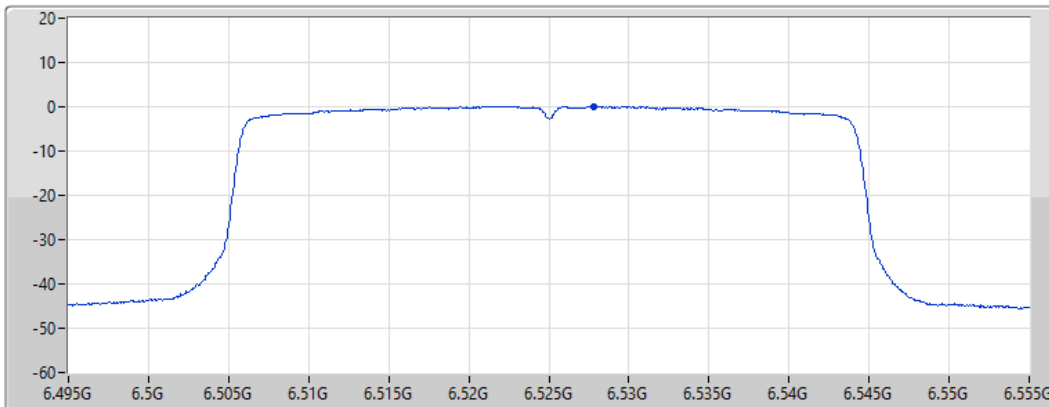

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.10 | 0.10 | 0.10 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6565MHz

15/02/2022

CF
6.565GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

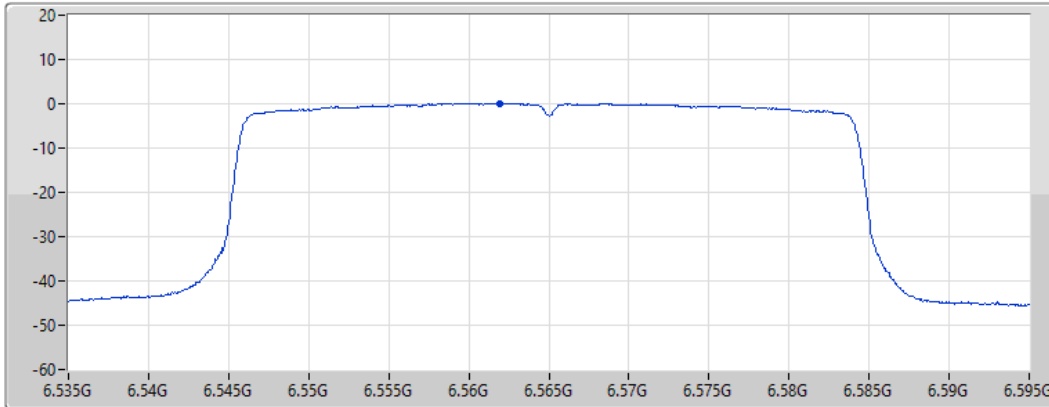

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.14 | 0.14 | 0.14 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6685MHz

15/02/2022

CF
6.685GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

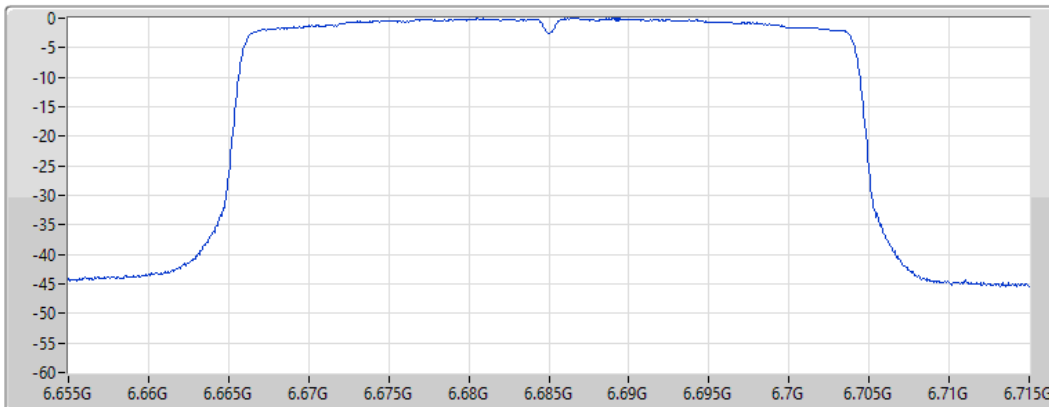

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.01 | -0.01 | -0.01 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6845MHz

15/02/2022

CF
6.845GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

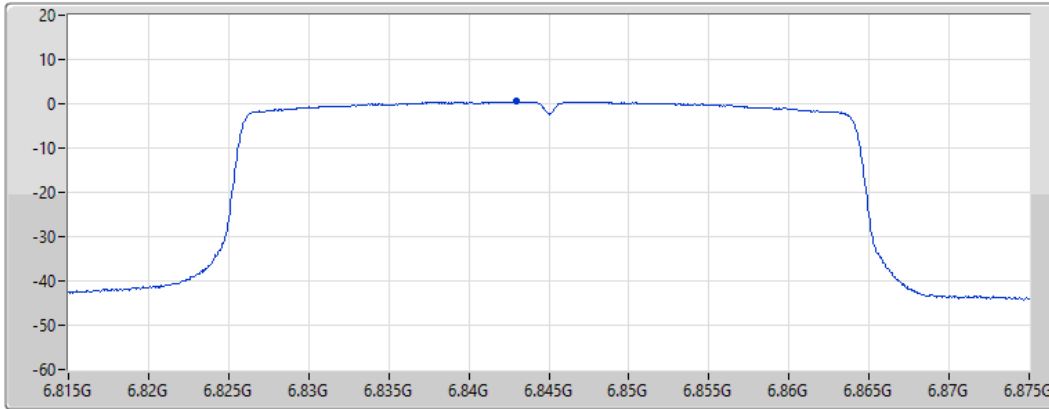

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.50 | 0.50 | 0.50 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6885MHz Straddle 6.525-6.875GHz

15/02/2022

CF
6.885GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

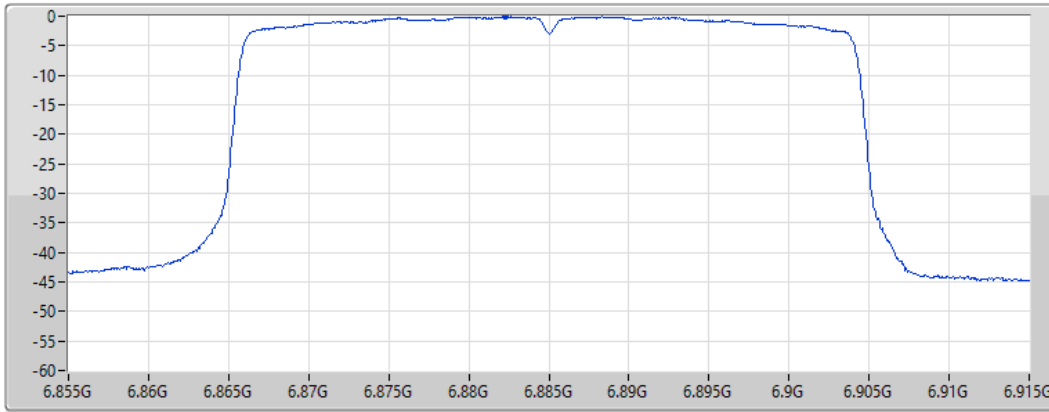

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.03 | -0.03 | -0.03 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6925MHz

15/02/2022

CF
6.925GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

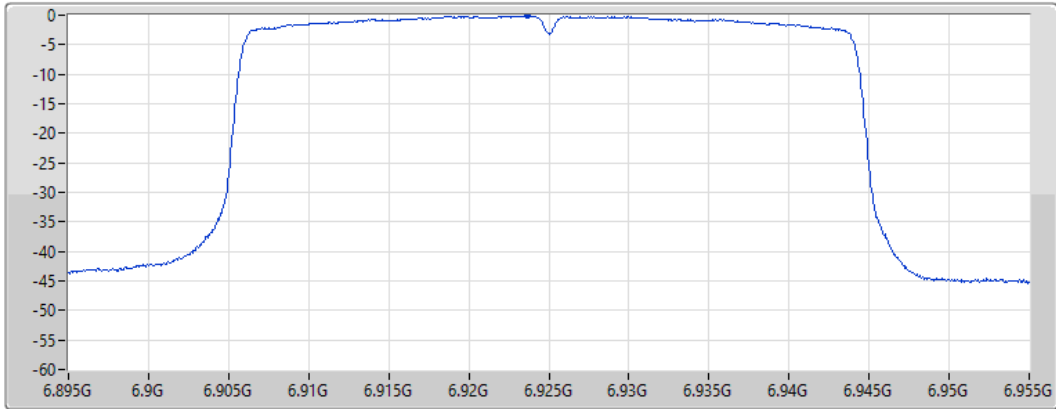

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.11 | -0.11 | -0.11 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

7005MHz

15/02/2022

CF
7.005GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

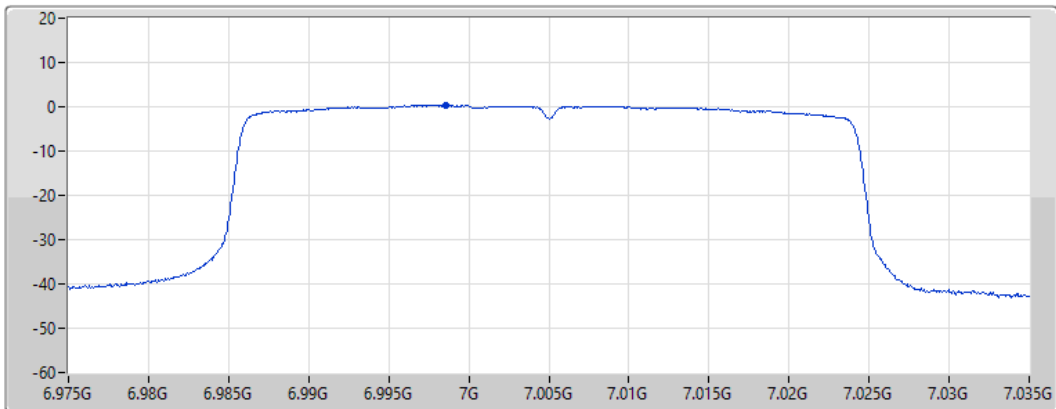

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.32 | 0.32 | 0.32 |

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

7085MHz

15/02/2022

CF
7.085GHz


Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

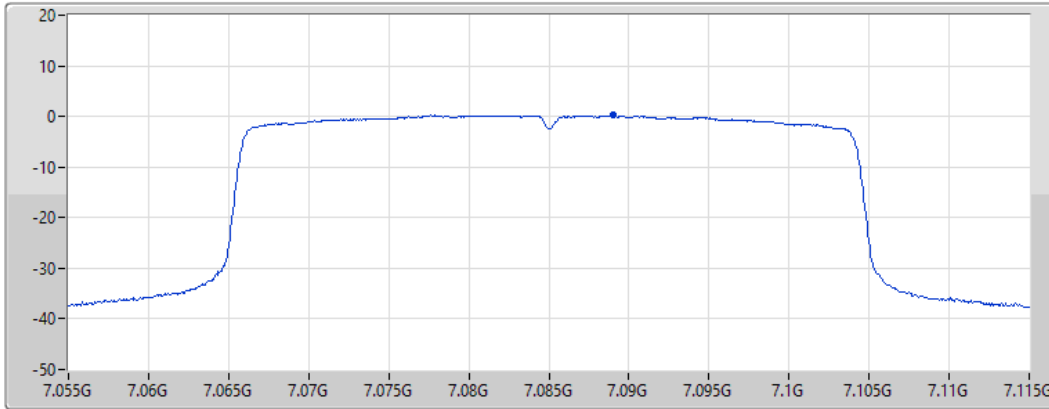

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| 0.25 | 0.25 | 0.25 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5985MHz

15/02/2022

CF
5.985GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

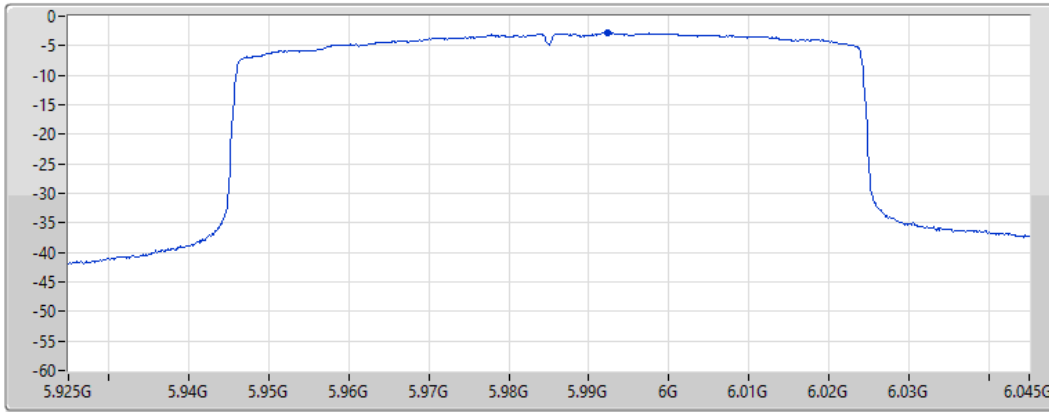

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.80 | -2.80 | -2.80 |


802.11ax HEW80_Nss1,(MCS0)_1TX


PSD

6145MHz

15/02/2022

CF
6.145GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

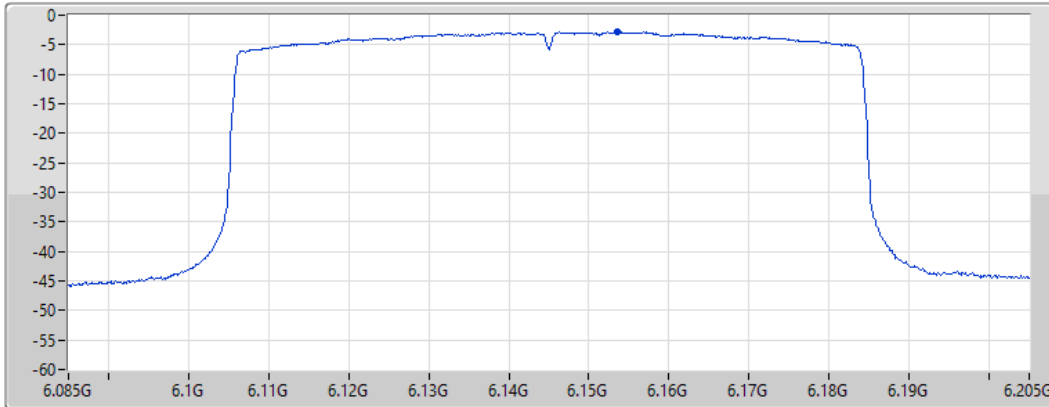

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.87 | -2.87 | -2.87 |


802.11ax HEW80_Nss1,(MCS0)_1TX


PSD

6385MHz

15/02/2022

CF
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

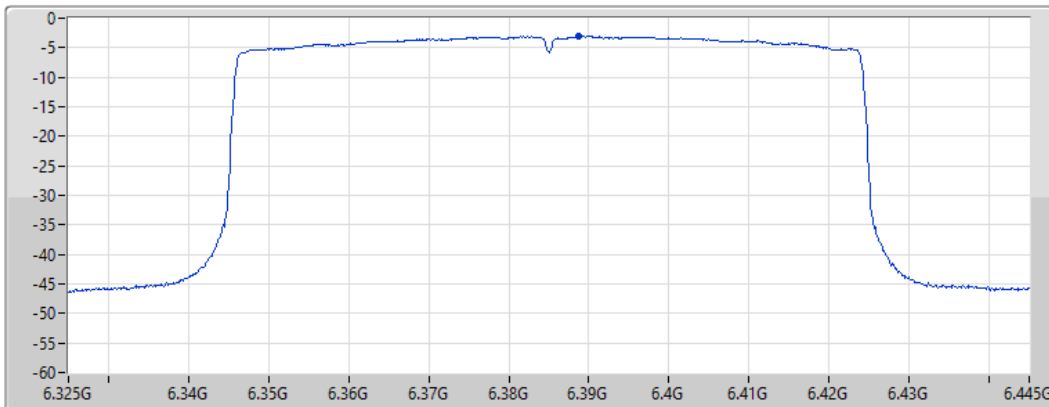

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.96 | -2.96 | -2.96 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6465MHz

15/02/2022

CF
6.465GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

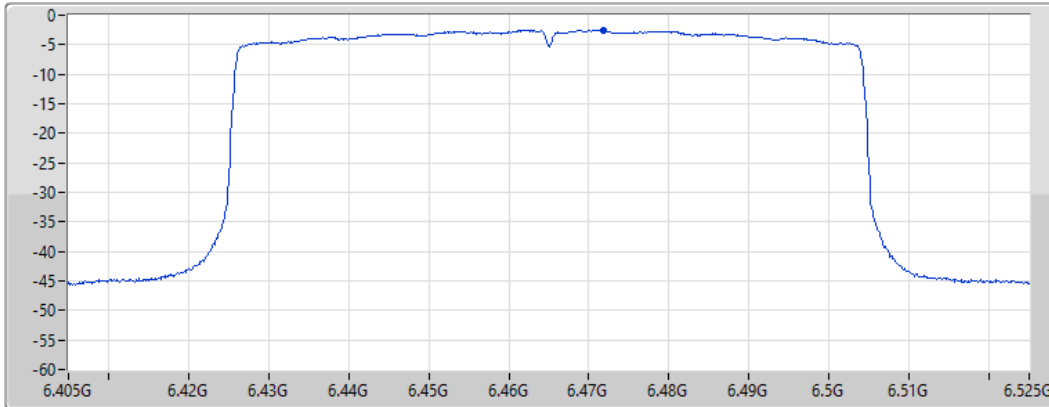

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.51 | -2.51 | -2.51 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6545MHz Straddle 6.425-6.525GHz

15/02/2022

CF
6.545GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

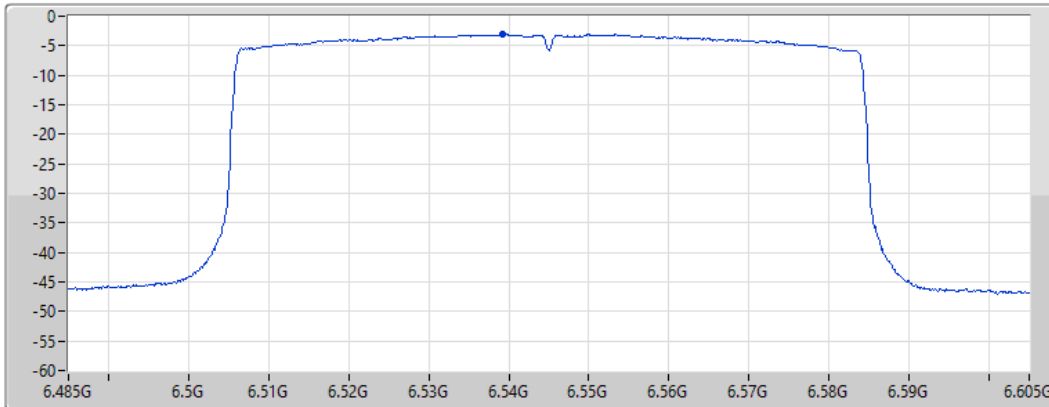

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -3.06 | -3.06 | -3.06 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6625MHz

15/02/2022

CF
6.625GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

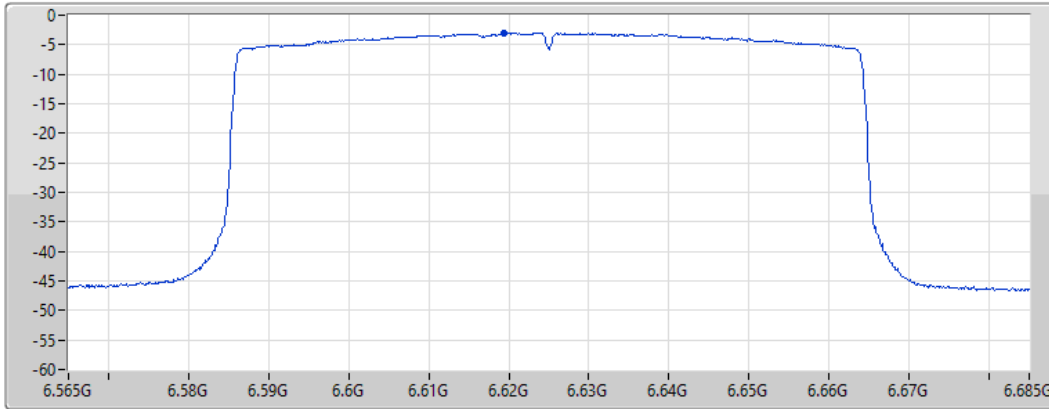

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.98 | -2.98 | -2.98 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6705MHz

15/02/2022

CF
6.705GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

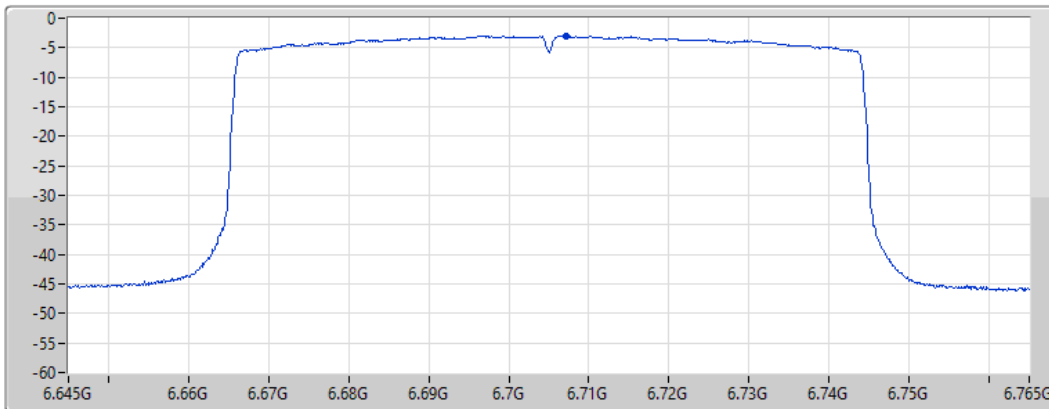

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.96 | -2.96 | -2.96 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6785MHz

15/02/2022

CF
6.785GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

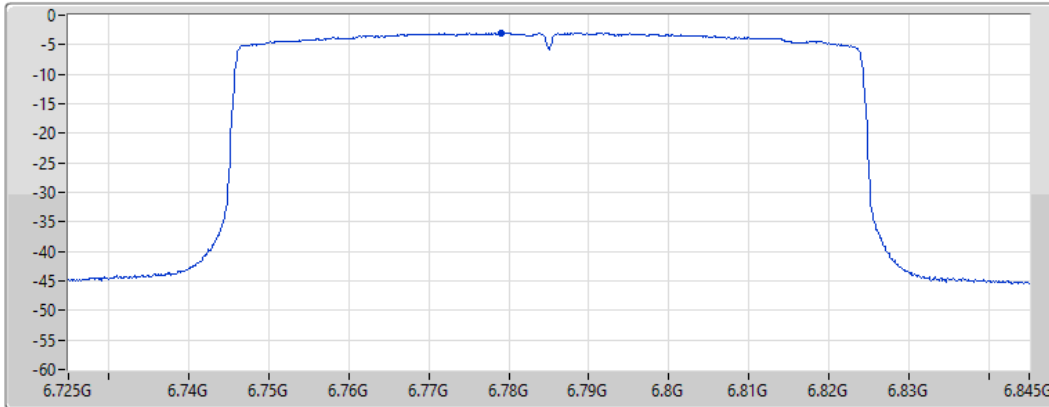

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -3.03 | -3.03 | -3.03 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6865MHz Straddle 6.525-6.875GHz

15/02/2022

CF
6.865GHz


Span
120MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

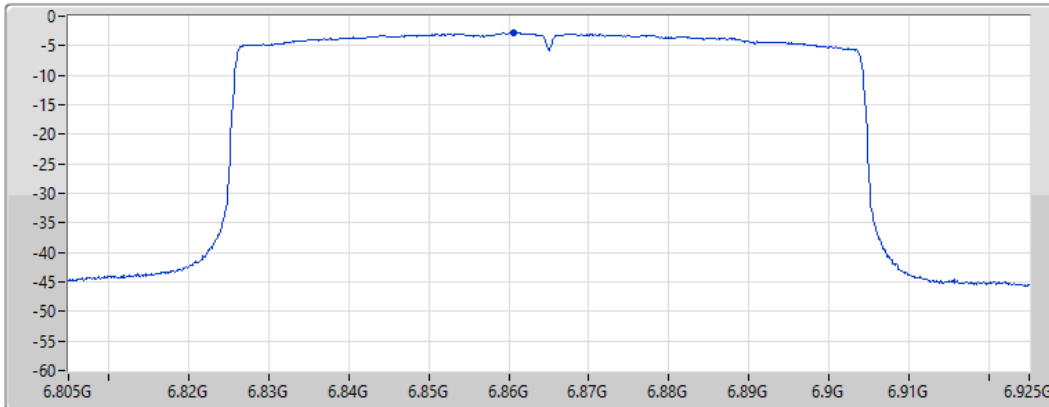

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -2.80 | -2.80 | -2.80 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6945MHz

15/02/2022

CF
6.945GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

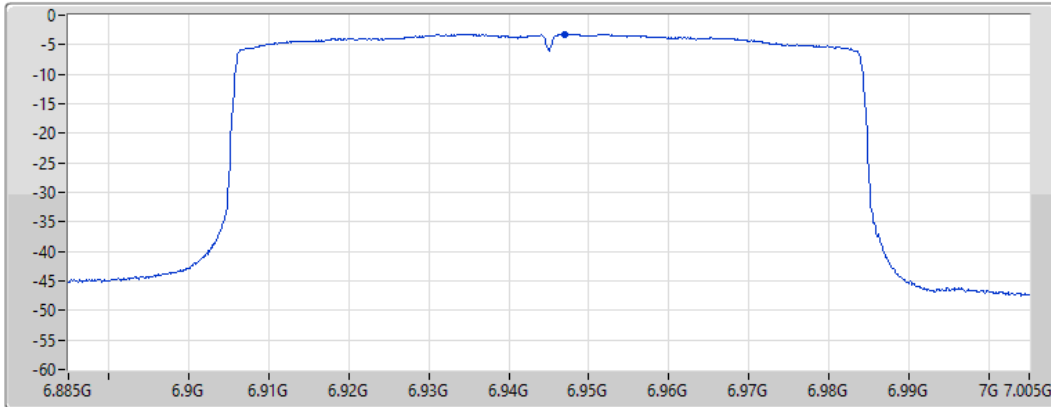

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -3.23 | -3.23 | -3.23 |

802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

7025MHz

15/02/2022

CF
7.025GHz


Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

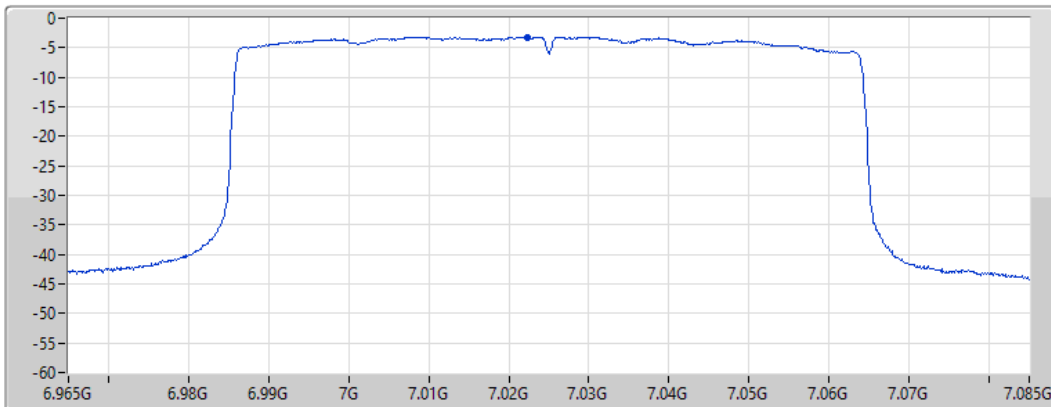

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -3.20 | -3.20 | -3.20 |

802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6025MHz

15/02/2022

CF
6.025GHz


Span
240MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

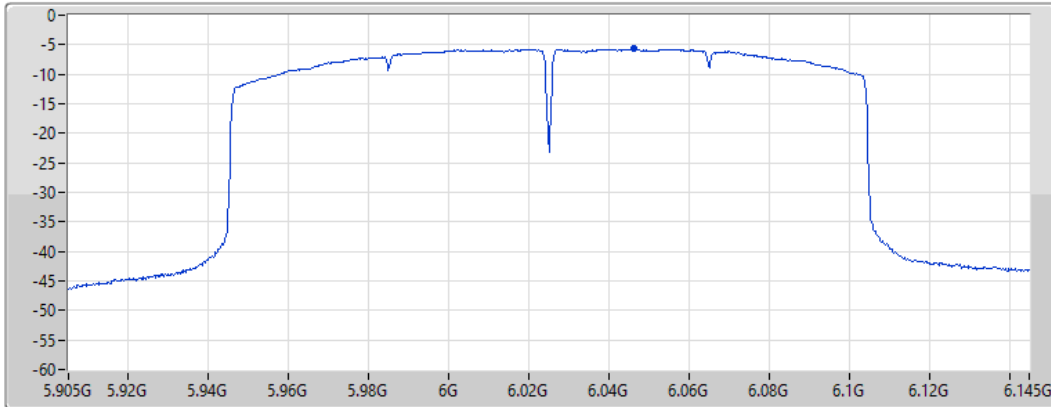

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.68 | -5.68 | -5.68 |

802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6185MHz

15/02/2022

CF
6.185GHz


Span
240MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

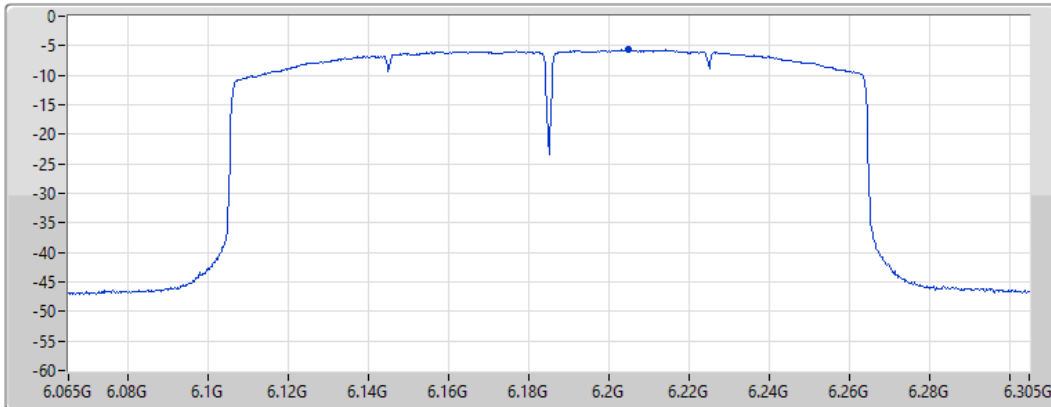

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.72 | -5.72 | -5.72 |


802.11ax HEW160_Nss1,(MCS0)_1TX


PSD

6345MHz

15/02/2022

CF
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

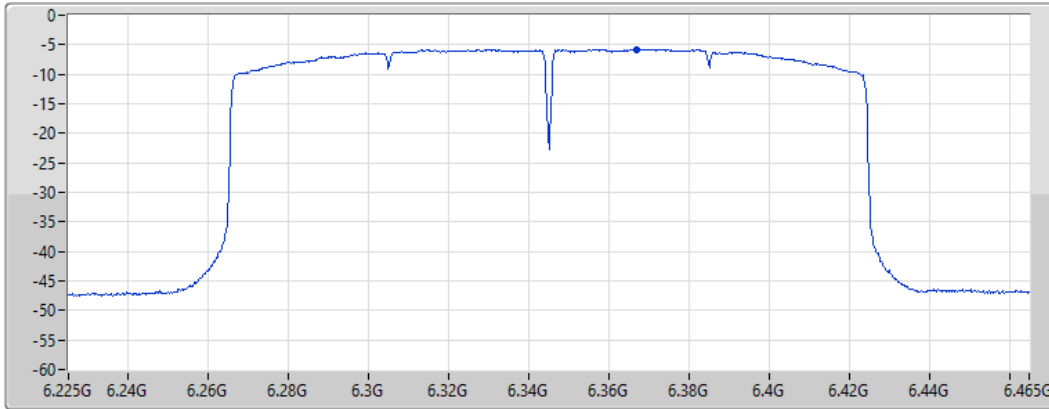

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.76 | -5.76 | -5.76 |


802.11ax HEW160_Nss1,(MCS0)_1TX


PSD

6505MHz Straddle 6.425-6.525GHz

15/02/2022

CF
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

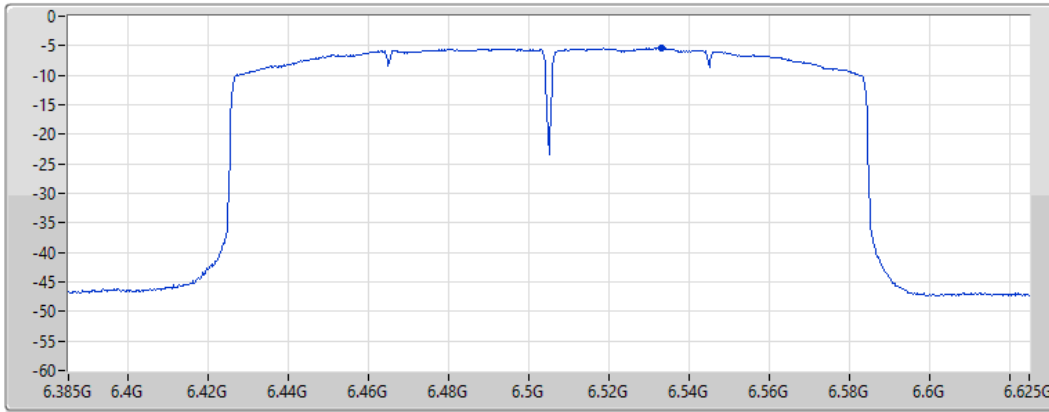

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.40 | -5.40 | -5.40 |


802.11ax HEW160_Nss1,(MCS0)_1TX


PSD

6665MHz

15/02/2022

CF
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

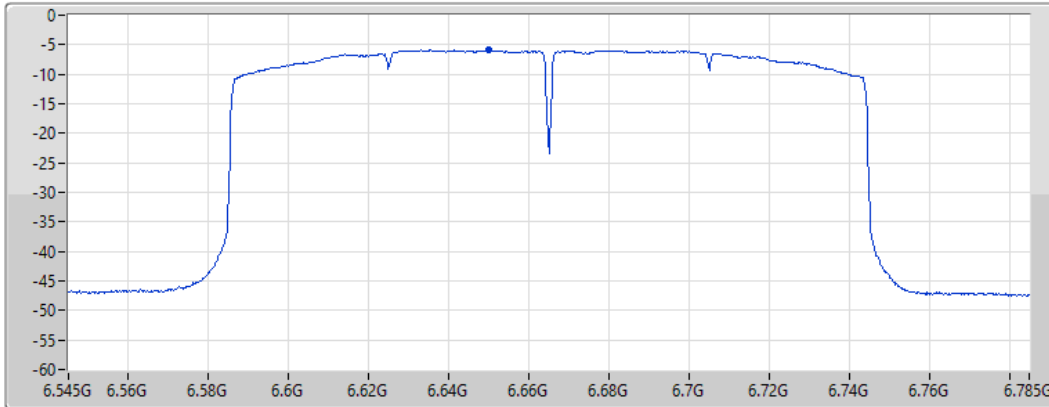

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.91 | -5.91 | -5.91 |


802.11ax HEW160_Nss1,(MCS0)_1TX


PSD

6825MHz Straddle 6.525-6.875GHz


15/02/2022

CF
6.825GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

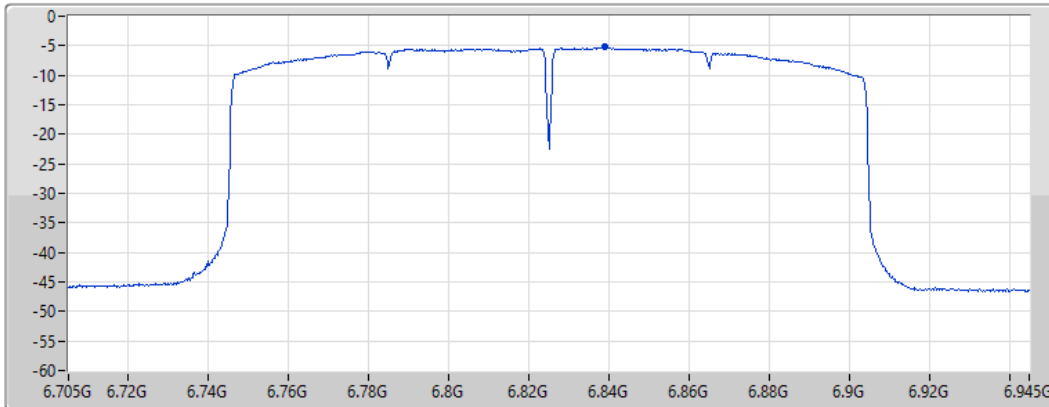

Port 1 

| Sum | PD | Port 1 |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -5.24 | -5.24 | -5.24 |

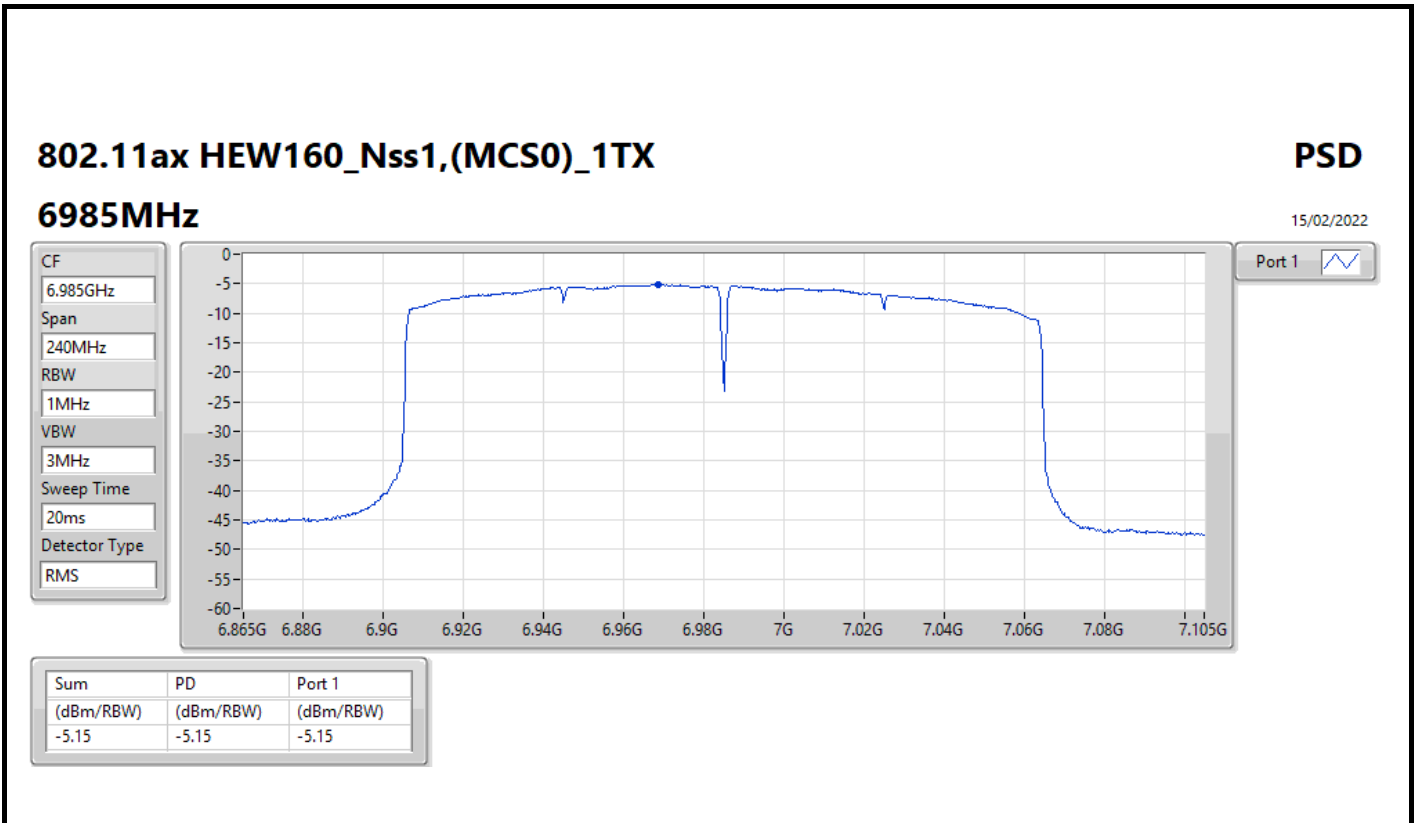



Summary

| Mode | PD (dBm/RBW) | EIRP PD (dBm/RBW) |
|---------------------------------|-----------------|----------------------|
| 5.925-6.425GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | -0.45 | 4.93 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | -0.62 | 4.76 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -0.52 | 4.86 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | -2.46 | 2.92 |
| 6.425-6.525GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 0.31 | 4.78 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 0.30 | 4.77 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 0.39 | 4.86 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | -2.50 | 1.97 |
| 6.525-6.875GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 0.63 | 4.76 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 0.72 | 4.85 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | 0.21 | 4.34 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | -2.42 | 1.71 |
| 6.875-7.125GHz | - | - |
| 802.11ax HEW20_Nss1,(MCS0)_2TX | 1.86 | 4.94 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | 1.77 | 4.85 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | -0.11 | 2.97 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | -2.28 | 0.80 |

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

| Mode | Result | DG (dBi) | Port 1 (dBm/RBW) | Port 2 (dBm/RBW) | PD (dBm/RBW) | PD Limit (dBm/RBW) | EIRP PD (dBm/RBW) | EIRP PD Limit (dBm/RBW) |
|---------------------------------|--------|----------|------------------|------------------|--------------|--------------------|-------------------|-------------------------|
| 802.11ax HEW20_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - |
| 5955MHz | Pass | 5.38 | -3.97 | -3.09 | -0.50 | Inf | 4.88 | 5.00 |
| 6175MHz | Pass | 5.38 | -3.42 | -3.52 | -0.49 | Inf | 4.89 | 5.00 |
| 6415MHz | Pass | 5.38 | -3.65 | -3.22 | -0.45 | Inf | 4.93 | 5.00 |
| 6435MHz | Pass | 4.47 | -2.70 | -2.62 | 0.31 | Inf | 4.78 | 5.00 |
| 6475MHz | Pass | 4.47 | -2.78 | -2.67 | 0.15 | Inf | 4.62 | 5.00 |
| 6515MHz | Pass | 4.47 | -2.73 | -2.72 | 0.19 | Inf | 4.66 | 5.00 |
| 6535MHz | Pass | 4.13 | -2.62 | -2.42 | 0.44 | Inf | 4.57 | 5.00 |
| 6695MHz | Pass | 4.13 | -2.53 | -2.33 | 0.45 | Inf | 4.58 | 5.00 |
| 6855MHz | Pass | 4.13 | -2.33 | -2.45 | 0.56 | Inf | 4.69 | 5.00 |
| 6875MHz Straddle 6.525-6.875GHz | Pass | 4.13 | -2.29 | -2.27 | 0.63 | Inf | 4.76 | 5.00 |
| 6895MHz | Pass | 3.08 | -1.10 | -1.03 | 1.86 | Inf | 4.94 | 5.00 |
| 6995MHz | Pass | 3.08 | -1.25 | -0.82 | 1.82 | Inf | 4.90 | 5.00 |
| 7095MHz | Pass | 3.08 | -1.72 | -1.25 | 1.52 | Inf | 4.60 | 5.00 |
| 7115MHz | Pass | 3.08 | -4.74 | -4.72 | -1.78 | Inf | 1.30 | 5.00 |
| 802.11ax HEW40_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - |
| 5965MHz | Pass | 5.38 | -3.91 | -3.23 | -0.74 | Inf | 4.64 | 5.00 |
| 6165MHz | Pass | 5.38 | -3.46 | -3.91 | -0.74 | Inf | 4.64 | 5.00 |
| 6405MHz | Pass | 5.38 | -3.54 | -3.63 | -0.62 | Inf | 4.76 | 5.00 |
| 6445MHz | Pass | 4.47 | -2.70 | -2.63 | 0.30 | Inf | 4.77 | 5.00 |
| 6485MHz | Pass | 4.47 | -2.80 | -2.87 | 0.14 | Inf | 4.61 | 5.00 |
| 6525MHz Straddle 6.425-6.525GHz | Pass | 4.47 | -2.87 | -2.56 | 0.17 | Inf | 4.64 | 5.00 |
| 6565MHz | Pass | 4.13 | -2.48 | -2.01 | 0.65 | Inf | 4.78 | 5.00 |
| 6685MHz | Pass | 4.13 | -2.45 | -1.94 | 0.72 | Inf | 4.85 | 5.00 |
| 6845MHz | Pass | 4.13 | -2.13 | -2.30 | 0.61 | Inf | 4.74 | 5.00 |
| 6885MHz Straddle 6.525-6.875GHz | Pass | 4.13 | -2.46 | -2.38 | 0.49 | Inf | 4.62 | 5.00 |
| 6925MHz | Pass | 3.08 | -1.20 | -1.02 | 1.77 | Inf | 4.85 | 5.00 |
| 7005MHz | Pass | 3.08 | -1.43 | -1.15 | 1.68 | Inf | 4.76 | 5.00 |
| 7085MHz | Pass | 3.08 | -1.28 | -0.95 | 1.75 | Inf | 4.83 | 5.00 |
| 802.11ax HEW80_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - |
| 5985MHz | Pass | 5.38 | -3.82 | -3.56 | -0.80 | Inf | 4.58 | 5.00 |
| 6145MHz | Pass | 5.38 | -3.21 | -3.84 | -0.55 | Inf | 4.83 | 5.00 |
| 6385MHz | Pass | 5.38 | -3.44 | -3.39 | -0.52 | Inf | 4.86 | 5.00 |
| 6465MHz | Pass | 4.47 | -2.47 | -2.60 | 0.39 | Inf | 4.86 | 5.00 |
| 6545MHz Straddle 6.425-6.525GHz | Pass | 4.47 | -3.07 | -2.98 | -0.07 | Inf | 4.40 | 5.00 |
| 6625MHz | Pass | 4.13 | -2.83 | -2.81 | 0.02 | Inf | 4.15 | 5.00 |
| 6705MHz | Pass | 4.13 | -2.62 | -3.03 | 0.13 | Inf | 4.26 | 5.00 |
| 6785MHz | Pass | 4.13 | -2.72 | -2.94 | 0.04 | Inf | 4.17 | 5.00 |
| 6865MHz Straddle 6.525-6.875GHz | Pass | 4.13 | -2.57 | -2.95 | 0.21 | Inf | 4.34 | 5.00 |
| 6945MHz | Pass | 3.08 | -2.97 | -3.17 | -0.11 | Inf | 2.97 | 5.00 |
| 7025MHz | Pass | 3.08 | -2.99 | -3.33 | -0.18 | Inf | 2.90 | 5.00 |
| 802.11ax HEW160_Nss1,(MCS0)_2TX | - | - | - | - | - | - | - | - |
| 6025MHz | Pass | 5.38 | -5.44 | -5.26 | -2.46 | Inf | 2.92 | 5.00 |
| 6185MHz | Pass | 5.38 | -5.52 | -5.58 | -2.61 | Inf | 2.77 | 5.00 |
| 6345MHz | Pass | 5.38 | -5.47 | -5.73 | -2.76 | Inf | 2.62 | 5.00 |
| 6505MHz Straddle 6.425-6.525GHz | Pass | 4.47 | -5.35 | -5.44 | -2.50 | Inf | 1.97 | 5.00 |
| 6665MHz | Pass | 4.13 | -5.60 | -5.65 | -2.75 | Inf | 1.38 | 5.00 |
| 6825MHz Straddle 6.525-6.875GHz | Pass | 4.13 | -5.09 | -5.42 | -2.42 | Inf | 1.71 | 5.00 |
| 6985MHz | Pass | 3.08 | -4.91 | -5.37 | -2.28 | Inf | 0.80 | 5.00 |


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5955MHz

29/03/2022

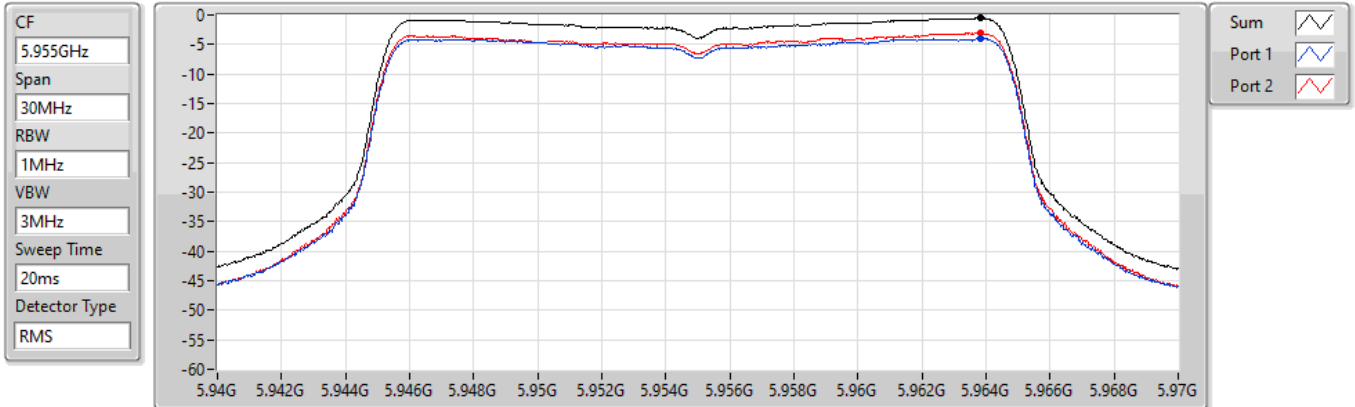


| Sum | PD | Port 1 | Port 2 |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.50 | -0.50 | -3.97 | -3.09 |

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

6175MHz

29/03/2022

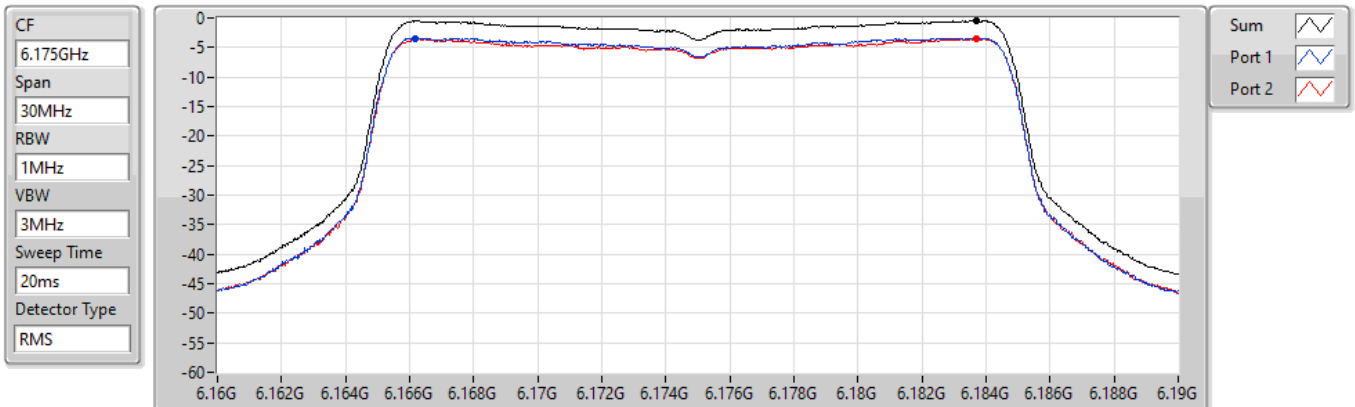

| Sum | PD | Port 1 | Port 2 |
|-----------|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -0.49 | -0.49 | -3.42 | -3.52 |