



Test Report

AIR-CAP1552yx-A-K9 Series

Cisco Aironet 802.11n Dual Band Mesh Access Points

FCC ID: LDK102074P

IC: 2461B-102074P

y = E (External Antenna), I (Internal Antenna), C (Cable), H (Hazardous Location)

x= U (band independent)

(Also covers AIR-CAP1552yx-T-K9)

5250-5350, 5470-5725 MHz

Class II Permissive Change

Against the following Specifications:

CFR47 Part 15.407

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW3

SECTION 2: ASSESSMENT INFORMATION4

2.1 GENERAL4

2.4 TESTING FACILITIES5

2.6 EUT DESCRIPTION5

SECTION 4: SAMPLE DETAILS.....6

APPENDIX A: EMISSION TEST RESULTS.....7

AVERAGE OUTPUT POWER7

PEAK OUTPUT POWER8

POWER SPECTRAL DENSITY8

CONDUCTED BANDEDGE48

APPENDIX B: EMISSION TEST RESULTS.....53

RADIATED SPURIOUS53

MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....58

APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST60



Section 1: Overview

Test Summary – This report presents data to support the addition of high gain antennas to the AIR-CAP1552xx series 802.11n Dual Band Mesh Access Point. Original DFS testing was done at 0db gain. Added antenna gain will not lessen the DFS detection levels so re-testing is deemed unnecessary.

1.1

Samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.407 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V-3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
 - 110V 60 Hz (+/-20%)
 - 220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of start of testing

26 January 2012

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson, Bud Chiller

2.5 Equipment Assessed (EUT)

AIR-CAP1552EU-A-K9 Cisco Aironet 802.11n Dual Band Mesh Access Point

2.6 EUT Description

The AIR-CAP1552 Series Cisco Aironet 802.11n Dual Band Mesh Access Points require professional installation, and supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT-20, 6 to 54 Mbps, Single
Non HT-20, 6 to 54 Mbps, Dual
Non HT-20 Beam Forming, 6 to 54 Mbps
HT-20, M0 to M7, Single
HT-20, M0 to M7, Dual
Non HT-40 Duplicate, 6-54 Mbps, Single
Non HT-40 Duplicate, 6-54 Mbps, Dual
HT-40, M0 to M7, Single
HT-40, M0 to M7, Dual



The following antennas are to be added and supported by this product series.

5 GHz

AIR-ANT5140V-N (4 dBi)

AIR-ANT5175V-N (7.5 dBi)

AIR-ANT5180V-N (8 dBi)

AIR-ANT5114P-N= (14 dBi, patch)

AIR-ANT5114P2M-N= (14 dBi, dual polarized patch)

Dual Band

AIR-ANT2588P3M-N= (8/8 dBi, patch)

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP1552EU-A-K9		Cisco Systems	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Average Output Power

Connect the antenna(s) to the power meter at the average power sensor input. Configure the power meter to measure average power for the transmitter frequencies listed below (be sure to enter all losses between the transmitter output and the power meter).

Place the radio in continuous transmit mode and record the reading on the power meter.

The following table details the maximum supported Total Channel Power for all operating modes

Frequency (MHz)	Operating Mode	Max Channel Power (dBm)
5250-5320 5500-5560 5680-5700	Non HT-20, 6 to 54 Mbps, Single	22
	Non HT-20, 6 to 54 Mbps, Dual	21
	Non HT-20 Beam Forming, 6 to 54 Mbps	20
	HT-20, M0 to M7, Single	22
	HT-20, M0 to M7, Dual	21
5300/5320 5500/5520 5540/5560	Non HT-40 Duplicate, 6-54 Mbps, Single	22
	Non HT-40 Duplicate, 6-54 Mbps, Dual	23
	HT-40, M0 to M7, Single	23
	HT-40, M0 to M7, Dual	23



Peak Output Power

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The smallest 26dB bandwidth for all channels is 22.6 MHz. The maximum conducted output power is calculated as $11\text{dBm} + 10 \cdot \log(20.4\text{MHz}) = 24.5\text{dBm}$

The maximum supported antenna gain is 14dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Power Spectral Density

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 14 dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(2)$ (or 3dB) is added to the worst case spectrum value before comparing to the emission limit.



Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data



After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power. Perform a Marker Peak Search function, and record this value as the Power Spectral Density.



Peak Transmit Power 8dBi							
Frequency (MHz)	Operating Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Peak Power (dBm)	Tx 2 Peak Power (dBm)	Total Tx Channel Power (dBm)	Power Limit (dBm)
5280	Non HT-20, 6 to 54 Mbps, Single	1	8	18.7	0.0	18.8	28
	Non HT-20, 6 to 54 Mbps, Dual	2	8	13.9	13.6	16.8	28
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	11	13.9	13.6	16.8	25
	HT-20, M0 to M7, Single	1	8	19.9	0.0	19.9	28
	HT-20, M0 to M7, Dual	2	8	13.6	13.9	16.7	28
5320	Non HT-20, 6 to 54 Mbps, Single	1	8	16.3	0.0	16.4	28
	Non HT-20, 6 to 54 Mbps, Dual	2	8	12.1	12.7	15.4	28
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	11	12.3	13.7	16.0	25
	HT-20, M0 to M7, Single	1	8	18.6	0.0	18.6	28
	HT-20, M0 to M7, Dual	2	8	12.1	12.6	15.3	28
5500	Non HT-20, 6 to 54 Mbps, Single	1	8	18.8	0.0	18.9	28
	Non HT-20, 6 to 54 Mbps, Dual	2	8	12.5	13.1	15.8	28
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	11	14.0	13.3	16.7	25
	HT-20, M0 to M7, Single	1	8	18.2	0.0	18.3	28
	HT-20, M0 to M7, Dual	2	8	13.4	14.1	16.8	28
5560	Non HT-20, 6 to 54 Mbps, Single	1	8	18.0	0.0	18.0	28
	Non HT-20, 6 to 54 Mbps, Dual	2	8	14.0	13.6	16.8	28
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	11	14.0	13.6	16.8	25
	HT-20, M0 to M7, Single	1	8	19.9	0.0	20.0	28
	HT-20, M0 to M7, Dual	2	8	13.7	13.9	16.8	28
5700	Non HT-20, 6 to 54 Mbps, Single	1	8	18.6	0.0	18.7	28
	Non HT-20, 6 to 54 Mbps, Dual	2	8	13.8	13.4	16.6	28
	Non HT-20 Beam Forming, 6 to 54 Mbps	2	11	13.8	13.4	16.6	25
	HT-20, M0 to M7, Single	1	8	19.5	0.0	19.5	28
	HT-20, M0 to M7, Dual	2	8	13.7	13.5	16.6	28
5300/5320	Non HT-40 Duplicate, 6-54 Mbps, Single	1	8	17.7	0.0	17.8	28
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	8	15.1	15.7	18.4	28
	HT-40, M0 to M7, Single	1	8	17.7	0.0	17.8	28
	HT-40, M0 to M7, Dual	2	8	15.7	14.6	18.2	28
5500/5520	Non HT-40 Duplicate, 6-54 Mbps, Single	1	8	18.8	0.0	18.8	28
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	8	16.2	15.6	18.9	28
	HT-40, M0 to M7, Single	1	8	18.9	0.0	18.9	28
	HT-40, M0 to M7, Dual	2	8	15.7	15.5	18.6	28
5540/5560	Non HT-40 Duplicate, 6-54 Mbps, Single	1	8	18.9	0.0	18.9	28
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	8	15.7	15.8	18.7	28
	HT-40, M0 to M7, Single	1	8	18.9	0.0	18.9	28
	HT-40, M0 to M7, Dual	2	8	15.7	15.8	18.8	28

**Peak Transmit Power 14 dBi**


Frequency (MHz)	Operating Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Peak Power (dBm)	Tx 2 Peak Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)
5280	Non HT-20, 6 to 54 Mbps, Single	1	14	12.4	0.0	12.7	13
	Non HT-20, 6 to 54 Mbps, Dual	2	14	6.4	6.2	9.3	10
	HT-20, M0 to M7, Single	1	14	12.6	0.0	12.8	13
	HT-20, M0 to M7, Dual	2	14	5.9	6.1	9.0	10
5320	Non HT-20, 6 to 54 Mbps, Single	1	14	11.4	0.0	11.4	13
	Non HT-20, 6 to 54 Mbps, Dual	2	14	6.1	6.4	9.3	10
	HT-20, M0 to M7, Single	1	14	11.4	0.0	11.4	13
	HT-20, M0 to M7, Dual	2	14	6.4	6.9	9.7	10
5500	Non HT-20, 6 to 54 Mbps, Single	1	14	11.2	0.0	11.2	13
	Non HT-20, 6 to 54 Mbps, Dual	2	14	6.4	6.3	9.3	10
	HT-20, M0 to M7, Single	1	14	12.6	0.0	12.6	13
	HT-20, M0 to M7, Dual	2	14	7.0	6.4	9.7	10
5560	Non HT-20, 6 to 54 Mbps, Single	1	14	12.1	0.0	12.1	13
	Non HT-20, 6 to 54 Mbps, Dual	2	14	5.0	5.3	8.2	10
	HT-20, M0 to M7, Single	1	14	10.2	0.0	10.2	13
	HT-20, M0 to M7, Dual	2	14	4.7	5.2	8.0	10
5700	Non HT-20, 6 to 54 Mbps, Single	1	14	11.8	0.0	11.8	13
	Non HT-20, 6 to 54 Mbps, Dual	2	14	6.5	6.8	9.6	10
	HT-20, M0 to M7, Single	1	14	12.6	0.0	12.6	13
	HT-20, M0 to M7, Dual	2	14	6.5	6.8	9.7	10
5300/5320	Non HT-40 Duplicate, 6-54 Mbps, Single	1	14	11.6	0.0	11.9	13
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	14	5.0	5.3	8.2	13
	HT-40, M0 to M7, Single	1	14	12.8	0.0	12.8	13
	HT-40, M0 to M7, Dual	2	14	5.3	5.0	8.1	13
5500/5520	Non HT-40 Duplicate, 6-54 Mbps, Single	1	14	12.1	0.0	12.4	13
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	14	5.9	5.3	8.6	13
	HT-40, M0 to M7, Single	1	14	12.1	0.0	12.3	13
	HT-40, M0 to M7, Dual	2	14	5.7	6.4	9.0	13
5540/5560	Non HT-40 Duplicate, 6-54 Mbps, Single	1	14	11.8	0.0	12.1	13
	Non HT-40 Duplicate, 6-54 Mbps, Dual	2	14	5.0	5.6	8.3	13
	HT-40, M0 to M7, Single	1	14	11.8	0.0	12.0	13
	HT-40, M0 to M7, Dual	2	14	5.0	5.6	8.3	13

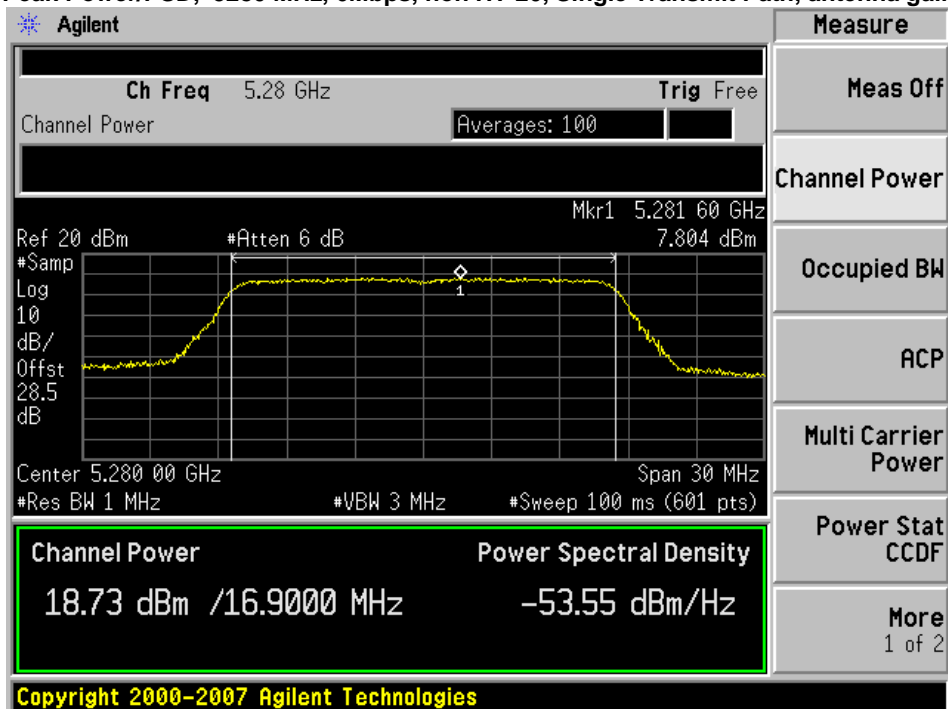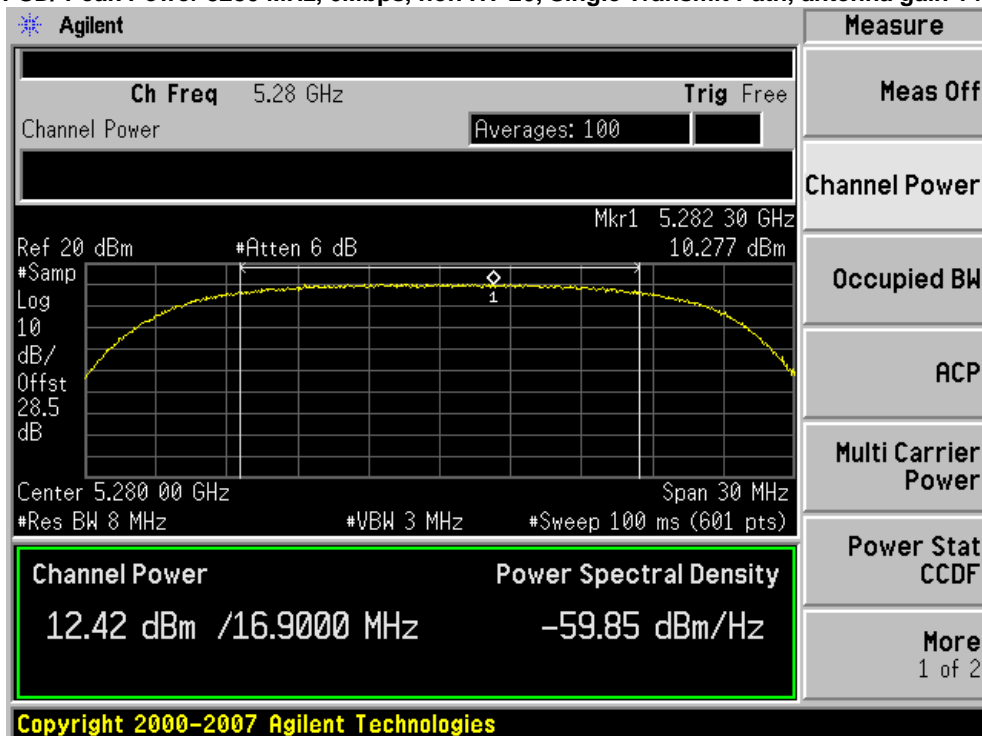Peak Power/PSD, 5280 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 8**PSD/ Peak Power 5280 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 14**




PSD, 5280 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 8

Ant A

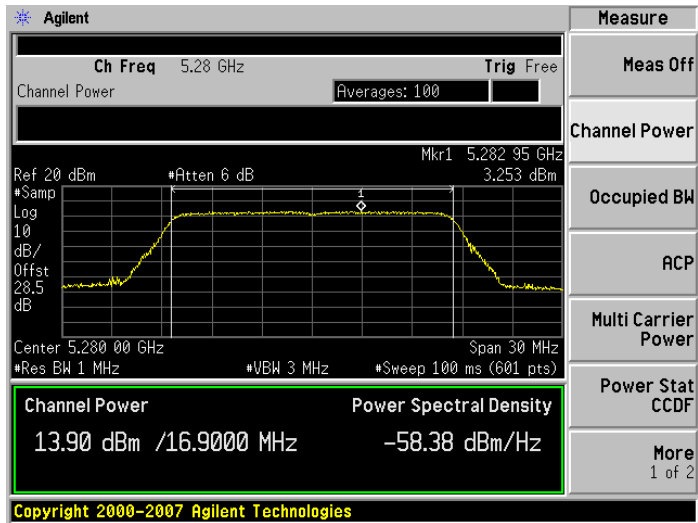


Ant B

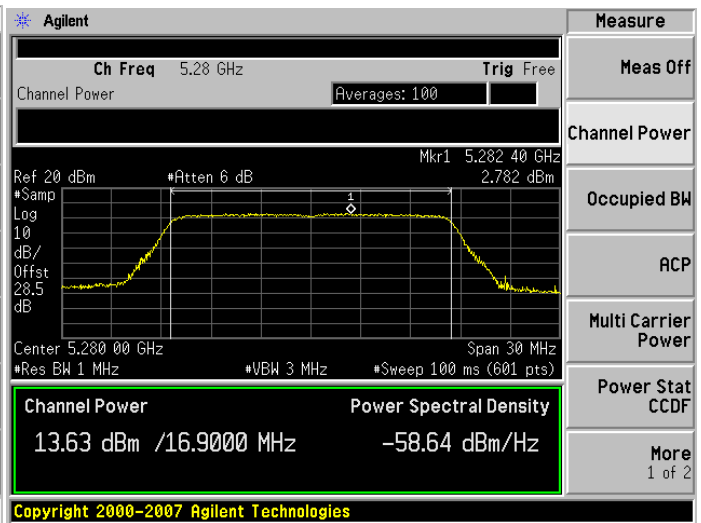




PSD/ Peak Power, 5280 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 14

Ant A

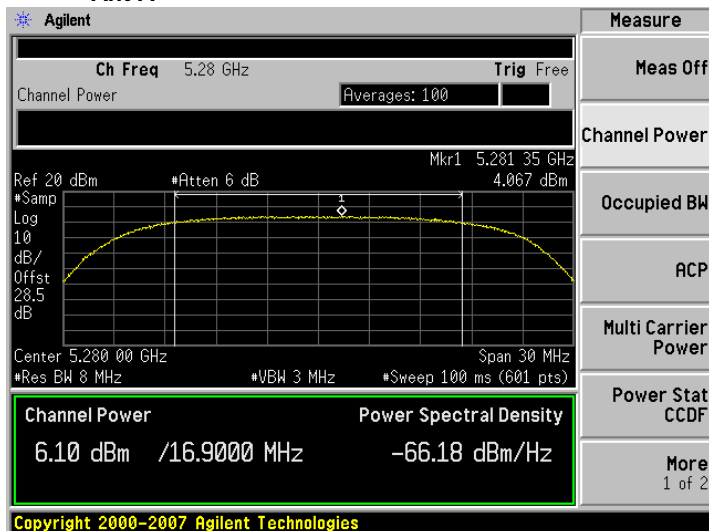


Ant B

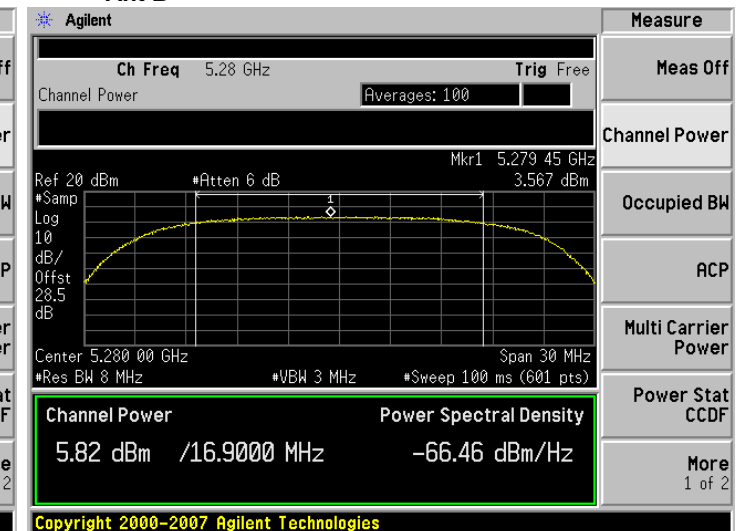

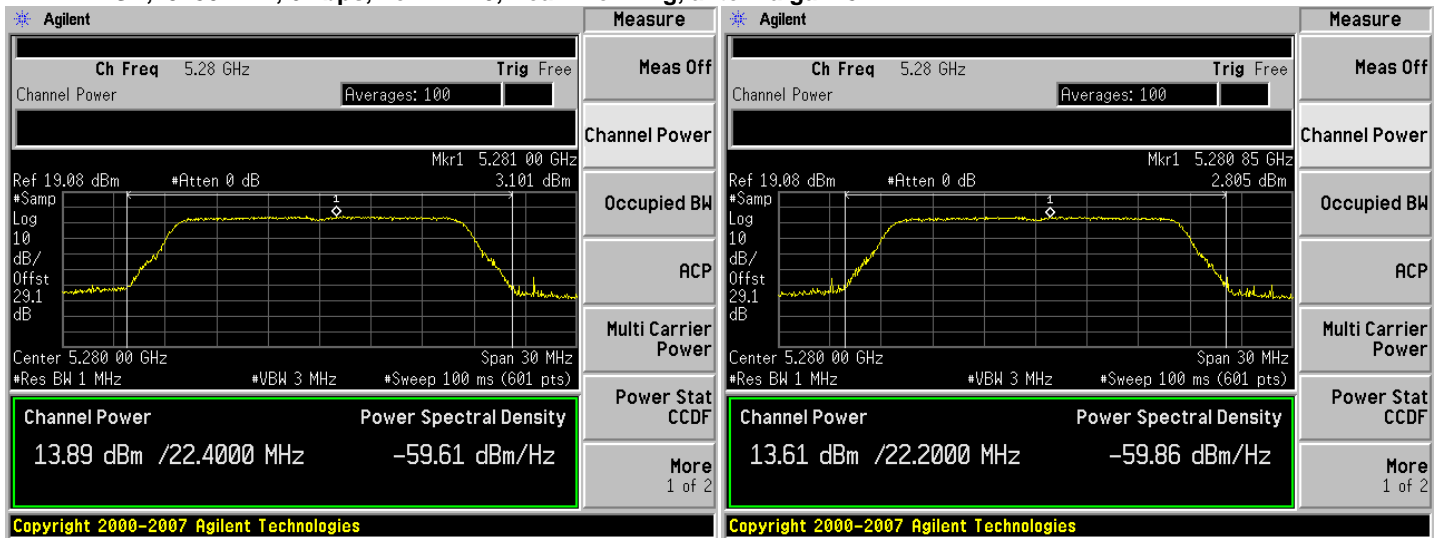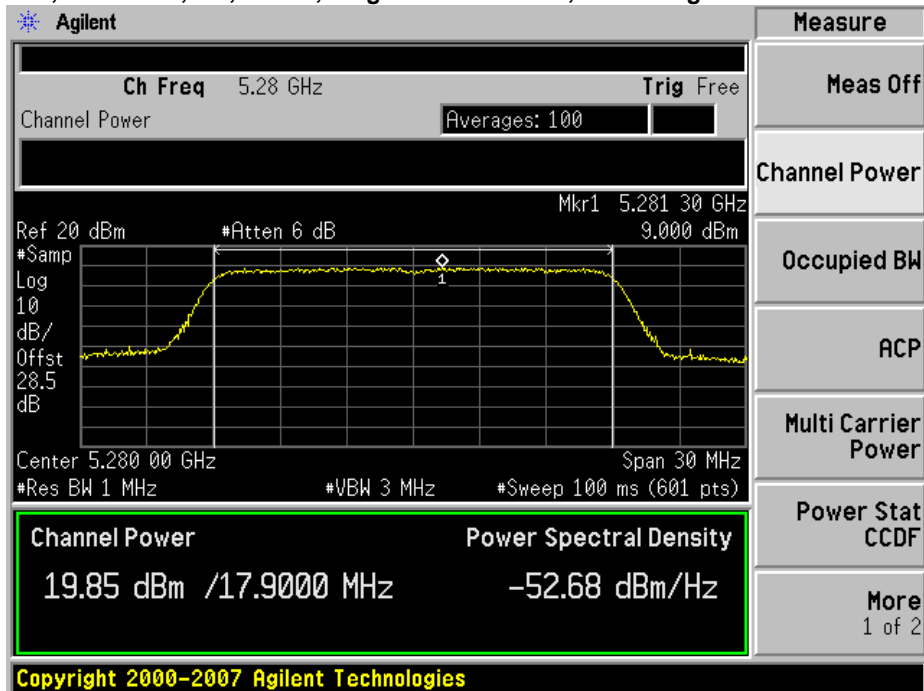
**PSD, 5280 MHz, 6Mbps, non HT-20, Beam Forming, antenna gain 8****PSD, 5280 MHz, m0, HT-20, Single Transmit Path, antenna gain 8**

PSD/ Peak Power, 5280 MHz, m0, HT-20, Single Transmit Path, antenna gain 14

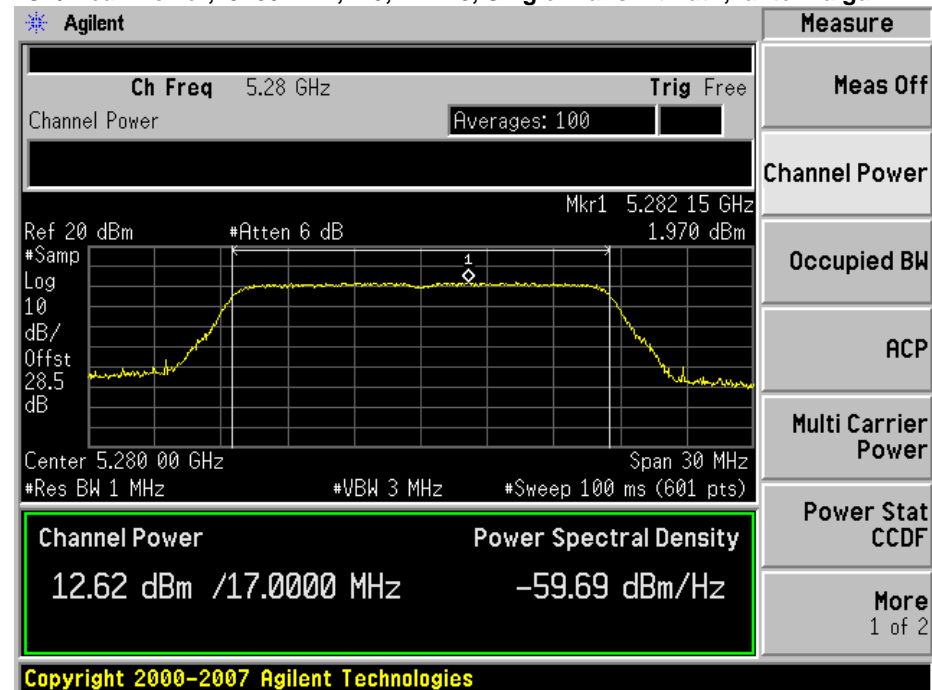


PSD, 5280 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 8

Ant A

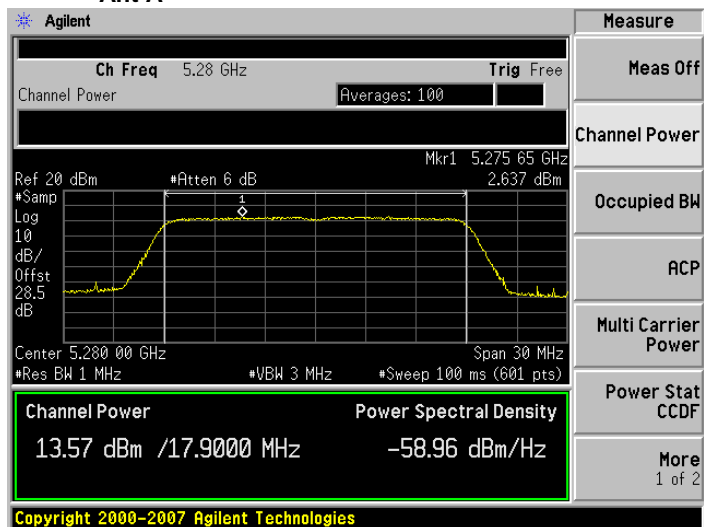


Ant B

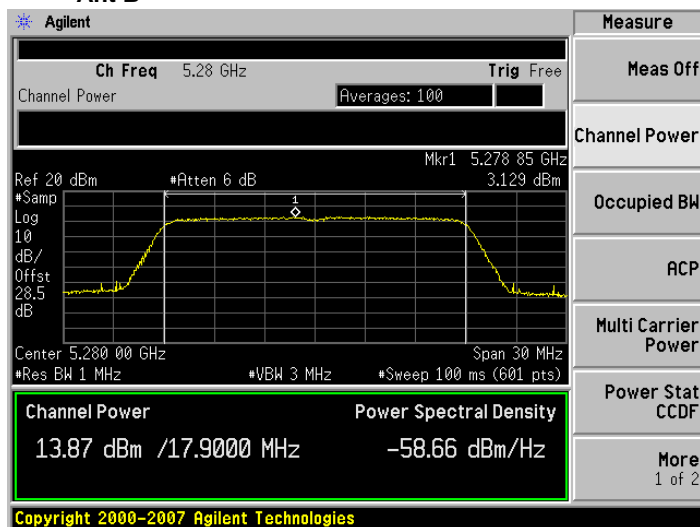




PSD/ Peak Power, 5280 MHz, m0, HT-20, Dual Transmit Paths, antenna 14


Ant A

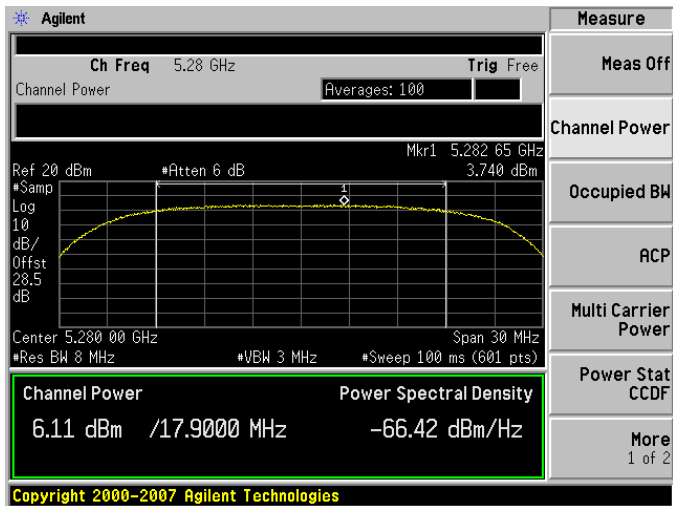


Ant B




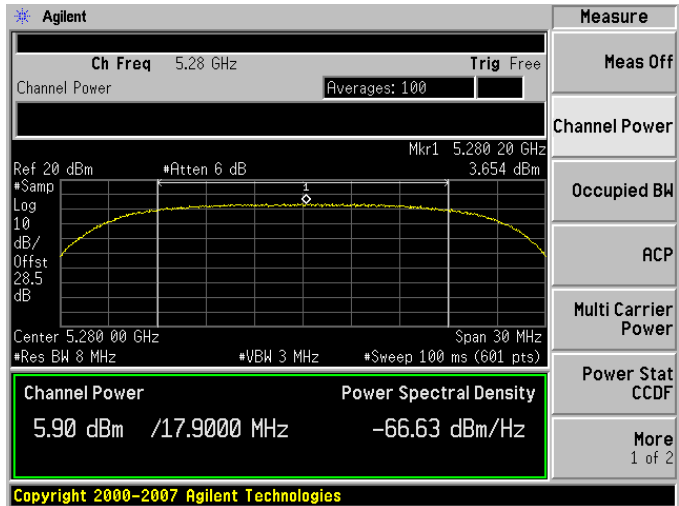


PSD, 5320 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 8

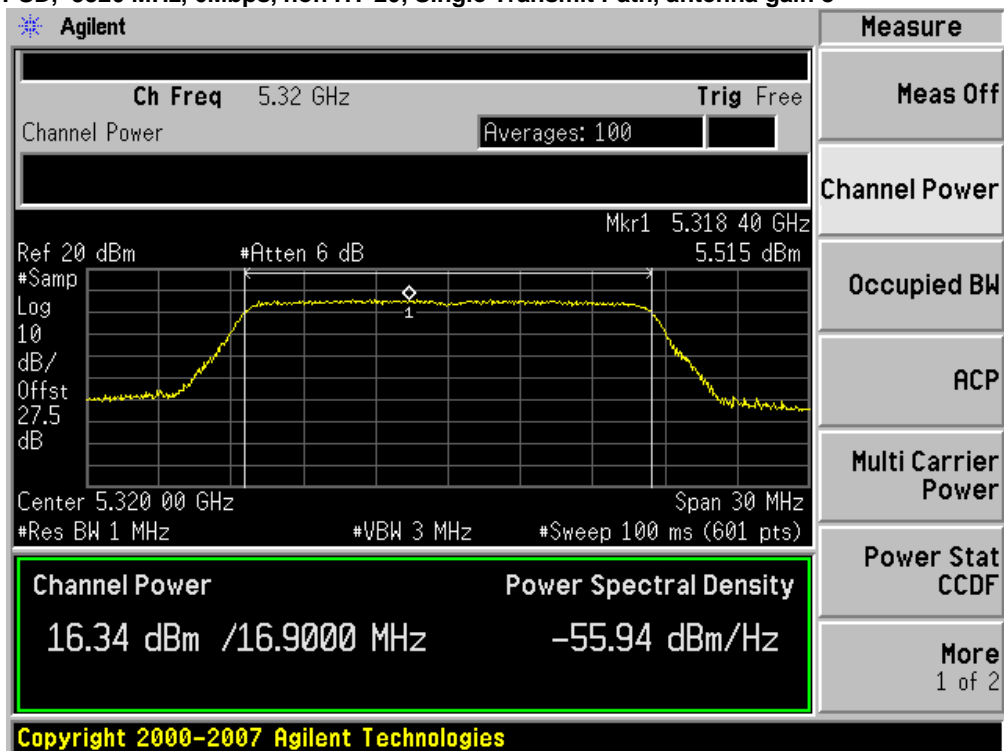

PSD/ Peak Power, 5320 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 14

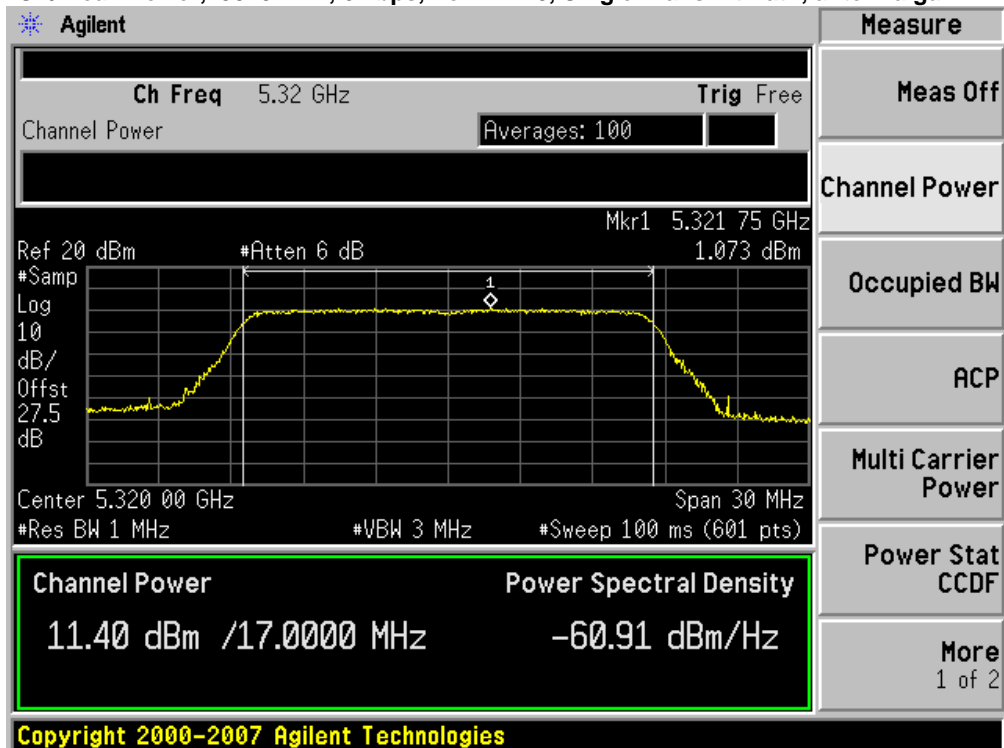


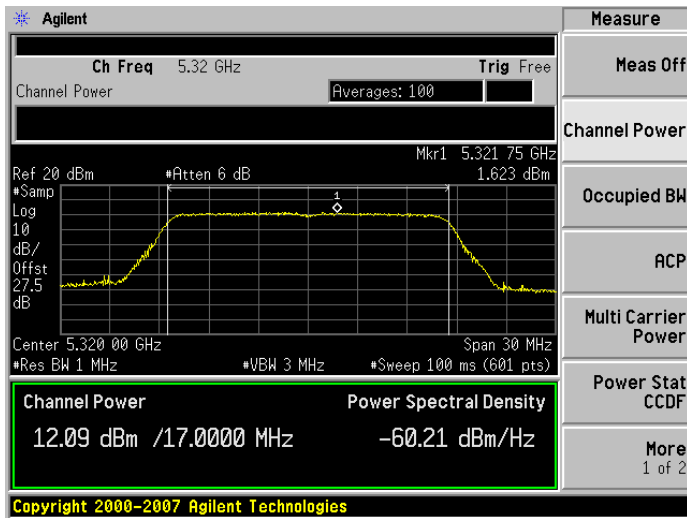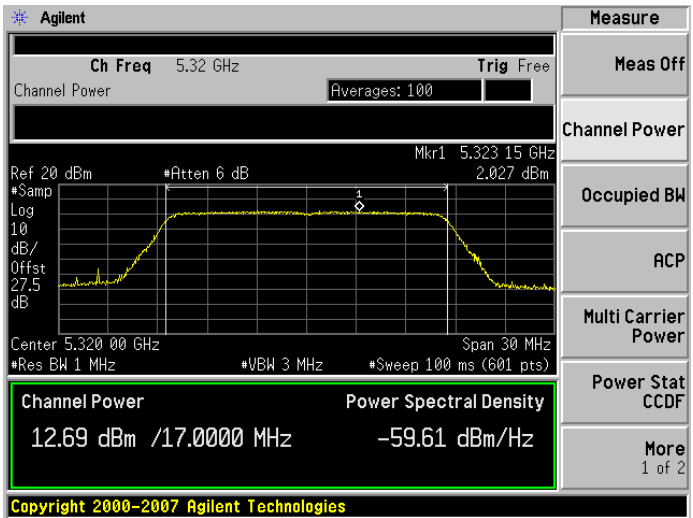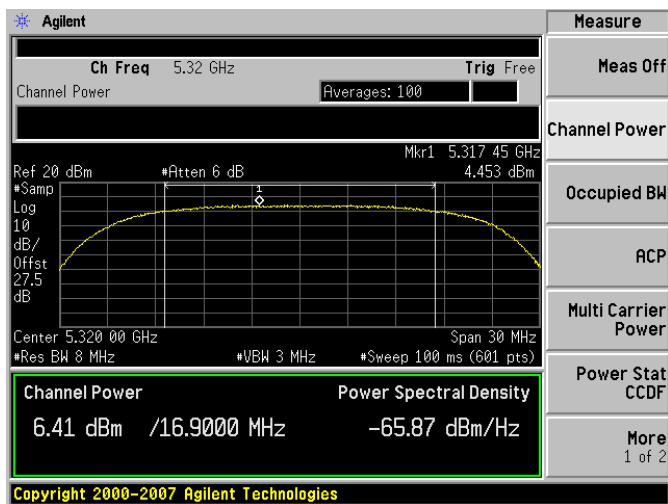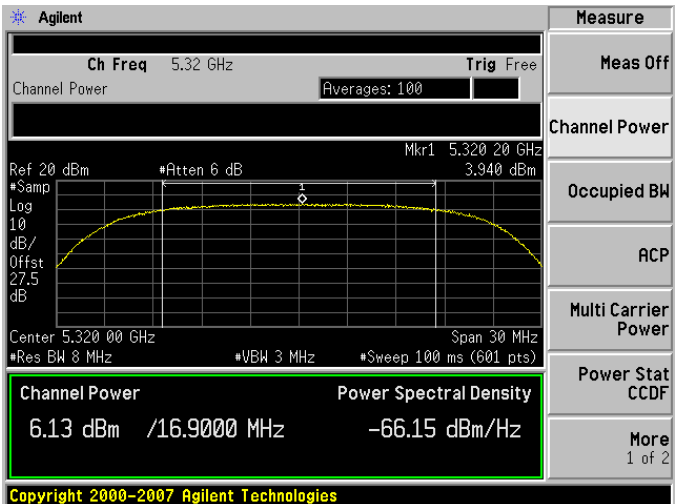**PSD, 5320 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 8****Ant A:****Ant B:****PSD/ Peak Power, 5320 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 14****Ant A:****Ant B:**




PSD, 5320 MHz, 6Mbps, non HT-20, Beam Forming, antenna gain 8


Ant A

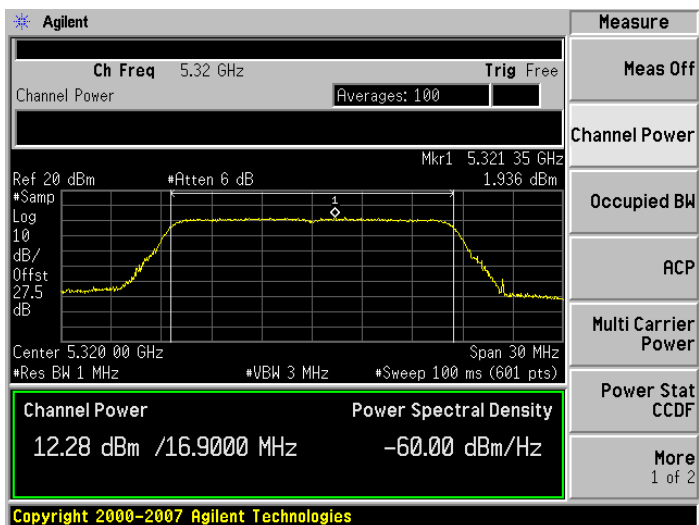

Ant B:

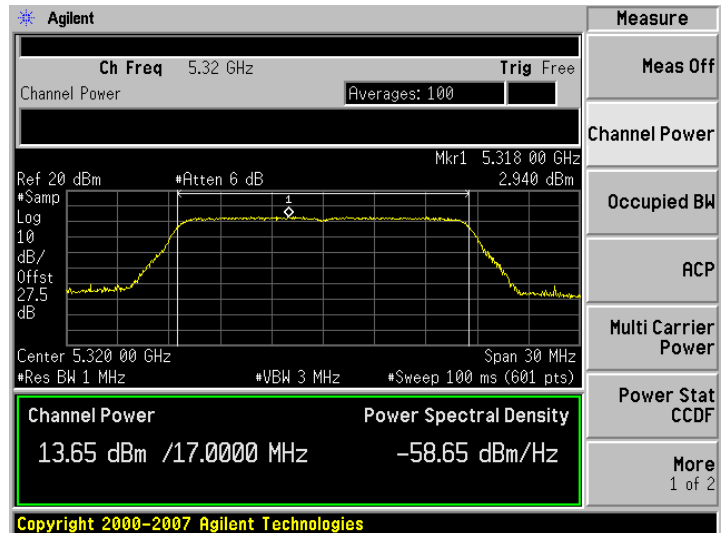


PSD, 5320 MHz, m0, HT-20, Single Transmit Path, antenna gain 8

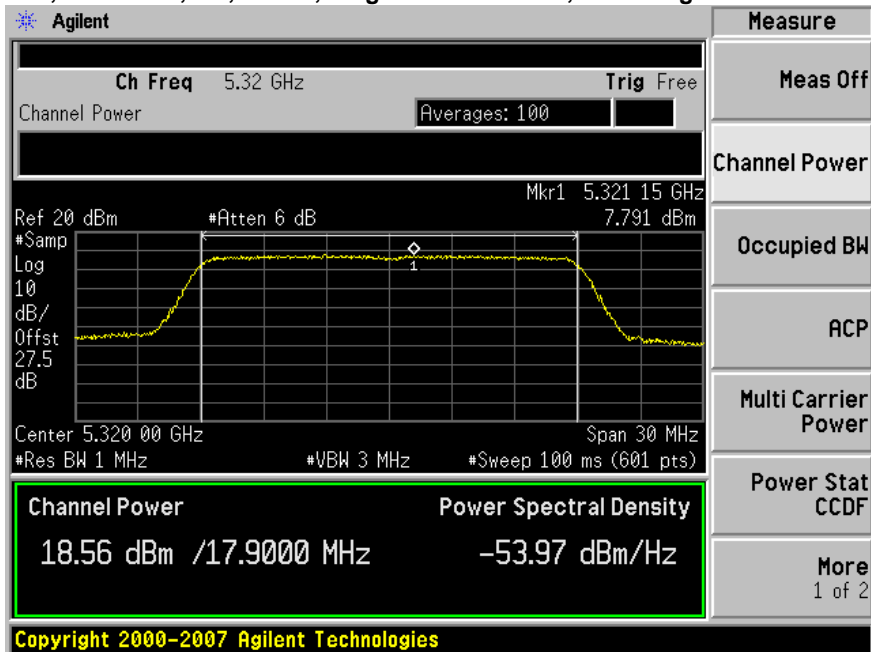




PSD/ Peak Power, 5320 MHz, m0, HT-20, Single Transmit Path, antenna gain 14

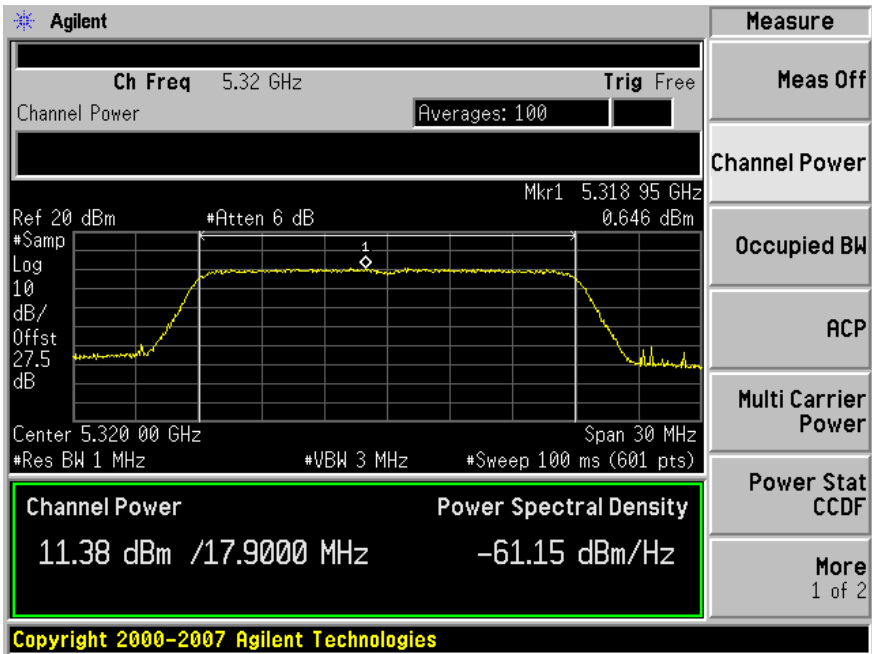


PSD, 5320 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 8

Ant A

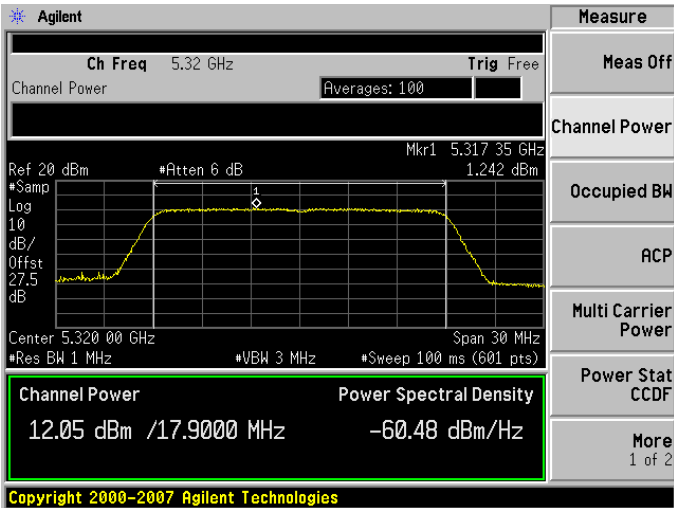


Ant B

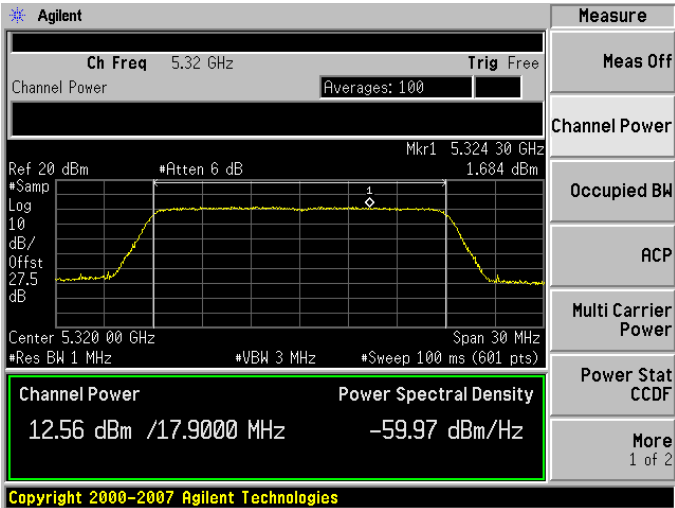




PSD/ Peak Power, 5320 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 14


Ant A

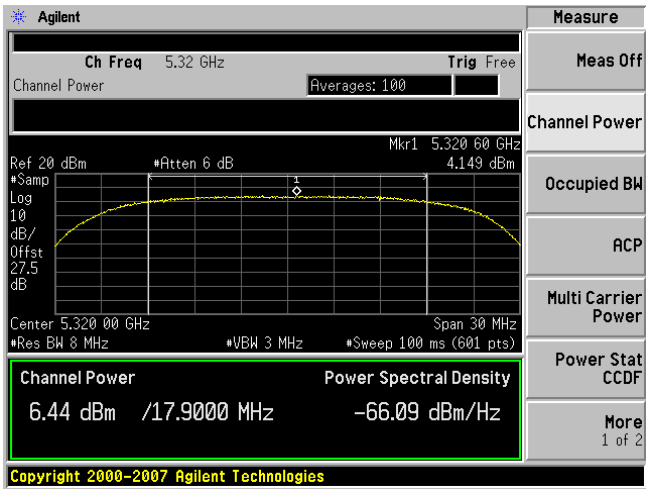


Ant B

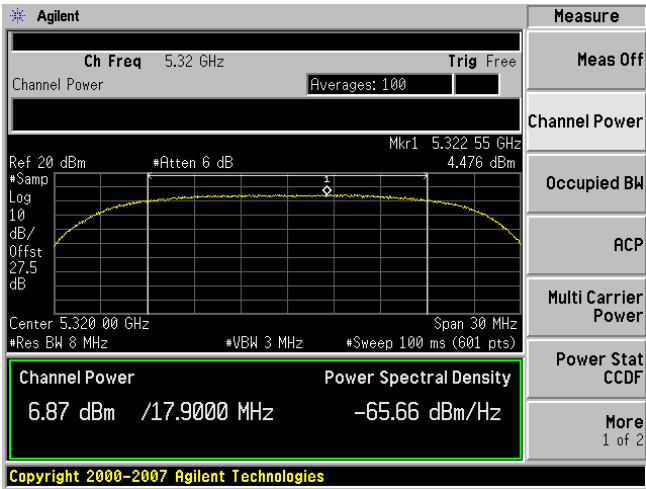

PSD, 5500 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 8

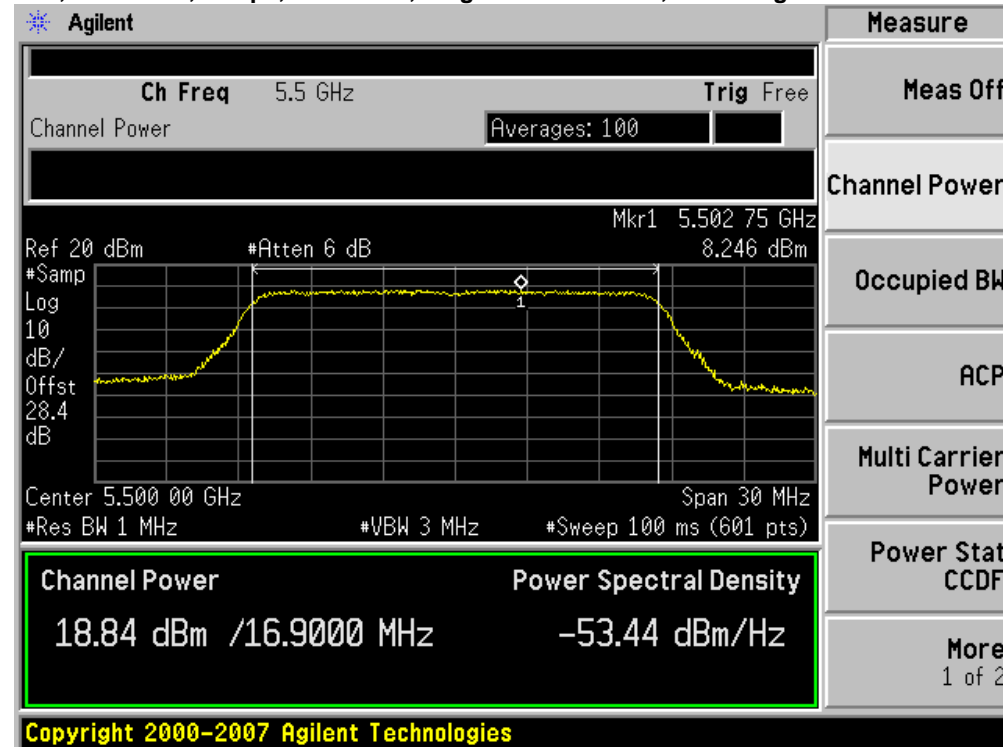


PSD/ Peak Power, 5500 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 14

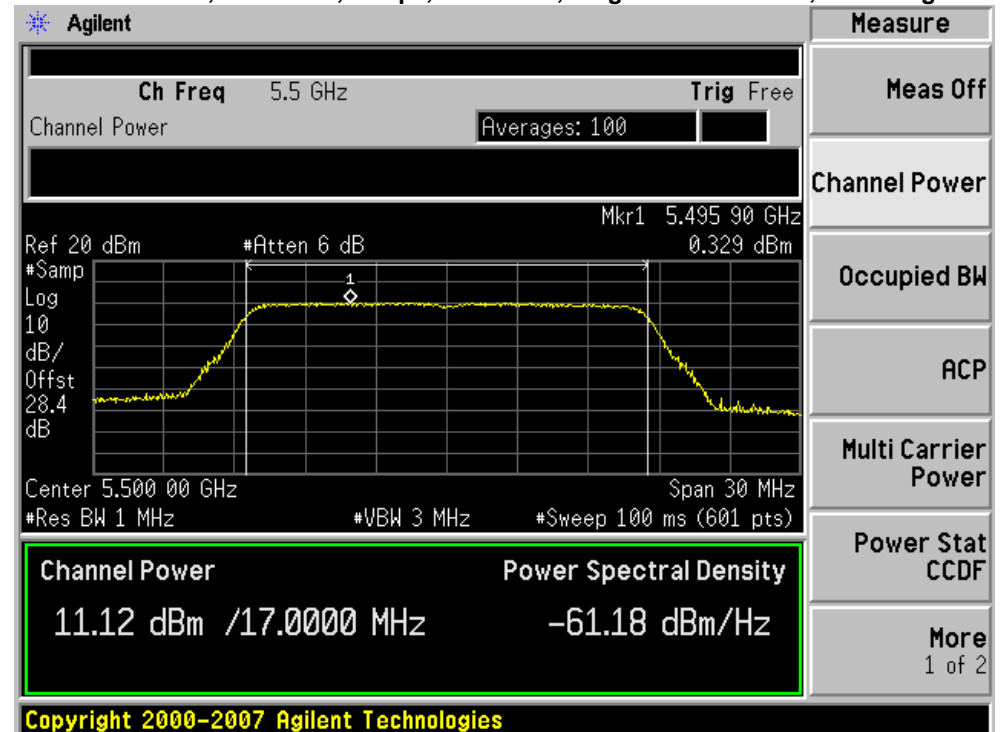




PSD, 5500 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 8

Ant A

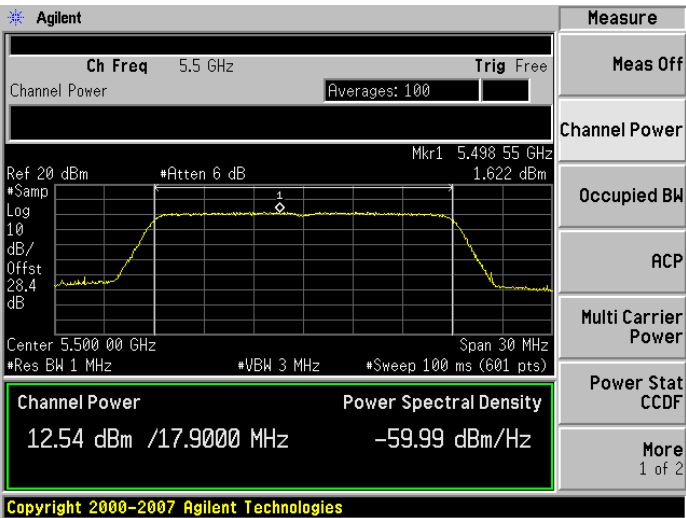


Ant B

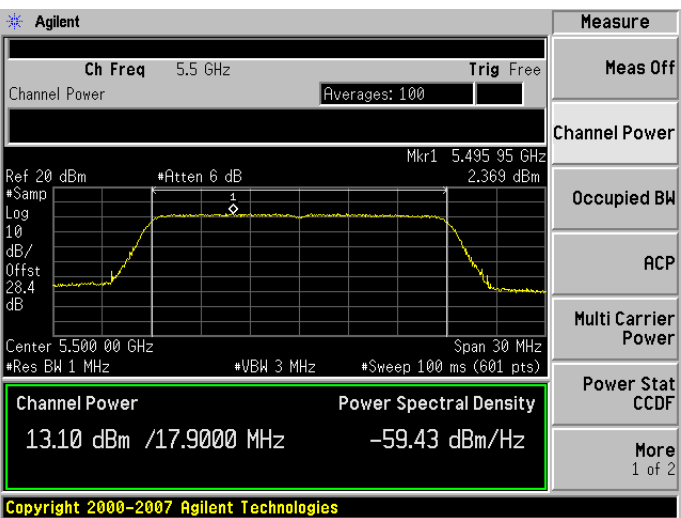


PSD/ Peak Power, 5500 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 14

Ant A

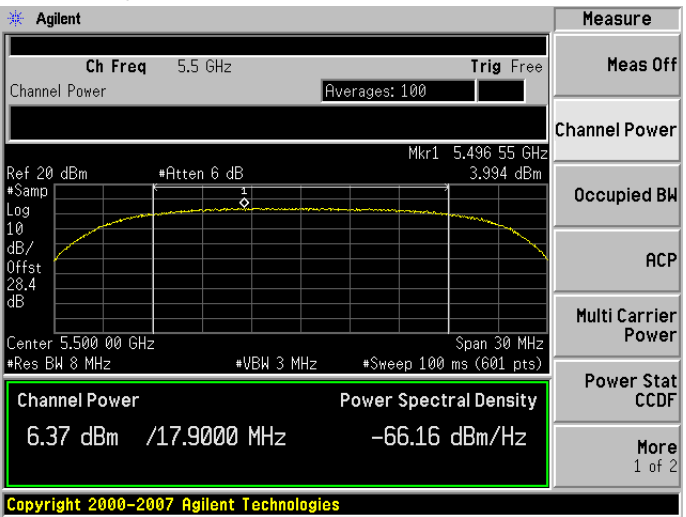


Ant B

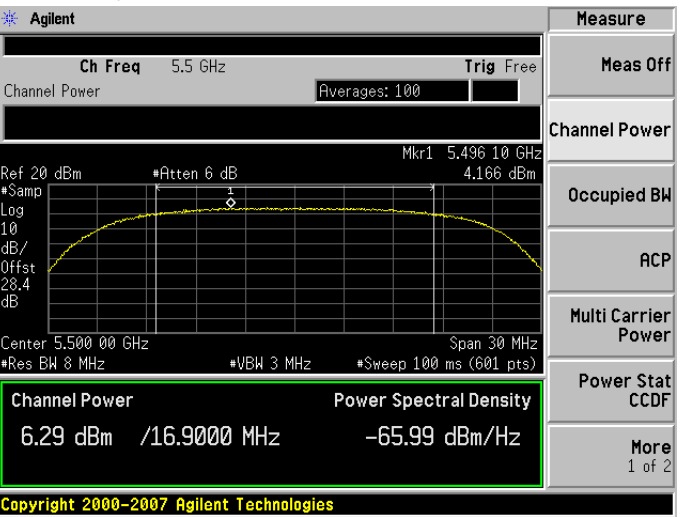




PSD, 5500 MHz, 6Mbps, non HT-20, Beam Forming, antenna gain 8


Ant A

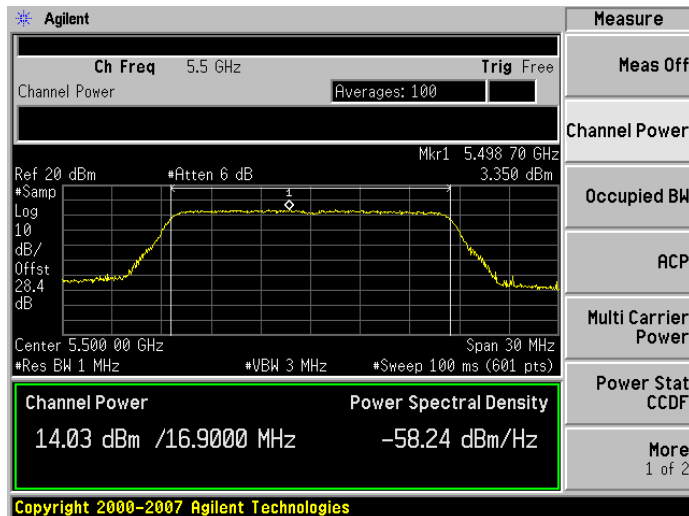


Ant B

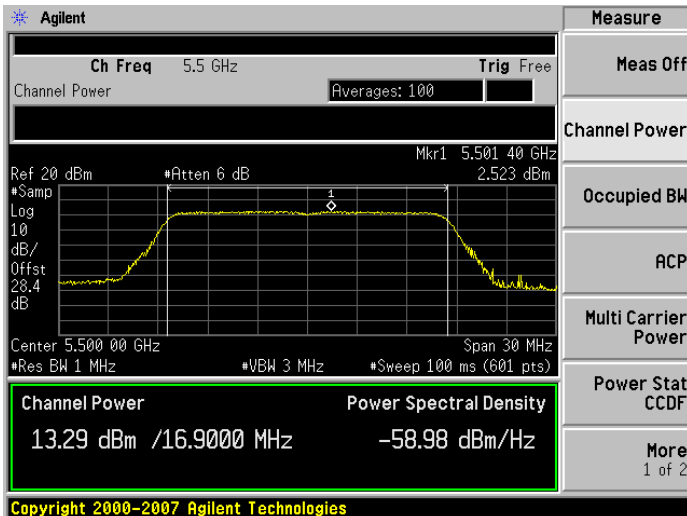

PSD, 5500 MHz, m0, HT-20, Single Transmit Path, antenna gain 8


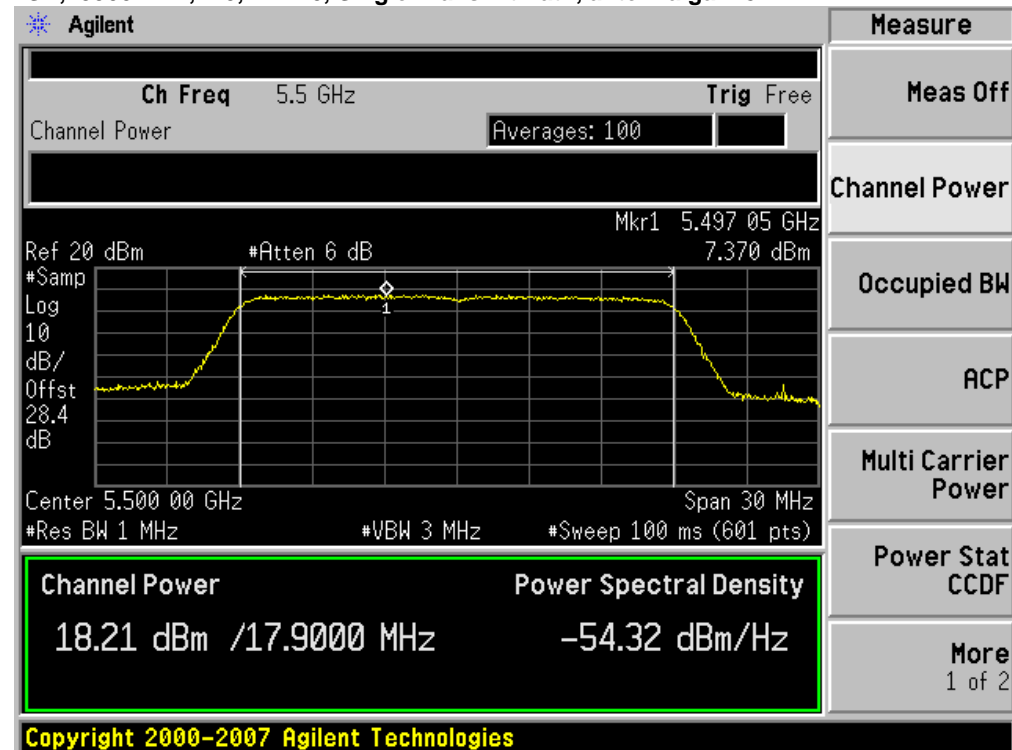





PSD/ Peak Power, 5500 MHz, m0, HT-20, Single Transmit Path, antenna gain 14

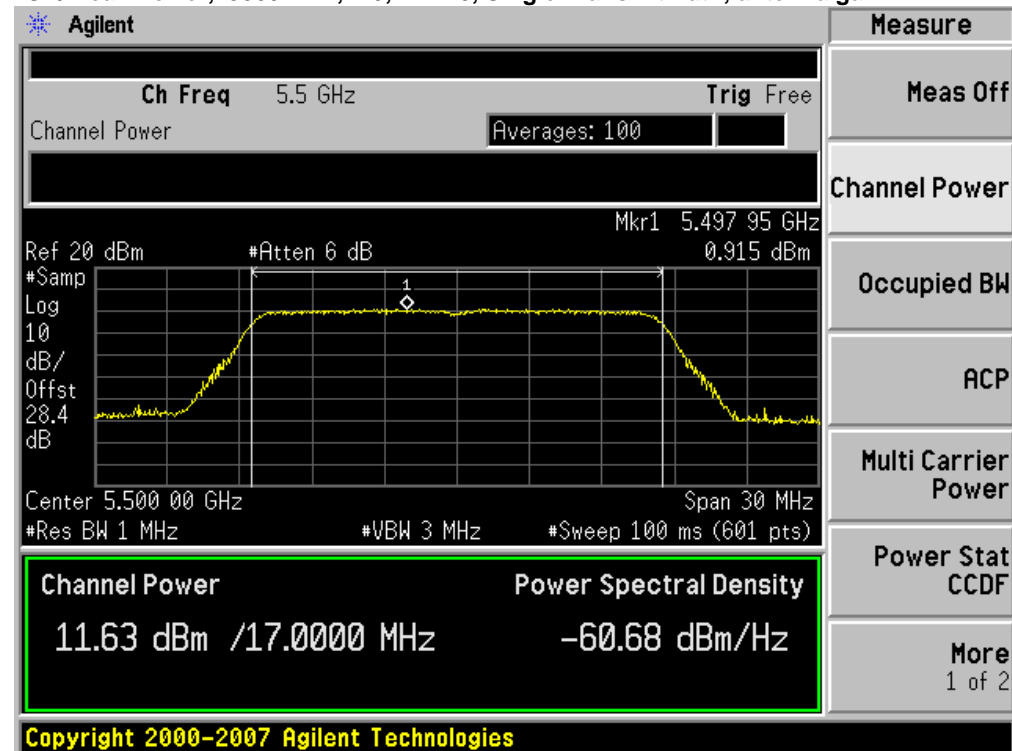

PSD, 5500 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 8

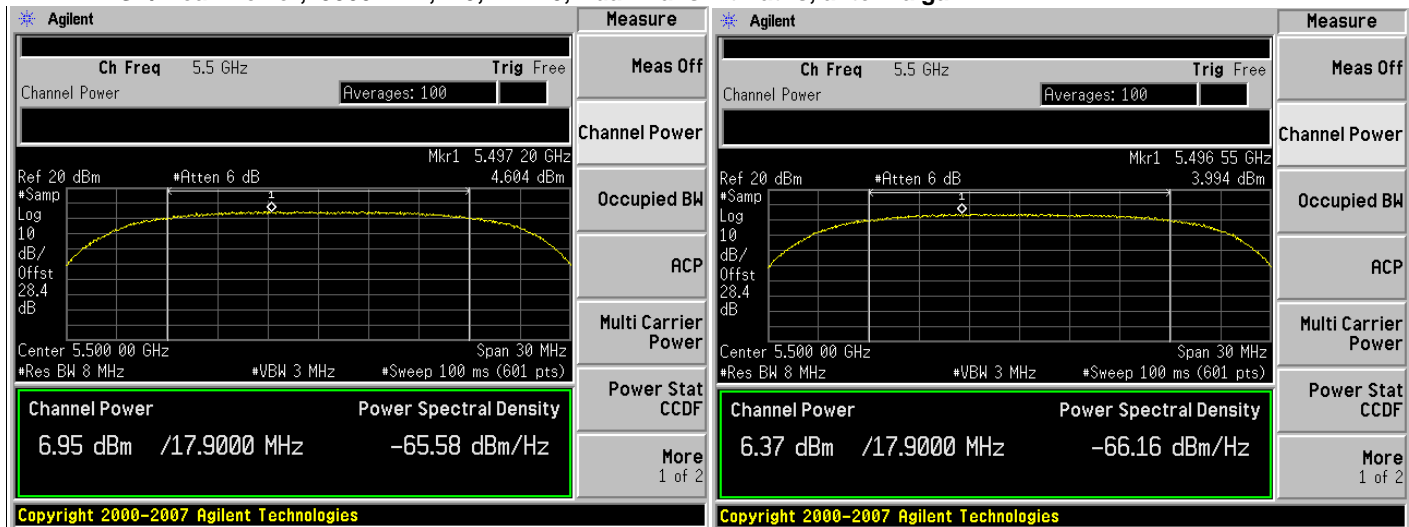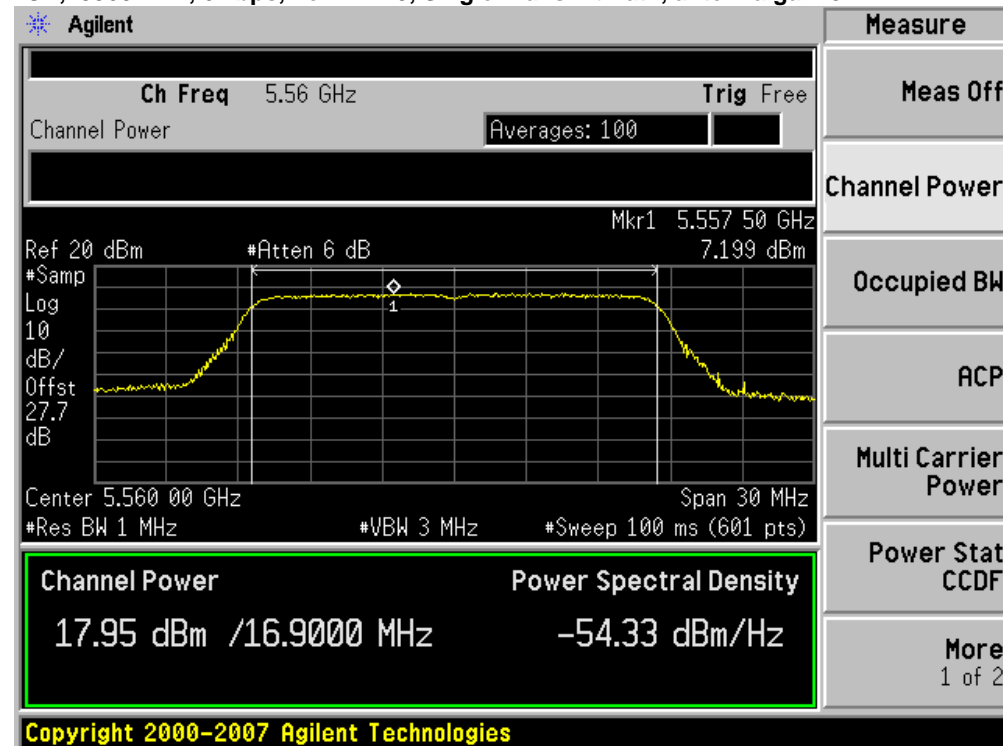


**PSD/ Peak Power, 5500 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 14****PSD, 5560 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 8**

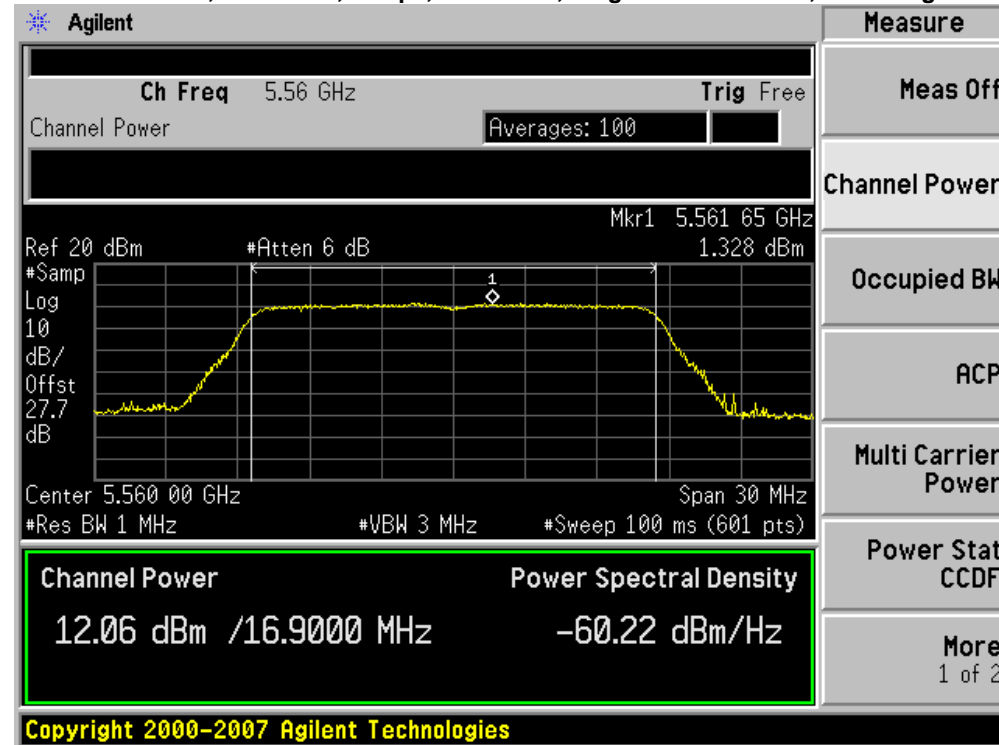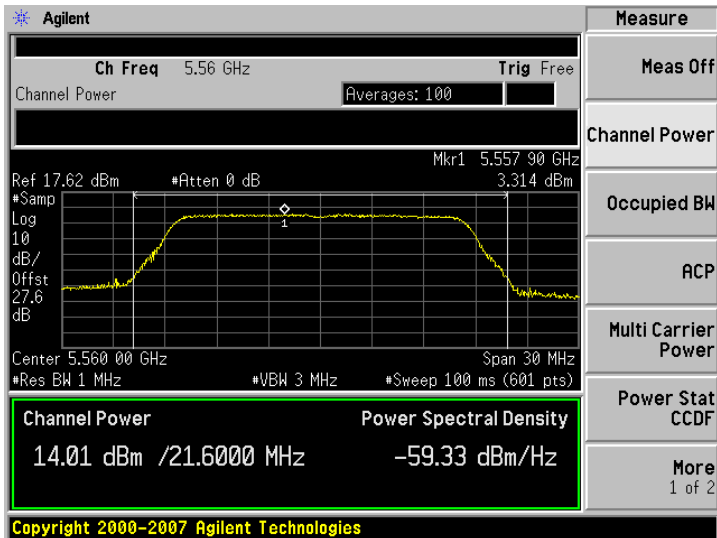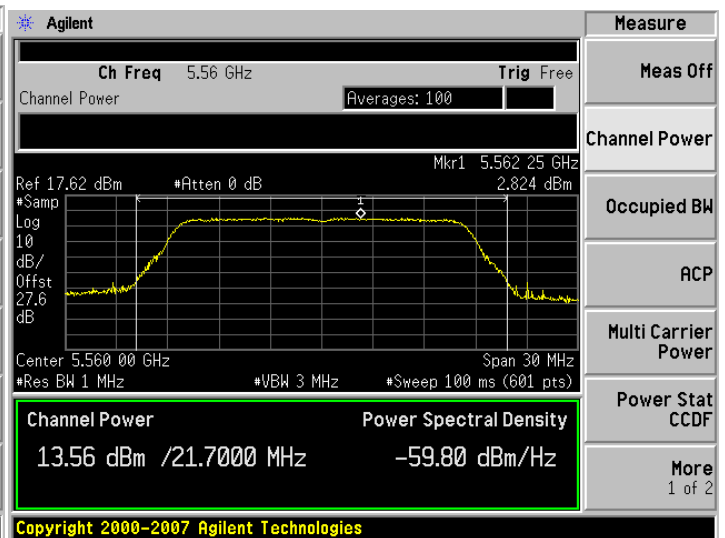PSD/ Peak Power, 5560 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 14**PSD, 5560 MHz, 6Mbps, non HT-20, Dual Transmit Paths and Beamforming, antenna gain 8****Ant A****Ant B**




PSD/ Peak Power, 5560 MHz, 6Mbps, non HT-20, Dual Transmit Paths, Antenna gain 14


Ant A

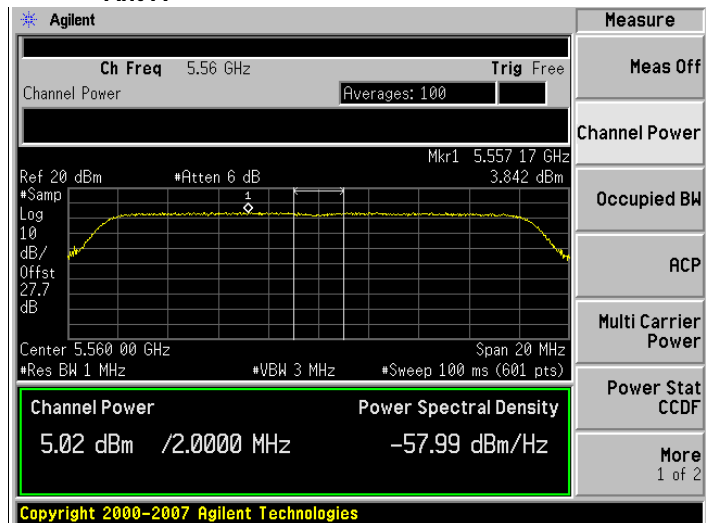


Ant B

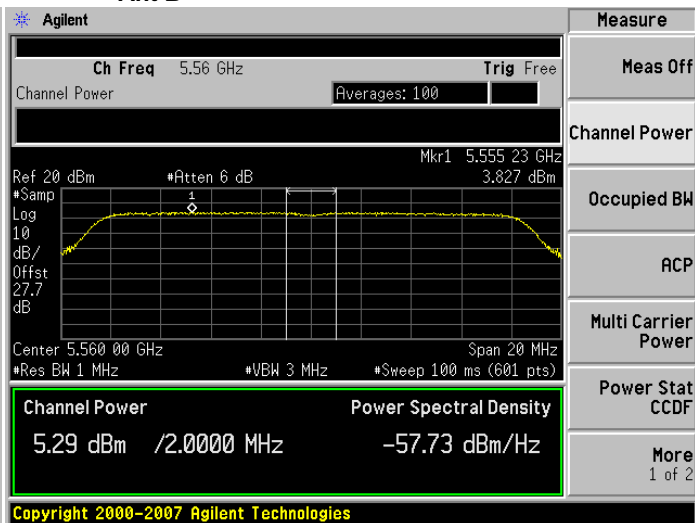

PSD, 5560 MHz, m0, HT-20, Single Transmit Path, antenna gain 8

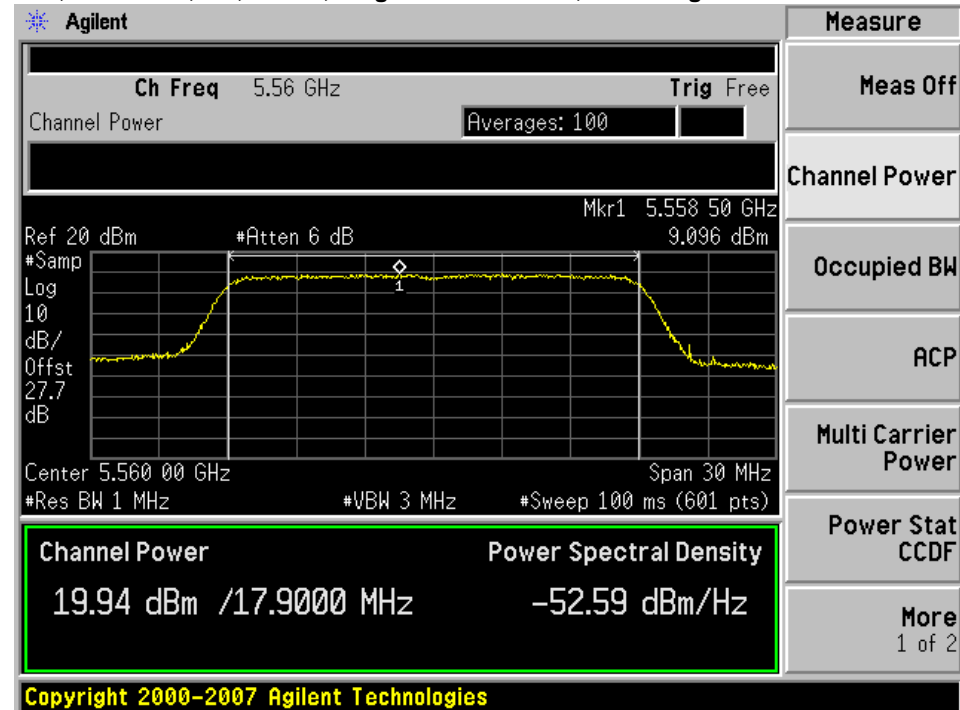


PSD/ Peak Power, 5560 MHz, m0, HT-20, Single Transmit Path, antenna gain 14

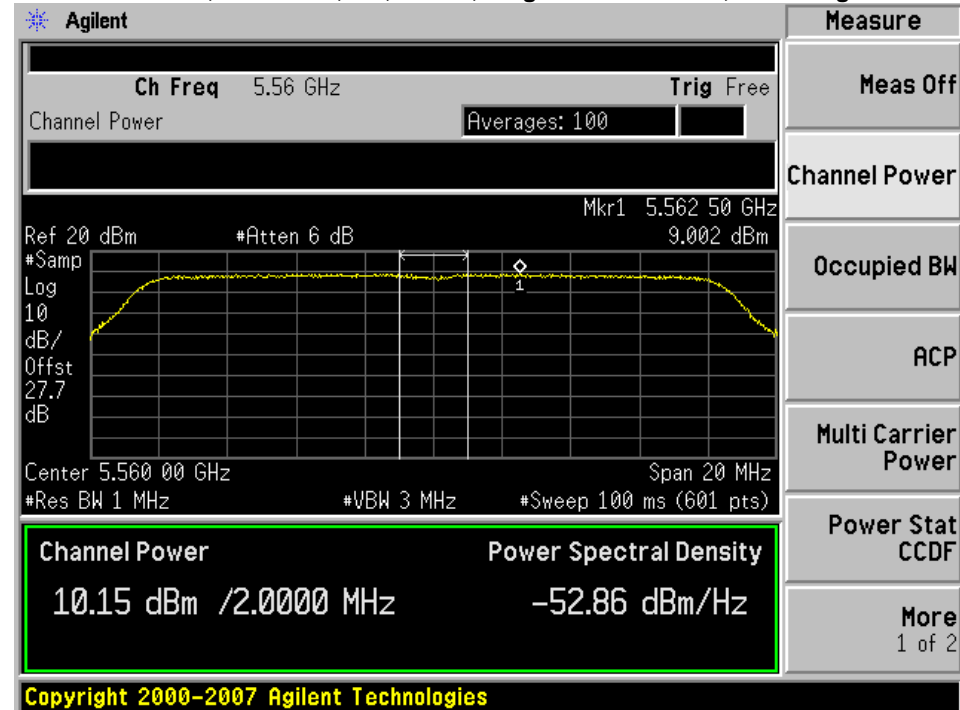




PSD, 5560 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 8

Ant A

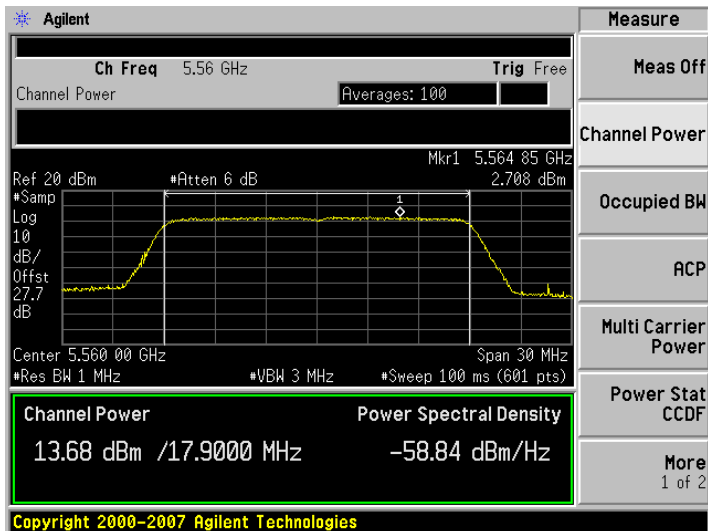


Ant B

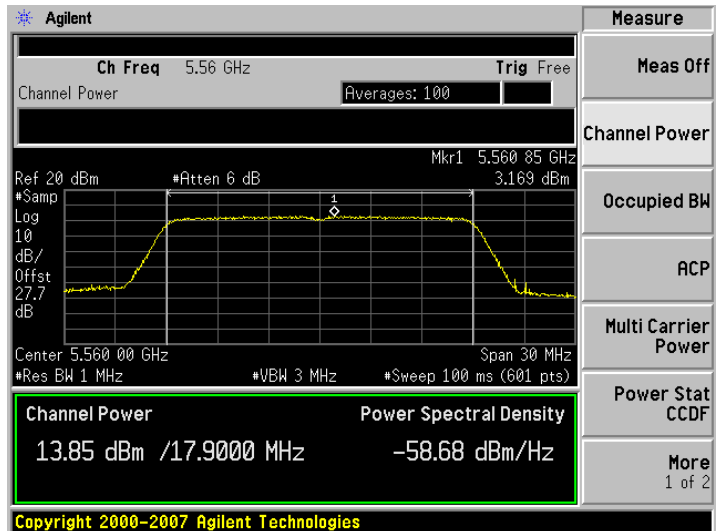


PSD/ Peak Power, 5560 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 14


Ant A

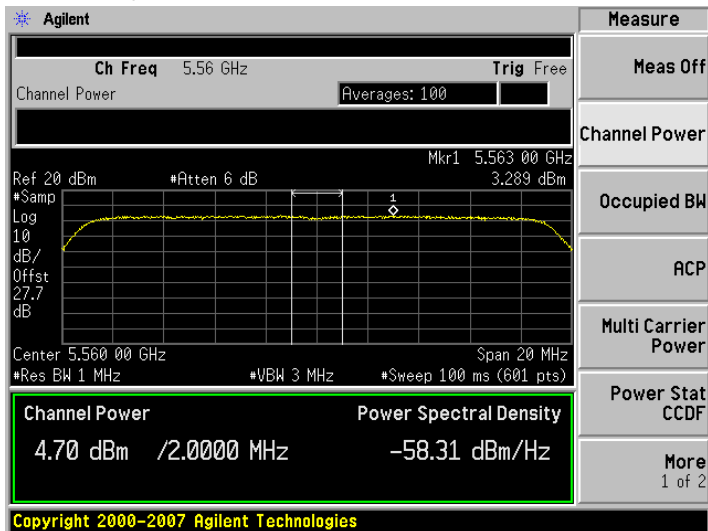


Ant B




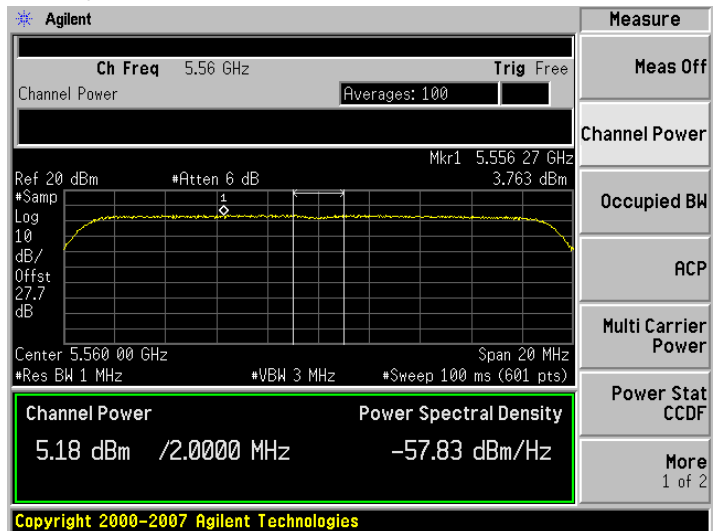


PSD, 5700 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 8

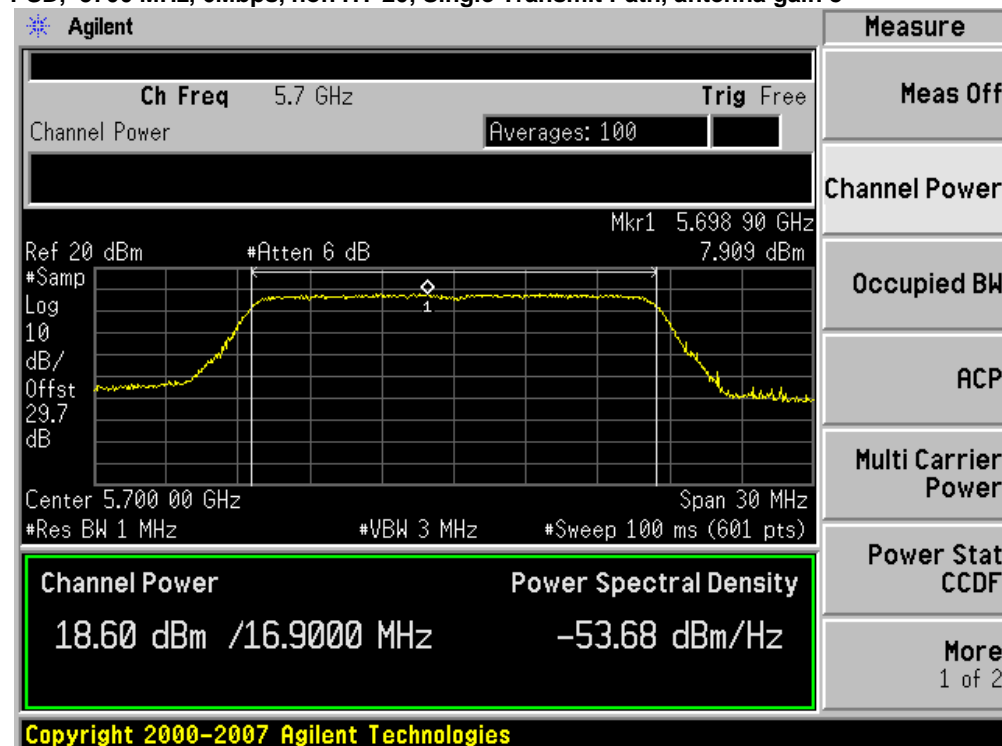

PSD/ Peak Power, 5700 MHz, 6Mbps, non HT-20, Single Transmit Path, antenna gain 14

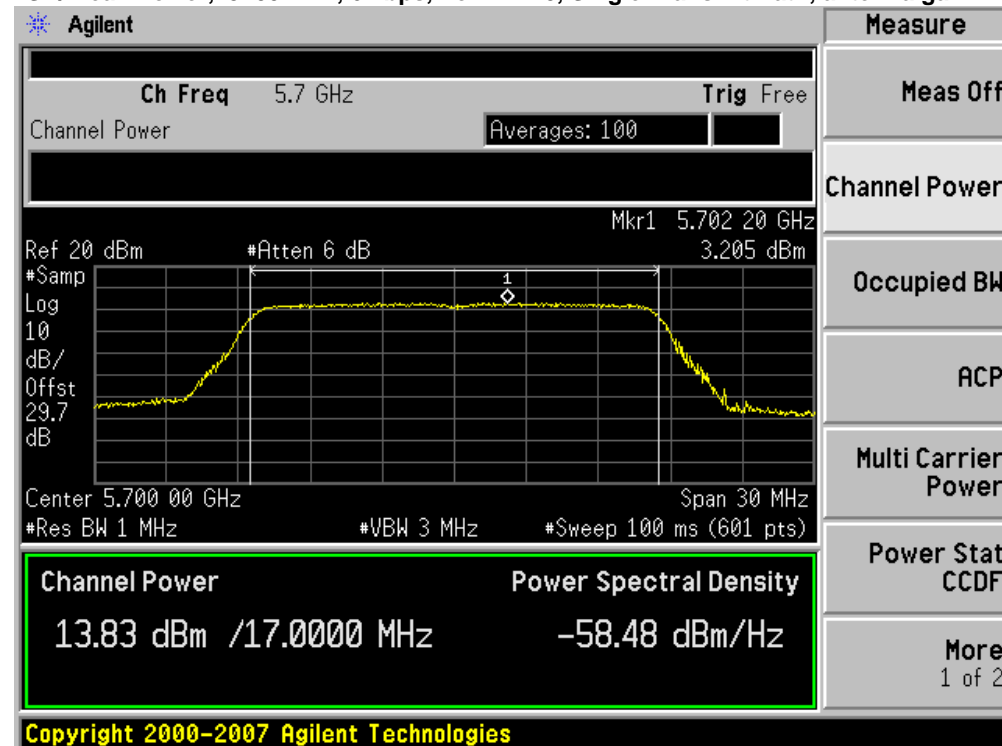


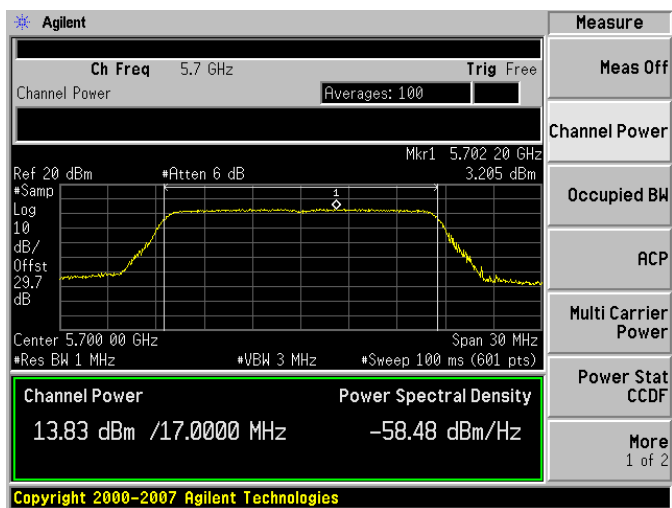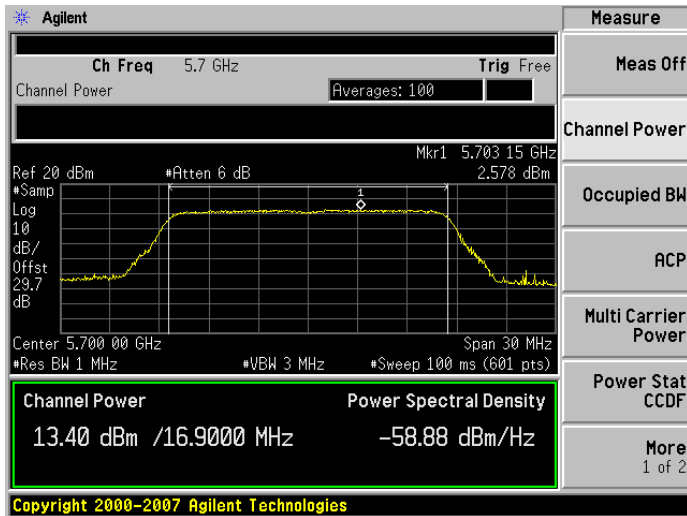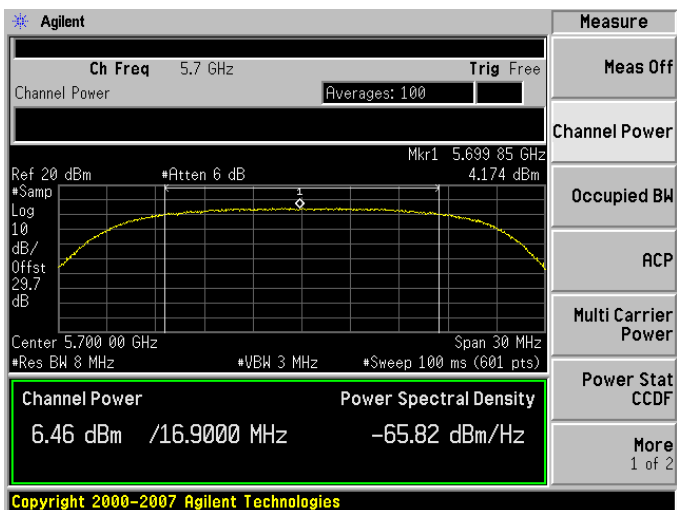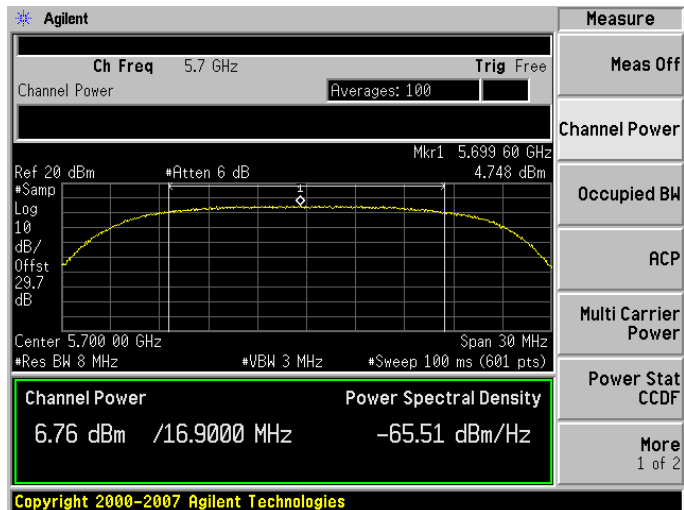**PSD, 5700 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 8****Ant A****Ant B****PSD/ Peak Power, 5700 MHz, 6Mbps, non HT-20, Dual Transmit Paths, antenna gain 14****Ant A****Ant B**




PSD, 5700 MHz, 6Mbps, non HT-20, Beam Forming, antenna gain 8


Ant A

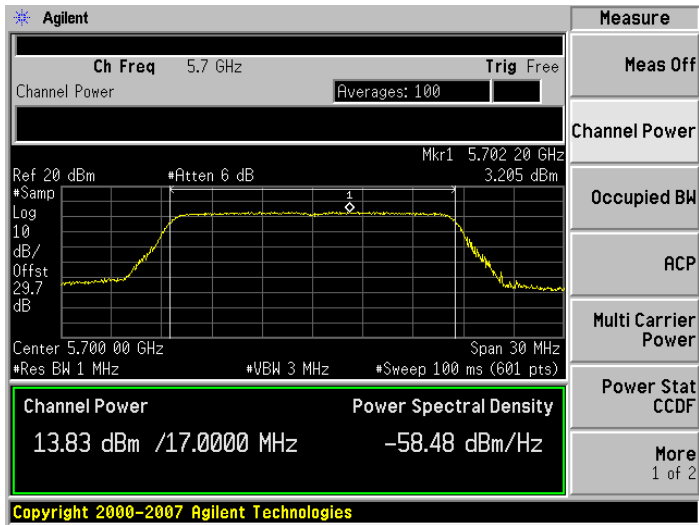

Ant B

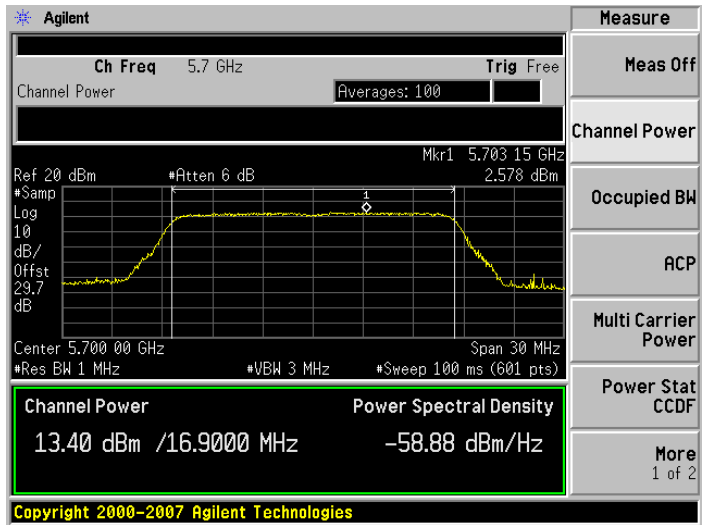


PSD, 5700 MHz, m0, HT-20, Single Transmit Path, antenna gain 8

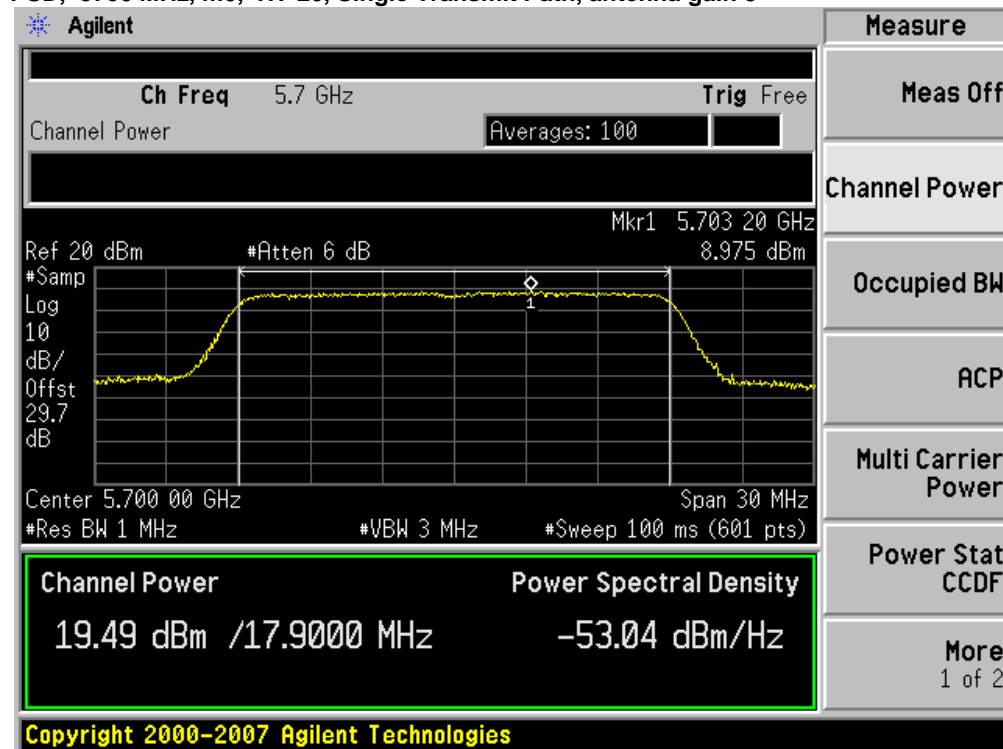




PSD/ Peak Power, 5700 MHz, m0, HT-20, Single Transmit Path, antenna gain 14

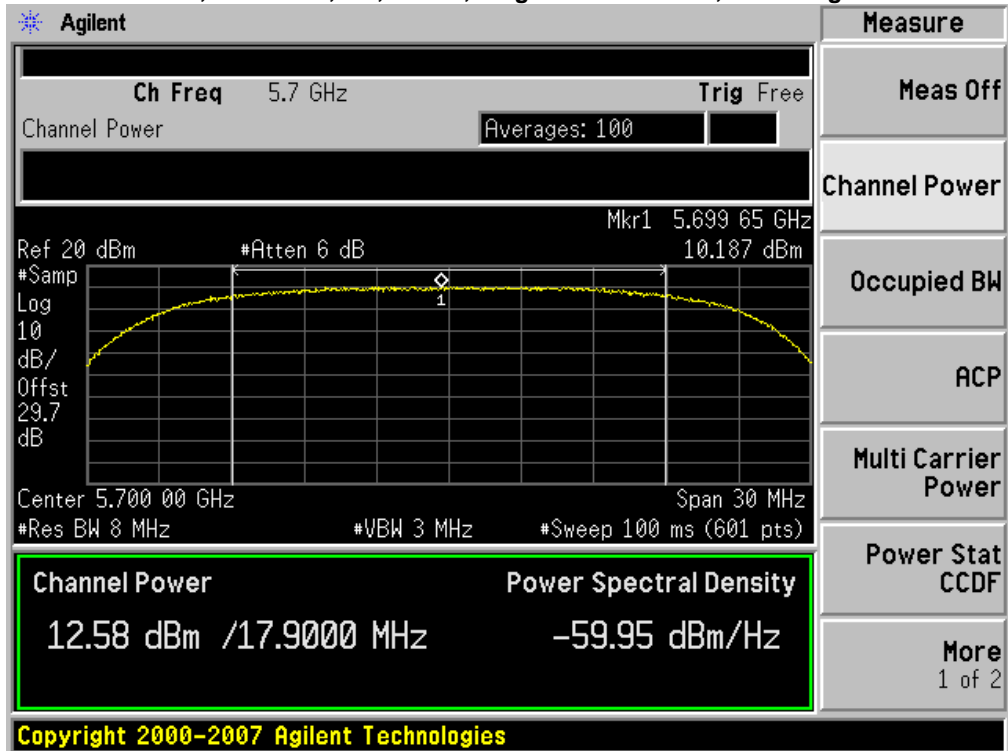





PSD, 5700 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 8

Ant A

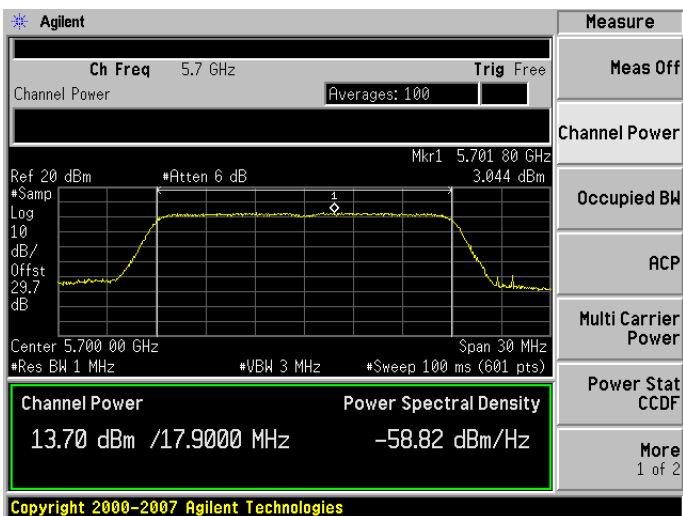


Ant B

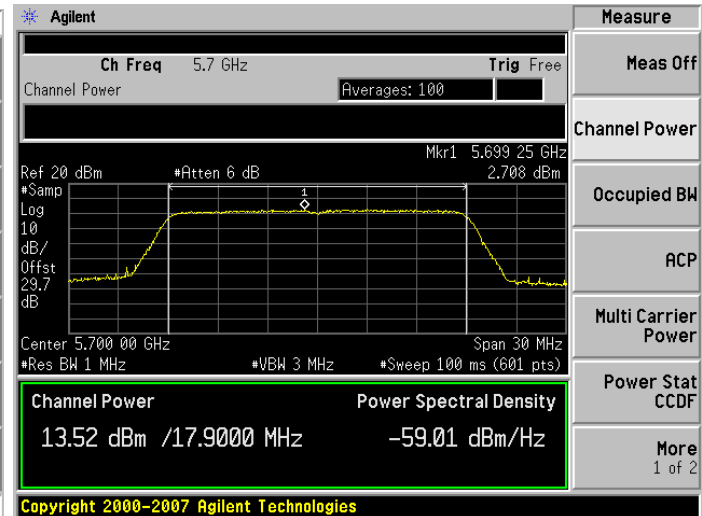

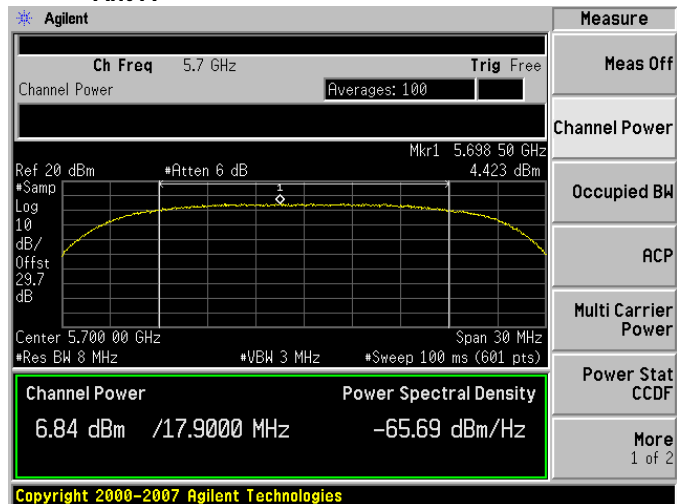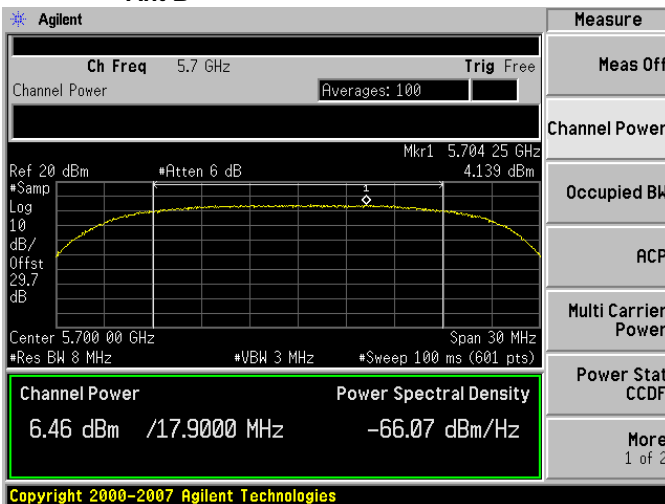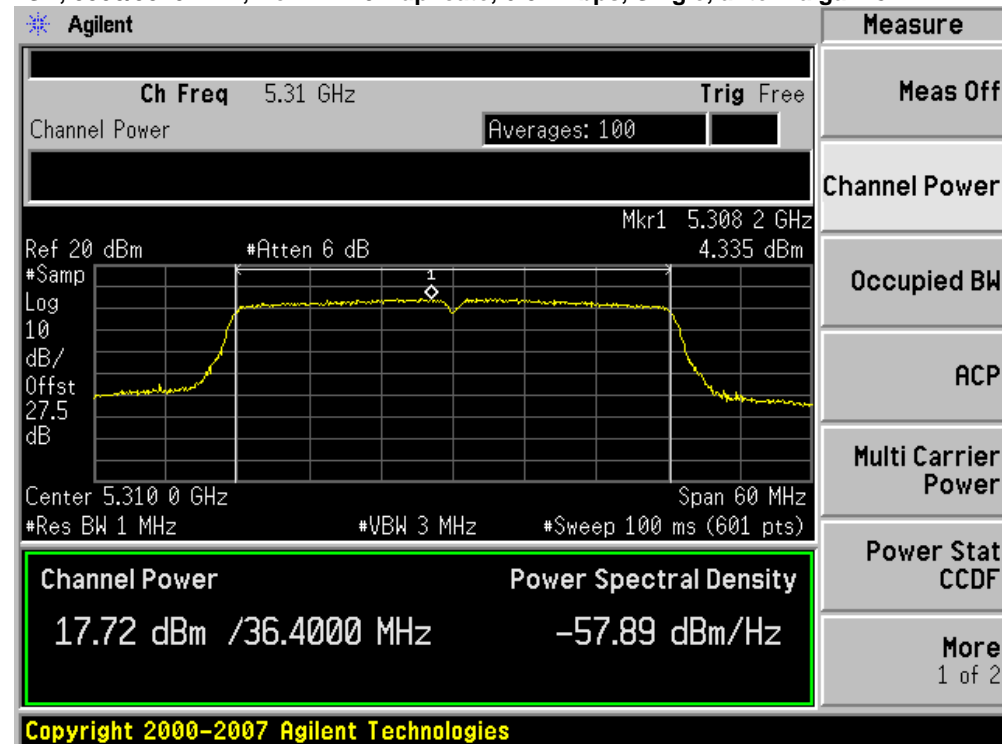**PSD/ Peak Power, 5700 MHz, m0, HT-20, Dual Transmit Paths, antenna gain 14****Ant A****Ant B****PSD, 5300/5320 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 8**




PSD/ Peak Power, 5300/5320 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 14

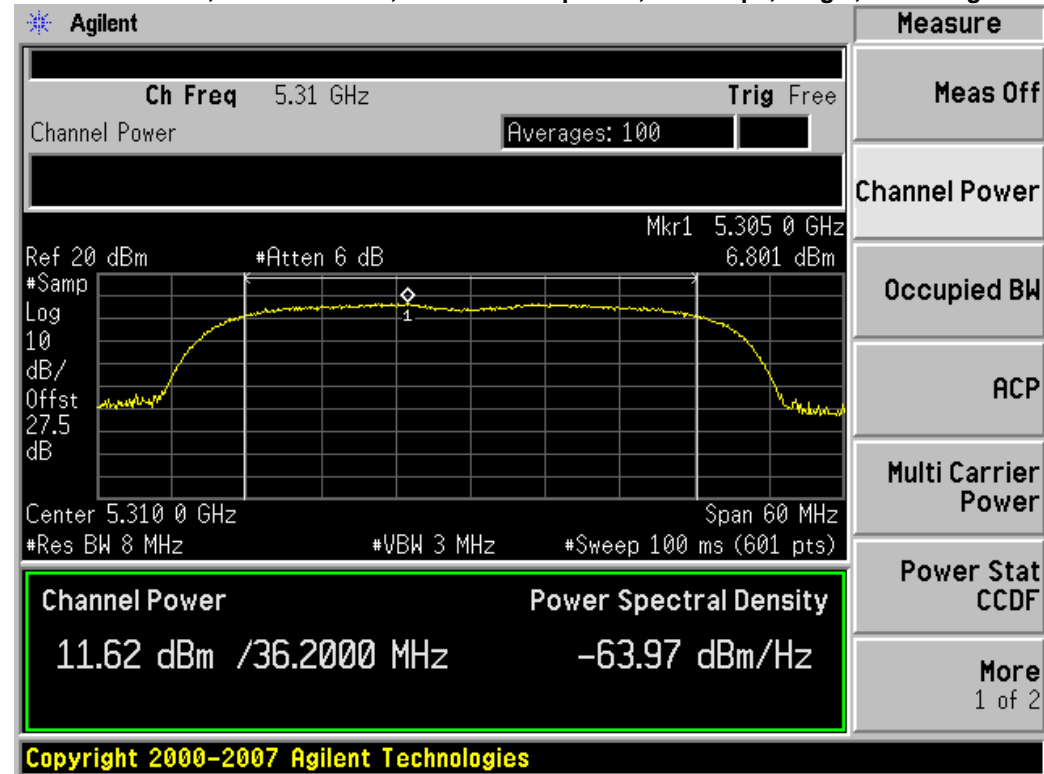




PSD, 5300/5320 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 8

Ant A

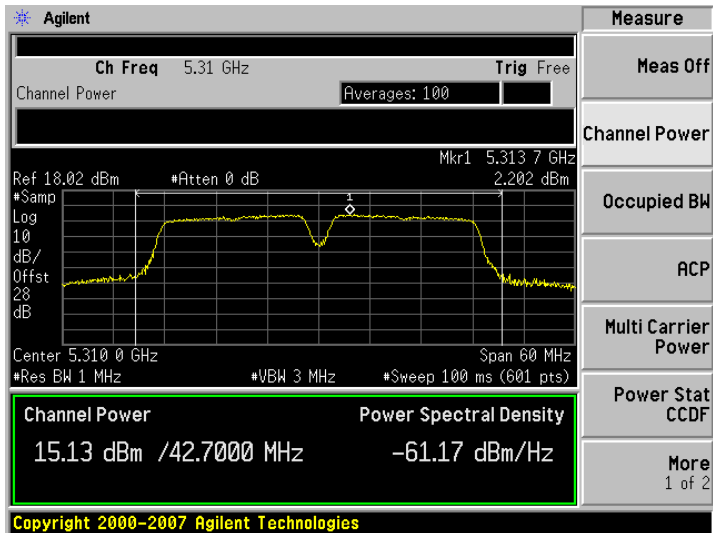


Ant B

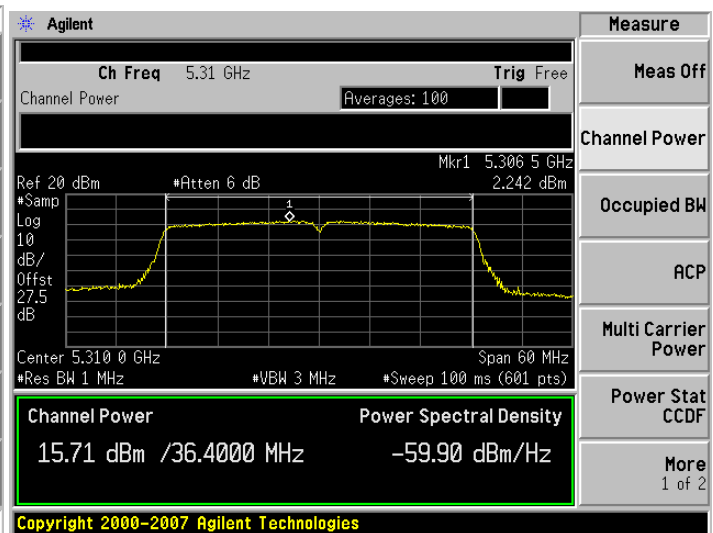


PSD/ Peak Power, 5300/5320 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 14


Ant A

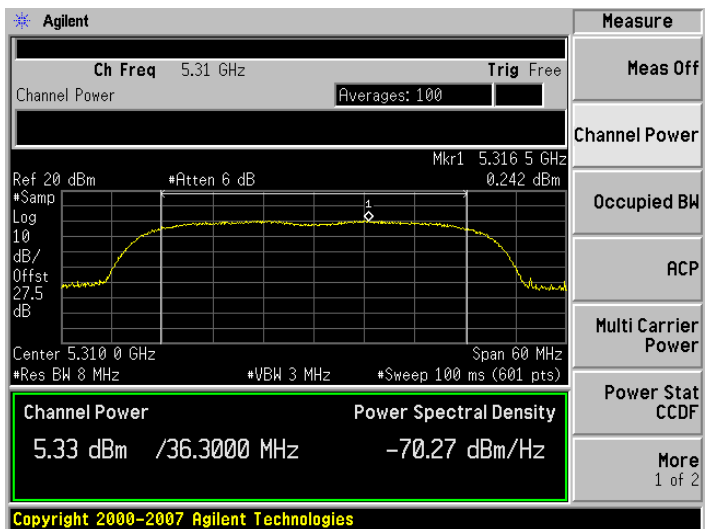


Ant B

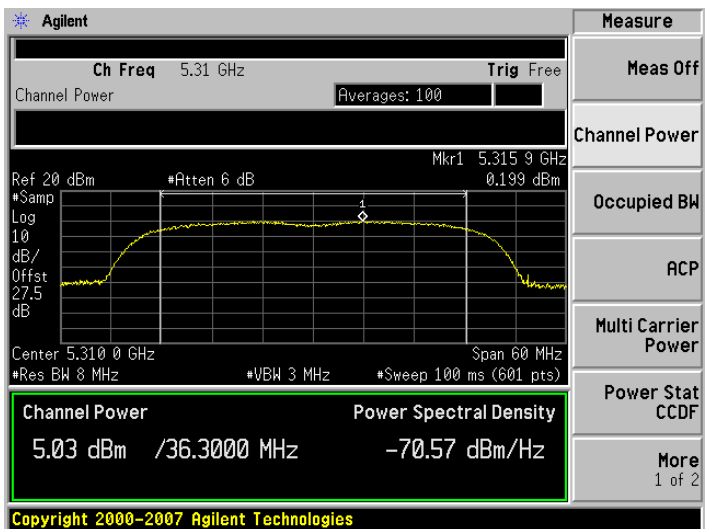

PSD, 5300/5320 MHz, HT-40, M0 to M7, Single, antenna gain 8

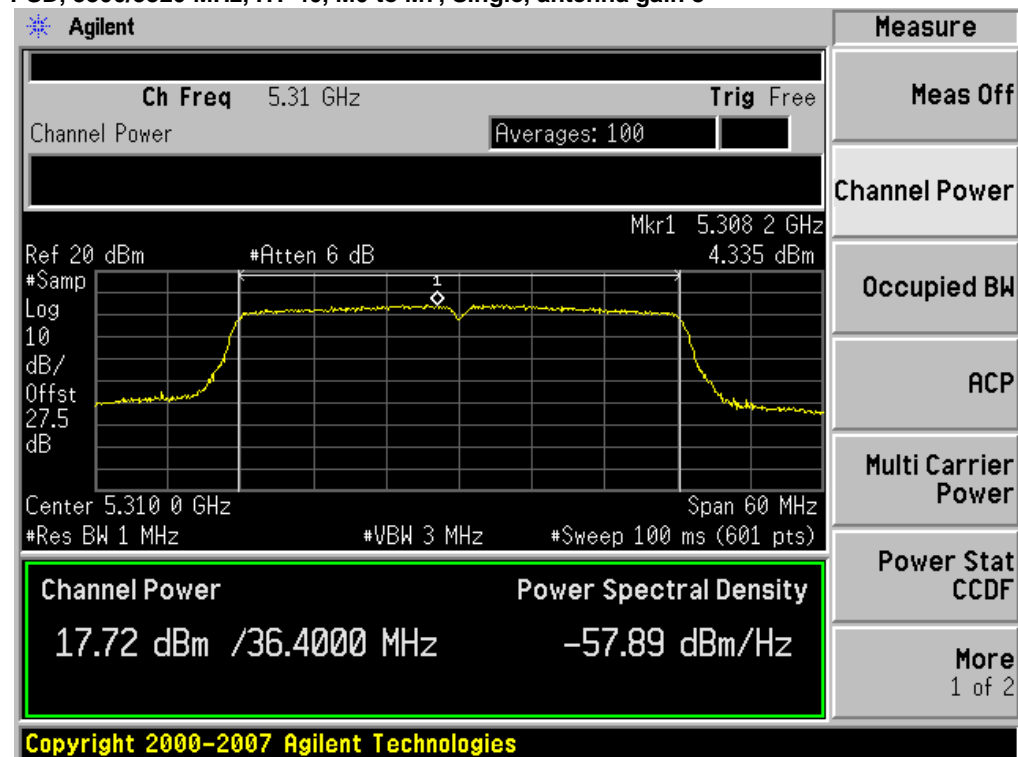


PSD/ Peak Power, 5300/5320 MHz, HT-40, M0 to M7, Single, antenna gain 14

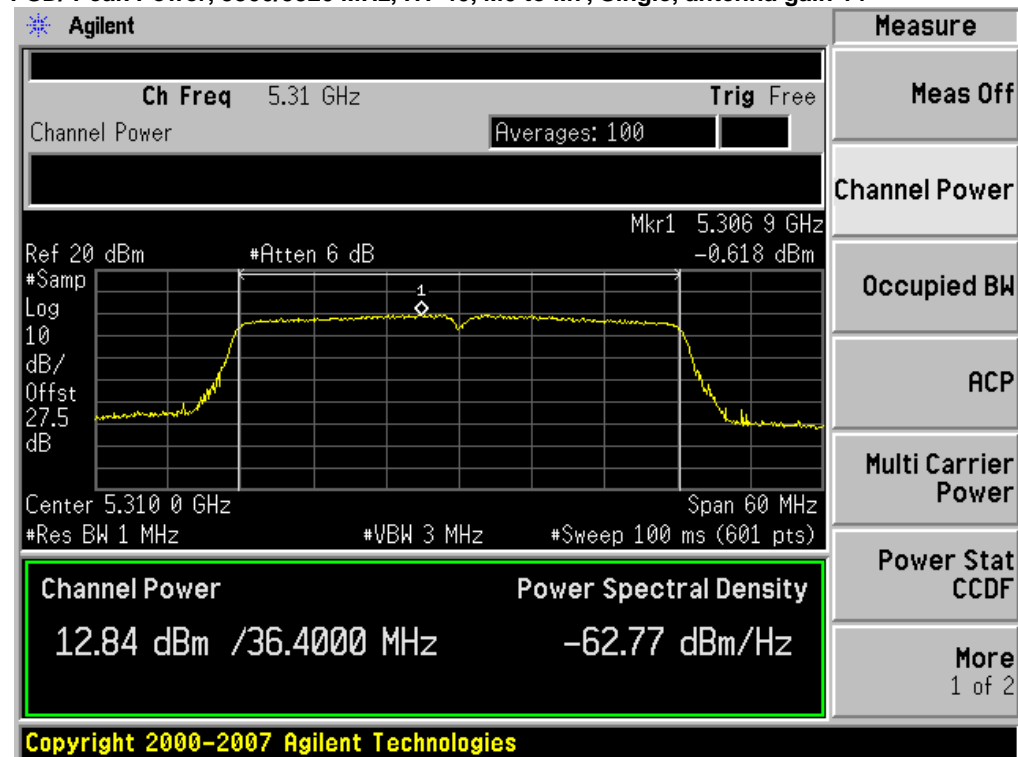




PSD, 5300/5320 MHz, HT-40, M0 to M7, Dual, antenna gain 8

Ant A

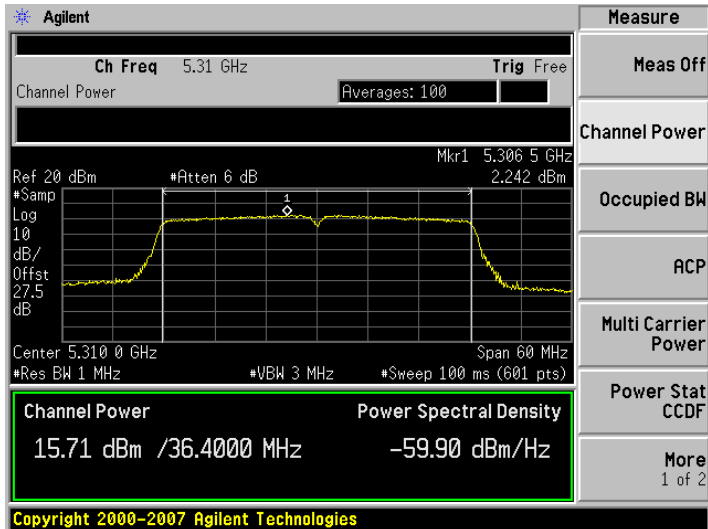


Ant B

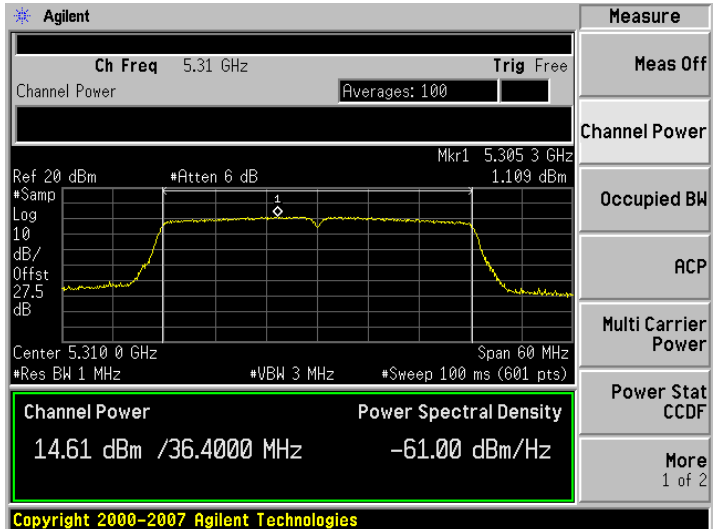


PSD/ Peak Power, 5300/5320 MHz, HT-40, M0 to M7, Dual, antenna gain 14


Ant A

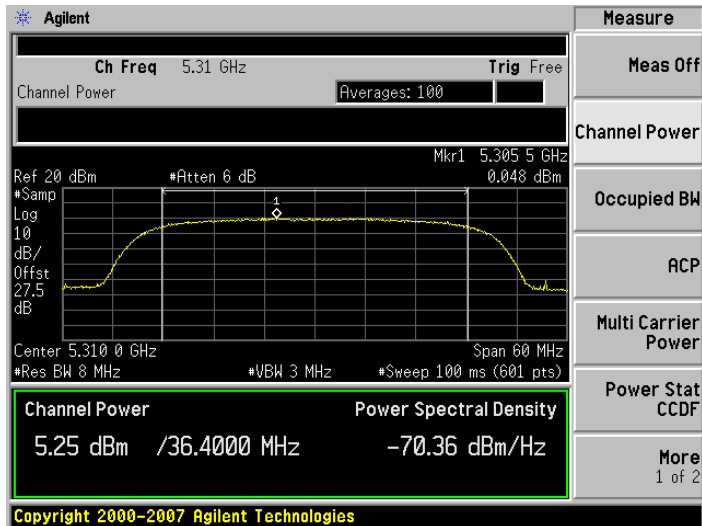


Ant B

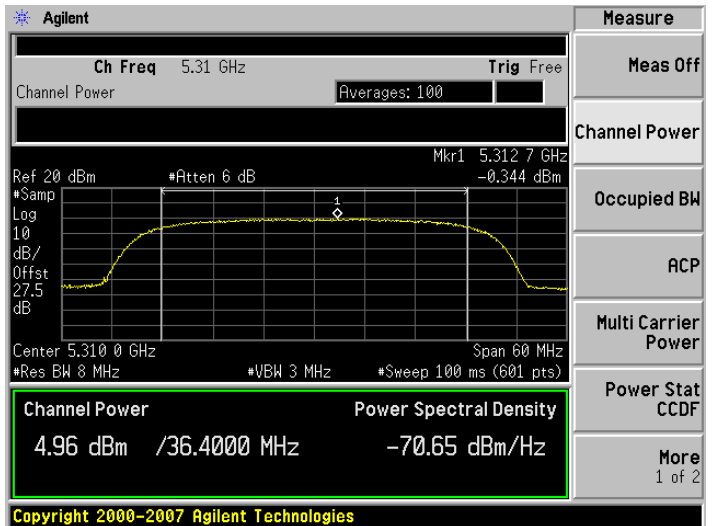

PSD, 5500/5520 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 8

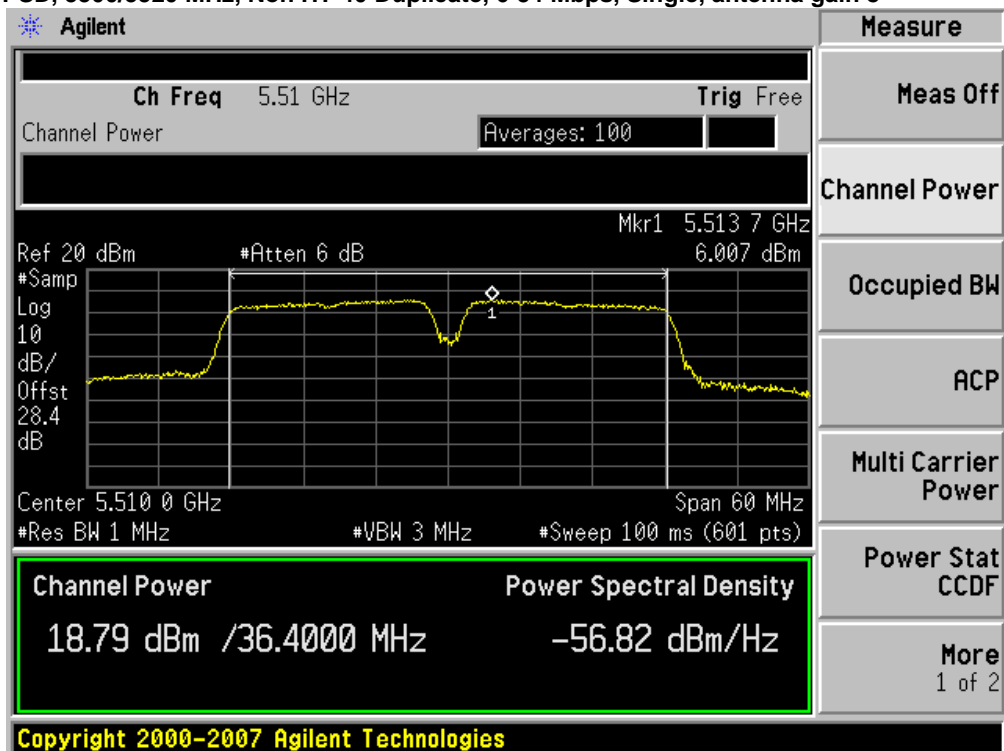


PSD/ Peak Power, 5500/5520 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 14

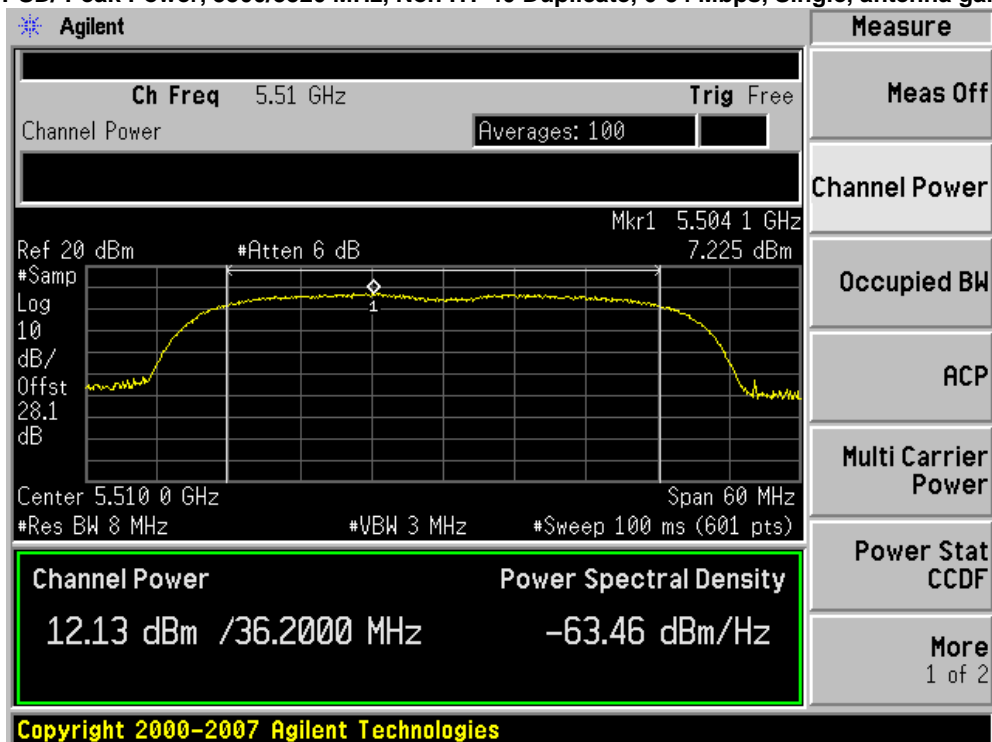




PSD, 5500/5520 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 8

Ant A

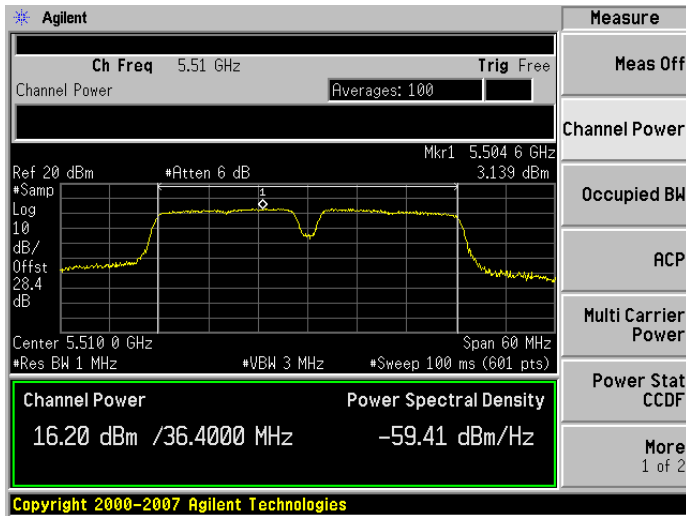


Ant B

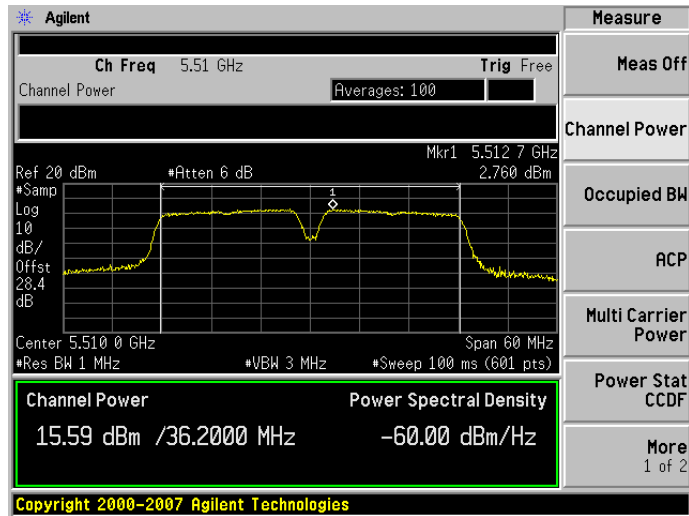


PSD/ Peak Power, 5500/5520 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 14


Ant A

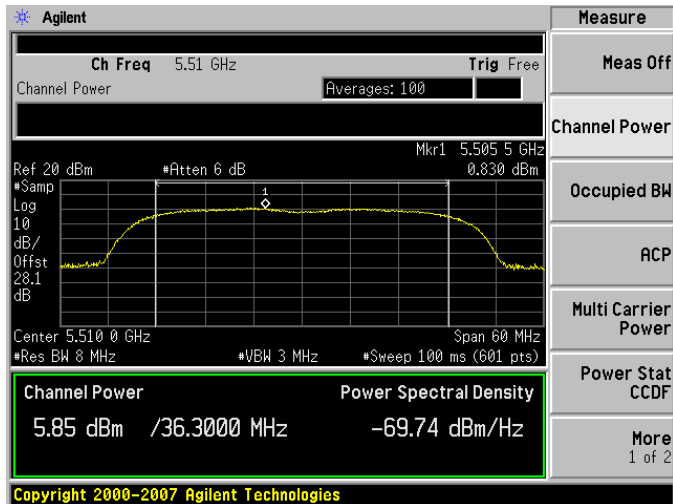


Ant B

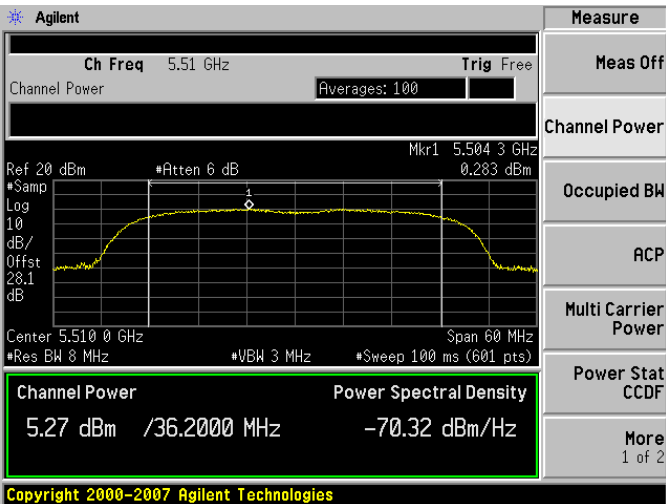

PSD, 5500/5520 MHz, HT-40, M0 to M7, Single, antenna gain 8

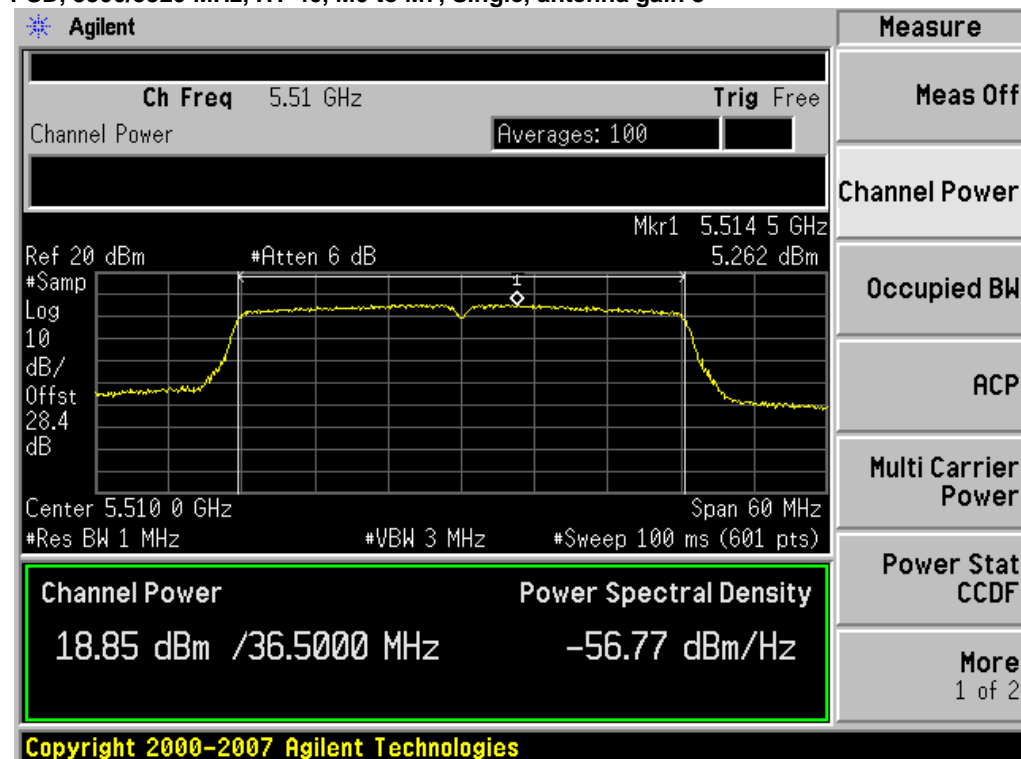


PSD/ Peak Power, 5500/5520 MHz, HT-40, M0 to M7, Single, antenna gain 14

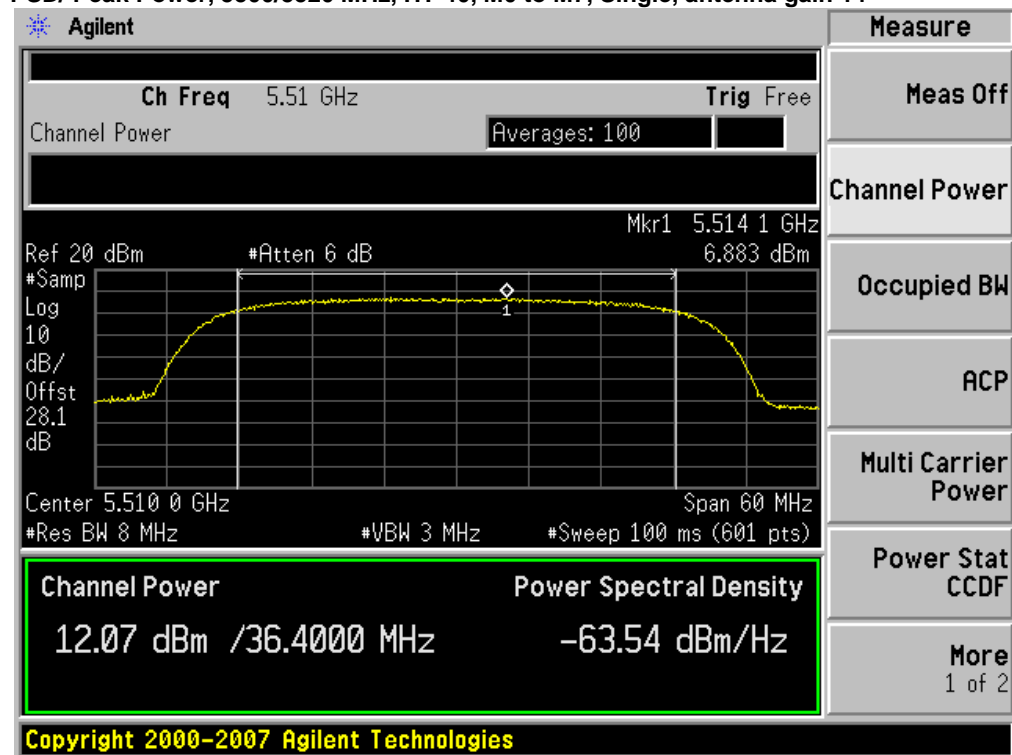




PSD, 5500/5520 MHz, HT-40, M0 to M7, Dual, antenna gain 8

Ant A

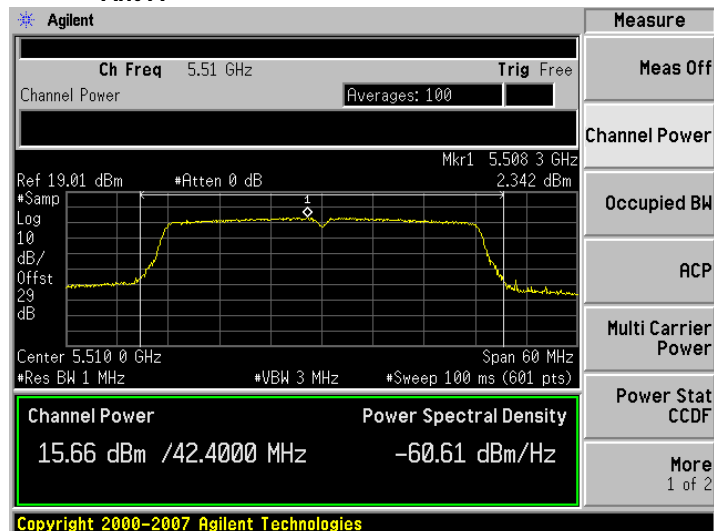


Ant B

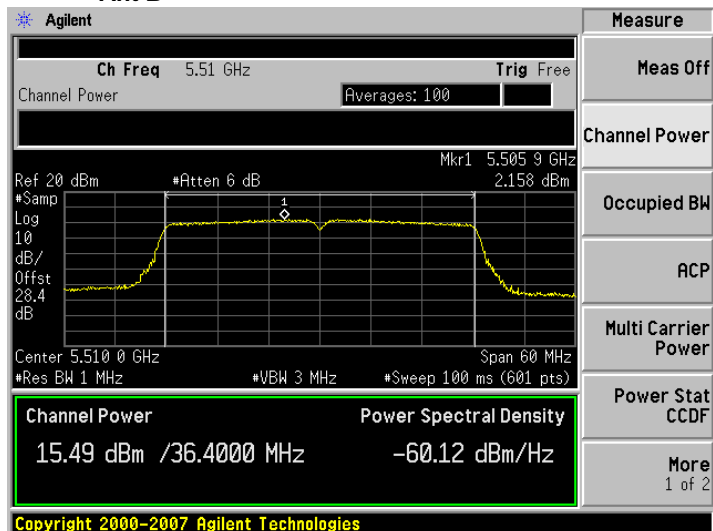


PSD/ Peak Power, 5500/5520 MHz, HT-40, M0 to M7, Dual, antenna gain 14


Ant A

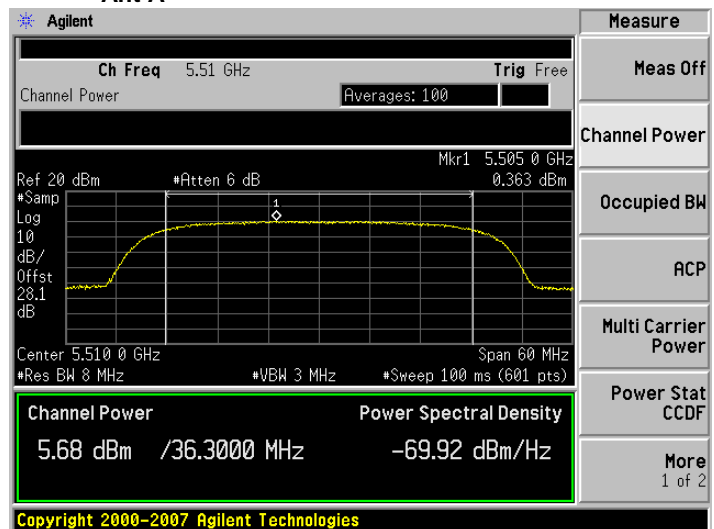


Ant B

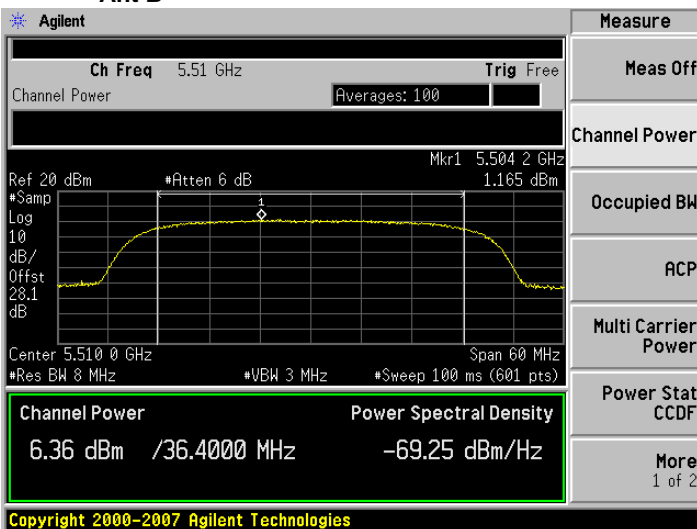

PSD, 5540/5560 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 8

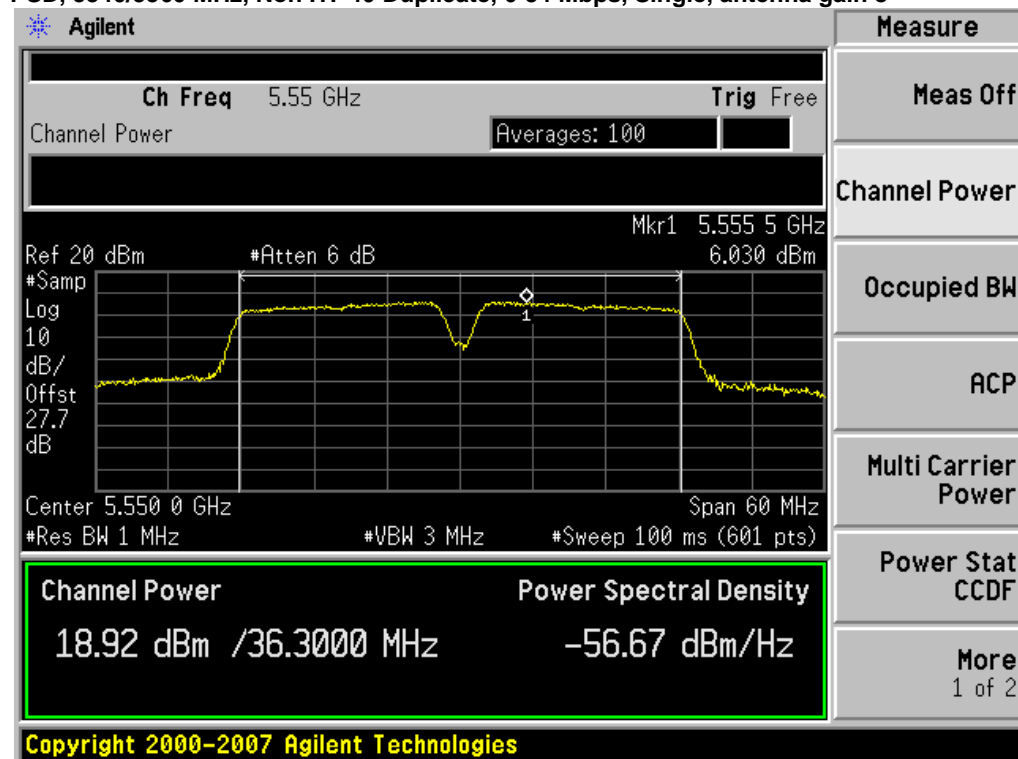


PSD/ Peak Power, 5540/5560 MHz, Non HT-40 Duplicate, 6-54 Mbps, Single, antenna gain 14

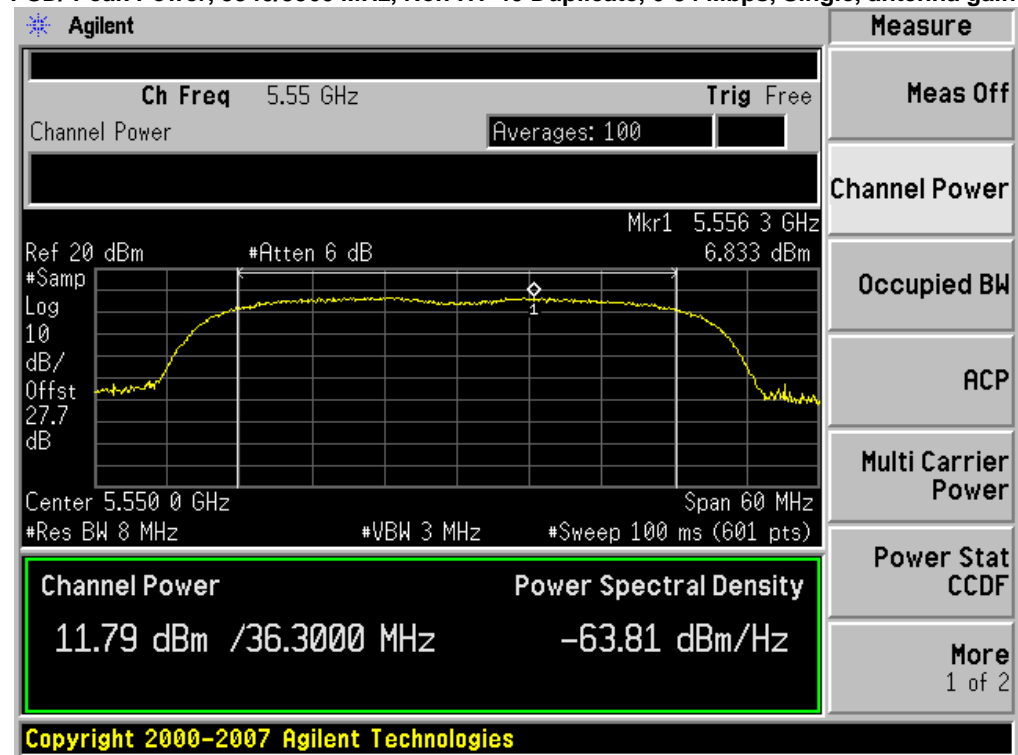




PSD, 5540/5560 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 8

Ant A

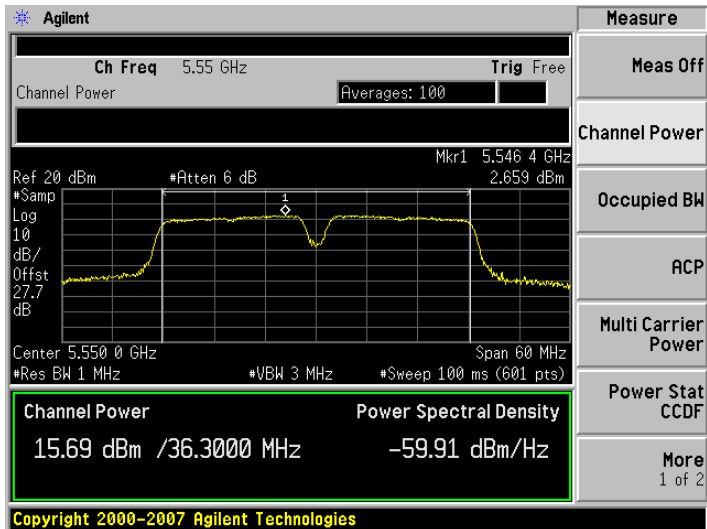


Ant B

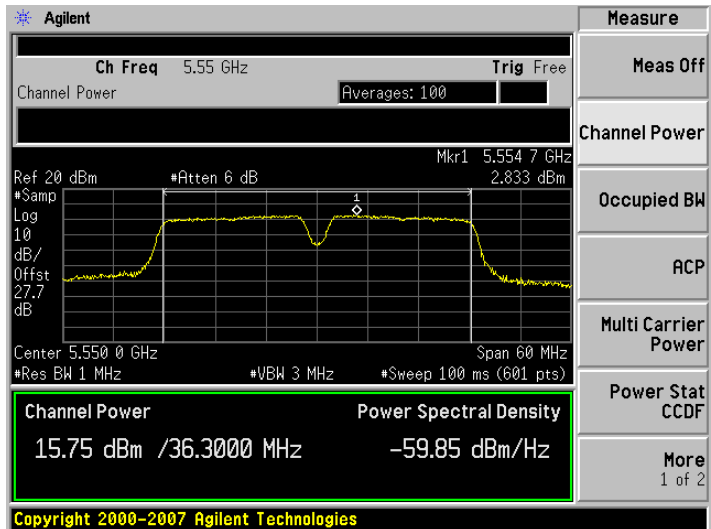


PSD/ Peak Power, 5540/5560 MHz, Non HT-40 Duplicate, 6-54 Mbps, Dual, antenna gain 14


Ant A

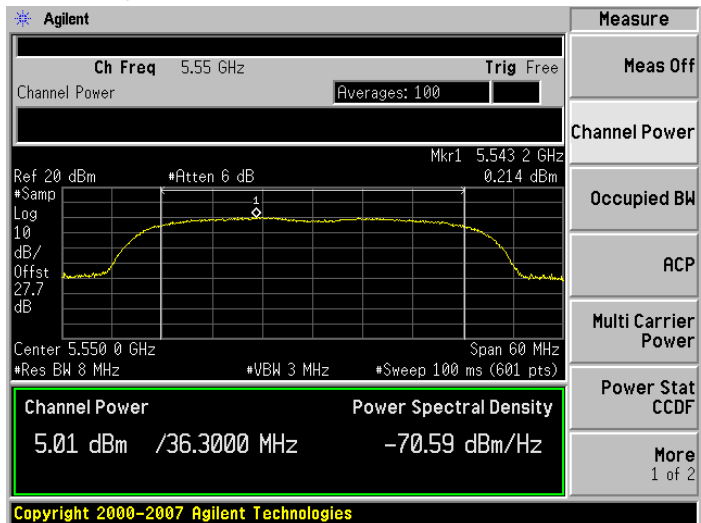


Ant B

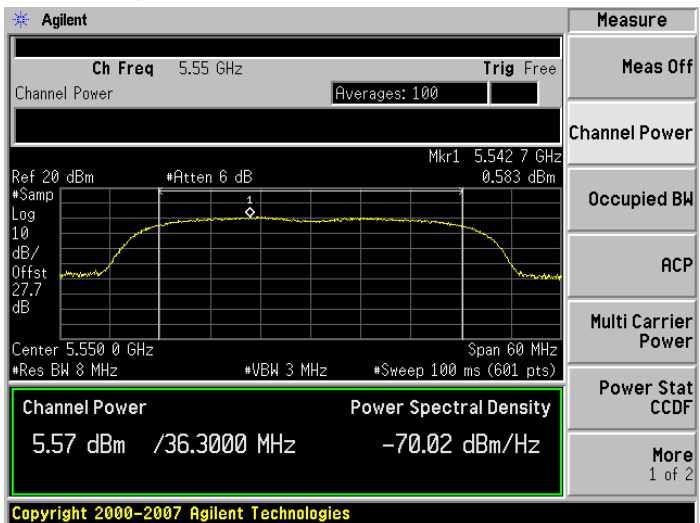

PSD, 5540/5560 MHz, HT-40, M0 to M7, Single, antenna gain 8

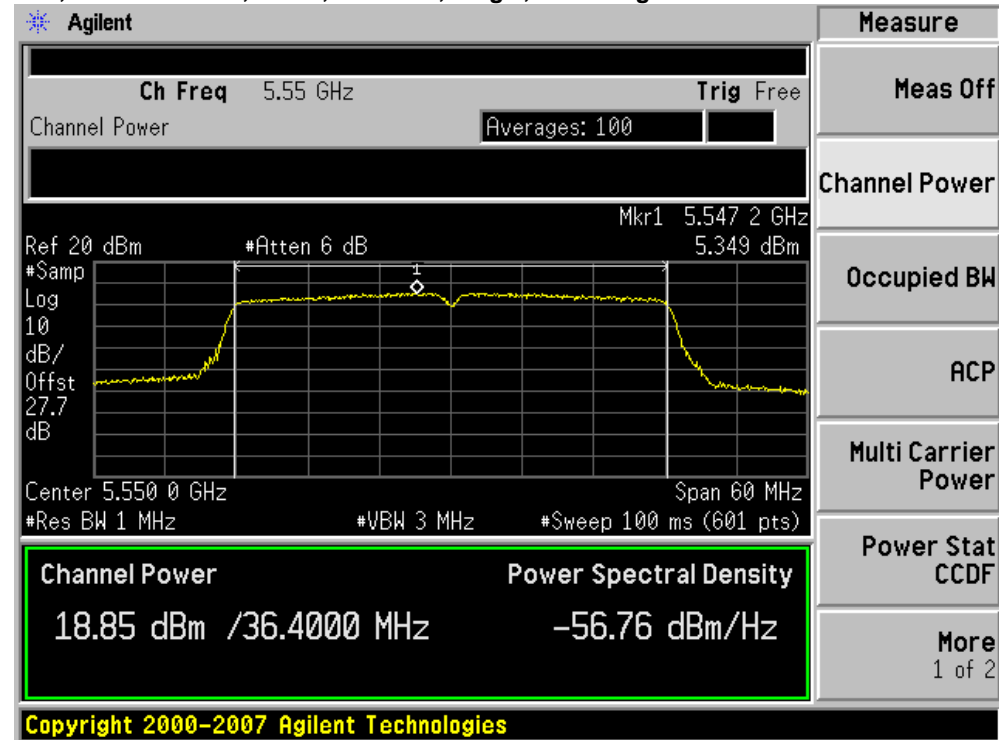


PSD/ Peak Power, 5540/5560 MHz, HT-40, M0 to M7, Single, antenna gain 14

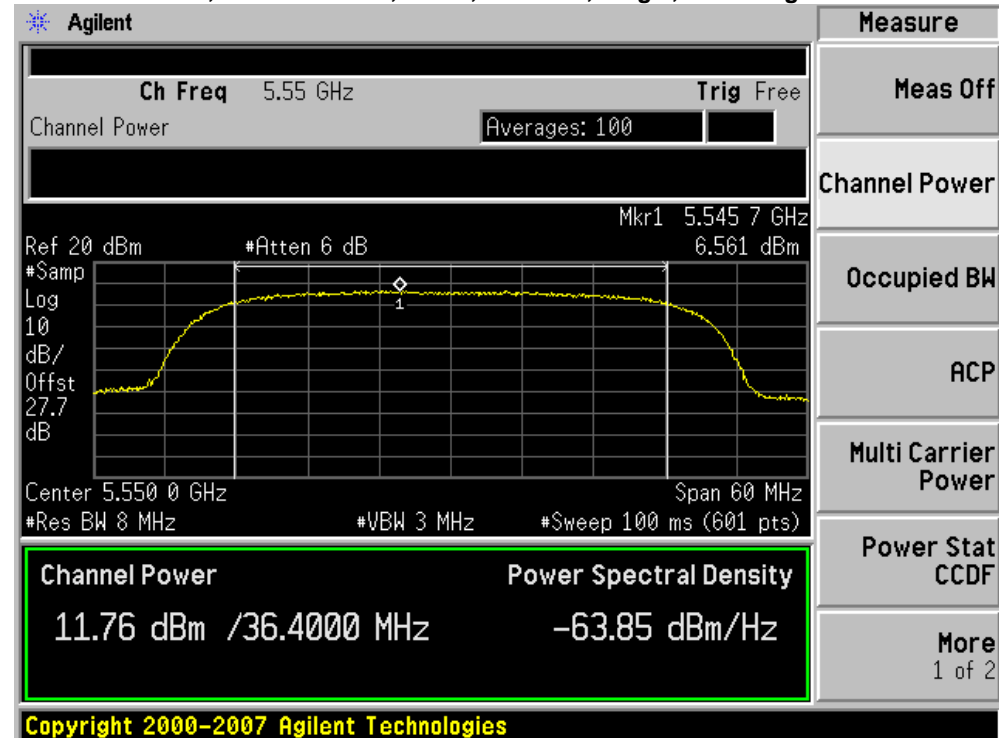




PSD, 5540/5560 MHz, HT-40, M0 to M7, Dual, antenna gain 8

Ant A

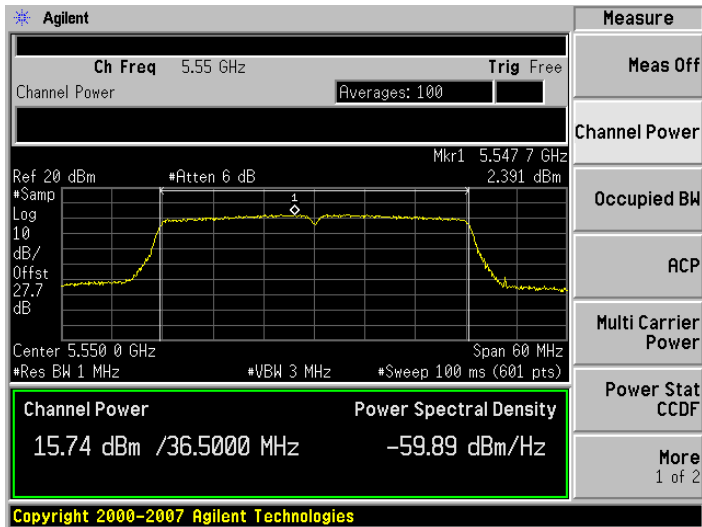


Ant B

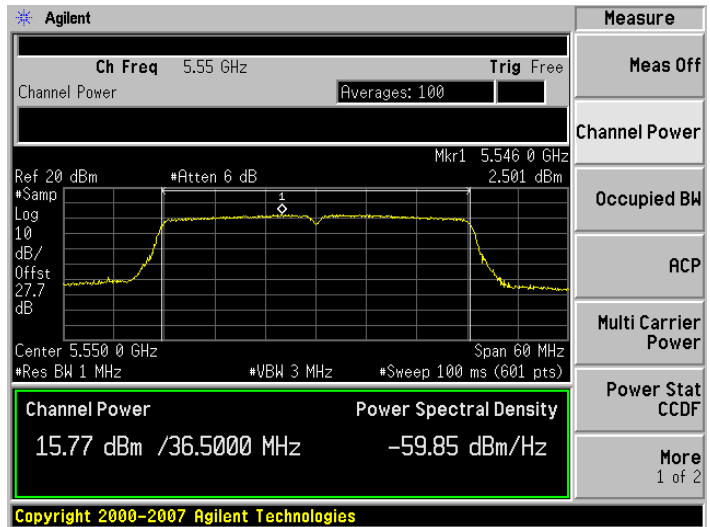


PSD/ Peak Power, 5540/5560 MHz, HT-40, M0 to M7, Dual, antenna gain 14

Ant A

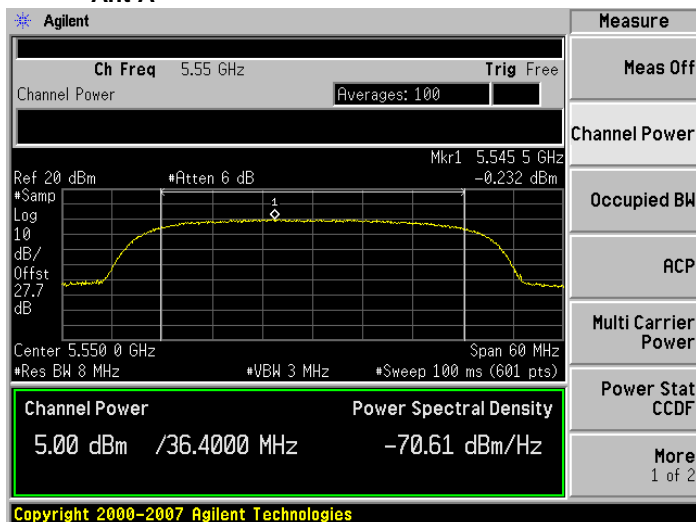

Ant B

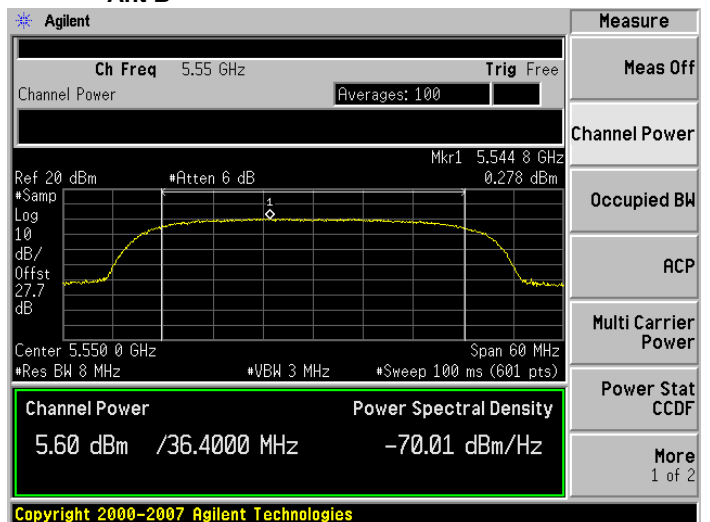



Conducted Bandedge

15.407: For transmitters operating in the 5.25-5.25 GHz and 5.47-5.725 GHz band: all emissions outside of the 5.25-5.35 GHz and 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.


Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	10 s
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Peak
Trace:	Single
Marker:	Peak


Record the marker waveform peak to spur difference

Frequency (MHz)	Operating Mode	Data Rate (Mbps)	Conducted Band Edge Level (dBm)	Limit (dBm)	Margin (dB)
5280	Non HT-20 Beam Forming, 6 to 54 Mbps	6	-39.39	-27	12.39
5280	HT-20, M0 to M7, Dual	M0	-38.00	-27	11
5500	Non HT-20 Beam Forming, 6 to 54 Mbps	6	-39.10	-27	12.1
5500	HT-20, M0 to M7, Dual	M0	-38.30	-27	11.3
5700	Non HT-20 Beam Forming, 6 to 54 Mbps	6	-38.95	-27	11.95
5700	HT-20, M0 to M7, Dual	M0	-37.00	-27	10
5500/5520	Non HT-40 Duplicate, 6-54 Mbps, Dual	6	-31.14	-27	4.14
5500/5520	HT-40 Duplicate, M0 to M7, Dual	m0	-32.70	-27	5.7


CBE_5280 non HT ant BF rate 6

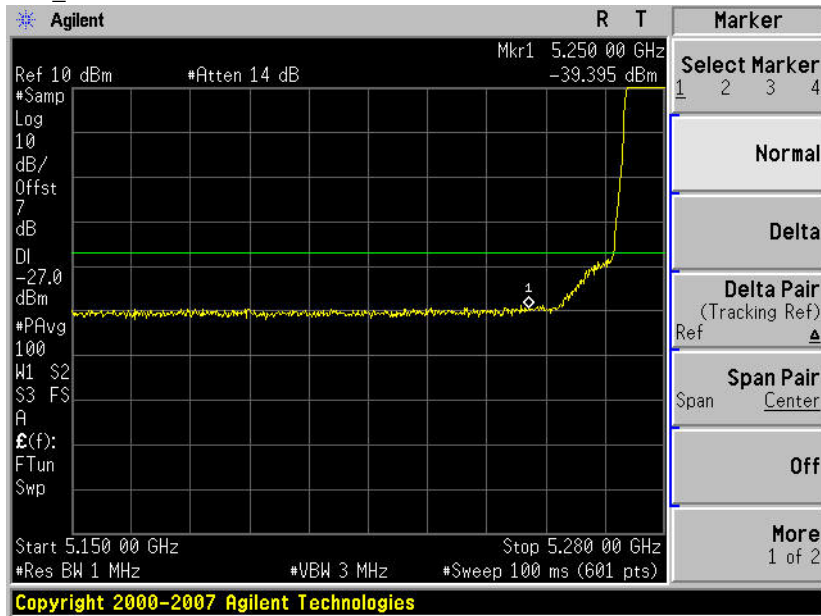


CBE_5280 non HT ant BF rate 6

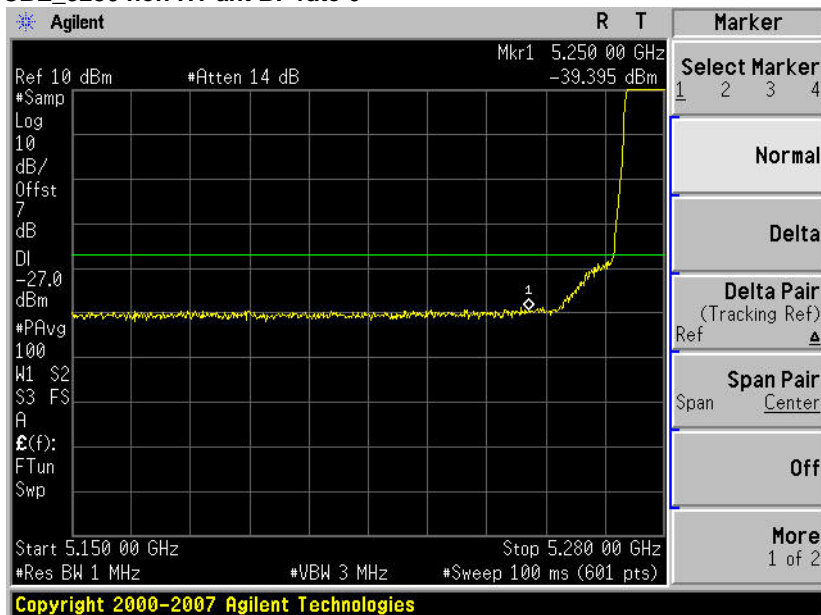

CBE_5500 non HT ant BF rate 6

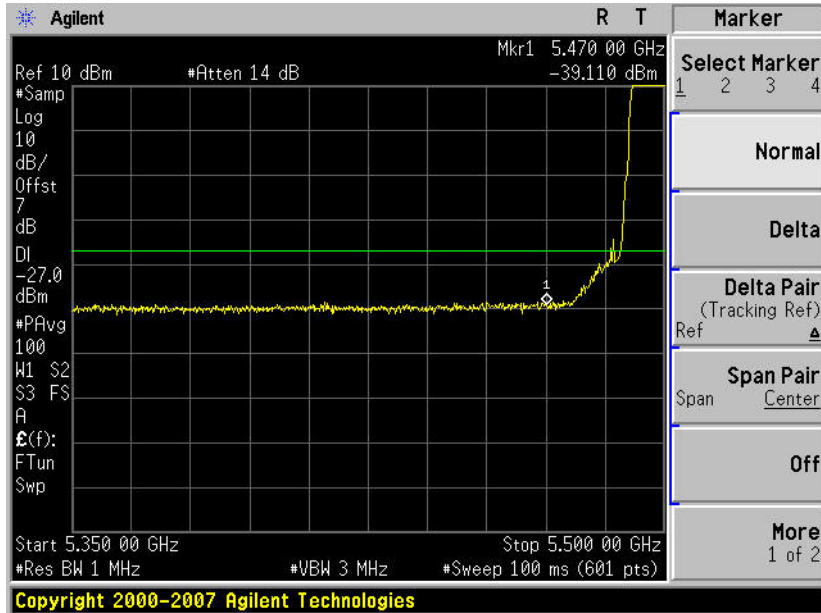


CBE_5500 HT ant DUAL rate m0

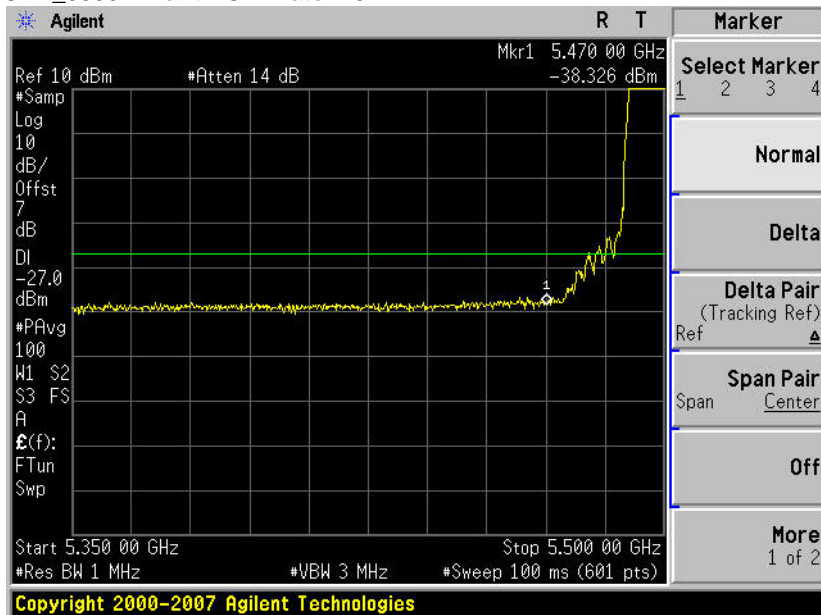




CBE_5500 Above NonHT40 ant DUAL rate 6

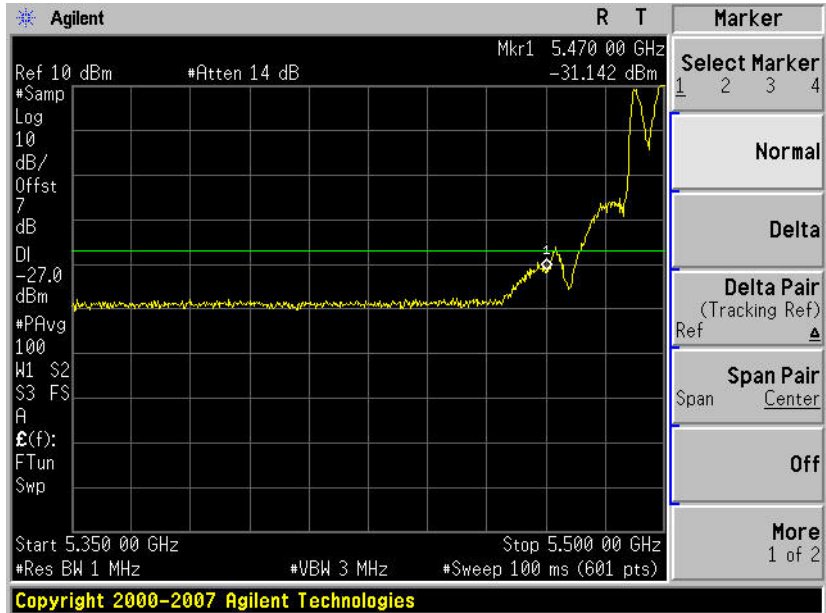


CBE_5500 Above HT40 ant DUAL rate m0

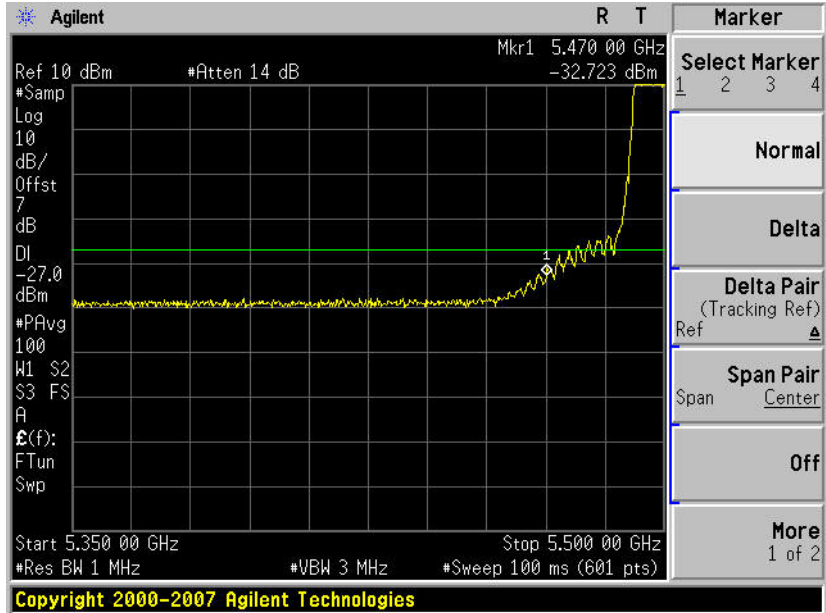



CBE_5700 non HT ant BF rate 6

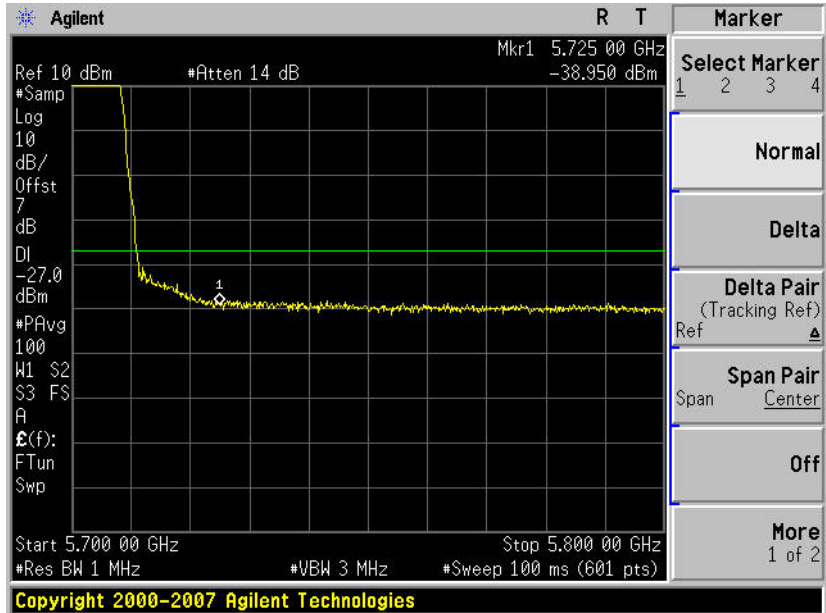

CBE_5700 HT ant DUAL rate m0



Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Spurious

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Reference Level: 110 dBuV
 Attenuation: 20 dB
 Sweep Time: Coupled
 Resolution Bandwidth: 1MHz
 Video Bandwidth: 1 MHz for peak, 10 Hz for average
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m


Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas.

Frequency (MHz)	Operating Mode	Data Rate (Mbps)	Radiated Band Edge Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5320	Non HT-20 Beam Forming, 6 to 54 Mbps	6	52.02	54	1.98
5320	HT-20, M0 to M7, Single	M0	52.48	54	1.52
5320	HT-20, M0 to M7, Dual	M0	53.21	54	0.79
5300/5320	Non HT-40 Duplicate, 6-54 Mbps, Single	6	53.59	54	0.41
5300/5320	Non HT-40 Duplicate, 6-54 Mbps, Dual	6	53.71	54	0.29
5300/5320	HT-40, M0 to M7, Single	M0	53.42	54	0.58
5300/5320	HT-40, M0 to M7, Dual	M0	52.67	54	1.33



Radiated Bandedge, 5320 MHz, 6Mbps, non HT-20, Beam Forming , average

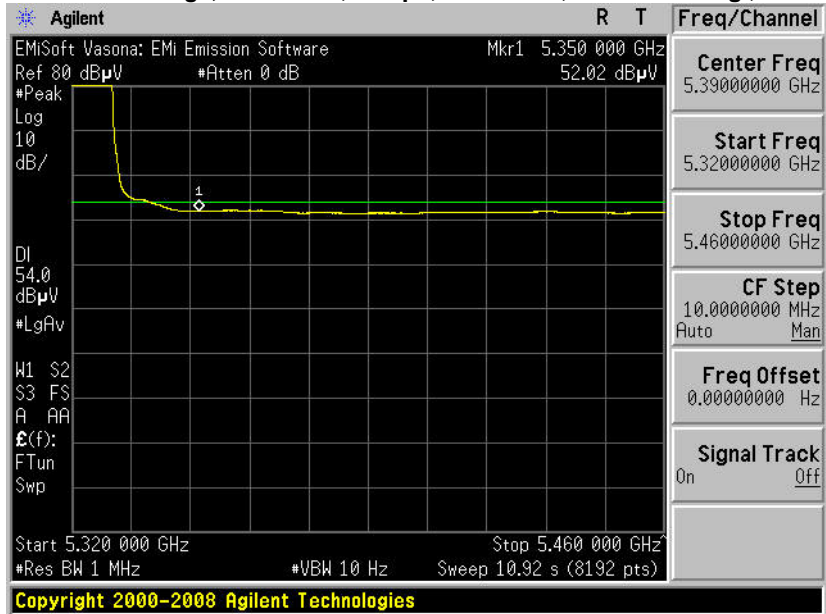


Radiated Bandedge, 5320 MHz, m0, HT-20, Single Transmit Path, average






Radiated Bandedge, 5320 MHz, m0, HT-20, Dual Transmit Paths , average

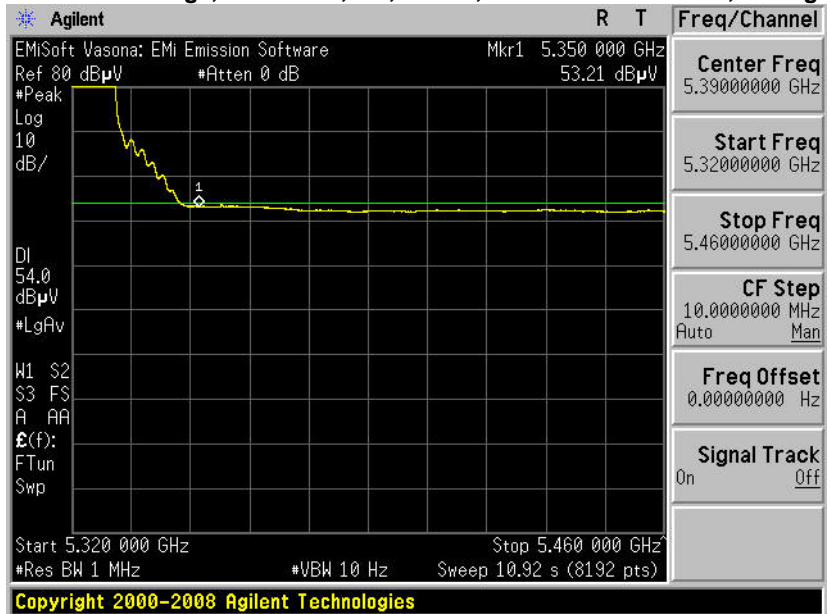


Radiated Bandedge, 5300/5320 MHz, Non HT-40 Duplicate, 6 Mbps, Single, average

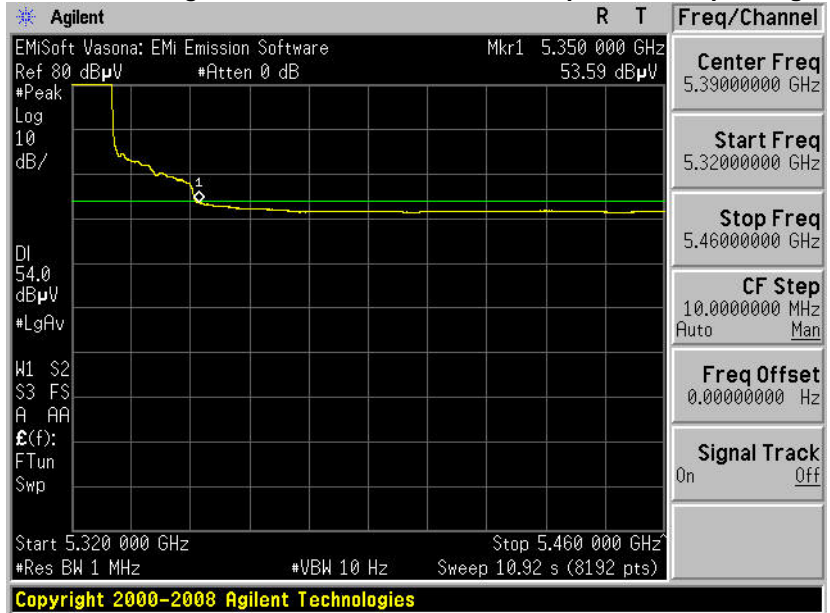




Radiated Bandedge, 5300/5320 MHz, Non HT-40 Duplicate, 6 Mbps, Dual , average

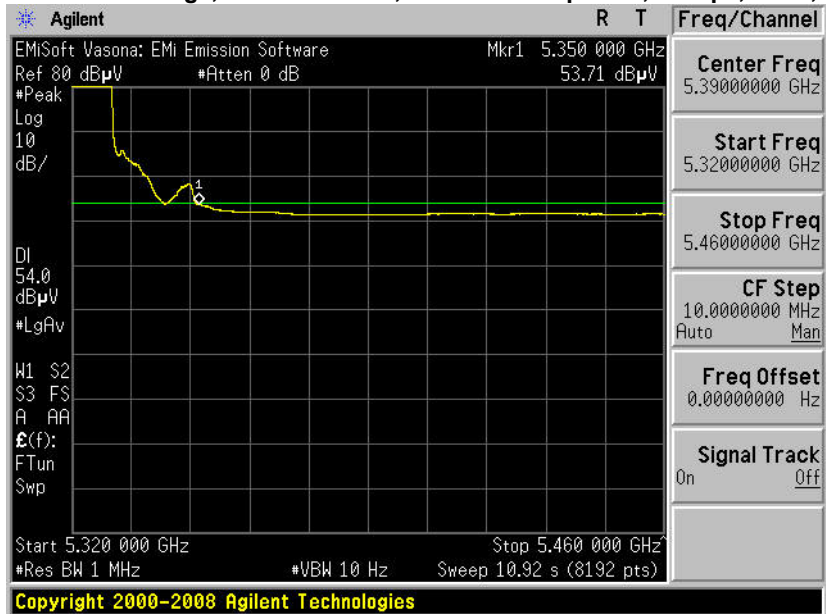


Radiated Bandedge, 5300/5320 MHz, HT-40, M0, Single, average

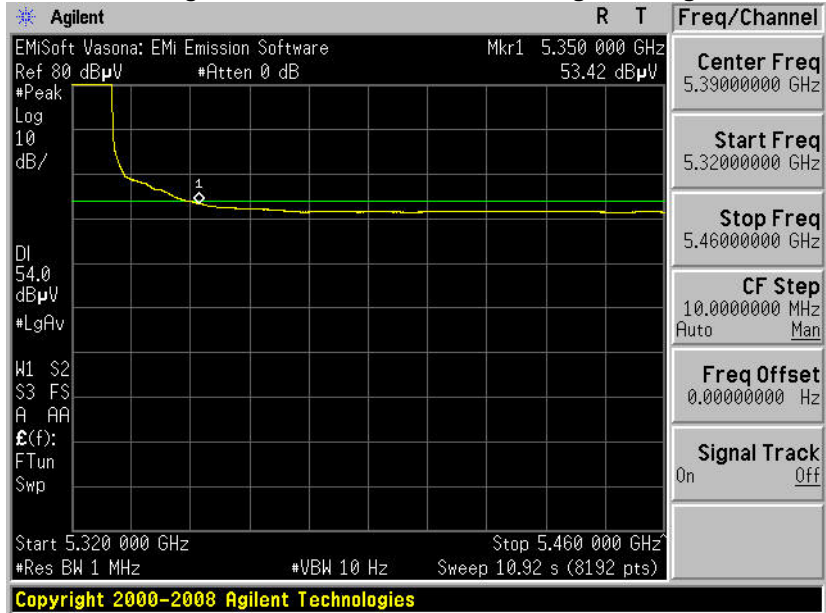



Radiated Bandedge, 5300/5320 MHz, HT-40, M0, Dual, average

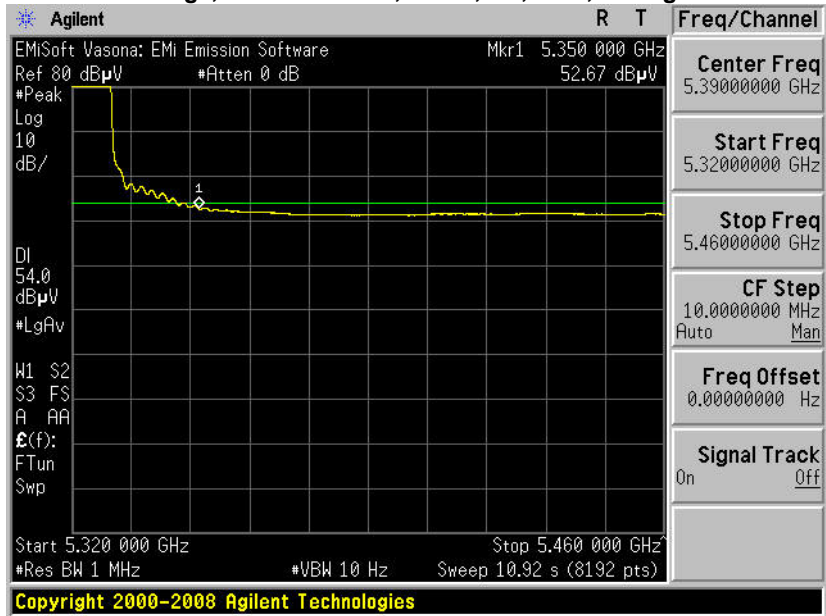



Maximum Permissible Exposure (MPE) Calculations

15.407: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \quad \text{and} \quad S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm²

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)} / \sqrt{S} \quad \text{Equation (1)}$$

and

$$s = ((0.282 \cdot 10^{((P+G)/20)})/d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm²



Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$ maximum. The highest supported antenna gain is 14 dBi (13dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

Frequency (MHz)	Bit Rate (Mbps)	Power Density (mW/cm ²)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	Limit (cm)	Margin (cm)
5280	54	1	12.8	14	6.17	20	13.83
5320	54	1	11.4	14	5.25	20	14.75
5500	54	1	12.6	14	6.03	20	13.97
5560	54	1	12.1	14	5.69	20	14.31
5700	54	1	12.6	14	6.03	20	13.97

MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

Frequency (MHz)	Bit Rate (Mbps)	MPE Distance (cm)	Peak Transmit Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Margin (mW/cm ²)
5280	54	20	12.8	14	0.10	1	0.90
5320	54	20	11.4	14	0.07	1	0.93
5500	54	20	12.6	14	0.09	1	0.91
5560	54	20	12.1	14	0.08	1	0.92
5700	54	20	12.6	14	0.09	1	0.91

**Appendix C: Test Equipment/Software Used to perform the test**

Equip #	Manufacturer	Model	Description	Last Cal	Next Due
CIS004882	EMC Test Systems	3115	Double Ridged Guide Horn Antenna	26-May-11	26-May-12
CIS005691	Miteq	NSP1800-25-S1	Broadband Preamplifier	31-Jan-12	31-Jan-13
COM000210	TTE	H785-150K-50-21378	Hi Pass Filter - 150KHz cutoff	17-Aug-11	17-Aug-12
COM000213	Fischer	FCC-LISN-50-50-2M	Turntable LISN (150KHz-30MHz)	5-Mar-11	5-Mar-12
CIS021117	Micro-Coax	UFB311A-0-2484-520520	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-11	24-Aug-12
CIS030564	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	24-Aug-11	24-Aug-12
COM000233	Sunol Sciences	JB1	Combination Antenna, 30MHz-2GHz	13-Jul-11	13-Jul-12
COM000239	Rohde & Schwarz	ESI40	EMI Test Receiver	21-Jun-11	21-Jun-12
COM000443	Sonoma Instrument	310N	Amplifier 9kHz-1GHz	8-Apr-11	8-Apr-12
CIS034972	Midwest Microwave	ATT-0640-20-29M-02	Attenuator, 20dB	17-May-11	16-May-12
CIS043116	Huber + Suhner	Sucoflex 104PE	N & SMA RF cable	14-Dec-11	14-Dec-12
CIS040603	Agilent	E4440A	Spectrum Analyzer	5-Aug-11	5-Aug-12
CIS040053	Agilent	E4448A	Spectrum Analyzer	29-Apr-11	28-Apr-12