

Test Report
AIR-CAP3702P-B-K9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102087P

5150-5250 MHz

Antenna Gain 7 dBi

Against the following Specifications:

CFR47 Part 15.407

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

	
Author: Jose Aguirre Tested By	Approved By: Jim Nicholson Title: Technical Leader, Engineering Revision: 3

This report replaces any previously entered test report under EDCS – **1518133**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION.....	7
SECTION 3: RESULT SUMMARY	9
3.1 RESULTS SUMMARY TABLE	9
SECTION 4: SAMPLE DETAILS.....	11
APPENDIX A: EMISSION TEST RESULTS.....	12
CONDUCTED TEST SETUP DIAGRAM.....	12
TARGET MAXIMUM CHANNEL POWER	12
A.1 99% AND 26dB BANDWIDTH	13
A.2 MAXIMUM CONDUCTED OUTPUT POWER/ POWER SPECTRAL DENSITY	20
A.3 CONDUCTED SPURIOUS EMISSIONS.....	35
A.4 CONDUCTED BANDEDGE.....	47
APPENDIX B: EMISSION TEST RESULTS.....	55
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G	55
B.1 RADIATED SPURIOUS EMISSIONS	56
B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ	68
B.3 AC CONDUCTED EMISSIONS	70
APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST	72
APPENDIX E: ABBREVIATION KEY AND DEFINITIONS	77

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 ⁻⁷
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2 Date of testing

07-Jul-15 - 08-Aug-15

2.3 Report Issue Date

02-November-2015

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-CAP3702P-B-K9

2.6 EUT Description

The AIR-CAP3702P-B-K9 Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

- 802.11n/ac - Non HT/VHT20, One Antenna, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT20, Two Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT20, Three Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT20, Four Antennas, 6 to 54 Mbps

- 802.11n/ac - Non HT/VHT20 Beam Forming, Two Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT20 Beam Forming, Three Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT20 Beam Forming, Four Antennas, 6 to 54 Mbps

- 802.11n/ac - HT/VHT20, One Antenna, M0 to M7
- 802.11n/ac - HT/VHT20, Two Antennas, M0 to M7
- 802.11n/ac - HT/VHT20, Two Antennas, M8 to M15
- 802.11n/ac - HT/VHT20, Three Antennas, M0 to M7
- 802.11n/ac - HT/VHT20, Three Antennas, M8 to M15
- 802.11n/ac - HT/VHT20, Three Antennas, M16 to M23
- 802.11n/ac - HT/VHT20, Four Antennas, M0 to M7
- 802.11n/ac - HT/VHT20, Four Antennas, M8 to M15
- 802.11n/ac - HT/VHT20, Four Antennas, M16 to M23

- 802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7
- 802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15
- 802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7
- 802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15
- 802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23
- 802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7
- 802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15
- 802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23

- 802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7
- 802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7
- 802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7

- 802.11n/ac - Non HT/VHT40 Duplicate, One Antenna, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT40 Duplicate, Two Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT40 Duplicate, Three Antennas, 6 to 54 Mbps
- 802.11n/ac - Non HT/VHT40 Duplicate, Four Antennas, 6 to 54 Mbps

- 802.11n/ac - HT/VHT40, One Antenna, M0 to M7
- 802.11n/ac - HT/VHT40, Two Antennas, M0 to M7
- 802.11n/ac - HT/VHT40, Two Antennas, M8 to M15
- 802.11n/ac - HT/VHT40, Three Antennas, M0 to M7
- 802.11n/ac - HT/VHT40, Three Antennas, M8 to M15
- 802.11n/ac - HT/VHT40, Three Antennas, M16 to M23
- 802.11n/ac - HT/VHT40, Four Antennas, M0 to M7
- 802.11n/ac - HT/VHT40, Four Antennas, M8 to M15
- 802.11n/ac - HT/VHT40, Four Antennas, M16 to M23

- 802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7
- 802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15
- 802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7
- 802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15
- 802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23
- 802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7
- 802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15

802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7
 802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT/VHT80 Duplicate, One Antenna, 6 to 54 Mbps
 802.11n/ac - Non HT/VHT80 Duplicate, Two Antennas, 6 to 54 Mbps
 802.11n/ac - Non HT/VHT80 Duplicate, Three Antennas, 6 to 54 Mbps
 802.11n/ac - Non HT/VHT80 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT80, One Antenna, M0 to M7
 802.11n/ac - HT/VHT80, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT80, Two Antennas, M8 to M15
 802.11n/ac - HT/VHT80, Three Antennas, M0 to M7
 802.11n/ac - HT/VHT80, Three Antennas, M8 to M15
 802.11n/ac - HT/VHT80, Three Antennas, M16 to M23
 802.11n/ac - HT/VHT80, Four Antennas, M0 to M7
 802.11n/ac - HT/VHT80, Four Antennas, M8 to M15
 802.11n/ac - HT/VHT80, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M8 to M15
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M0 to M7
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M8 to M15
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M16 to M23
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M0 to M7
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M8 to M15
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 STBC, Two Antennas, M0 to M7
 802.11n/ac - HT/VHT80 STBC, Three Antennas, M0 to M7
 802.11n/ac - HT/VHT80 STBC, Four Antennas, M0 to M7

The following antennas are supported by this product series.
 The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	Antenna Gain >30 degrees (dBi)
2.4/5 GHz	AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4	NA
	AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4	NA
	AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4	NA
	AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4	NA
	AIR-ANT2544V4M-R8	Dual-resonant omni (4-pack)	3 / 2	1
	AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4	1
	AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6	3
	AIR-ANT2566D4M-R	Dual-Band Polarization-Diverse Directional Array	6 / 6	3
	AIR-ANT2547V-N	Dual Band Omni	4 / 7	-7
	AIR-ANT2513P4M-N	Dual-resonant cross-pol "directional" antenna (4-pack)	13 / 13	-7

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	<p>99% & 26 dB Bandwidth:</p> <p>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p>	Pass
FCC 15.407	<p>Output Power:</p> <p>15.407: (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
FCC 15.407	<p>Power Spectral Density:</p> <p>15.407 The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
FCC 15.407	<p>Conducted Spurious Emissions / Band-Edge:</p> <p>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27dBm/MHz.</p>	Pass
FCC 15.407 FCC 15.209 FCC 152.05	<p>Restricted band:</p> <p>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).</p>	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	AC conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

* MPE calculation is recorded in a separate report

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-CAP3702P-B-K9	Cisco Systems	V02	AP3G2-K9W7-M	IOS 15.3	FTX1850R0F5
S02*	AIR-PWR-C	Meanwell	A0	NA	NA	EB46E93226

(*) S02 and S04 are support equipment Power supplies for EUT S01 and S03

4.2 System Details

System #	Description	Samples
1	AIR-SAP3702P-B-K9 (EUT)	S01
2	AIR-PWR-C (Support power supply)	S02

4.3 Mode of Operation Details


Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01
- KDB 662911 D01 Multiple Transmitter Output

Appendix A: Emission Test Results

Conducted Test Setup Diagram

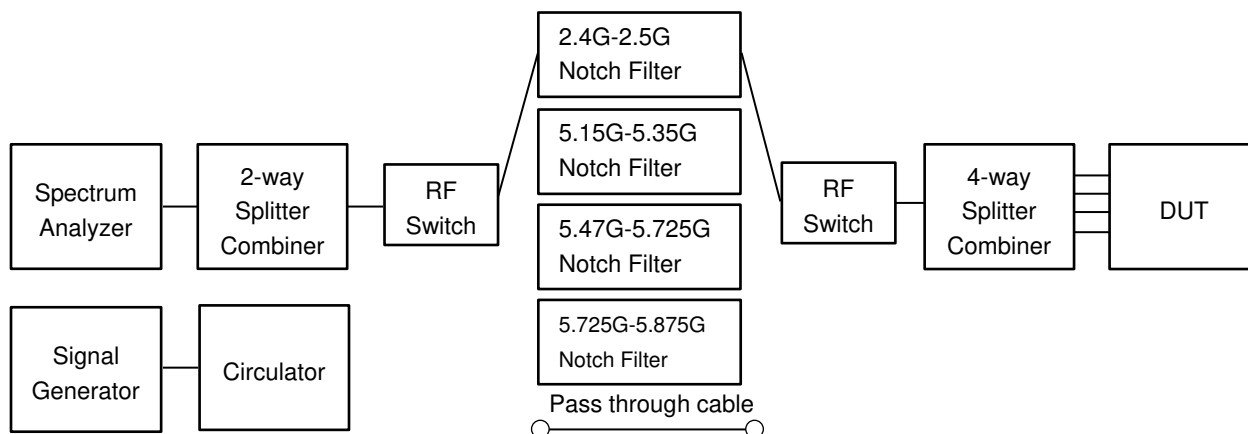

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5180	5240
Non HT/VHT20, 6 to 54 Mbps	20	20
Non HT/VHT20 Beam Forming, 6 to 54 Mbps	18	20
HT/VHT20, M0 to M23, M0 to M9 1-0ss	20	22
HT/VHT20 Beam Forming, M0 to M23, M0 to M9 1-0ss	20	22
HT/VHT20 STBC, M0 to M7	20	22
	5190	5230
Non HT/VHT40, 6 to 54 Mbps	16	20
HT/VHT40, M0 to M23, M0 to M9 1-0ss	18	21
HT/VHT40 Beam Forming, M0 to M23, M0 to M9 1-0ss	18	21
HT/VHT40 STBC, M0 to M7	18	21
	5210	
Non HT/VHT80, 6 to 54 Mbps	13	
HT/VHT80, M0 to M23, M0 to M9 1-0ss	17	
HT/VHT80 Beam Forming, M0 to M23, M0 to M9 1-0ss	17	
HT/VHT80 STBC, M0 to M7	17	

A.1 99% and 26dB Bandwidth

FCC 15.407 The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB)

Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

99% BW and EBW (-26dB)

Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW \geq 3 x RBW

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

07-Jul-15 - 08-Aug-15


Test Result : PASS

See Appendix C for list of test equipment


Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT/VHT20, 6 to 54 Mbps	6	22.2	17.7
	HT/VHT20, M0 to M23, M0 to M9 1-0ss	m0	22.5	18.2
5190	Non HT/VHT40, 6 to 54 Mbps	6	43.2	36.6
	HT/VHT40, M0 to M23, M0 to M9 1-0ss	m0	42.1	36.5
5210	Non HT/VHT80, 6 to 54 Mbps	6	87.6	76.4
	HT/VHT80, M0 to M23, M0 to M9 1-0ss	m0x1	83.2	76.8
5230	Non HT/VHT40, 6 to 54 Mbps	6	42.9	36.8
	HT/VHT40, M0 to M23, M0 to M9 1-0ss	m0	42.0	36.6
5240	Non HT/VHT20, 6 to 54 Mbps	6	22.5	17.8
	HT/VHT20, M0 to M23, M0 to M9 1-0ss	m0	22.6	18.2




26dB / 99% Bandwidth, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps

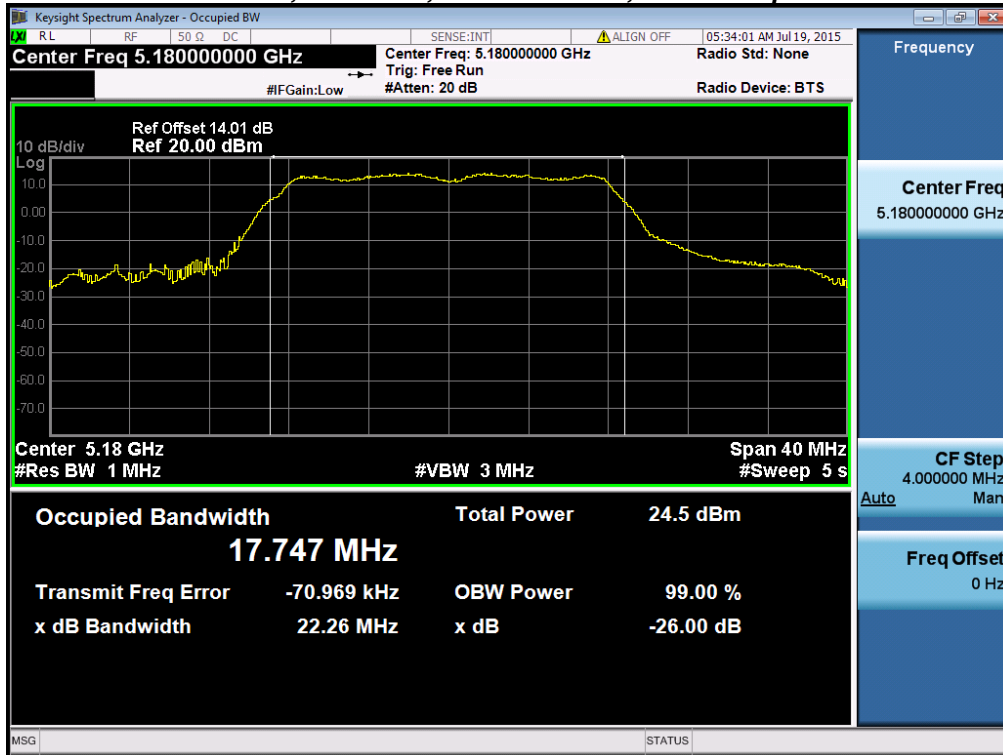


26dB / 99% Bandwidth, 5180 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss

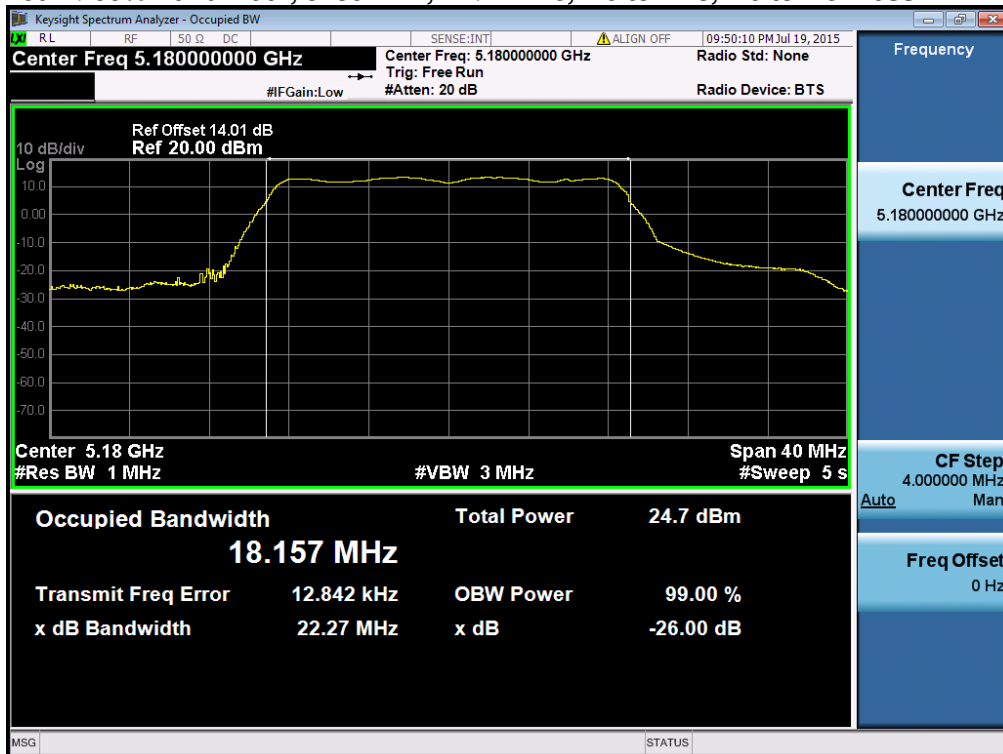


26dB / 99% Bandwidth, 5190 MHz, Non HT/VHT40, 6 to 54 Mbps

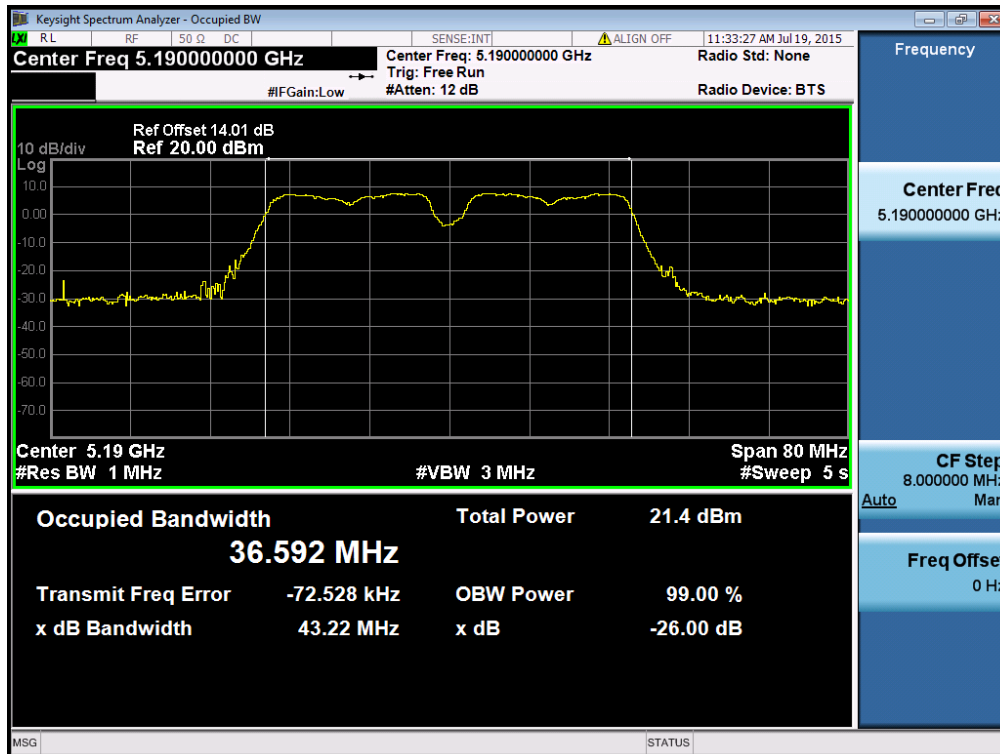


26dB / 99% Bandwidth, 5190 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss

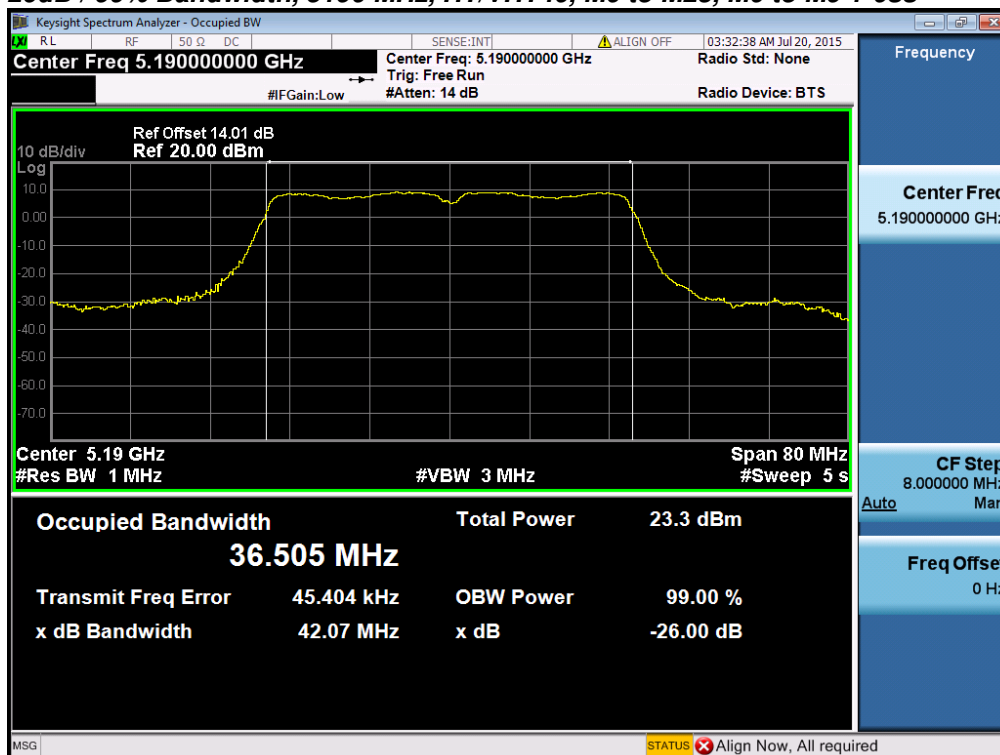


26dB / 99% Bandwidth, 5210 MHz, Non HT/VHT80, 6 to 54 Mbps

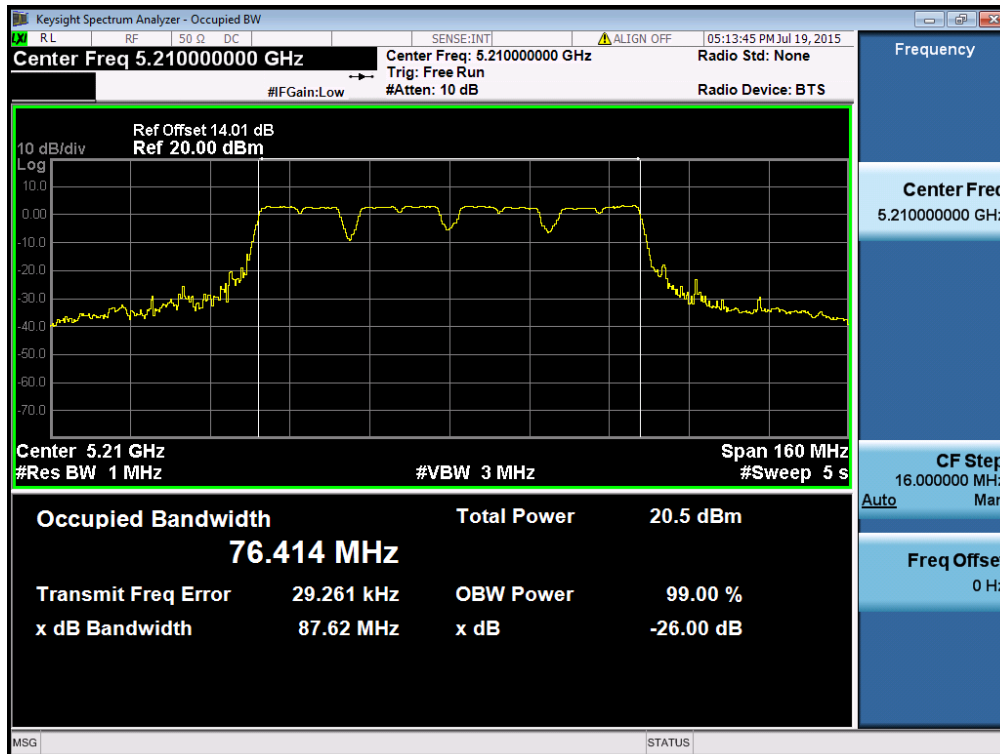


26dB / 99% Bandwidth, 5210 MHz, HT/VHT80, M0 to M23, M0 to M9 1-0ss

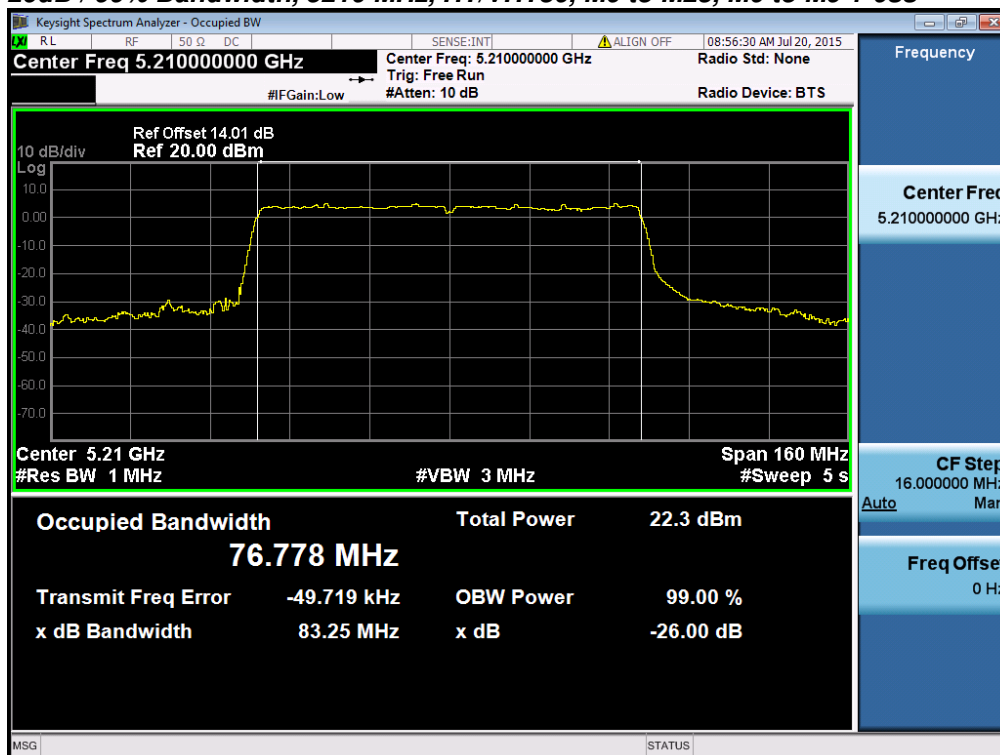


26dB / 99% Bandwidth, 5230 MHz, Non HT/VHT40, 6 to 54 Mbps

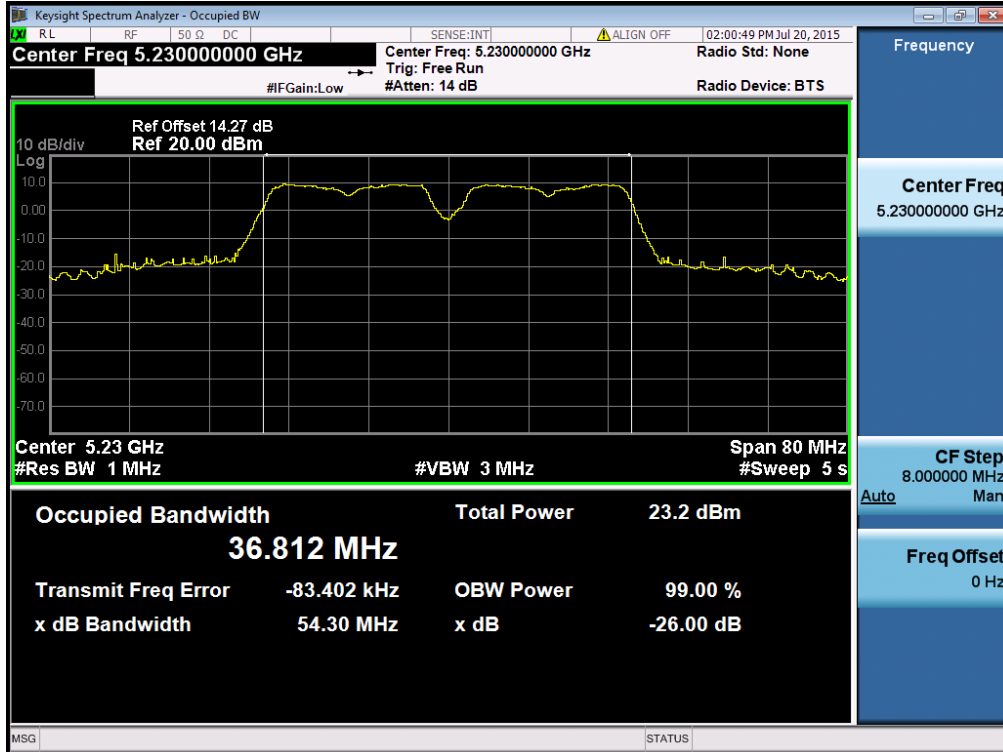


26dB / 99% Bandwidth, 5230 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss

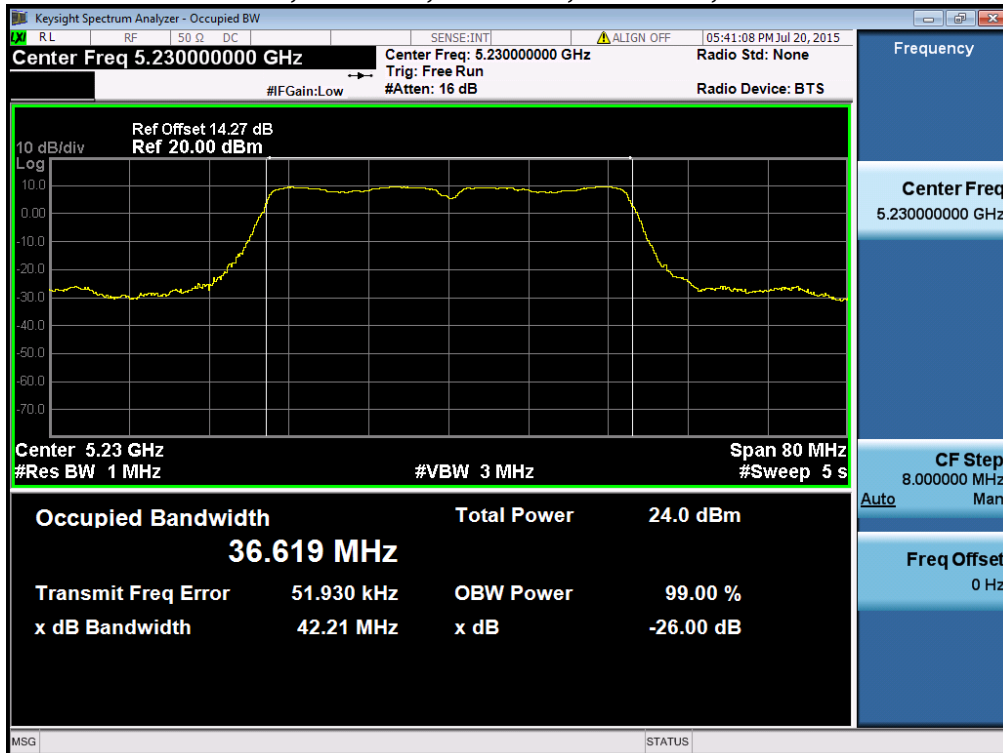

26dB / 99% Bandwidth, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps

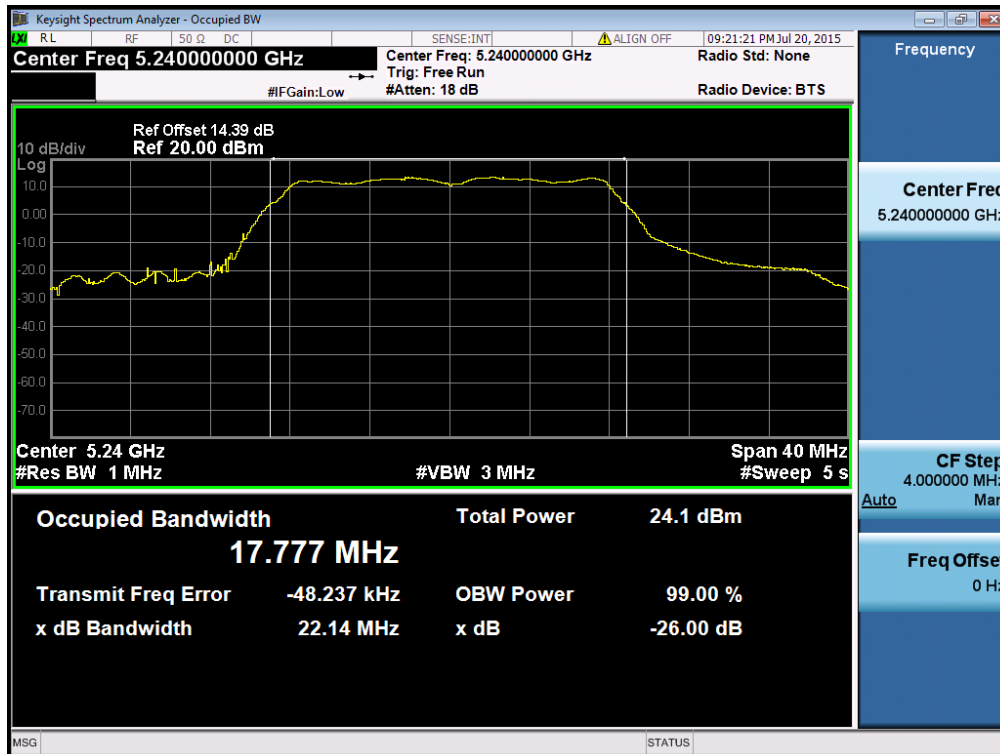

26dB / 99% Bandwidth, 5240 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss

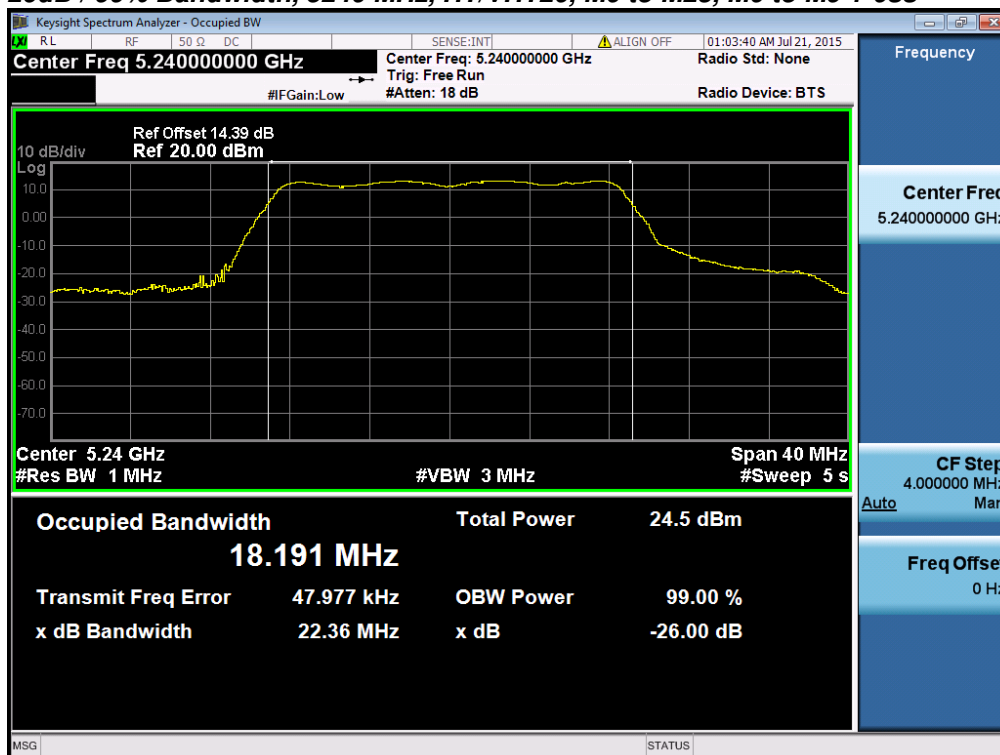

A.2 Maximum Conducted Output Power/ Power Spectral Density

15.407 (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Output Power
Test Procedure
<ol style="list-style-type: none"> 1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

Output Power
Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 07-Jul-15 - 08-Aug-15
Test Result : PASS	

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	16.3				16.3	29.0	12.7
	Non HT/VHT20, 6 to 54 Mbps	2	7	16.3	15.4			18.9	29.0	10.1
	Non HT/VHT20, 6 to 54 Mbps	3	7	16.3	15.4	15.0		20.4	29.0	8.6
	Non HT/VHT20, 6 to 54 Mbps	4	7	15.0	14.2	13.7	14.1	20.3	29.0	8.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	15.0	14.2			17.6	26.0	8.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	12.9	12.0	11.4		16.9	24.2	7.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	11.7	10.9	10.3	10.8	17.0	23.0	6.0
	HT/VHT20, M0 to M7	1	7	16.3				16.3	29.0	12.7
	HT/VHT20, M0 to M7	2	7	16.3	15.4			18.9	29.0	10.1
	HT/VHT20, M8 to M15	2	7	16.3	15.4			18.9	29.0	10.1
	HT/VHT20, M0 to M7	3	7	16.3	15.4	15.1		20.4	29.0	8.6
	HT/VHT20, M8 to M15	3	7	16.3	15.4	15.1		20.4	29.0	8.6
	HT/VHT20, M16 to M23	3	7	16.3	15.4	15.1		20.4	29.0	8.6
	HT/VHT20, M0 to M7	4	7	15.1	14.1	13.8	14.2	20.3	29.0	8.7
	HT/VHT20, M8 to M15	4	7	15.1	14.1	13.8	14.2	20.3	29.0	8.7
	HT/VHT20, M16 to M23	4	7	15.1	14.1	13.8	14.2	20.3	29.0	8.7
	HT/VHT20 Beam Forming, M0 to M7	2	10	15.1	14.1			17.6	26.0	8.4
	HT/VHT20 Beam Forming, M8 to M15	2	7	16.3	15.4			18.9	29.0	10.1
	HT/VHT20 Beam Forming, M0 to M7	3	12	13.1	12.3	11.6		17.1	24.2	7.1
	HT/VHT20 Beam Forming, M8 to M15	3	9	15.1	14.1	13.8		19.1	27.2	8.1
	HT/VHT20 Beam Forming, M16 to M23	3	7	16.3	15.4	15.1		20.4	29.0	8.6
	HT/VHT20 Beam Forming, M0 to M7	4	13	12.1	11.3	10.4	11.2	17.3	23.0	5.7
	HT/VHT20 Beam Forming, M8 to M15	4	10	13.9	12.9	12.7	13.1	19.2	26.0	6.8
	HT/VHT20 Beam Forming, M16 to M23	4	8	15.1	14.1	13.8	14.2	20.3	27.8	7.5
	HT/VHT20 STBC, M0 to M7	2	7	16.3	15.4			18.9	29.0	10.1
	HT/VHT20 STBC, M0 to M7	3	7	16.3	15.4	15.1		20.4	29.0	8.6
	HT/VHT20 STBC, M0 to M7	4	7	15.1	14.1	13.8	14.2	20.3	29.0	8.7
	5190	Non HT/VHT40, 6 to 54 Mbps	1	7	13.0				13.0	29.0
Non HT/VHT40, 6 to 54 Mbps		2	7	12.0	11.3			14.7	29.0	14.3
Non HT/VHT40, 6 to 54 Mbps		3	7	11.1	10.3	9.6		15.1	29.0	13.9
Non HT/VHT40, 6 to 54 Mbps		4	7	11.1	10.3	9.6	10.3	16.4	29.0	12.6
HT/VHT40, M0 to M7		1	7	15.2				15.2	29.0	13.8
HT/VHT40, M0 to M7		2	7	14.0	13.0			16.5	29.0	12.5
HT/VHT40, M8 to M15		2	7	14.0	13.0			16.5	29.0	12.5



	HT/VHT40, M0 to M7	3	7	12.9	12.2	11.3		17.0	29.0	12.0
	HT/VHT40, M8 to M15	3	7	12.9	12.2	11.3		17.0	29.0	12.0
	HT/VHT40, M16 to M23	3	7	12.9	12.2	11.3		17.0	29.0	12.0
	HT/VHT40, M0 to M7	4	7	12.9	12.2	11.3	12.2	18.2	29.0	10.8
	HT/VHT40, M8 to M15	4	7	12.9	12.2	11.3	12.2	18.2	29.0	10.8
	HT/VHT40, M16 to M23	4	7	12.9	12.2	11.3	12.2	18.2	29.0	10.8
	HT/VHT40 Beam Forming, M0 to M7	2	10	12.9	12.2			15.6	26.0	10.4
	HT/VHT40 Beam Forming, M8 to M15	2	7	14.0	13.0			16.5	29.0	12.5
	HT/VHT40 Beam Forming, M0 to M7	3	12	10.8	9.9	9.3		14.8	24.2	9.4
	HT/VHT40 Beam Forming, M8 to M15	3	9	12.9	12.2	11.3		17.0	27.2	10.2
	HT/VHT40 Beam Forming, M16 to M23	3	7	12.9	12.2	11.3		17.0	29.0	12.0
	HT/VHT40 Beam Forming, M0 to M7	4	13	8.9	7.7	7.1	8.1	14.0	23.0	9.0
	HT/VHT40 Beam Forming, M8 to M15	4	10	11.9	11.2	10.3	11.0	17.2	26.0	8.8
	HT/VHT40 Beam Forming, M16 to M23	4	8	12.9	12.2	11.3	12.2	18.2	27.8	9.6
	HT/VHT40 STBC, M0 to M7	2	7	14.0	13.0			16.5	29.0	12.5
	HT/VHT40 STBC, M0 to M7	3	7	12.9	12.2	11.3		17.0	29.0	12.0
	HT/VHT40 STBC, M0 to M7	4	7	12.9	12.2	11.3	12.2	18.2	29.0	10.8
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	12.4				12.4	29.0	16.6
	Non HT/VHT80, 6 to 54 Mbps	2	7	10.5	9.9			13.2	29.0	15.8
	Non HT/VHT80, 6 to 54 Mbps	3	7	8.6	7.8	7.2		12.7	29.0	16.3
	Non HT/VHT80, 6 to 54 Mbps	4	7	7.4	6.6	6.2	7.4	13.0	29.0	16.0
	HT/VHT80, M0 to M7	1	7	13.9				13.9	29.0	15.1
	HT/VHT80, M0 to M7	2	7	12.7	12.2			15.5	29.0	13.5
	HT/VHT80, M8 to M15	2	7	12.7	12.2			15.5	29.0	13.5
	HT/VHT80, M0 to M7	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80, M8 to M15	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80, M16 to M23	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80, M0 to M7	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80, M8 to M15	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80, M16 to M23	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80 Beam Forming, M0 to M7	2	7	12.7	12.2			15.5	29.0	13.5
	HT/VHT80 Beam Forming, M8 to M15	2	7	12.7	12.2			15.5	29.0	13.5
	HT/VHT80 Beam Forming, M0 to M7	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80 Beam Forming, M8 to M15	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80 Beam Forming, M16 to M23	3	7	11.6	11.1	10.4		15.8	29.0	13.2
	HT/VHT80 Beam Forming, M0 to M7	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80 Beam Forming, M8 to M15	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80 Beam Forming, M16 to M23	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9
	HT/VHT80 STBC, M0 to M7	2	7	12.7	12.2			15.5	29.0	13.5
	HT/VHT80 STBC, M0 to M7	3	7	11.6	11.1	10.4		15.8	29.0	13.2
HT/VHT80 STBC, M0 to M7	4	7	11.6	11.1	10.4	11.0	17.1	29.0	11.9	

5230	Non HT/VHT40, 6 to 54 Mbps	1	7	15.0				15.0	29.0	14.0
	Non HT/VHT40, 6 to 54 Mbps	2	7	15.0	14.4			17.7	29.0	11.3
	Non HT/VHT40, 6 to 54 Mbps	3	7	15.0	14.4	14.1		19.3	29.0	9.7
	Non HT/VHT40, 6 to 54 Mbps	4	7	15.0	14.4	14.1	14.3	20.5	29.0	8.5
	HT/VHT40, M0 to M7	1	7	15.8				15.8	29.0	13.2
	HT/VHT40, M0 to M7	2	7	15.8	15.3			18.6	29.0	10.4
	HT/VHT40, M8 to M15	2	7	15.8	15.3			18.6	29.0	10.4
	HT/VHT40, M0 to M7	3	7	15.8	15.3	14.8		20.1	29.0	8.9
	HT/VHT40, M8 to M15	3	7	15.8	15.3	14.8		20.1	29.0	8.9
	HT/VHT40, M16 to M23	3	7	15.8	15.3	14.8		20.1	29.0	8.9
	HT/VHT40, M0 to M7	4	7	15.8	15.3	14.8	15.3	21.3	29.0	7.7
	HT/VHT40, M8 to M15	4	7	15.8	15.3	14.8	15.3	21.3	29.0	7.7
	HT/VHT40, M16 to M23	4	7	15.8	15.3	14.8	15.3	21.3	29.0	7.7
	HT/VHT40 Beam Forming, M0 to M7	2	10	15.8	15.3			18.6	26.0	7.4
	HT/VHT40 Beam Forming, M8 to M15	2	7	15.8	15.3			18.6	29.0	10.4
	HT/VHT40 Beam Forming, M0 to M7	3	12	15.8	15.3	14.8		20.1	24.2	4.1
	HT/VHT40 Beam Forming, M8 to M15	3	9	15.8	15.3	14.8		20.1	27.2	7.1
	HT/VHT40 Beam Forming, M16 to M23	3	7	15.8	15.3	14.8		20.1	29.0	8.9
	HT/VHT40 Beam Forming, M0 to M7	4	13	14.2	13.3	12.7	13.4	19.5	23.0	3.5
	HT/VHT40 Beam Forming, M8 to M15	4	10	15.8	15.3	14.8	15.3	21.3	26.0	4.7
	HT/VHT40 Beam Forming, M16 to M23	4	8	15.8	15.3	14.8	15.3	21.3	27.8	6.5
	HT/VHT40 STBC, M0 to M7	2	7	15.8	15.3			18.6	29.0	10.4
	HT/VHT40 STBC, M0 to M7	3	7	15.8	15.3	14.8		20.1	29.0	8.9
HT/VHT40 STBC, M0 to M7	4	7	15.8	15.3	14.8	15.3	21.3	29.0	7.7	
5240	Non HT/VHT20, 6 to 54 Mbps	1	7	16.0				16.0	29.0	13.0
	Non HT/VHT20, 6 to 54 Mbps	2	7	16.0	15.6			18.8	29.0	10.2
	Non HT/VHT20, 6 to 54 Mbps	3	7	16.0	15.6	15.3		20.4	29.0	8.6
	Non HT/VHT20, 6 to 54 Mbps	4	7	14.8	14.5	14.0	14.2	20.4	29.0	8.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	16.0	15.6			18.8	26.0	7.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	16.0	15.6	15.3		20.4	24.2	3.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	14.8	14.5	14.0	14.2	20.4	23.0	2.6
	HT/VHT20, M0 to M7	1	7	16.0				16.0	29.0	13.0
	HT/VHT20, M0 to M7	2	7	16.0	15.3			18.7	29.0	10.3
	HT/VHT20, M8 to M15	2	7	16.0	15.3			18.7	29.0	10.3
	HT/VHT20, M0 to M7	3	7	16.0	15.3	15.4		20.3	29.0	8.7
	HT/VHT20, M8 to M15	3	7	16.0	15.3	15.4		20.3	29.0	8.7
	HT/VHT20, M16 to M23	3	7	16.0	15.3	15.4		20.3	29.0	8.7
	HT/VHT20, M0 to M7	4	7	14.6	14.4	14.0	14.3	20.4	29.0	8.6
HT/VHT20, M8 to M15	4	7	16.0	15.3	15.4	15.4	21.6	29.0	7.4	
HT/VHT20, M16 to M23	4	7	16.0	15.3	15.4	15.4	21.6	29.0	7.4	

HT/VHT20 Beam Forming, M0 to M7	2	10	16.0	15.3			18.7	26.0	7.3
HT/VHT20 Beam Forming, M8 to M15	2	7	16.0	15.3			18.7	29.0	10.3
HT/VHT20 Beam Forming, M0 to M7	3	12	16.0	15.3	15.4		20.3	24.2	3.9
HT/VHT20 Beam Forming, M8 to M15	3	9	16.0	15.3	15.4		20.3	27.2	6.9
HT/VHT20 Beam Forming, M16 to M23	3	7	16.0	15.3	15.4		20.3	29.0	8.7
HT/VHT20 Beam Forming, M0 to M7	4	13	14.6	14.4	14.0	14.3	20.4	23.0	2.6
HT/VHT20 Beam Forming, M8 to M15	4	10	16.0	15.3	15.4	15.4	21.6	26.0	4.4
HT/VHT20 Beam Forming, M16 to M23	4	8	16.0	15.3	15.4	15.4	21.6	27.8	6.2
HT/VHT20 STBC, M0 to M7	2	7	16.0	15.3			18.7	29.0	10.3
HT/VHT20 STBC, M0 to M7	3	7	16.0	15.3	15.4		20.3	29.0	8.7
HT/VHT20 STBC, M0 to M7	4	7	16.0	15.3	15.4	15.4	21.6	29.0	7.4

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	5.9				5.9	16.0	10.1
	Non HT/VHT20, 6 to 54 Mbps	2	7	5.9	5.1			8.5	16.0	7.5
	Non HT/VHT20, 6 to 54 Mbps	3	7	5.9	5.1	4.5		10.0	16.0	6.0
	Non HT/VHT20, 6 to 54 Mbps	4	7	4.7	4.1	3.3	3.7	10.0	16.0	6.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	4.7	4.1			7.4	13.0	5.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	2.6	1.8	1.3		6.7	11.2	4.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	1.3	0.6	-0.2	0.1	6.5	10.0	3.5
	HT/VHT20, M0 to M7	1	7	5.4				5.4	16.0	10.6
	HT/VHT20, M0 to M7	2	7	5.4	4.6			8.0	16.0	8.0
	HT/VHT20, M8 to M15	2	7	5.4	4.6			8.0	16.0	8.0
	HT/VHT20, M0 to M7	3	7	5.4	4.6	4.5		9.6	16.0	6.4
	HT/VHT20, M8 to M15	3	7	5.4	4.6	4.5		9.6	16.0	6.4
	HT/VHT20, M16 to M23	3	7	5.4	4.6	4.5		9.6	16.0	6.4
	HT/VHT20, M0 to M7	4	7	4.5	3.4	3.2	3.7	9.7	16.0	6.3
	HT/VHT20, M8 to M15	4	7	4.5	3.4	3.2	3.7	9.7	16.0	6.3
	HT/VHT20, M16 to M23	4	7	4.5	3.4	3.2	3.7	9.7	16.0	6.3
	HT/VHT20 Beam Forming, M0 to M7	2	10	4.5	3.4			7.0	13.0	6.0
	HT/VHT20 Beam Forming, M8 to M15	2	7	5.4	4.6			8.0	16.0	8.0
	HT/VHT20 Beam Forming, M0 to M7	3	12	2.2	1.6	1.0		6.4	11.2	4.8
	HT/VHT20 Beam Forming, M8 to M15	3	9	4.5	3.4	3.2		8.5	14.2	5.7
	HT/VHT20 Beam Forming, M16 to M23	3	7	5.4	4.6	4.5		9.6	16.0	6.4
	HT/VHT20 Beam Forming, M0 to M7	4	13	1.2	0.7	-0.2	0.7	6.6	10.0	3.4
	HT/VHT20 Beam Forming, M8 to M15	4	10	3.1	2.1	2.1	2.2	8.4	13.0	4.6
	HT/VHT20 Beam Forming, M16 to M23	4	8	4.5	3.4	3.2	3.7	9.7	14.8	5.1
	HT/VHT20 STBC, M0 to M7	2	7	5.4	4.6			8.0	16.0	8.0
	HT/VHT20 STBC, M0 to M7	3	7	5.4	4.6	4.5		9.6	16.0	6.4
	HT/VHT20 STBC, M0 to M7	4	7	4.5	3.4	3.2	3.7	9.7	16.0	6.3
	5190	Non HT/VHT40, 6 to 54 Mbps	1	7	-0.1				-0.1	16.0
Non HT/VHT40, 6 to 54 Mbps		2	7	-1.3	-2.3			1.2	16.0	14.8
Non HT/VHT40, 6 to 54 Mbps		3	7	-2.4	-2.7	-3.8		1.8	16.0	14.2
Non HT/VHT40, 6 to 54 Mbps		4	7	-2.4	-2.7	-3.8	-3.0	3.1	16.0	12.9
HT/VHT40, M0 to M7		1	7	1.7				1.7	16.0	14.3
HT/VHT40, M0 to M7		2	7	0.4	-0.5			3.0	16.0	13.0
HT/VHT40, M8 to M15		2	7	0.4	-0.5			3.0	16.0	13.0

	HT/VHT40, M0 to M7	3	7	-0.7	-1.3	-2.0		3.5	16.0	12.5
	HT/VHT40, M8 to M15	3	7	-0.7	-1.3	-2.0		3.5	16.0	12.5
	HT/VHT40, M16 to M23	3	7	-0.7	-1.3	-2.0		3.5	16.0	12.5
	HT/VHT40, M0 to M7	4	7	-0.7	-1.3	-2.0	-1.4	4.7	16.0	11.3
	HT/VHT40, M8 to M15	4	7	-0.7	-1.3	-2.0	-1.4	4.7	16.0	11.3
	HT/VHT40, M16 to M23	4	7	-0.7	-1.3	-2.0	-1.4	4.7	16.0	11.3
	HT/VHT40 Beam Forming, M0 to M7	2	10	-0.7	-1.3			2.0	13.0	11.0
	HT/VHT40 Beam Forming, M8 to M15	2	7	0.4	-0.5			3.0	16.0	13.0
	HT/VHT40 Beam Forming, M0 to M7	3	12	-2.6	-3.8	-4.3		1.3	11.2	9.9
	HT/VHT40 Beam Forming, M8 to M15	3	9	-0.7	-1.3	-2.0		3.5	14.2	10.7
	HT/VHT40 Beam Forming, M16 to M23	3	7	-0.7	-1.3	-2.0		3.5	16.0	12.5
	HT/VHT40 Beam Forming, M0 to M7	4	13	-4.8	-5.9	-6.7	-5.4	0.4	10.0	9.6
	HT/VHT40 Beam Forming, M8 to M15	4	10	-1.8	-2.3	-3.3	-2.7	3.5	13.0	9.5
	HT/VHT40 Beam Forming, M16 to M23	4	8	-0.7	-1.3	-2.0	-1.4	4.7	14.8	10.1
	HT/VHT40 STBC, M0 to M7	2	7	0.4	-0.5			3.0	16.0	13.0
	HT/VHT40 STBC, M0 to M7	3	7	-0.7	-1.3	-2.0		3.5	16.0	12.5
	HT/VHT40 STBC, M0 to M7	4	7	-0.7	-1.3	-2.0	-1.4	4.7	16.0	11.3
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	-4.4				-4.4	16.0	20.4
	Non HT/VHT80, 6 to 54 Mbps	2	7	-6.0	-6.5			-3.2	16.0	19.2
	Non HT/VHT80, 6 to 54 Mbps	3	7	-8.4	-8.6	-9.4		-4.0	16.0	20.0
	Non HT/VHT80, 6 to 54 Mbps	4	7	-9.4	-10.0	-10.4	-8.9	-3.6	16.0	19.6
	HT/VHT80, M0 to M7	1	7	-3.6				-3.6	16.0	19.6
	HT/VHT80, M0 to M7	2	7	-4.5	-5.0			-1.7	16.0	17.7
	HT/VHT80, M8 to M15	2	7	-4.5	-5.0			-1.7	16.0	17.7
	HT/VHT80, M0 to M7	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80, M8 to M15	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80, M16 to M23	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80, M0 to M7	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80, M8 to M15	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80, M16 to M23	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80 Beam Forming, M0 to M7	2	7	-4.5	-5.0			-1.7	16.0	17.7
	HT/VHT80 Beam Forming, M8 to M15	2	7	-4.5	-5.0			-1.7	16.0	17.7
	HT/VHT80 Beam Forming, M0 to M7	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80 Beam Forming, M8 to M15	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80 Beam Forming, M16 to M23	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
	HT/VHT80 Beam Forming, M0 to M7	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80 Beam Forming, M8 to M15	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80 Beam Forming, M16 to M23	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2
	HT/VHT80 STBC, M0 to M7	2	7	-4.5	-5.0			-1.7	16.0	17.7
	HT/VHT80 STBC, M0 to M7	3	7	-5.9	-6.0	-6.9		-1.5	16.0	17.5
HT/VHT80 STBC, M0 to M7	4	7	-5.9	-6.0	-6.9	-6.0	-0.2	16.0	16.2	



5230	Non HT/VHT40, 6 to 54 Mbps	1	7	2.1				2.1	16.0	13.9
	Non HT/VHT40, 6 to 54 Mbps	2	7	2.1	1.3			4.7	16.0	11.3
	Non HT/VHT40, 6 to 54 Mbps	3	7	2.1	1.3	0.9		6.2	16.0	9.8
	Non HT/VHT40, 6 to 54 Mbps	4	7	2.1	1.3	0.9	0.9	7.3	16.0	8.7
	HT/VHT40, M0 to M7	1	7	2.0				2.0	16.0	14.0
	HT/VHT40, M0 to M7	2	7	2.0	1.7			4.9	16.0	11.1
	HT/VHT40, M8 to M15	2	7	2.0	1.7			4.9	16.0	11.1
	HT/VHT40, M0 to M7	3	7	2.0	1.7	1.6		6.5	16.0	9.5
	HT/VHT40, M8 to M15	3	7	2.0	1.7	1.6		6.5	16.0	9.5
	HT/VHT40, M16 to M23	3	7	2.0	1.7	1.6		6.5	16.0	9.5
	HT/VHT40, M0 to M7	4	7	2.0	1.7	1.6	1.7	7.8	16.0	8.2
	HT/VHT40, M8 to M15	4	7	2.0	1.7	1.6	1.7	7.8	16.0	8.2
	HT/VHT40, M16 to M23	4	7	2.0	1.7	1.6	1.7	7.8	16.0	8.2
	HT/VHT40 Beam Forming, M0 to M7	2	10	2.0	1.7			4.9	13.0	8.1
	HT/VHT40 Beam Forming, M8 to M15	2	7	2.0	1.7			4.9	16.0	11.1
	HT/VHT40 Beam Forming, M0 to M7	3	12	2.0	1.7	1.6		6.5	11.2	4.7
	HT/VHT40 Beam Forming, M8 to M15	3	9	2.0	1.7	1.6		6.5	14.2	7.7
	HT/VHT40 Beam Forming, M16 to M23	3	7	2.0	1.7	1.6		6.5	16.0	9.5
	HT/VHT40 Beam Forming, M0 to M7	4	13	0.4	-0.4	-1.0	-0.3	5.7	10.0	4.3
	HT/VHT40 Beam Forming, M8 to M15	4	10	2.0	1.7	1.6	1.7	7.8	13.0	5.2
	HT/VHT40 Beam Forming, M16 to M23	4	8	2.0	1.7	1.6	1.7	7.8	14.8	7.0
	HT/VHT40 STBC, M0 to M7	2	7	2.0	1.7			4.9	16.0	11.1
	HT/VHT40 STBC, M0 to M7	3	7	2.0	1.7	1.6		6.5	16.0	9.5
HT/VHT40 STBC, M0 to M7	4	7	2.0	1.7	1.6	1.7	7.8	16.0	8.2	
5240	Non HT/VHT20, 6 to 54 Mbps	1	7	5.6				5.6	16.0	10.4
	Non HT/VHT20, 6 to 54 Mbps	2	7	5.6	5.3			8.5	16.0	7.5
	Non HT/VHT20, 6 to 54 Mbps	3	7	5.6	5.3	5.1		10.1	16.0	5.9
	Non HT/VHT20, 6 to 54 Mbps	4	7	4.3	4.0	3.6	3.8	10.0	16.0	6.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	5.6	5.3			8.5	13.0	4.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	5.6	5.3	5.1		10.1	11.2	1.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	4.3	4.0	3.6	3.8	10.0	10.0	0.0
	HT/VHT20, M0 to M7	1	7	5.3				5.3	16.0	10.7
	HT/VHT20, M0 to M7	2	7	5.3	4.5			7.9	16.0	8.1
	HT/VHT20, M8 to M15	2	7	5.3	4.5			7.9	16.0	8.1
	HT/VHT20, M0 to M7	3	7	5.3	4.5	4.7		9.6	16.0	6.4
	HT/VHT20, M8 to M15	3	7	5.3	4.5	4.7		9.6	16.0	6.4
	HT/VHT20, M16 to M23	3	7	5.3	4.5	4.7		9.6	16.0	6.4
	HT/VHT20, M0 to M7	4	7	4.3	3.7	3.7	3.7	9.9	16.0	6.1
HT/VHT20, M8 to M15	4	7	5.3	4.5	4.7	4.9	10.9	16.0	5.1	
HT/VHT20, M16 to M23	4	7	5.3	4.5	4.7	4.9	10.9	16.0	5.1	

HT/VHT20 Beam Forming, M0 to M7	2	10	5.3	4.5			7.9	13.0	5.1
HT/VHT20 Beam Forming, M8 to M15	2	7	5.3	4.5			7.9	16.0	8.1
HT/VHT20 Beam Forming, M0 to M7	3	12	5.3	4.5	4.7		9.6	11.2	1.6
HT/VHT20 Beam Forming, M8 to M15	3	9	5.3	4.5	4.7		9.6	14.2	4.6
HT/VHT20 Beam Forming, M16 to M23	3	7	5.3	4.5	4.7		9.6	16.0	6.4
HT/VHT20 Beam Forming, M0 to M7	4	13	4.3	3.7	3.7	3.7	9.9	10.0	0.1
HT/VHT20 Beam Forming, M8 to M15	4	10	5.3	4.5	4.7	4.9	10.9	13.0	2.1
HT/VHT20 Beam Forming, M16 to M23	4	8	5.3	4.5	4.7	4.9	10.9	14.8	3.9
HT/VHT20 STBC, M0 to M7	2	7	5.3	4.5			7.9	16.0	8.1
HT/VHT20 STBC, M0 to M7	3	7	5.3	4.5	4.7		9.6	16.0	6.4
HT/VHT20 STBC, M0 to M7	4	7	5.3	4.5	4.7	4.9	10.9	16.0	5.1

15.407 (i) The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Radiated Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	-7	16.3				9.3	21.0	11.7
	Non HT/VHT20, 6 to 54 Mbps	2	-7	16.3	15.4			11.9	21.0	9.1
	Non HT/VHT20, 6 to 54 Mbps	3	-7	16.3	15.4	15.0		13.4	21.0	7.6
	Non HT/VHT20, 6 to 54 Mbps	4	-7	15.0	14.2	13.7	14.1	13.3	21.0	7.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	-4	15.0	14.2			13.6	21.0	7.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	-2	12.9	12.0	11.4		14.7	21.0	6.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	-1	11.7	10.9	10.3	10.8	16.0	21.0	5.0
	HT/VHT20, M0 to M7	1	-7	16.3				9.3	21.0	11.7
	HT/VHT20, M0 to M7	2	-7	16.3	15.4			11.9	21.0	9.1
	HT/VHT20, M8 to M15	2	-7	16.3	15.4			11.9	21.0	9.1
	HT/VHT20, M0 to M7	3	-7	16.3	15.4	15.1		13.4	21.0	7.6
	HT/VHT20, M8 to M15	3	-7	16.3	15.4	15.1		13.4	21.0	7.6
	HT/VHT20, M16 to M23	3	-7	16.3	15.4	15.1		13.4	21.0	7.6
	HT/VHT20, M0 to M7	4	-7	15.1	14.1	13.8	14.2	13.3	21.0	7.7
	HT/VHT20, M8 to M15	4	-7	15.1	14.1	13.8	14.2	13.3	21.0	7.7
	HT/VHT20, M16 to M23	4	-7	15.1	14.1	13.8	14.2	13.3	21.0	7.7
	HT/VHT20 Beam Forming, M0 to M7	2	-4	15.1	14.1			13.6	21.0	7.4
	HT/VHT20 Beam Forming, M8 to M15	2	-7	16.3	15.4			11.9	21.0	9.1
	HT/VHT20 Beam Forming, M0 to M7	3	-2	13.1	12.3	11.6		14.9	21.0	6.1
	HT/VHT20 Beam Forming, M8 to M15	3	-5	15.1	14.1	13.8		13.9	21.0	7.1
	HT/VHT20 Beam Forming, M16 to M23	3	-7	16.3	15.4	15.1		13.4	21.0	7.6
	HT/VHT20 Beam Forming, M0 to M7	4	-1	12.1	11.3	10.4	11.2	16.3	21.0	4.7
	HT/VHT20 Beam Forming, M8 to M15	4	-4	13.9	12.9	12.7	13.1	15.2	21.0	5.8
	HT/VHT20 Beam Forming, M16 to M23	4	-6	15.1	14.1	13.8	14.2	14.5	21.0	6.5
	HT/VHT20 STBC, M0 to M7	2	-7	16.3	15.4			11.9	21.0	9.1
	HT/VHT20 STBC, M0 to M7	3	-7	16.3	15.4	15.1		13.4	21.0	7.6
HT/VHT20 STBC, M0 to M7	4	-7	15.1	14.1	13.8	14.2	13.3	21.0	7.7	
5190	Non HT/VHT40, 6 to 54 Mbps	1	-7	13.0				6.0	21.0	15.0
	Non HT/VHT40, 6 to 54 Mbps	2	-7	12.0	11.3			7.7	21.0	13.3
	Non HT/VHT40, 6 to 54 Mbps	3	-7	11.1	10.3	9.6		8.1	21.0	12.9
	Non HT/VHT40, 6 to 54 Mbps	4	-7	11.1	10.3	9.6	10.3	9.4	21.0	11.6
	HT/VHT40, M0 to M7	1	-7	15.2				8.2	21.0	12.8

	HT/VHT40, M0 to M7	2	-7	14.0	13.0			9.5	21.0	11.5
	HT/VHT40, M8 to M15	2	-7	14.0	13.0			9.5	21.0	11.5
	HT/VHT40, M0 to M7	3	-7	12.9	12.2	11.3		10.0	21.0	11.0
	HT/VHT40, M8 to M15	3	-7	12.9	12.2	11.3		10.0	21.0	11.0
	HT/VHT40, M16 to M23	3	-7	12.9	12.2	11.3		10.0	21.0	11.0
	HT/VHT40, M0 to M7	4	-7	12.9	12.2	11.3	12.2	11.2	21.0	9.8
	HT/VHT40, M8 to M15	4	-7	12.9	12.2	11.3	12.2	11.2	21.0	9.8
	HT/VHT40, M16 to M23	4	-7	12.9	12.2	11.3	12.2	11.2	21.0	9.8
	HT/VHT40 Beam Forming, M0 to M7	2	-4	12.9	12.2			11.6	21.0	9.4
	HT/VHT40 Beam Forming, M8 to M15	2	-7	14.0	13.0			9.5	21.0	11.5
	HT/VHT40 Beam Forming, M0 to M7	3	-2	10.8	9.9	9.3		12.6	21.0	8.4
	HT/VHT40 Beam Forming, M8 to M15	3	-5	12.9	12.2	11.3		11.8	21.0	9.2
	HT/VHT40 Beam Forming, M16 to M23	3	-7	12.9	12.2	11.3		10.0	21.0	11.0
	HT/VHT40 Beam Forming, M0 to M7	4	-1	8.9	7.7	7.1	8.1	13.0	21.0	8.0
	HT/VHT40 Beam Forming, M8 to M15	4	-4	11.9	11.2	10.3	11.0	13.2	21.0	7.8
	HT/VHT40 Beam Forming, M16 to M23	4	-6	12.9	12.2	11.3	12.2	12.4	21.0	8.6
	HT/VHT40 STBC, M0 to M7	2	-7	14.0	13.0			9.5	21.0	11.5
	HT/VHT40 STBC, M0 to M7	3	-7	12.9	12.2	11.3		10.0	21.0	11.0
	HT/VHT40 STBC, M0 to M7	4	-7	12.9	12.2	11.3	12.2	11.2	21.0	9.8
5210	Non HT/VHT80, 6 to 54 Mbps	1	-7	12.4				5.4	21.0	15.6
	Non HT/VHT80, 6 to 54 Mbps	2	-7	10.5	9.9			6.2	21.0	14.8
	Non HT/VHT80, 6 to 54 Mbps	3	-7	8.6	7.8	7.2		5.7	21.0	15.3
	Non HT/VHT80, 6 to 54 Mbps	4	-7	7.4	6.6	6.2	7.4	6.0	21.0	15.0
	HT/VHT80, M0 to M7	1	-7	13.9				6.9	21.0	14.1
	HT/VHT80, M0 to M7	2	-7	12.7	12.2			8.5	21.0	12.5
	HT/VHT80, M8 to M15	2	-7	12.7	12.2			8.5	21.0	12.5
	HT/VHT80, M0 to M7	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80, M8 to M15	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80, M16 to M23	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80, M0 to M7	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
	HT/VHT80, M8 to M15	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
	HT/VHT80, M16 to M23	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
	HT/VHT80 Beam Forming, M0 to M7	2	-7	12.7	12.2			8.5	21.0	12.5
	HT/VHT80 Beam Forming, M8 to M15	2	-7	12.7	12.2			8.5	21.0	12.5
	HT/VHT80 Beam Forming, M0 to M7	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80 Beam Forming, M8 to M15	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80 Beam Forming, M16 to M23	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80 Beam Forming, M0 to M7	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
	HT/VHT80 Beam Forming, M8 to M15	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
HT/VHT80 Beam Forming, M16 to M23	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9	
HT/VHT80 STBC, M0 to M7	2	-7	12.7	12.2			8.5	21.0	12.5	


	HT/VHT80 STBC, M0 to M7	3	-7	11.6	11.1	10.4		8.8	21.0	12.2
	HT/VHT80 STBC, M0 to M7	4	-7	11.6	11.1	10.4	11.0	10.1	21.0	10.9
5230	Non HT/VHT40, 6 to 54 Mbps	1	-7	15.0				8.0	21.0	13.0
	Non HT/VHT40, 6 to 54 Mbps	2	-7	15.0	14.4			10.7	21.0	10.3
	Non HT/VHT40, 6 to 54 Mbps	3	-7	15.0	14.4	14.1		12.3	21.0	8.7
	Non HT/VHT40, 6 to 54 Mbps	4	-7	15.0	14.4	14.1	14.3	13.5	21.0	7.5
	HT/VHT40, M0 to M7	1	-7	15.8				8.8	21.0	12.2
	HT/VHT40, M0 to M7	2	-7	15.8	15.3			11.6	21.0	9.4
	HT/VHT40, M8 to M15	2	-7	15.8	15.3			11.6	21.0	9.4
	HT/VHT40, M0 to M7	3	-7	15.8	15.3	14.8		13.1	21.0	7.9
	HT/VHT40, M8 to M15	3	-7	15.8	15.3	14.8		13.1	21.0	7.9
	HT/VHT40, M16 to M23	3	-7	15.8	15.3	14.8		13.1	21.0	7.9
	HT/VHT40, M0 to M7	4	-7	15.8	15.3	14.8	15.3	14.3	21.0	6.7
	HT/VHT40, M8 to M15	4	-7	15.8	15.3	14.8	15.3	14.3	21.0	6.7
	HT/VHT40, M16 to M23	4	-7	15.8	15.3	14.8	15.3	14.3	21.0	6.7
	HT/VHT40 Beam Forming, M0 to M7	2	-4	15.8	15.3			14.6	21.0	6.4
	HT/VHT40 Beam Forming, M8 to M15	2	-7	15.8	15.3			11.6	21.0	9.4
	HT/VHT40 Beam Forming, M0 to M7	3	-2	15.8	15.3	14.8		17.9	21.0	3.1
	HT/VHT40 Beam Forming, M8 to M15	3	-5	15.8	15.3	14.8		14.9	21.0	6.1
	HT/VHT40 Beam Forming, M16 to M23	3	-7	15.8	15.3	14.8		13.1	21.0	7.9
	HT/VHT40 Beam Forming, M0 to M7	4	-1	14.2	13.3	12.7	13.4	18.5	21.0	2.5
	HT/VHT40 Beam Forming, M8 to M15	4	-4	15.8	15.3	14.8	15.3	17.3	21.0	3.7
	HT/VHT40 Beam Forming, M16 to M23	4	-6	15.8	15.3	14.8	15.3	15.5	21.0	5.5
HT/VHT40 STBC, M0 to M7	2	-7	15.8	15.3			11.6	21.0	9.4	
HT/VHT40 STBC, M0 to M7	3	-7	15.8	15.3	14.8		13.1	21.0	7.9	
HT/VHT40 STBC, M0 to M7	4	-7	15.8	15.3	14.8	15.3	14.3	21.0	6.7	
5240	Non HT/VHT20, 6 to 54 Mbps	1	-7	16.0				9.0	21.0	12.0
	Non HT/VHT20, 6 to 54 Mbps	2	-7	16.0	15.6			11.8	21.0	9.2
	Non HT/VHT20, 6 to 54 Mbps	3	-7	16.0	15.6	15.3		13.4	21.0	7.6
	Non HT/VHT20, 6 to 54 Mbps	4	-7	14.8	14.5	14.0	14.2	13.4	21.0	7.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	-4	16.0	15.6			14.8	21.0	6.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	-2	16.0	15.6	15.3		18.2	21.0	2.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	-1	14.8	14.5	14.0	14.2	19.4	21.0	1.6
	HT/VHT20, M0 to M7	1	-7	16.0				9.0	21.0	12.0
	HT/VHT20, M0 to M7	2	-7	16.0	15.3			11.7	21.0	9.3
	HT/VHT20, M8 to M15	2	-7	16.0	15.3			11.7	21.0	9.3
	HT/VHT20, M0 to M7	3	-7	16.0	15.3	15.4		13.3	21.0	7.7
	HT/VHT20, M8 to M15	3	-7	16.0	15.3	15.4		13.3	21.0	7.7
	HT/VHT20, M16 to M23	3	-7	16.0	15.3	15.4		13.3	21.0	7.7
HT/VHT20, M0 to M7	4	-7	14.6	14.4	14.0	14.3	13.4	21.0	7.6	




HT/VHT20, M8 to M15	4	-7	16.0	15.3	15.4	15.4	14.6	21.0	6.4
HT/VHT20, M16 to M23	4	-7	16.0	15.3	15.4	15.4	14.6	21.0	6.4
HT/VHT20 Beam Forming, M0 to M7	2	-4	16.0	15.3			14.7	21.0	6.3
HT/VHT20 Beam Forming, M8 to M15	2	-7	16.0	15.3			11.7	21.0	9.3
HT/VHT20 Beam Forming, M0 to M7	3	-2	16.0	15.3	15.4		18.1	21.0	2.9
HT/VHT20 Beam Forming, M8 to M15	3	-5	16.0	15.3	15.4		15.1	21.0	5.9
HT/VHT20 Beam Forming, M16 to M23	3	-7	16.0	15.3	15.4		13.3	21.0	7.7
HT/VHT20 Beam Forming, M0 to M7	4	-1	14.6	14.4	14.0	14.3	19.4	21.0	1.6
HT/VHT20 Beam Forming, M8 to M15	4	-4	16.0	15.3	15.4	15.4	17.6	21.0	3.4
HT/VHT20 Beam Forming, M16 to M23	4	-6	16.0	15.3	15.4	15.4	15.8	21.0	5.2
HT/VHT20 STBC, M0 to M7	2	-7	16.0	15.3			11.7	21.0	9.3
HT/VHT20 STBC, M0 to M7	3	-7	16.0	15.3	15.4		13.3	21.0	7.7
HT/VHT20 STBC, M0 to M7	4	-7	16.0	15.3	15.4	15.4	14.6	21.0	6.4




Peak Output Power, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

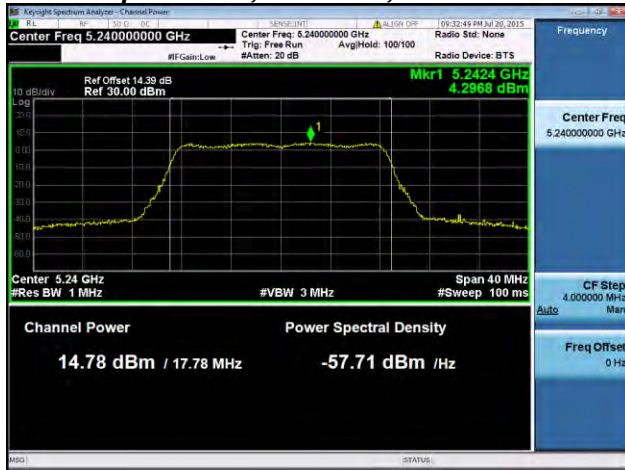


Antenna A

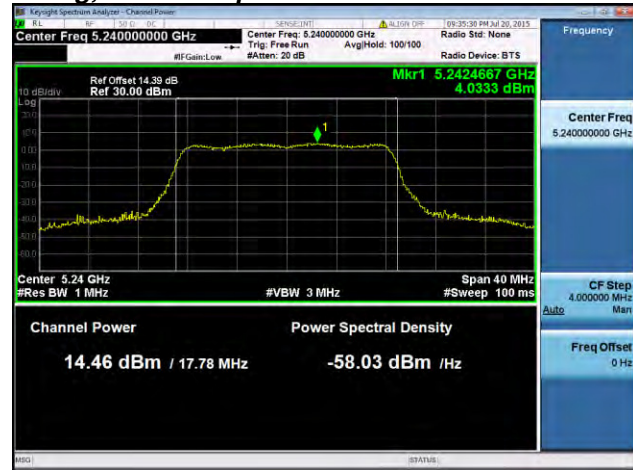

Antenna B

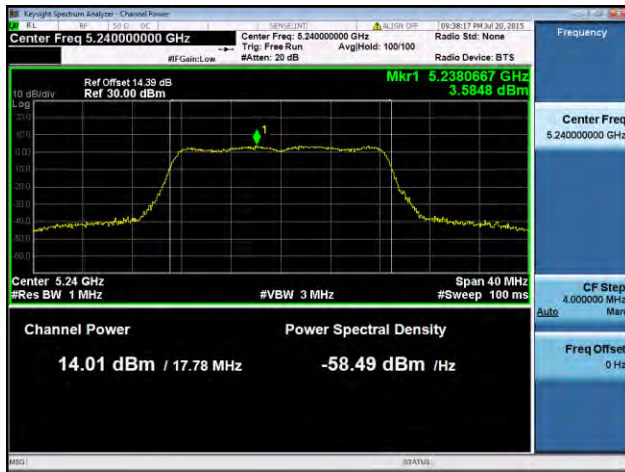


Antenna C

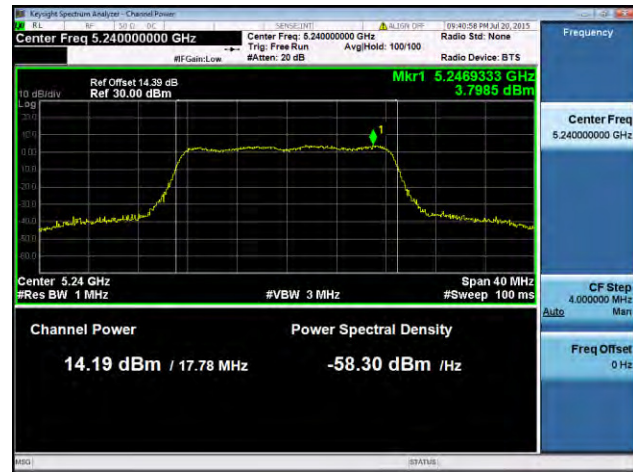


Antenna D




Power Spectral Density, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

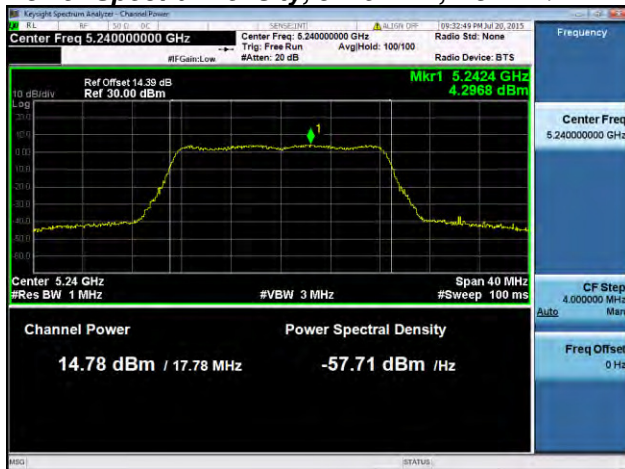


Antenna A

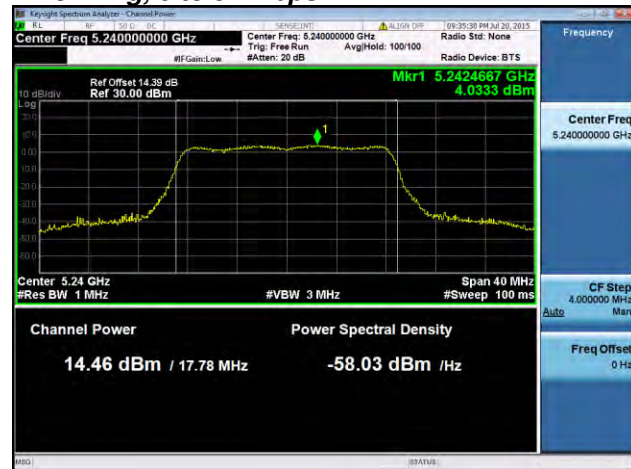

Antenna B

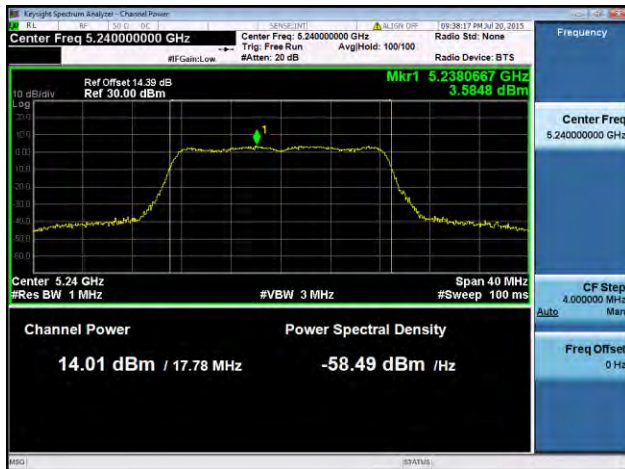

Antenna C

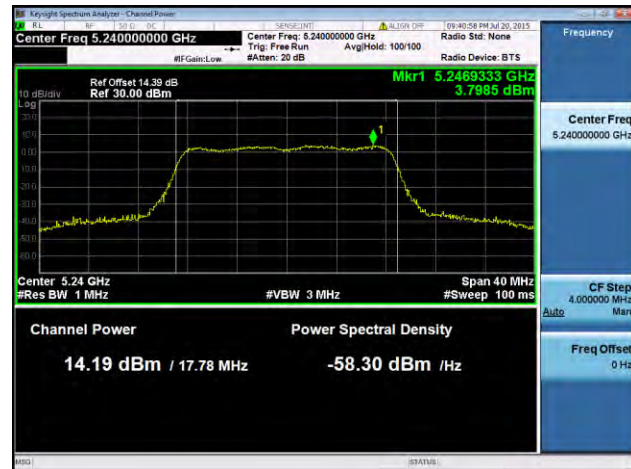

Antenna D

A.3 Conducted Spurious Emissions

15.407 b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

Conducted Spurious Emissions

Test parameters

Span = 30MHz to 18GHz / 18GHz to 40GHz
RBW = 1 MHz
VBW $\geq 3 \times$ RBW for Peak, 1kHz for Average
Sweep = Auto couple
Detector = Peak
Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 07-Jul-15 - 08-Aug-15
------------------------------------	--

Test Result : PASS

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	-66.6				-59.6	-41.25	18.4
	Non HT/VHT20, 6 to 54 Mbps	2	7	-66.6	-66.6			-56.6	-41.25	15.3
	Non HT/VHT20, 6 to 54 Mbps	3	7	-66.6	-66.6	-66.7		-54.9	-41.25	13.6
	Non HT/VHT20, 6 to 54 Mbps	4	7	-66.8	-66.3	-66.7	-66.6	-53.6	-41.25	12.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-66.8	-66.3			-53.5	-41.25	12.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-66.4	-66.3	-66.6		-49.9	-41.25	8.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-66.3	-66.4	-66.6	-66.3	-47.4	-41.25	6.1
	HT/VHT20, M0 to M7	1	7	-66.3				-59.3	-41.25	18.1
	HT/VHT20, M0 to M7	2	7	-66.3	-66.3			-56.3	-41.25	15.0
	HT/VHT20, M8 to M15	2	7	-66.3	-66.3			-56.3	-41.25	15.0
	HT/VHT20, M0 to M7	3	7	-66.3	-66.3	-66.5		-54.6	-41.25	13.3
	HT/VHT20, M8 to M15	3	7	-66.3	-66.3	-66.5		-54.6	-41.25	13.3
	HT/VHT20, M16 to M23	3	7	-66.3	-66.3	-66.5		-54.6	-41.25	13.3
	HT/VHT20, M0 to M7	4	7	-66.4	-66.4	-66.5	-66.4	-53.4	-41.25	12.2
	HT/VHT20, M8 to M15	4	7	-66.4	-66.4	-66.5	-66.4	-53.4	-41.25	12.2
	HT/VHT20, M16 to M23	4	7	-66.4	-66.4	-66.5	-66.4	-53.4	-41.25	12.2
	HT/VHT20 Beam Forming, M0 to M7	2	10	-66.4	-66.4			-53.4	-41.25	12.1
	HT/VHT20 Beam Forming, M8 to M15	2	7	-66.3	-66.3			-56.3	-41.25	15.0
	HT/VHT20 Beam Forming, M0 to M7	3	12	-66.4	-66.1	-66.7		-49.8	-41.25	8.6
	HT/VHT20 Beam Forming, M8 to M15	3	9	-66.4	-66.4	-66.5		-52.9	-41.25	11.6
	HT/VHT20 Beam Forming, M16 to M23	3	7	-66.3	-66.3	-66.5		-54.6	-41.25	13.3
	HT/VHT20 Beam Forming, M0 to M7	4	13	-66.2	-66.2	-66.5	-66.4	-47.3	-41.25	6.1
	HT/VHT20 Beam Forming, M8 to M15	4	10	-66.3	-66.4	-66.7	-66.7	-50.5	-41.25	9.3
	HT/VHT20 Beam Forming, M16 to M23	4	8	-66.4	-66.4	-66.5	-66.4	-52.2	-41.25	11.0
	HT/VHT20 STBC, M0 to M7	2	7	-66.3	-66.3			-56.3	-41.25	15.0
	HT/VHT20 STBC, M0 to M7	3	7	-66.3	-66.3	-66.5		-54.6	-41.25	13.3
HT/VHT20 STBC, M0 to M7	4	7	-66.4	-66.4	-66.5	-66.4	-53.4	-41.25	12.2	
5190	Non HT/VHT40, 6 to 54 Mbps	1	7	-66.5				-59.5	-41.25	18.3
	Non HT/VHT40, 6 to 54 Mbps	2	7	-66.1	-66.4			-56.2	-41.25	15.0
	Non HT/VHT40, 6 to 54 Mbps	3	7	-66.4	-65.9	-66.5		-54.5	-41.25	13.2
	Non HT/VHT40, 6 to 54 Mbps	4	7	-66.4	-65.9	-66.5	-66.4	-53.3	-41.25	12.0
	HT/VHT40, M0 to M7	1	7	-66.4				-59.4	-41.25	18.2
	HT/VHT40, M0 to M7	2	7	-66.4	-66.0			-56.2	-41.25	14.9
	HT/VHT40, M8 to M15	2	7	-66.4	-66.0			-56.2	-41.25	14.9



	HT/VHT40, M0 to M7	3	7	-66.4	-66.5	-66.9		-54.8	-41.25	13.6
	HT/VHT40, M8 to M15	3	7	-66.4	-66.5	-66.9		-54.8	-41.25	13.6
	HT/VHT40, M16 to M23	3	7	-66.4	-66.5	-66.9		-54.8	-41.25	13.6
	HT/VHT40, M0 to M7	4	7	-66.4	-66.5	-66.9	-66.4	-53.5	-41.25	12.3
	HT/VHT40, M8 to M15	4	7	-66.4	-66.5	-66.9	-66.4	-53.5	-41.25	12.3
	HT/VHT40, M16 to M23	4	7	-66.4	-66.5	-66.9	-66.4	-53.5	-41.25	12.3
	HT/VHT40 Beam Forming, M0 to M7	2	10	-66.4	-66.5			-53.4	-41.25	12.2
	HT/VHT40 Beam Forming, M8 to M15	2	7	-66.4	-66.0			-56.2	-41.25	14.9
	HT/VHT40 Beam Forming, M0 to M7	3	12	-66.7	-66.6	-66.6		-50.1	-41.25	8.8
	HT/VHT40 Beam Forming, M8 to M15	3	9	-66.4	-66.5	-66.9		-53.0	-41.25	11.8
	HT/VHT40 Beam Forming, M16 to M23	3	7	-66.4	-66.5	-66.9		-54.8	-41.25	13.6
	HT/VHT40 Beam Forming, M0 to M7	4	13	-66.4	-66.3	-66.5	-66.4	-47.4	-41.25	6.1
	HT/VHT40 Beam Forming, M8 to M15	4	10	-66.2	-66.4	-66.3	-66.5	-50.3	-41.25	9.1
	HT/VHT40 Beam Forming, M16 to M23	4	8	-66.4	-66.5	-66.9	-66.4	-52.3	-41.25	11.1
	HT/VHT40 STBC, M0 to M7	2	7	-66.4	-66.0			-56.2	-41.25	14.9
	HT/VHT40 STBC, M0 to M7	3	7	-66.4	-66.5	-66.9		-54.8	-41.25	13.6
	HT/VHT40 STBC, M0 to M7	4	7	-66.4	-66.5	-66.9	-66.4	-53.5	-41.25	12.3
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	-66.3				-59.3	-41.25	18.1
	Non HT/VHT80, 6 to 54 Mbps	2	7	-66.4	-66.2			-56.3	-41.25	15.0
	Non HT/VHT80, 6 to 54 Mbps	3	7	-66.1	-66.2	-66.4		-54.5	-41.25	13.2
	Non HT/VHT80, 6 to 54 Mbps	4	7	-66.2	-66.4	-66.6	-66.2	-53.3	-41.25	12.1
	HT/VHT80, M0 to M7	1	7	-66.4				-59.4	-41.25	18.2
	HT/VHT80, M0 to M7	2	7	-66.4	-66.2			-56.3	-41.25	15.0
	HT/VHT80, M8 to M15	2	7	-66.4	-66.2			-56.3	-41.25	15.0
	HT/VHT80, M0 to M7	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80, M8 to M15	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80, M16 to M23	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80, M0 to M7	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1
	HT/VHT80, M8 to M15	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1
	HT/VHT80, M16 to M23	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1
	HT/VHT80 Beam Forming, M0 to M7	2	7	-66.4	-66.2			-56.3	-41.25	15.0
	HT/VHT80 Beam Forming, M8 to M15	2	7	-66.4	-66.2			-56.3	-41.25	15.0
	HT/VHT80 Beam Forming, M0 to M7	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80 Beam Forming, M8 to M15	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80 Beam Forming, M16 to M23	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4
	HT/VHT80 Beam Forming, M0 to M7	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1
	HT/VHT80 Beam Forming, M8 to M15	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1
HT/VHT80 Beam Forming, M16 to M23	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1	
HT/VHT80 STBC, M0 to M7	2	7	-66.4	-66.2			-56.3	-41.25	15.0	
HT/VHT80 STBC, M0 to M7	3	7	-66.3	-66.3	-66.8		-54.7	-41.25	13.4	
HT/VHT80 STBC, M0 to M7	4	7	-66.3	-66.3	-66.8	-66.2	-53.4	-41.25	12.1	



5230	Non HT/VHT40, 6 to 54 Mbps	1	7	-65.9				-58.9	-41.25	17.7
	Non HT/VHT40, 6 to 54 Mbps	2	7	-65.9	-66.2			-56.0	-41.25	14.8
	Non HT/VHT40, 6 to 54 Mbps	3	7	-65.9	-66.2	-66.3		-54.4	-41.25	13.1
	Non HT/VHT40, 6 to 54 Mbps	4	7	-65.9	-66.2	-66.3	-65.9	-53.1	-41.25	11.8
	HT/VHT40, M0 to M7	1	7	-66.1				-59.1	-41.25	17.9
	HT/VHT40, M0 to M7	2	7	-66.1	-66.0			-56.0	-41.25	14.8
	HT/VHT40, M8 to M15	2	7	-66.1	-66.0			-56.0	-41.25	14.8
	HT/VHT40, M0 to M7	3	7	-66.1	-66.0	-66.6		-54.5	-41.25	13.2
	HT/VHT40, M8 to M15	3	7	-66.1	-66.0	-66.6		-54.5	-41.25	13.2
	HT/VHT40, M16 to M23	3	7	-66.1	-66.0	-66.6		-54.5	-41.25	13.2
	HT/VHT40, M0 to M7	4	7	-66.1	-66.0	-66.6	-66.2	-53.2	-41.25	11.9
	HT/VHT40, M8 to M15	4	7	-66.1	-66.0	-66.6	-66.2	-53.2	-41.25	11.9
	HT/VHT40, M16 to M23	4	7	-66.1	-66.0	-66.6	-66.2	-53.2	-41.25	11.9
	HT/VHT40 Beam Forming, M0 to M7	2	10	-66.1	-66.0			-53.0	-41.25	11.8
	HT/VHT40 Beam Forming, M8 to M15	2	7	-66.1	-66.0			-56.0	-41.25	14.8
	HT/VHT40 Beam Forming, M0 to M7	3	12	-66.1	-66.0	-66.6		-49.7	-41.25	8.4
	HT/VHT40 Beam Forming, M8 to M15	3	9	-66.1	-66.0	-66.6		-52.7	-41.25	11.4
	HT/VHT40 Beam Forming, M16 to M23	3	7	-66.1	-66.0	-66.6		-54.5	-41.25	13.2
	HT/VHT40 Beam Forming, M0 to M7	4	13	-66.4	-66.2	-66.6	-66.3	-47.4	-41.25	6.1
	HT/VHT40 Beam Forming, M8 to M15	4	10	-66.1	-66.0	-66.6	-66.2	-50.2	-41.25	8.9
	HT/VHT40 Beam Forming, M16 to M23	4	8	-66.1	-66.0	-66.6	-66.2	-52.0	-41.25	10.7
	HT/VHT40 STBC, M0 to M7	2	7	-66.1	-66.0			-56.0	-41.25	14.8
	HT/VHT40 STBC, M0 to M7	3	7	-66.1	-66.0	-66.6		-54.5	-41.25	13.2
HT/VHT40 STBC, M0 to M7	4	7	-66.1	-66.0	-66.6	-66.2	-53.2	-41.25	11.9	
5240	Non HT/VHT20, 6 to 54 Mbps	1	7	-65.8				-58.8	-41.25	17.6
	Non HT/VHT20, 6 to 54 Mbps	2	7	-65.8	-65.6			-55.7	-41.25	14.4
	Non HT/VHT20, 6 to 54 Mbps	3	7	-65.8	-65.6	-66.0		-54.0	-41.25	12.8
	Non HT/VHT20, 6 to 54 Mbps	4	7	-65.9	-66.0	-66.1	-65.8	-52.9	-41.25	11.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-65.8	-65.6			-52.7	-41.25	11.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-65.8	-65.6	-66.0		-49.2	-41.25	8.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-65.9	-66.0	-66.1	-65.8	-46.9	-41.25	5.7
	HT/VHT20, M0 to M7	1	7	-66.0				-59.0	-41.25	17.8
	HT/VHT20, M0 to M7	2	7	-66.0	-66.1			-56.0	-41.25	14.8
	HT/VHT20, M8 to M15	2	7	-66.0	-66.1			-56.0	-41.25	14.8
	HT/VHT20, M0 to M7	3	7	-66.0	-66.1	-66.1		-54.3	-41.25	13.0
	HT/VHT20, M8 to M15	3	7	-66.0	-66.1	-66.1		-54.3	-41.25	13.0
	HT/VHT20, M16 to M23	3	7	-66.0	-66.1	-66.1		-54.3	-41.25	13.0
	HT/VHT20, M0 to M7	4	7	-65.5	-65.6	-66.3	-66.2	-52.9	-41.25	11.6
HT/VHT20, M8 to M15	4	7	-66.0	-66.1	-66.1	-65.6	-52.9	-41.25	11.7	
HT/VHT20, M16 to M23	4	7	-66.0	-66.1	-66.1	-65.6	-52.9	-41.25	11.7	



HT/VHT20 Beam Forming, M0 to M7	2	10	-66.0	-66.1			-53.0	-41.25	11.8
HT/VHT20 Beam Forming, M8 to M15	2	7	-66.0	-66.1			-56.0	-41.25	14.8
HT/VHT20 Beam Forming, M0 to M7	3	12	-66.0	-66.1	-66.1		-49.5	-41.25	8.2
HT/VHT20 Beam Forming, M8 to M15	3	9	-66.0	-66.1	-66.1		-52.5	-41.25	11.2
HT/VHT20 Beam Forming, M16 to M23	3	7	-66.0	-66.1	-66.1		-54.3	-41.25	13.0
HT/VHT20 Beam Forming, M0 to M7	4	13	-65.5	-65.6	-66.3	-66.2	-46.9	-41.25	5.6
HT/VHT20 Beam Forming, M8 to M15	4	10	-66.0	-66.1	-66.1	-65.6	-49.9	-41.25	8.7
HT/VHT20 Beam Forming, M16 to M23	4	8	-66.0	-66.1	-66.1	-65.6	-51.7	-41.25	10.5
HT/VHT20 STBC, M0 to M7	2	7	-66.0	-66.1			-56.0	-41.25	14.8
HT/VHT20 STBC, M0 to M7	3	7	-66.0	-66.1	-66.1		-54.3	-41.25	13.0
HT/VHT20 STBC, M0 to M7	4	7	-66.0	-66.1	-66.1	-65.6	-52.9	-41.25	11.7

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	-63.7				-56.7	-21.25	35.5
	Non HT/VHT20, 6 to 54 Mbps	2	7	-63.7	-62.2			-52.9	-21.25	31.6
	Non HT/VHT20, 6 to 54 Mbps	3	7	-63.7	-62.2	-64.2		-51.5	-21.25	30.3
	Non HT/VHT20, 6 to 54 Mbps	4	7	-62.8	-63.6	-63.5	-61.8	-49.8	-21.25	28.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-62.8	-63.6			-50.2	-21.25	28.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-63.1	-63.6	-63.9		-46.9	-21.25	25.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-63.9	-64.0	-64.3	-61.6	-44.3	-21.25	23.0
	HT/VHT20, M0 to M7	1	7	-63.3				-56.3	-21.25	35.1
	HT/VHT20, M0 to M7	2	7	-63.3	-63.8			-53.5	-21.25	32.3
	HT/VHT20, M8 to M15	2	7	-63.3	-63.8			-53.5	-21.25	32.3
	HT/VHT20, M0 to M7	3	7	-63.3	-63.8	-61.6		-51.0	-21.25	29.8
	HT/VHT20, M8 to M15	3	7	-63.3	-63.8	-61.6		-51.0	-21.25	29.8
	HT/VHT20, M16 to M23	3	7	-63.3	-63.8	-61.6		-51.0	-21.25	29.8
	HT/VHT20, M0 to M7	4	7	-62.2	-63.7	-62.3	-62.6	-49.6	-21.25	28.4
	HT/VHT20, M8 to M15	4	7	-62.2	-63.7	-62.3	-62.6	-49.6	-21.25	28.4
	HT/VHT20, M16 to M23	4	7	-62.2	-63.7	-62.3	-62.6	-49.6	-21.25	28.4
	HT/VHT20 Beam Forming, M0 to M7	2	10	-62.2	-63.7			-49.9	-21.25	28.6
	HT/VHT20 Beam Forming, M8 to M15	2	7	-63.3	-63.8			-53.5	-21.25	32.3
	HT/VHT20 Beam Forming, M0 to M7	3	12	-63.8	-62.6	-63.8		-46.8	-21.25	25.5
	HT/VHT20 Beam Forming, M8 to M15	3	9	-62.2	-63.7	-62.3		-49.1	-21.25	27.9
	HT/VHT20 Beam Forming, M16 to M23	3	7	-63.3	-63.8	-61.6		-51.0	-21.25	29.8
	HT/VHT20 Beam Forming, M0 to M7	4	13	-62.9	-64.6	-61.9	-65.2	-44.4	-21.25	23.2
	HT/VHT20 Beam Forming, M8 to M15	4	10	-63.7	-63.1	-63.7	-62.1	-47.1	-21.25	25.8
	HT/VHT20 Beam Forming, M16 to M23	4	8	-62.2	-63.7	-62.3	-62.6	-48.4	-21.25	27.2
	HT/VHT20 STBC, M0 to M7	2	7	-63.3	-63.8			-53.5	-21.25	32.3
	HT/VHT20 STBC, M0 to M7	3	7	-63.3	-63.8	-61.6		-51.0	-21.25	29.8
HT/VHT20 STBC, M0 to M7	4	7	-62.2	-63.7	-62.3	-62.6	-49.6	-21.25	28.4	
5190	Non HT/VHT40, 6 to 54 Mbps	1	7	-66.5				-59.5	-21.25	38.3
	Non HT/VHT40, 6 to 54 Mbps	2	7	-64.2	-64.7			-54.4	-21.25	33.2
	Non HT/VHT40, 6 to 54 Mbps	3	7	-64.2	-63.9	-64.3		-52.4	-21.25	31.1
	Non HT/VHT40, 6 to 54 Mbps	4	7	-64.2	-63.9	-64.3	-63.3	-50.9	-21.25	29.6
	HT/VHT40, M0 to M7	1	7	-62.6				-55.6	-21.25	34.4
	HT/VHT40, M0 to M7	2	7	-64.7	-64.0			-54.3	-21.25	33.1
	HT/VHT40, M8 to M15	2	7	-64.7	-64.0			-54.3	-21.25	33.1


	HT/VHT40, M0 to M7	3	7	-62.8	-63.3	-62.4		-51.0	-21.25	29.8
	HT/VHT40, M8 to M15	3	7	-62.8	-63.3	-62.4		-51.0	-21.25	29.8
	HT/VHT40, M16 to M23	3	7	-62.8	-63.3	-62.4		-51.0	-21.25	29.8
	HT/VHT40, M0 to M7	4	7	-62.8	-63.3	-62.4	-62.8	-49.8	-21.25	28.5
	HT/VHT40, M8 to M15	4	7	-62.8	-63.3	-62.4	-62.8	-49.8	-21.25	28.5
	HT/VHT40, M16 to M23	4	7	-62.8	-63.3	-62.4	-62.8	-49.8	-21.25	28.5
	HT/VHT40 Beam Forming, M0 to M7	2	10	-62.8	-63.3			-50.0	-21.25	28.8
	HT/VHT40 Beam Forming, M8 to M15	2	7	-64.7	-64.0			-54.3	-21.25	33.1
	HT/VHT40 Beam Forming, M0 to M7	3	12	-65.2	-62.4	-63.7		-47.0	-21.25	25.8
	HT/VHT40 Beam Forming, M8 to M15	3	9	-62.8	-63.3	-62.4		-49.2	-21.25	28.0
	HT/VHT40 Beam Forming, M16 to M23	3	7	-62.8	-63.3	-62.4		-51.0	-21.25	29.8
	HT/VHT40 Beam Forming, M0 to M7	4	13	-63.8	-63.5	-63.2	-62.7	-44.3	-21.25	23.0
	HT/VHT40 Beam Forming, M8 to M15	4	10	-64.1	-63.9	-64.0	-64.1	-48.0	-21.25	26.8
	HT/VHT40 Beam Forming, M16 to M23	4	8	-62.8	-63.3	-62.4	-62.8	-48.6	-21.25	27.3
	HT/VHT40 STBC, M0 to M7	2	7	-64.7	-64.0			-54.3	-21.25	33.1
	HT/VHT40 STBC, M0 to M7	3	7	-62.8	-63.3	-62.4		-51.0	-21.25	29.8
	HT/VHT40 STBC, M0 to M7	4	7	-62.8	-63.3	-62.4	-62.8	-49.8	-21.25	28.5
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	-61.0				-54.0	-21.25	32.8
	Non HT/VHT80, 6 to 54 Mbps	2	7	-64.2	-63.4			-53.8	-21.25	32.5
	Non HT/VHT80, 6 to 54 Mbps	3	7	-60.5	-64.0	-64.8		-50.9	-21.25	29.7
	Non HT/VHT80, 6 to 54 Mbps	4	7	-63.0	-62.2	-63.1	-64.2	-50.0	-21.25	28.8
	HT/VHT80, M0 to M7	1	7	-64.4				-57.4	-21.25	36.2
	HT/VHT80, M0 to M7	2	7	-65.2	-64.4			-54.8	-21.25	33.5
	HT/VHT80, M8 to M15	2	7	-65.2	-64.4			-54.8	-21.25	33.5
	HT/VHT80, M0 to M7	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80, M8 to M15	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80, M16 to M23	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80, M0 to M7	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80, M8 to M15	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80, M16 to M23	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80 Beam Forming, M0 to M7	2	7	-65.2	-64.4			-54.8	-21.25	33.5
	HT/VHT80 Beam Forming, M8 to M15	2	7	-65.2	-64.4			-54.8	-21.25	33.5
	HT/VHT80 Beam Forming, M0 to M7	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80 Beam Forming, M8 to M15	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80 Beam Forming, M16 to M23	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
	HT/VHT80 Beam Forming, M0 to M7	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80 Beam Forming, M8 to M15	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80 Beam Forming, M16 to M23	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8
	HT/VHT80 STBC, M0 to M7	2	7	-65.2	-64.4			-54.8	-21.25	33.5
	HT/VHT80 STBC, M0 to M7	3	7	-61.8	-64.4	-64.0		-51.5	-21.25	30.2
HT/VHT80 STBC, M0 to M7	4	7	-61.8	-64.4	-64.0	-62.6	-50.1	-21.25	28.8	

5230	Non HT/VHT40, 6 to 54 Mbps	1	7	-63.5				-56.5	-21.25	35.3
	Non HT/VHT40, 6 to 54 Mbps	2	7	-63.5	-63.0			-53.2	-21.25	32.0
	Non HT/VHT40, 6 to 54 Mbps	3	7	-63.5	-63.0	-62.6		-51.2	-21.25	30.0
	Non HT/VHT40, 6 to 54 Mbps	4	7	-63.5	-63.0	-62.6	-63.0	-50.0	-21.25	28.7
	HT/VHT40, M0 to M7	1	7	-62.8				-55.8	-21.25	34.6
	HT/VHT40, M0 to M7	2	7	-62.8	-64.6			-53.6	-21.25	32.3
	HT/VHT40, M8 to M15	2	7	-62.8	-64.6			-53.6	-21.25	32.3
	HT/VHT40, M0 to M7	3	7	-62.8	-64.6	-64.4		-52.1	-21.25	30.8
	HT/VHT40, M8 to M15	3	7	-62.8	-64.6	-64.4		-52.1	-21.25	30.8
	HT/VHT40, M16 to M23	3	7	-62.8	-64.6	-64.4		-52.1	-21.25	30.8
	HT/VHT40, M0 to M7	4	7	-62.8	-64.6	-64.4	-61.2	-50.0	-21.25	28.8
	HT/VHT40, M8 to M15	4	7	-62.8	-64.6	-64.4	-61.2	-50.0	-21.25	28.8
	HT/VHT40, M16 to M23	4	7	-62.8	-64.6	-64.4	-61.2	-50.0	-21.25	28.8
	HT/VHT40 Beam Forming, M0 to M7	2	10	-62.8	-64.6			-50.6	-21.25	29.3
	HT/VHT40 Beam Forming, M8 to M15	2	7	-62.8	-64.6			-53.6	-21.25	32.3
	HT/VHT40 Beam Forming, M0 to M7	3	12	-62.8	-64.6	-64.4		-47.3	-21.25	26.0
	HT/VHT40 Beam Forming, M8 to M15	3	9	-62.8	-64.6	-64.4		-50.3	-21.25	29.0
	HT/VHT40 Beam Forming, M16 to M23	3	7	-62.8	-64.6	-64.4		-52.1	-21.25	30.8
	HT/VHT40 Beam Forming, M0 to M7	4	13	-64.2	-62.9	-63.5	-62.8	-44.3	-21.25	23.0
	HT/VHT40 Beam Forming, M8 to M15	4	10	-62.8	-64.6	-64.4	-61.2	-47.0	-21.25	25.8
	HT/VHT40 Beam Forming, M16 to M23	4	8	-62.8	-64.6	-64.4	-61.2	-48.8	-21.25	27.6
	HT/VHT40 STBC, M0 to M7	2	7	-62.8	-64.6			-53.6	-21.25	32.3
	HT/VHT40 STBC, M0 to M7	3	7	-62.8	-64.6	-64.4		-52.1	-21.25	30.8
HT/VHT40 STBC, M0 to M7	4	7	-62.8	-64.6	-64.4	-61.2	-50.0	-21.25	28.8	
5240	Non HT/VHT20, 6 to 54 Mbps	1	7	-63.5				-56.5	-21.25	35.3
	Non HT/VHT20, 6 to 54 Mbps	2	7	-63.5	-61.7			-52.5	-21.25	31.2
	Non HT/VHT20, 6 to 54 Mbps	3	7	-63.5	-61.7	-62.1		-50.6	-21.25	29.3
	Non HT/VHT20, 6 to 54 Mbps	4	7	-63.0	-62.2	-63.1	-64.0	-50.0	-21.25	28.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-63.5	-61.7			-49.5	-21.25	28.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-63.5	-61.7	-62.1		-45.8	-21.25	24.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-63.0	-62.2	-63.1	-64.0	-44.0	-21.25	22.8
	HT/VHT20, M0 to M7	1	7	-64.1				-57.1	-21.25	35.9
	HT/VHT20, M0 to M7	2	7	-64.1	-62.5			-53.2	-21.25	32.0
	HT/VHT20, M8 to M15	2	7	-64.1	-62.5			-53.2	-21.25	32.0
	HT/VHT20, M0 to M7	3	7	-64.1	-62.5	-62.3		-51.1	-21.25	29.9
	HT/VHT20, M8 to M15	3	7	-64.1	-62.5	-62.3		-51.1	-21.25	29.9
	HT/VHT20, M16 to M23	3	7	-64.1	-62.5	-62.3		-51.1	-21.25	29.9
	HT/VHT20, M0 to M7	4	7	-63.1	-62.2	-63.0	-64.3	-50.1	-21.25	28.8
HT/VHT20, M8 to M15	4	7	-64.1	-62.5	-62.3	-62.9	-49.9	-21.25	28.6	
HT/VHT20, M16 to M23	4	7	-64.1	-62.5	-62.3	-62.9	-49.9	-21.25	28.6	




HT/VHT20 Beam Forming, M0 to M7	2	10	-64.1	-62.5			-50.2	-21.25	29.0
HT/VHT20 Beam Forming, M8 to M15	2	7	-64.1	-62.5			-53.2	-21.25	32.0
HT/VHT20 Beam Forming, M0 to M7	3	12	-64.1	-62.5	-62.3		-46.3	-21.25	25.1
HT/VHT20 Beam Forming, M8 to M15	3	9	-64.1	-62.5	-62.3		-49.3	-21.25	28.1
HT/VHT20 Beam Forming, M16 to M23	3	7	-64.1	-62.5	-62.3		-51.1	-21.25	29.9
HT/VHT20 Beam Forming, M0 to M7	4	13	-63.1	-62.2	-63.0	-64.3	-44.1	-21.25	22.8
HT/VHT20 Beam Forming, M8 to M15	4	10	-64.1	-62.5	-62.3	-62.9	-46.9	-21.25	25.6
HT/VHT20 Beam Forming, M16 to M23	4	8	-64.1	-62.5	-62.3	-62.9	-48.7	-21.25	27.4
HT/VHT20 STBC, M0 to M7	2	7	-64.1	-62.5			-53.2	-21.25	32.0
HT/VHT20 STBC, M0 to M7	3	7	-64.1	-62.5	-62.3		-51.1	-21.25	29.9
HT/VHT20 STBC, M0 to M7	4	7	-64.1	-62.5	-62.3	-62.9	-49.9	-21.25	28.6

Conducted Spurs Average Upper, All Antennas

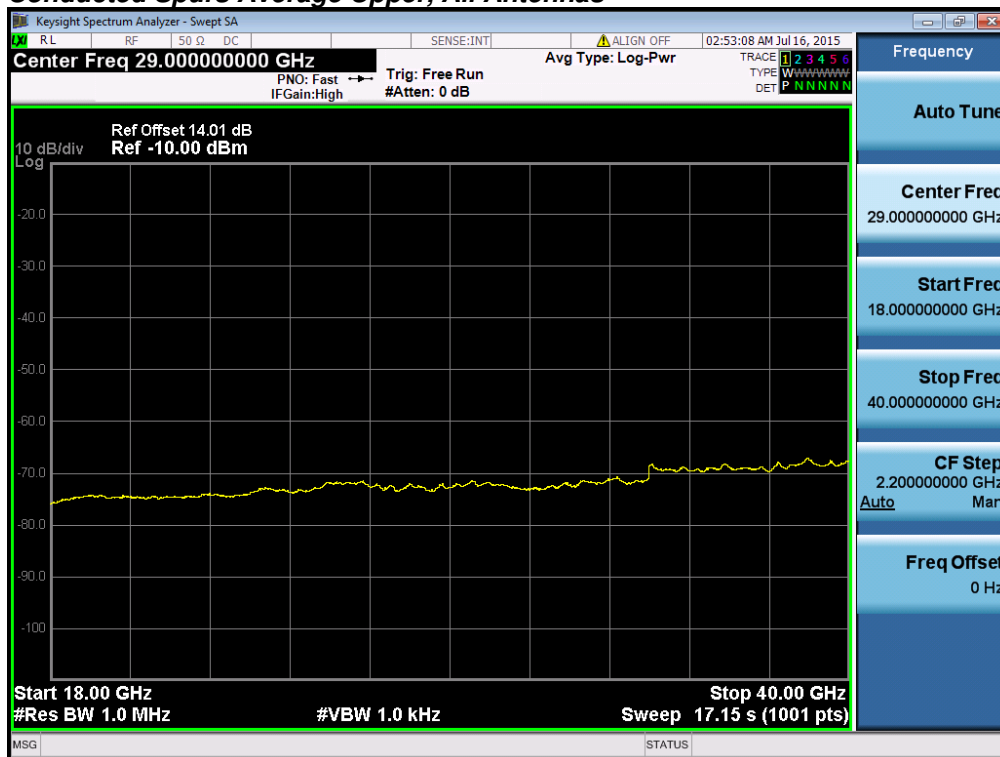

Conducted Spurs Peak Upper, All Antennas

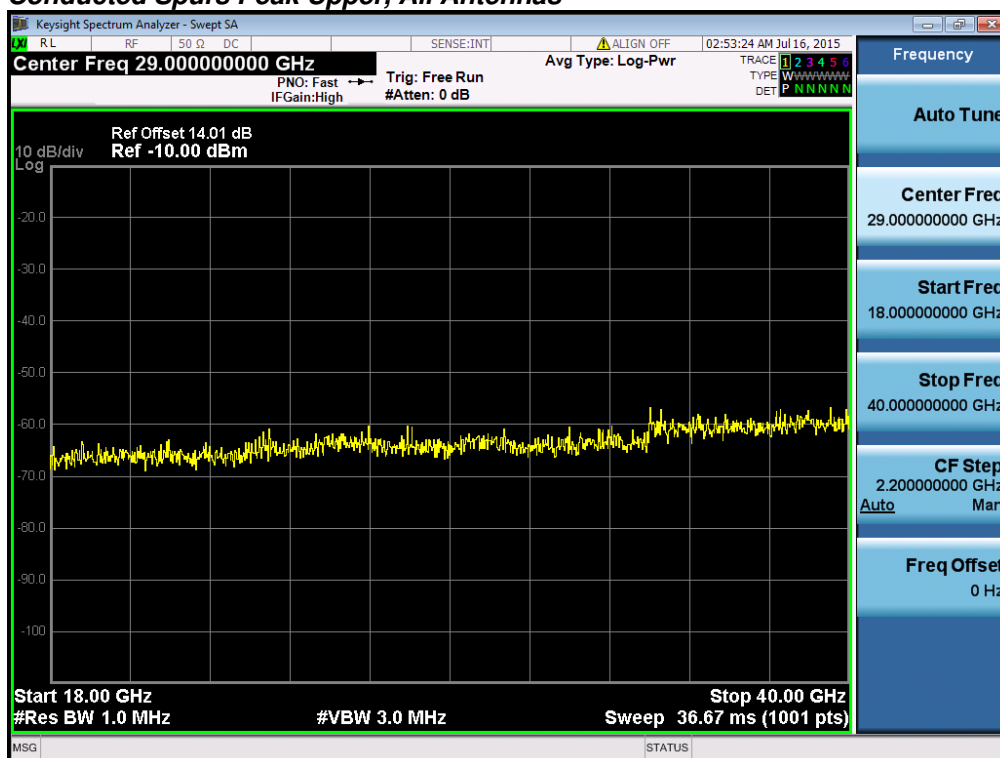





Conducted Spurs Average, 5240 MHz, HT/VHT20 Beam Forming, M0 to M7




Antenna A

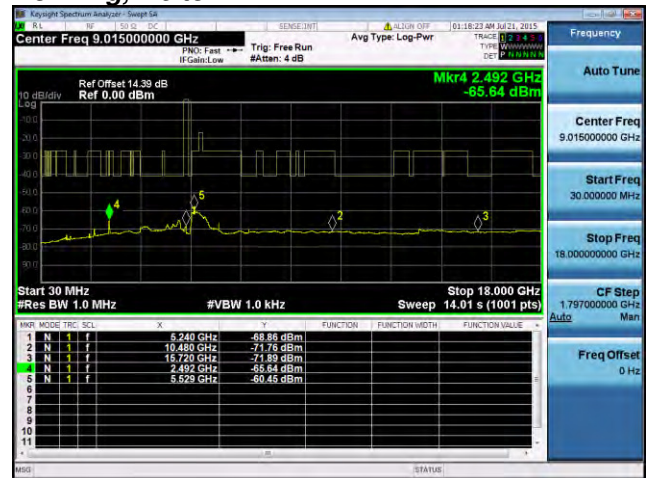

Antenna B

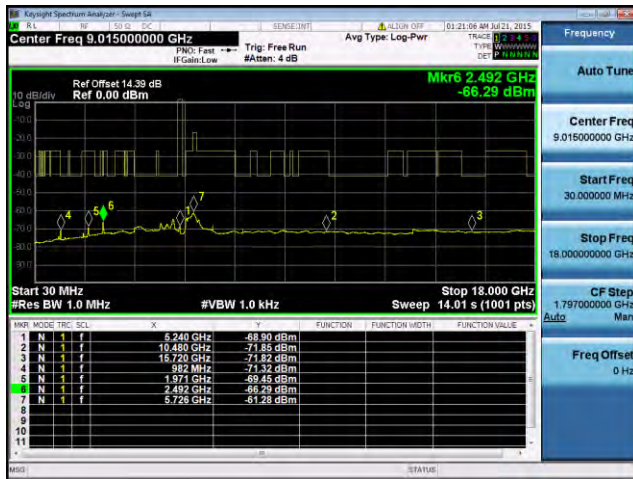


Antenna C

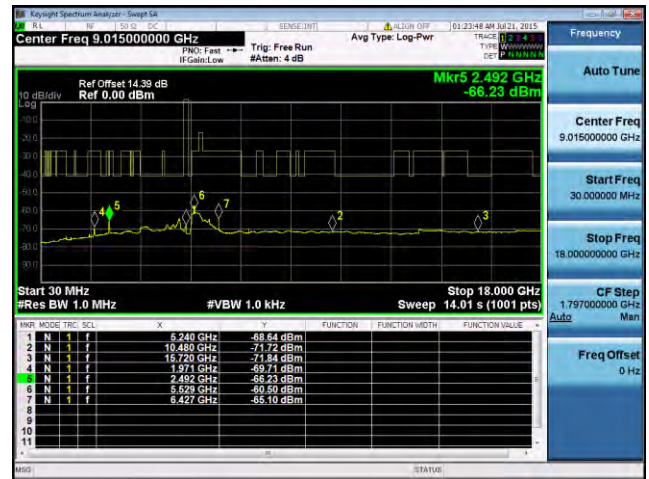


Antenna D




Conducted Spurs Peak, 5240 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

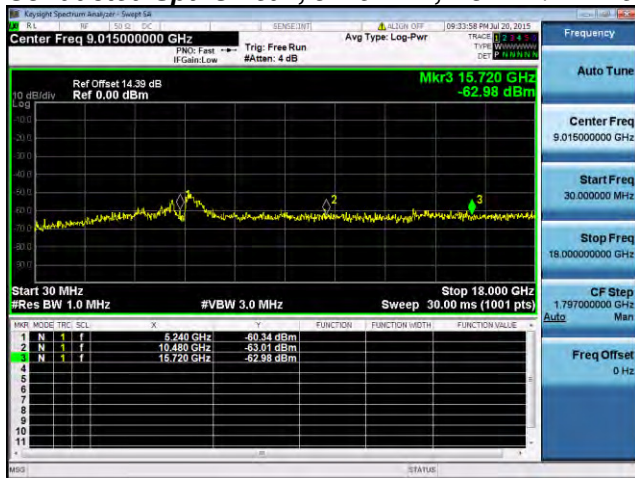


Antenna A

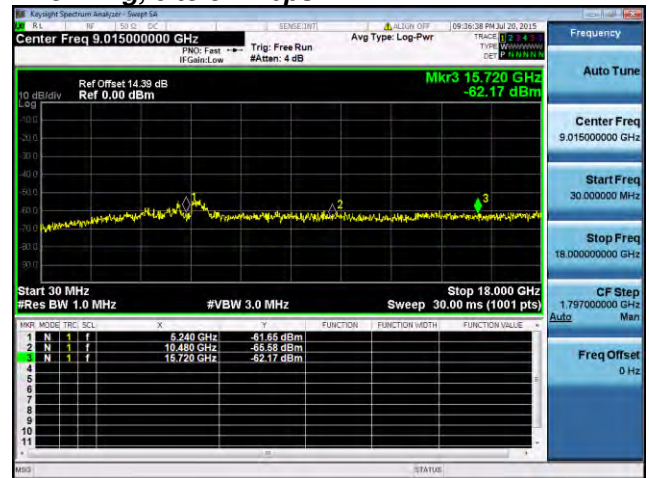

Antenna B

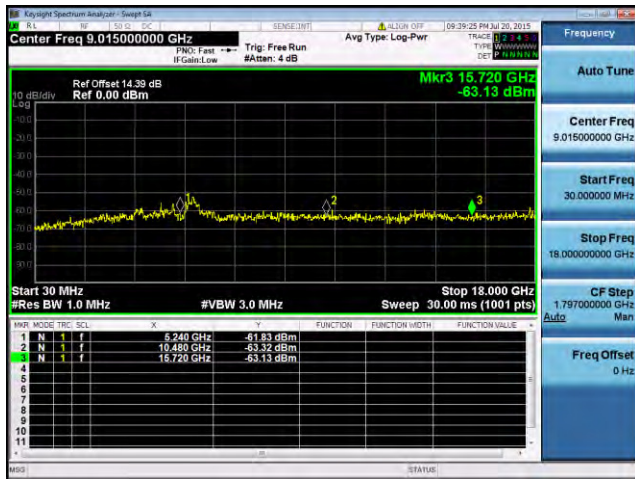

Antenna C

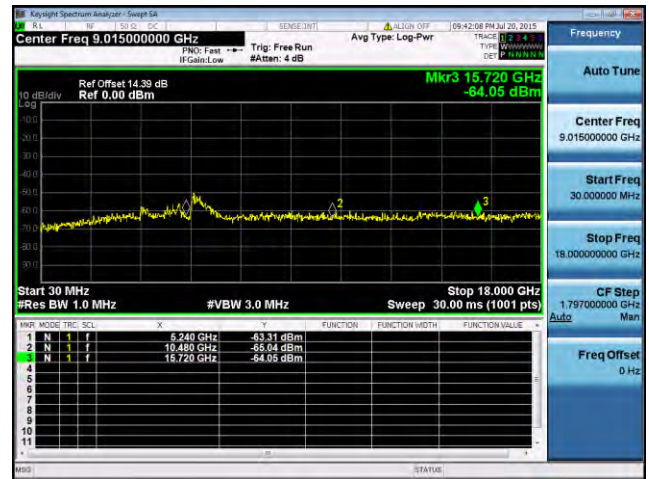

Antenna D

A.4 Conducted Band Edge

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). **However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz maximum emission limit.**

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

Test Procedure

Ref. ANSI C63.10: 2013

Conducted Bandedge

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

Conducted Bandedge

Test parameters restricted Band

RBW = 1 MHz
 VBW ≥ 3 x RBW for Peak, 100Hz for Average
 Sweep = Auto couple
 Detector = Peak
 Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

07-Jul-15 - 08-Aug-15

Test Result : PASS

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	-51.6				-44.6	-41.25	3.4
	Non HT/VHT20, 6 to 54 Mbps	2	7	-51.6	-54.6			-42.8	-41.25	1.6
	Non HT/VHT20, 6 to 54 Mbps	3	7	-51.6	-54.6	-54.1		-41.5	-41.25	0.2
	Non HT/VHT20, 6 to 54 Mbps	4	7	-55.5	-56.6	-56.4	-57.0	-43.3	-41.25	2.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-55.5	-56.6			-43.0	-41.25	1.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-57.9	-60.5	-60.7		-42.9	-41.25	1.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-59.5	-62.2	-61.5	-62.4	-42.2	-41.25	1.0
	HT/VHT20, M0 to M7	1	7	-52.3				-45.3	-41.25	4.1
	HT/VHT20, M0 to M7	2	7	-52.3	-53.7			-42.9	-41.25	1.7
	HT/VHT20, M8 to M15	2	7	-52.3	-53.7			-42.9	-41.25	1.7
	HT/VHT20, M0 to M7	3	7	-52.3	-53.7	-53.4		-41.3	-41.25	0.1
	HT/VHT20, M8 to M15	3	7	-52.3	-53.7	-53.4		-41.3	-41.25	0.1
	HT/VHT20, M16 to M23	3	7	-52.3	-53.7	-53.4		-41.3	-41.25	0.1
	HT/VHT20, M0 to M7	4	7	-54.3	-56.5	-56.0	-56.9	-42.8	-41.25	1.5
	HT/VHT20, M8 to M15	4	7	-54.3	-56.5	-56.0	-56.9	-42.8	-41.25	1.5
	HT/VHT20, M16 to M23	4	7	-54.3	-56.5	-56.0	-56.9	-42.8	-41.25	1.5
	HT/VHT20 Beam Forming, M0 to M7	2	10	-54.3	-56.5			-42.3	-41.25	1.0
	HT/VHT20 Beam Forming, M8 to M15	2	7	-52.3	-53.7			-42.9	-41.25	1.7
	HT/VHT20 Beam Forming, M0 to M7	3	12	-57.6	-59.7	-59.3		-42.2	-41.25	0.9
	HT/VHT20 Beam Forming, M8 to M15	3	9	-54.3	-56.5	-56.0		-41.9	-41.25	0.7
	HT/VHT20 Beam Forming, M16 to M23	3	7	-52.3	-53.7	-53.4		-41.3	-41.25	0.1
	HT/VHT20 Beam Forming, M0 to M7	4	13	-59.6	-61.4	-60.3	-61.5	-41.6	-41.25	0.4
	HT/VHT20 Beam Forming, M8 to M15	4	10	-55.5	-59.3	-58.7	-58.3	-41.7	-41.25	0.4
	HT/VHT20 Beam Forming, M16 to M23	4	8	-54.3	-56.5	-56.0	-56.9	-41.6	-41.25	0.3
	HT/VHT20 STBC, M0 to M7	2	7	-52.3	-53.7			-42.9	-41.25	1.7
	HT/VHT20 STBC, M0 to M7	3	7	-52.3	-53.7	-53.4		-41.3	-41.25	0.1
	HT/VHT20 STBC, M0 to M7	4	7	-54.3	-56.5	-56.0	-56.9	-42.8	-41.25	1.5
	5190	Non HT/VHT40, 6 to 54 Mbps	1	7	-49.6				-42.6	-41.25
Non HT/VHT40, 6 to 54 Mbps		2	7	-51.5	-54.0			-42.6	-41.25	1.3
Non HT/VHT40, 6 to 54 Mbps		3	7	-53.1	-56.6	-56.2		-43.2	-41.25	2.0
Non HT/VHT40, 6 to 54 Mbps		4	7	-53.1	-56.6	-56.2	-56.9	-42.4	-41.25	1.1
HT/VHT40, M0 to M7		1	7	-49.3				-42.3	-41.25	1.1
HT/VHT40, M0 to M7		2	7	-52.3	-51.6			-41.9	-41.25	0.7

	HT/VHT40, M8 to M15	2	7	-52.3	-51.6			-41.9	-41.25	0.7
	HT/VHT40, M0 to M7	3	7	-54.5	-55.6	-55.8		-43.5	-41.25	2.2
	HT/VHT40, M8 to M15	3	7	-54.5	-55.6	-55.8		-43.5	-41.25	2.2
	HT/VHT40, M16 to M23	3	7	-54.5	-55.6	-55.8		-43.5	-41.25	2.2
	HT/VHT40, M0 to M7	4	7	-54.5	-55.6	-55.8	-56.5	-42.5	-41.25	1.3
	HT/VHT40, M8 to M15	4	7	-54.5	-55.6	-55.8	-56.5	-42.5	-41.25	1.3
	HT/VHT40, M16 to M23	4	7	-54.5	-55.6	-55.8	-56.5	-42.5	-41.25	1.3
	HT/VHT40 Beam Forming, M0 to M7	2	10	-54.5	-55.6			-42.0	-41.25	0.8
	HT/VHT40 Beam Forming, M8 to M15	2	7	-52.3	-51.6			-41.9	-41.25	0.7
	HT/VHT40 Beam Forming, M0 to M7	3	12	-57.3	-58.5	-58.6		-41.5	-41.25	0.3
	HT/VHT40 Beam Forming, M8 to M15	3	9	-54.5	-55.6	-55.8		-41.7	-41.25	0.4
	HT/VHT40 Beam Forming, M16 to M23	3	7	-54.5	-55.6	-55.8		-43.5	-41.25	2.2
	HT/VHT40 Beam Forming, M0 to M7	4	13	-58.8	-61.0	-61.9	-62.3	-41.8	-41.25	0.5
	HT/VHT40 Beam Forming, M8 to M15	4	10	-56.2	-57.1	-57.3	-59.6	-41.4	-41.25	0.1
	HT/VHT40 Beam Forming, M16 to M23	4	8	-54.5	-55.6	-55.8	-56.5	-41.3	-41.25	0.1
	HT/VHT40 STBC, M0 to M7	2	7	-52.3	-51.6			-41.9	-41.25	0.7
	HT/VHT40 STBC, M0 to M7	3	7	-54.5	-55.6	-55.8		-43.5	-41.25	2.2
	HT/VHT40 STBC, M0 to M7	4	7	-54.5	-55.6	-55.8	-56.5	-42.5	-41.25	1.3
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	-49.1				-42.1	-41.25	0.9
	Non HT/VHT80, 6 to 54 Mbps	2	7	-51.4	-51.7			-41.5	-41.25	0.3
	Non HT/VHT80, 6 to 54 Mbps	3	7	-52.6	-53.4	-56.0		-42.0	-41.25	0.8
	Non HT/VHT80, 6 to 54 Mbps	4	7	-53.2	-53.9	-56.6	-54.7	-41.4	-41.25	0.2
	HT/VHT80, M0 to M7	1	7	-48.8				-41.8	-41.25	0.6
	HT/VHT80, M0 to M7	2	7	-51.9	-53.2			-42.5	-41.25	1.2
	HT/VHT80, M8 to M15	2	7	-51.9	-53.2			-42.5	-41.25	1.2
	HT/VHT80, M0 to M7	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80, M8 to M15	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80, M16 to M23	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80, M0 to M7	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80, M8 to M15	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80, M16 to M23	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M0 to M7	2	7	-51.9	-53.2			-42.5	-41.25	1.2
	HT/VHT80 Beam Forming, M8 to M15	2	7	-51.9	-53.2			-42.5	-41.25	1.2
	HT/VHT80 Beam Forming, M0 to M7	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80 Beam Forming, M8 to M15	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80 Beam Forming, M16 to M23	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8
	HT/VHT80 Beam Forming, M0 to M7	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M8 to M15	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M16 to M23	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
	HT/VHT80 STBC, M0 to M7	2	7	-51.9	-53.2			-42.5	-41.25	1.2
	HT/VHT80 STBC, M0 to M7	3	7	-53.3	-54.0	-54.1		-42.0	-41.25	0.8




	HT/VHT80 STBC, M0 to M7	4	7	-53.3	-54.0	-54.1	-56.9	-41.4	-41.25	0.1
--	-------------------------	---	---	-------	-------	-------	-------	-------	--------	-----

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	7	-40.5				-33.5	-21.25	12.3
	Non HT/VHT20, 6 to 54 Mbps	2	7	-40.5	-45.5			-32.3	-21.25	11.1
	Non HT/VHT20, 6 to 54 Mbps	3	7	-40.5	-45.5	-47.5		-31.7	-21.25	10.4
	Non HT/VHT20, 6 to 54 Mbps	4	7	-42.1	-47.0	-44.2	-50.3	-31.9	-21.25	10.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	-42.1	-47.0			-30.9	-21.25	9.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	12	-49.1	-53.5	-50.3		-34.0	-21.25	12.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	-49.3	-51.0	-52.4	-54.2	-32.3	-21.25	11.1
	HT/VHT20, M0 to M7	1	7	-36.1				-29.1	-21.25	7.9
	HT/VHT20, M0 to M7	2	7	-36.1	-35.2			-25.6	-21.25	4.4
	HT/VHT20, M8 to M15	2	7	-36.1	-35.2			-25.6	-21.25	4.4
	HT/VHT20, M0 to M7	3	7	-36.1	-35.2	-41.5		-25.1	-21.25	3.8
	HT/VHT20, M8 to M15	3	7	-36.1	-35.2	-41.5		-25.1	-21.25	3.8
	HT/VHT20, M16 to M23	3	7	-36.1	-35.2	-41.5		-25.1	-21.25	3.8
	HT/VHT20, M0 to M7	4	7	-43.4	-40.8	-46.5	-46.6	-30.6	-21.25	9.4
	HT/VHT20, M8 to M15	4	7	-43.4	-40.8	-46.5	-46.6	-30.6	-21.25	9.4
	HT/VHT20, M16 to M23	4	7	-43.4	-40.8	-46.5	-46.6	-30.6	-21.25	9.4
	HT/VHT20 Beam Forming, M0 to M7	2	10	-43.4	-40.8			-28.9	-21.25	7.6
	HT/VHT20 Beam Forming, M8 to M15	2	7	-36.1	-35.2			-25.6	-21.25	4.4
	HT/VHT20 Beam Forming, M0 to M7	3	12	-47.5	-48.0	-47.3		-31.0	-21.25	9.8
	HT/VHT20 Beam Forming, M8 to M15	3	9	-43.4	-40.8	-46.5		-29.4	-21.25	8.2
	HT/VHT20 Beam Forming, M16 to M23	3	7	-36.1	-35.2	-41.5		-25.1	-21.25	3.8
	HT/VHT20 Beam Forming, M0 to M7	4	13	-51.2	-51.4	-52.9	-53.8	-33.2	-21.25	11.9
	HT/VHT20 Beam Forming, M8 to M15	4	10	-47.2	-47.0	-48.4	-50.1	-32.0	-21.25	10.7
	HT/VHT20 Beam Forming, M16 to M23	4	8	-43.4	-40.8	-46.5	-46.6	-29.4	-21.25	8.2
	HT/VHT20 STBC, M0 to M7	2	7	-36.1	-35.2			-25.6	-21.25	4.4
	HT/VHT20 STBC, M0 to M7	3	7	-36.1	-35.2	-41.5		-25.1	-21.25	3.8
HT/VHT20 STBC, M0 to M7	4	7	-43.4	-40.8	-46.5	-46.6	-30.6	-21.25	9.4	
5190	Non HT/VHT40, 6 to 54 Mbps	1	7	-36.5				-29.5	-21.25	8.3
	Non HT/VHT40, 6 to 54 Mbps	2	7	-36.9	-36.7			-26.8	-21.25	5.5
	Non HT/VHT40, 6 to 54 Mbps	3	7	-45.0	-41.3	-45.7		-31.8	-21.25	10.5
	Non HT/VHT40, 6 to 54 Mbps	4	7	-45.0	-41.3	-45.7	-47.3	-31.2	-21.25	10.0
	HT/VHT40, M0 to M7	1	7	-34.8				-27.8	-21.25	6.6
	HT/VHT40, M0 to M7	2	7	-40.7	-41.8			-31.2	-21.25	10.0
	HT/VHT40, M8 to M15	2	7	-40.7	-41.8			-31.2	-21.25	10.0


	HT/VHT40, M0 to M7	3	7	-40.9	-46.1	-43.8		-31.3	-21.25	10.1
	HT/VHT40, M8 to M15	3	7	-40.9	-46.1	-43.8		-31.3	-21.25	10.1
	HT/VHT40, M16 to M23	3	7	-40.9	-46.1	-43.8		-31.3	-21.25	10.1
	HT/VHT40, M0 to M7	4	7	-40.9	-46.1	-43.8	-44.4	-30.4	-21.25	9.1
	HT/VHT40, M8 to M15	4	7	-40.9	-46.1	-43.8	-44.4	-30.4	-21.25	9.1
	HT/VHT40, M16 to M23	4	7	-40.9	-46.1	-43.8	-44.4	-30.4	-21.25	9.1
	HT/VHT40 Beam Forming, M0 to M7	2	10	-40.9	-46.1			-29.8	-21.25	8.5
	HT/VHT40 Beam Forming, M8 to M15	2	7	-40.7	-41.8			-31.2	-21.25	10.0
	HT/VHT40 Beam Forming, M0 to M7	3	12	-48.3	-49.1	-48.7		-32.1	-21.25	10.9
	HT/VHT40 Beam Forming, M8 to M15	3	9	-40.9	-46.1	-43.8		-29.5	-21.25	8.3
	HT/VHT40 Beam Forming, M16 to M23	3	7	-40.9	-46.1	-43.8		-31.3	-21.25	10.1
	HT/VHT40 Beam Forming, M0 to M7	4	13	-50.4	-51.4	-51.7	-53.7	-32.6	-21.25	11.4
	HT/VHT40 Beam Forming, M8 to M15	4	10	-45.4	-48.1	-48.9	-51.9	-32.0	-21.25	10.7
	HT/VHT40 Beam Forming, M16 to M23	4	8	-40.9	-46.1	-43.8	-44.4	-29.2	-21.25	7.9
	HT/VHT40 STBC, M0 to M7	2	7	-40.7	-41.8			-31.2	-21.25	10.0
	HT/VHT40 STBC, M0 to M7	3	7	-40.9	-46.1	-43.8		-31.3	-21.25	10.1
	HT/VHT40 STBC, M0 to M7	4	7	-40.9	-46.1	-43.8	-44.4	-30.4	-21.25	9.1
5210	Non HT/VHT80, 6 to 54 Mbps	1	7	-37.5				-30.5	-21.25	9.3
	Non HT/VHT80, 6 to 54 Mbps	2	7	-40.1	-43.1			-31.3	-21.25	10.1
	Non HT/VHT80, 6 to 54 Mbps	3	7	-45.0	-43.2	-49.9		-33.5	-21.25	12.2
	Non HT/VHT80, 6 to 54 Mbps	4	7	-45.1	-44.3	-47.4	-47.2	-32.8	-21.25	11.5
	HT/VHT80, M0 to M7	1	7	-36.8				-29.8	-21.25	8.6
	HT/VHT80, M0 to M7	2	7	-41.3	-40.9			-31.1	-21.25	9.8
	HT/VHT80, M8 to M15	2	7	-41.3	-40.9			-31.1	-21.25	9.8
	HT/VHT80, M0 to M7	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80, M8 to M15	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80, M16 to M23	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80, M0 to M7	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80, M8 to M15	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80, M16 to M23	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80 Beam Forming, M0 to M7	2	7	-41.3	-40.9			-31.1	-21.25	9.8
	HT/VHT80 Beam Forming, M8 to M15	2	7	-41.3	-40.9			-31.1	-21.25	9.8
	HT/VHT80 Beam Forming, M0 to M7	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80 Beam Forming, M8 to M15	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80 Beam Forming, M16 to M23	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80 Beam Forming, M0 to M7	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80 Beam Forming, M8 to M15	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80 Beam Forming, M16 to M23	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2
	HT/VHT80 STBC, M0 to M7	2	7	-41.3	-40.9			-31.1	-21.25	9.8
	HT/VHT80 STBC, M0 to M7	3	7	-45.3	-45.5	-44.8		-33.4	-21.25	12.2
	HT/VHT80 STBC, M0 to M7	4	7	-45.3	-45.5	-44.8	-46.2	-32.4	-21.25	11.2




Conducted Bandedge Average, 5190 MHz, HT/VHT40 Beam Forming, M16 to M23

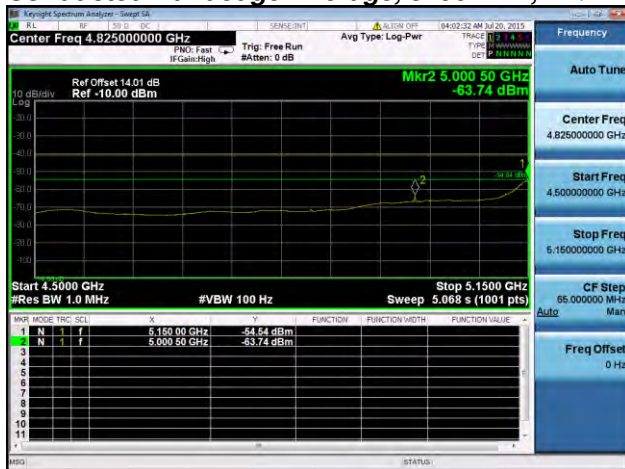


Antenna A

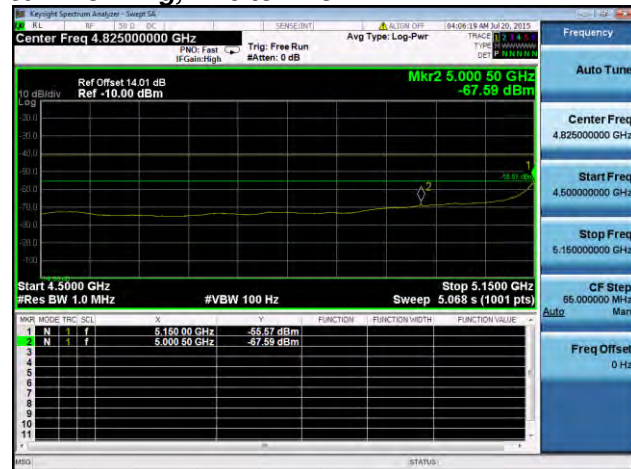

Antenna B

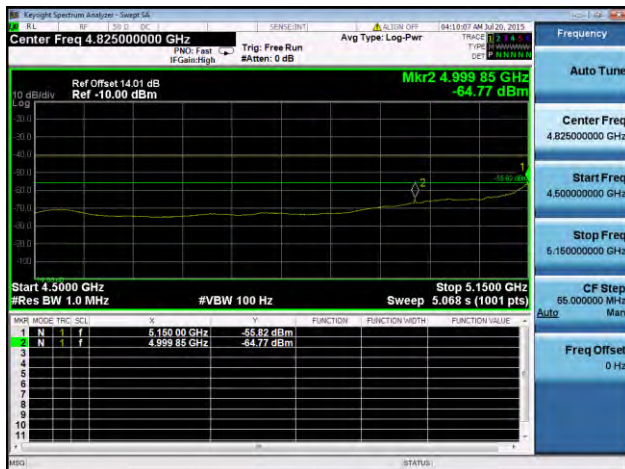


Antenna C

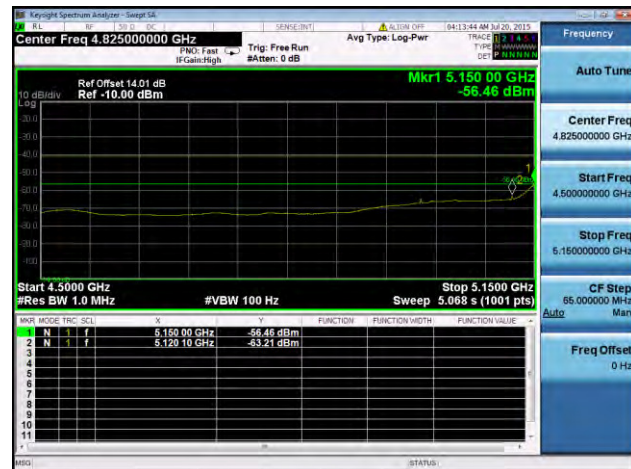


Antenna D




Conducted Bandedge Peak, 5180 MHz, HT/VHT20, M0 to M7

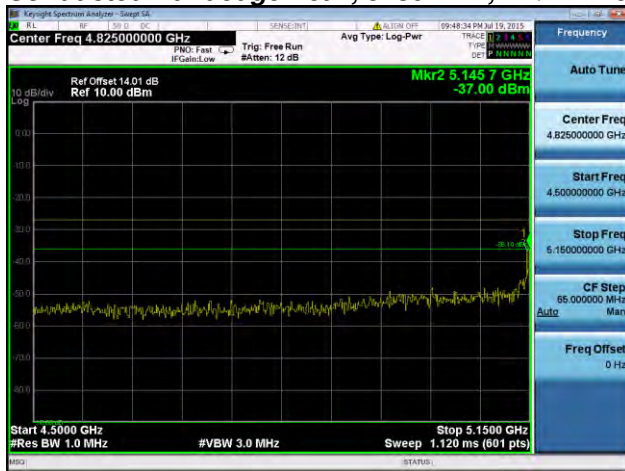

Antenna A

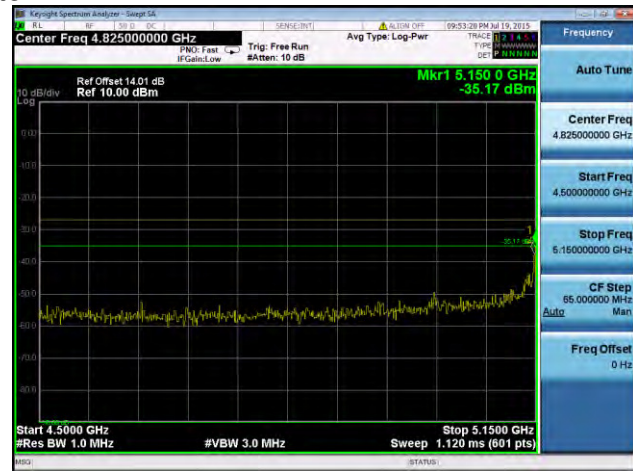

Antenna B

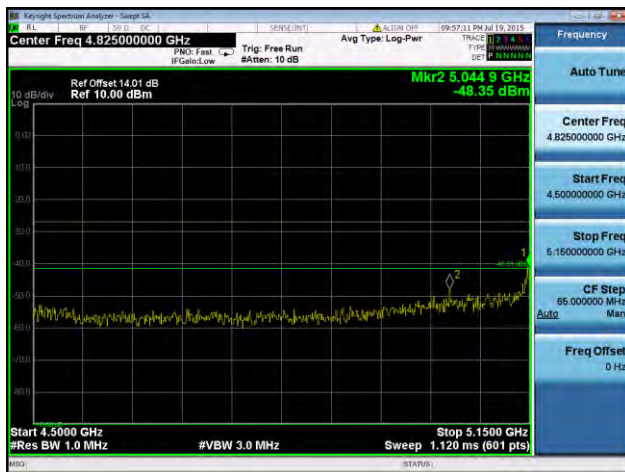


Antenna C


Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

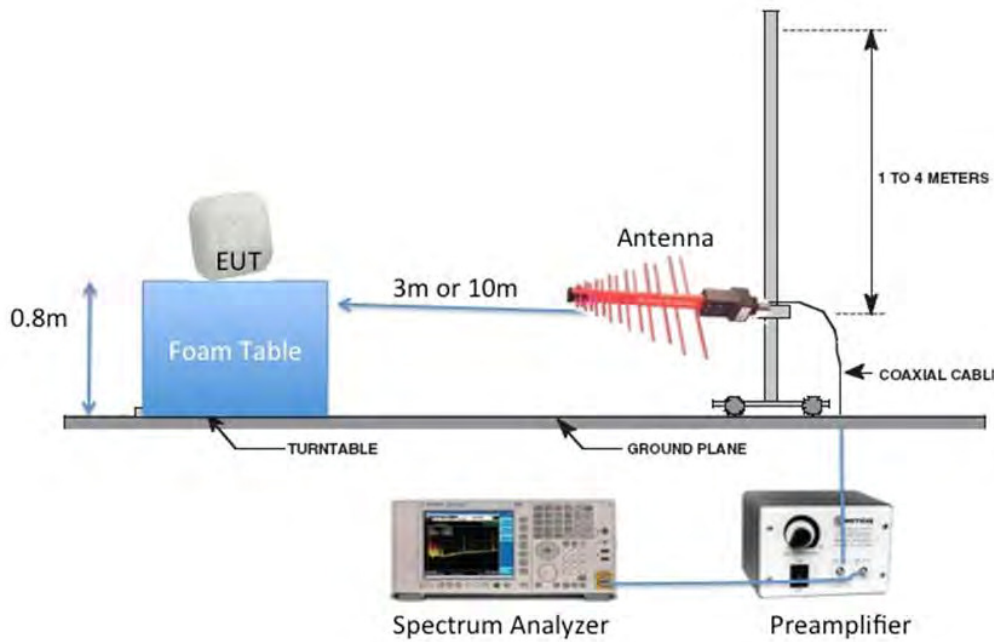

Radiated Emission Setup Diagram-Above 1G

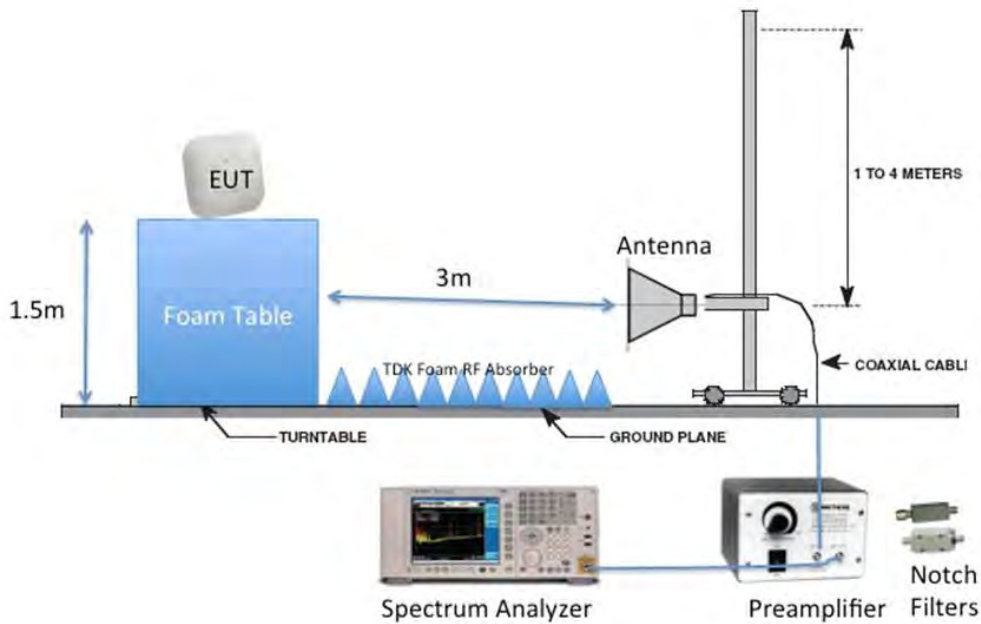

B.1 Radiated Spurious Emissions

FCC 15.205 / 15.407 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz/18GHz-26G/26GHz-40GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz for peak, 1 KHz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 07-Jul-15 - 08-Aug-15
Test Result : PASS	


See Appendix C for list of test equipment

B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5180	HT/VHT20, M0 to M7, M0 to M9 1ss	m0	45.4	54	8.6
5190	HT/VHT40, M0 to M7, M0 to M9 1ss	m0	48.6	54	5.4
5210	HT/VHT80, M0 to M7, M0 to M9 1ss	m0x1	46.6	54	7.4
5230	HT/VHT40, M0 to M7, M0 to M9 1ss	m0	49.2	54	4.8
5240	HT/VHT20, M0 to M7, M0 to M9 1ss	m0	48.7	54	5.3




B.1.A.1 Radiated Transmitter Spurs, 5180 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

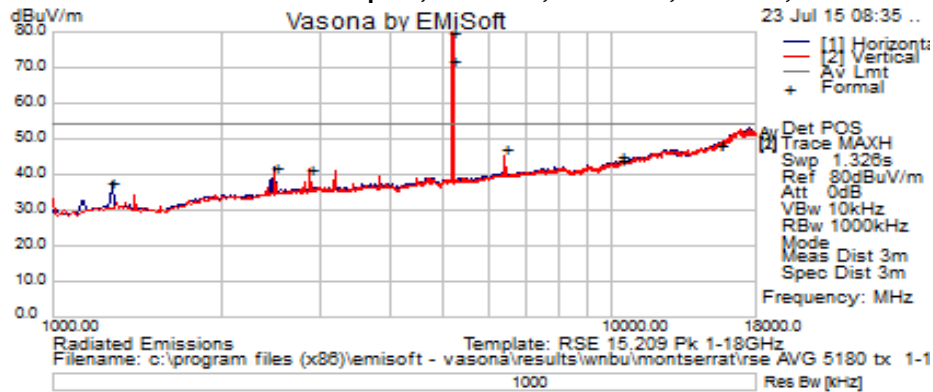

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5186.25	72.2	8.6	-3.6	77.3	Average.	V	223	20	--	--	--
5187.5	64.2	8.7	-3.6	69.3	Average.	H	114	90	--	--	--
10360.208	25.51	12.7	4.99	43.21	Average.		115	90	54	-10.79	Pass
10360.887	25.4	12.7	5	43.1	Average.	V	222	20	54	-10.9	Pass
15539.244	26.7	16.15	2.22	45.07	Average.	V	222	20	54	-8.93	Pass
15539.578	26.99	16.15	2.22	45.36	Average.	H	115	90	54	-8.64	Pass
2880.625	35.49	6.46	-4.96	36.99	Average.	V	200	359	54	-17.01	Pass
2498.125	35.02	6	-5.29	35.73	Average.	V	150	342	54	-18.27	Pass

B.1.A.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

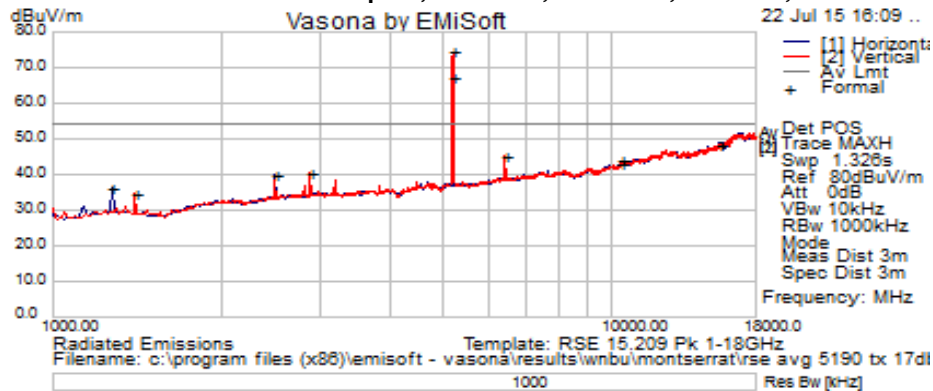


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1276.25	35.77	4.24	-3.79	36.23	Average.	H	200	111	54	-17.77	Pass
1403.75	34.83	4.44	-4.41	34.85	Average.	V	100	18	54	-19.15	Pass
2498.125	35.7	6	-1.54	40.16	Average.	H	150	110	54	-13.84	Pass
2880.625	35.68	6.46	-1.65	40.48	Average.	V	200	18	54	-13.52	Pass
5183.375	61.5	8.6	-3	67.2	Average.	H	122	245	--	--	--
5196.875	68.81	8.66	-2.97	74.5	Average.	V	170	356	--	--	--
6429.375	37.24	9.7	-1.92	45.03	Average.	V	150	342	54	-8.97	Pass
10380.103	27.3	12.7	4	44	Average.	H	124	245	54	-10	Pass




10380.724	26.3	12.7	4	43	Average.	V	169	357	54	-11	Pass
15570.415	27.8	16.1	4.4	48.3	Average.	V	169	357	54	-5.7	Pass
15571.272	28.1	16.1	4.4	48.6	Average.	H	124	245	54	-5.4	Pass

B.1.A.3 Radiated Transmitter Spurs, 5210 MHz, HT/VHT80, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

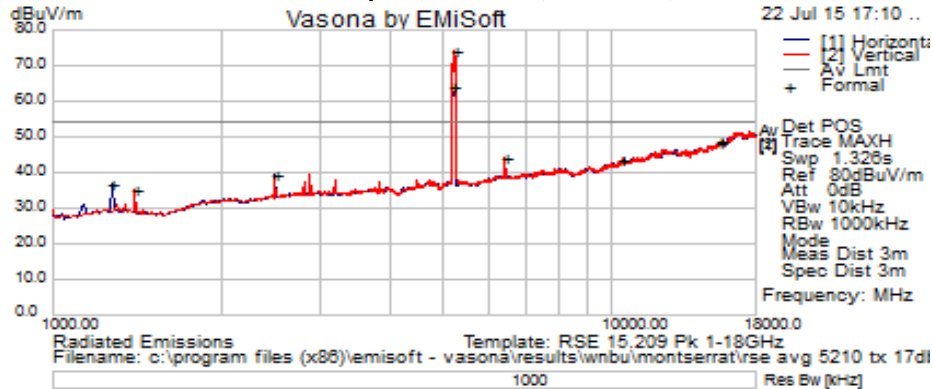

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5182.875	56.1	8.6	-3.6	61.2	Average.	H	125	48	--	--	--
5245	61.2	8.7	-3.4	66.5	Average.	V	180	352	--	--	--
10416.848	28.9	12.7	5	46.6	Average.	V	179	352	54	-7.4	Pass
10418.213	25.2	12.7	5	42.9	Average.	H	125	48	54	-11.1	Pass
15627.568	26.5	16.2	1.9	44.6	Average.	V	179	352	54	-9.4	Pass
15629.387	26.2	16.3	1.9	44.3	Average.	H	125	48	54	-9.7	Pass
6429.375	36.87	9.7	-3.19	43.39	Average.	V	150	342	54	-10.61	Pass
2498.125	34.89	6	-5.29	35.59	Average.	H	200	83	54	-18.41	Pass
3199.572	34.21	6.76	-4.01	36.96	Average.	V	102	360	54	-17.04	Pass

B.1.A.4 Radiated Transmitter Spurs, 5200 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

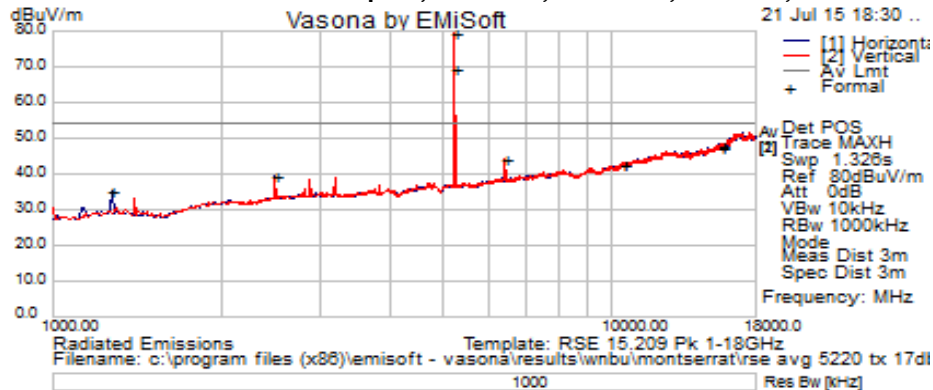


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5218.125	73.8	8.7	-2.9	79.58	Average.	V	184	358	--	--	--
5227.25	63.7	8.7	-2.8	69.5	Average.	H	105	134	--	--	--
10440.22	25.22	12.75	4.42	42.39	Average.	V	183	358	54	-11.61	Pass
10440.739	25.29	12.75	4.42	42.46	Average.	H	105	134	54	-11.54	Pass
15659.57	26.92	16.25	4.39	47.56	Average.	H	105	134	54	-6.44	Pass




15660.146	26.8	16.25	4.38	47.43	Average.	V	183	358	54	-6.57	Pass
6429.375	36.42	9.7	-1.92	44.2	Average.	V	200	342	54	-9.8	Pass
2498.125	34.85	6	-1.54	39.3	Average.	H	200	100	54	-14.7	Pass
1276.25	34.84	4.24	-3.79	35.3	Average.	H	200	123	54	-18.7	Pass

B.1.A.5 Radiated Transmitter Spurs, 5240 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

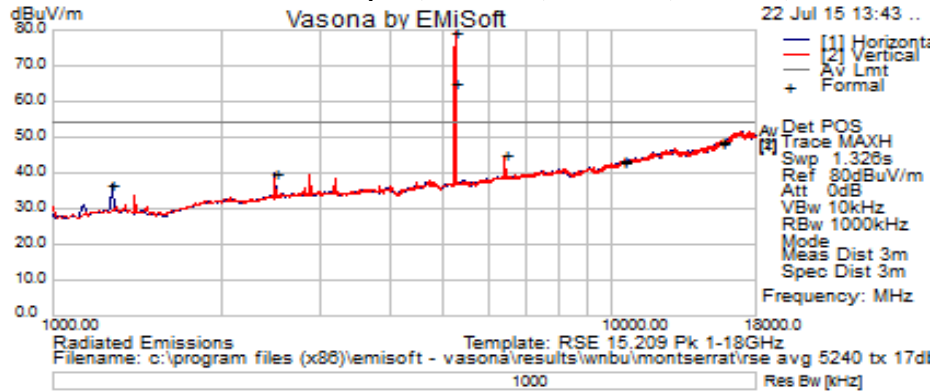

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1276.25	36.38	4.24	-3.79	36.84	Average.	H	200	122	54	-17.16	Pass
2498.125	35.5	6	-1.54	39.96	Average.	H	150	110	54	-14.04	Pass
5239.375	73.4	8.7	-2.8	79.3	Average.	V	175	358	--	--	--
5247.188	59.7	8.7	-2.8	65.5	Average.	H	109	87	--	--	--
6428.104	37.5	9.7	-1.9	45.3	Average.	V	175	358	54	-8.7	Pass
10480.117	26.5	12.8	4.5	43.8	Average.	V	174	360	54	-10.2	Pass
10480.4	25.75	12.78	4.49	43.02	Average.	H	111	88	54	-10.98	Pass
15719.033	27.7	16.3	4.7	48.7	Average.	H	111	88	54	-5.3	Pass
15719.878	27.6	16.3	4.7	48.6	Average.	V	174	360	54	-5.4	Pass

B.1.A.6 Radiated Transmitter Spurs, 5230 MHz, , HT/VHT40, M0 to M7, M0 to M9 1ss, Average (1-18GHz)

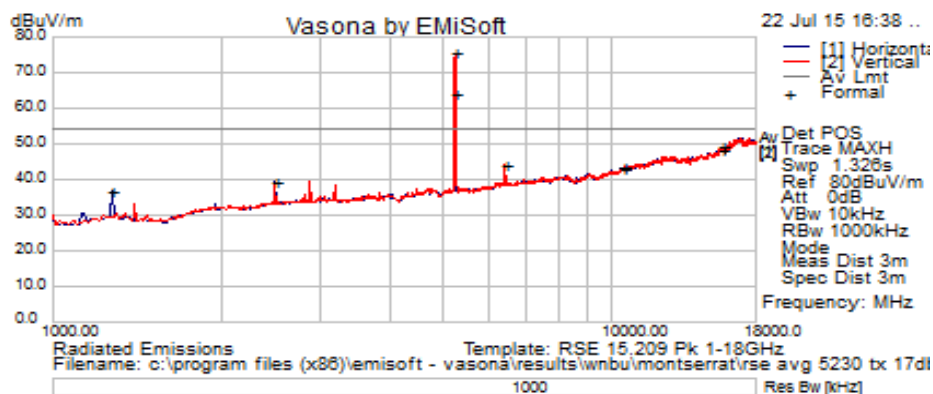

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1276.25	36.43	4.24	-3.79	36.89	Average.	H	150	134	54	-17.11	Pass
2498.125	35.07	6	-1.54	39.53	Average.	H	150	110	54	-14.48	Pass
5235.938	58.3	8.7	-2.8	64.2	Average.	H	114	42	--	--	--



5247.125	69.9	8.7	-2.8	75.7	Average.	V	192	353	--	--	--
6429.375	36.46	9.7	-1.92	44.24	Average.	V	200	342	54	-9.76	Pass
10458.174	25.8	12.8	4.5	43.1	Average.	V	190	353	54	-10.9	Pass
10458.53	26.2	12.8	4.5	43.5	Average.	H	113	42	54	-10.5	Pass
15688.609	27.5	16.2	4.4	48.1	Average.	V	190	353	54	-5.9	Pass
15688.865	28.6	16.2	4.4	49.2	Average.	H	113	42	54	-4.8	Pass

B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz)



B.1.A.9 Radiated Transmitter Spurs, All rate, All modes, Average (26.5- 40GHz)




B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
5180	HT/VHT20, M0 to M7, M0 to M9 1ss	m0	56.5	74	17.5
5190	HT/VHT40, M0 to M7, M0 to M9 1ss	m0	56.6	74	17.4
5210	HT/VHT80, M0 to M7, M0 to M9 1ss	m0x1	57.0	74	17.0
5230	HT/VHT40, M0 to M7, M0 to M9 1ss	m0	55.9	74	18.1
5240	HT/VHT20, M0 to M7, M0 to M9 1ss	m0	55.9	74	18.1




B.1.P.1 Radiated Transmitter Spurs, HT/VHT20, M0 to M7, M0 to M9 1ss, (1-18GHz)

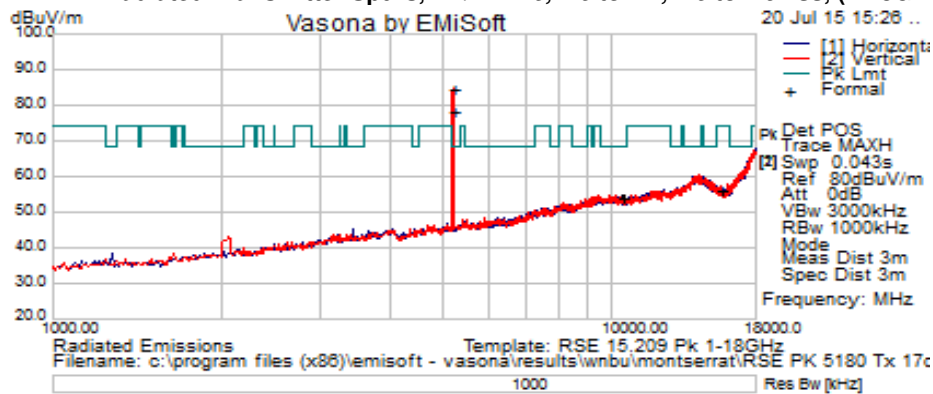

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5186.25	79.8	8.6	-3.6	84.9	Peak.	V	223	20	--	--	--
5187.5	73.1	8.7	-3.6	78.2	Peak.	H	114	90	--	--	--
10360.055	36.58	12.7	4.99	54.27	Peak.	H	113	90	68.2	-13.93	Pass
15540.476	38.08	16.15	2.22	56.45	Peak.	H	113	90	74	-17.55	Pass
10359.208	36.47	12.7	4.99	54.16	Peak.	V	221	20	68.2	-14.04	Pass
15539.828	37.85	16.15	2.22	56.22	Peak.	V	221	20	74	-17.78	Pass


B.1.P.2 Radiated Transmitter Spurs, 5190 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)

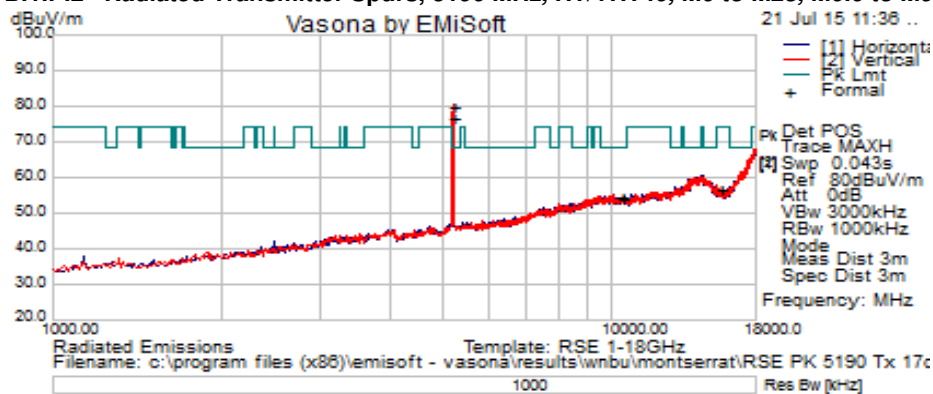

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5183.375	71.8	8.6	-3.6	76.9	Peak.	H	122	245	--	--	--
5196.875	74.9	8.7	-3.5	80	Peak.	V	170	356	--	--	--
10379.902	36.37	12.71	4.99	54.07	Peak.	H	122	245	68.2	-14.13	Pass
10380.648	36.73	12.71	4.99	54.42	Peak.	V	169	356	68.2	-13.78	Pass
15568.798	38.42	16.12	1.99	56.53	Peak.	V	169	356	74	-17.47	Pass
15569.084	38.36	16.12	1.99	56.47	Peak.	H	122	245	74	-17.53	Pass




B.1.P.3 Radiated Transmitter Spurs, 5210 MHz, VHT80, M0 to M9, M0 to M9 1.1, Peak (1-18GHz)

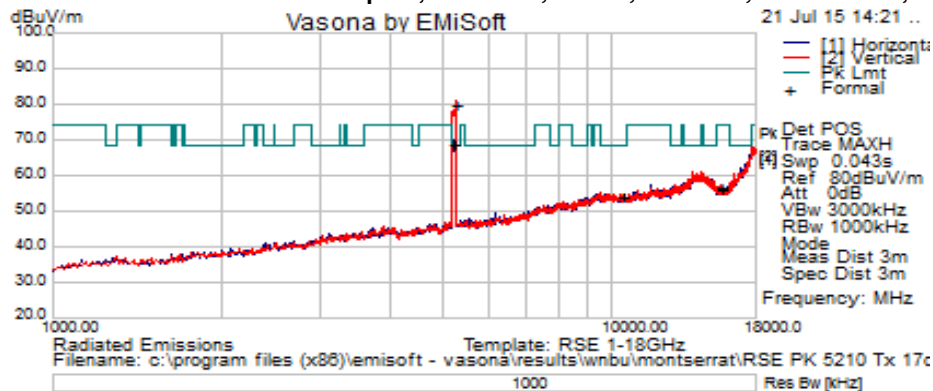

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5182.875	63.9	8.6	-3.6	69	Peak.	H	125	48	--	--	--
5245	74.6	8.7	-3.4	79.9	Peak.	V	180	352	--	--	--
10416.848	36.5	12.72	5	54.22	Peak.	V	179	352	68.2	-13.98	Pass
10418.213	36.41	12.72	5.01	54.15	Peak.	H	125	48	68.2	-14.05	Pass
15627.568	38.84	16.24	1.87	56.96	Peak.	V	179	352	74	-17.04	Pass
15629.387	38.19	16.25	1.88	56.32	Peak.	H	125	48	74	-17.68	Pass


B.1.P.4 Radiated Transmitter Spurs, 5200 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Peak (1-18GHz)

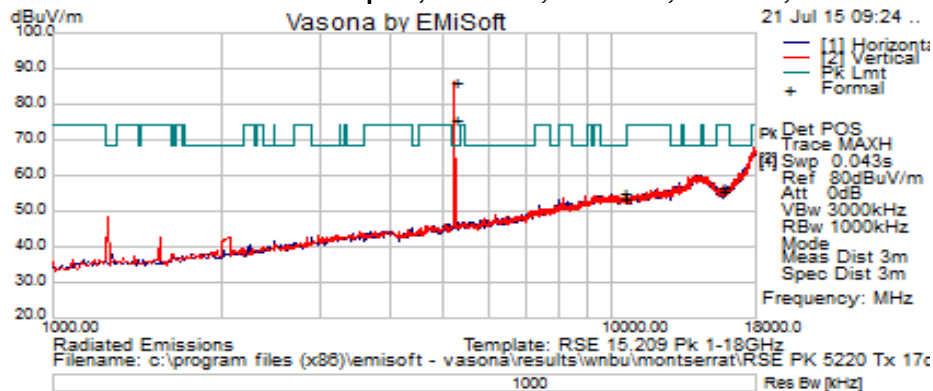

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5218.125	80.83	8.67	-3.43	86.07	Peak.	V	184	358	--	--	--
5227.063	70.4	8.7	-3.4	75.7	Peak.	H	105	134	--	--	--
10439.045	35.7	12.75	5.25	53.7	Peak.	V	183	358	68.2	-14.5	Pass
10439.709	36.96	12.75	5.25	54.96	Peak.	H	107	134	68.2	-13.24	Pass
15659.47	37.68	16.25	1.64	55.57	Peak.	V	183	358	74	-18.43	Pass
15659.826	38.6	16.25	1.64	56.49	Peak.	H	107	134	74	-17.51	Pass




B.1.P.5 Radiated Transmitter Spurs, 5240 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss, Peak (1-18GHz)

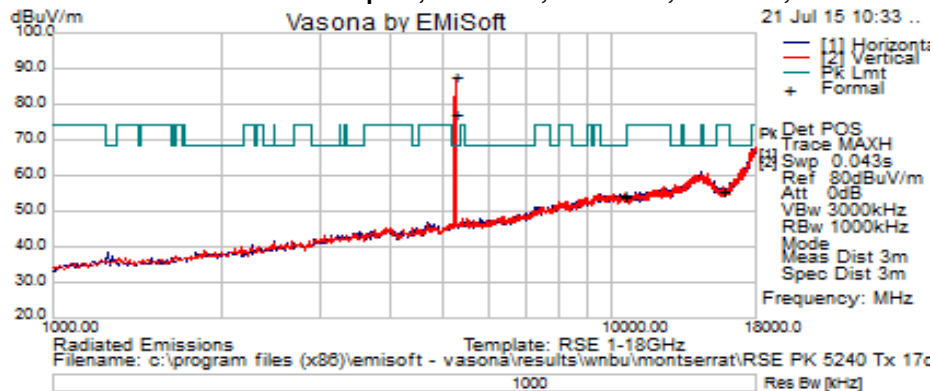


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5239.375	82.67	8.68	-3.4	87.95	Peak.	V	175	358	--	--	--
5247.188	72.2	8.7	-3.4	77.5	Peak.	H	109	87	--	--	--
10479.976	36.37	12.78	5.26	54.41	Peak.	H	109	87	68.2	-13.79	Pass
15721.504	37.78	16.3	1.8	55.88	Peak.	H	109	87	74	-18.12	Pass
10480.782	35.86	12.78	5.25	53.89	Peak.	V	173	358	68.2	-14.31	Pass
15720.892	37.5	16.3	1.8	55.6	Peak.	V	173	358	74	-18.4	Pass

B.1.P.6 Radiated Transmitter Spurs, 5230 MHz, HT/VHT40, M0 to M23, M0.0 to M9.4, Peak (1-18GHz)

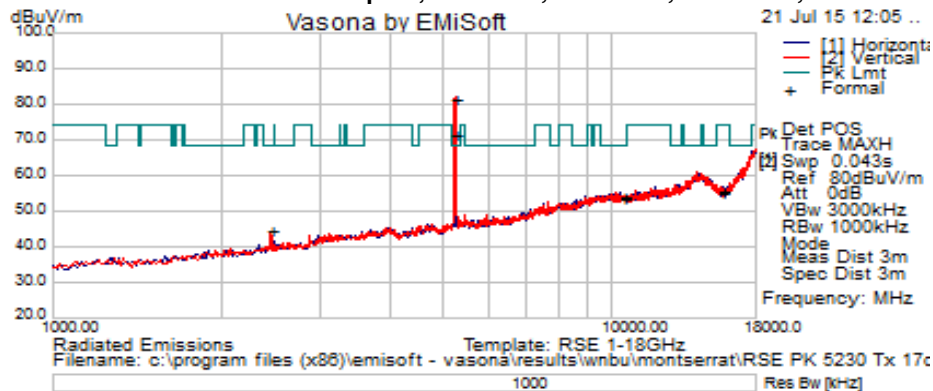

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
5247.125	76.52	8.68	-3.41	81.79	Peak.	V	192	360	--	--	--
5235.938	66	8.7	-3.4	71.3	Peak.	H	114	42	--	--	--
10459.188	35.28	12.76	5.31	53.34	Peak.	H	114	42	68.2	-14.86	Pass
15690.372	38.03	16.2	1.61	55.84	Peak.	H	114	42	74	-18.16	Pass
10460.108	36.16	12.76	5.31	54.22	Peak.	V	192	360	68.2	-13.98	Pass
15690.429	37.12	16.2	1.61	54.93	Peak.	V	192	360	74	-19.07	Pass
2457.583	44.2	6	-5.4	44.7	Peak.	V	192	360	68.2	-23.5	Pass

B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical

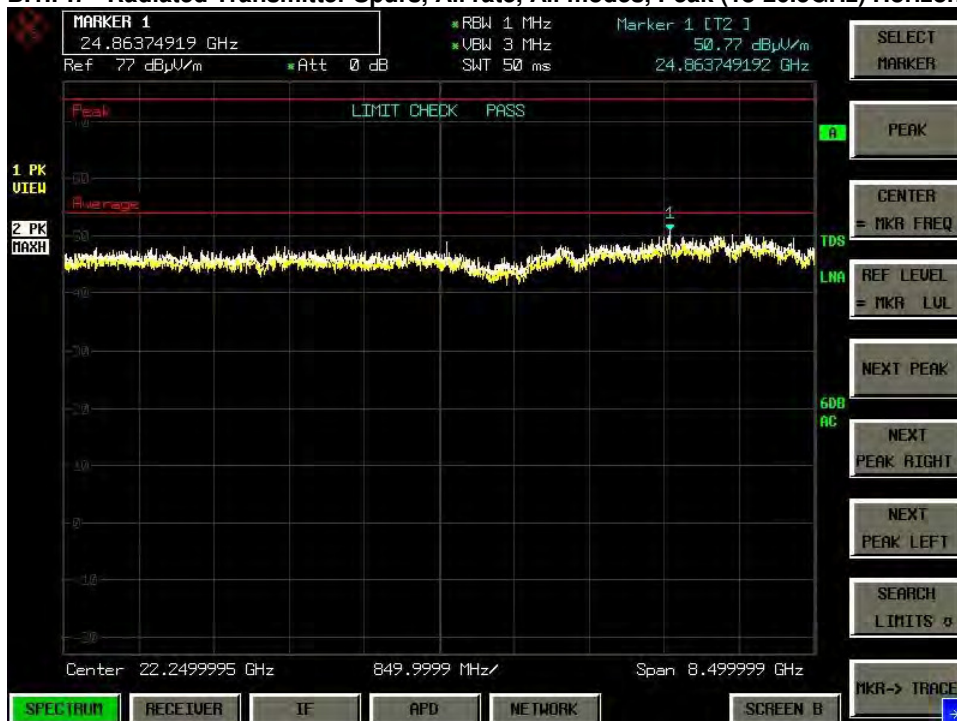

B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical



B.2 Radiated Emissions 30MHz to 1GHz

FCC 15.209 / 15.205 / 15.407 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.


Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 07-Jul-15 - 08-Aug-15
Test Result : PASS	

See Appendix C for list of test equipment

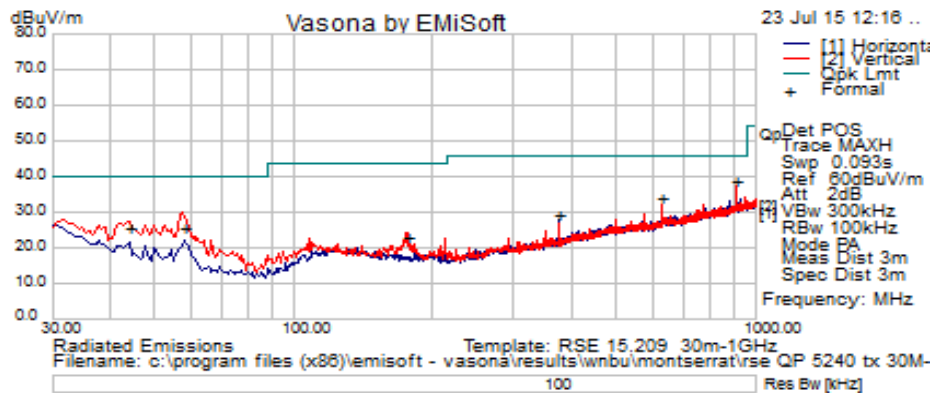

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
907.24375	12.67	3.54	22.4	38.61	Quasi Max	V	130	256	46	-7.39	Pass
57.506	17.32	0.8	7.35	25.46	Quasi Max	V	132	142	40	-14.54	Pass
43.826	14.18	0.66	10.99	25.83	Quasi Max	V	114	246	40	-14.18	Pass
625.025	11.7	2.86	19.4	33.97	Quasi Max	V	108	197	46	-12.03	Pass
375.035	12.29	2.19	15.1	29.58	Quasi Max	H	112	115	46	-16.42	Pass
174.981	10.25	1.43	11.5	23.19	Quasi Max	V	115	254	43.5	-20.31	Pass

B.3 AC Conducted Emissions

FCC 15.207 Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2


Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average

System Number	Description	Samples	System under test	Support equipment
2	EUT	S03	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S04	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 07-Jul-15 - 08-Aug-15
Test Result : PASS	


See Appendix C for list of test equipment

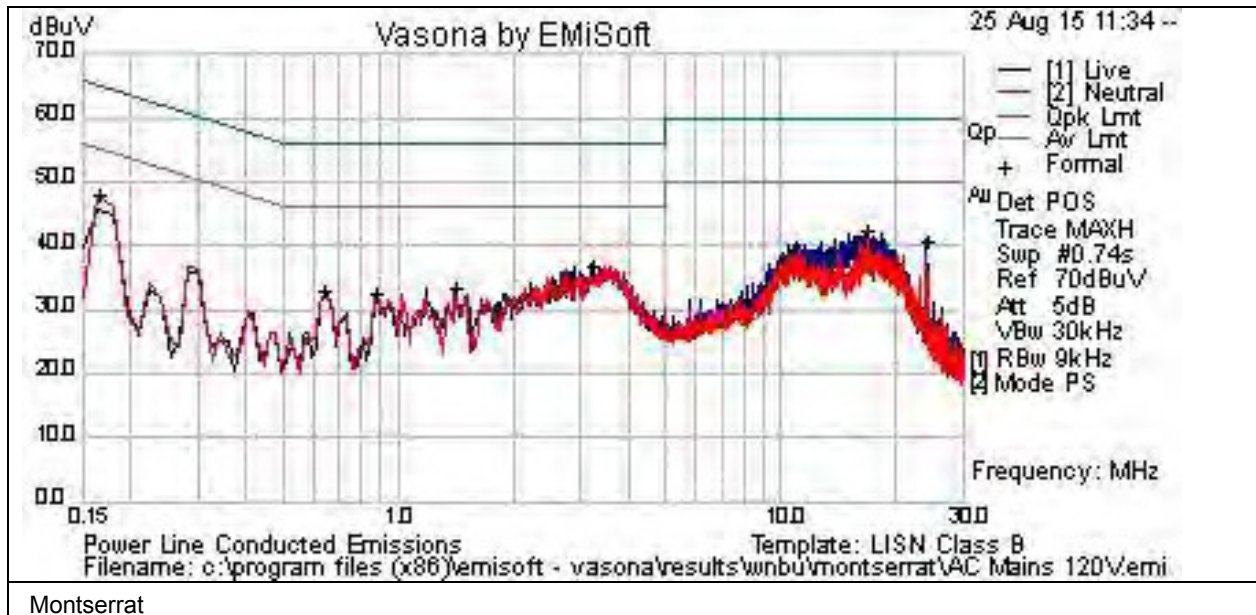

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.164925	26.9	21	0.1	48	Peak	L	55.2	-7.2	Pass	
16.896	22	20.3	0.1	42.4	Peak	L	50	-7.6	Pass	
3.21	17	20	0	37.1	Peak	L	46	-8.9	Pass	
24.015	19.8	20.9	0.2	40.9	Peak	L	50	-9.1	Pass	
1.419	13.3	20	0	33.3	Peak	L	46	-12.7	Pass	
0.881325	12.8	20	0	32.8	Peak	L	46	-13.2	Pass	
0.164925	26.9	21	0	48	Peak	N	55.2	-7.2	Pass	
16.896	22.1	20.3	0.1	42.4	Peak	N	50	-7.6	Pass	
3.21	17.1	20	0	37.1	Peak	N	46	-8.9	Pass	
24.015	19.8	20.9	0.2	40.9	Peak	N	50	-9.1	Pass	
1.419	13.3	20	0	33.3	Peak	N	46	-12.7	Pass	
0.642525	12.8	20	0	32.8	Peak	N	46	-13.2	Pass	
0.881325	12.8	20	0	32.8	Peak	N	46	-13.2	Pass	

Photographs of setup

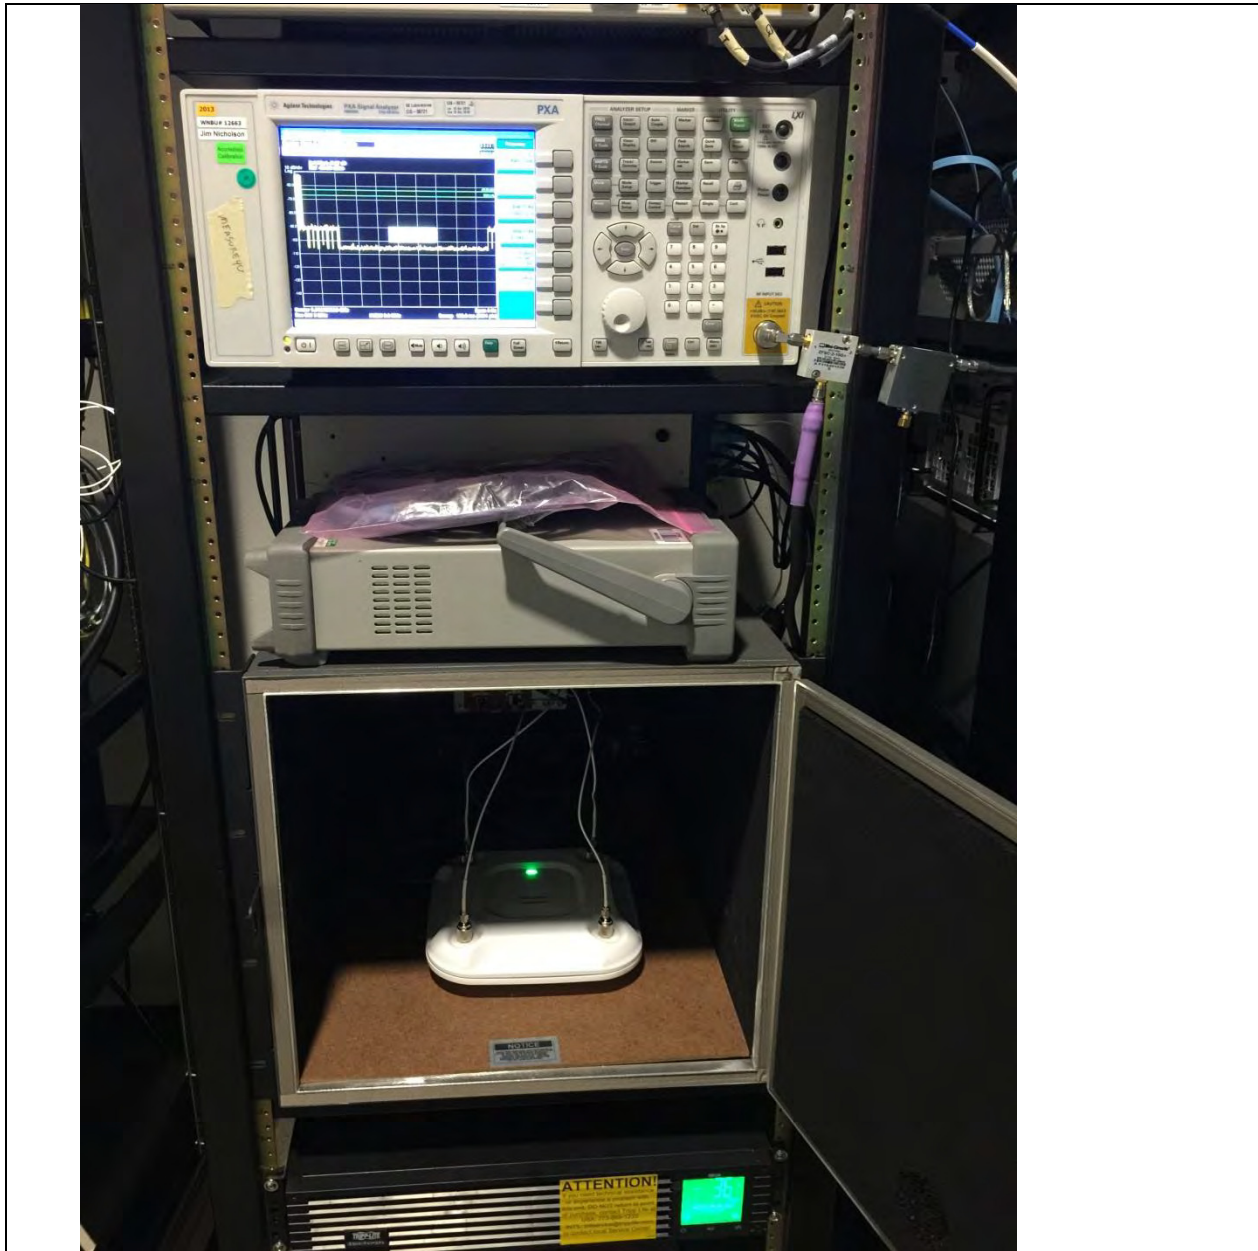


Title: RF Conducted Test Setup

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

AIR-CAP3702P-B-K9 Radiated Test setup photo 30MHz to 1GHz



AIR-CAP3702P-B-K9 Radiated Test setup photo above 1GHz

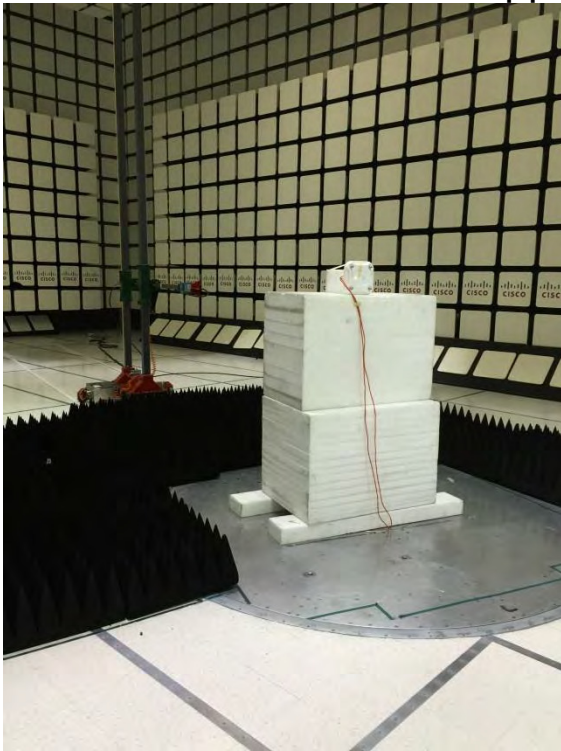

AIR-CAP3702P-B-K9 AC Conducted Emissions setup photo



Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS008447	Cisco / NSA 10m Chamber	NSA 10m Chamber	14-Oct-14	14-Oct-15	B.2
CIS030652	Sunol Sciences / JB1	Combination Antenna, 30MHz-2GHz	5-Nov-14	5-Nov-15	B.2
CIS033988	Agilent /E4446A	PSA Spectrum Analyzer	9-Dec-14	9-Dec-15	B.1
CIS044940	ROHDE & SCHWARZ / ESU40	EMI RECEIVER, 40GHZ	27-May-15	27-May-16	B.1
CIS041929	Newport /iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	20-Dec-14	20-Dec-15	B.1, B.2
CIS024998	MICRO-COAX / UFB197C-1-0240-504504	Coaxial RF Cable, 26.5 GHz	11-Mar-15	11-Mar-16	B.1, B.2
CIS035284	ETS Lindgren / 3117	Double Ridged Horn Antenna	16-Sep-14	16-Sep-15	B.1
CIS049516	Keysight / N9030A	PXA Spectrum Analyzer	12-Nov-14	12-Nov-15	B.1, B.2
CIS043124	Cisco /Above 1GHz Site Cal	Above 1GHz Cspr Site Verification	15-Jan-15	15-Jan-16	B.1
CIS008166	HP / 8491B Opt 010	10dB Attenuator	2-Feb-15	2-Feb-16	B.1
CIS020975	Micro-Coax / UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	18-Feb-15	18-Feb-16	B.1, B.2
CIS030559	Micro-Coax / UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	20-Feb-15	20-Feb-16	B.1, B.2
CIS003003	HP / 83731B	Synthesized Signal Generator	13-Mar-15	13-Mar-16	B.1
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS041979	Cisco / 1840	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS047410	Agilent / N9038A	EMI Receiver	17-Feb-15	17-Feb-16	B.1, B.2
CIS051642	Huber+Suhner / Sucoflex 106PA	RF N Type Cable 8.5m	10-Feb-15	10-Feb-16	B.1, B.2
Test Equipment used for AC Mains Conducted Emissions					
CIS008192	Fischer Custom Communications FCC-450B-2.4-N	Instrumentation Limiter	28-JUL-15	28-JUL-16	B.3
CIS008197	TTE /H613-150K-50-21378	Hi Pass Filter - 150KHz cutoff	16-APR-15	16-APR-16	B.3
CIS008471	Bird / 5-T-MB	50 Ohm, 5W Terminator, Type BNC	18-SEP-14	18-SEP-15	B.3
CIS019337	Fischer Custom Communications FCC-LISN-50/250-50-2-01	LISN	08-SEP-14	08-SEP-15	B.3
CIS019136	Fischer Custom Communications FCC-801-M3-32A	Power Line Coupling/Decoupling Network	12-NOV-14	12-NOV-15	B.3
CIS023874	Fischer Custom Communications FCC-LISN-PA-NEMA-5-15	Power Adaptor, Polarized 120VAC	08-SEP-14	08-SEP-15	B.3
CIS035235	Lufkin / HY1035CME	5 Meter Tape Measure	Cal Not Required	N/A	B.3
CIS036031	York / CNE V	Comparison Noise Emitter	Cal Not Required	N/A	B.3
CIS039110	Coleman /RG-223	25 ft BNC cable	24-NOV-14	24-NOV-15	B.3
CIS045050	ROHDE & SCHWARZ/ ESCI	EMI Test Receiver	31-Oct-2014	31 Oct 2015	B.3
RF Conducted at output antenna port					
CIS050721	N9030A/ Keysight	PXA Signal Analyzer	13-Apr-16	13-Apr-16	A1 thru A4
CIS054609	ZFSC-2-10G /Mini-Circuits	Splitter	01-June-15	01-June-16	A1 thru A4

CIS054608	D3C2060 / Ditom	Splitter	01-June-15	01-June-16	A1 thru A4
CIS054607	PS4-09-452/4S/ Pulsar	Splitter	01-June-15	01-June-16	A1 thru A4
CIS054606	BRC50705-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054605	BRC50703-02 / Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054604	BRC50704-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054603	BRM50702-02/ Micro-Tronics	Notch Filter	01-June-15	01-June-16	A1 thru A4
CIS054637	BWS30-W2/ Aeroflex	SMA 30dB Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054636	BWS20-W2/ Aeroflex	20dB SMA Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054625	RA08-S1S1-24/Megaphase	SMA cable 24"	02-June-15	02-June-16	A1 thru A4
CIS054624	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054623	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054622	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4
CIS054621	RA08-S1S1-18/Megaphase	SMA cable 18"	02-June-15	02-June-16	A1 thru A4

Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

End