



Test Report
AIR-AP1572xxx-B-K9

(Where x = model options not effecting the radio module)

FCC ID: LDK102093P

5725-5850 MHz

Antenna Gain = 14dBi

Point to Point Cross Polarized Directional antenna

Against the following Specifications:

CFR47 Part 15.247

Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

Test Engineer: *Bud Chilton*

Date: 6/11/2014



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW3

 1.1 TEST SUMMARY3

SECTION 2: ASSESSMENT INFORMATION4

 2.1 GENERAL4

 2.2 DATE OF TESTING5

 2.3 REPORT ISSUE DATE5

 2.4 TESTING FACILITIES5

 2.5 EQUIPMENT ASSESSED (EUT)5

 2.6 EUT DESCRIPTION6

SECTION 3: SAMPLE DETAILS8

APPENDIX A: EMISSION TEST RESULTS9

 TARGET MAXIMUM CHANNEL POWER9

 6DB BANDWIDTH10

 99% AND 26DB BANDWIDTH18

 PEAK OUTPUT POWER26

 POWER SPECTRAL DENSITY184

 CONDUCTED SPURIOUS EMISSION192

 CONDUCTED BANDEDGE508

APPENDIX B: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST516

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.247	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
 - 110V 60 Hz (+/-20%)
 - 220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



2.2 Date of Testing

14-May-2014

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

Bud Chiller

2.5 Equipment Assessed (EUT)

AIR-AP1572xxx-B-K9



2.6 EUT Description

The AIR-AP1572xxx-B-K9 Cisco Aironet 802.11ac Radio Modules support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT20, One Antenna, 6 to 54 Mbps
Non HT/VHT20, Two Antennas, 6 to 54 Mbps
Non HT/VHT20, Three Antennas, 6 to 54 Mbps
Non HT/VHT20, Four Antennas, 6 to 54 Mbps

Non HT/VHT20 Beam Forming, Two Antennas, 6 to 54 Mbps
Non HT/VHT20 Beam Forming, Three Antennas, 6 to 54 Mbps
Non HT/VHT20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT/VHT20, One Antenna, M0 to M7, M0.1 to M9.1
HT/VHT20, Two Antennas, M0 to M15, M0.1 to M9.2
HT/VHT20, Three Antennas, M0 to M23, M0.1 to M9.3
HT/VHT20, Four Antennas, M0 to M23, M0.1 to M9.3

HT/VHT20 Beam Forming, Two Antennas, M0 to M15, M0.1 to M9.2
HT/VHT20 Beam Forming, Three Antennas, M0 to M23, M0.1 to M9.3
HT/VHT20 Beam Forming, Four Antennas, M0 to M23, M0.1 to M9.3

HT/VHT20 STBC, Two Antennas, M0 to M7, M0.1 to M9.1
HT/VHT20 STBC, Three Antennas, M0 to M7, M0.1 to M9.1
HT/VHT20 STBC, Four Antennas, M0 to M7, M0.1 to M9.1

Non HT/VHT40 Duplicate, One Antenna, 6 to 54 Mbps
Non HT/VHT40 Duplicate, Two Antennas, 6 to 54 Mbps
Non HT/VHT40 Duplicate, Three Antennas, 6 to 54 Mbps
Non HT/VHT40 Duplicate, Four Antennas, 6 to 54 Mbps

HT/VHT40, One Antenna, M0 to M7, M0.1 to M9.1
HT/VHT40, Two Antennas, M0 to M15, M0.1 to M9.2
HT/VHT40, Three Antennas, M0 to M23, M0.1 to M9.3
HT/VHT40, Four Antennas, M0 to M23, M0.1 to M9.3

HT/VHT40 Beam Forming, Two Antennas, M0 to M15, M0.1 to M9.2
HT/VHT40 Beam Forming, Three Antennas, M0 to M23, M0.1 to M9.3
HT/VHT40 Beam Forming, Four Antennas, M0 to M23, M0.1 to M9.3

HT/VHT40 STBC, Two Antennas, M0 to M7, M0.1 to M9.1
HT/VHT40 STBC, Three Antennas, M0 to M7, M0.1 to M9.1
HT/VHT40 STBC, Four Antennas, M0 to M7, M0.1 to M9.1

Non HT/VHT80 Duplicate, One Antenna, 6 to 54 Mbps
Non HT/VHT80 Duplicate, Two Antennas, 6 to 54 Mbps
Non HT/VHT80 Duplicate, Three Antennas, 6 to 54 Mbps
Non HT/VHT80 Duplicate, Four Antennas, 6 to 54 Mbps

HT/VHT80, One Antenna, M0 to M7, M0.1 to M9.1
HT/VHT80, Two Antennas, M0 to M15, M0.1 to M9.2
HT/VHT80, Three Antennas, M0 to M23, M0.1 to M9.3
HT/VHT80, Four Antennas, M0 to M23, M0.1 to M9.3



HT/VHT80 Beam Forming, Two Antennas, M0 to M15, M0.1 to M9.2
 HT/VHT80 Beam Forming, Three Antennas, M0 to M23, M0.1 to M9.3
 HT/VHT80 Beam Forming, Four Antennas, M0 to M23, M0.1 to M9.3

HT/VHT80 STBC, Two Antennas, M0 to M7, M0.1 to M9.1
 HT/VHT80 STBC, Three Antennas, M0 to M7, M0.1 to M9.1
 HT/VHT80 STBC, Four Antennas, M0 to M7, M0.1 to M9.1

The following antennas are supported by this product series.
 The data included in this report represent the worst case data for all 14 dBi antennas

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	Comment
5 GHz	AIR-ANT5140V-N	5GHZ Omni	4	
	AIR-ANT5175V-N	5GHZ Omni	7.5	
	AIR-ANT5180V-N	5GHZ Omni	8	
	AIR-ANT5114P-N	5GHz Patch	14	
	AIR-ANT5114P2M-N	Patch, dual polarized	14	
Dual Band	AIR-ANT2588P3M-N	Dual Band 3 element DIRECTIONAL	8 / 8	
	AIR-ANT2547V(G)-N	Dual Band Omni	4 / 7	(G) indicates gray color
	AIR-ANT2568V(G)-N	Dual Band Omni	6 / 8	(G) indicates gray color
	AIR-ANT2513P4M-N	Dual-Band Polarization Diverse Patch Array	13	
	Internal	Omni	4 / 6	



Section 3: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

3.1 Sample Details

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP1572EAC-B-K9		Cisco Systems	NA	NA	NA	

3.2 System Details

System #	Description	Samples
1	EUT	S01

3.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting => 98% duty cycle



Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Supported Channels

UNII-3	5745	149
	5765	153
	5785	157
	5805	161
5.8 ISM	5825	165

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
Non HT/VHT20, 6 to 54 Mbps	22	22	22
Non HT/VHT20 Beam Forming, 6 to 54 Mbps	22	21	21
HT/VHT20, M0 to M23, M0.1 to M9.3	22	22	22
HT/VHT20 Beam Forming, M0 to M23, M0.1 to M9.3	22	22	22
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	22	22	22
	5755	5795	
Non HT/VHT40, 6 to 54 Mbps	22	22	
HT/VHT40, M0 to M23, M0.1 to M9.3	22	22	
HT/VHT40 Beam Forming, M0 to M23, M0.1 to M9.3	22	22	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	22	22	
	5775		
Non HT/VHT80, 6 to 54 Mbps	21		
HT/VHT80, M0 to M23, M0.1 to M9.3	22		
HT/VHT80 Beam Forming, M0 to M23, M0.1 to M9.3	22		
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	22		



6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 5725-5850MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	100 kHz
Video Bandwidth:	100 kHz
X dB Bandwidth:	6 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
5745	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	17.5	>500	17.0
5755	Non HT/VHT40, 6 to 54 Mbps	6	36.1	>500	35.6
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	35.6	>500	35.1
5775	Non HT/VHT80, 6 to 54 Mbps	6	76.5	>500	76.0
	HT/VHT80, M0 to M23, M0.1 to M9.3	m0x1	76.5	>500	76.0
5785	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	17.6	>500	17.1
5795	Non HT/VHT40, 6 to 54 Mbps	6	35.3	>500	34.8
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	35.5	>500	35.0
5825	Non HT/VHT20, 6 to 54 Mbps	6	16.4	>500	15.9
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	17.6	>500	17.1



6dB Bandwidth, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps

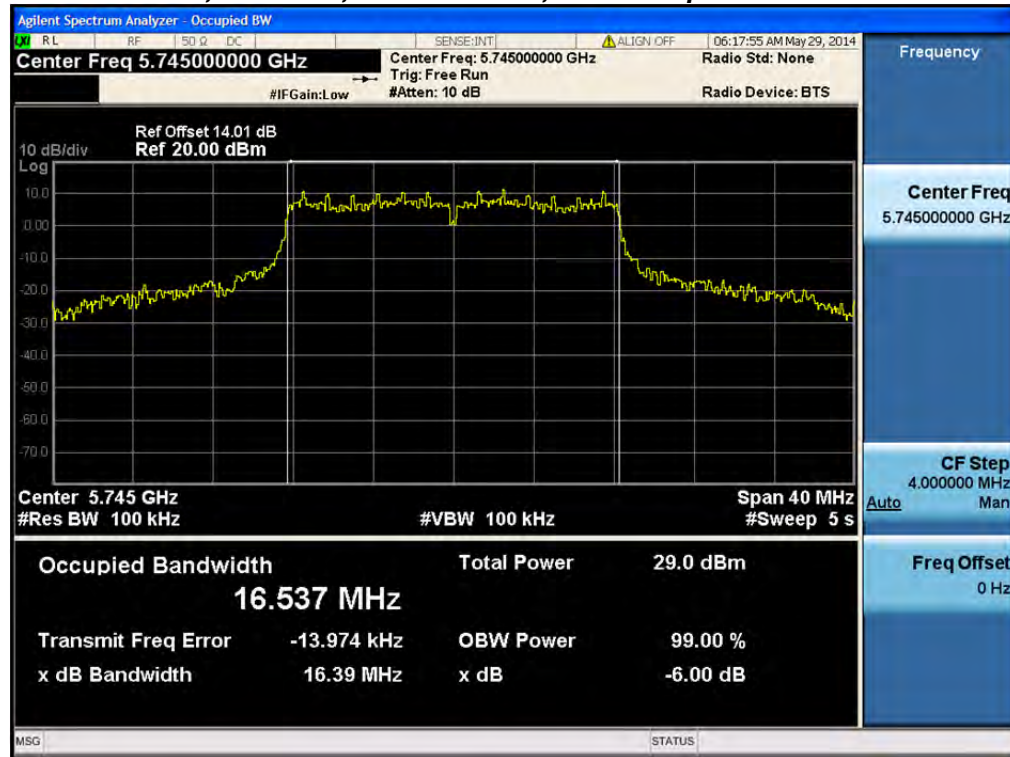

6dB Bandwidth, 5745 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

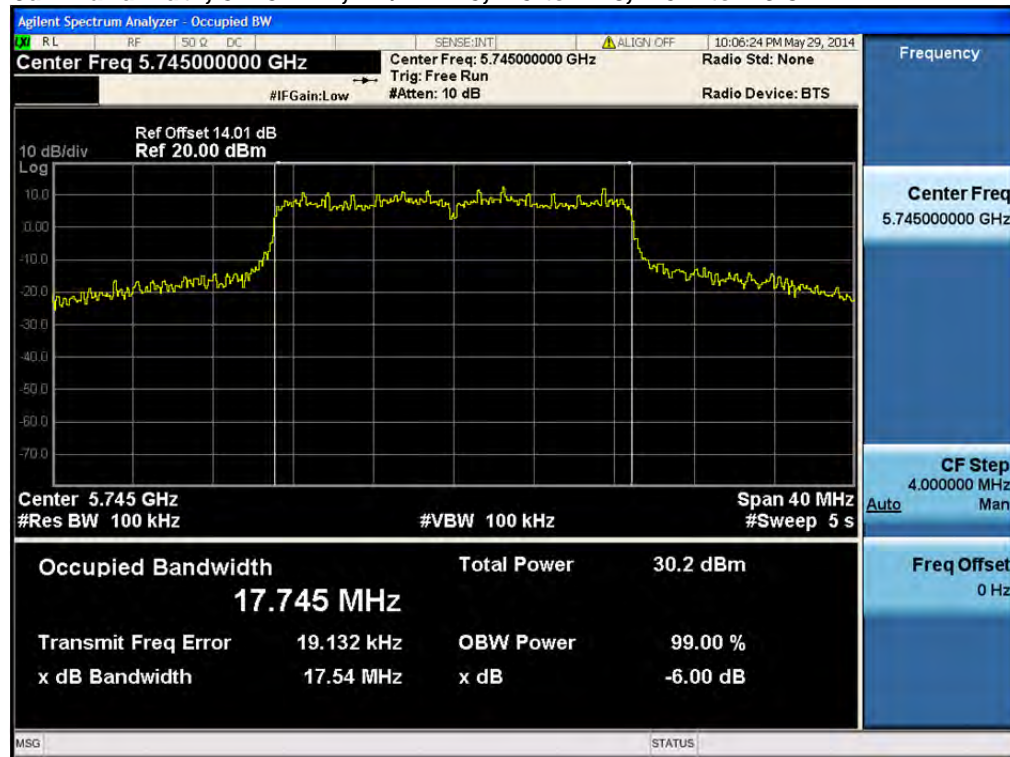




6dB Bandwidth, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps




6dB Bandwidth, 5755 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

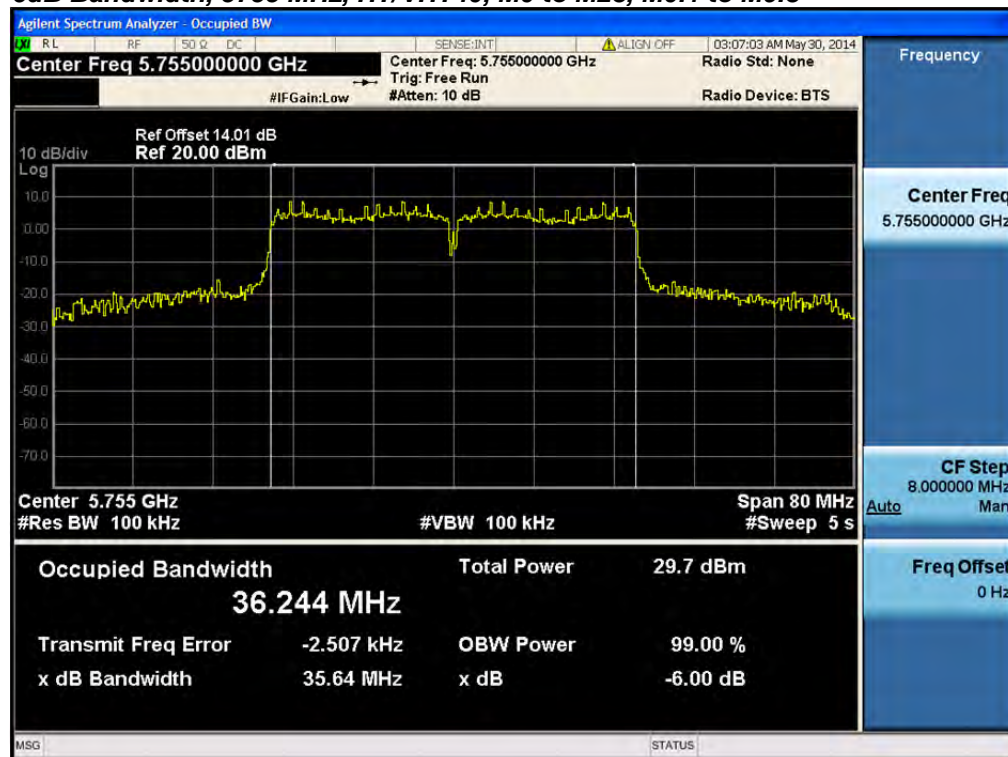




6dB Bandwidth, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps

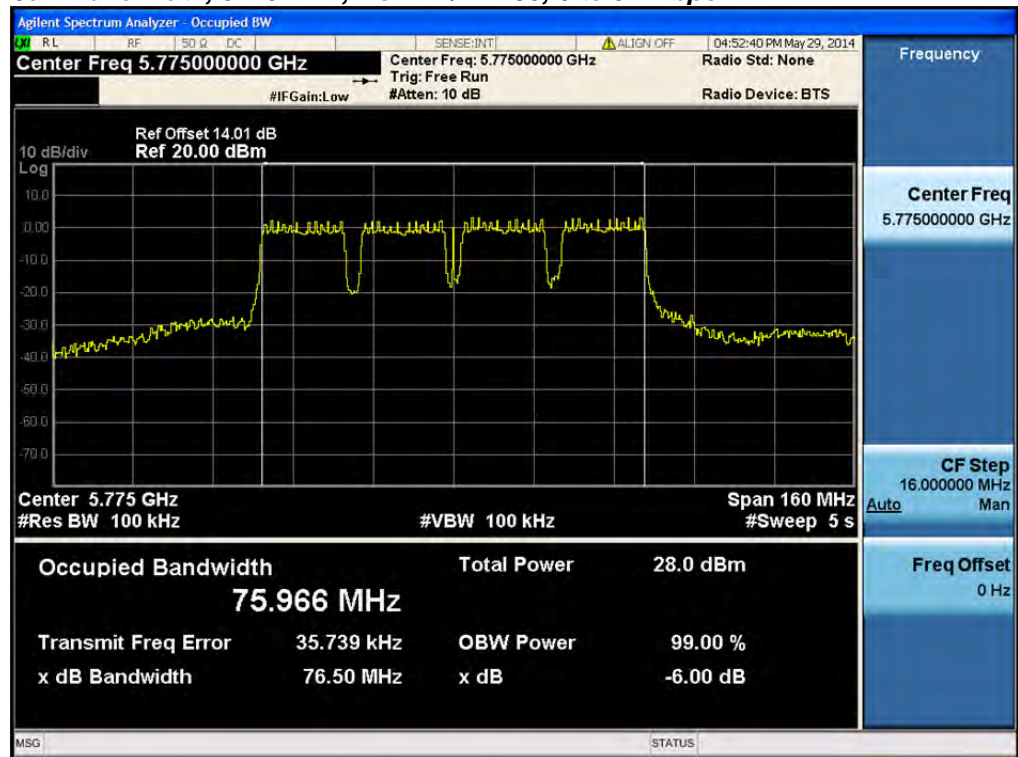


6dB Bandwidth, 5775 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3

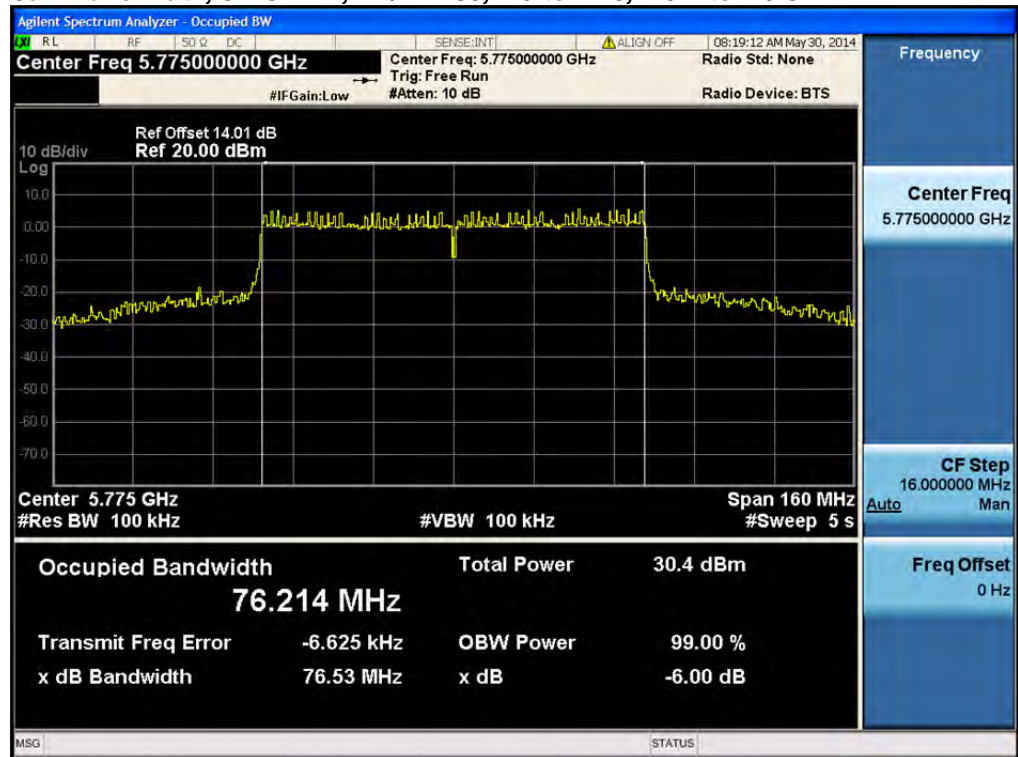




6dB Bandwidth, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

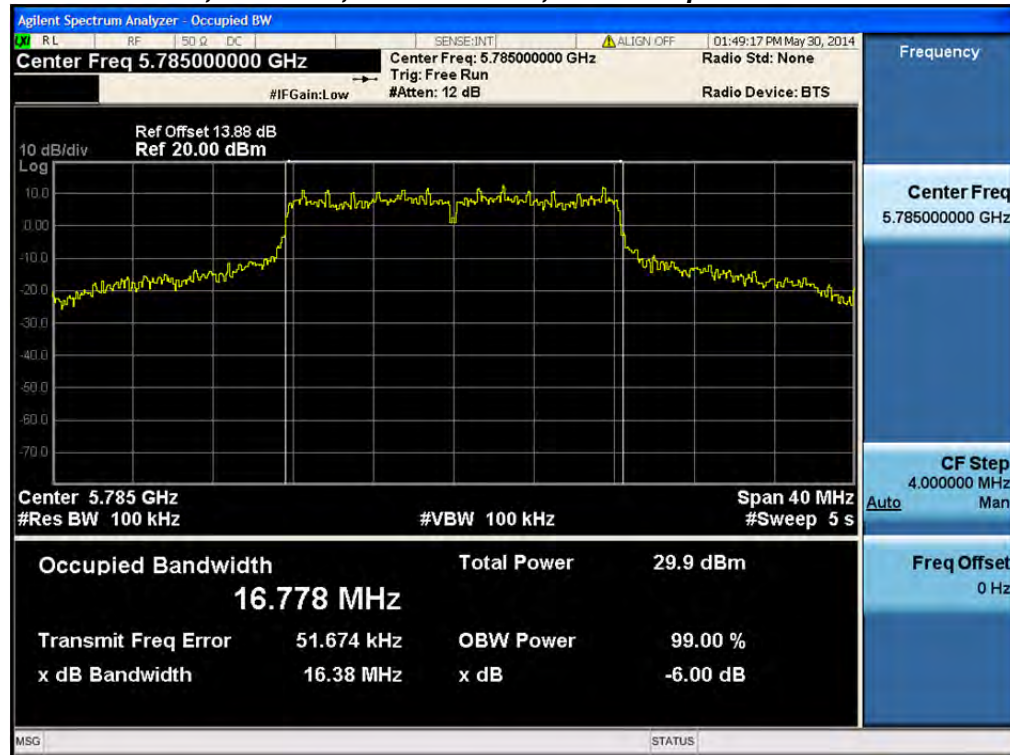


6dB Bandwidth, 5785 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

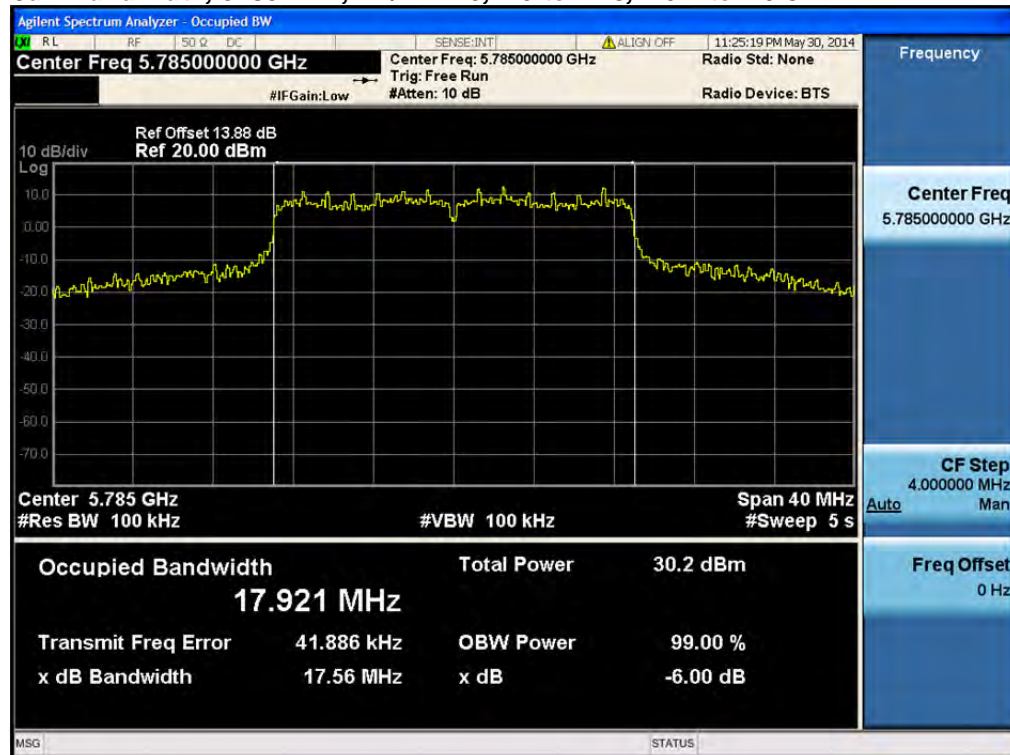




6dB Bandwidth, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

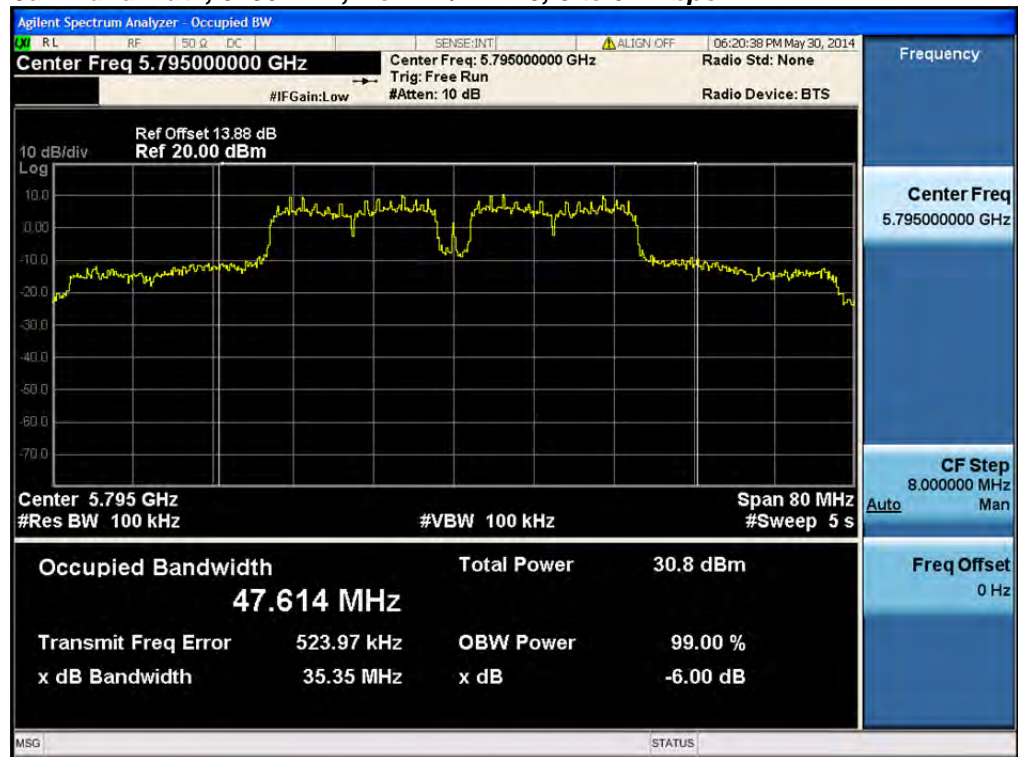


6dB Bandwidth, 5795 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

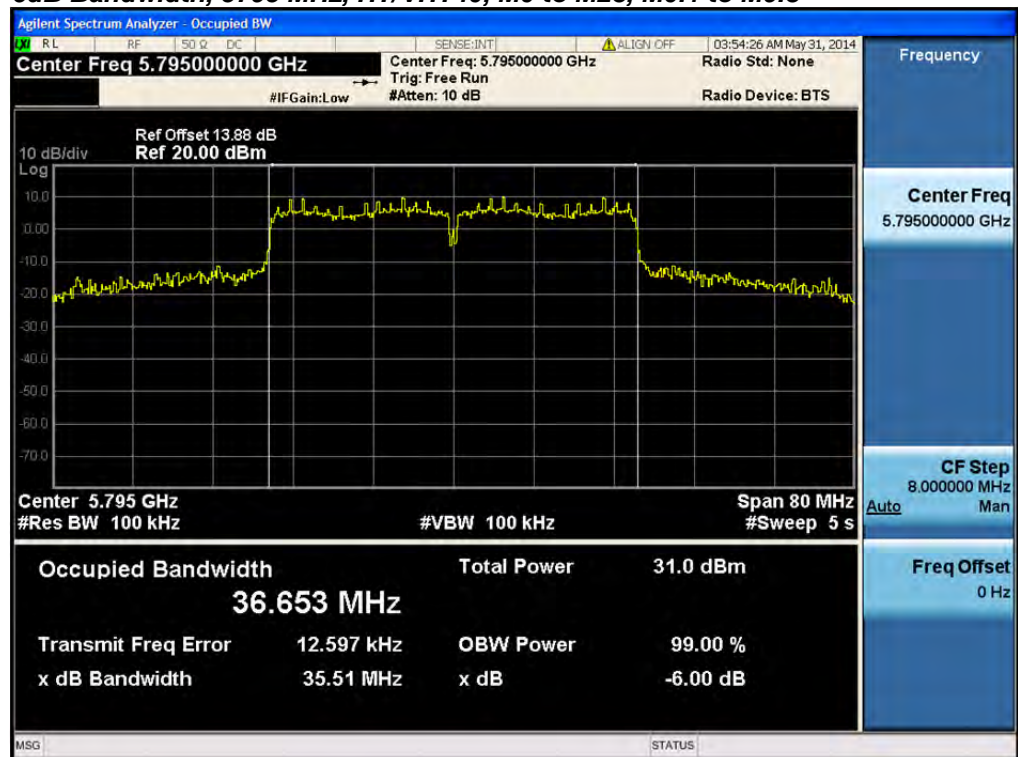




6dB Bandwidth, 5825 MHz, Non HT/VHT20, 6 to 54 Mbps

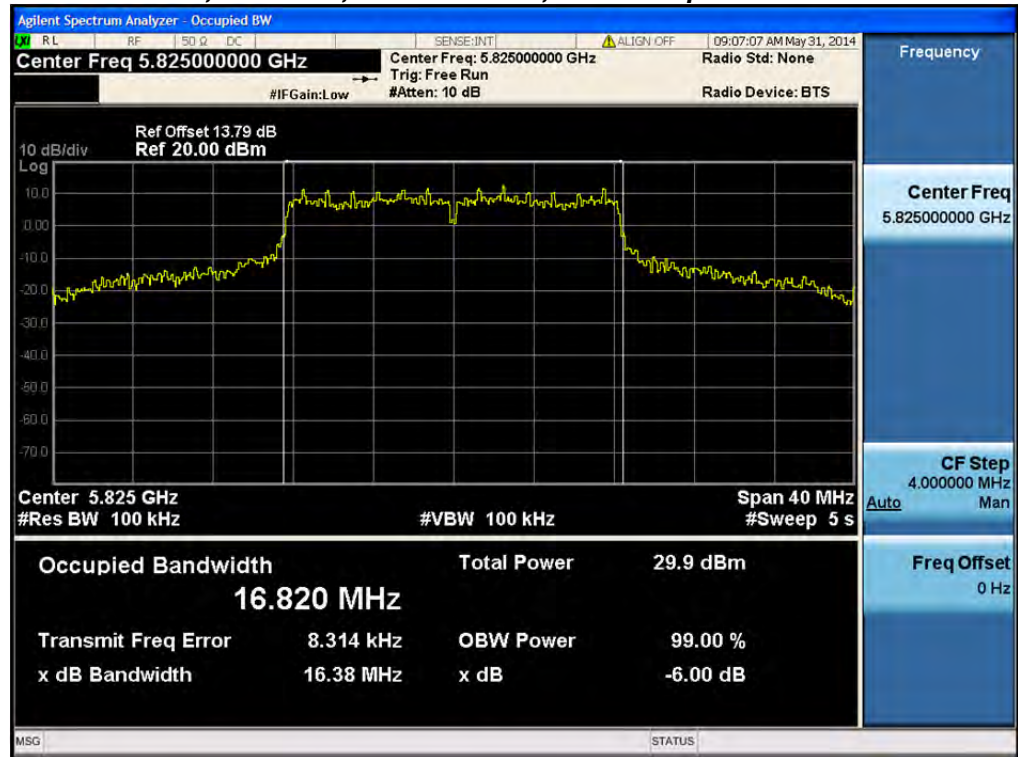

6dB Bandwidth, 5825 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

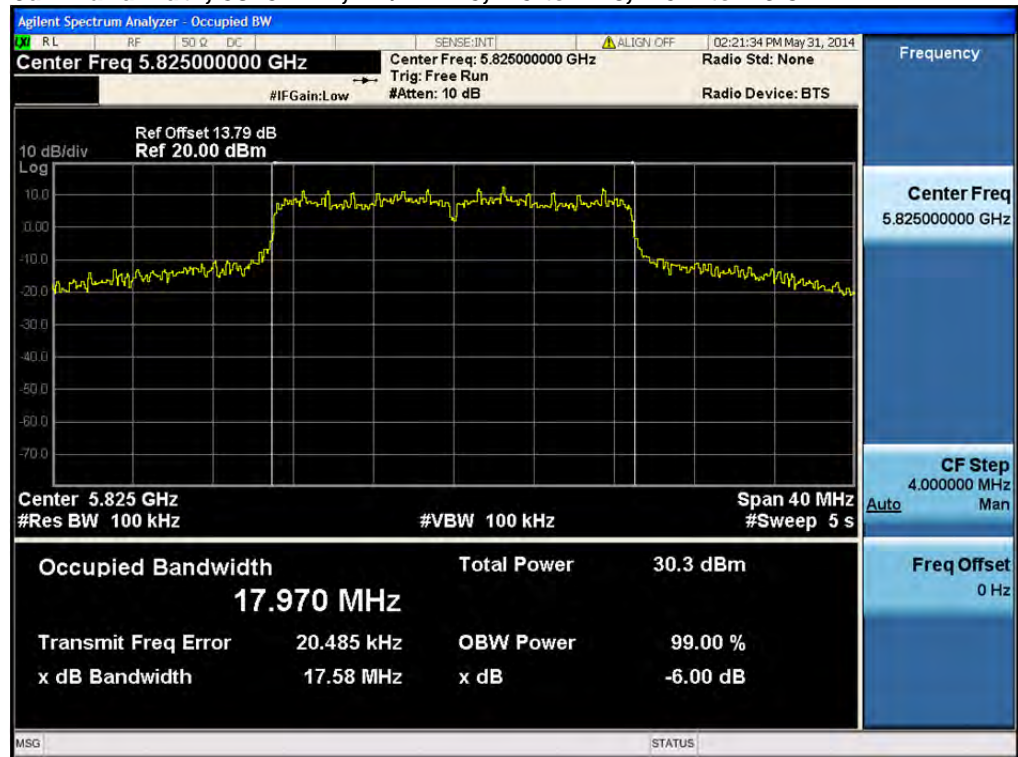



99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table be.low
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5745	Non HT/VHT20, 6 to 54 Mbps	6	19.1	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	20.5	17.7
5755	Non HT/VHT40, 6 to 54 Mbps	6	38.7	36.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	45.7	36.2
5775	Non HT/VHT80, 6 to 54 Mbps	6	79.6	76
	HT/VHT80, M0 to M23, M0.1 to M9.3	m0x1	93.8	76.1
5785	Non HT/VHT20, 6 to 54 Mbps	6	19.1	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	22.4	17.7
5795	Non HT/VHT40, 6 to 54 Mbps	6	75	41
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	67.2	36.4
5825	Non HT/VHT20, 6 to 54 Mbps	6	18.7	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	32.9	18



26dB / 99% Bandwidth, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps

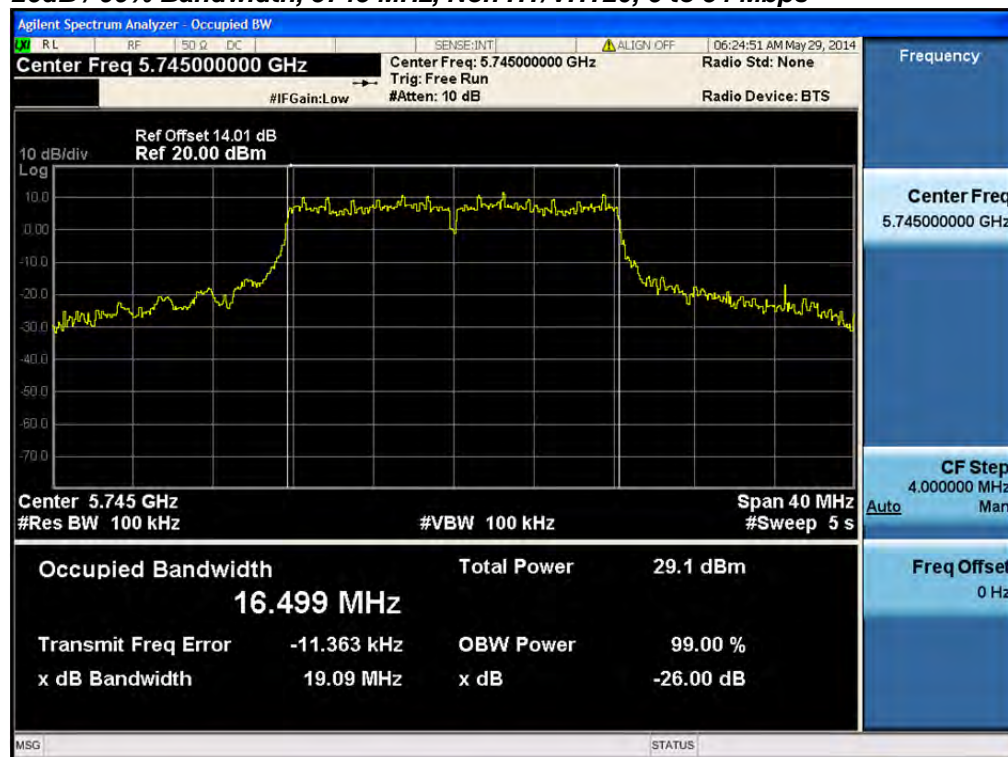


26dB / 99% Bandwidth, 5745 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

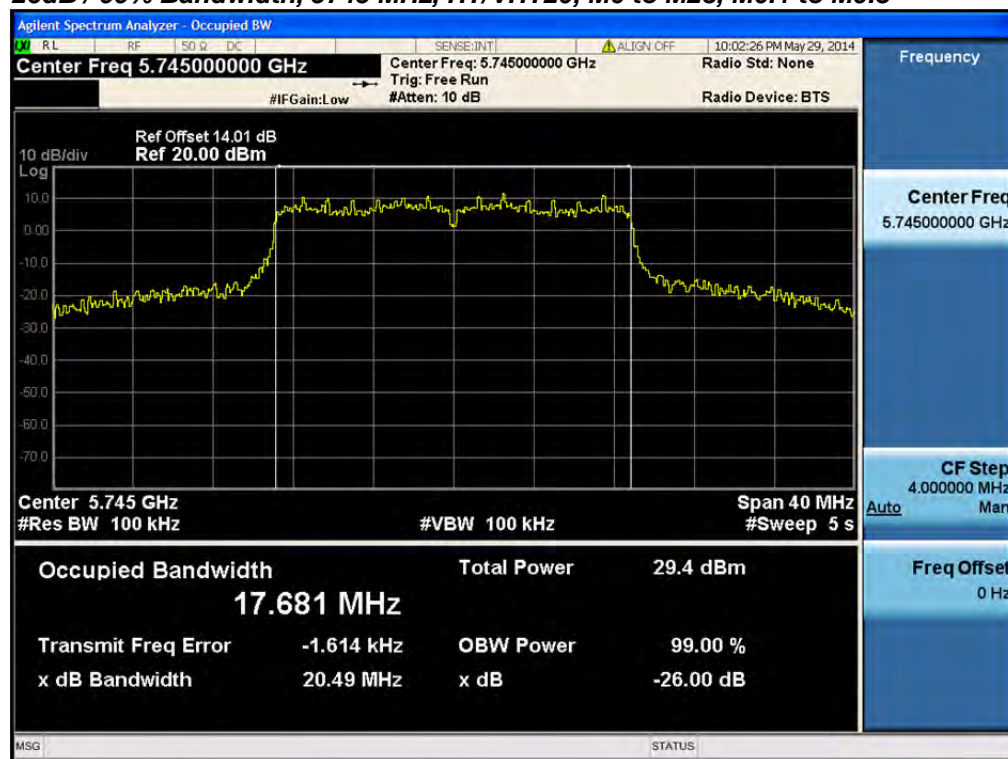




26dB / 99% Bandwidth, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps

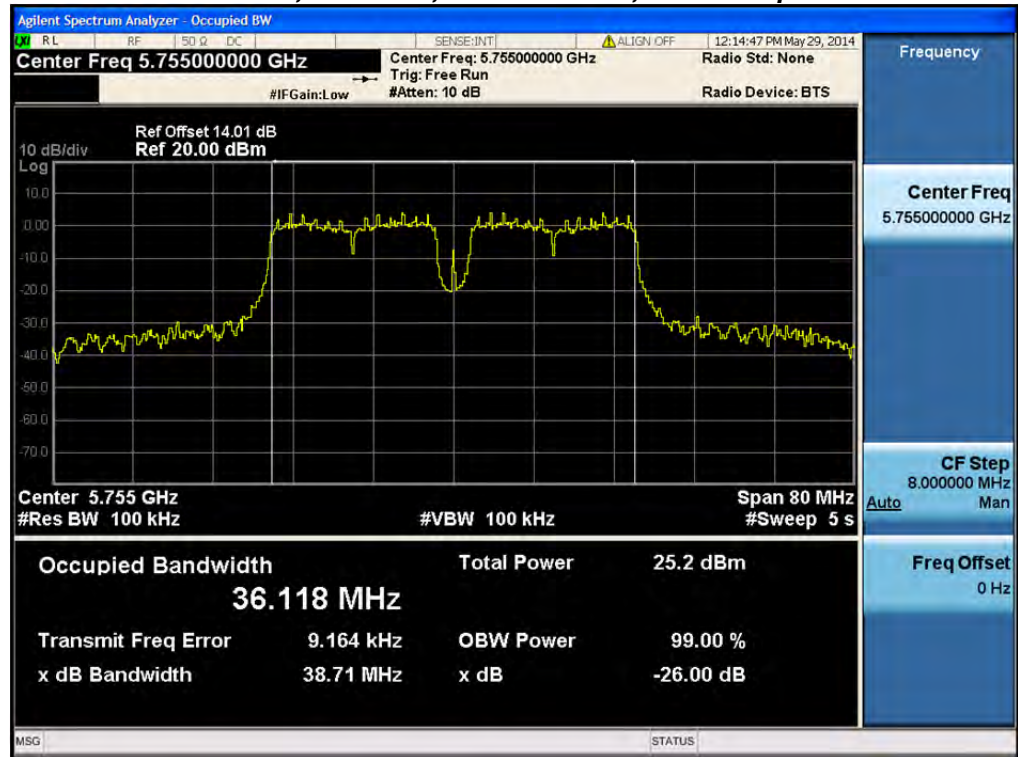


26dB / 99% Bandwidth, 5755 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

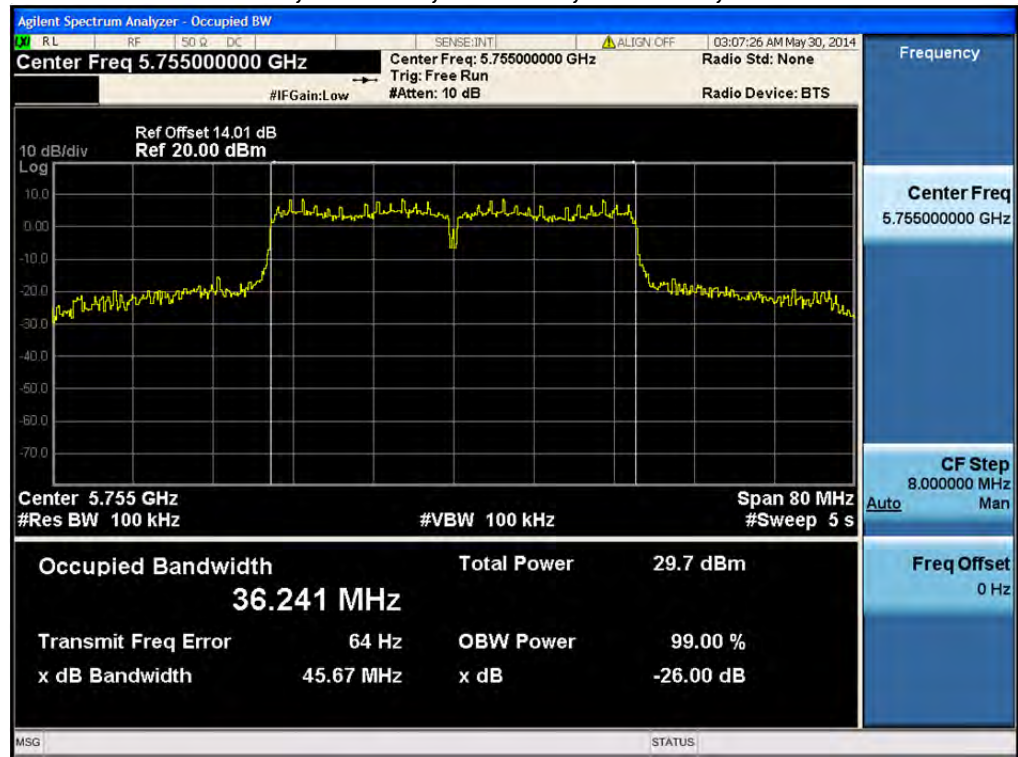




26dB / 99% Bandwidth, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps

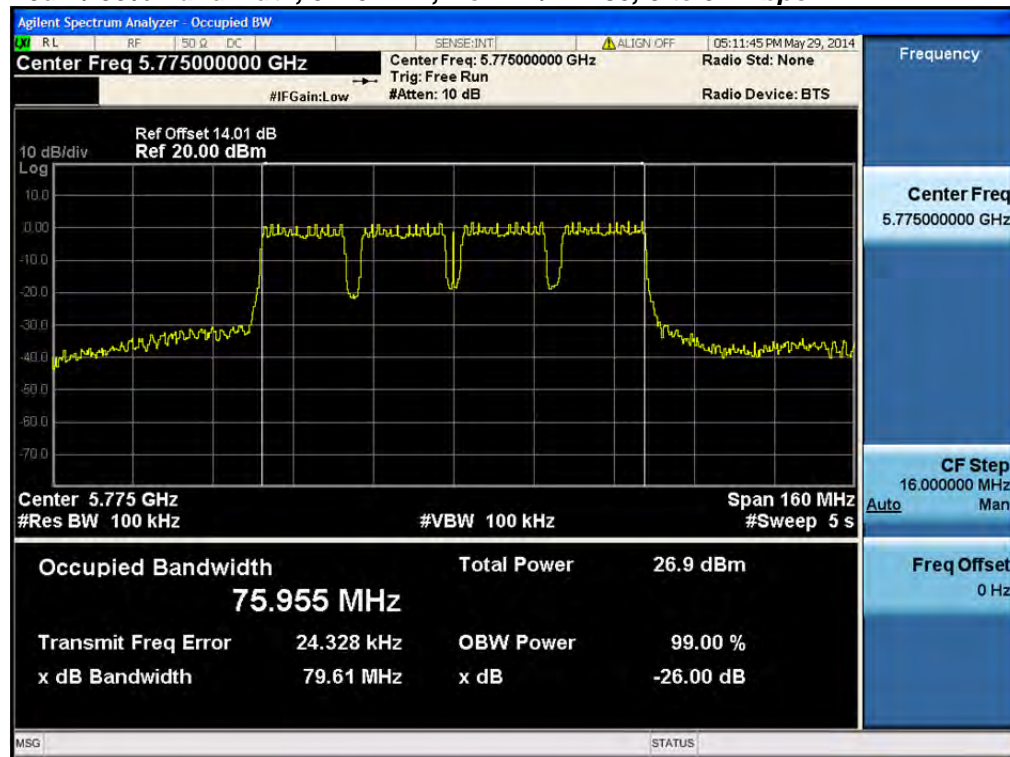


26dB / 99% Bandwidth, 5775 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3

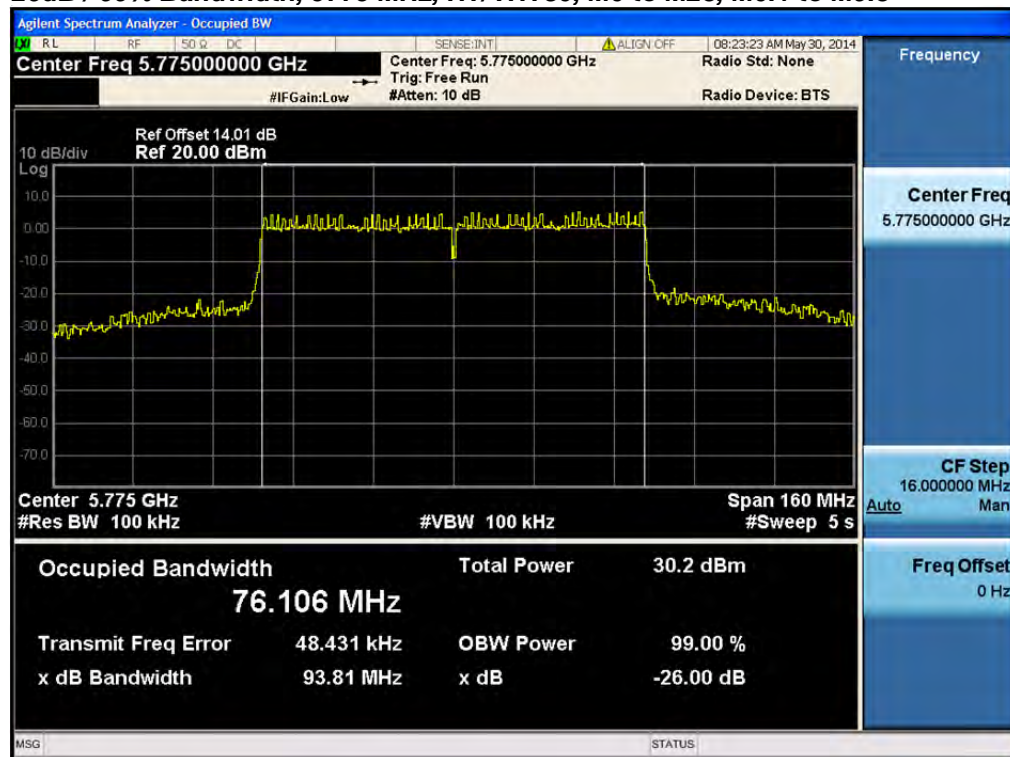




26dB / 99% Bandwidth, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

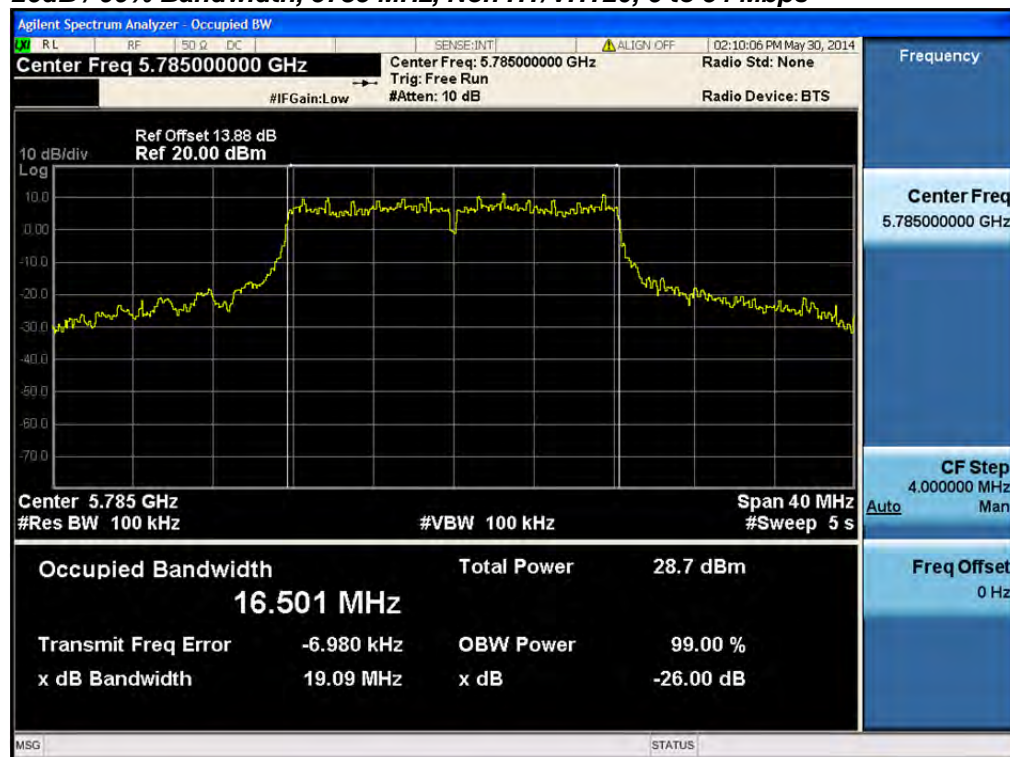


26dB / 99% Bandwidth, 5785 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

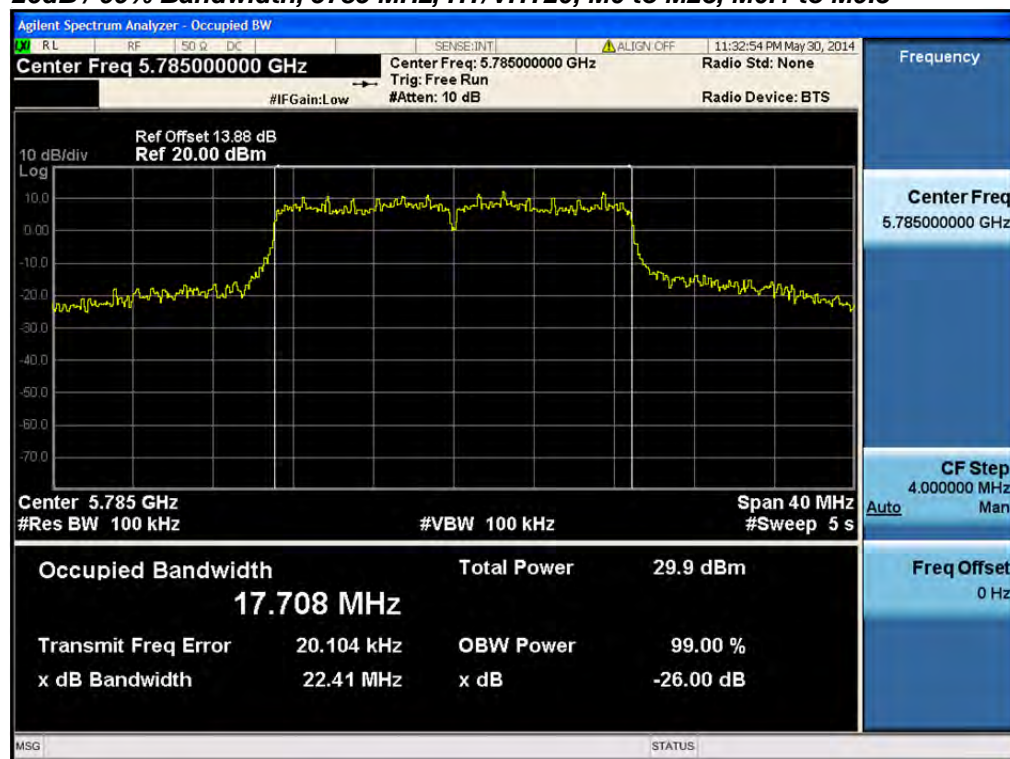




26dB / 99% Bandwidth, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

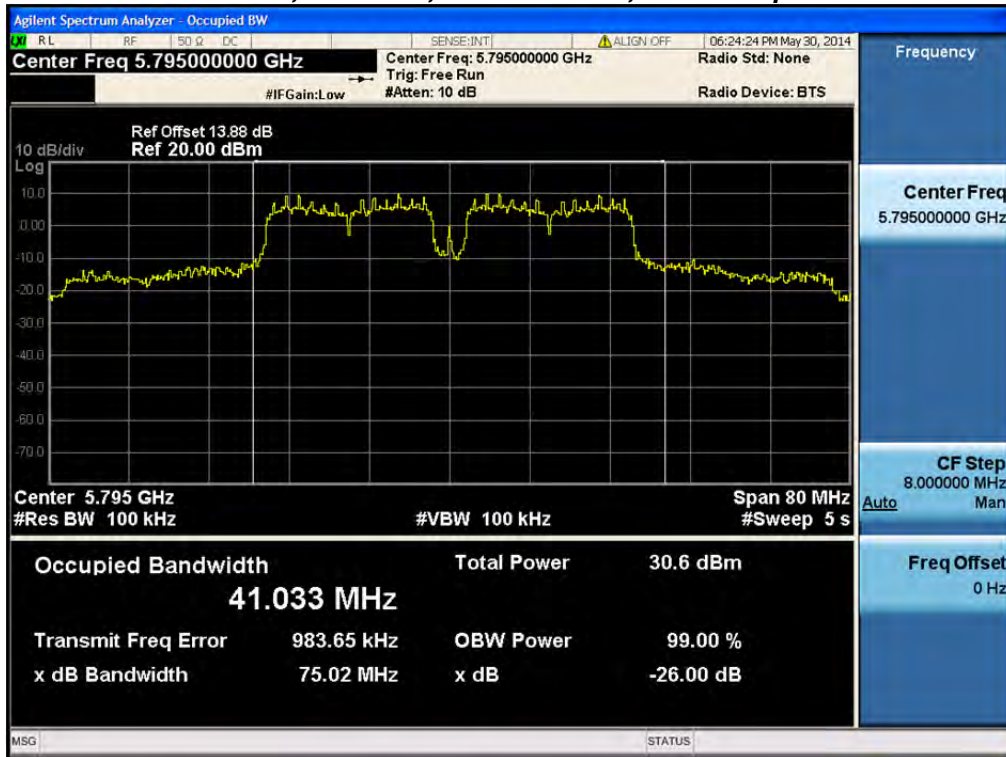


26dB / 99% Bandwidth, 5795 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

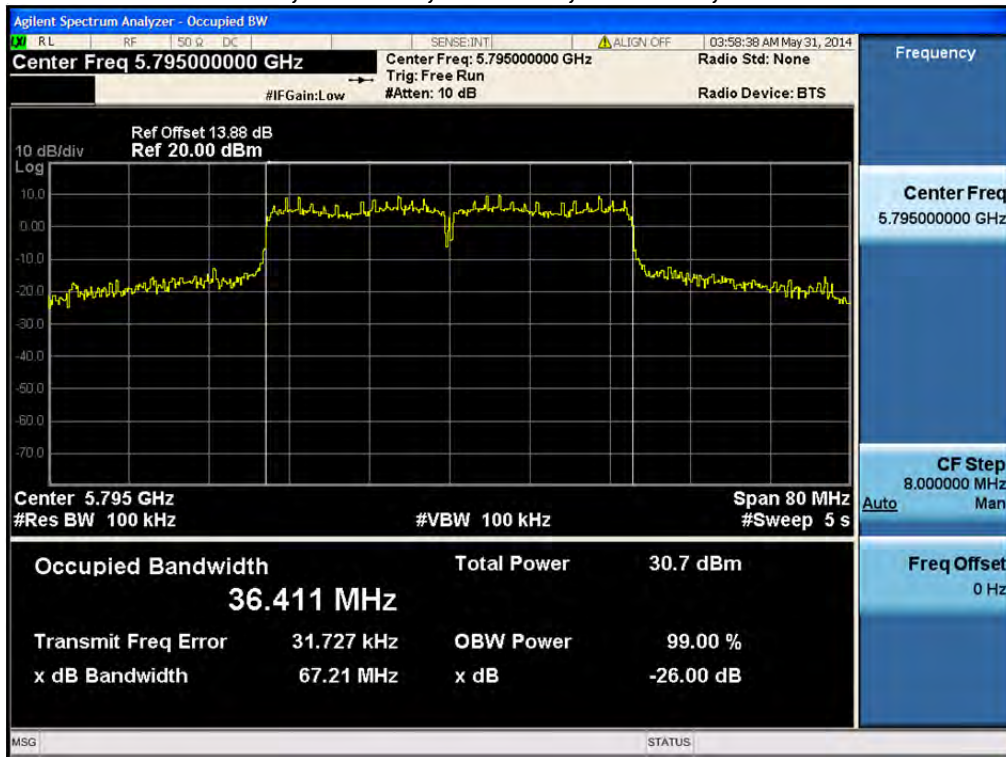




26dB / 99% Bandwidth, 5825 MHz, Non HT/VHT20, 6 to 54 Mbps

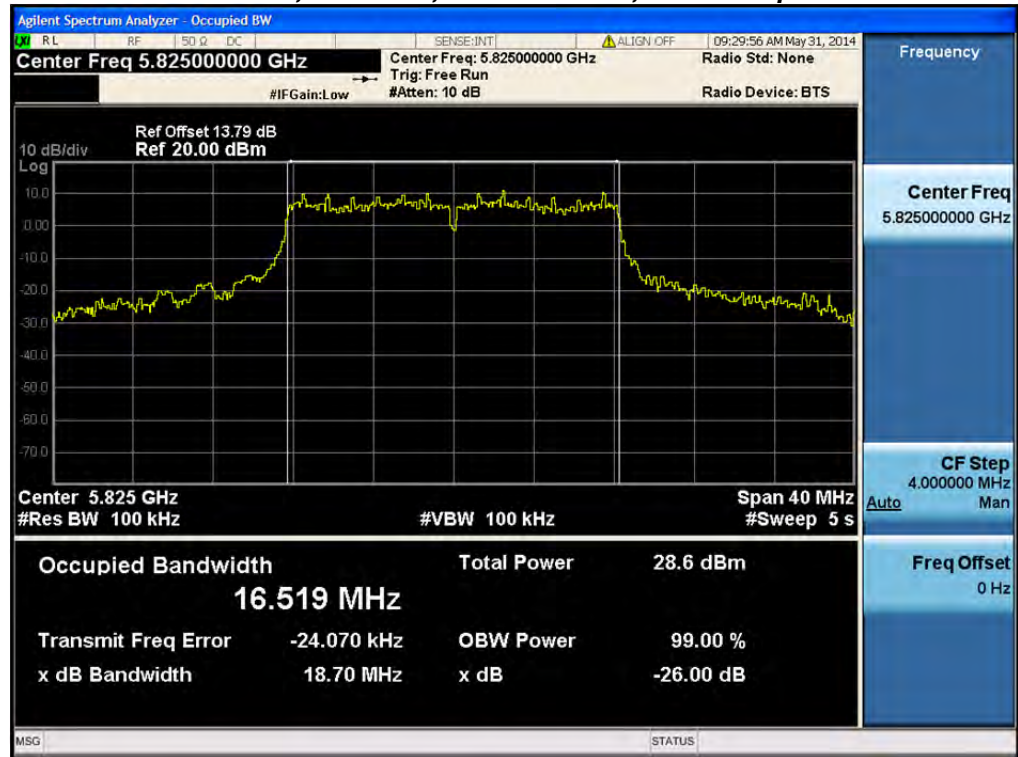

26dB / 99% Bandwidth, 5825 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

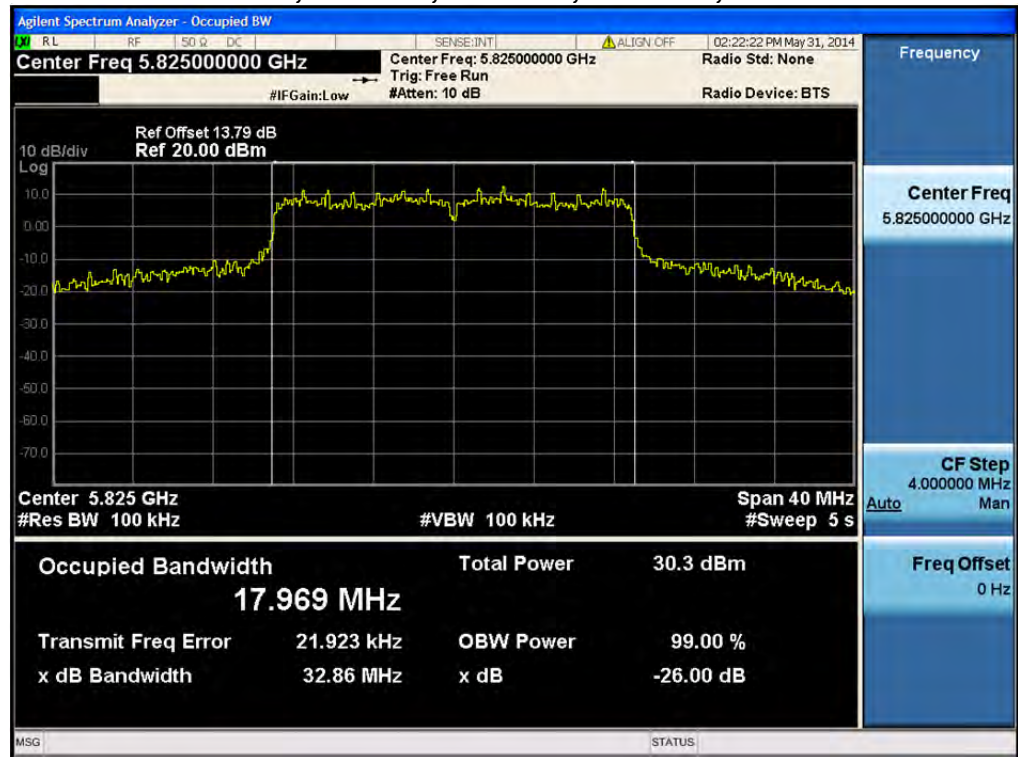



Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 5725-5850 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 14 dBi. The peak correlated gain for each mode is listed in the table below.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=26 dB BW from 26 dB Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5745	Non HT/VHT20, 6 to 54 Mbps	1	14	21.5				21.5	22.0	0.5
	Non HT/VHT20, 6 to 54 Mbps	2	14	18.6	19.0			21.8	22.0	0.2
	Non HT/VHT20, 6 to 54 Mbps	3	14	16.6	17.1	16.4		21.5	22.0	0.5
	Non HT/VHT20, 6 to 54 Mbps	4	14	15.5	16.1	15.4	15.9	21.8	22.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	14	18.6	19.0			21.8	22.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	17	13.4	14.1	13.7		18.5	19.0	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	17	12.4	13.0	12.5	12.9	18.7	19.0	0.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	14	21.3				21.3	22.0	0.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	14	18.3	19.0			21.7	22.0	0.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	14	18.3	19.0			21.7	22.0	0.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	18.3	19.0			21.7	22.0	0.3
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	18.3	19.0			21.7	22.0	0.3
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.4	13.9	13.2		18.3	19.0	0.7
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	12.4	13.0	12.2	12.8	18.6	19.0	0.4
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	14	18.3	19.0			21.7	22.0	0.3	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	14	16.0	16.6	16.2		21.0	22.0	1.0	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	14	15.3	15.5	15.3	15.8	21.5	22.0	0.5	
5755	Non HT/VHT40, 6 to 54 Mbps	1	14	19.3				19.3	22.0	2.7
	Non HT/VHT40, 6 to 54 Mbps	2	14	18.3	18.8			21.6	22.0	0.4
	Non HT/VHT40, 6 to 54 Mbps	3	14	16.4	16.8	16.4		21.3	22.0	0.7
	Non HT/VHT40, 6 to 54 Mbps	4	14	15.4	15.8	15.5	16.0	21.7	22.0	0.3
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	14	21.5				21.5	22.0	0.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	14	18.7	19.0			21.9	22.0	0.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	14	18.7	19.0			21.9	22.0	0.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	14	16.2	17.1	16.4		21.4	22.0	0.6



	HT/VHT40, M8 to M15, M0.2 to M9.2	3	14	16.2	17.1	16.4		21.4	22.0	0.6
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	14	16.2	17.1	16.4		21.4	22.0	0.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	18.7	19.0			21.9	22.0	0.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	18.7	19.0			21.9	22.0	0.1
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.5	14.1	13.4		18.4	19.0	0.6
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	16.2	17.1	16.4		21.4	22.0	0.6
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	16.2	17.1	16.4		21.4	22.0	0.6
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	12.6	13.2	12.3	12.9	18.8	19.0	0.2
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	14	18.7	19.0			21.9	22.0	0.1
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	14	16.2	17.1	16.4		21.4	22.0	0.6
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	14	15.4	15.9	15.4	15.9	21.7	22.0	0.3
5775	Non HT/VHT80, 6 to 54 Mbps	1	14	20.2				20.2	22.0	1.8
	Non HT/VHT80, 6 to 54 Mbps	2	14	18.1	18.5			21.3	22.0	0.7
	Non HT/VHT80, 6 to 54 Mbps	3	14	16.0	16.6	16.2		21.0	22.0	1.0
	Non HT/VHT80, 6 to 54 Mbps	4	14	15.0	15.8	15.2	15.7	21.5	22.0	0.5
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	14	22.0				22.0	22.0	0.0
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	14	18.3	18.8			21.6	22.0	0.4
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	14	18.3	18.8			21.6	22.0	0.4
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	14	15.9	16.5	16.3		21.0	22.0	1.0
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	14	15.9	16.5	16.3		21.0	22.0	1.0
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	14	15.9	16.5	16.3		21.0	22.0	1.0
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	18.3	18.8			21.6	22.0	0.4
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	18.3	18.8			21.6	22.0	0.4
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.3	13.5	13.3		18.1	19.0	0.9
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	15.9	16.5	16.3		21.0	22.0	1.0
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	15.9	16.5	16.3		21.0	22.0	1.0
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	12.3	12.5	12.3	12.8	18.5	19.0	0.5
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5
HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	14	18.3	18.8			21.6	22.0	0.4	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	14	15.9	16.5	16.3		21.0	22.0	1.0	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	14	15.3	15.5	15.3	15.9	21.5	22.0	0.5	



5785	Non HT/VHT20, 6 to 54 Mbps	1	14	21.8				21.8	22.0	0.2
	Non HT/VHT20, 6 to 54 Mbps	2	14	18.1	18.3			21.2	22.0	0.8
	Non HT/VHT20, 6 to 54 Mbps	3	14	16.1	16.4	16.2		21.0	22.0	1.0
	Non HT/VHT20, 6 to 54 Mbps	4	14	14.8	15.4	15.2	15.7	21.3	22.0	0.7
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	14	18.1	18.3			21.2	22.0	0.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	17	14.1	14.3	14.2		19.0	19.0	0.0
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	17	12.0	12.3	12.2	12.7	18.3	19.0	0.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	14	21.9				21.9	22.0	0.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	14	17.7	18.3			21.0	22.0	1.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	14	17.7	18.3			21.0	22.0	1.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	14	16.7	17.3	17.0		21.8	22.0	0.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	14	16.7	17.3	17.0		21.8	22.0	0.2
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	14	16.7	17.3	17.0		21.8	22.0	0.2
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	17.7	18.3			21.0	22.0	1.0
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	17.7	18.3			21.0	22.0	1.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.7	14.0	14.3		18.8	19.0	0.2
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	16.7	17.3	17.0		21.8	22.0	0.2
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	16.7	17.3	17.0		21.8	22.0	0.2
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	11.7	12.4	12.3	12.4	18.2	19.0	0.8
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9
HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	14	17.7	18.3			21.0	22.0	1.0	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	14	16.7	17.3	17.0		21.8	22.0	0.2	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	14	14.6	15.0	15.3	15.3	21.1	22.0	0.9	
5795	Non HT/VHT40, 6 to 54 Mbps	1	14	21.3				21.3	22.0	0.7
	Non HT/VHT40, 6 to 54 Mbps	2	14	18.3	18.6			21.5	22.0	0.5
	Non HT/VHT40, 6 to 54 Mbps	3	14	16.3	16.5	16.5		21.2	22.0	0.8
	Non HT/VHT40, 6 to 54 Mbps	4	14	15.1	15.6	15.5	16.1	21.6	22.0	0.4
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	14	21.3				21.3	22.0	0.7
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	14	18.2	18.7			21.5	22.0	0.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	14	18.2	18.7			21.5	22.0	0.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3



	HT/VHT40, M16 to M23, M0.3 to M9.3	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	18.2	18.7			21.5	22.0	0.5
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	18.2	18.7			21.5	22.0	0.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.0	13.8	13.7		18.3	19.0	0.7
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	12.1	12.8	12.7	12.9	18.7	19.0	0.3
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	14	18.2	18.7			21.5	22.0	0.5
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	14	16.2	16.8	16.6		21.3	22.0	0.7
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	14	15.1	15.8	15.8	15.9	21.7	22.0	0.3
5825	Non HT/VHT20, 6 to 54 Mbps	1	14	22.0				22.0	22.0	0.0
	Non HT/VHT20, 6 to 54 Mbps	2	14	17.9	18.5			21.2	22.0	0.8
	Non HT/VHT20, 6 to 54 Mbps	3	14	16.9	17.5	16.9		21.9	22.0	0.1
	Non HT/VHT20, 6 to 54 Mbps	4	14	14.9	15.3	15.0	15.6	21.2	22.0	0.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	14	17.9	18.5			21.2	22.0	0.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	17	13.8	14.4	14.0		18.8	19.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	17	12.0	12.6	11.9	12.7	18.3	19.0	0.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	14	21.2				21.2	22.0	0.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	14	18.0	18.1			21.1	22.0	0.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	14	18.0	18.1			21.1	22.0	0.9
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	14	17.0	17.3	17.0		21.9	22.0	0.1
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	14	17.0	17.3	17.0		21.9	22.0	0.1
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	14	17.0	17.3	17.0		21.9	22.0	0.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	14	18.0	18.1			21.1	22.0	0.9
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	14	18.0	18.1			21.1	22.0	0.9
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	17	13.9	14.3	14.0		18.8	19.0	0.2
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	14	17.0	17.3	17.0		21.9	22.0	0.1
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	14	17.0	17.3	17.0		21.9	22.0	0.1
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	17	11.9	12.3	12.0	12.6	18.2	19.0	0.8
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	14	18.0	18.1			21.1	22.0	0.9
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	14	17.0	17.3	17.0		21.9	22.0	0.1	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	14	14.9	15.2	15.0	15.6	21.2	22.0	0.8	



Peak Output Power, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps




Antenna A



Peak Output Power, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A

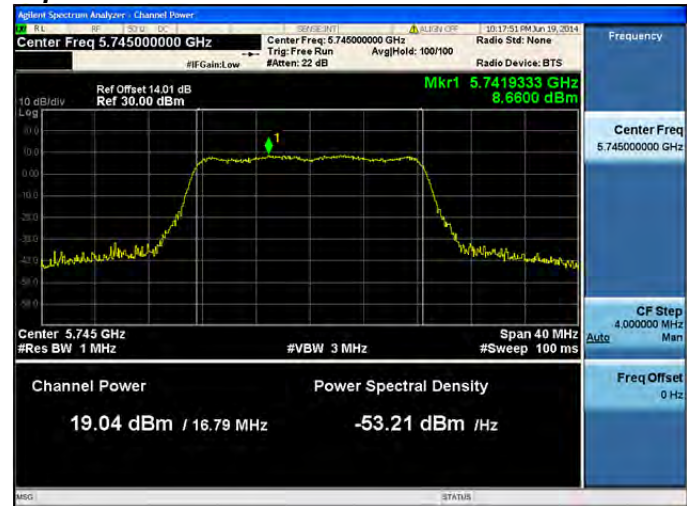


Antenna B




Peak Output Power, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A

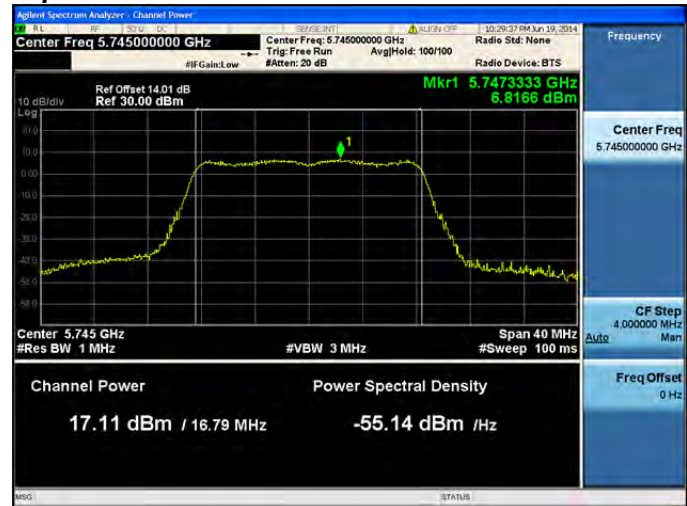

Antenna B

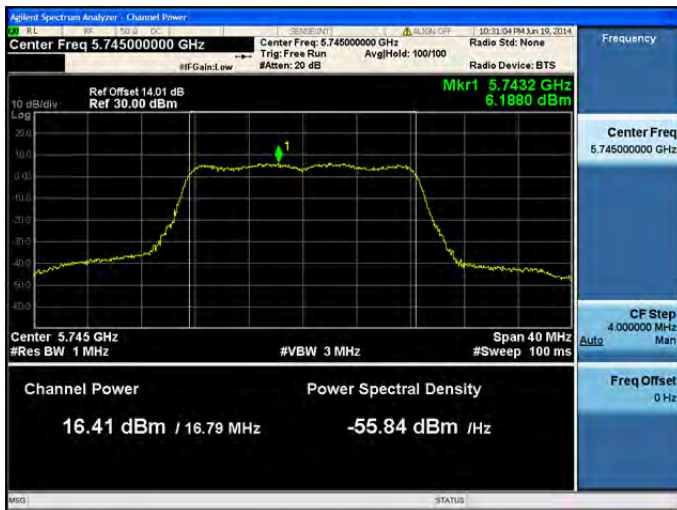


Antenna C



Peak Output Power, 5745 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A

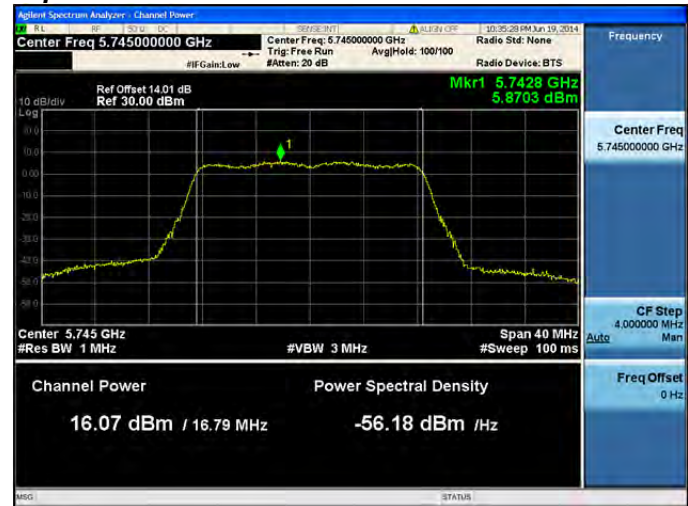

Antenna B



Antenna C




Antenna D



Peak Output Power, 5745 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



Antenna A

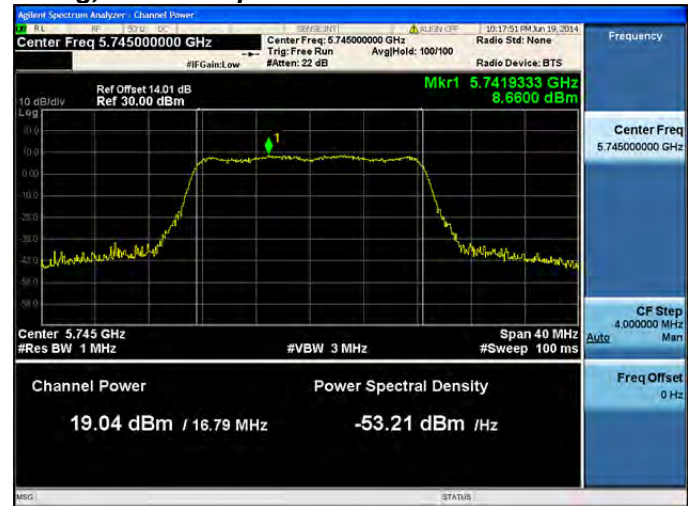


Antenna B



Peak Output Power, 5745 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



Antenna A

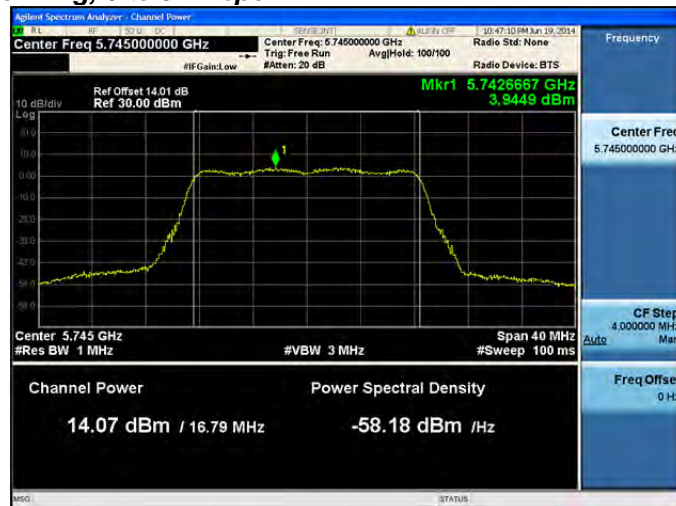

Antenna B




Antenna C




Peak Output Power, 5745 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps




Antenna A

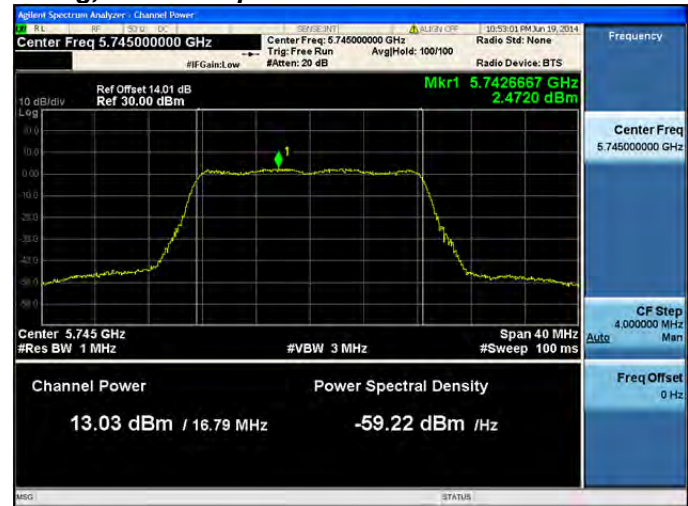

Antenna B

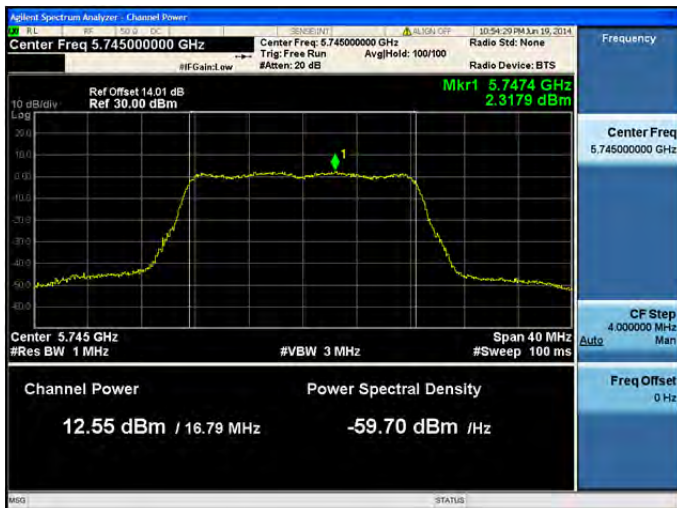

Antenna C

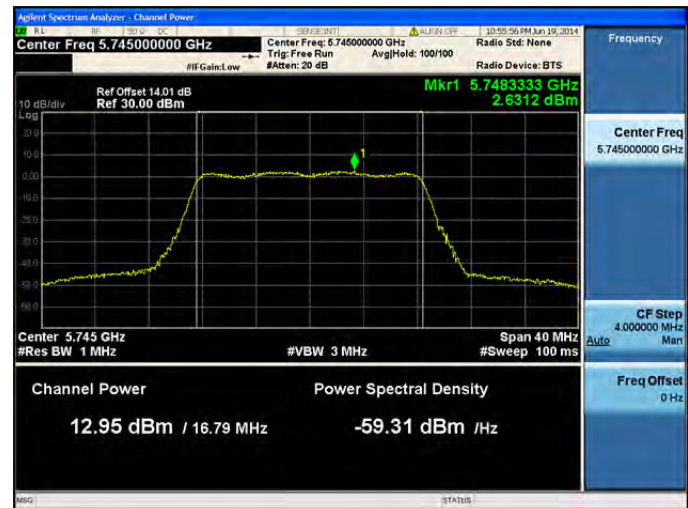

Antenna D




Peak Output Power, 5745 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1




Antenna A



Peak Output Power, 5745 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

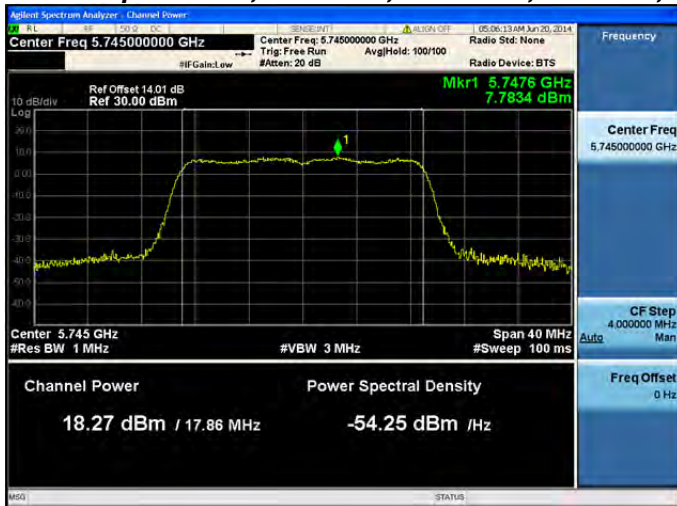


Antenna A

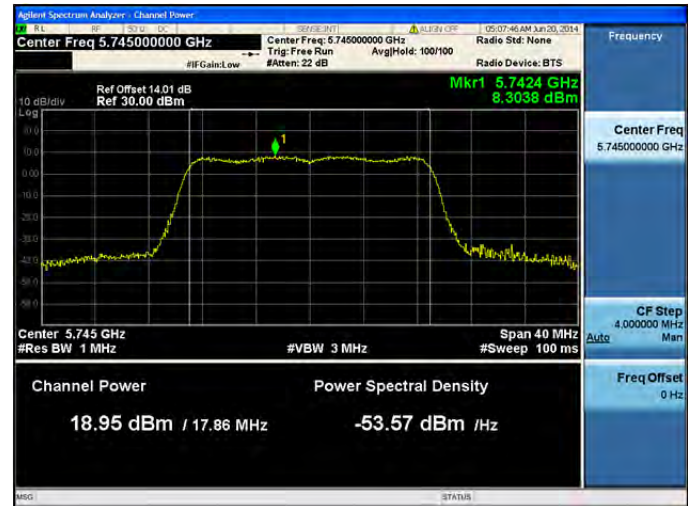


Antenna B



Peak Output Power, 5745 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

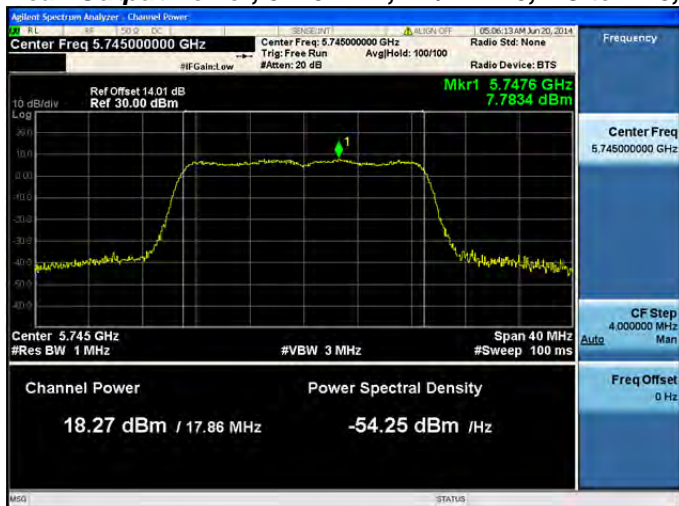


Antenna A

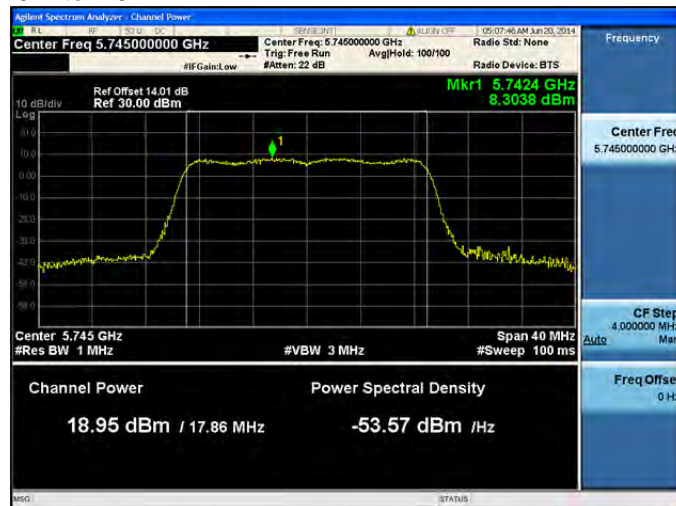

Antenna B



Peak Output Power, 5745 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

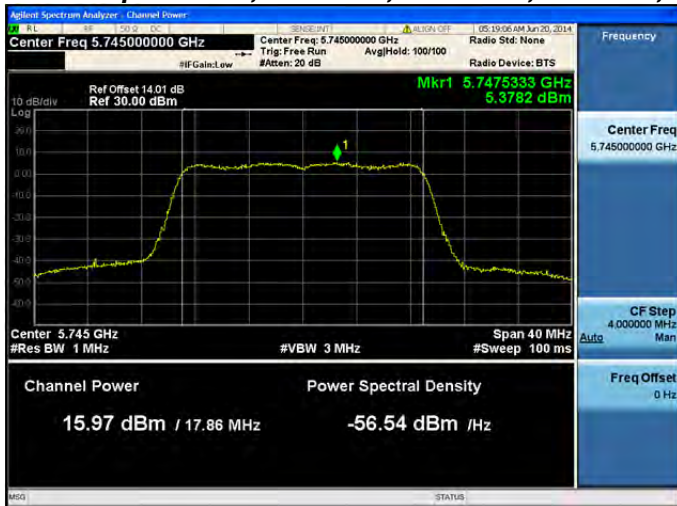

Antenna A




Antenna B



Antenna C




Peak Output Power, 5745 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

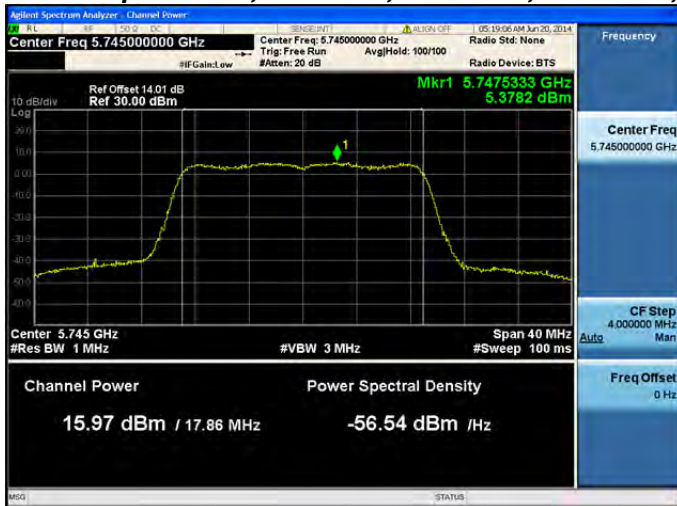

Antenna A




Antenna B

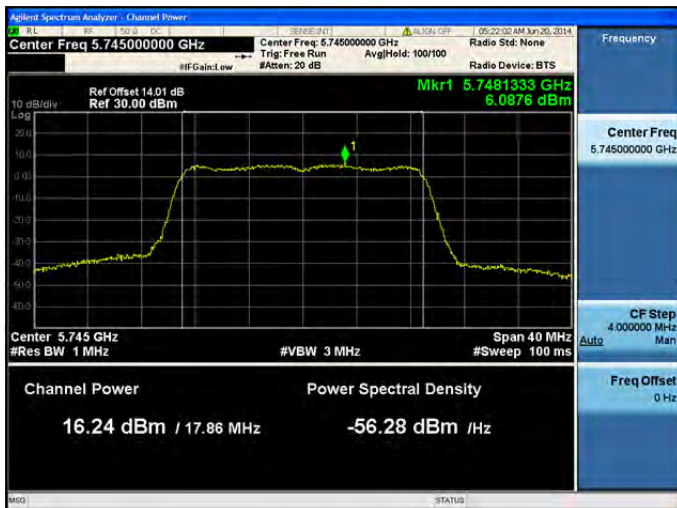

Antenna C




Peak Output Power, 5745 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

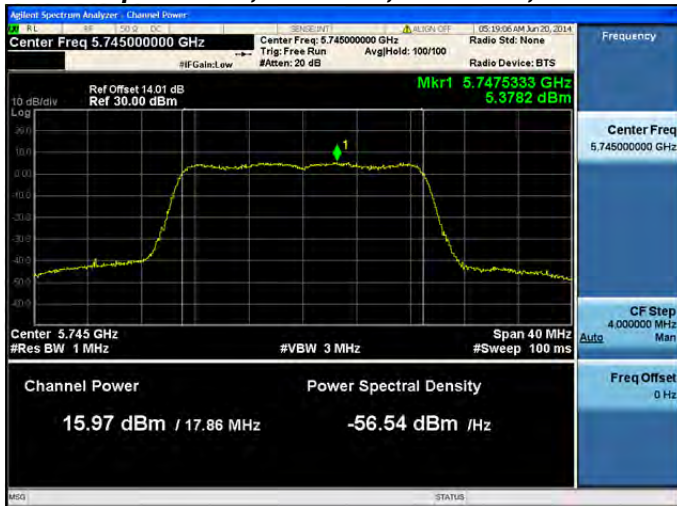

Antenna A



Antenna B

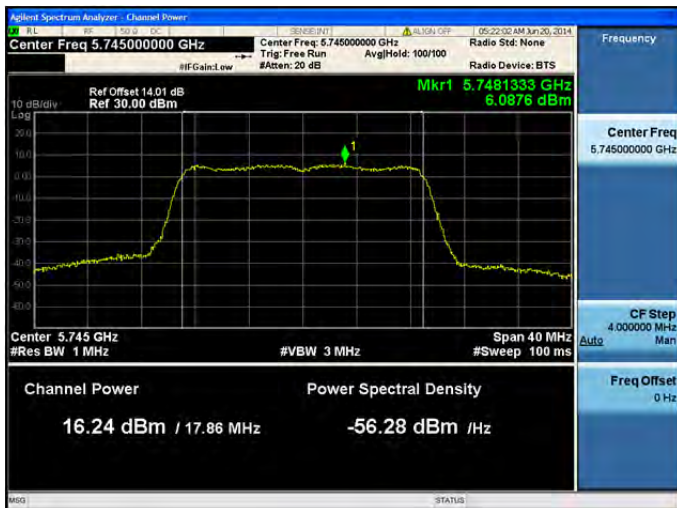


Antenna C




Peak Output Power, 5745 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



Antenna A

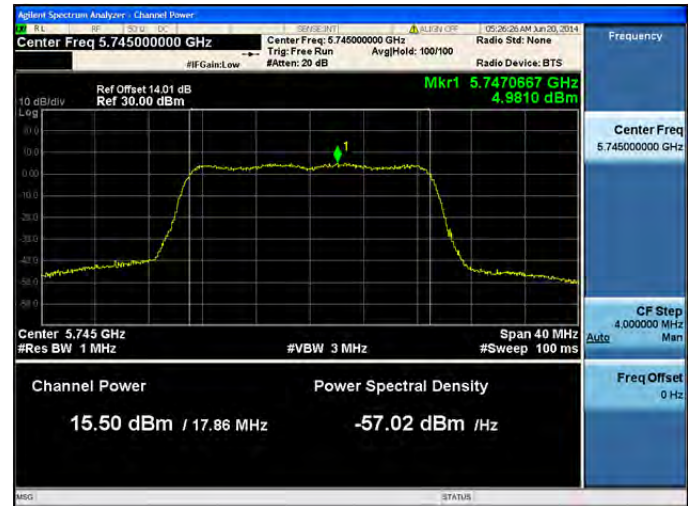

Antenna B

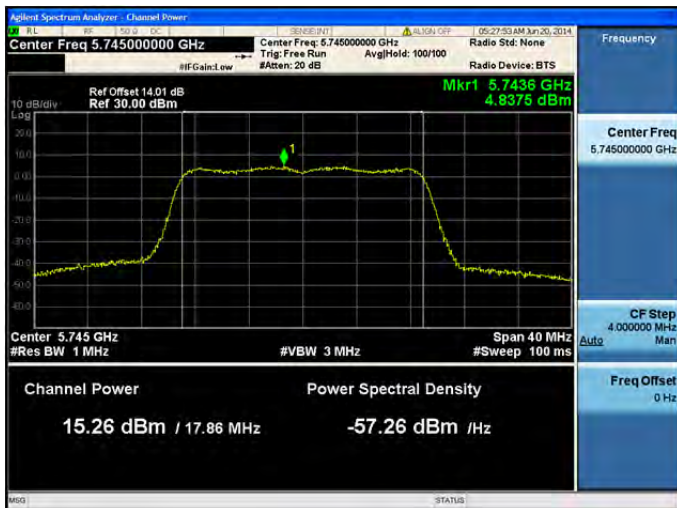

Antenna C




Antenna D



Peak Output Power, 5745 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2



Antenna A

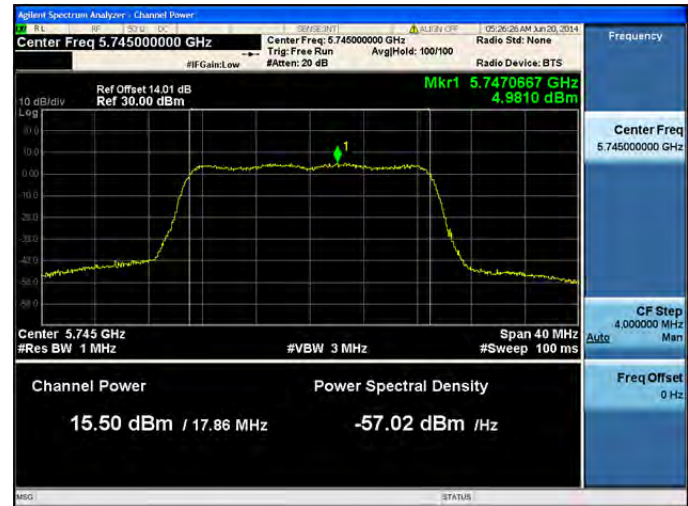

Antenna B



Antenna C



Antenna D




Peak Output Power, 5745 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B

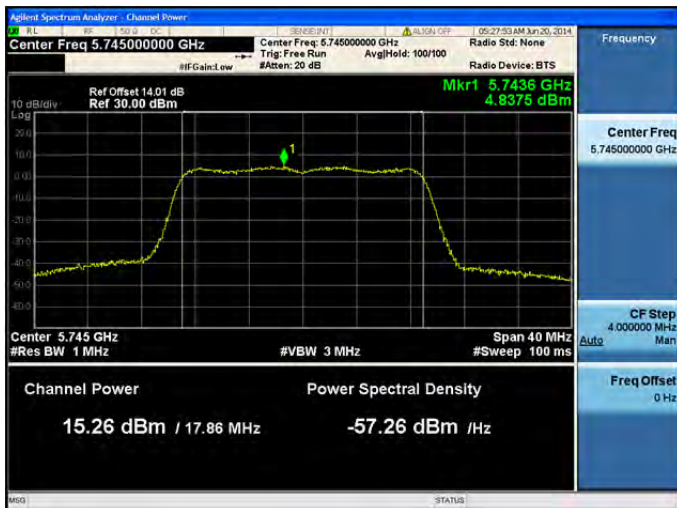

Antenna C



Antenna D



Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

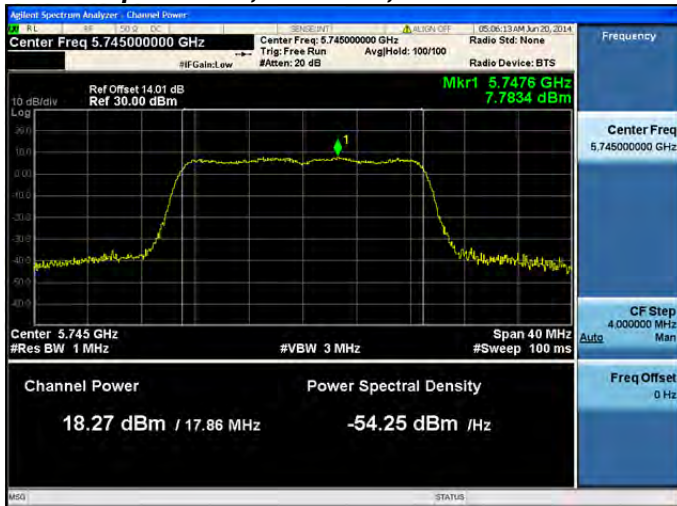


Antenna A



Antenna B




Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

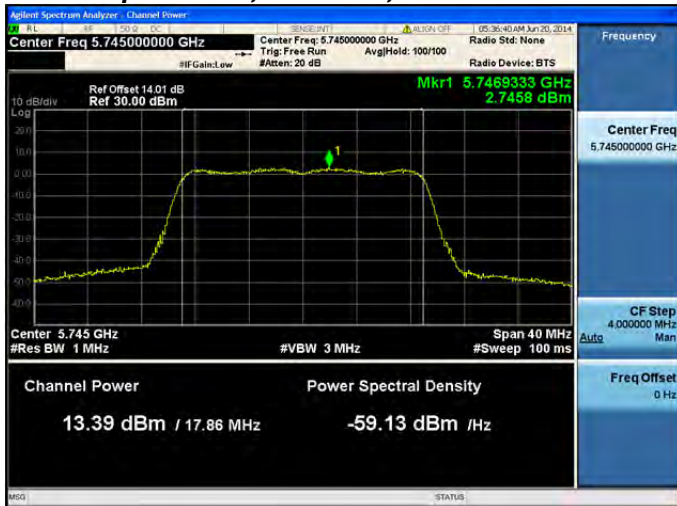

Antenna A




Antenna B

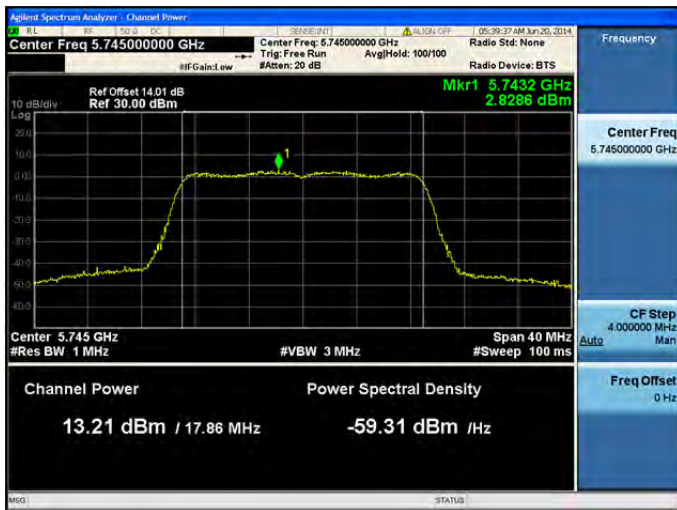

Antenna C




Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

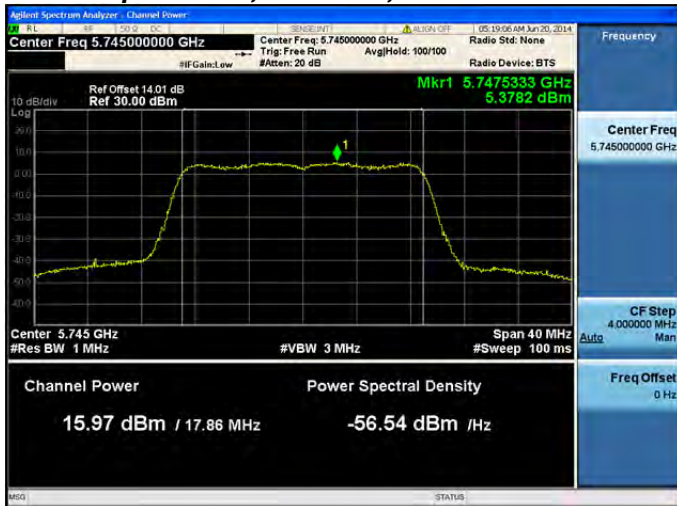

Antenna A




Antenna B

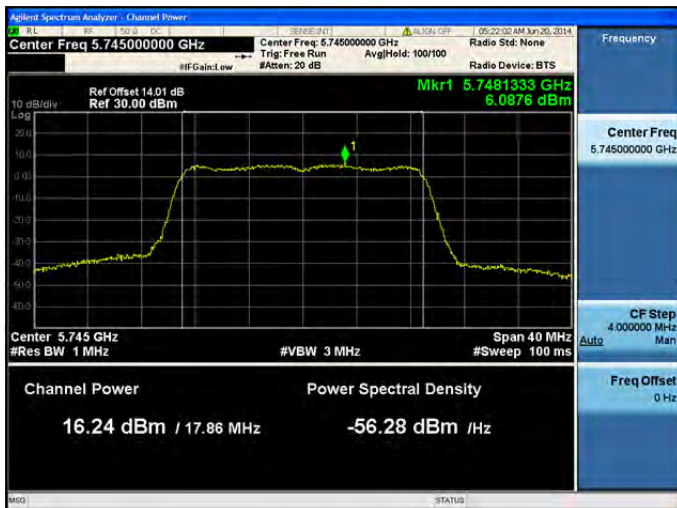

Antenna C




Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

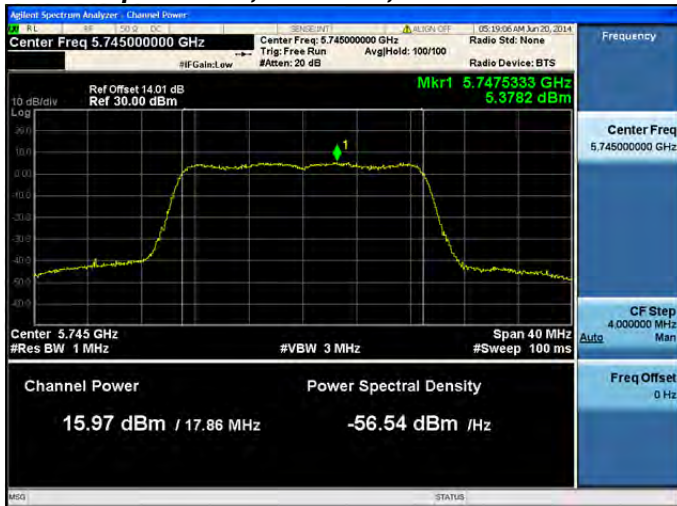

Antenna A




Antenna B

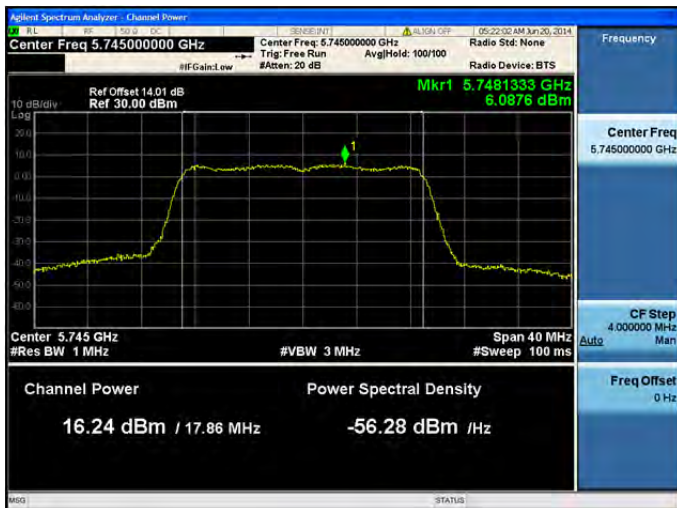


Antenna C




Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

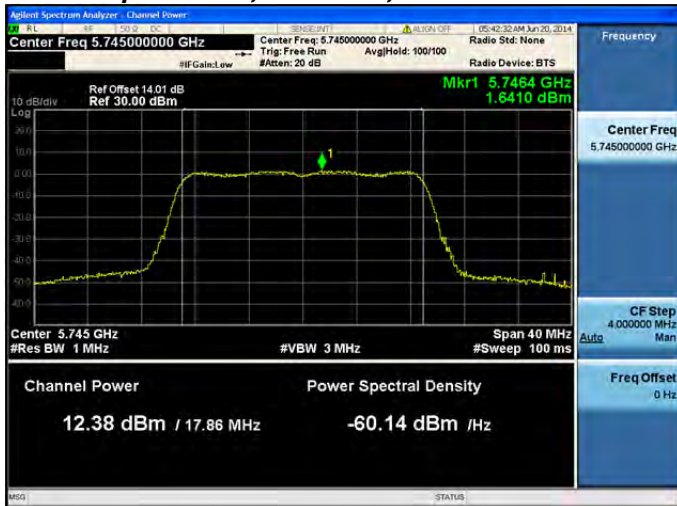


Antenna A

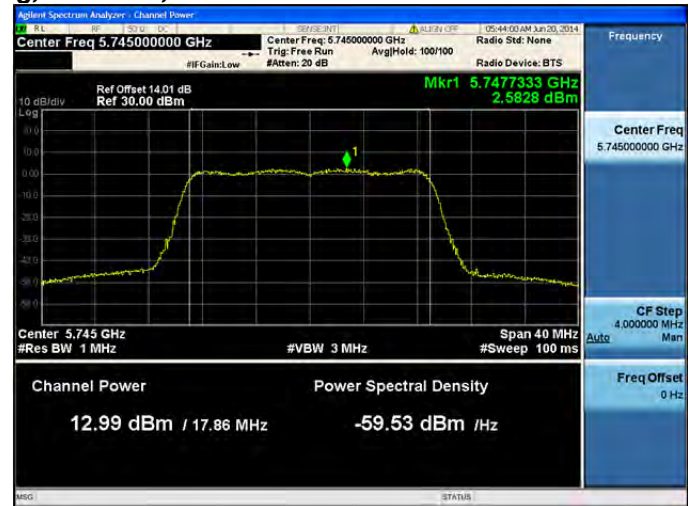

Antenna B

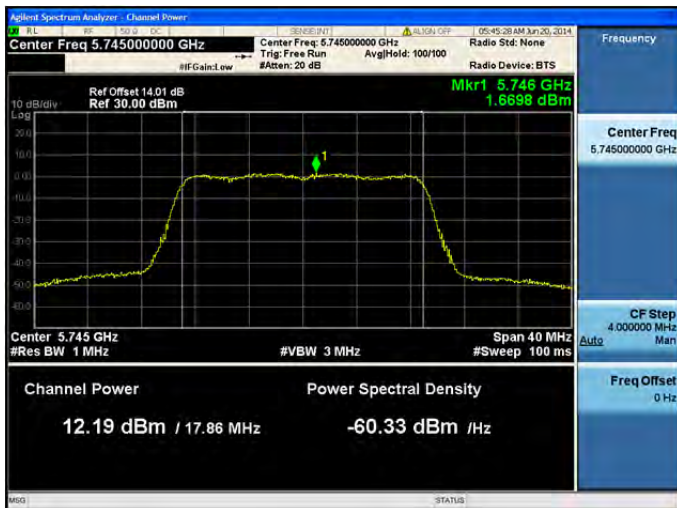

Antenna C

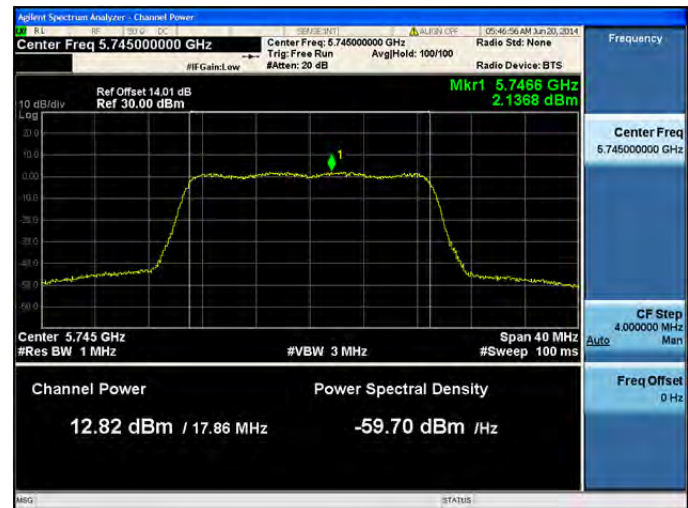

Antenna D



Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B



Antenna C



Antenna D




Peak Output Power, 5745 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B

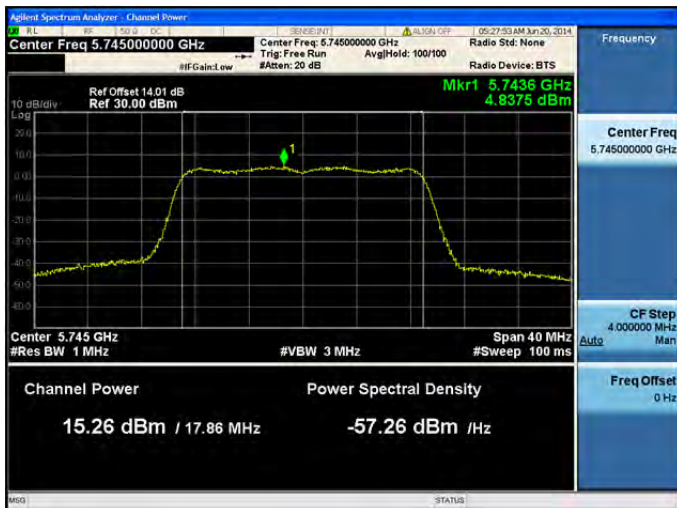

Antenna C



Antenna D



Peak Output Power, 5745 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Peak Output Power, 5745 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

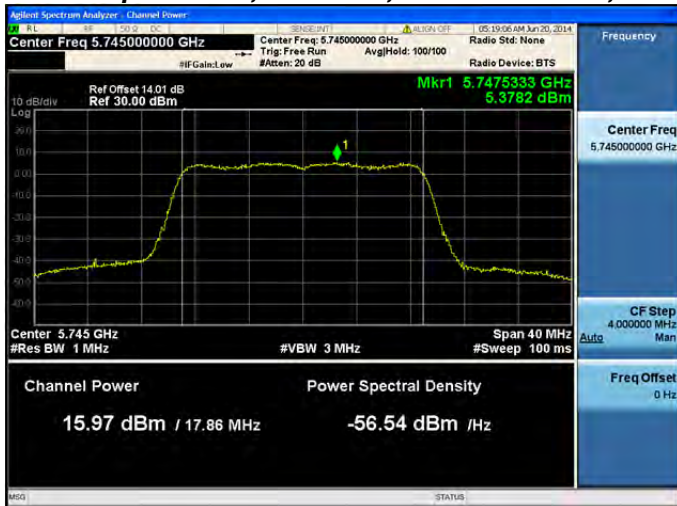

Antenna A



Antenna B



Antenna C




Peak Output Power, 5745 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B

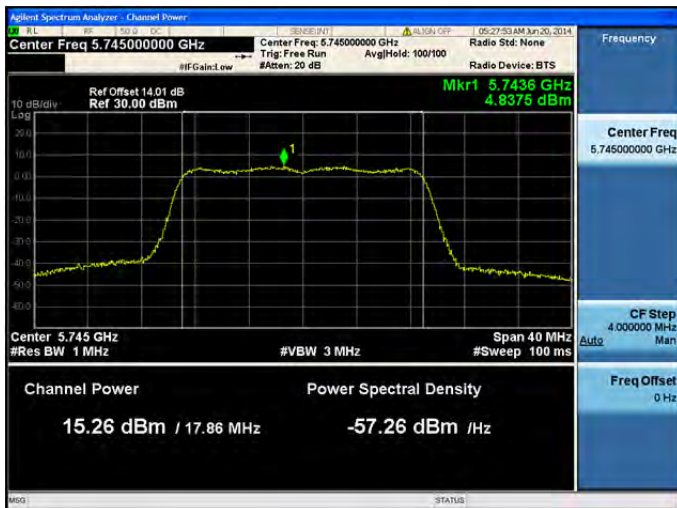

Antenna C



Antenna D




Peak Output Power, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps



Antenna A



Peak Output Power, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps

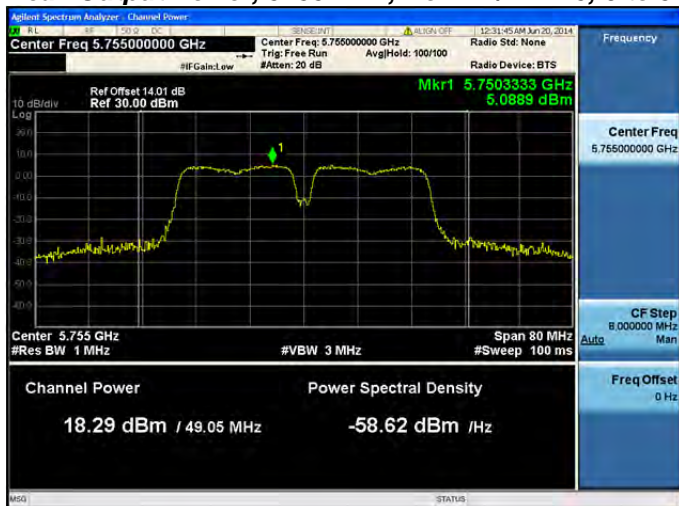

Antenna A




Antenna B



Peak Output Power, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps



Antenna A

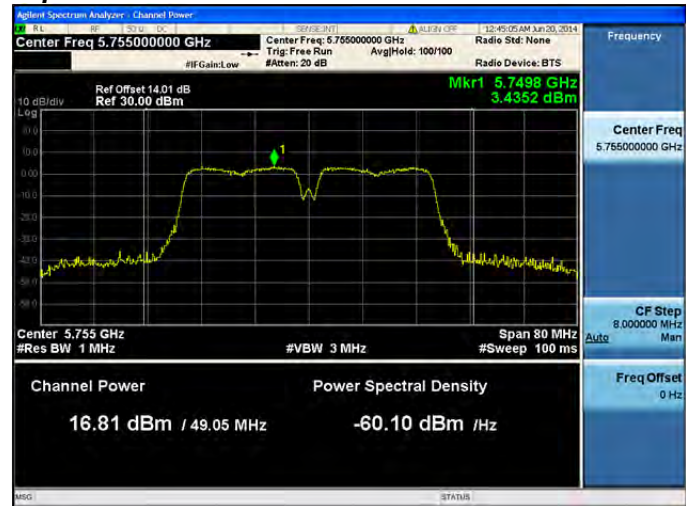


Antenna B




Antenna C



Peak Output Power, 5755 MHz, Non HT/VHT40, 6 to 54 Mbps

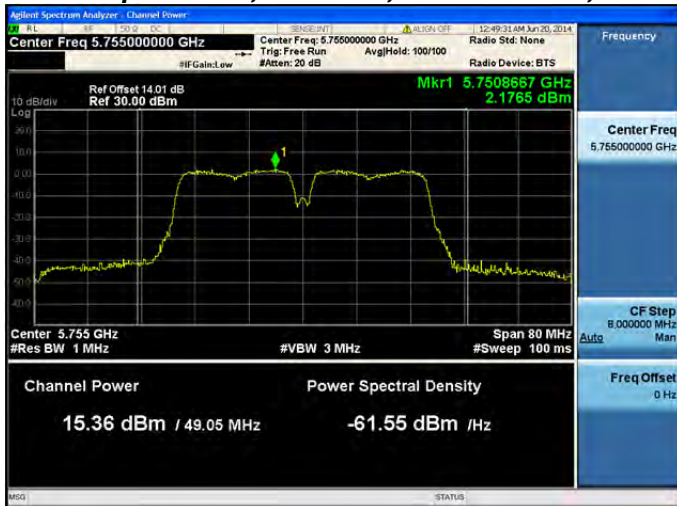

Antenna A

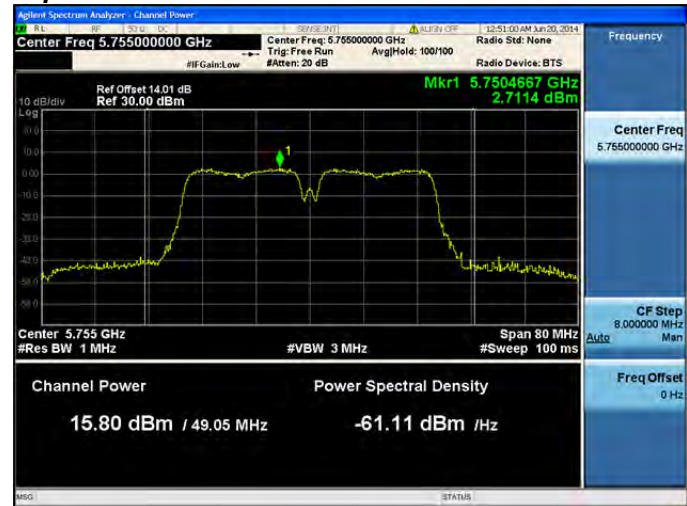

Antenna B



Antenna C



Antenna D




Peak Output Power, 5755 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1




Antenna A



Peak Output Power, 5755 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

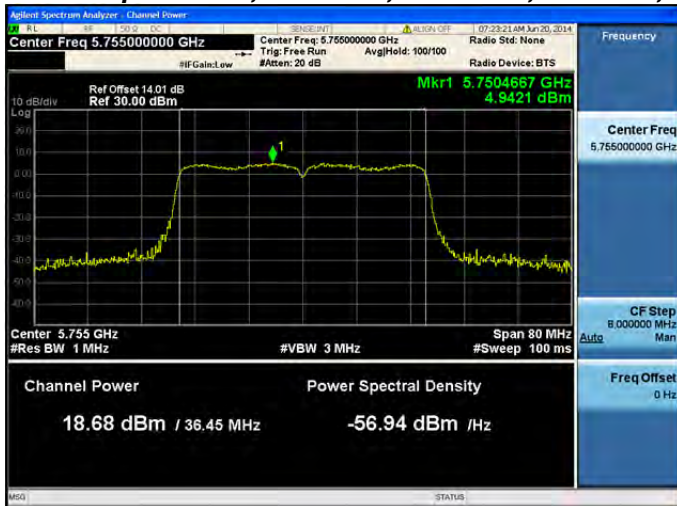

Antenna A

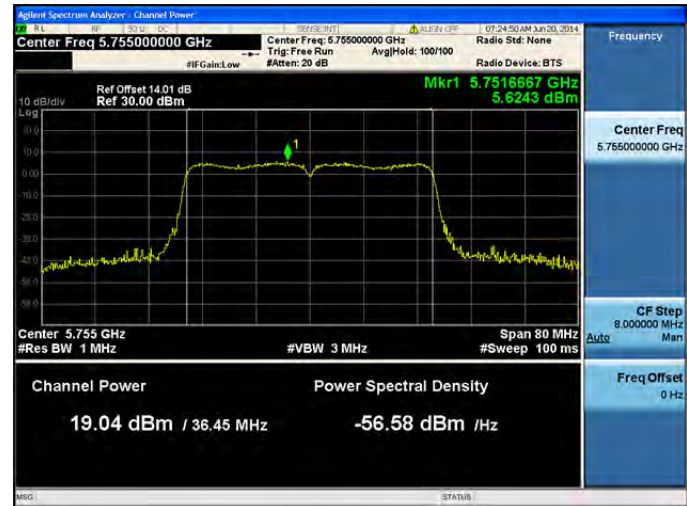


Antenna B



Peak Output Power, 5755 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2



Antenna A

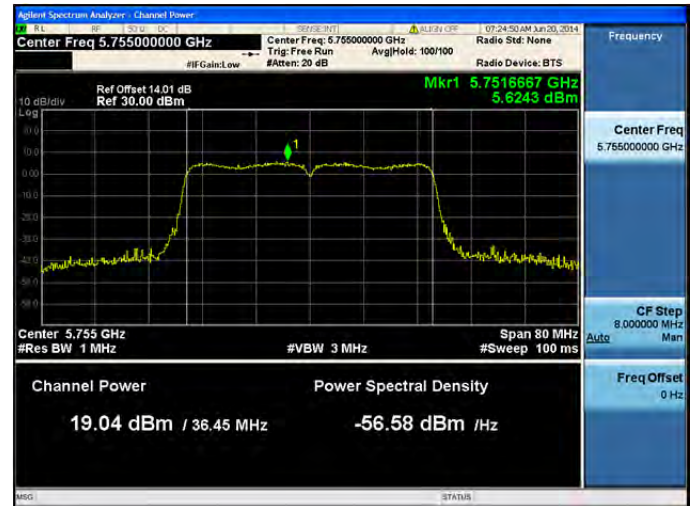


Antenna B




Peak Output Power, 5755 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1



Antenna A

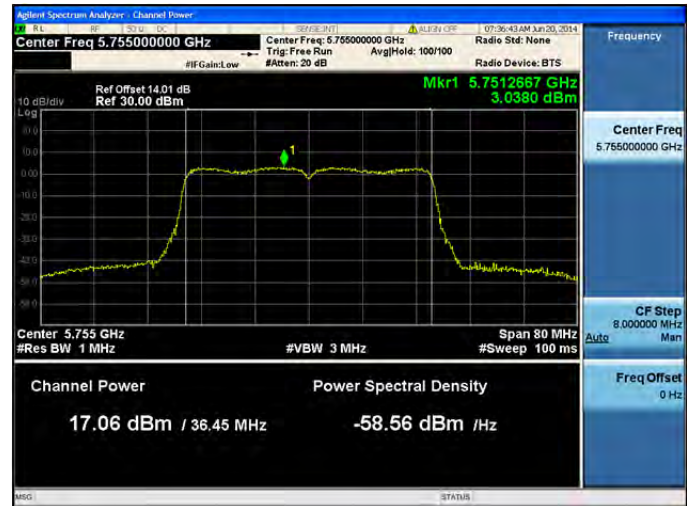


Antenna B

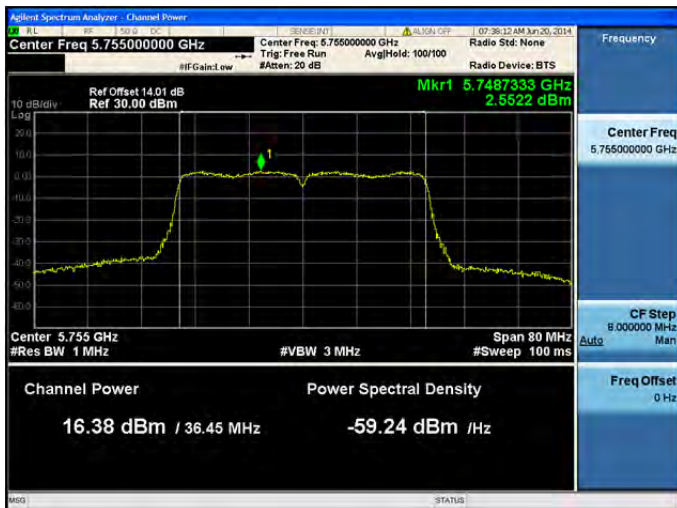


Antenna C




Peak Output Power, 5755 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

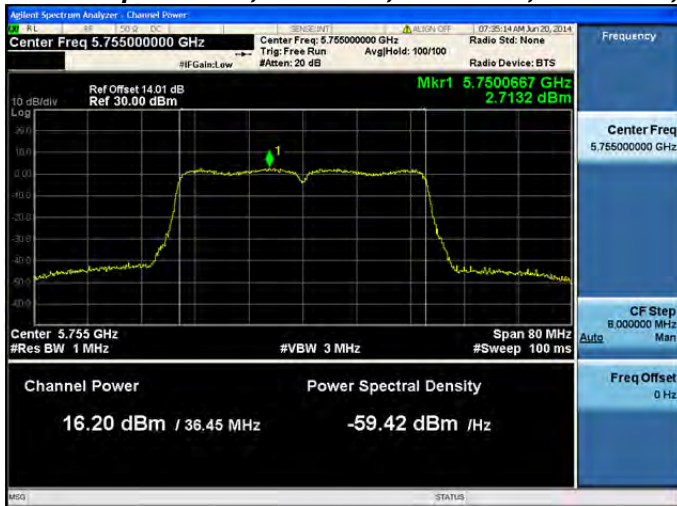

Antenna A

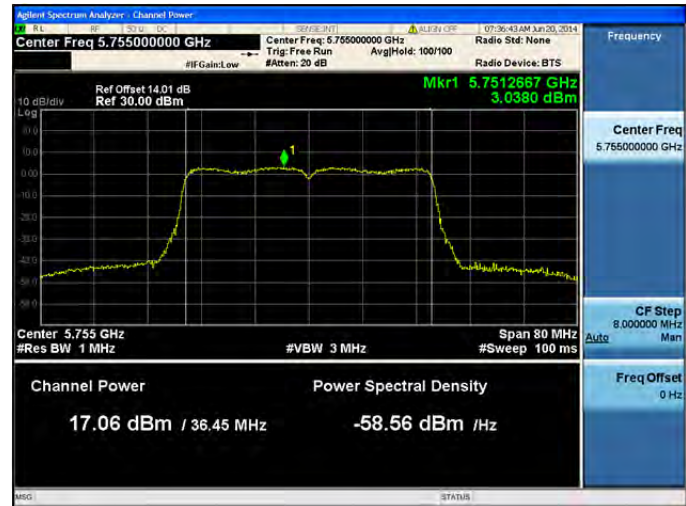


Antenna B

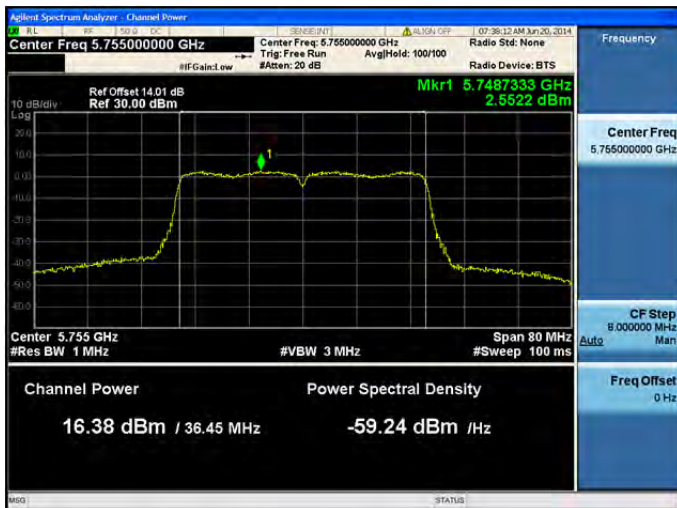


Antenna C




Peak Output Power, 5755 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

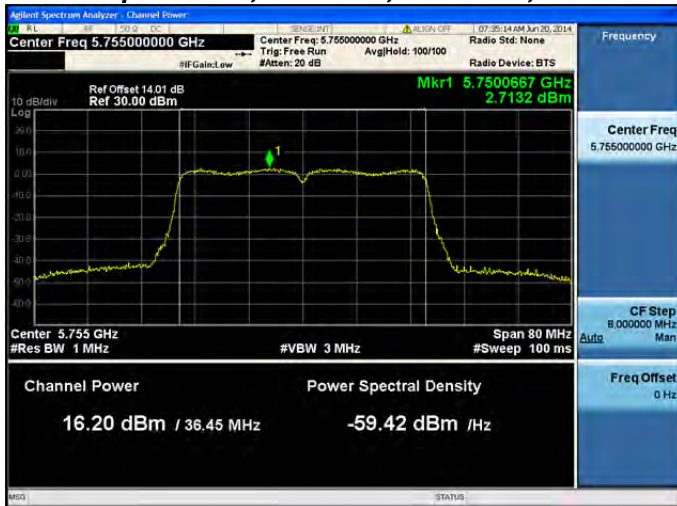

Antenna A

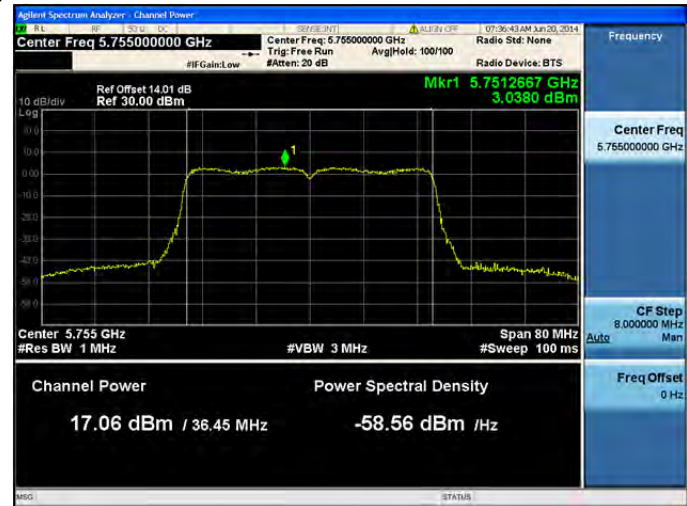

Antenna B

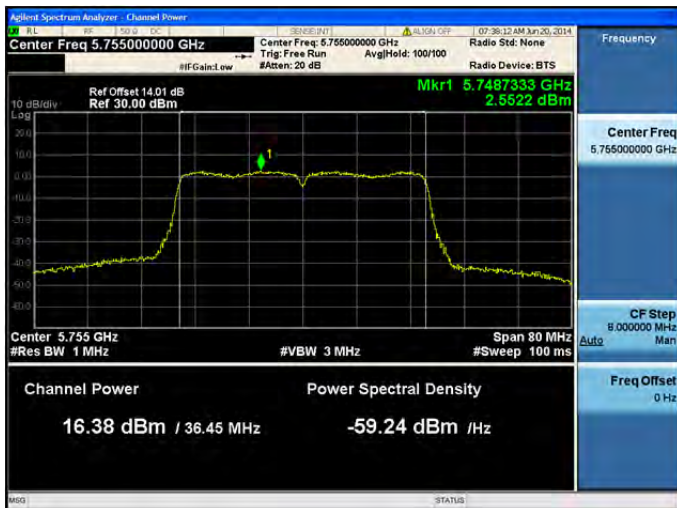


Antenna C



Peak Output Power, 5755 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1



Antenna A

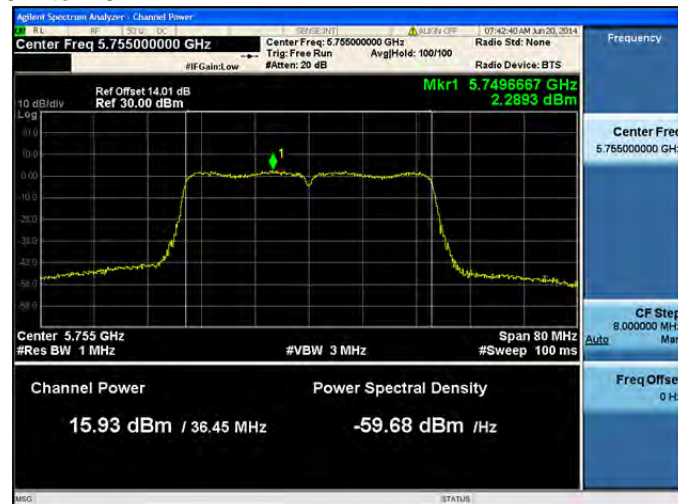

Antenna B



Antenna C




Antenna D



Peak Output Power, 5755 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2



Antenna A

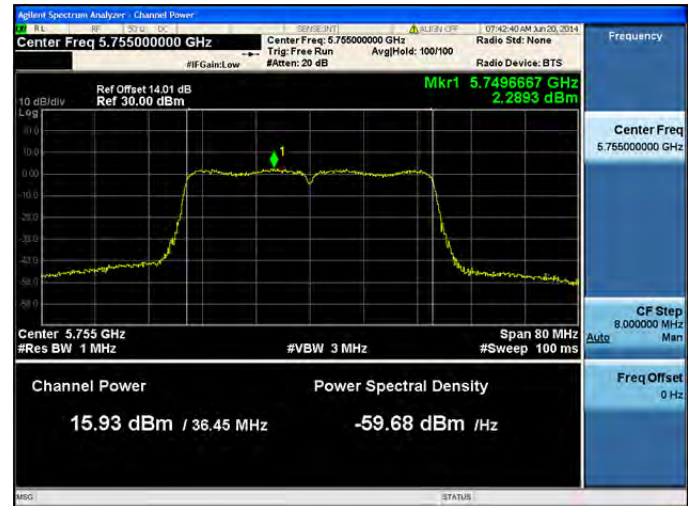

Antenna B



Antenna C




Antenna D



Peak Output Power, 5755 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3



Antenna A

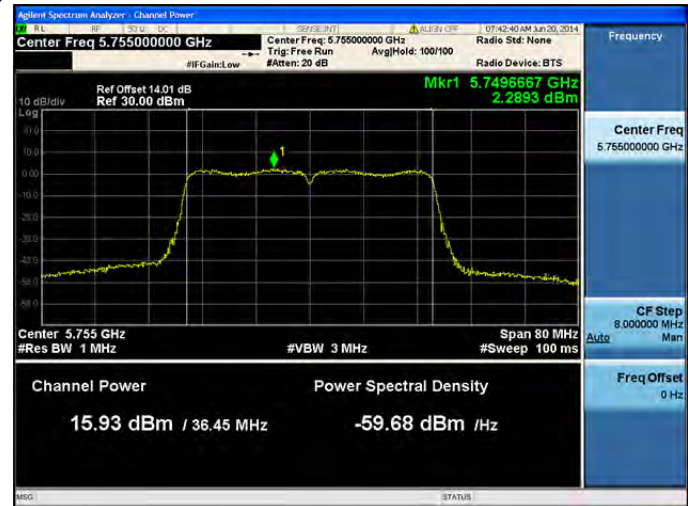

Antenna B




Antenna C




Antenna D



Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

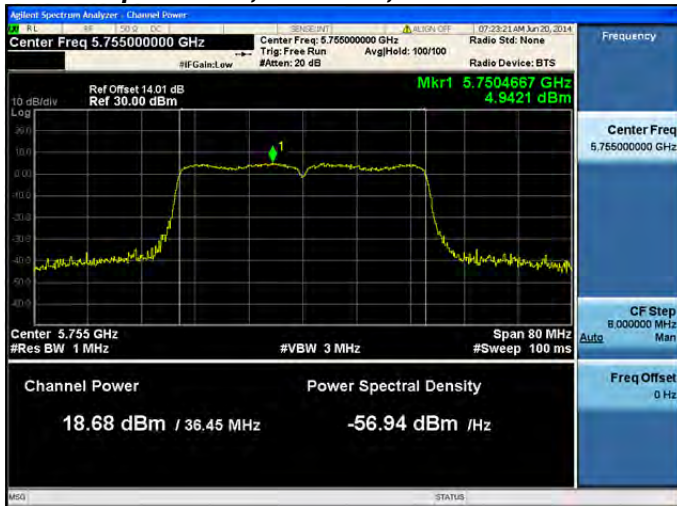


Antenna A

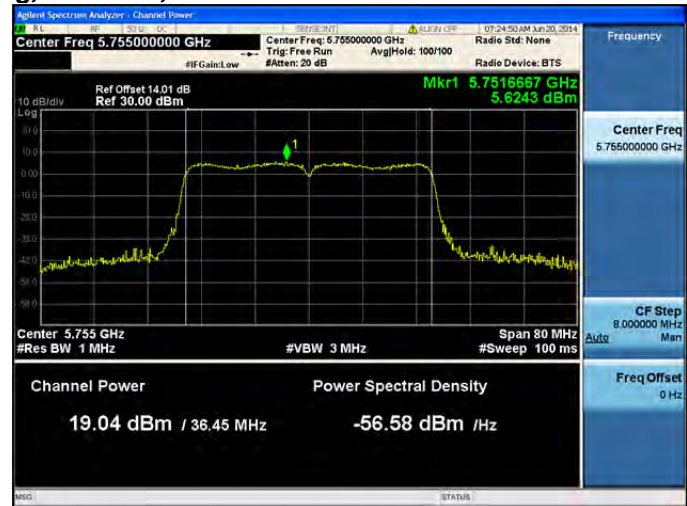


Antenna B



Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

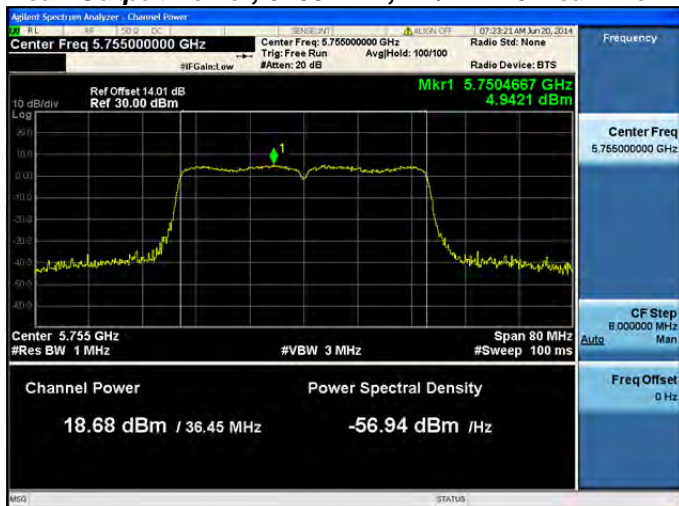


Antenna A

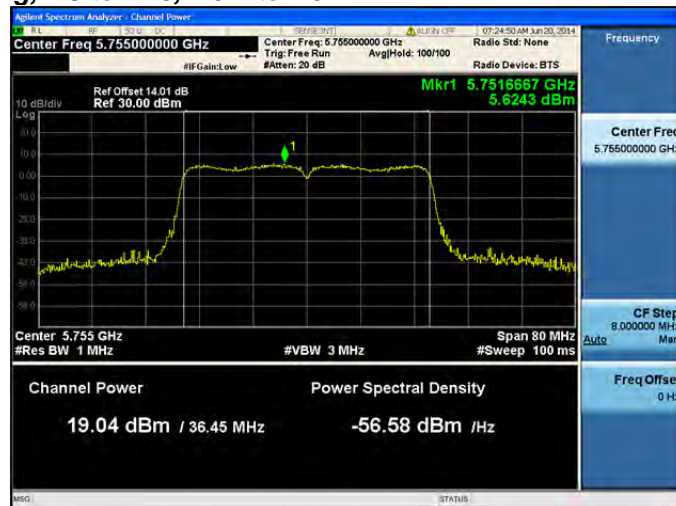


Antenna B




Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

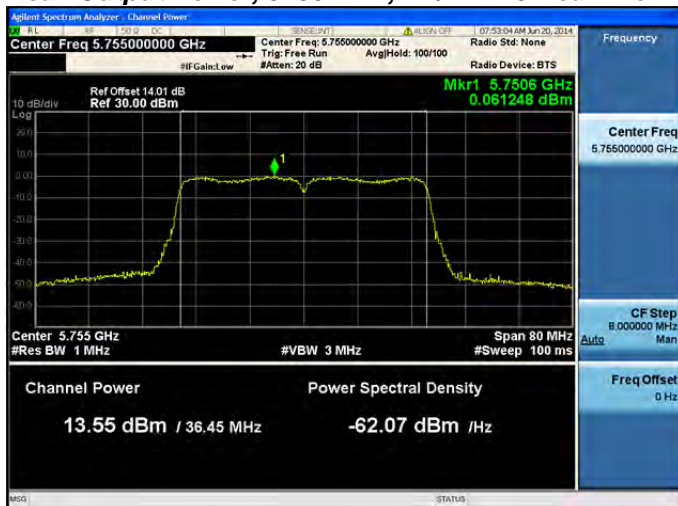

Antenna A

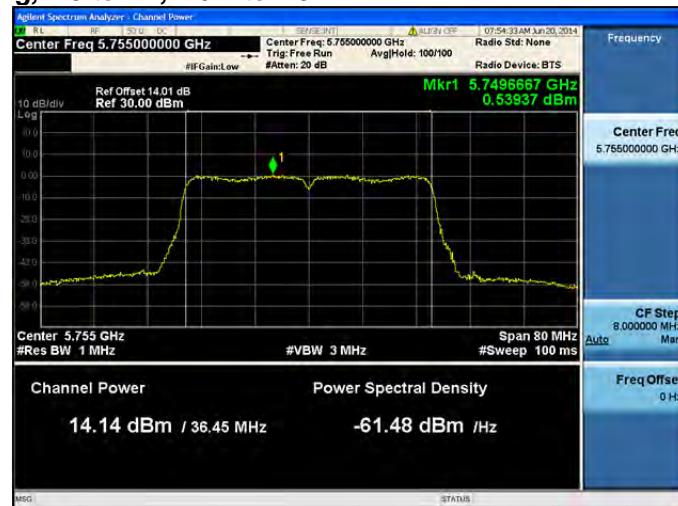


Antenna B

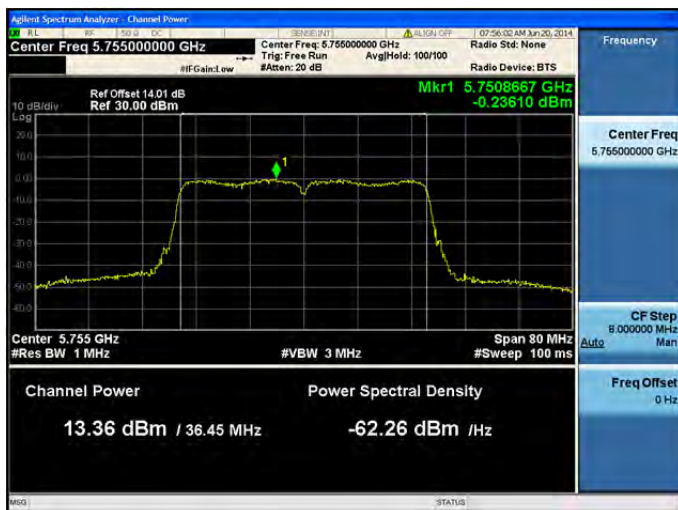


Antenna C




Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

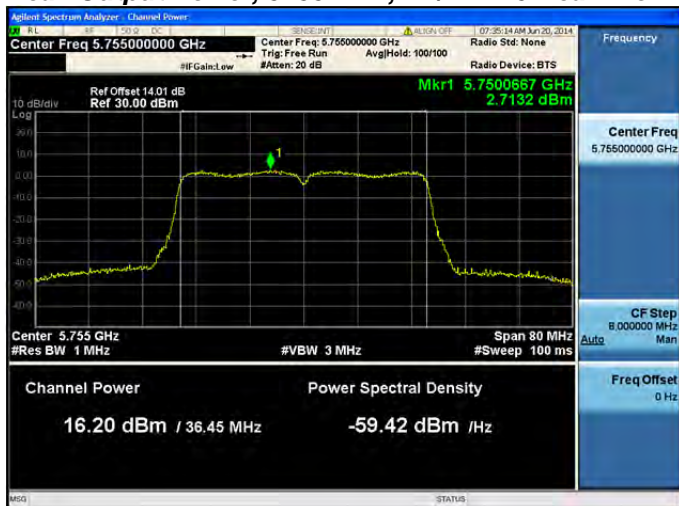

Antenna A

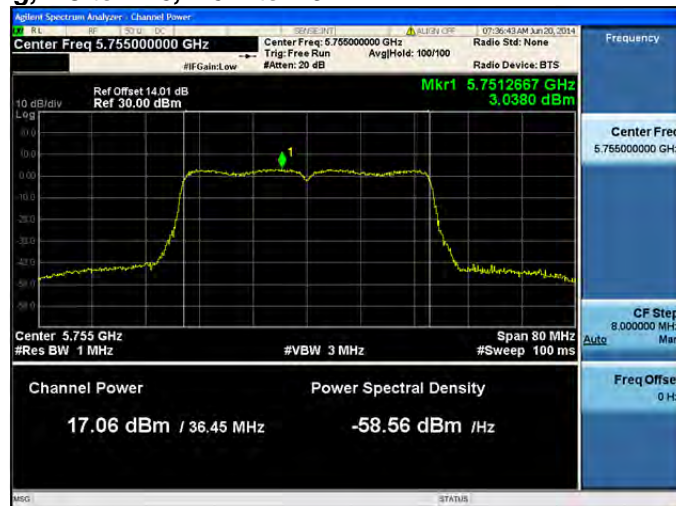


Antenna B

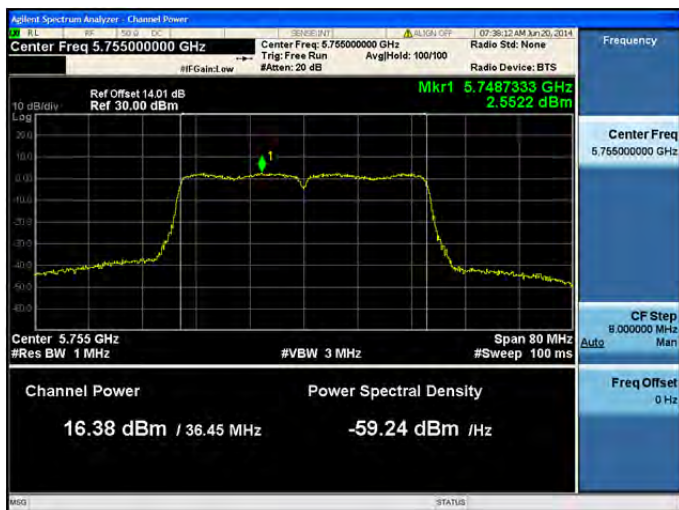


Antenna C




Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3

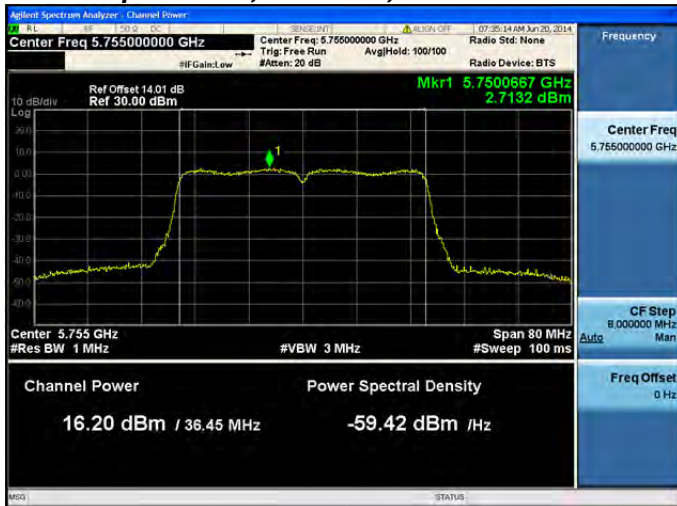

Antenna A

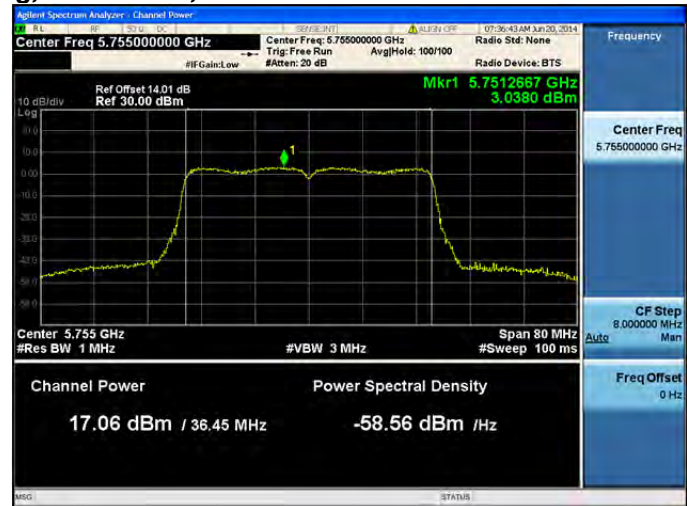


Antenna B

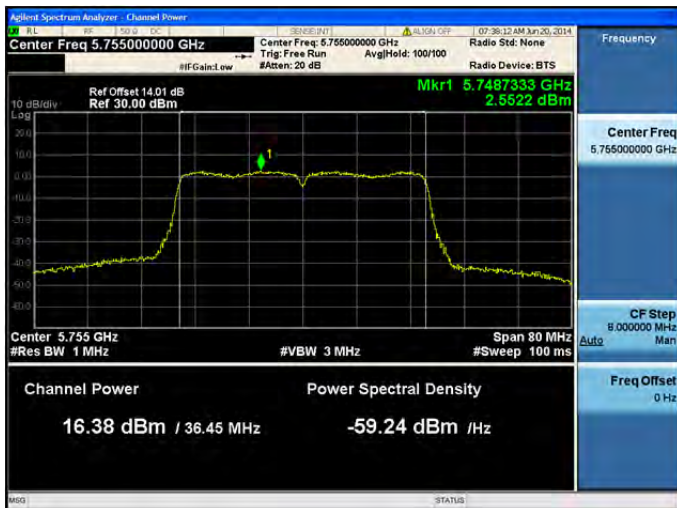


Antenna C




Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

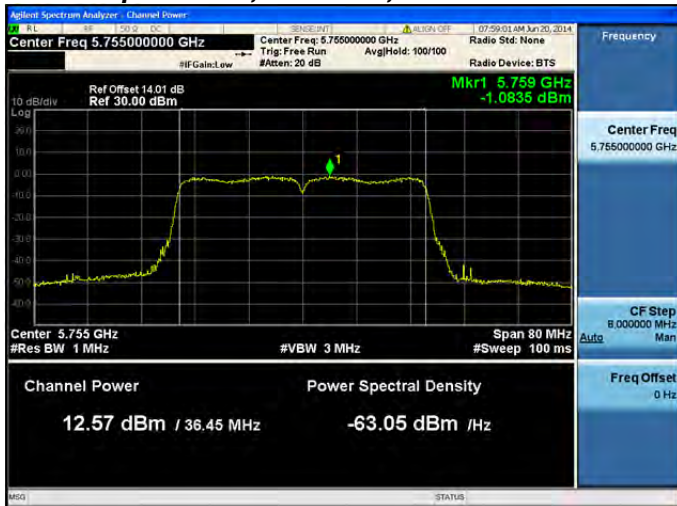


Antenna A

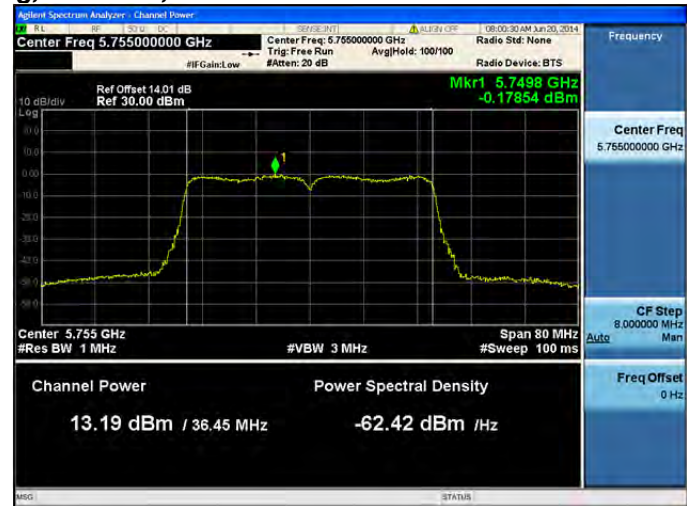

Antenna B

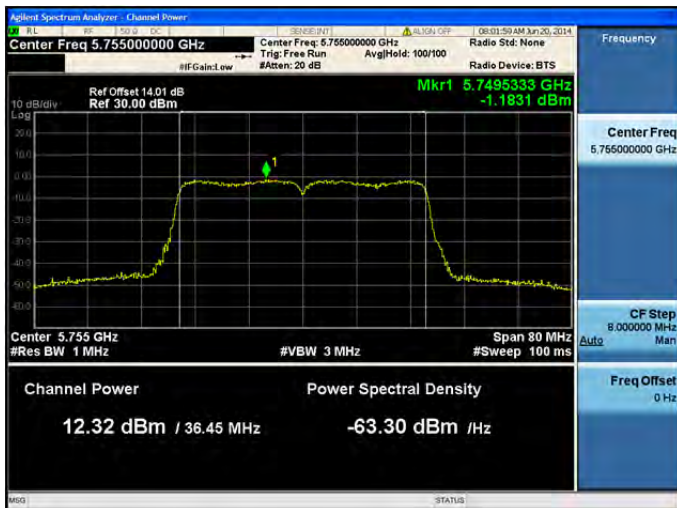

Antenna C

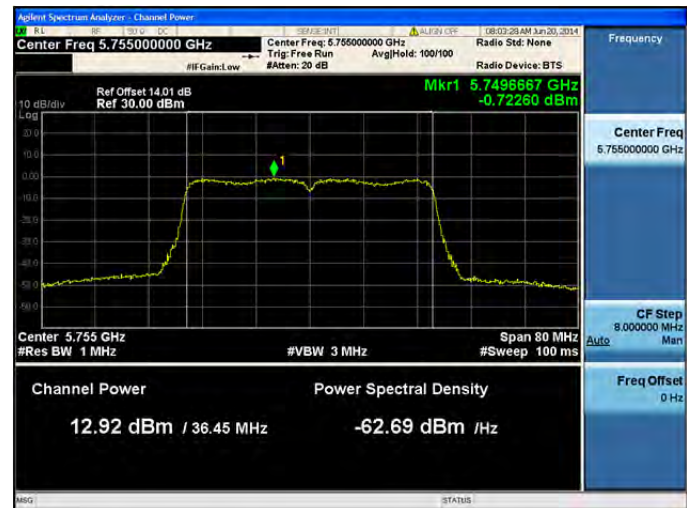


Antenna D



Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A

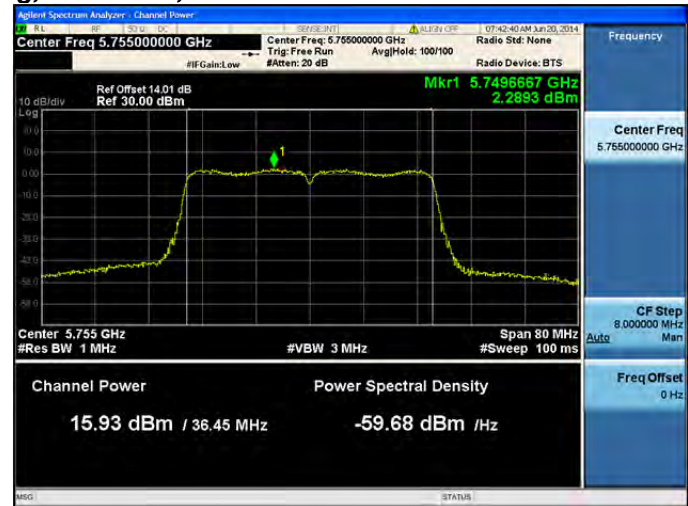

Antenna B



Antenna C




Antenna D



Peak Output Power, 5755 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A

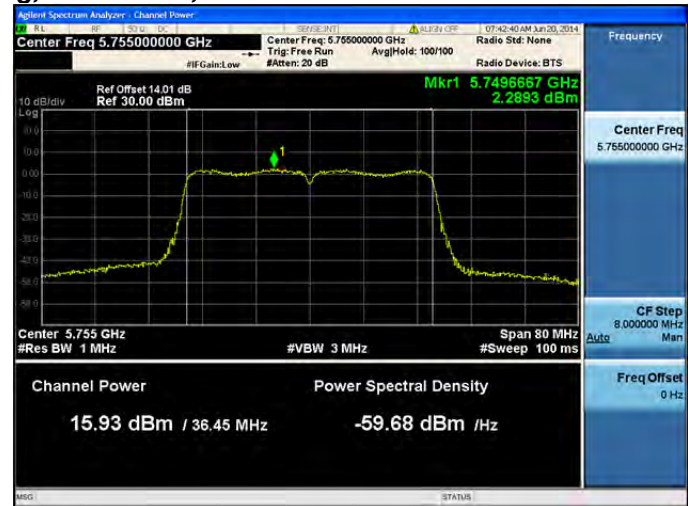

Antenna B




Antenna C




Antenna D



Peak Output Power, 5755 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

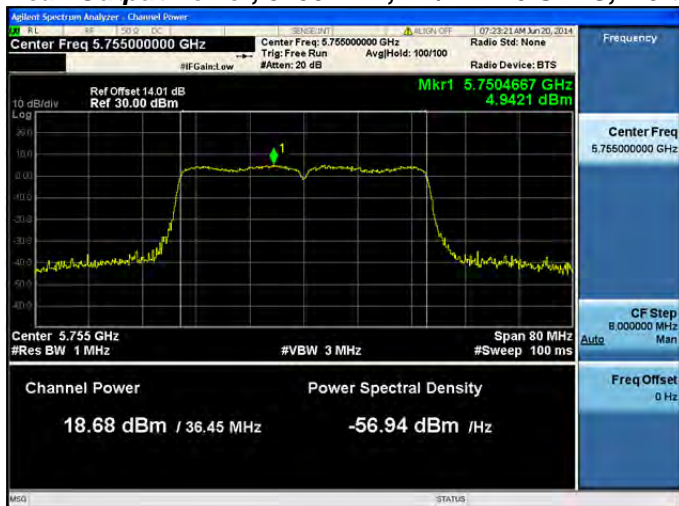


Antenna A

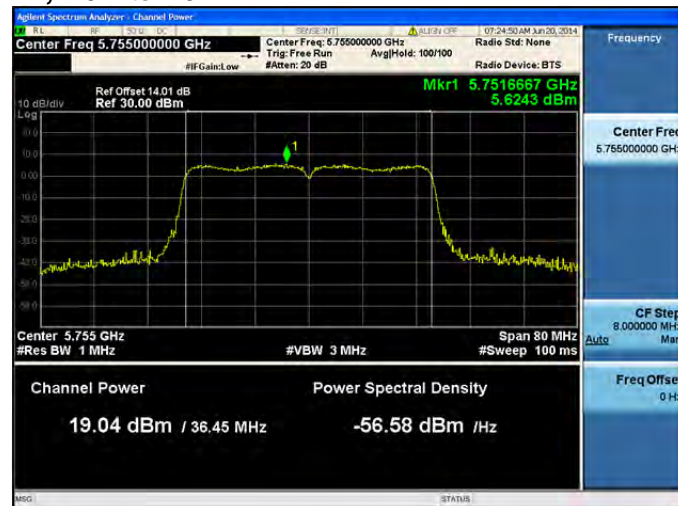


Antenna B




Peak Output Power, 5755 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

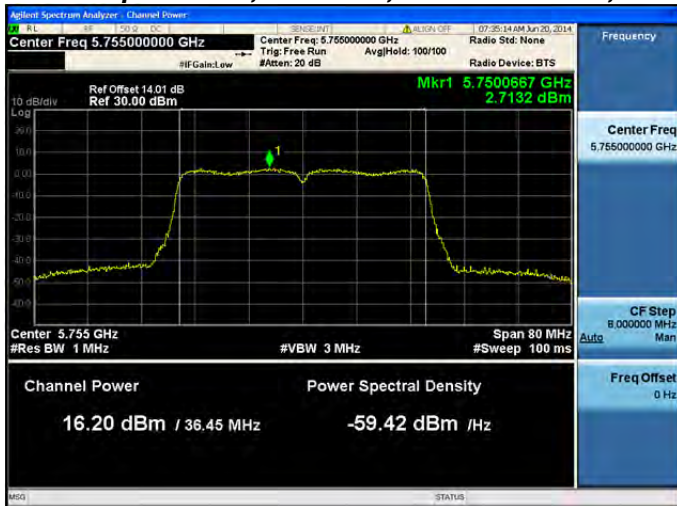

Antenna A

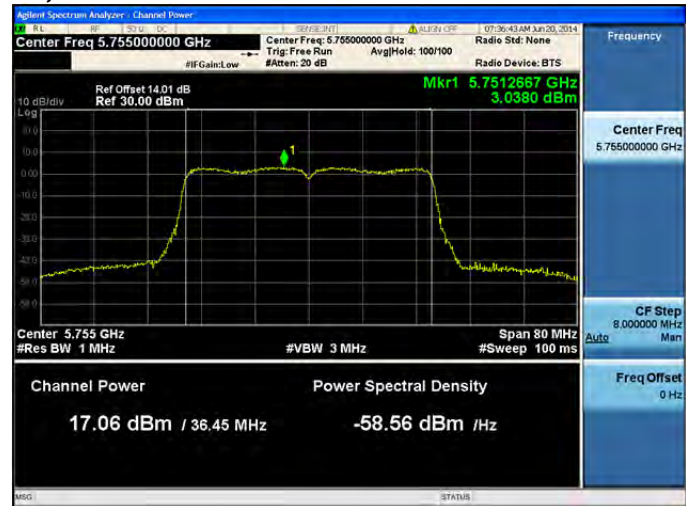


Antenna B

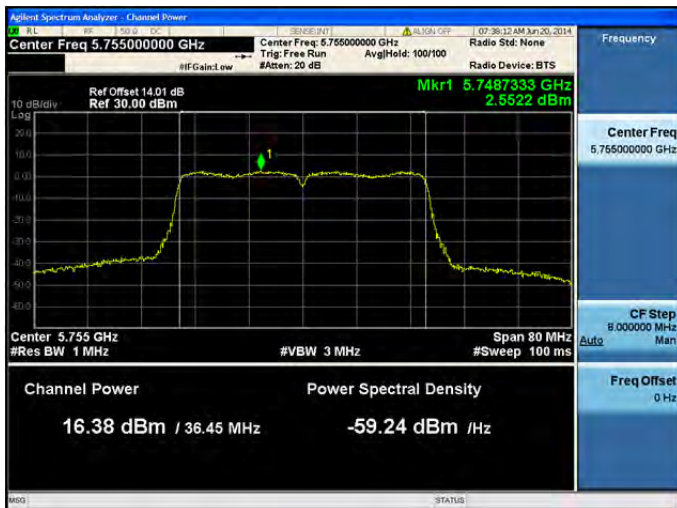


Antenna C



Peak Output Power, 5755 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

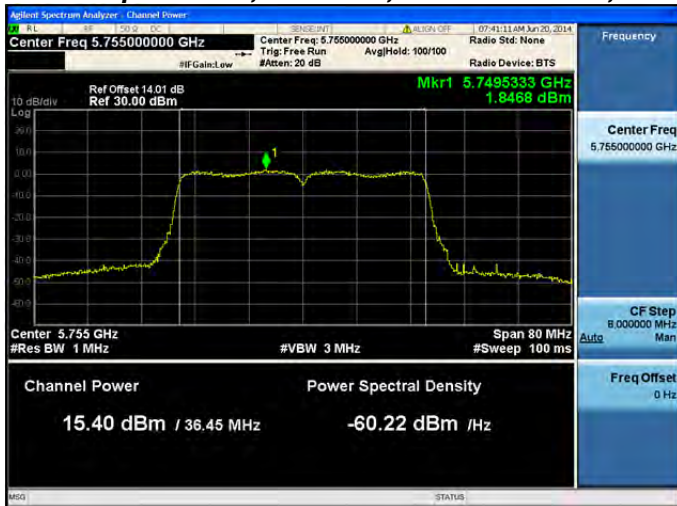

Antenna A

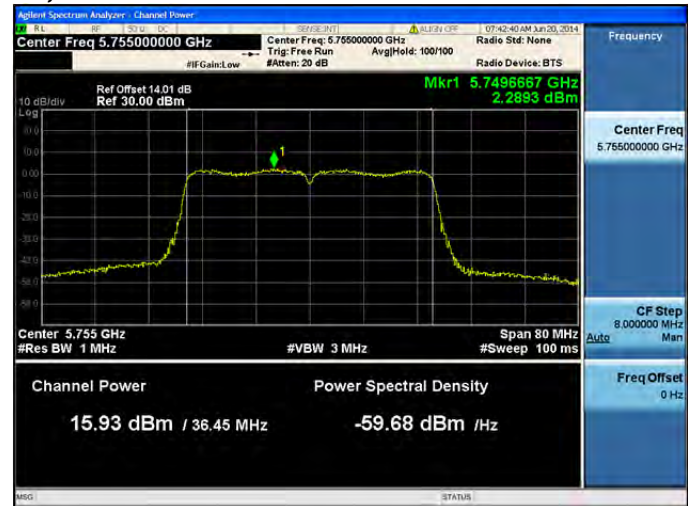

Antenna B



Antenna C



Antenna D




Peak Output Power, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Peak Output Power, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps

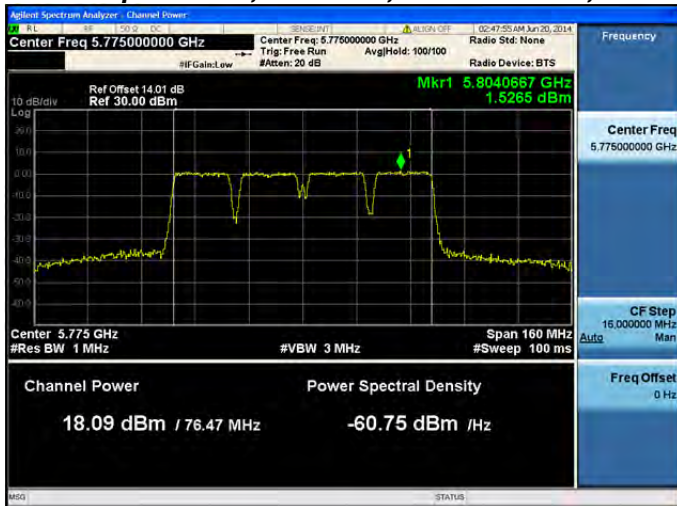

Antenna A




Antenna B



Peak Output Power, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A

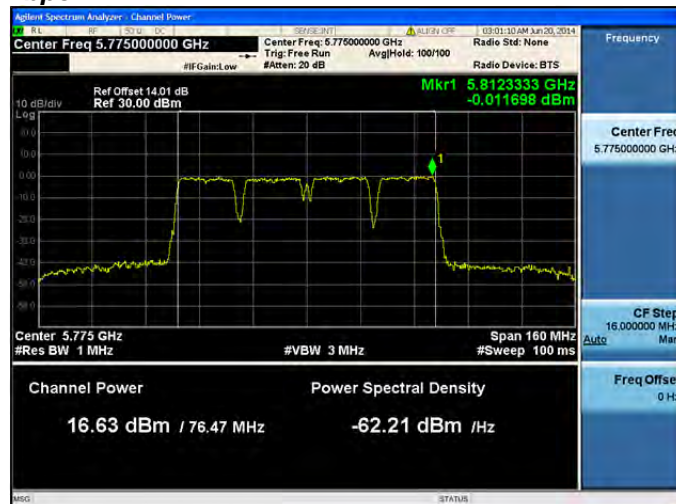

Antenna B



Antenna C



Peak Output Power, 5775 MHz, Non HT/VHT80, 6 to 54 Mbps




Antenna A



Antenna B




Antenna C

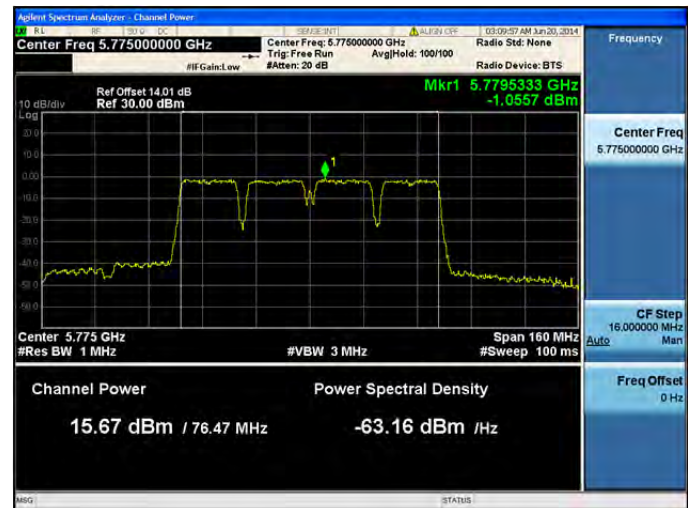

Antenna D




Peak Output Power, 5775 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

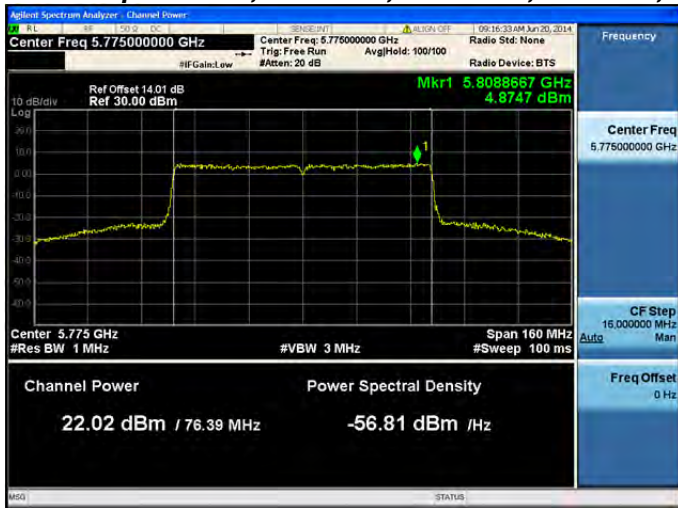


Antenna A



Peak Output Power, 5775 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

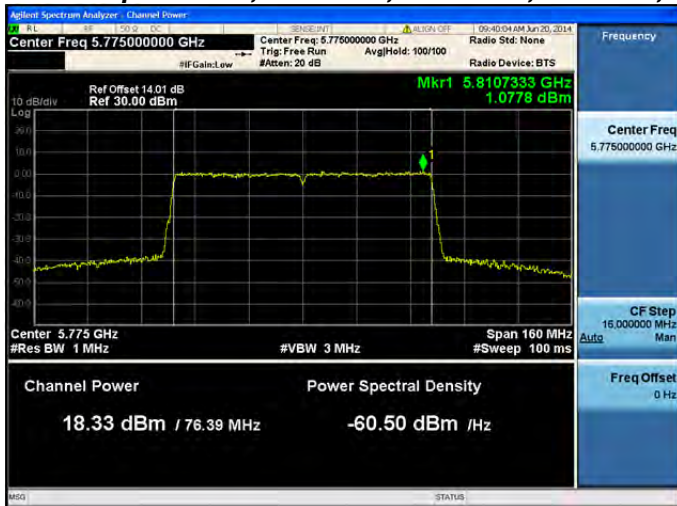

Antenna A

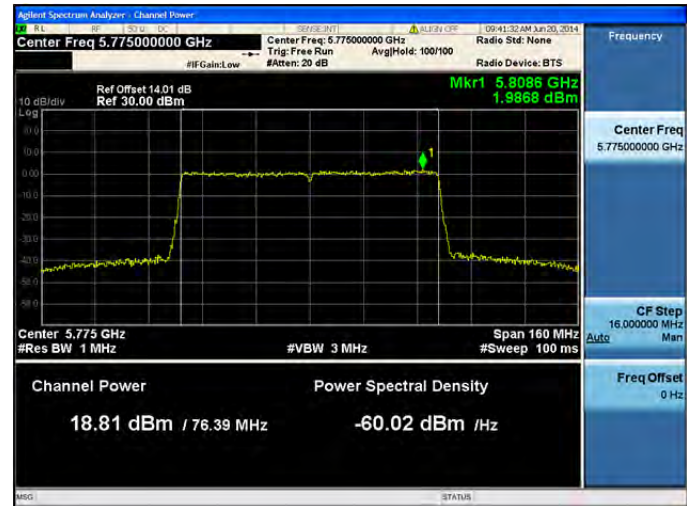


Antenna B



Peak Output Power, 5775 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2




Antenna A

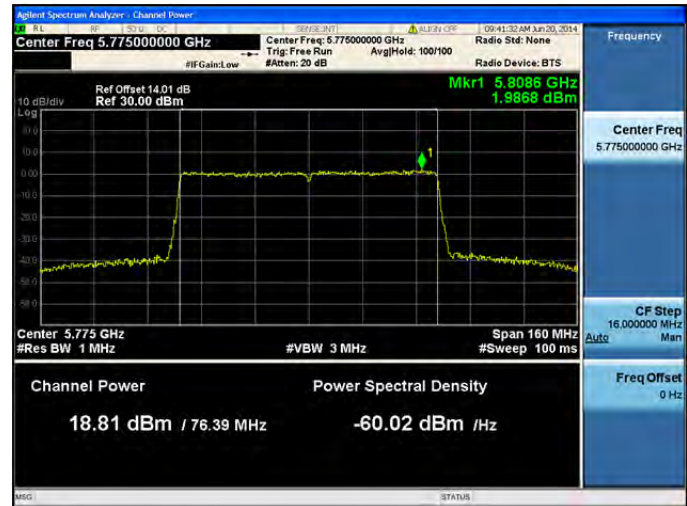

Antenna B



Peak Output Power, 5775 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

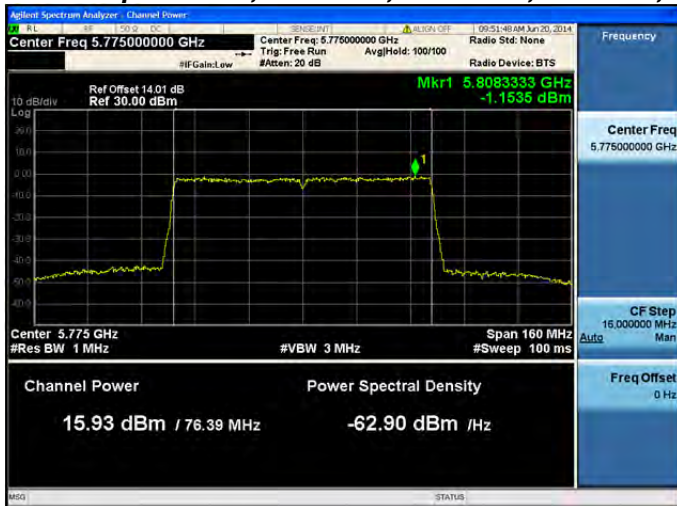

Antenna A



Antenna B




Antenna C



Peak Output Power, 5775 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2



Antenna A

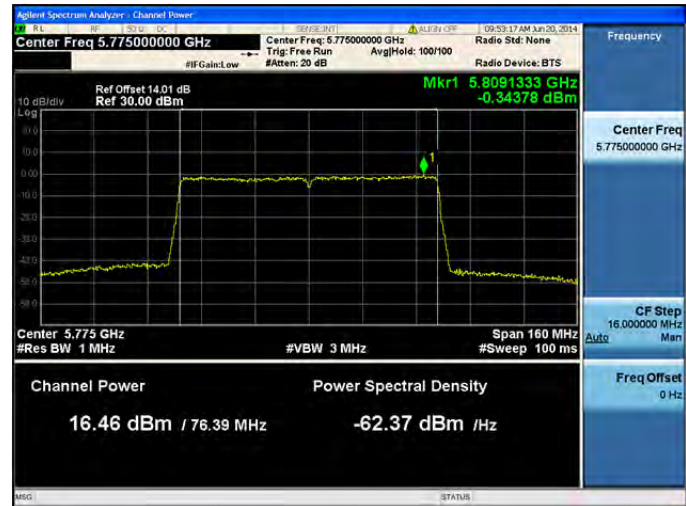

Antenna B




Antenna C




Peak Output Power, 5775 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3



Antenna A

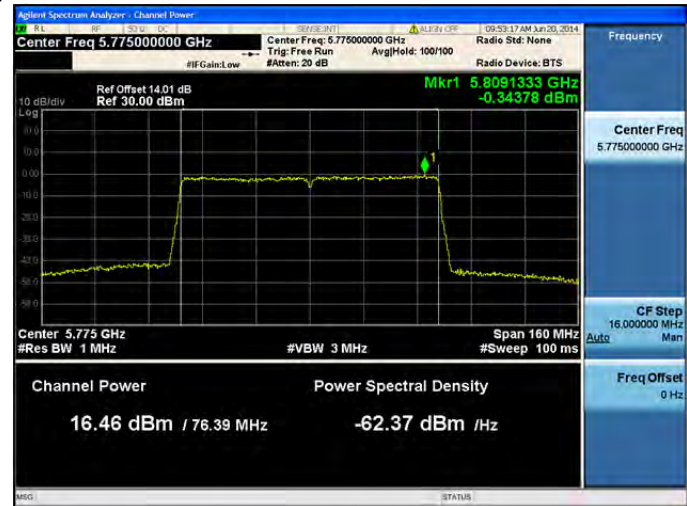

Antenna B

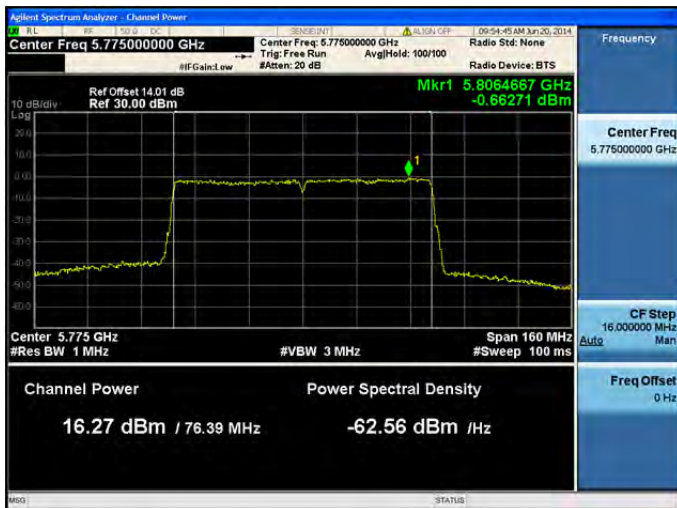

Antenna C



Peak Output Power, 5775 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Antenna C

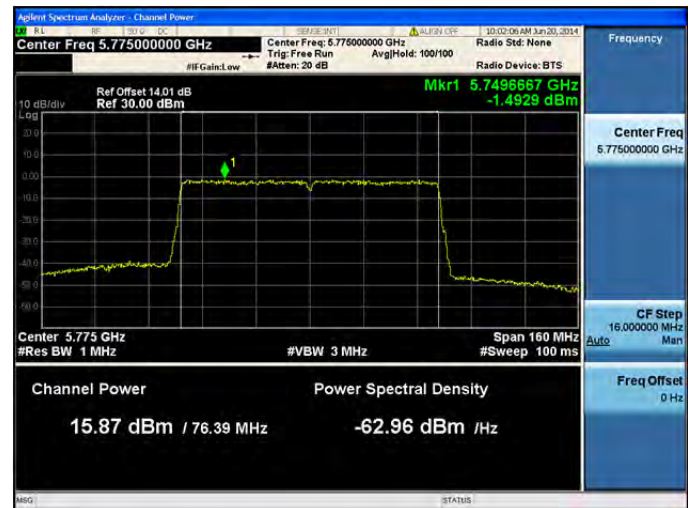


Antenna D




Peak Output Power, 5775 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2




Antenna A

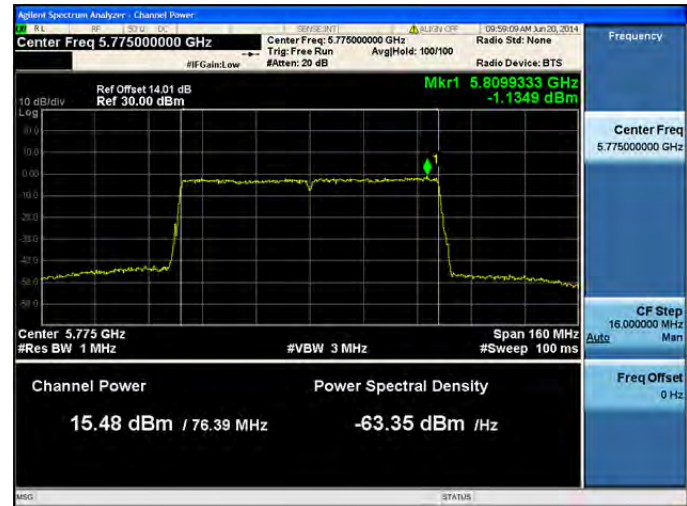

Antenna B

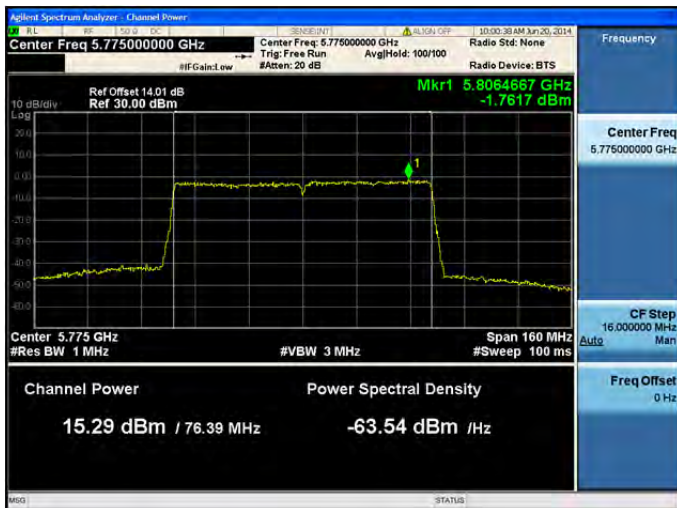

Antenna C

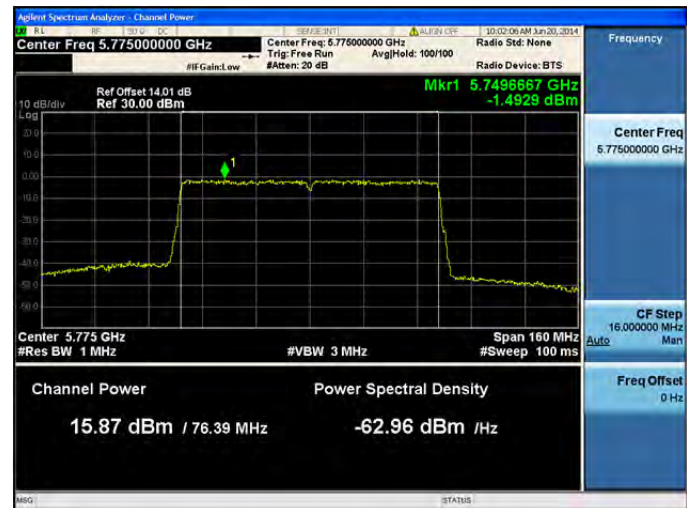

Antenna D




Peak Output Power, 5775 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B

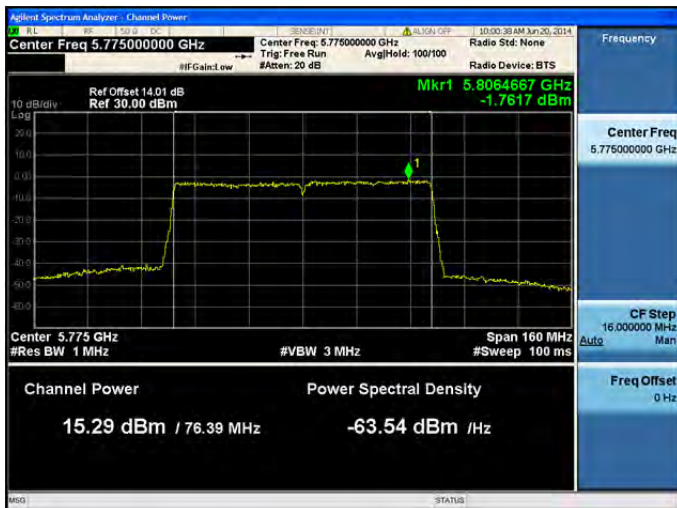

Antenna C



Antenna D



Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2

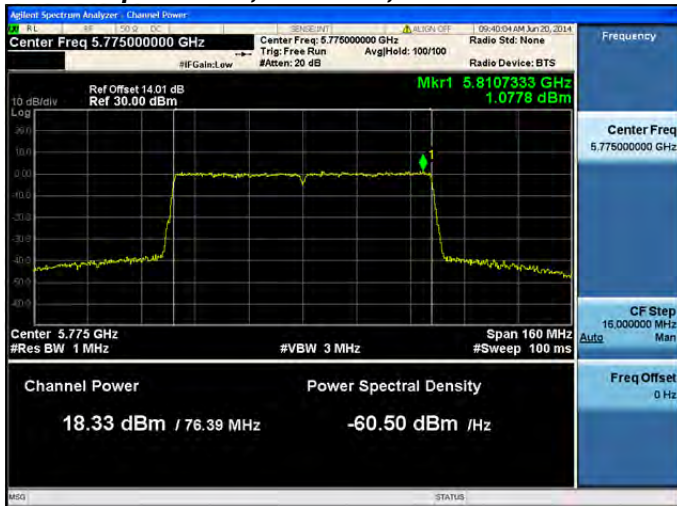


Antenna A




Antenna B



Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1

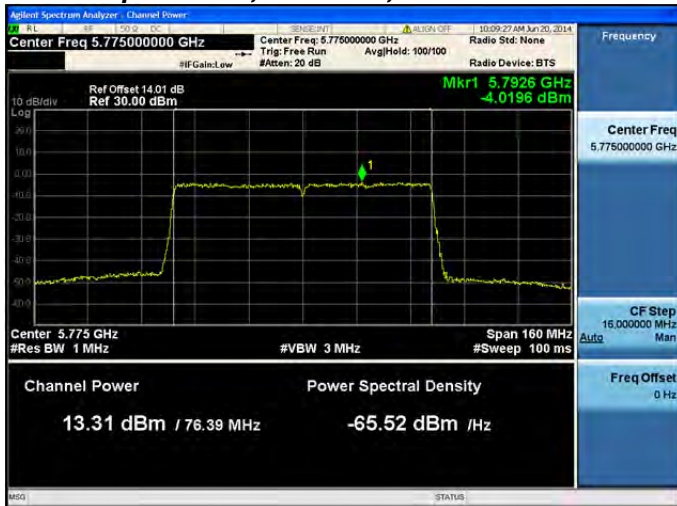

Antenna A

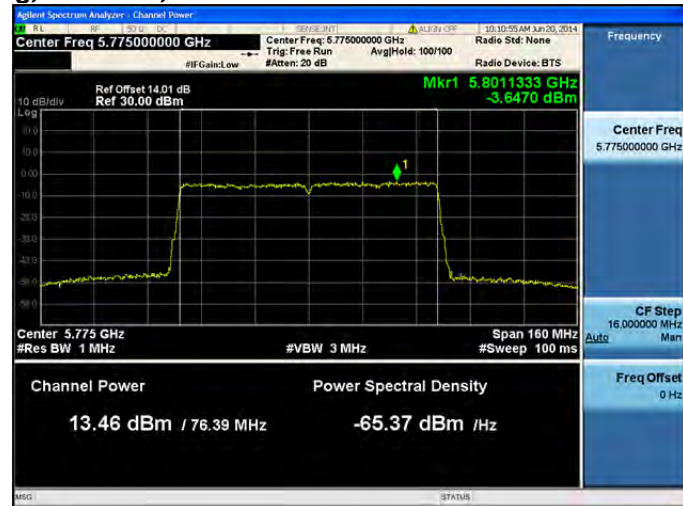

Antenna B




Antenna C



Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A

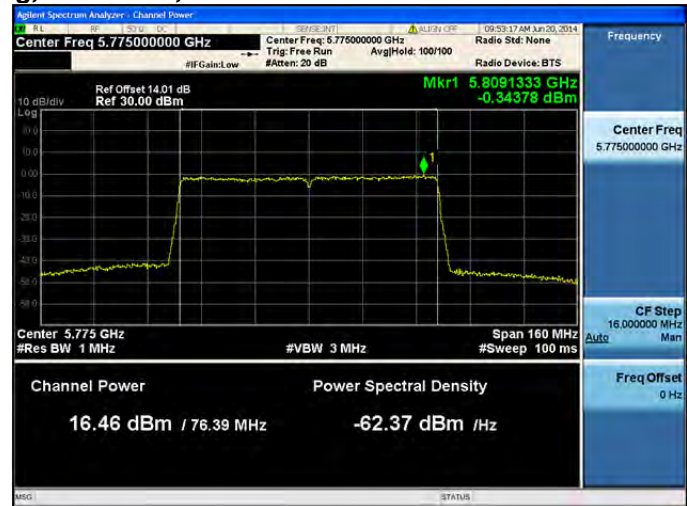

Antenna B




Antenna C




Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A

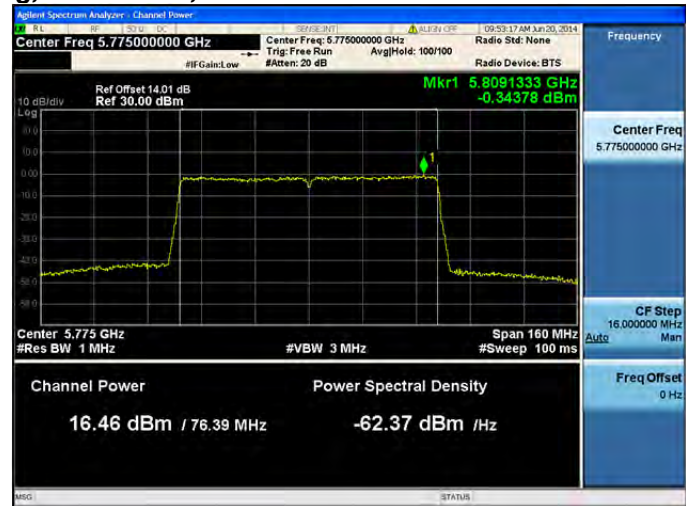

Antenna B

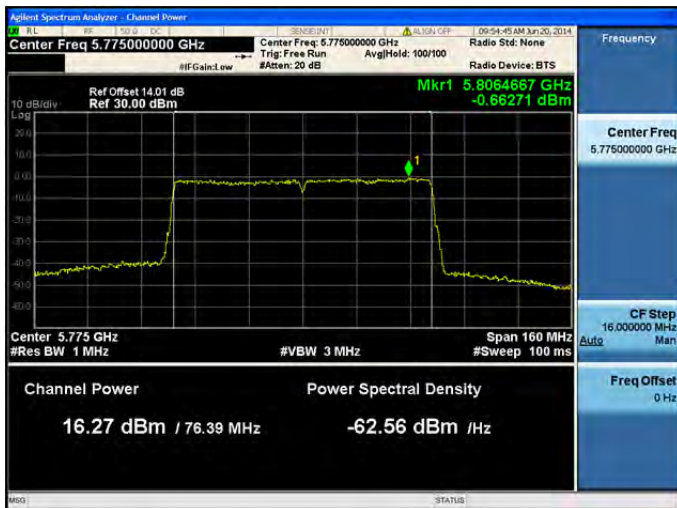


Antenna C



Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1




Antenna A

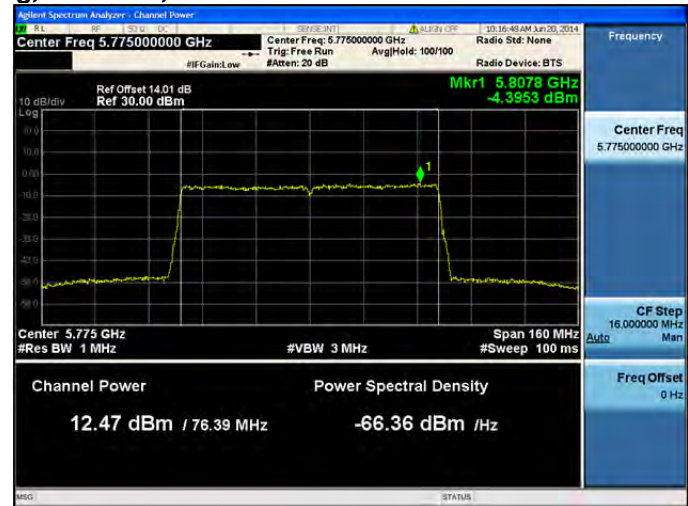

Antenna B



Antenna C

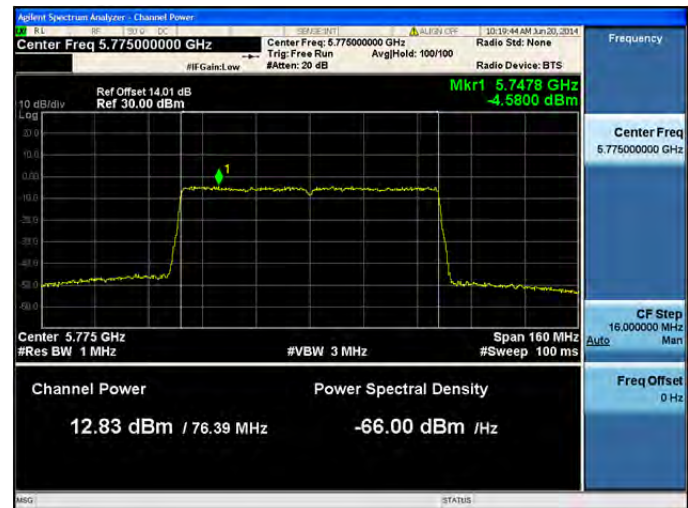

Antenna D




Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B

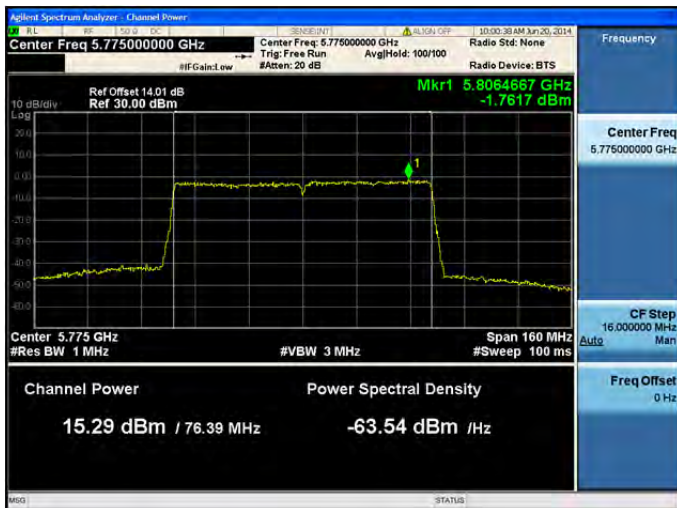

Antenna C

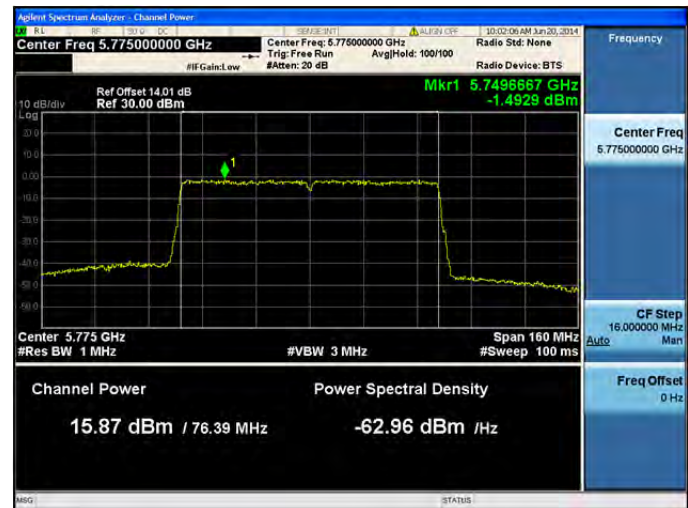

Antenna D




Peak Output Power, 5775 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3




Antenna A



Antenna B

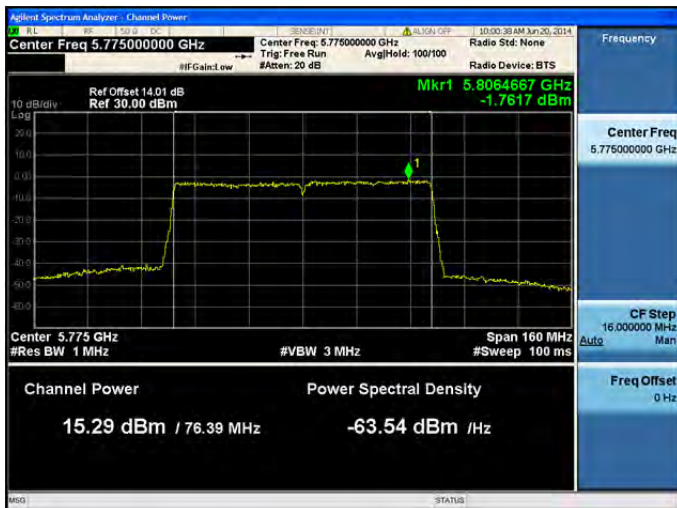


Antenna C

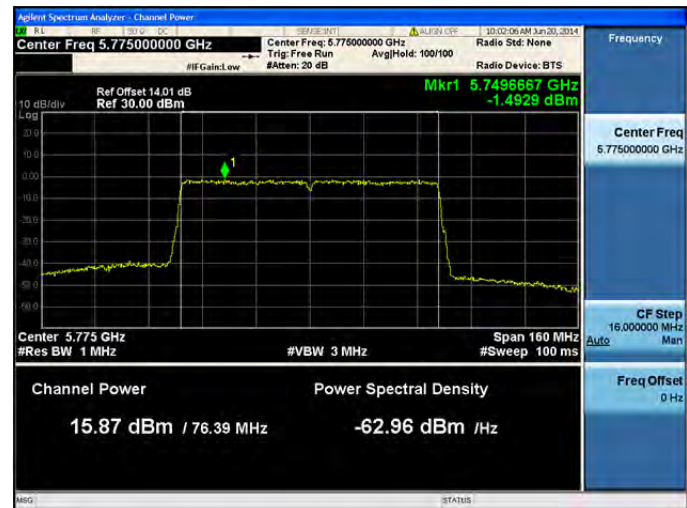

Antenna D



Peak Output Power, 5775 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1

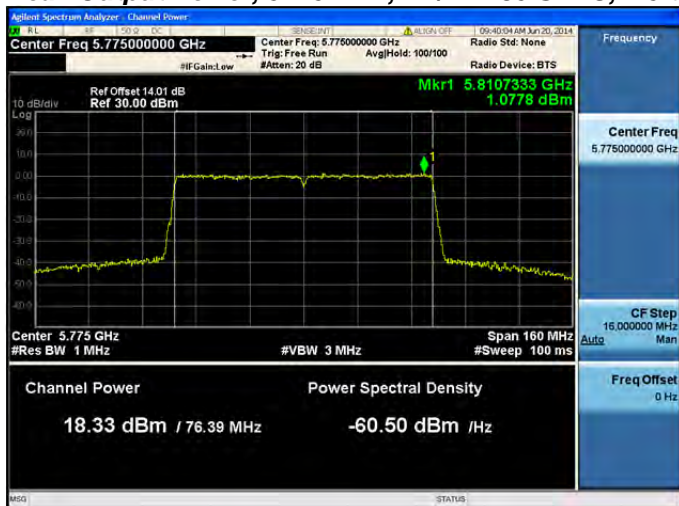


Antenna A




Antenna B



Peak Output Power, 5775 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1

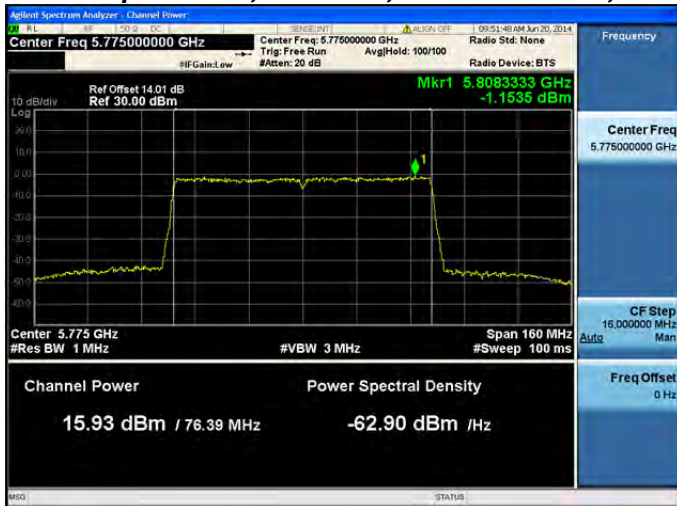

Antenna A

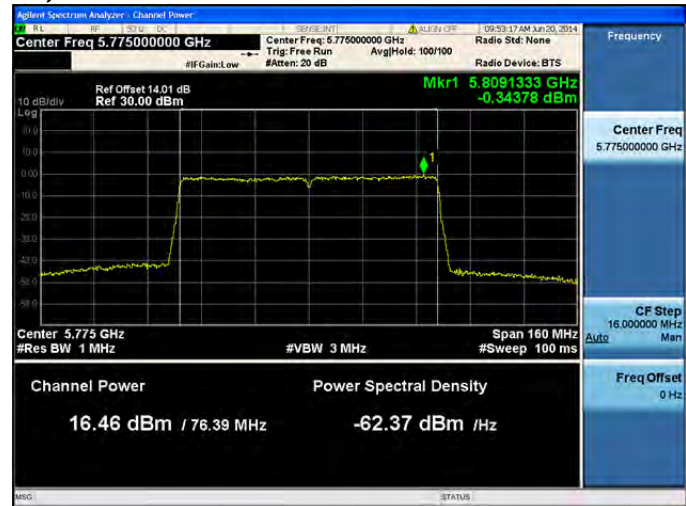

Antenna B




Antenna C




Peak Output Power, 5775 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1




Antenna A

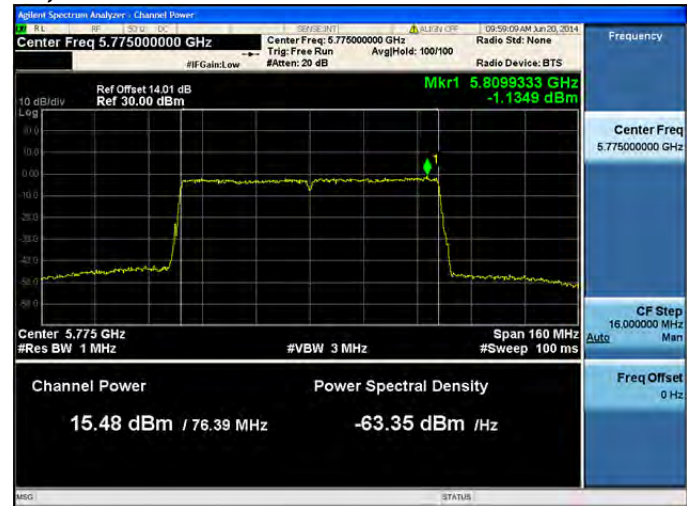

Antenna B

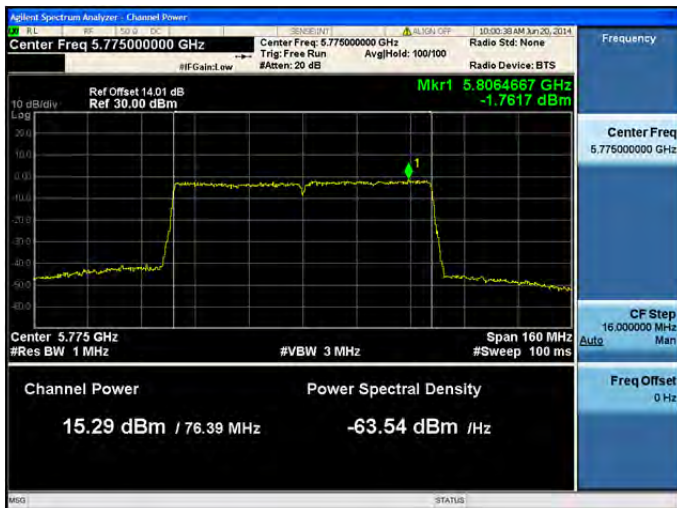


Antenna C

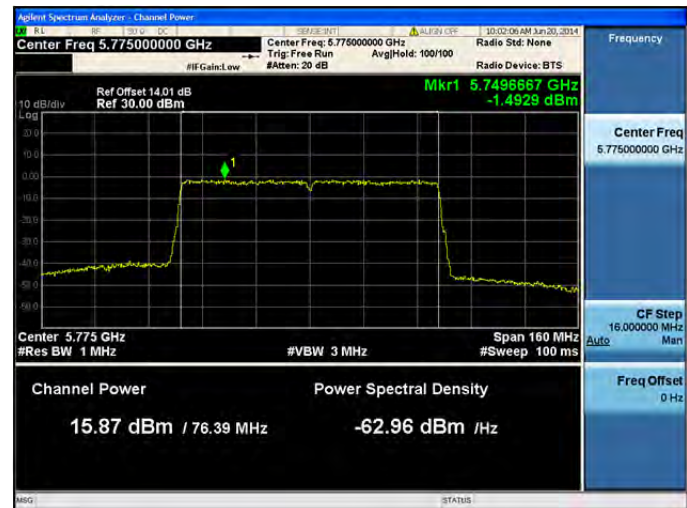

Antenna D



Peak Output Power, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

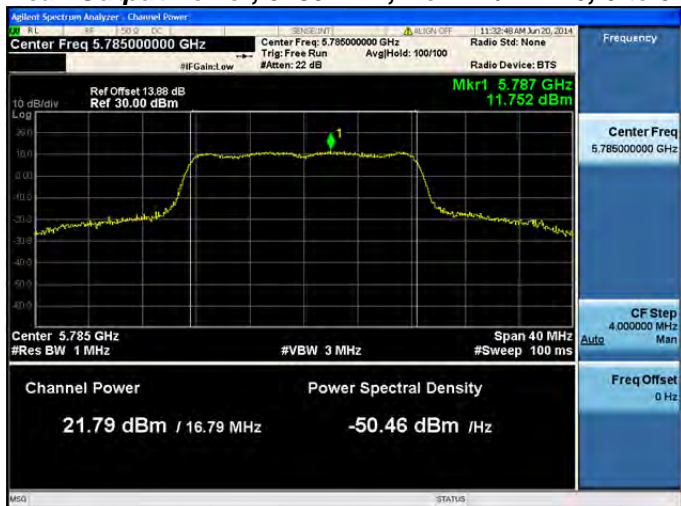


Antenna A



Peak Output Power, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps




Antenna A

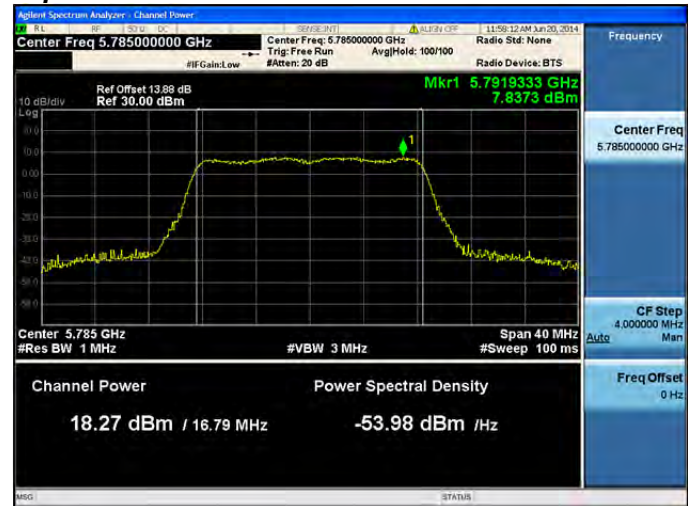


Antenna B



Peak Output Power, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps

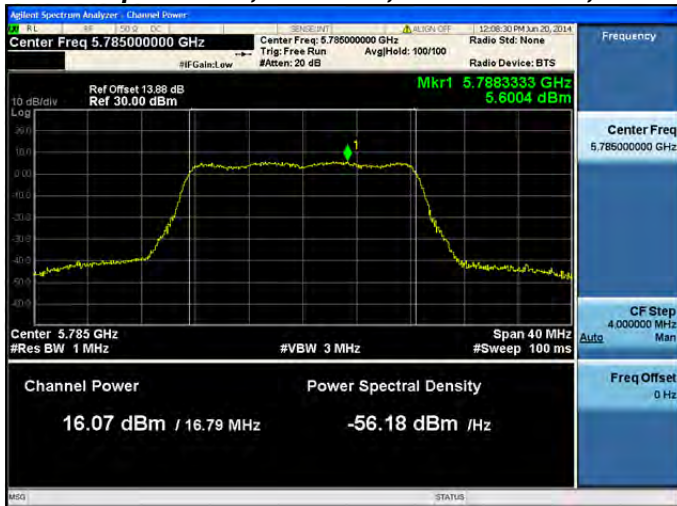

Antenna A

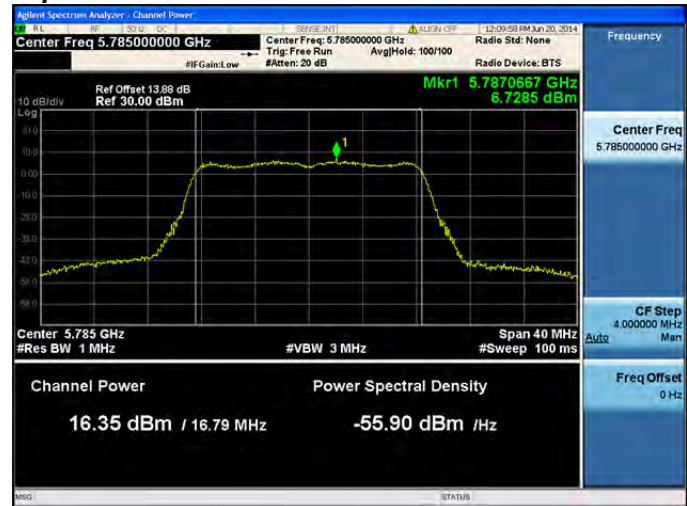

Antenna B




Antenna C




Peak Output Power, 5785 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A

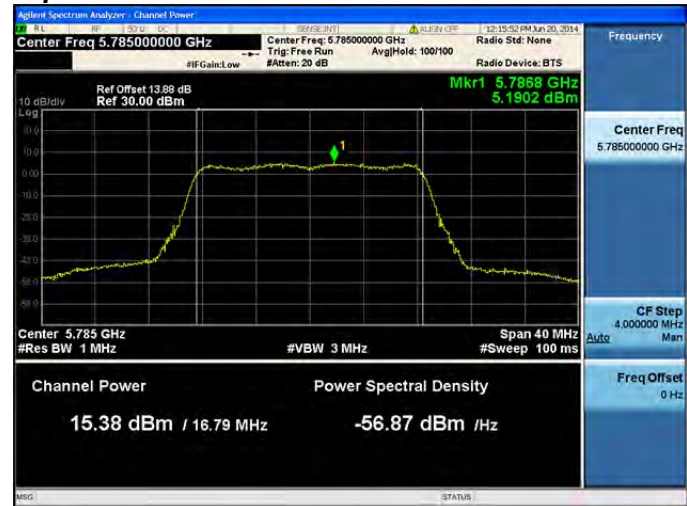

Antenna B

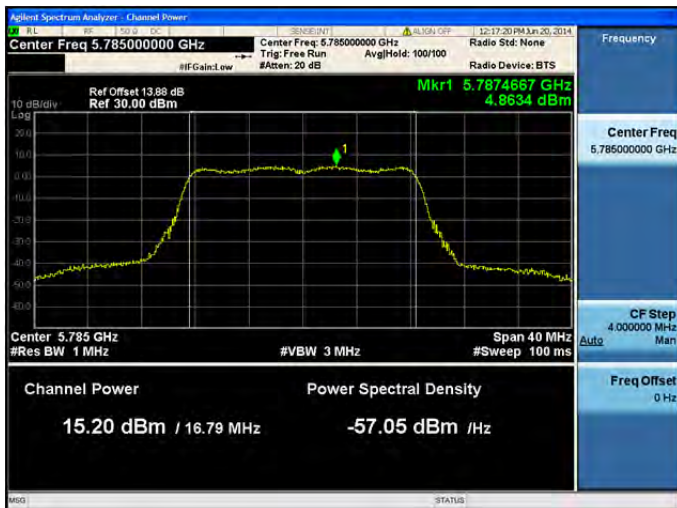


Antenna C




Antenna D



Peak Output Power, 5785 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

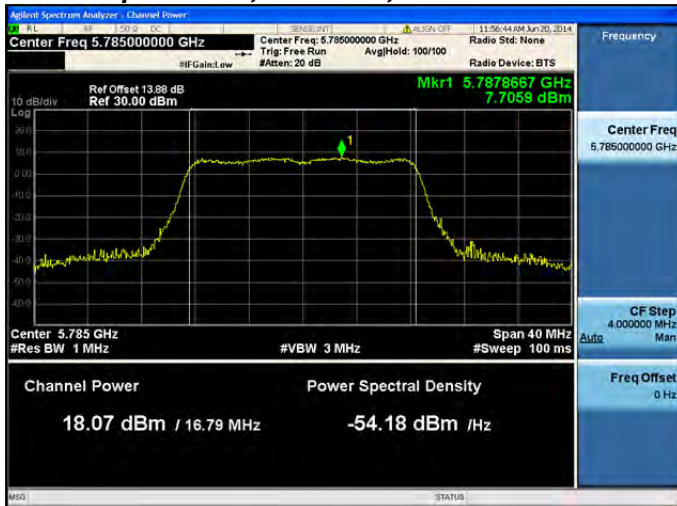


Antenna A

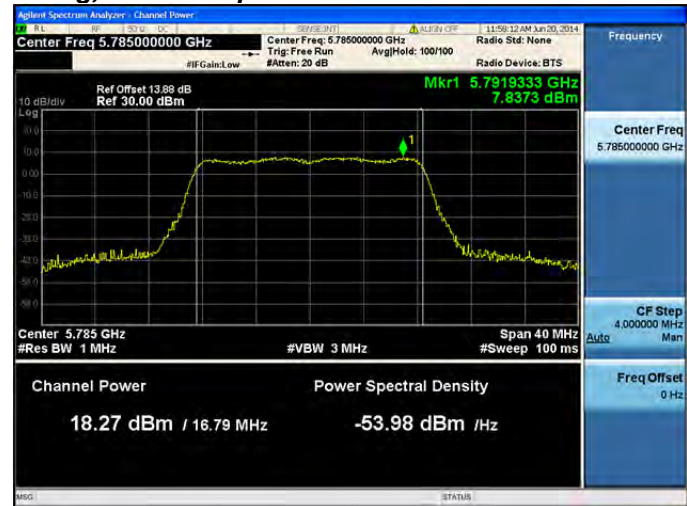


Antenna B




Peak Output Power, 5785 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

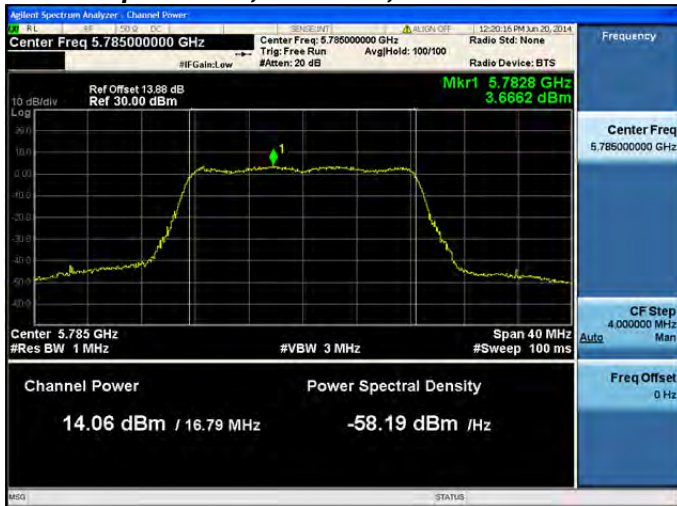

Antenna A

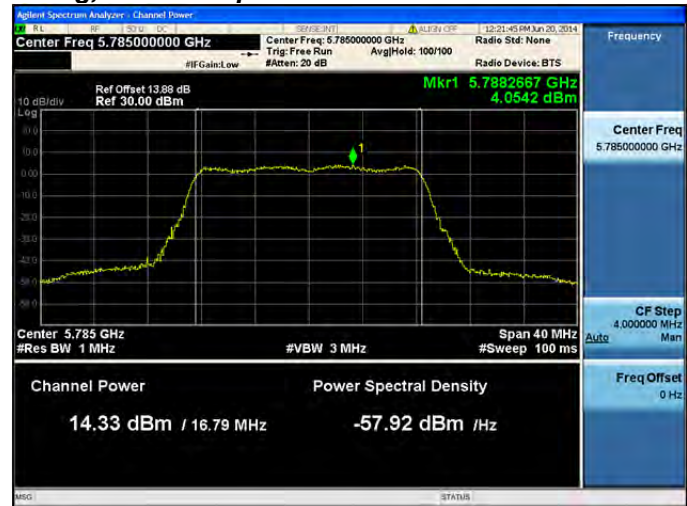

Antenna B

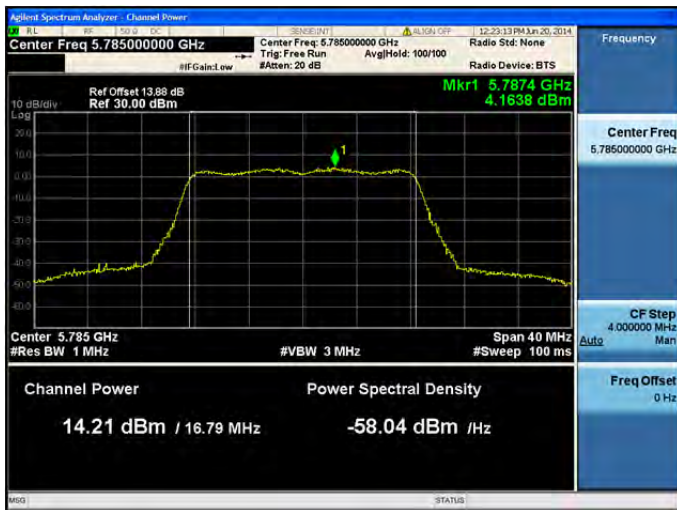


Antenna C




Peak Output Power, 5785 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps



Antenna A

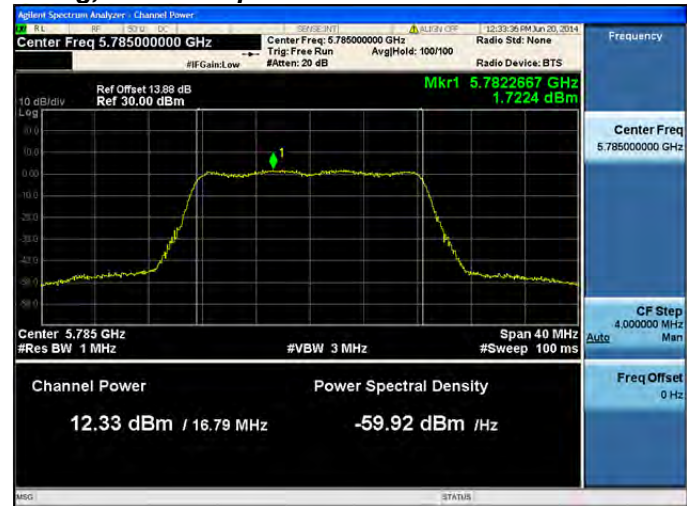

Antenna B

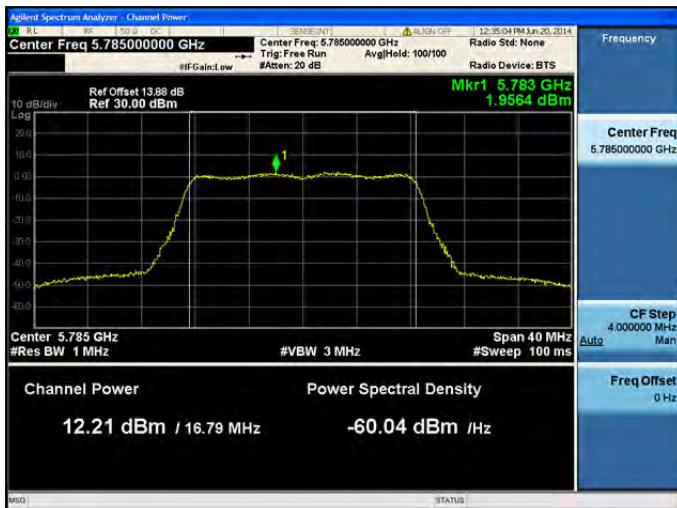

Antenna C



Antenna D



Peak Output Power, 5785 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1




Antenna A



Peak Output Power, 5785 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1




Antenna A

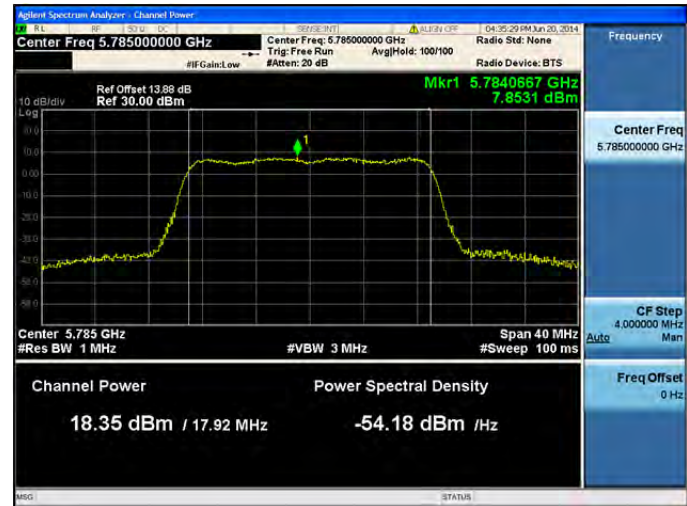


Antenna B



Peak Output Power, 5785 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

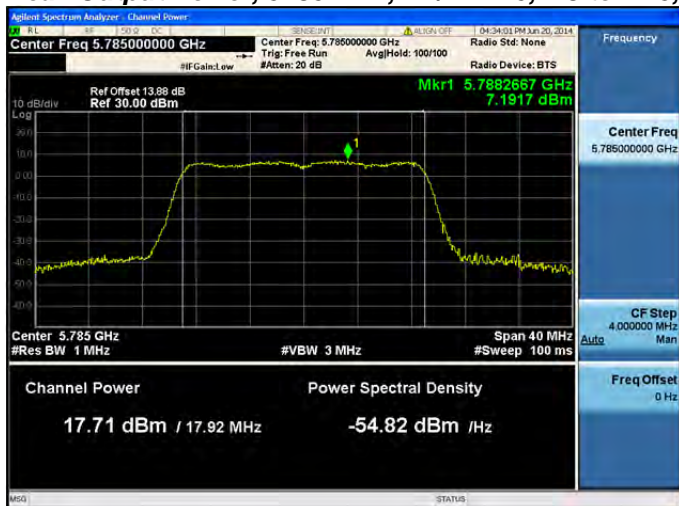

Antenna A

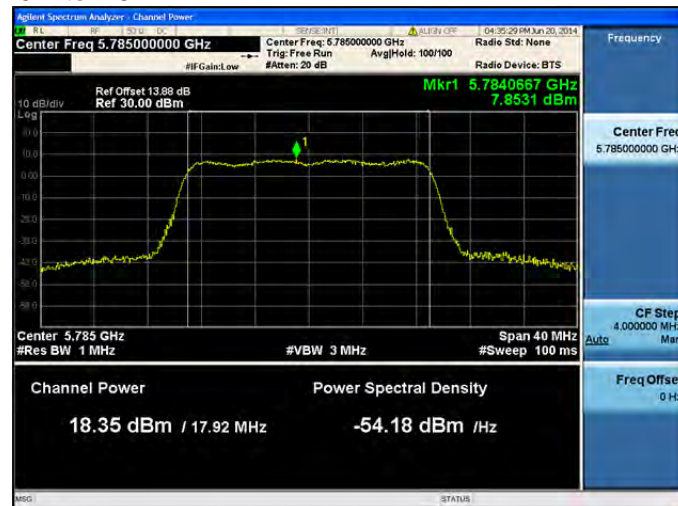


Antenna B



Peak Output Power, 5785 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



Antenna A

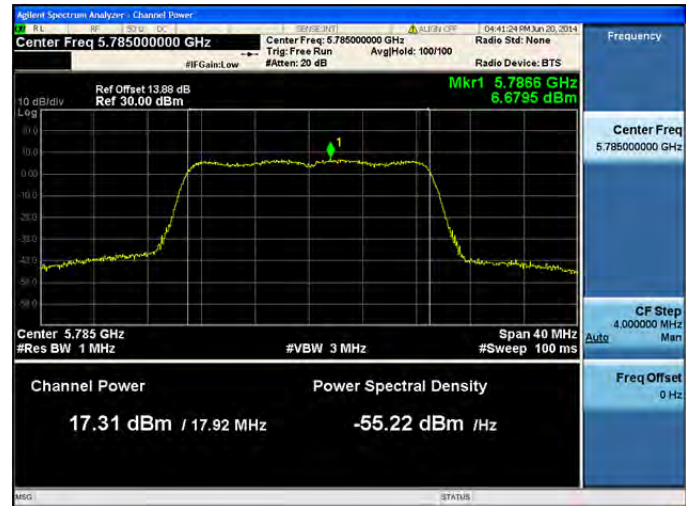

Antenna B




Antenna C



Peak Output Power, 5785 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2



Antenna A

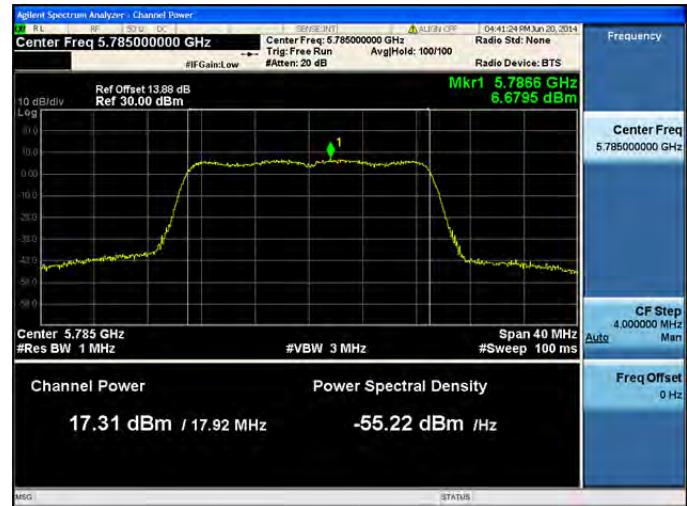

Antenna B



Antenna C



Peak Output Power, 5785 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3



Antenna A




Antenna B



Antenna C



Peak Output Power, 5785 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

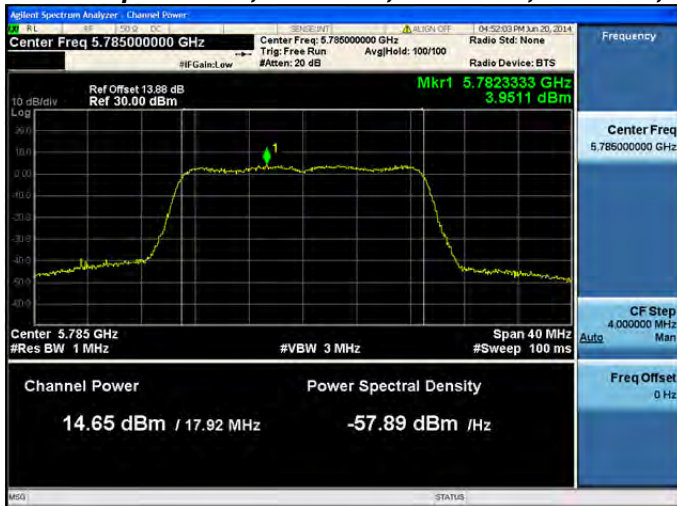


Antenna A



Antenna B




Antenna C

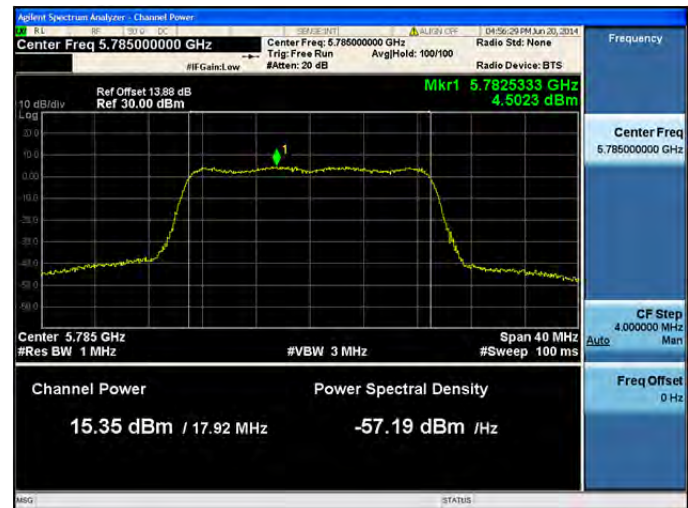


Antenna D



Peak Output Power, 5785 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

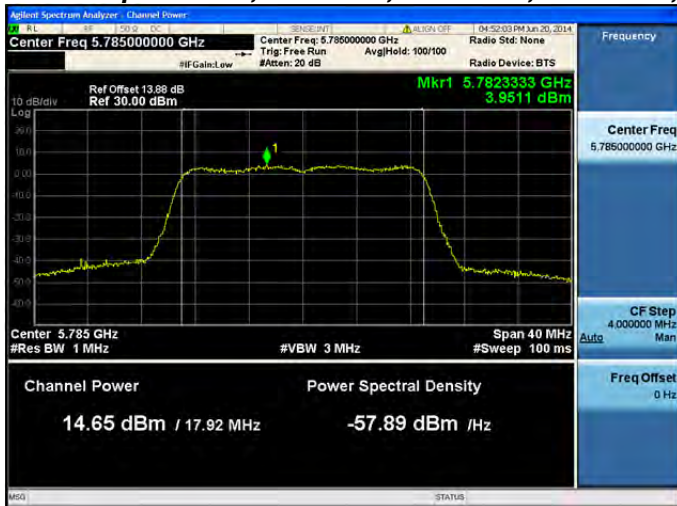


Antenna A

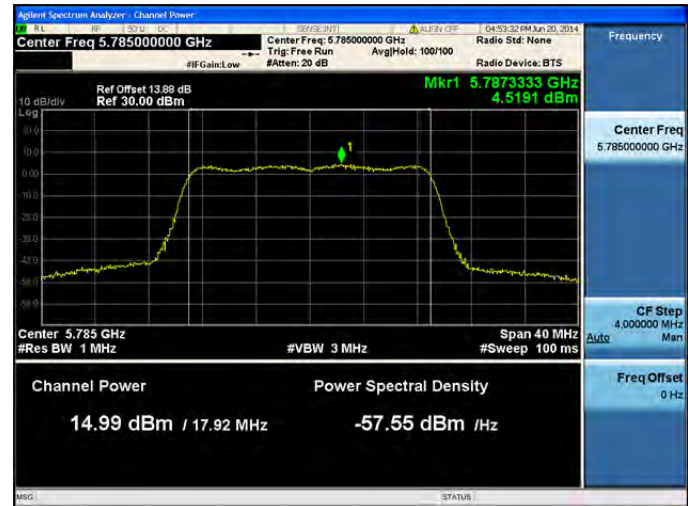

Antenna B



Antenna C

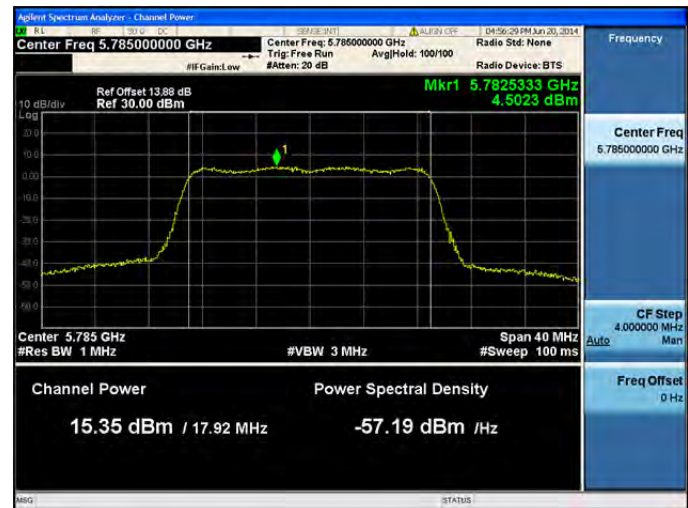


Antenna D



Peak Output Power, 5785 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3




Antenna A

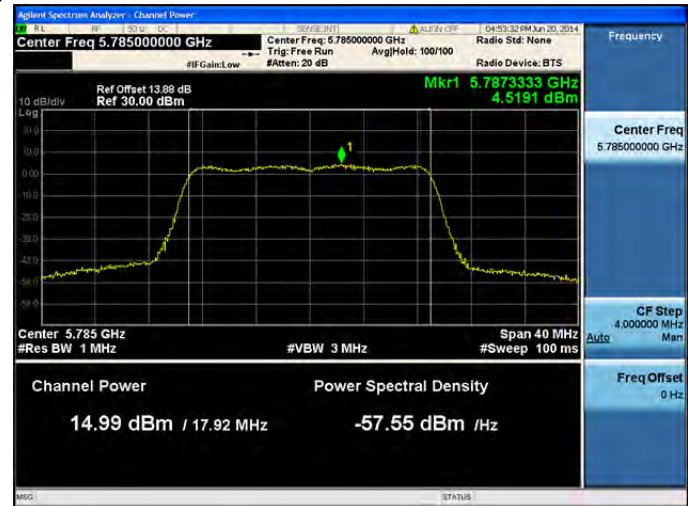

Antenna B



Antenna C

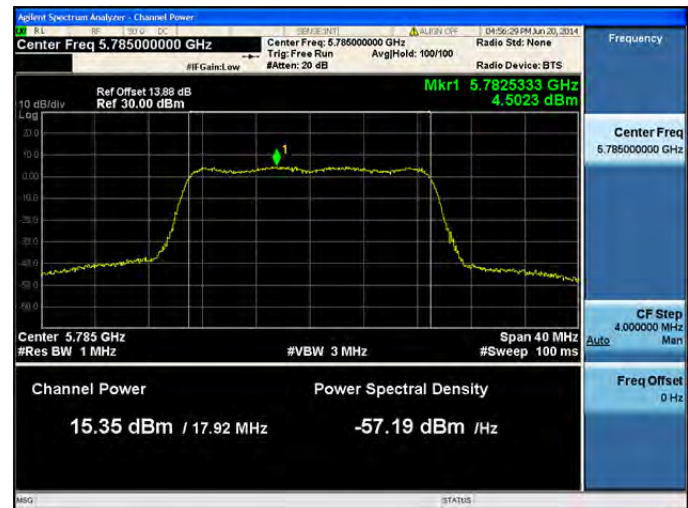


Antenna D



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A

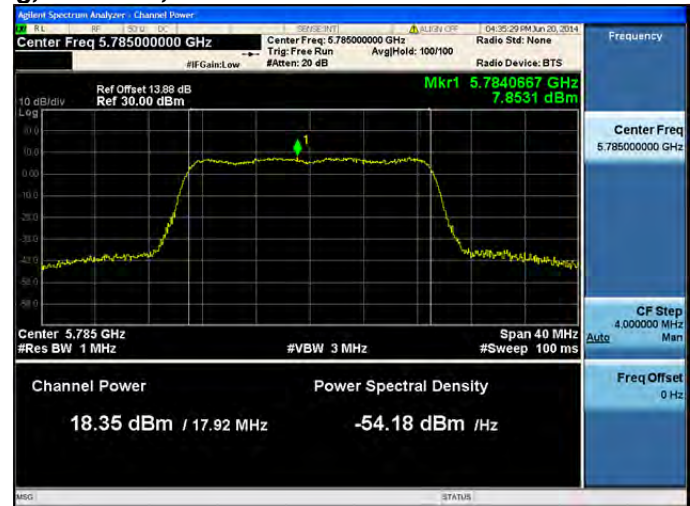


Antenna B



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A

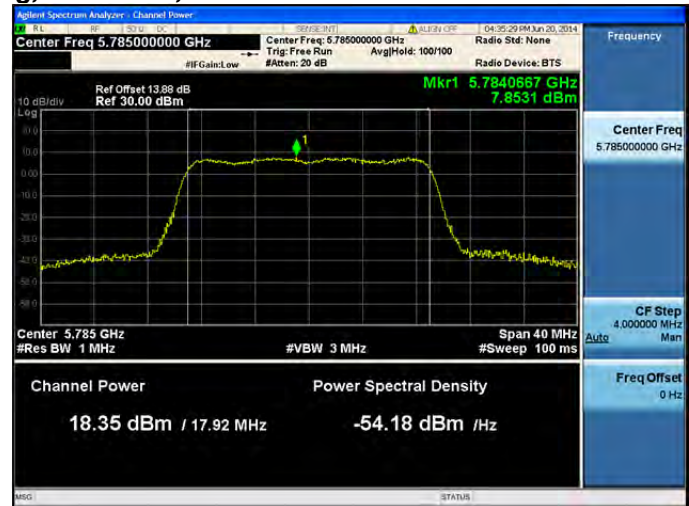


Antenna B



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A

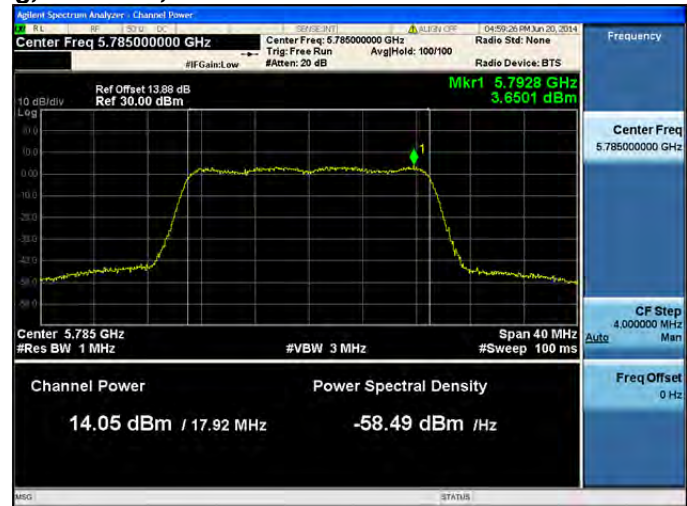


Antenna B




Antenna C



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

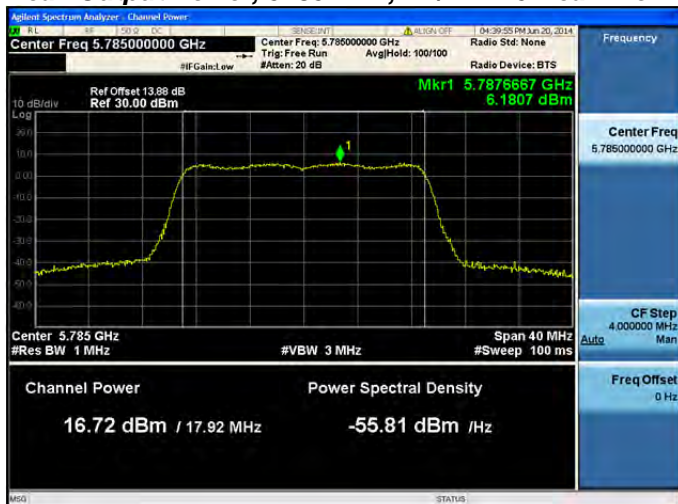

Antenna A

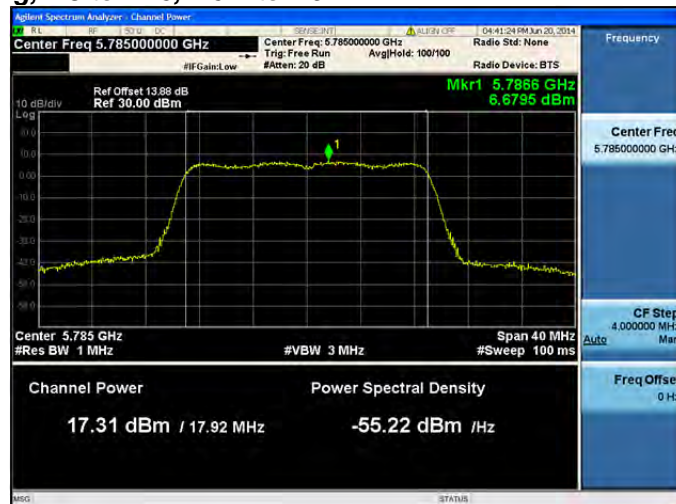

Antenna B




Antenna C



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A

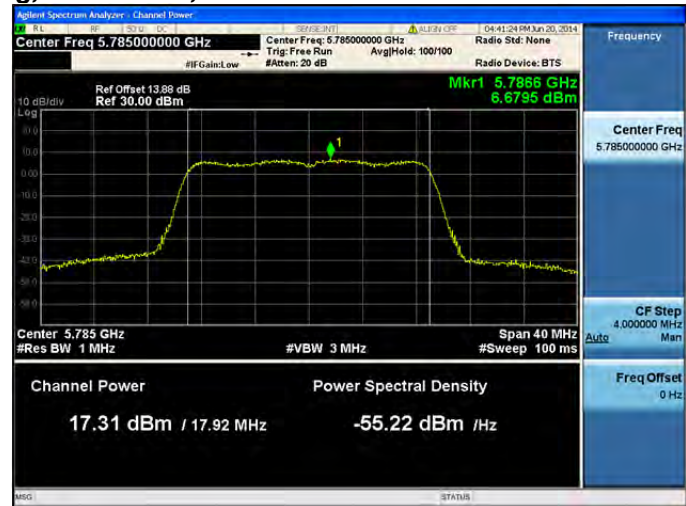

Antenna B




Antenna C




Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1




Antenna A

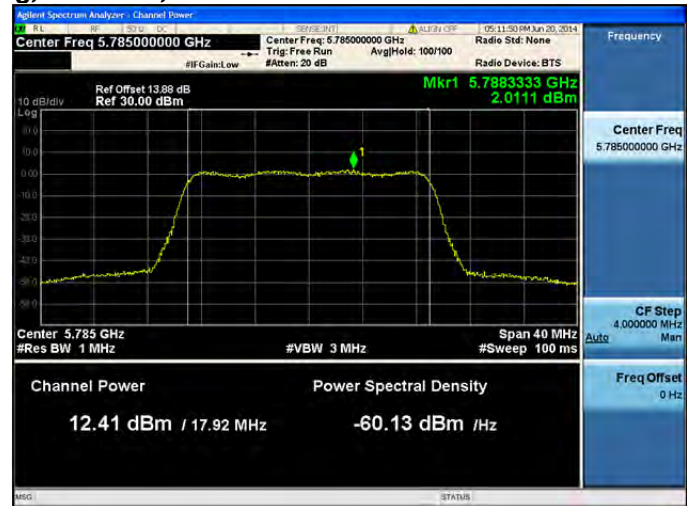

Antenna B

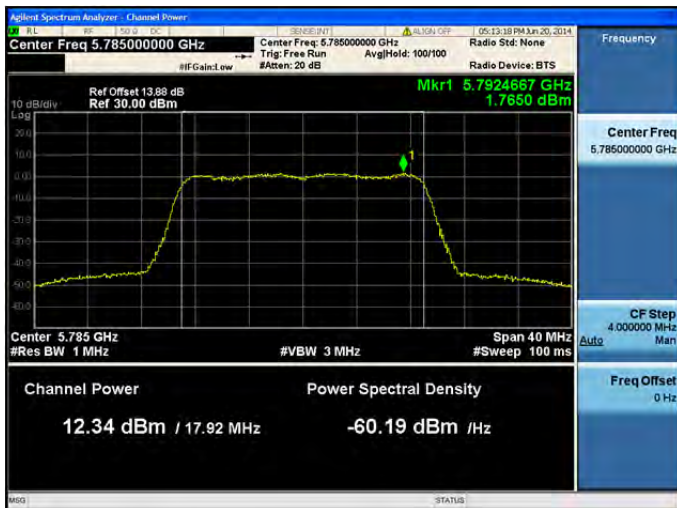


Antenna C

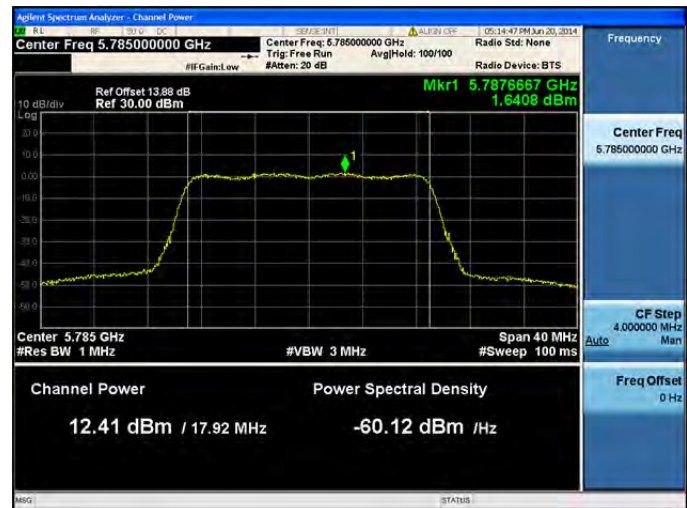

Antenna D



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

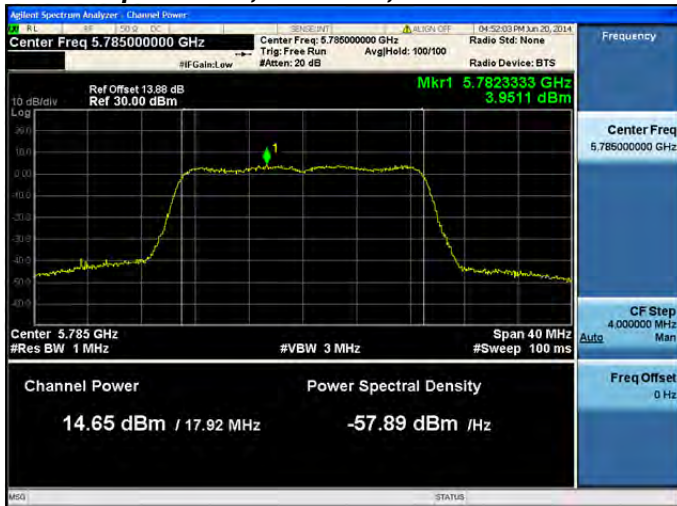


Antenna A



Antenna B




Antenna C

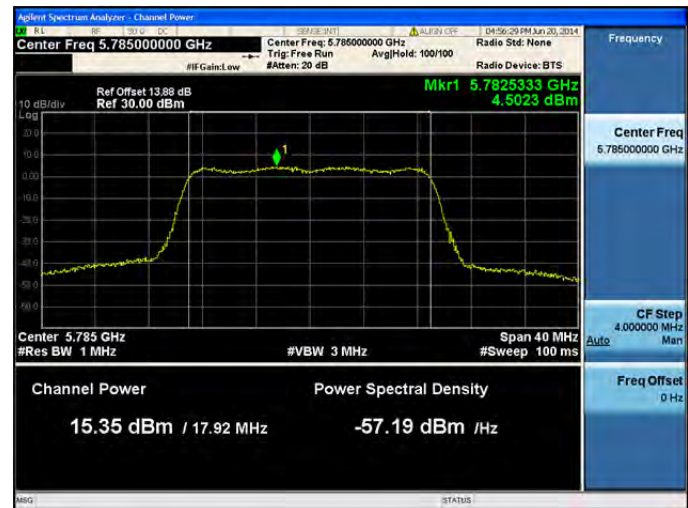


Antenna D



Peak Output Power, 5785 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

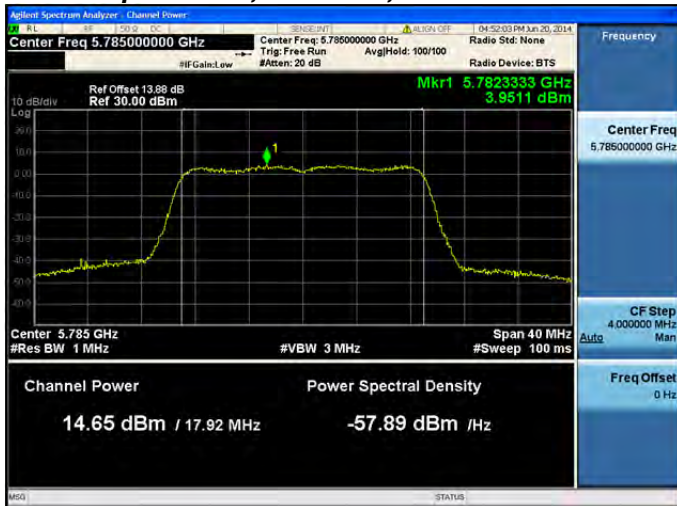


Antenna A

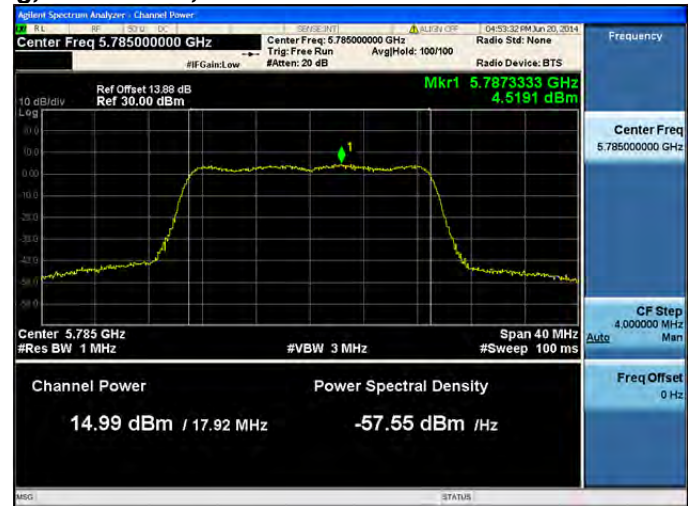

Antenna B




Antenna C

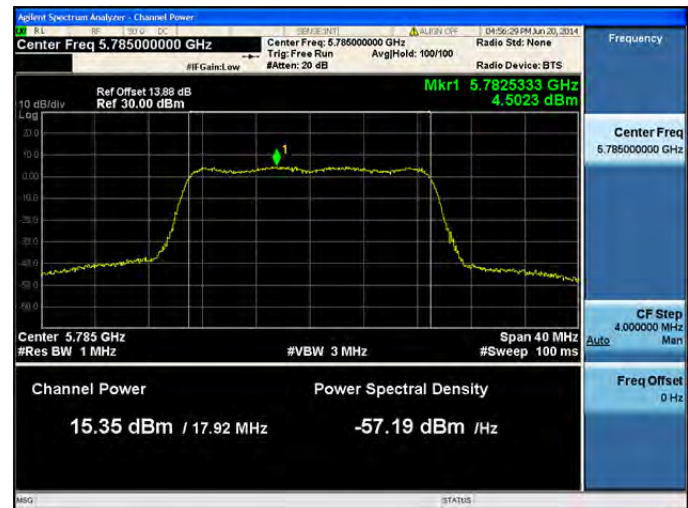


Antenna D



Peak Output Power, 5785 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

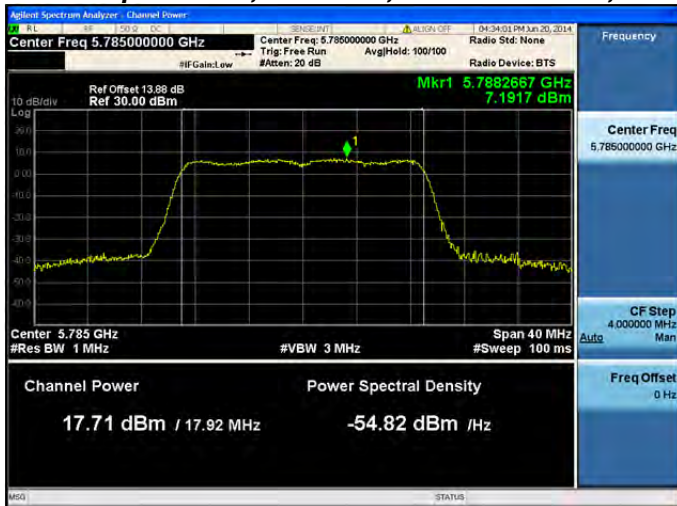

Antenna A

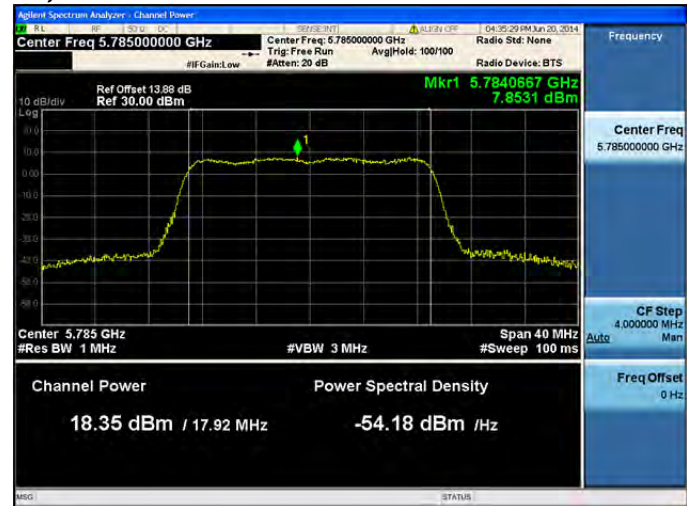


Antenna B



Peak Output Power, 5785 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



Antenna A

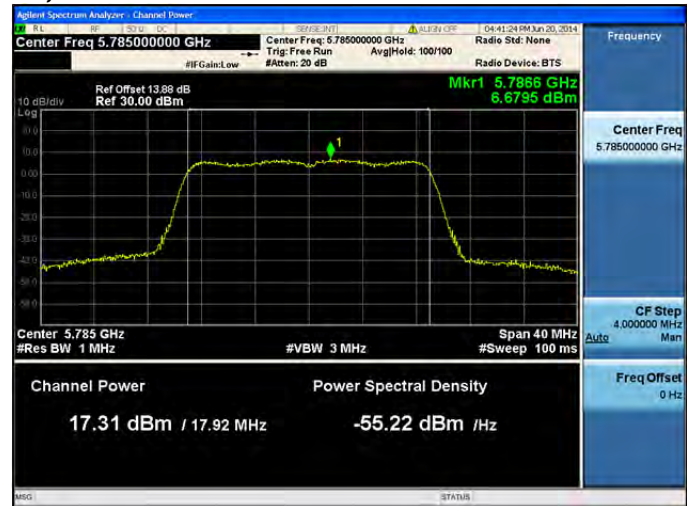


Antenna B



Antenna C



Peak Output Power, 5785 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

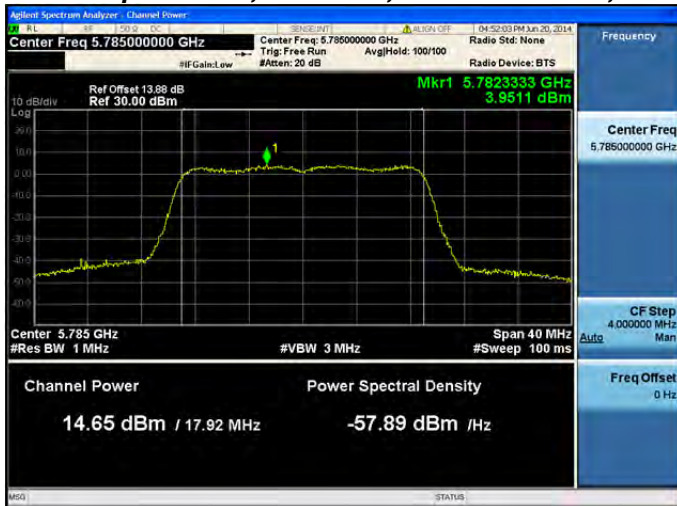


Antenna A



Antenna B




Antenna C

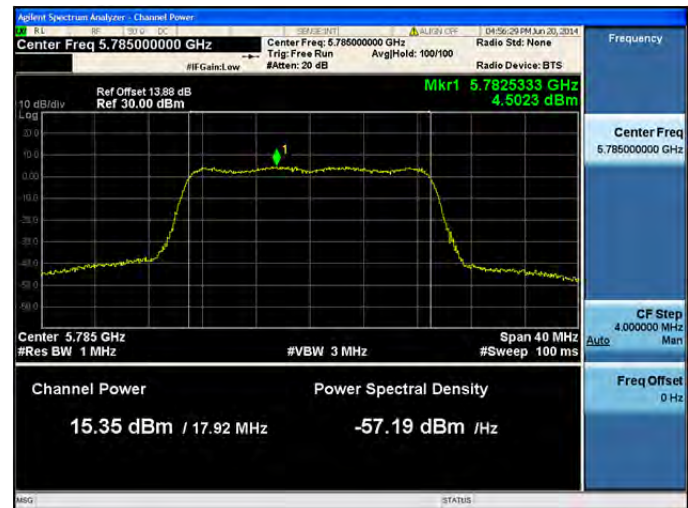

Antenna D



Peak Output Power, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

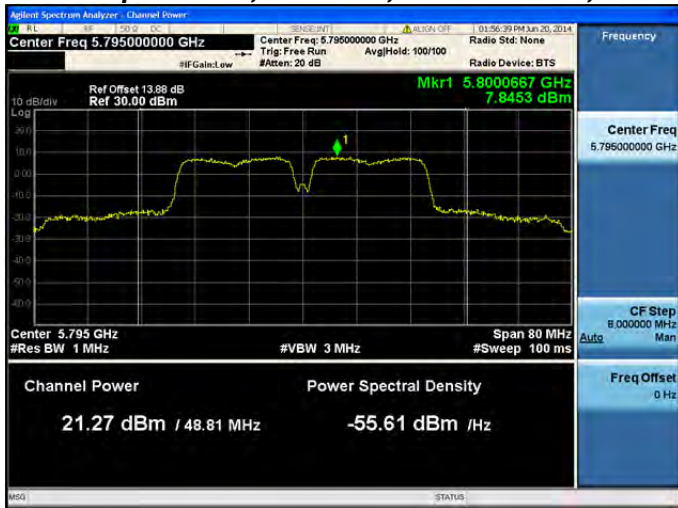


Antenna A



Peak Output Power, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps




Antenna A

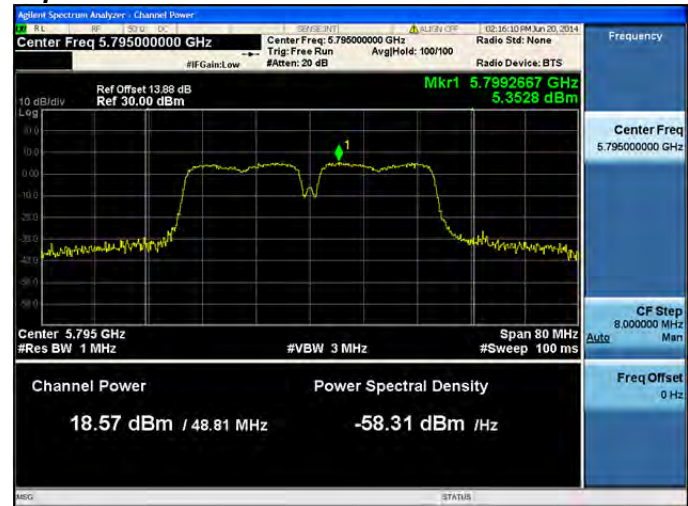


Antenna B



Peak Output Power, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps

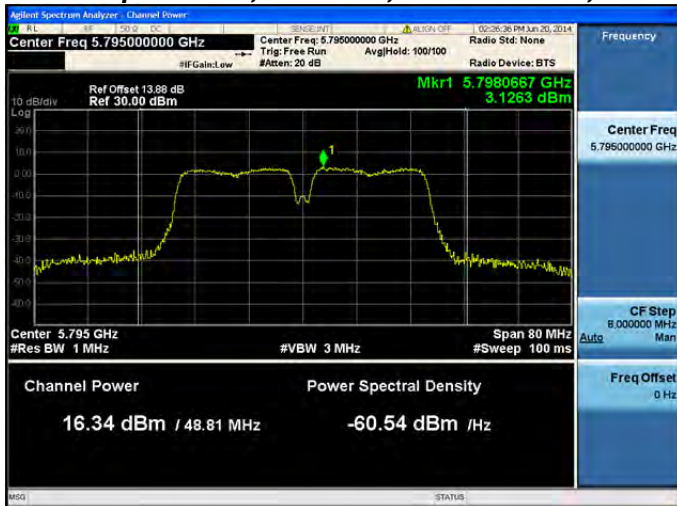

Antenna A

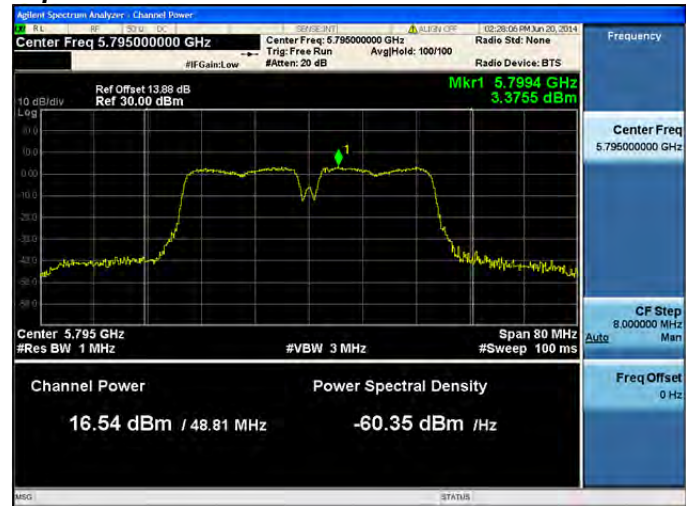

Antenna B




Antenna C




Peak Output Power, 5795 MHz, Non HT/VHT40, 6 to 54 Mbps




Antenna A

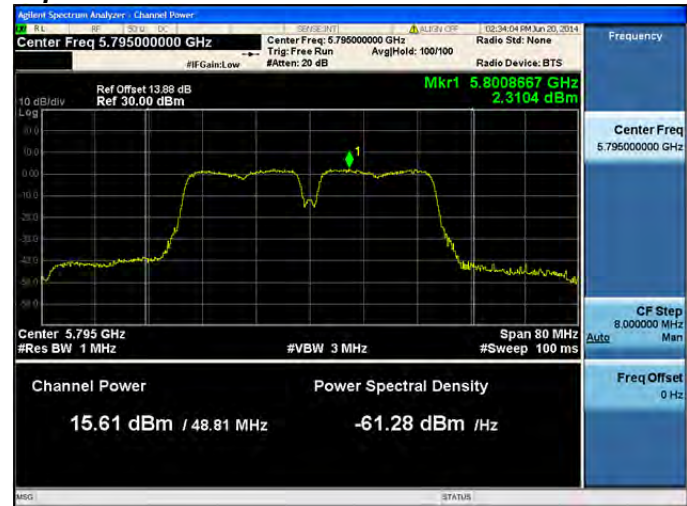

Antenna B

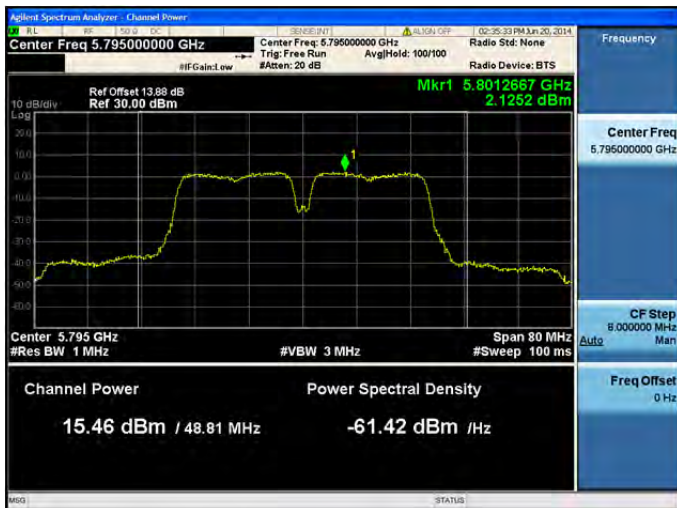

Antenna C

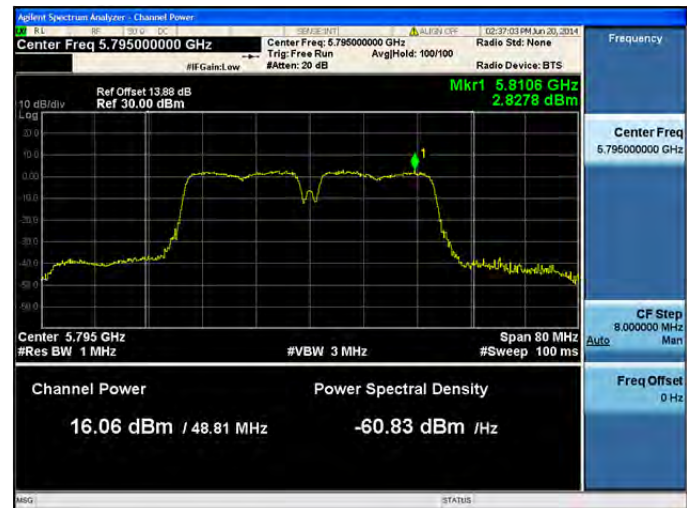

Antenna D




Peak Output Power, 5795 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1




Antenna A



Peak Output Power, 5795 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

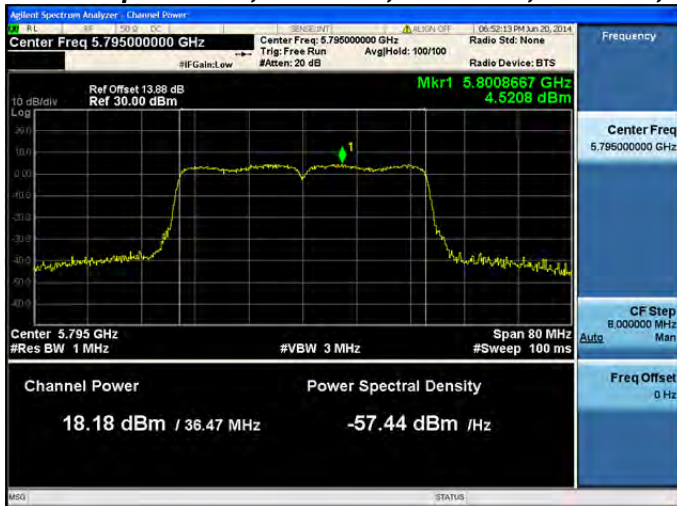


Antenna A

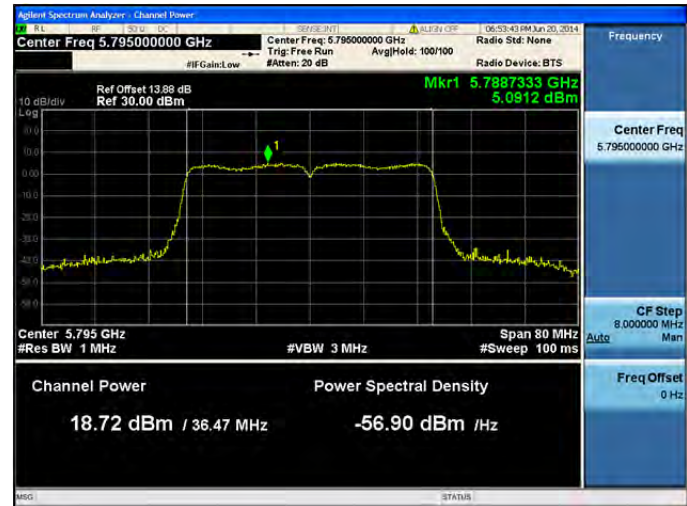


Antenna B



Peak Output Power, 5795 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

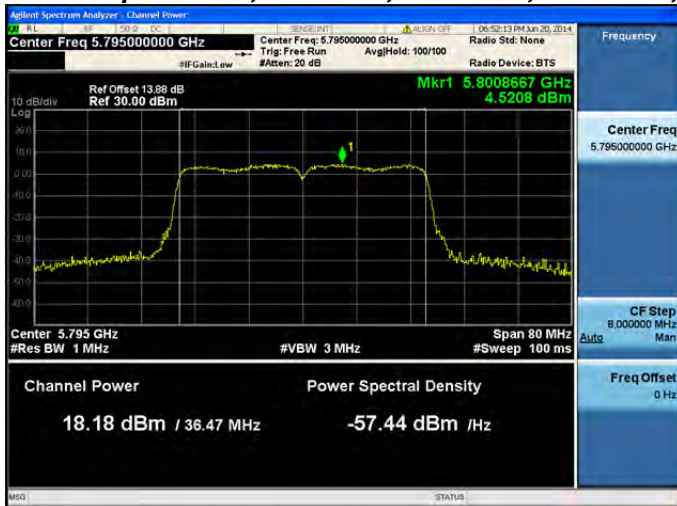


Antenna A

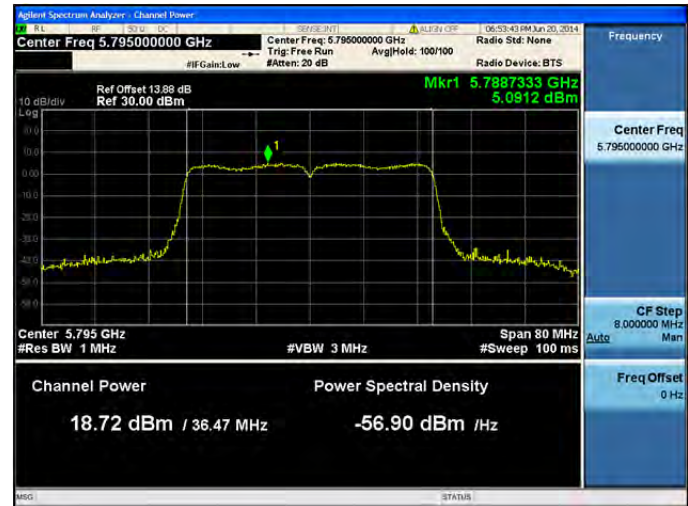


Antenna B




Peak Output Power, 5795 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

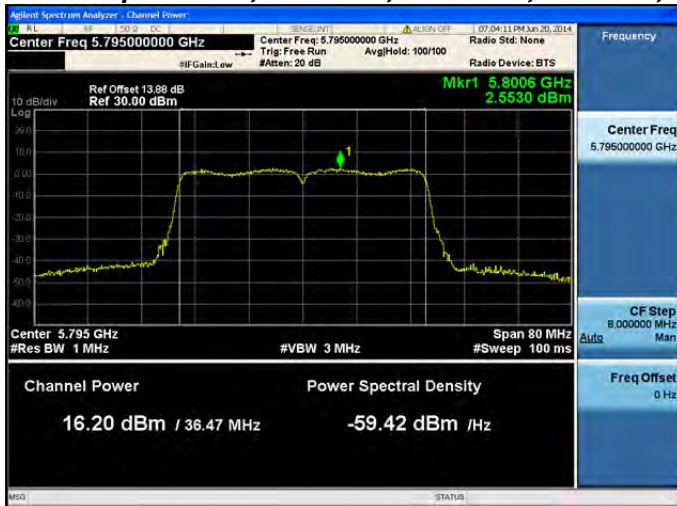

Antenna A

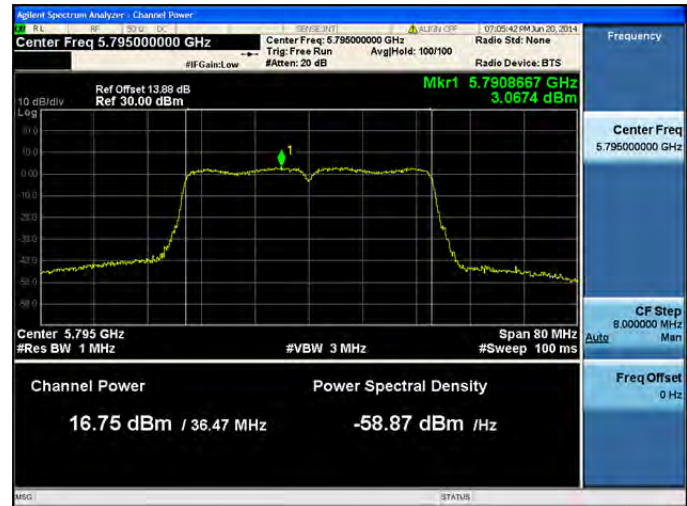


Antenna B

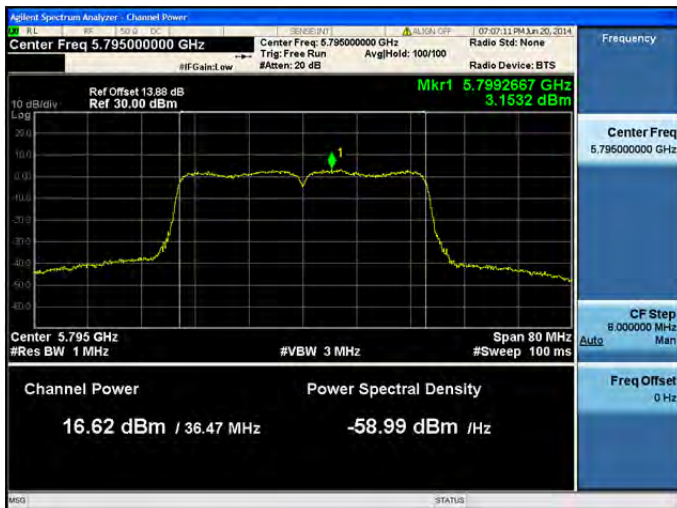


Antenna C



Peak Output Power, 5795 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

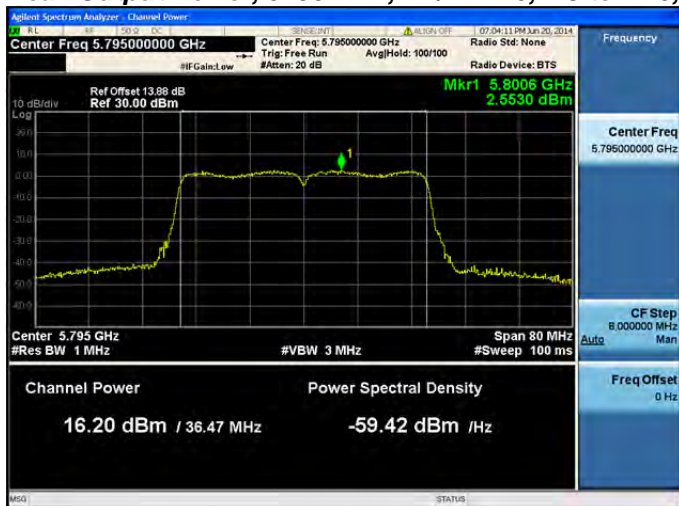

Antenna A

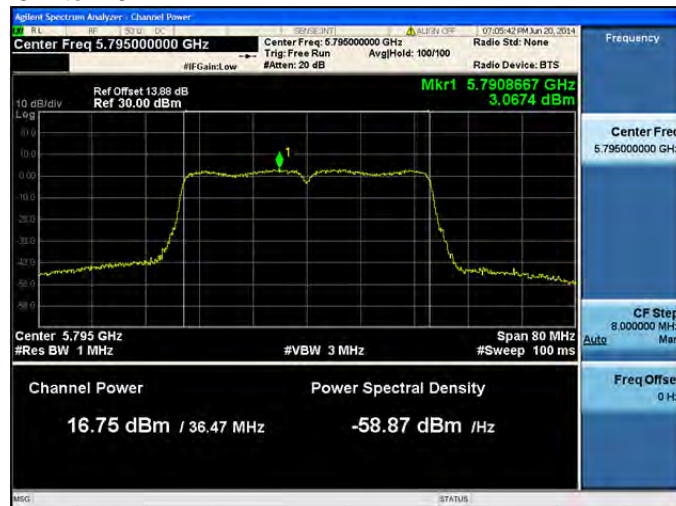


Antenna B




Antenna C




Peak Output Power, 5795 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

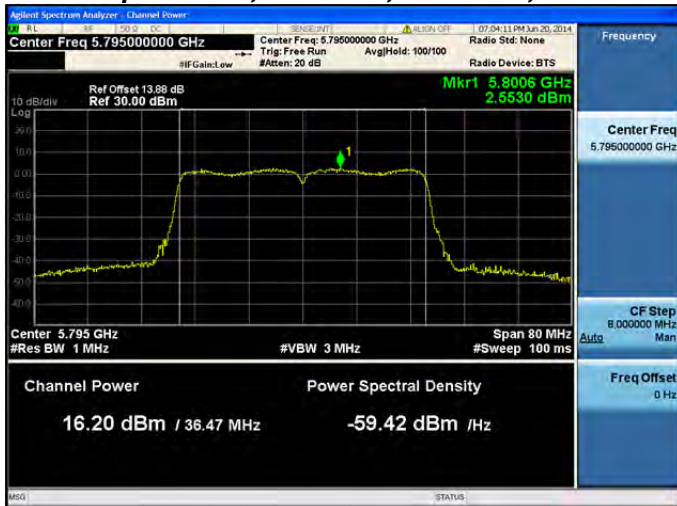

Antenna A

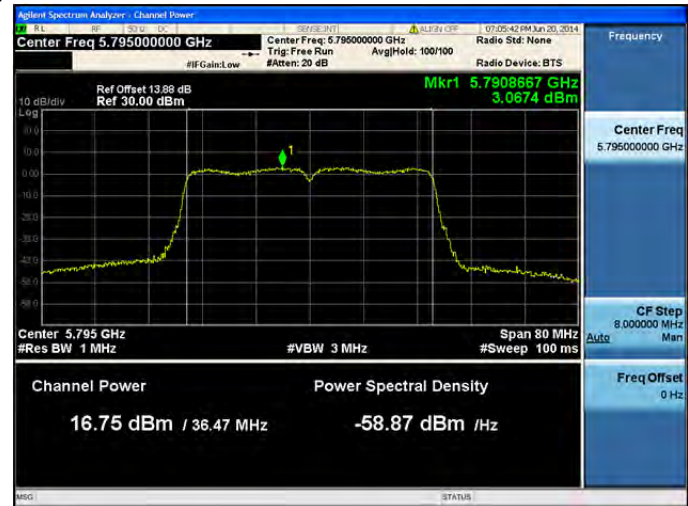


Antenna B

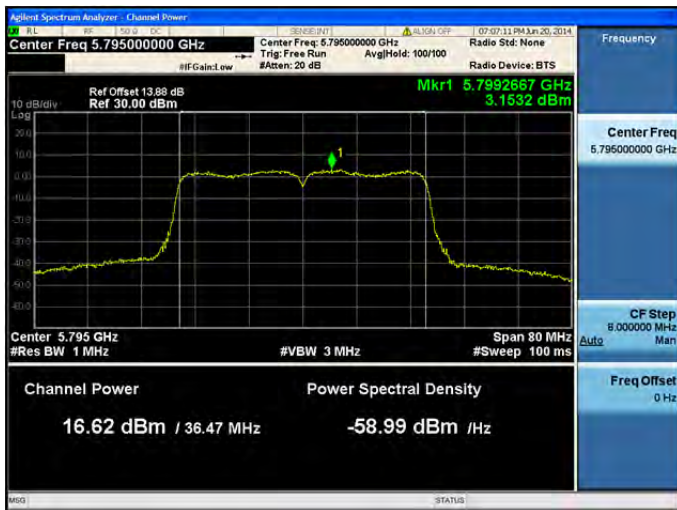


Antenna C



Peak Output Power, 5795 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

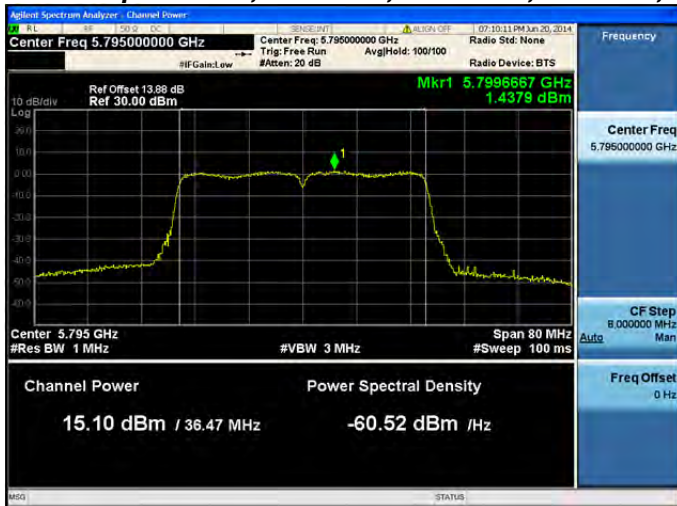


Antenna A

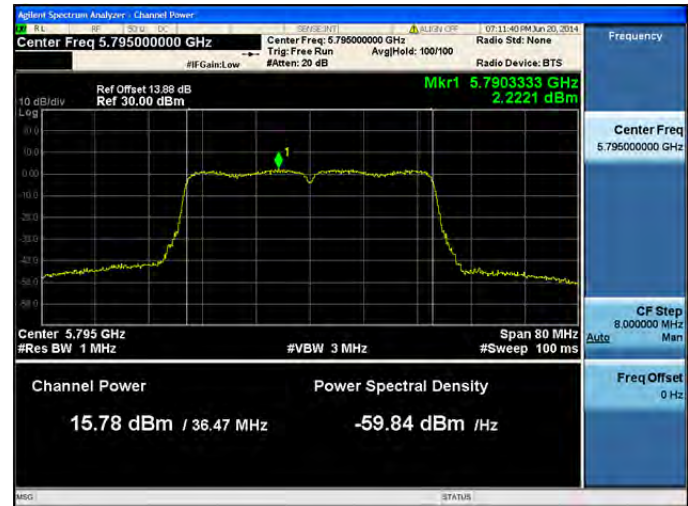

Antenna B




Antenna C

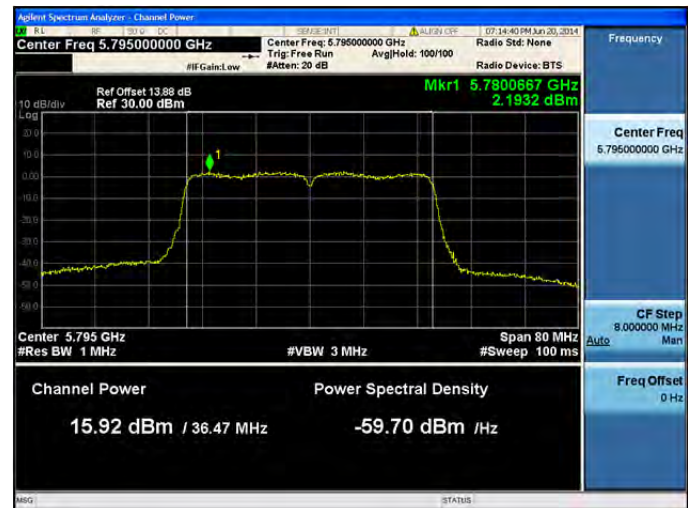


Antenna D



Peak Output Power, 5795 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

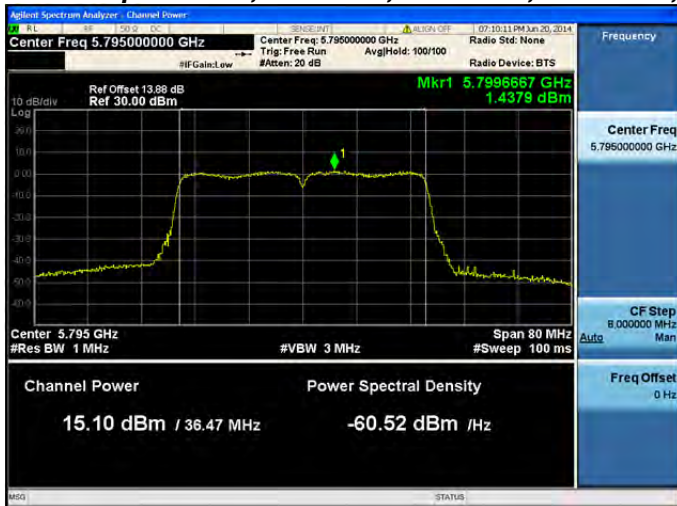

Antenna A

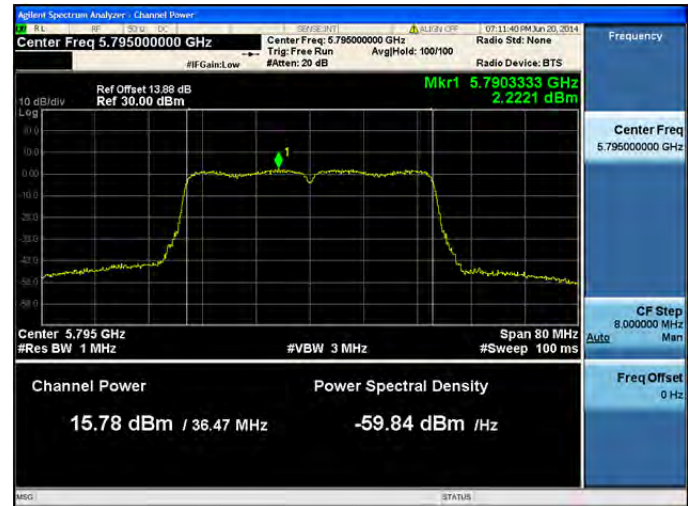

Antenna B



Antenna C




Antenna D




Peak Output Power, 5795 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3




Antenna A

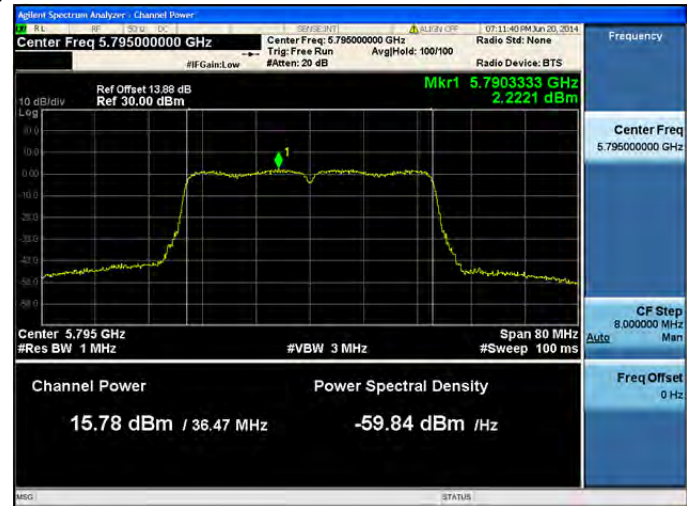

Antenna B

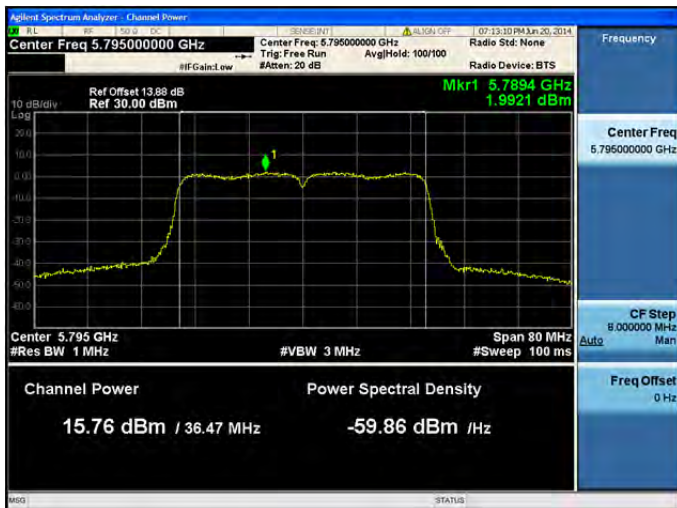


Antenna C

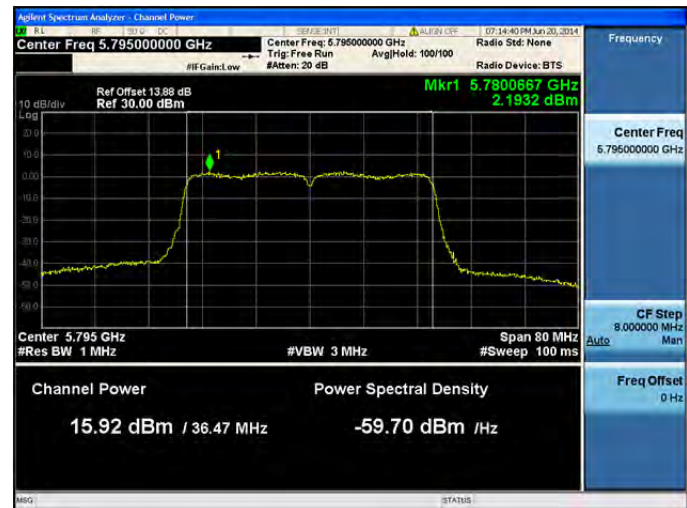


Antenna D



Peak Output Power, 5795 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

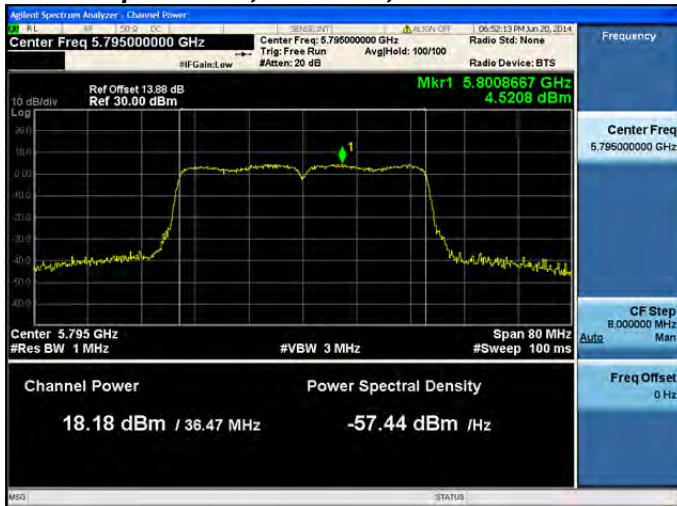


Antenna A

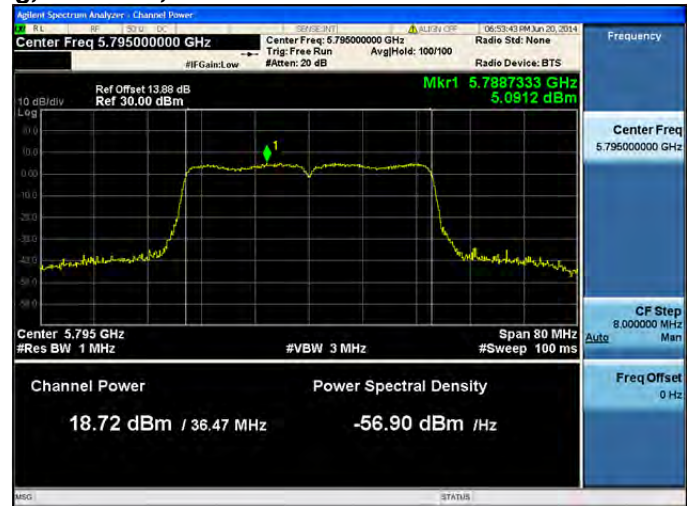


Antenna B



Peak Output Power, 5795 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

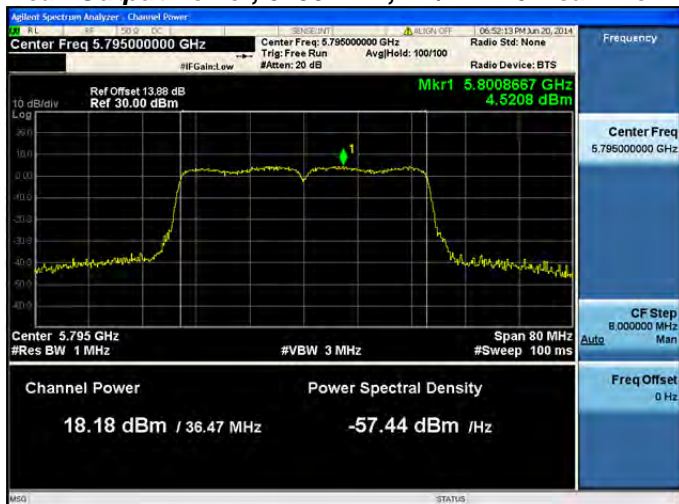

Antenna A

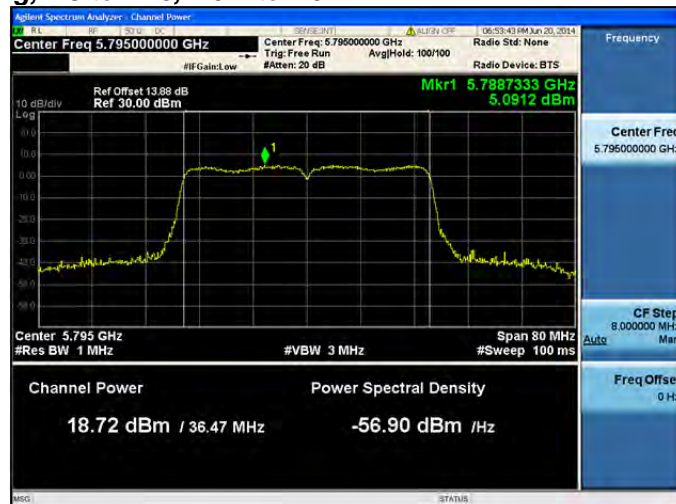

Antenna B



Peak Output Power, 5795 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A




Antenna B




Antenna C




Peak Output Power, 5795 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

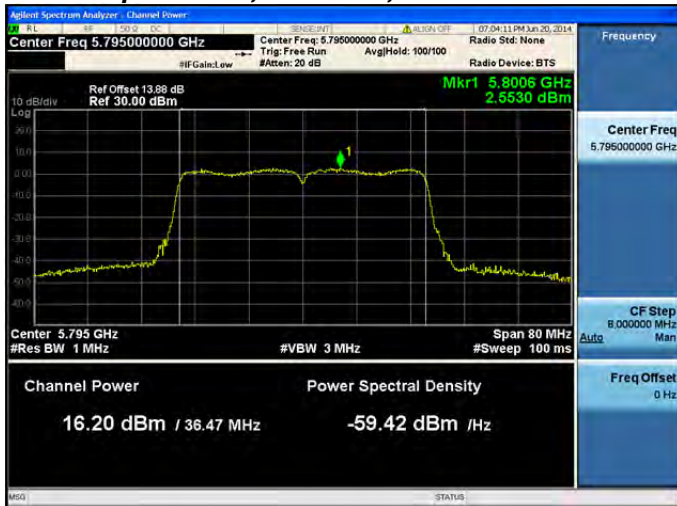

Antenna A

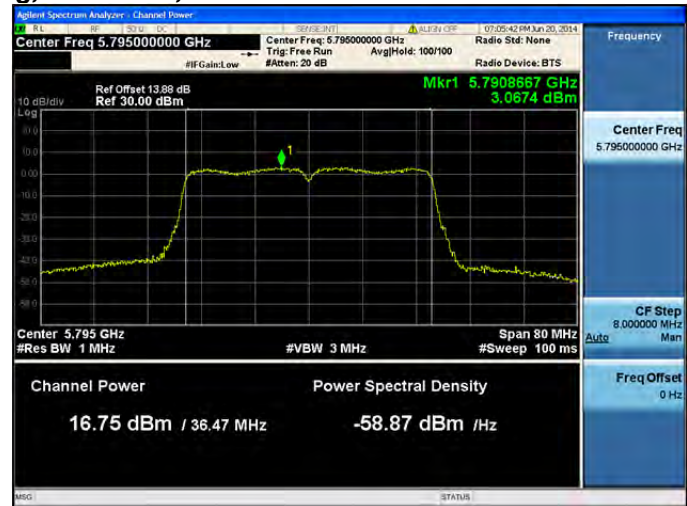


Antenna B

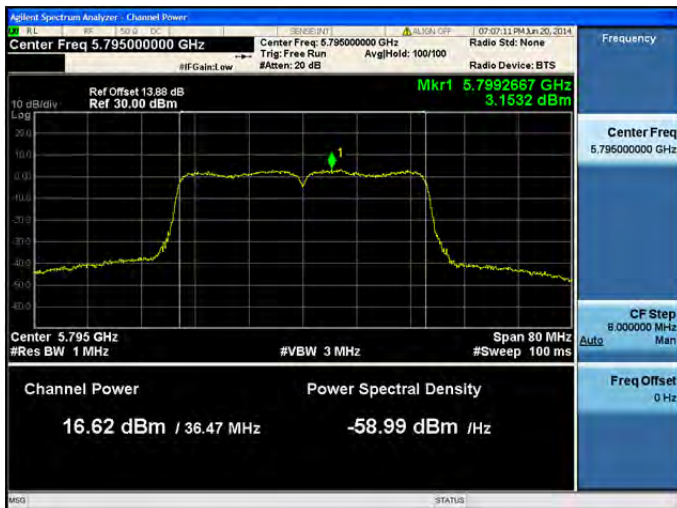


Antenna C




Peak Output Power, 5795 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3

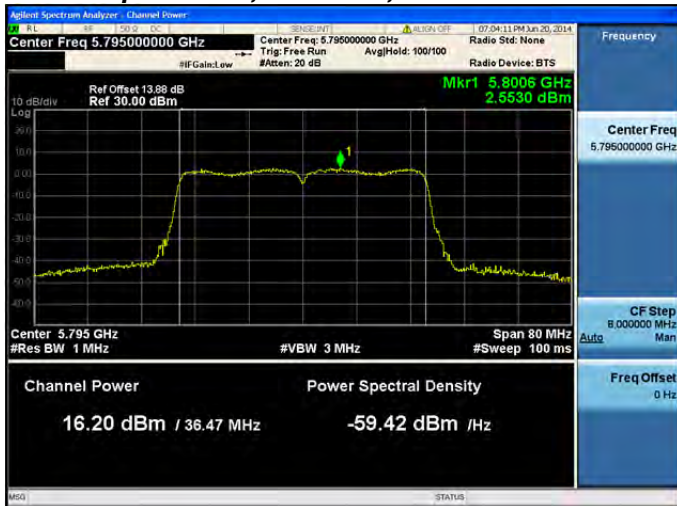

Antenna A

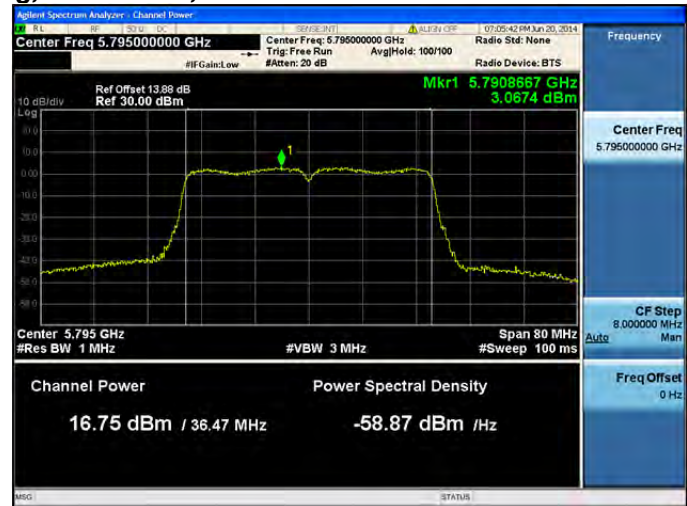

Antenna B

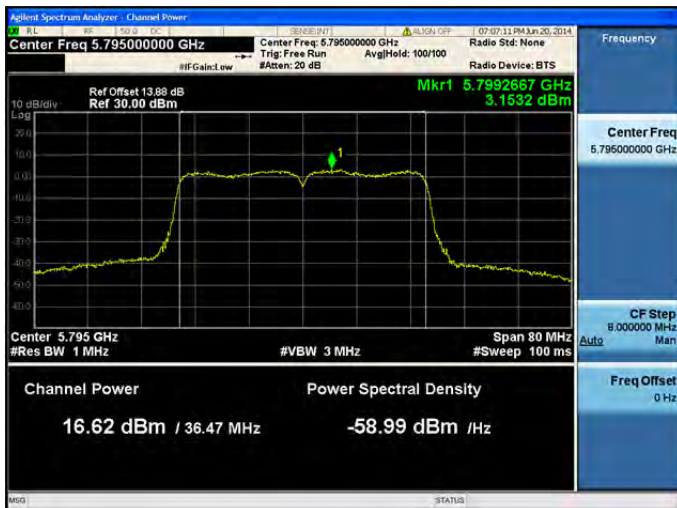

Antenna C