

## Test Report

AIR-AP3802I-B-K9  
AIR-AP3802I-UXK9  
AIR-AP2802I-B-K9  
AIR-AP2802I-UXK9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102100



**5150-5250 MHz**

Against the following Specifications:

CFR47 Part 15.407

**Cisco Systems**

170 West Tasman Drive  
San Jose, CA 95134

	
<b>Author:</b> Jose Aguirre <b>Tested By</b>	<b>Approved By:</b> Jim Nicholson <b>Title:</b> Technical Leader, Engineering <b>Revision:</b> 3

This report replaces any previously entered test report under EDCS – **1550042**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

<b>SECTION 1: OVERVIEW .....</b>	<b>3</b>
<b>SECTION 2: ASSESSMENT INFORMATION .....</b>	<b>4</b>
2.1 GENERAL .....	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE .....	6
2.4 TESTING FACILITIES .....	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION .....	7
<b>SECTION 3: RESULT SUMMARY .....</b>	<b>9</b>
3.1 RESULTS SUMMARY TABLE .....	9
<b>SECTION 4: SAMPLE DETAILS.....</b>	<b>11</b>
<b>APPENDIX A: EMISSION TEST RESULTS.....</b>	<b>12</b>
CONDUCTED TEST SETUP DIAGRAM.....	12
TARGET MAXIMUM CHANNEL POWER .....	12
A.1 99% AND 26dB BANDWIDTH .....	13
A.2 MAXIMUM CONDUCTED OUTPUT POWER/ POWER SPECTRAL DENSITY .....	21
A.3 CONDUCTED SPURIOUS EMISSIONS .....	33
A.4 CONDUCTED BANDEDGE.....	46
<b>APPENDIX B: EMISSION TEST RESULTS.....</b>	<b>54</b>
B1 RADIATED SPURIOUS EMISSIONS .....	55
B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ.....	66
B.3 AC CONDUCTED EMISSIONS .....	68
<b>PHOTOGRAPHS OF SETUP.....</b>	<b>71</b>
<b>APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....</b>	<b>75</b>
<b>APPENDIX E: ABBREVIATION KEY AND DEFINITIONS .....</b>	<b>77</b>

## Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r01
- KDB 662911 D01 Multiple Transmitter Output v02r01

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
---------------------

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$



## Measurement Uncertainty Values

voltage and power measurements	$\pm 2$ dB
conducted EIRP measurements	$\pm 1.4$ dB
radiated measurements	$\pm 3.2$ dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

14-Jan-2016 – 22-February-2016

**2.3 Report Issue Date**

22-Feb-2016

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.,  
125 West Tasman Drive  
San Jose, CA 95134, USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

**Test Engineers**

Jose Aguirre

**2.5 Equipment Assessed (EUT)**

AIR-AP3802I-B-K9

## 2.6 EUT Description

The Cisco Aironet 802.11ac Radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11n/ac - Non HT/VHT20, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20, Four Antennas, 6 to 54 Mbps

802.11n/ac - Non HT/VHT20 Beam Forming, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20 Beam Forming, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT20 Beam Forming, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT20, One Antenna, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT/VHT40 Duplicate, One Antenna, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Two Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Three Antennas, 6 to 54 Mbps  
802.11n/ac - Non HT/VHT40 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT40, One Antenna, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15  
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7

802.11n/ac - Non HT/VHT80 Duplicate, One Antenna, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Two Antennas, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Three Antennas, 6 to 54 Mbps  
 802.11n/ac - Non HT/VHT80 Duplicate, Four Antennas, 6 to 54 Mbps

802.11n/ac - HT/VHT80, One Antenna, M0 to M7  
 802.11n/ac - HT/VHT80, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Two Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Three Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Three Antennas, M16 to M23  
 802.11n/ac - HT/VHT80, Four Antennas, M0 to M7  
 802.11n/ac - HT/VHT80, Four Antennas, M8 to M15  
 802.11n/ac - HT/VHT80, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Two Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Three Antennas, M16 to M23  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M8 to M15  
 802.11n/ac - HT/VHT80 Beam Forming, Four Antennas, M16 to M23

802.11n/ac - HT/VHT80 STBC, Two Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 STBC, Three Antennas, M0 to M7  
 802.11n/ac - HT/VHT80 STBC, Four Antennas, M0 to M7

The following antennas are supported by this product series.  
 The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
<b>5 GHz</b> <b>2.4 / 5 GHz</b>	Internal	Directional (5G XOR)	6
	Internal	Omni (2.4G XOR / 5G Dedicated)	4 / 5

## Section 3: Result Summary

### 3.1 Results Summary Table

#### Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	<b>99% &amp; 26 dB Bandwidth:</b> The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.  The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.407	<b>Output Power:</b> <b>15.407:</b> (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).  (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	<b>Power Spectral Density:</b> <b>15.407</b> The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	<b>Conducted Spurious Emissions / Band-Edge:</b> For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27dBm/MHz.	Pass
FCC 15.407 FCC 15.209 FCC 152.05	<b>Restricted band:</b> Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).	Pass

**Radiated Emissions (General requirements)**

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	<b>TX Spurious Emissions:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
FCC 15.207	<b>AC conducted Emissions:</b> Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

\* MPE calculation is recorded in a separate report

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP3802I-B-K9	Cisco Systems	V00	8.3.1.51	8.3.1.51	FOC19448XL0E
S02*	PWR-CUBE-B	Delta	341-1004 60-001	NA	NA	Engineering Sample

(\*) S02 are support equipment Power supplies for EUT S01

### 4.2 System Details

System #	Description	Samples
1	AIR-AP3802I-B-K9	S01
2	PWR-CUBE-B	S02

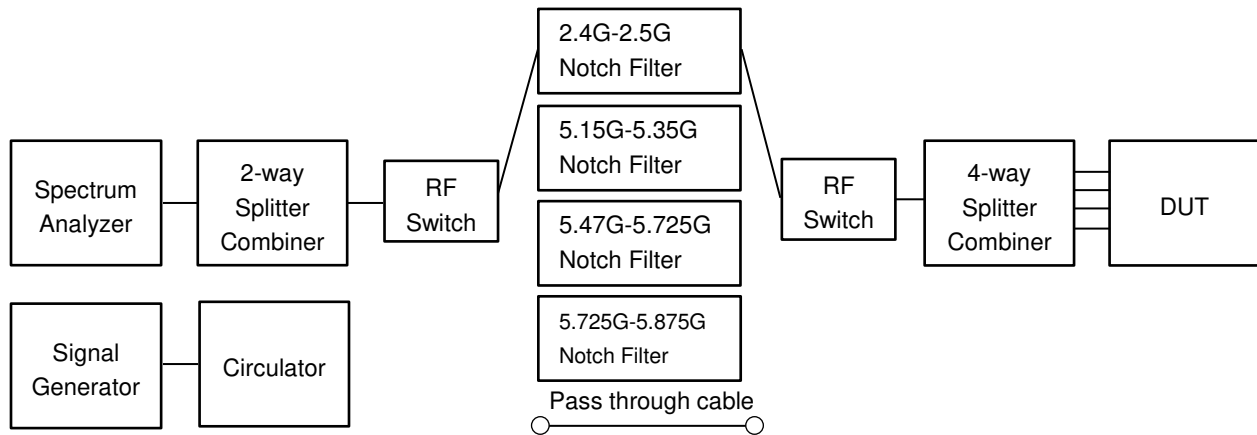
### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting ≥98% duty cycle

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r01
- KDB 662911 D01 Multiple Transmitter Output v02r01

## Appendix A: Emission Test Results Conducted Test Setup Diagram



## Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5180	5220
Non HT20, 6 to 54 Mbps	22	23
Non HT20 Beam Forming, 6 to 54 Mbps	20	23
HT/VHT20, M0 to M23, M0 to M9 1-0ss	23	24
HT/VHT20 Beam Forming, M0 to M23, M0 to M9 1-0ss	22	24
HT/VHT20 STBC, M0 to M7	23	24
	5190	5230
Non HT40, 6 to 54 Mbps	21	25
HT/VHT40, M0 to M23, M0 to M9 1-0ss	22	24
HT/VHT40 Beam Forming, M0 to M23, M0 to M9 1-0ss	21	24
HT/VHT40 STBC, M0 to M7	22	24
	5210	
Non HT80, 6 to 54 Mbps	19	
VHT80, M0 to M9, M0 to M9 1-0ss	21	
VHT80 Beam Forming, M0 to M9, M0 to M9 1-0ss	21	
VHT80 STBC, M0.1 to M9.1	21	



## A.1 99% and 26dB Bandwidth

**FCC 15.407** The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

### Test Procedure

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 Section 6.9.3

#### 99% BW and EBW (-26dB)

##### Test parameters

Span = 1.5 x to 5.0 times OBW

RBW = approx. 1% to 5% of the OBW

VBW  $\geq$  3 x RBW

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

#### Tested By :

Jose Aguirre

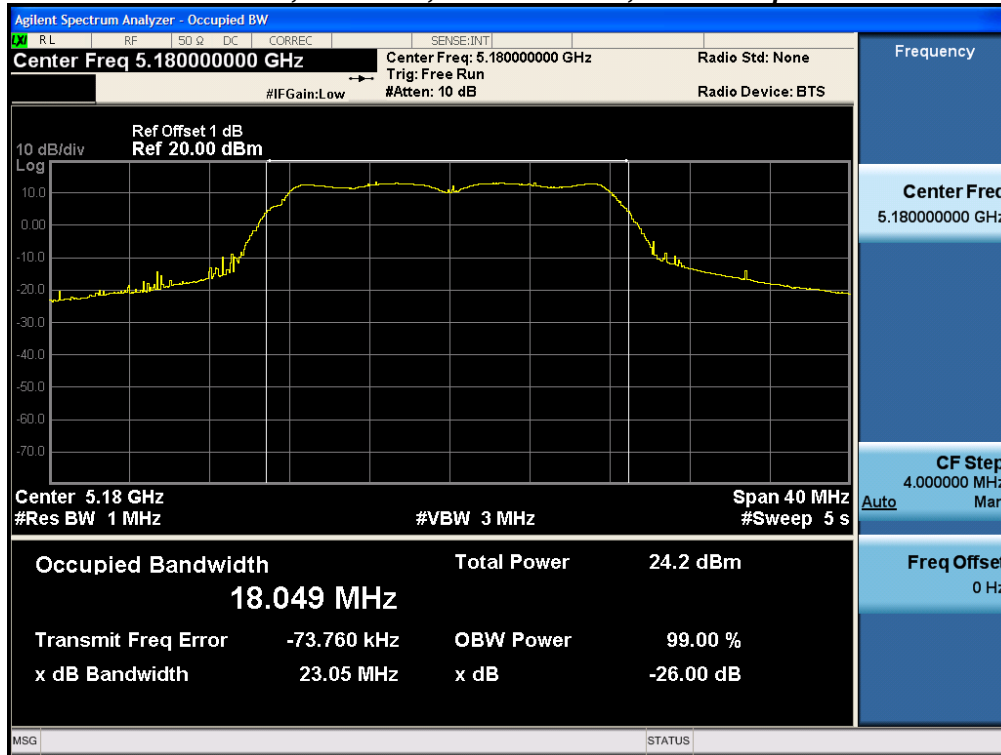
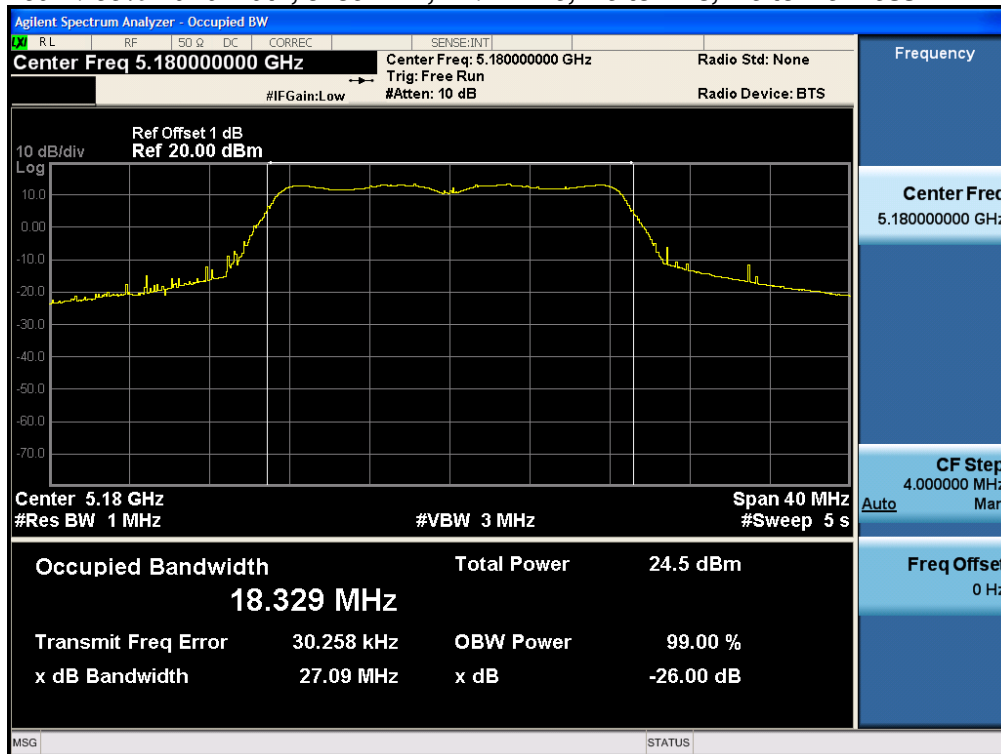
#### Date of testing:

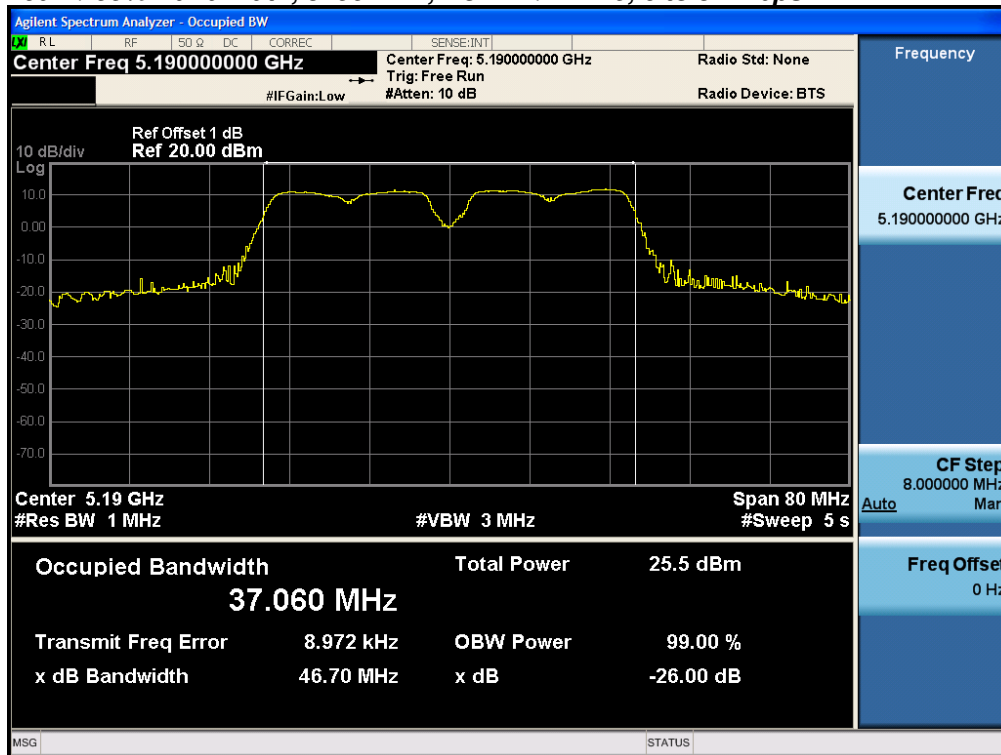
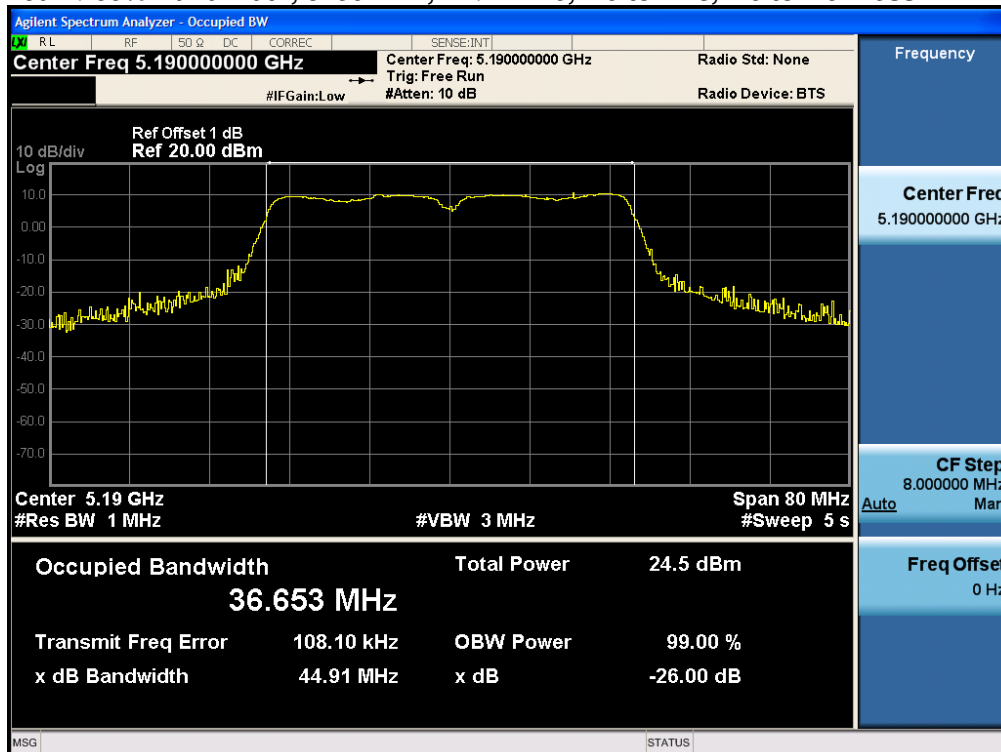
14-Jan-2016 – 22-February-2016

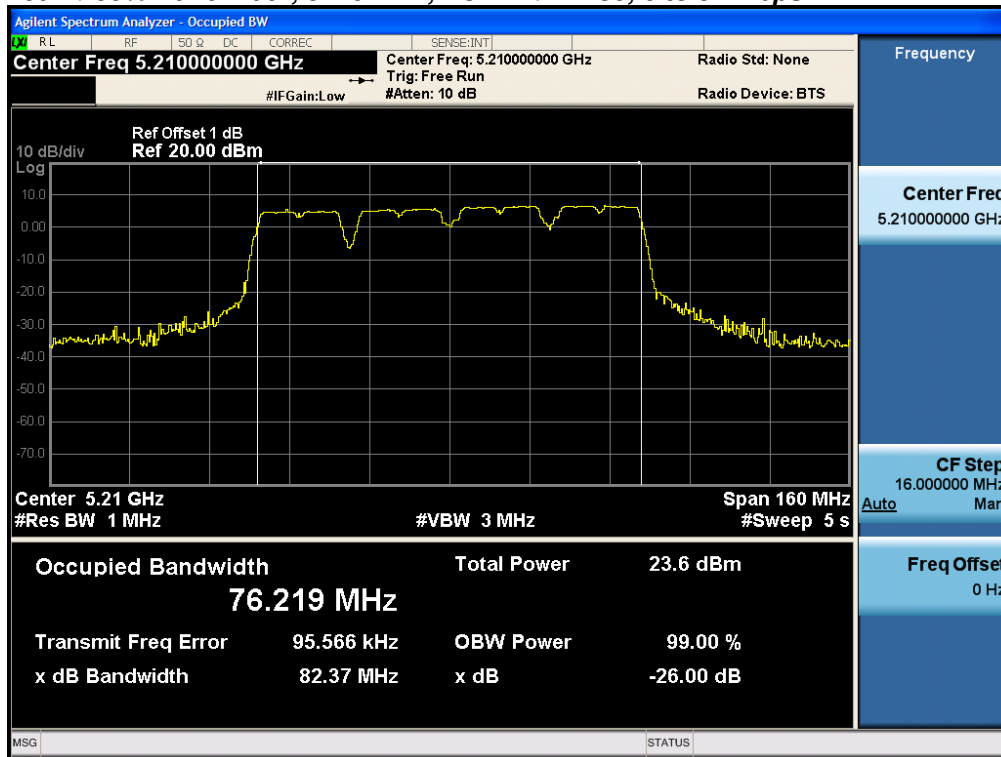
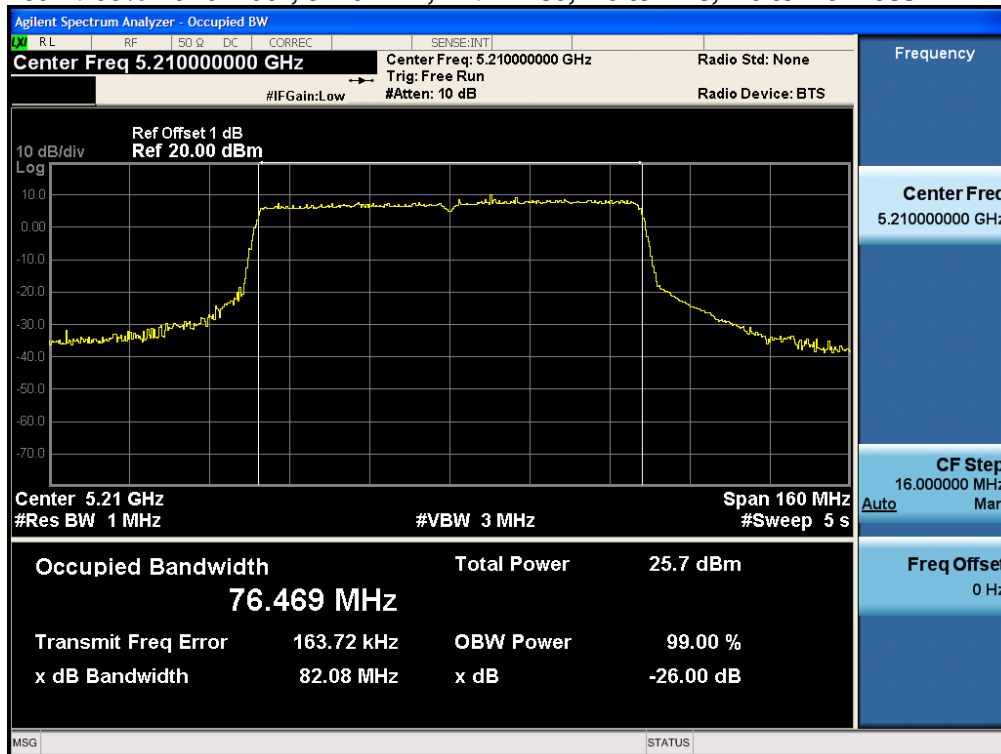
#### Test Result : PASS

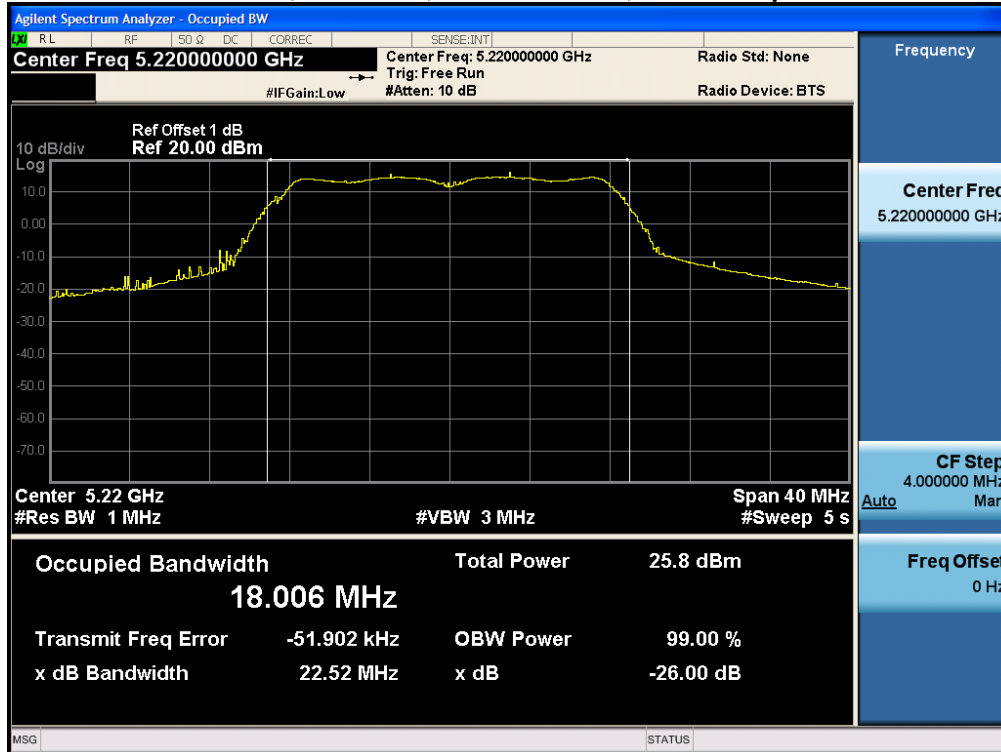
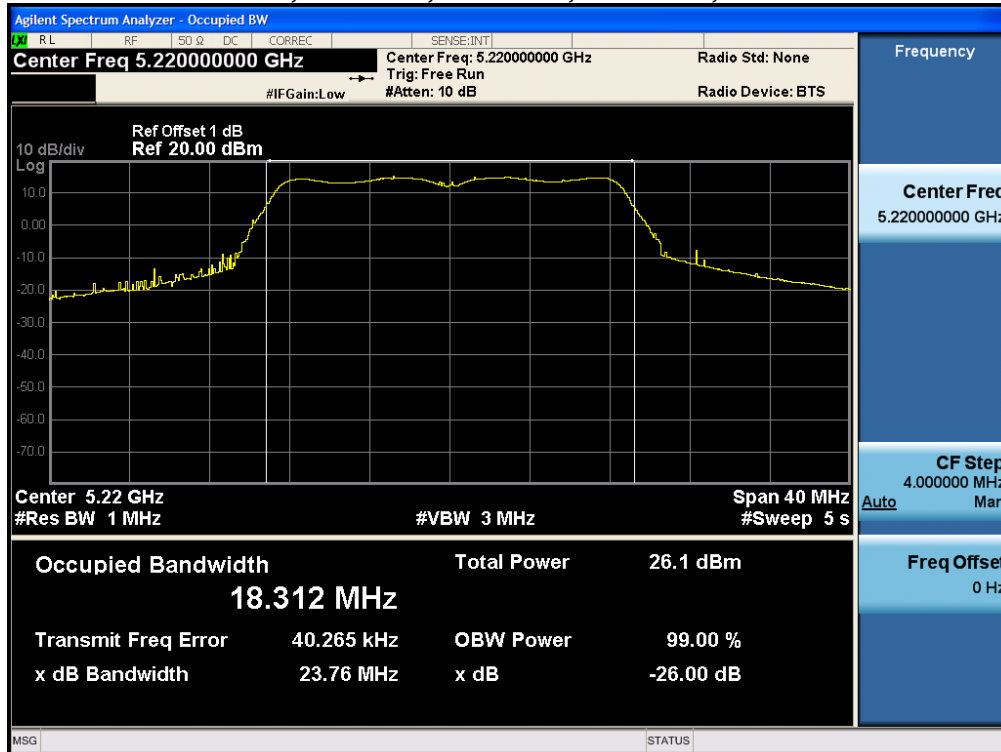
See Appendix C for list of test equipment

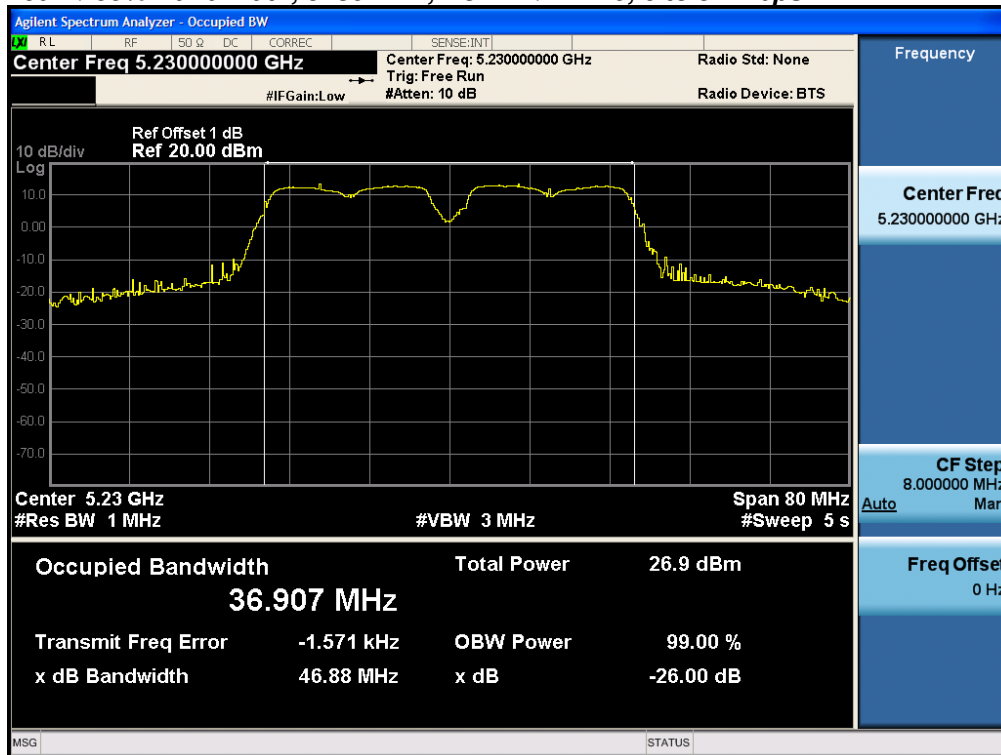
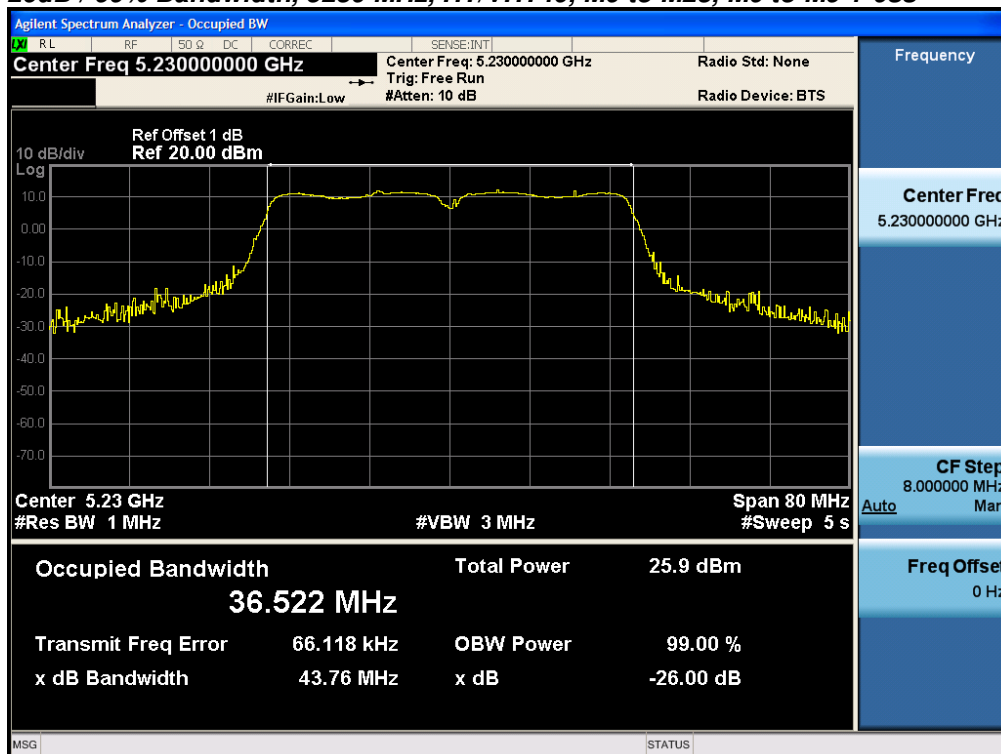
Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT/VHT20, 6 to 54 Mbps	6	23.1	18.0
	HT/VHT20, M0 to M23, M0 to M9 1-0ss	m0	27.1	18.3
5190	Non HT/VHT40, 6 to 54 Mbps	6	46.7	37.0
	HT/VHT40, M0 to M23, M0 to M9 1-0ss	m0	44.9	36.7
5210	Non HT/VHT80, 6 to 54 Mbps	6	82.4	76.2
	HT/VHT80, M0 to M23, M0 to M9 1-0ss	m0x1	82.1	76.5
5220	Non HT/VHT20, 6 to 54 Mbps	6	22.5	18.0
	HT/VHT20, M0 to M23, M0 to M9 1-0ss	m0	23.8	18.3
5230	Non HT/VHT40, 6 to 54 Mbps	6	46.9	36.9
	HT/VHT40, M0 to M23, M0 to M9 1-0ss	m0	43.8	36.6
5240	Non HT/VHT20, 6 to 54 Mbps	6	22.9	18.0
	HT/VHT20, M0 to M23, M0 to M9 1-0ss	m0	22.9	18.3

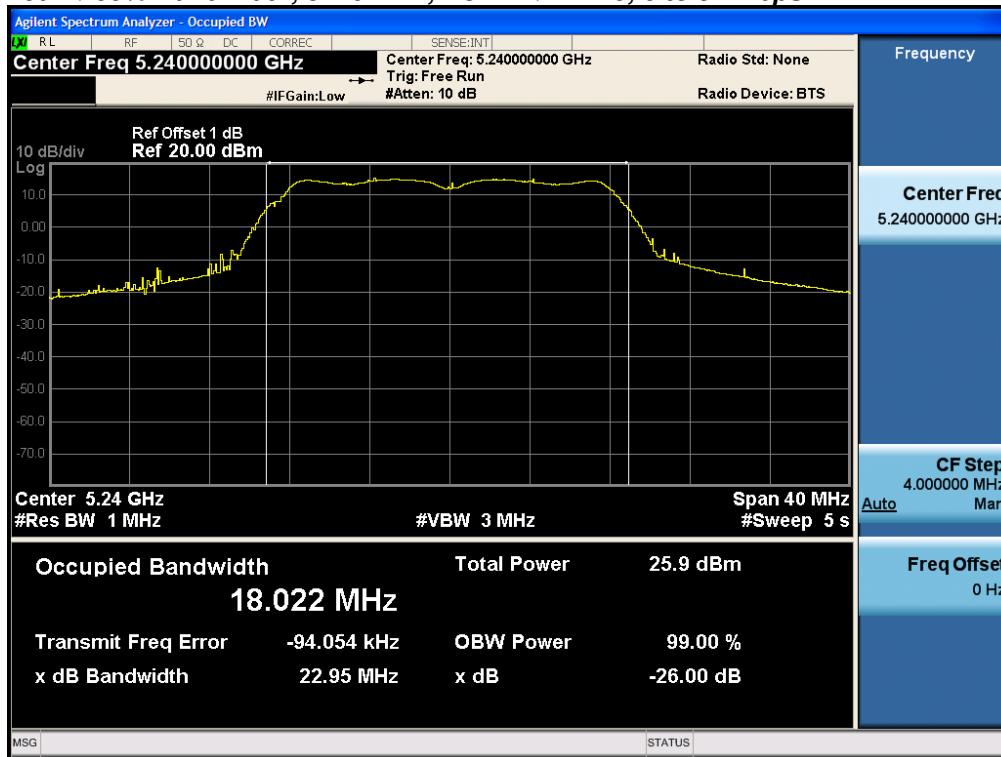
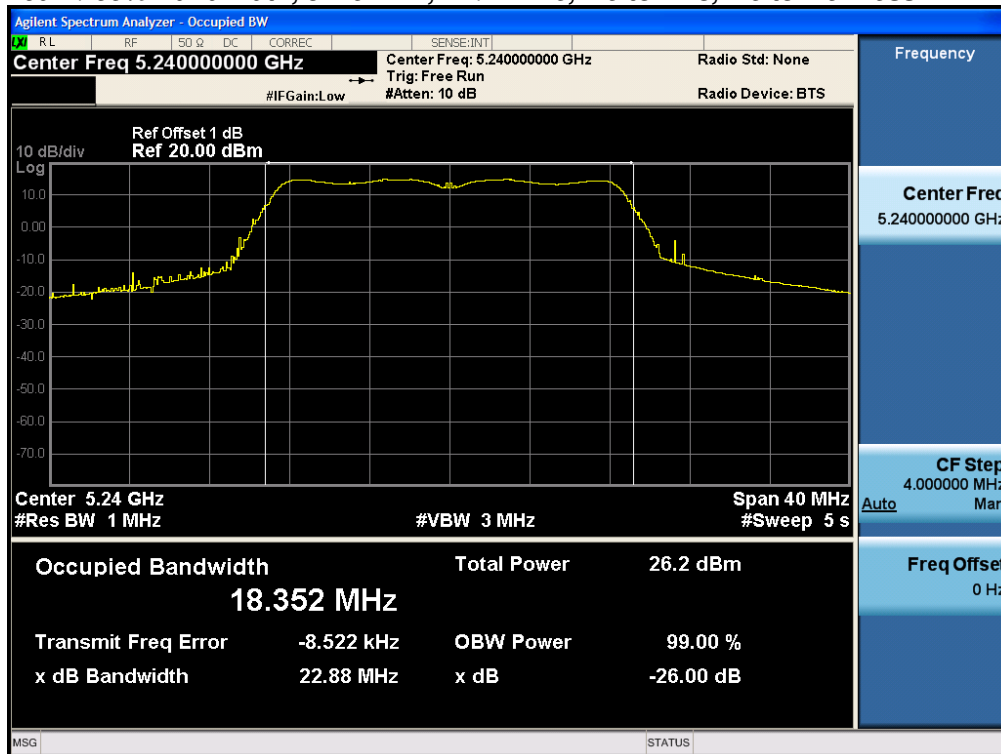
**26dB / 99% Bandwidth, 5180 MHz, Non HT/VHT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5180 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5190 MHz, Non HT/VHT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5190 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5210 MHz, Non HT/VHT80, 6 to 54 Mbps****26dB / 99% Bandwidth, 5210 MHz, HT/VHT80, M0 to M23, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5220 MHz, Non HT/VHT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5220 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5230 MHz, Non HT/VHT40, 6 to 54 Mbps****26dB / 99% Bandwidth, 5230 MHz, HT/VHT40, M0 to M23, M0 to M9 1-0ss**

**26dB / 99% Bandwidth, 5240 MHz, Non HT/VHT20, 6 to 54 Mbps****26dB / 99% Bandwidth, 5240 MHz, HT/VHT20, M0 to M23, M0 to M9 1-0ss**



## A.2 Maximum Conducted Output Power/ Power Spectral Density

**15.407** (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01r01  
ANSI C63.10: 2013

<b>Output Power</b>
Test Procedure
<ol style="list-style-type: none"> <li>1. Set the radio in the continuous transmitting mode at full power</li> <li>2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.</li> <li>3. Capture graphs and record pertinent measurement data.</li> </ol>

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01r01  
ANSI C63.10: 2013 section 12.3.2.2 Method SA-1

<b>Output Power</b>
Test parameters
Span = >1.5 times the OBW RBW = 1MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = sample Trace = Trace Average 100

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>



<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 14-Jan-2016 – 22-February-201
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm) EIRP	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	16.3				16.3	30.0	13.7
	Non HT20, 6 to 54 Mbps	2	5	16.3	17.4			19.9	30.0	10.1
	Non HT20, 6 to 54 Mbps	3	5	16.3	17.4	17.7		21.9	30.0	8.1
	Non HT20, 6 to 54 Mbps	4	5	15.1	16.2	16.6	15.2	21.8	30.0	8.2
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	16.3	17.4			19.9	28.0	8.1
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	13.8	15.0	15.5		19.6	26.0	6.4
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	8.7	9.9	10.7	8.9	15.6	25.0	9.4
	HT/VHT20, M0 to M7	1	5	16.4				16.4	30.0	13.6
	HT/VHT20, M0 to M7	2	5	16.4	17.6			20.1	30.0	9.9
	HT/VHT20, M8 to M15	2	5	16.4	17.6			20.1	30.0	9.9
	HT/VHT20, M0 to M7	3	5	16.4	17.6	17.9		22.1	30.0	7.9
	HT/VHT20, M8 to M15	3	5	16.4	17.6	17.9		22.1	30.0	7.9
	HT/VHT20, M16 to M23	3	5	16.4	17.6	17.9		22.1	30.0	7.9
	HT/VHT20, M0 to M7	4	5	15.3	16.4	16.8	15.3	22.0	30.0	8.0
	HT/VHT20, M8 to M15	4	5	16.4	17.6	17.9	16.5	23.2	30.0	6.8
	HT/VHT20, M16 to M23	4	5	16.4	17.6	17.9	16.5	23.2	30.0	6.8
	HT/VHT20 Beam Forming, M0 to M7	2	8	16.4	17.6			20.1	28.0	7.9
	HT/VHT20 Beam Forming, M8 to M15	2	5	16.4	17.6			20.1	30.0	9.9
	HT/VHT20 Beam Forming, M0 to M7	3	10	12.9	14.1	14.5		18.7	26.0	7.3
	HT/VHT20 Beam Forming, M8 to M15	3	7	15.3	16.4	16.8		21.0	29.0	8.0
	HT/VHT20 Beam Forming, M16 to M23	3	5	16.4	17.6	17.9		22.1	30.0	7.9
	HT/VHT20 Beam Forming, M0 to M7	4	11	9.0	10.1	10.9	9.1	15.9	25.0	9.1
	HT/VHT20 Beam Forming, M8 to M15	4	8	14.0	15.2	15.7	14.1	20.8	28.0	7.2
	HT/VHT20 Beam Forming, M16 to M23	4	6	15.3	16.4	16.8	15.3	22.0	30.0	8.0
	HT/VHT20 STBC, M0 to M7	2	5	16.4	17.6			20.1	30.0	9.9
	HT/VHT20 STBC, M0 to M7	3	5	16.4	17.6	17.9		22.1	30.0	7.9
	HT/VHT20 STBC, M0 to M7	4	5	16.4	17.6	17.9	16.5	23.2	30.0	6.8
5190	Non HT40, 6 to 54 Mbps	1	5	17.5				17.5	30.0	12.5
	Non HT40, 6 to 54 Mbps	2	5	16.4	17.2			19.8	30.0	10.2
	Non HT40, 6 to 54 Mbps	3	5	15.3	16.0	16.6		20.8	30.0	9.2
	Non HT40, 6 to 54 Mbps	4	5	14.2	15.0	15.5	14.1	20.8	30.0	9.2
	HT/VHT40, M0 to M7	1	5	16.4				16.4	30.0	13.6
	HT/VHT40, M0 to M7	2	5	16.4	17.3			19.9	30.0	10.1
	HT/VHT40, M8 to M15	2	5	16.4	17.3			19.9	30.0	10.1

	HT/VHT40, M0 to M7	3	5	15.2	16.2	16.7		20.8	30.0	9.2
	HT/VHT40, M8 to M15	3	5	15.2	16.2	16.7		20.8	30.0	9.2
	HT/VHT40, M16 to M23	3	5	15.2	16.2	16.7		20.8	30.0	9.2
	HT/VHT40, M0 to M7	4	5	15.2	16.2	16.7	15.2	21.9	30.0	8.1
	HT/VHT40, M8 to M15	4	5	15.2	16.2	16.7	15.2	21.9	30.0	8.1
	HT/VHT40, M16 to M23	4	5	15.2	16.2	16.7	15.2	21.9	30.0	8.1
	HT/VHT40 Beam Forming, M0 to M7	2	8	15.2	16.2			18.7	28.0	9.3
	HT/VHT40 Beam Forming, M8 to M15	2	5	16.4	17.3			19.9	30.0	10.1
	HT/VHT40 Beam Forming, M0 to M7	3	10	12.1	12.9	13.5		17.6	26.0	8.4
	HT/VHT40 Beam Forming, M8 to M15	3	7	15.2	16.0	15.5		20.4	29.0	8.6
	HT/VHT40 Beam Forming, M16 to M23	3	5	15.2	16.2	16.7		20.8	30.0	9.2
	HT/VHT40 Beam Forming, M0 to M7	4	11	9.1	9.9	10.6	9.1	15.7	25.0	9.3
	HT/VHT40 Beam Forming, M8 to M15	4	8	13.1	13.9	14.4	12.9	19.6	28.0	8.4
	HT/VHT40 Beam Forming, M16 to M23	4	6	15.2	16.0	15.5	15.1	21.5	30.0	8.5
	HT/VHT40 STBC, M0 to M7	2	5	16.4	17.3			19.9	30.0	10.1
	HT/VHT40 STBC, M0 to M7	3	5	15.2	16.2	16.7		20.8	30.0	9.2
	HT/VHT40 STBC, M0 to M7	4	5	15.2	16.2	16.7	15.2	21.9	30.0	8.1
5210	Non HT80, 6 to 54 Mbps	1	5	15.5				15.5	30.0	14.5
	Non HT80, 6 to 54 Mbps	2	5	14.2	14.4			17.3	30.0	12.7
	Non HT80, 6 to 54 Mbps	3	5	13.1	13.2	13.8		18.1	30.0	11.9
	Non HT80, 6 to 54 Mbps	4	5	13.1	13.2	13.8	12.9	19.3	30.0	10.7
	VHT80, M0 to M9 1ss	1	5	17.1				17.1	30.0	12.9
	VHT80, M0 to M9 1ss	2	5	16.0	16.1			19.1	30.0	10.9
	VHT80, M0 to M9 2ss	2	5	16.0	16.1			19.1	30.0	10.9
	VHT80, M0 to M9 1ss	3	5	14.8	14.9	15.6		19.9	30.0	10.1
	VHT80, M0 to M9 2ss	3	5	14.8	14.9	15.6		19.9	30.0	10.1
	VHT80, M0 to M9 3ss	3	5	14.8	14.9	15.6		19.9	30.0	10.1
	VHT80, M0 to M9 1ss	4	5	14.8	14.9	15.6	14.7	21.0	30.0	9.0
	VHT80, M0 to M9 2ss	4	5	14.8	14.9	15.6	14.7	21.0	30.0	9.0
	VHT80, M0 to M9 3ss	4	5	14.8	14.9	15.6	14.7	21.0	30.0	9.0
	VHT80 Beam Forming, M0 to M9 1ss	2	8	13.7	13.8			16.8	28.0	11.2
	VHT80 Beam Forming, M0 to M9 2ss	2	5	16.0	16.1			19.1	30.0	10.9
	VHT80 Beam Forming, M0 to M9 1ss	3	10	9.7	10.0	10.7		14.9	26.0	11.1
	VHT80 Beam Forming, M0 to M9 2ss	3	7	13.7	13.8	14.6		18.8	29.0	10.2
	VHT80 Beam Forming, M0 to M9 3ss	3	5	14.8	14.9	15.6		19.9	30.0	10.1
	VHT80 Beam Forming, M0 to M9 1ss	4	11	8.8	9.0	9.6	8.7	15.1	25.0	9.9
	VHT80 Beam Forming, M0 to M9 2ss	4	8	11.7	12.0	12.6	11.6	18.0	28.0	10.0
	VHT80 Beam Forming, M0 to M9 3ss	4	6	13.7	13.8	14.6	13.5	19.9	30.0	10.1
	VHT80 STBC, M0 to M9 1ss	2	5	16.0	16.1			19.1	30.0	10.9
	VHT80 STBC, M0 to M9 1ss	3	5	14.8	14.9	15.6		19.9	30.0	10.1
	VHT80 STBC, M0 to M9 1ss	4	5	14.8	14.9	15.6	14.7	21.0	30.0	9.0

5220	Non HT20, 6 to 54 Mbps	1	5	17.8				17.8	30.0	12.2
	Non HT20, 6 to 54 Mbps	2	5	17.8	17.3			20.6	30.0	9.4
	Non HT20, 6 to 54 Mbps	3	5	17.8	17.3	18.6		22.7	30.0	7.3
	Non HT20, 6 to 54 Mbps	4	5	16.5	16.1	16.4	16.0	22.3	30.0	7.7
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	17.8	17.3			20.6	28.0	7.4
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	17.8	17.3	18.6		22.7	26.0	3.3
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	16.5	16.1	16.4	16.0	22.3	25.0	2.7
	HT/VHT20, M0 to M7	1	5	18.0				18.0	30.0	12.0
	HT/VHT20, M0 to M7	2	5	18.0	17.4			20.7	30.0	9.3
	HT/VHT20, M8 to M15	2	5	18.0	17.4			20.7	30.0	9.3
	HT/VHT20, M0 to M7	3	5	18.0	17.4	18.8		22.9	30.0	7.1
	HT/VHT20, M8 to M15	3	5	18.0	17.4	18.8		22.9	30.0	7.1
	HT/VHT20, M16 to M23	3	5	18.0	17.4	18.8		22.9	30.0	7.1
	HT/VHT20, M0 to M7	4	5	16.7	16.3	16.6	16.2	22.5	30.0	7.5
	HT/VHT20, M8 to M15	4	5	18.0	17.4	18.8	17.5	24.0	30.0	6.0
	HT/VHT20, M16 to M23	4	5	18.0	17.4	18.8	17.5	24.0	30.0	6.0
	HT/VHT20 Beam Forming, M0 to M7	2	8	18.0	17.4			20.7	28.0	7.3
	HT/VHT20 Beam Forming, M8 to M15	2	5	18.0	17.4			20.7	30.0	9.3
	HT/VHT20 Beam Forming, M0 to M7	3	10	18.0	17.4	18.8		22.9	26.0	3.1
	HT/VHT20 Beam Forming, M8 to M15	3	7	18.0	17.4	18.8		22.9	29.0	6.1
	HT/VHT20 Beam Forming, M16 to M23	3	5	18.0	17.4	18.8		22.9	30.0	7.1
	HT/VHT20 Beam Forming, M0 to M7	4	11	16.7	16.3	16.6	16.2	22.5	25.0	2.5
	HT/VHT20 Beam Forming, M8 to M15	4	8	18.0	17.4	18.8	17.5	24.0	28.0	4.0
	HT/VHT20 Beam Forming, M16 to M23	4	6	18.0	17.4	18.8	17.5	24.0	30.0	6.0
	HT/VHT20 STBC, M0 to M7	2	5	18.0	17.4			20.7	30.0	9.3
	HT/VHT20 STBC, M0 to M7	3	5	18.0	17.4	18.8		22.9	30.0	7.1
	HT/VHT20 STBC, M0 to M7	4	5	18.0	17.4	18.8	17.5	24.0	30.0	6.0
5230	Non HT40, 6 to 54 Mbps	1	5	18.9				18.9	30.0	11.1
	Non HT40, 6 to 54 Mbps	2	5	18.9	18.5			21.7	30.0	8.3
	Non HT40, 6 to 54 Mbps	3	5	18.9	18.5	19.3		23.7	30.0	6.3
	Non HT40, 6 to 54 Mbps	4	5	18.9	18.5	19.3	18.8	24.9	30.0	5.1
	HT/VHT40, M0 to M7	1	5	17.7				17.7	30.0	12.3
	HT/VHT40, M0 to M7	2	5	17.7	17.5			20.6	30.0	9.4
	HT/VHT40, M8 to M15	2	5	17.7	17.5			20.6	30.0	9.4
	HT/VHT40, M0 to M7	3	5	17.7	17.5	18.3		22.6	30.0	7.4
	HT/VHT40, M8 to M15	3	5	17.7	17.5	18.3		22.6	30.0	7.4
	HT/VHT40, M16 to M23	3	5	17.7	17.5	18.3		22.6	30.0	7.4
	HT/VHT40, M0 to M7	4	5	17.7	17.5	18.3	17.7	23.8	30.0	6.2
	HT/VHT40, M8 to M15	4	5	17.7	17.5	18.3	17.7	23.8	30.0	6.2
	HT/VHT40, M16 to M23	4	5	17.7	17.5	18.3	17.7	23.8	30.0	6.2

	HT/VHT40 Beam Forming, M0 to M7	2	8	17.7	17.5			20.6	28.0	7.4
	HT/VHT40 Beam Forming, M8 to M15	2	5	17.7	17.5			20.6	30.0	9.4
	HT/VHT40 Beam Forming, M0 to M7	3	10	17.7	17.5	18.3		22.6	26.0	3.4
	HT/VHT40 Beam Forming, M8 to M15	3	7	17.7	17.5	18.3		22.6	29.0	6.4
	HT/VHT40 Beam Forming, M16 to M23	3	5	17.7	17.5	18.3		22.6	30.0	7.4
	<b>HT/VHT40 Beam Forming, M0 to M7</b>	<b>4</b>	<b>11</b>	<b>17.7</b>	<b>17.5</b>	<b>18.3</b>	<b>17.7</b>	<b>23.8</b>	<b>25.0</b>	<b>1.2</b>
	HT/VHT40 Beam Forming, M8 to M15	4	8	17.7	17.5	18.3	17.7	23.8	28.0	4.2
	HT/VHT40 Beam Forming, M16 to M23	4	6	17.7	17.5	18.3	17.7	23.8	30.0	6.2
	HT/VHT40 STBC, M0 to M7	2	5	17.7	17.5			20.6	30.0	9.4
	HT/VHT40 STBC, M0 to M7	3	5	17.7	17.5	18.3		22.6	30.0	7.4
	HT/VHT40 STBC, M0 to M7	4	5	17.7	17.5	18.3	17.7	23.8	30.0	6.2
5240	Non HT20, 6 to 54 Mbps	1	5	18.0				18.0	30.0	12.0
	Non HT20, 6 to 54 Mbps	2	5	18.0	17.7			20.9	30.0	9.1
	Non HT20, 6 to 54 Mbps	3	5	18.0	17.7	18.3		22.8	30.0	7.2
	Non HT20, 6 to 54 Mbps	4	5	15.6	15.3	16.2	15.7	21.7	30.0	8.3
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	18.0	17.7			20.9	28.0	7.1
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	18.0	17.7	18.3		22.8	26.0	3.2
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	15.6	15.3	16.2	15.7	21.7	25.0	3.3
	HT/VHT20, M0 to M7	1	5	18.1				18.1	30.0	11.9
	HT/VHT20, M0 to M7	2	5	18.1	17.8			21.0	30.0	9.0
	HT/VHT20, M8 to M15	2	5	18.1	17.8			21.0	30.0	9.0
	HT/VHT20, M0 to M7	3	5	18.1	17.8	18.4		22.9	30.0	7.1
	HT/VHT20, M8 to M15	3	5	18.1	17.8	18.4		22.9	30.0	7.1
	HT/VHT20, M16 to M23	3	5	18.1	17.8	18.4		22.9	30.0	7.1
	HT/VHT20, M0 to M7	4	5	16.9	16.6	16.3	17.0	22.7	30.0	7.3
	HT/VHT20, M8 to M15	4	5	18.1	17.8	18.4	18.3	24.2	30.0	5.8
	HT/VHT20, M16 to M23	4	5	18.1	17.8	18.4	18.3	24.2	30.0	5.8
	HT/VHT20 Beam Forming, M0 to M7	2	8	18.1	17.8			21.0	28.0	7.0
	HT/VHT20 Beam Forming, M8 to M15	2	5	18.1	17.8			21.0	30.0	9.0
	HT/VHT20 Beam Forming, M0 to M7	3	10	18.1	17.8	18.4		22.9	26.0	3.1
	HT/VHT20 Beam Forming, M8 to M15	3	7	18.1	17.8	18.4		22.9	29.0	6.1
	HT/VHT20 Beam Forming, M16 to M23	3	5	18.1	17.8	18.4		22.9	30.0	7.1
	HT/VHT20 Beam Forming, M0 to M7	4	11	16.9	16.6	16.3	17.0	22.7	25.0	2.3
	HT/VHT20 Beam Forming, M8 to M15	4	8	18.1	17.8	18.4	18.3	24.2	28.0	3.8
	HT/VHT20 Beam Forming, M16 to M23	4	6	18.1	17.8	18.4	18.3	24.2	30.0	5.8
	HT/VHT20 STBC, M0 to M7	2	5	18.1	17.8			21.0	30.0	9.0
	HT/VHT20 STBC, M0 to M7	3	5	18.1	17.8	18.4		22.9	30.0	7.1
	HT/VHT20 STBC, M0 to M7	4	5	18.1	17.8	18.4	18.3	24.2	30.0	5.8

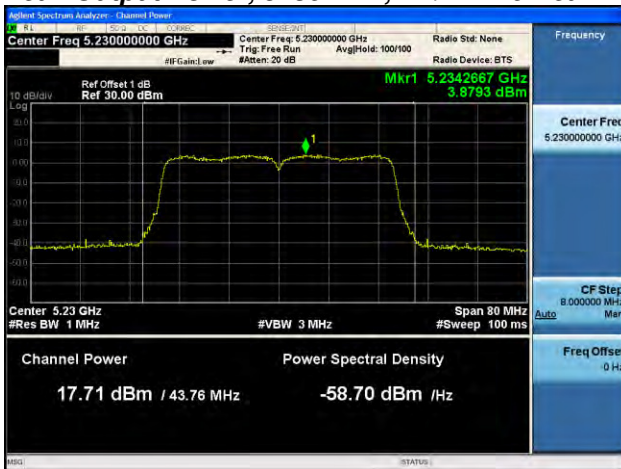
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz) EIRP	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	5.7				5.7	17.0	11.3
	Non HT20, 6 to 54 Mbps	2	8	5.7	7.2			9.5	15.0	5.5
	Non HT20, 6 to 54 Mbps	3	10	5.7	7.2	7.2		11.5	13.0	1.5
	Non HT20, 6 to 54 Mbps	4	11	4.7	5.8	6.2	4.5	11.4	12.0	0.6
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	5.7	7.2			9.5	15.0	5.5
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	3.4	4.5	4.9		9.1	13.0	3.9
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-1.9	-0.5	0.1	-1.8	5.1	12.0	6.9
	HT/VHT20, M0 to M7	1	5	5.9				5.9	17.0	11.1
	HT/VHT20, M0 to M7	2	8	5.9	6.7			9.3	15.0	5.7
	HT/VHT20, M8 to M15	2	5	5.9	6.7			9.3	17.0	7.7
	HT/VHT20, M0 to M7	3	10	5.9	6.7	7.5		11.5	13.0	1.5
	HT/VHT20, M8 to M15	3	7	5.9	6.7	7.5		11.5	16.0	4.5
	HT/VHT20, M16 to M23	3	5	5.9	6.7	7.5		11.5	17.0	5.5
	HT/VHT20, M0 to M7	4	11	4.4	5.7	6.3	4.7	11.4	12.0	0.6
	HT/VHT20, M8 to M15	4	8	5.9	6.7	7.5	5.7	12.5	15.0	2.5
	HT/VHT20, M16 to M23	4	6	5.9	6.7	7.5	5.7	12.5	17.0	4.5
	HT/VHT20 Beam Forming, M0 to M7	2	8	5.9	6.7			9.3	15.0	5.7
	HT/VHT20 Beam Forming, M8 to M15	2	5	5.9	6.7			9.3	17.0	7.7
	HT/VHT20 Beam Forming, M0 to M7	3	10	2.0	3.4	3.7		7.9	13.0	5.1
	HT/VHT20 Beam Forming, M8 to M15	3	7	4.4	5.7	6.3		10.3	16.0	5.7
	HT/VHT20 Beam Forming, M16 to M23	3	5	5.9	6.7	7.5		11.5	17.0	5.5
	HT/VHT20 Beam Forming, M0 to M7	4	11	-1.8	-0.7	-0.1	-1.7	5.0	12.0	7.0
	HT/VHT20 Beam Forming, M8 to M15	4	8	3.3	4.5	5.3	3.1	10.2	15.0	4.8
	HT/VHT20 Beam Forming, M16 to M23	4	6	4.4	5.7	6.3	4.7	11.4	17.0	5.6
	HT/VHT20 STBC, M0 to M7	2	5	5.9	6.7			9.3	17.0	7.7
	HT/VHT20 STBC, M0 to M7	3	7	5.9	6.7	7.5		11.5	16.0	4.5
	HT/VHT20 STBC, M0 to M7	4	8	5.9	6.7	7.5	5.7	12.5	15.0	2.5
5190	Non HT40, 6 to 54 Mbps	1	5	4.1				4.1	17.0	12.9
	Non HT40, 6 to 54 Mbps	2	8	3.5	3.8			6.7	15.0	8.3
	Non HT40, 6 to 54 Mbps	3	10	1.9	2.5	3.1		7.3	13.0	5.7
	Non HT40, 6 to 54 Mbps	4	11	1.1	1.7	2.1	0.6	7.4	12.0	4.6
	HT/VHT40, M0 to M7	1	5	2.9				2.9	17.0	14.1
	HT/VHT40, M0 to M7	2	8	2.9	3.6			6.3	15.0	8.7
	HT/VHT40, M8 to M15	2	5	2.9	3.6			6.3	17.0	10.7

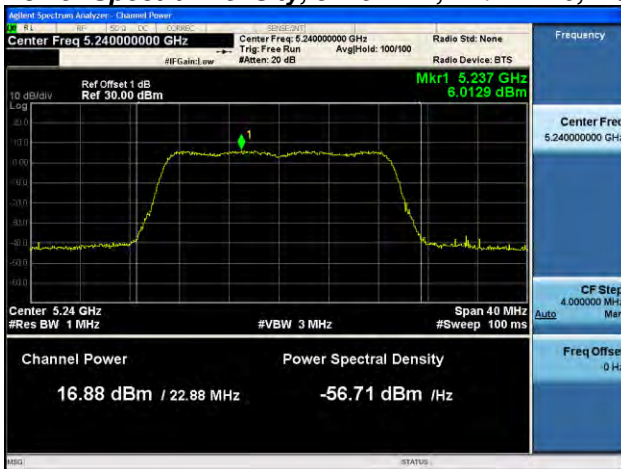
	HT/VHT40, M0 to M7	3	10	1.4	2.3	3.5		7.3	13.0	5.7
	HT/VHT40, M8 to M15	3	7	1.4	2.3	3.5		7.3	16.0	8.7
	HT/VHT40, M16 to M23	3	5	1.4	2.3	3.5		7.3	17.0	9.7
	HT/VHT40, M0 to M7	4	11	1.4	2.3	3.5	1.7	8.3	12.0	3.7
	HT/VHT40, M8 to M15	4	8	1.4	2.3	3.5	1.7	8.3	15.0	6.7
	HT/VHT40, M16 to M23	4	6	1.4	2.3	3.5	1.7	8.3	17.0	8.7
	HT/VHT40 Beam Forming, M0 to M7	2	8	1.4	2.3			4.9	15.0	10.1
	HT/VHT40 Beam Forming, M8 to M15	2	5	2.9	3.6			6.3	17.0	10.7
	HT/VHT40 Beam Forming, M0 to M7	3	10	-1.4	-0.8	-0.3		4.0	13.0	9.0
	HT/VHT40 Beam Forming, M8 to M15	3	7	2.0	2.3	1.9		6.8	16.0	9.2
	HT/VHT40 Beam Forming, M16 to M23	3	5	1.4	2.3	3.5		7.3	17.0	9.7
	HT/VHT40 Beam Forming, M0 to M7	4	11	-4.8	-3.9	-3.0	-4.7	2.0	12.0	10.0
	HT/VHT40 Beam Forming, M8 to M15	4	8	-0.3	0.1	0.7	-0.7	6.0	15.0	9.0
	HT/VHT40 Beam Forming, M16 to M23	4	6	2.0	2.3	1.9	1.3	7.9	17.0	9.1
	HT/VHT40 STBC, M0 to M7	2	5	2.9	3.6			6.3	17.0	10.7
	HT/VHT40 STBC, M0 to M7	3	7	1.4	2.3	3.5		7.3	16.0	8.7
	HT/VHT40 STBC, M0 to M7	4	8	1.4	2.3	3.5	1.7	8.3	15.0	6.7
5210	Non HT80, 6 to 54 Mbps	1	5	-1.0				-1.0	17.0	18.0
	Non HT80, 6 to 54 Mbps	2	8	-2.3	-2.5			0.6	15.0	14.4
	Non HT80, 6 to 54 Mbps	3	10	-3.5	-3.4	-2.9		1.5	13.0	11.5
	Non HT80, 6 to 54 Mbps	4	11	-3.5	-3.4	-2.9	-3.1	2.8	12.0	9.2
	VHT80, M0 to M9 1ss	1	5	0.4				0.4	17.0	16.6
	VHT80, M0 to M9 1ss	2	8	-1.2	-1.4			1.7	15.0	13.3
	VHT80, M0 to M9 2ss	2	5	-1.2	-1.4			1.7	17.0	15.3
	VHT80, M0 to M9 1ss	3	10	-2.1	-2.5	-1.8		2.6	13.0	10.4
	VHT80, M0 to M9 2ss	3	7	-2.1	-2.5	-1.8		2.6	16.0	13.4
	VHT80, M0 to M9 3ss	3	5	-2.1	-2.5	-1.8		2.6	17.0	14.4
	VHT80, M0 to M9 1ss	4	11	-2.1	-2.5	-1.8	-2.2	3.9	12.0	8.1
	VHT80, M0 to M9 2ss	4	8	-2.1	-2.5	-1.8	-2.2	3.9	15.0	11.1
	VHT80, M0 to M9 3ss	4	6	-2.1	-2.5	-1.8	-2.2	3.9	17.0	13.1
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-3.1	-3.6			-0.3	15.0	15.3
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-1.2	-1.4			1.7	17.0	15.3
	VHT80 Beam Forming, M0 to M9 1ss	3	10	-7.3	-7.5	-6.5		-2.3	13.0	15.3
	VHT80 Beam Forming, M0 to M9 2ss	3	7	-3.1	-3.6	-2.4		1.8	16.0	14.2
	VHT80 Beam Forming, M0 to M9 3ss	3	5	-2.1	-2.5	-1.8		2.6	17.0	14.4
	VHT80 Beam Forming, M0 to M9 1ss	4	11	-8.1	-8.4	-7.9	-7.9	-2.0	12.0	14.0
	VHT80 Beam Forming, M0 to M9 2ss	4	8	-5.0	-4.9	-4.5	-5.0	1.2	15.0	13.8
	VHT80 Beam Forming, M0 to M9 3ss	4	6	-3.1	-3.6	-2.4	-3.4	2.9	17.0	14.1
	VHT80 STBC, M0 to M9 1ss	2	5	-1.2	-1.4			1.7	17.0	15.3
	VHT80 STBC, M0 to M9 1ss	3	5	-2.1	-2.5	-1.8		2.6	17.0	14.4
	VHT80 STBC, M0 to M9 1ss	4	5	-2.1	-2.5	-1.8	-2.2	3.9	17.0	13.1



5220	Non HT20, 6 to 54 Mbps	1	5	7.4				7.4	17.0	9.6
	Non HT20, 6 to 54 Mbps	2	8	7.4	6.6			10.0	15.0	5.0
	Non HT20, 6 to 54 Mbps	3	10	7.4	6.6	8.0		12.1	13.0	0.9
	Non HT20, 6 to 54 Mbps	4	11	6.1	5.5	5.8	5.8	11.8	12.0	0.2
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	7.4	6.6			10.0	15.0	5.0
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	7.4	6.6	8.0		12.1	13.0	0.9
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	6.1	5.5	5.8	5.8	11.8	12.0	0.2
	HT/VHT20, M0 to M7	1	5	7.3				7.3	17.0	9.7
	HT/VHT20, M0 to M7	2	8	7.3	6.8			10.1	15.0	4.9
	HT/VHT20, M8 to M15	2	5	7.3	6.8			10.1	17.0	6.9
	HT/VHT20, M0 to M7	3	10	7.3	6.8	8.3		12.3	13.0	0.7
	HT/VHT20, M8 to M15	3	7	7.3	6.8	8.3		12.3	16.0	3.7
	HT/VHT20, M16 to M23	3	5	7.3	6.8	8.3		12.3	17.0	4.7
	HT/VHT20, M0 to M7	4	11	5.8	5.6	5.7	5.8	11.7	12.0	0.3
	HT/VHT20, M8 to M15	4	8	7.3	6.8	8.3	7.2	13.5	15.0	1.5
	HT/VHT20, M16 to M23	4	6	7.3	6.8	8.3	7.2	13.5	17.0	3.5
	HT/VHT20 Beam Forming, M0 to M7	2	8	7.3	6.8			10.1	15.0	4.9
	HT/VHT20 Beam Forming, M8 to M15	2	5	7.3	6.8			10.1	17.0	6.9
	HT/VHT20 Beam Forming, M0 to M7	3	10	7.3	6.8	8.3		12.3	13.0	0.7
	HT/VHT20 Beam Forming, M8 to M15	3	7	7.3	6.8	8.3		12.3	16.0	3.7
	HT/VHT20 Beam Forming, M16 to M23	3	5	7.3	6.8	8.3		12.3	17.0	4.7
	HT/VHT20 Beam Forming, M0 to M7	4	11	5.8	5.6	5.7	5.8	11.7	12.0	0.3
	HT/VHT20 Beam Forming, M8 to M15	4	8	7.3	6.8	8.3	7.2	13.5	15.0	1.5
	HT/VHT20 Beam Forming, M16 to M23	4	6	7.3	6.8	8.3	7.2	13.5	17.0	3.5
	HT/VHT20 STBC, M0 to M7	2	5	7.3	6.8			10.1	17.0	6.9
	HT/VHT20 STBC, M0 to M7	3	7	7.3	6.8	8.3		12.3	16.0	3.7
	HT/VHT20 STBC, M0 to M7	4	8	7.3	6.8	8.3	7.2	13.5	15.0	1.5
5230	Non HT40, 6 to 54 Mbps	1	5	5.8				5.8	17.0	11.2
	Non HT40, 6 to 54 Mbps	2	8	5.8	5.0			8.4	15.0	6.6
	Non HT40, 6 to 54 Mbps	3	10	5.8	5.0	5.8		10.3	13.0	2.7
	Non HT40, 6 to 54 Mbps	4	11	5.8	5.0	5.8	5.6	11.6	12.0	0.4
	HT/VHT40, M0 to M7	1	5	3.9				3.9	17.0	13.1
	HT/VHT40, M0 to M7	2	8	3.9	3.7			6.8	15.0	8.2
	HT/VHT40, M8 to M15	2	5	3.9	3.7			6.8	17.0	10.2
	HT/VHT40, M0 to M7	3	10	3.9	3.7	4.6		8.9	13.0	4.1
	HT/VHT40, M8 to M15	3	7	3.9	3.7	4.6		8.9	16.0	7.1
	HT/VHT40, M16 to M23	3	5	3.9	3.7	4.6		8.9	17.0	8.1
	HT/VHT40, M0 to M7	4	11	3.9	3.7	4.6	4.5	10.2	12.0	1.8
	HT/VHT40, M8 to M15	4	8	3.9	3.7	4.6	4.5	10.2	15.0	4.8
	HT/VHT40, M16 to M23	4	6	3.9	3.7	4.6	4.5	10.2	17.0	6.8

	HT/VHT40 Beam Forming, M0 to M7	2	8	3.9	3.7			6.8	15.0	8.2
	HT/VHT40 Beam Forming, M8 to M15	2	5	3.9	3.7			6.8	17.0	10.2
	HT/VHT40 Beam Forming, M0 to M7	3	10	3.9	3.7	4.6		8.9	13.0	4.1
	HT/VHT40 Beam Forming, M8 to M15	3	7	3.9	3.7	4.6		8.9	16.0	7.1
	HT/VHT40 Beam Forming, M16 to M23	3	5	3.9	3.7	4.6		8.9	17.0	8.1
	HT/VHT40 Beam Forming, M0 to M7	4	11	3.9	3.7	4.6	4.5	10.2	12.0	1.8
	HT/VHT40 Beam Forming, M8 to M15	4	8	3.9	3.7	4.6	4.5	10.2	15.0	4.8
	HT/VHT40 Beam Forming, M16 to M23	4	6	3.9	3.7	4.6	4.5	10.2	17.0	6.8
	HT/VHT40 STBC, M0 to M7	2	5	3.9	3.7			6.8	17.0	10.2
	HT/VHT40 STBC, M0 to M7	3	7	3.9	3.7	4.6		8.9	16.0	7.1
	HT/VHT40 STBC, M0 to M7	4	8	3.9	3.7	4.6	4.5	10.2	15.0	4.8
5240	Non HT20, 6 to 54 Mbps	1	5	7.6				7.6	17.0	9.4
	Non HT20, 6 to 54 Mbps	2	8	7.6	7.4			10.5	15.0	4.5
	Non HT20, 6 to 54 Mbps	3	10	7.6	7.4	7.6		12.3	13.0	0.7
	Non HT20, 6 to 54 Mbps	4	11	5.1	4.9	5.6	5.2	11.2	12.0	0.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	7.6	7.4			10.5	15.0	4.5
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	7.6	7.4	7.6		12.3	13.0	0.7
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	5.1	4.9	5.6	5.2	11.2	12.0	0.8
	HT/VHT20, M0 to M7	1	5	7.3				7.3	17.0	9.7
	HT/VHT20, M0 to M7	2	8	7.3	7.1			10.2	15.0	4.8
	HT/VHT20, M8 to M15	2	5	7.3	7.1			10.2	17.0	6.8
	HT/VHT20, M0 to M7	3	10	7.3	7.1	7.5		12.1	13.0	0.9
	HT/VHT20, M8 to M15	3	7	7.3	7.1	7.5		12.1	16.0	3.9
	HT/VHT20, M16 to M23	3	5	7.3	7.1	7.5		12.1	17.0	4.9
	<b>HT/VHT20, M0 to M7</b>	<b>4</b>	<b>11</b>	<b>6.0</b>	<b>5.9</b>	<b>5.4</b>	<b>6.4</b>	<b>12.0</b>	<b>12.0</b>	<b>0.0</b>
	HT/VHT20, M8 to M15	4	8	7.3	7.1	7.5	7.9	13.5	15.0	1.5
	HT/VHT20, M16 to M23	4	6	7.3	7.1	7.5	7.9	13.5	17.0	3.5
	HT/VHT20 Beam Forming, M0 to M7	2	8	7.3	7.1			10.2	15.0	4.8
	HT/VHT20 Beam Forming, M8 to M15	2	5	7.3	7.1			10.2	17.0	6.8
	HT/VHT20 Beam Forming, M0 to M7	3	10	7.3	7.1	7.5		12.1	13.0	0.9
	HT/VHT20 Beam Forming, M8 to M15	3	7	7.3	7.1	7.5		12.1	16.0	3.9
	HT/VHT20 Beam Forming, M16 to M23	3	5	7.3	7.1	7.5		12.1	17.0	4.9
	HT/VHT20 Beam Forming, M0 to M7	4	11	6.0	5.9	5.4	6.4	12.0	12.0	0.0
	HT/VHT20 Beam Forming, M8 to M15	4	8	7.3	7.1	7.5	7.9	13.5	15.0	1.5
	HT/VHT20 Beam Forming, M16 to M23	4	6	7.3	7.1	7.5	7.9	13.5	17.0	3.5
	HT/VHT20 STBC, M0 to M7	2	5	7.3	7.1			10.2	17.0	6.8
	HT/VHT20 STBC, M0 to M7	3	7	7.3	7.1	7.5		12.1	16.0	3.9
	HT/VHT20 STBC, M0 to M7	4	8	7.3	7.1	7.5	7.9	13.5	15.0	1.5

**Peak Output Power, 5230 MHz, HT/VHT40 Beam Forming, M0 to M7****Antenna A****Antenna B****Antenna C****Antenna D**

**Power Spectral Density, 5240 MHz, HT/VHT20, M0 to M7****Antenna A****Antenna B****Antenna C****Antenna D**

## A.3 Conducted Spurious Emissions

**15.407 (b) Undesirable emission limits.** Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test Procedure

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01r01  
ANSI C63.10: 2013

#### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v01 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Record the marker waveform peak to spur difference. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Capture graphs and record pertinent measurement data.

**Ref.** KDB 789033 D02 General UNII Test Procedures New Rules v01r01  
ANSI C63.10: 2013 section 12.7.7.3 (average) & 12.7.6 (peak)

#### Conducted Spurious Emissions

##### Test parameters

Span = 30MHz to 18GHz / 18GHz to 40GHz  
 RBW = 1 MHz  
 VBW  $\geq 3 \times$  RBW for Peak, 1kHz for Average  
 Sweep = Auto couple  
 Detector = Peak  
 Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 14-Jan-2016 – 22-February-2016
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-65.2				-60.2	-41.25	19.0
	Non HT20, 6 to 54 Mbps	2	5	-65.2	-65.2			-57.2	-41.25	15.9
	Non HT20, 6 to 54 Mbps	3	5	-65.2	-65.2	-65.1		-55.4	-41.25	14.1
	Non HT20, 6 to 54 Mbps	4	5	-65.2	-65.2	-65.1	-65.1	-54.1	-41.25	12.9
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-65.2	-65.2			-54.2	-41.25	12.9
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-65.2	-65.2	-65.1		-50.6	-41.25	9.3
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-65.2	-65.2	-65.1	-65.1	-48.1	-41.25	6.9
	HT/VHT20, M0 to M7	1	5	-65.0				-60.0	-41.25	18.8
	HT/VHT20, M0 to M7	2	5	-65.0	-65.3			-57.1	-41.25	15.9
	HT/VHT20, M8 to M15	2	5	-65.0	-65.3			-57.1	-41.25	15.9
	HT/VHT20, M0 to M7	3	5	-65.0	-65.3	-65.0		-55.3	-41.25	14.1
	HT/VHT20, M8 to M15	3	5	-65.0	-65.3	-65.0		-55.3	-41.25	14.1
	HT/VHT20, M16 to M23	3	5	-65.0	-65.3	-65.0		-55.3	-41.25	14.1
	HT/VHT20, M0 to M7	4	5	-65.0	-65.3	-65.0	-65.0	-54.1	-41.25	12.8
	HT/VHT20, M8 to M15	4	5	-65.0	-65.3	-65.0	-65.0	-54.1	-41.25	12.8
	HT/VHT20, M16 to M23	4	5	-65.0	-65.3	-65.0	-65.0	-54.1	-41.25	12.8
	HT/VHT20 Beam Forming, M0 to M7	2	8	-65.0	-65.3			-54.1	-41.25	12.9
	HT/VHT20 Beam Forming, M8 to M15	2	5	-65.0	-65.3			-57.1	-41.25	15.9
	HT/VHT20 Beam Forming, M0 to M7	3	10	-65.0	-65.3	-65.0		-50.5	-41.25	9.3
	HT/VHT20 Beam Forming, M8 to M15	3	7	-65.0	-65.3	-65.0		-53.5	-41.25	12.3
	HT/VHT20 Beam Forming, M16 to M23	3	5	-65.0	-65.3	-65.0		-55.3	-41.25	14.1
	<b>HT/VHT20 Beam Forming, M0 to M7</b>	<b>4</b>	<b>11</b>	<b>-65.0</b>	<b>-65.3</b>	<b>-65.0</b>	<b>-65.0</b>	<b>-48.1</b>	<b>-41.25</b>	<b>6.8</b>
	HT/VHT20 Beam Forming, M8 to M15	4	8	-65.0	-65.3	-65.0	-65.0	-51.1	-41.25	9.8
	HT/VHT20 Beam Forming, M16 to M23	4	6	-65.0	-65.3	-65.0	-65.0	-52.9	-41.25	11.6
	HT/VHT20 STBC, M0 to M7	2	5	-65.0	-65.3			-57.1	-41.25	15.9
	HT/VHT20 STBC, M0 to M7	3	5	-65.0	-65.3	-65.0		-55.3	-41.25	14.1
	HT/VHT20 STBC, M0 to M7	4	5	-65.0	-65.3	-65.0	-65.0	-54.1	-41.25	12.8
5190	Non HT40, 6 to 54 Mbps	1	5	-65.1				-60.1	-41.25	18.9
	Non HT40, 6 to 54 Mbps	2	5	-65.1	-65.2			-57.1	-41.25	15.9
	Non HT40, 6 to 54 Mbps	3	5	-65.1	-65.2	-65.1		-55.4	-41.25	14.1
	Non HT40, 6 to 54 Mbps	4	5	-65.1	-65.2	-65.1	-65.1	-54.1	-41.25	12.9
	HT/VHT40, M0 to M7	1	5	-65.1				-60.1	-41.25	18.9
	HT/VHT40, M0 to M7	2	5	-65.1	-65.1			-57.1	-41.25	15.8
	HT/VHT40, M8 to M15	2	5	-65.1	-65.1			-57.1	-41.25	15.8

	HT/VHT40, M0 to M7	3	5	-65.1	-65.1	-65.1		-55.3	-41.25	14.1
	HT/VHT40, M8 to M15	3	5	-65.1	-65.1	-65.1		-55.3	-41.25	14.1
	HT/VHT40, M16 to M23	3	5	-65.1	-65.1	-65.1		-55.3	-41.25	14.1
	HT/VHT40, M0 to M7	4	5	-65.1	-65.1	-65.1	-65.2	-54.1	-41.25	12.9
	HT/VHT40, M8 to M15	4	5	-65.1	-65.1	-65.1	-65.2	-54.1	-41.25	12.9
	HT/VHT40, M16 to M23	4	5	-65.1	-65.1	-65.1	-65.2	-54.1	-41.25	12.9
	HT/VHT40 Beam Forming, M0 to M7	2	8	-65.1	-65.1			-54.1	-41.25	12.8
	HT/VHT40 Beam Forming, M8 to M15	2	5	-65.1	-65.1			-57.1	-41.25	15.8
	HT/VHT40 Beam Forming, M0 to M7	3	10	-65.1	-65.1	-65.1		-50.5	-41.25	9.3
	HT/VHT40 Beam Forming, M8 to M15	3	7	-65.1	-65.1	-65.1		-53.5	-41.25	12.3
	HT/VHT40 Beam Forming, M16 to M23	3	5	-65.1	-65.1	-65.1		-55.3	-41.25	14.1
	HT/VHT40 Beam Forming, M0 to M7	4	11	-65.1	-65.1	-65.1	-65.2	-48.1	-41.25	6.9
	HT/VHT40 Beam Forming, M8 to M15	4	8	-65.1	-65.1	-65.1	-65.2	-51.1	-41.25	9.9
	HT/VHT40 Beam Forming, M16 to M23	4	6	-65.1	-65.1	-65.1	-65.2	-52.9	-41.25	11.7
	HT/VHT40 STBC, M0 to M7	2	5	-65.1	-65.1			-57.1	-41.25	15.8
	HT/VHT40 STBC, M0 to M7	3	5	-65.1	-65.1	-65.1		-55.3	-41.25	14.1
	HT/VHT40 STBC, M0 to M7	4	5	-65.1	-65.1	-65.1	-65.2	-54.1	-41.25	12.9
5210	Non HT80, 6 to 54 Mbps	1	5	-65.1				-60.1	-41.25	18.9
	Non HT80, 6 to 54 Mbps	2	5	-65.1	-65.1			-57.1	-41.25	15.8
	Non HT80, 6 to 54 Mbps	3	5	-65.1	-65.1	-65.2		-55.4	-41.25	14.1
	Non HT80, 6 to 54 Mbps	4	5	-65.1	-65.1	-65.2	-65.2	-54.1	-41.25	12.9
	VHT80, M0.1 to M9.1	1	5	-65.0				-60.0	-41.25	18.8
	VHT80, M0.1 to M9.1	2	5	-65.0	-65.2			-57.1	-41.25	15.8
	VHT80, M0.2 to M9.2	2	5	-65.0	-65.2			-57.1	-41.25	15.8
	VHT80, M0.1 to M9.1	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80, M0.2 to M9.2	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80, M0.3 to M9.3	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80, M0.1 to M9.1	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80, M0.2 to M9.2	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80, M0.3 to M9.3	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80 Beam Forming, M0.1 to M9.1	2	5	-65.0	-65.2			-57.1	-41.25	15.8
	VHT80 Beam Forming, M0.2 to M9.2	2	5	-65.0	-65.2			-57.1	-41.25	15.8
	VHT80 Beam Forming, M0.1 to M9.1	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80 Beam Forming, M0.2 to M9.2	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80 Beam Forming, M0.3 to M9.3	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80 Beam Forming, M0.1 to M9.1	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80 Beam Forming, M0.2 to M9.2	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80 Beam Forming, M0.3 to M9.3	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8
	VHT80 STBC, M0.1 to M9.1	2	5	-65.0	-65.2			-57.1	-41.25	15.8
	VHT80 STBC, M0.1 to M9.1	3	5	-65.0	-65.2	-65.0		-55.3	-41.25	14.0
	VHT80 STBC, M0.1 to M9.1	4	5	-65.0	-65.2	-65.0	-65.2	-54.1	-41.25	12.8



5220	Non HT20, 6 to 54 Mbps	1	5	-65.9				-60.9	-41.25	19.7
	Non HT20, 6 to 54 Mbps	2	5	-65.9	-65.9			-57.9	-41.25	16.6
	Non HT20, 6 to 54 Mbps	3	5	-65.9	-65.9	-65.6		-56.0	-41.25	14.8
	Non HT20, 6 to 54 Mbps	4	5	-65.9	-65.9	-65.6	-65.8	-54.8	-41.25	13.5
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-65.9	-65.9			-54.9	-41.25	13.6
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-65.9	-65.9	-65.6		-51.2	-41.25	10.0
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-65.9	-65.9	-65.6	-65.8	-48.8	-41.25	7.5
	HT/VHT20, M0 to M7	1	5	-65.8				-60.8	-41.25	19.6
	HT/VHT20, M0 to M7	2	5	-65.8	-66.0			-57.9	-41.25	16.6
	HT/VHT20, M8 to M15	2	5	-65.8	-66.0			-57.9	-41.25	16.6
	HT/VHT20, M0 to M7	3	5	-65.8	-66.0	-66.0		-56.2	-41.25	14.9
	HT/VHT20, M8 to M15	3	5	-65.8	-66.0	-66.0		-56.2	-41.25	14.9
	HT/VHT20, M16 to M23	3	5	-65.8	-66.0	-66.0		-56.2	-41.25	14.9
	HT/VHT20, M0 to M7	4	5	-65.8	-66.0	-66.0	-65.9	-54.9	-41.25	13.7
	HT/VHT20, M8 to M15	4	5	-65.8	-66.0	-66.0	-65.9	-54.9	-41.25	13.7
	HT/VHT20, M16 to M23	4	5	-65.8	-66.0	-66.0	-65.9	-54.9	-41.25	13.7
	HT/VHT20 Beam Forming, M0 to M7	2	8	-65.8	-66.0			-54.9	-41.25	13.6
	HT/VHT20 Beam Forming, M8 to M15	2	5	-65.8	-66.0			-57.9	-41.25	16.6
	HT/VHT20 Beam Forming, M0 to M7	3	10	-65.8	-66.0	-66.0		-51.4	-41.25	10.1
	HT/VHT20 Beam Forming, M8 to M15	3	7	-65.8	-66.0	-66.0		-54.4	-41.25	13.1
	HT/VHT20 Beam Forming, M16 to M23	3	5	-65.8	-66.0	-66.0		-56.2	-41.25	14.9
	HT/VHT20 Beam Forming, M0 to M7	4	11	-65.8	-66.0	-66.0	-65.9	-48.9	-41.25	7.7
	HT/VHT20 Beam Forming, M8 to M15	4	8	-65.8	-66.0	-66.0	-65.9	-51.9	-41.25	10.7
	HT/VHT20 Beam Forming, M16 to M23	4	6	-65.8	-66.0	-66.0	-65.9	-53.7	-41.25	12.5
	HT/VHT20 STBC, M0 to M7	2	5	-65.8	-66.0			-57.9	-41.25	16.6
	HT/VHT20 STBC, M0 to M7	3	5	-65.8	-66.0	-66.0		-56.2	-41.25	14.9
	HT/VHT20 STBC, M0 to M7	4	5	-65.8	-66.0	-66.0	-65.9	-54.9	-41.25	13.7
5230	Non HT40, 6 to 54 Mbps	1	5	-66.1				-61.1	-41.25	19.9
	Non HT40, 6 to 54 Mbps	2	5	-66.1	-65.8			-57.9	-41.25	16.7
	Non HT40, 6 to 54 Mbps	3	5	-66.1	-65.8	-65.8		-56.1	-41.25	14.9
	Non HT40, 6 to 54 Mbps	4	5	-66.1	-65.8	-65.8	-66.0	-54.9	-41.25	13.7
	HT/VHT40, M0 to M7	1	5	-65.9				-60.9	-41.25	19.7
	HT/VHT40, M0 to M7	2	5	-65.9	-66.0			-57.9	-41.25	16.7
	HT/VHT40, M8 to M15	2	5	-65.9	-66.0			-57.9	-41.25	16.7
	HT/VHT40, M0 to M7	3	5	-65.9	-66.0	-65.8		-56.1	-41.25	14.9
	HT/VHT40, M8 to M15	3	5	-65.9	-66.0	-65.8		-56.1	-41.25	14.9
	HT/VHT40, M16 to M23	3	5	-65.9	-66.0	-65.8		-56.1	-41.25	14.9
	HT/VHT40, M0 to M7	4	5	-65.9	-66.0	-65.8	-66.0	-54.9	-41.25	13.7
	HT/VHT40, M8 to M15	4	5	-65.9	-66.0	-65.8	-66.0	-54.9	-41.25	13.7
	HT/VHT40, M16 to M23	4	5	-65.9	-66.0	-65.8	-66.0	-54.9	-41.25	13.7

	HT/VHT40 Beam Forming, M0 to M7	2	8	-65.9	-66.0			-54.9	-41.25	13.7
	HT/VHT40 Beam Forming, M8 to M15	2	5	-65.9	-66.0			-57.9	-41.25	16.7
	HT/VHT40 Beam Forming, M0 to M7	3	10	-65.9	-66.0	-65.8		-51.3	-41.25	10.1
	HT/VHT40 Beam Forming, M8 to M15	3	7	-65.9	-66.0	-65.8		-54.3	-41.25	13.1
	HT/VHT40 Beam Forming, M16 to M23	3	5	-65.9	-66.0	-65.8		-56.1	-41.25	14.9
	HT/VHT40 Beam Forming, M0 to M7	4	11	-65.9	-66.0	-65.8	-66.0	-48.9	-41.25	7.7
	HT/VHT40 Beam Forming, M8 to M15	4	8	-65.9	-66.0	-65.8	-66.0	-51.9	-41.25	10.7
	HT/VHT40 Beam Forming, M16 to M23	4	6	-65.9	-66.0	-65.8	-66.0	-53.7	-41.25	12.5
	HT/VHT40 STBC, M0 to M7	2	5	-65.9	-66.0			-57.9	-41.25	16.7
	HT/VHT40 STBC, M0 to M7	3	5	-65.9	-66.0	-65.8		-56.1	-41.25	14.9
	HT/VHT40 STBC, M0 to M7	4	5	-65.9	-66.0	-65.8	-66.0	-54.9	-41.25	13.7
5240	Non HT20, 6 to 54 Mbps	1	5	-66.0				-61.0	-41.25	19.8
	Non HT20, 6 to 54 Mbps	2	5	-66.0	-66.2			-58.1	-41.25	16.8
	Non HT20, 6 to 54 Mbps	3	5	-66.0	-66.2	-66.1		-56.3	-41.25	15.1
	Non HT20, 6 to 54 Mbps	4	5	-66.0	-66.2	-66.1	-66.1	-55.1	-41.25	13.8
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-66.0	-66.2			-55.1	-41.25	13.8
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-66.0	-66.2	-66.1		-51.5	-41.25	10.3
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-66.0	-66.2	-66.1	-66.1	-49.1	-41.25	7.8
	HT/VHT20, M0 to M7	1	5	-66.2				-61.2	-41.25	20.0
	HT/VHT20, M0 to M7	2	5	-66.2	-66.1			-58.1	-41.25	16.9
	HT/VHT20, M8 to M15	2	5	-66.2	-66.1			-58.1	-41.25	16.9
	HT/VHT20, M0 to M7	3	5	-66.2	-66.1	-66.2		-56.4	-41.25	15.1
	HT/VHT20, M8 to M15	3	5	-66.2	-66.1	-66.2		-56.4	-41.25	15.1
	HT/VHT20, M16 to M23	3	5	-66.2	-66.1	-66.2		-56.4	-41.25	15.1
	HT/VHT20, M0 to M7	4	5	-66.2	-66.1	-66.2	-66.2	-55.2	-41.25	13.9
	HT/VHT20, M8 to M15	4	5	-66.2	-66.1	-66.2	-66.2	-55.2	-41.25	13.9
	HT/VHT20, M16 to M23	4	5	-66.2	-66.1	-66.2	-66.2	-55.2	-41.25	13.9
	HT/VHT20 Beam Forming, M0 to M7	2	8	-66.2	-66.1			-55.1	-41.25	13.9
	HT/VHT20 Beam Forming, M8 to M15	2	5	-66.2	-66.1			-58.1	-41.25	16.9
	HT/VHT20 Beam Forming, M0 to M7	3	10	-66.2	-66.1	-66.2		-51.6	-41.25	10.3
	HT/VHT20 Beam Forming, M8 to M15	3	7	-66.2	-66.1	-66.2		-54.6	-41.25	13.3
	HT/VHT20 Beam Forming, M16 to M23	3	5	-66.2	-66.1	-66.2		-56.4	-41.25	15.1
	HT/VHT20 Beam Forming, M0 to M7	4	11	-66.2	-66.1	-66.2	-66.2	-49.2	-41.25	7.9
	HT/VHT20 Beam Forming, M8 to M15	4	8	-66.2	-66.1	-66.2	-66.2	-52.2	-41.25	10.9
	HT/VHT20 Beam Forming, M16 to M23	4	6	-66.2	-66.1	-66.2	-66.2	-54.0	-41.25	12.7
	HT/VHT20 STBC, M0 to M7	2	5	-66.2	-66.1			-58.1	-41.25	16.9
	HT/VHT20 STBC, M0 to M7	3	5	-66.2	-66.1	-66.2		-56.4	-41.25	15.1
	HT/VHT20 STBC, M0 to M7	4	5	-66.2	-66.1	-66.2	-66.2	-55.2	-41.25	13.9

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-55.7				-50.7	-21.25	29.5
	Non HT20, 6 to 54 Mbps	2	5	-55.7	-46.6			-41.1	-21.25	19.8
	Non HT20, 6 to 54 Mbps	3	5	-55.7	-46.6	-56.5		-40.7	-21.25	19.5
	Non HT20, 6 to 54 Mbps	4	5	-55.7	-46.6	-56.5	-55.1	-40.2	-21.25	19.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-55.7	-46.6			-38.1	-21.25	16.8
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-55.7	-46.6	-56.5		-35.9	-21.25	14.7
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-55.7	-46.6	-56.5	-55.1	-34.2	-21.25	13.0
	HT/VHT20, M0 to M7	1	5	-57.9				-52.9	-21.25	31.7
	HT/VHT20, M0 to M7	2	5	-57.9	-56.4			-49.1	-21.25	27.8
	HT/VHT20, M8 to M15	2	5	-57.9	-56.4			-49.1	-21.25	27.8
	HT/VHT20, M0 to M7	3	5	-57.9	-56.4	-55.9		-46.9	-21.25	25.6
	HT/VHT20, M8 to M15	3	5	-57.9	-56.4	-55.9		-46.9	-21.25	25.6
	HT/VHT20, M16 to M23	3	5	-57.9	-56.4	-55.9		-46.9	-21.25	25.6
	HT/VHT20, M0 to M7	4	5	-57.9	-56.4	-55.9	-54.4	-45.0	-21.25	23.7
	HT/VHT20, M8 to M15	4	5	-57.9	-56.4	-55.9	-54.4	-45.0	-21.25	23.7
	HT/VHT20, M16 to M23	4	5	-57.9	-56.4	-55.9	-54.4	-45.0	-21.25	23.7
	HT/VHT20 Beam Forming, M0 to M7	2	8	-57.9	-56.4			-46.1	-21.25	24.8
	HT/VHT20 Beam Forming, M8 to M15	2	5	-57.9	-56.4			-49.1	-21.25	27.8
	HT/VHT20 Beam Forming, M0 to M7	3	10	-57.9	-56.4	-55.9		-42.1	-21.25	20.8
	HT/VHT20 Beam Forming, M8 to M15	3	7	-57.9	-56.4	-55.9		-45.1	-21.25	23.8
	HT/VHT20 Beam Forming, M16 to M23	3	5	-57.9	-56.4	-55.9		-46.9	-21.25	25.6
	HT/VHT20 Beam Forming, M0 to M7	4	11	-57.9	-56.4	-55.9	-54.4	-39.0	-21.25	17.7
	HT/VHT20 Beam Forming, M8 to M15	4	8	-57.9	-56.4	-55.9	-54.4	-42.0	-21.25	20.7
	HT/VHT20 Beam Forming, M16 to M23	4	6	-57.9	-56.4	-55.9	-54.4	-43.8	-21.25	22.5
	HT/VHT20 STBC, M0 to M7	2	5	-57.9	-56.4			-49.1	-21.25	27.8
	HT/VHT20 STBC, M0 to M7	3	5	-57.9	-56.4	-55.9		-46.9	-21.25	25.6
	HT/VHT20 STBC, M0 to M7	4	5	-57.9	-56.4	-55.9	-54.4	-45.0	-21.25	23.7
5190	Non HT40, 6 to 54 Mbps	1	5	-54.2				-49.2	-21.25	28.0
	Non HT40, 6 to 54 Mbps	2	5	-54.2	-56.6			-47.2	-21.25	26.0
	Non HT40, 6 to 54 Mbps	3	5	-54.2	-56.6	-47.9		-41.5	-21.25	20.3
	Non HT40, 6 to 54 Mbps	4	5	-54.2	-56.6	-47.9	-56.3	-41.1	-21.25	19.8
	HT/VHT40, M0 to M7	1	5	-56.6				-51.6	-21.25	30.4
	HT/VHT40, M0 to M7	2	5	-56.6	-47.2			-41.7	-21.25	20.5
	HT/VHT40, M8 to M15	2	5	-56.6	-47.2			-41.7	-21.25	20.5

	HT/VHT40, M0 to M7	3	5	-56.6	-47.2	-47.9		-39.3	-21.25	18.0
	HT/VHT40, M8 to M15	3	5	-56.6	-47.2	-47.9		-39.3	-21.25	18.0
	HT/VHT40, M16 to M23	3	5	-56.6	-47.2	-47.9		-39.3	-21.25	18.0
	HT/VHT40, M0 to M7	4	5	-56.6	-47.2	-47.9	-56.1	-39.0	-21.25	17.7
	HT/VHT40, M8 to M15	4	5	-56.6	-47.2	-47.9	-56.1	-39.0	-21.25	17.7
	HT/VHT40, M16 to M23	4	5	-56.6	-47.2	-47.9	-56.1	-39.0	-21.25	17.7
	HT/VHT40 Beam Forming, M0 to M7	2	8	-56.6	-47.2			-38.7	-21.25	17.5
	HT/VHT40 Beam Forming, M8 to M15	2	5	-56.6	-47.2			-41.7	-21.25	20.5
	HT/VHT40 Beam Forming, M0 to M7	3	10	-56.6	-47.2	-47.9		-34.5	-21.25	13.2
	HT/VHT40 Beam Forming, M8 to M15	3	7	-56.6	-47.2	-47.9		-37.5	-21.25	16.2
	HT/VHT40 Beam Forming, M16 to M23	3	5	-56.6	-47.2	-47.9		-39.3	-21.25	18.0
	<b>HT/VHT40 Beam Forming, M0 to M7</b>	<b>4</b>	<b>11</b>	<b>-56.6</b>	<b>-47.2</b>	<b>-47.9</b>	<b>-56.1</b>	<b>-33.0</b>	<b>-21.25</b>	<b>11.7</b>
	HT/VHT40 Beam Forming, M8 to M15	4	8	-56.6	-47.2	-47.9	-56.1	-36.0	-21.25	14.7
	HT/VHT40 Beam Forming, M16 to M23	4	6	-56.6	-47.2	-47.9	-56.1	-37.8	-21.25	16.5
	HT/VHT40 STBC, M0 to M7	2	5	-56.6	-47.2			-41.7	-21.25	20.5
	HT/VHT40 STBC, M0 to M7	3	5	-56.6	-47.2	-47.9		-39.3	-21.25	18.0
	HT/VHT40 STBC, M0 to M7	4	5	-56.6	-47.2	-47.9	-56.1	-39.0	-21.25	17.7
5210	Non HT80, 6 to 54 Mbps	1	5	-56.6				-51.6	-21.25	30.4
	Non HT80, 6 to 54 Mbps	2	5	-56.6	-55.6			-48.1	-21.25	26.8
	Non HT80, 6 to 54 Mbps	3	5	-56.6	-55.6	-55.4		-46.1	-21.25	24.8
	Non HT80, 6 to 54 Mbps	4	5	-56.6	-55.6	-55.4	-55.7	-44.8	-21.25	23.5
	VHT80, M0.1 to M9.1	1	5	-54.4				-49.4	-21.25	28.2
	VHT80, M0.1 to M9.1	2	5	-54.4	-57.0			-47.5	-21.25	26.2
	VHT80, M0.2 to M9.2	2	5	-54.4	-57.0			-47.5	-21.25	26.2
	VHT80, M0.1 to M9.1	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80, M0.2 to M9.2	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80, M0.3 to M9.3	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80, M0.1 to M9.1	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80, M0.2 to M9.2	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80, M0.3 to M9.3	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80 Beam Forming, M0.1 to M9.1	2	5	-54.4	-57.0			-47.5	-21.25	26.2
	VHT80 Beam Forming, M0.2 to M9.2	2	5	-54.4	-57.0			-47.5	-21.25	26.2
	VHT80 Beam Forming, M0.1 to M9.1	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80 Beam Forming, M0.2 to M9.2	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80 Beam Forming, M0.3 to M9.3	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80 Beam Forming, M0.1 to M9.1	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80 Beam Forming, M0.2 to M9.2	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80 Beam Forming, M0.3 to M9.3	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1
	VHT80 STBC, M0.1 to M9.1	2	5	-54.4	-57.0			-47.5	-21.25	26.2
	VHT80 STBC, M0.1 to M9.1	3	5	-54.4	-57.0	-57.2		-46.2	-21.25	25.0
	VHT80 STBC, M0.1 to M9.1	4	5	-54.4	-57.0	-57.2	-57.7	-45.3	-21.25	24.1

5220	Non HT20, 6 to 54 Mbps	1	5	-55.1				-50.1	-21.25	28.9
	Non HT20, 6 to 54 Mbps	2	5	-55.1	-58.8			-48.6	-21.25	27.3
	Non HT20, 6 to 54 Mbps	3	5	-55.1	-58.8	-50.4		-43.7	-21.25	22.4
	Non HT20, 6 to 54 Mbps	4	5	-55.1	-58.8	-50.4	-58.0	-43.2	-21.25	22.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-55.1	-58.8			-45.6	-21.25	24.3
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-55.1	-58.8	-50.4		-38.9	-21.25	17.6
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-55.1	-58.8	-50.4	-58.0	-37.2	-21.25	16.0
	HT/VHT20, M0 to M7	1	5	-57.6				-52.6	-21.25	31.4
	HT/VHT20, M0 to M7	2	5	-57.6	-54.8			-48.0	-21.25	26.7
	HT/VHT20, M8 to M15	2	5	-57.6	-54.8			-48.0	-21.25	26.7
	HT/VHT20, M0 to M7	3	5	-57.6	-54.8	-57.4		-46.6	-21.25	25.4
	HT/VHT20, M8 to M15	3	5	-57.6	-54.8	-57.4		-46.6	-21.25	25.4
	HT/VHT20, M16 to M23	3	5	-57.6	-54.8	-57.4		-46.6	-21.25	25.4
	HT/VHT20, M0 to M7	4	5	-57.6	-54.8	-57.4	-55.8	-45.2	-21.25	24.0
	HT/VHT20, M8 to M15	4	5	-57.6	-54.8	-57.4	-55.8	-45.2	-21.25	24.0
	HT/VHT20, M16 to M23	4	5	-57.6	-54.8	-57.4	-55.8	-45.2	-21.25	24.0
	HT/VHT20 Beam Forming, M0 to M7	2	8	-57.6	-54.8			-45.0	-21.25	23.7
	HT/VHT20 Beam Forming, M8 to M15	2	5	-57.6	-54.8			-48.0	-21.25	26.7
	HT/VHT20 Beam Forming, M0 to M7	3	10	-57.6	-54.8	-57.4		-41.8	-21.25	20.6
	HT/VHT20 Beam Forming, M8 to M15	3	7	-57.6	-54.8	-57.4		-44.8	-21.25	23.6
	HT/VHT20 Beam Forming, M16 to M23	3	5	-57.6	-54.8	-57.4		-46.6	-21.25	25.4
	HT/VHT20 Beam Forming, M0 to M7	4	11	-57.6	-54.8	-57.4	-55.8	-39.2	-21.25	18.0
	HT/VHT20 Beam Forming, M8 to M15	4	8	-57.6	-54.8	-57.4	-55.8	-42.2	-21.25	21.0
	HT/VHT20 Beam Forming, M16 to M23	4	6	-57.6	-54.8	-57.4	-55.8	-44.0	-21.25	22.8
	HT/VHT20 STBC, M0 to M7	2	5	-57.6	-54.8			-48.0	-21.25	26.7
	HT/VHT20 STBC, M0 to M7	3	5	-57.6	-54.8	-57.4		-46.6	-21.25	25.4
	HT/VHT20 STBC, M0 to M7	4	5	-57.6	-54.8	-57.4	-55.8	-45.2	-21.25	24.0
5230	Non HT40, 6 to 54 Mbps	1	5	-58.1				-53.1	-21.25	31.9
	Non HT40, 6 to 54 Mbps	2	5	-58.1	-57.6			-49.8	-21.25	28.6
	Non HT40, 6 to 54 Mbps	3	5	-58.1	-57.6	-47.0		-41.3	-21.25	20.1
	Non HT40, 6 to 54 Mbps	4	5	-58.1	-57.6	-47.0	-55.5	-40.8	-21.25	19.6
	HT/VHT40, M0 to M7	1	5	-57.8				-52.8	-21.25	31.6
	HT/VHT40, M0 to M7	2	5	-57.8	-57.1			-49.4	-21.25	28.2
	HT/VHT40, M8 to M15	2	5	-57.8	-57.1			-49.4	-21.25	28.2
	HT/VHT40, M0 to M7	3	5	-57.8	-57.1	-46.6		-40.9	-21.25	19.7
	HT/VHT40, M8 to M15	3	5	-57.8	-57.1	-46.6		-40.9	-21.25	19.7
	HT/VHT40, M16 to M23	3	5	-57.8	-57.1	-46.6		-40.9	-21.25	19.7
	HT/VHT40, M0 to M7	4	5	-57.8	-57.1	-46.6	-59.1	-40.7	-21.25	19.5
	HT/VHT40, M8 to M15	4	5	-57.8	-57.1	-46.6	-59.1	-40.7	-21.25	19.5
	HT/VHT40, M16 to M23	4	5	-57.8	-57.1	-46.6	-59.1	-40.7	-21.25	19.5

	HT/VHT40 Beam Forming, M0 to M7	2	8	-57.8	-57.1			-46.4	-21.25	25.2
	HT/VHT40 Beam Forming, M8 to M15	2	5	-57.8	-57.1			-49.4	-21.25	28.2
	HT/VHT40 Beam Forming, M0 to M7	3	10	-57.8	-57.1	-46.6		-36.1	-21.25	14.9
	HT/VHT40 Beam Forming, M8 to M15	3	7	-57.8	-57.1	-46.6		-39.1	-21.25	17.9
	HT/VHT40 Beam Forming, M16 to M23	3	5	-57.8	-57.1	-46.6		-40.9	-21.25	19.7
	HT/VHT40 Beam Forming, M0 to M7	4	11	-57.8	-57.1	-46.6	-59.1	-34.7	-21.25	13.5
	HT/VHT40 Beam Forming, M8 to M15	4	8	-57.8	-57.1	-46.6	-59.1	-37.7	-21.25	16.5
	HT/VHT40 Beam Forming, M16 to M23	4	6	-57.8	-57.1	-46.6	-59.1	-39.5	-21.25	18.3
	HT/VHT40 STBC, M0 to M7	2	5	-57.8	-57.1			-49.4	-21.25	28.2
	HT/VHT40 STBC, M0 to M7	3	5	-57.8	-57.1	-46.6		-40.9	-21.25	19.7
	HT/VHT40 STBC, M0 to M7	4	5	-57.8	-57.1	-46.6	-59.1	-40.7	-21.25	19.5
5240	Non HT20, 6 to 54 Mbps	1	5	-58.4				-53.4	-21.25	32.2
	Non HT20, 6 to 54 Mbps	2	5	-58.4	-47.3			-42.0	-21.25	20.7
	Non HT20, 6 to 54 Mbps	3	5	-58.4	-47.3	-56.9		-41.6	-21.25	20.3
	Non HT20, 6 to 54 Mbps	4	5	-58.4	-47.3	-56.9	-58.3	-41.3	-21.25	20.0
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-58.4	-47.3			-39.0	-21.25	17.7
	Non HT20 Beam Forming, 6 to 54 Mbps	3	10	-58.4	-47.3	-56.9		-36.8	-21.25	15.5
	Non HT20 Beam Forming, 6 to 54 Mbps	4	11	-58.4	-47.3	-56.9	-58.3	-35.3	-21.25	14.0
	HT/VHT20, M0 to M7	1	5	-47.5				-42.5	-21.25	21.3
	HT/VHT20, M0 to M7	2	5	-47.5	-47.4			-39.4	-21.25	18.2
	HT/VHT20, M8 to M15	2	5	-47.5	-47.4			-39.4	-21.25	18.2
	HT/VHT20, M0 to M7	3	5	-47.5	-47.4	-59.1		-39.3	-21.25	18.0
	HT/VHT20, M8 to M15	3	5	-47.5	-47.4	-59.1		-39.3	-21.25	18.0
	HT/VHT20, M16 to M23	3	5	-47.5	-47.4	-59.1		-39.3	-21.25	18.0
	HT/VHT20, M0 to M7	4	5	-47.5	-47.4	-59.1	-58.2	-39.1	-21.25	17.9
	HT/VHT20, M8 to M15	4	5	-47.5	-47.4	-59.1	-58.2	-39.1	-21.25	17.9
	HT/VHT20, M16 to M23	4	5	-47.5	-47.4	-59.1	-58.2	-39.1	-21.25	17.9
	HT/VHT20 Beam Forming, M0 to M7	2	8	-47.5	-47.4			-36.4	-21.25	15.2
	HT/VHT20 Beam Forming, M8 to M15	2	5	-47.5	-47.4			-39.4	-21.25	18.2
	HT/VHT20 Beam Forming, M0 to M7	3	10	-47.5	-47.4	-59.1		-34.5	-21.25	13.2
	HT/VHT20 Beam Forming, M8 to M15	3	7	-47.5	-47.4	-59.1		-37.5	-21.25	16.2
	HT/VHT20 Beam Forming, M16 to M23	3	5	-47.5	-47.4	-59.1		-39.3	-21.25	18.0
	HT/VHT20 Beam Forming, M0 to M7	4	11	-47.5	-47.4	-59.1	-58.2	-33.1	-21.25	11.9
	HT/VHT20 Beam Forming, M8 to M15	4	8	-47.5	-47.4	-59.1	-58.2	-36.1	-21.25	14.9
	HT/VHT20 Beam Forming, M16 to M23	4	6	-47.5	-47.4	-59.1	-58.2	-37.9	-21.25	16.7
	HT/VHT20 STBC, M0 to M7	2	5	-47.5	-47.4			-39.4	-21.25	18.2
	HT/VHT20 STBC, M0 to M7	3	5	-47.5	-47.4	-59.1		-39.3	-21.25	18.0
	HT/VHT20 STBC, M0 to M7	4	5	-47.5	-47.4	-59.1	-58.2	-39.1	-21.25	17.9



**Conducted Spurs Average, All Antennas****Conducted Spurs Peak, All Antennas**

No emissions seen above 18GHz. The plots above are representative of all modes tested.

### Conducted Spurs Average, 5180 MHz, HT/VHT20 Beam Forming, M0 to M7



Antenna A



Antenna B

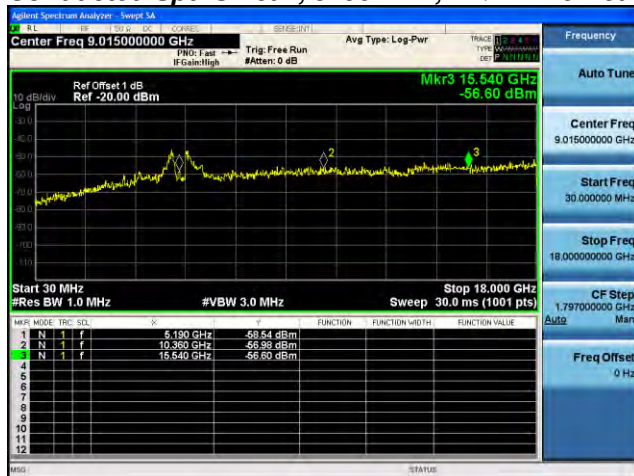
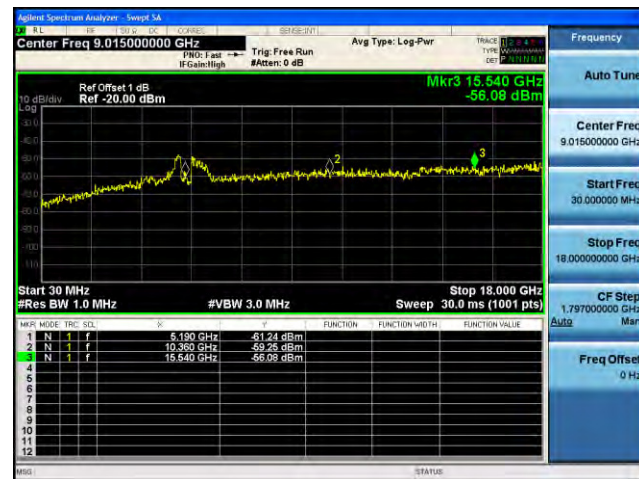


Antenna C



Antenna D



**Conducted Spurs Peak, 5190 MHz, HT/VHT40 Beam Forming, M0 to M7****Antenna A****Antenna B****Antenna C****Antenna D**

## A.4 Conducted Bandedge

**15.407 (b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz maximum emission limit.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

1) Average Plot, Limit= -41.25 dBm eirp

2) Peak plot, Limit = -21.25 dBm eirp

### Test Procedure

Ref. ANSI C63.10: 2013

#### Conducted Bandedge

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode. Use the procedures in ANSI C63.10: 2013 to substitute conducted measurements in place of radiated measurements.
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded.
6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands
7. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average, Method VB-A (Alternative))

#### Conducted Bandedge

##### Test parameters restricted Band

RBW = 1 MHz  
 VBW ≥ 3 x RBW for Peak, 100Hz for Average  
 Sweep = Auto couple  
 Detector = Peak  
 Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Jose Aguirre

**Date of testing:**

14-Jan-2016 – 22-February-2016

**Test Result : PASS**

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	-54.1				-49.1	-41.25	7.9
	Non HT/VHT20, 6 to 54 Mbps	2	5	-54.1	-53.3			-45.7	-41.25	4.4
	Non HT/VHT20, 6 to 54 Mbps	3	5	-54.1	-53.3	-52.7		-43.6	-41.25	2.3
	Non HT/VHT20, 6 to 54 Mbps	4	5	-54.1	-53.3	-52.7	-53.7	-42.4	-41.25	1.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	-54.1	-53.3			-42.7	-41.25	1.4
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	-57.3	-56.5	-55.3		-41.7	-41.25	0.5
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	-60.7	-61.4	-56.2	-60.7	-42.2	-41.25	0.9
	HT/VHT20, M0 to M7	1	5	-53.7				-48.7	-41.25	7.5
	HT/VHT20, M0 to M7	2	5	-53.7	-52.8			-45.2	-41.25	4.0
	HT/VHT20, M8 to M15	2	5	-53.7	-52.8			-45.2	-41.25	4.0
	HT/VHT20, M0 to M7	3	5	-53.7	-52.8	-52.4		-43.2	-41.25	1.9
	HT/VHT20, M8 to M15	3	5	-53.7	-52.8	-52.4		-43.2	-41.25	1.9
	HT/VHT20, M16 to M23	3	5	-53.7	-52.8	-52.4		-43.2	-41.25	1.9
	HT/VHT20, M0 to M7	4	5	-53.7	-52.8	-52.4	-53.8	-42.1	-41.25	0.9
	HT/VHT20, M8 to M15	4	5	-53.7	-52.8	-52.4	-53.8	-42.1	-41.25	0.9
	HT/VHT20, M16 to M23	4	5	-53.7	-52.8	-52.4	-53.8	-42.1	-41.25	0.9
	HT/VHT20 Beam Forming, M0 to M7	2	8	-53.7	-52.8			-42.2	-41.25	1.0
	HT/VHT20 Beam Forming, M8 to M15	2	5	-53.7	-52.8			-45.2	-41.25	4.0
	HT/VHT20 Beam Forming, M0 to M7	3	10	-57.4	-57.0	-55.5		-42.0	-41.25	0.7
	HT/VHT20 Beam Forming, M8 to M15	3	7	-53.7	-52.8	-52.4		-41.4	-41.25	0.1
	HT/VHT20 Beam Forming, M16 to M23	3	5	-53.7	-52.8	-52.4		-43.2	-41.25	1.9
	HT/VHT20 Beam Forming, M0 to M7	4	11	-60.7	-61.4	-56.3	-60.7	-42.2	-41.25	1.0
	HT/VHT20 Beam Forming, M8 to M15	4	8	-57.1	-56.1	-55.3	-56.5	-42.2	-41.25	0.9
	HT/VHT20 Beam Forming, M16 to M23	4	6	-54.6	-53.8	-53.4	-54.1	-41.7	-41.25	0.5
	HT/VHT20 STBC, M0 to M7	2	5	-53.7	-52.8			-45.2	-41.25	4.0
	HT/VHT20 STBC, M0 to M7	3	5	-53.7	-52.8	-52.4		-43.2	-41.25	1.9
	HT/VHT20 STBC, M0 to M7	4	5	-53.7	-52.8	-52.4	-53.8	-42.1	-41.25	0.9
5190	Non HT/VHT40, 6 to 54 Mbps	1	5	-49.0				-44.0	-41.25	2.8
	Non HT/VHT40, 6 to 54 Mbps	2	5	-51.5	-49.0			-42.1	-41.25	0.8
	Non HT/VHT40, 6 to 54 Mbps	3	5	-51.9	-51.0	-51.5		-41.7	-41.25	0.4
	Non HT/VHT40, 6 to 54 Mbps	4	5	-53.2	-52.5	-52.9	-54.3	-42.2	-41.25	0.9
	HT/VHT40, M0 to M7	1	5	-50.7				-45.7	-41.25	4.5
	HT/VHT40, M0 to M7	2	5	-50.7	-51.4			-43.0	-41.25	1.8

	HT/VHT40, M8 to M15	2	5	-50.7	-51.4			-43.0	-41.25	1.8
	HT/VHT40, M0 to M7	3	5	-52.2	-53.2	-51.3		-42.4	-41.25	1.1
	HT/VHT40, M8 to M15	3	5	-52.2	-53.2	-51.3		-42.4	-41.25	1.1
	HT/VHT40, M16 to M23	3	5	-52.2	-53.2	-51.3		-42.4	-41.25	1.1
	HT/VHT40, M0 to M7	4	5	-52.2	-53.2	-51.3	-53.9	-41.5	-41.25	0.3
	HT/VHT40, M8 to M15	4	5	-52.2	-53.2	-51.3	-53.9	-41.5	-41.25	0.3
	HT/VHT40, M16 to M23	4	5	-52.2	-53.2	-51.3	-53.9	-41.5	-41.25	0.3
	HT/VHT40 Beam Forming, M0 to M7	2	8	-52.2	-53.2			-41.7	-41.25	0.4
	HT/VHT40 Beam Forming, M8 to M15	2	5	-50.7	-51.4			-43.0	-41.25	1.8
	<b>HT/VHT40 Beam Forming, M0 to M7</b>	<b>3</b>	<b>10</b>	<b>-55.4</b>	<b>-56.9</b>	<b>-55.5</b>		<b>-41.3</b>	<b>-41.25</b>	<b>0.1</b>
	HT/VHT40 Beam Forming, M8 to M15	3	7	-52.9	-53.9	-53.0		-41.7	-41.25	0.4
	HT/VHT40 Beam Forming, M16 to M23	3	5	-52.2	-53.2	-51.3		-42.4	-41.25	1.1
	HT/VHT40 Beam Forming, M0 to M7	4	11	-59.3	-60.8	-56.1	-61.0	-41.8	-41.25	0.5
	HT/VHT40 Beam Forming, M8 to M15	4	8	-55.4	-56.9	-55.5	-57.6	-42.2	-41.25	1.0
	HT/VHT40 Beam Forming, M16 to M23	4	6	-52.9	-53.9	-53.0	-55.4	-41.5	-41.25	0.2
	HT/VHT40 STBC, M0 to M7	2	5	-50.7	-51.4			-43.0	-41.25	1.8
	HT/VHT40 STBC, M0 to M7	3	5	-52.2	-53.2	-51.3		-42.4	-41.25	1.1
	HT/VHT40 STBC, M0 to M7	4	5	-52.2	-53.2	-51.3	-53.9	-41.5	-41.25	0.3
5210	Non HT/VHT80, 6 to 54 Mbps	1	5	-46.4				-41.4	-41.25	0.1
	Non HT/VHT80, 6 to 54 Mbps	2	5	-50.5	-51.5			-43.0	-41.25	1.7
	Non HT/VHT80, 6 to 54 Mbps	3	5	-51.7	-53.0	-53.1		-42.8	-41.25	1.5
	Non HT/VHT80, 6 to 54 Mbps	4	5	-51.7	-53.0	-53.1	-54.0	-41.9	-41.25	0.6
	HT/VHT80, M0 to M7	1	5	-48.2				-43.2	-41.25	2.0
	HT/VHT80, M0 to M7	2	5	-49.9	-50.5			-42.2	-41.25	0.9
	HT/VHT80, M8 to M15	2	5	-49.9	-50.5			-42.2	-41.25	0.9
	HT/VHT80, M0 to M7	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80, M8 to M15	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80, M16 to M23	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80, M0 to M7	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80, M8 to M15	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80, M16 to M23	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M0 to M7	2	5	-49.9	-50.5			-42.2	-41.25	0.9
	HT/VHT80 Beam Forming, M8 to M15	2	5	-49.9	-50.5			-42.2	-41.25	0.9
	HT/VHT80 Beam Forming, M0 to M7	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80 Beam Forming, M8 to M15	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80 Beam Forming, M16 to M23	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1
	HT/VHT80 Beam Forming, M0 to M7	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M8 to M15	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80 Beam Forming, M16 to M23	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
	HT/VHT80 STBC, M0 to M7	2	5	-49.9	-50.5			-42.2	-41.25	0.9
	HT/VHT80 STBC, M0 to M7	3	5	-51.8	-52.3	-52.2		-42.3	-41.25	1.1

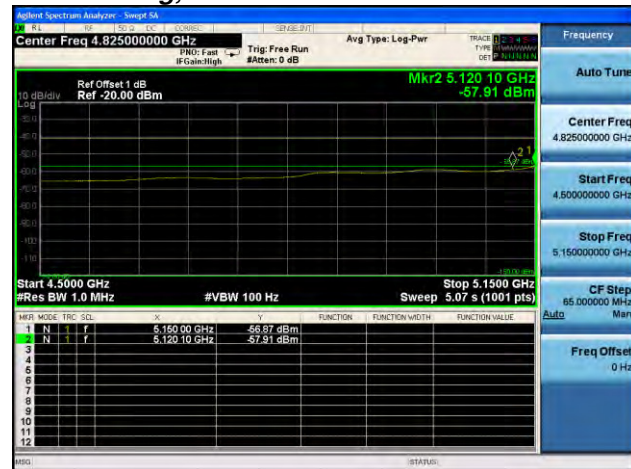
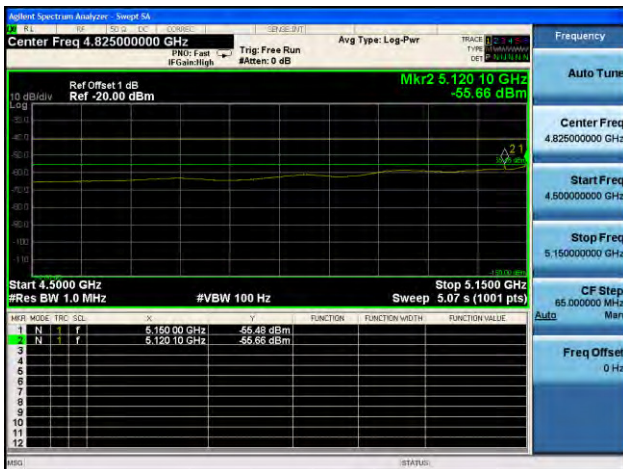
HT/VHT80 STBC, M0 to M7	4	5	-51.8	-52.3	-52.2	-53.5	-41.4	-41.25	0.1
-------------------------	---	---	-------	-------	-------	-------	-------	--------	-----

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT/VHT20, 6 to 54 Mbps	1	5	-39.0				-34.0	-21.25	12.8
	Non HT/VHT20, 6 to 54 Mbps	2	5	-39.0	-42.9			-32.5	-21.25	11.3
	Non HT/VHT20, 6 to 54 Mbps	3	5	-39.0	-42.9	-41.0		-30.9	-21.25	9.7
	Non HT/VHT20, 6 to 54 Mbps	4	5	-39.0	-42.9	-41.0	-45.4	-30.4	-21.25	9.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	8	-39.0	-42.9			-29.5	-21.25	8.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	10	-48.4	-45.8	-44.1		-31.2	-21.25	9.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	11	-48.3	-49.1	-47.2	-50.4	-31.6	-21.25	10.3
	HT/VHT20, M0 to M7	1	5	-42.0				-37.0	-21.25	15.8
	HT/VHT20, M0 to M7	2	5	-42.0	-40.5			-33.2	-21.25	11.9
	HT/VHT20, M8 to M15	2	5	-42.0	-40.5			-33.2	-21.25	11.9
	HT/VHT20, M0 to M7	3	5	-42.0	-40.5	-42.6		-31.8	-21.25	10.6
	HT/VHT20, M8 to M15	3	5	-42.0	-40.5	-42.6		-31.8	-21.25	10.6
	HT/VHT20, M16 to M23	3	5	-42.0	-40.5	-42.6		-31.8	-21.25	10.6
	HT/VHT20, M0 to M7	4	5	-42.0	-40.5	-42.6	-42.2	-30.7	-21.25	9.5
	HT/VHT20, M8 to M15	4	5	-42.0	-40.5	-42.6	-42.2	-30.7	-21.25	9.5
	HT/VHT20, M16 to M23	4	5	-42.0	-40.5	-42.6	-42.2	-30.7	-21.25	9.5
	HT/VHT20 Beam Forming, M0 to M7	2	8	-42.0	-40.5			-30.2	-21.25	8.9
	HT/VHT20 Beam Forming, M8 to M15	2	5	-42.0	-40.5			-33.2	-21.25	11.9
	HT/VHT20 Beam Forming, M0 to M7	3	10	-41.6	-47.4	-39.4		-27.1	-21.25	5.9
	HT/VHT20 Beam Forming, M8 to M15	3	7	-42.0	-40.5	-42.6		-30.0	-21.25	8.8
	HT/VHT20 Beam Forming, M16 to M23	3	5	-42.0	-40.5	-42.6		-31.8	-21.25	10.6
	HT/VHT20 Beam Forming, M0 to M7	4	11	-49.8	-48.9	-41.8	-48.2	-28.8	-21.25	7.6
	<b>HT/VHT20 Beam Forming, M8 to M15</b>	<b>4</b>	<b>8</b>	<b>-31.3</b>	<b>-47.0</b>	<b>-44.7</b>	<b>-42.4</b>	<b>-22.7</b>	<b>-21.25</b>	<b>1.4</b>
	HT/VHT20 Beam Forming, M16 to M23	4	6	-43.9	-34.6	-37.9	-42.2	-25.9	-21.25	4.7
	HT/VHT20 STBC, M0 to M7	2	5	-42.0	-40.5			-33.2	-21.25	11.9
	HT/VHT20 STBC, M0 to M7	3	5	-42.0	-40.5	-42.6		-31.8	-21.25	10.6
	HT/VHT20 STBC, M0 to M7	4	5	-42.0	-40.5	-42.6	-42.2	-30.7	-21.25	9.5
5190	Non HT/VHT40, 6 to 54 Mbps	1	5	-31.0				-26.0	-21.25	4.8
	Non HT/VHT40, 6 to 54 Mbps	2	5	-29.4	-34.2			-23.2	-21.25	1.9
	Non HT/VHT40, 6 to 54 Mbps	3	5	-36.0	-30.2	-42.1		-24.0	-21.25	2.7
	Non HT/VHT40, 6 to 54 Mbps	4	5	-42.8	-34.8	-35.8	-39.4	-26.2	-21.25	4.9
	HT/VHT40, M0 to M7	1	5	-41.5				-36.5	-21.25	15.3

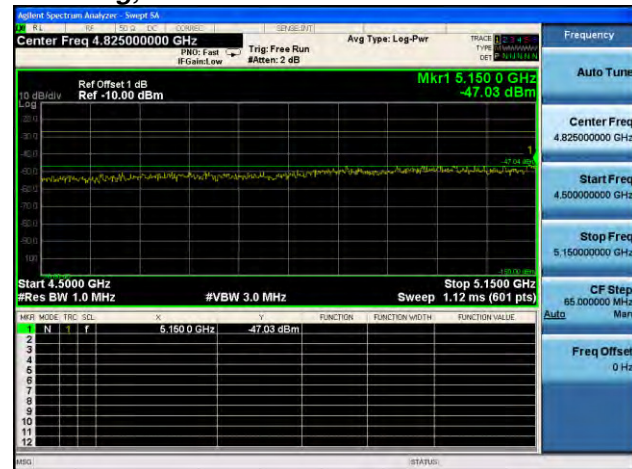
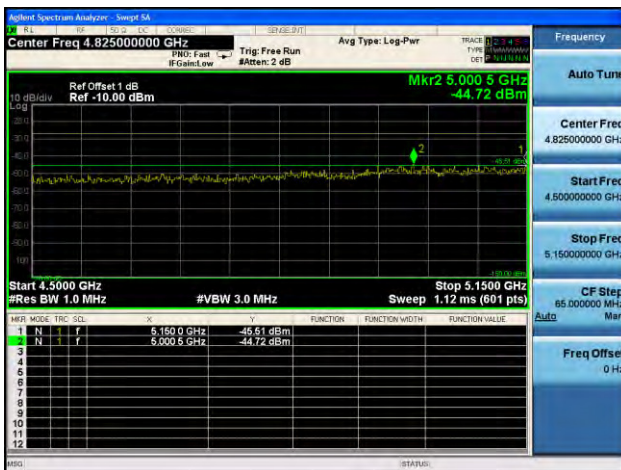
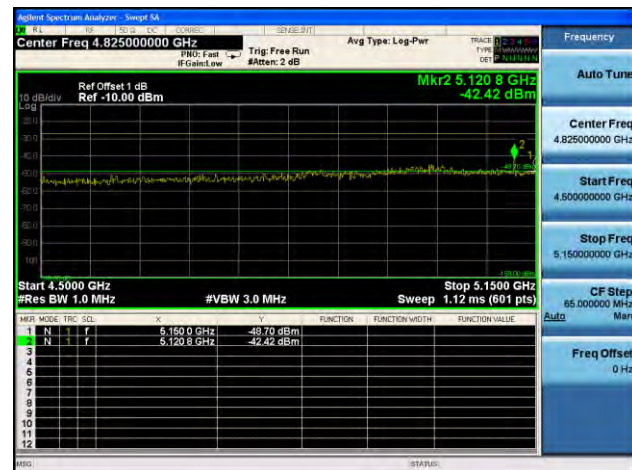


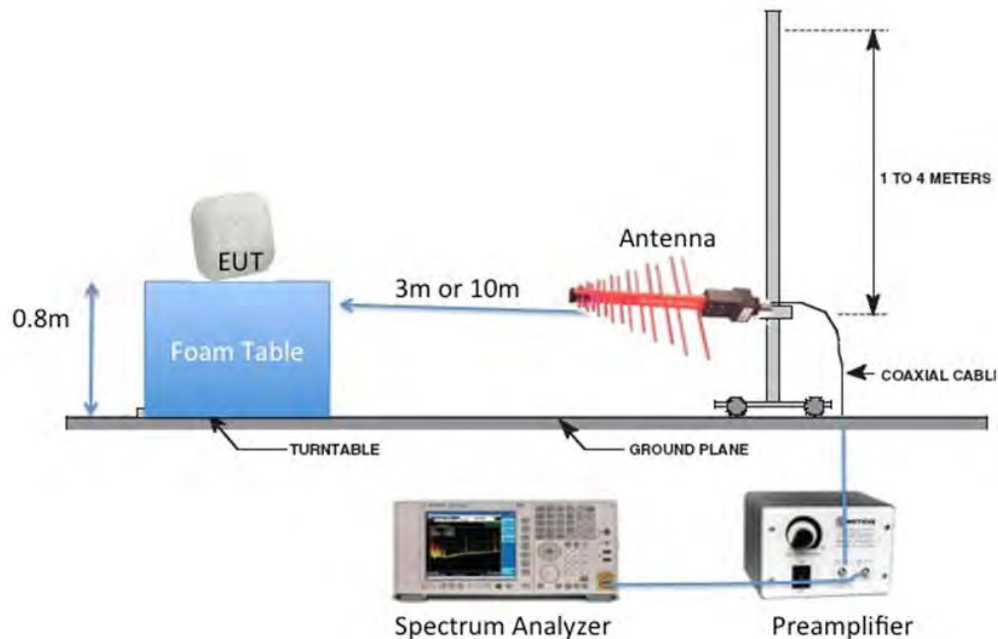
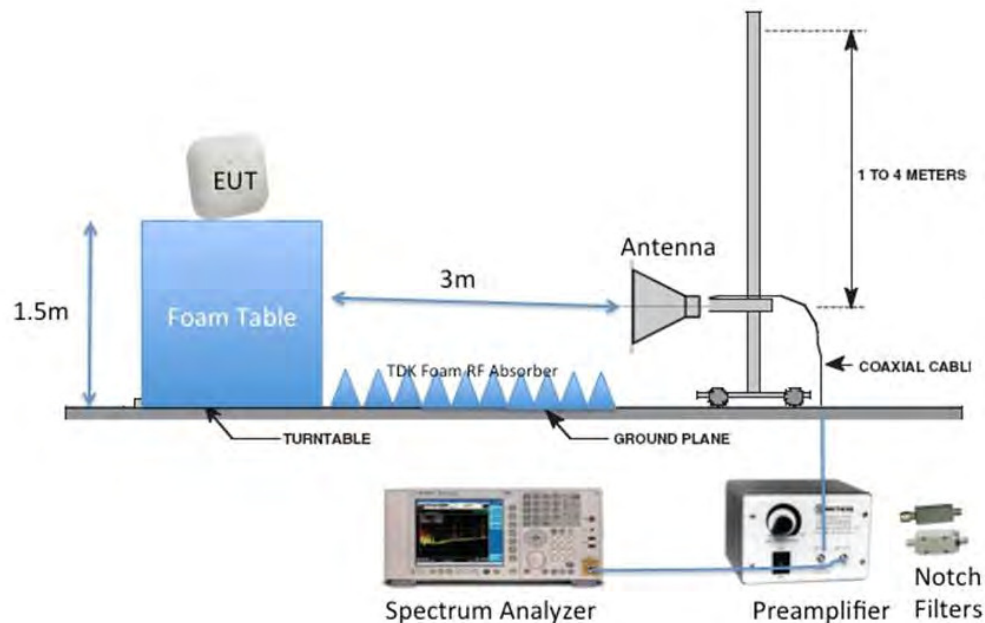
	HT/VHT40, M0 to M7	2	5	-41.5	-42.1			-33.8	-21.25	12.5
	HT/VHT40, M8 to M15	2	5	-41.5	-42.1			-33.8	-21.25	12.5
	HT/VHT40, M0 to M7	3	5	-42.5	-37.4	-42.7		-30.3	-21.25	9.1
	HT/VHT40, M8 to M15	3	5	-42.5	-37.4	-42.7		-30.3	-21.25	9.1
	HT/VHT40, M16 to M23	3	5	-42.5	-37.4	-42.7		-30.3	-21.25	9.1
	HT/VHT40, M0 to M7	4	5	-42.5	-37.4	-42.7	-42.5	-29.6	-21.25	8.3
	HT/VHT40, M8 to M15	4	5	-42.5	-37.4	-42.7	-42.5	-29.6	-21.25	8.3
	HT/VHT40, M16 to M23	4	5	-42.5	-37.4	-42.7	-42.5	-29.6	-21.25	8.3
	HT/VHT40 Beam Forming, M0 to M7	2	8	-42.5	-37.4			-28.2	-21.25	7.0
	HT/VHT40 Beam Forming, M8 to M15	2	5	-41.5	-42.1			-33.8	-21.25	12.5
	HT/VHT40 Beam Forming, M0 to M7	3	10	-45.4	-47.4	-44.9		-31.2	-21.25	10.0
	HT/VHT40 Beam Forming, M8 to M15	3	7	-31.4	-36.6	-40.0		-23.0	-21.25	1.8
	HT/VHT40 Beam Forming, M16 to M23	3	5	-42.5	-37.4	-42.7		-30.3	-21.25	9.1
	HT/VHT40 Beam Forming, M0 to M7	4	11	-44.7	-49.8	-39.0	-44.5	-25.9	-21.25	4.6
	HT/VHT40 Beam Forming, M8 to M15	4	8	-45.4	-47.4	-44.9	-44.8	-31.5	-21.25	10.2
	HT/VHT40 Beam Forming, M16 to M23	4	6	-31.4	-36.6	-40.0	-44.2	-23.5	-21.25	2.2
	HT/VHT40 STBC, M0 to M7	2	5	-41.5	-42.1			-33.8	-21.25	12.5
	HT/VHT40 STBC, M0 to M7	3	5	-42.5	-37.4	-42.7		-30.3	-21.25	9.1
	HT/VHT40 STBC, M0 to M7	4	5	-42.5	-37.4	-42.7	-42.5	-29.6	-21.25	8.3
5210	Non HT/VHT80, 6 to 54 Mbps	1	5	-34.4				-29.4	-21.25	8.2
	Non HT/VHT80, 6 to 54 Mbps	2	5	-39.2	-39.5			-31.3	-21.25	10.1
	Non HT/VHT80, 6 to 54 Mbps	3	5	-40.0	-43.3	-38.8		-30.6	-21.25	9.3
	Non HT/VHT80, 6 to 54 Mbps	4	5	-40.0	-43.3	-38.8	-42.8	-29.8	-21.25	8.6
	HT/VHT80, M0 to M7	1	5	-40.0				-35.0	-21.25	13.8
	HT/VHT80, M0 to M7	2	5	-41.2	-40.1			-32.6	-21.25	11.4
	HT/VHT80, M8 to M15	2	5	-41.2	-40.1			-32.6	-21.25	11.4
	HT/VHT80, M0 to M7	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80, M8 to M15	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80, M16 to M23	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80, M0 to M7	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80, M8 to M15	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80, M16 to M23	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80 Beam Forming, M0 to M7	2	5	-41.2	-40.1			-32.6	-21.25	11.4
	HT/VHT80 Beam Forming, M8 to M15	2	5	-41.2	-40.1			-32.6	-21.25	11.4
	HT/VHT80 Beam Forming, M0 to M7	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80 Beam Forming, M8 to M15	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80 Beam Forming, M16 to M23	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80 Beam Forming, M0 to M7	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80 Beam Forming, M8 to M15	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80 Beam Forming, M16 to M23	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9
	HT/VHT80 STBC, M0 to M7	2	5	-41.2	-40.1			-32.6	-21.25	11.4

	HT/VHT80 STBC, M0 to M7	3	5	-42.2	-45.0	-44.9		-34.1	-21.25	12.8
	HT/VHT80 STBC, M0 to M7	4	5	-42.2	-45.0	-44.9	-45.2	-33.1	-21.25	11.9

**Conducted Bandedge Average, 5190 MHz, HT/VHT40 Beam Forming, M0 to M7****Antenna A****Antenna B****Antenna C**



**Conducted Bandedge Peak, 5180 MHz, HT/VHT20 Beam Forming, M8 to M15****Antenna A****Antenna B****Antenna C****Antenna D**

**Appendix B: Emission Test Results****Testing Laboratory:** Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA**Radiated Emission Setup Diagram-Below 1G****Radiated Emission Setup Diagram-Above 1G**

## B1 Radiated Spurious Emissions

15.205 / 15.407 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Ref.** ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz  
 Reference Level: 80 dBuV  
 Attenuation: 10 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 3 MHz for peak, 1 kHz for average  
 Detector: Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

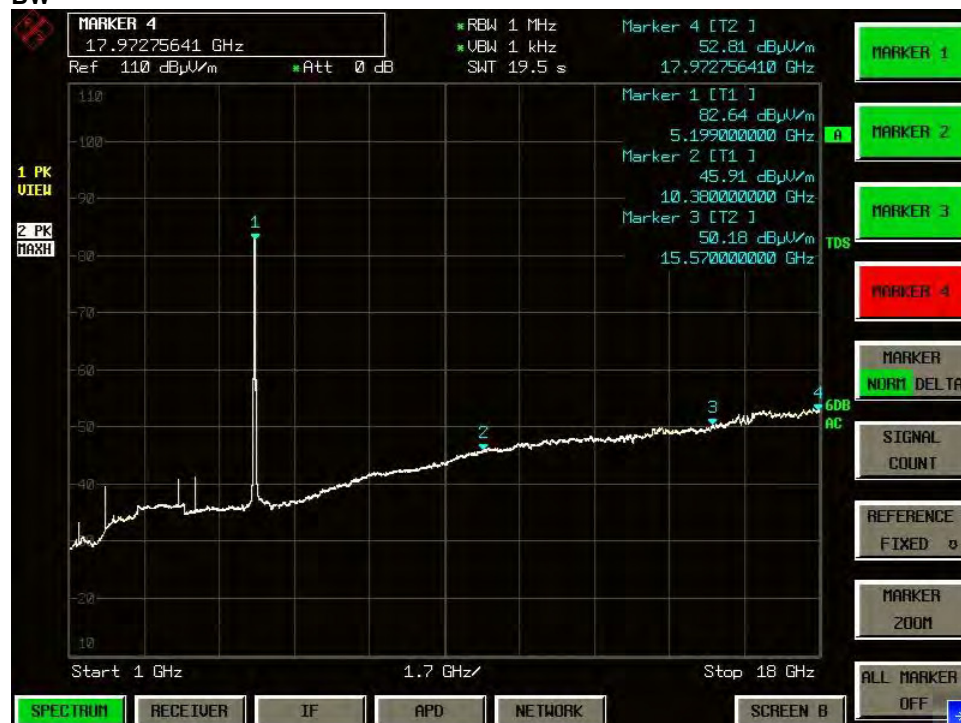
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 10-Feb-2016 – 22-Feb-2016
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment

**B.1.A Transmitter Radiated Spurious Emissions-Average Worst case**

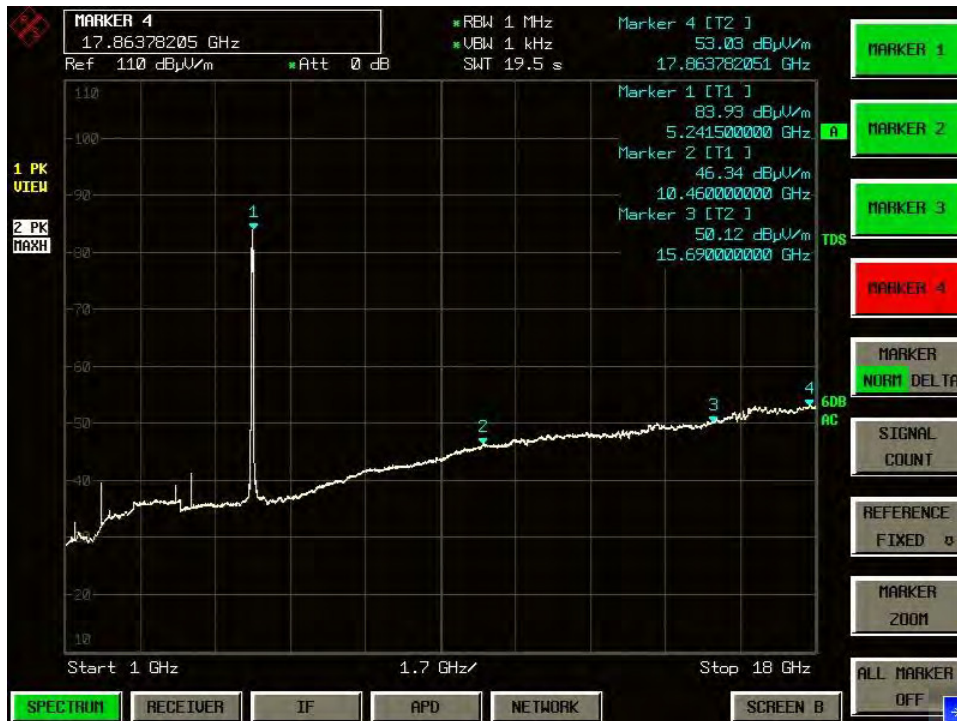
Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
5180	6 to 54 Mbps	6	52.8	54.0	1.2
5190	HT40, M0 to M15	m0	52.8	54.0	1.2
5200	6 to 54 Mbps	6	52.9	54.0	1.1
5210	HT80, M0 to M15	m0x1	53.0	54.0	1.0
5230	HT40, M0 to M15	m0	53.0	54.0	1.0
5240	6 to 54 Mbps	6	52.9	54.0	1.1

**B.1.A.1 Radiated Transmitter Spurs, 5180 MHz, 6 to 54 Mbps , Average (1-18GHz) Worst Case 20MHz BW****B.1.A.2 Radiated Transmitter Spurs, 5190 MHz, HT40, M0 to M15, Average (1-18GHz) Worst Case 40MHz BW**



**B.1.A.3 Radiated Transmitter Spurs, 5200 MHz, 6 to 54 Mbps , Average (1-18GHz) Worst Case 20MHz BW**

**B.1.A.4 Radiated Transmitter Spurs, 5210 MHz, HT80, M0 to M15, Average (1-18GHz) Worst Case 20MHz BW**

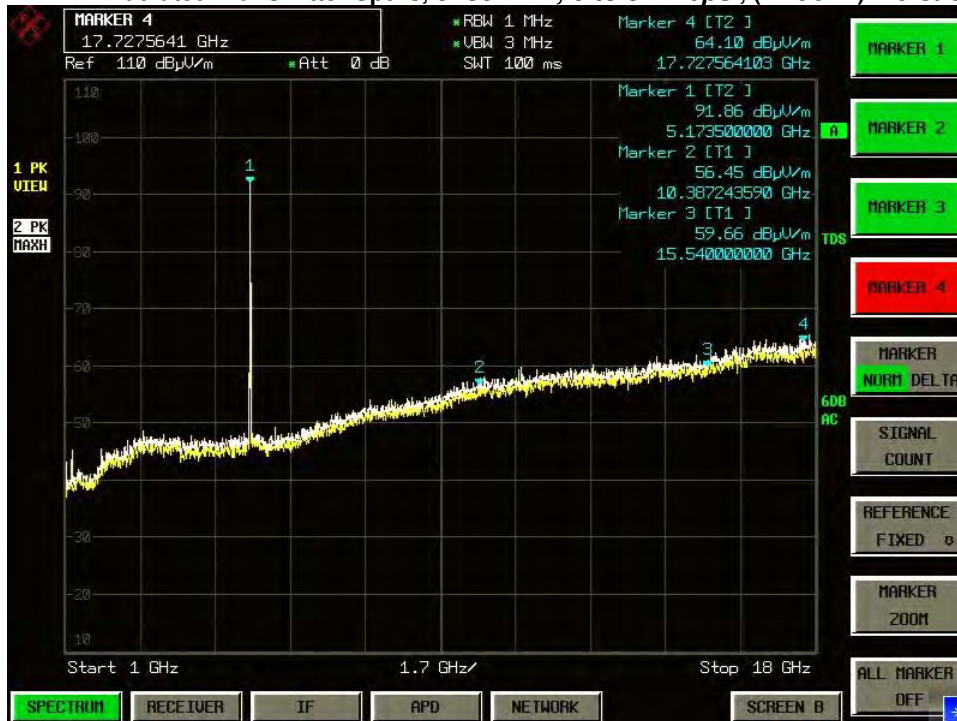
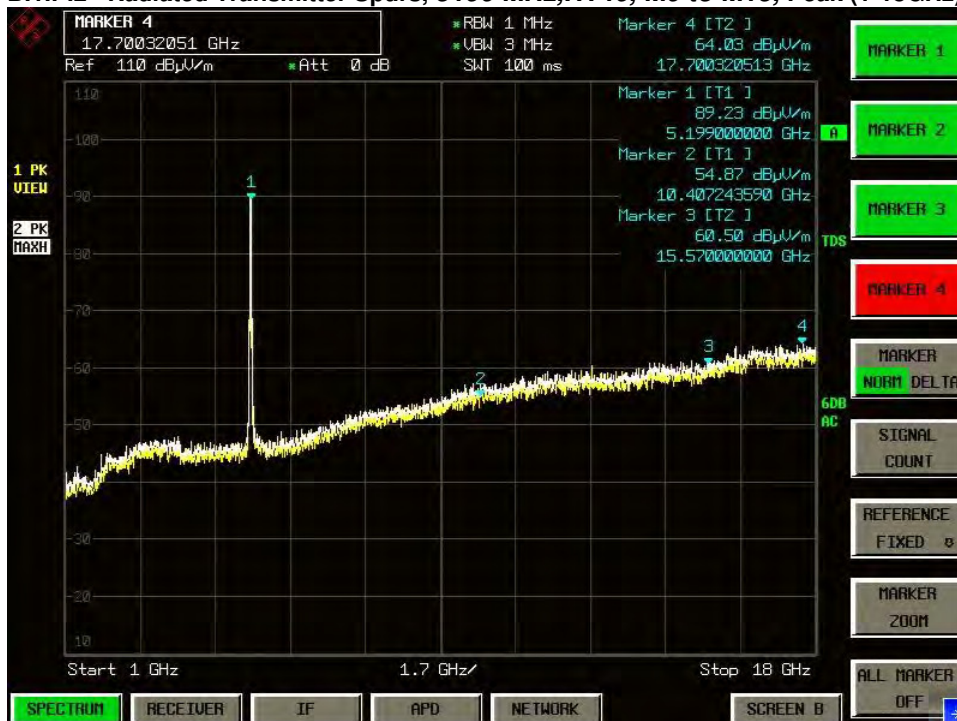

**B.1.A.5 Radiated Transmitter Spurs, 5230 MHz, HT40, M0 to M15, Average (1-18GHz) Worst Case 40MHz BW****B.1.A.6 Radiated Transmitter Spurs, 5240 MHz, 6 to 54 Mbps, Average (1-18GHz) Worst Case 20MHz BW**

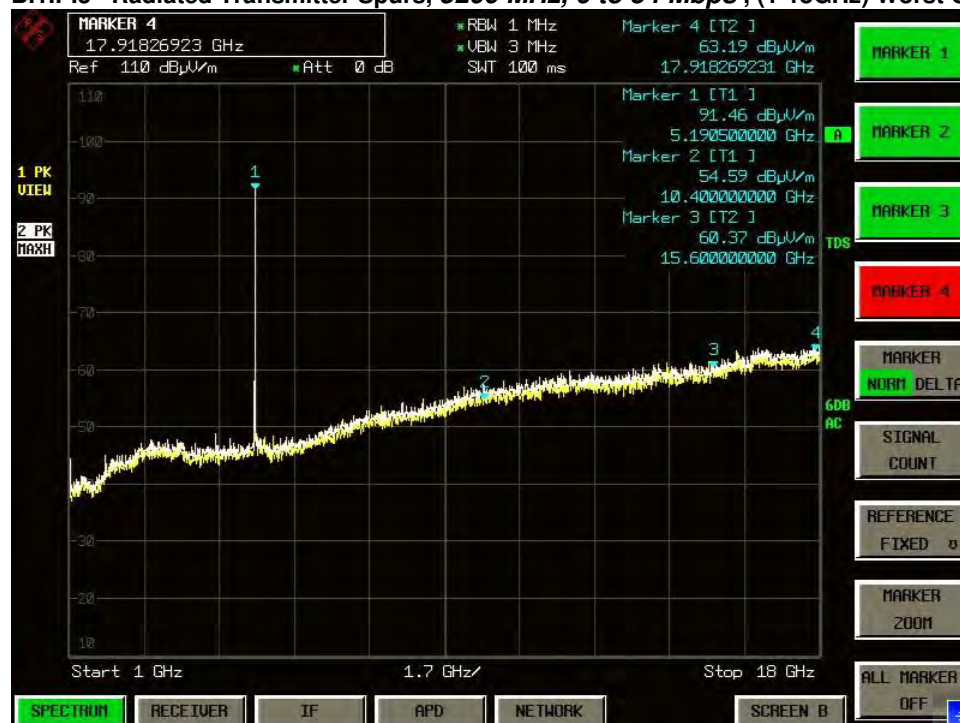
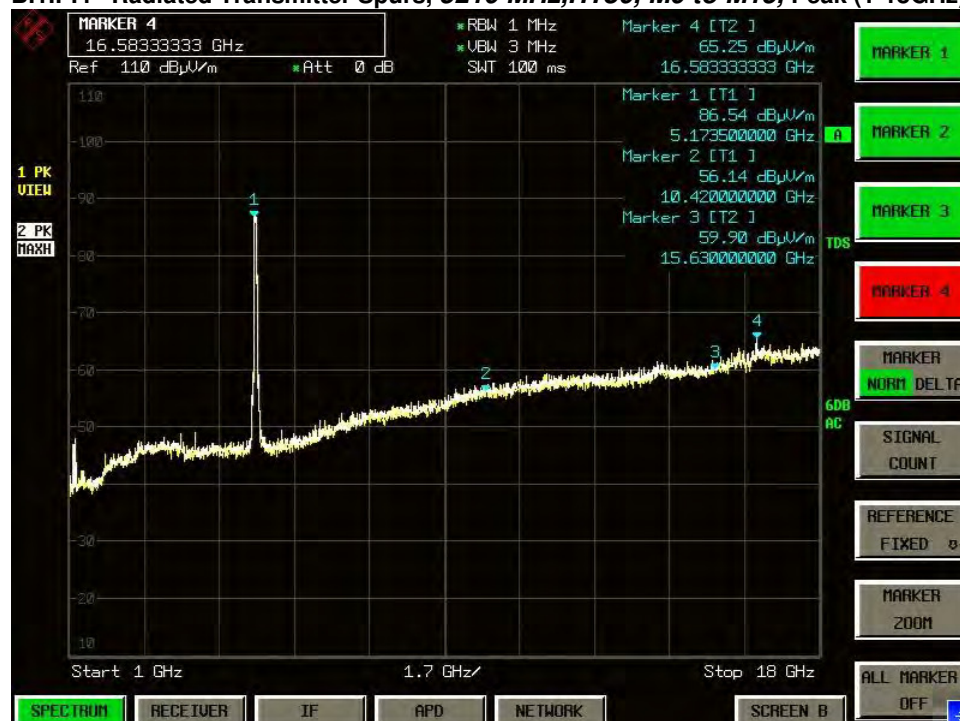
**B.1.A.7 Radiated Transmitter Spurs, All rate, All modes, Average (18-26.5GHz)****B.1.A.8 Radiated Transmitter Spurs, All rate, All modes, Average (26.5- 40GHz)**



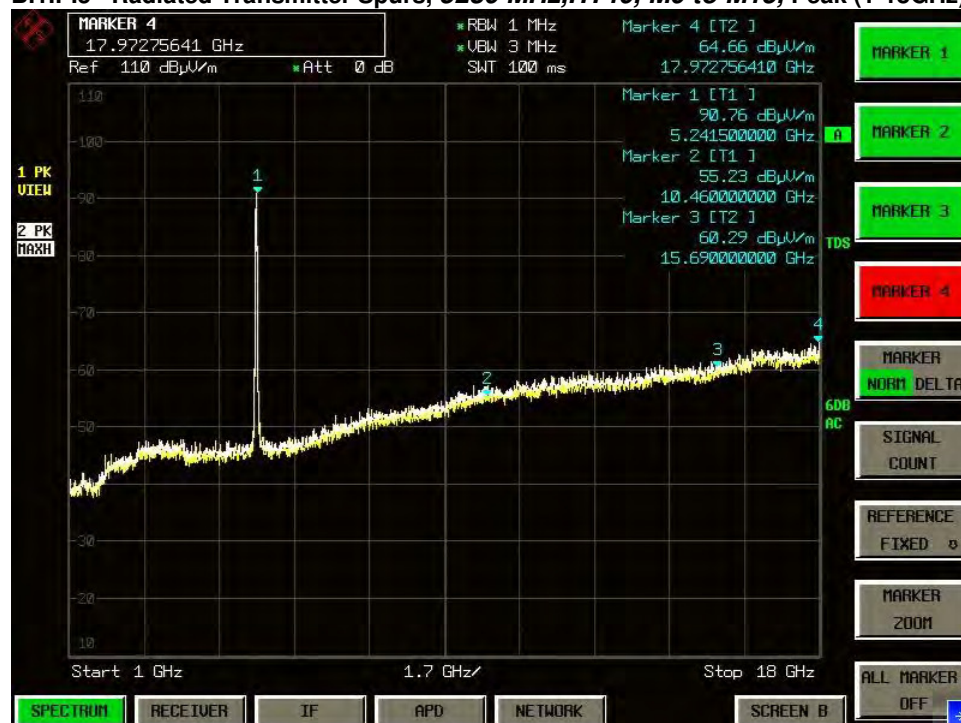
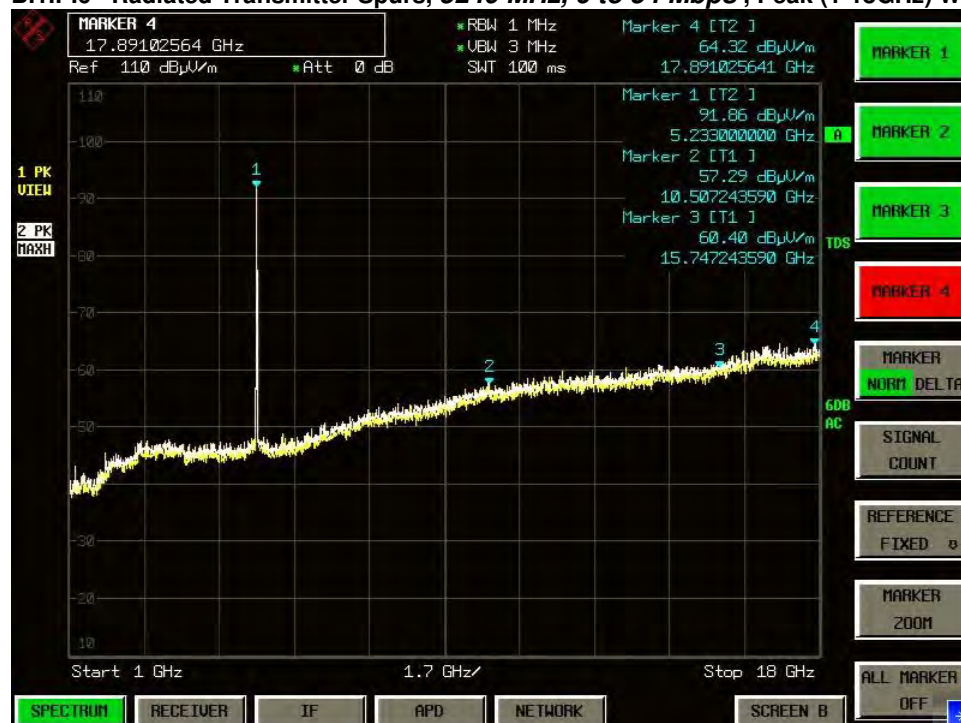
**B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV/m)
5180	6 to 54 Mbps	6	64.1	74.0	9.9
5190	HT40, M0 to M23	m0	64.0	74.0	10.0
5200	6 to 54 Mbps	6	63.2	74.0	10.8
5210	HT80, M0 to M23	m0x1	65.3	74.0	8.7
5230	HT40, M0 to M23	m0	64.7	74.0	9.3
5240	6 to 54 Mbps	6	64.3	74.0	9.7

**B.1.P.1 Radiated Transmitter Spurs, 5180 MHz, 6 to 54 Mbps, (1-18GHz) Worst Case 20MHz BW**

**B.1.P.2 Radiated Transmitter Spurs, 5190 MHz, HT40, M0 to M15, Peak (1-18GHz) Worst Case 20MHz BW**


**B.1.P.3 Radiated Transmitter Spurs, 5200 MHz, 6 to 54 Mbps, (1-18GHz) Worst Case 20MHz BW**

**B.1.P.4 Radiated Transmitter Spurs, 5210 MHz, HT80, M0 to M15, Peak (1-18GHz) Worst Case 20MHz BW**




**B.1.P.5 Radiated Transmitter Spurs, 5230 MHz, HT40, M0 to M15, Peak (1-18GHz) Worst Case 20MHz BW****B.1.P.6 Radiated Transmitter Spurs, 5240 MHz, 6 to 54 Mbps, Peak (1-18GHz) Worst Case 20MHz BW**

**B.1.P.7 Radiated Transmitter Spurs, All rate, All modes, Peak (18-26.5GHz) Horizontal & Vertical****B.1.P.8 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz) Horizontal & Vertical**

## B.2 Radiated Emissions 30MHz to 1GHz

### 15.209 / 15.205 / 15.407:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Ref.** ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 30MHz – 1GHz  
Reference Level: 80 dBuV  
Attenuation: 10 dB  
Sweep Time: Coupled  
Resolution Bandwidth: 100kHz  
Video Bandwidth: 300kHz  
Detector: Peak for Pre-scan, Quasi-Peak  
Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

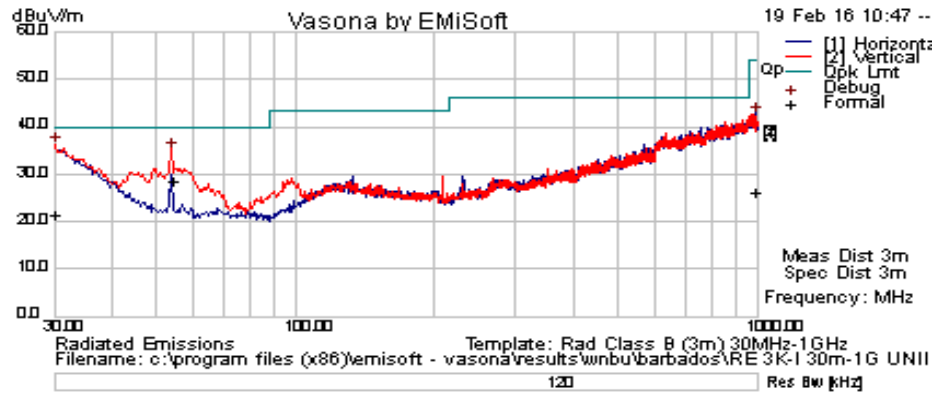
Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System #	Description	Samples
1	EUT	S01
2	Support Power Supply	S02

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 10-Feb-2016 – 22-Feb-2016
<b>Test Result : PASS</b>	

See Appendix C for list of test equipment



### Test Result

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
54.078	20.53	0.7	7.34	28.57	Quasi Max	V	115	0	40	-11.43	Pass
988.36	0.26	3	23.1 7	26.43	Quasi Max	H	101	223	54	-27.57	Pass
30	-0.76	0.49	21.7	21.44	Quasi Max	V	262	343	40	-18.56	Pass

## B.3 AC Conducted Emissions

### 15.207

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

#### Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

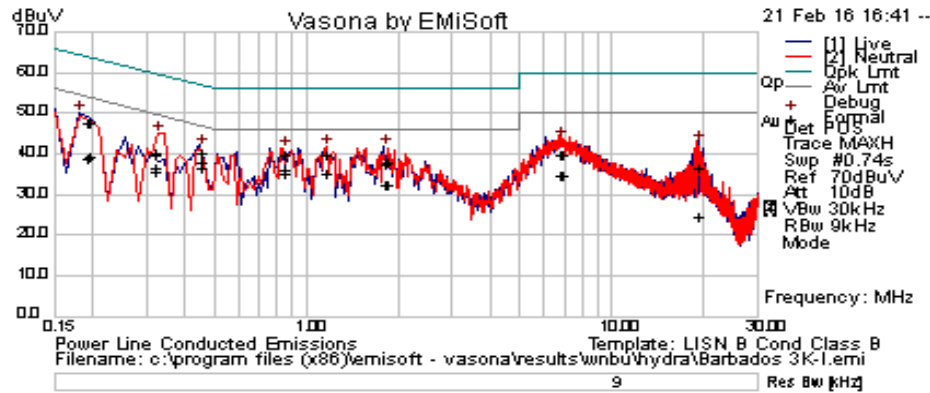
Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average

This report represents the worst case data for all supported operating modes.

System #	Description	Samples
1	EUT	S01
2	Support Power Supply	S02

<b>Tested By :</b> Jose Aguirre	<b>Date of testing:</b> 10-Feb-2016 – 22-Feb-2016
<b>Test Result : Pass</b>	





### Test Results

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.320966	20.09	20.31	0.05	40.45	Quasi Peak	Live	59.68	-19.23	Pass
0.19578	27.1	20.86	0.05	48.02	Quasi Peak	Live	63.79	-15.77	Pass
6.845766	20.05	20.01	0.07	40.13	Quasi Peak	Live	60	-19.87	Pass
1.169166	20.05	19.9	0.04	40	Quasi Peak	Live	56	-16	Pass
0.845716	20.19	19.92	0.03	40.14	Quasi Peak	Live	56	-15.86	Pass
1.826544	18.25	19.9	0.03	38.18	Quasi Peak	Live	56	-17.82	Pass
0.449884	20.41	19.94	0.04	40.39	Quasi Peak	Live	56.88	-16.49	Pass
19.316794	16.23	20.3	0.2	36.73	Quasi Peak	Live	60	-23.27	Pass
0.193098	27.03	20.88	0.06	47.97	Quasi Peak	Neutra I	63.9	-15.93	Pass
1.167132	20.1	19.9	0.04	40.05	Quasi Peak	Neutra I	56	-15.95	Pass
0.451342	20.56	19.94	0.04	40.53	Quasi Peak	Neutra I	56.85	-16.32	Pass
19.304428	16.11	20.3	0.2	36.61	Quasi Peak	Neutra I	60	-23.39	Pass
1.805952	17.96	19.9	0.03	37.89	Quasi Peak	Neutra I	56	-18.11	Pass
0.32174	19.74	20.31	0.04	40.1	Quasi Peak	Neutra I	59.66	-19.56	Pass
0.840658	20.25	19.92	0.03	40.2	Quasi Peak	Neutra I	56	-15.8	Pass
6.826092	19.97	20.01	0.07	40.05	Quasi Peak	Neutra I	60	-19.95	Pass
0.320966	16.38	20.31	0.05	36.74	Average	Live	49.68	-12.94	Pass
0.19578	18.65	20.86	0.05	39.57	Average	Live	53.79	-14.22	Pass
6.845766	14.78	20.01	0.07	34.87	Average	Live	50	-15.13	Pass
1.169166	15.34	19.9	0.04	35.29	Average	Live	46	-10.71	Pass
0.845716	16.15	19.92	0.03	36.1	Average	Live	46	-9.9	Pass
1.826544	12.68	19.9	0.03	32.61	Average	Live	46	-13.39	Pass
0.449884	16.69	19.94	0.04	36.67	Average	Live	46.88	-10.21	Pass
19.316794	4.26	20.3	0.2	24.76	Average	Live	50	-25.24	Pass
0.193098	18.24	20.88	0.06	39.18	Average	Neutra I	53.9	-14.72	Pass
1.167132	15.66	19.9	0.04	35.6	Average	Neutra I	46	-10.4	Pass

0.451342	18.28	19.94	0.04	38.25	Average	Neutra I	46.85	-8.6	Pass
19.304428	4.24	20.3	0.2	24.75	Average	Neutra I	50	-25.25	Pass
1.805952	12.45	19.9	0.03	32.38	Average	Neutra I	46	-13.62	Pass
0.32174	15.6	20.31	0.04	35.95	Average	Neutra I	49.66	-13.71	Pass
0.840658	15.4	19.92	0.03	35.35	Average	Neutra I	46	-10.65	Pass
6.826092	14.71	20.01	0.07	34.8	Average	Neutra I	50	-15.2	Pass

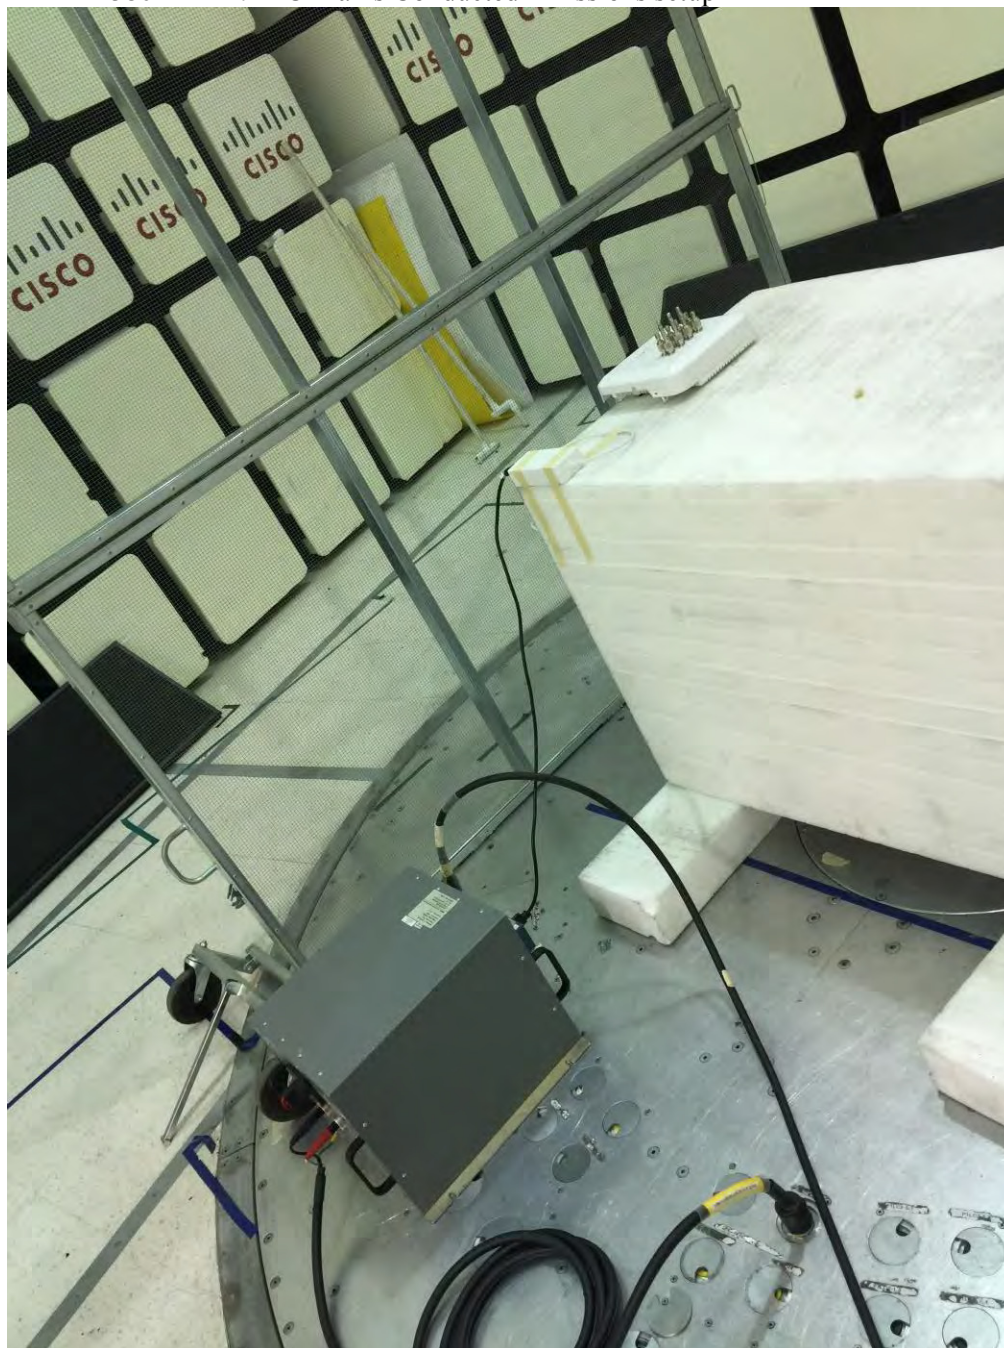
## Photographs of Setup



**Title: Conducted Test Setup**

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

**AIR-AP3802I-B-K9** AC Mains Conducted Emissions setup





**AIR-AP3802I-B-K9** Radiated Emissions setup 30MHz – 1GHz



**AIR-AP3802I-B-K9** Radiated Emissions setup above 1GHz



## Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
<b>Test Equipment used for Radiated Emissions</b>					
CIS005691	NSP1800-25-S1 Miteq	Broadband Preamplifier (1-18GHz)	25-Jun-15	25-Jun-16	B.1
CIS008448	NSA 5m Chamber Cisco	NSA 5m Chamber	9-Oct-15	9-Oct-16	B.2
CIS021117	UFB311A-0-2484-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-15	24-Aug-16	B.1, B.2
CIS034075	RSG 2000 Schaffner	Reference Spectrum Generator, 1-18GHz	Cal Not Required	Cal Not Required	B.1
CIS035284	3117 ETS-Lindgren	Double Ridged Waveguide Horn Antenna	30-Sep-15	30-Sep-16	B.1
CIS037236	50CB-015 JFW	GPIB Control Box	Cal Not Required	Cal Not Required	B.1
CIS040597	Above 1GHz Site Cal Cisco	Above 1GHz Cspr Site Verification	25-Sep-15	25-Sep-16	B.1
CIS041979	1840 Cisco	18-40GHz EMI Test Head/Verification Fixture	13-Jul-15	13-Jul-16	B.1
CIS042266	JB1 Sunol Sciences	Combination Antenna	21-Apr-15	21-Apr-16	B.2
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.1
CIS054230	iBTHP-5-DB9 Newport	5 inch Temp/RH/Press Sensor w/20ft cable	10-Feb-16	10-Feb-17	B.1, B.2

<b>Test Equipment used for AC Mains Conducted Emissions</b>					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS002464	FCC-801-M2-16 Fischer Custom Communications	CDN, 2-LINE, 16A	12-Mar-15	12-Mar-16	B.3
CIS049532	H785-150K-50-21378 TTE	High Pass Filter	8-May-15	8-May-16	B.3
CIS020913	FCC-LISN-PA-NEMA-5-15 Fischer Custom Communications	AC Adapter	8-May-15	8-May-16	B.3
CIS007704	FCC-LISN-50/250-50-2-01 Fischer Custom Communications	LISN	8-May-15	8-May-16	B.3
CIS008185	FCC-450B-2.4-N Fischer Custom Communications	Instrumentation Limiter	28-Jul-15	28-Jul-16	B.3
CIS051756	5-T-MB Bird	5W 50 Ohm BNC Termination 4GHz	6-Aug-15	6-Aug-16	B.3
CIS049563	Sucoflex 106A Huber + Suhner	N Type Cable 18GHz	24-Aug-15	24-Aug-16	B.3
CIS021117	UFB311A-0-2484-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 248.4 in	24-Aug-15	24-Aug-16	B.3
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	2-Nov-15	2-Nov-16	B.3
CIS054647	33-605 Stanley	10meter Measuring Tape	Cal not required	Cal not required	B.3
CIS018963	CNE V York	Comparison Noise Emitter, 30 - 1000MHz	Cal not required	Cal not required	B.3

<b>Test Equipment used for RF Conducted Tests</b>					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS050721	N9030A	PSA Signal Analyzer	13-Apr-15	13-Apr-16	A1 thru A4



	Keysight				
CIS054662	SF18-S1S1-36 MegaPhase	SMA 36" cable	24-Sep-15	24-Sep-16	A1 thru A4
CIS054663	F120-S1S1-48 MegaPhase	SMA 48" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054665	RA08-S1S1-24 MegaPhase	SMA 24" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054666	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054667	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054668	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054669	RA08-S1S1-18 MegaPhase	SMA 18" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054670	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054671	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054672	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054673	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054674	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054675	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054677	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054678	RA08-S1S1-12 MegaPhase	SMA 12" Cable	25-Sep-15	25-Sep-16	A1 thru A4
CIS054686	NI PXI-2796 National Instruments	Plug-in switch module	6-Oct-15	6-Oct-16	A1 thru A4
CIS055094	PXI-1042 National Instruments	Chassis	Cal Not Required	Cal Not Required	A1 thru A4
CIS055117	RFLT2WDC40G RF Lambda	2 Way 40GHz Splitter	11-Nov-15	11-Nov-16	A1 thru A4
CIS055166	RFLT4WDC40GK RF Lambda	4 Way Power Divider 40GHz	23-Nov-15	23-Nov-16	A1 thru A4
CIS054656	BRC50705-02 Micro-Tronics	Band Reject Filter	24-Sep-15	24-Sep-16	A1 thru A4
CIS054655	BRC50704-02 Micro-Tronics	Notch Filter, SB:5.470-5.725GHz, to 12GHz	24-Sep-15	24-Sep-16	A1 thru A4
CIS054654	BRC50703-02 Micro-Tronics	Notch Filter, SB:5.150-5.350GHz, to 11GHz	24-Sep-15	24-Sep-16	A1 thru A4
CIS054653	BRM50702-02 Micro-Tronics	Notch Filter, SB:2.400-2.500GHz, to 18GHz	24-Sep-15	24-Sep-16	A1 thru A4
CIS054637	BWS30-W2/ Aeroflex	SMA 30dB Attenuator	02-June-15	02-June-16	A1 thru A4
CIS054636	BWS20-W2/ Aeroflex	20dB SMA Attenuator	02-June-15	02-June-16	A1 thru A4

**Appendix E: Abbreviation Key and Definitions**

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz ( $1 \times 10^3$ )
EN	European Norm	MHz	MegaHertz ( $1 \times 10^6$ )
IEC	International Electro technical Commission	GHz	Gigahertz ( $1 \times 10^9$ )
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt ( $1 \times 10^3$ )
L1	Line 1	$\mu$ V	Microvolt ( $1 \times 10^{-6}$ )
L2	Line2	A	Amp
L3	Line 3	$\mu$ A	Micro Amp ( $1 \times 10^{-6}$ )
DC	Direct Current	mS	Milli Second ( $1 \times 10^{-3}$ )
RAW	Uncorrected measurement value, as indicated by the measuring device	$\mu$ S	Micro Second ( $1 \times 10^{-6}$ )
RF	Radio Frequency	$\mu$ S	Micro Second ( $1 \times 10^{-6}$ )
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

**End**