



Test Report

AIR-CAP3702P-A-K9

Cisco Aironet 802.11ac Dual Band Access Points

FCC ID: LDK102087P

IC: 2461B-102087P

Also covers:

AIR-CAP3702P-D-K9,

AIR-CAP3702P-N-K9,

AIR-CAP3702P-Z-K9,

5250-5350 MHz

Against the following Specifications:

CFR47 Part 15.407

RSS210

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW3

 1.1 TEST SUMMARY 3

SECTION 2: ASSESSMENT INFORMATION4

 2.1 GENERAL4

 2.2 DATE OF TESTING.....5

 2.3 REPORT ISSUE DATE5

 2.4 TESTING FACILITIES5

 2.5 EQUIPMENT ASSESSED (EUT).....5

 2.6 EUT DESCRIPTION6

 THE FOLLOWING ANTENNAS ARE SUPPORTED BY THIS PRODUCT SERIES.....7

SECTION 4: SAMPLE DETAILS.....8

APPENDIX A: EMISSION TEST RESULTS.....9

 TARGET MAXIMUM CHANNEL POWER9

 99% AND 26DB BANDWIDTH.....10

 PEAK OUTPUT POWER17

 POWER SPECTRAL DENSITY17

 CONDUCTED SPURIOUS EMISSIONS153

 CONDUCTED BANDEDGE161

 MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS.....318

APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST320



Section 1: Overview

1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Emission	Immunity
CFR47 Part 15.407 RSS210	N/A

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V-3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
 - 110V 60 Hz (+/-20%)
 - 220V 50 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.



22.2 Date of testing

22-May-2013 to 5-June-2013

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,	Cisco Systems, Inc.
4125 Highlander Parkway	170 West Tasman Drive
Richfield, OH 44286	San Jose, CA 95134
USA	USA

Test Engineers

James Nicholson

2.5 Equipment Assessed (EUT)

AIR-SAP3702P-A-K9 Cisco Aironet 802.11ac Dual Band Access Point



2.6 EUT Description

The 3700 Series Cisco Aironet 802.11ac Dual Band Access Points support the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps
Non HT/VHT-20, Two Antennas, 6 to 54 Mbps
Non HT/VHT-20, Three Antennas, 6 to 54 Mbps
Non HT/VHT-20, Four Antennas, 6 to 54 Mbps

Non HT/VHT-20 Beam Forming, Two Antennas, 6 to 54 Mbps
Non HT/VHT-20 Beam Forming, Three Antennas, 6 to 54 Mbps
Non HT/VHT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7, m0.1 to m9.1
HT/VHT-20, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-20, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-20, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-20 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-20 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-20 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-20 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-20 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-20 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps
Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps
Non HT/VHT-40 Duplicate, Three Antennas, 6-54 Mbps
Non HT/VHT-40 Duplicate, Four Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7, m0.1 to m9.1
HT/VHT-40, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-40, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-40, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-40 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-40 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
HT/VHT-40 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-40 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
HT/VHT-40 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
HT/VHT-40 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3



Non VHT-80 Duplicate, One Antenna, 6-54 Mbps
 Non VHT-80 Duplicate, Two Antennas, 6-54 Mbps
 Non VHT-80 Duplicate, Three Antennas, 6-54 Mbps
 Non VHT-80 Duplicate, Four Antennas, 6-54 Mbps

VHT-80, One Antenna, M0 to M7, m0.1 to m9.1
 VHT-80, Two Antennas, M0 to M15, m0.1 to m9.2
 VHT-80, Three Antennas, M0 to M23, m0.1 to m9.3
 VHT-80, Four Antennas, M0 to M23, m0.1 to m9.3

VHT-80 STBC, Two Antennas, M0 to M7, m0.1 to m9.1
 VHT-80 STBC, Three Antennas, M0 to M7, m0.1 to m9.1
 VHT-80 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

VHT-80 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2
 VHT-80 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3
 VHT-80 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

The following antennas are supported by this product series.

The data included in this report represent the antennas in **bold** below.

Part Number	Antenna Type	Antenna Gain (dBi)
AIR-ANT2524DB-R	Dual-resonant black dipole	2 / 4
AIR-ANT2524DW-R	Dual-resonant white dipole	2 / 4
AIR-ANT2524DG-R	Dual-resonant gray dipole	2 / 4
AIR-ANT2524V4C-R	Dual-resonant ceiling mount omni (4-pack)	2 / 4
AIR-ANT2544V4M-R	Dual-resonant omni (4-pack)	4 / 4
AIR-ANT2566P4W-R	Dual-resonant "directional" antenna (4-pack)	6 / 6
AIR-ANT2513P4M-N	Dual-resonant cross-pol "directional" antenna (4-pack)	13 / 13
AIR-ANT2534V4C-R	Dual-resonant ceiling mount omni (4-pack)	3 / 4



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-SAP3702P-A-K9		Cisco Systems	NA	NA	NA	
S02	AIR-PWR-B	341-0306-01	Cisco Systems	NA	NA	NA	

4.2 System Details

System #	Description	Samples
1	EUT	S01, S02

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting

All tests in this report were performed as described in FCC KDB 662911 D01

Appendix A: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5260	5320
Non HT-20, 6 to 54 Mbps	20	19
Non HT-20 Beam Forming, 6 to 54 Mbps	20	19
HT-20, M0 to M23, M0.1 to M9.3	21	20
HT-20 STBC, M0 to M7, M0.1 to M9.1	21	20
HT-20 Beam Forming, M0 to M23, M0.1 to M9.3	21	20
	5260/5280	5300/5320
Non HT-40 Duplicate, 6 to 54 Mbps	21	21
HT-40, M0 to M23, M0.1 to M9.3	23	22
HT-40 STBC, M0 to M7, M0.1 to M9.1	23	22
HT-40 Beam Forming, M0 to M23, M0.1 to M9.3	22	21
	5260/5280/5300/5320	
Non HT-80 Duplicate, 6 to 54 Mbps	22	
HT-80, M0 to M23, M0.1 to M9.3	23	
HT-80 STBC, M0 to M7, M0.1 to M9.1	23	
HT-80 Beam Forming, M0 to M23, M0.1 to M9.3	22	



99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency:	Frequency from table below
Span:	2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	5 s
Resolution Bandwidth:	1%-3% of 26 dB Bandwidth
Video Bandwidth:	≥Resolution Bandwidth
X dB Bandwidth:	26 dB
Detector:	Peak
Trace:	Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:




Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5260	Non HT/VHT20, 6 to 54 Mbps	6	<u>18.6</u>	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	<u>19.4</u>	17.6
5260/5280	Non HT/VHT40, 6 to 54 Mbps	6	<u>38.4</u>	36.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	<u>38.3</u>	36
5260/5280 5300/5320	Non HT/VHT80, 6 to 54 Mbps	6	<u>79.3</u>	75.9
	HT/VHT80, M0 to M23, M0.1 to M9.3	m0x1	<u>79.9</u>	75.8
5300/5320	Non HT/VHT40, 6 to 54 Mbps	6	<u>38.5</u>	36.1
	HT/VHT40, M0 to M23, M0.1 to M9.3	m0	<u>38.2</u>	36
5320	Non HT/VHT20, 6 to 54 Mbps	6	<u>18.6</u>	16.5
	HT/VHT20, M0 to M23, M0.1 to M9.3	m0	<u>19.4</u>	17.6



26dB / 99% Bandwidth, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps

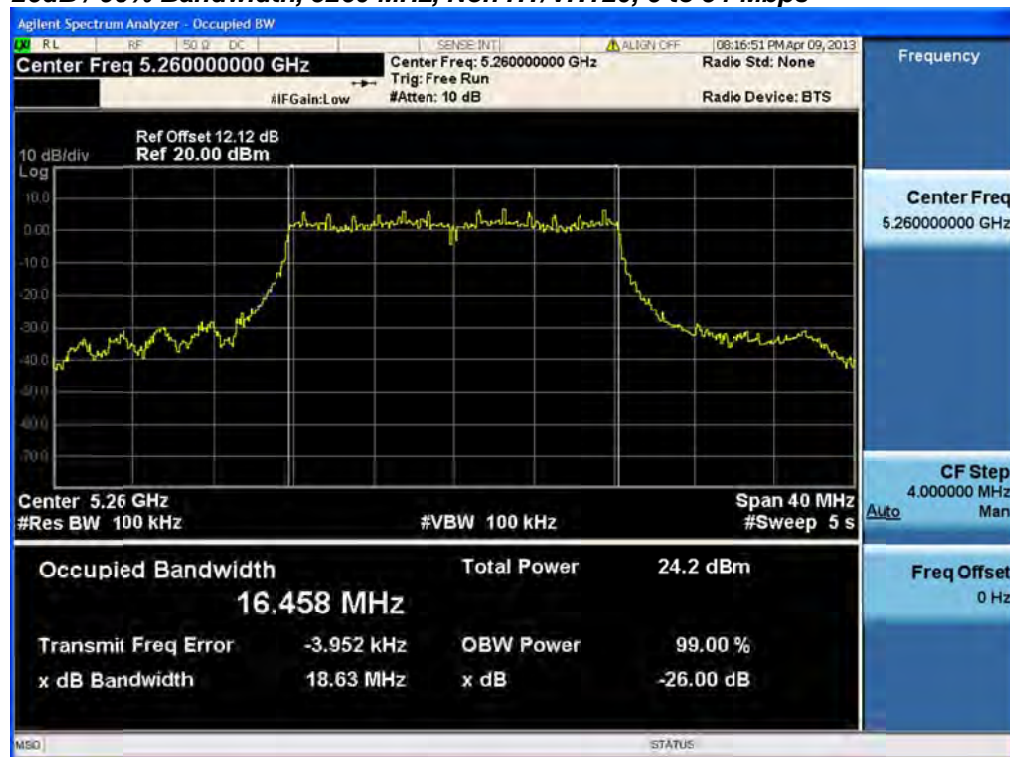


26dB / 99% Bandwidth, 5260 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

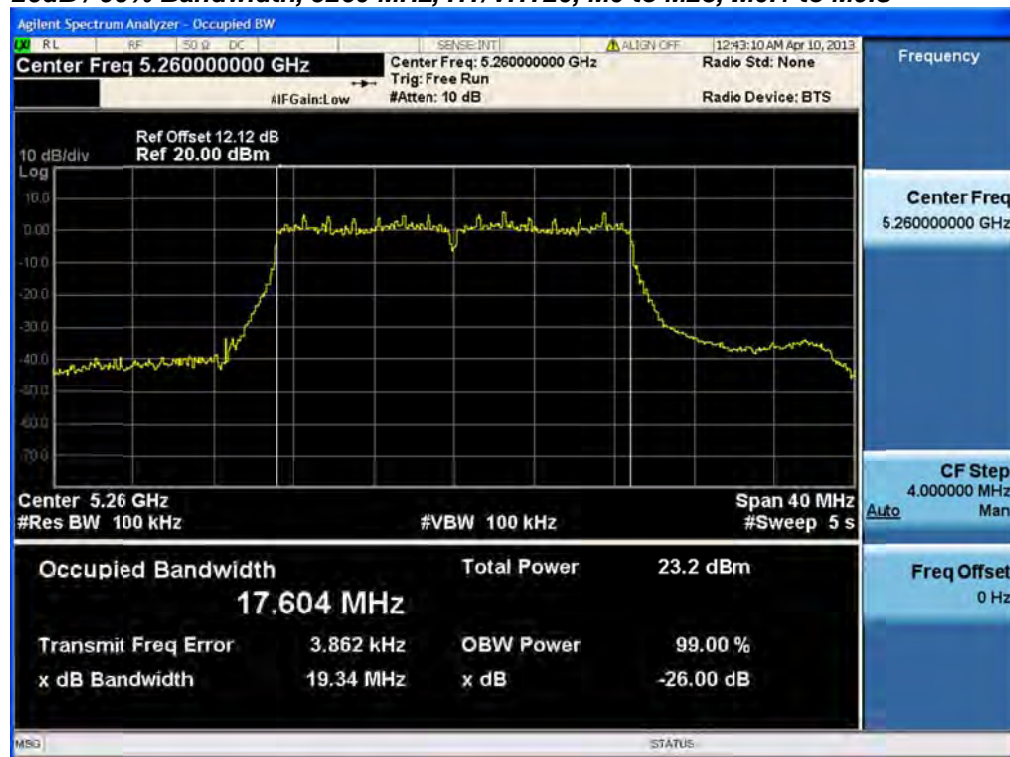




26dB / 99% Bandwidth, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps

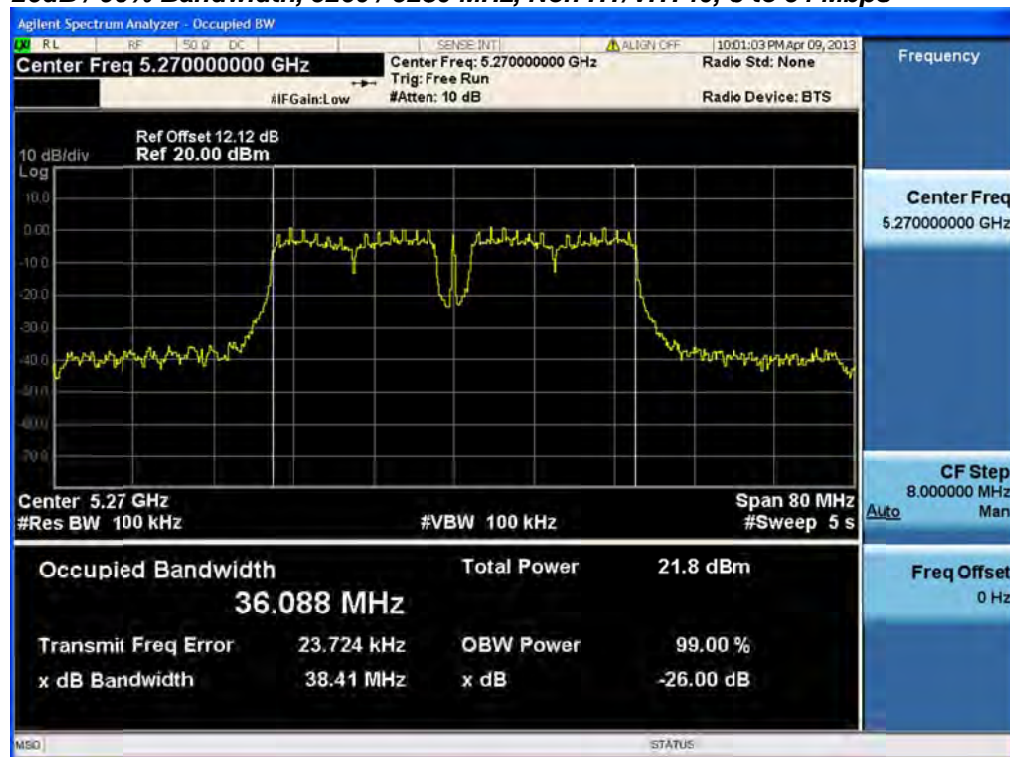


26dB / 99% Bandwidth, 5260 / 5280 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

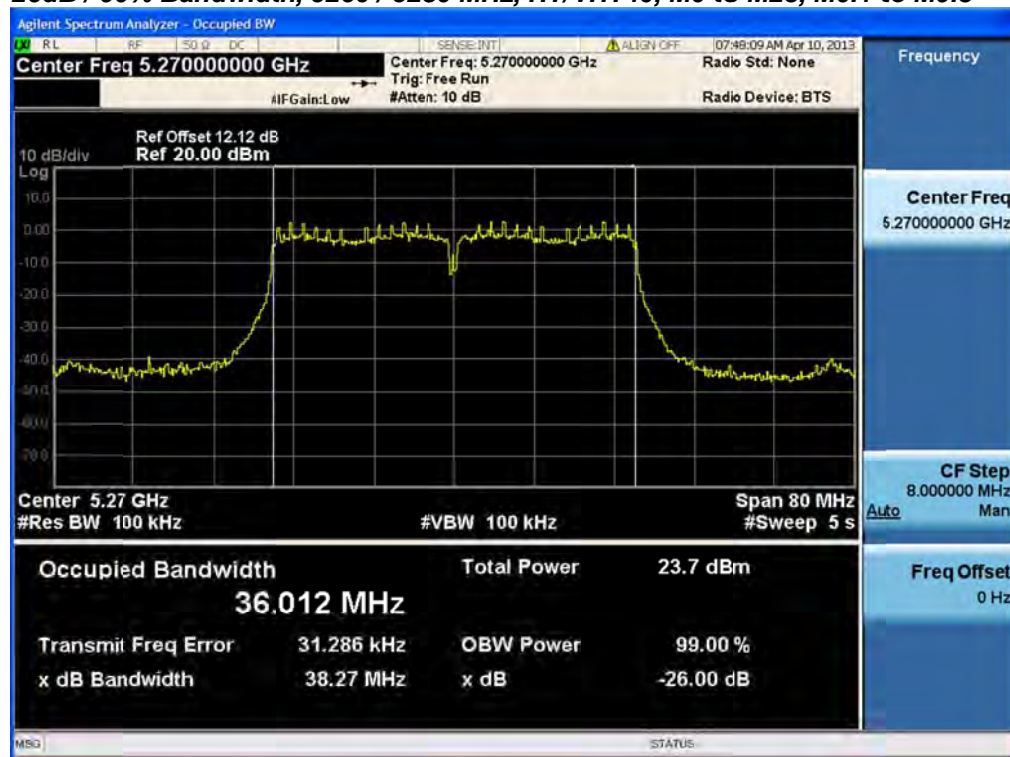




26dB / 99% Bandwidth, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps

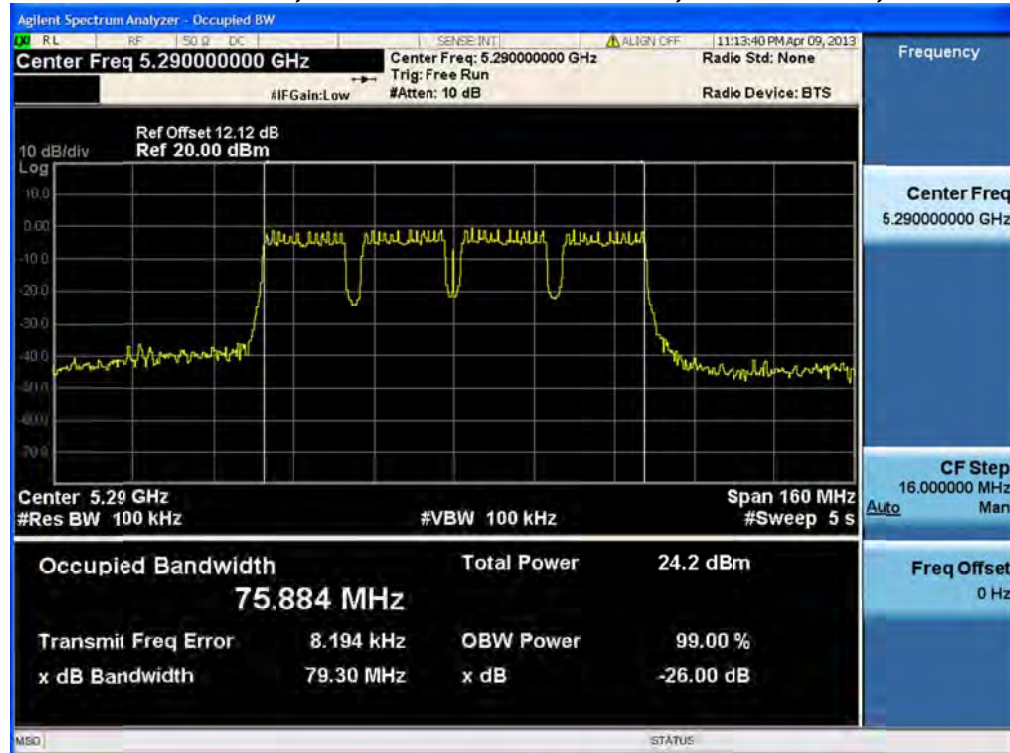


26dB / 99% Bandwidth, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3

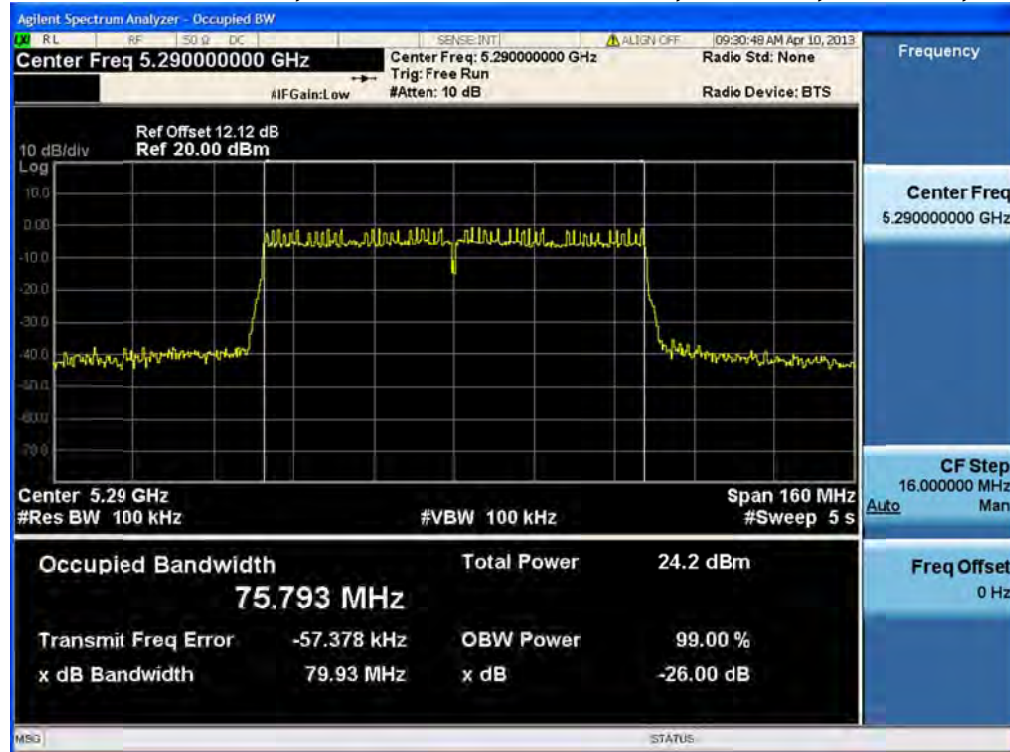




26dB / 99% Bandwidth, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

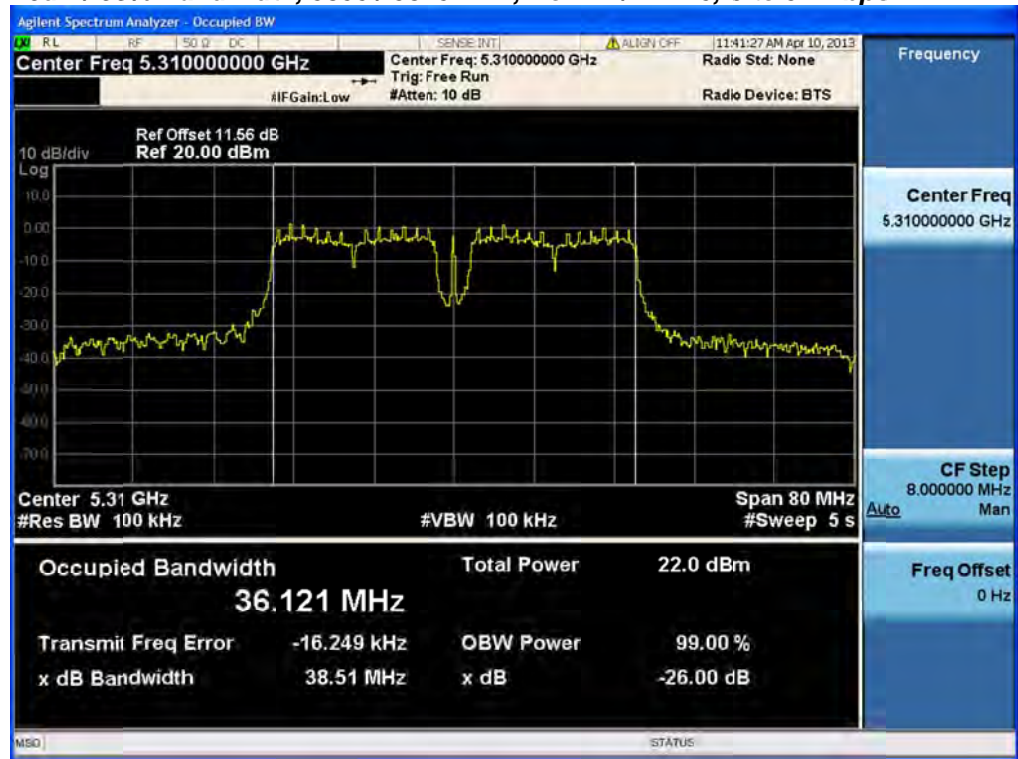


26dB / 99% Bandwidth, 5300 / 5320 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

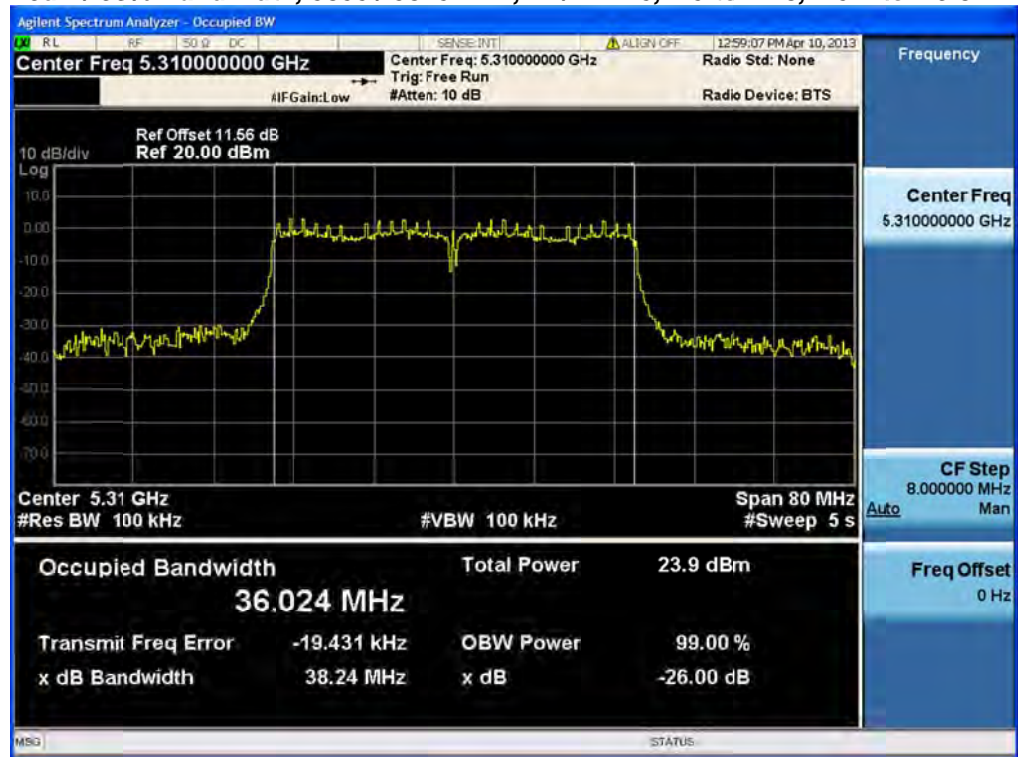




26dB / 99% Bandwidth, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps

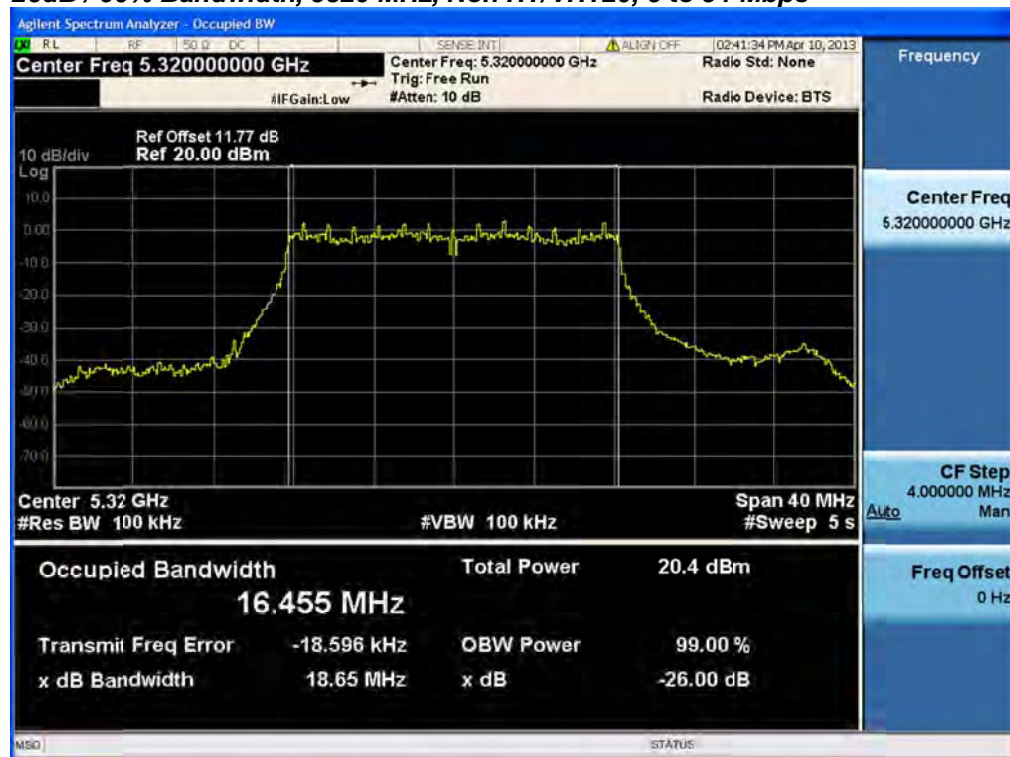

26dB / 99% Bandwidth, 5320 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

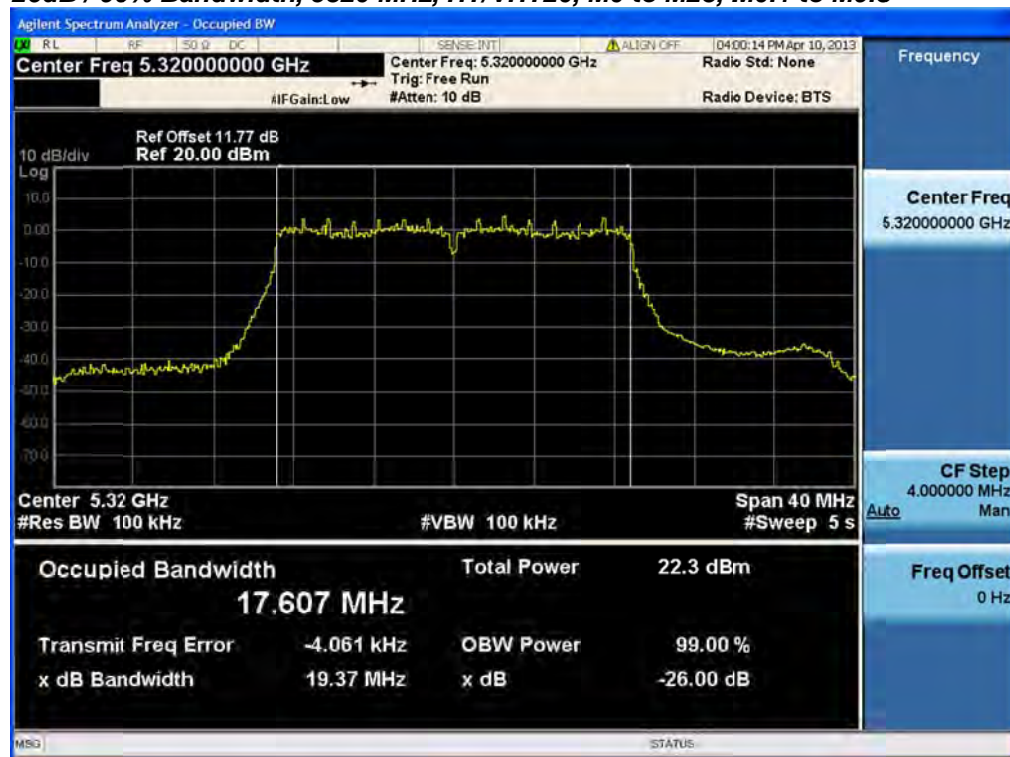



Peak Output Power

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The smallest 26dB bandwidth for all channels is 18.6 MHz. The maximum conducted output power is calculated as $4\text{dBm} + 10 \cdot \log(18.6\text{MHz}) = 16.7\text{dBm}$

The maximum supported antenna gain for all bands is 4dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Power Spectral Density

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 4dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “Measure and add $10 \log(N)$ dB technique”, where N is the number of outputs, is used for measuring in-band Power Spectral Density. With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(4)$ (or 6dB) is added to the worst case spectrum value before comparing to the emission limit.



Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer	
Center Frequency:	Frequency from table below
Span:	20 MHz (must be greater than 26dB bandwidth, adjust as necessary)
Ref Level Offset:	Correct for attenuator and cable loss.
Reference Level:	20 dBm
Attenuation:	20 dB
Sweep Time:	100ms, Single sweep
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Sample
Trace:	Trace Average 100 traces in Power Averaging Mode
Integration BW:	=99% BW from 99% Bandwidth Data

After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power. Perform a Marker Peak Search function, and record this value as the Power Spectral Density.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	4	<u>16.2</u>				16.2	23.72	7.5
	Non HT/VHT20, 6 to 54 Mbps	2	4	<u>16.2</u>	<u>17.5</u>			19.9	23.7	3.8
	Non HT/VHT20, 6 to 54 Mbps	3	4	<u>13.4</u>	<u>14.1</u>	<u>14.0</u>		18.6	23.72	5.1
	Non HT/VHT20, 6 to 54 Mbps	4	4	<u>10.4</u>	<u>11.2</u>	<u>11.0</u>	<u>11.0</u>	16.9	23.7	6.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	<u>16.2</u>	<u>17.5</u>			19.9	22.7	2.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	<u>12.3</u>	<u>13.1</u>	<u>13.0</u>		17.6	20.92	3.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	<u>10.4</u>	<u>11.2</u>	<u>11.0</u>	<u>11.0</u>	16.9	19.7	2.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>16.4</u>				16.4	23.88	7.5
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	4	<u>16.4</u>	<u>17.8</u>			20.2	23.88	3.7
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	<u>16.4</u>	<u>17.8</u>			20.2	23.88	3.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	4	<u>13.4</u>	<u>14.3</u>	<u>14.1</u>		18.7	23.88	5.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	4	<u>15.3</u>	<u>16.5</u>	<u>16.4</u>		20.9	23.88	3.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	<u>15.3</u>	<u>16.5</u>	<u>16.4</u>		20.9	23.88	3.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	4	<u>10.6</u>	<u>11.3</u>	<u>11.1</u>	<u>11.0</u>	17.0	23.88	6.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	4	<u>13.4</u>	<u>14.3</u>	<u>14.1</u>	<u>13.7</u>	19.9	23.88	4.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	4	<u>14.3</u>	<u>15.4</u>	<u>15.3</u>	<u>14.8</u>	21.0	23.88	2.9
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>16.4</u>	<u>17.8</u>			20.2	22.88	2.7
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>16.4</u>	<u>17.8</u>			20.2	23.88	3.7
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>12.4</u>	<u>13.3</u>	<u>13.1</u>		17.7	21.08	3.4
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>15.3</u>	<u>16.5</u>	<u>16.4</u>		20.9	23.88	3.0
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>15.3</u>	<u>16.5</u>	<u>16.4</u>		20.9	23.88	3.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>10.6</u>	<u>11.3</u>	<u>11.1</u>	<u>11.0</u>	17.0	19.88	2.9
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>13.4</u>	<u>14.3</u>	<u>14.1</u>	<u>13.7</u>	19.9	22.88	3.0
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>14.3</u>	<u>15.4</u>	<u>15.3</u>	<u>14.8</u>	21.0	23.88	2.9
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>16.4</u>	<u>17.8</u>			20.2	23.88	3.7
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>15.3</u>	<u>16.5</u>	<u>16.4</u>		20.9	23.88	3.0
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>13.4</u>	<u>14.3</u>	<u>14.1</u>	<u>13.7</u>	19.9	23.88	4.0	



5260/5280	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>17.0</u>				17.0	24	7.0
	Non HT/VHT40, 6 to 54 Mbps	2	4	<u>17.0</u>	<u>18.3</u>			20.7	24	3.3
	Non HT/VHT40, 6 to 54 Mbps	3	4	<u>14.8</u>	<u>15.9</u>	<u>15.8</u>		20.3	24	3.7
	Non HT/VHT40, 6 to 54 Mbps	4	4	<u>13.7</u>	<u>14.8</u>	<u>14.5</u>	<u>14.2</u>	20.3	24	3.7
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>16.4</u>				16.4	24	7.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	4	<u>16.4</u>	<u>17.8</u>			20.2	24	3.8
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>16.4</u>	<u>17.8</u>			20.2	24	3.8
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	4	<u>15.3</u>	<u>16.6</u>	<u>16.5</u>		20.9	24	3.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>		22.1	24	1.9
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>		22.1	24	1.9
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	4	<u>13.4</u>	<u>14.5</u>	<u>14.0</u>	<u>13.9</u>	20.0	24	4.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>	<u>17.0</u>	23.3	24	0.7
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>	<u>17.0</u>	23.3	24	0.7
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>16.4</u>	<u>17.8</u>			20.2	23	2.8
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>16.4</u>	<u>17.8</u>			20.2	24	3.8
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>12.6</u>	<u>13.4</u>	<u>13.0</u>		17.8	21.2	3.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>15.3</u>	<u>16.6</u>	<u>16.5</u>		20.9	24	3.1
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>		22.1	24	1.9
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>10.6</u>	<u>11.2</u>	<u>11.0</u>	<u>11.0</u>	17.0	20	3.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>13.4</u>	<u>14.5</u>	<u>14.0</u>	<u>13.9</u>	20.0	23	3.0
HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>15.3</u>	<u>16.6</u>	<u>16.5</u>	<u>16.0</u>	22.2	24	1.8	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>16.4</u>	<u>17.8</u>			20.2	24	3.8	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>		22.1	24	1.9	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>16.4</u>	<u>17.8</u>	<u>17.6</u>	<u>17.0</u>	23.3	24	0.7	
5260/5280/5300/5320	Non HT/VHT80, 6 to 54 Mbps	1	4	<u>16.6</u>				16.6	24	7.4
	Non HT/VHT80, 6 to 54 Mbps	2	4	<u>16.6</u>	<u>17.8</u>			20.3	24	3.7
	Non HT/VHT80, 6 to 54 Mbps	3	4	<u>15.5</u>	<u>16.5</u>	<u>16.0</u>		20.8	24	3.2
	Non HT/VHT80, 6 to 54 Mbps	4	4	<u>15.5</u>	<u>16.5</u>	<u>16.0</u>	<u>16.0</u>	22.0	24	2.0
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	4	<u>16.2</u>				16.2	24	7.8
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	4	<u>16.2</u>	<u>17.2</u>			19.7	24	4.3
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	4	<u>16.2</u>	<u>17.2</u>			19.7	24	4.3
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>		21.5	24	2.5
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>		21.5	24	2.5
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>		21.5	24	2.5
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>	<u>16.7</u>	22.7	24	1.3
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>	<u>16.7</u>	22.7	24	1.3
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>	<u>16.7</u>	22.7	24	1.3
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>15.1</u>	<u>16.1</u>			18.6	23	4.4
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>16.2</u>	<u>17.2</u>			19.7	24	4.3
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>12.2</u>	<u>12.8</u>	<u>12.2</u>		17.2	21.2	4.0



	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>15.1</u>	<u>16.1</u>	<u>15.5</u>		20.4	24	3.6
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>		21.5	24	2.5
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>10.2</u>	<u>10.5</u>	<u>10.1</u>	<u>10.7</u>	16.4	20	3.6
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>13.1</u>	<u>13.5</u>	<u>13.2</u>	<u>13.4</u>	19.3	23	3.7
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>15.1</u>	<u>16.1</u>	<u>15.5</u>	<u>15.4</u>	21.6	24	2.4
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>16.2</u>	<u>17.2</u>			19.7	24	4.3
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>		21.5	24	2.5
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>16.2</u>	<u>17.2</u>	<u>16.7</u>	<u>16.7</u>	22.7	24	1.3
5300/5320	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>16.0</u>				16.0	24	8.0
	Non HT/VHT40, 6 to 54 Mbps	2	4	<u>16.0</u>	<u>17.1</u>			19.6	24	4.4
	Non HT/VHT40, 6 to 54 Mbps	3	4	<u>16.0</u>	<u>17.1</u>	<u>16.4</u>		21.3	24	2.7
	Non HT/VHT40, 6 to 54 Mbps	4	4	<u>13.8</u>	<u>14.8</u>	<u>13.9</u>	<u>14.3</u>	20.2	24	3.8
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>15.5</u>				15.5	24	8.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	4	<u>15.5</u>	<u>16.5</u>			19.0	24	5.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>15.5</u>	<u>16.5</u>			19.0	24	5.0
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>		20.7	24	3.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>		20.7	24	3.3
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>		20.7	24	3.3
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	4	<u>13.5</u>	<u>14.1</u>	<u>13.5</u>	<u>13.8</u>	19.8	24	4.2
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>	<u>15.9</u>	21.9	24	2.1
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>	<u>15.9</u>	21.9	24	2.1
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>15.5</u>	<u>16.5</u>			19.0	23	4.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>15.5</u>	<u>16.5</u>			19.0	24	5.0
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>11.4</u>	<u>11.9</u>	<u>11.5</u>		16.4	21.2	4.8
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>14.5</u>	<u>15.2</u>	<u>14.5</u>		19.5	24	4.5
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>		20.7	24	3.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>9.7</u>	<u>9.8</u>	<u>9.1</u>	<u>9.8</u>	15.6	20	4.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>12.5</u>	<u>12.9</u>	<u>12.2</u>	<u>12.6</u>	18.6	23	4.4
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>14.5</u>	<u>15.2</u>	<u>14.5</u>	<u>14.8</u>	20.8	24	3.2
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>15.5</u>	<u>16.5</u>			19.0	24	5.0
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>		20.7	24	3.3
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>15.5</u>	<u>16.5</u>	<u>15.7</u>	<u>15.9</u>	21.9	24	2.1	



5320	Non HT/VHT20, 6 to 54 Mbps	1	4	<u>15.3</u>				15.3	23.72	8.4
	Non HT/VHT20, 6 to 54 Mbps	2	4	<u>15.3</u>	<u>15.9</u>			18.6	23.72	5.1
	Non HT/VHT20, 6 to 54 Mbps	3	4	<u>13.3</u>	<u>13.6</u>	<u>13.2</u>		18.1	23.7	5.6
	Non HT/VHT20, 6 to 54 Mbps	4	4	<u>10.4</u>	<u>10.5</u>	<u>10.0</u>	<u>10.6</u>	16.4	23.7	7.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	<u>15.3</u>	<u>15.9</u>			18.6	22.72	4.1
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	<u>11.3</u>	<u>11.6</u>	<u>11.1</u>		16.1	20.9	4.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	<u>9.8</u>	<u>9.6</u>	<u>9.1</u>	<u>9.8</u>	15.6	19.7	4.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>15.1</u>				15.1	23.88	8.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	4	<u>15.1</u>	<u>16.0</u>			18.6	23.88	5.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	<u>15.1</u>	<u>16.0</u>			18.6	23.88	5.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	4	<u>13.2</u>	<u>13.6</u>	<u>12.9</u>		18.0	23.88	5.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	4	<u>15.1</u>	<u>16.0</u>	<u>15.3</u>		20.3	23.88	3.6
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	<u>15.1</u>	<u>16.0</u>	<u>15.3</u>		20.3	23.88	3.6
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	4	<u>10.3</u>	<u>10.5</u>	<u>9.7</u>	<u>10.5</u>	16.3	23.88	7.6
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	4	<u>13.2</u>	<u>13.6</u>	<u>12.9</u>	<u>13.4</u>	19.3	23.88	4.6
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	4	<u>14.1</u>	<u>14.8</u>	<u>14.0</u>	<u>14.5</u>	20.4	23.88	3.5
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>15.1</u>	<u>16.0</u>			18.6	22.88	4.3
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>15.1</u>	<u>16.0</u>			18.6	23.88	5.3
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>11.3</u>	<u>11.5</u>	<u>10.7</u>		16.0	21.08	5.1
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>14.1</u>	<u>14.8</u>	<u>14.0</u>		19.1	23.88	4.8
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>15.1</u>	<u>16.0</u>	<u>15.3</u>		20.3	23.88	3.6
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>9.4</u>	<u>9.5</u>	<u>8.7</u>	<u>9.5</u>	15.3	19.88	4.6
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>12.3</u>	<u>12.6</u>	<u>11.8</u>	<u>12.5</u>	18.3	22.88	4.5
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>14.1</u>	<u>14.8</u>	<u>14.0</u>	<u>14.5</u>	20.4	23.88	3.5
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>15.1</u>	<u>16.0</u>			18.6	23.88	5.3	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>15.1</u>	<u>16.0</u>	<u>15.3</u>		20.3	23.88	3.6	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>13.2</u>	<u>13.6</u>	<u>12.9</u>	<u>13.4</u>	19.3	23.88	4.6	



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5260	Non HT/VHT20, 6 to 54 Mbps	1	4	5.8				5.8	11.0	5.2
	Non HT/VHT20, 6 to 54 Mbps	2	7	5.8	7.4			9.7	10.0	0.3
	Non HT/VHT20, 6 to 54 Mbps	3	9	2.9	3.6	3.3		8.0	8.2	0.2
	Non HT/VHT20, 6 to 54 Mbps	4	10	0.2	0.8	1.1	0.9	6.8	7.0	0.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	5.8	7.4			9.7	10.0	0.3
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	2.3	2.8	2.9		7.4	8.2	0.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	0.2	0.8	1.1	0.9	6.8	7.0	0.2
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	5.8				5.8	11.0	5.2
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	7	5.8	7.0			9.5	10.0	0.5
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	5.8	7.0			9.5	11.0	1.5
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	9	2.8	3.7	3.8		8.2	8.2	0.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	6	4.5	5.7	5.6		10.1	11.0	0.9
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	4.5	5.7	5.6		10.1	11.0	0.9
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	10	0.1	0.8	0.4	0.1	6.4	7.0	0.6
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	7	2.8	3.7	3.8	3.0	9.4	10.0	0.6
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	3.6	4.6	4.8	4.0	10.3	11.0	0.7
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	5.8	7.0			9.5	10.0	0.5
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	5.8	7.0			9.5	11.0	1.5
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	2.0	2.8	2.6		7.3	8.2	1.0
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	4.5	5.7	5.6		10.1	11.0	0.9
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	4.5	5.7	5.6		10.1	11.0	0.9
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	0.1	0.8	0.4	0.1	6.4	7.0	0.6
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	2.8	3.7	3.8	3.0	9.4	10.0	0.6
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	3.6	4.6	4.8	4.0	10.3	11.0	0.7
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	5.8	7.0			9.5	11.0	1.5	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	6	4.5	5.7	5.6		10.1	11.0	0.9	
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	7	2.8	3.7	3.8	3.0	9.4	10.0	0.6	



5260/5280	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>3.6</u>				3.6	11.0	7.4
	Non HT/VHT40, 6 to 54 Mbps	2	7	<u>3.6</u>	<u>5.0</u>			7.4	10.0	2.6
	Non HT/VHT40, 6 to 54 Mbps	3	9	<u>1.4</u>	<u>2.8</u>	<u>2.6</u>		7.1	8.2	1.1
	Non HT/VHT40, 6 to 54 Mbps	4	10	<u>0.3</u>	<u>1.2</u>	<u>1.0</u>	<u>0.6</u>	6.8	7.0	0.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>2.9</u>				2.9	11.0	8.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	7	<u>2.9</u>	<u>4.3</u>			6.7	10.0	3.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>2.9</u>	<u>4.3</u>			6.7	11.0	4.3
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	9	<u>2.1</u>	<u>3.0</u>	<u>3.0</u>		7.5	8.2	0.7
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	6	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>		8.6	11.0	2.4
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>		8.6	11.0	2.4
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	10	<u>-0.3</u>	<u>0.7</u>	<u>0.4</u>	<u>0.4</u>	6.3	7.0	0.6
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	7	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>	<u>3.4</u>	9.7	10.0	0.3
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>	<u>3.4</u>	9.7	11.0	1.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>2.9</u>	<u>4.3</u>			6.7	10.0	3.3
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>2.9</u>	<u>4.3</u>			6.7	11.0	4.3
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-1.0</u>	<u>-0.3</u>	<u>-0.9</u>		4.0	8.2	4.2
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>2.1</u>	<u>3.0</u>	<u>3.0</u>		7.5	11.0	3.5
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>		8.6	11.0	2.4
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-2.9</u>	<u>-2.7</u>	<u>-2.8</u>	<u>-2.5</u>	3.3	7.0	3.7
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-0.3</u>	<u>0.7</u>	<u>0.4</u>	<u>0.4</u>	6.3	10.0	3.7
HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>2.1</u>	<u>3.0</u>	<u>3.0</u>	<u>2.4</u>	8.7	11.0	2.3	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>2.9</u>	<u>4.3</u>			6.7	11.0	4.3	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	6	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>		8.6	11.0	2.4	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	7	<u>2.9</u>	<u>4.3</u>	<u>4.1</u>	<u>3.4</u>	9.7	10.0	0.3	
5260/5280/5300/5320	Non HT/VHT80, 6 to 54 Mbps	1	4	<u>0.2</u>				0.2	11.0	10.8
	Non HT/VHT80, 6 to 54 Mbps	2	7	<u>0.2</u>	<u>0.9</u>			3.6	10.0	6.4
	Non HT/VHT80, 6 to 54 Mbps	3	9	<u>-1.3</u>	<u>-0.1</u>	<u>-0.5</u>		4.2	8.2	4.1
	Non HT/VHT80, 6 to 54 Mbps	4	10	<u>-1.3</u>	<u>-0.1</u>	<u>-0.5</u>	<u>-0.5</u>	5.4	7.0	1.5
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	4	<u>-0.9</u>				-0.9	11.0	11.9
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	7	<u>-0.9</u>	<u>0.0</u>			2.6	10.0	7.4
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	4	<u>-0.9</u>	<u>0.0</u>			2.6	11.0	8.4
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	9	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>		4.5	8.2	3.8
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	6	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>		4.5	11.0	6.5
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	4	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>		4.5	11.0	6.5
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	10	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>	<u>-0.6</u>	5.6	7.0	1.3
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	7	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>	<u>-0.6</u>	5.6	10.0	4.4
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	5	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>	<u>-0.6</u>	5.6	11.0	5.4
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-1.9</u>	<u>-0.9</u>			1.6	10.0	8.4
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-0.9</u>	<u>0.0</u>			2.6	11.0	8.4
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-4.7</u>	<u>-4.4</u>	<u>-4.9</u>		0.1	8.2	8.1




	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-1.9</u>	<u>-0.9</u>	<u>-1.5</u>		3.4	11.0	7.6
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>		4.5	11.0	6.5
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-6.9</u>	<u>-6.7</u>	<u>-7.1</u>	<u>-6.2</u>	-0.7	7.0	7.7
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-4.0</u>	<u>-3.4</u>	<u>-3.6</u>	<u>-3.7</u>	2.4	10.0	7.6
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-1.9</u>	<u>-0.9</u>	<u>-1.5</u>	<u>-1.8</u>	4.5	11.0	6.5
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-0.9</u>	<u>0.0</u>			2.6	11.0	8.4
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	6	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>		4.5	11.0	6.5
	HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	7	<u>-0.9</u>	<u>0.0</u>	<u>-0.1</u>	<u>-0.6</u>	5.6	10.0	4.4
5300/5320	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>2.7</u>				2.7	11.0	8.3
	Non HT/VHT40, 6 to 54 Mbps	2	7	<u>2.7</u>	<u>3.7</u>			6.2	10.0	3.8
	Non HT/VHT40, 6 to 54 Mbps	3	9	<u>2.7</u>	<u>3.7</u>	<u>3.6</u>		8.1	8.2	0.1
	Non HT/VHT40, 6 to 54 Mbps	4	10	<u>0.4</u>	<u>1.3</u>	<u>1.0</u>	<u>0.9</u>	6.9	7.0	0.0
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>1.9</u>				1.9	11.0	9.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	7	<u>1.9</u>	<u>3.0</u>			5.5	10.0	4.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>1.9</u>	<u>3.0</u>			5.5	11.0	5.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	9	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>		7.3	8.2	0.9
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	6	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>		7.3	11.0	3.7
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>		7.3	11.0	3.7
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	10	<u>-0.1</u>	<u>0.5</u>	<u>0.1</u>	<u>0.2</u>	6.2	7.0	0.8
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	7	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>	<u>2.0</u>	8.4	10.0	1.6
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	5	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>	<u>2.0</u>	8.4	11.0	2.6
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>1.9</u>	<u>3.0</u>			5.5	10.0	4.5
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>1.9</u>	<u>3.0</u>			5.5	11.0	5.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-2.2</u>	<u>-1.7</u>	<u>-1.8</u>		2.9	8.2	5.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>0.8</u>	<u>1.5</u>	<u>1.4</u>		6.0	11.0	5.0
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>		7.3	11.0	3.7
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-4.2</u>	<u>-4.0</u>	<u>-4.2</u>	<u>-3.6</u>	2.0	7.0	5.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-1.0</u>	<u>-0.8</u>	<u>-0.9</u>	<u>-1.0</u>	5.1	10.0	4.9
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>0.8</u>	<u>1.5</u>	<u>1.4</u>	<u>1.3</u>	7.3	11.0	3.7
	HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>1.9</u>	<u>3.0</u>			5.5	11.0	5.5
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	6	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>		7.3	11.0	3.7	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	7	<u>1.9</u>	<u>3.0</u>	<u>2.6</u>	<u>2.0</u>	8.4	10.0	1.6	



5320	Non HT/VHT20, 6 to 54 Mbps	1	4	<u>4.9</u>				4.9	11.0	6.1
	Non HT/VHT20, 6 to 54 Mbps	2	7	<u>4.9</u>	<u>5.4</u>			8.2	10.0	1.8
	Non HT/VHT20, 6 to 54 Mbps	3	9	<u>3.0</u>	<u>3.1</u>	<u>2.9</u>		7.8	8.2	0.5
	Non HT/VHT20, 6 to 54 Mbps	4	10	<u>0.1</u>	<u>0.1</u>	<u>-0.2</u>	<u>0.4</u>	6.1	7.0	0.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	<u>4.9</u>	<u>5.4</u>			8.2	10.0	1.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	<u>1.0</u>	<u>1.4</u>	<u>1.4</u>		6.0	8.2	2.2
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	<u>-0.7</u>	<u>-0.8</u>	<u>-1.4</u>	<u>-0.7</u>	5.1	7.0	1.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>4.9</u>				4.9	11.0	6.1
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	7	<u>4.9</u>	<u>5.5</u>			8.2	10.0	1.8
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	<u>4.9</u>	<u>5.5</u>			8.2	11.0	2.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	9	<u>2.7</u>	<u>3.5</u>	<u>2.9</u>		7.8	8.2	0.4
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	6	<u>4.9</u>	<u>5.5</u>	<u>5.2</u>		10.0	11.0	1.0
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	<u>4.9</u>	<u>5.5</u>	<u>5.2</u>		10.0	11.0	1.0
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	10	<u>-0.1</u>	<u>0.2</u>	<u>-0.4</u>	<u>0.2</u>	6.0	7.0	1.0
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	7	<u>2.7</u>	<u>3.5</u>	<u>2.9</u>	<u>3.1</u>	9.1	10.0	0.9
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	5	<u>3.5</u>	<u>4.5</u>	<u>3.8</u>	<u>4.1</u>	10.0	11.0	1.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>4.9</u>	<u>5.5</u>			8.2	10.0	1.8
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>4.9</u>	<u>5.5</u>			8.2	11.0	2.8
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>1.1</u>	<u>1.1</u>	<u>0.8</u>		5.8	8.2	2.5
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>3.5</u>	<u>4.5</u>	<u>3.8</u>		8.7	11.0	2.3
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>4.9</u>	<u>5.5</u>	<u>5.2</u>		10.0	11.0	1.0
	HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-1.0</u>	<u>-0.9</u>	<u>-1.2</u>	<u>-1.1</u>	5.0	7.0	2.0
	HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>2.3</u>	<u>2.1</u>	<u>1.7</u>	<u>2.0</u>	8.1	10.0	1.9
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>3.5</u>	<u>4.5</u>	<u>3.8</u>	<u>4.1</u>	10.0	11.0	1.0
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>4.9</u>	<u>5.5</u>			8.2	11.0	2.8
	HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	6	<u>4.9</u>	<u>5.5</u>	<u>5.2</u>		10.0	11.0	1.0
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	7	<u>2.7</u>	<u>3.5</u>	<u>2.9</u>	<u>3.1</u>	9.1	10.0	0.9	

Peak Output Power / PSD, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps

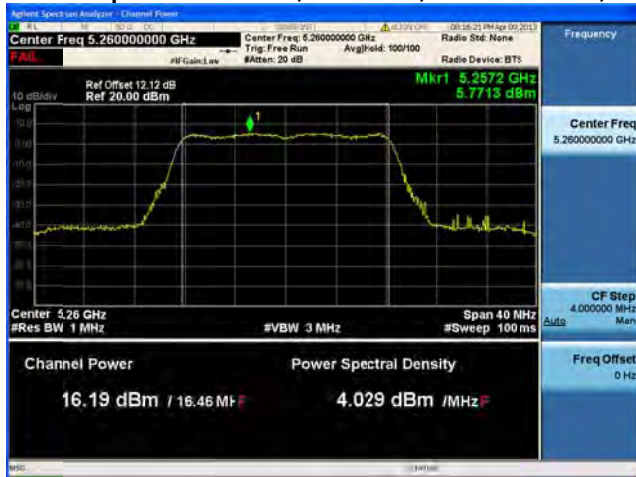

Antenna A



Peak Output Power / PSD, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A



Antenna B




Peak Output Power / PSD, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A



Antenna B

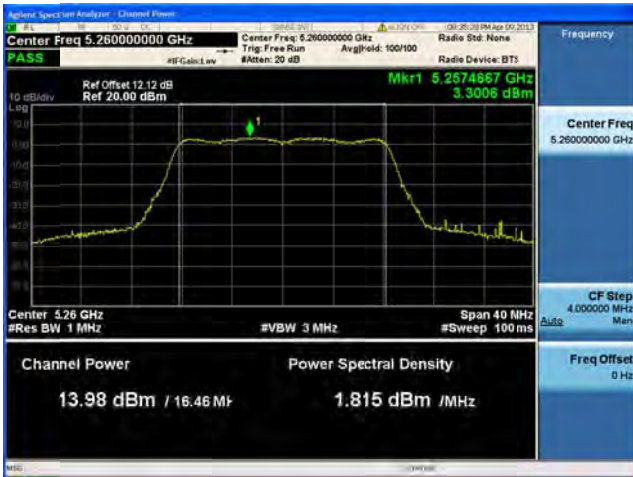


Antenna C



Peak Output Power / PSD, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps




Antenna A

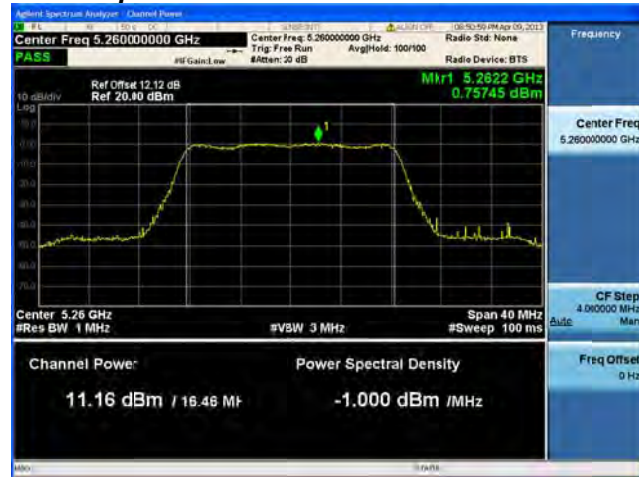

Antenna B




Antenna C

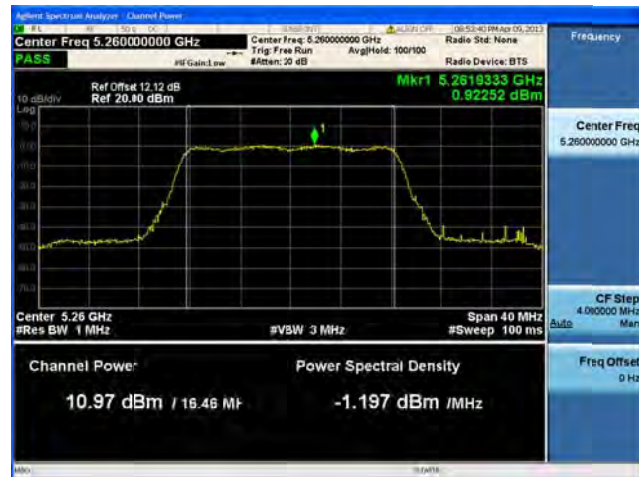

Antenna D



Peak Output Power / PSD, 5260 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

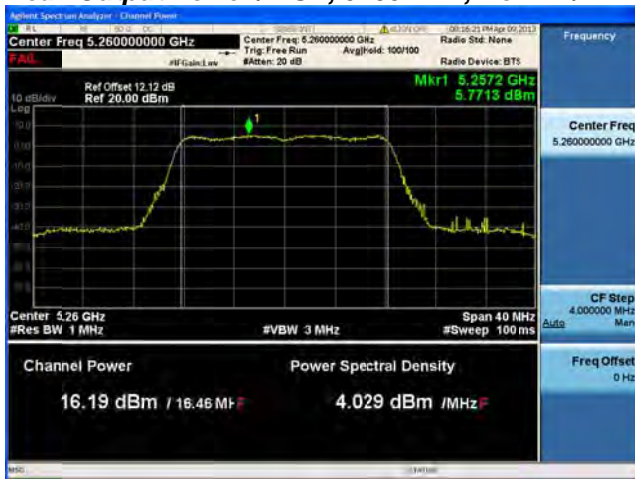


Antenna A



Antenna B




Peak Output Power / PSD, 5260 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

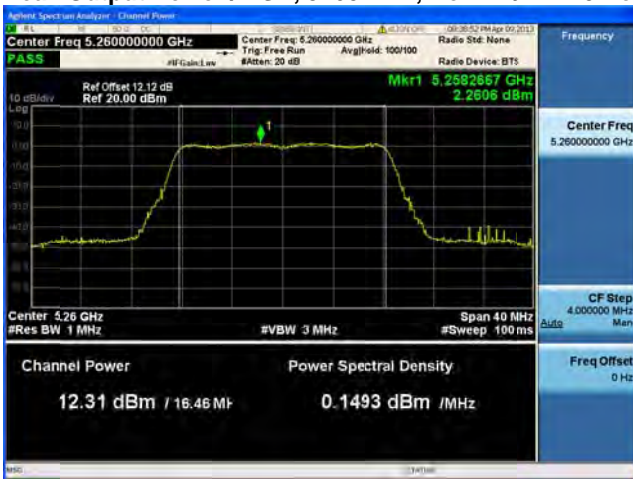

Antenna A




Antenna B

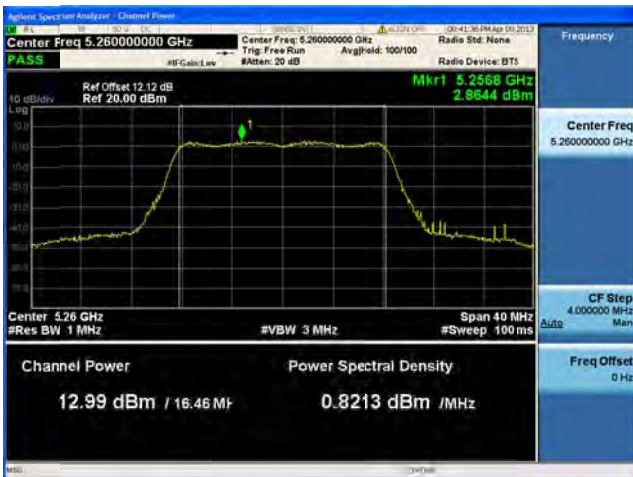

Antenna C



Peak Output Power / PSD, 5260 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

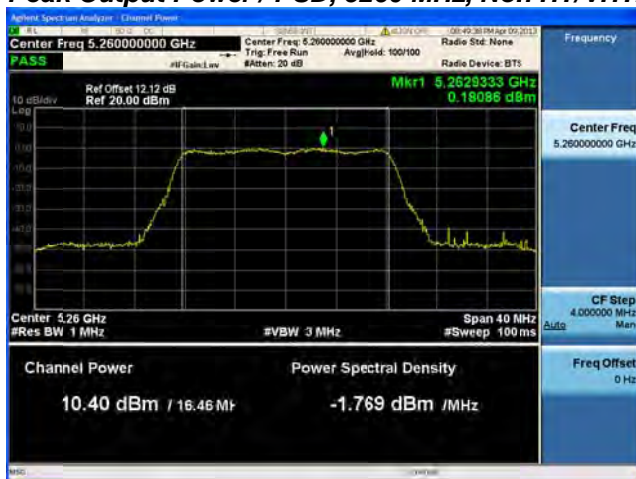


Antenna A



Antenna B



Antenna C

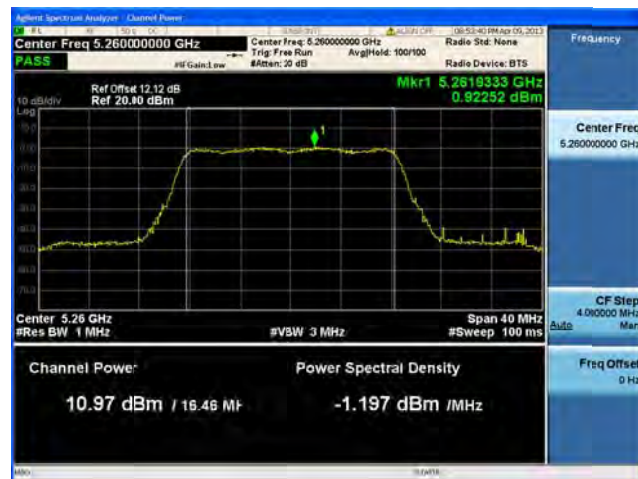

Antenna D



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



Antenna A



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2




Antenna A




Antenna B



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

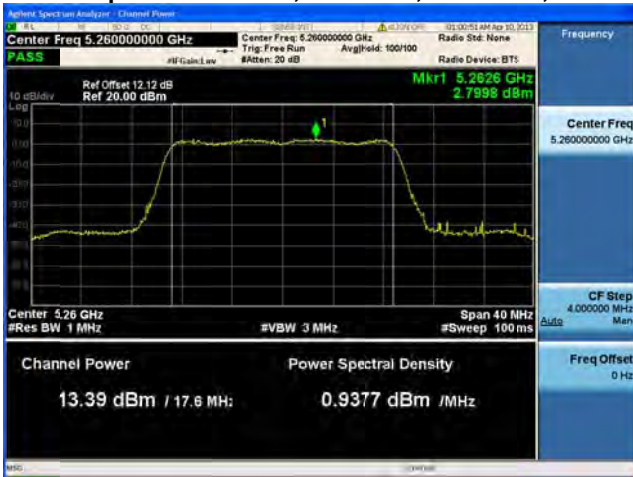

Antenna A

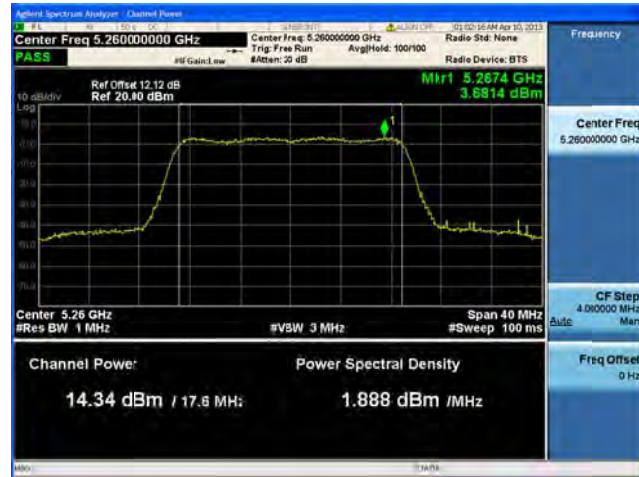


Antenna B



Antenna C




Peak Output Power / PSD, 5260 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

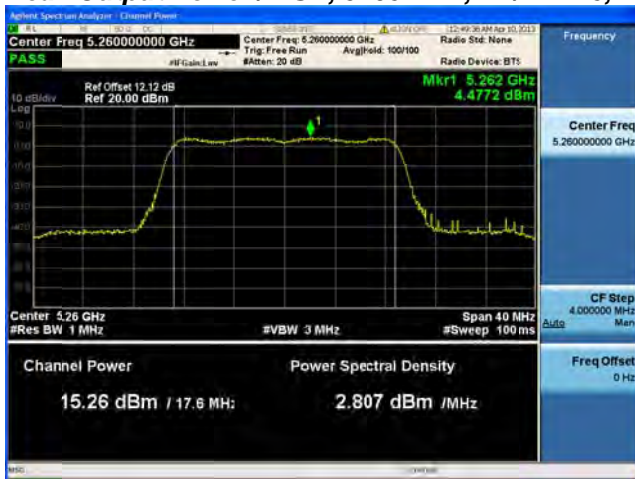

Antenna A




Antenna B

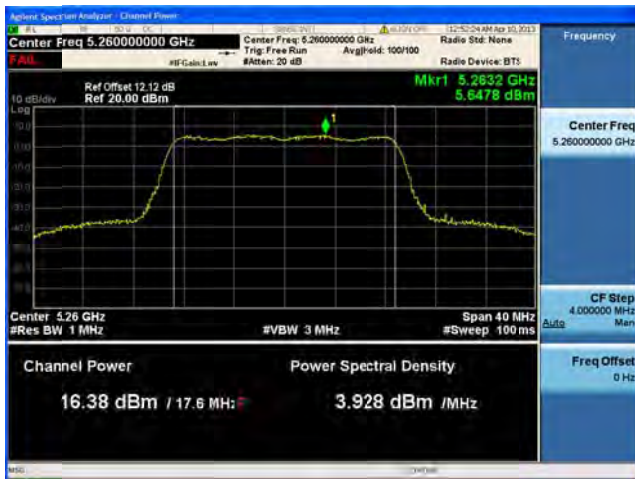

Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

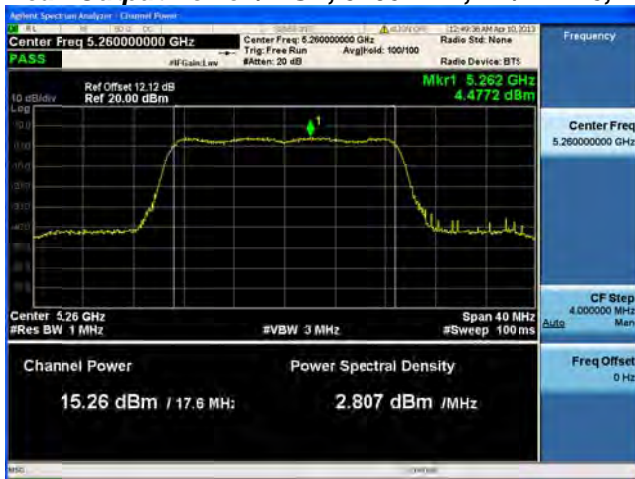

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

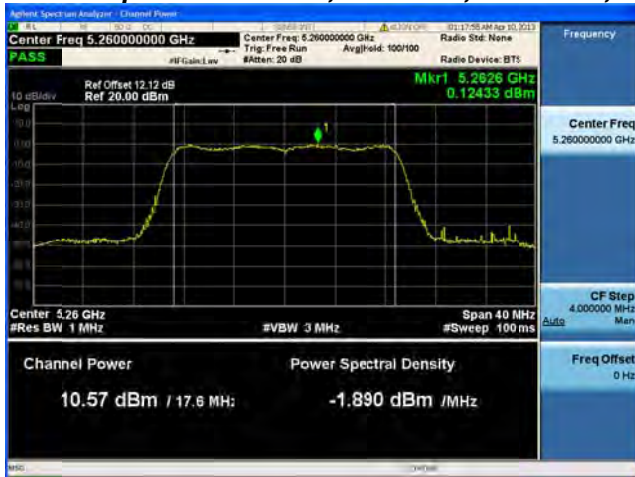

Antenna A



Antenna B




Antenna C




Antenna D




Peak Output Power / PSD, 5260 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

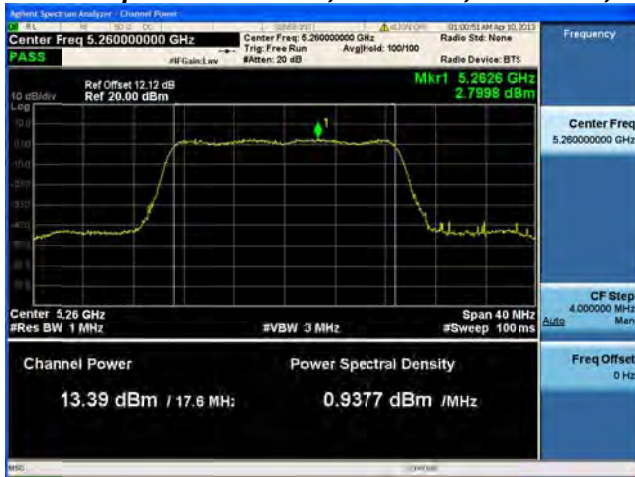

Antenna A

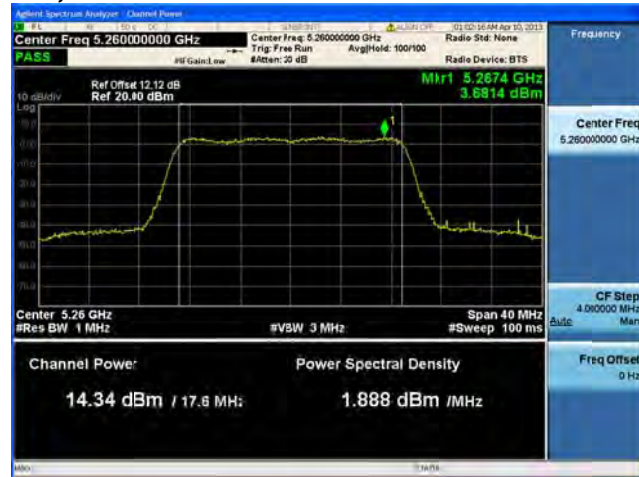

Antenna B

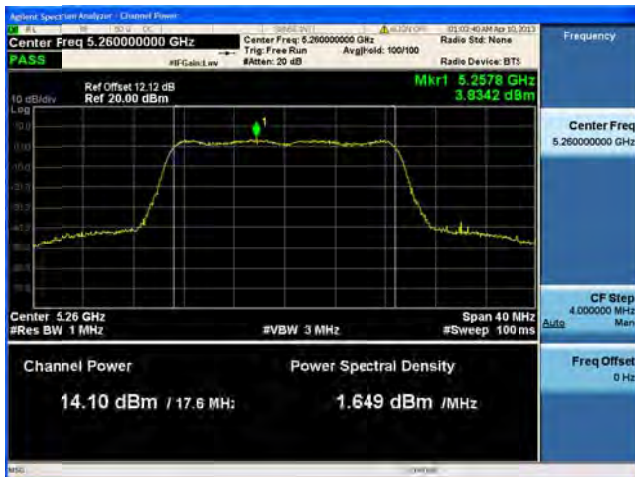


Antenna C




Antenna D




Peak Output Power / PSD, 5260 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

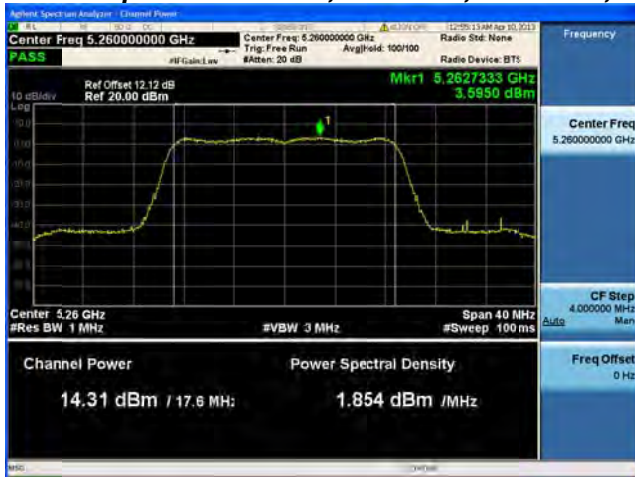


Antenna A

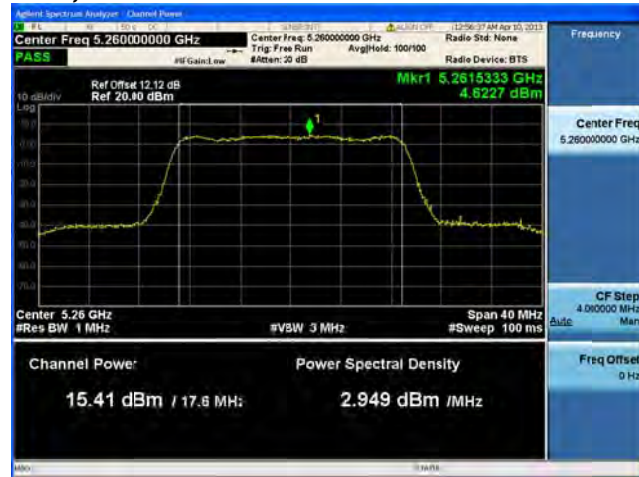

Antenna B

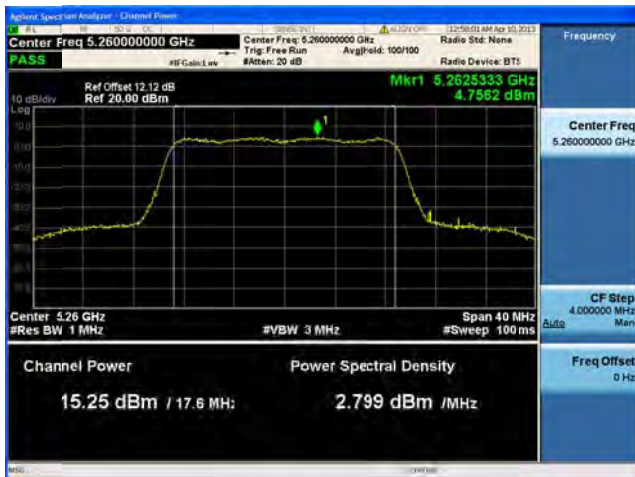


Antenna C

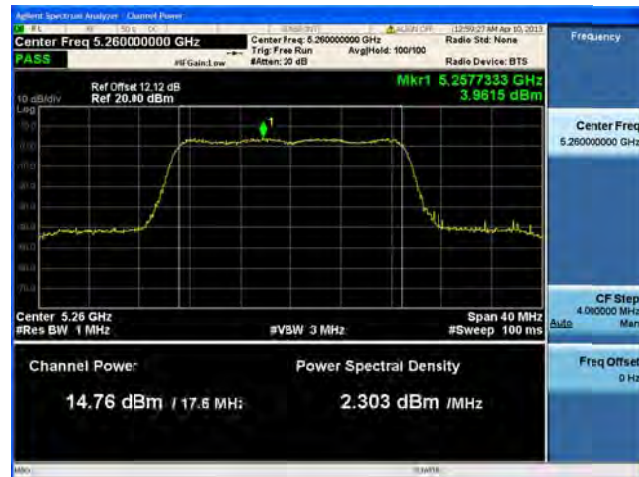

Antenna D



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

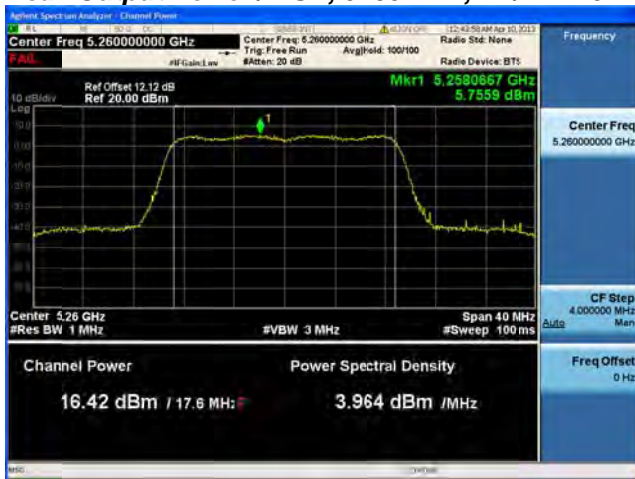

Antenna A



Antenna B



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

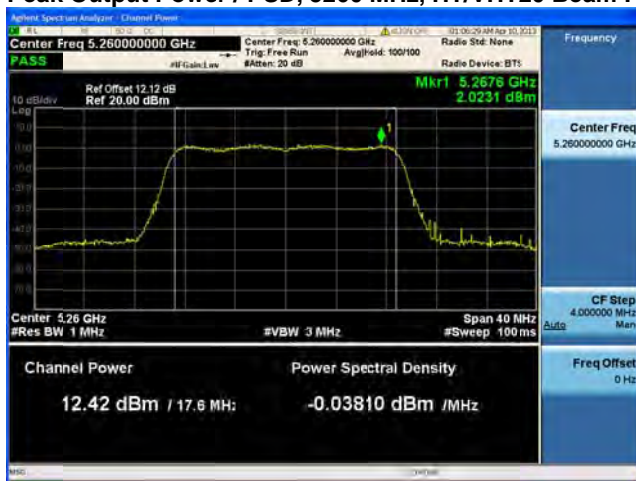

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

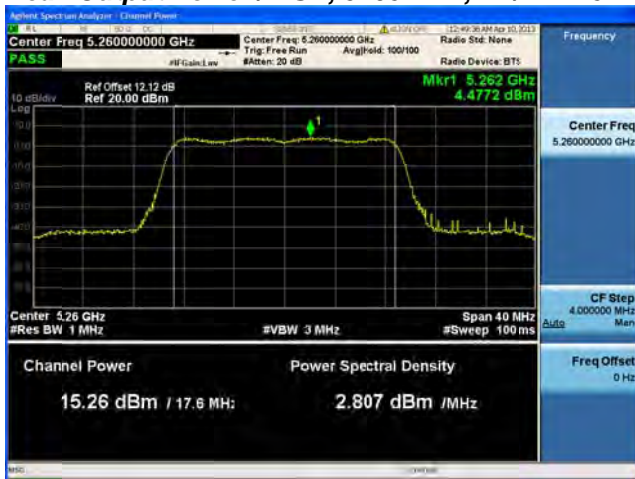

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

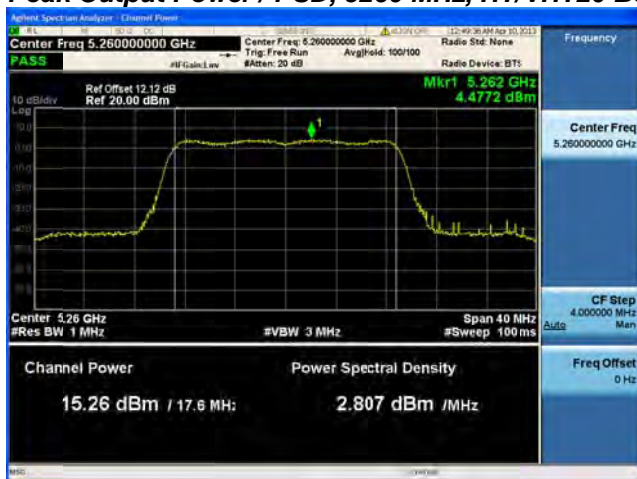

Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Antenna C




Antenna D



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2




Antenna A

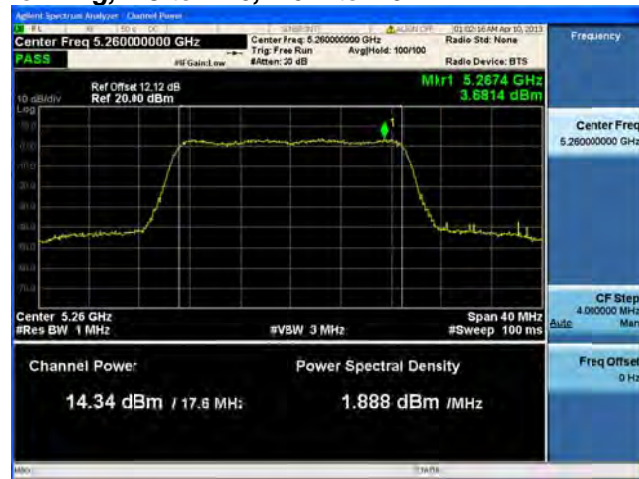

Antenna B



Antenna C

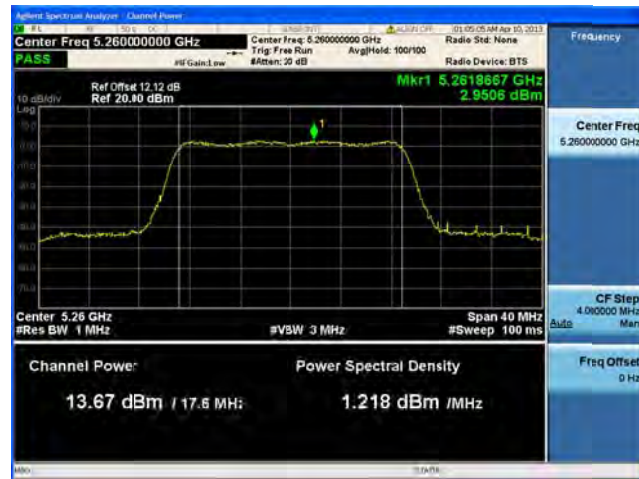


Antenna D



Peak Output Power / PSD, 5260 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3




Antenna A

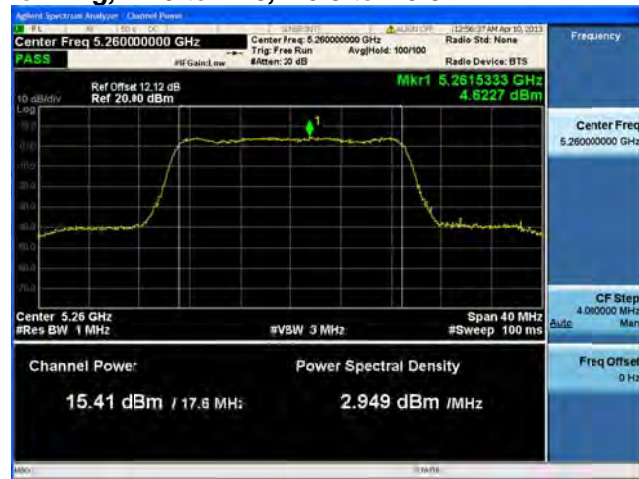

Antenna B




Antenna C

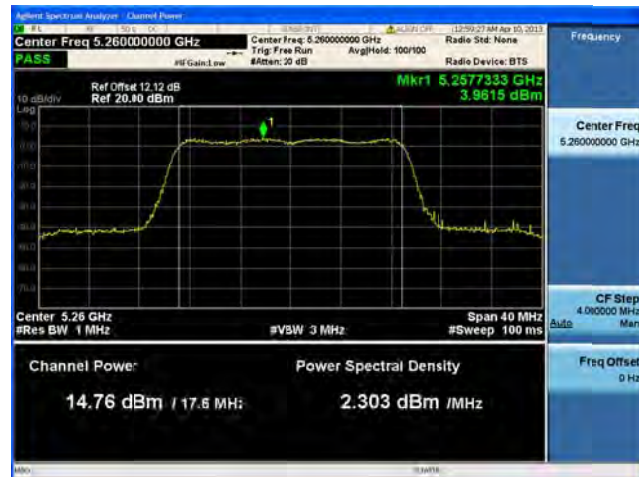

Antenna D



Peak Output Power / PSD, 5260 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

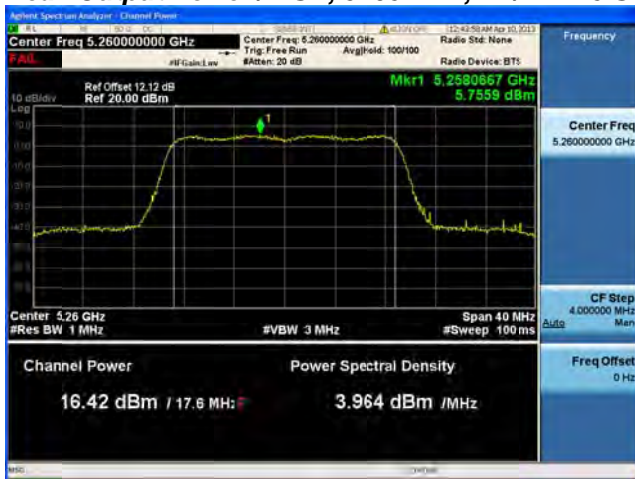


Antenna A




Antenna B



Peak Output Power / PSD, 5260 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

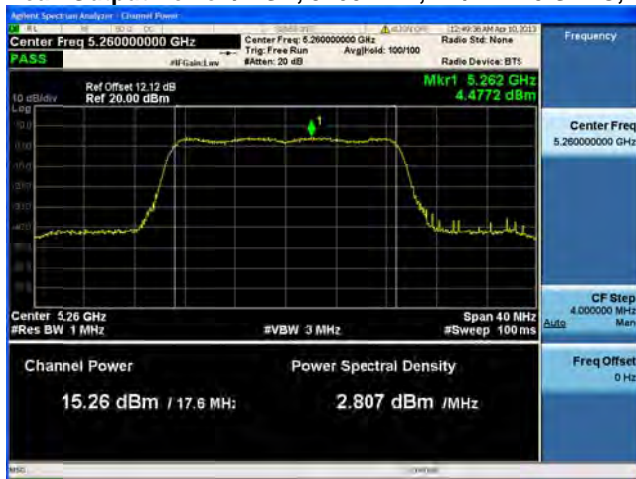

Antenna A

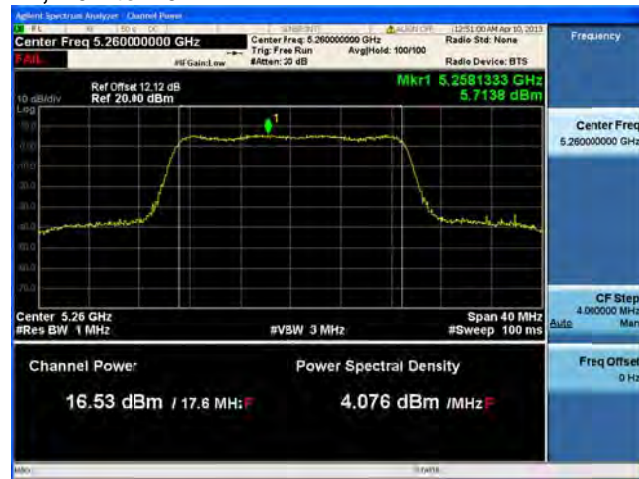

Antenna B



Antenna C



Peak Output Power / PSD, 5260 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Antenna C



Antenna D

Peak Output Power / PSD, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps



Antenna A



Peak Output Power / PSD, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps




Antenna A



Antenna B




Peak Output Power / PSD, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps

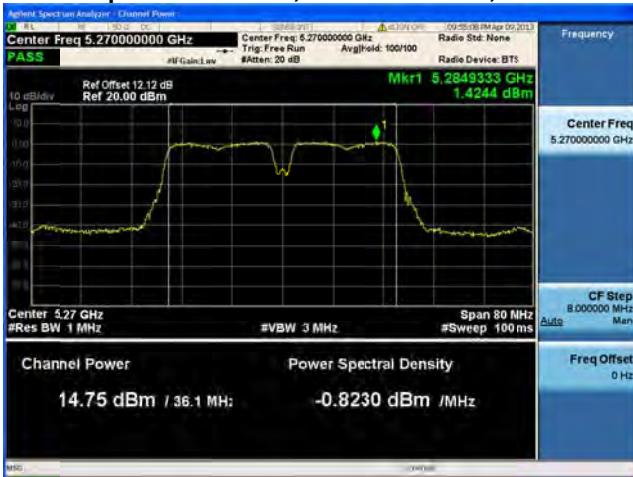

Antenna A



Antenna B

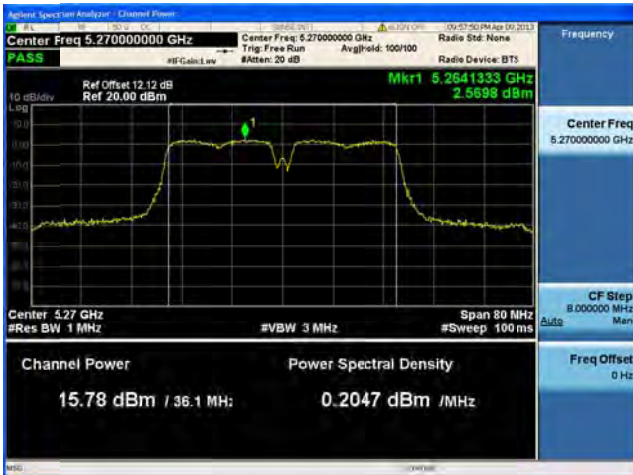

Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps




Antenna A



Antenna B




Antenna C

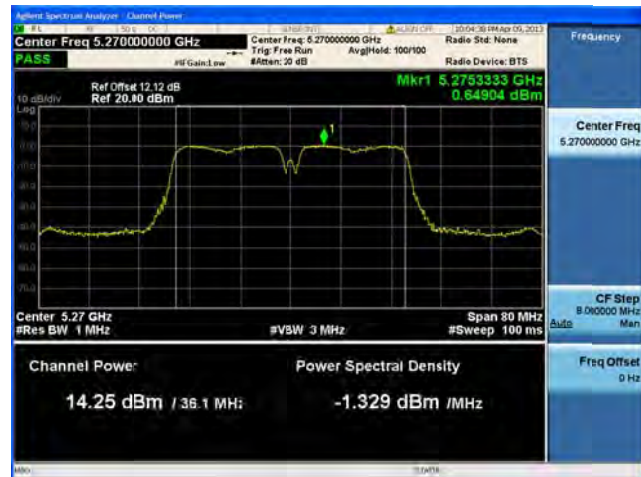

Antenna D




Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

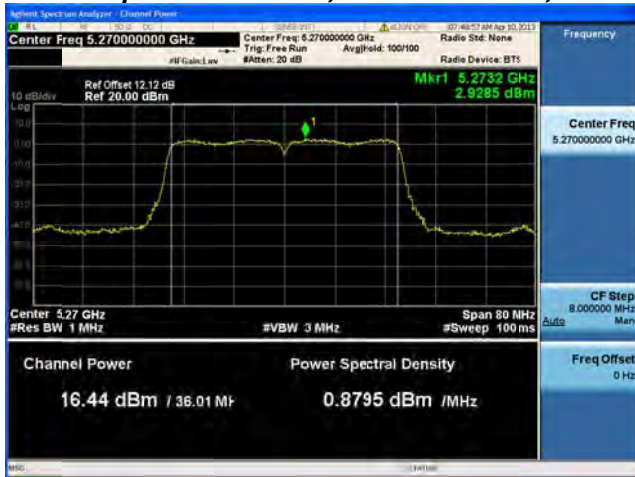

Antenna A



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

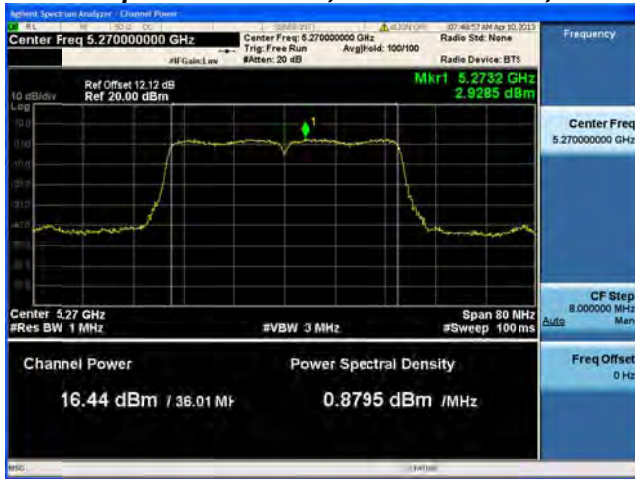


Antenna A



Antenna B



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

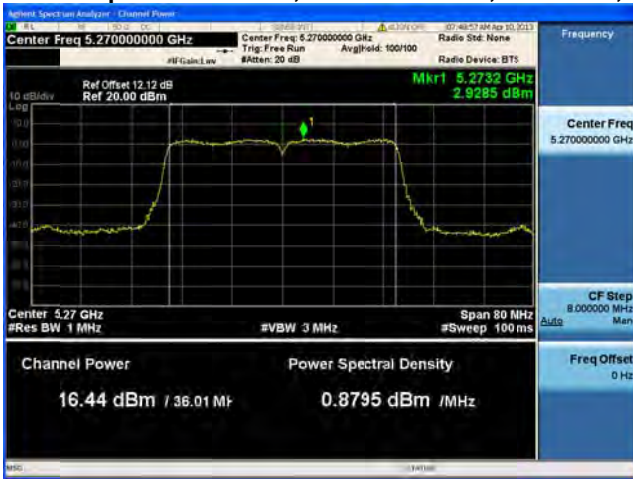


Antenna A



Antenna B



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

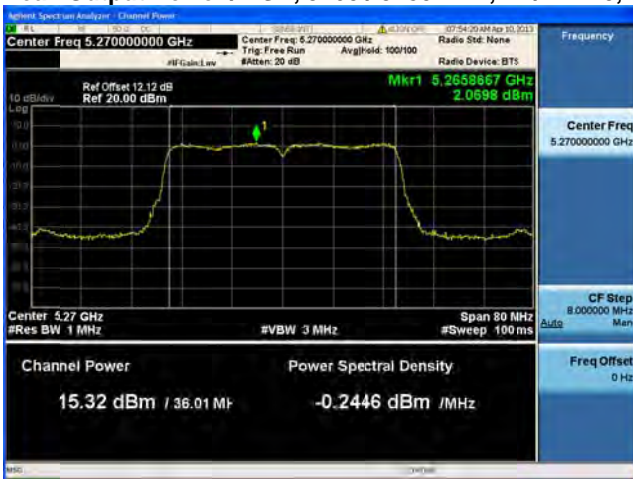

Antenna A




Antenna B




Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M8 to M15, MO.2 to M9.2

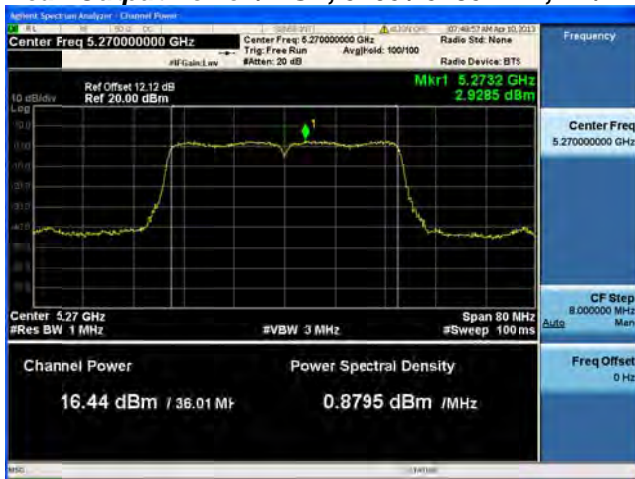

Antenna A

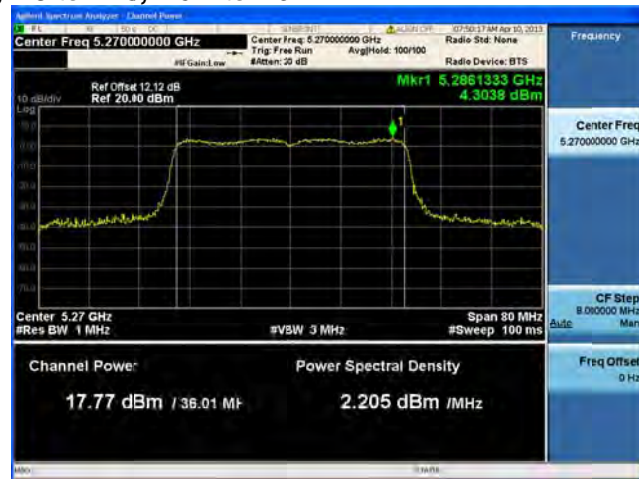


Antenna B




Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

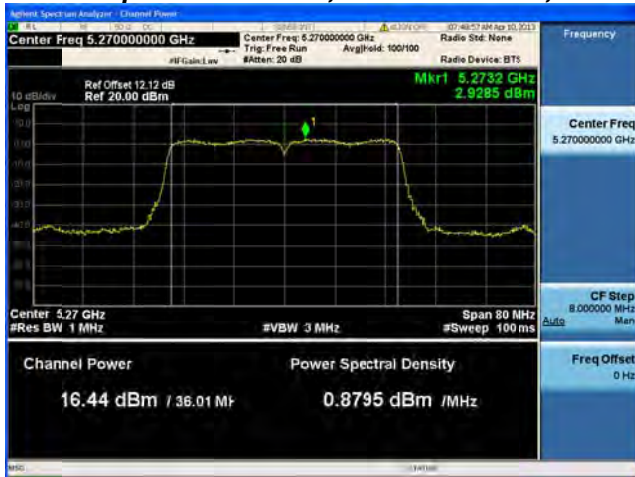

Antenna A

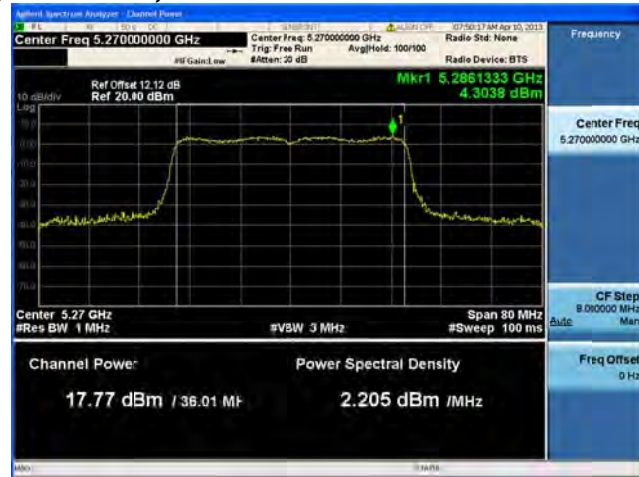


Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

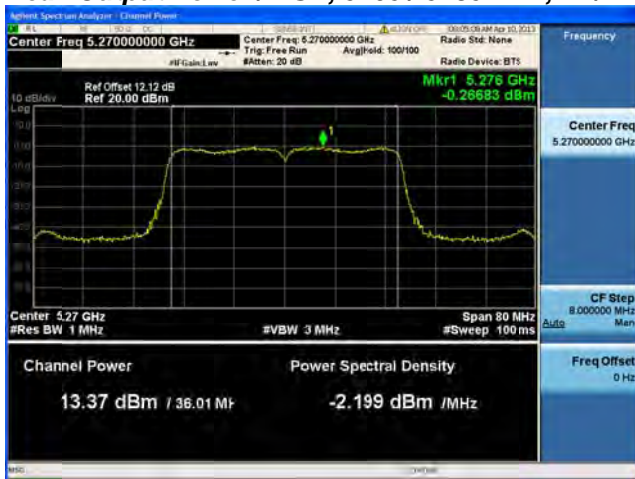


Antenna A



Antenna B



Antenna C

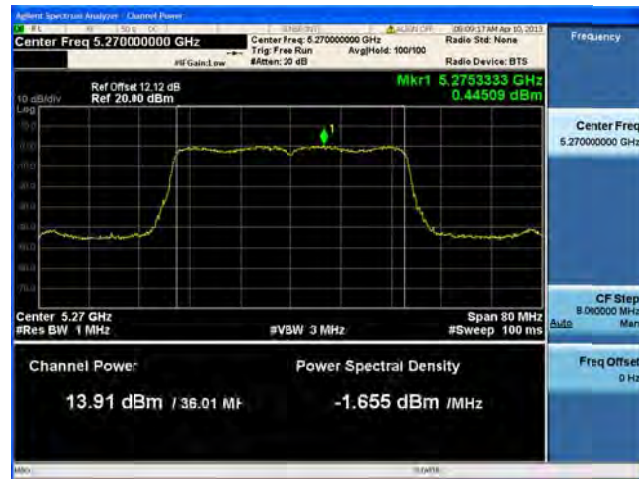

Antenna D



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B




Antenna C

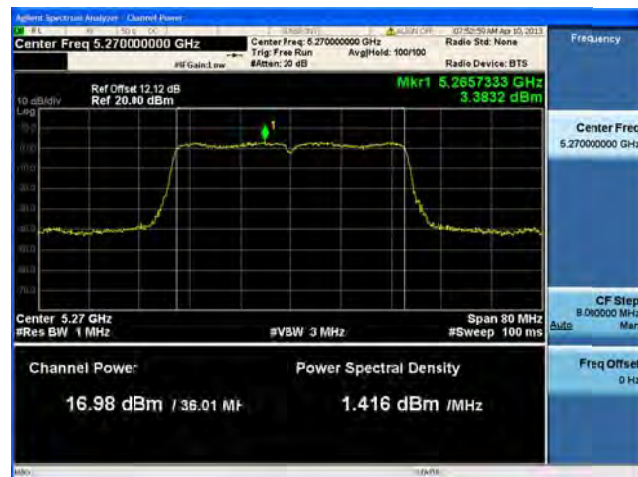

Antenna D



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

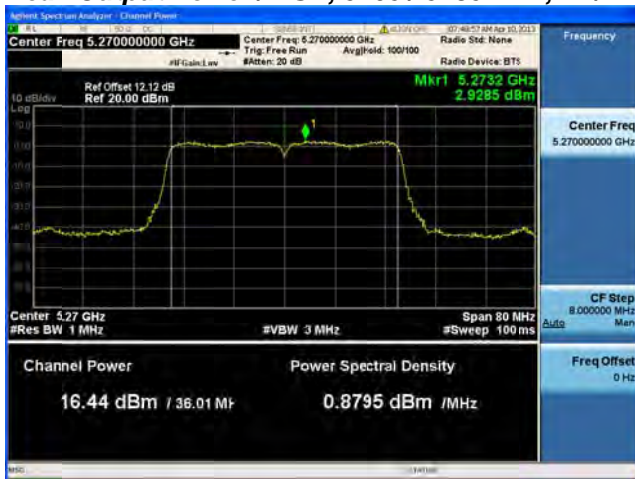

Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

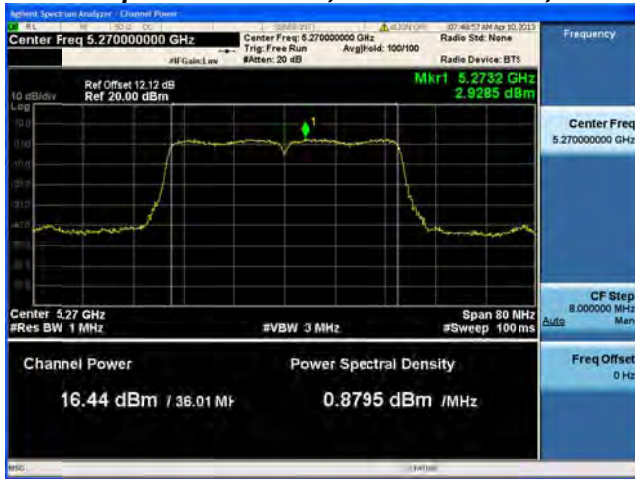

Antenna A



Antenna B



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

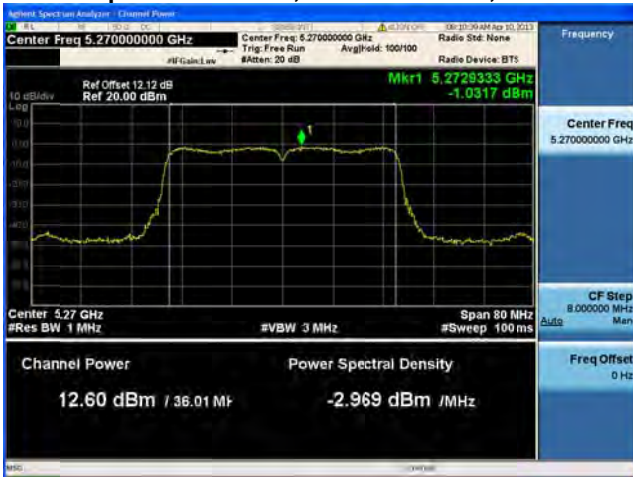

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

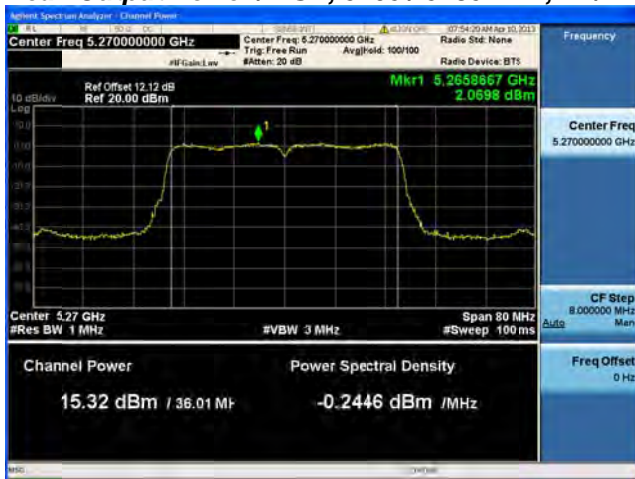

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3

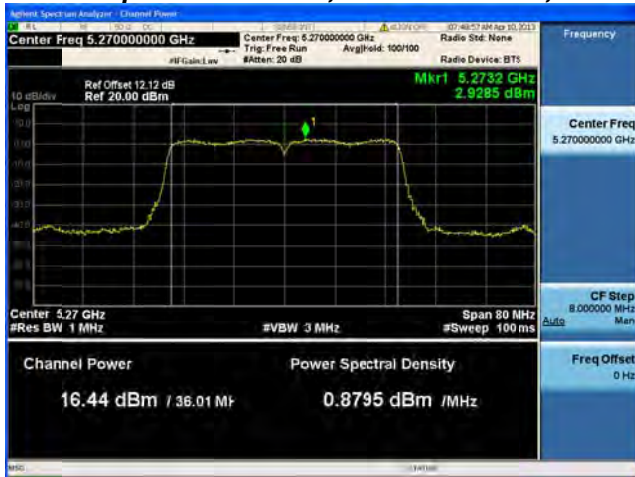

Antenna A




Antenna B




Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

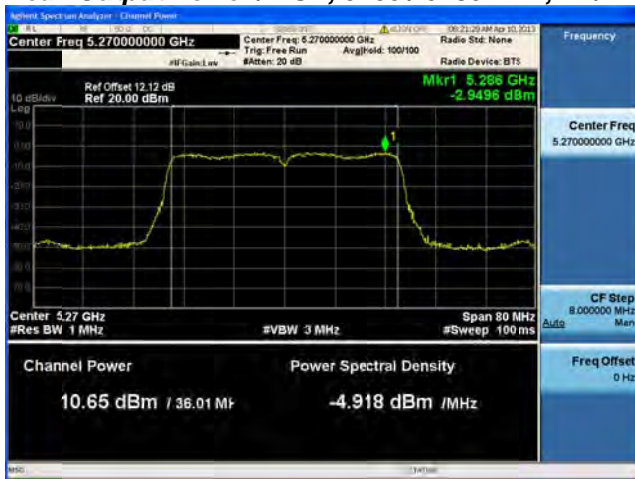


Antenna A

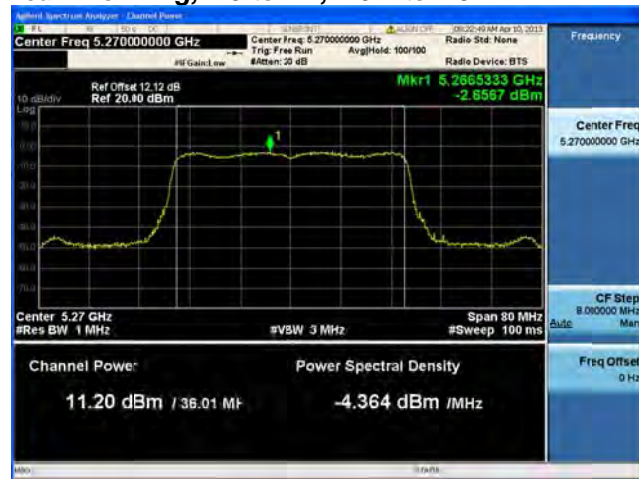

Antenna B



Antenna C

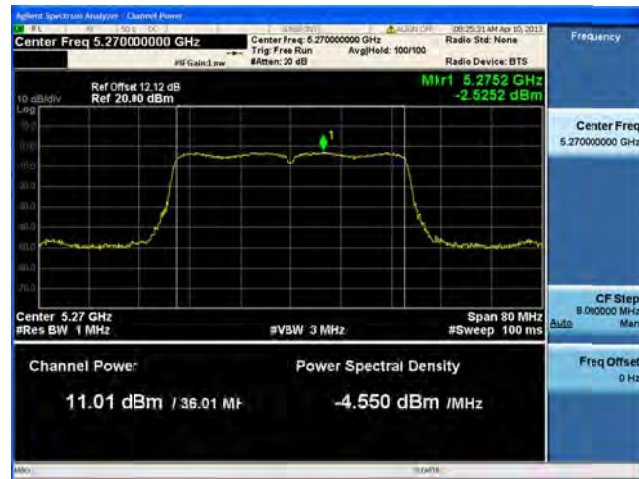

Antenna D



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B




Antenna C



Antenna D




Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3

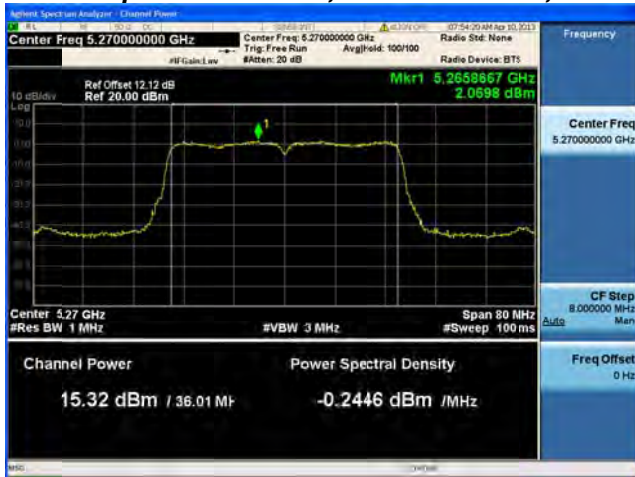

Antenna A



Antenna B

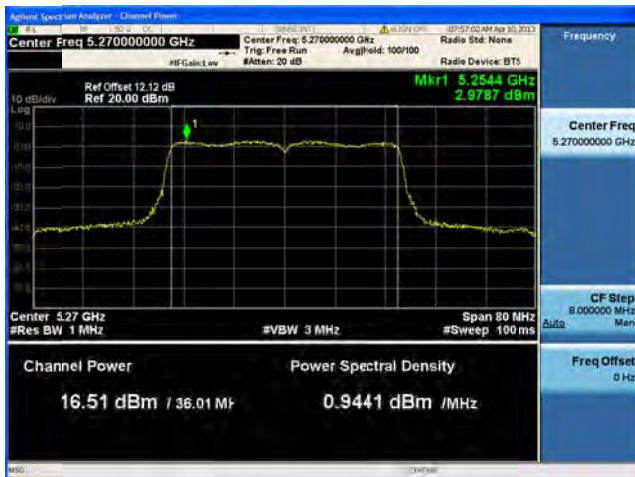

Antenna C




Antenna D



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1




Antenna A

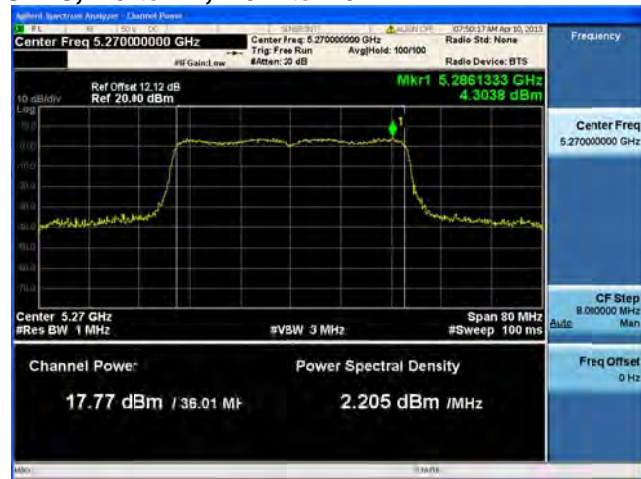

Antenna B



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

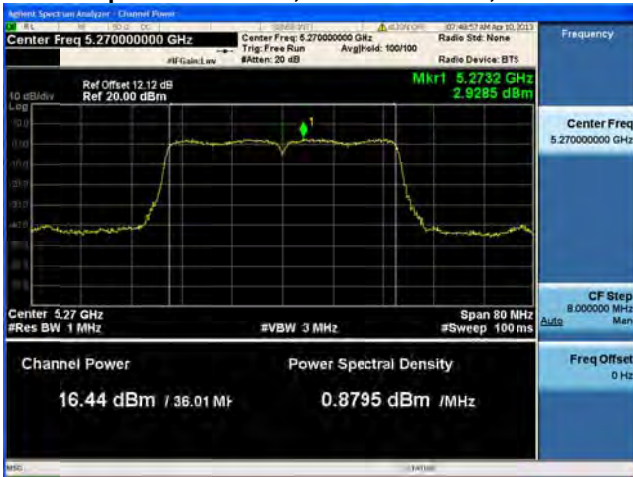

Antenna A




Antenna B




Antenna C



Peak Output Power / PSD, 5260 / 5280 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

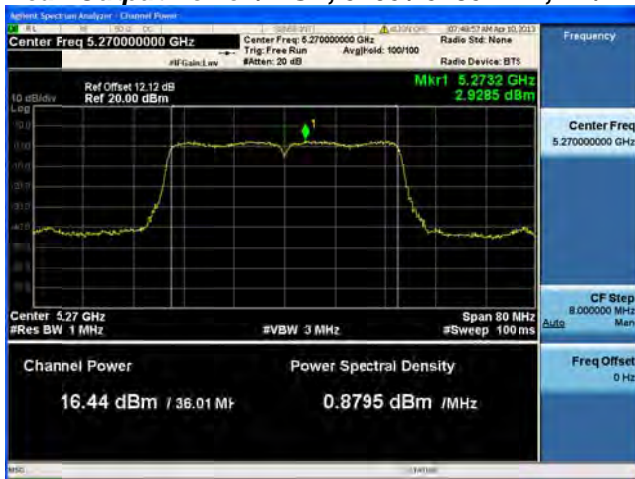


Antenna A

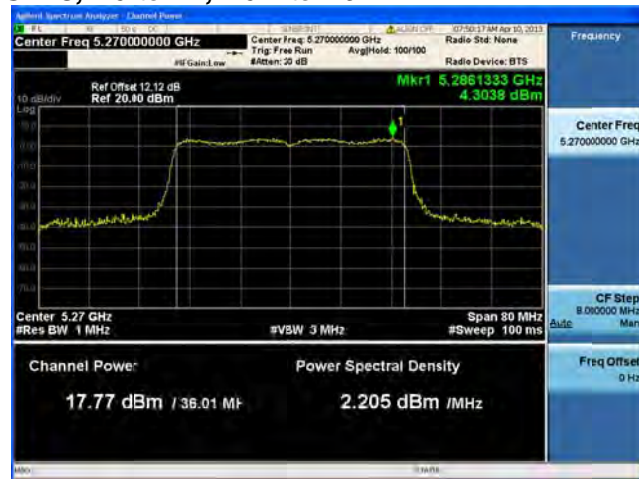

Antenna B



Antenna C

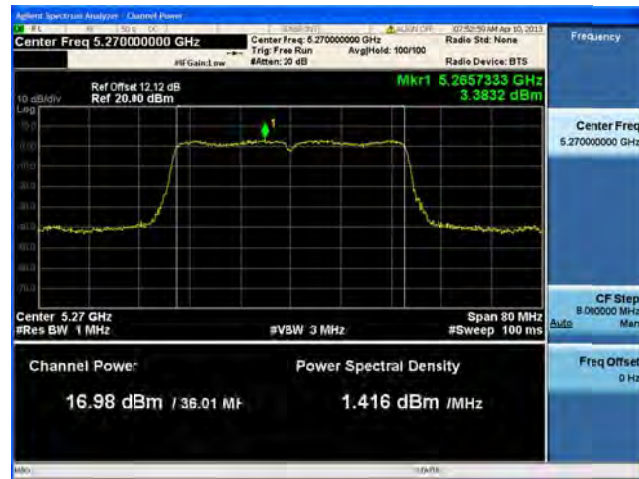

Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A




Antenna B



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A

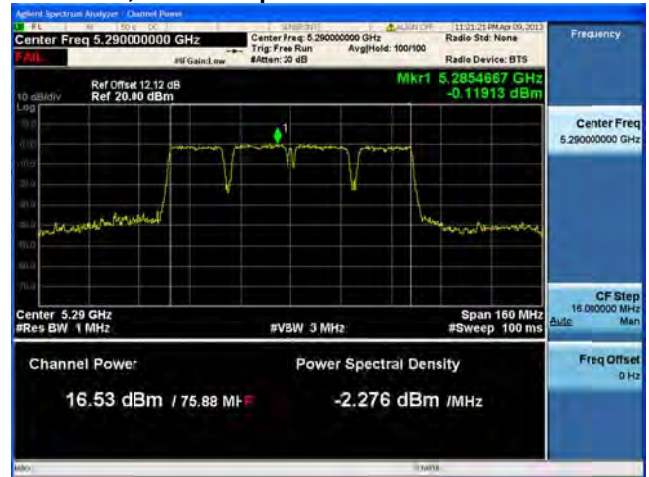

Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

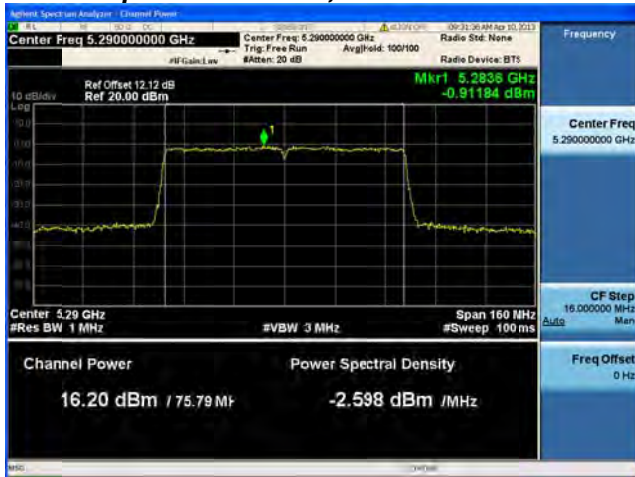

Antenna A



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2

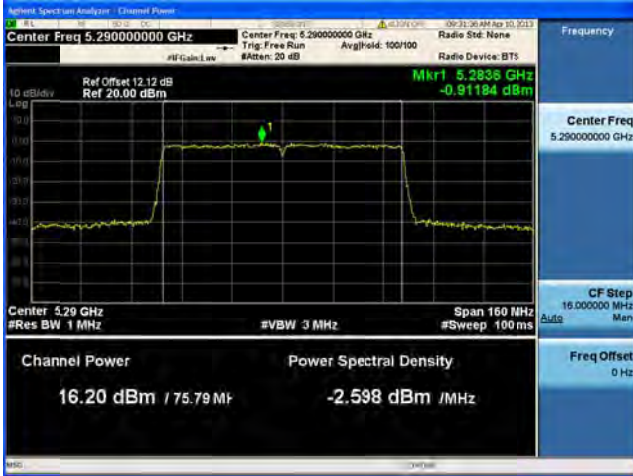

Antenna A



Antenna B




Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B

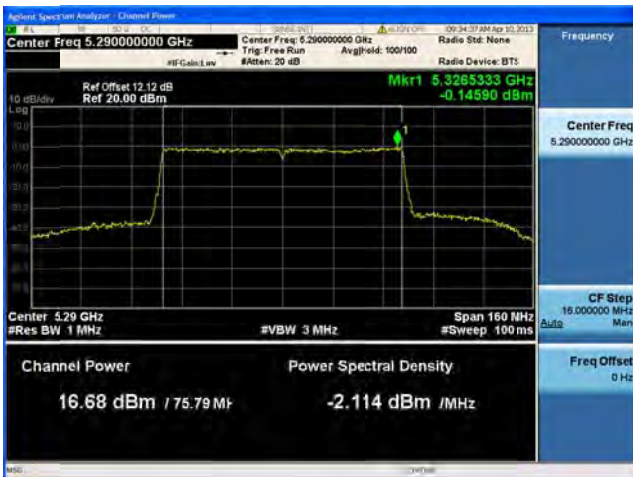

Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Antenna C

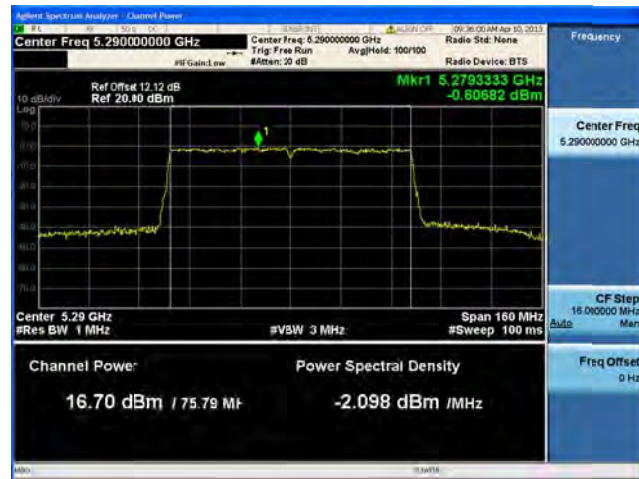

Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A




Antenna B



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A

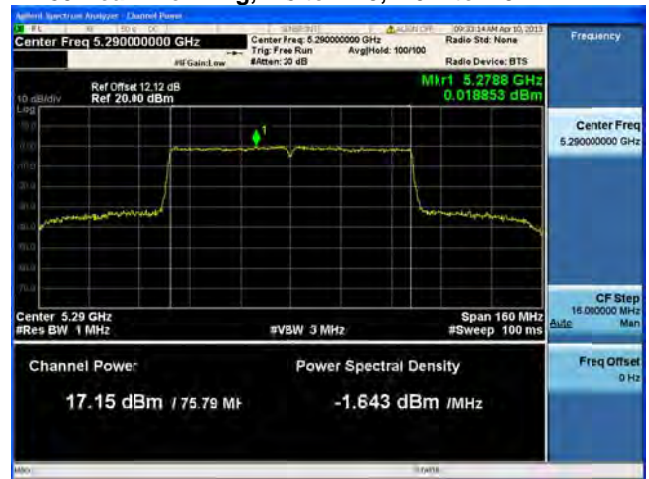

Antenna B



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2

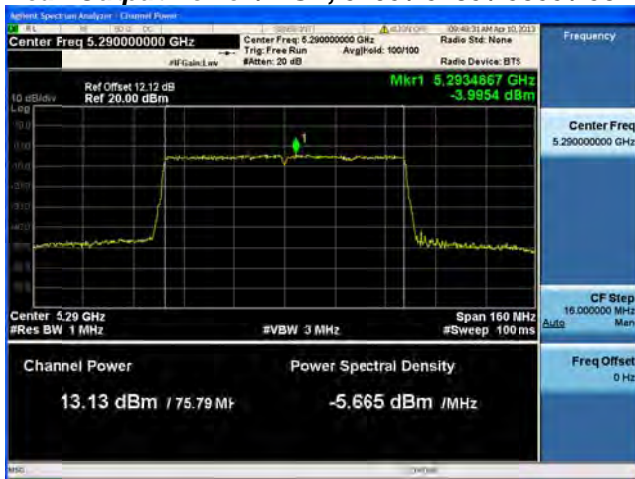

Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B




Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B

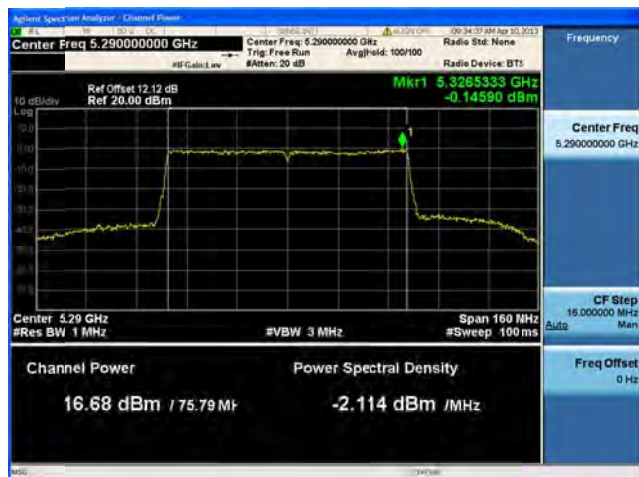

Antenna C



Peak Output Power / PSD, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B




Antenna C



Antenna D




Peak Output Power / PSD, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

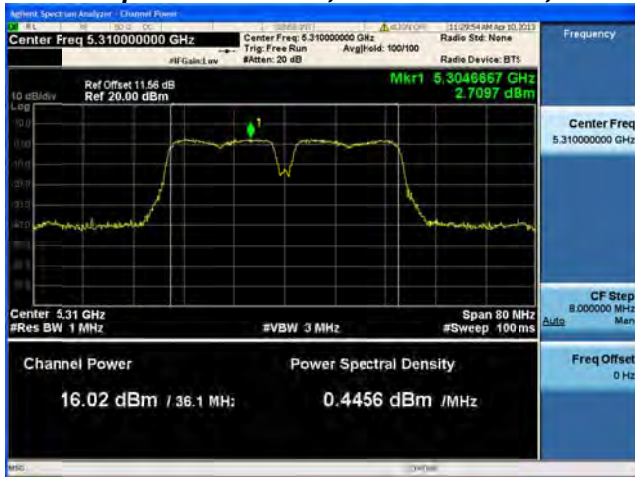

Antenna A



Peak Output Power / PSD, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

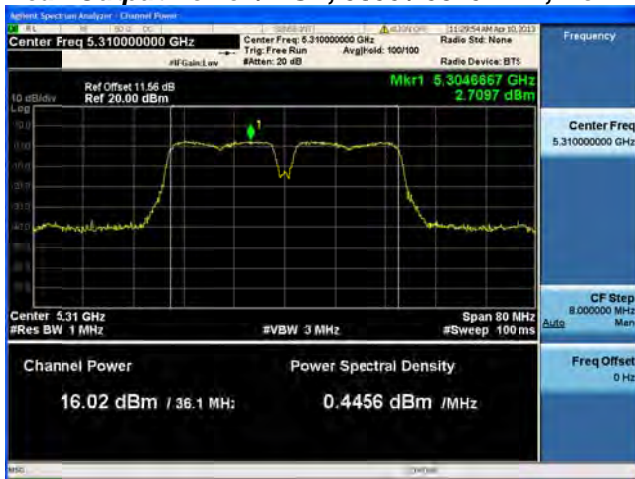


Antenna A



Antenna B



Peak Output Power / PSD, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

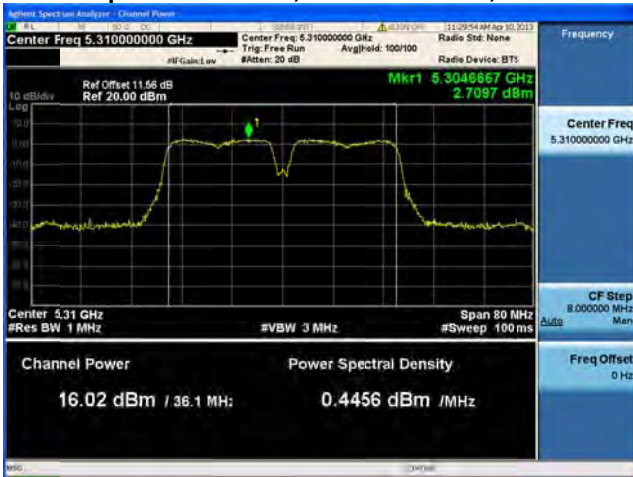

Antenna A



Antenna B




Antenna C



Peak Output Power / PSD, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps



Antenna A

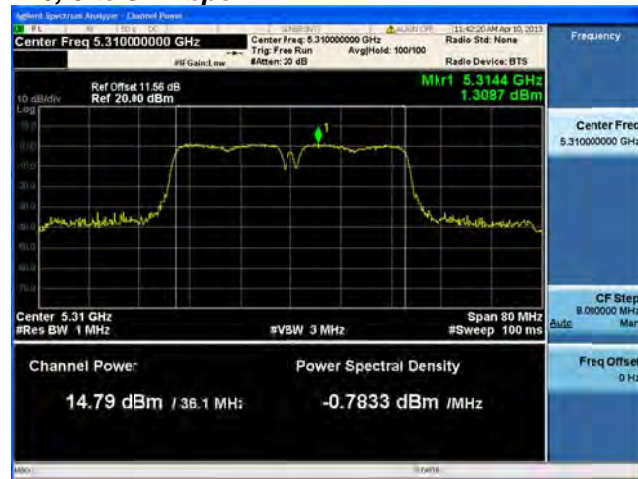

Antenna B




Antenna C



Antenna D




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

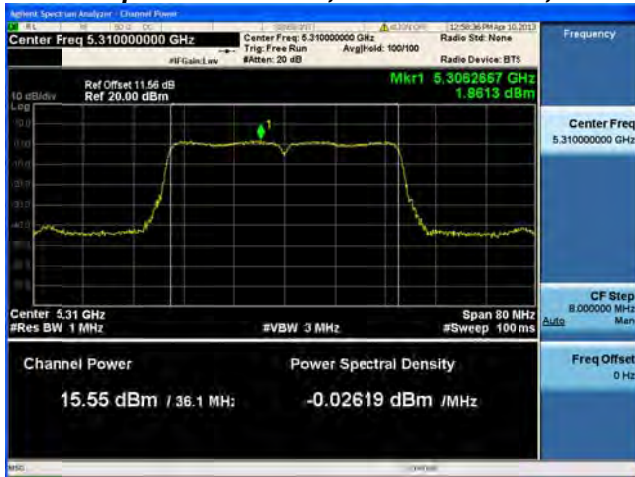


Antenna A



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

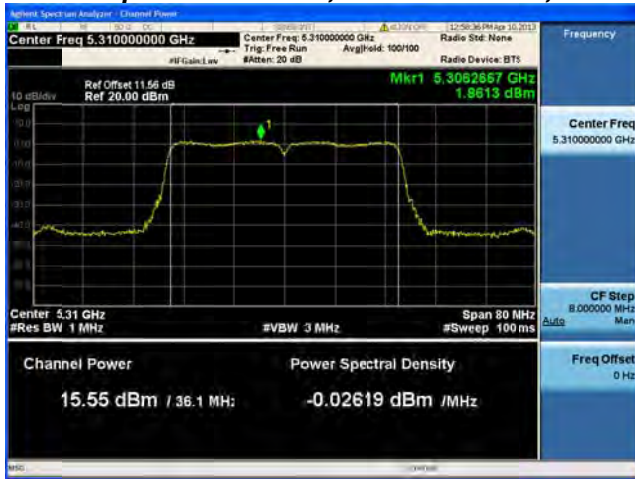


Antenna A

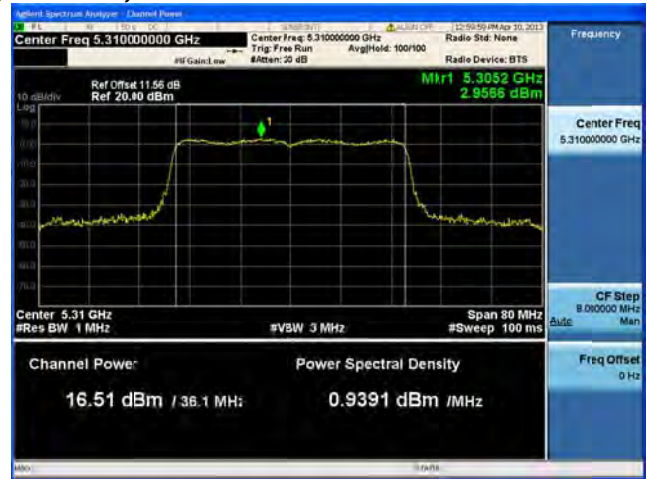


Antenna B



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

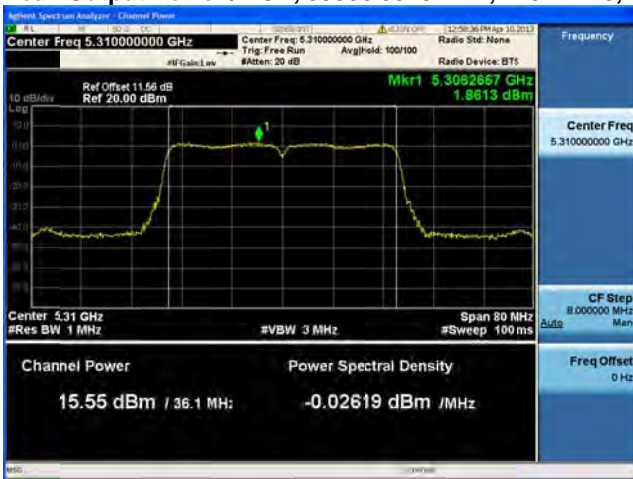


Antenna A

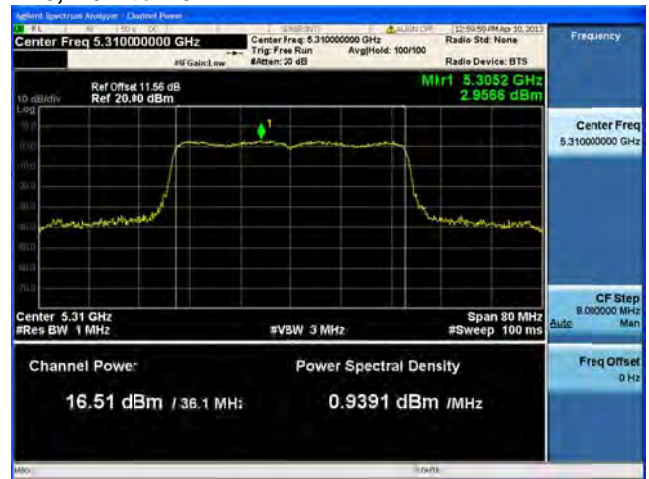

Antenna B




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

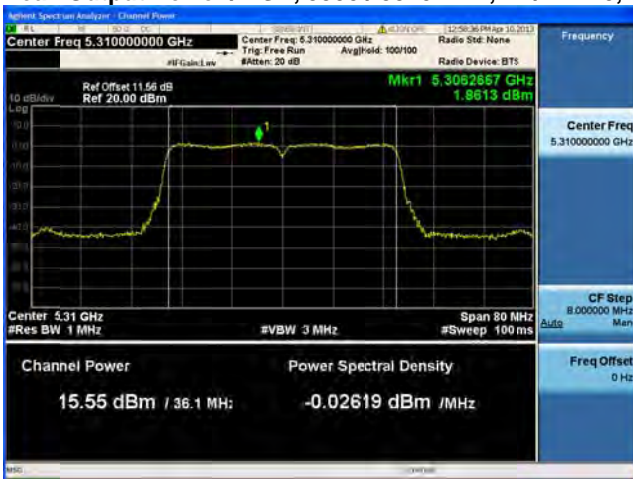

Antenna A




Antenna B

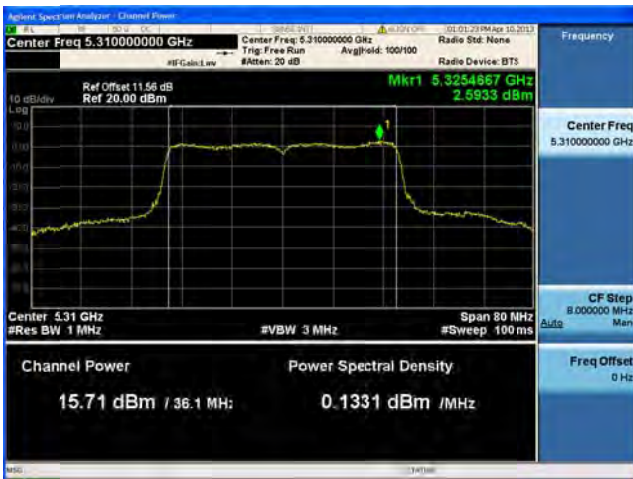

Antenna C



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

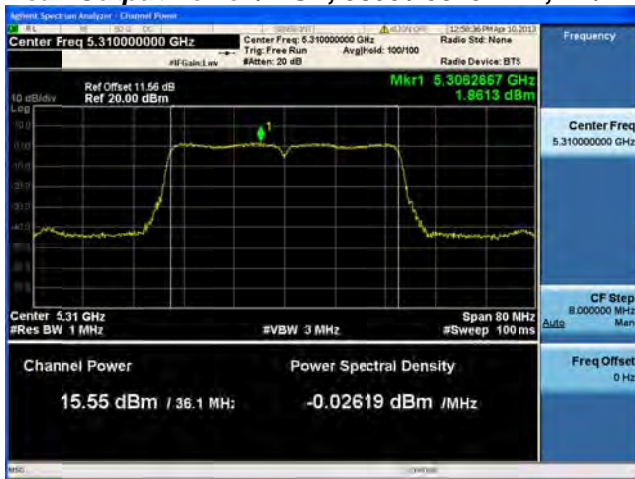

Antenna A




Antenna B



Antenna C




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

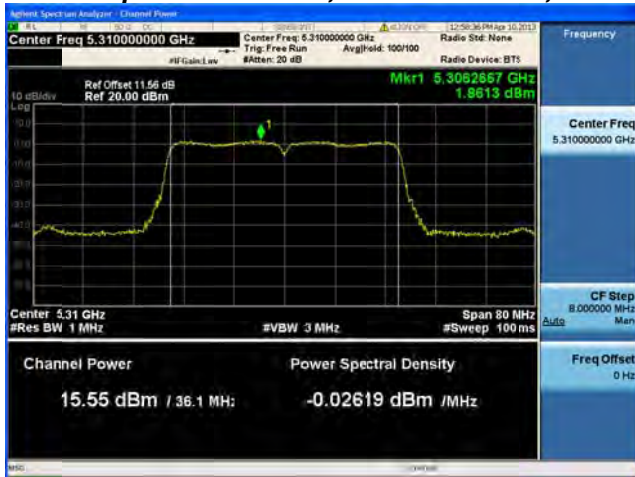

Antenna A



Antenna B

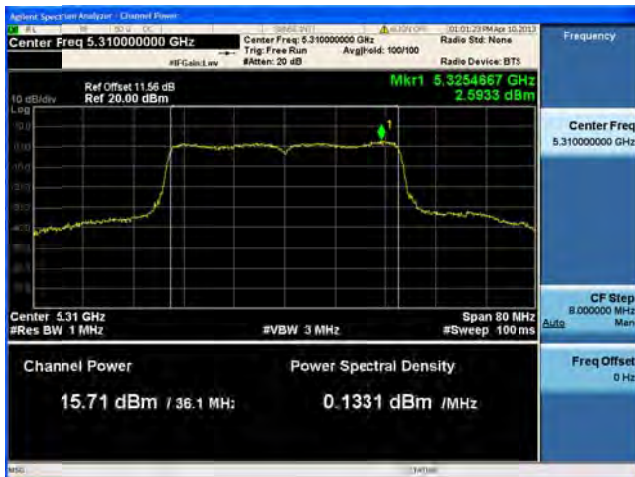

Antenna C



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B




Antenna C



Antenna D




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

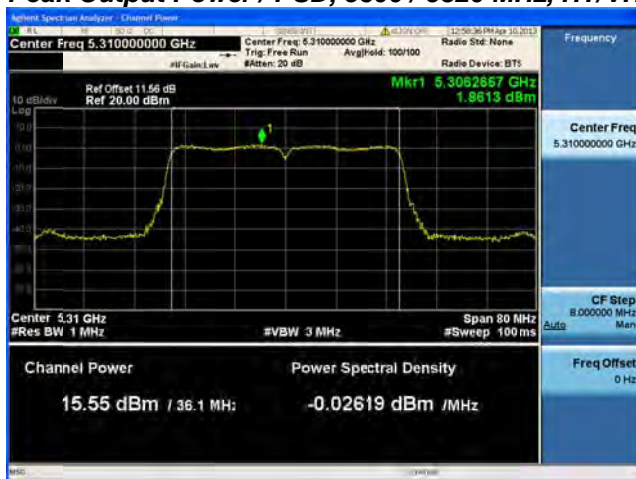

Antenna A



Antenna B

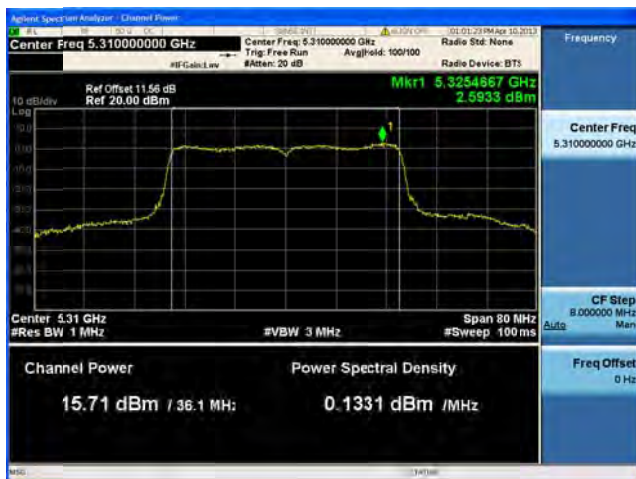


Antenna C



Antenna D




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

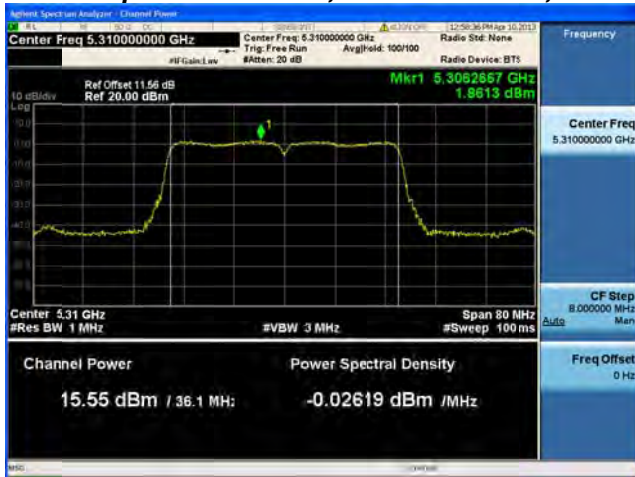

Antenna A



Antenna B

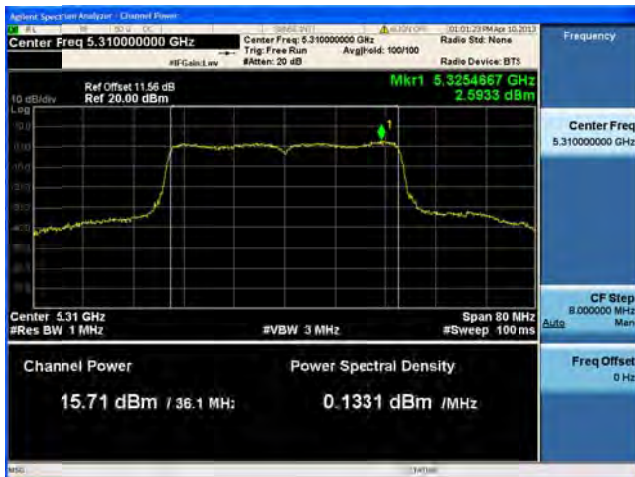


Antenna C



Antenna D



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

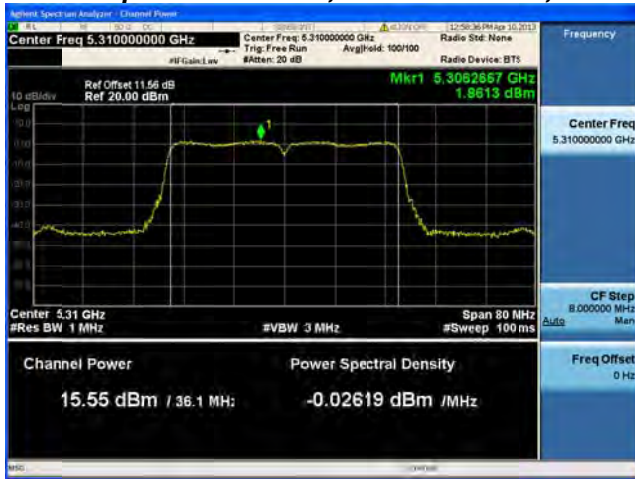


Antenna A



Antenna B



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

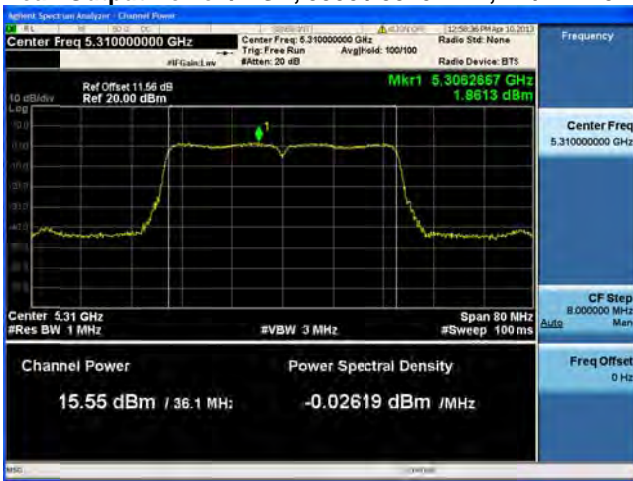


Antenna A



Antenna B



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

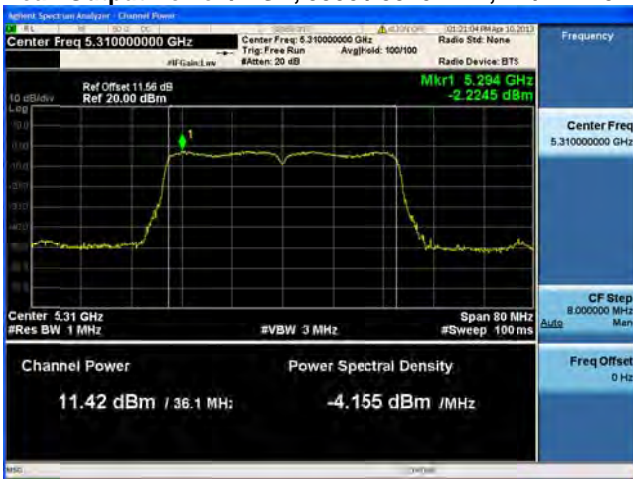

Antenna A




Antenna B



Antenna C



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

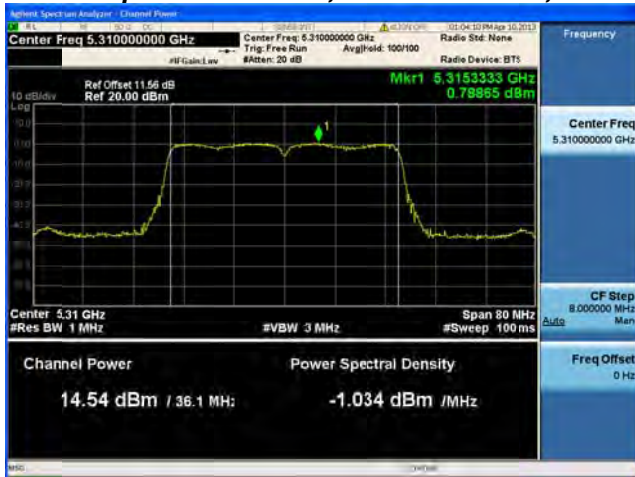

Antenna A




Antenna B



Antenna C




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3

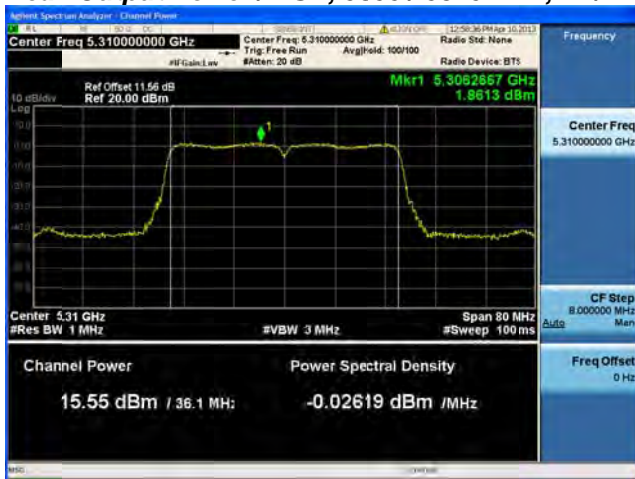

Antenna A



Antenna B

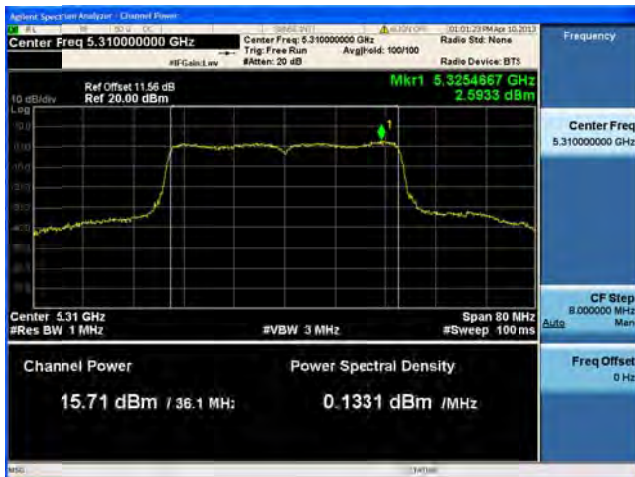

Antenna C




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B

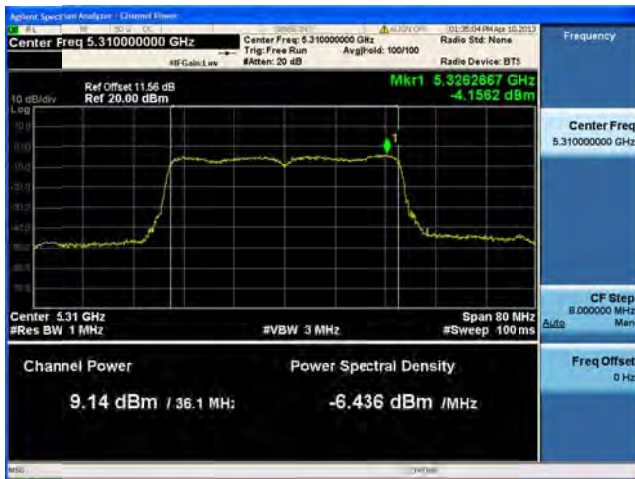


Antenna C

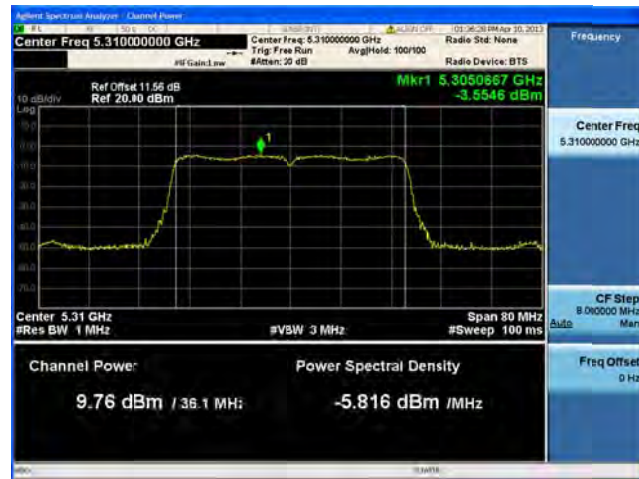

Antenna D



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2

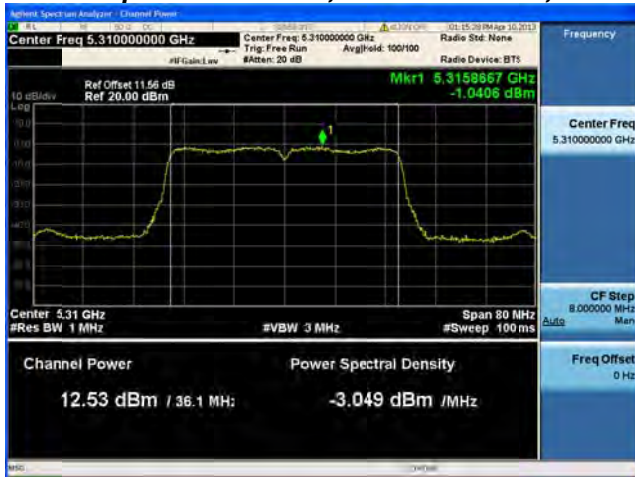


Antenna A



Antenna B



Antenna C

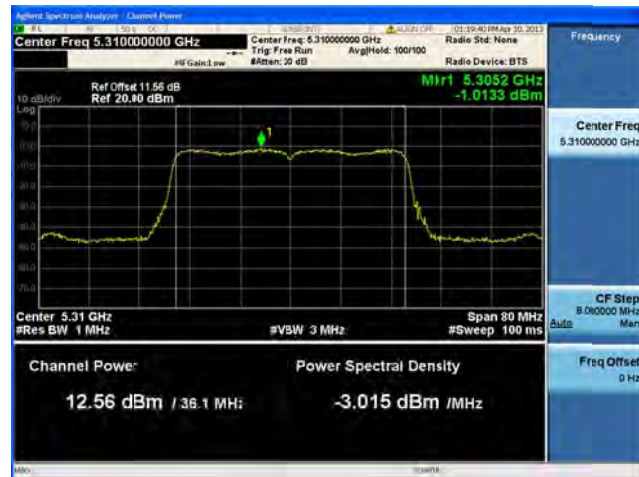

Antenna D



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3



Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

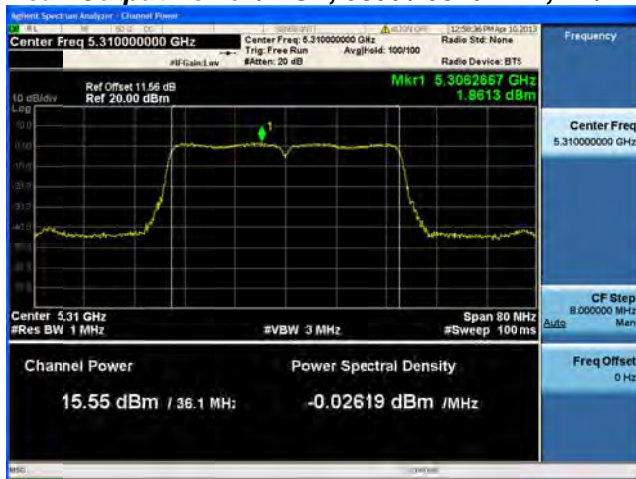


Antenna A



Antenna B




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

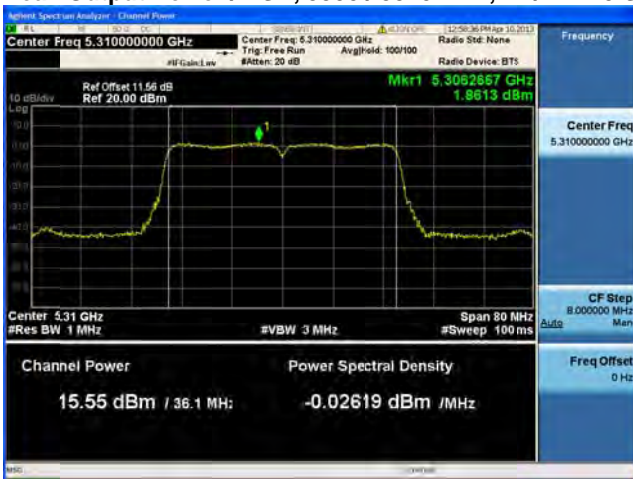

Antenna A




Antenna B

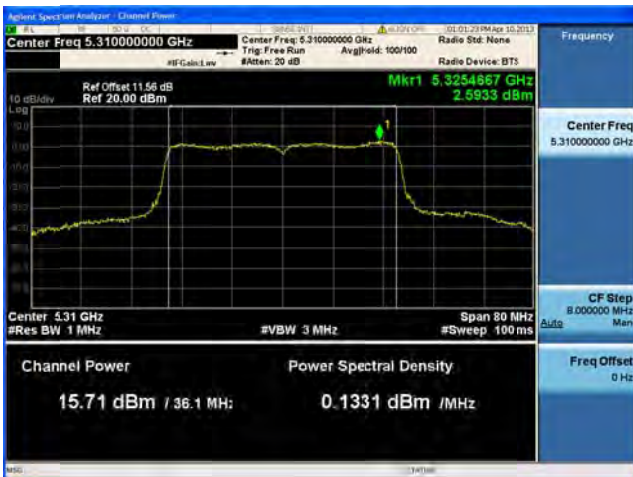

Antenna C




Peak Output Power / PSD, 5300 / 5320 MHz, HT/VHT40 STBC, M0 to M7, M0.1 to M9.1

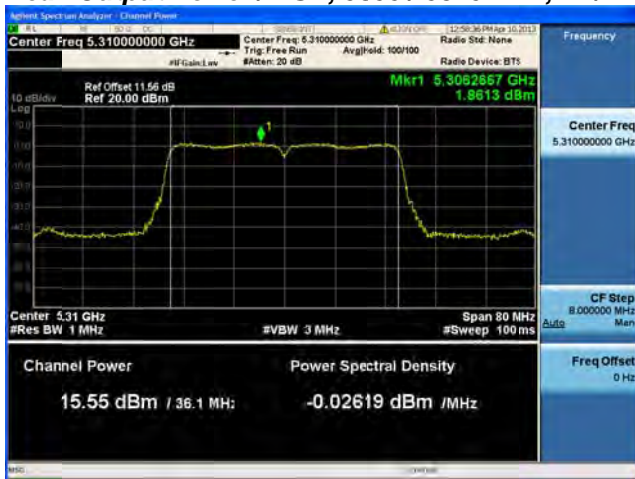

Antenna A



Antenna B

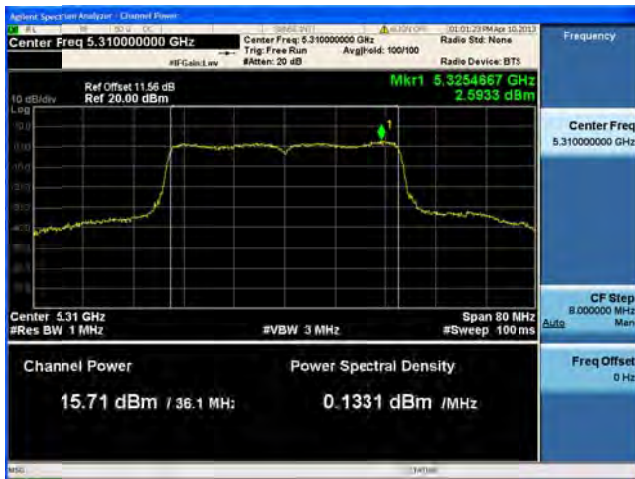


Antenna C



Antenna D




Peak Output Power / PSD, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps

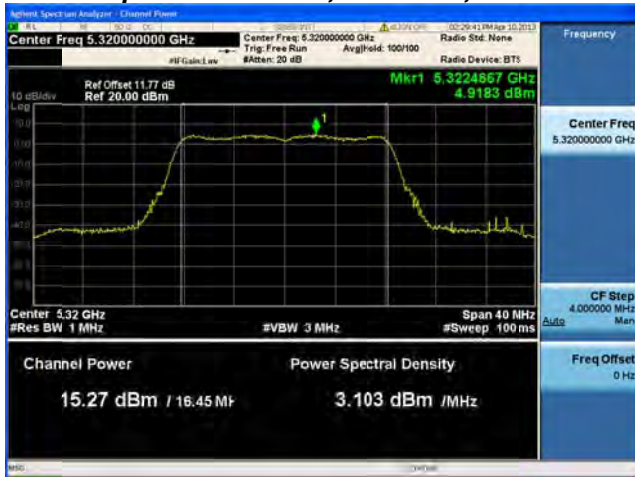

Antenna A



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps

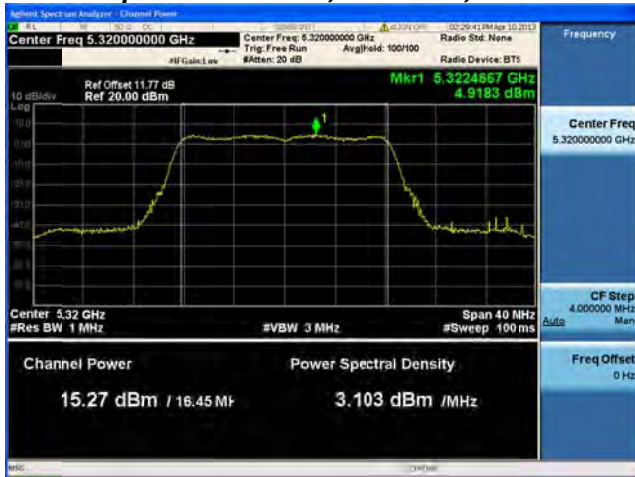


Antenna A




Antenna B



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps

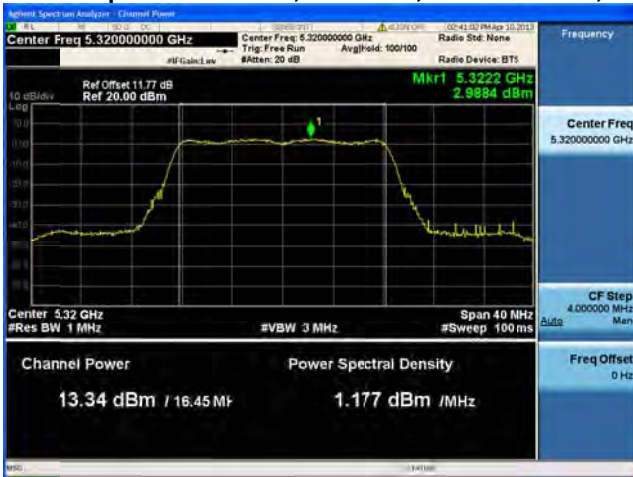

Antenna A

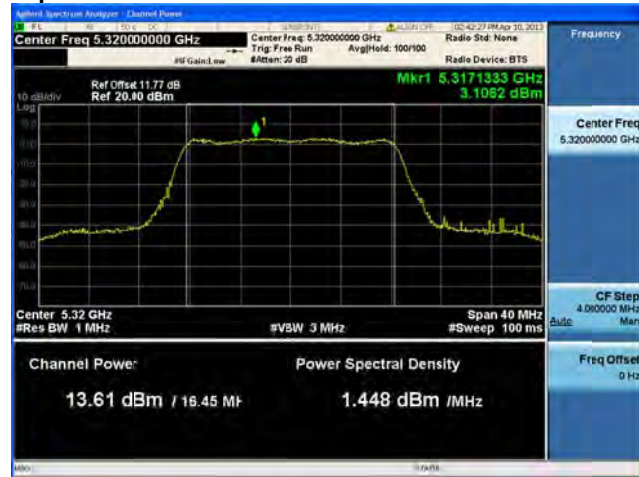

Antenna B



Antenna C



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps




Antenna A



Antenna B



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

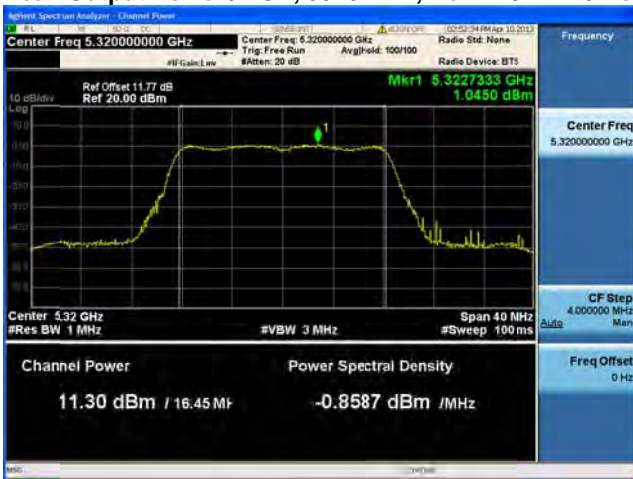

Antenna A



Antenna B




Antenna C



Peak Output Power / PSD, 5320 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps




Antenna A

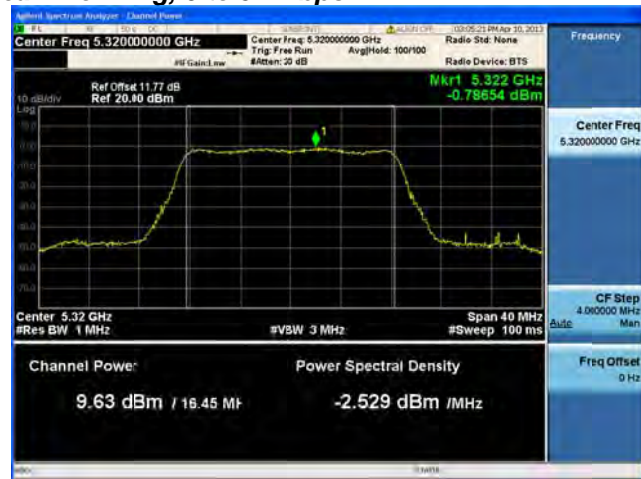

Antenna B




Antenna C

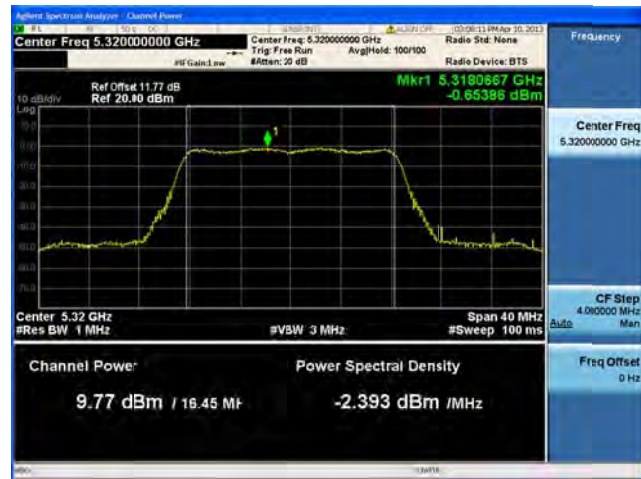

Antenna D




Peak Output Power / PSD, 5320 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

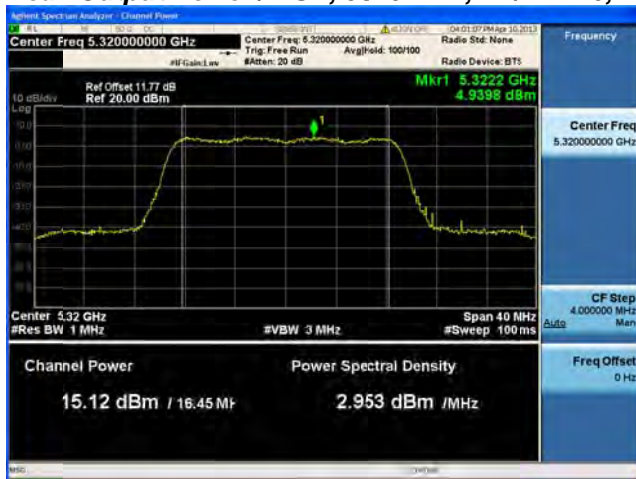

Antenna A



Peak Output Power / PSD, 5320 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

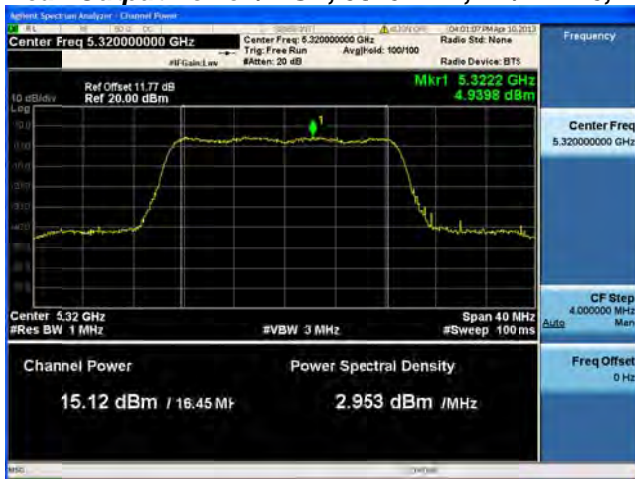

Antenna A



Antenna B



Peak Output Power / PSD, 5320 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B




Peak Output Power / PSD, 5320 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

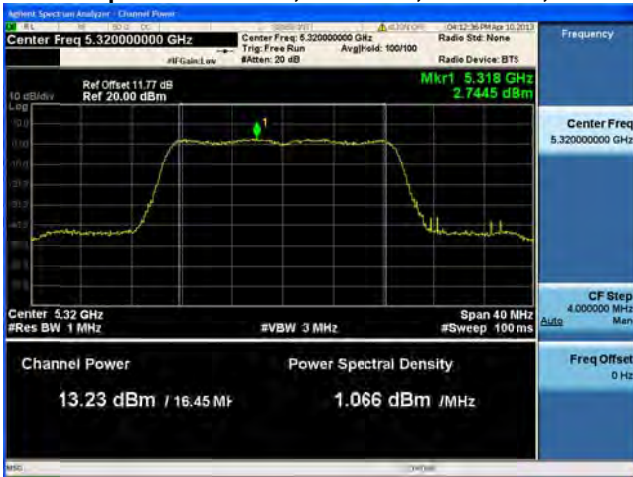

Antenna A




Antenna B

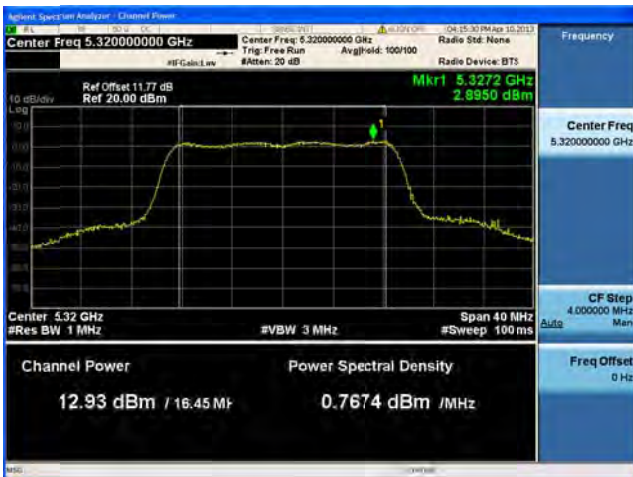


Antenna C



Peak Output Power / PSD, 5320 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

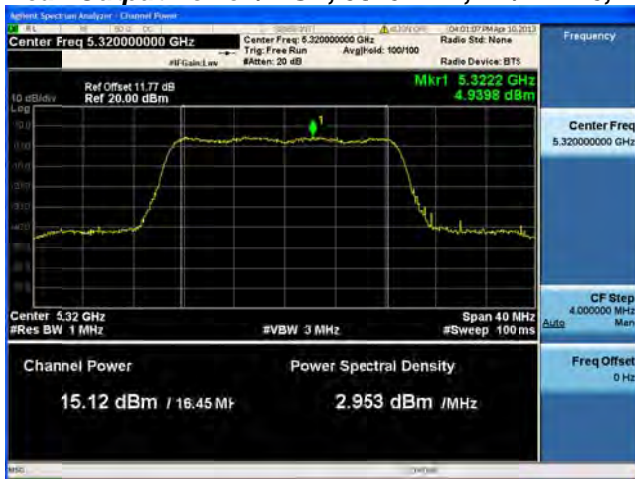

Antenna A

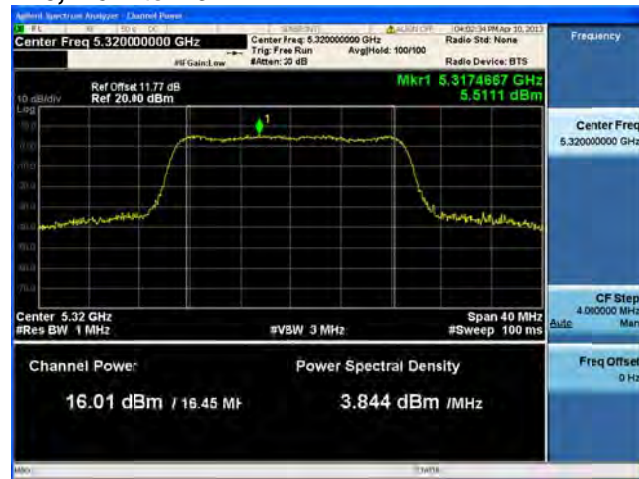


Antenna B



Antenna C




Peak Output Power / PSD, 5320 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

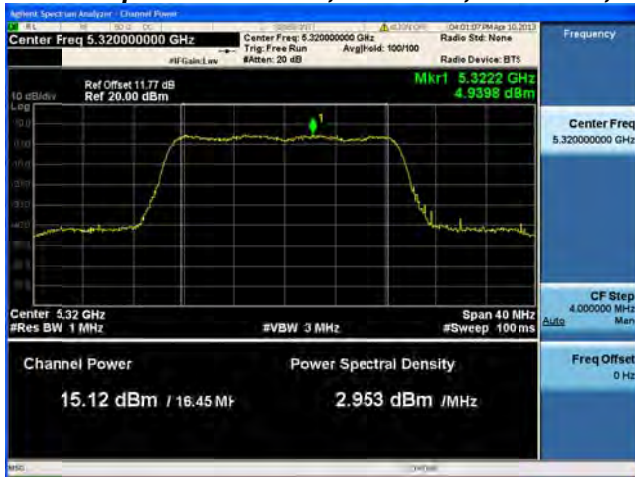

Antenna A




Antenna B

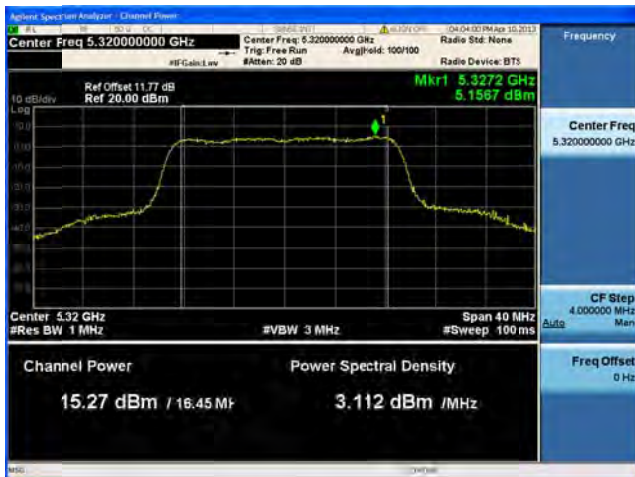

Antenna C



Peak Output Power / PSD, 5320 MHz, HT/VHT20, M0 to M7, M0.1 to M9.1

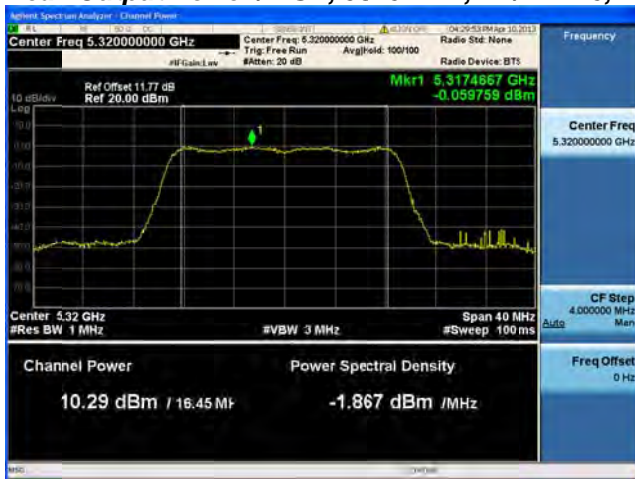

Antenna A



Antenna B




Antenna C



Antenna D




Peak Output Power / PSD, 5320 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

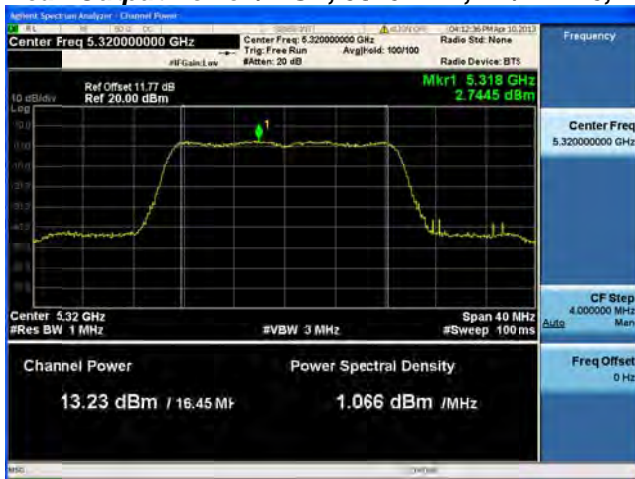


Antenna A



Antenna B

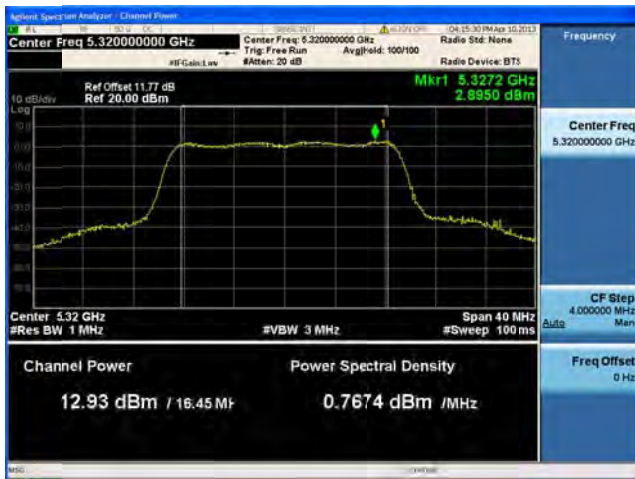


Antenna C

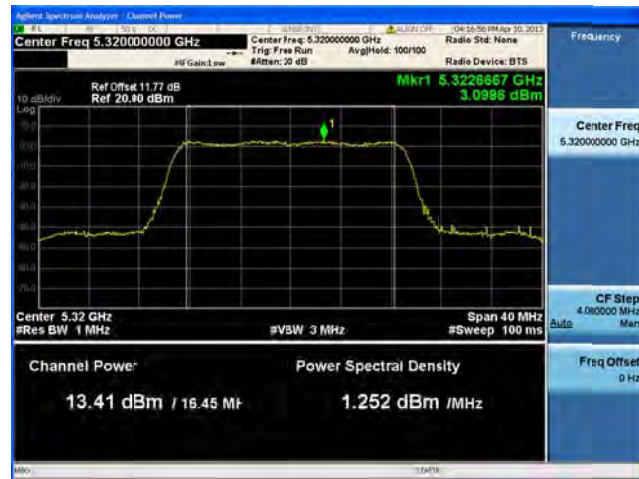

Antenna D



Peak Output Power / PSD, 5320 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

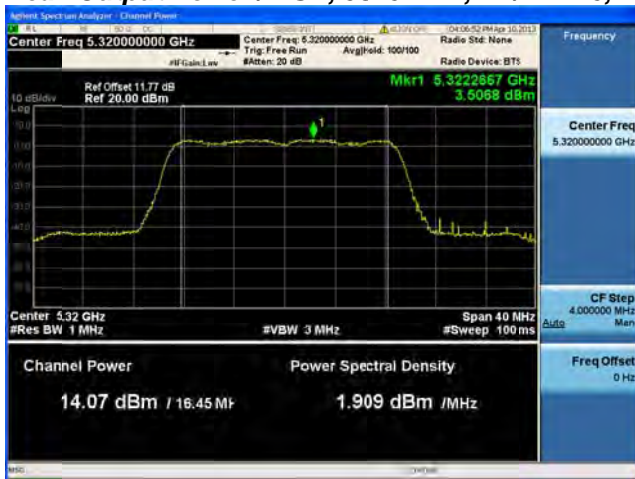

Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

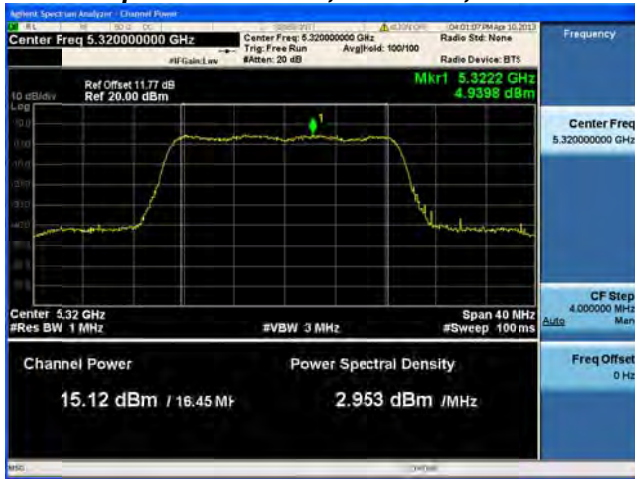

Antenna A



Antenna B



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2




Antenna A



Antenna B



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1

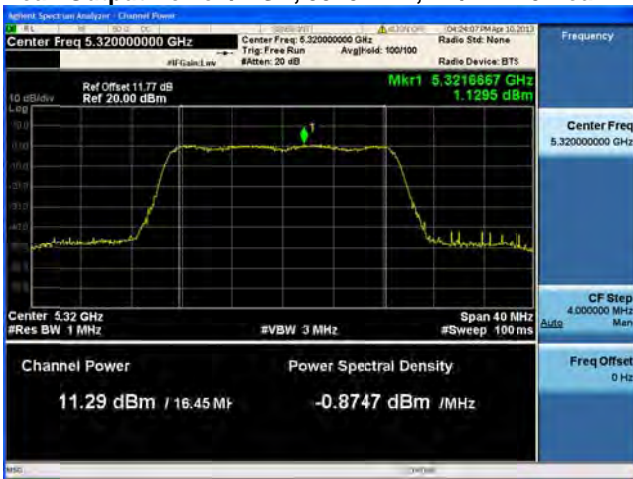

Antenna A




Antenna B




Antenna C



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2

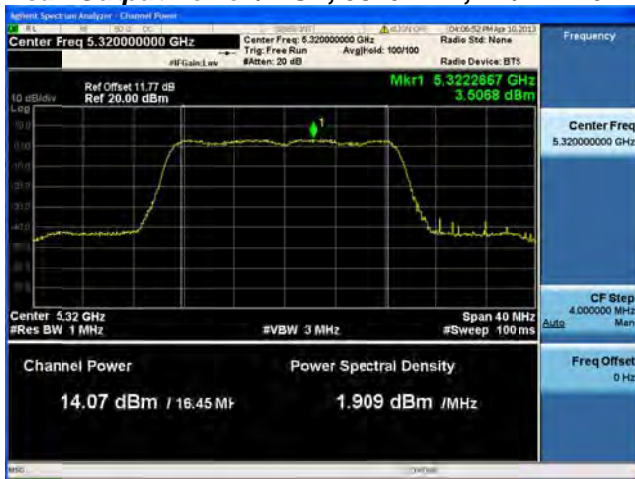

Antenna A

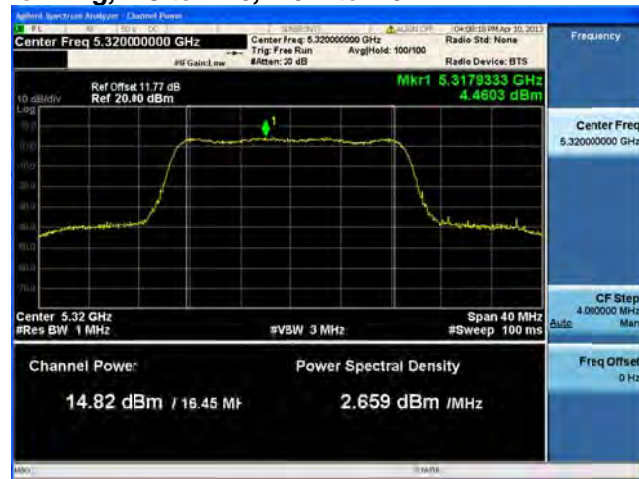


Antenna B



Antenna C




Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

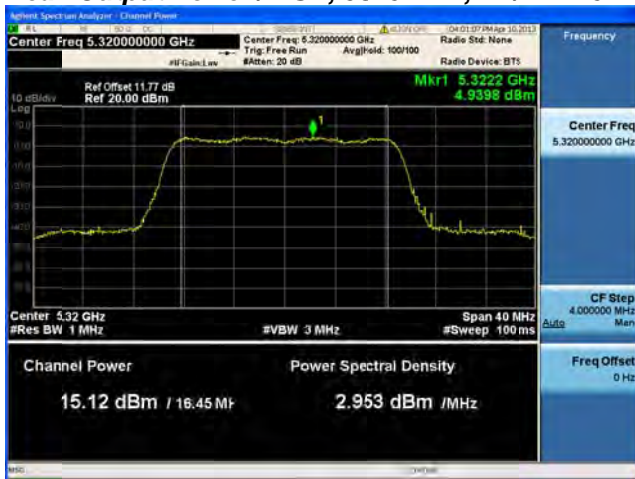

Antenna A



Antenna B

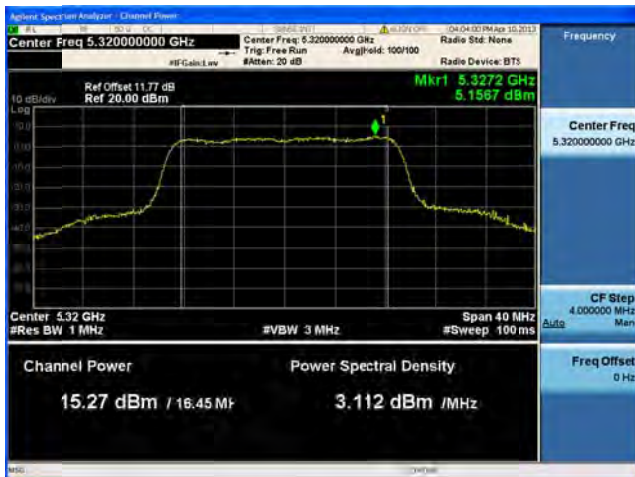

Antenna C



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2



Antenna A



Antenna B




Antenna C



Antenna D



Peak Output Power / PSD, 5320 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

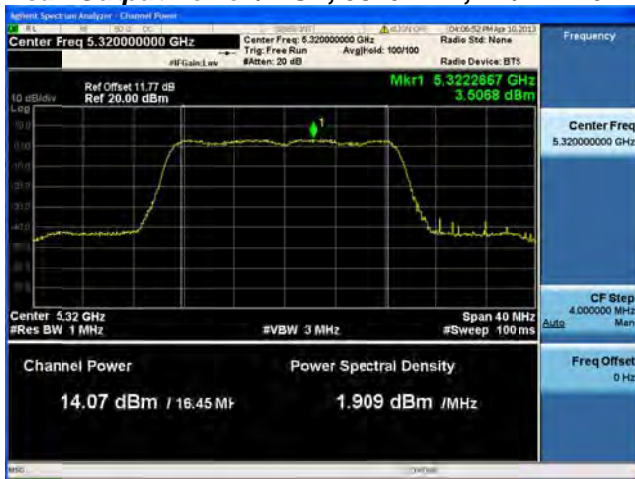

Antenna A



Antenna B



Antenna C



Antenna D



Peak Output Power / PSD, 5320 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1




Antenna A



Antenna B



Peak Output Power / PSD, 5320 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1

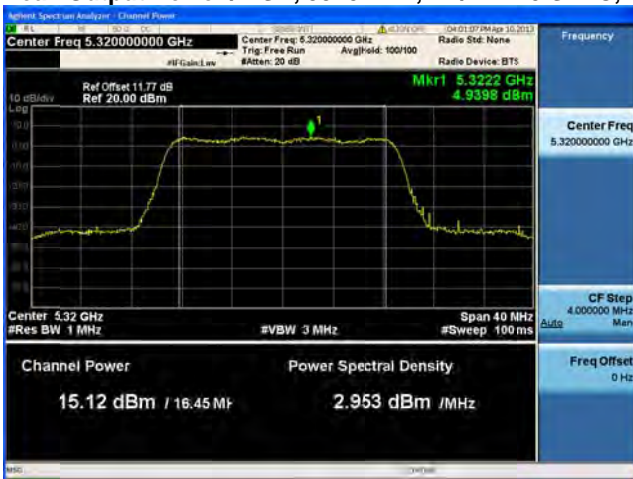

Antenna A



Antenna B



Antenna C



Peak Output Power / PSD, 5320 MHz, HT/VHT20 STBC, M0 to M7, M0.1 to M9.1



Antenna A



Antenna B



Antenna C



Antenna D



Conducted Spurious Emissions

15.407: For transmitters operating in the 5.25-5.35 and 5.47-5.725 GHz band: all emissions outside of the 5.25-5.35 and 5.47-5.725 GHz bands shall not exceed an EIRP of -27dBm/MHz.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

Span:	30 MHz-40 GHz
Reference Level:	20 dBm
Attenuation:	10 dB
Sweep Time:	10 s
Resolution Bandwidth:	1 MHz
Video Bandwidth:	3 MHz
Detector:	Peak
Trace:	Single
Marker:	Peak


Record the marker waveform peak to spur difference




Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Spurs Delta (MHz)	Limit (kHz)	Margin (MHz)
5260	Non HT/VHT20, 6 to 54 Mbps	2	10	<u>-52.3</u>	-39.3
	HT/VHT20, M0 to M23, M0.1 to M9.3	3	4	<u>-46.1</u>	-37.3
5260/5280	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>-50.4</u>	-46.4
	HT/VHT40, M0 to M23, M0.1 to M9.3	4	4	<u>-50.4</u>	-40.4
5260/5280 5300/5320	Non HT/VHT80, 6 to 54 Mbps	1	4	<u>-52.1</u>	-48.1
	HT/VHT80, M0 to M23, M0.1 to M9.3	3	4	<u>-47.4</u>	-38.6
5300/5320	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>-50.3</u>	-46.3
	HT/VHT40, M0 to M23, M0.1 to M9.3	4	4	<u>-47</u>	-37.0
5320	Non HT/VHT20, 6 to 54 Mbps	2	10	<u>-51.4</u>	-38.4
	HT/VHT20, M0 to M23, M0.1 to M9.3	4	4	<u>-47.1</u>	-37.1



Conducted Spurs, 5260 MHz, Non HT/VHT20, 6 to 54 Mbps

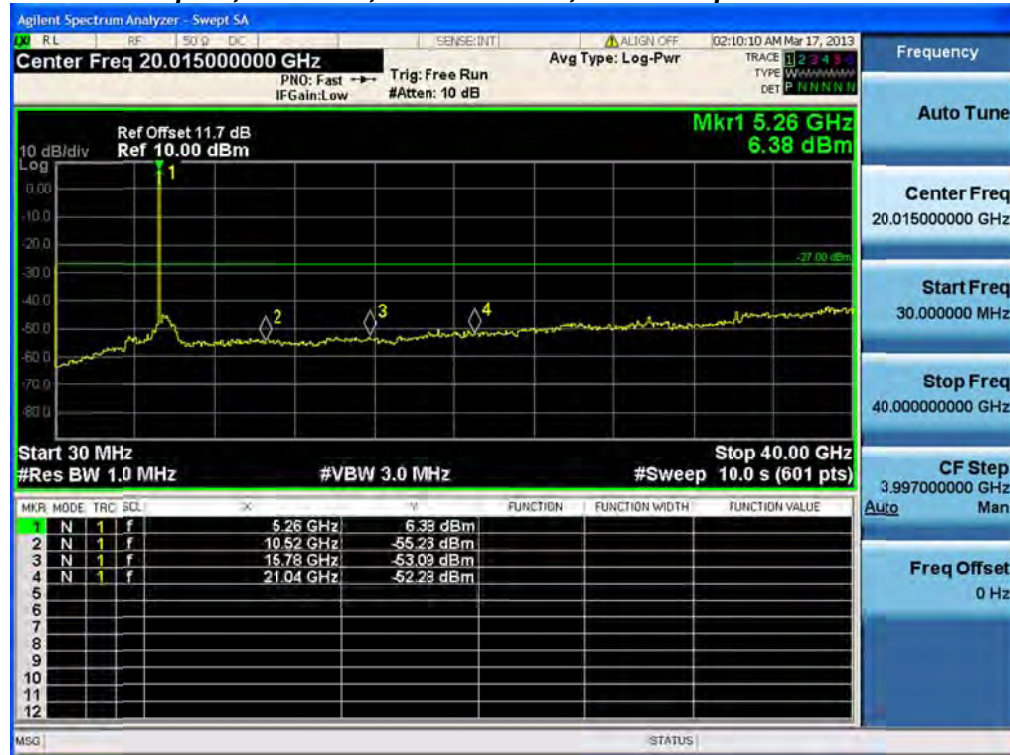


Conducted Spurs, 5260 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3

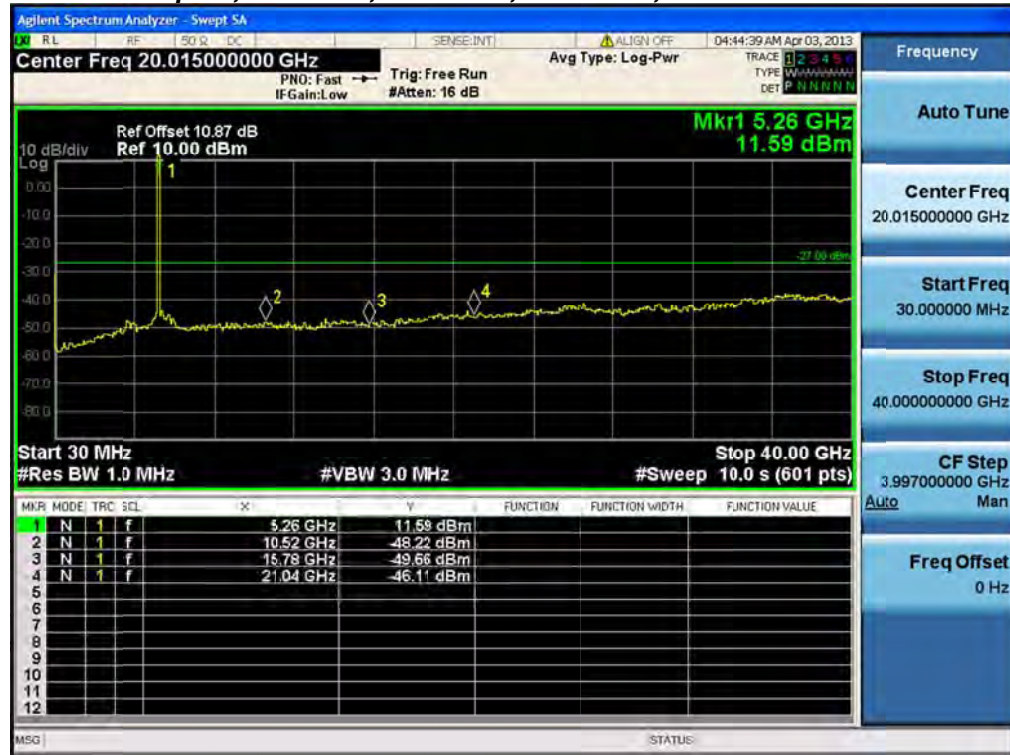




Conducted Spurs, 5260 / 5280 MHz, Non HT/VHT40, 6 to 54 Mbps

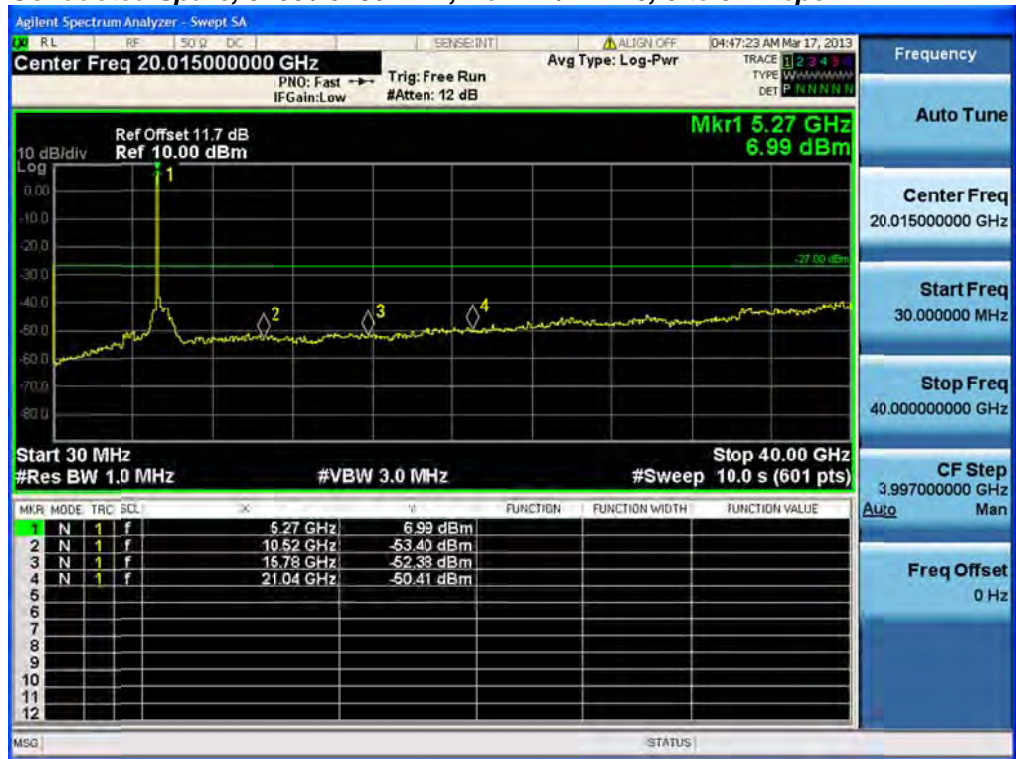


Conducted Spurs, 5260 / 5280 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

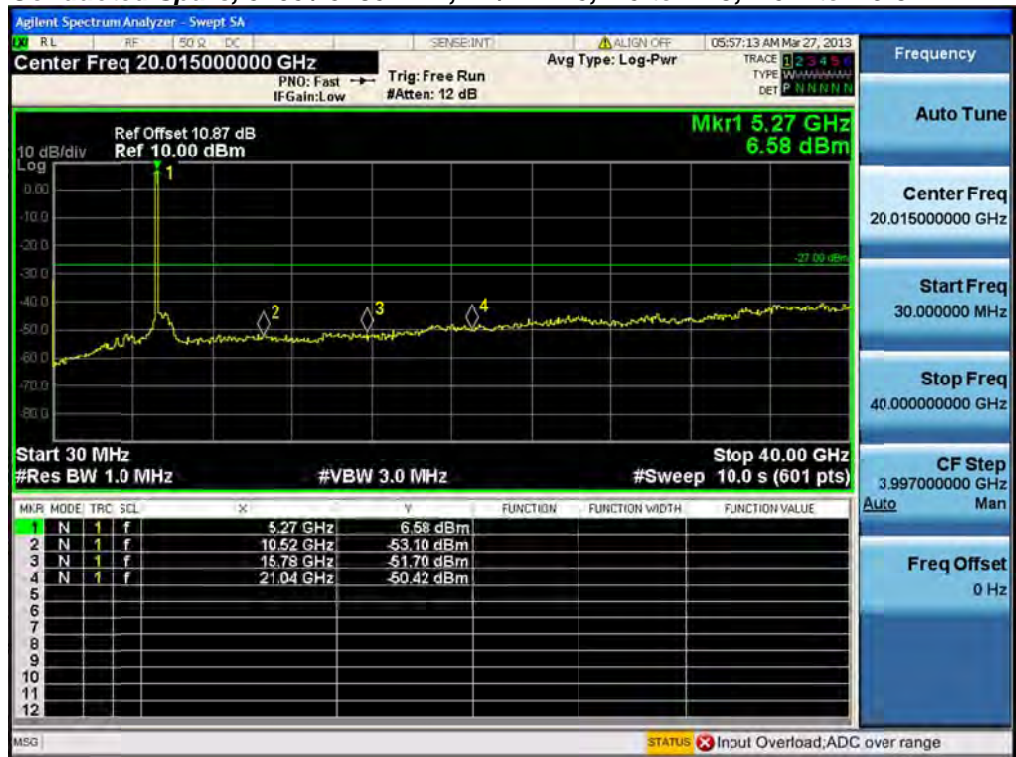



Conducted Spurs, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps

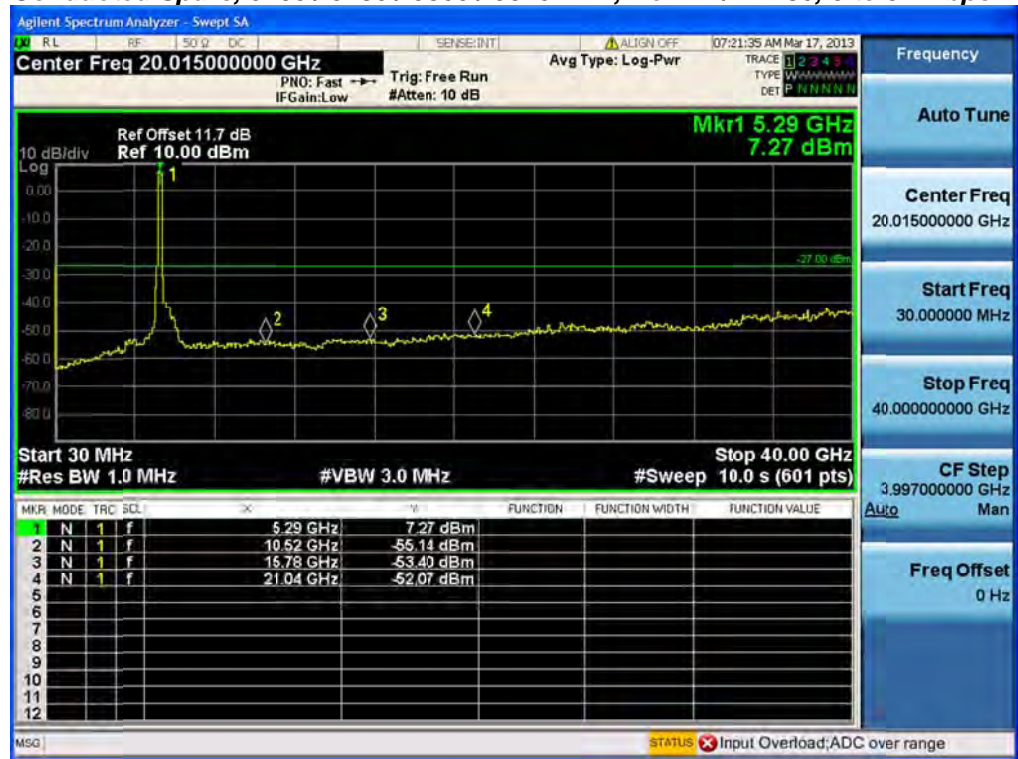


Conducted Spurs, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M23, M0.1 to M9.3






Conducted Spurs, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

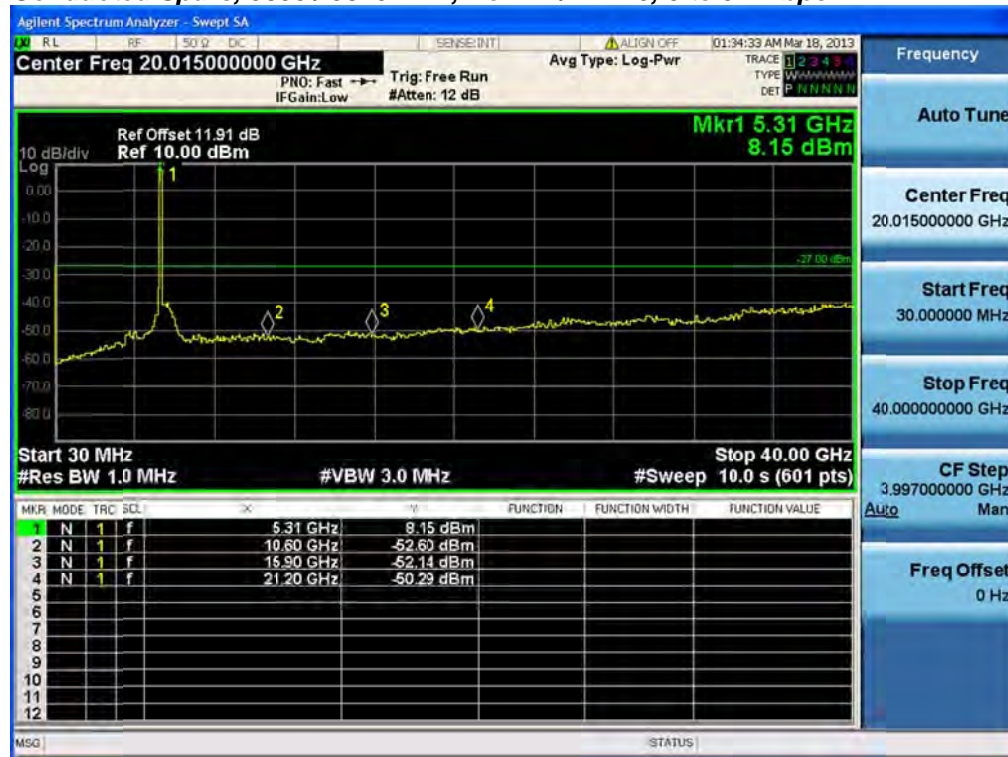


Conducted Spurs, 5300 / 5320 MHz, HT/VHT40, M0 to M23, M0.1 to M9.3

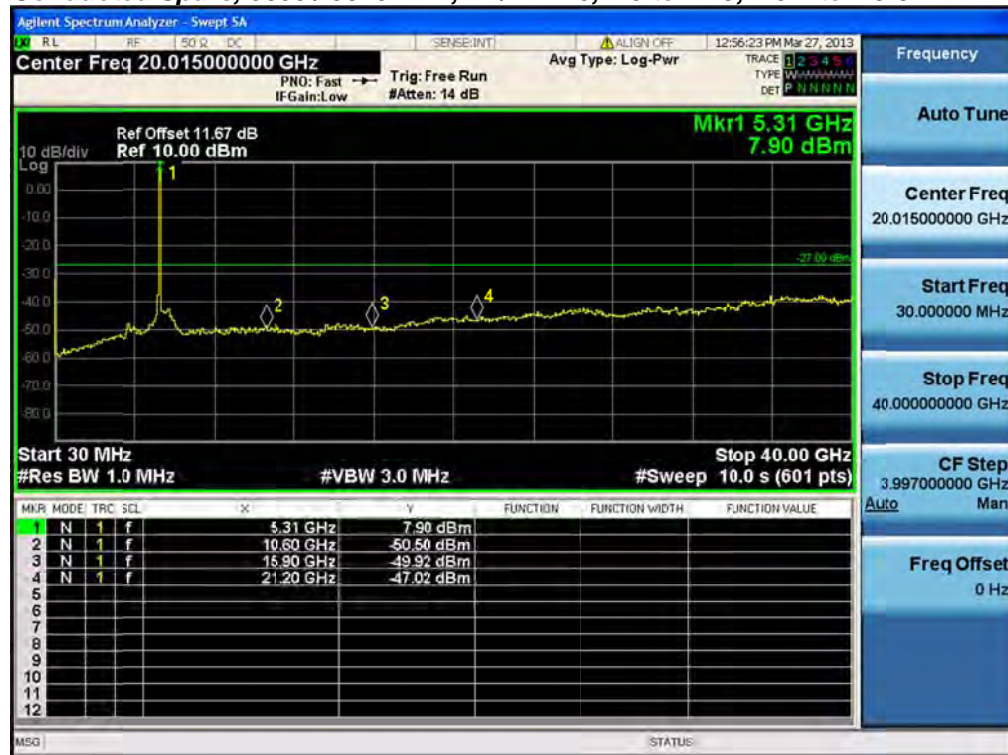




Conducted Spurs, 5320 MHz, Non HT/VHT20, 6 to 54 Mbps

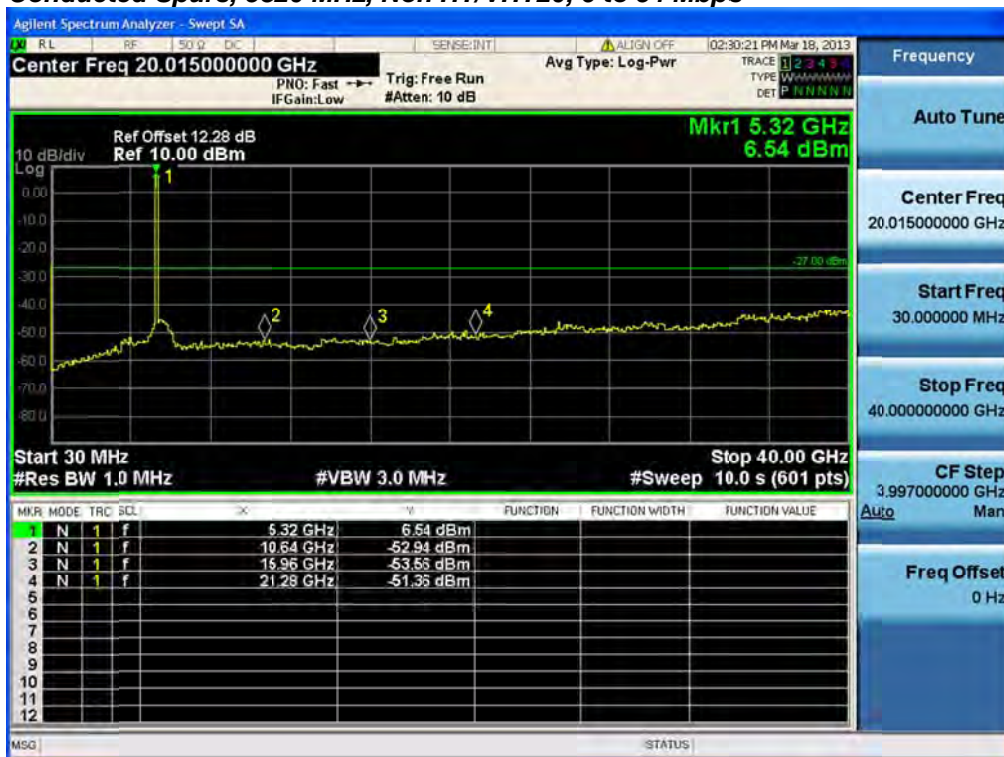

Conducted Spurs, 5320 MHz, HT/VHT20, M0 to M23, M0.1 to M9.3



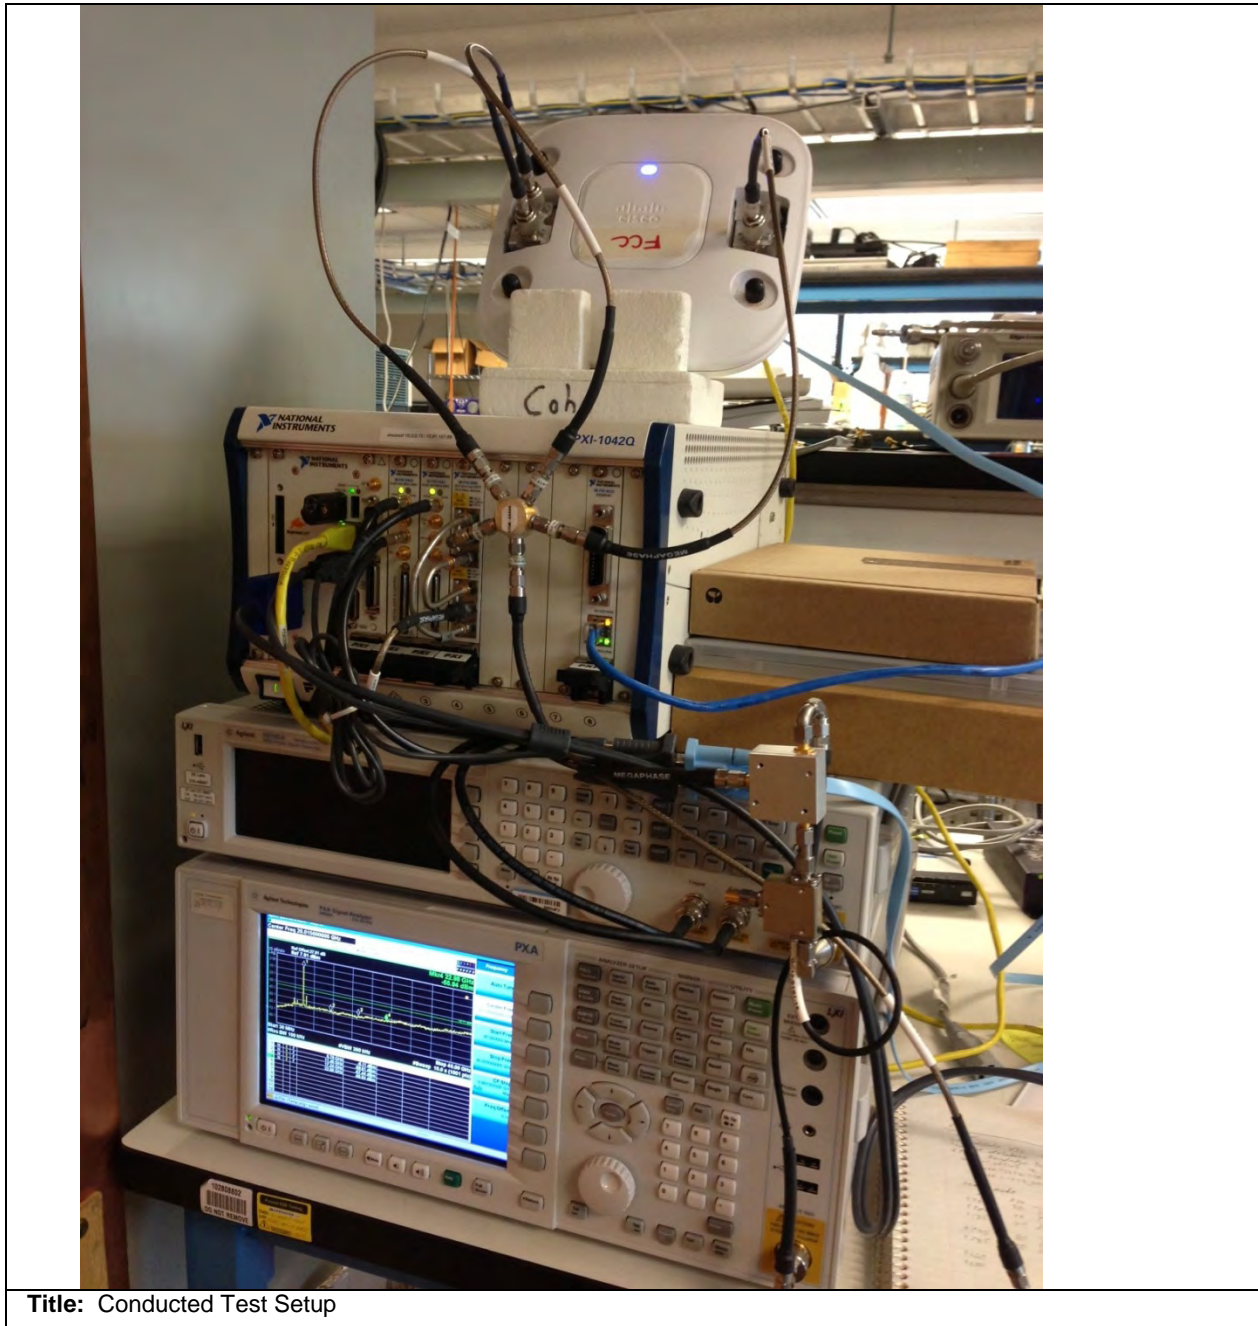

Title: Conducted Test Setup



Conducted Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use the procedures in 718828 D01 DTS Meas Guidance v01 to substitute conducted measurements in place of radiated measurements.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Be sure to enter all losses between the transmitter output and the spectrum analyzer.

Reference Level:	10 dBm
Attenuation:	4 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 100 Hz for average
Detector:	Peak

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= -41.25 dBm eirp (54dBuV @3m)
 2) Peak plot (Vertical and Horizontal), Limit = -21.25 dBm eirp (74dBuV @3m)

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

This report represents the worst case data for all supported operating modes and antennas.



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5260/5280/5300/5320	Non HT/VHT80, 6 to 54 Mbps	1	4	<u>-56.6</u>				-52.6	-41.25	11.4
	Non HT/VHT80, 6 to 54 Mbps	2	4	<u>-56.6</u>	<u>-49.4</u>			-44.6	-41.25	3.4
	Non HT/VHT80, 6 to 54 Mbps	3	4	<u>-59.4</u>	<u>-52.9</u>	<u>-48.5</u>		-42.9	-41.25	1.7
	Non HT/VHT80, 6 to 54 Mbps	4	4	<u>-59.4</u>	<u>-52.9</u>	<u>-48.5</u>	<u>-55.5</u>	-42.3	-41.25	1.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	4	<u>-52.2</u>				-48.2	-41.25	7.0
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	4	<u>-52.2</u>	<u>-49.2</u>			-43.4	-41.25	2.2
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	4	<u>-52.2</u>	<u>-49.2</u>			-43.4	-41.25	2.2
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>		-42.6	-41.25	1.3
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>		-42.6	-41.25	1.3
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>		-42.6	-41.25	1.3
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>	<u>-53.5</u>	-41.8	-41.25	0.5
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>	<u>-53.5</u>	-41.8	-41.25	0.5
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>	<u>-53.5</u>	-41.8	-41.25	0.5
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-55.6</u>	<u>-52.2</u>			-43.6	-41.25	2.3
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-52.2</u>	<u>-49.2</u>			-43.4	-41.25	2.2
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-58.2</u>	<u>-56.8</u>	<u>-63.6</u>		-45.1	-41.25	3.9
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-55.6</u>	<u>-52.2</u>	<u>-56.2</u>		-43.7	-41.25	2.5
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>		-42.6	-41.25	1.3
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-61.1</u>	<u>-58.1</u>	<u>-65.3</u>	<u>-63.1</u>	-45.1	-41.25	3.8
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-60.2</u>	<u>-57.5</u>	<u>-61.3</u>	<u>-60.9</u>	-46.7	-41.25	5.4
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-55.6</u>	<u>-52.2</u>	<u>-56.2</u>	<u>-56.2</u>	-43.5	-41.25	2.2
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-52.2</u>	<u>-49.2</u>			-43.4	-41.25	2.2	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>		-42.6	-41.25	1.3	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>-52.2</u>	<u>-49.2</u>	<u>-53.9</u>	<u>-53.5</u>	-41.8	-41.25	0.5	



5300/5320	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>-48.9</u>				-44.9	-41.25	3.7
	Non HT/VHT40, 6 to 54 Mbps	2	4	<u>-48.9</u>	<u>-52.5</u>			-43.3	-41.25	2.1
	Non HT/VHT40, 6 to 54 Mbps	3	4	<u>-48.9</u>	<u>-52.5</u>	<u>-55.6</u>		-42.7	-41.25	1.5
	Non HT/VHT40, 6 to 54 Mbps	4	4	<u>-56.4</u>	<u>-58.8</u>	<u>-57.3</u>	<u>-58.2</u>	-47.6	-41.25	6.3
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>-55.3</u>				-51.3	-41.25	10.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	4	<u>-55.3</u>	<u>-52.0</u>			-46.3	-41.25	5.1
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>-55.3</u>	<u>-52.0</u>			-46.3	-41.25	5.1
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>		-44.7	-41.25	3.5
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>		-44.7	-41.25	3.5
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>		-44.7	-41.25	3.5
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	4	<u>-57.5</u>	<u>-55.4</u>	<u>-59.8</u>	<u>-58.7</u>	-47.5	-41.25	6.3
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>	<u>-55.2</u>	-43.8	-41.25	2.6
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>	<u>-55.2</u>	-43.8	-41.25	2.6
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-55.3</u>	<u>-52.0</u>			-43.3	-41.25	2.1
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-55.3</u>	<u>-52.0</u>			-46.3	-41.25	5.1
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-63.2</u>	<u>-61.5</u>	<u>-60.7</u>		-48.1	-41.25	6.9
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-56.7</u>	<u>-53.8</u>	<u>-58.8</u>		-45.4	-41.25	4.1
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>		-44.7	-41.25	3.5
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-63.7</u>	<u>-63.4</u>	<u>-63.3</u>	<u>-65.7</u>	-47.9	-41.25	6.7
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-57.9</u>	<u>-56.8</u>	<u>-60.4</u>	<u>-59.6</u>	-45.4	-41.25	4.2
HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-56.7</u>	<u>-53.8</u>	<u>-58.8</u>	<u>-57.6</u>	-45.1	-41.25	3.8	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-55.3</u>	<u>-52.0</u>			-46.3	-41.25	5.1	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>		-44.7	-41.25	3.5	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>-55.3</u>	<u>-52.0</u>	<u>-53.8</u>	<u>-55.2</u>	-43.8	-41.25	2.6	
5320	Non HT/VHT20, 6 to 54 Mbps	1	4	<u>-63.8</u>				-59.8	-41.25	18.6
	Non HT/VHT20, 6 to 54 Mbps	2	4	<u>-63.8</u>	<u>-64.3</u>			-57.0	-41.25	15.8
	Non HT/VHT20, 6 to 54 Mbps	3	4	<u>-65.8</u>	<u>-66.6</u>	<u>-67.6</u>		-57.8	-41.25	16.6
	Non HT/VHT20, 6 to 54 Mbps	4	4	<u>-70.6</u>	<u>-70.3</u>	<u>-68.9</u>	<u>-70.8</u>	-60.1	-41.25	18.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	<u>-63.8</u>	<u>-64.3</u>			-54.0	-41.25	12.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	<u>-69.7</u>	<u>-69.8</u>	<u>-68.9</u>		-55.9	-41.25	14.6
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	<u>-71.0</u>	<u>-70.7</u>	<u>-69.6</u>	<u>-71.3</u>	-54.6	-41.25	13.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>-63.7</u>				-59.7	-41.25	18.5
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	4	<u>-63.7</u>	<u>-59.5</u>			-54.1	-41.25	12.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	<u>-63.7</u>	<u>-59.5</u>			-54.1	-41.25	12.9
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	4	<u>-65.8</u>	<u>-63.3</u>	<u>-68.2</u>		-56.5	-41.25	15.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	4	<u>-63.7</u>	<u>-59.5</u>	<u>-63.6</u>		-53.0	-41.25	11.8
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	<u>-63.7</u>	<u>-59.5</u>	<u>-63.6</u>		-53.0	-41.25	11.8
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	4	<u>-70.3</u>	<u>-68.3</u>	<u>-69.8</u>	<u>-69.9</u>	-59.5	-41.25	18.2
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	4	<u>-65.8</u>	<u>-63.3</u>	<u>-68.2</u>	<u>-66.1</u>	-55.5	-41.25	14.2
HT/VHT20, M16 to M23, M0.3 to M9.3	4	4	<u>-64.9</u>	<u>-62.2</u>	<u>-67.0</u>	<u>-64.8</u>	-54.4	-41.25	13.1	



HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-63.7</u>	<u>-59.5</u>				-51.1	-41.25	9.9
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-63.7</u>	<u>-59.5</u>				-54.1	-41.25	12.9
HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-69.8</u>	<u>-68.0</u>	<u>-69.5</u>			-55.5	-41.25	14.2
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-64.9</u>	<u>-62.2</u>	<u>-67.0</u>			-53.7	-41.25	12.4
HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-63.7</u>	<u>-59.5</u>	<u>-63.6</u>			-53.0	-41.25	11.8
HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-70.8</u>	<u>-69.4</u>	<u>-70.5</u>	<u>-71.5</u>		-54.5	-41.25	13.2
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-67.5</u>	<u>-65.8</u>	<u>-68.9</u>	<u>-66.8</u>		-54.1	-41.25	12.8
HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-64.9</u>	<u>-62.2</u>	<u>-67.0</u>	<u>-64.8</u>		-53.2	-41.25	11.9
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-63.7</u>	<u>-59.5</u>				-54.1	-41.25	12.9
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>-63.7</u>	<u>-59.5</u>	<u>-63.6</u>			-53.0	-41.25	11.8
HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>-65.8</u>	<u>-63.3</u>	<u>-68.2</u>	<u>17.0</u>		21.0	15	-6.0



Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5260/5280/5300/5320	Non HT/VHT80, 6 to 54 Mbps	1	4	-43.5				-39.5	-21.25	18.3
	Non HT/VHT80, 6 to 54 Mbps	2	4	-43.5	-35.0			-30.4	-21.25	9.2
	Non HT/VHT80, 6 to 54 Mbps	3	4	-47.3	-37.2	-39.2		-30.8	-21.25	9.6
	Non HT/VHT80, 6 to 54 Mbps	4	4	-47.3	-37.2	-39.2	-38.6	-29.3	-21.25	8.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	1	4	-36.8				-32.8	-21.25	11.6
	HT/VHT80, M0 to M7, M0.1 to M9.1	2	4	-36.8	-35.8			-29.3	-21.25	8.0
	HT/VHT80, M8 to M15, M0.2 to M9.2	2	4	-36.8	-35.8			-29.3	-21.25	8.0
	HT/VHT80, M0 to M7, M0.1 to M9.1	3	4	-36.8	-35.8	-39.8		-28.4	-21.25	7.1
	HT/VHT80, M8 to M15, M0.2 to M9.2	3	4	-36.8	-35.8	-39.8		-28.4	-21.25	7.1
	HT/VHT80, M16 to M23, M0.3 to M9.3	3	4	-36.8	-35.8	-39.8		-28.4	-21.25	7.1
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	4	-36.8	-35.8	-39.8	-40.2	-27.7	-21.25	6.5
	HT/VHT80, M8 to M15, M0.2 to M9.2	4	4	-36.8	-35.8	-39.8	-40.2	-27.7	-21.25	6.5
	HT/VHT80, M16 to M23, M0.3 to M9.3	4	4	-36.8	-35.8	-39.8	-40.2	-27.7	-21.25	6.5
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	-41.6	-38.6			-29.8	-21.25	8.6
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	-36.8	-35.8			-29.3	-21.25	8.0
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	-43.2	-42.8	-51.1		-30.9	-21.25	9.6
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	-41.6	-38.6	-41.3		-29.7	-21.25	8.5
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	-36.8	-35.8	-39.8		-28.4	-21.25	7.1
	HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	-47.6	-44.4	-52.3	-49.0	-31.4	-21.25	10.2
	HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	-47.5	-47.2	-49.5	-49.2	-35.2	-21.25	14.0
	HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	-41.6	-38.6	-41.3	-44.2	-29.8	-21.25	8.5
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	2	4	-36.8	-35.8			-29.3	-21.25	8.0	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	3	4	-36.8	-35.8	-39.8		-28.4	-21.25	7.1	
HT/VHT80 STBC, M0 to M7, M0.1 to M9.1	4	4	-36.8	-35.8	-39.8	-40.2	-27.7	-21.25	6.5	



5300/5320	Non HT/VHT40, 6 to 54 Mbps	1	4	<u>-33.3</u>				-29.3	-21.25	8.1
	Non HT/VHT40, 6 to 54 Mbps	2	4	<u>-33.3</u>	<u>-37.8</u>			-28.0	-21.25	6.7
	Non HT/VHT40, 6 to 54 Mbps	3	4	<u>-33.3</u>	<u>-37.8</u>	<u>-35.8</u>		-26.5	-21.25	5.2
	Non HT/VHT40, 6 to 54 Mbps	4	4	<u>-42.2</u>	<u>-40.7</u>	<u>-44.0</u>	<u>-46.5</u>	-32.8	-21.25	11.6
	HT/VHT40, M0 to M7, M0.1 to M9.1	1	4	<u>-39.4</u>				-35.4	-21.25	14.2
	HT/VHT40, M0 to M7, M0.1 to M9.1	2	4	<u>-39.4</u>	<u>-35.9</u>			-30.3	-21.25	9.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	2	4	<u>-39.4</u>	<u>-35.9</u>			-30.3	-21.25	9.0
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>		-30.0	-21.25	8.8
	HT/VHT40, M8 to M15, M0.2 to M9.2	3	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>		-30.0	-21.25	8.8
	HT/VHT40, M16 to M23, M0.3 to M9.3	3	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>		-30.0	-21.25	8.8
	HT/VHT40, M0 to M7, M0.1 to M9.1	4	4	<u>-47.5</u>	<u>-44.8</u>	<u>-51.9</u>	<u>-47.5</u>	-37.2	-21.25	16.0
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>	<u>-40.1</u>	-29.1	-21.25	7.8
	HT/VHT40, M16 to M23, M0.3 to M9.3	4	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>	<u>-40.1</u>	-29.1	-21.25	7.8
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-39.4</u>	<u>-35.9</u>			-27.3	-21.25	6.0
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-39.4</u>	<u>-35.9</u>			-30.3	-21.25	9.0
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-45.4</u>	<u>-48.4</u>	<u>-56.4</u>		-34.6	-21.25	13.4
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-44.7</u>	<u>-40.3</u>	<u>-49.9</u>		-32.8	-21.25	11.6
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>		-30.0	-21.25	8.8
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-54.9</u>	<u>-55.3</u>	<u>-57.5</u>	<u>-55.2</u>	-39.6	-21.25	18.3
	HT/VHT40 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-46.2</u>	<u>-47.3</u>	<u>-46.1</u>	<u>-51.3</u>	-34.3	-21.25	13.0
HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-44.7</u>	<u>-40.3</u>	<u>-49.9</u>	<u>-44.0</u>	-32.3	-21.25	11.1	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-39.4</u>	<u>-35.9</u>			-30.3	-21.25	9.0	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>		-30.0	-21.25	8.8	
HT/VHT40 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>-39.4</u>	<u>-35.9</u>	<u>-46.0</u>	<u>-40.1</u>	-29.1	-21.25	7.8	
5320	Non HT/VHT20, 6 to 54 Mbps	1	4	<u>-51.9</u>				-47.9	-21.25	26.7
	Non HT/VHT20, 6 to 54 Mbps	2	4	<u>-51.9</u>	<u>-54.7</u>			-46.1	-21.25	24.8
	Non HT/VHT20, 6 to 54 Mbps	3	4	<u>-52.7</u>	<u>-55.0</u>	<u>-57.2</u>		-45.8	-21.25	24.6
	Non HT/VHT20, 6 to 54 Mbps	4	4	<u>-60.4</u>	<u>-63.2</u>	<u>-60.7</u>	<u>-60.6</u>	-51.1	-21.25	29.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	7	<u>-51.9</u>	<u>-54.7</u>			-43.1	-21.25	21.8
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	3	9	<u>-60.4</u>	<u>-61.1</u>	<u>-60.7</u>		-47.2	-21.25	25.9
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	10	<u>-59.2</u>	<u>-63.5</u>	<u>-60.3</u>	<u>-60.9</u>	-44.7	-21.25	23.4
	HT/VHT20, M0 to M7, M0.1 to M9.1	1	4	<u>-43.9</u>				-39.9	-21.25	18.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	2	4	<u>-43.9</u>	<u>-43.2</u>			-36.5	-21.25	15.3
	HT/VHT20, M8 to M15, M0.2 to M9.2	2	4	<u>-43.9</u>	<u>-43.2</u>			-36.5	-21.25	15.3
	HT/VHT20, M0 to M7, M0.1 to M9.1	3	4	<u>-53.7</u>	<u>-49.6</u>	<u>-57.3</u>		-43.7	-21.25	22.4
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	4	<u>-43.9</u>	<u>-43.2</u>	<u>-48.7</u>		-35.9	-21.25	14.7
	HT/VHT20, M16 to M23, M0.3 to M9.3	3	4	<u>-43.9</u>	<u>-43.2</u>	<u>-48.7</u>		-35.9	-21.25	14.7
	HT/VHT20, M0 to M7, M0.1 to M9.1	4	4	<u>-61.2</u>	<u>-57.6</u>	<u>-61.2</u>	<u>-62.2</u>	-50.1	-21.25	28.9
	HT/VHT20, M8 to M15, M0.2 to M9.2	4	4	<u>-53.7</u>	<u>-49.6</u>	<u>-57.3</u>	<u>-55.1</u>	-43.0	-21.25	21.7
HT/VHT20, M16 to M23, M0.3 to M9.3	4	4	<u>-53.5</u>	<u>-45.8</u>	<u>-54.2</u>	<u>-50.5</u>	-39.6	-21.25	18.4	



HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	2	7	<u>-43.9</u>	<u>-43.2</u>			-33.5	-21.25	12.3
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	2	4	<u>-43.9</u>	<u>-43.2</u>			-36.5	-21.25	15.3
HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	3	9	<u>-61.1</u>	<u>-57.6</u>	<u>-58.1</u>		-45.1	-21.25	23.9
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	3	6	<u>-53.5</u>	<u>-45.8</u>	<u>-54.2</u>		-38.8	-21.25	17.6
HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	4	<u>-43.9</u>	<u>-43.2</u>	<u>-48.7</u>		-35.9	-21.25	14.7
HT/VHT20 Beam Forming, M0 to M7, M0.1 to M9.1	4	10	<u>-62.5</u>	<u>-61.4</u>	<u>-59.2</u>	<u>-64.1</u>	-45.4	-21.25	24.2
HT/VHT20 Beam Forming, M8 to M15, M0.2 to M9.2	4	7	<u>-54.9</u>	<u>-50.5</u>	<u>-57.8</u>	<u>-57.4</u>	-41.1	-21.25	19.8
HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	5	<u>-53.5</u>	<u>-45.8</u>	<u>-54.2</u>	<u>-50.5</u>	-38.4	-21.25	17.2
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	2	4	<u>-43.9</u>	<u>-43.2</u>			-36.5	-21.25	15.3
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	3	4	<u>-43.9</u>	<u>-43.2</u>	<u>-48.7</u>		-35.9	-21.25	14.7
HT/VHT20 STBC, M0 to M7, M0.1 to M9.1	4	4	<u>-53.7</u>	<u>-49.6</u>	<u>-57.3</u>	<u>-55.1</u>	-43.0	-21.25	21.7



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Antenna B




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps



Antenna A



Antenna B

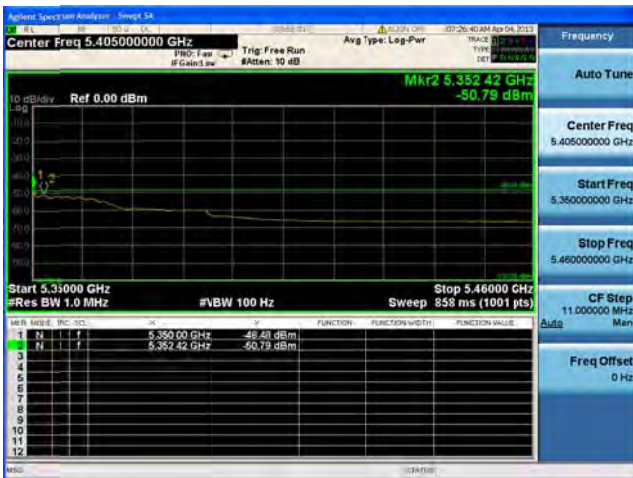

Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, Non HT/VHT80, 6 to 54 Mbps




Antenna A



Antenna B

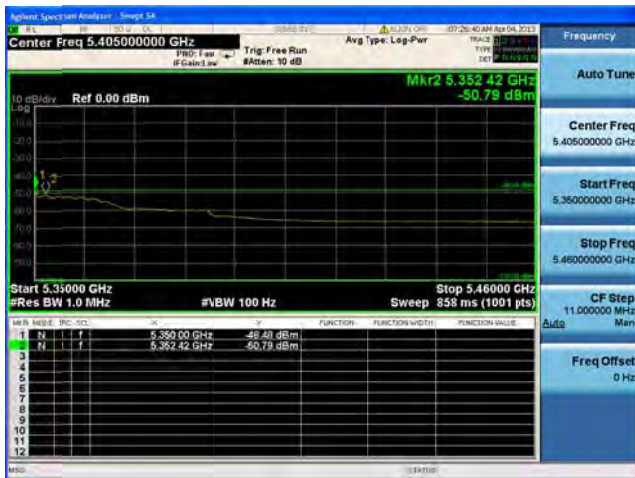


Antenna C

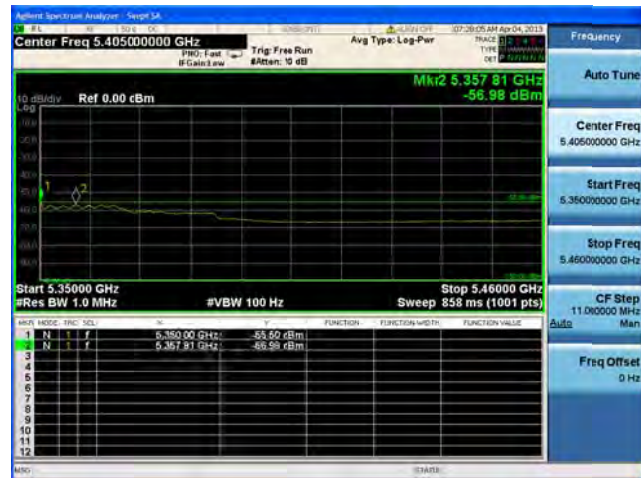

Antenna D




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

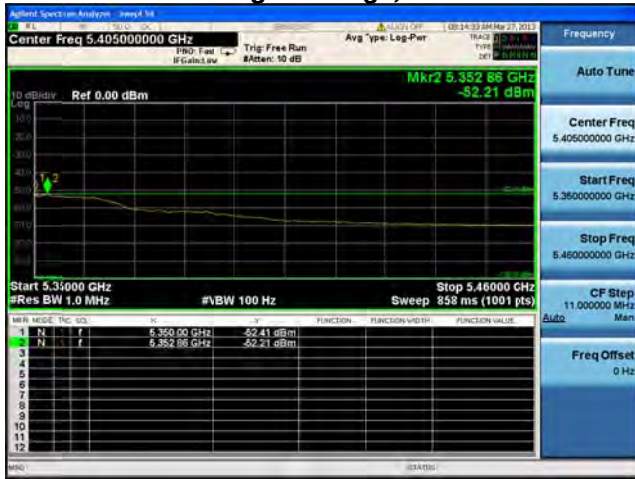

Antenna A



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

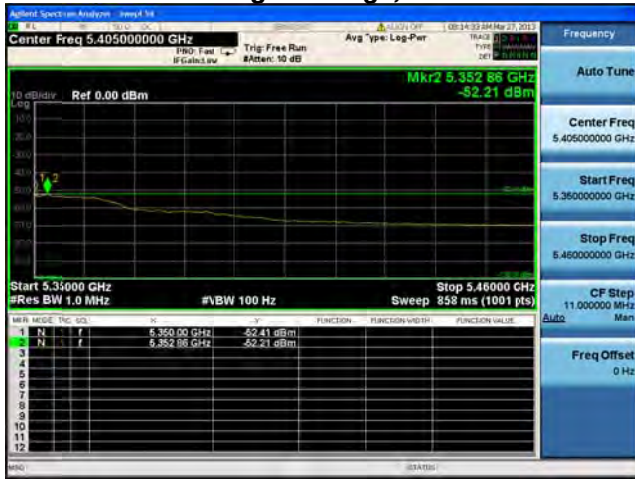


Antenna A




Antenna B



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2

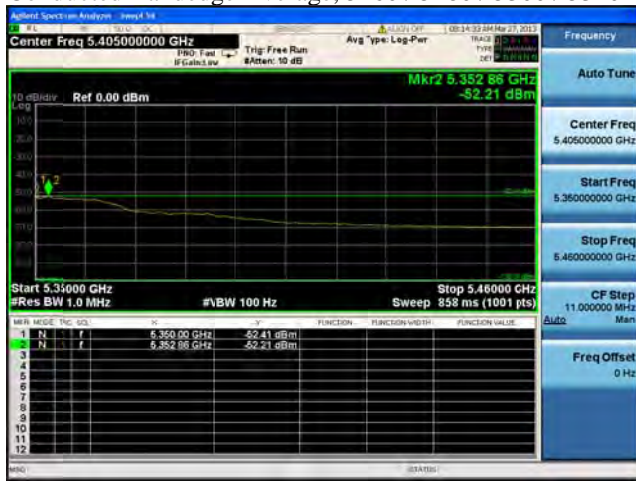


Antenna A

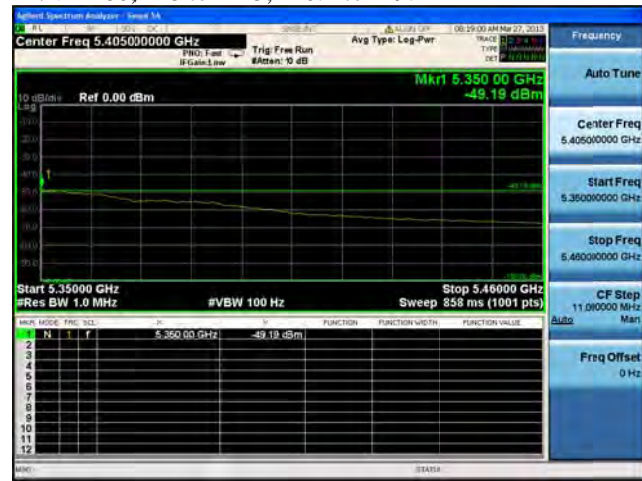


Antenna B




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

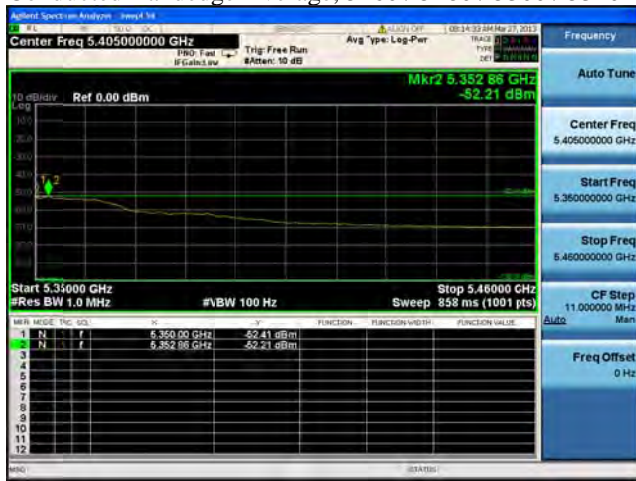

Antenna A

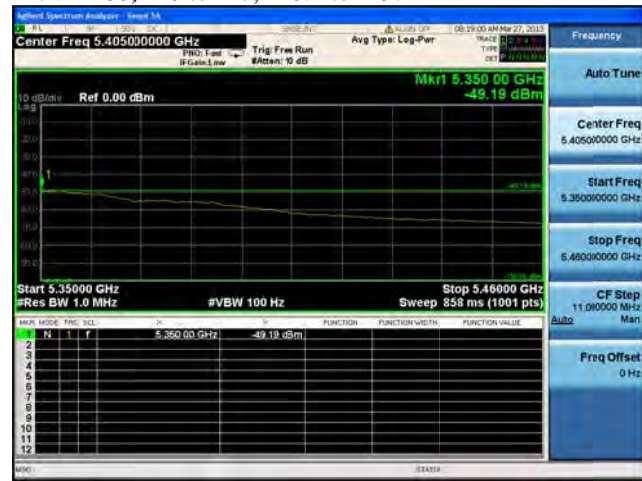


Antenna B

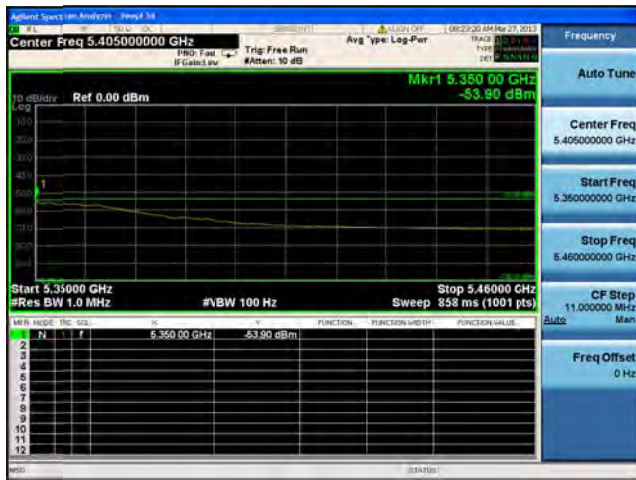


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2

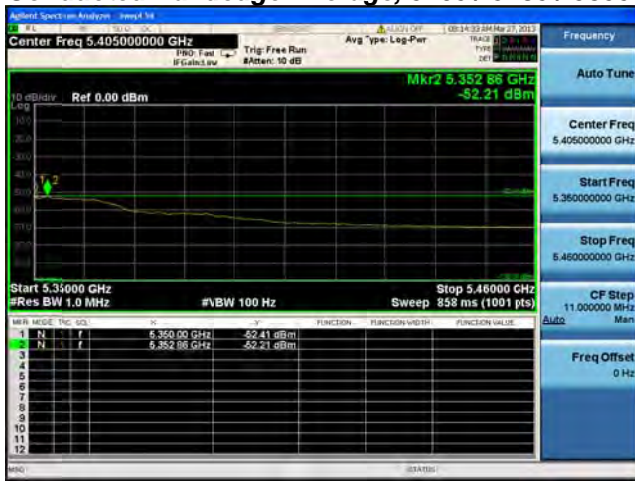

Antenna A

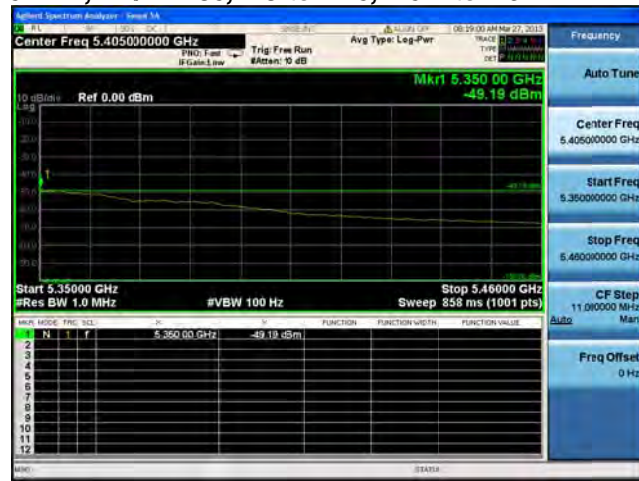


Antenna B

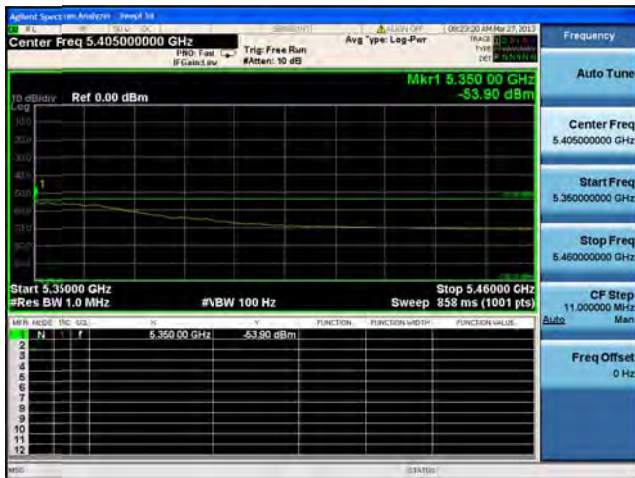

Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3

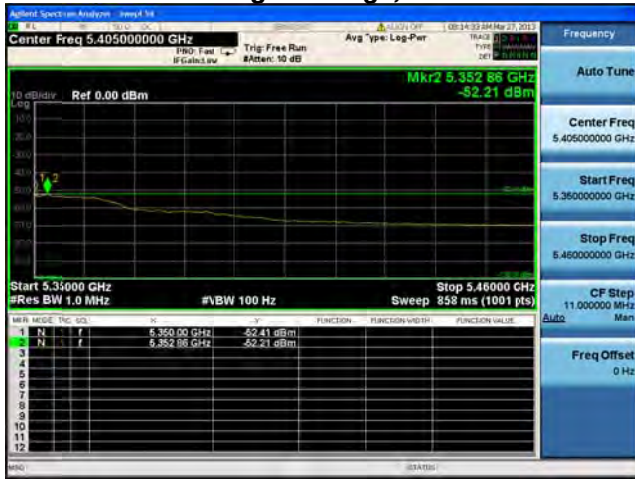

Antenna A




Antenna B

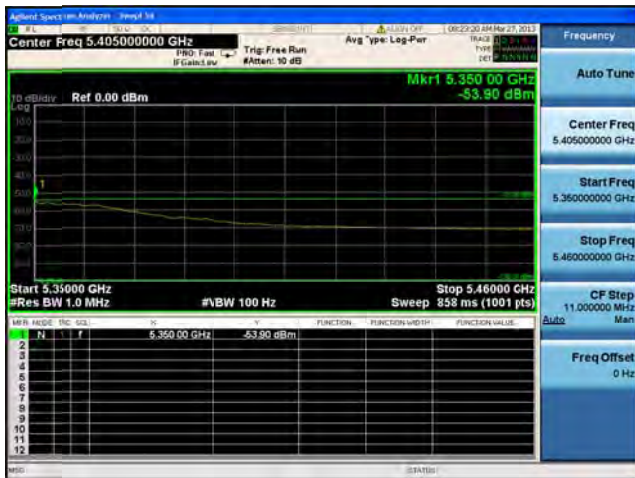


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

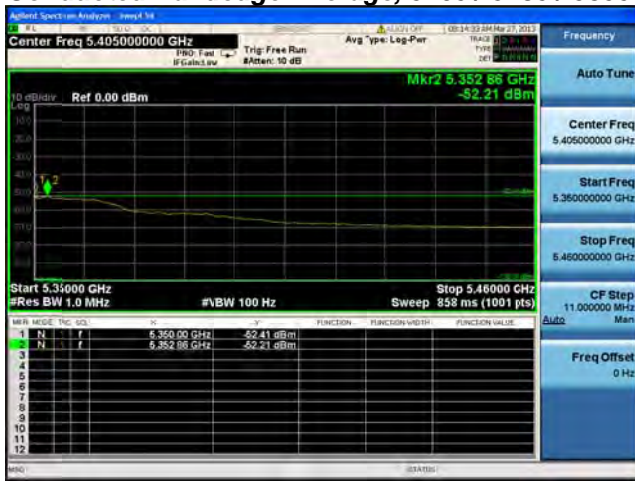


Antenna A

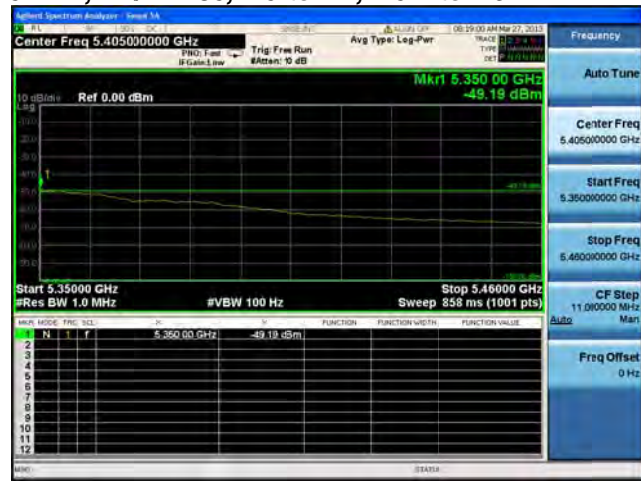

Antenna B

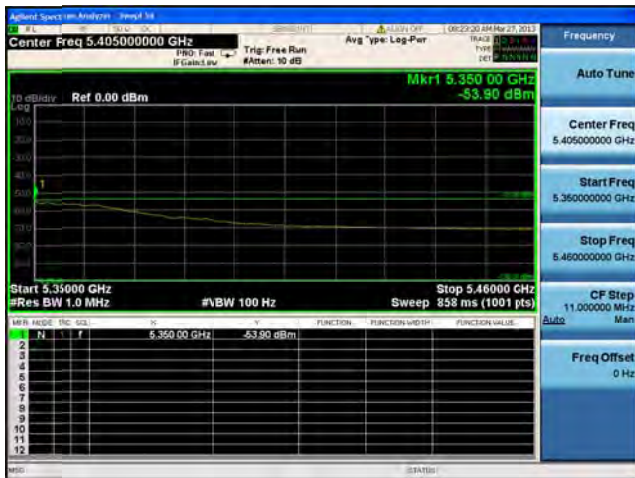


Antenna C

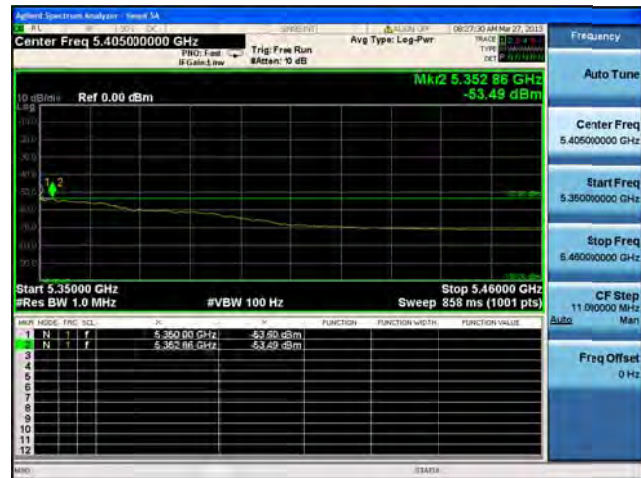


Antenna D




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M8 to M15, M0.2 to M9.2

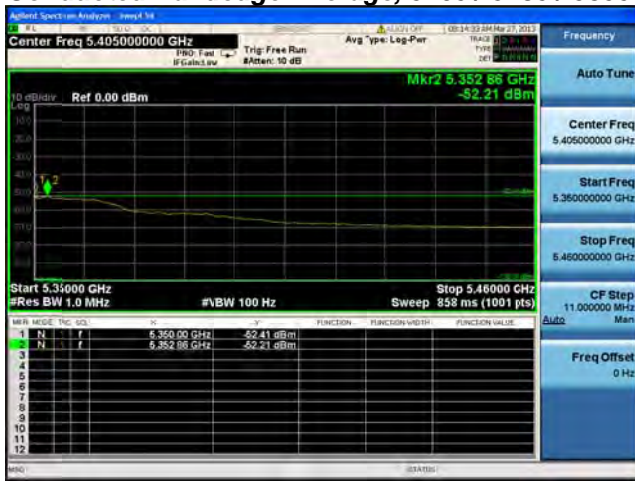


Antenna A

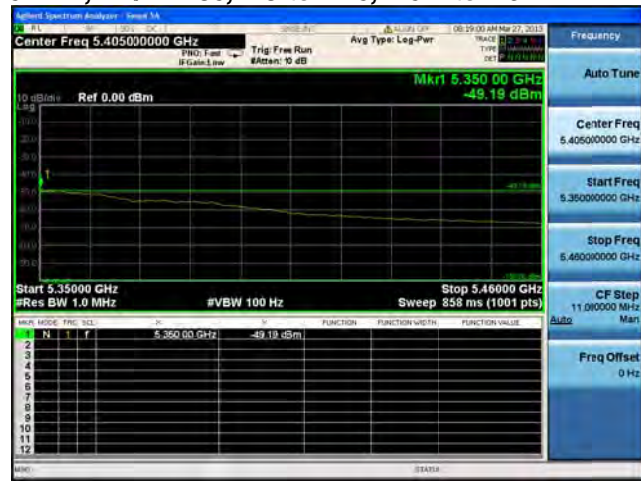

Antenna B

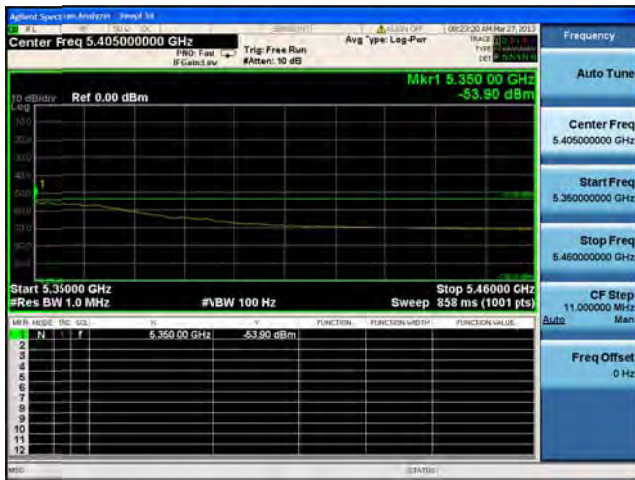


Antenna C

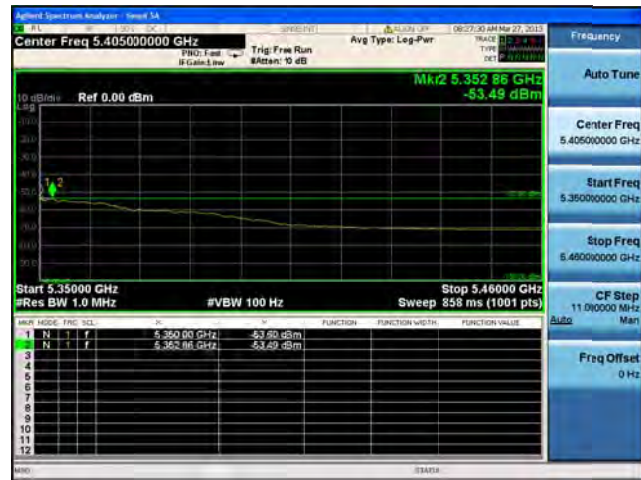


Antenna D




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80, M16 to M23, M0.3 to M9.3

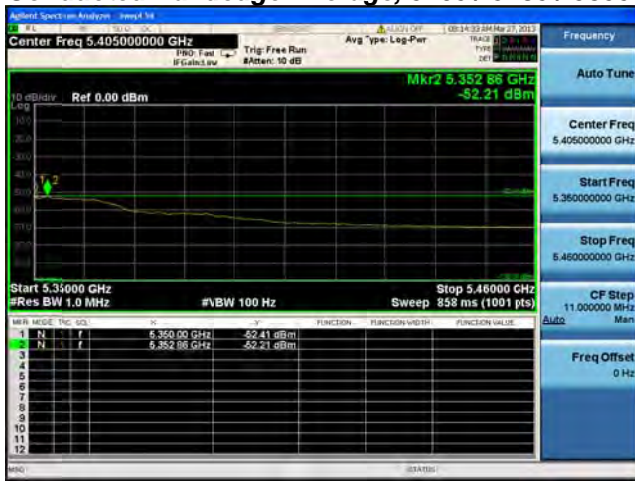


Antenna A

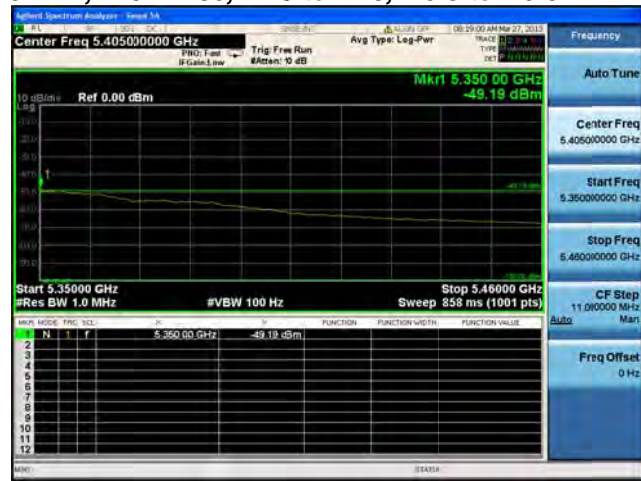

Antenna B

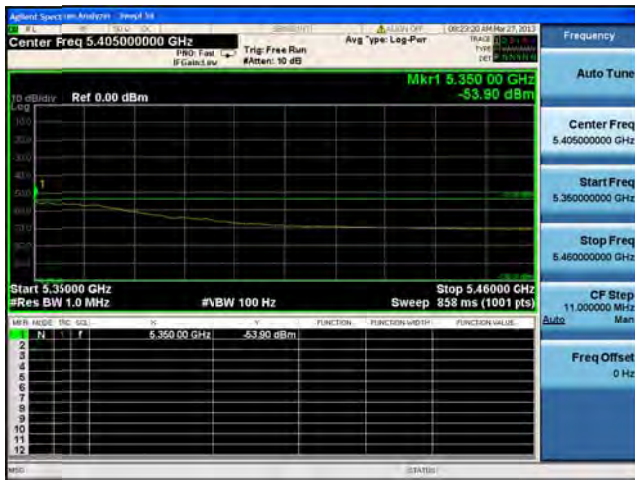


Antenna C

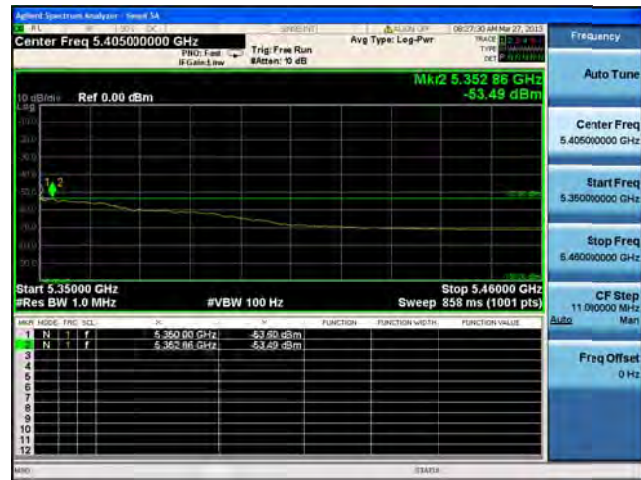


Antenna D



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1

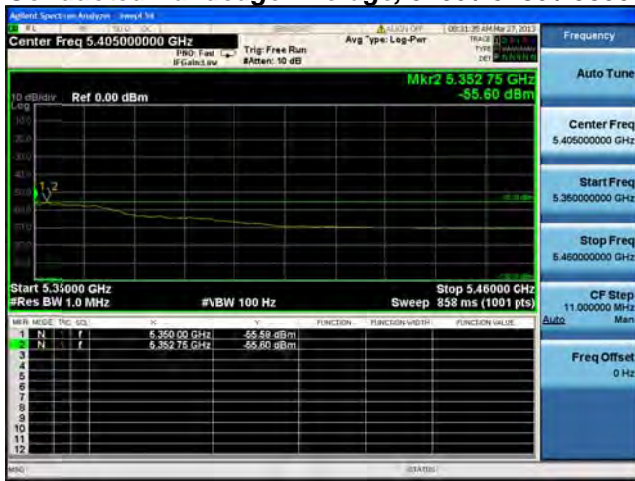


Antenna A

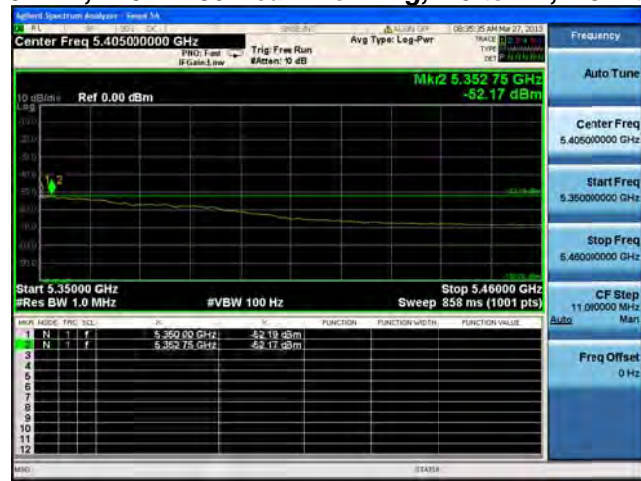


Antenna B



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2

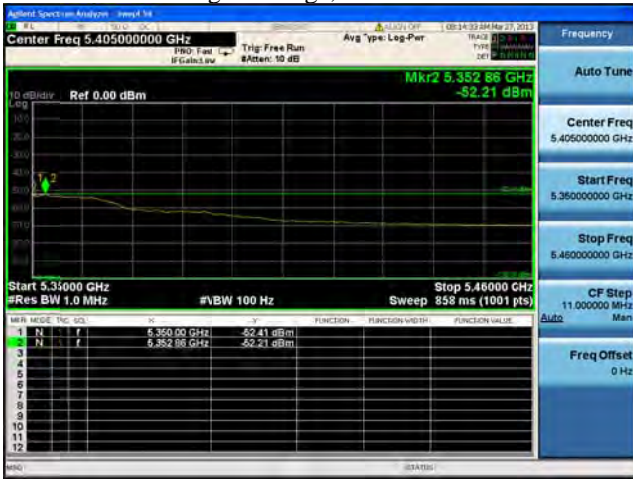


Antenna A

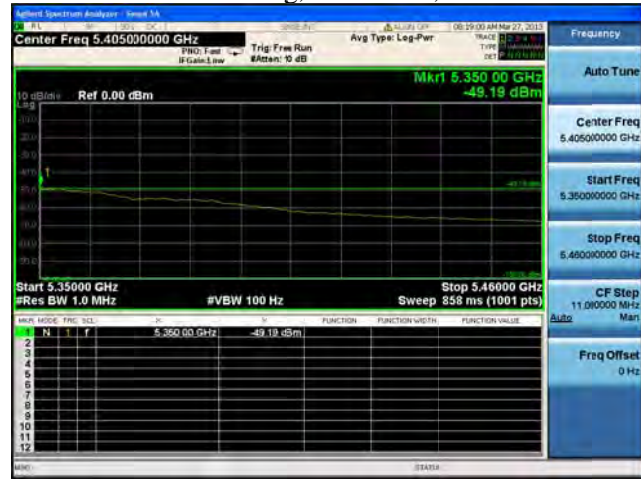


Antenna B




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1

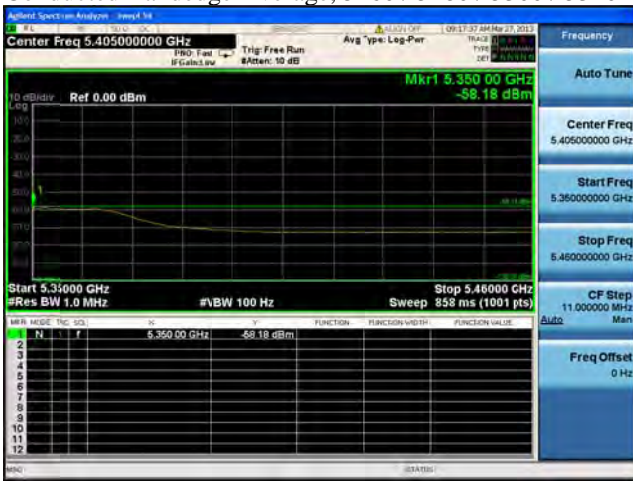

Antenna A

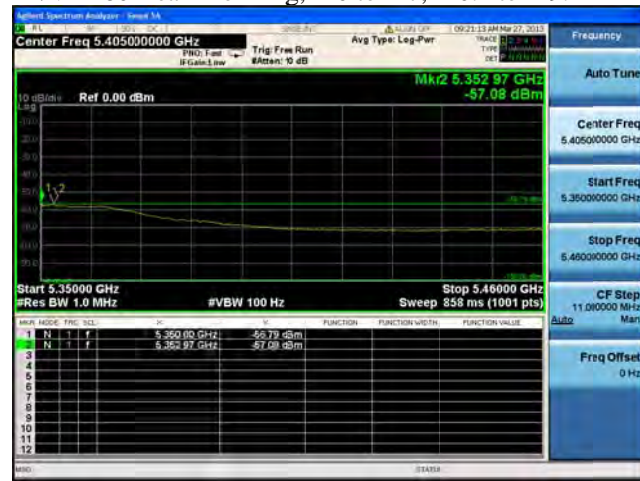


Antenna B

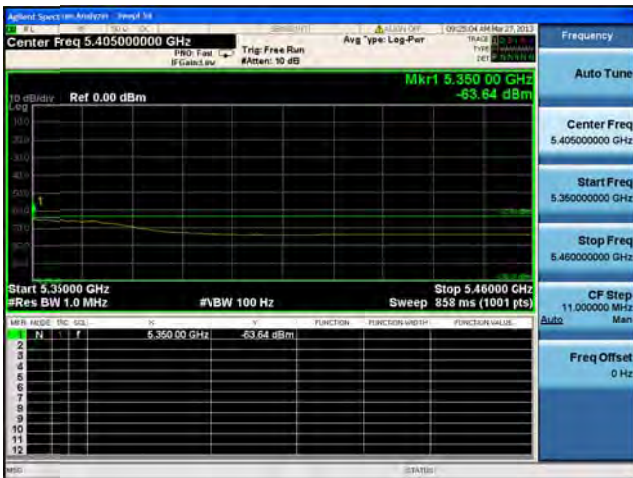


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2

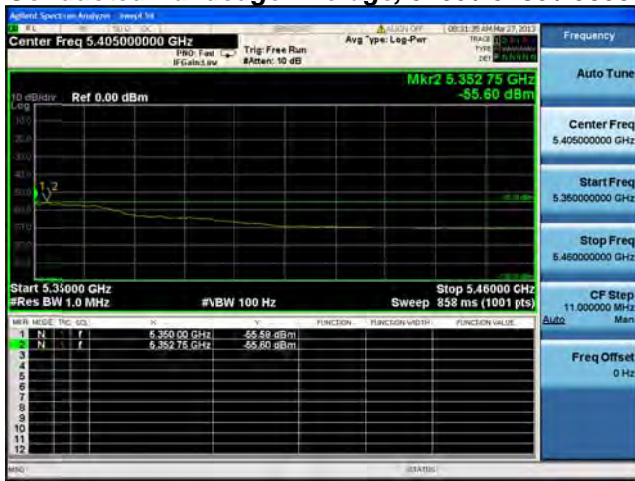

Antenna A

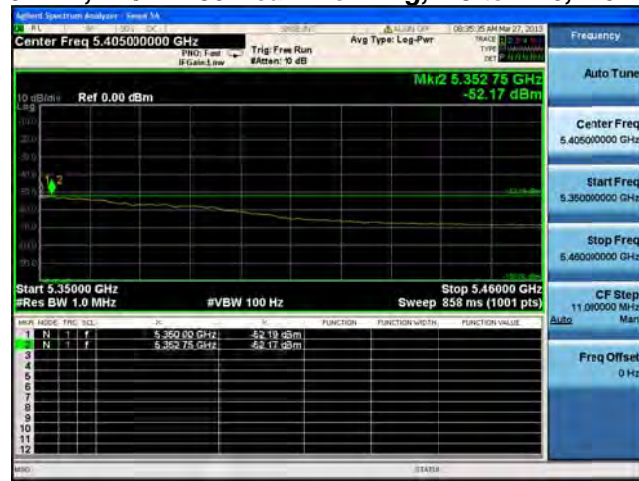


Antenna B

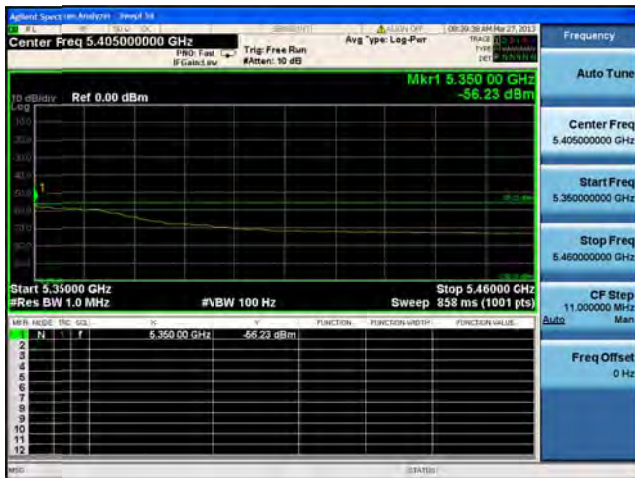


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3

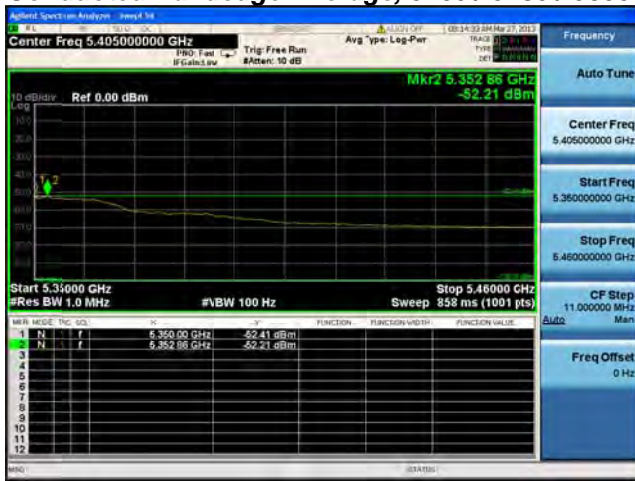

Antenna A

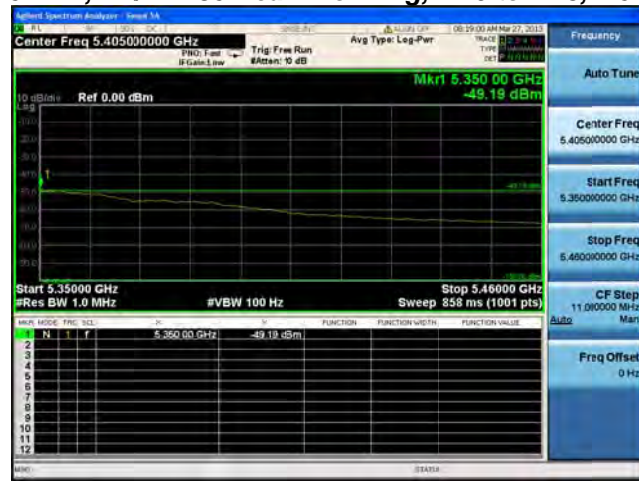


Antenna B

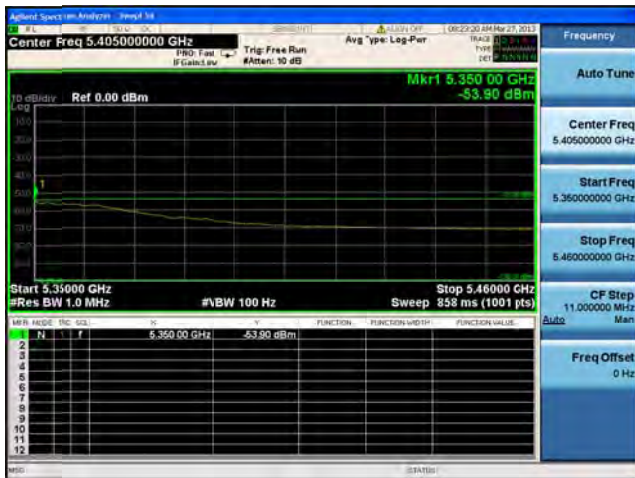


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M0 to M7, M0.1 to M9.1

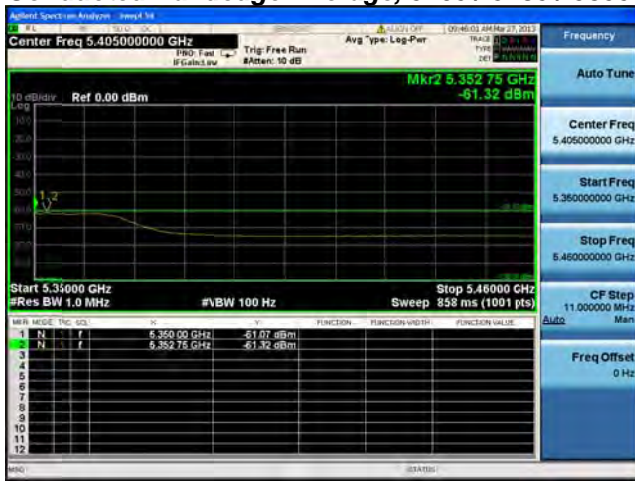


Antenna A

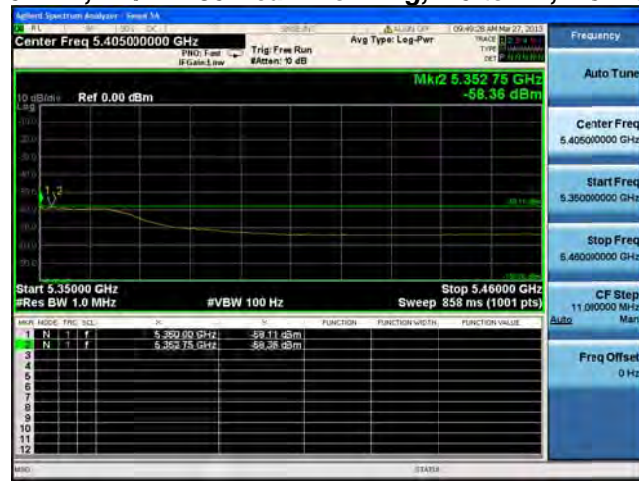

Antenna B

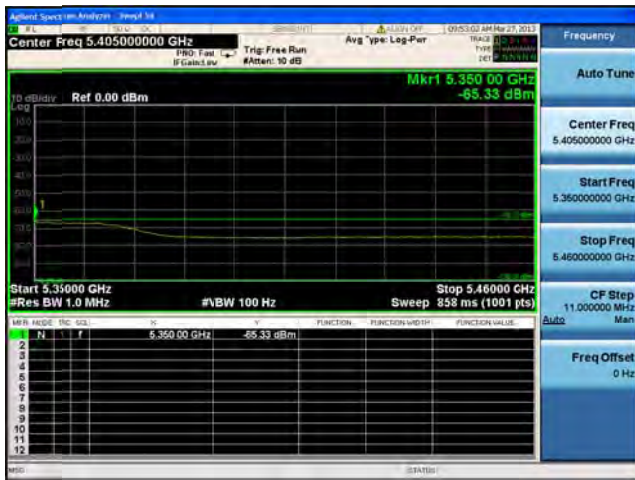


Antenna C

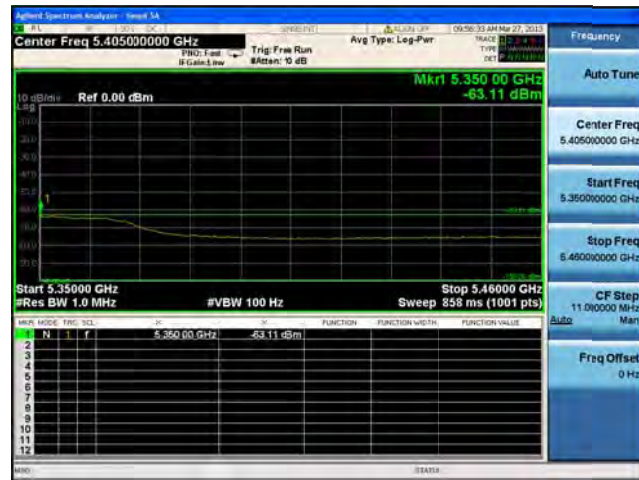


Antenna D




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M8 to M15, M0.2 to M9.2

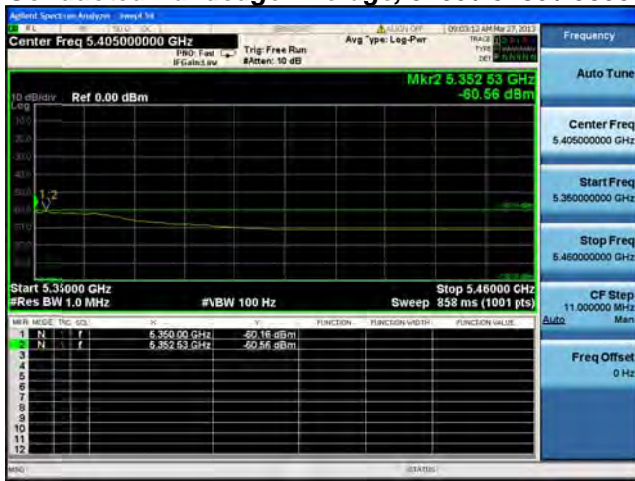


Antenna A

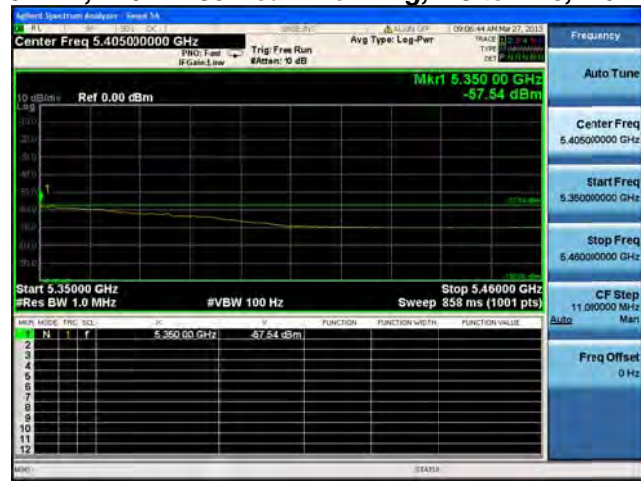

Antenna B

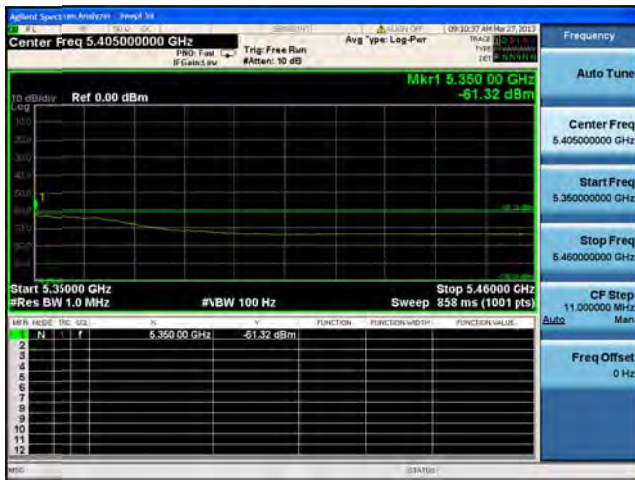


Antenna C

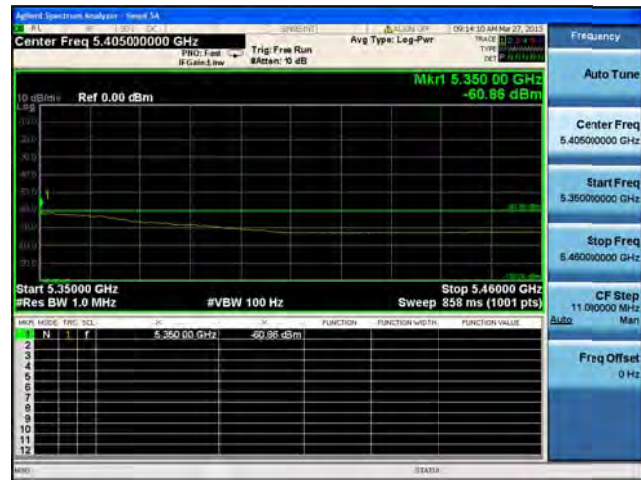


Antenna D




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 Beam Forming, M16 to M23, M0.3 to M9.3

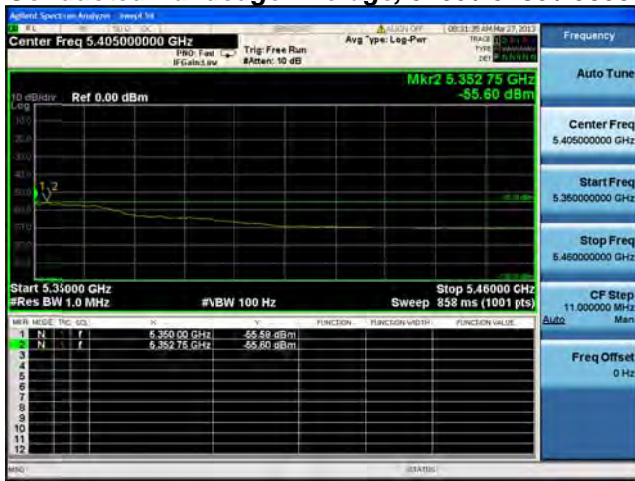


Antenna A

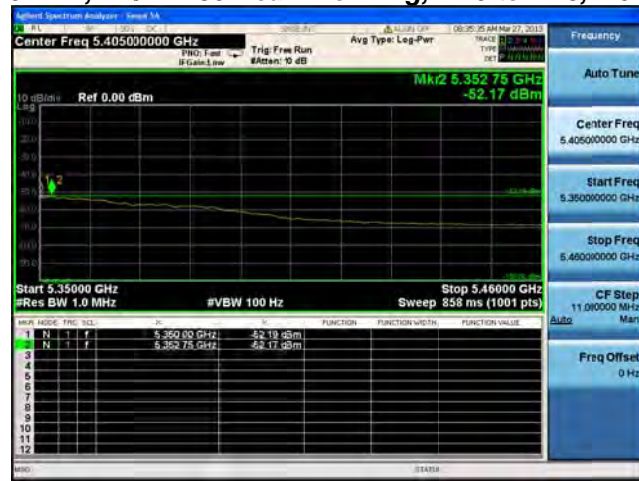

Antenna B

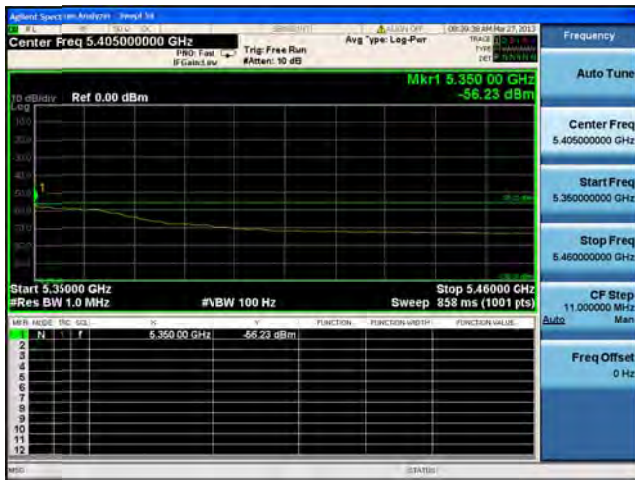


Antenna C

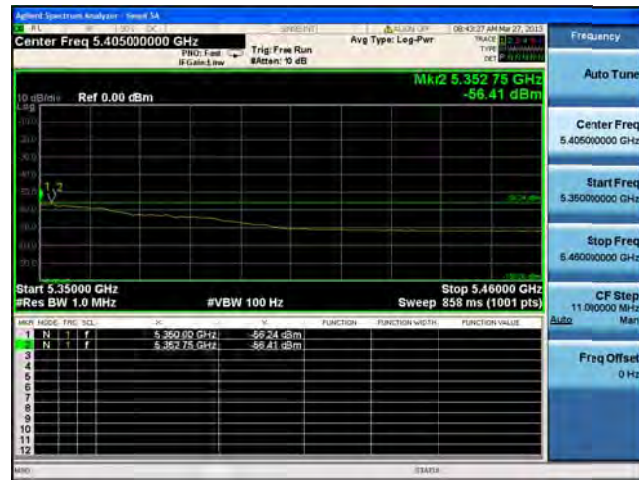


Antenna D



Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1

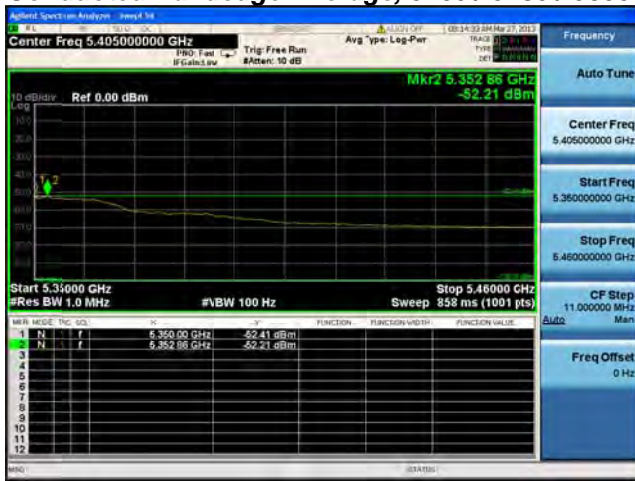


Antenna A

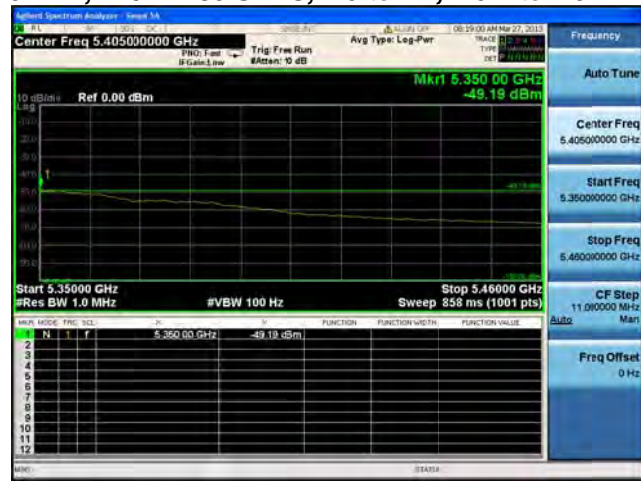


Antenna B




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1

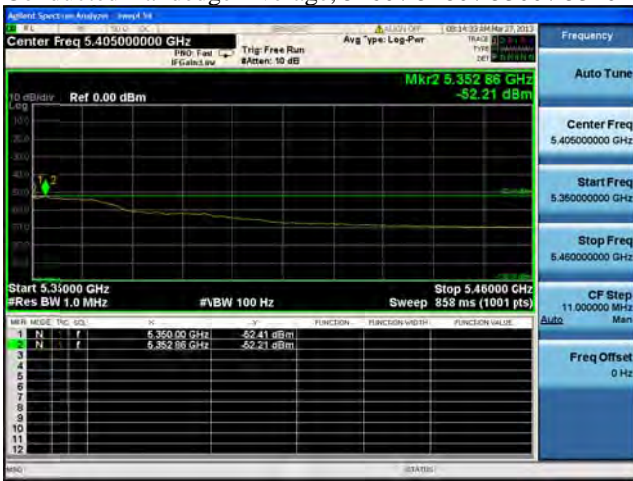

Antenna A

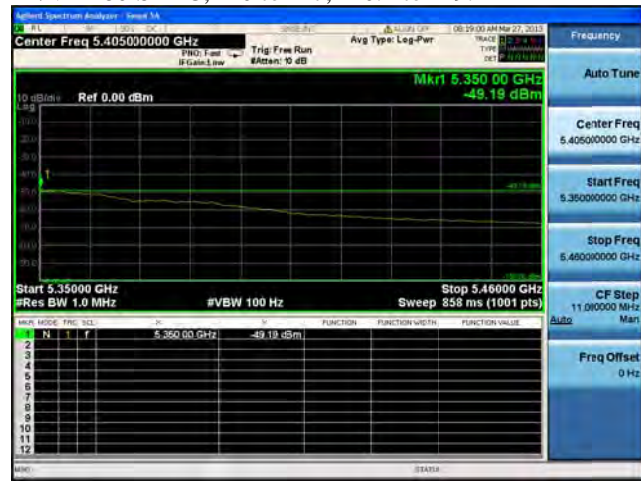


Antenna B

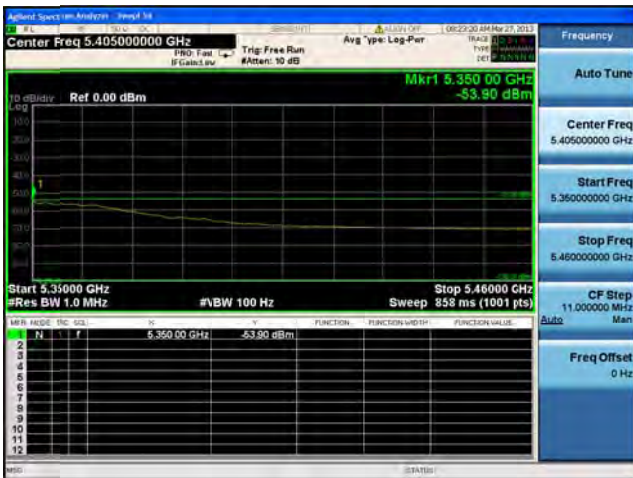


Antenna C




Conducted Bandedge Average, 5260 / 5280 / 5300 / 5320 MHz, HT/VHT80 STBC, M0 to M7, M0.1 to M9.1

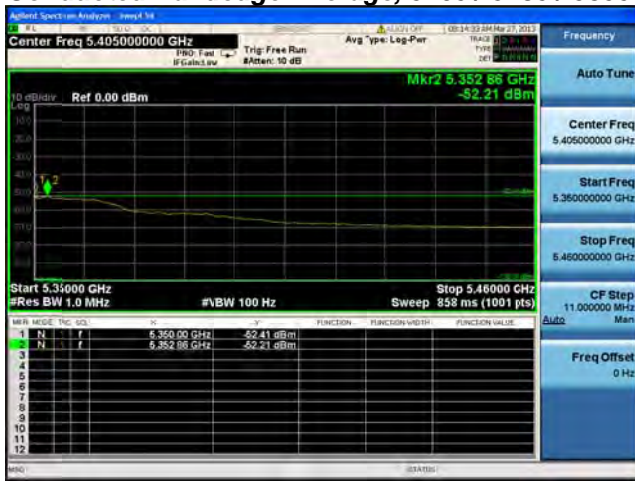


Antenna A

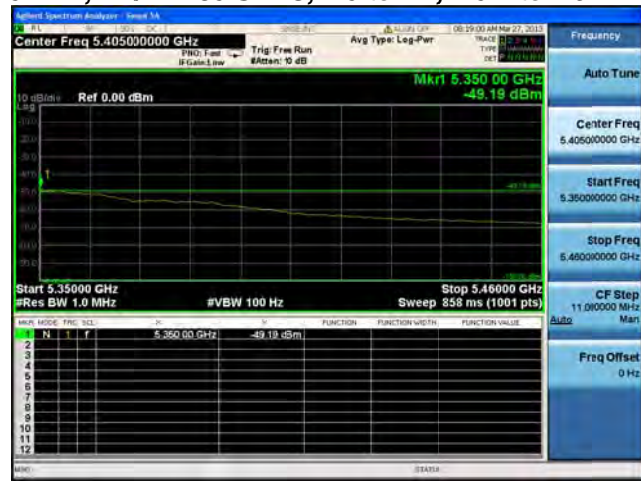

Antenna B

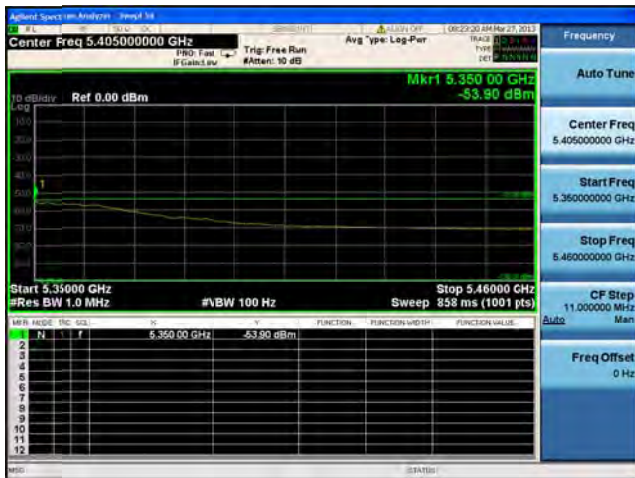


Antenna C

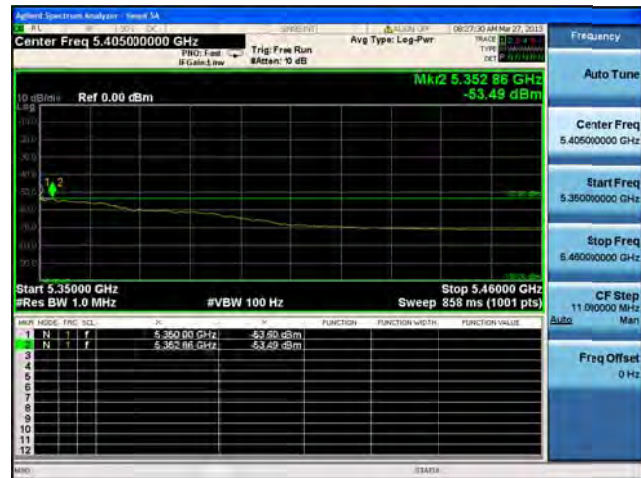

Antenna D




Conducted Bandedge Average, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

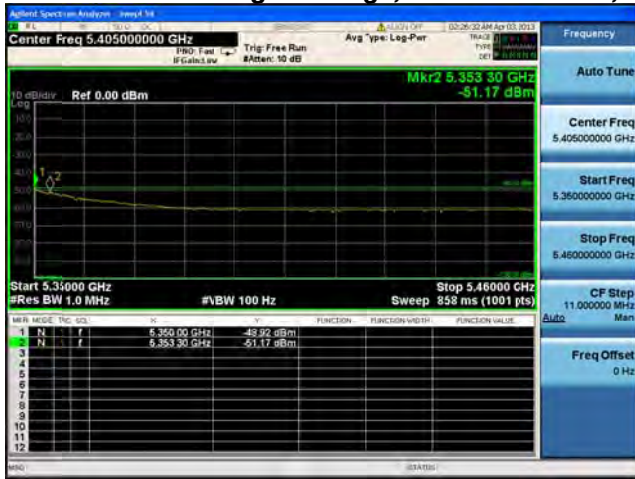


Antenna A



Conducted Bandedge Average, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

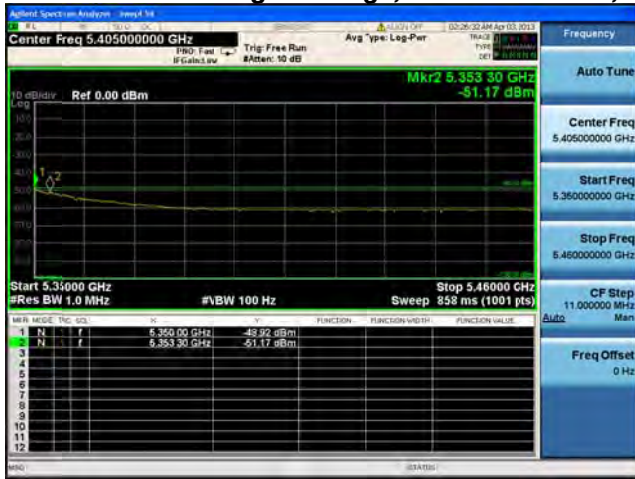


Antenna A

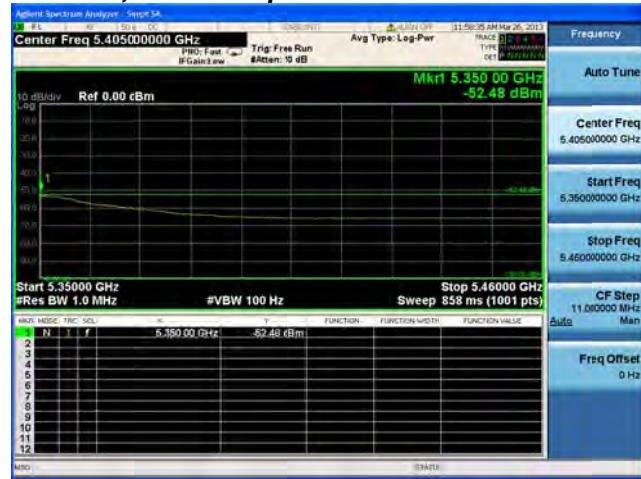


Antenna B




Conducted Bandedge Average, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

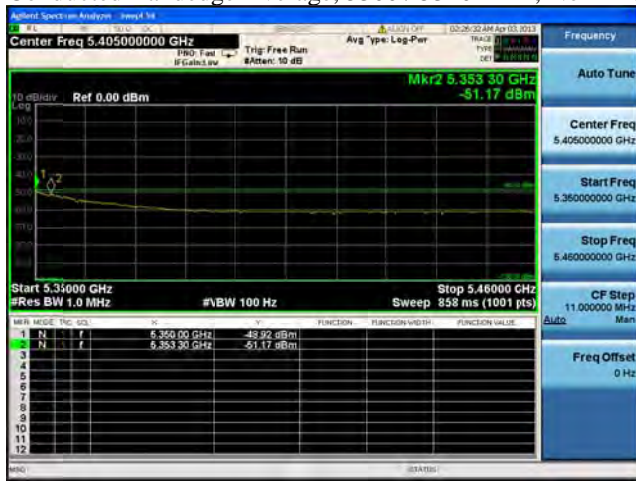

Antenna A

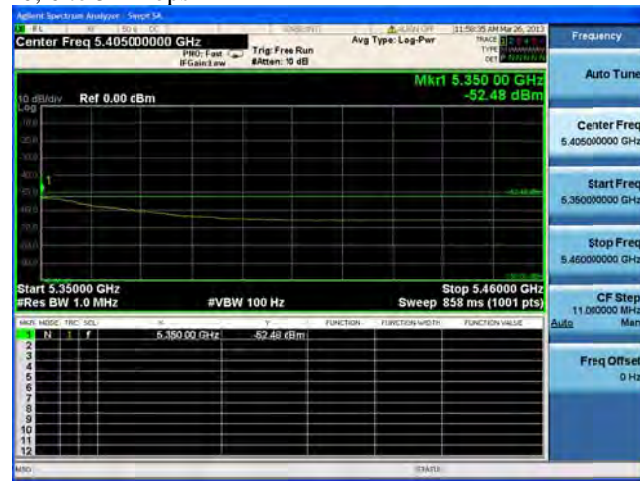


Antenna B

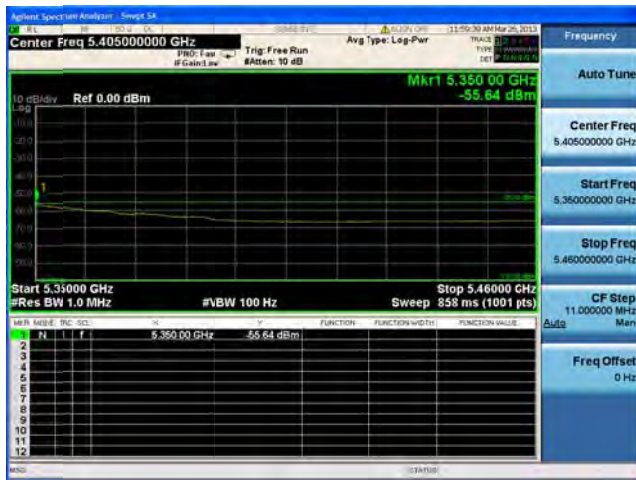


Antenna C




Conducted Bandedge Average, 5300 / 5320 MHz, Non HT/VHT40, 6 to 54 Mbps

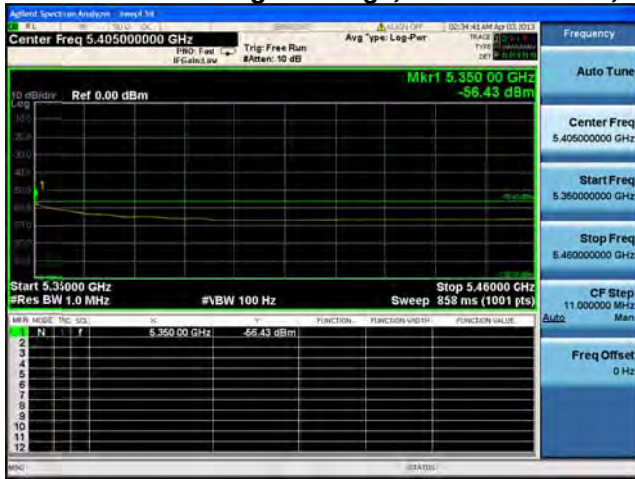


Antenna A

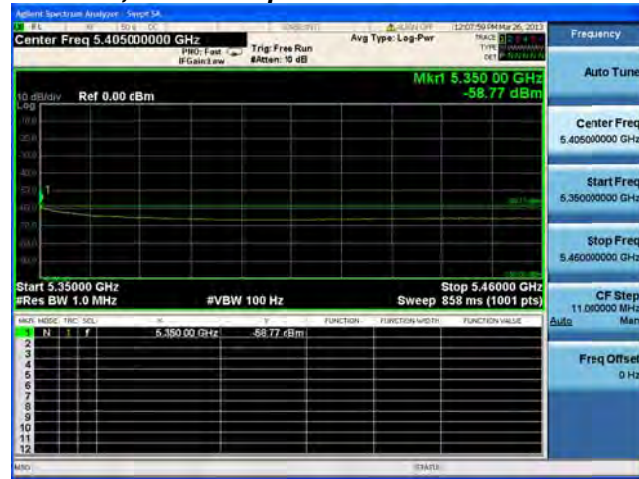

Antenna B

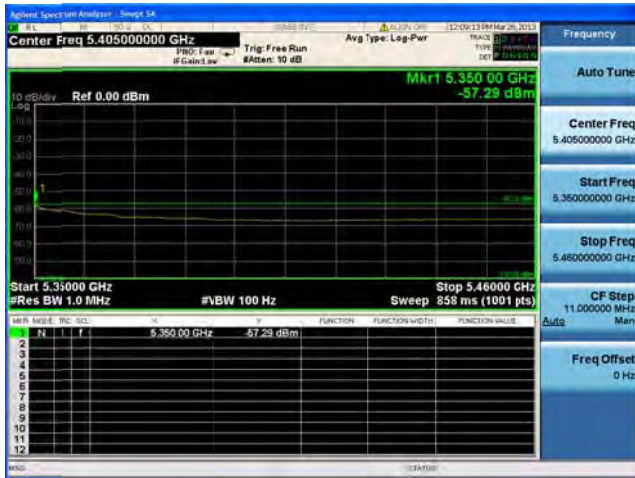


Antenna C

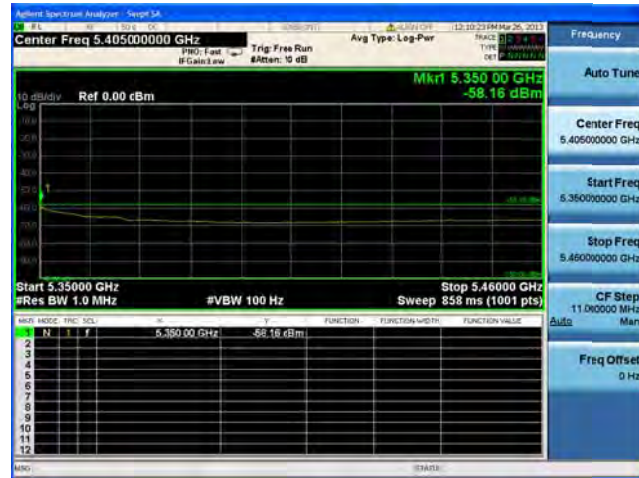

Antenna D




Conducted Bandedge Average, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

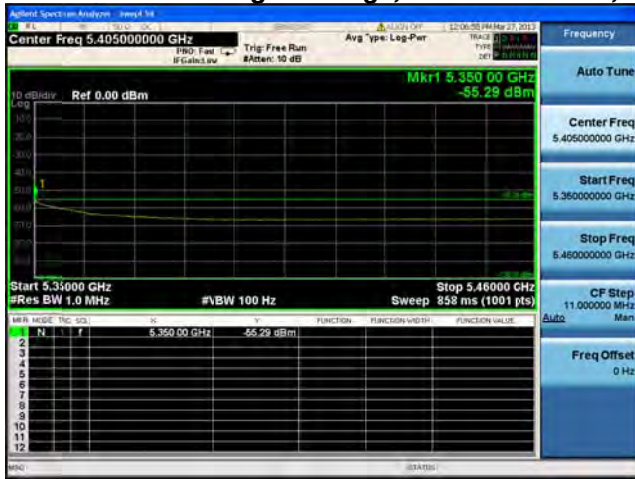


Antenna A



Conducted Bandedge Average, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

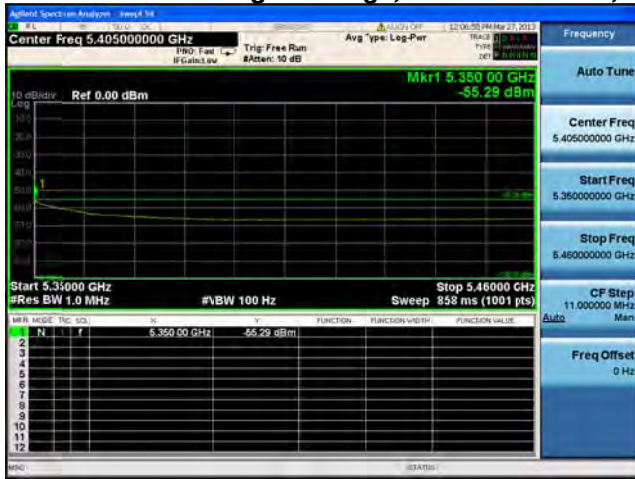


Antenna A

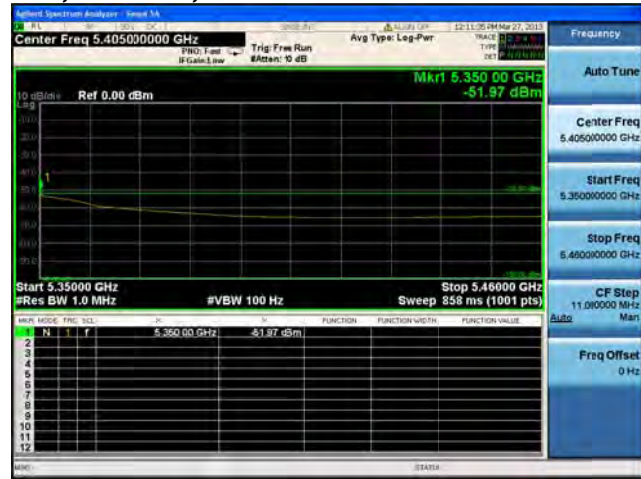


Antenna B



Conducted Bandedge Average, 5300 / 5320 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

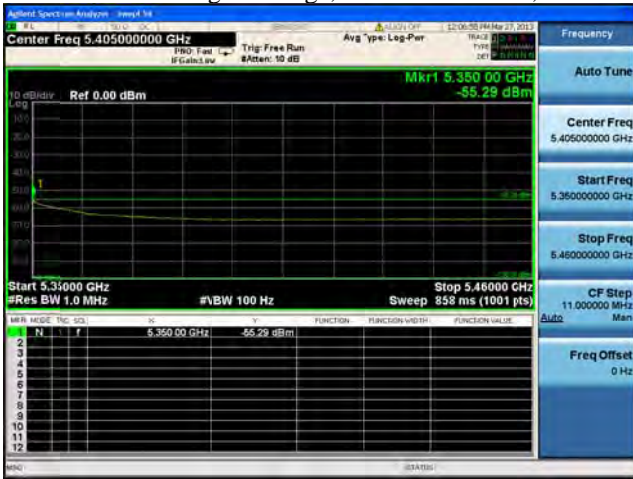


Antenna A

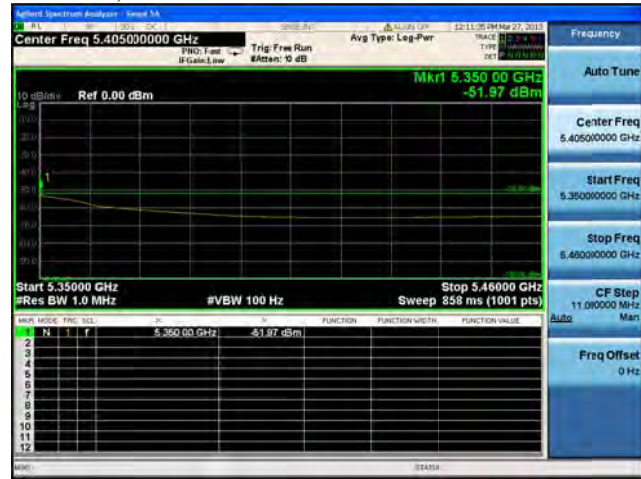

Antenna B




Conducted Bandedge Average, 5300 / 5320 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

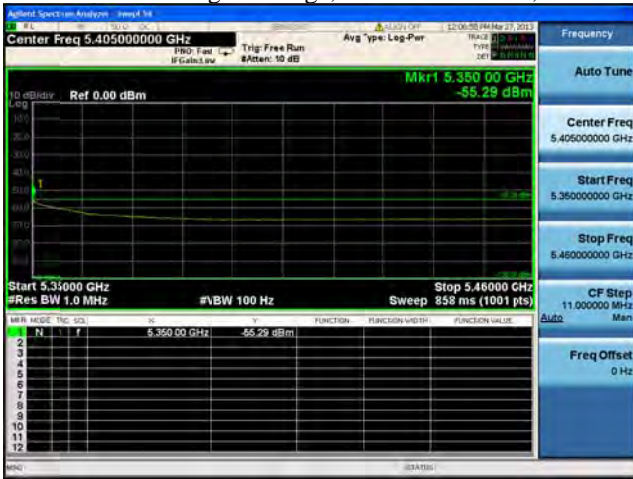

Antenna A




Antenna B

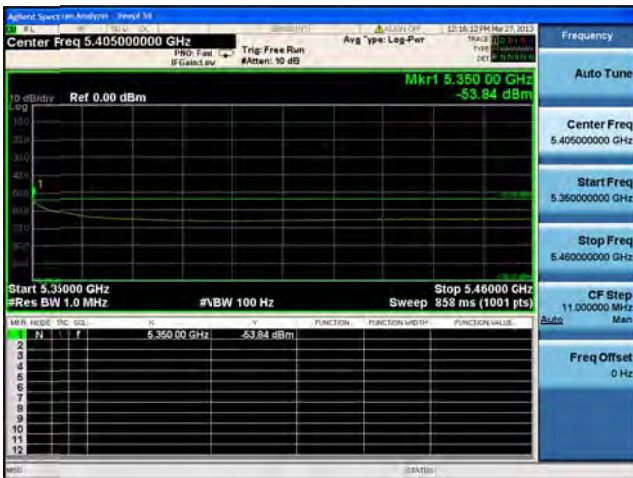


Antenna C




Conducted Bandedge Average, 5300 / 5320 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

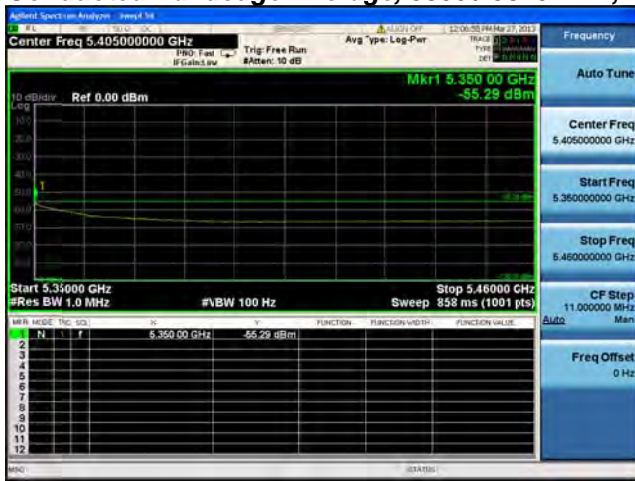

Antenna A

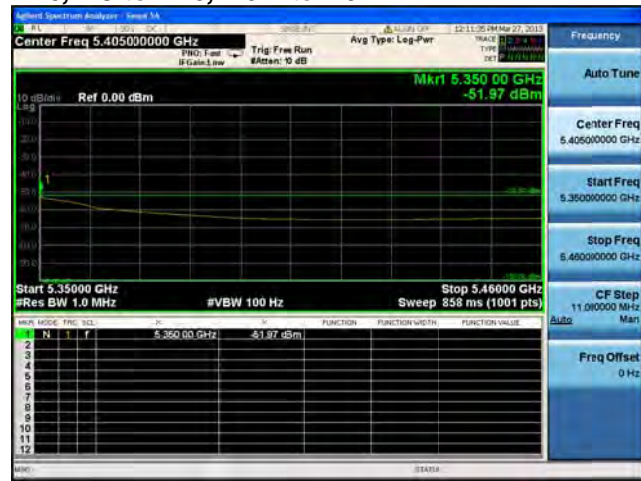

Antenna B

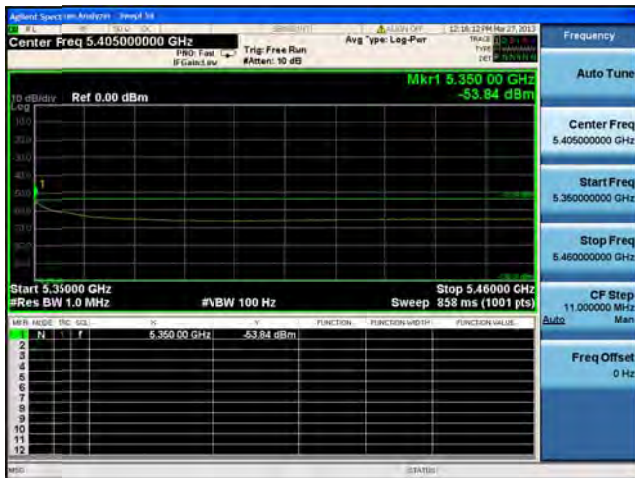

Antenna C