



## Test Report

# IW3702 - 4E - UXK9

## Cisco Industrial Wireless 802.11ac Dual Band Access Point

FCC ID: LDKIW3702  
IC: 2461B-IW3702

Antenna Gain 7 dBi

5470-5725 MHz

Against the following Specifications:

CFR47 Part 15.407

Cisco Systems

170 West Tasman Drive

San Jose, CA 95134



Testing - Certificate Number : 1178-01



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**SECTION 1: OVERVIEW .....3**

    1.1 TEST SUMMARY ..... 3

**SECTION 2: ASSESSMENT INFORMATION.....4**

    2.1 GENERAL..... 4

    2.2 DATE OF TESTING ..... 5

    2.3 REPORT ISSUE DATE..... 5

    2.4 TESTING FACILITIES..... 5

    2.5 EQUIPMENT ASSESSED (EUT) ..... 5

    2.6 EUT DESCRIPTION ..... 6

**SECTION 3: RESULTS SUMMARY ..... 8**

**SECTION 4: SAMPLE DETAILS..... 9**

**EMISSION TEST RESULTS..... 10**

    TARGET MAXIMUM CHANNEL POWER..... 10

    99% AND 26DB BANDWIDTH..... 11

    PEAK OUTPUT POWER..... 24

    POWER SPECTRAL DENSITY ..... 25

    CONDUCTED SPURIOUS EMISSIONS ..... 72

    CONDUCTED BANDEDGE..... 80

    RADIATED SPURIOUS EMISSIONS..... 86

    RADIATED RECEIVER SPURIOUS MEASUREMENTS ..... 110

**APPENDIX A: EUT PHOTOS ..... 113**

**APPENDIX B: PHYSICAL TEST ARRANGEMENT PHOTOS: ..... 115**

**APPENDIX C: TEST EQUIPMENT AND SOFTWARE USED TO PERFORM TESTING ..... 117**

**APPENDIX D: TEST PROCEDURES..... 119**

**APPENDIX E: TEST ASSESSMENT PLAN ..... 119**

**APPENDIX F: WORST CASE JUSTIFICATION..... 119**

**APPENDIX G: SCOPE OF ACCREDITATION ..... 119**

**APPENDIX H: DUTY CYCLE ..... 120**



## **Section 1: Overview**

### **1.1 Test Summary**

Samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Emission</b>	<b>Immunity</b>
CFR47 Part 15.407	N/A



## **Section 2: Assessment Information**

### **2.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
  - Temperature 15°C to 35°C (54°F to 95°F)
  - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
  - Humidity 10% to 75\*%\*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
  - 110V 60 Hz (+/-20%)
  - 220V 50 Hz (+/-20%)

**This report must not be reproduced except in full, without written approval of Cisco Systems.**



**22.2 Date of testing**

4-May-2015 to 29-June-2015

**2.3 Report Issue Date**

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134  
USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Site Identifier</b>
Building P, 5m Chamber	Company #: 2461N-1

**Test Engineers**

Johanna Knudsen, Vinay Ganji, Chris Blair

**2.5 Equipment Assessed (EUT)**

IW3702, Cisco Industrial Wireless 802.11ac Dual Band Access Point



## 2.6 EUT Description

The IW3702 Series Outdoor/Industrial 802.11ac Dual Band Access Point supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

Non HT/VHT-20, One Antenna, 6 to 54 Mbps  
Non HT/VHT-20, Two Antennas, 6 to 54 Mbps  
Non HT/VHT-20, Three Antennas, 6 to 54 Mbps  
Non HT/VHT-20, Four Antennas, 6 to 54 Mbps

Non HT/VHT-20 Beam Forming, Two Antennas, 6 to 54 Mbps  
Non HT/VHT-20 Beam Forming, Three Antennas, 6 to 54 Mbps  
Non HT/VHT-20 Beam Forming, Four Antennas, 6 to 54 Mbps

HT/VHT-20, One Antenna, M0 to M7, m0.1 to m9.1  
HT/VHT-20, Two Antennas, M0 to M15, m0.1 to m9.2  
HT/VHT-20, Three Antennas, M0 to M23, m0.1 to m9.3  
HT/VHT-20, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-20 STBC, Two Antennas, M0 to M7, m0.1 to m9.1  
HT/VHT-20 STBC, Three Antennas, M0 to M7, m0.1 to m9.1  
HT/VHT-20 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-20 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2  
HT/VHT-20 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3  
HT/VHT-20 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

Non HT/VHT-40 Duplicate, One Antenna, 6-54 Mbps  
Non HT/VHT-40 Duplicate, Two Antennas, 6-54 Mbps  
Non HT/VHT-40 Duplicate, Three Antennas, 6-54 Mbps  
Non HT/VHT-40 Duplicate, Four Antennas, 6-54 Mbps

HT/VHT-40, One Antenna, M0 to M7, m0.1 to m9.1  
HT/VHT-40, Two Antennas, M0 to M15, m0.1 to m9.2  
HT/VHT-40, Three Antennas, M0 to M23, m0.1 to m9.3  
HT/VHT-40, Four Antennas, M0 to M23, m0.1 to m9.3

HT/VHT-40 STBC, Two Antennas, M0 to M7, m0.1 to m9.1  
HT/VHT-40 STBC, Three Antennas, M0 to M7, m0.1 to m9.1  
HT/VHT-40 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

HT/VHT-40 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2  
HT/VHT-40 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3  
HT/VHT-40 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3



Non VHT-80 Duplicate, One Antenna, 6-54 Mbps  
 Non VHT-80 Duplicate, Two Antennas, 6-54 Mbps  
 Non VHT-80 Duplicate, Three Antennas, 6-54 Mbps  
 Non VHT-80 Duplicate, Four Antennas, 6-54 Mbps

VHT-80, One Antenna, M0 to M7, m0.1 to m9.1  
 VHT-80, Two Antennas, M0 to M15, m0.1 to m9.2  
 VHT-80, Three Antennas, M0 to M23, m0.1 to m9.3  
 VHT-80, Four Antennas, M0 to M23, m0.1 to m9.3

VHT-80 STBC, Two Antennas, M0 to M7, m0.1 to m9.1  
 VHT-80 STBC, Three Antennas, M0 to M7, m0.1 to m9.1  
 VHT-80 STBC, Four Antennas, M0 to M7, m0.1 to m9.1

VHT-80 Beam Forming, Two Antennas, M0 to M15, m0.1 to m9.2  
 VHT-80 Beam Forming, Three Antennas, M0 to M23, m0.1 to m9.3  
 VHT-80 Beam Forming, Four Antennas, M0 to M23, m0.1 to m9.3

The following antennas are supported by this product series.

The data included in this report represent the antennas in **bold** below.

AIR-ANT2547V-N	<b>Dual-band 4 dBi (2.4 GHz) 7 dBi (5 GHz) omnidirectional antenna with 1x type N (m) connector (white)</b>
AIR-ANT2547VG-N	<b>Dual-band 4 dBi (2.4 GHz) 7 dBi (5 GHz) omnidirectional antenna with 1x type N (m) connector (gray)</b>
AIR-ANT2513P4M-N	Dual-band 13 dBi (2.4 GHz) 13 dBi (5 GHz) patch antenna with 4x type N (f) connector
AIR-ANT2524V4C-R	Dual-band 2 dBi (2.4 GHz) 4 dBi (5 GHz) omni-directional antenna with 4x RP-TNC (m) connector (indoor only)
AIR-ANT2544V4M-R	Dual-band 4 dBi (2.4 GHz) 4 dBi (5 GHz) omni-directional antenna with 4x RP-TNC (m) connector
AIR-ANT2566P4W-R	Dual-band 6 dBi (2.4 GHz) 6 dBi (5 GHz) patch antenna with 4x RP-TNC (m) connector



**Section 3: Results Summary**

Conducted emissions

Basic Standard	Result
99% and 26dB Bandwidth	Pass
Peak Output Power	Pass
Power Spectral Density	Pass
Conducted Spurious Emissions	Pass
Restricted Band Edge Measurements	Pass

Radiated emissions

Basic Standard	Result
Radiated Spurious Emissions	Pass





## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

### 4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix A)

Sample No.	Equipment Details	Part Number	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	IW3702 - 4E - U XK9	68-5584-03	Cisco Systems	03	NA	NA	FOC1848 6MLL
S02	PWR-IE3000-AC	341-0304-01	Cisco Systems	01	NA	NA	DTM170 704Z2
S03	IW3702 - 4E - U XK9	68-5584-04	Cisco Systems	04	NA	NA	FOC1916 7ZLE
S04	PWR-IE3000-AC	341-0304-01	Cisco Systems	01	NA	NA	DTM160 801WH

### 4.2 System Details

System #	Description	Samples
1	EUT System used for all Conducted testing Image version: flash:/ap3g2-k9w7-mx.newptable_apr30/ap3g2-k9w7-xx.newptable_ap	S01, S02
2	EUT System used for all Radiated testing Image version: flash:/ap3g2-k9w7-mx.newptable_apr30/ap3g2-k9w7-xx.newptable_ap	S03, S04

### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting
2	Receive Mode	Receive Mode



## Emission Test Results

### Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5500	5560	5700
Non HT-20, 6 to 54 Mbps	19	19	13
Non HT-20 Beam Forming, 6 to 54 Mbps	17	17	13
HT-20, M0 to M23, M0.1 to M9.3	19	19	13
HT-20 STBC, M0 to M7, M0.1 to M9.1	19	19	13
HT-20 Beam Forming, M0 to M23, M0.1 to M9.3	17	17	13
	<b>5500/5520</b>	<b>5540/5560</b>	
Non HT-40 Duplicate, 6 to 54 Mbps	14	19	
HT-40, M0 to M23, M0.1 to M9.3	19	19	
HT-40 STBC, M0 to M7, M0.1 to M9.1	19	19	
HT-40 Beam Forming, M0 to M23, M0.1 to M9.3	17	17	
	<b>5500/5520/5540/5560</b>		
Non HT-80 Duplicate, 6 to 54 Mbps	14		
HT-80, M0 to M23, M0.1 to M9.3	17		
HT-80 STBC, M0 to M7, M0.1 to M9.1	19		
HT-80 Beam Forming, M0 to M23, M0.1 to M9.3	19		

## 99% and 26dB Bandwidth

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

KDB used: 789033 D01 General UNII Test Procedures Old Rules v01r04

### C) Emission bandwidth

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### D) 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in section H)3)d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the 26-dB emission bandwidth to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section E). However, the 26-dB bandwidth must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a). The following procedure shall be used for measuring (99 %) power bandwidth.

- 1) Set center frequency to the nominal EUT channel center frequency.
- 2) Set span = 1.5 times to 5.0 times the OBW.
- 3) Set RBW = 1 % to 5 % of the OBW
- 4) Set  $VBW \geq 3 \cdot RBW$
- 5) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6) Use the 99 % power bandwidth function of the instrument (if available).
- 7) If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Radio was placed in continuous transmit mode. Peak detection with max hold was utilized.



Frequency (MHz)	Mode	Data Rate (Mbps)	99% BW (MHz)	26dB BW (MHz)
5500	Non HT/VHT20, 6 to 54 Mbps	6Mbps	16.5528	19.423
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	6Mbps	16.5281	19.451
	HT/VHT20, M16 to M23, M0.3 to M9.3	M0x3	17.6357	19.349
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	M0x3	17.6271	19.232

5500/5520	Non HT/VHT40, 6 to 54 Mbps	6	36.2707	40.487
	HT/VHT40, M8 to M15, M0.2 to M9.2	M0x2	36.0681	39.704

5530	Non HT/VHT80, 6 to 54 Mbps	6Mbps	76.1558	81.307
	HT/VHT80, M0 to M7, M0.1 to M9.1	M0x1	76.2575	85.292


5550	Non HT/VHT40, 6 to 54 Mbps	6Mbps	36.2248	40.297
	HT/VHT40, M0 to M7, M0.1 to M9.1	M0	35.9950	39.854
	HT/VHT40, M16 to M23, M0.3 to M9.3	M0x3	35.9875	39.976
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	M0	36.0051	39.876

5560	Non HT/VHT20, 6 to 54 Mbps	6Mbps	16.5429	19.457
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	6Mbps	16.5499	19.222
	HT/VHT20, M8 to M15, M0.2 to M9.2	M0x2	17.6134	19.785
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	M0x3	17.6451	19.956


5700	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	6Mbps	16.5388	19.375
	HT/VHT20, M8 to M15, M0.2 to M9.2	M0x2	17.5806	19.634
	HT/VHT20, M16 to M23, M0.3 to M9.3	M0x3	17.6324	19.376
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	M0x3	17.6205	19.974
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	M0x3	17.6177	19.284



**26dB / 99% Bandwidth, 5500 MHz, Non HT/VHT20, 6 to 54 Mbps**

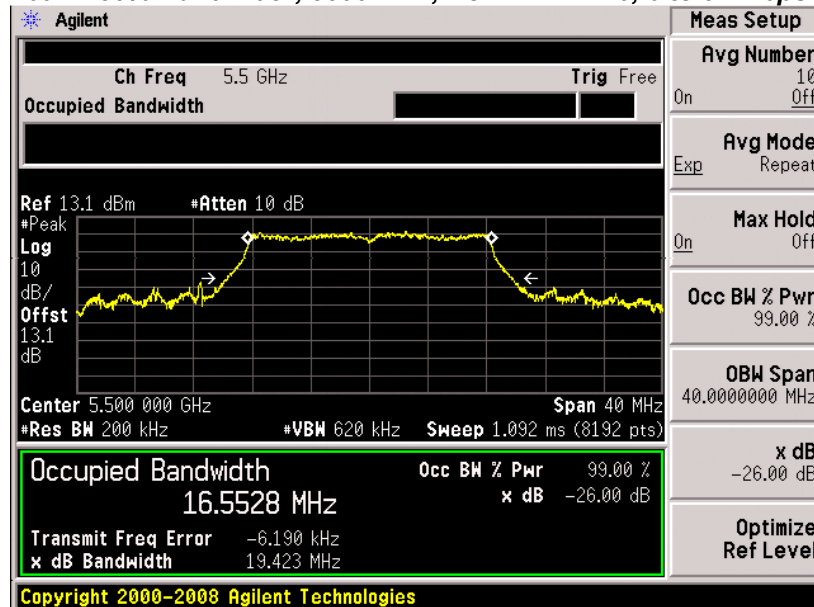


**26dB / 99% Bandwidth, 5500 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**

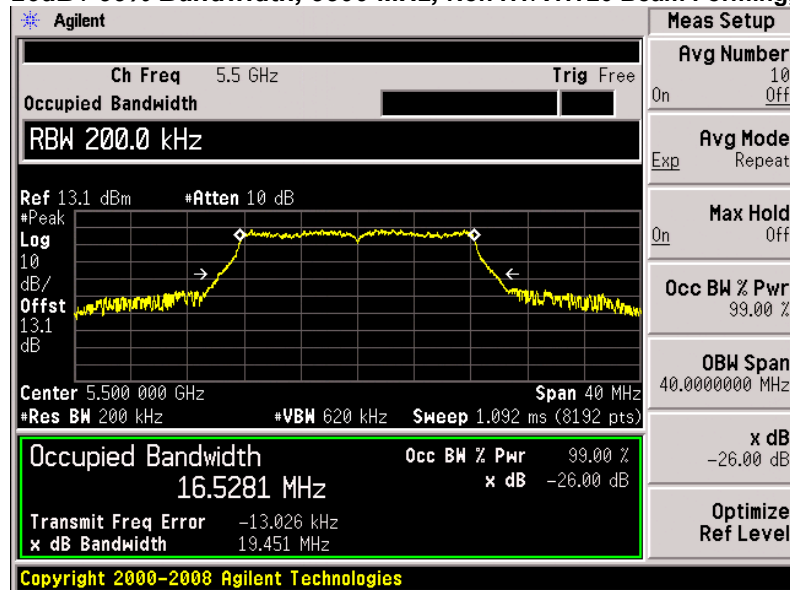




**26dB / 99% Bandwidth, 5500 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**

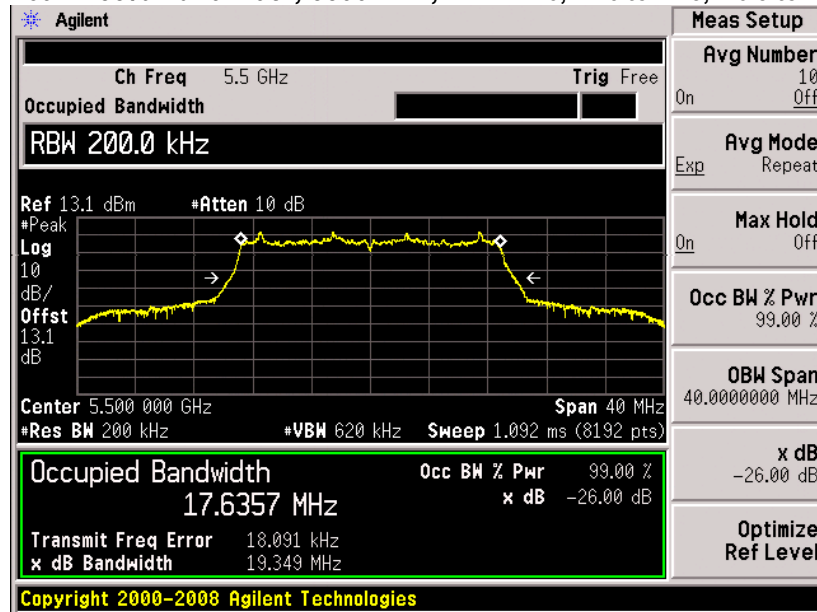


**26dB / 99% Bandwidth, 5500 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**

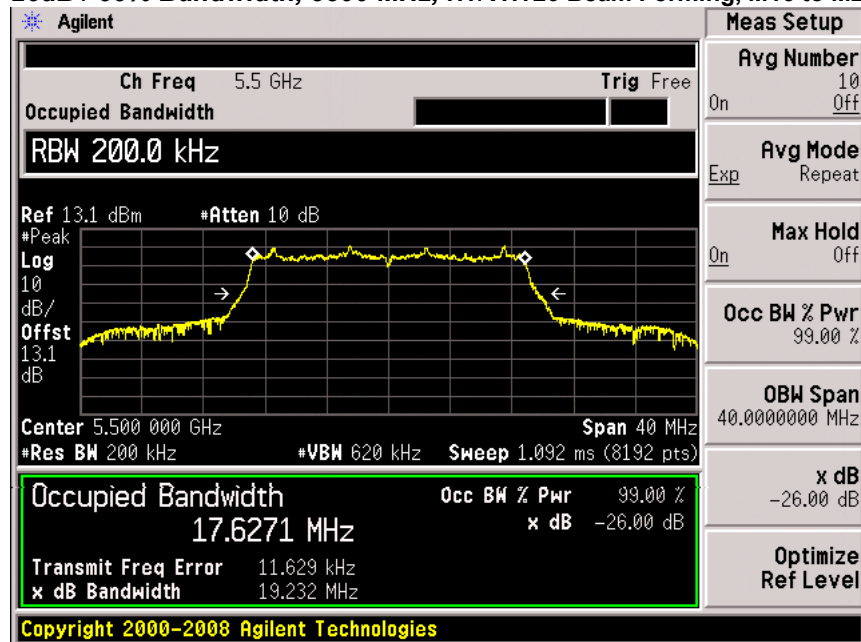




**26dB / 99% Bandwidth, 5510 MHz, Non HT/VHT40, 6 to 54 Mbps**

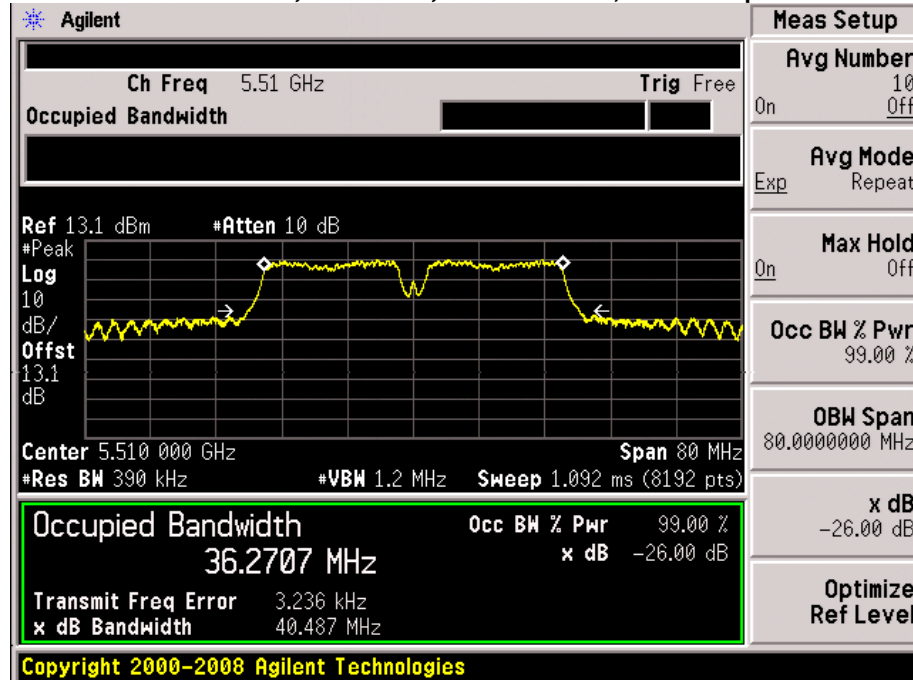


**26dB / 99% Bandwidth, 5510 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2**

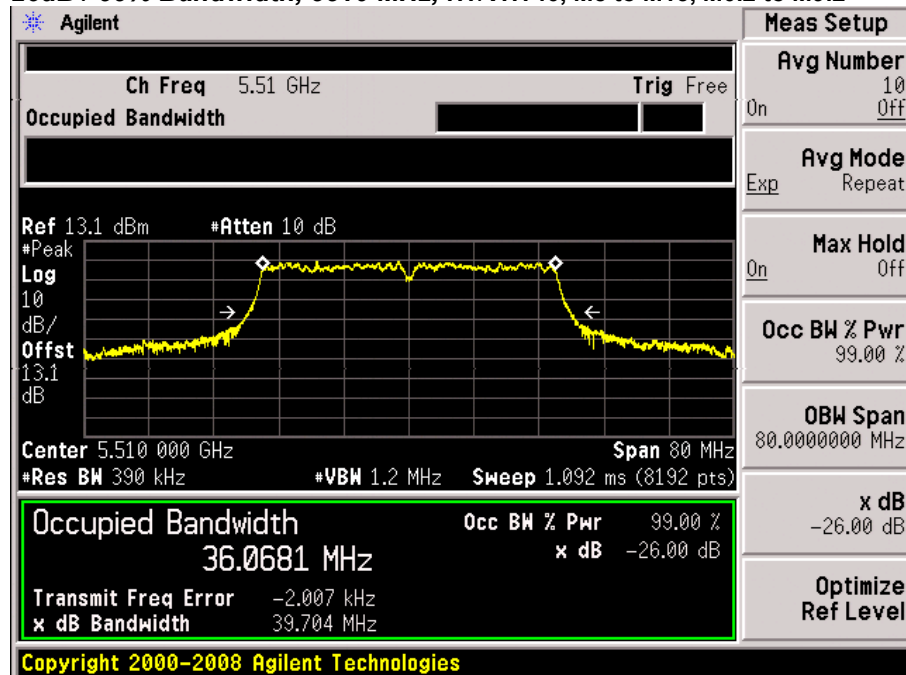




**26dB / 99% Bandwidth, 5530 MHz, Non HT/VHT80, 6 to 54 Mbps**

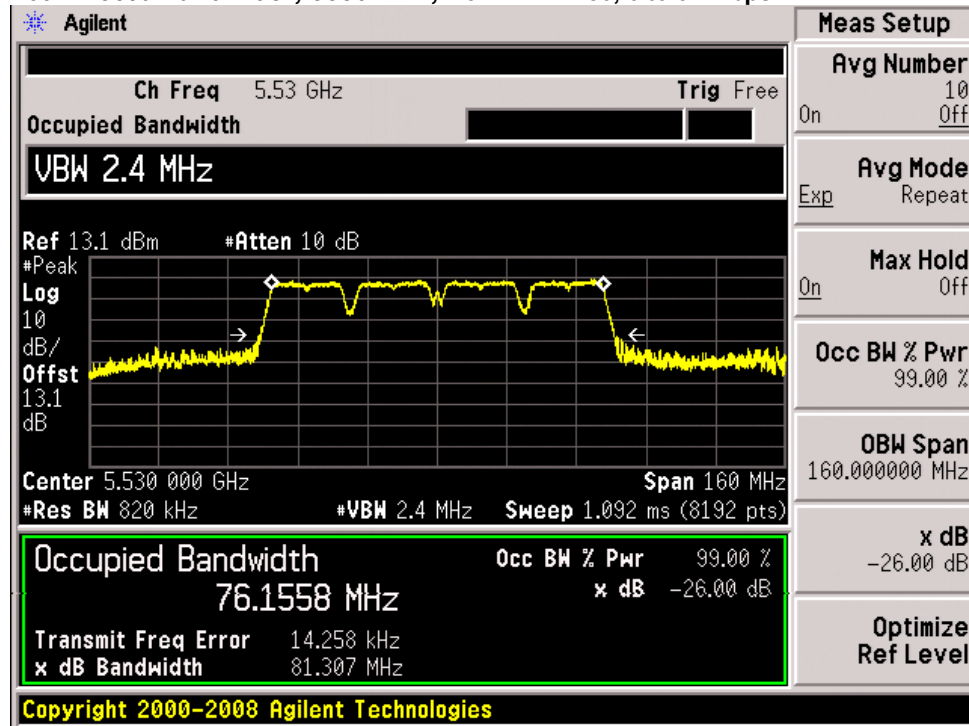


**26dB / 99% Bandwidth, 5530 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1**

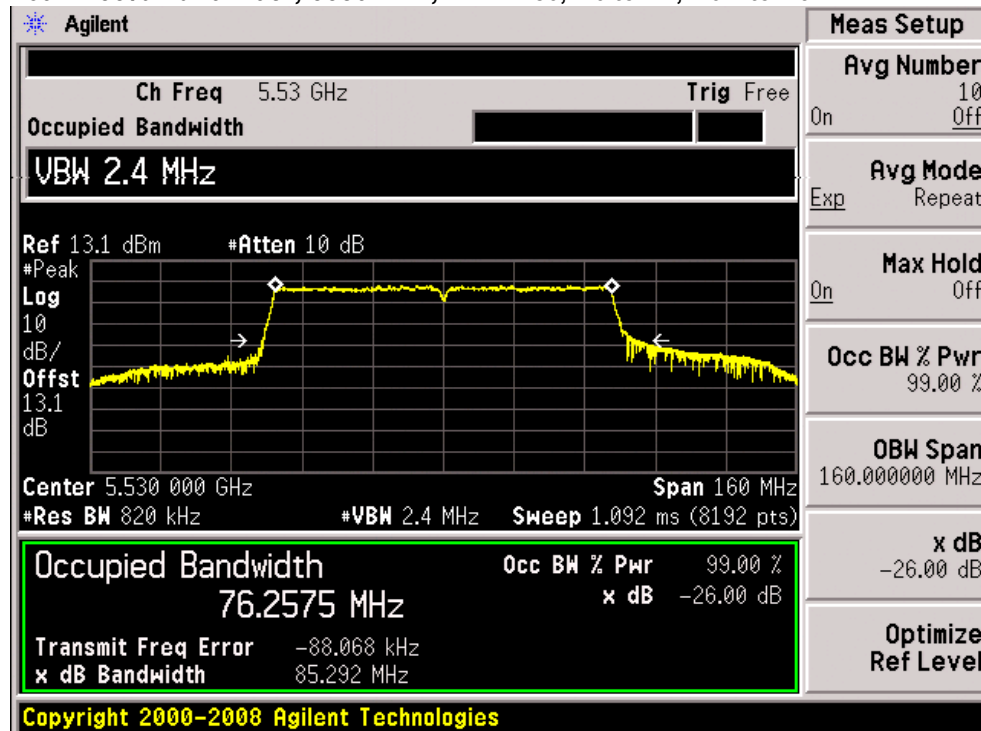






**26dB / 99% Bandwidth, 5550 MHz, Non HT/VHT40, 6 to 54 Mbps**

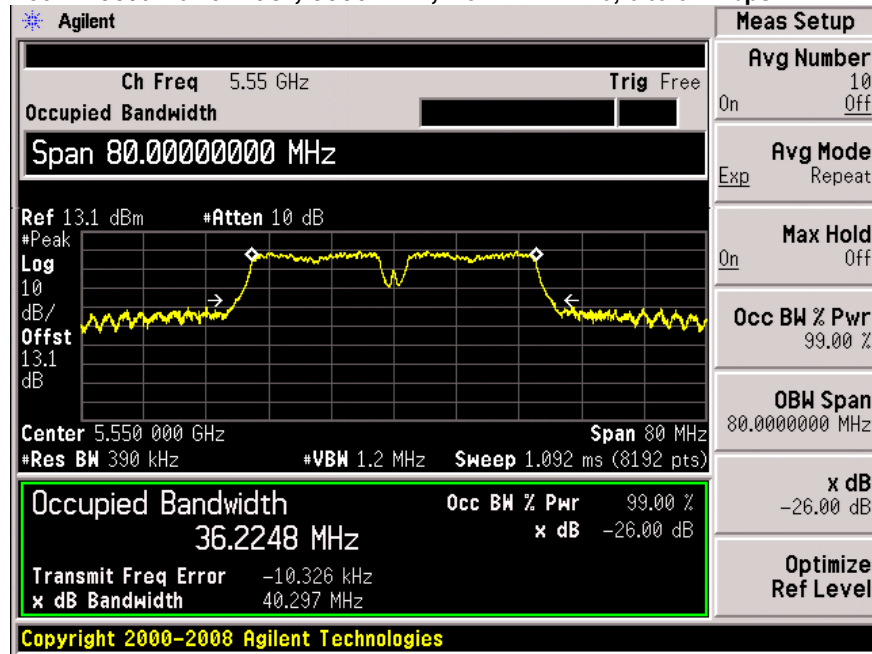


**26dB / 99% Bandwidth, 5550 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1**

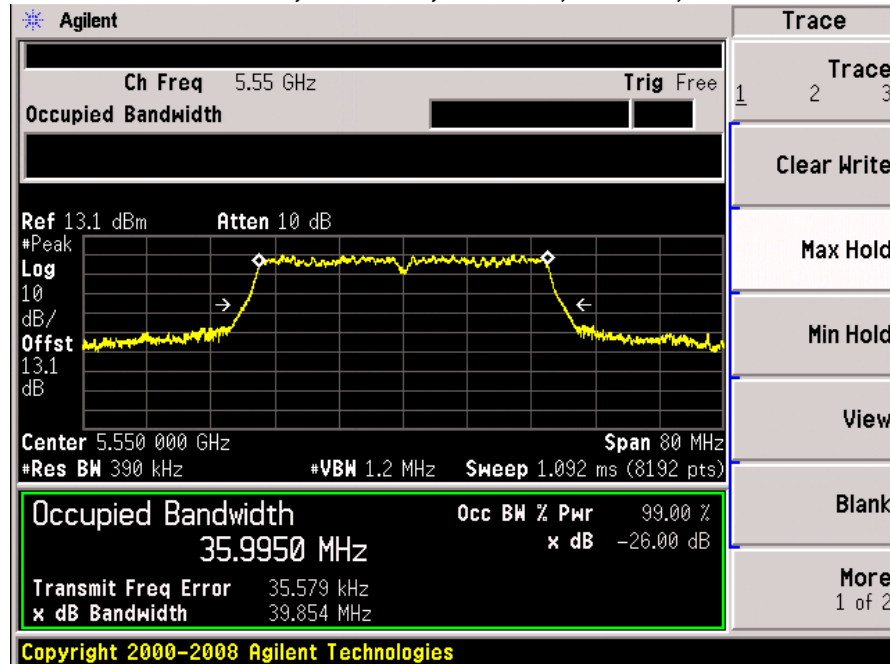




**26dB / 99% Bandwidth, 5550 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3**

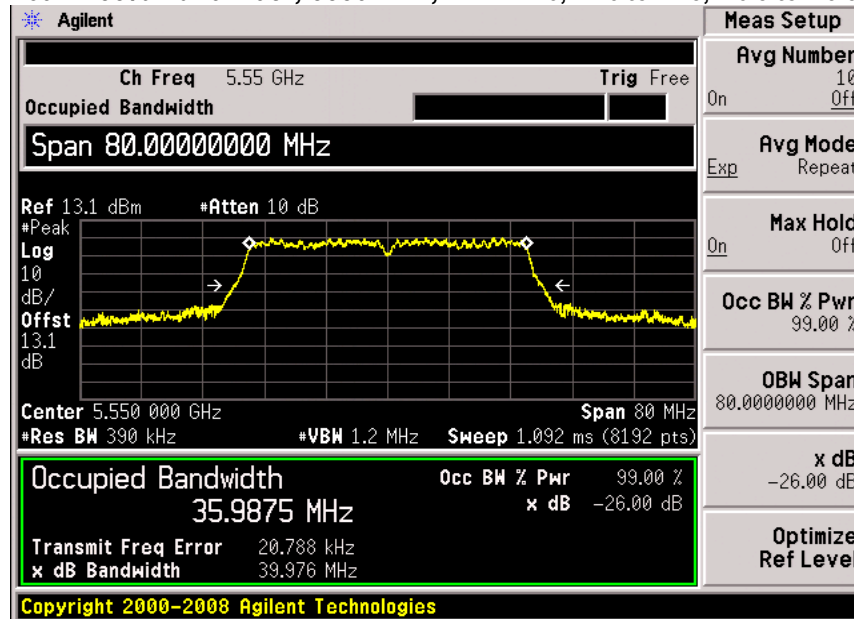


**26dB / 99% Bandwidth, 5550 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1**

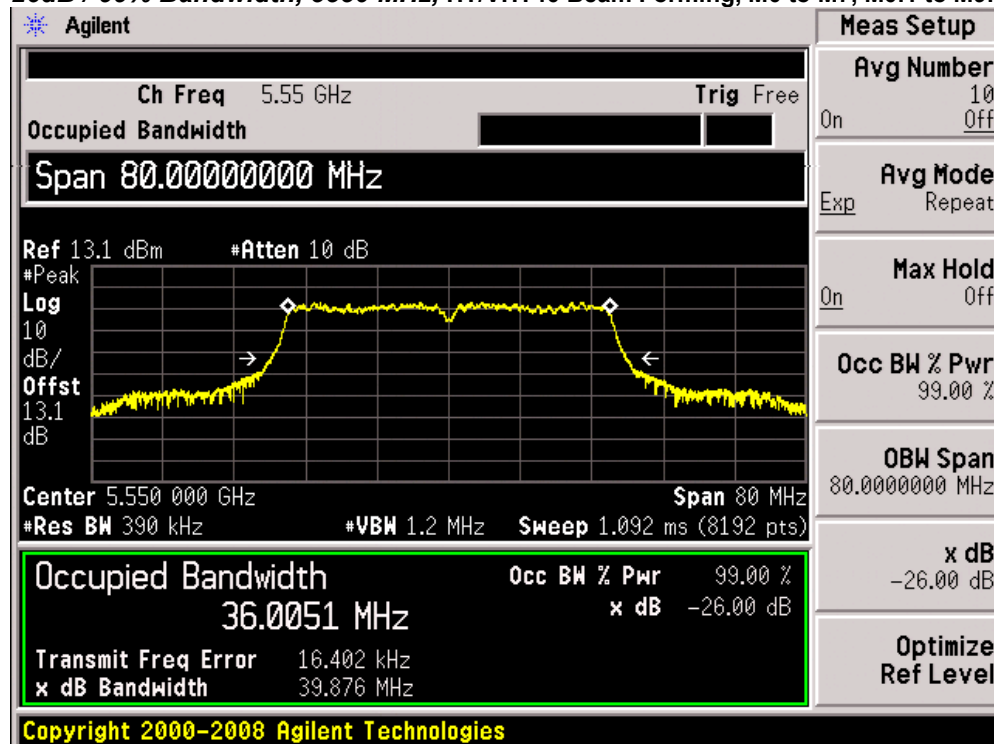




**26dB / 99% Bandwidth, 5560 MHz, Non HT/VHT20, 6 to 54 Mbps**

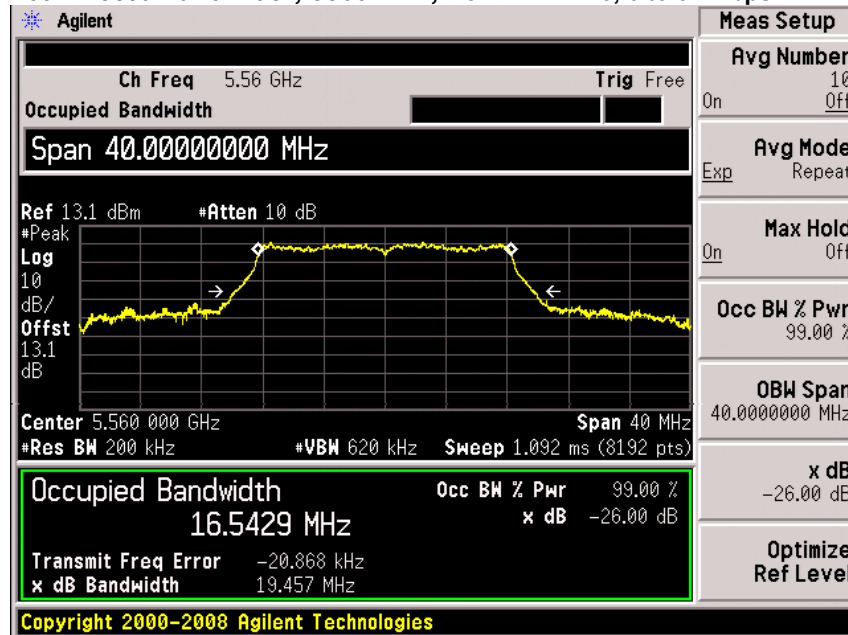


**26dB / 99% Bandwidth, 5560 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**

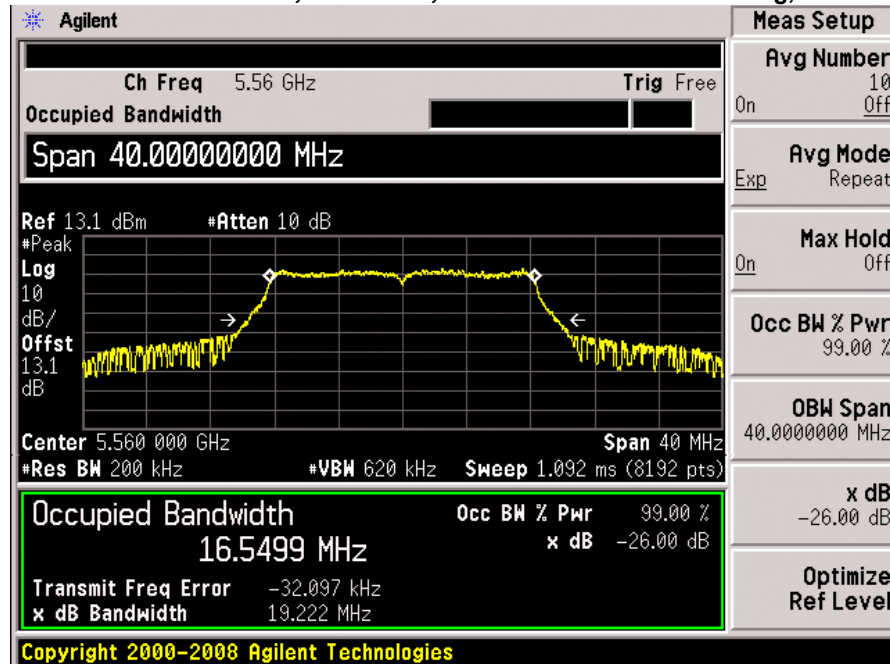




**26dB / 99% Bandwidth, 5560 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**

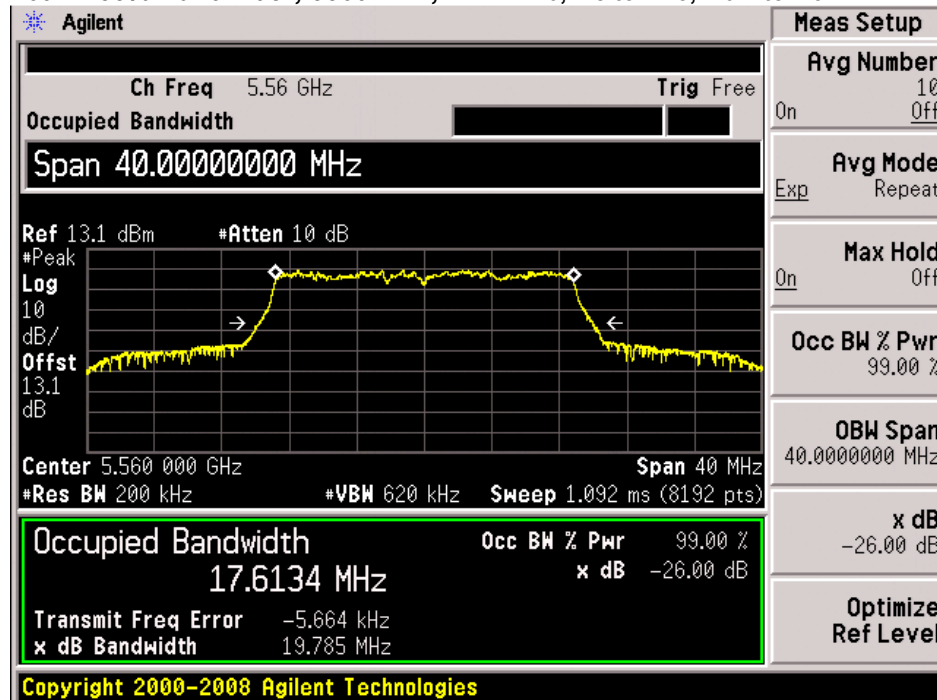


**26dB / 99% Bandwidth, 5560 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**

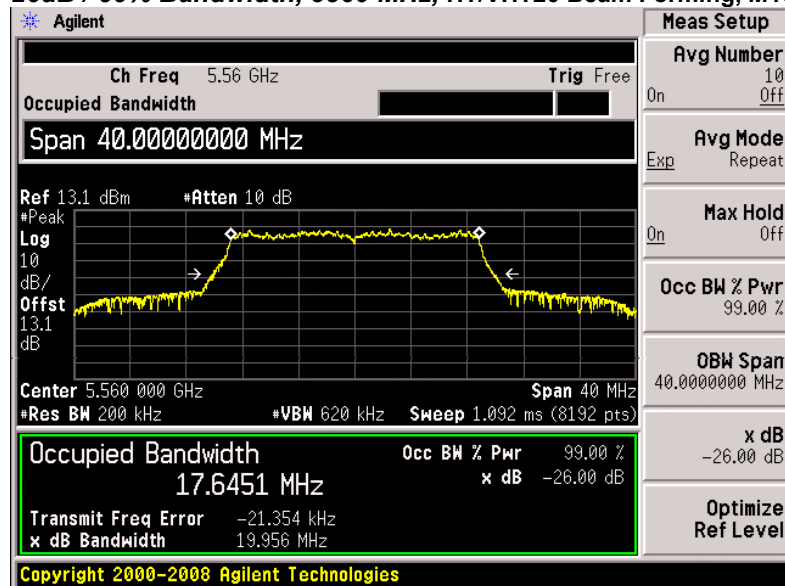




**26dB / 99% Bandwidth, 5700 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**

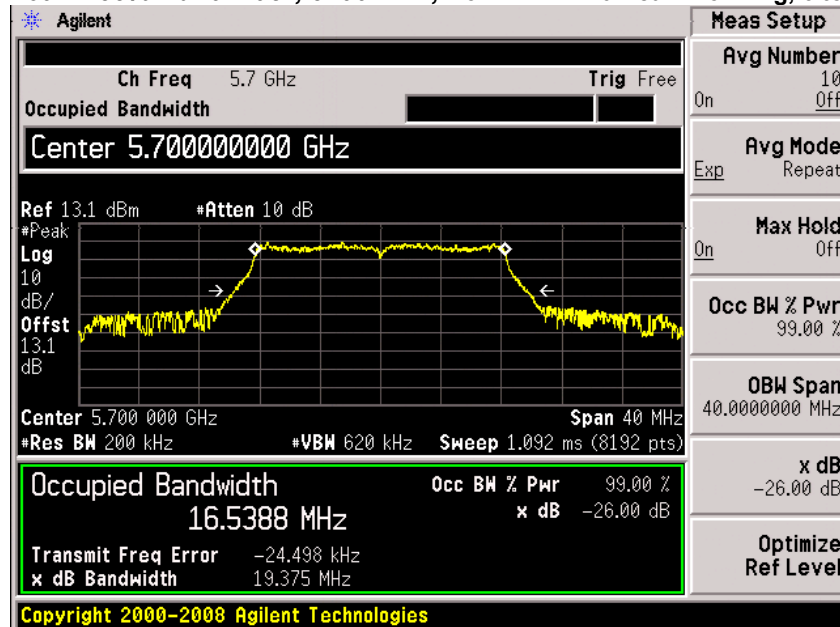


**26dB / 99% Bandwidth, 5700 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2**

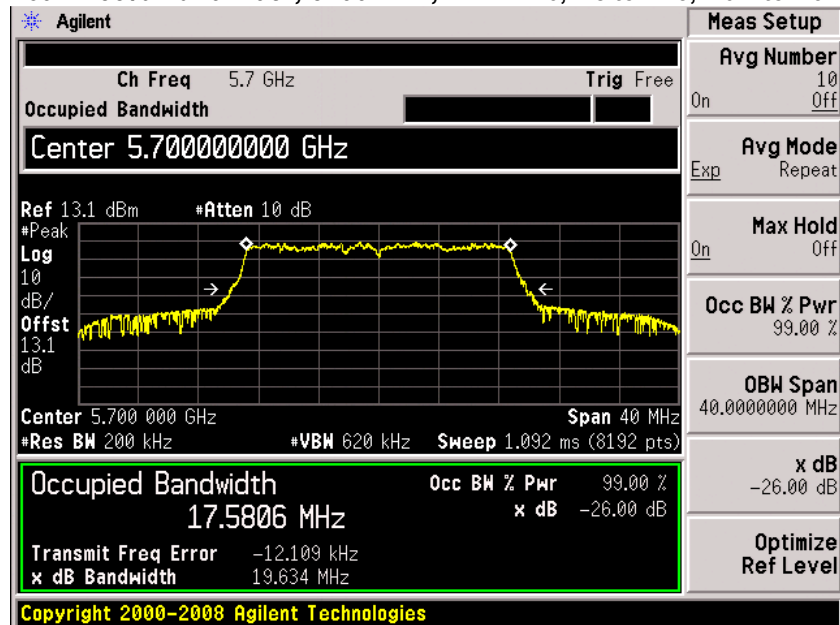




**26dB / 99% Bandwidth, 5700 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3**

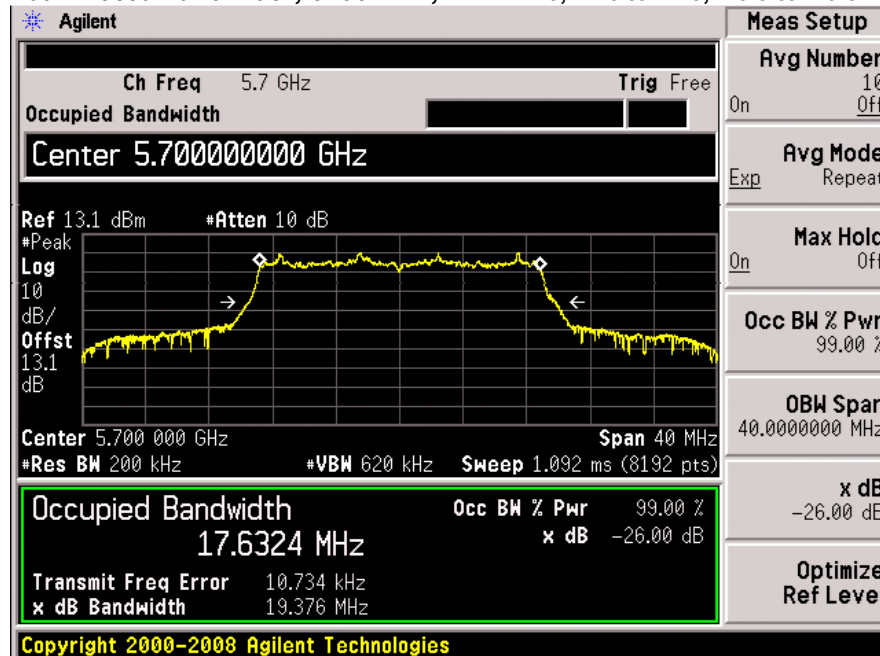


**26dB / 99% Bandwidth, 5700 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**

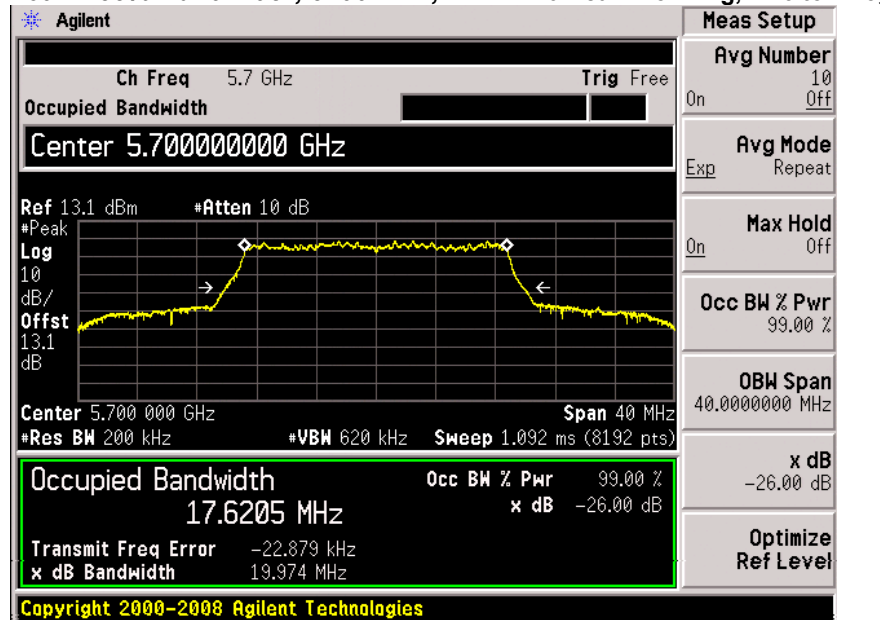



**26dB / 99% Bandwidth, 5700 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**

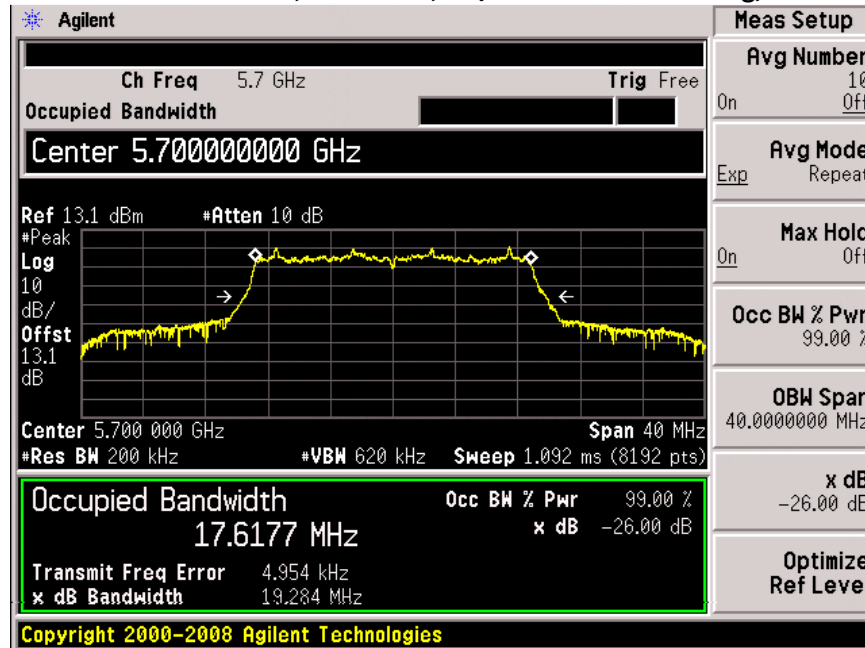

## Peak Output Power

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Sample calculation for the maximum conducted output power for the NonHT80 mode:  
 $11 \text{ dBm} + 10 \log(82.29 \text{ MHz}) = 29.15 \text{ dBm}$ . The limit is further reduced by 1dB (the difference between the antenna gain of 7dBi and 6dBi). The limit is then 28.15dBm. However, the limit of 250mW (24dBm) must also be considered. This limit is further reduced by 1dBm for a limit of 23dBm, which is lower than 28.15dBm. The limit for this case is 23dBm.

The maximum supported antenna gain for all bands is 7dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Method SA-2 from 789033 D01 General UNII Test Procedures Old Rules v01r04 was used.

**Method SA-2** (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section B).
- (ii) Set span to encompass the 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW  $\geq$  3 MHz.
- (v) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.





(xi) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

## Power Spectral Density

15.407: For the bands 5.25-5.35 and 5.47-5.725 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 7dBi. The peak correlated gain for each mode is listed in the table below. See the Theory of Operation for details on the correlated gain for each mode.

The “measure-and-sum technique” is used for measuring in-band power spectral density of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units.

Test Procedure: follow Power procedure listed above, but also perform a Marker Peak Search function, and record this value as the Power Spectral Density.



**Power Results Table**

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Duty Cycle (%)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Total Tx Channel Power (dBm)	Total Tx Channel Power corrected for duty cycle (dBm)	Limit (dBm)	Margin (dB)
5500	Non HT/VHT20, 6 to 54 Mbps	2	7	99.3	14.49	14.28			17.40	17.43	22.88	5.46
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	99.3	12.31	11.97			15.15	15.18	19.89	4.71
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	7	97.8	11.68	12.4	10.93	11.78	17.75	17.85	22.87	5.02
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	8	97.6	10.62	11.32	9.86	10.6	16.65	16.76	21.84	5.08
5500/ 5520	Non HT/VHT40, 6 to 54 Mbps	3	7	99.4	12.71	12.24	11.74		17.02	17.05	23	5.95
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	7	97.3	11.89	12.11	11.69	11.28	17.77	17.89	23	5.11
5500/ 5520/ 5540/ 5560	Non HT/VHT80, 6 to 54 Mbps	4	7	99.3	12.24	12.21	11.48	11.89	17.99	18.02	23	4.98
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	7	95.7	11.89	11.54	10.79	11.06	17.36	17.55	23	5.45
5540/ 5560	Non HT/VHT40, 6 to 54 Mbps	3	7	99.3	12.07	11.67	11.18		16.43	16.46	23	6.54



	HT/VHT40, M0 to M7, M0.1 to M9.1	3	7	98.5	12.89	12.52	11.74		17.18	17.25	23	5.75
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	7	94.3	12.69	11.77	11.34	11.88	17.97	18.22	23	4.78
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	8	98.5	6.7	5.73	5.7	5.58	11.97	12.04	22	9.96

5560	Non HT/VHT20, 6 to 54 Mbps	2	7	99.4	13.87	13.68			16.79	16.81	22.89	6.08
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	99.4	6.2	5.3	5.41	5.48	11.63	11.66	16.84	5.18
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	7	98.3	12.34	13.6	11.91		17.45	17.52	22.96	5.44
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	7	97.6	11.63	12.42	11.24		16.56	16.67	23.00	6.33

5700	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	99.3	12.73	12.11			15.44	15.47	19.93	4.46
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	7	98.2	12.53	13.45	12.13		17.51	17.59	22.93	5.34
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	7	97.6	10.36	10.75	9.4	10.12	16.21	16.31	22.87	6.56
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	7	97.4	11.78	12.36	11.12		16.55	16.67	23.00	6.34
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	8	97.4	10.27	10.71	9.33	10.04	16.14	16.25	21.85	5.60



### PSD Results Table


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Duty Cycle (%)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Total PSD corrected for duty cycle (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5500	Non HT/VHT20, 6 to 54 Mbps	2	10	99.3	4.186	3.702			6.96	6.99	7.00	0.01
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	99.3	1.797	1.338			4.58	4.61	7.00	2.39
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	8	97.8	1.64	1.436	0.627	1.148	7.25	7.35	9.00	1.65
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	8	97.6	0.611	0.127	-0.783	0.118	6.07	6.17	9.00	2.83
5500/ 5520	Non HT/VHT40, 6 to 54 Mbps	3	12	99.4	-1.218	-1.435	-0.741		3.65	3.68	5	1.32
	HT/VHT40, M8 to M15, M0.2 to M9.2	4	10	97.3	-1.517	-1.699	-1.931	-2.139	4.21	4.32	7	2.68
5500/ 5520/ 5540/ 5560	Non HT/VHT80, 6 to 54 Mbps	4	13	99.3	-5.238	-4.874	-4.1	-4.658	1.32	1.35	4	2.65
	HT/VHT80, M0 to M7, M0.1 to M9.1	4	13	95.7	-5.481	-5.909	-5.156	-6.142	0.37	0.56	4	3.44
5540/ 5560	Non HT/VHT40, 6 to 54 Mbps	3	12	99.3	-1.709	-1.786	-1.591		3.08	3.11	5	1.89
	HT/VHT40, M0 to M7, M0.1 to M9.1	3	12	98.5	-1.748	-1.447	-1.192		3.31	3.38	5	1.62
	HT/VHT40 Beam Forming, M16 to M23, M0.3 to M9.3	4	8	94.3	-0.799	-1.841	-1.122	-0.87	4.88	5.14	9	3.86
	HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1	4	13	98.5	-7.479	-8.254	-7.189	-7.903	-1.67	-1.60	4	5.60
5560	Non HT/VHT20, 6 to 54 Mbps	2	10	99.4	3.185	3.051			6.13	6.15	7.00	0.85
	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	4	13	99.4	-4.499	-5.167	-5.274	-6.987	0.63	0.66	4.00	3.34
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	9	98.3	1.553	2.677	2.108		6.91	6.98	8.00	1.02
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	7	97.6	0.757	1.482	0.469		5.70	5.80	10.00	4.20




5700	Non HT/VHT20 Beam Forming, 6 to 54 Mbps	2	10	99.3	1.901	1.563			4.75	4.78	7.00	2.22
	HT/VHT20, M8 to M15, M0.2 to M9.2	3	9	98.2	1.502	2.474	2.074		6.81	6.88	8.00	1.12
	HT/VHT20, M16 to M23, M0.3 to M9.3	4	8	97.6	0.536	-0.317	-1.198	-0.638	5.66	5.77	9.00	3.23
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	3	7	97.4	0.159	0.669	-0.102		5.03	5.14	10.00	4.86
	HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3	4	8	97.4	-0.152	-0.997	-1.968	-1.216	4.99	5.10	9.00	3.90



**Peak Output Power, 5500 MHz, Non HT/VHT20, 6 to 54 Mbps**

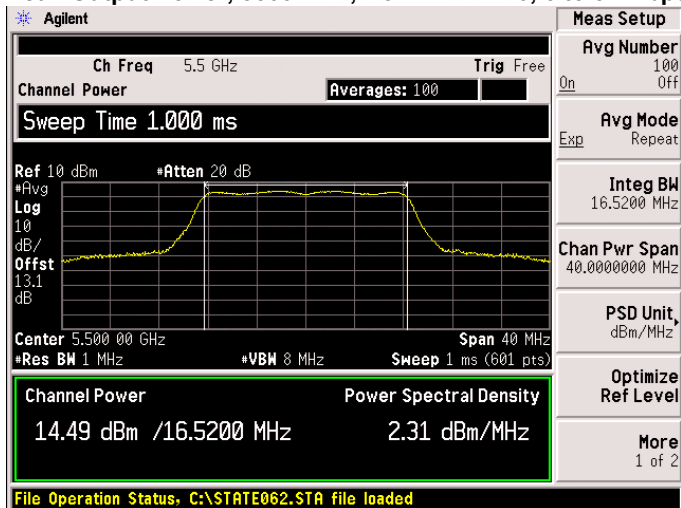


**Antenna A**

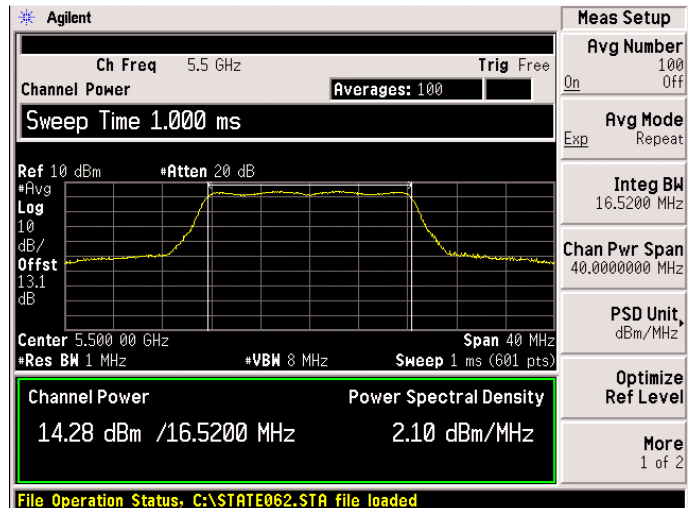


**Antenna B**



Peak Output Power, 5500 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

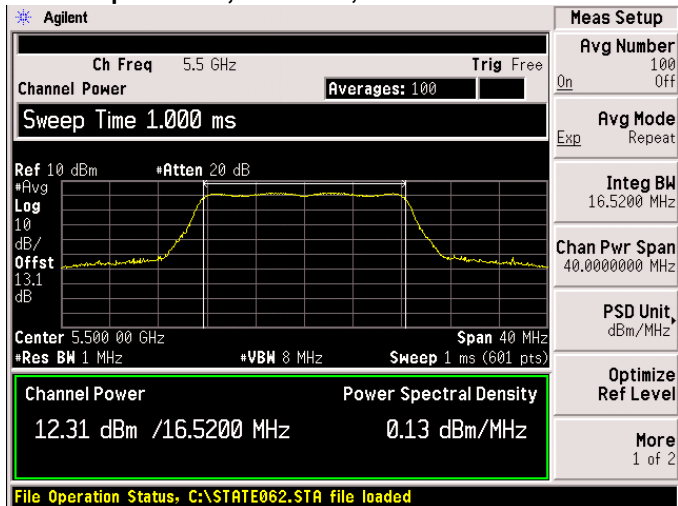


Antenna A

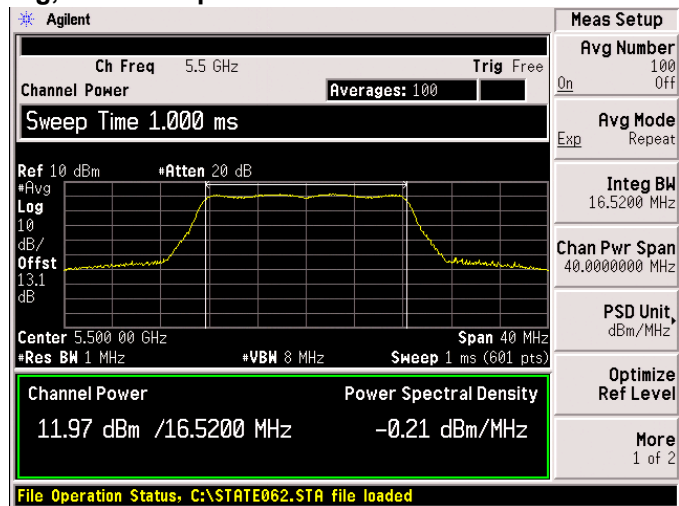


Antenna B




Peak Output Power, 5500 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

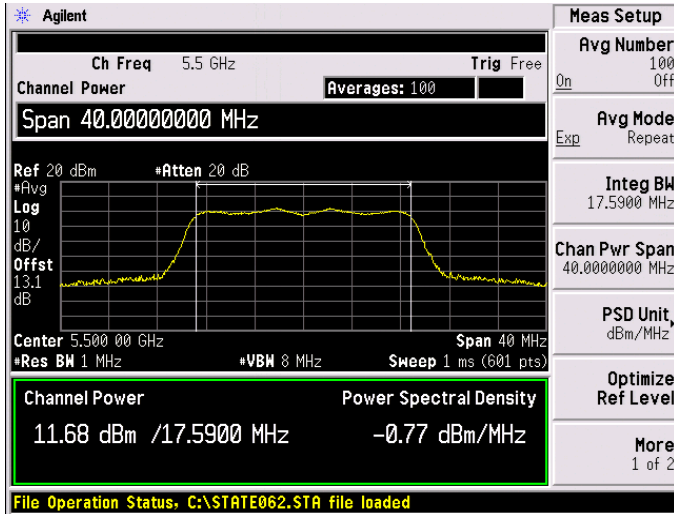


Antenna A

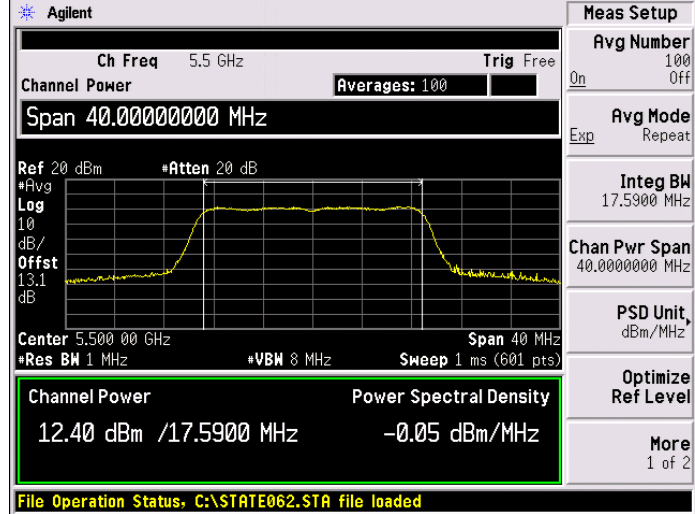

Antenna B

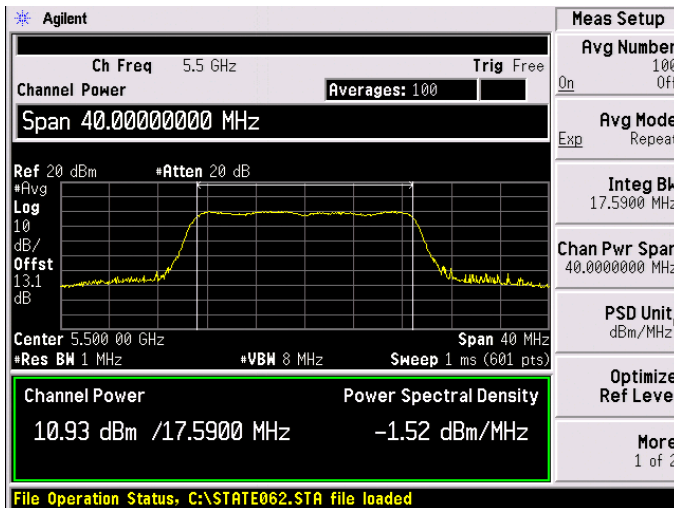

Antenna C

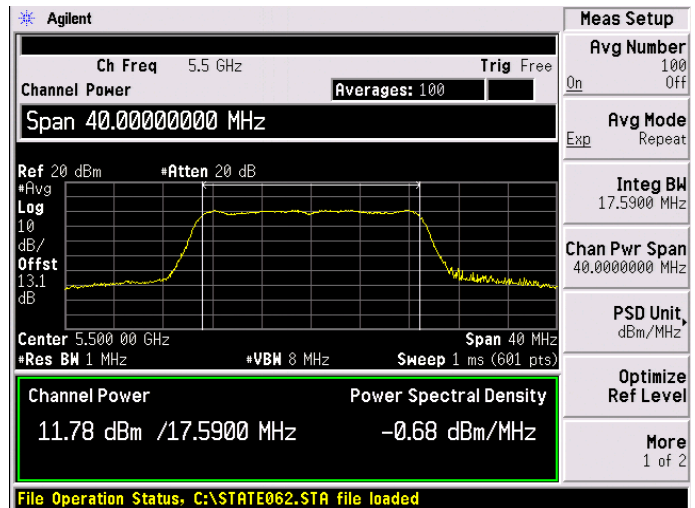


Antenna D







Peak Output Power, 5500 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

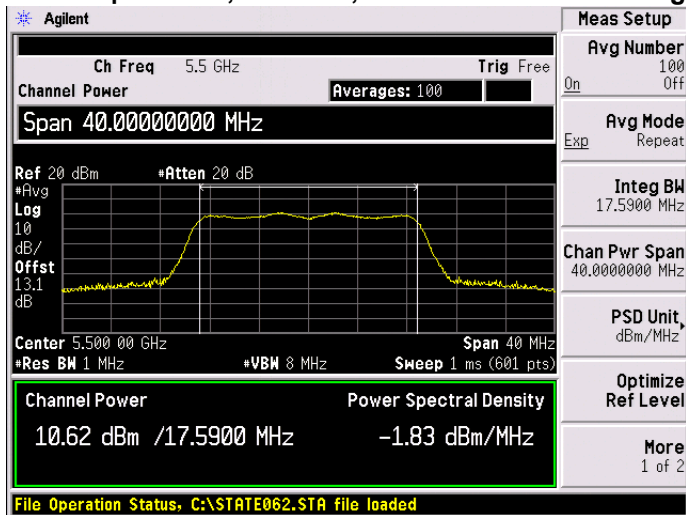


Antenna A

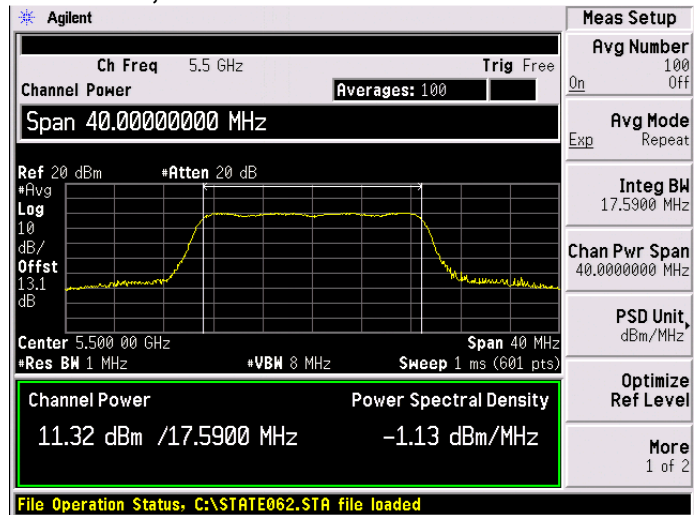

Antenna B

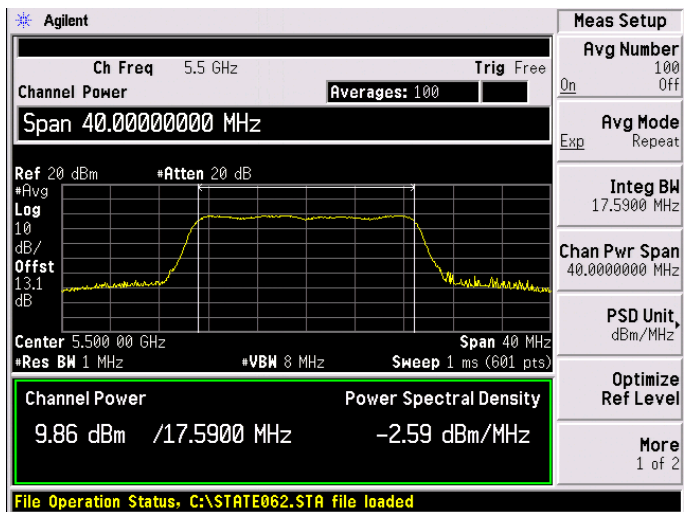


Antenna C

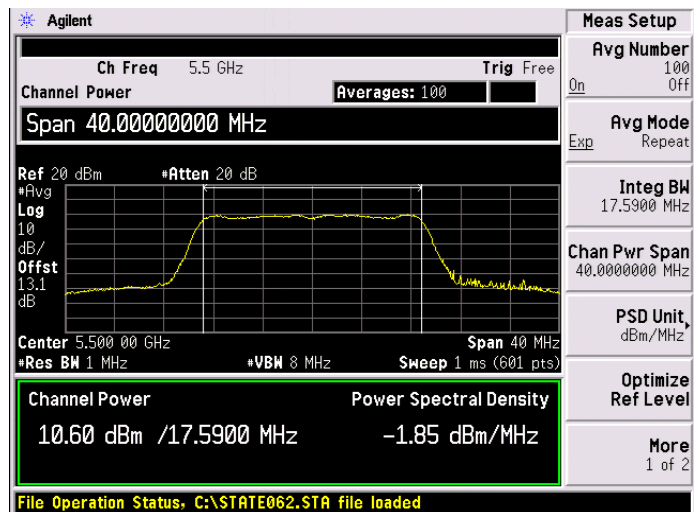


Antenna D




Peak Output Power, 5510 MHz, Non HT/VHT40, 6 to 54 Mbps

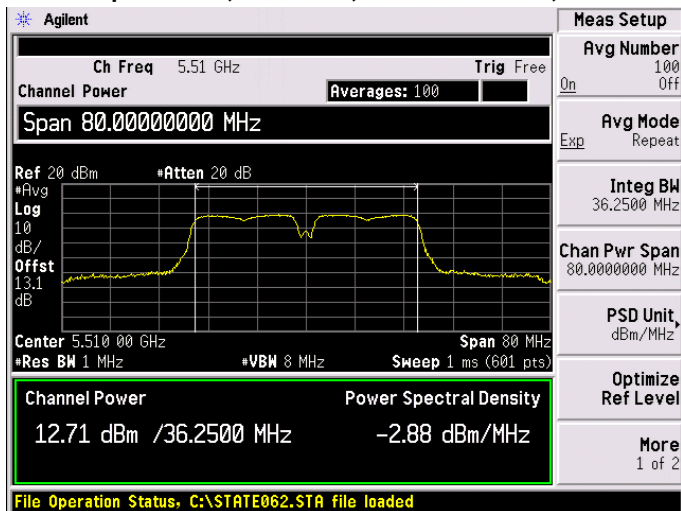

Antenna A

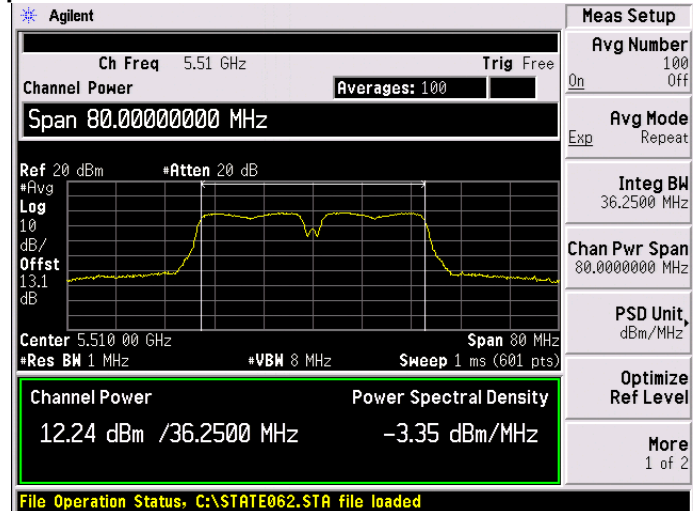


Antenna B

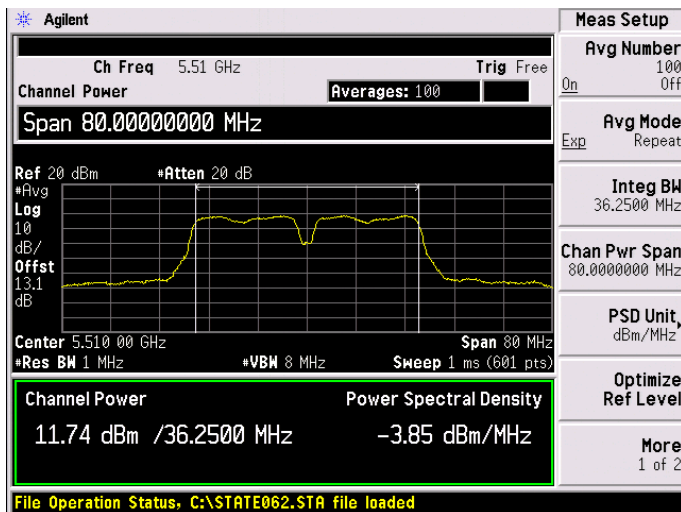


Antenna C




Peak Output Power, 5510 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

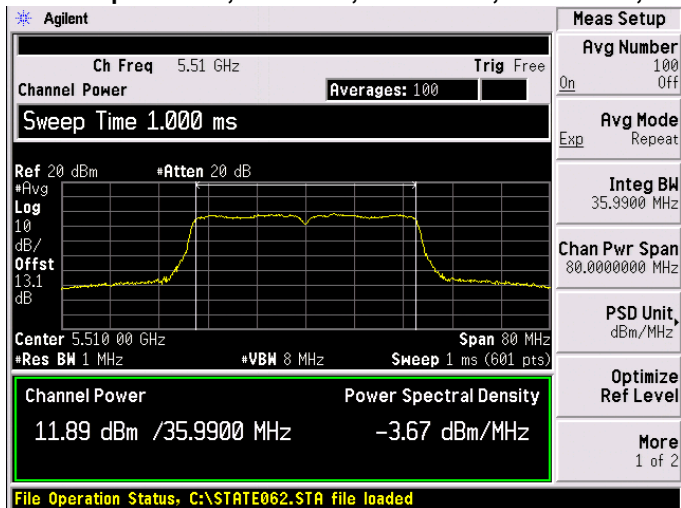


Antenna A

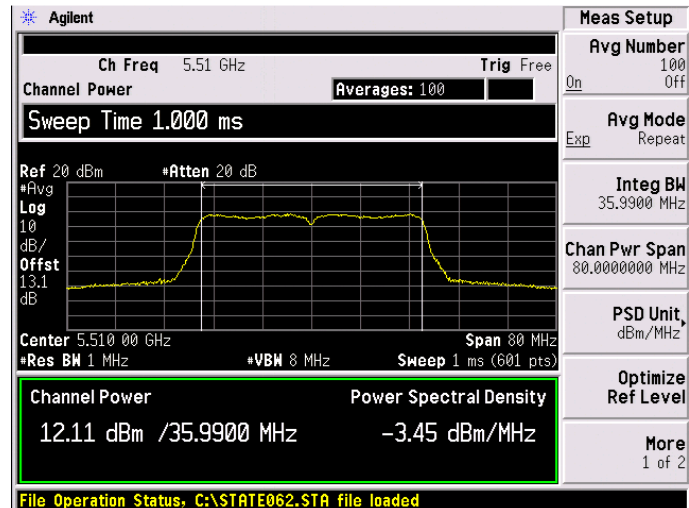

Antenna B

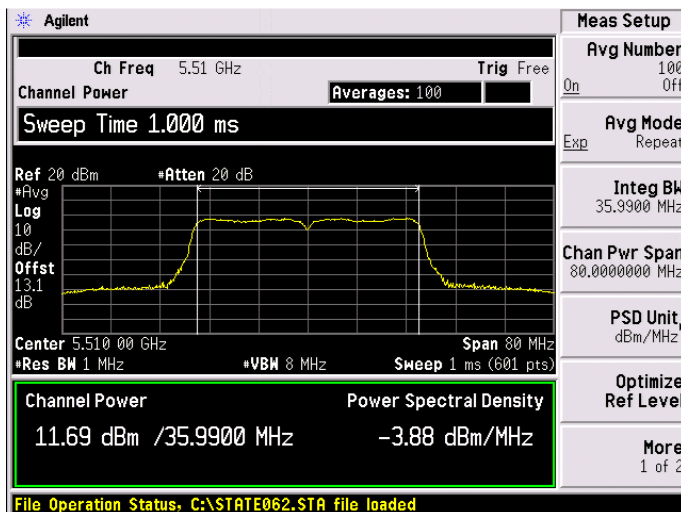


Antenna C

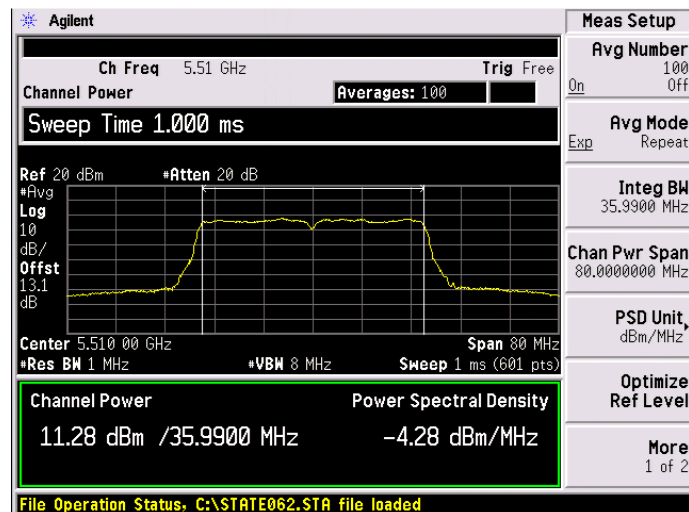


Antenna D




Peak Output Power, 5530 MHz, Non HT/VHT80, 6 to 54 Mbps

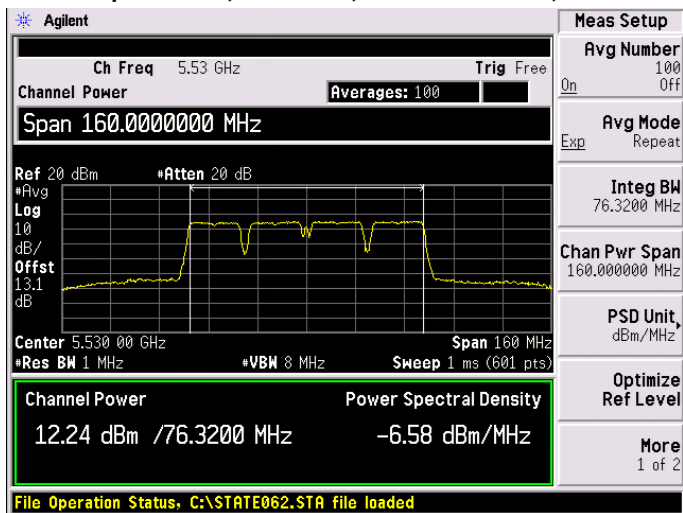


Antenna A

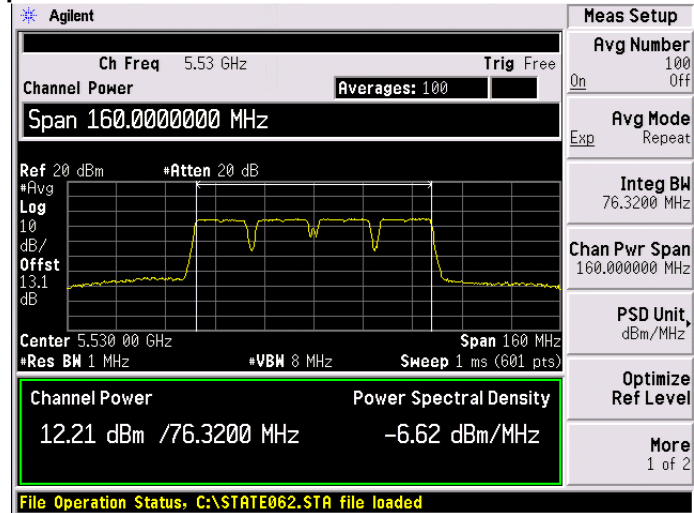

Antenna B

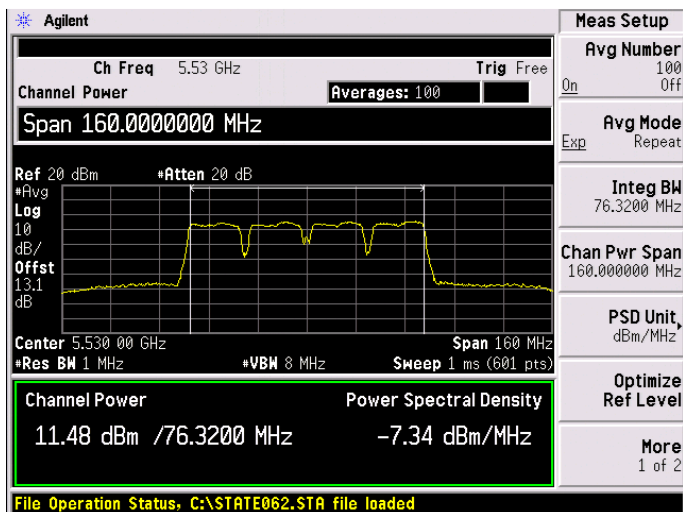


Antenna C

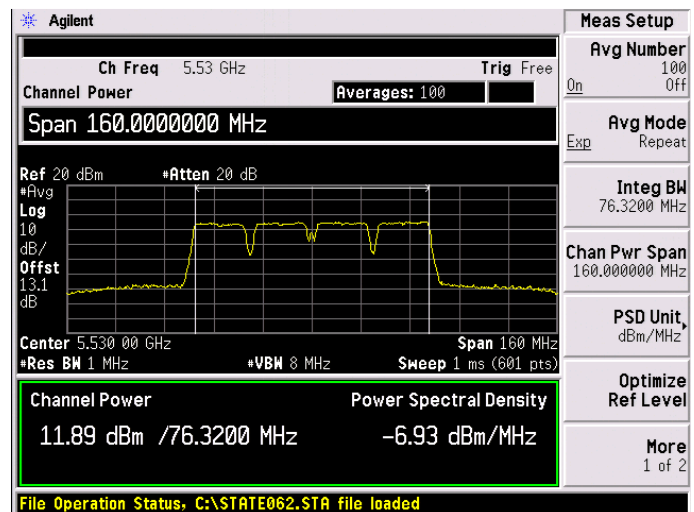


Antenna D




Peak Output Power, 5530 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

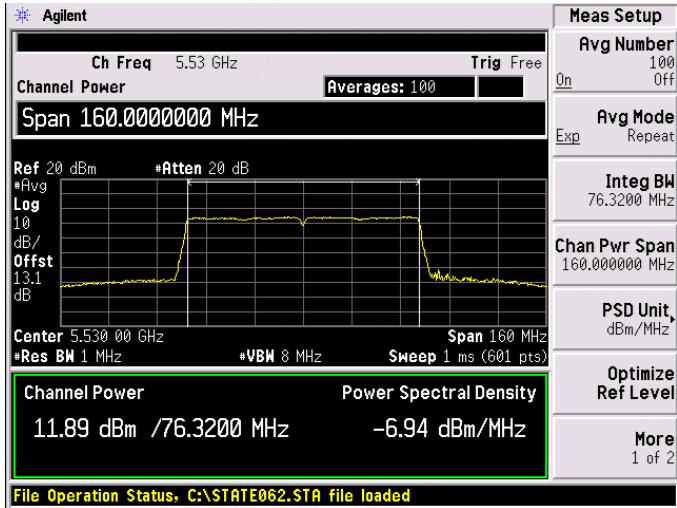


Antenna A

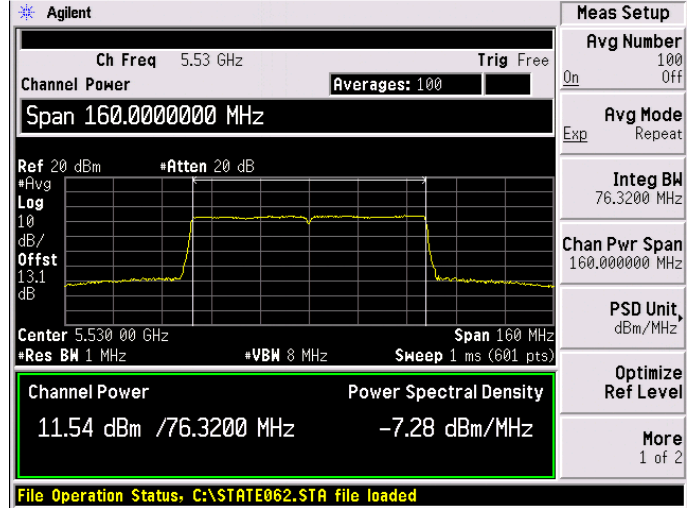

Antenna B

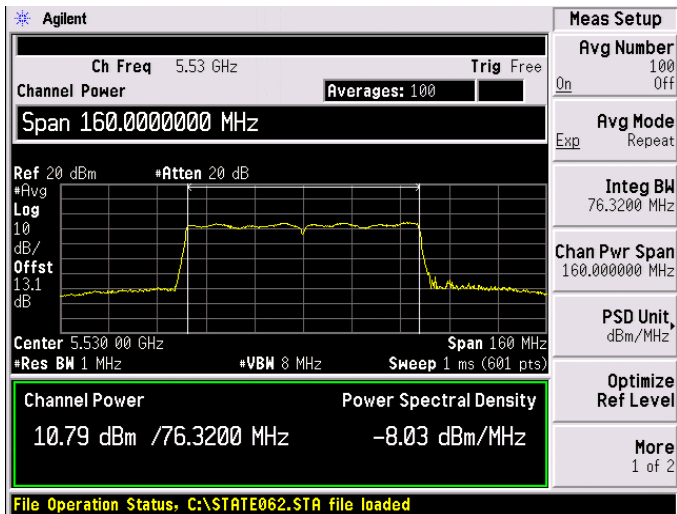


Antenna C

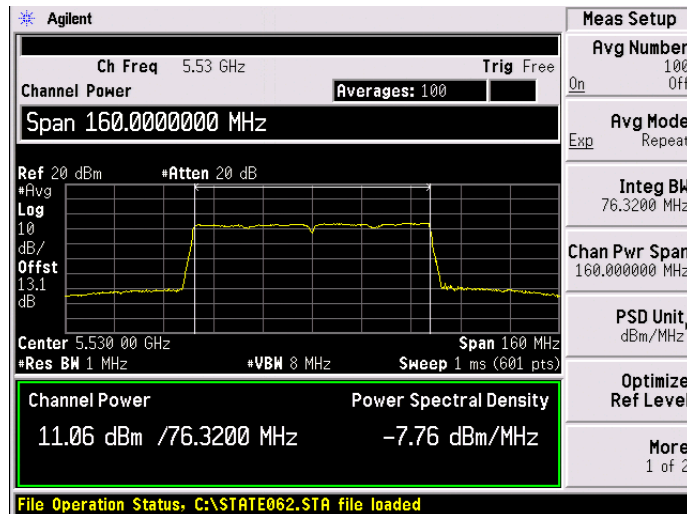


Antenna D




Peak Output Power, 5550 MHz, Non HT/VHT40, 6 to 54 Mbps

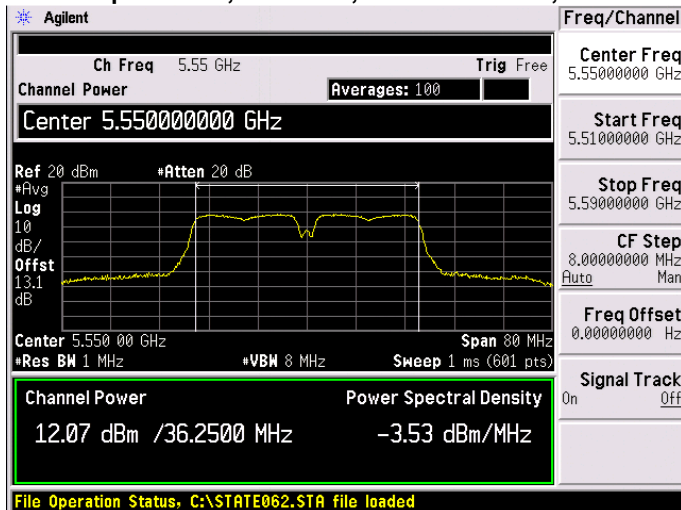

Antenna A

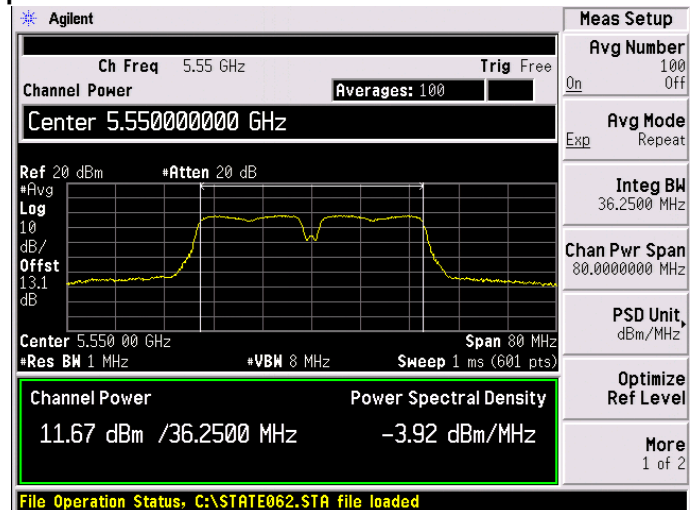

Antenna B

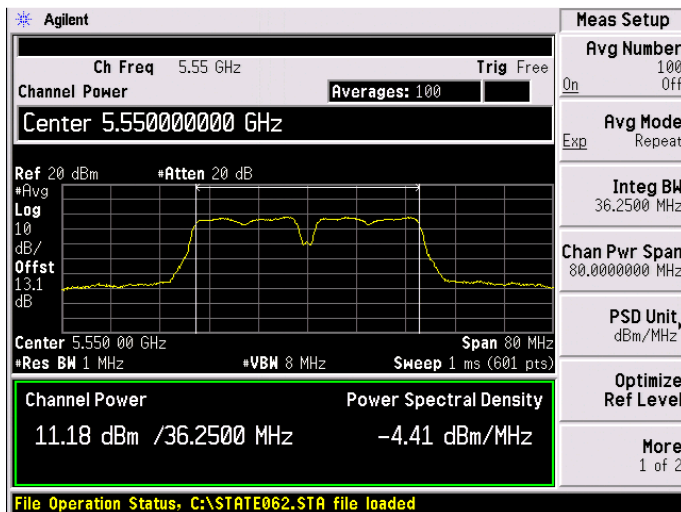


Antenna C







Peak Output Power, 5550 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

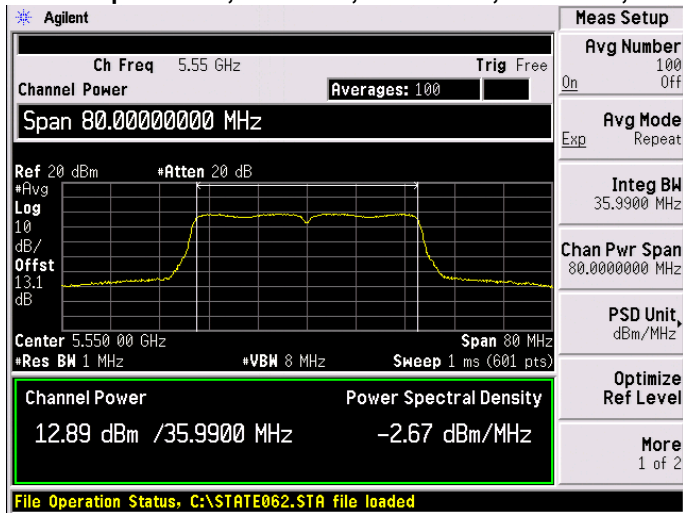

Antenna A

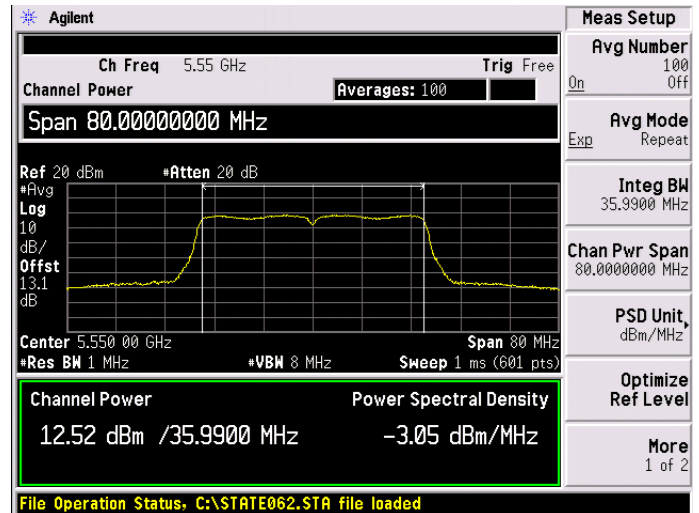


Antenna B

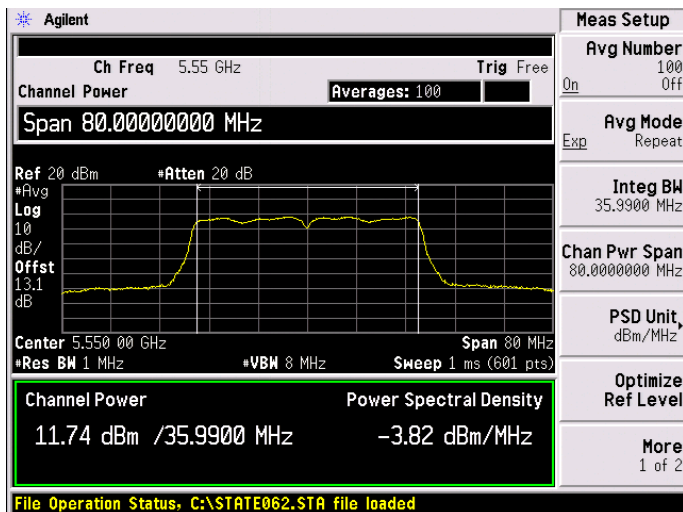


Antenna C




Peak Output Power, 5550 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

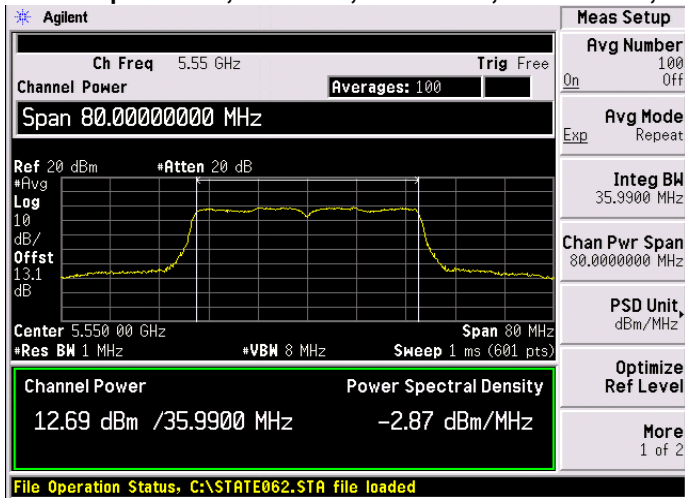


Antenna A

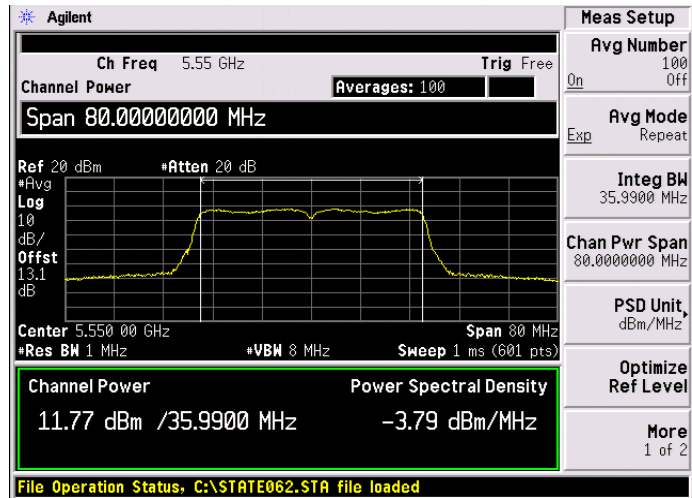

Antenna B

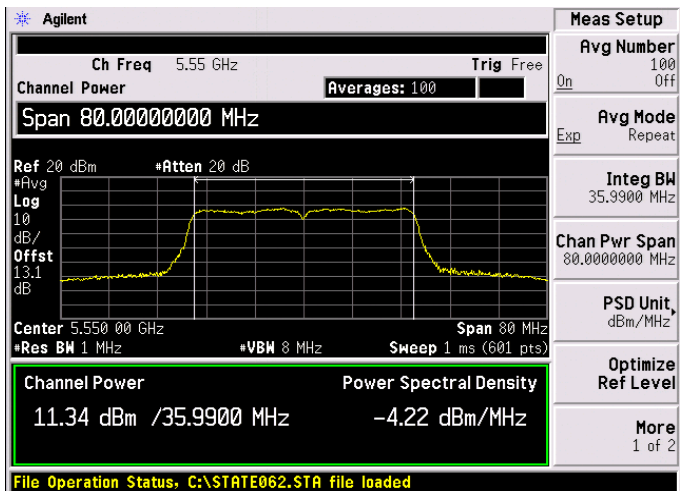

Antenna C

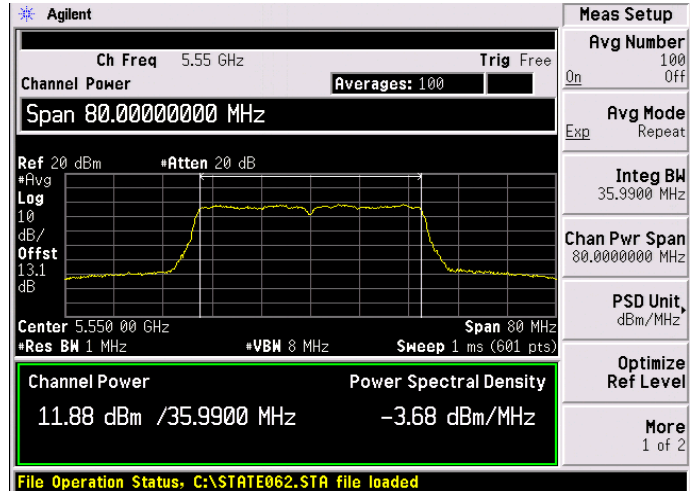


Antenna D







Peak Output Power, 5550 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

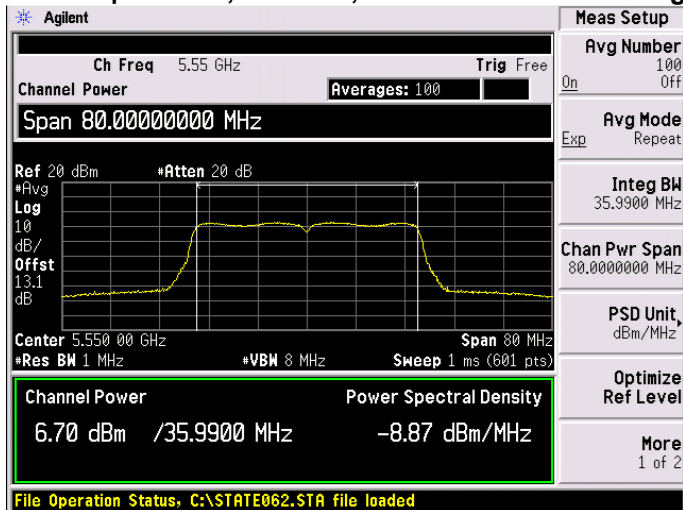


Antenna A

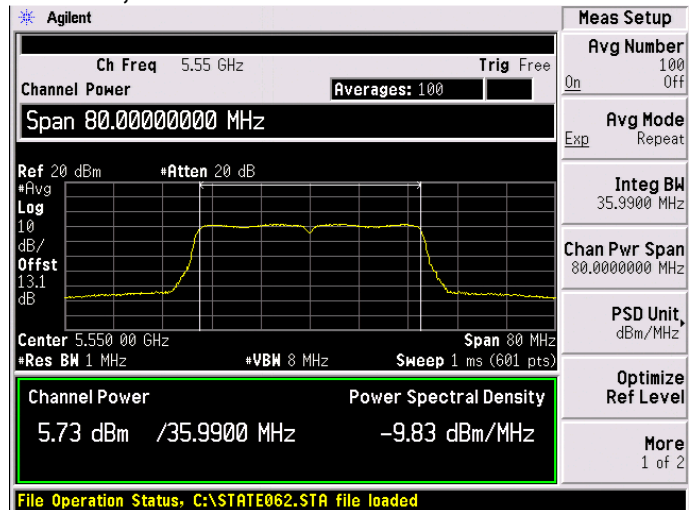

Antenna B

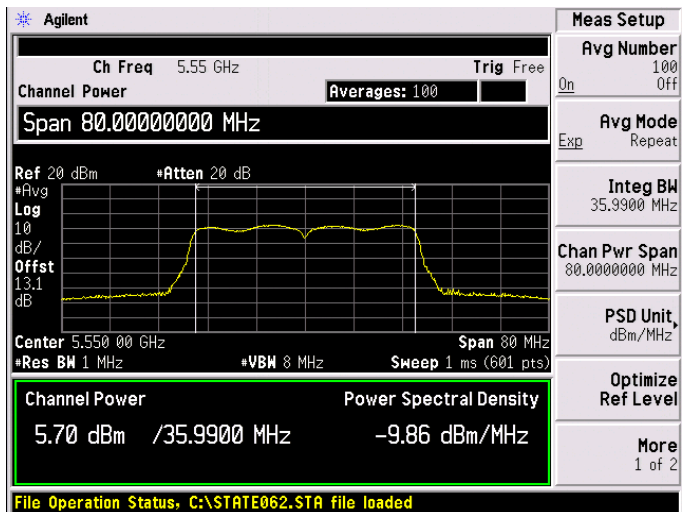


Antenna C

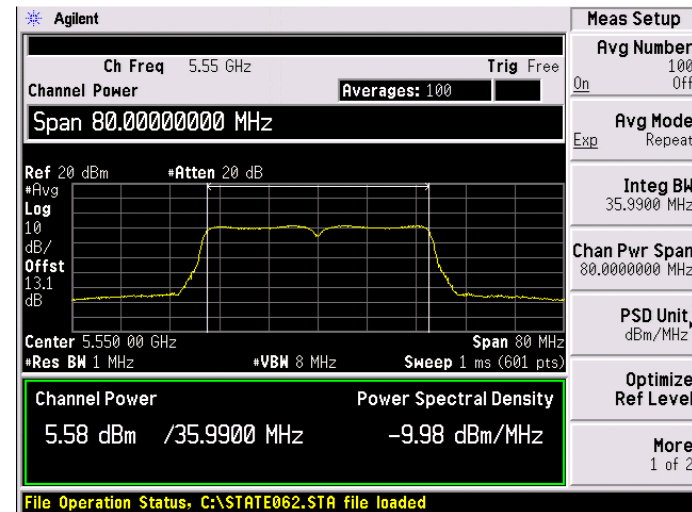


Antenna D



Peak Output Power, 5560 MHz, Non HT/VHT20, 6 to 54 Mbps

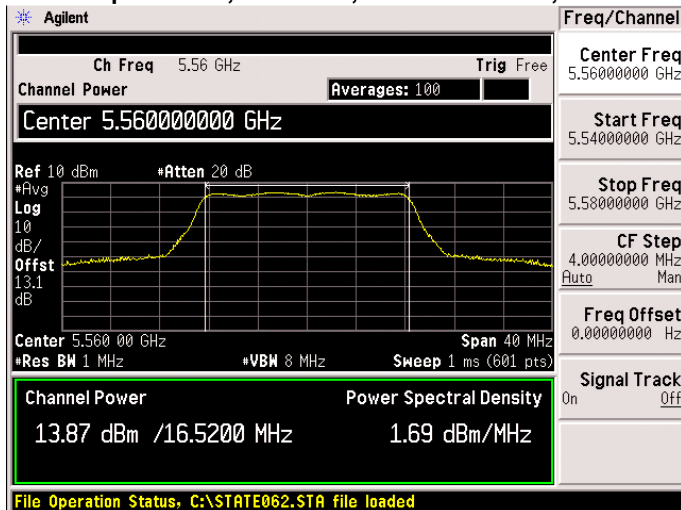


Antenna A

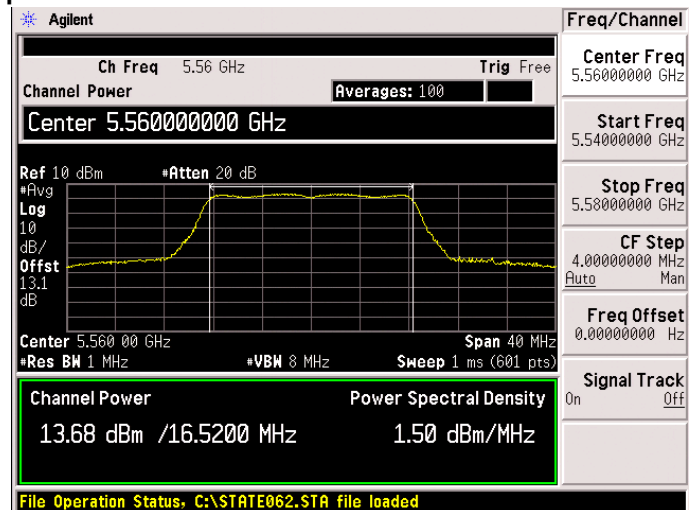


Antenna B




Peak Output Power, 5560 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

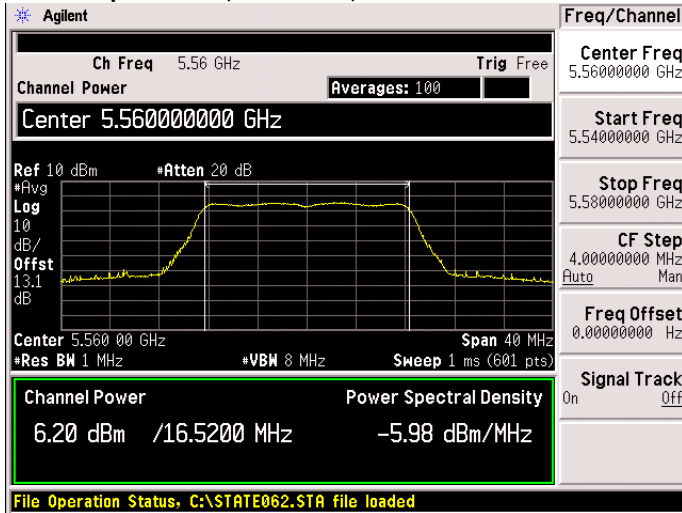


Antenna A

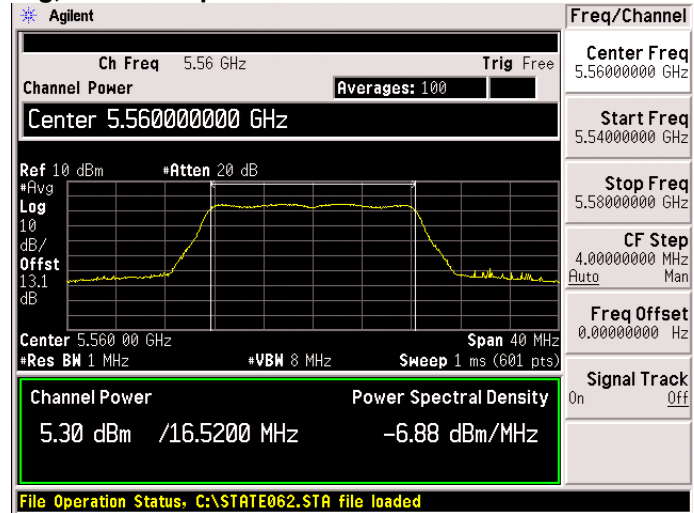

Antenna B

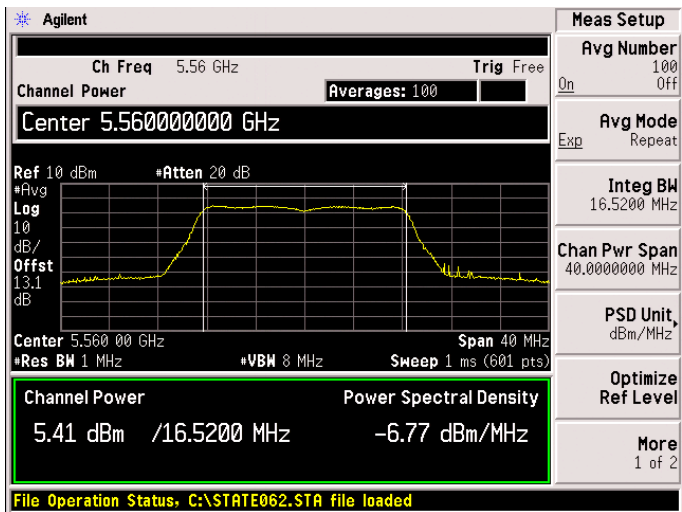


Antenna C

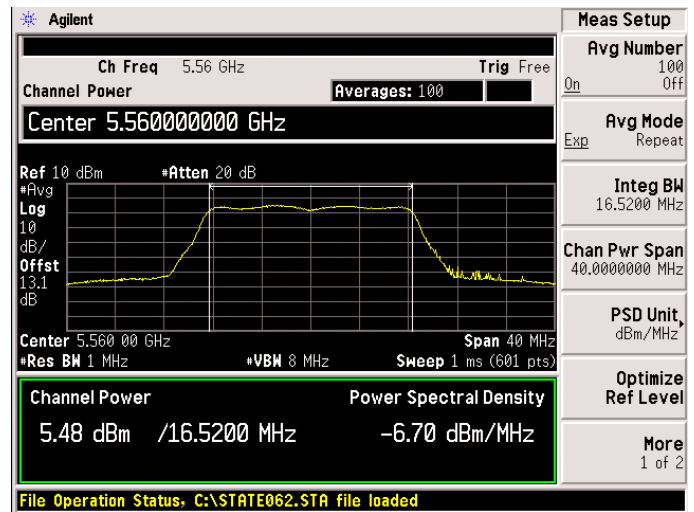


Antenna D




Peak Output Power, 5560 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

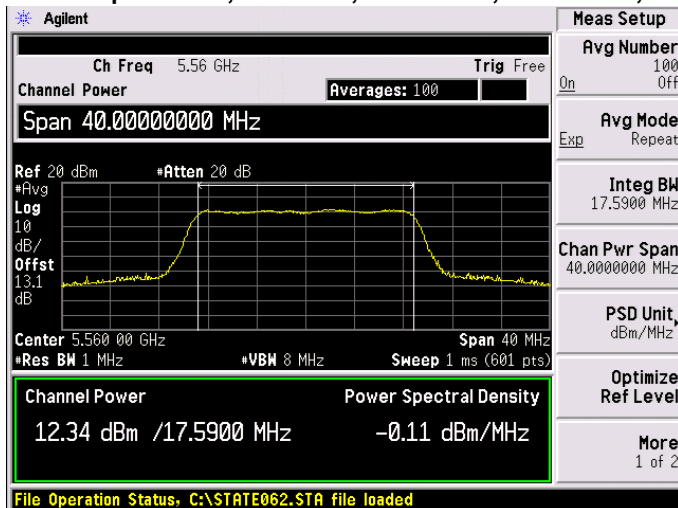

Antenna A

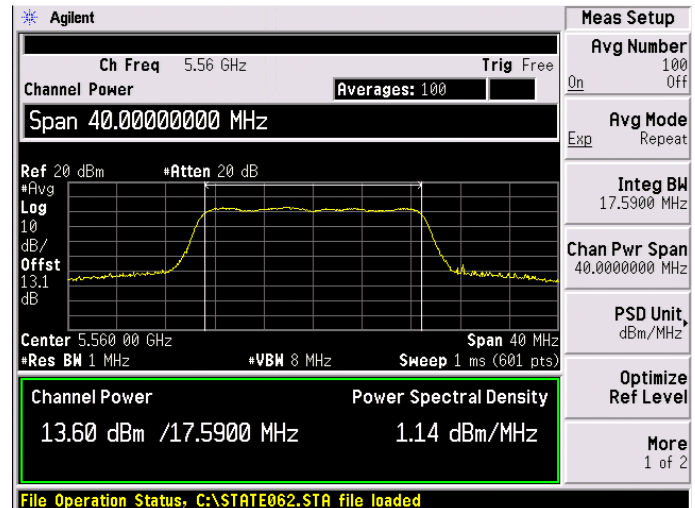


Antenna B

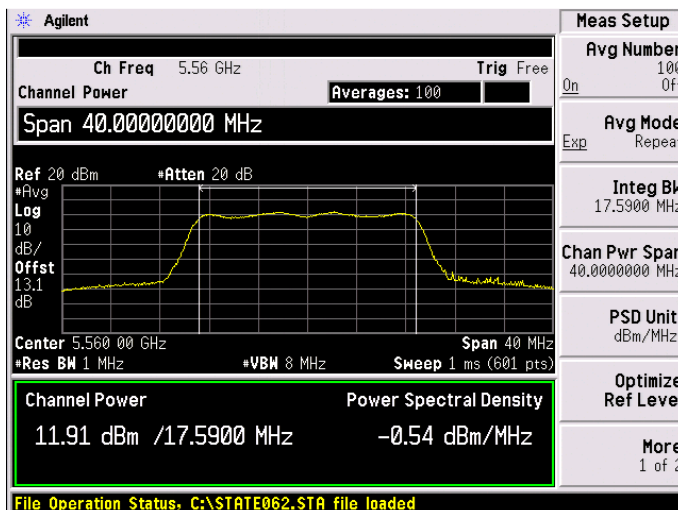


Antenna C




Peak Output Power, 5560 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

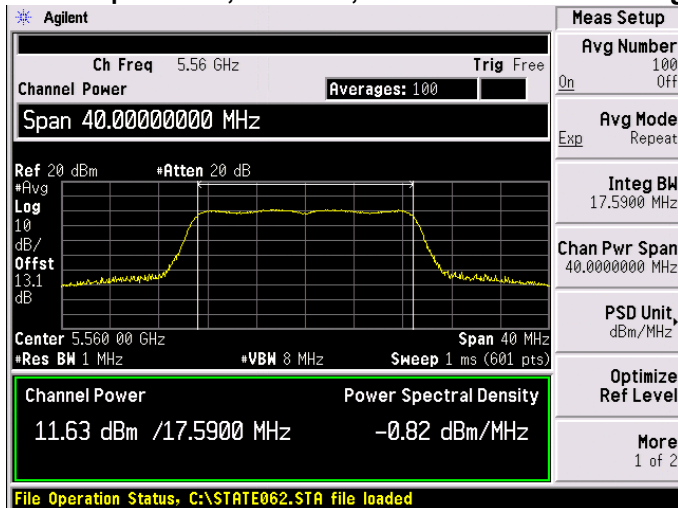

Antenna A

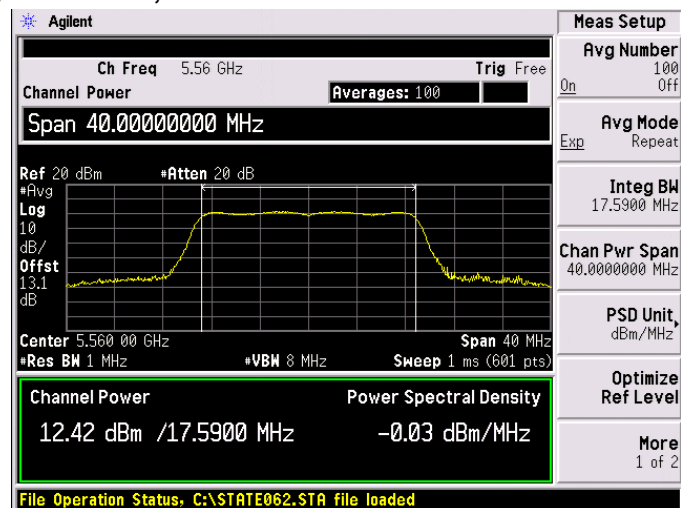


Antenna B

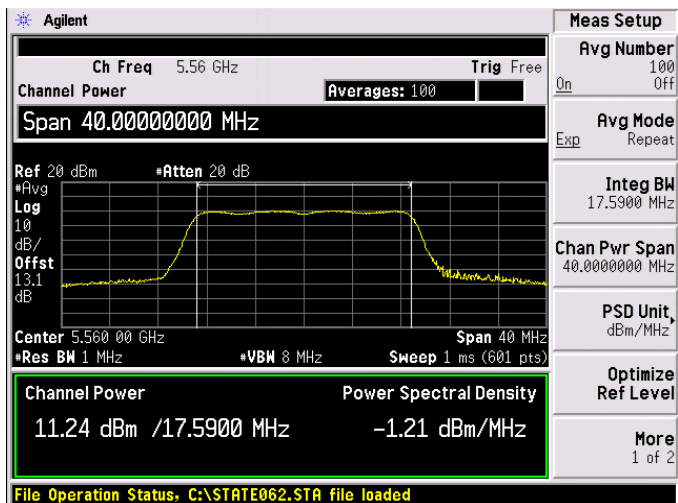


Antenna C



**Peak Output Power, 5700 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**

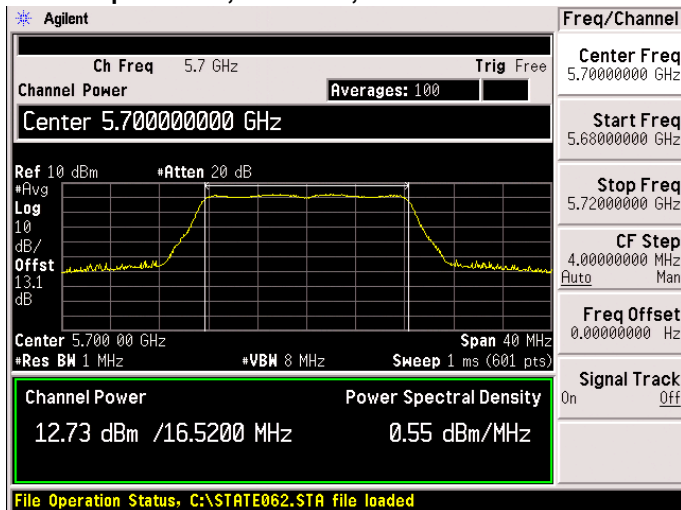


**Antenna A**

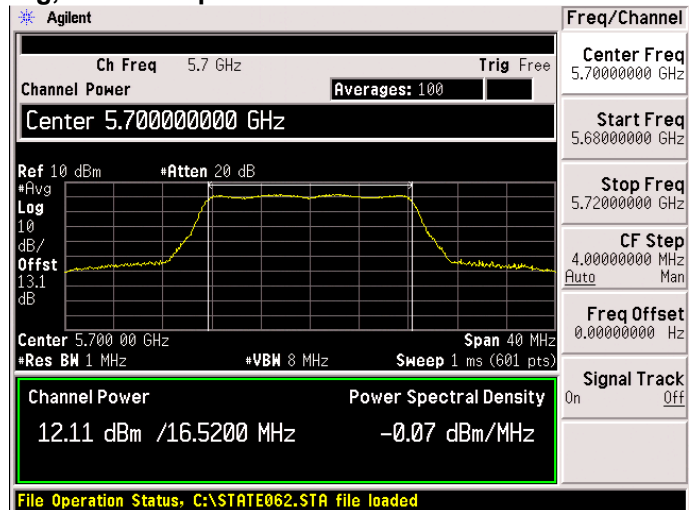


**Antenna B**




Peak Output Power, 5700 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

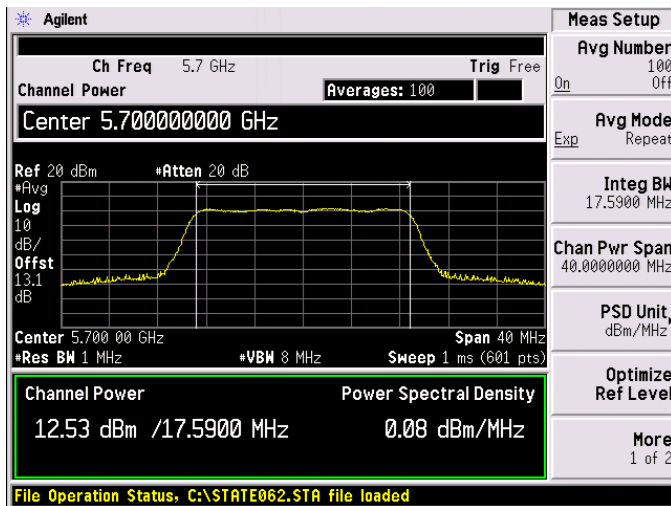

Antenna A

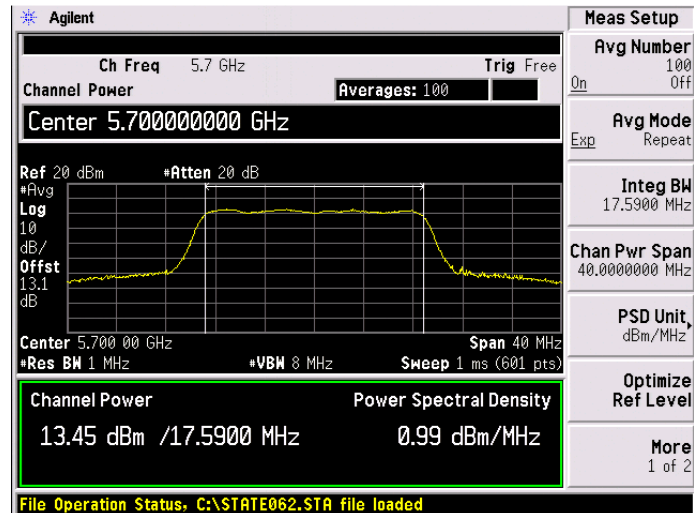

Antenna B

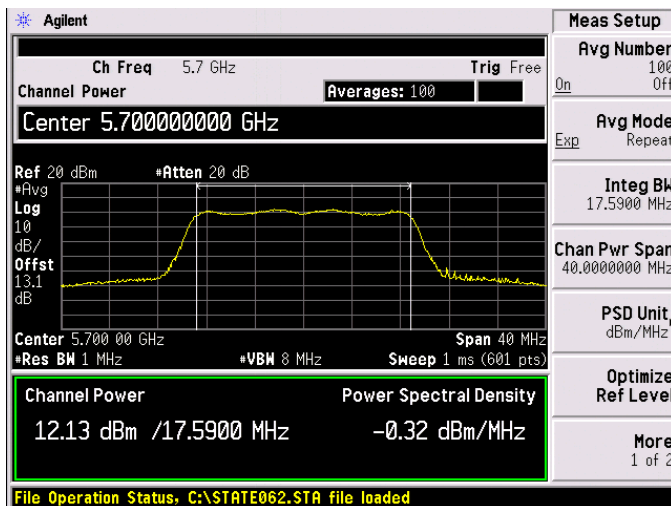


Antenna C







Peak Output Power, 5700 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

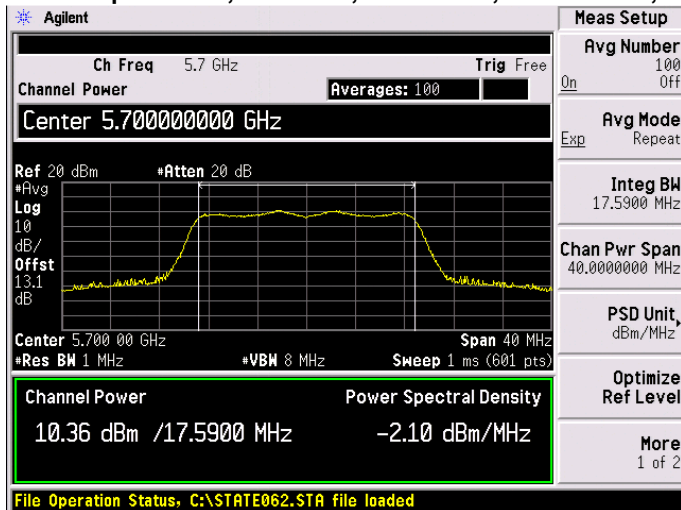


Antenna A

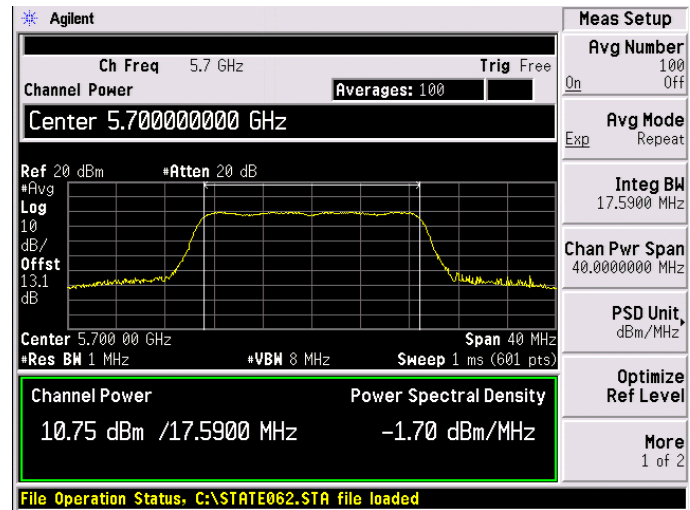

Antenna B

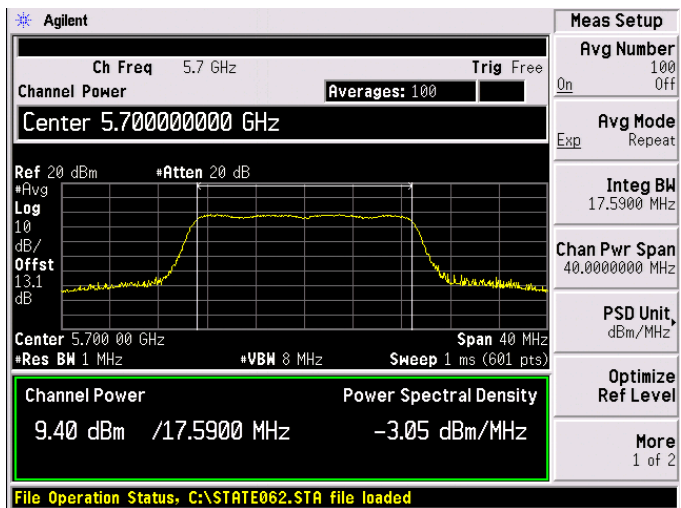

Antenna C

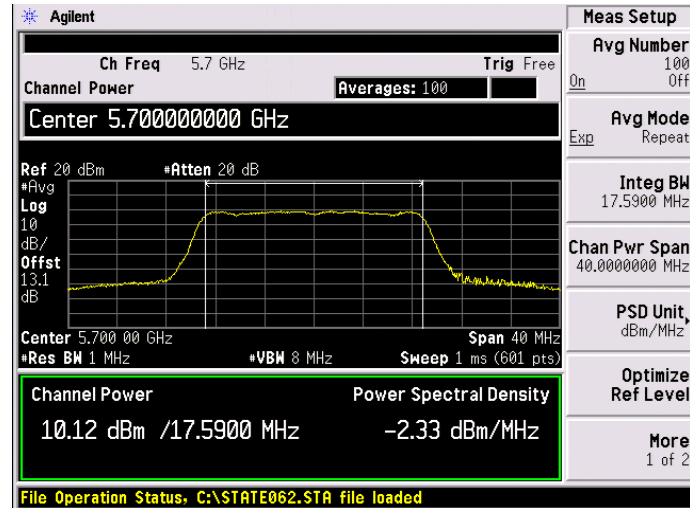


Antenna D







**Peak Output Power, 5700 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3**

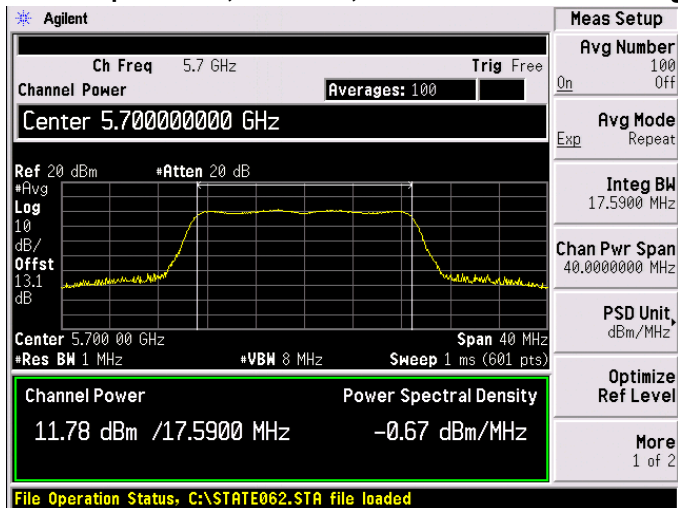

**Antenna A**

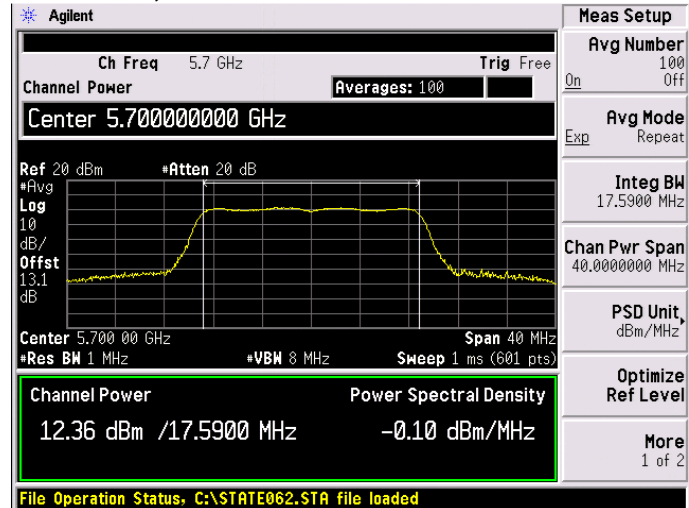


**Antenna B**

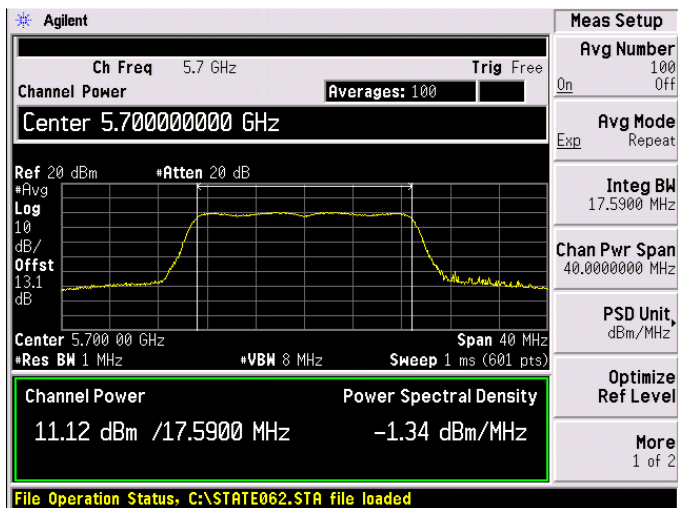


**Antenna C**




Peak Output Power, 5700 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

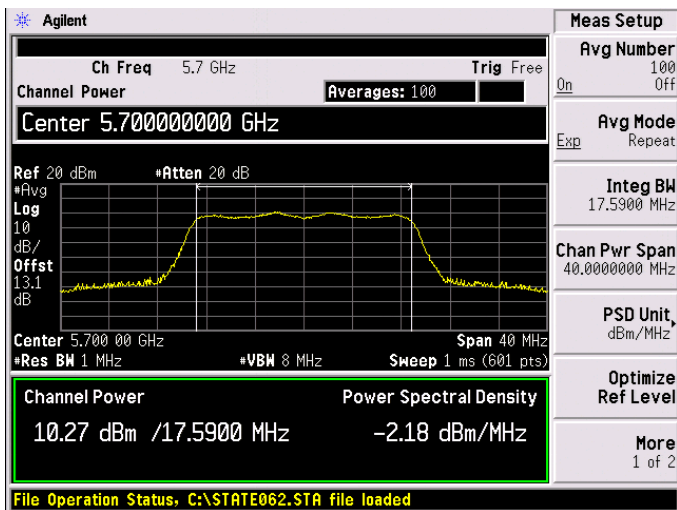


Antenna A

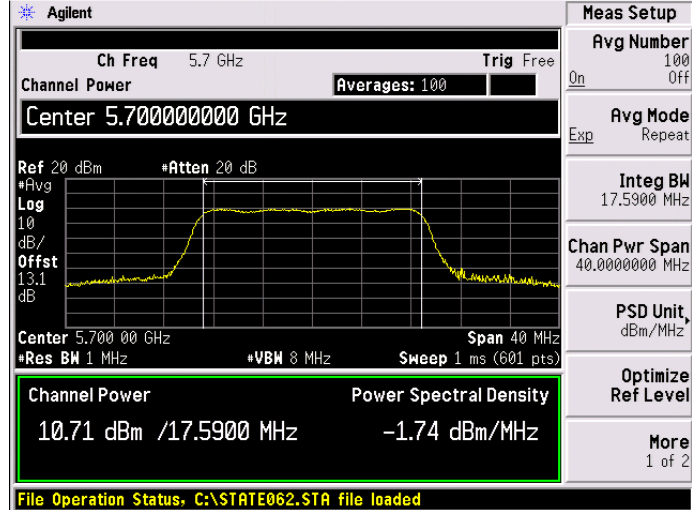

Antenna B

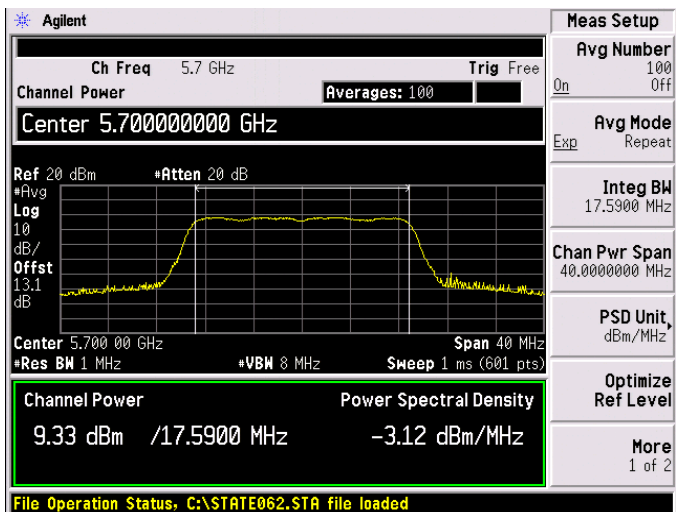


Antenna C

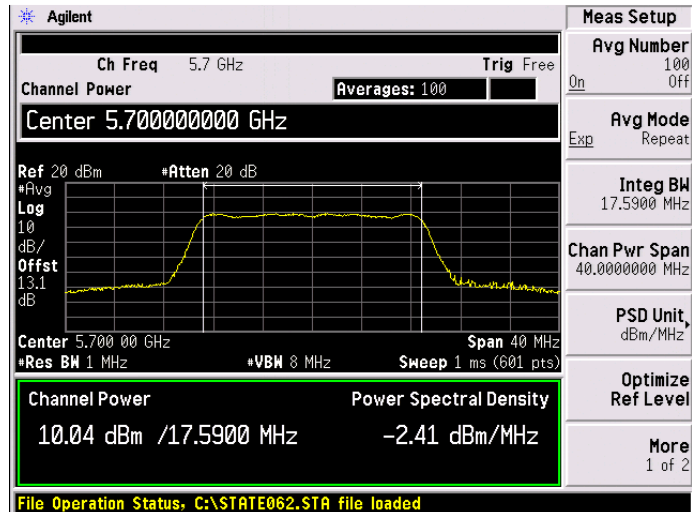


Antenna D



**PSD, 5500 MHz, Non HT/VHT20, 6 to 54 Mbps**

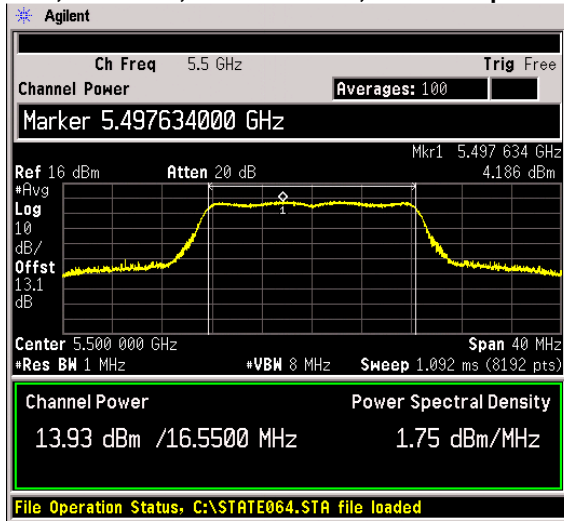


**Antenna A**

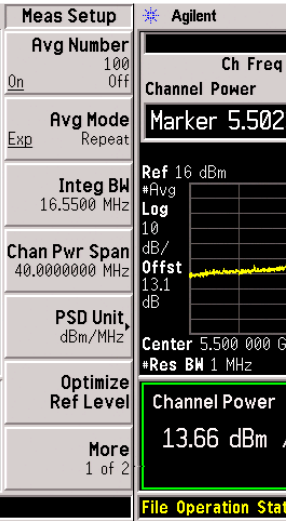

**Antenna B**



**PSD, 5500 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps**

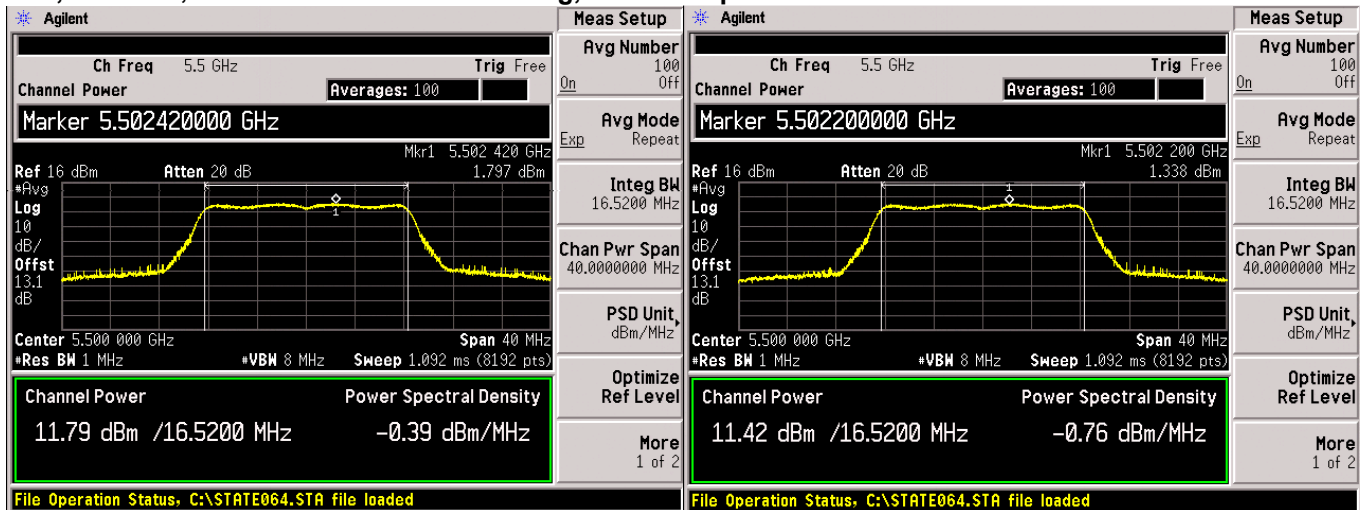


**Antenna A**


**Antenna B**



PSD, 5500 MHz, HT/VHT20, M16 to M23, M0.3 to M9.3

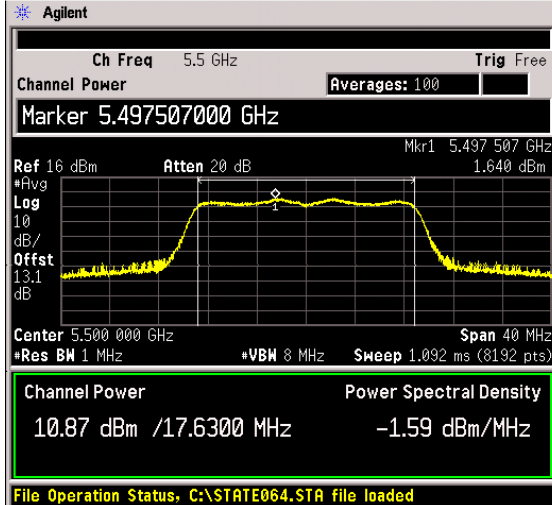


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 17.6300 MHz
Chan Pwr Span 40.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

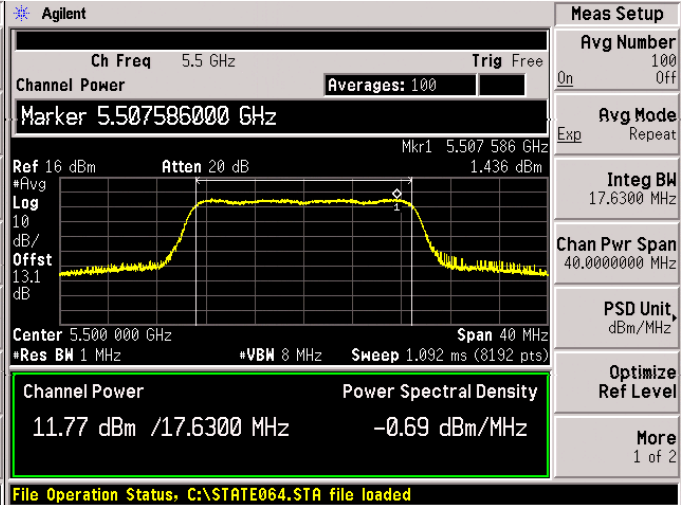


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 17.6300 MHz
Chan Pwr Span 40.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

Antenna A

Antenna B

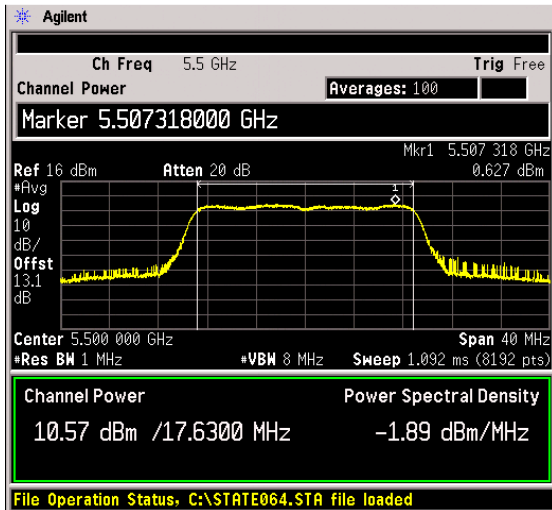

Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 17.6300 MHz
Chan Pwr Span 40.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

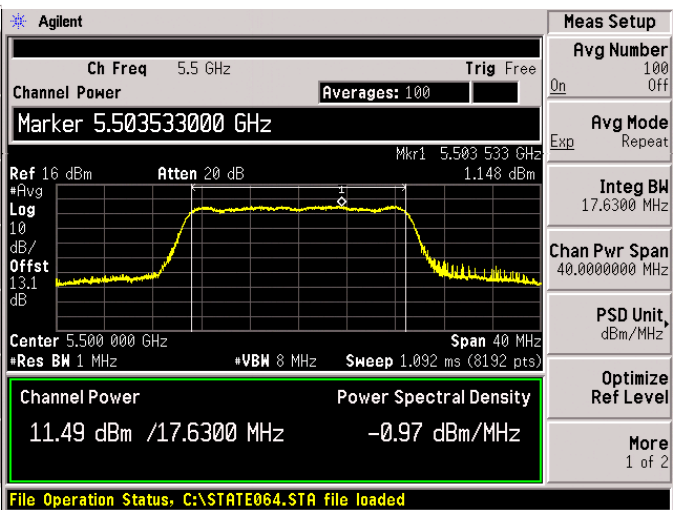


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 17.6300 MHz
Chan Pwr Span 40.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

Antenna C

Antenna D




PSD, 5500 MHz, HT/VHT20 Beam Forming, M16 to M23, M0.3 to M9.3

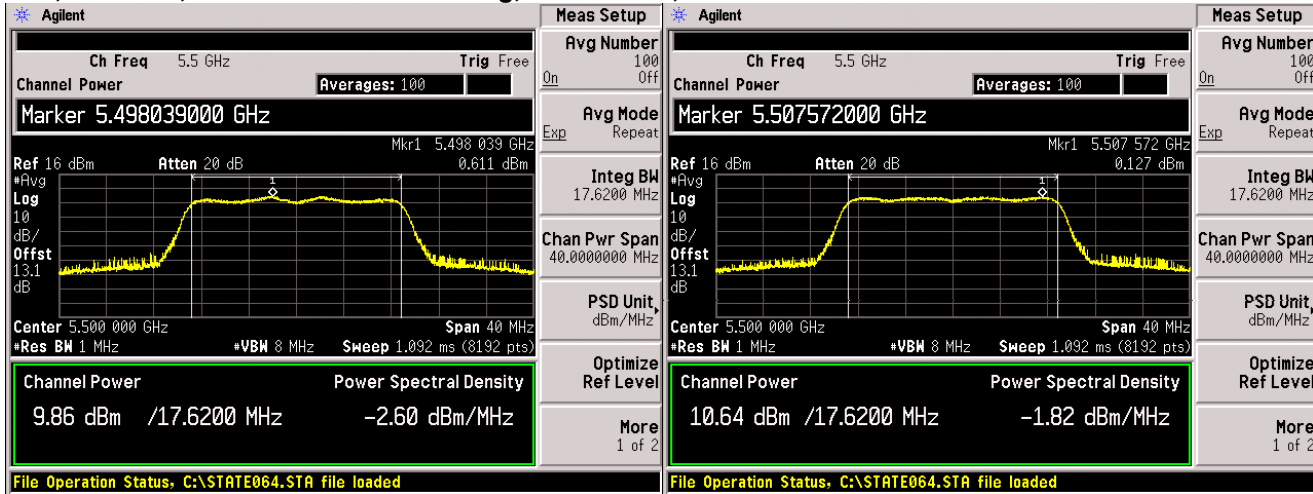

Antenna A

Antenna B

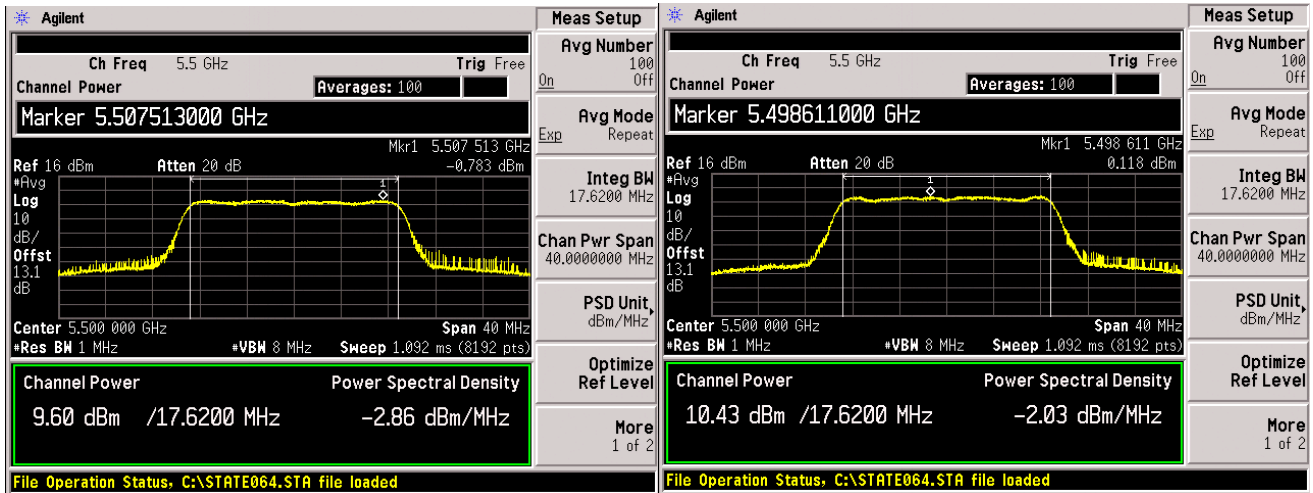


Antenna C


Antenna D




PSD, 5510 MHz, Non HT/VHT40, 6 to 54 Mbps

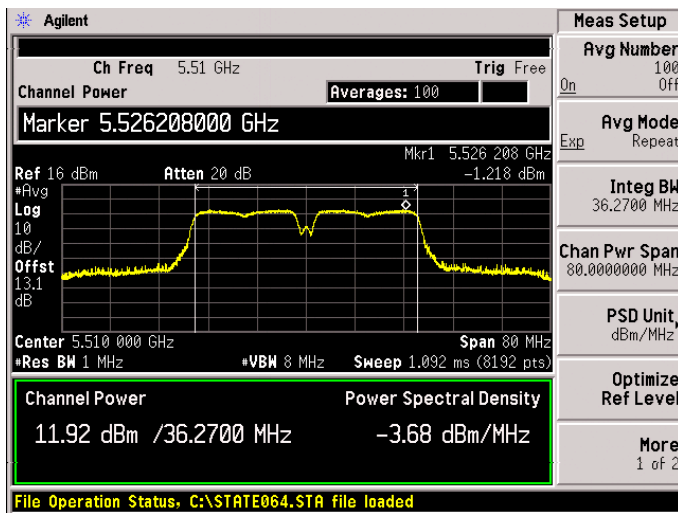

Antenna A

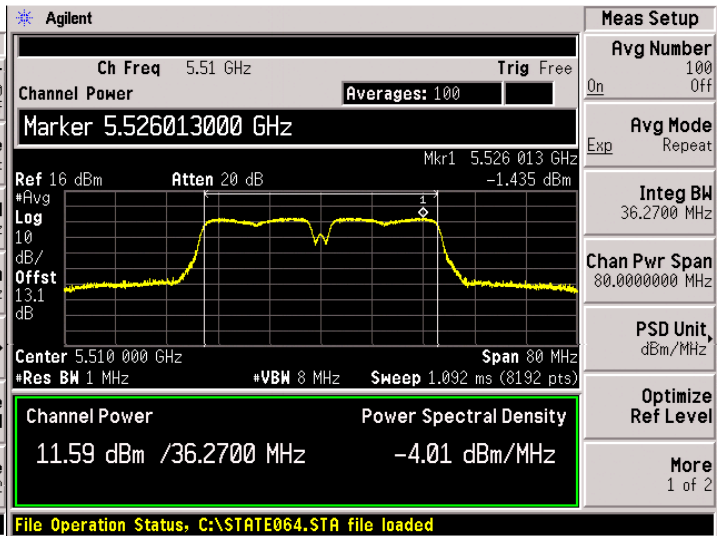


Antenna B

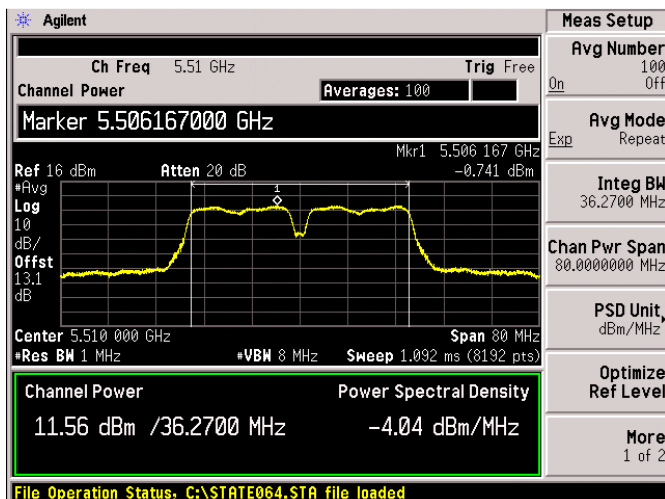


Antenna C




PSD, 5510 MHz, HT/VHT40, M8 to M15, M0.2 to M9.2

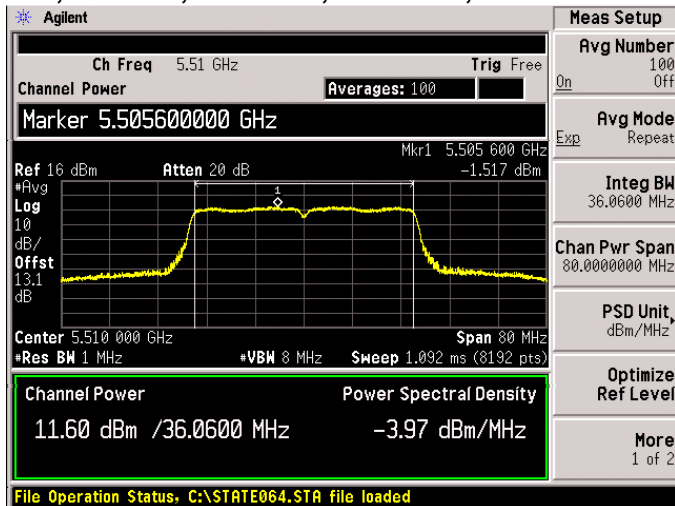


Antenna A

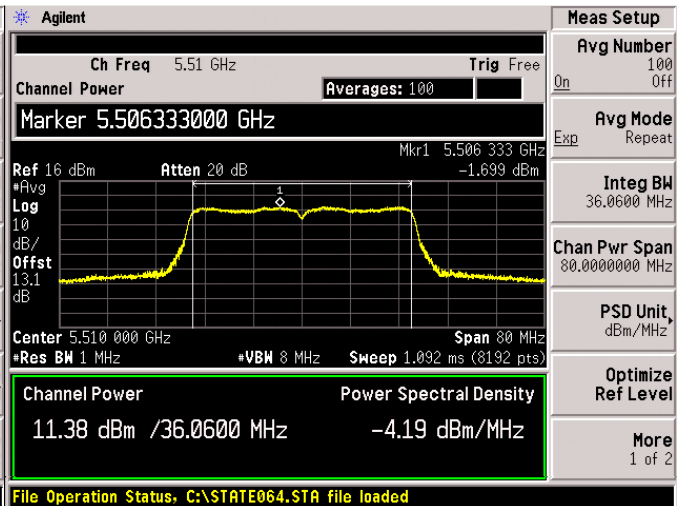

Antenna B

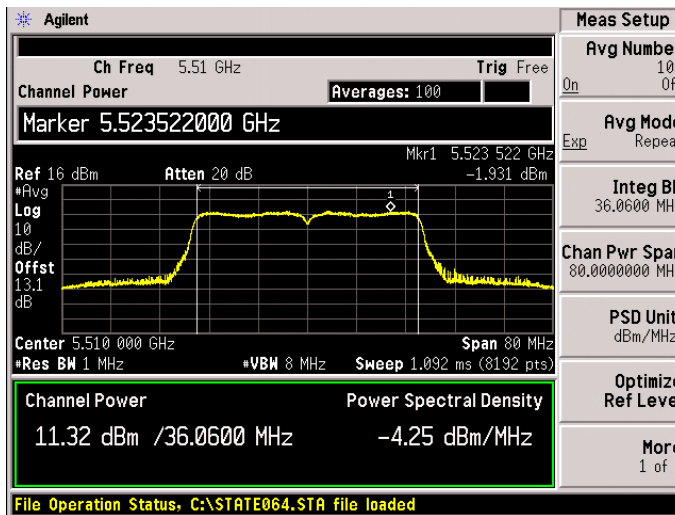

Antenna C

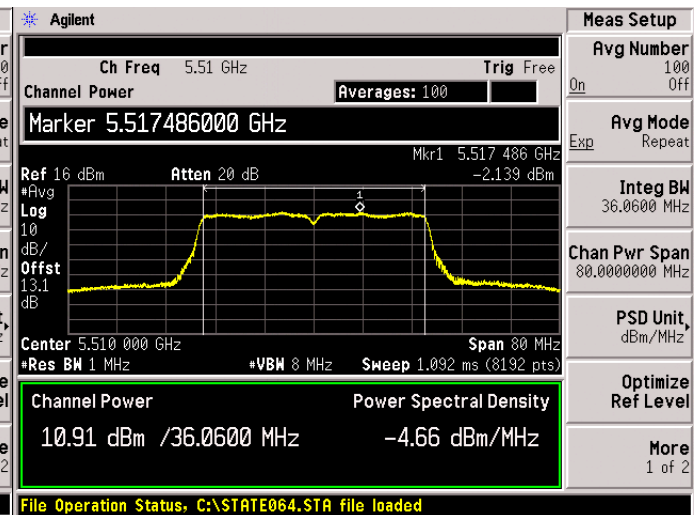


Antenna D






PSD, 5530 MHz, Non HT/VHT80, 6 to 54 Mbps

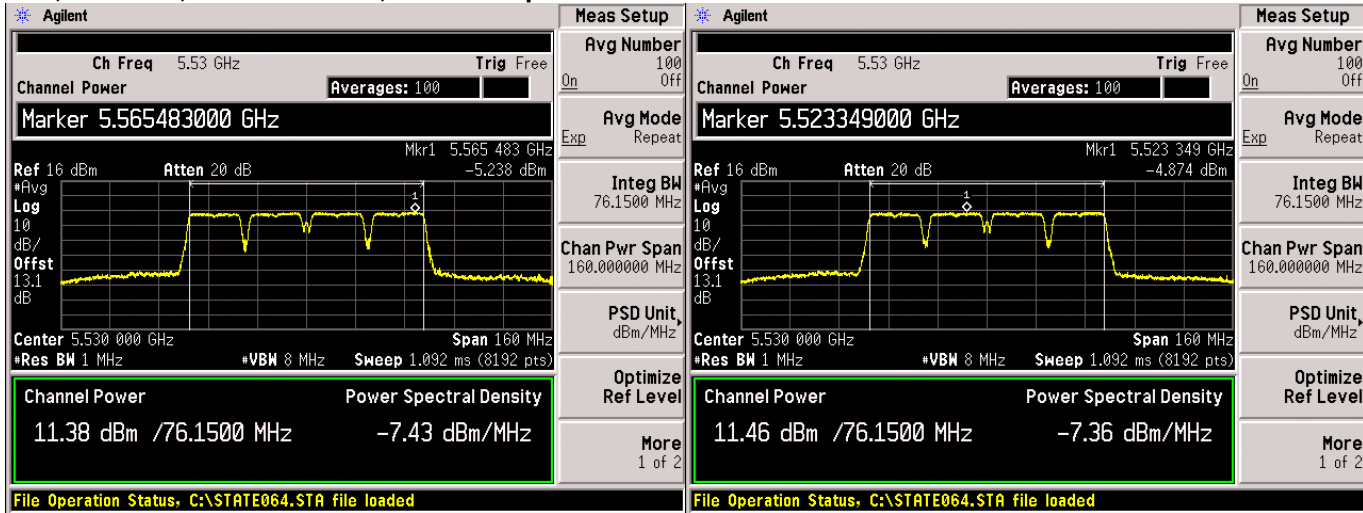

Antenna A

Antenna B

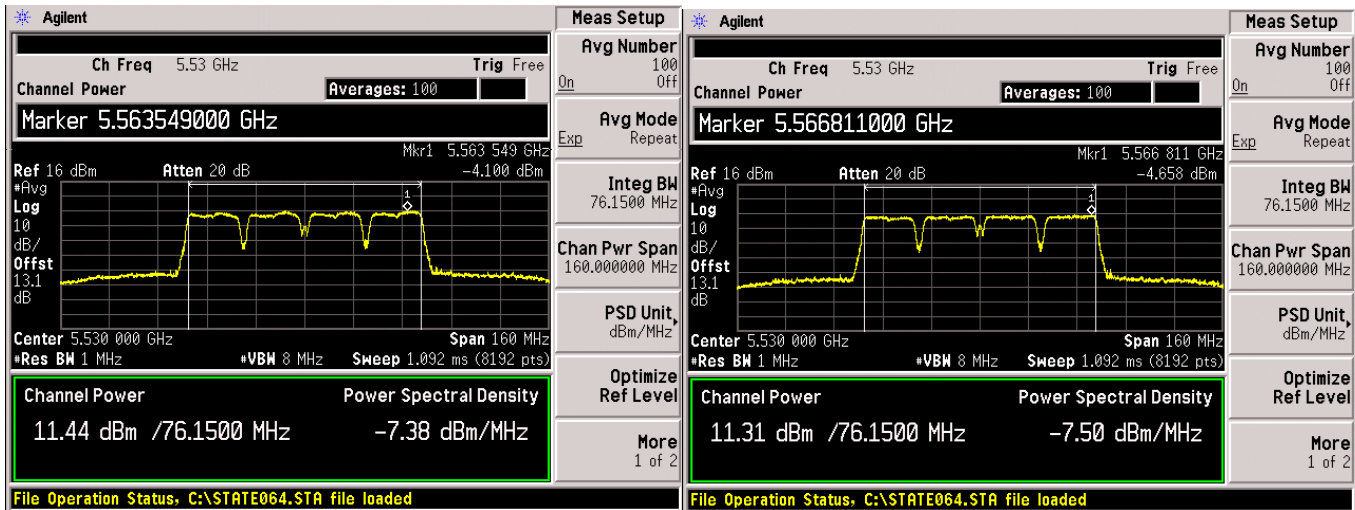


Antenna C

Antenna D




PSD, 5530 MHz, HT/VHT80, M0 to M7, M0.1 to M9.1

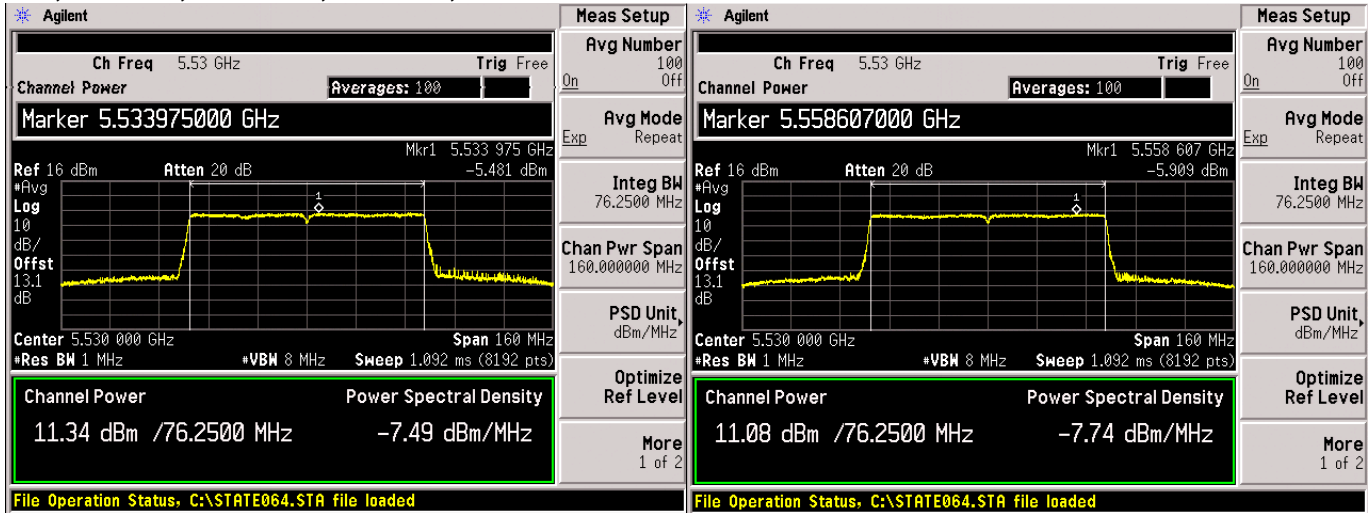

Antenna A

Antenna B

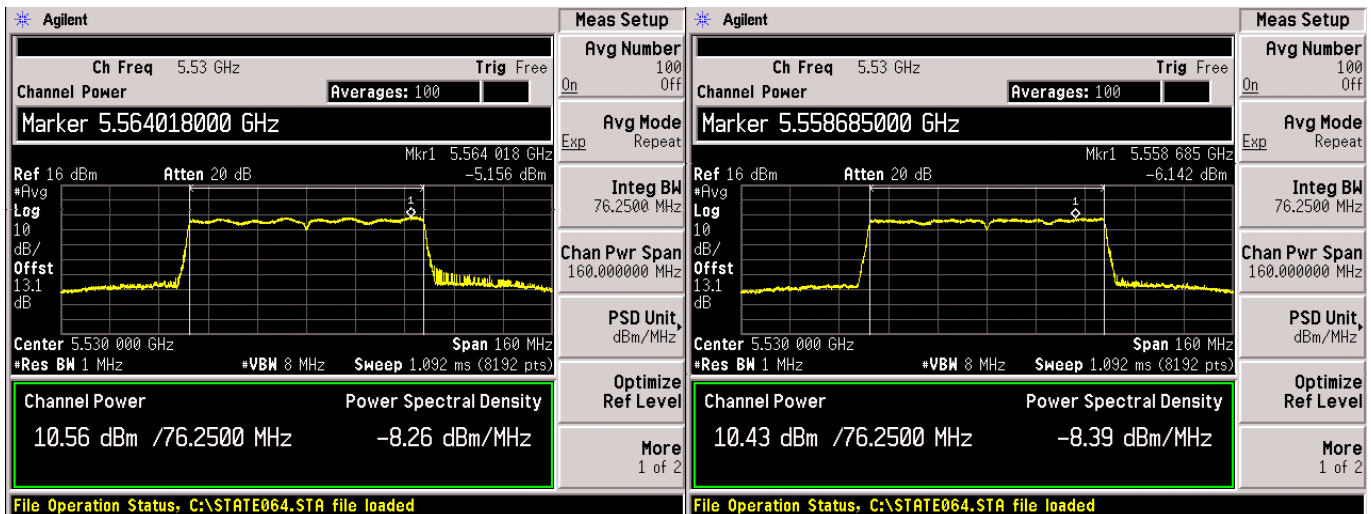


Antenna C


Antenna D




PSD, 5550 MHz, Non HT/VHT40, 6 to 54 Mbps

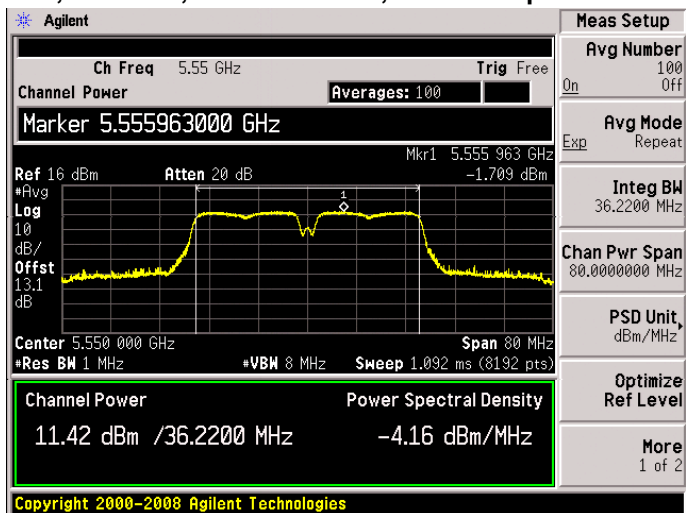

Antenna A

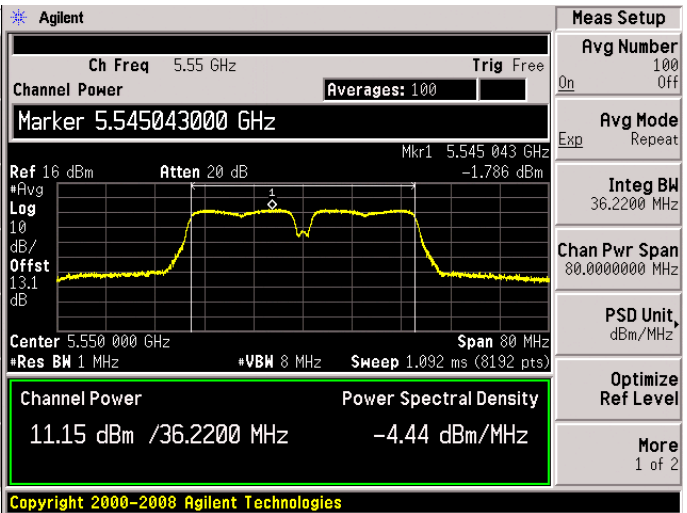


Antenna B

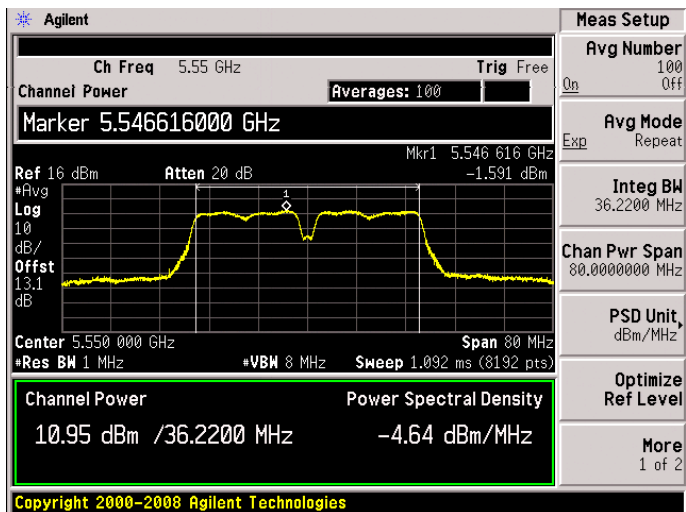


Antenna C



PSD, 5550 MHz, HT/VHT40, M0 to M7, M0.1 to M9.1

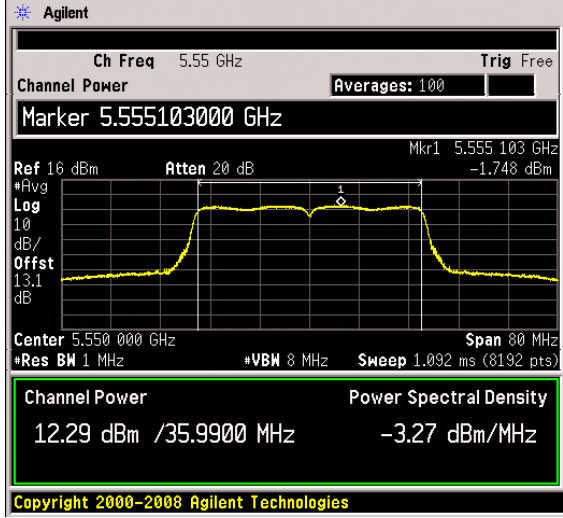


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	Repeat
Integ BW	35.9900 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

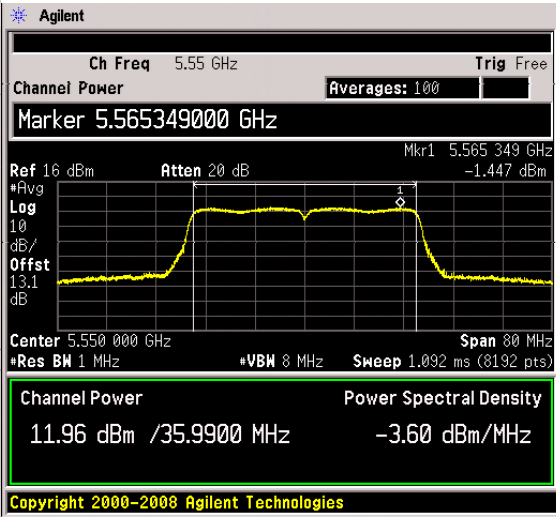

Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	Repeat
Integ BW	35.9900 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

Antenna A

Antenna B

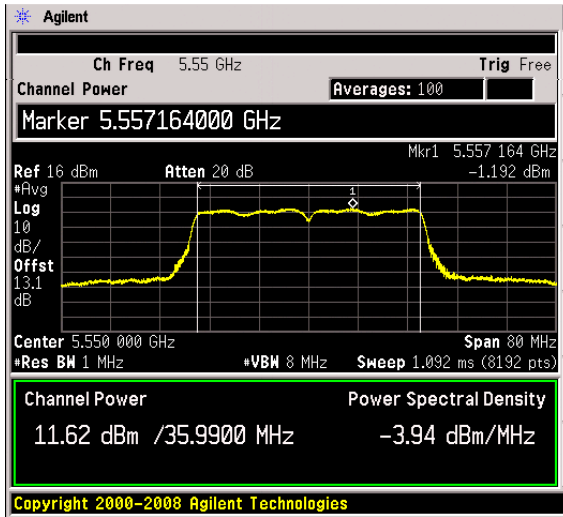


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	Repeat
Integ BW	35.9900 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2


Antenna C



PSD, 5550 MHz, HT/VHT40, M16 to M23, M0.3 to M9.3

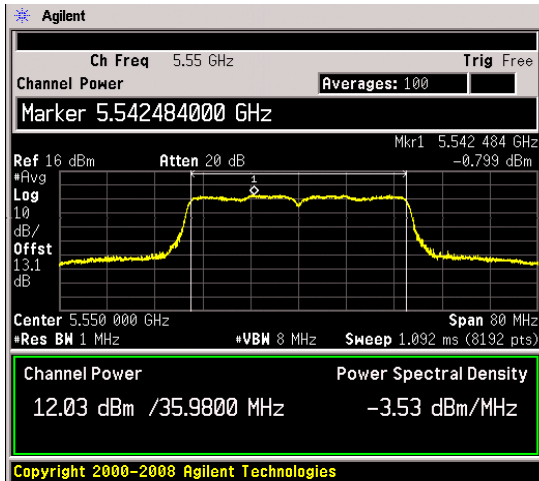


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 35.9800 MHz
Chan Pwr Span 80.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

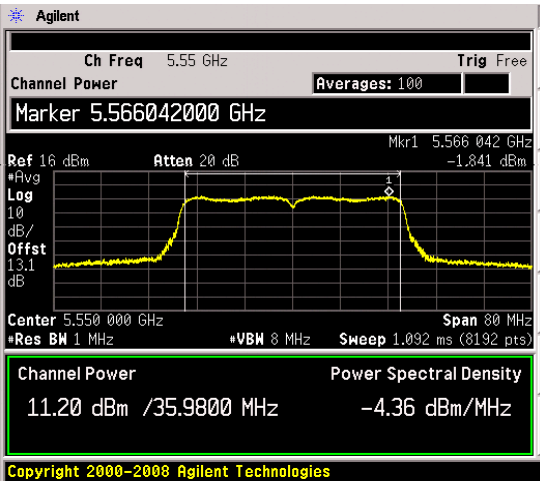


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 35.9800 MHz
Chan Pwr Span 80.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

Antenna A

Antenna B

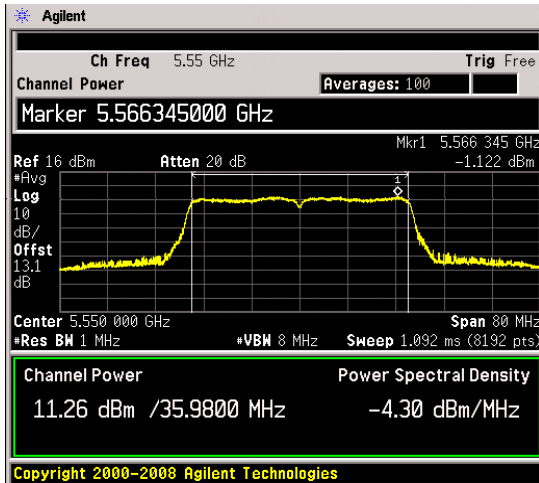

Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 35.9800 MHz
Chan Pwr Span 80.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

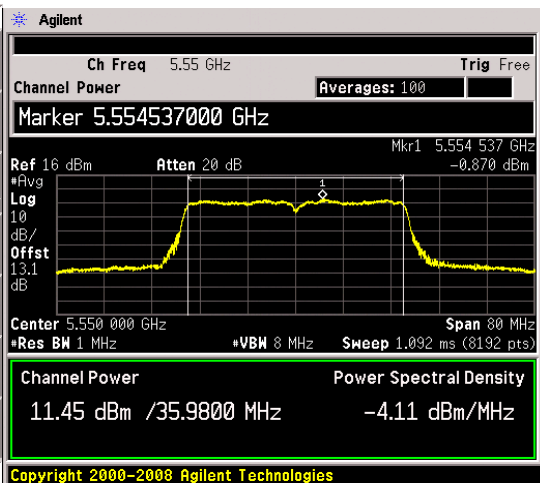


Meas Setup
Avg Number 100 On Off
Avg Mode Repeat
Integ BW 35.9800 MHz
Chan Pwr Span 80.0000000 MHz
PSD Unit, dBm/MHz
Optimize Ref Level
More 1 of 2

Antenna C


Antenna D



PSD, 5550 MHz, HT/VHT40 Beam Forming, M0 to M7, M0.1 to M9.1

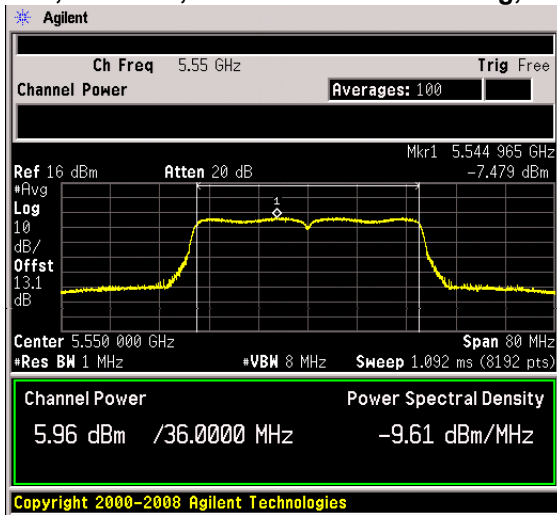


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	
Integ BW	36.0000 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

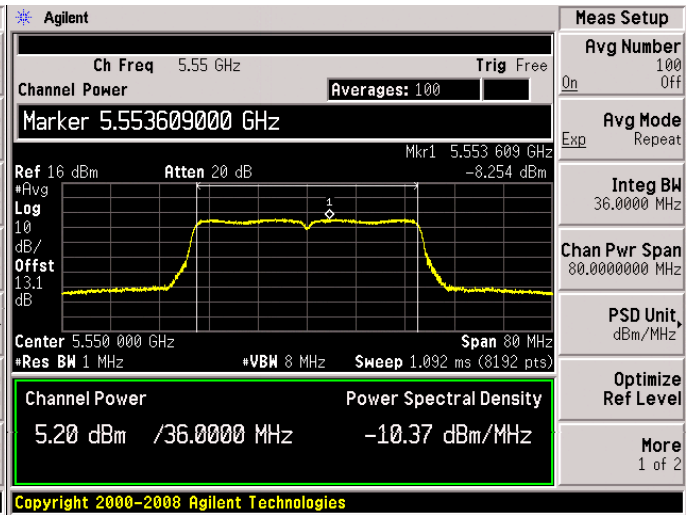


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	
Integ BW	36.0000 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

Antenna A

Antenna B

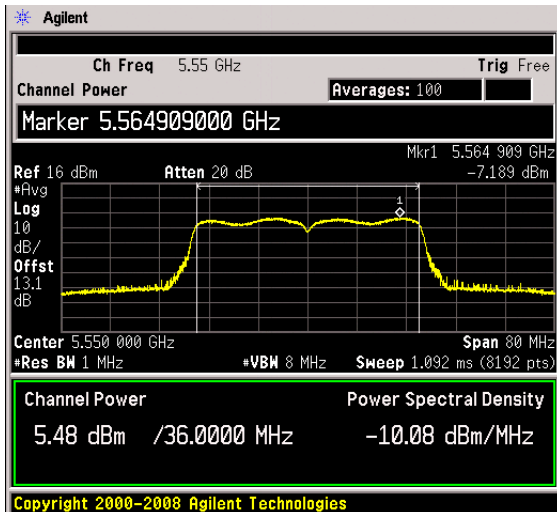

Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	
Integ BW	36.0000 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

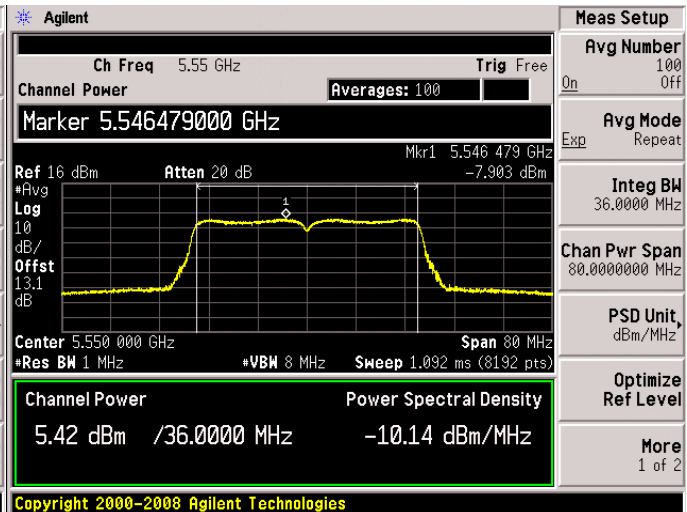


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Exp	
Integ BW	36.0000 MHz
Chan Pwr Span	80.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

Antenna C

Antenna D



**PSD, 5560 MHz, Non HT/VHT20, 6 to 54 Mbps**

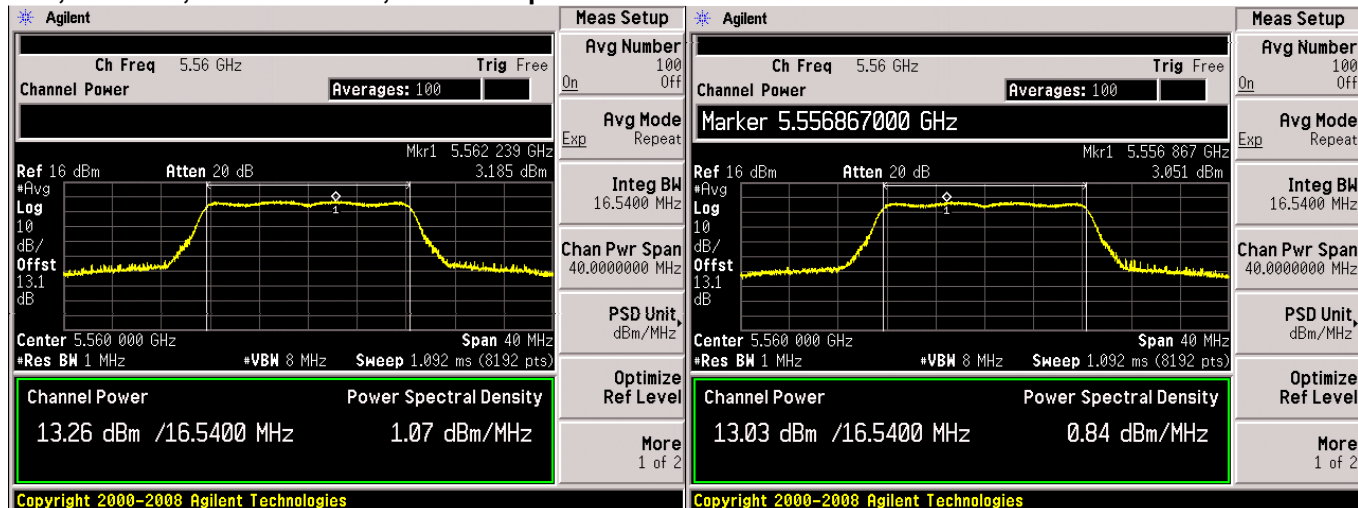


**Antenna A**

**Antenna B**






PSD, 5560 MHz, Non HT/VHT20 Beam Forming, 6 to 54 Mbps

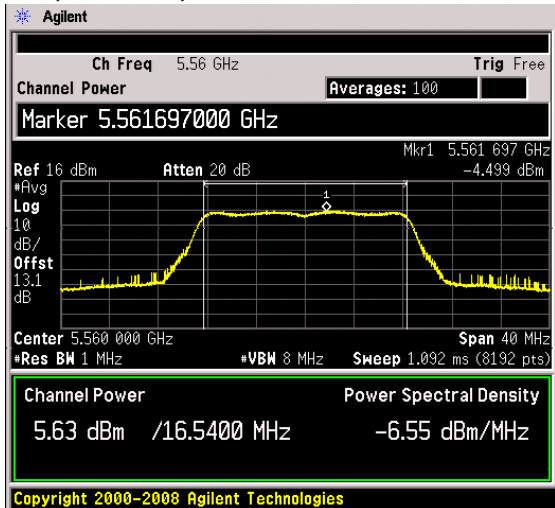


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Integ BW	16.5400 MHz
Chan Pwr Span	40.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

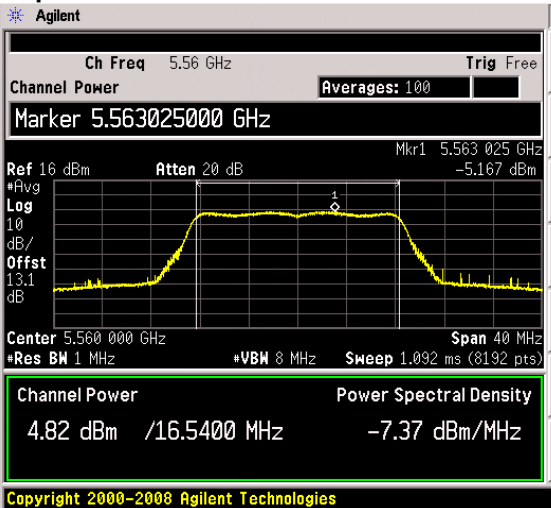


Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Integ BW	16.5400 MHz
Chan Pwr Span	40.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

Antenna A

Antenna B

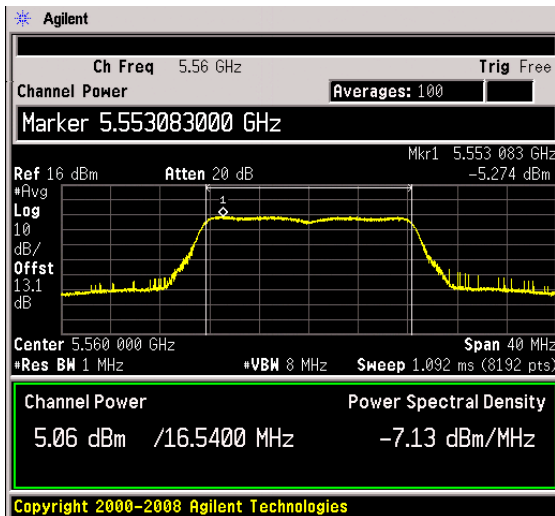

Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Integ BW	16.5400 MHz
Chan Pwr Span	40.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2

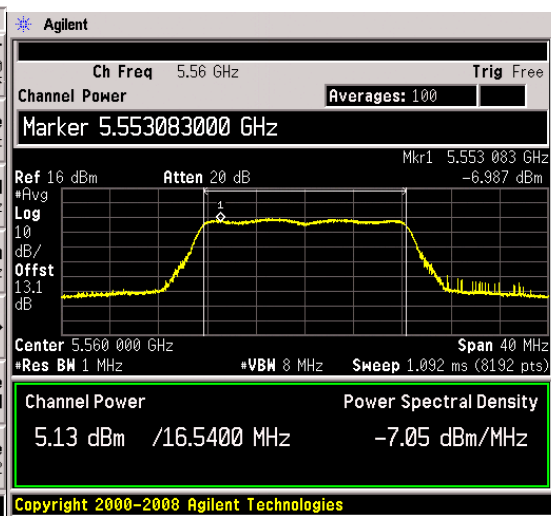

Meas Setup	
Avg Number	100
On	Off
Avg Mode	Repeat
Integ BW	16.5400 MHz
Chan Pwr Span	40.0000000 MHz
PSD Unit,	dBm/MHz
Optimize Ref Level	
More	1 of 2


Antenna C

Antenna D






PSD, 5560 MHz, HT/VHT20, M8 to M15, M0.2 to M9.2

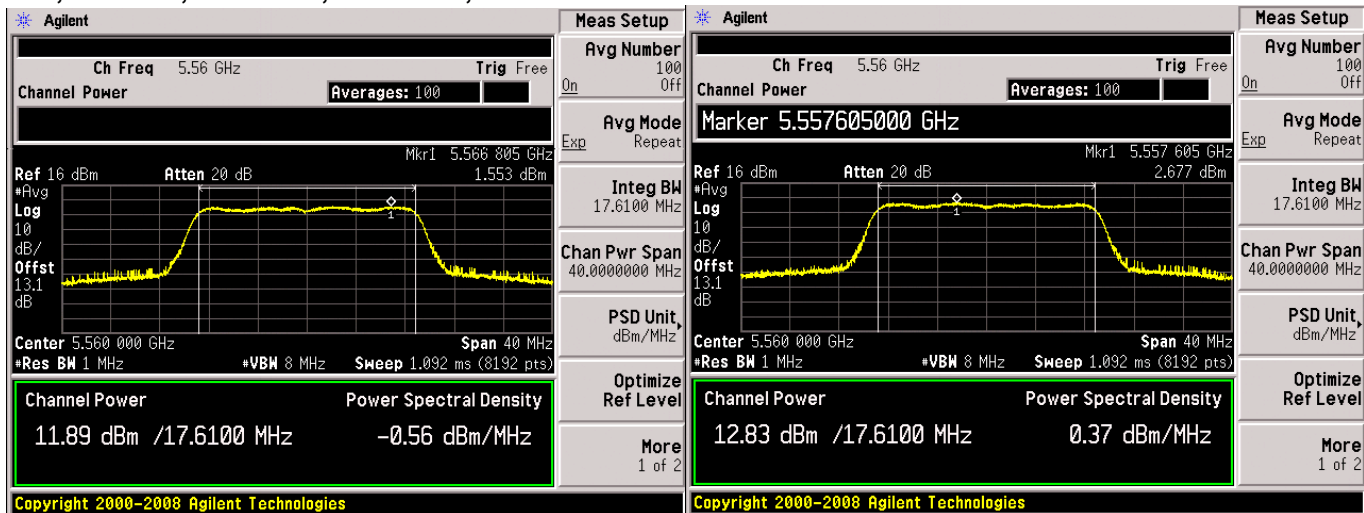

Antenna A

Antenna B

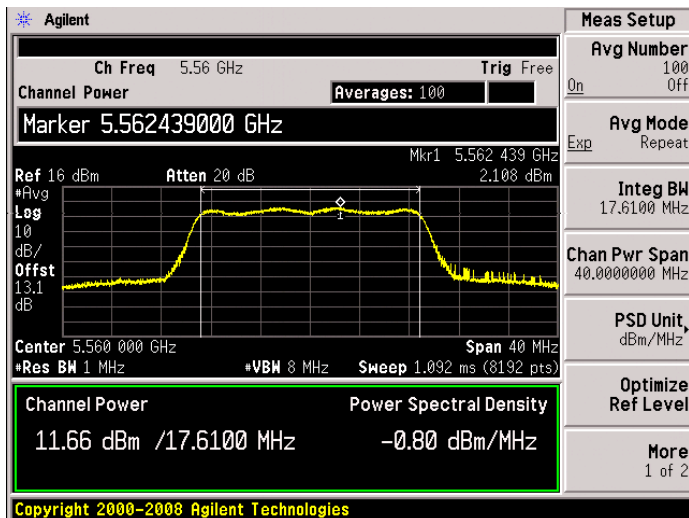

Antenna C