

### SRD2.4G 2403MHz\_Left side 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2403 MHz;

Medium parameters used (interpolated):  $f = 2403$  MHz;  $\sigma = 1.81$  S/m;  $\epsilon_r = 39.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = -19.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.0548 W/kg


**Configuration/Body/Zoom Scan (7x7x4)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.191 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.191 W/kg

**SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.00864 W/kg**

Maximum value of SAR (measured) = 0.113 W/kg

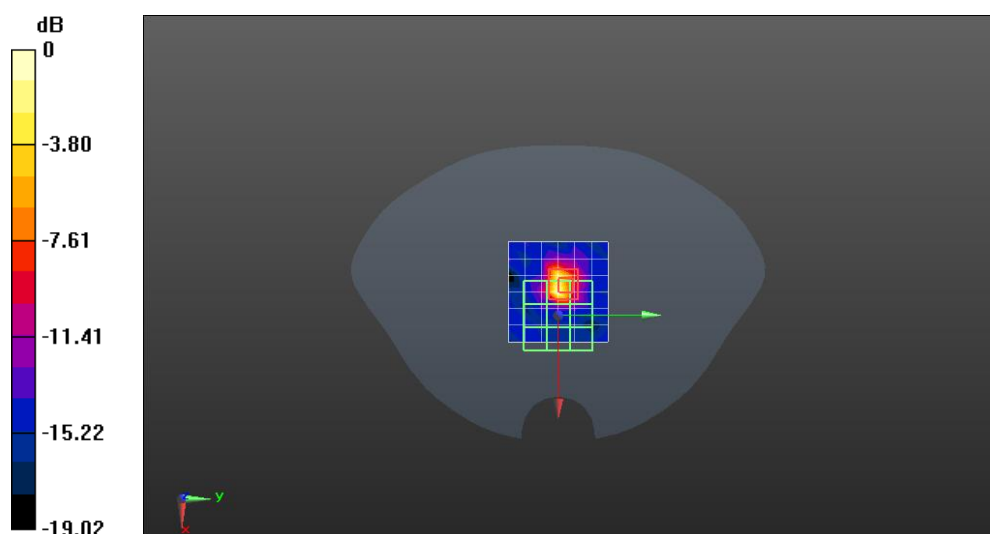

0 dB = 0.0548 W/kg = -12.61 dBW/kg