



FCC RADIO TEST REPORT

FCC ID : LHJ-FE5NA0D31
Equipment : FE5NA0D31
Brand Name : Continental
Model Name : FE5NA0D31
Applicant : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd., Deer Park, IL
60010, USA
Manufacturer : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd., Deer Park, IL
60010, USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

The product was received on Nov. 26, 2021 and testing was performed from Dec. 03, 2021 and completed on May 03, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 6

 1.1 Product Feature of Equipment Under Test..... 6

 1.2 Modification of EUT 7

 1.3 Testing Location 7

 1.4 Applicable Standards..... 8

2 Test Configuration of Equipment Under Test 9

 2.1 Test Mode..... 9

 2.2 Connection Diagram of Test System..... 11

 2.3 Support Unit used in test configuration and system 11

 2.4 Measurement Results Explanation Example..... 11

 2.5 Frequency List of Low/Middle/High Channels 12

3 Conducted Test Items..... 15

 3.1 Measuring Instruments 15

 3.2 Conducted Output Power and ERP/EIRP 16

 3.3 Peak-to-Average Ratio 17

 3.4 Occupied Bandwidth..... 18

 3.5 Conducted Band Edge 19

 3.6 Conducted Spurious Emission 21

 3.7 Frequency Stability 22

4 Radiated Test Items 23

 4.1 Measuring Instruments 23

 4.2 Radiated Spurious Emission Measurement 25

5 List of Measuring Equipment..... 26

6 Uncertainty of Evaluation..... 28

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



History of this test report

Report No.	Version	Description	Issued Date
FG1N2419C	01	Initial issue of report	May 17, 2022
FG1N2419C	02	1. Revise antenna gain and appendix A 2. Add remark in Section 1.1	Jun. 06, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (n5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n25) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n41)		
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (n2) (n5) (n25) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n41)		
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (n2) (n5) (n25) (n66) (n71)	Pass	Under limit 22.66 dB at 10609.000 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n41)		

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	FE5NA0D31
Brand Name	Continental
Model Name	FE5NA0D31
FCC ID	LHJ-FE5NA0D31
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/LTE/5G NR/GNSS
HW Version	P2
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer.
2. The test antenna TAOGLAS TG.55.8113W provided by the applicant is used for the purpose of radiated testing. The EUT is not equipped with an antenna.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n25: 1852.5 MHz ~ 1912.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5 MHz
Rx Frequency	5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n25: 1932.5 MHz ~ 1992.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 2112.5 MHz ~ 2197.5 MHz 5G NR n71: 619.5 MHz ~ 649.5 MHz
Bandwidth	5G NR n2: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n25: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz 5G NR n41: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz 5G NR n66: 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz 5G NR n71: 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	5G NR n2 : 22.90 dBm 5G NR n5 : 22.95 dBm 5G NR n25 : 23.20 dBm 5G NR n41 : 23.16 dBm 5G NR n66 : 23.12 dBm 5G NR n71 : 23.08 dBm
Antenna Type	Fixed External Antenna



Product Specification is subject to this standard	
Antenna Gain	5G NR n2: 2.5 dBi 5G NR n5: 4.5 dBi 5G NR n25: 2.5 dBi 5G NR n41: 6.0 dBi 5G NR n66: 5.5 dBi 5G NR n71: 6.0 dBi
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Luffy Lin
Temperature (°C)	23.7~24.2
Relative Humidity (%)	51~53

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH15-HY (TAF Code: 3786)
Test Engineer	Leo Lee, Mancy Chou and Bigshow Wang
Temperature (°C)	22.3~24.2
Relative Humidity (%)	46~56
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two Config (Ant. Degree 0 and Ant. Degree 90), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures. The worst cases as below table were recorded in this report.


Ant. Degree 0		Ant. Degree 90	
SA Mode	EN-DC Mode	SA Mode	EN-DC Mode
5G NR n25	EN-DC 7A-n5A	5G NR n66	EN-DC 5A-n2A
5G NR n41	EN-DC 5A-n41A	5G NR n71	EN-DC 12A-n2A
	EN-DC 12A-n41A		EN-DC 13A-n2A
	EN-DC 26A-n41A		EN-DC 14A-n2A
	EN-DC 71A-n41A		EN-DC 71A-n2A
	EN-DC 5A-n66A		EN-DC 2A-n5A
	EN-DC 12A-n66A		EN-DC 66A-n5A
	EN-DC 13A-n66A		EN-DC 2A-n71A
	EN-DC 14A-n66A		EN-DC 7A-n71A
	EN-DC 71A-n66A		EN-DC 66A-n71A

Test Items	NR Band	Bandwidth (MHz)												Modulation					RB #			Test Channel					
		5	10	15	20	25	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H			
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n2	Covered by 5G NR n25																									
	n5				v	-	-	-	-	-	-	-	-	v	v	v	v	v				v			v		
	n25				v				-	-	-	-	-	v	v	v	v	v				v			v		
	n41	-	-	-	v	-								v	v	v	v	v				v			v		
	n66				v	-			-	-	-	-	-	v	v	v	v	v				v			v		
	n71				v	-	-	-	-	-	-	-	-	v	v	v	v	v				v			v		
26dB and 99% Bandwidth	n2	Covered by 5G NR n25																									
	n5	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v				v			v		
	n25	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v				v			v		
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v				v			v		
	n66	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v				v			v		
	n71	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v				v			v		



Test Items	NR Band	Bandwidth (MHz)											Modulation					RB #			Test Channel				
		5	10	15	20	25	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Conducted Band Edge	n2	Covered by 5G NR n25																							
	n5	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v		v	v	v		
	n25	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v		v	v	v	
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v
	n66	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v		v	v	v
	n71	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v		v	v	v
Conducted Spurious Emission	n2	Covered by 5G NR n25																							
	n5	v				-	-	-	-	-	-	-		v						v		v	v	v	
	n25	v							-	-	-	-		v						v		v	v	v	
	n41	-	-	-	v	-									v					v		v	v	v	
	n66	v				-			-	-	-	-			v					v		v	v	v	
	n71	v				-	-	-	-	-	-	-			v					v		v	v	v	
Frequency Stability	n2	Covered by 5G NR n25																							
	n5				v	-	-	-	-	-	-	-	v								v		v		
	n25				v				-	-	-	-	v								v		v		
	n41	-	-	-	v	-								v							v		v		
	n66				v	-			-	-	-	-	v								v		v		
	n71				v	-	-	-	-	-	-	-	v								v		v		
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v		Max Power					
	n5	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v							
	n25	v	v	v	v	v	v	v	-	-	-	-	v	v	v	v	v	v							
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v							
	n66	v	v	v	v	-	v	v	-	-	-	-	v	v	v	v	v	v							
	n71	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v							
Radiated Spurious Emission	n2	Worst Case																				v			
	n5	Worst Case																				v	v	v	
	n25	Worst Case																				v	v	v	
	n41	Worst Case																				v	v	v	
	n66	Worst Case																				v	v	v	
	n71	Worst Case																				v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. Test combination are EN-DC 5A-n2A, EN-DC 12A-n2A, EN-DC 13A-n2A, EN-DC 14A-n2A, EN-DC 71A-n2A., EN-DC 2A-n5A, EN-DC 7A-n5A, EN-DC 66A-n5A, EN-DC 5A-n41A, EN-DC 12A-n41A, EN-DC 26A-n41A, EN-DC 71A-n41A, EN-DC 5A-n66A, EN-DC 12A-n66A, EN-DC 13A-n66A, EN-DC 14A-n66A, EN-DC 71A-n66A, EN-DC 2A-n71A, EN-DC 7A-n71A, and EN-DC 66A-n71A 																								

2.2 Connection Diagram of Test System

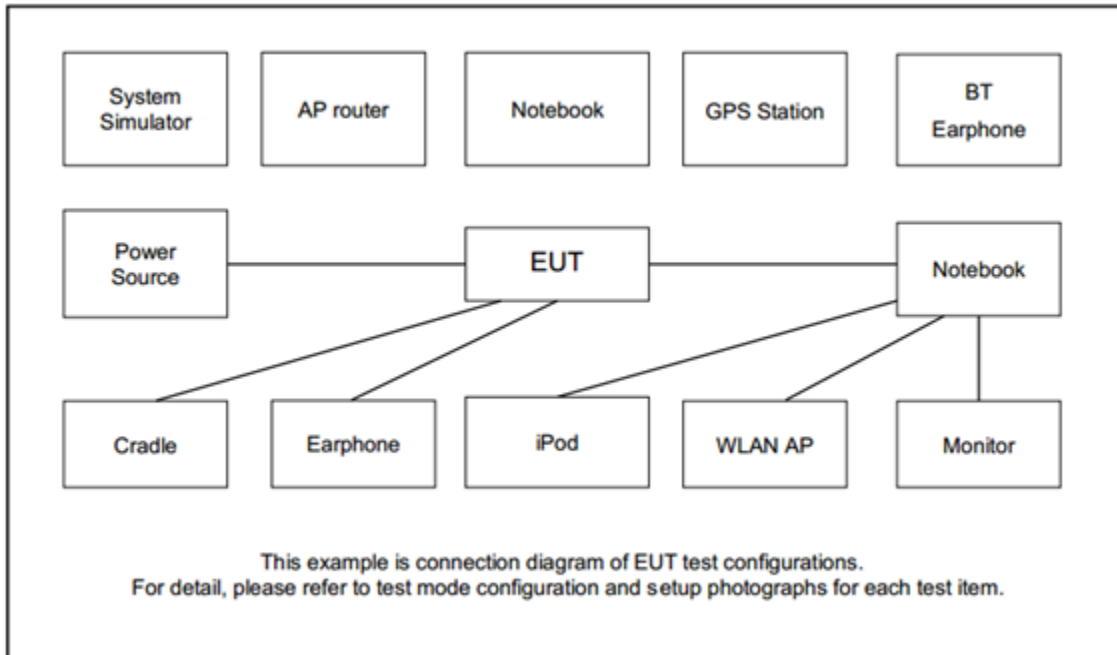

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Antenna	Taoglas	TG.55.8113	N/A	N/A	N/A
2.	DC Power Supply	GW Instek	GEU810960	N/A	N/A	Unshielded, 1.8m
3.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
4.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR Band n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR Band n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR Band n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR Band n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99



5G NR Band n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

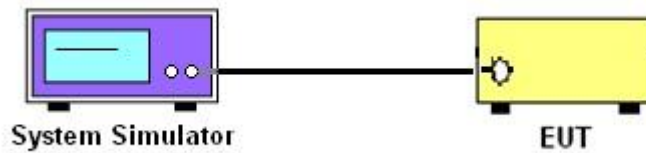

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

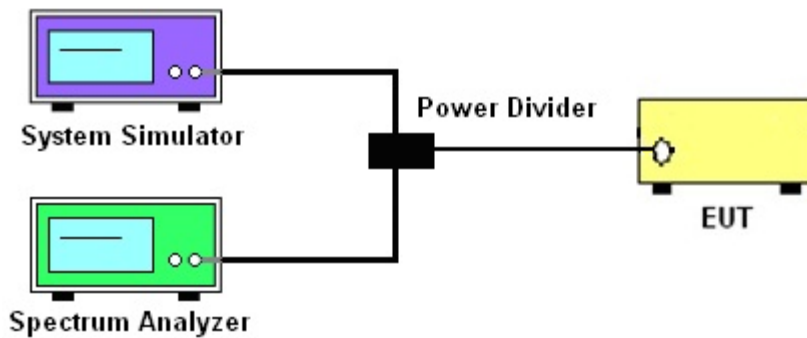

3.1.4 Frequency Stability

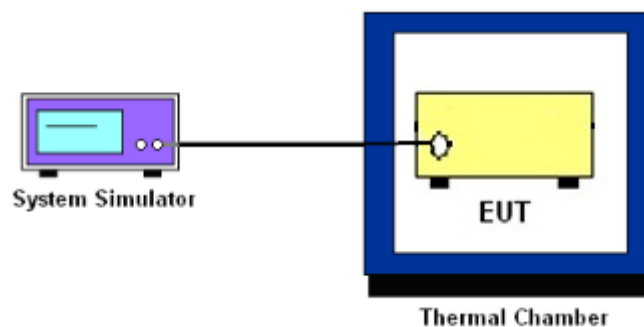

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2 and n25 and n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

**27.53(m)(4)**

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n41

The other 40 dB, and 55 dB have additionally applied same calculation above.



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

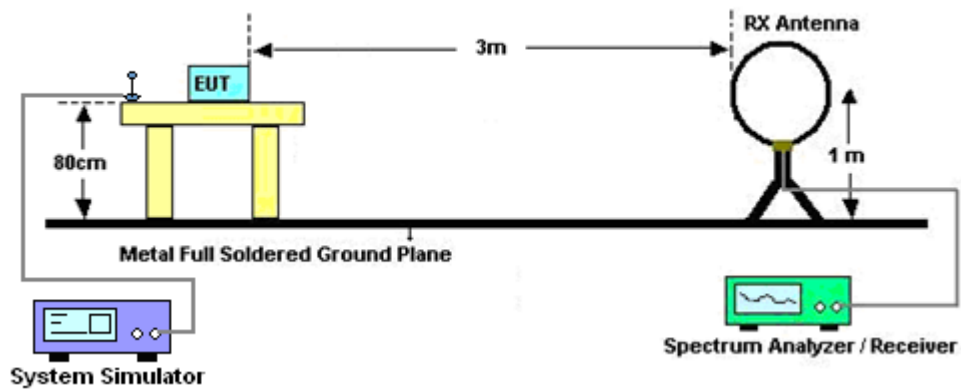


For radiated test from 30MHz to 1GHz

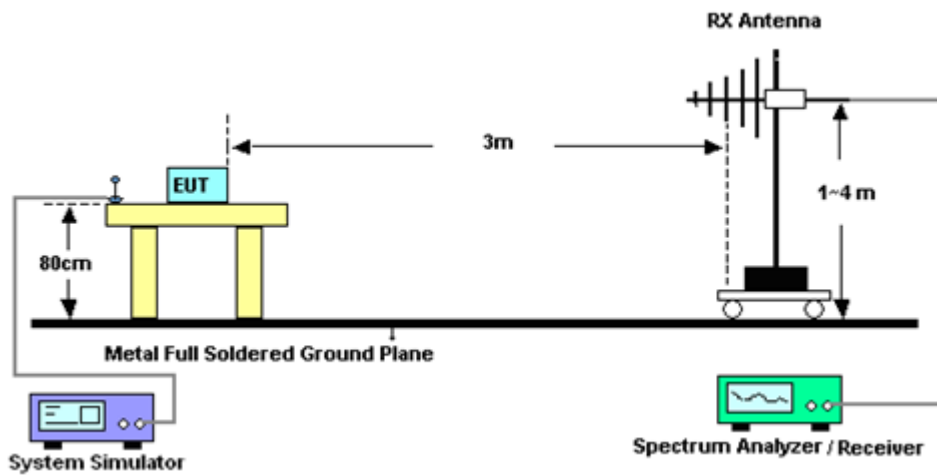

For radiated test from 1GHz to 18GHz

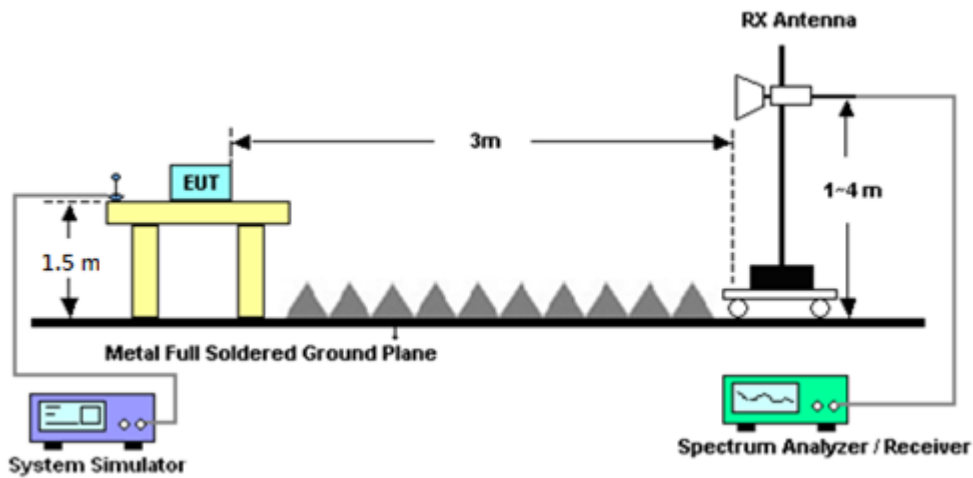

For radiated test above 18GHz

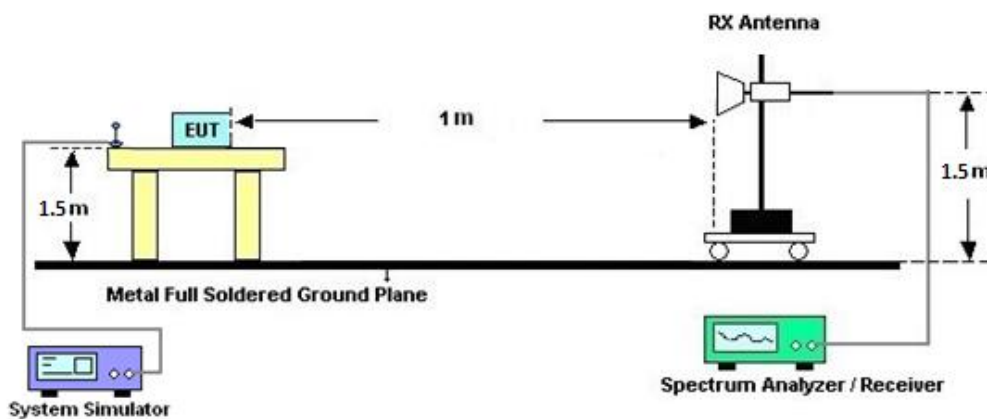

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Dec. 03, 2021~ Jan. 02, 2022	Jan. 03, 2022	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Jan. 07, 2022~ Apr. 26, 2022	Jan. 06, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Oct. 09, 2021	Dec. 03, 2021~ Apr. 26, 2022	Oct. 08, 2022	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00 800N1D01N-0 6	41912&05	30MHz to 1GHz	Feb. 08, 2021	Dec. 03, 2021~ Feb. 05, 2022	Feb. 07, 2022	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00 800N1D01N-0 6	41912&05	30MHz to 1GHz	Feb. 06, 2022	Feb. 06, 2022~ Apr. 26, 2022	Feb. 05, 2023	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2020	Dec. 03, 2021~ Dec. 26, 2021	Dec. 27, 2021	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 27, 2021	Dec. 27, 2021~ Apr. 26, 2022	Dec. 26, 2022	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-0203 8	1GHz~18GHz	Aug. 04, 2021	Dec. 03, 2021~ Apr. 26, 2022	Aug. 03, 2022	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Dec. 03, 2021	Dec. 03, 2021~ Apr. 26, 2022	Dec. 02, 2022	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz~40GHz	Nov. 30, 2021	Dec. 03, 2021~ Apr. 26, 2022	Nov. 29, 2022	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz~40GHz	May 21, 2021	Dec. 03, 2021~ Apr. 26, 2022	May 20, 2022	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-30 3	1710001800 055006	1GHz~18GHz	May 06, 2021	Dec. 03, 2021~ Apr. 26, 2022	May 05, 2022	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz-18GHz	Jul. 26, 2021	Dec. 03, 2021~ Apr. 26, 2022	Jul. 25, 2022	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18-40GHz	Jun. 22, 2021	Dec. 03, 2021~ Apr. 26, 2022	Jun. 21, 2022	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 21, 2021	Dec. 03, 2021~ Apr. 26, 2022	Oct. 20, 2022	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 03, 2021~ Apr. 26, 2022	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 03, 2021~ Apr. 26, 2022	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Dec. 03, 2021~ Apr. 26, 2022	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY36980/4, MY9838/4PE ,508405/2E	30MHz~18G	Nov. 15, 2021	Dec. 03, 2021~ Apr. 26, 2022	Nov. 14, 2022	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,80 4012/2	30MHz-40GHz	Jan. 04, 2021	Dec. 03, 2021~ Jan. 02, 2022	Jan. 03, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,80 4012/2	30MHz-40GHz	Jan. 04, 2022	Jan. 04, 2022~ Apr. 26, 2022	Jan. 03, 2023	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Dec. 03, 2021~ Feb. 28, 2022	Mar. 10, 2022	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Apr. 25, 2022~ Apr. 26, 2022	Mar. 09, 2023	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Jul. 02, 2021	Dec. 03, 2021~ Apr. 26, 2022	Jul. 01, 2022	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-935- 1000-15000-40 ST	SN1	1GHz High Pass Filter	Apr. 29, 2021	Dec. 03, 2021~ Apr. 26, 2022	Apr. 28, 2022	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN4	3GHz High Pass Filter	Sep. 15, 2021	Dec. 03, 2021~ Apr. 26, 2022	Sep. 14, 2022	Radiation (03CH15-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	50Hz~60Hz	Oct. 06, 2021	Dec. 20, 2021~ May 03, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Hygrometer	Testo	608-H11	34893240	NA	Nov. 17, 2021	Dec. 20, 2021~ May 03, 2022	Nov. 16, 2022	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101049	10Hz~44GHz	Aug. 31, 2021	Dec. 20, 2021~ May 03, 2022	Aug. 30, 2022	Conducted (TH03-HY)
Temperature Chamber	ESPEC	LHU-113	1012005860	-20°C ~85°C	May 15, 2021	Dec. 20, 2021~ May 03, 2022	May 14, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6261849015	LTE	Oct. 06, 2021	Dec. 20, 2021~ May 03, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Oct. 29, 2021	Dec. 20, 2021~ May 03, 2022	Oct. 28, 2022	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.92 dB
-------------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
-------------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.94 dB
-------------------------------------------------------------------------	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

NR n2 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.59	22.69	22.63	25.28	0.3373
5	1	23		22.61	22.73	22.58		
5	12	6		22.69	22.78	22.73		
5	1	0		22.01	22.16	22.04		
5	1	24		22.05	22.14	22.19		
5	25	0		22.06	22.16	22.11		
5	1	1	QPSK	22.50	22.62	22.50		
5	1	23		22.52	22.69	22.58		
5	12	6		22.63	22.68	22.70		
5	1	0		22.45	22.63	22.50		
5	1	24		22.56	22.65	22.55		
5	25	0		21.62	21.68	21.66		
5	1	1	16-QAM	21.65	21.85	21.76	24.35	0.2723
5	1	1	64-QAM	19.98	20.01	19.92		
5	1	1	256-QAM	17.62	17.68	17.65		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.64	22.58	22.62	25.25	0.3350
10	1	50		22.65	22.68	22.65		
10	25	12		22.74	22.71	22.74		
10	1	0		22.17	22.07	22.13		
10	1	51		22.15	22.13	22.16		
10	50	0		22.25	22.23	22.21		
10	1	1	QPSK	22.61	22.61	22.63		
10	1	50		22.59	22.60	22.68		
10	25	12		22.72	22.71	22.75		
10	1	0		22.61	22.49	22.21		
10	1	51		22.59	22.60	22.17		
10	50	0		21.68	21.88	22.21		
10	1	1	16-QAM	21.73	21.81	21.85	24.35	0.2723
10	1	1	64-QAM	20.07	19.98	19.75		
10	1	1	256-QAM	17.71	17.73	17.54		
Limit	EIRP < 2W			Result			Pass	



NR n2 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.90	22.71	22.63	25.40	0.3467
15	1	77		22.87	22.64	22.63		
15	36	18		22.78	22.74	22.58		
15	1	0		22.27	22.19	22.04		
15	1	78		22.30	22.09	22.04		
15	75	0		22.25	22.23	22.11		
15	1	1	QPSK	22.72	22.59	22.54		
15	1	77		22.72	22.61	22.62		
15	36	18		22.77	22.72	22.58		
15	1	0		22.65	22.62	22.55		
15	1	78		22.71	22.57	22.59		
15	75	0		21.80	21.73	21.62		
15	1	1	16-QAM	21.93	21.82	21.75	24.43	0.2773
15	1	1	64-QAM	20.08	20.04	19.86		
15	1	1	256-QAM	17.82	17.82	17.56		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.74	22.79	22.58	25.29	0.3381
20	1	104		22.69	22.65	22.65		
20	50	25		22.72	22.71	22.68		
20	1	0		22.24	22.22	22.06		
20	1	105		22.25	22.09	22.19		
20	100	0		22.17	22.19	22.09		
20	1	1	QPSK	22.62	22.63	22.51		
20	1	104		22.66	22.57	22.52		
20	50	25		22.72	22.76	22.62		
20	1	0		22.65	22.62	22.52		
20	1	105		22.67	22.49	22.25		
20	100	0		21.76	21.70	21.62		
20	1	1	16-QAM	21.76	21.73	21.63	24.26	0.2667
20	1	1	64-QAM	20.51	20.11	19.92		
20	1	1	256-QAM	17.58	17.75	17.59		
Limit	EIRP < 2W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = 4.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	22.71	22.76	22.81	25.19	0.3304
5	1	23		22.68	22.71	22.42		
5	12	6		22.79	22.84	22.79		
5	1	0		22.11	22.18	22.31		
5	1	24		22.19	22.15	22.15		
5	25	0		22.30	22.28	22.19		
5	1	1	QPSK	22.72	22.65	22.76		
5	1	23		22.66	22.63	22.66		
5	12	6		22.80	22.76	22.74		
5	1	0		22.63	22.70	22.78		
5	1	24		22.58	22.66	22.59		
5	25	0		21.53	21.48	21.65		
5	1	1	16-QAM	22.03	21.98	21.99	24.38	0.2742
5	1	1	64-QAM	20.11	20.08	20.16		
5	1	1	256-QAM	17.98	18.01	17.97		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 4.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.59	22.65	22.72	25.30	0.3388
10	1	50		22.73	22.77	22.56		
10	25	12		22.72	22.95	22.88		
10	1	0		22.09	22.19	22.12		
10	1	51		22.22	22.29	21.14		
10	50	0		22.19	22.31	22.15		
10	1	1	QPSK	22.47	22.64	22.61		
10	1	50		22.74	22.70	22.52		
10	25	12		22.75	22.84	22.68		
10	1	0		22.65	22.60	22.53		
10	1	51		22.71	22.72	22.54		
10	50	0		21.66	21.82	21.61		
10	1	1	16-QAM	21.65	21.77	21.74	24.12	0.2582
10	1	1	64-QAM	19.81	20.16	20.13		
10	1	1	256-QAM	17.74	17.84	17.82		
Limit	ERP < 7W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = 4.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	22.63	22.74	22.76	25.20	0.3311
15	1	77		22.75	22.79	22.65		
15	36	18		22.81	22.84	22.85		
15	1	0		22.12	22.18	22.22		
15	1	78		22.21	22.19	22.10		
15	75	0		22.35	22.31	22.26		
15	1	1	QPSK	22.65	22.69	22.68		
15	1	77		22.74	22.65	22.63		
15	36	18		22.75	22.78	22.82		
15	1	0		22.51	22.58	22.68		
15	1	78		22.67	22.63	22.53		
15	75	0		21.81	21.72	21.78		
15	1	1	16-QAM	21.75	21.92	21.85	24.27	0.2673
15	1	1	64-QAM	20.02	20.14	20.12		
15	1	1	256-QAM	17.85	17.88	17.91		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 4.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	22.67	22.76	22.65	25.27	0.3365
20	1	104		22.76	22.77	22.62		
20	50	25		22.91	22.92	22.81		
20	1	0		22.18	22.23	22.64		
20	1	105		22.32	22.21	22.19		
20	100	0		22.24	22.25	22.24		
20	1	1	QPSK	22.63	22.73	22.67		
20	1	104		22.74	22.63	22.62		
20	50	25		22.83	22.85	22.79		
20	1	0		22.64	22.61	22.63		
20	1	105		22.72	22.71	22.59		
20	100	0		21.80	21.84	21.71		
20	1	1	16-QAM	21.76	21.78	21.82	24.17	0.2612
20	1	1	64-QAM	19.87	20.16	20.01		
20	1	1	256-QAM	17.72	17.89	17.79		
Limit	ERP < 7W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.54	22.65	22.47	25.30	0.3388
5	1	23		22.58	22.74	22.42		
5	12	6		22.62	22.75	22.51		
5	1	0		22.11	22.22	21.97		
5	1	24		22.06	22.24	21.90		
5	25	0		22.11	22.23	21.99		
5	1	1	QPSK	22.62	22.68	22.60		
5	1	23		22.65	22.80	22.55		
5	12	6		22.58	22.74	22.44		
5	1	0		21.54	21.75	21.48		
5	1	24		21.49	21.78	21.46		
5	25	0		21.65	21.77	21.45		
5	1	1	16-QAM	21.44	21.61	21.44	24.11	0.2576
5	1	1	64-QAM	20.21	20.39	20.16		
5	1	1	256-QAM	17.59	17.75	17.48		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.69	22.59	22.68	25.34	0.3420
10	1	50		22.62	22.63	22.45		
10	25	12		22.66	22.75	22.58		
10	1	0		22.18	21.98	22.07		
10	1	51		22.12	22.12	21.99		
10	50	0		22.15	22.16	22.11		
10	1	1	QPSK	22.82	22.84	22.77		
10	1	50		22.71	22.76	22.52		
10	25	12		22.61	22.73	22.59		
10	1	0		21.67	21.76	21.53		
10	1	51		21.69	21.78	21.52		
10	50	0		21.76	21.76	21.55		
10	1	1	16-QAM	21.68	21.53	21.55	24.18	0.2618
10	1	1	64-QAM	20.22	20.01	20.08		
10	1	1	256-QAM	17.70	17.68	17.66		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.80	22.75	22.72	25.45	0.3508
15	1	77		22.68	22.74	22.51		
15	36	18		22.74	22.76	22.59		
15	1	0		22.38	22.22	22.21		
15	1	78		22.14	22.21	21.95		
15	75	0		22.21	22.26	22.09		
15	1	1	QPSK	22.95	22.81	22.77		
15	1	77		22.75	22.79	22.56		
15	36	18		22.71	22.74	22.56		
15	1	0		21.89	21.65	21.83		
15	1	78		21.73	21.76	21.54		
15	75	0		21.76	21.78	21.62		
15	1	1	16-QAM	22.01	21.82	21.74	24.51	0.2825
15	1	1	64-QAM	20.22	20.45	20.39		
15	1	1	256-QAM	17.72	17.79	17.66		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.87	22.68	22.82	25.37	0.3443
20	1	104		22.72	22.58	22.43		
20	50	25		22.65	22.72	22.65		
20	1	0		22.45	22.22	22.28		
20	1	105		22.18	22.05	21.94		
20	100	0		22.21	22.23	22.14		
20	1	1	QPSK	22.78	22.77	22.86		
20	1	104		22.65	22.72	22.49		
20	50	25		22.72	22.77	22.68		
20	1	0		21.85	21.72	21.85		
20	1	105		21.63	21.74	21.38		
20	100	0		21.73	21.78	21.68		
20	1	1	16-QAM	21.94	21.54	22.06	24.56	0.2858
20	1	1	64-QAM	20.12	20.15	20.05		
20	1	1	256-QAM	17.79	17.72	17.80		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	22.97	22.79	23.01	25.52	0.3565
25	1	131		22.87	22.98	22.59		
25	64	32		22.72	22.81	22.67		
25	1	0		22.32	22.25	22.54		
25	1	132		22.25	22.42	22.10		
25	128	0		22.21	22.25	22.25		
25	1	1	QPSK	22.85	22.75	22.98		
25	1	131		22.98	23.02	22.73		
25	64	32		22.65	22.88	22.64		
25	1	0		21.92	21.82	22.06		
25	1	132		21.99	22.03	21.63		
25	128	0		21.79	21.82	21.75		
25	1	1	16-QAM	21.96	21.82	22.08	24.58	0.2871
25	1	1	64-QAM	20.22	20.46	20.74		
25	1	1	256-QAM	17.89	17.65	17.95		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	22.97	22.75	22.98	25.55	0.3589
30	1	158		23.05	22.95	22.72		
30	80	40		22.72	22.88	22.76		
30	1	0		22.48	22.24	22.46		
30	1	159		22.45	22.45	22.15		
30	160	0		22.31	22.35	22.35		
30	1	1	QPSK	22.79	22.77	22.86		
30	1	158		22.97	23.01	22.63		
30	80	40		22.75	22.87	22.74		
30	1	0		22.06	21.82	22.03		
30	1	159		22.03	22.05	21.72		
30	160	0		21.85	21.95	21.88		
30	1	1	16-QAM	22.18	21.72	22.38	24.88	0.3076
30	1	1	64-QAM	20.54	20.39	20.17		
30	1	1	256-QAM	17.86	17.75	17.93		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 2.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.20	22.83	23.15	25.70	0.3715
40	1	214		23.16	22.82	22.31		
40	108	54		22.74	22.85	22.89		
40	1	0		22.43	22.39	22.58		
40	1	215		22.62	22.31	21.62		
40	216	0		22.31	22.26	22.42		
40	1	1	QPSK	22.91	22.75	23.15		
40	1	214		23.15	22.94	22.54		
40	108	54		22.74	22.81	22.93		
40	1	0		21.99	21.89	22.54		
40	1	215		22.17	21.92	21.73		
40	216	0		21.81	21.85	21.85		
40	1	1	16-QAM	22.35	22.08	22.06	24.85	0.3055
40	1	1	64-QAM	20.12	19.89	20.11		
40	1	1	256-QAM	17.85	17.73	17.89		
Limit	EIRP < 2W			Result			Pass	



NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	22.91	22.98	22.98	29.04	0.8017		
20	1	49		22.99	22.92	22.96				
20	25	12		23.04	22.98	22.95				
20	1	0		22.65	22.55	22.63				
20	1	50		22.48	22.47	22.52				
20	50	0		22.65	22.54	22.56				
20	1	1	QPSK	22.88	22.92	22.78			28.26	0.6699
20	1	49		22.92	22.82	22.49				
20	25	12		23.00	22.90	22.93				
20	1	0		22.03	21.98	22.06				
20	1	50		22.04	21.95	21.91				
20	50	0		22.18	22.10	22.08				
20	1	1	16-QAM	22.15	22.26	22.14	28.26	0.6699		
20	1	1	64-QAM	20.56	20.19	20.22				
20	1	1	256-QAM	18.32	18.33	18.15				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.15	23.01	23.02	29.15	0.8222		
30	1	76		23.14	23.12	22.93				
30	36	18		23.06	22.96	23.01				
30	1	0		22.83	22.65	22.68				
30	1	77		22.78	22.75	22.56				
30	75	0		22.85	22.65	22.58				
30	1	1	QPSK	23.15	22.91	22.84			28.54	0.7145
30	1	76		23.12	23.04	22.97				
30	36	18		23.15	22.95	22.92				
30	1	0		22.25	22.03	22.01				
30	1	77		22.17	22.13	22.16				
30	75	0		22.29	22.15	22.01				
30	1	1	16-QAM	22.54	22.13	22.21	28.54	0.7145		
30	1	1	64-QAM	20.35	20.65	20.13				
30	1	1	256-QAM	18.57	18.35	18.34				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	23.16	22.96	22.94	29.16	0.8241		
40	1	104		22.95	23.02	22.86				
40	50	25		23.12	23.03	22.92				
40	1	0		22.74	22.59	22.59				
40	1	105		22.59	22.65	22.54				
40	100	0		22.71	22.68	22.53				
40	1	1	QPSK	23.07	22.89	22.98			29.16	0.8241
40	1	104		22.89	22.99	22.82				
40	50	25		23.10	23.01	22.88				
40	1	0		22.23	22.02	22.01				
40	1	105		22.05	22.16	21.98				
40	100	0		22.21	22.18	22.03				
40	1	1	16-QAM	22.35	22.19	22.15	28.35	0.6839		
40	1	1	64-QAM	20.34	20.24	20.21				
40	1	1	256-QAM	18.52	18.35	18.36				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	23.12	22.98	22.85	29.12	0.8166		
50	1	131		22.87	22.85	22.82				
50	64	32		23.06	22.87	22.87				
50	1	0		22.62	22.53	22.35				
50	1	132		22.43	22.38	22.40				
50	128	0		22.59	22.48	22.35				
50	1	1	QPSK	23.05	22.92	22.72			29.12	0.8166
50	1	131		22.79	22.79	22.77				
50	64	32		23.02	22.87	22.81				
50	1	0		22.13	22.03	21.84				
50	1	132		21.95	21.85	21.84				
50	128	0		22.10	21.95	21.86				
50	1	1	16-QAM	22.37	22.32	22.16	28.37	0.6871		
50	1	1	64-QAM	20.35	20.51	20.36				
50	1	1	256-QAM	18.48	18.42	18.25				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	22.89	23.04	22.69	29.04	0.8017
60	1	160		22.74	22.75	22.71		
60	81	40		22.84	22.86	22.72		
60	1	0		22.43	22.62	22.26		
60	1	161		22.35	22.36	22.31		
60	162	0		22.49	22.54	22.38		
60	1	1	QPSK	22.85	22.91	22.62		
60	1	160		22.70	22.63	22.73		
60	81	40		22.84	22.82	22.71		
60	1	0		21.96	22.06	21.68		
60	1	161		21.85	21.75	21.76		
60	162	0		22.01	21.98	21.86		
60	1	1	16-QAM	22.15	22.26	21.88	28.26	0.6699
60	1	1	64-QAM	20.15	20.13	19.95		
60	1	1	256-QAM	18.28	18.25	17.92		
Limit	EIRP < 2W			Result			Pass	

NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	23.07	23.02	22.96	29.07	0.8072
80	1	215		22.49	22.77	22.68		
80	108	54		22.85	22.91	22.86		
80	1	0		22.68	22.65	22.56		
80	1	216		22.16	22.46	22.32		
80	216	0		22.45	22.59	22.46		
80	1	1	QPSK	23.05	22.95	22.94		
80	1	215		22.44	22.68	22.67		
80	108	54		22.85	22.93	22.81		
80	1	0		22.09	22.15	22.08		
80	1	216		21.63	21.83	21.81		
80	216	0		22.01	22.06	21.92		
80	1	1	16-QAM	22.34	22.23	22.07	28.34	0.6823
80	1	1	64-QAM	20.21	20.54	20.71		
80	1	1	256-QAM	18.54	18.40	18.38		
Limit	EIRP < 2W			Result			Pass	



NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	23.08	23.06	22.94	29.08	0.8091		
90	1	243		22.51	22.79	22.73				
90	120	60		22.93	22.96	22.30				
90	1	0		22.68	22.63	22.58				
90	1	244		22.12	22.36	22.35				
90	243	0		22.54	22.58	22.56				
90	1	1	QPSK	23.03	22.93	23.01			29.08	0.8091
90	1	243		22.45	22.72	22.76				
90	120	60		22.89	22.90	22.95				
90	1	0		22.14	22.11	22.03				
90	1	244		21.57	21.98	21.80				
90	243	0		22.03	22.14	22.06				
90	1	1	16-QAM	22.32	22.25	22.16	28.32	0.6792		
90	1	1	64-QAM	20.32	20.34	20.19				
90	1	1	256-QAM	18.44	18.36	18.26				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	23.03	23.05	22.91	29.05	0.8035		
100	1	271		22.41	22.82	22.77				
100	135	67		22.86	23.01	22.93				
100	1	0		22.70	22.46	22.56				
100	1	272		22.03	22.45	22.25				
100	270	0		22.53	22.59	22.52				
100	1	1	QPSK	23.02	22.86	22.79			29.05	0.8035
100	1	271		22.39	22.82	22.65				
100	135	67		22.76	22.98	22.92				
100	1	0		22.09	21.94	21.95				
100	1	272		21.49	21.95	21.77				
100	270	0		22.06	22.07	22.02				
100	1	1	16-QAM	22.15	22.16	22.11	28.16	0.6546		
100	1	1	64-QAM	20.32	20.57	20.48				
100	1	1	256-QAM	18.39	18.36	18.24				
Limit	EIRP < 2W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.71	22.67	22.85	28.36	0.6855
5	1	23		22.63	22.76	22.74		
5	12	6		22.75	22.78	22.82		
5	1	0		22.69	22.21	22.33		
5	1	24		22.68	22.16	22.24		
5	25	0		21.79	22.26	22.36		
5	1	1	QPSK	22.63	22.74	2.82		
5	1	23		22.78	22.71	22.86		
5	12	6		22.72	22.74	22.80		
5	1	0		22.73	22.72	22.74		
5	1	24		22.55	22.75	22.69		
5	25	0		21.82	21.81	21.91		
5	1	1	16-QAM	21.64	21.82	21.84	27.34	0.5420
5	1	1	64-QAM	20.54	20.52	20.55		
5	1	1	256-QAM	17.79	17.82	17.88		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.81	22.83	22.92	28.45	0.6998
10	1	50		22.78	22.79	22.81		
10	25	12		22.82	22.75	22.95		
10	1	0		22.33	22.31	22.36		
10	1	51		22.23	22.26	22.32		
10	50	0		22.31	22.27	22.41		
10	1	1	QPSK	22.89	22.73	22.92		
10	1	50		22.77	22.80	22.82		
10	25	12		22.81	22.73	22.93		
10	1	0		22.87	22.81	22.91		
10	1	51		22.73	22.76	22.84		
10	50	0		21.89	21.83	21.99		
10	1	1	16-QAM	21.93	21.81	22.01	27.51	0.5636
10	1	1	64-QAM	20.64	20.63	20.67		
10	1	1	256-QAM	17.90	17.85	17.94		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.82	22.73	22.71	28.42	0.6950
15	1	77		22.77	22.71	22.75		
15	36	18		22.81	22.68	22.73		
15	1	0		22.38	22.29	22.24		
15	1	78		22.23	22.26	22.29		
15	75	0		22.32	22.22	22.25		
15	1	1	QPSK	22.87	22.77	22.74		
15	1	77		22.86	22.81	22.72		
15	36	18		22.83	22.72	22.75		
15	1	0		22.92	22.79	22.75		
15	1	78		22.84	22.70	22.76		
15	75	0		21.95	21.87	21.85		
15	1	1	16-QAM	21.87	21.82	21.83	27.37	0.5458
15	1	1	64-QAM	20.65	20.62	20.54		
15	1	1	256-QAM	17.94	17.82	17.85		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.85	22.89	22.77	28.39	0.6902
20	1	104		22.71	22.76	22.81		
20	50	25		22.85	22.73	22.71		
20	1	0		22.38	22.34	22.25		
20	1	105		22.24	22.25	22.28		
20	100	0		22.28	22.21	22.26		
20	1	1	QPSK	22.85	22.87	22.76		
20	1	104		22.75	22.79	22.85		
20	50	25		22.83	22.70	22.79		
20	1	0		22.87	22.85	22.81		
20	1	105		22.68	22.81	22.85		
20	100	0		21.90	21.87	21.86		
20	1	1	16-QAM	21.98	21.92	21.76	27.48	0.5598
20	1	1	64-QAM	20.65	20.63	20.58		
20	1	1	256-QAM	17.95	17.93	17.82		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	22.96	22.86	22.94	28.56	0.7178		
30	1	158		22.92	22.93	22.98				
30	80	40		22.92	22.83	22.95				
30	1	0		22.46	22.36	22.47				
30	1	159		22.44	22.42	22.48				
30	160	0		22.41	22.31	22.46				
30	1	1	QPSK	22.95	22.90	23.01			27.58	0.5728
30	1	158		23.01	22.85	23.03				
30	80	40		22.94	22.82	22.95				
30	1	0		23.02	22.88	23.02				
30	1	159		22.69	22.88	23.06				
30	160	0		22.06	21.92	22.08				
30	1	1	16-QAM	22.04	21.90	22.08	27.58	0.5728		
30	1	1	64-QAM	20.69	20.65	20.74				
30	1	1	256-QAM	18.02	17.98	18.04				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = 5.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	22.92	22.84	22.95	28.62	0.7278		
40	1	214		22.85	22.93	23.12				
40	108	54		22.91	22.61	22.92				
40	1	0		22.88	22.79	22.95				
40	1	215		22.86	23.02	23.11				
40	216	0		22.02	21.77	21.98				
40	1	1	QPSK	22.81	22.56	22.88			27.42	0.5521
40	1	214		22.69	22.85	22.92				
40	108	54		22.83	22.65	22.92				
40	1	0		22.36	22.24	22.35				
40	1	215		22.28	22.45	22.52				
40	216	0		22.36	22.15	22.41				
40	1	1	16-QAM	21.85	21.77	21.92	27.42	0.5521		
40	1	1	64-QAM	20.42	20.08	20.74				
40	1	1	256-QAM	18.29	18.05	18.98				
Limit	EIRP < 1W			Result			Pass			



NR n71 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	22.95	22.98	22.85	26.92	0.4920
5	1	23		22.87	22.89	22.72		
5	12	6		22.94	22.99	22.82		
5	1	0		22.51	22.47	22.38		
5	1	24		22.45	22.35	22.17		
5	25	0		22.44	22.45	22.33		
5	1	1	QPSK	23.07	23.01	22.94		
5	1	23		22.97	22.84	22.81		
5	12	6		22.85	22.94	22.86		
5	1	0		21.95	21.96	21.95		
5	1	24		21.93	21.85	21.78		
5	25	0		21.93	21.93	21.84		
5	1	1	16-QAM	21.98	21.94	21.92	25.83	0.3828
5	1	1	64-QAM	20.62	20.65	20.68		
5	1	1	256-QAM	18.11	18.07	17.98		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = 6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	22.87	22.98	22.81	26.88	0.4875
10	1	50		22.85	22.93	22.75		
10	25	12		22.95	23.03	22.86		
10	1	0		22.47	22.42	22.35		
10	1	51		22.36	22.39	22.24		
10	50	0		22.49	22.51	22.32		
10	1	1	QPSK	22.95	23.02	22.84		
10	1	50		22.85	22.95	22.73		
10	25	12		22.95	22.95	22.82		
10	1	0		21.95	21.96	21.86		
10	1	51		21.93	21.95	21.74		
10	50	0		21.96	21.98	21.82		
10	1	1	16-QAM	21.84	21.95	21.78	25.80	0.3802
10	1	1	64-QAM	20.61	20.65	20.45		
10	1	1	256-QAM	18.05	18.12	17.89		
Limit	ERP < 3W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	22.93	23.02	22.92	26.90	0.4898		
15	1	77		23.03	22.94	22.73				
15	36	18		22.98	23.01	22.84				
15	1	0		22.48	22.44	22.41				
15	1	78		22.52	22.32	22.26				
15	75	0		22.41	22.54	22.44				
15	1	1	QPSK	22.98	23.05	23.01			26.90	0.4898
15	1	77		23.02	22.88	22.83				
15	36	18		22.98	23.01	22.84				
15	1	0		21.95	22.03	21.95				
15	1	78		21.94	21.88	21.74				
15	75	0		22.01	22.01	21.92				
15	1	1	16-QAM	21.92	21.97	21.72	25.82	0.3819		
15	1	1	64-QAM	20.65	20.72	20.59				
15	1	1	256-QAM	18.01	18.03	18.06				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = 6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	22.98	23.05	23.08	26.93	0.4932		
20	1	104		22.91	22.86	22.79				
20	50	25		23.01	23.05	22.90				
20	1	0		21.96	22.11	22.09				
20	1	105		21.92	21.98	21.82				
20	100	0		21.96	22.05	21.95				
20	1	1	QPSK	22.95	22.92	23.04			26.93	0.4932
20	1	104		22.83	22.82	22.76				
20	50	25		22.96	23.01	22.88				
20	1	0		22.37	22.56	22.53				
20	1	105		22.35	22.43	22.21				
20	100	0		22.48	22.46	22.41				
20	1	1	16-QAM	21.85	22.05	22.04	25.90	0.3890		
20	1	1	64-QAM	20.55	20.82	20.68				
20	1	1	256-QAM	17.92	18.05	18.11				
Limit	ERP < 3W			Result			Pass			



FR1 n5

Peak-to-Average Ratio



Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	3.68	4.75	5.62	6.00	PASS
Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.63				PASS



FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB



PI/2 BPSK

QPSK

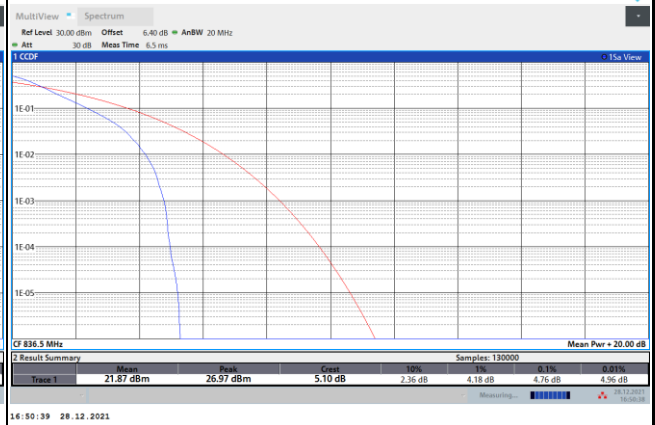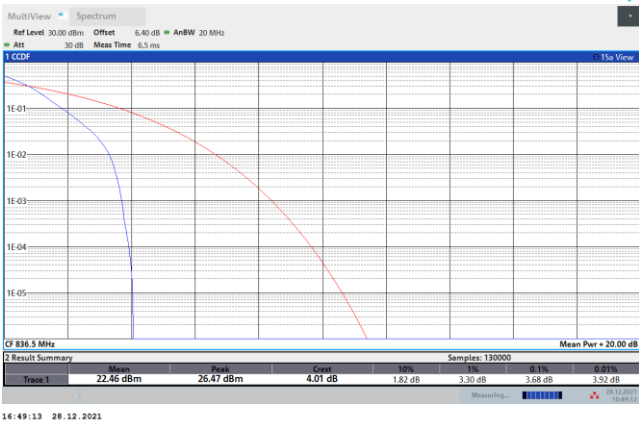


16QAM

64QAM

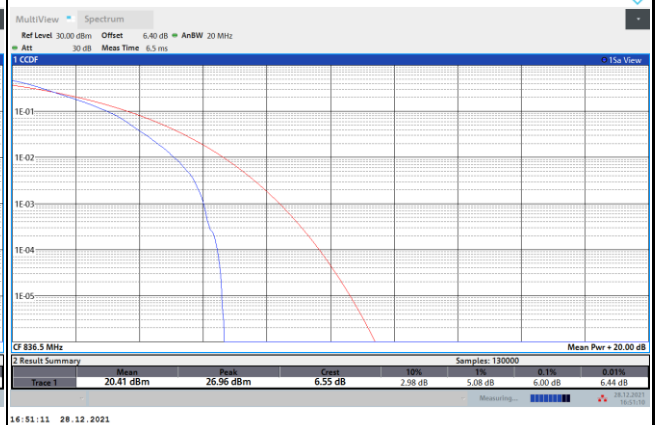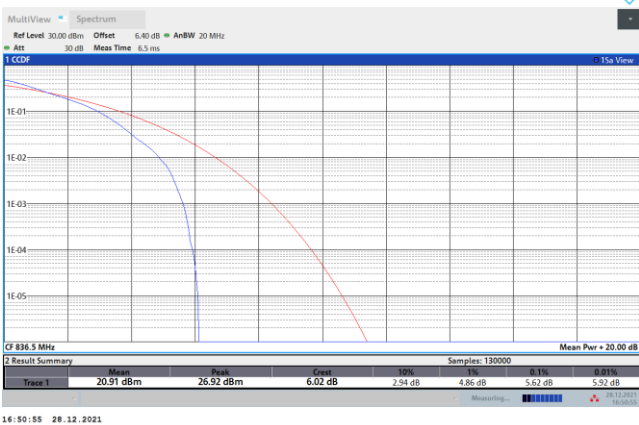

256QAM

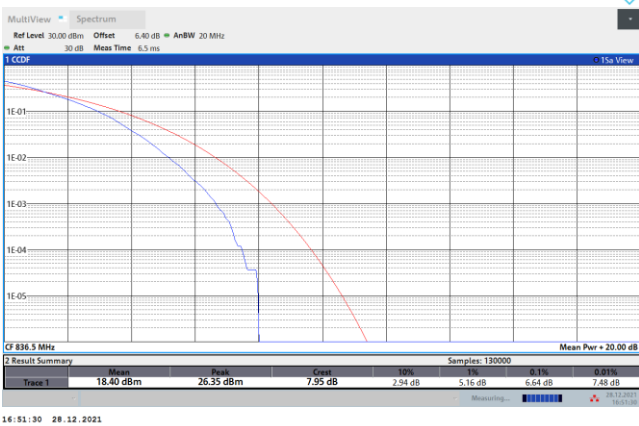



26dB Bandwidth


Mode	FR1 n5 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	4.88		9.43		14.20		18.70	

Mode	FR1 n5 : 26dB BW(MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.94	4.93	9.89	9.86	15.04	15.04	19.85	19.85
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	5.00	4.93	9.76	9.84	14.95	15.01	19.82	19.78




FR1 n5 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

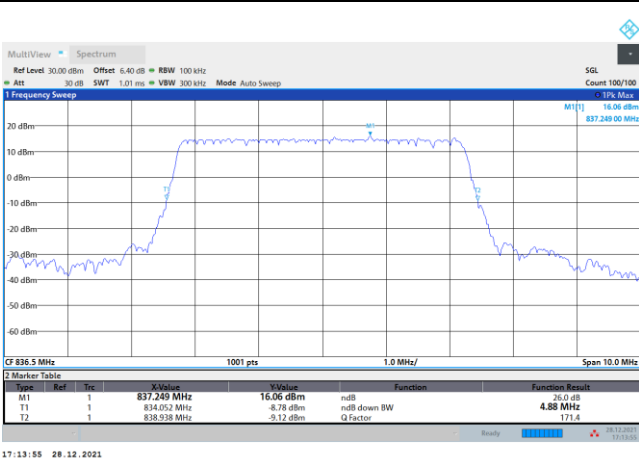


FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

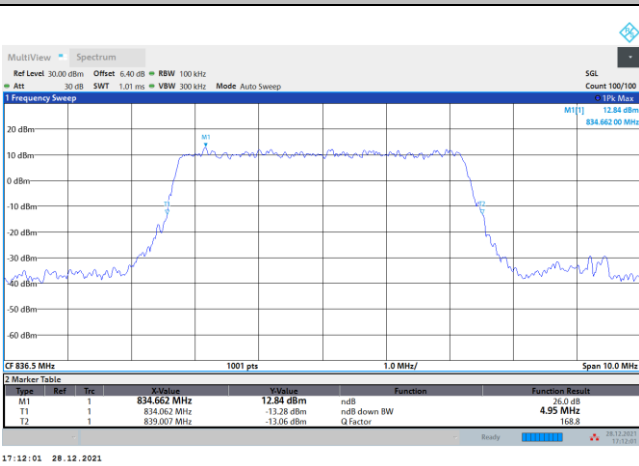


16QAM

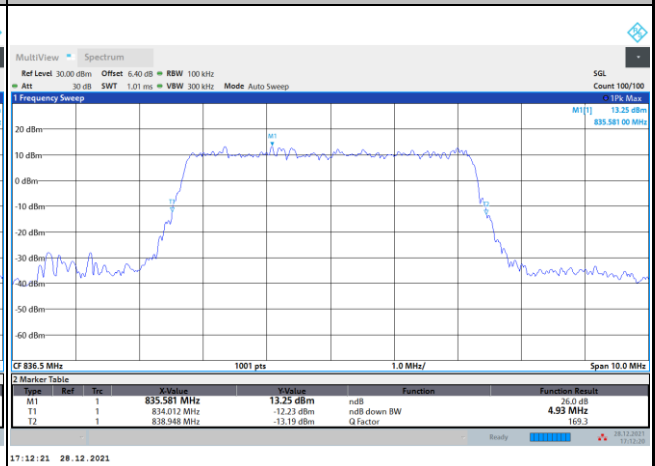

64QAM

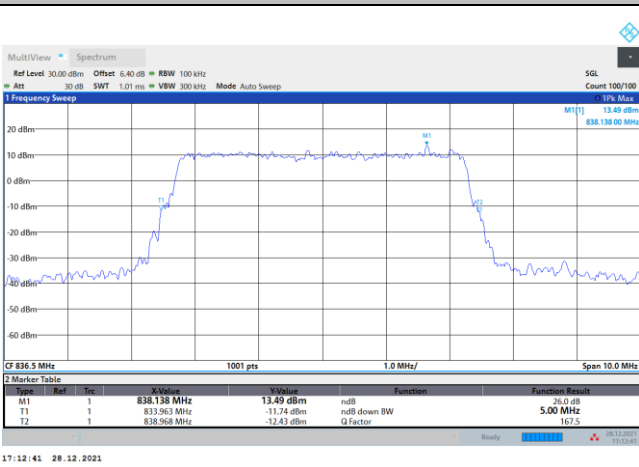


256QAM

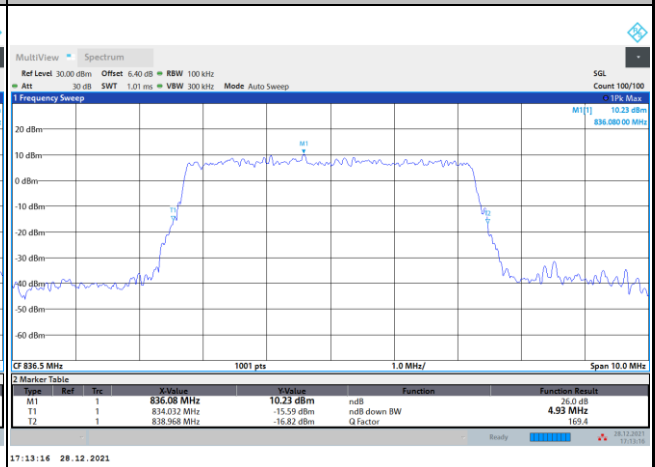




FR1 n5 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

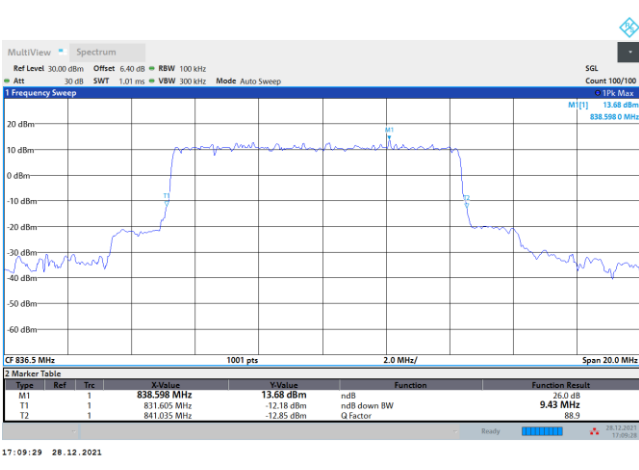


FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

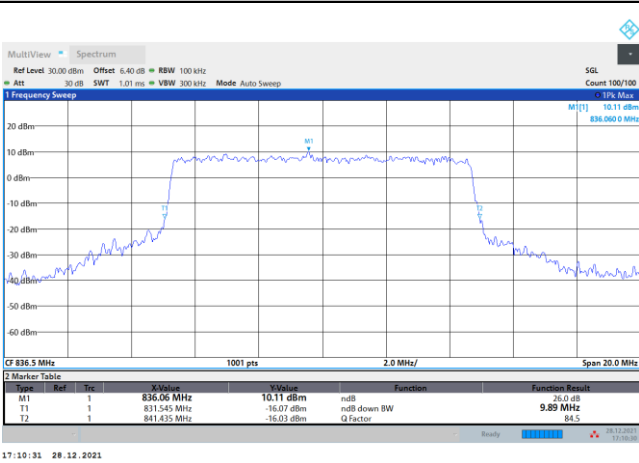


16QAM

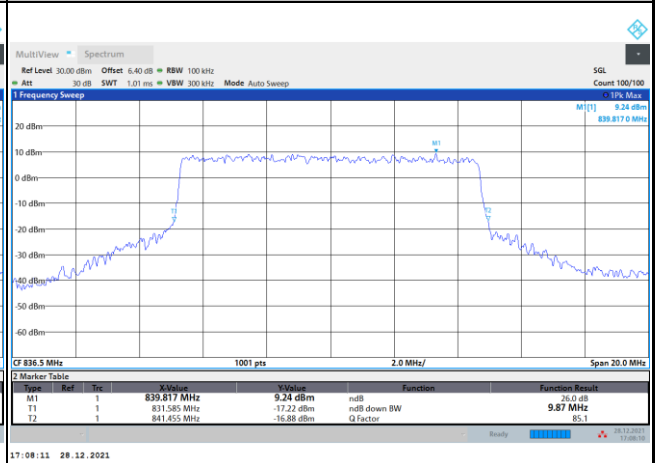

64QAM

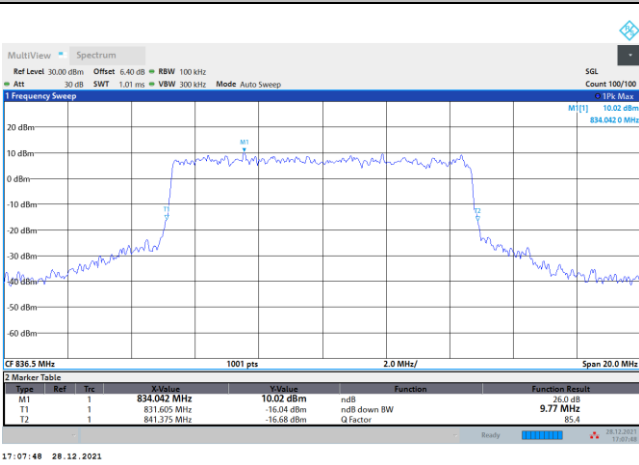


256QAM

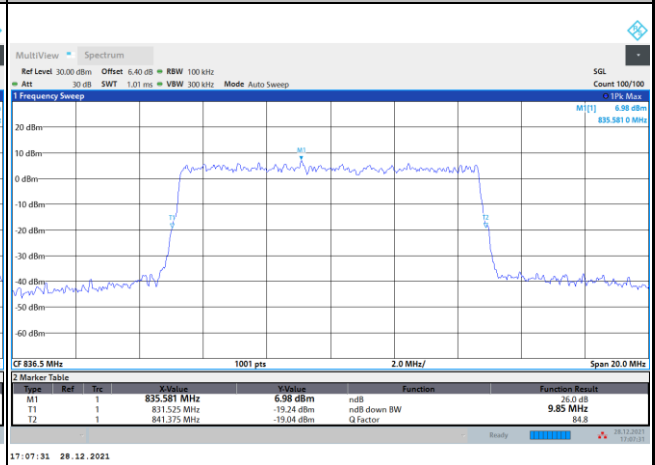




FR1 n5 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

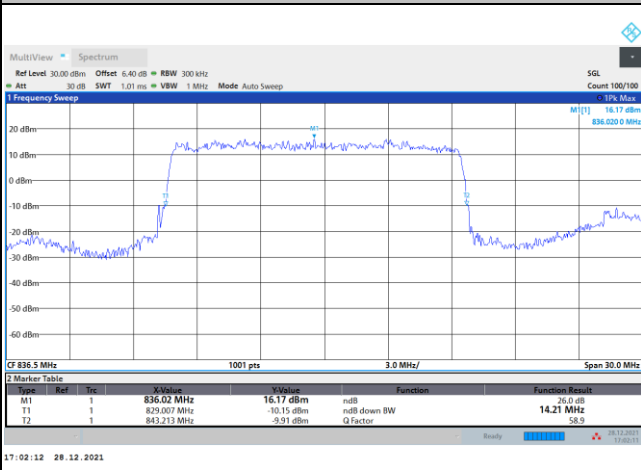


FR1 n5 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

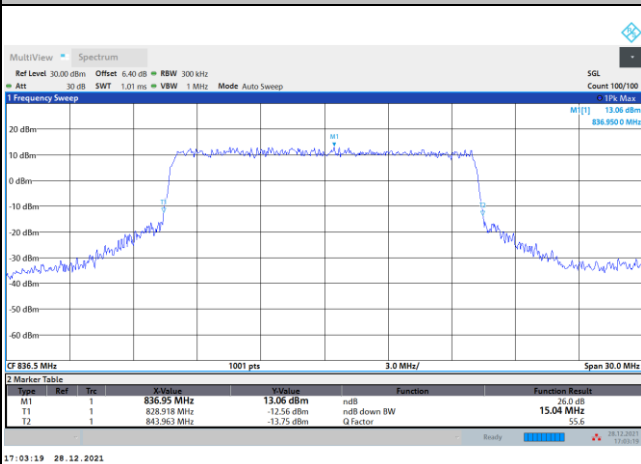


16QAM

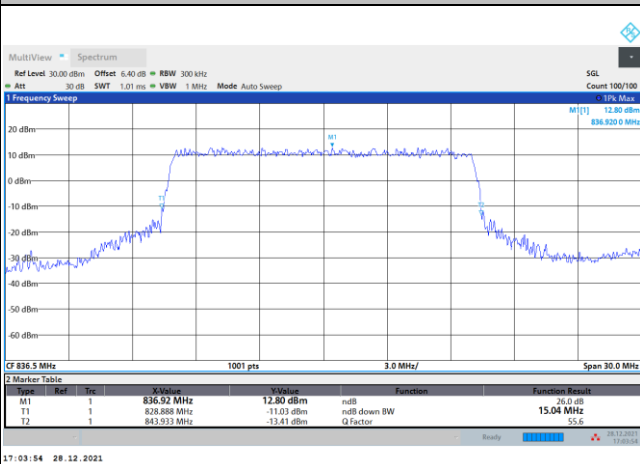

64QAM

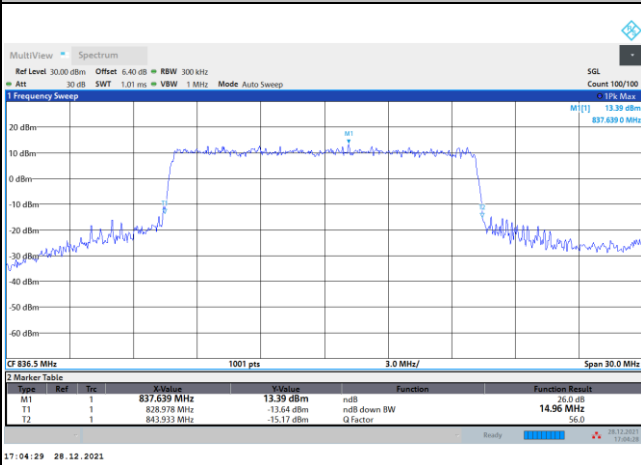


256QAM

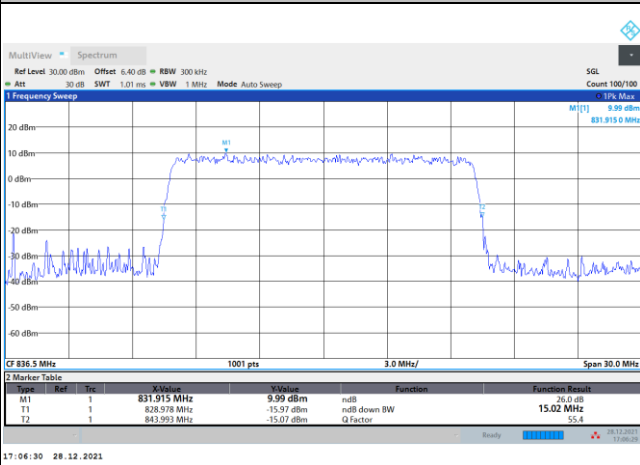




FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

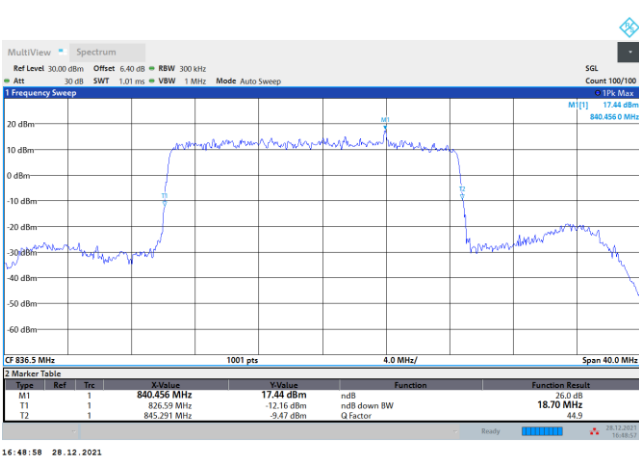


FR1 n5 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

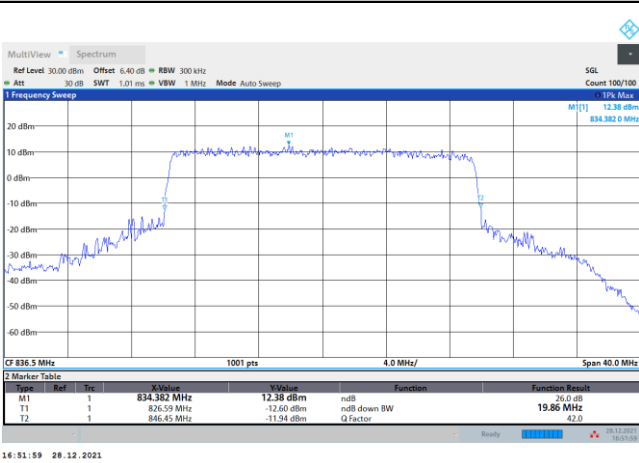


16QAM

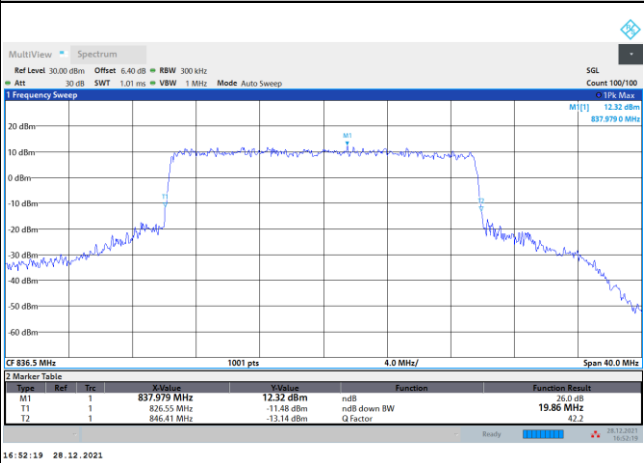

64QAM

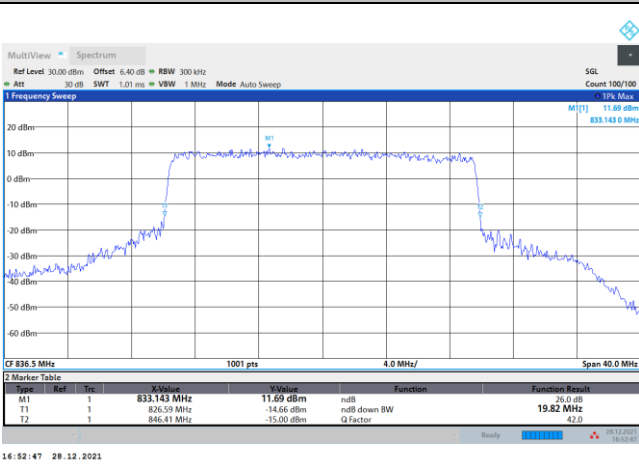

256QAM

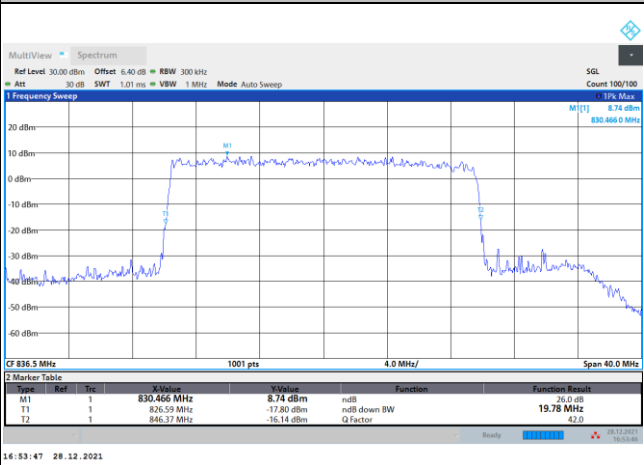



Occupied Bandwidth


Mode	FR1 n5 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	4.48		8.92		13.45		17.81	

Mode	FR1 n5 : 99%OBW (MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.49	4.47	9.26	9.28	14.14	14.11	18.88	18.93
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	4.50	4.48	9.29	9.27	14.11	14.11	18.86	18.93




FR1 n5 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

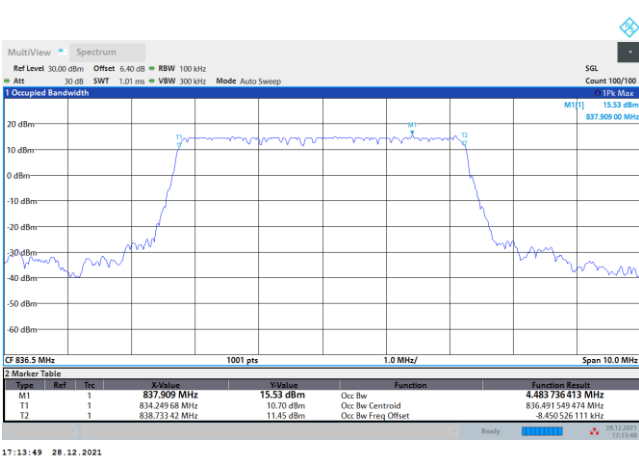


FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

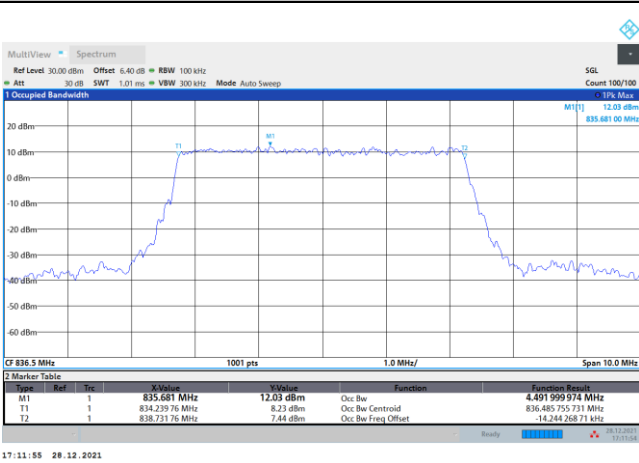


16QAM

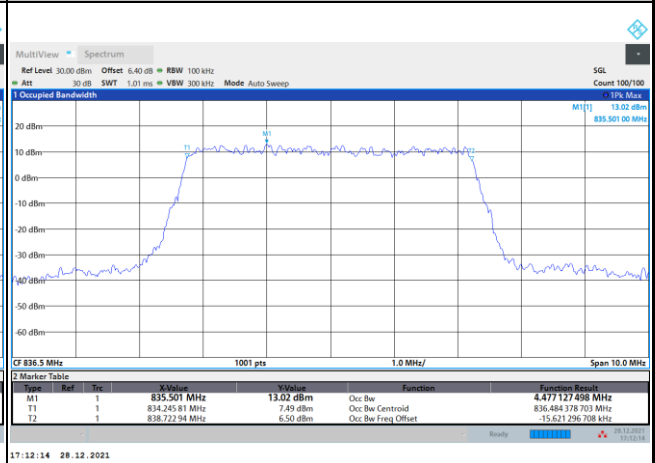

64QAM

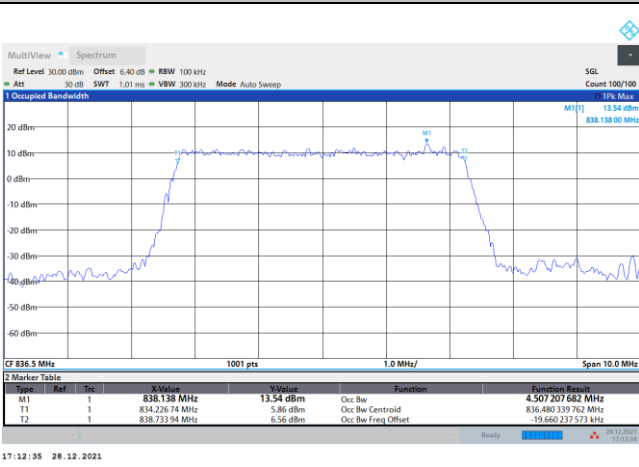


256QAM

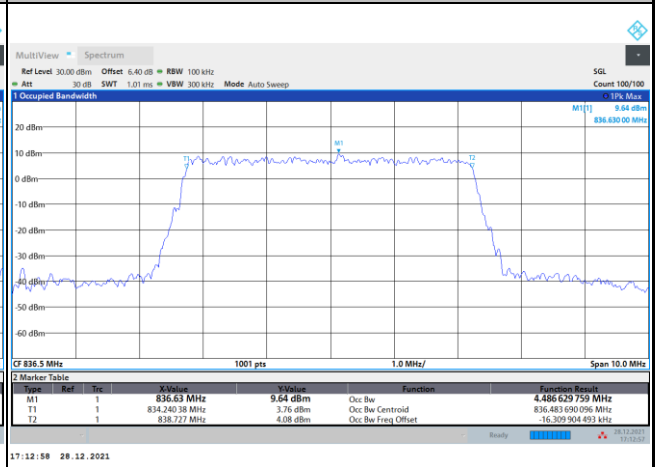




FR1 n5 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

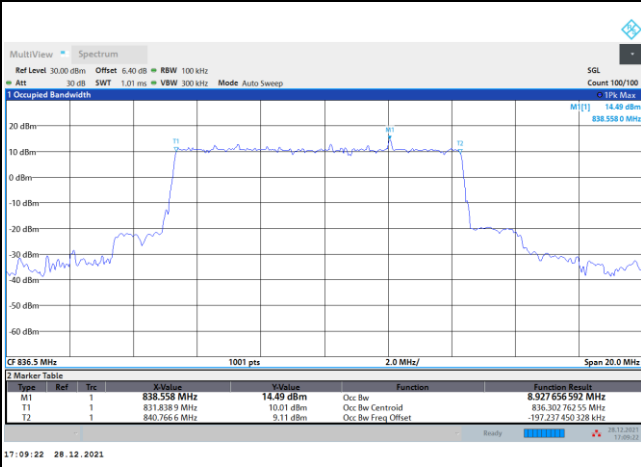


FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

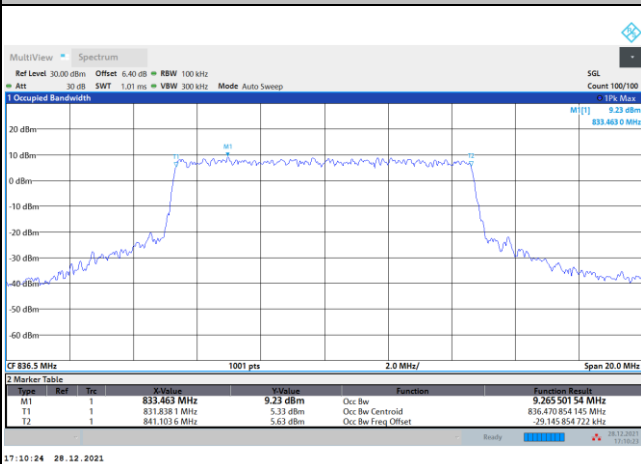


16QAM

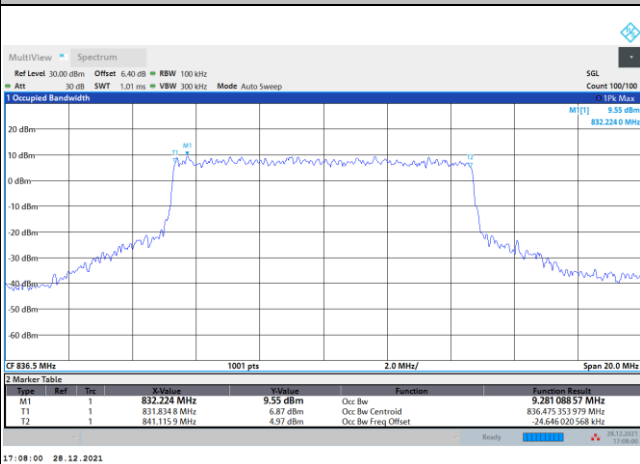

64QAM

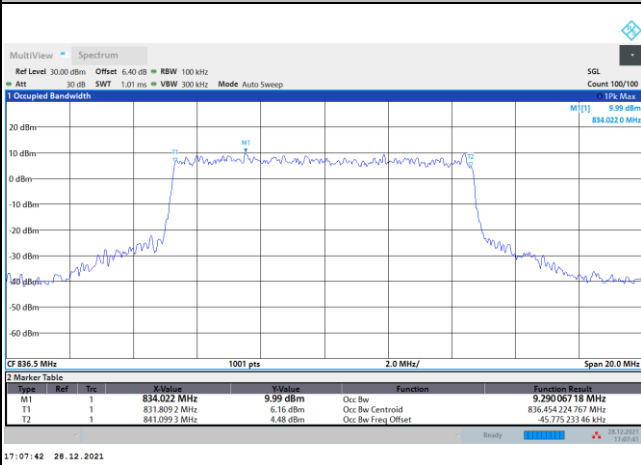


256QAM

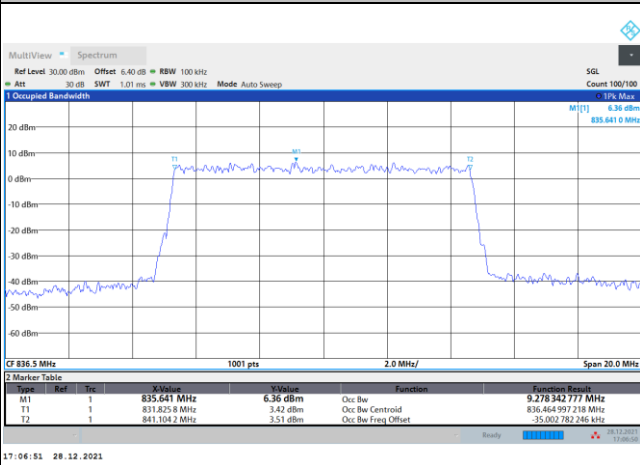




FR1 n5 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

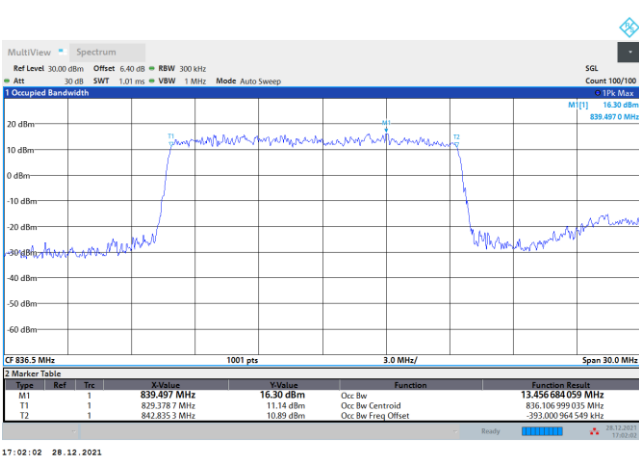


FR1 n5 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

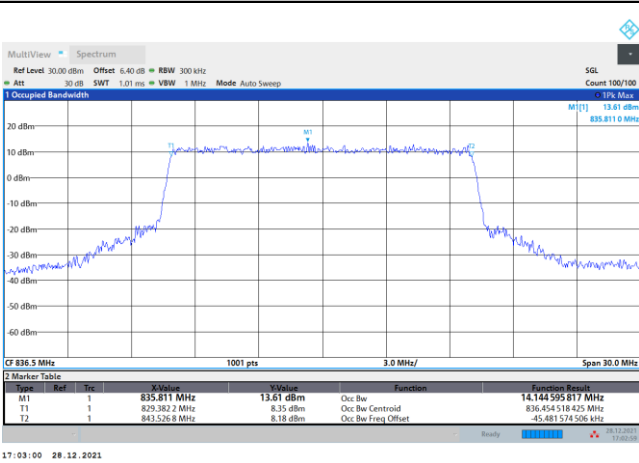


16QAM

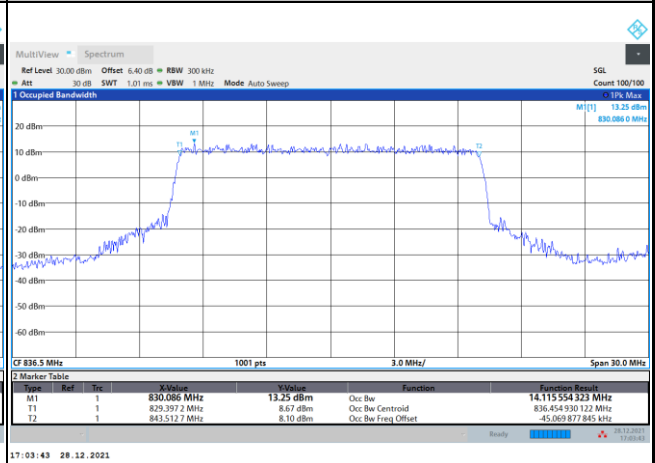

64QAM

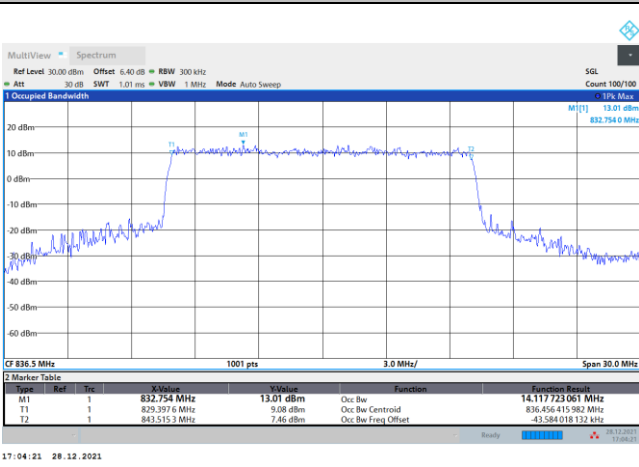


256QAM

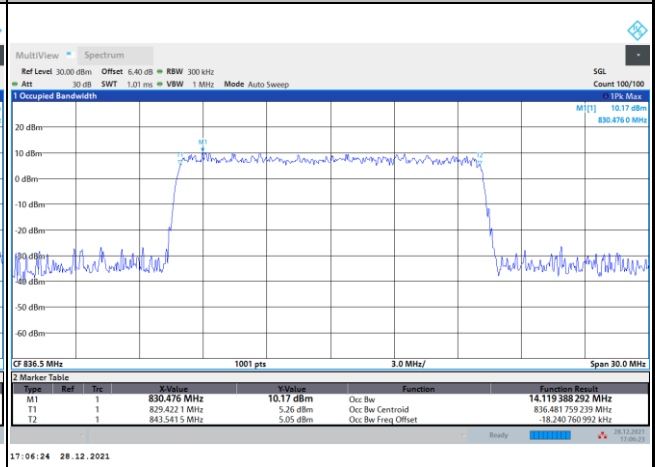




FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

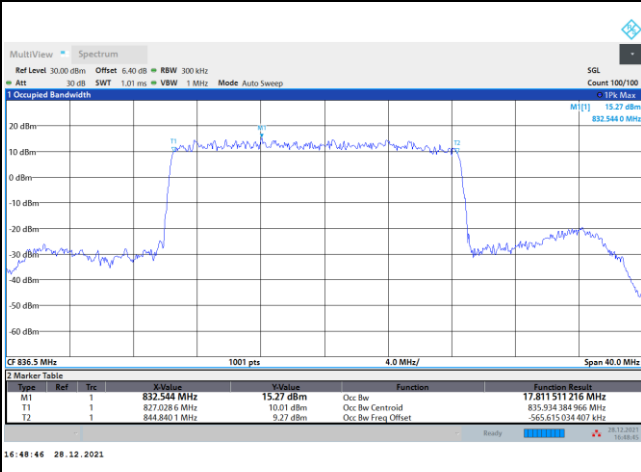


FR1 n5 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

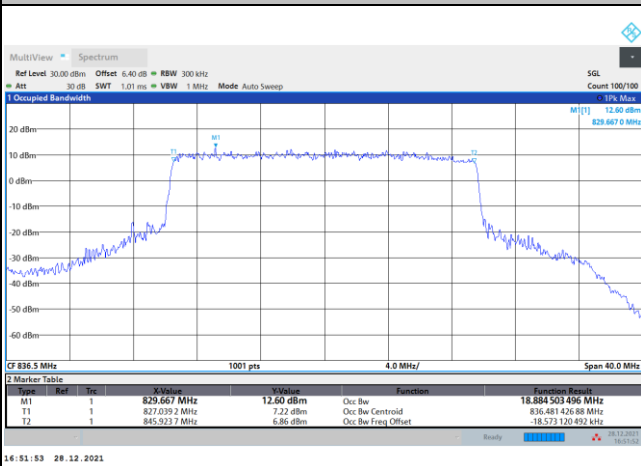


16QAM

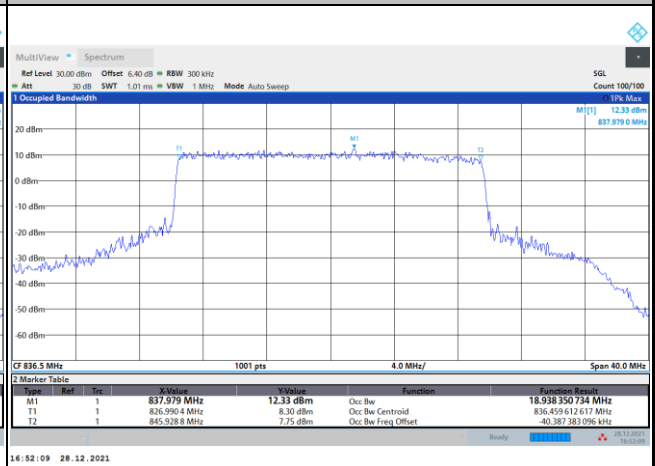

64QAM

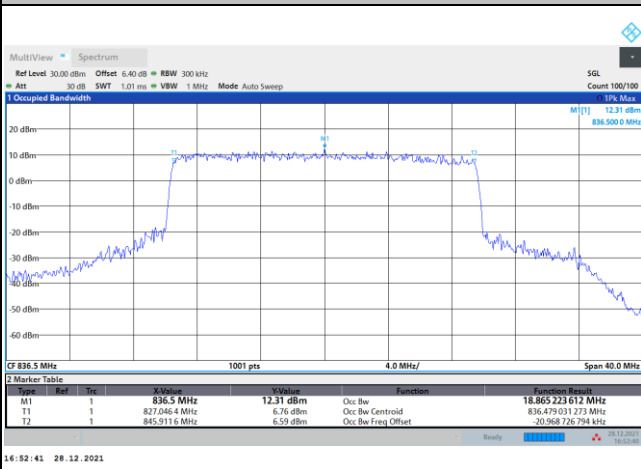

256QAM

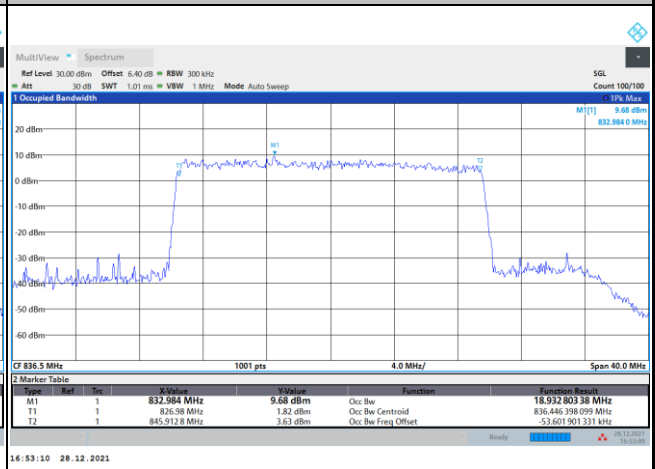





Conducted Band Edge

FR1 n5 / 5MHz / DFT-S OFDM / PI/2 BPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

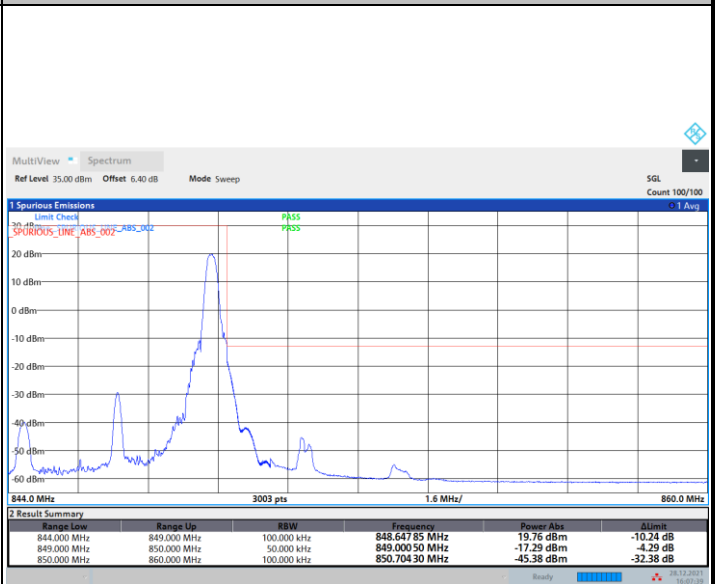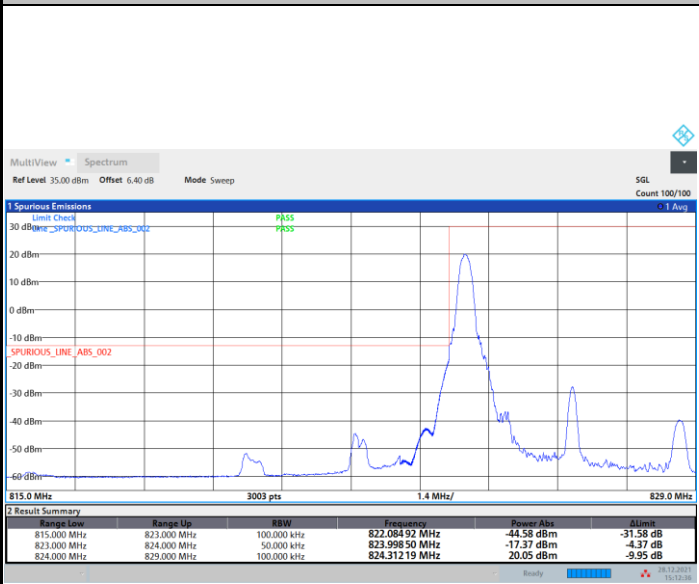

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

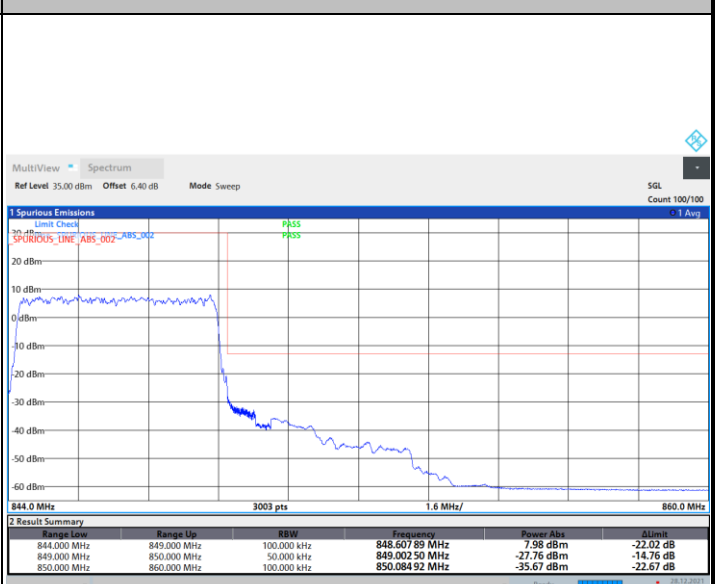
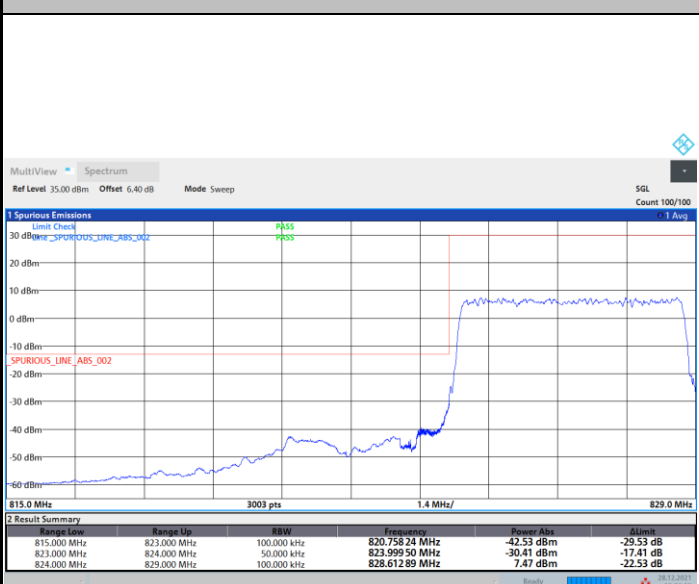




FR1 n5 / 5MHz / DFT-S OFDM / QPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

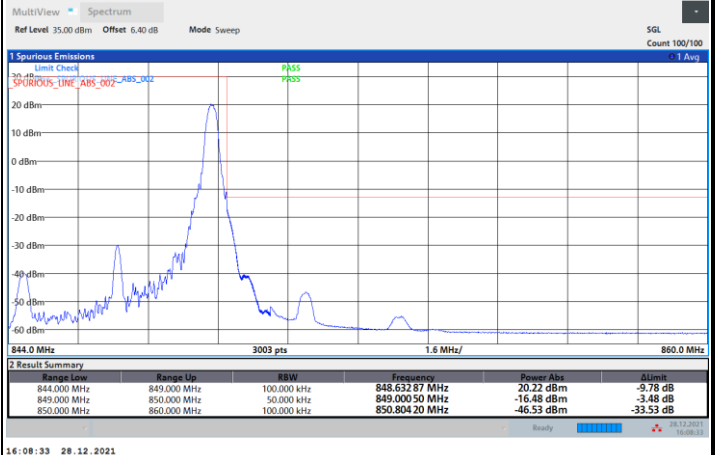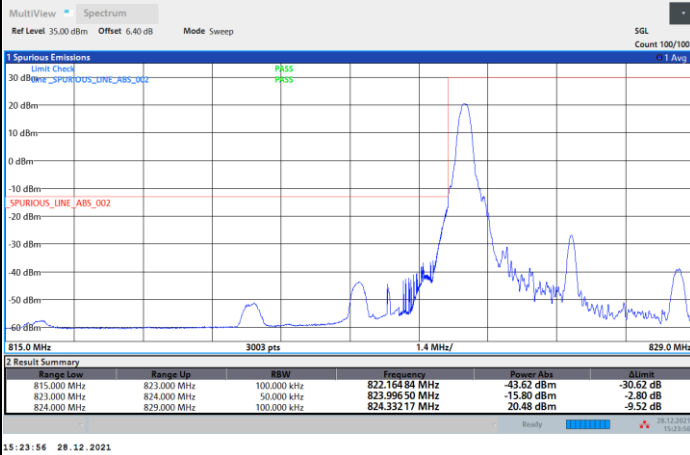

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

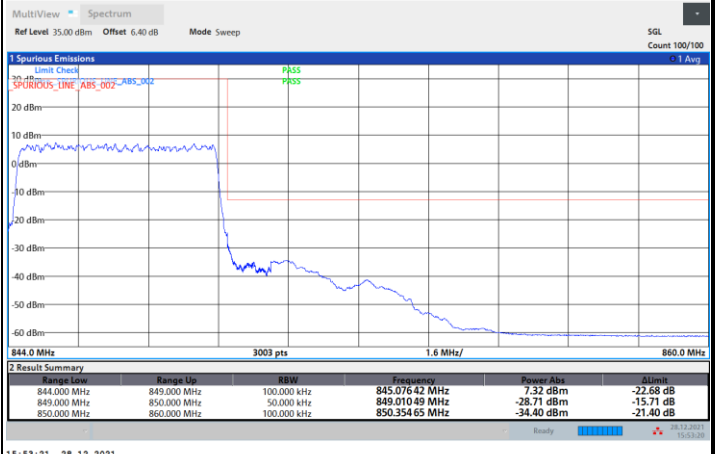
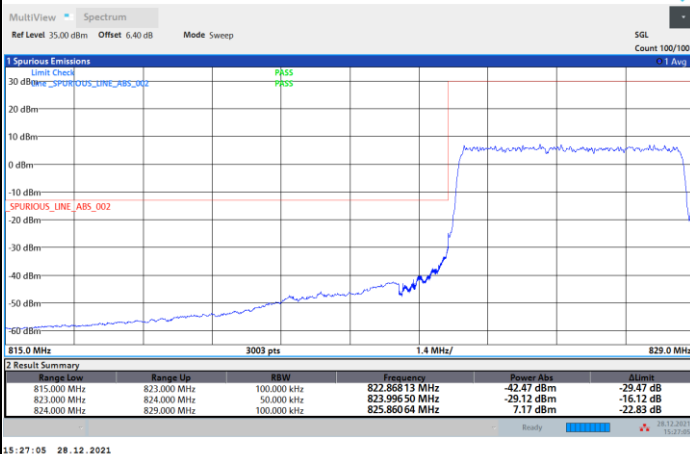




FR1 n5 / 5MHz / DFT-S OFDM / 16QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

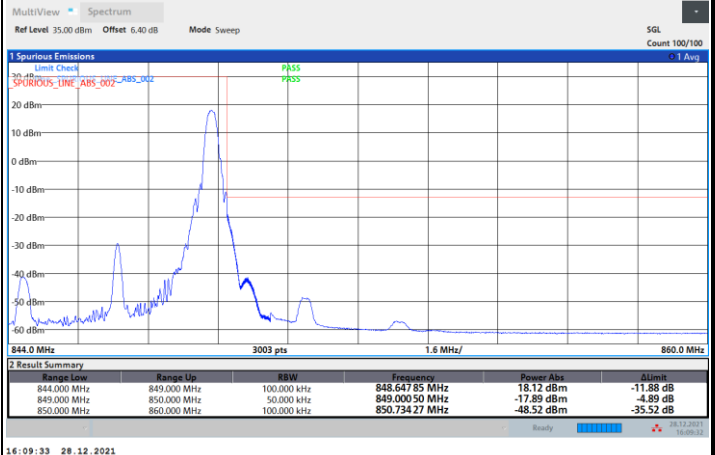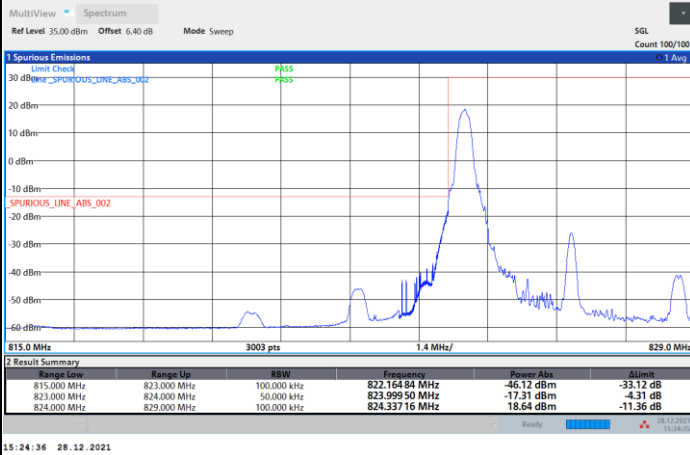

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

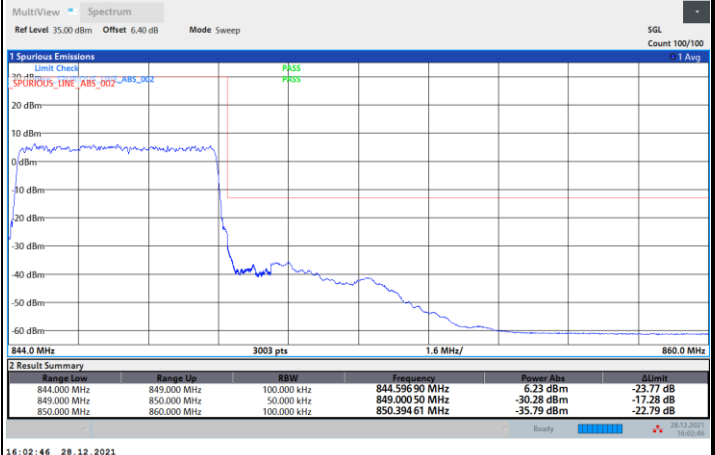
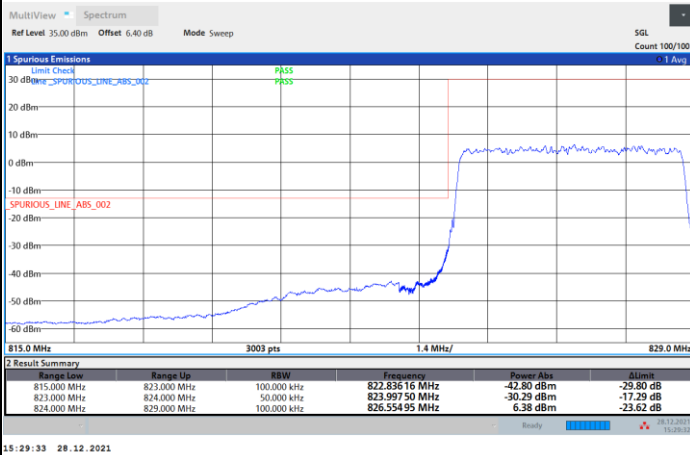




FR1 n5 / 5MHz / DFT-S OFDM / 64QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

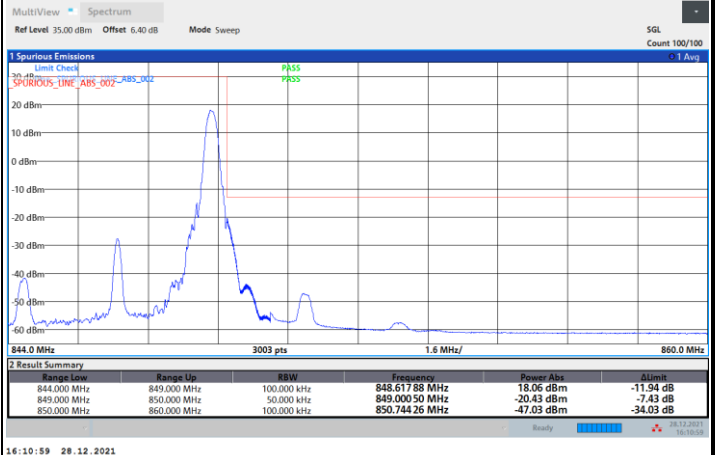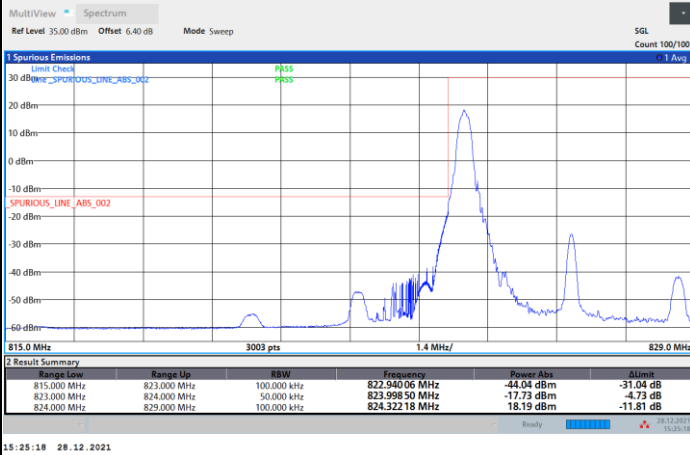

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

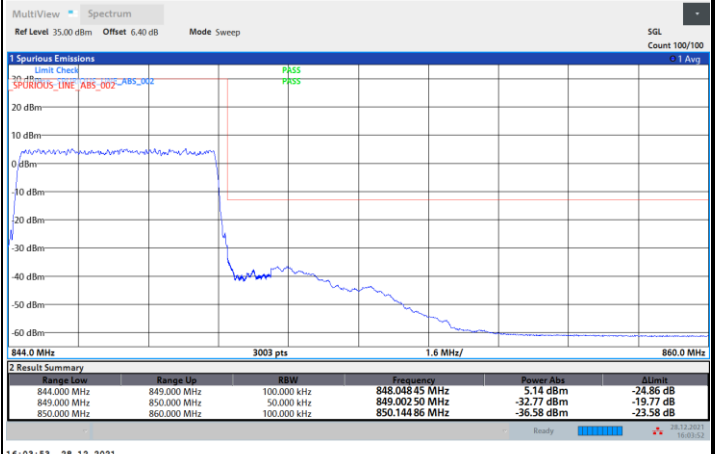
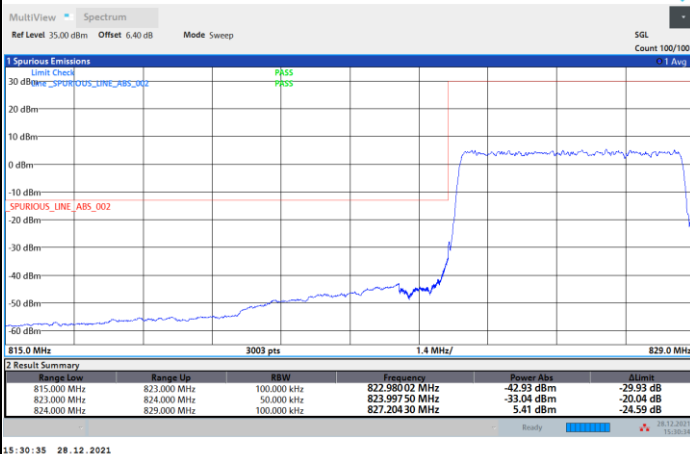




FR1 n5 / 5MHz / DFT-S OFDM / 256QAM



Lowest Band Edge / 1RB0


Highest Band Edge / 1RBmax

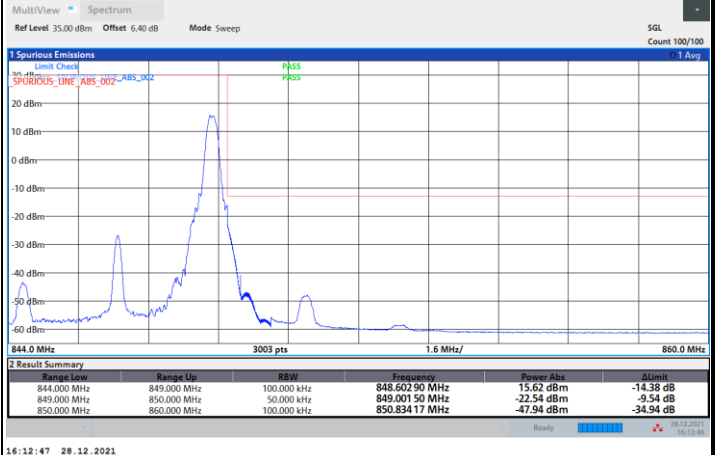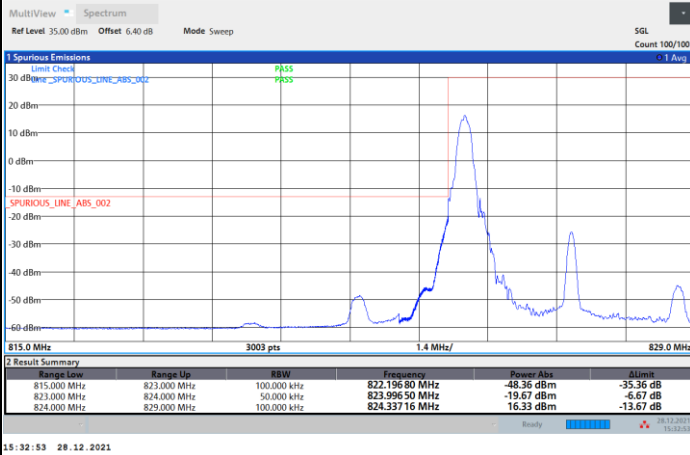

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

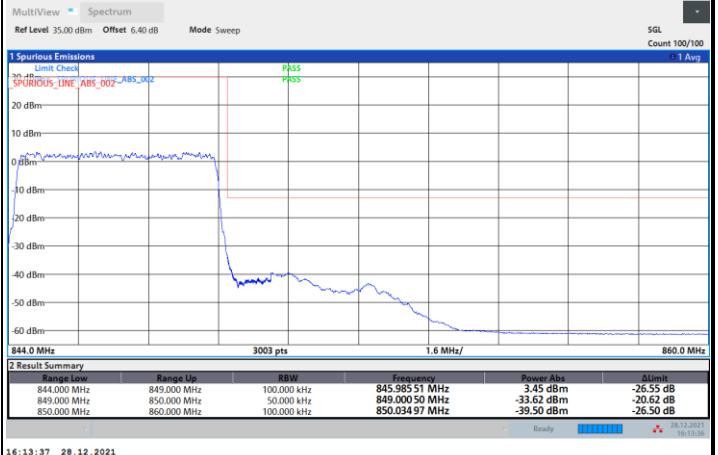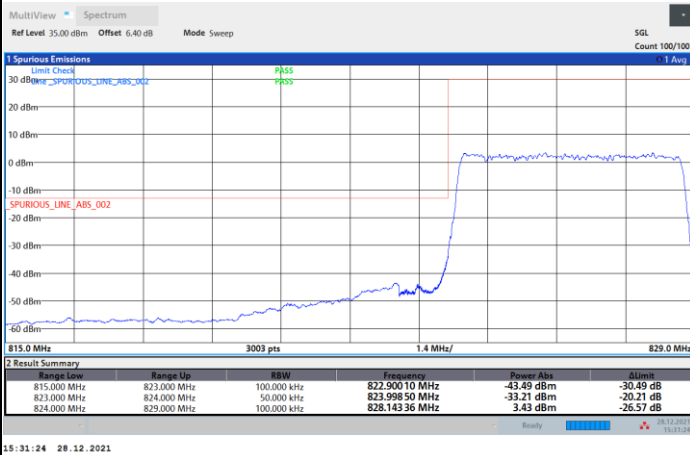

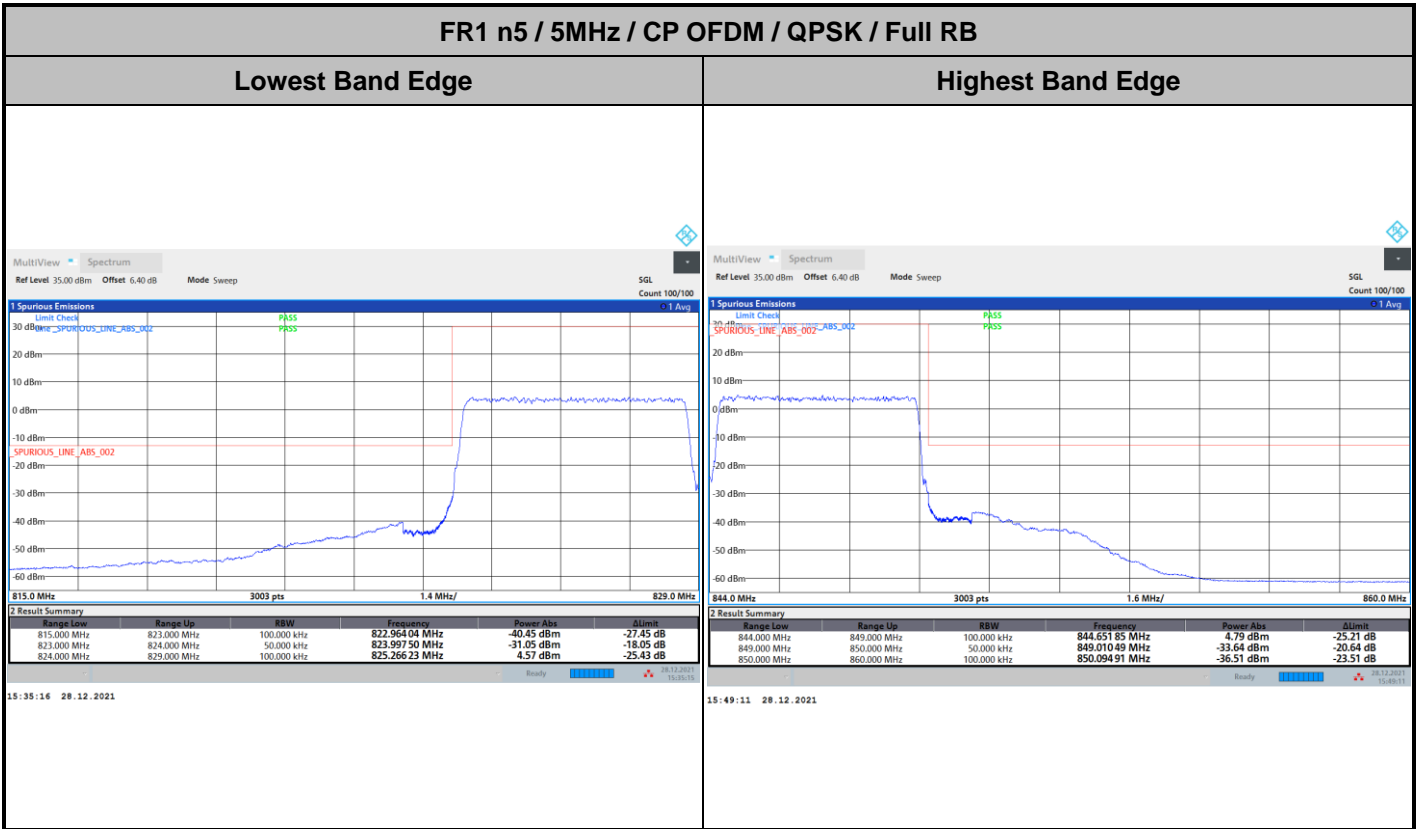






FR1 n5 / 10MHz / DFT-s-OFDM / PI/2 BPSK / Full RB


Lowest Band Edge


Highest Band Edge

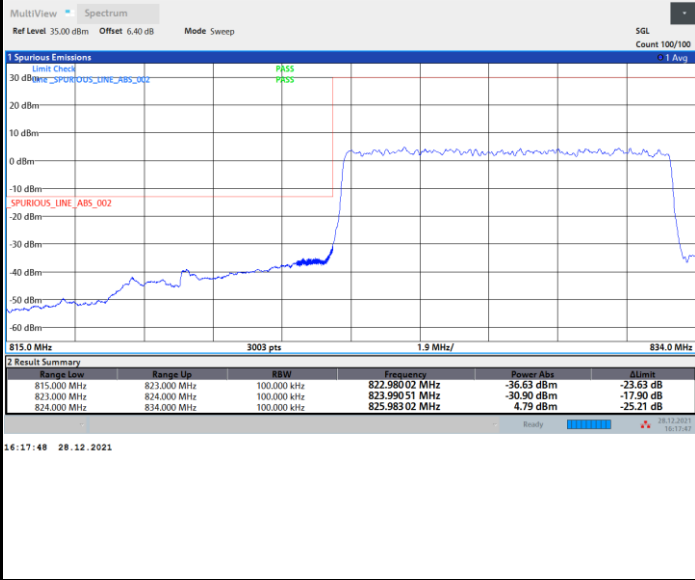


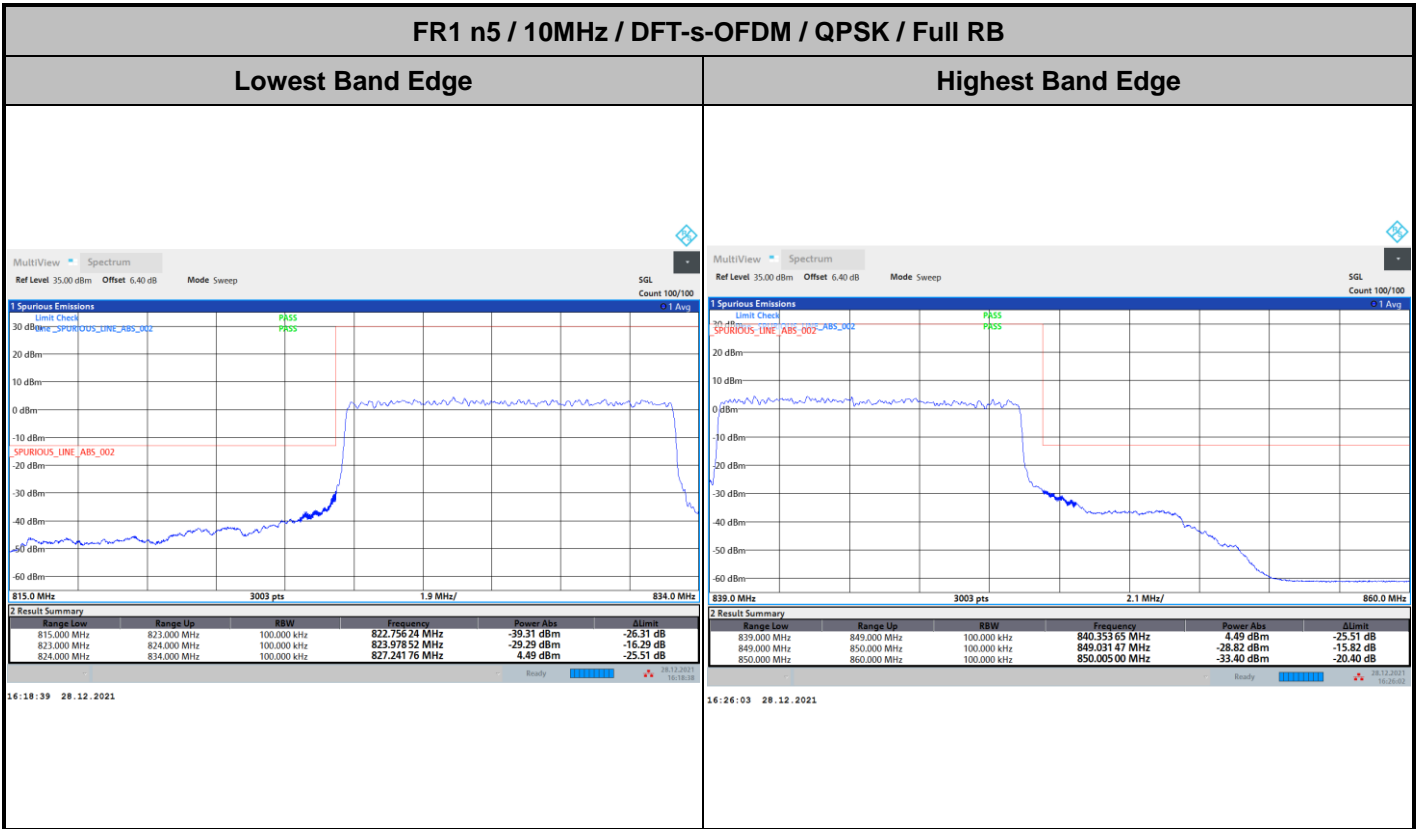

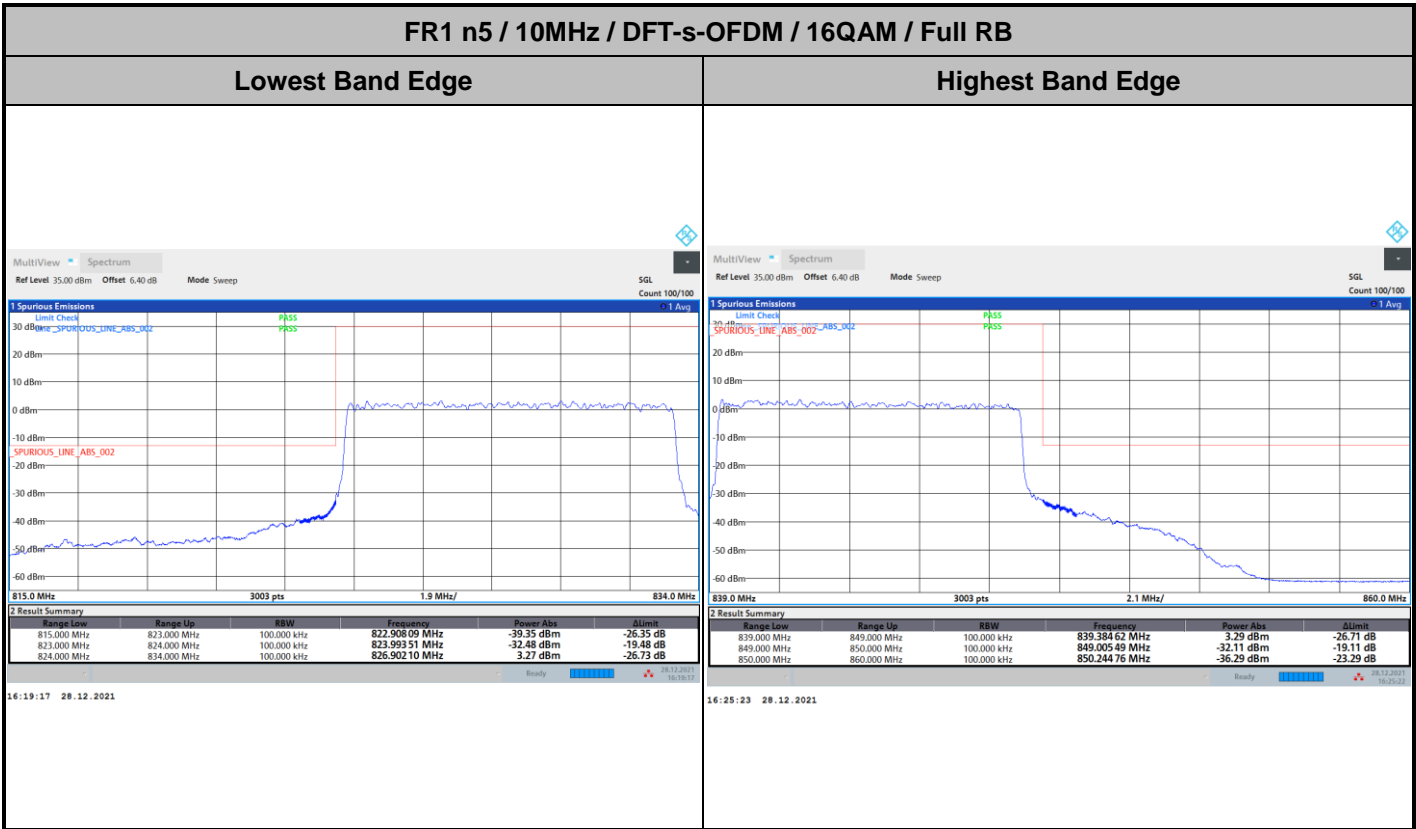

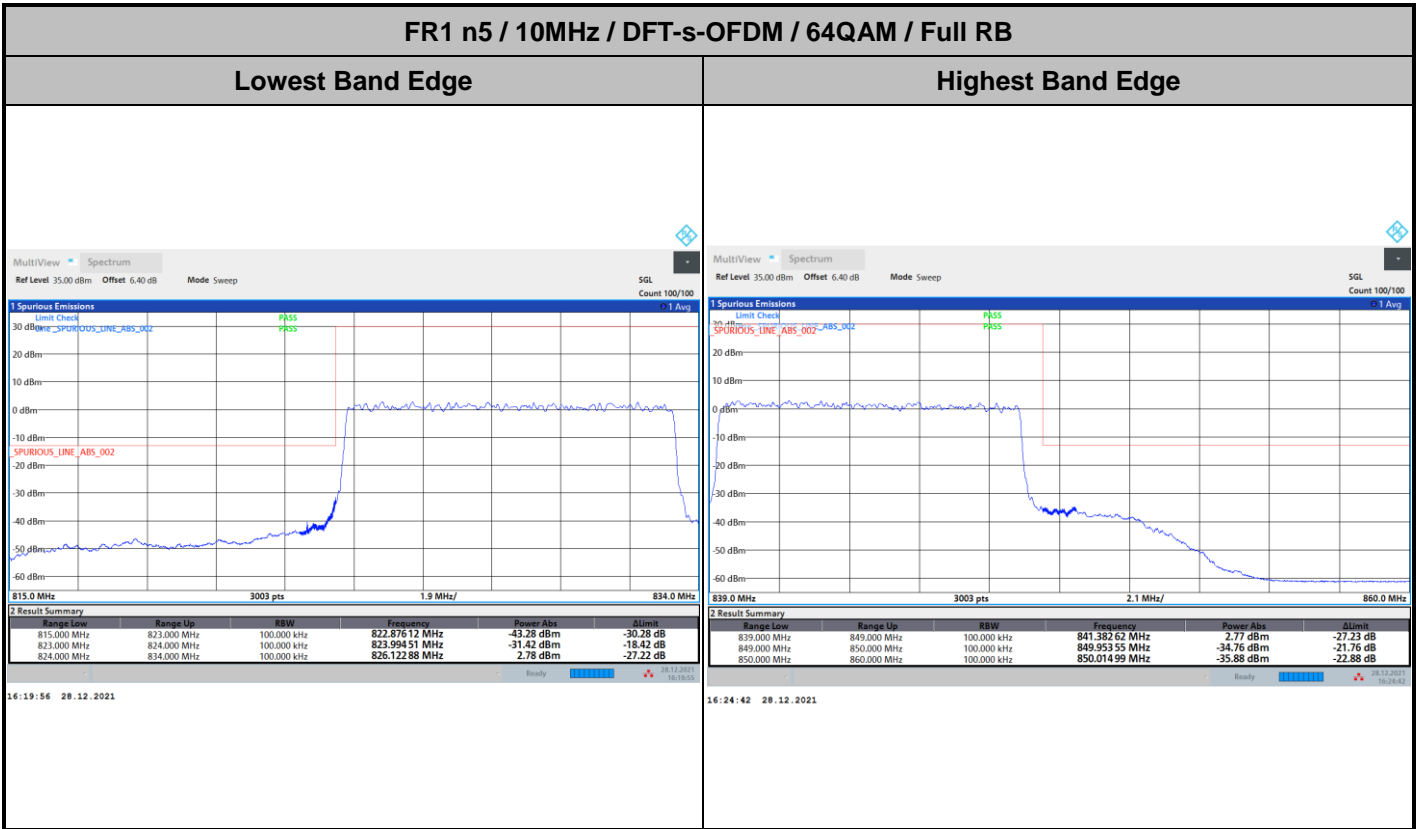

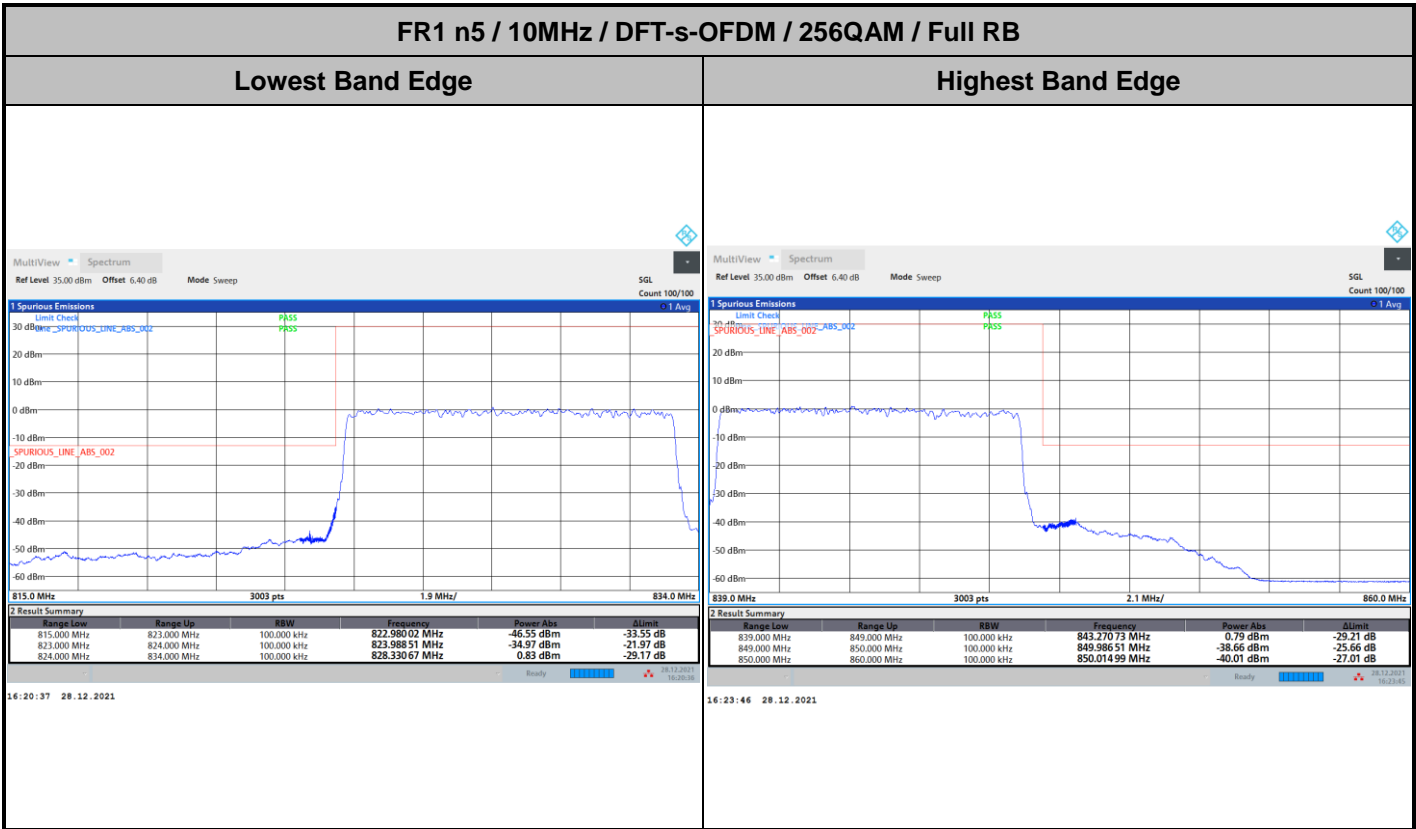

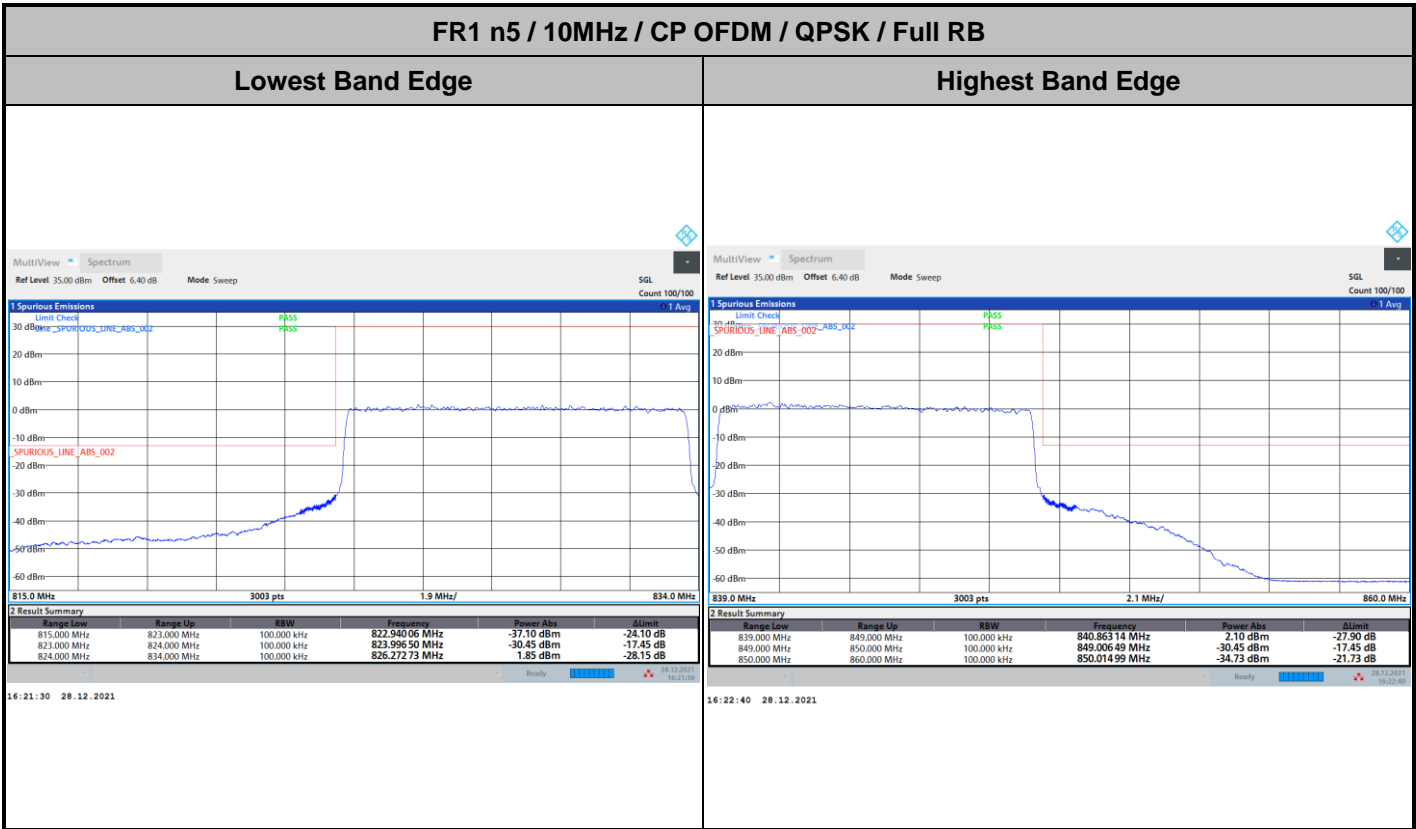



FR1 n5 / 15MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge

Highest Band Edge

