

EMC TEST REPORT

Applicant:	Continental Automotive Systems, Inc.
Address:	21440 W Lake Cook Rd., Deer Park, IL 60010, USA

Manufacturer or Supplier:	Continental Automotive Systems, Inc.
Address:	21440 W Lake Cook Rd., Deer Park, IL 60010, USA
Product:	Module
Brand Name:	Continental
Model Name:	FE5NAR110, FE5NAR111
FCC ID:	LHJ-FE5NAR110
Date of tests:	May. 01, 2024 ~ Jun. 17, 2024


The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

- FCC Part 15, Subpart B, Class A
- FCC Part 15, Subpart B, Class B
- ANSI C63.4:2014

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang
Engineer / Mobile Department

Approved by Luke Lu
Manager / Mobile Department



Date: Jun. 17, 2024



Date: Jun. 17, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EUT.....	4
1.2 SUMMARY OF TEST RESULTS	17
1.3 MEASUREMENT UNCERTAINTY	17
1.4 DESCRIPTION OF TEST MODES.....	18
1.5 DESCRIPTION OF SUPPORT UNITS.....	19
2 EMISSION TEST	20
2.1 CONDUCTED EMISSION MEASUREMENT.....	20
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	20
2.1.2 TEST INSTRUMENTS.....	20
2.1.3 TEST PROCEDURES	21
2.1.4 DEVIATION FROM TEST STANDARD	21
2.1.5 TEST SETUP.....	21
2.1.6 EUT OPERATING CONDITIONS	22
2.1.7 TEST RESULTS	23
2.2 RADIATED EMISSION MEASUREMENT.....	25
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	25
2.2.2 TEST INSTRUMENTS.....	26
2.2.3 TEST PROCEDURE.....	27
2.2.4 DEVIATION FROM TEST STANDARD	28
2.2.5 TEST SETUP.....	29
2.2.6 EUT OPERATING CONDITIONS	29
2.2.7 TEST RESULTS	30
3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	34



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-240430W002EM01	Original release	Jun. 17, 2024

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Module	
BRAND NAME	Continental	
MODEL NAME	FE5NAR110, FE5NAR111	
NOMINAL VOLTAGE	DC4.0V	
MODULATION TYPE	WCDMA	BPSK/QPSK
	LTE	QPSK/16QAM/64QAM
	5G NR	DFT-s-OFDM(π /2BPSK,QPSK,16QAM,64QAM,256QAM); CP-OFDM(QPSK,16QAM,64QAM,256QAM);
OPERATING FREQUENCY	WCDMA	1852.4MHz ~ 1907.6MHz(FOR WCDMA Band 2) 1712.4MHz ~ 1752.6MHz(FOR WCDMA Band 4) 826.4MHz ~ 846.6MHz (FOR WCDMA Band 5)
	LTE	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5) 2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12) 779.5MHz ~ 784.5MHz (FOR LTE Band13) 790.5MHz ~ 795.5MHz (FOR LTE Band14) 1710.7MHz ~ 1779.3MHz (FOR LTE Band66) 665.5MHz ~ 695.5MHz (FOR LTE Band71) 825.6MHz ~ 847.4MHz (FOR LTE Band5B) 2505.5MHz ~ 2564.7MHz (FOR LTE Band7C) 1712.5MHz ~1782.3MHz (FOR LTE Band66B) 1713.3MHz ~1776.7MHz (FOR LTE Band66C) LTE UL CA: B5B[2,2];B[1,1] Intra ULCA B2A[4];A[1]+B12A[2];A[1] Inter ULCA B4A[4];A[1]+B12A[2];A[1] Inter ULCA B12A[2];A[1]+B66A[4];A[1] Inter ULCA B2A[4];A[1]+B5A[2];A[1] Inter ULCA B5A[2];A[1]+B66A[4];A[1] Inter ULCA B2A[4];A[1]+B14A[2];A[1] Inter ULCA B14A[2];A[1]+B66A[4];A[1] Inter ULCA B7C[4,4];C[1,1] Intra ULCA B66B[4,4];B[1,1] Intra ULCA B66C[4,4];C[1,1] Intra ULCA



		<p>LTE UL&DL CA: B2A[4];A[1]+B2A[4] B2A[4];A[1]+B4A[4] B2A[4]+B4A[4];A[1] B2A[4];A[1]+B5A[2] B2A[4]+B5A[2];A[1] B2A[4];A[1]+B12A[2] B2A[4]+B12A[2];A[1] B2A[4];A[1]+B14A[2] B2A[4]+B14A[2];A[1] B2A[4];A[1]+B29A[2] B2A[4];A[1]+B66A[4] B2A[4]+B66A[4];A[1] B4A[4];A[1]+B4A[4] B4A[4];A[1]+B5A[2] B4A[4]+B5A[2];A[1] B4A[4];A[1]+B12A[2] B4A[4]+B12A[2];A[1] B4A[4];A[1]+B29A[2] B4A[4];A[1]+B30A[4] B5B[2,2];A[1] B5A[2];A[1]+B30A[4] B5A[2];A[1]+B66A[4] B5A[2]+B66A[4];A[1] B12B[2,2];A[1] B12A[2];A[1]+B30A[4] B12A[2];A[1]+B66A[4] B12A[2]+B66A[4];A[1] B14A[2];A[1]+B30A[4] B14A[2];A[1]+B66A[4] B14A[2]+B66A[4];A[1] B66A[4];A[1]+B66A[4] B66B[4,4];A[1] B66C[4,4];A[1] B2A[4];A[1]+B2A[4]+B4A[4] B2A[4]+B2A[4]+B4A[4];A[1] B2A[4];A[1]+B2A[4]+B5A[2] B2A[4]+B2A[4]+B5A[2];A[1] B2A[4];A[1]+B2A[4]+B12A[2] B2A[4]+B2A[4]+B12A[2];A[1] B2A[4];A[1]+B12B[2,2] B2A[4]+B12B[2,2];A[1] B2A[4];A[1]+B2A[4]+B14A[2] B2A[4]+B2A[4]+B14A[2];A[1] B2A[4];A[1]+B2A[4]+B66A[4]</p>
--	--	---



		<p>B2A[4]+B2A[4]+B66A[4];A[1] B2A[4];A[1]+B4A[4]+B5A[2] B2A[4]+B4A[4];A[1]+B5A[2] B2A[4]+B4A[4]+B5A[2];A[1] B2A[4];A[1]+B4A[4]+B12A[2] B2A[4]+B4A[4];A[1]+B12A[2] B2A[4]+B4A[4]+B12A[2];A[1] B2A[4];A[1]+B4A[4]+B29A[2] B2A[4]+B4A[4];A[1]+B29A[2] B2A[4];A[1]+B4A[4]+B30A[4] B2A[4]+B4A[4];A[1]+B30A[4] B2A[4];A[1]+B5A[2]+B30A[4] B2A[4]+B5A[2];A[1]+B30A[4] B2A[4];A[1]+B12A[2]+B30A[4] B2A[4]+B12A[2];A[1]+B30A[4] B2A[4];A[1]+B12A[2]+B66A[4] B2A[4]+B12A[2];A[1]+B66A[4] B2A[4]+B12A[2]+B66A[4];A[1] B2A[4];A[1]+B14A[2]+B30A[4] B2A[4]+B14A[2];A[1]+B30A[4] B2A[4];A[1]+B14A[2]+B66A[4] B2A[4]+B14A[2];A[1]+B66A[4] B2A[4]+B14A[2]+B66A[4];A[1] B2A[4];A[1]+B29A[2]+B30A[4] B4A[4];A[1]+B4A[4]+B5A[2] B4A[4]+B4A[4]+B5A[2];A[1] B4A[4];A[1]+B4A[4]+B12A[2] B4A[4]+B4A[4]+B12A[2];A[1] B4A[4];A[1]+B12B[2,2] B4A[4]+B12B[2,2];A[1] B4A[4];A[1]+B5A[2]+B30A[4] B4A[4]+B5A[2];A[1]+B30A[4] B4A[4];A[1]+B12A[2]+B30A[4] B4A[4]+B12A[2];A[1]+B30A[4] B4A[4];A[1]+B29A[2]+B30A[4] B12A[2];A[1]+B30A[4]+B66A[4] B12A[2]+B30A[4]+B66A[4];A[1] B12A[2];A[1]+B66A[4]+B66A[4] B12A[2]+B66A[4]+B66A[4];A[1] B14A[2];A[1]+B30A[4]+B66A[4] B14A[2]+B30A[4]+B66A[4];A[1] B14A[2];A[1]+B66A[4]+B66A[4] B14A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B5A[2]+B30A[4] B2A[4]+B2A[4]+B5A[2];A[1]+B30A[4]</p>
--	--	--



		<p>B2A[4];A[1]+B2A[4]+B5A[2]+B66A[4] B2A[4]+B2A[4]+B5A[2];A[1]+B66A[4] B2A[4]+B2A[4]+B5A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B12A[2]+B30A[4] B2A[4]+B2A[4]+B12A[2];A[1]+B30A[4] B2A[4];A[1]+B2A[4]+B12A[2]+B66A[4] B2A[4]+B2A[4]+B12A[2];A[1]+B66A[4] B2A[4]+B2A[4]+B12A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B14A[2]+B66A[4] B2A[4]+B2A[4]+B14A[2];A[1]+B66A[4] B2A[4]+B2A[4]+B14A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B29A[2]+B30A[4] B2A[4];A[1]+B2A[4]+B66A[4]+B66A[4] B2A[4]+B2A[4]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B5A[2]+B30A[4]+B66A[4] B2A[4]+B5A[2];A[1]+B30A[4]+B66A[4] B2A[4]+B5A[2]+B30A[4]+B66A[4];A[1] B2A[4];A[1]+B5A[2]+B66A[4]+B66A[4] B2A[4]+B5A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B5A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B5B[2,2]+B30A[4] B2A[4]+B5B[2,2];A[1]+B30A[4] B2A[4];A[1]+B5B[2,2]+B66A[4] B2A[4]+B5B[2,2];A[1]+B66A[4] B2A[4]+B5B[2,2]+B66A[4];A[1] B2A[4];A[1]+B12A[2]+B30A[4]+B66A[4] B2A[4]+B12A[2];A[1]+B30A[4]+B66A[4] B2A[4]+B12A[2]+B30A[4]+B66A[4];A[1] B2A[4];A[1]+B12A[2]+B66A[4]+B66A[4] B2A[4]+B12A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B12A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B14A[2]+B30A[4]+B66A[4] B2A[4]+B14A[2];A[1]+B30A[4]+B66A[4] B2A[4]+B14A[2]+B30A[4]+B66A[4];A[1] B2A[4];A[1]+B14A[2]+B66A[4]+B66A[4] B2A[4]+B14A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B14A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B29A[2]+B30A[4]+B66A[4] B2A[4]+B29A[2]+B30A[4]+B66A[4];A[1] B5A[2];A[1]+B30A[4]+B66A[4]+B66A[4] B5A[2]+B30A[4]+B66A[4]+B66A[4];A[1] B5B[2,2];A[1]+B30A[4]+B66A[4] B5B[2,2]+B30A[4]+B66A[4];A[1] B5B[2,2];A[1]+B66A[4]+B66A[4] B5B[2,2]+B66A[4]+B66A[4];A[1]</p>
--	--	--



		<p>B12A[2];A[1]+B30A[4]+B66A[4]+B66A[4] B12A[2]+B30A[4]+B66A[4]+B66A[4];A[1] B14A[2];A[1]+B30A[4]+B66A[4]+B66A[4] B14A[2]+B30A[4]+B66A[4]+B66A[4];A[1] B29A[2]+B30A[4]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B5A[2]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B5A[2];A[1]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B5A[2]+B30A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[2]+B5A[2]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B5A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B5A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B12A[2]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B12A[2];A[1]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B12A[2]+B30A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[2]+B12A[2]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B12A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B12A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B14A[2]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B14A[2];A[1]+B30A[2]+B66A[4] B2A[4]+B2A[4]+B14A[2]+B30A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[2]+B14A[2]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B14A[2];A[1]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B14A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B5A[2]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B5A[2];A[1]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B2A[2]+B30A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B5B[2,2]+B30A[4]+B66A[4] B2A[4]+B5B[2,2];A[1]+B30A[4]+B66A[4] B2A[4]+B5B[2,2]+B30A[4]+B66A[4];A[1] B2A[4];A[1]+B5B[2,2]+B66A[4]+B66A[4] B2A[4]+B5B[2,2];A[1]+B66A[4]+B66A[4] B2A[4]+B5B[2,2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B12A[2]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B12A[2];A[1]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B12A[2]+B30A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B14A[2]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B14A[2];A[1]+B30A[2]+B66A[4]+B66A[4] B2A[4]+B14A[2]+B30A[2]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B14A[2]+B66A[2]+B66A[4]+B66A[4] B2A[4]+B14A[2];A[1]+B66A[2]+B66A[4]+B66A[4] B2A[4]+B14A[2]+B66A[2]+B66A[4]+B66A[4];A[1] B5B[2,2];A[1]+B66A[4]+B66A[4]+B66A[4] B5B[2,2]+B66A[4]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B4A[4]+B12A[2]+B30A[4] B2A[4]+B4A[4];A[1]+B12A[2]+B30A[4]</p>
--	--	--



		<p> B2A[4]+B4A[4]+B12A[2];A[1]+B30A[4] B2A[4];A[1]+B4A[4]+B5A[2]+B30A[4] B2A[4]+B4A[4];A[1]+B5A[2]+B30A[4] B2A[4]+B4A[4]+B5A[2];A[1]+B30A[4] B2A[4];A[1]+B4A[4]+B4A[4]+B12A[2] B2A[4]+B4A[4];A[1]+B4A[4]+B12A[2] B2A[4]+B4A[4]+B4A[4]+B12A[2];A[1] B4A[4];A[1]+B4A[4]+B12A[2]+B30A[4] B4A[4]+B4A[4]+B12A[2];A[1]+B30A[4] B2A[4];A[1]+B2A[4]+B30A[4]+B66A[4] B2A[4]+B2A[4]+B30A[4]+B66A[4];A[1] B2A[4];A[1]+B30A[4]+B66A[4]+B66A[4] B2A[4]+B30A[4]+B66A[4]+B66A[4];A[1] B5B[2,2];B[1,1] B2A[4];A[1]+B12A[2];A[1] B4A[4];A[1]+B12A[2];A[1] B12A[2];A[1]+B66A[4];A[1] B2A[4];A[1]+B5A[2];A[1] B5A[2];A[1]+B66A[4];A[1] B2A[4];A[1]+B14A[2];A[1] B14A[2];A[1]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B5B[2,2]+B66A[4] B2A[4]+B2A[4]+B5B[2,2];A[1]+B66A[4] B2A[4]+B2A[4]+B5B[2,2]+B66A[4];A[1] B2A[4];A[1]+B5A[2]+B12A[2]+B66A[4] B2A[4]+B5A[2];A[1]+B12A[2]+B66A[4] B2A[4]+B5A[2]+B12A[2];A[1]+B66A[4] B2A[4]+B5A[2]+B12A[2]+B66A[4];A[1] B2A[4];A[1]+B2A[4]+B14A[2]+B66A[2]+B66A[4] B2A[4]+B2A[4]+B14A[2];A[1]+B66A[2]+B66A[4] B2A[4]+B2A[4]+B14A[2]+B66A[2]+B66A[4];A[1] B7C[4,4];C[1,1] B66B[4,4];B[1,1] B66C[4,4];C[1,1] B2A[4];A[1]+B4A[4]+B7A[4] B2A[4]+B4A[4];A[1]+B7A[4] B2A[4]+B4A[4]+B7A[4];A[1] B4A[4];A[1]+B5A[2];A[1] B5A[2];A[1]+B7A[4];A[1] B5A[2];A[1]+B7A[4] B5A[2]+B7A[4];A[1] B30A[4]+B66A[4];A[1] B2A[4]+B12A[2];A[1] B2A[4]+B5A[2];A[1]+B66A[4] B2A[4]+B66A[4]+B66A[4];A[1] </p>
--	--	--



		<p>B30A[4]+B66A[4]+B66A[4];A[1] B2A[4];A[1]+B12A[2] B12A[2];A[1]+B30A[4] B14A[2];A[1]+B66A[4] B14A[2];A[1]+B30A[4] B5A[2];A[1]+B30A[4] B2A[4];A[1]+B14A[2] B2A[4]+B14A[2];A[1] B2A[4]+B2A[4]+B14A[2];A[1]+B30A[4] B4A[4];A[1]+B7A[4] B4A[4]+B7A[4];A[1] B7A[4];A[1]+B7A[4] B7A[4];A[1]+B28A[2] B7A[4]+B28A[2];A[1] B7C[4,4];A[1] B2A[4];A[1]+B4A[4]+B7A[4] B2A[4]+B4A[4];A[1]+B7A[4] B2A[4]+B4A[4]+B7A[4];A[1] B2A[4];A[1]+B7A[4]+B7A[4] B2A[4]+B7A[4]+B7A[4];A[1] B2A[4];A[1]+B7A[4]+B12A[2] B2A[4]+B7A[4];A[1]+B12A[2] B2A[4]+B7A[4]+B12A[2];A[1] B2A[4];A[1]+B7C[4,4] B2A[4]+B7C[4,4];A[1] B4A[4];A[1]+B7A[4]+B7A[4] B4A[4]+B7A[4]+B7A[4];A[1] B4A[4];A[1]+B7A[4]+B12A[2] B4A[4]+B7A[4];A[1]+B12A[2] B4A[4]+B7A[4]+B12A[2];A[1] B4A[4];A[1]+B7C[4,4] B4A[4]+B7C[4,4];A[1] B7A[4];A[1]+B66A[4]+B66A[4] B7A[4]+B66A[4]+B66A[4];A[1] B12A[2];A[1]+B66C[4,4] B2A[4];A[1]+B2A[4]+B7A[4]+B66A[4] B2A[4]+B2A[4]+B7A[4];A[1]+B66A[4] B2A[4]+B2A[4]+B7A[4]+B66A[4];A[1] B2A[4];A[1]+B4A[4]+B7A[4]+B7A[4] B2A[4]+B4A[4];A[1]+B7A[4]+B7A[4] B2A[4]+B4A[4]+B7A[4]+B7A[4];A[1] B2A[4];A[1]+B4A[4]+B7A[4]+B12A[2] B2A[4]+B4A[4];A[1]+B7A[4]+B12A[2] B2A[4]+B4A[4]+B7A[4];A[1]+B12A[2] B2A[4]+B4A[4]+B7A[4]+B12A[2];A[1]</p>
--	--	--



		<p>B2A[4];A[1]+B4A[4]+B7C[4,4] B2A[4]+B4A[4];A[1]+B7C[4,4] B2A[4]+B4A[4]+B7C[4,4];A[1] B2A[4];A[1]+B2A[4]+B4A[4]+B12A[2] B2A[4]+B2A[4]+B4A[4];A[1]+B12A[2] B2A[4]+B2A[4]+B4A[4]+B12A[2];A[1] B2A[4];A[1]+B4A[4]+B5A[2]+B12A[2] B2A[4]+B4A[4];A[1]+B5A[2]+B12A[2] B2A[4]+B4A[4]+B5A[2];A[1]+B12A[2] B2A[4]+B4A[4]+B5A[2]+B12A[2];A[1] B2A[4];A[1] + B2A[4] + B29A[2] + B30A[2] + B66A[4] B2A[4] + B2A[4] + B29A[2] + B30A[2] + B66A[4];A[1] B2A[4];A[1] + B2A[4] + B29A[2] + B66A[2] + B66A[4] B2A[4] + B2A[4] + B29A[2] + B66A[2] + B66A[4];A[1] B2A[4];A[1] + B5A[2] + B12A[2] + B30A[4] + B66A[4] B2A[4] + B5A[2];A[1] + B12A[2] + B30A[4] + B66A[4] B2A[4] + B5A[2] + B12A[2];A[1] + B30A[4] + B66A[4] B2A[4] + B5A[2] + B12A[2] + B30A[4] + B66A[4];A[1]</p>
	<p>5G NR</p>	<p>SA: n2 (1852.5MHz ~1907.5MHz) n5(826.5MHz ~ 846.5MHz) n25(1852.5MHz ~ 1912.5MHz) n41/n41 HPUE/n41 MIMO(2506.02 ~ 2679.99MHz) n66(1712.5 ~ 1777.5MHz) n71(665.5 ~ 695.5MHz) n77/n77 HPUE/n77 MIMO (3710.01 ~ 3969.99MHz) ENDC B2A[4];A[1] + N5A[20x2];A[20x1] B66A[4];A[1] + N5A[20x2];A[20x1] B5A[2];A[1] + N66A[40x4];A[40x1] B12A[2];A[1] + N66A[40x4];A[40x1] B5A[2];A[1] + N2A[20x4];A[20x1] B12A[2];A[1] + N2A[20x4];A[20x1] B2A[4];A[1] + B2A[4] + N5A[20x2];A[20x1] B2A[4];A[1] + B5A[2] + N5A[20x2];A[20x1] B5A[2] + B66A[4];A[1] + N5A[20x2];A[20x1]</p>



		<p>B2A[4];A[1] + B30A[4] + N5A[20x2];A[20x1] B2A[4];A[1] + B66A[4] + N5A[20x2];A[20x1] B30A[2] + B66A[4];A[1] + N5A[20x2];A[20x1] B66A[4];A[1] + B66A[4] + N5A[20x2];A[20x1] B2A[2] + B5A[2];A[1] + N66A[40x4];A[40x1] B2A[2] + B12A[2];A[1] + N66A[40x4];A[40x1] B5A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B12A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B5A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B12A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B5A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B12A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B5A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B12A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B2A[4] + B5A[2];A[1] + N2A[20x4];A[20x1] B2A[4] + B12A[2];A[1] + N2A[20x4];A[20x1] B2A[4] + B5A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B2A[4]+ B12A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B5A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1] B12A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1] B2A[4]+ B5A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B2A[4] + B12A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B2A[4] + B5A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B12A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B2A[4];A[1] + B2A[4] + B30A[4] + N5A[20x2];A[20x1] B2A[4] + B5A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1] B2A[4] + B12A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1] B2A[4];A[1] + B30A[4] + B66A[4] + N5A[20x2];A[20x1] B2A[4] + B30A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B2A[4] + B2A[4] + B5A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B2A[4] + B2A[4] + B12A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B2A[2] + B5A[2];A[1] + B30A[4] + B66A[4] +</p>
--	--	---



		<p>N2A[20x4];A[20x1] B2A[4];A[1] + B2A[4] + B66A[4] + N5A[20x2];A[20x1] B2A[4] + B2A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B2A[4] + B12A[2];A[1] + B30A[4] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B5A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B12A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1] B2A[4];A[1] + B66A[4] + B66A[4] + N5A[20x2];A[20x1] B2A[4] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B30A[2] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B2A[4];A[1] + B2A[4] + B5A[2] + N5A[20x2];A[20x1] B2A[4];A[1] + B5A[2] + B66A[4] + N5A[20x2];A[20x1] B2A[4] + B5A[2] + B66A[4];A[1] + N5A[20x2];A[20x1] B2A[4];A[1] + B5A[2] + B30A[4] + N5A[20x2];A[20x1] B5A[2] + B30A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B5A[2] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1] B2A[4] + B5A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B2A[4]+ B12A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B2A[4] + B2A[4] + B5A[2];A[1] + N66A[40x4];A[40x1] B2A[4] + B2A[4] + B12A[2];A[1] + N66A[40x4];A[40x1] B5A[2];A[1] + B30A[4] + B66A[4] + N2A[20x4];A[20x1] B12A[2];A[1] + B30A[4] + B66A[4] + N2A[20x4];A[20x1] B5A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1] B12A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1] B2A[4];A[1] + N77A[100x4];A[100x1] B66A[4];A[1] + N77A[100x4];A[100x1] B12A[2];A[1] + N77A[100x4];A[100x1]</p>
--	--	--



		<p>B14A[2];A[1] + N77A[100x4];A[100x1] B2A[2];A[1] + B12A[2] + N77A[100x4];A[100x1] B12A[2];A[1] + B66A[2] + N77A[100x4];A[100x1] B14A[2];A[1] + N66A[40x4];A[40x1] B12A[2];A[1] + B30A[2] + N77A[100x4];A[100x1] B2A[2];A[1] + B14A[2] + N77A[100x4];A[100x1] B14A[2];A[1] + B66A[2] + N77A[100x4];A[100x1] B14A[2];A[1] + B30A[2] + N77A[100x4];A[100x1] B2A[2];A[1] + B2A[2] + N77A[100x4];A[100x1] B14A[2];A[1] + N2A[20x4];A[20x1] B2A[2];A[1] + B5A[2] + N77A[100x4];A[100x1] B2A[2] + B5A[2];A[1] + N77A[100x4];A[100x1] B2A[2];A[1] + B29A[2] + N77A[100x4];A[100x1] B2A[2];A[1] + B30A[2] + N77A[100x4];A[100x1] B2A[2];A[1] + B66A[2] + N77A[100x4];A[100x1] B2A[2] + B66A[2];A[1] + N77A[100x4];A[100x1] B5A[2];A[1] + B30A[2] + N77A[100x4];A[100x1] B2A[4] + B14A[2];A[1] + N66A[40x4];A[40x1] B5A[2];A[1] + B66A[2] + N77A[100x4];A[100x1] B5A[2] + B66A[2];A[1] + N77A[100x4];A[100x1] B29A[2] + B66A[2];A[1] + N77A[100x4];A[100x1] B30A[2] + B66A[2];A[1] + N77A[100x4];A[100x1] B66A[2];A[1] + B66A[2] + N77A[100x4];A[100x1] B14A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B14A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B14A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B14A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B14A[2];A[1] + N2A[20x4];A[20x1] B2A[4] + B14A[2];A[1] + B30A[4] + N66A[40x4];A[40x1] B2A[4] + B2A[4] + B14A[2];A[1] + N66A[40x4];A[40x1] B2A[4] + B14A[2];A[1] + B66A[4] + N66A[40x4];A[40x1] B14A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1] B14A[2];A[1] + B30A[4] + B66A[4] + N2A[20x4];A[20x1] B14A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B14A[2];A[1] + B30A[4] + N2A[20x4];A[20x1] B2A[4] + B14A[2];A[1] + B66A[4] + N2A[20x4];A[20x1] B2A[4] + B2A[4] + B14A[2];A[1] + B30A[4] + N66A[40x4];A[40x1]</p>
--	--	---



		<p>B2A[4] + B14A[2];A[1] + B30A[4] + B66A[4] + N66A[40x4];A[40x1]</p> <p>B2A[4] + B2A[4] + B14A[2];A[1] + B66A[4] + N66A[40x4];A[40x1]</p> <p>B14A[2];A[1] + B30A[4] + B66A[4] + B66A[4] + N2A[20x4];A[20x1]</p> <p>B2A[4] + B14A[2];A[1] + B30A[4] + B66A[4] + N2A[20x4];A[20x1]</p> <p>B2A[4] + B14A[2];A[1] + B66A[4] + B66A[4] + N2A[20x4];A[20x1]</p> <p>B2A[4];A[1] + B2A[4] + B30A[4] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B2A[4] + B30A[4] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B30A[4] + B66A[4] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B30A[4] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B2A[4] + B66A[4] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B2A[4] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B2A[4] + B5A[2] + B30A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B2A[4] + B5A[2] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B2A[4] + B5A[2] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B5A[2] + B30A[4] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B5A[2] + B30A[4] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4];A[1] + B5A[2] + B66A[4] + B66A[4] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B5A[2] + B66A[4] + B66A[4];A[1] + N5A[20x2];A[20x1]</p> <p>B2A[4] + B2A[4] + B5A[2];A[1] + B30A[4] + N66A[40x4];A[40x1]</p> <p>B2A[4] + B2A[4] + B12A[2];A[1] + B30A[4] + N66A[40x4];A[40x1]</p> <p>B5A[2];A[1] + B30A[4] + B66A[4] + B66A[4] + N2A[20x4];A[20x1]</p> <p>B12A[2];A[1] + B30A[4] + B66A[4] + B66A[4] + N2A[20x4];A[20x1]</p> <p>B2A[2];A[1] + N78A[100x4];A[100x1]</p> <p>B2A[2];A[1] + B2A[2] + N78A[100x4];A[100x1]</p> <p>B2A[2] + B7A[2];A[1] + N78A[100x4];A[100x1]</p> <p>B2A[2];A[1] + B7A[2] + N78A[100x4];A[100x1]</p>
--	--	--



		B2A[2] + B66A[2];A[1] + N78A[100x4];A[100x1] B2A[2];A[1] + B66A[2] + N78A[100x4];A[100x1] B5A[2] + B7A[2];A[1] + N78A[100x4];A[100x1] B5A[2];A[1] + B7A[2] + N78A[100x4];A[100x1] B5A[2] + B66A[2];A[1] + N78A[100x4];A[100x1] B5A[2];A[1] + B66A[2] + N78A[100x4];A[100x1] B7A[4];A[1] + N78A[100x4];A[100x1] B7A[2] + B66A[2];A[1] + N78A[100x4];A[100x1] B7A[2];A[1] + B66A[2] + N78A[100x4];A[100x1] B12A[2];A[1] + N78A[100x4];A[100x1] B66A[4];A[1] + N78A[100x4];A[100x1]
HW VERSION	P2.0	
SW VERSION	MODEM_GM_C3_3.0.2.24	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
ACCESSORY DEVICES	Refer to note as below	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. According to the information provided by the manufacturer, The difference between FE5NAR110, FE5NAR111 is as follows:

Sample	HVIN/PMN	5G Bands NSA	5G Bands SA	SA UL MIMO	LTE Bands	UMTS	GNSS
1	FE5NAR110	n2, n5, n66, n77, n78	n25, n41, n66, n71, n77, n78	n41, n77, n78	2, 4, 5, 7, 12, 13, 14, 28A, 28B, 29Rx, 30Rx, 66, 71	2, 4, 5	L1, L5
2	FE5NAR111	n2, n5, n66, n77, n78	n25, n41, n66, n71, n77, n78	n41, n77, n78	2, 4, 5, 7, 12, 13, 14, 28A, 28B, 29Rx, 30Rx, 66, 71	2, 4, 5	L1

1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B		
Standard Section	Test Item	Result
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance
	Radiated Emission Test (Above 1GHz)	Compliance

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	±2.70dB
Radiated emissions	30MHz~1GHz	±4.98dB
	1GHz ~6GHz	±4.70dB
	6GHz ~18GHz	±4.60dB
	18GHz ~40GHz	±4.12dB

1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
Radiated emission test	
1	WCDMA B5 Idle+DC Cable+DC14V+EUT(FE5NAR110)
2	LTE B5 Idle+DC Cable+DC14V+EUT(FE5NAR110)
3	LTE B12 Idle+DC Cable+DC14V+EUT(FE5NAR110)
4	LTE B13 Idle+DC Cable+DC14V+EUT(FE5NAR110)
5	LTE B14 Idle+DC Cable+DC14V+EUT(FE5NAR110)
6	LTE B71 Idle+DC Cable+DC14V+EUT(FE5NAR110)
7	N71 Idle+DC Cable+DC14V+EUT(FE5NAR110)
8	Worst case of 1-8+EUT(FE5NAR111)

Conducted emission test	
1	WCDMA B5 Idle+DC Cable+DC14V+EUT(FE5NAR110)
2	LTE B5 Idle+DC Cable+DC14V+EUT(FE5NAR110)
3	LTE B12 Idle+DC Cable+DC14V+EUT(FE5NAR110)
4	LTE B13 Idle+DC Cable+DC14V+EUT(FE5NAR110)
5	LTE B14 Idle+DC Cable+DC14V+EUT(FE5NAR110)
6	LTE B71 Idle+DC Cable+DC14V+EUT(FE5NAR110)
7	N71 Idle+DC Cable+DC14V+EUT(FE5NAR110)
8	Worst case of 1-8+EUT(FE5NAR111)

NOTE:

1. For conducted emission test, Pre-scan all mode, mode 5 was the worst case and only this mode was presented in this report.
2. For radiated emission test, Pre-scan all mode, test mode 1 was the worst case and only this mode was presented in this report

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Universal radio communication tester	Rohde&Schwarz	CMW500	N/A	N/A
2	Radio Communication Analyzer	Anritsu(China) Co., Ltd	MT8000A	6262093255	N/A
4	DC source	Kikusui/JP	PMX18-5A	0000001	N/A
5	Radio Communication Analyzer	Starpoint	SP9500-CTS	20460	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1m;
2	N/A
3	N/A
4	N/A

2 EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.107 A CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.107 B CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

2.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,24	Feb. 13,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,24	Mar. 09,25

NOTE: 1. The test was performed in CE shielded room.

2.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

2.1.4 DEVIATION FROM TEST STANDARD

No deviation.

2.1.5 TEST SETUP

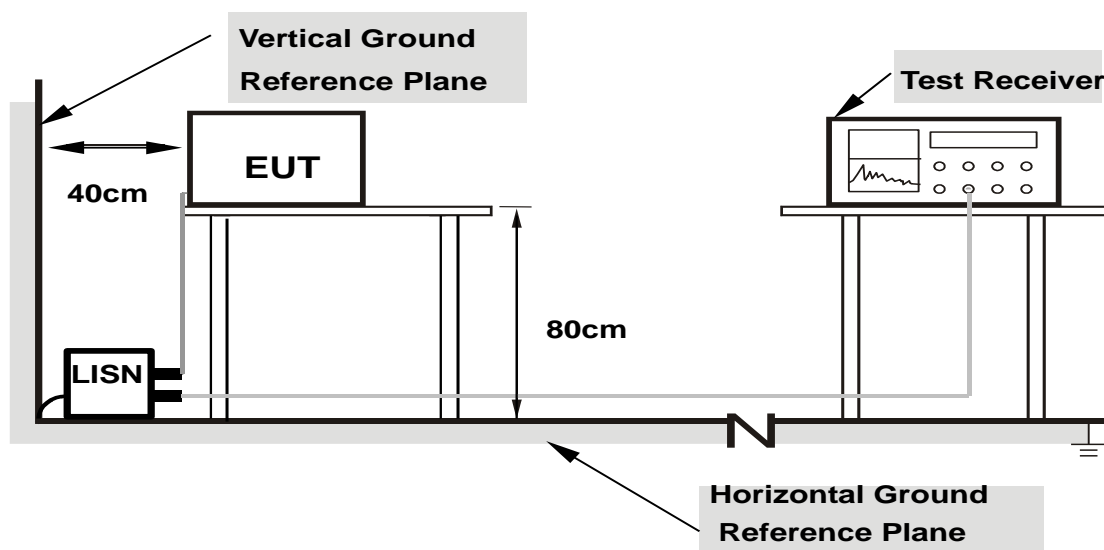

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.




2.1.7 TEST RESULTS

TEST VOLTAGE	Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH	TESTED BY	Carl xie

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174000	---	44.90	54.77	9.87	L1	ON	9.8
0.174000	44.90	---	64.77	19.87	L1	ON	9.8
0.348000	---	32.99	49.01	16.02	L1	ON	9.8
0.348000	32.88	---	59.01	26.13	L1	ON	9.8
0.520000	---	27.79	46.00	18.21	L1	ON	9.8
0.520000	27.67	---	56.00	28.33	L1	ON	9.8
0.868000	---	23.65	46.00	22.35	L1	ON	9.8
0.868000	23.58	---	56.00	32.42	L1	ON	9.8
12.612000	---	14.66	50.00	35.34	L1	ON	10.7
12.612000	25.20	---	60.00	34.80	L1	ON	10.7
23.912000	---	28.45	50.00	21.55	L1	ON	11.3
23.912000	30.39	---	60.00	29.61	L1	ON	11.3

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

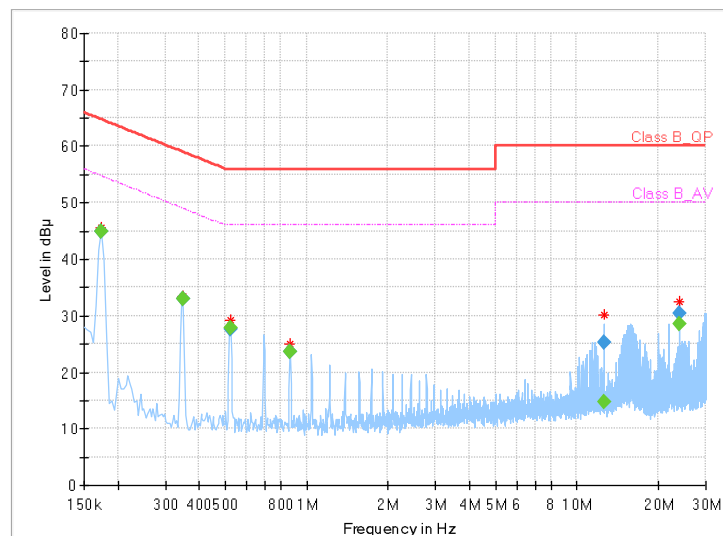




TEST VOLTAGE	Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH	TESTED BY	Carl xie

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174000	---	44.64	54.77	10.13	N	ON	9.7
0.174000	44.62	---	64.77	20.15	N	ON	9.7
0.348000	---	32.96	49.01	16.05	N	ON	9.6
0.348000	32.85	---	59.01	26.16	N	ON	9.6
0.520000	---	27.24	46.00	18.76	N	ON	9.7
0.520000	27.12	---	56.00	28.88	N	ON	9.7
1.388000	---	21.35	46.00	24.65	N	ON	9.7
1.388000	21.31	---	56.00	34.69	N	ON	9.7
12.612000	---	16.84	50.00	33.16	N	ON	10.6
12.612000	26.47	---	60.00	33.53	N	ON	10.6
23.920000	---	30.14	50.00	19.86	N	ON	11.4
23.920000	31.25	---	60.00	28.75	N	ON	11.4

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

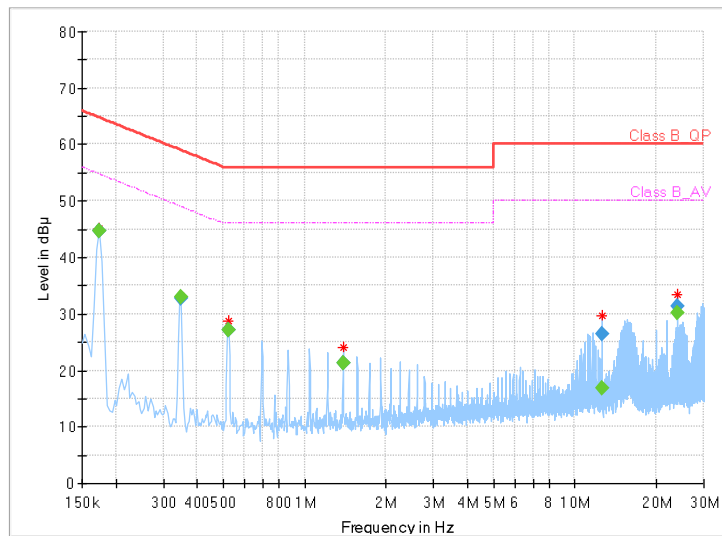

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B, Class A	FCC 15B, Class B
30-88	49	40
88-216	53.5	43.5
216-960	56	46
960-1000	59.5	54
Above 1000	Avg: 59.5 Peak: 79.5	Avg: 54 Peak: 74

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 4. QP detector shall be applied if not specified.

2.2.2 TEST INSTRUMENTS

Frequency range below 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,24	Feb. 17,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,24	Mar. 27,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
E3 Test Software	E3	V 9.160323	N/A	N/A	N/A

Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 30,23	Nov. 29,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,24	Mar. 27,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,24	Feb. 16,25
E3 Test Software	E3	V 9.160323	N/A	N/A	N/A

- NOTE:** 1. The test was performed in 3m chamber.
2. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

NOTE:


- . The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- . The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
- . For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
- . Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
- . Margin value = Emission level – Limit value.

2.2.4 DEVIATION FROM TEST STANDARD


No deviation.

2.2.5 TEST SETUP

<Frequency Range below 1GHz>

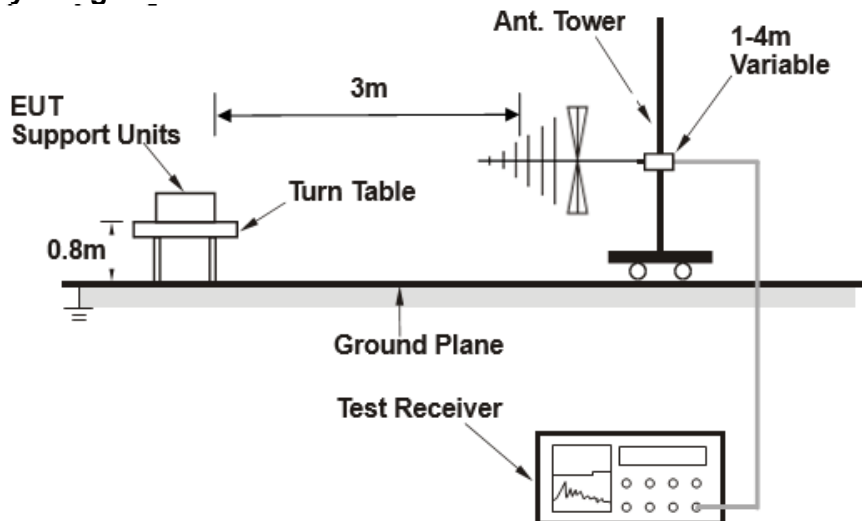

<Frequency Range above 1GHz>

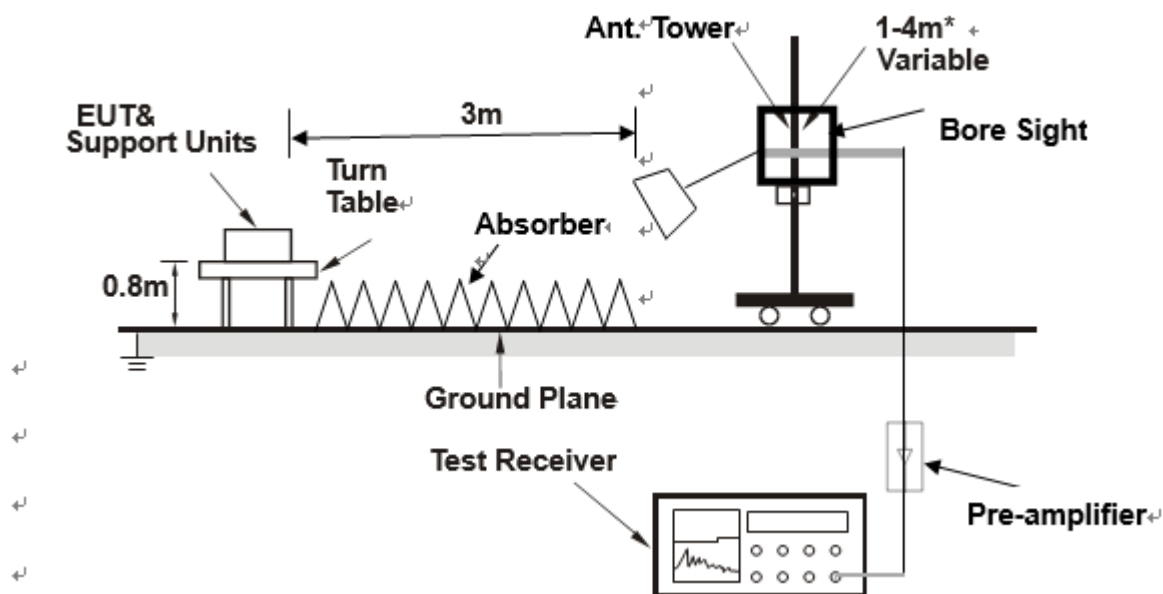

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.

2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.

2.2.7 TEST RESULTS


Acceleromete alternative worst case:

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	PP	32.910	30.66	42.75	40.00	-9.34	-12.09 Peak	Horizontal
2		56.190	26.45	49.81	40.00	-13.55	-23.36 Peak	Horizontal
3		163.860	32.07	49.72	43.50	-11.43	-17.65 Peak	Horizontal
4		301.600	33.18	48.13	46.00	-12.82	-14.95 Peak	Horizontal
5		326.820	33.63	47.95	46.00	-12.37	-14.32 Peak	Horizontal
6		850.620	32.47	37.67	46.00	-13.53	-5.20 Peak	Horizontal

- REMARKS:**
1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)- Amplifier Gain
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

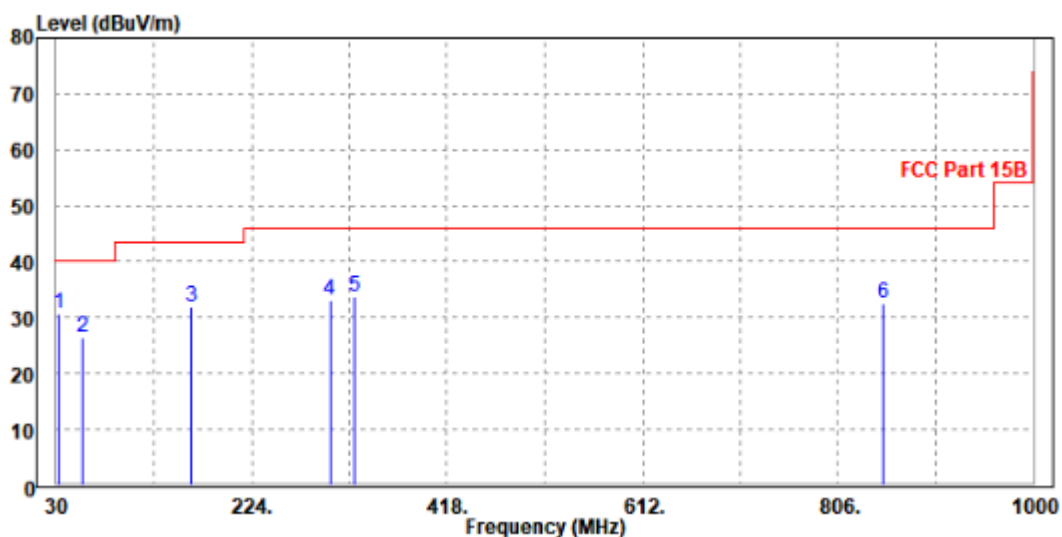




TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70% RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak , 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	PP 55.220	30.13	53.21	40.00	-9.87	-23.08	Peak	Vertical
2	75.590	29.33	52.33	40.00	-10.67	-23.00	Peak	Vertical
3	88.200	30.96	53.67	43.50	-12.54	-22.71	Peak	Vertical
4	163.860	27.79	43.36	43.50	-15.71	-15.57	Peak	Vertical
5	302.570	28.52	43.13	46.00	-17.48	-14.61	Peak	Vertical
6	842.860	30.85	36.45	46.00	-15.15	-5.60	Peak	Vertical


- REMARKS:**
1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Amplifier Gain
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

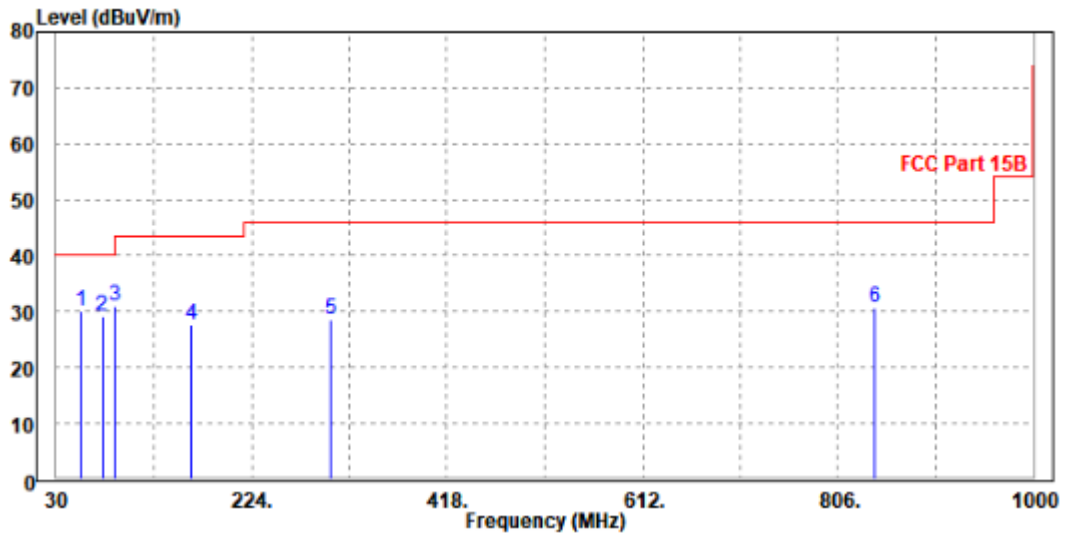

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2870	43.17	48.49	74	-30.83	32.37	8.41	46.1	100	180	Peak
2870	37.8	43.12	54	-16.2	32.37	8.41	46.1	100	180	Average
4247	44.12	48.18	74	-29.88	33.89	10.08	48.03	100	100	Peak
4247	39.52	43.58	54	-14.48	33.89	10.08	48.03	100	100	Average
5165	47.26	48.34	74	-26.74	34.27	11.18	46.53	100	0	Peak
5165	42.91	43.99	54	-11.09	34.27	11.18	46.53	100	0	Average

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
 4. Only emissions significantly above equipment noise floor are reported.

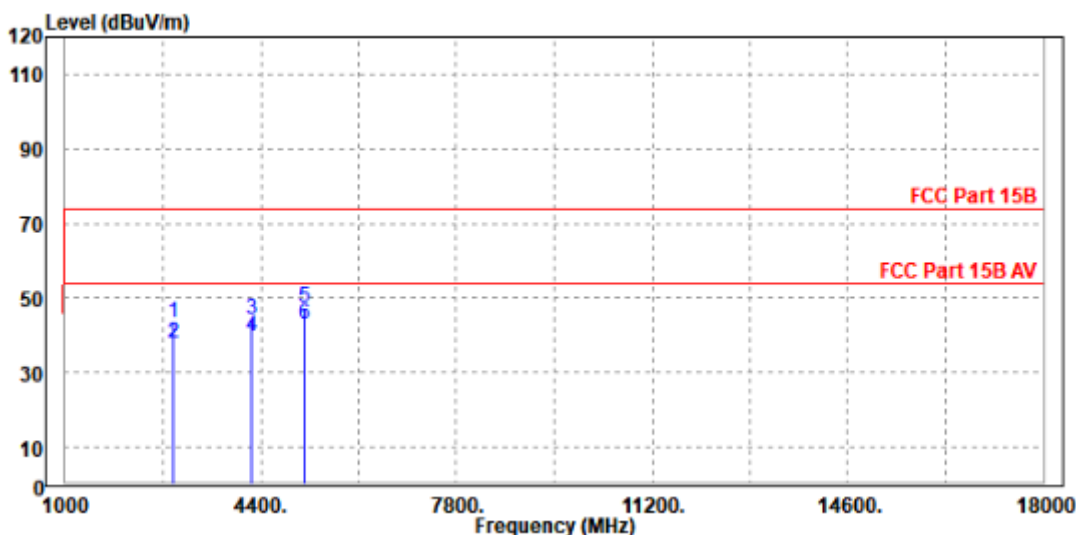




TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
3091	44.28	49.27	74	-29.72	32.62	8.68	46.29	100	60	Peak
3091	38.56	43.55	54	-15.44	32.62	8.68	46.29	100	60	Average
4910	46.15	47.64	74	-27.85	34.28	10.9	46.67	100	75	Peak
4910	40.53	42.02	54	-13.47	34.28	10.9	46.67	100	75	Average
6032	49.63	49.07	74	-24.37	35.51	11.8	46.75	100	160	Peak
6032	43.64	43.08	54	-10.36	35.51	11.8	46.75	100	160	Average

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
 4. Only emissions significantly above equipment noise floor are reported.

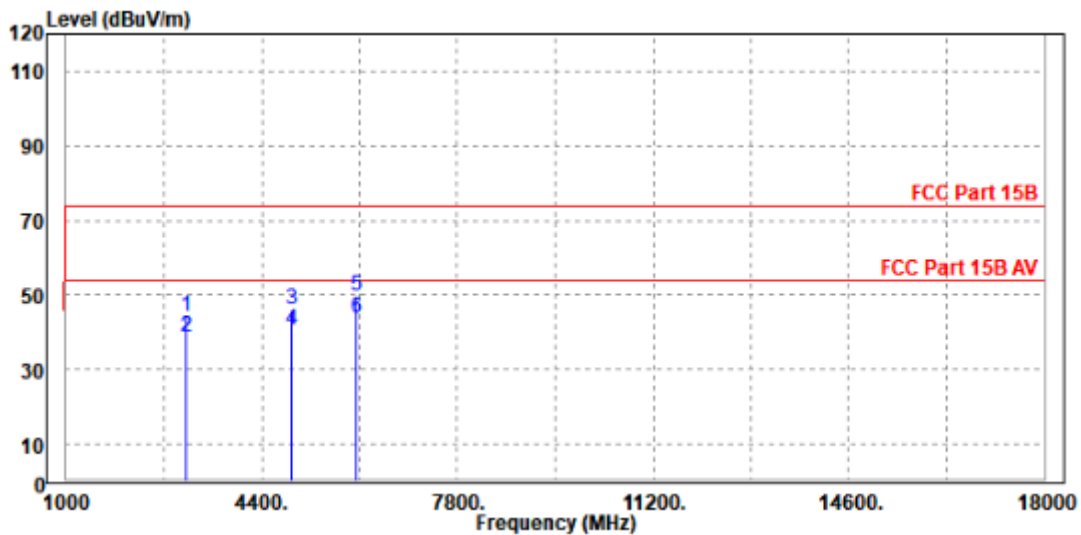



3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---