

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 647-1792

Measured Radio Frequency Emissions  
From

**Motorola DaimlerChrysler RKE Receiver**  
**Model: LHJ010**  
**(MY01 CTM-AN,-DN)**


Report No. 415031-010  
October 20, 1999

For:  
Motorola, Inc.  
3740 North Austin Street  
Seguin, TX 78155-7398

Contact:  
Rob Bishop  
Tel: 830-372-7321  
Fax: 830-372-7352  
PO: SV8176

Measurements made by:  
Valdis V. Liepa

Tests supervised by:  
Report approved by:

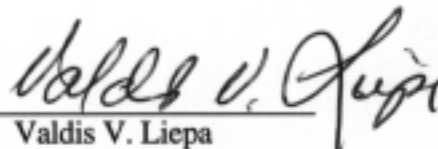  
Valdis V. Liepa  
Research Scientist

---

### Summary

Tests for compliance with FCC Regulations subject to Part 15, Subpart B, were performed on Motorola Chrysler RKE Receiver. This device is subject to FCC Rules and Regulations as a Receiver. As a Digital Device it is exempt, but such measurements were made to assess the receiver's overall emissions.

In testing performed on September 30 and October 6, 1999, the device tested in the worst case met the allowed FCC (Class B) specifications for radiated emissions by 8.8 dB (see p. 6). The conductive emission tests do not apply, since the device is powered from an automotive 12 VDC system.

## 1. Introduction

Motorola Chrysler RKE receiver was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland. (FCC file 31040/SIT)

## 2. Test Procedure and Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1 below. The second column identifies the specific equipment used in these tests. The HP 8593E spectrum analyzer is used for primary amplitude and frequency reference.

Table 2.1. Test Equipment.

Test Instrument	Equipment Used	Manufacturer/Model	Cal. Date/By
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358	October 1999/UM
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E SN: 3107A01131	September 1999/HP
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard 182T/8558B SN: 1529A01114/543592	October 1999/U of M Rad Lab
Preamplifier (5-1000MHz)	X	Watkins-Johnson A11 -1 plus A25-1S	Oct. 1999/U of M Rad Lab
Preamplifier (5-4000 MHz)	X	Avantek	Nov. 1996/ U of M Rad Lab
Broadband Bicone (20-200 MHz)	X	University of Michigan	June 1996/U of M Rad Lab
Broadband Bicone (200-1000 MHz)		University of Michigan	June 1996/U of M Rad Lab
Dipole Antenna Set (25-1000 MHz)	X	University of Michigan	June 1997/U of M Rad Lab
Dipole Antenna Set (30-1000 MHz)		EMCO 3121C SN: 992	June 1996/U of M Rad Lab
Active Loop Antenna (0.090-30MHz)		EMCO 6502 SN: 2855	December 1993/ EMCO
Active Rod (30Hz-50 MHz)		EMCO 3301B SN: 3223	December 1993/EMCO
Ridge-horn Antenna (0.5-5 GHz)	X	University of Michigan	March 1999/U of M Rad Lab
LISN Box		University of Michigan	Dec 1997/U of M Rad Lab
Signal Cables	X	Assorted	January 1993/U of M Rad Lab
X-Y Plotter		Hewlett-Packard 7046A	During Use/U of M Rad Lab
Signal Generator (0.1-990 MHz)	X	Hewlett-Packard 8656A	January 1990/U of M Rad Lab
Printer	X	Hewlett-Packard 2225A	August 1989/HP

### 3. Configuration and Identification of Device Under Test

The DUT is a 315.0 MHz superregenerative receiver, designed for onboard automobile security/convenience applications, and as such, it is powered from an automotive 12 VDC source. It is housed in a plastic case approximately 6 by 6 by 1.5 inches. Antenna is internal. For testing, a generic harness was made up, containing some 16 wires, all about three meters long. The (12V) power wires were separated from the signal wires. In the receiver digital section, the decoding, signal processing, etc. are performed by a microprocessor timed by a 8.0 MHz oscillator.

The DUT was designed and manufactured by Motorola AIEG, 4000 Commercial Ave., Northbrook, IL 60062-1840. It is identified as:

Motorola RKE Receiver  
Model: LHJ010 (MY01 CTM-AN, -DN)  
S/N: 103, 112022816  
FCC ID: LHJ010  
CANADA:

Two versions were provided. One fully populated (AN) and the other depopulated in control section. The RF sections are identical in both. The AN was fully measured; the DN was measured at the worst case emission (for AN).

#### 3.1 Modifications Made

There were no modifications made to the DUT by this laboratory.

### 4. Emission Limits

The DUT tested falls under Part 15, Subpart B, "Unintentional Radiators". The pertinent test frequencies, with corresponding emission limits, are given in Tables 4.1 and 4.2 below.

#### 4.1 Radiated Emission Limits

Table 4.1. Radiated Emission Limits (Ref: 15.33, 15.35, 15.109).

Freq. (MHz)	$E_{lim}$ (3m) $\mu$ V/m	$E_{lim}$ dB( $\mu$ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Quasi-Peak readings apply to 1000 MHz (120 kHz BW)  
Average readings apply above 1000 MHz (1 MHz BW)

#### 4.2 Conducted Emission Limits

Table 4.2. Conducted Emission Limits (Ref: 15.107).

Freq. (MHz)	$\mu$ V	dB( $\mu$ V)
0.450 - 1.705	250	48.0
1.705 - 30.0	250	48.0

Note: Quasi-Peak readings apply here

### 4.3 Antenna Power Conduction Limits

Ref: 15.111(a).  $P_{max} = 2 \text{ nW}$ ; for frequency range see Table 4.1.

## 5. Emission Tests and Results

NOTE: Even though the FCC and/or Industry Canada specify that both the radiated and conductive emissions be measured using the Quasi-Peak and/or average detection schemes, we normally use peak detection since especially the Quasi-Peak is cumbersome to use with our instrumentation. In case the measurement fails to meet the limits, or the measurement is near the limit, it is remeasured using appropriate detection. We note, that since the peak detected signal is always higher or equal to the Quasi-Peak or average detected signal, the margin of compliance may be better, but not worse, than indicated in this report. The type of detection used is indicated in the data table, Table 5.1.

### 5.1 Anechoic Chamber Radiated Emission Tests

To familiarize with the radiated emission behavior of the DUT, it was studied and measured in the shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with turntable, antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

To study and test for radiated emissions, the DUT was powered by a laboratory power supply at 13.5 VDC. A 315 MHz CW signal was injected (radiated) from a nearby signal generator using a short wire antenna. The DUT was taped to a styrofoam block and placed on the test table on each of the three axis. At each orientation, the table was rotated to obtain maximum signal for vertical and horizontal emission polarizations. This sequence was repeated throughout the required frequency range.

In the chamber we studied and recorded all the emissions using a ridge-horn antenna, which covers 200 MHz to 5000 MHz, up to 2 GHz. In scanning from 30 MHz to 2.0 GHz, there were no spurious emissions observed other than the LO and injection signal (315 MHz), and the LO harmonics. Figures 5.1 and 5.2 show emissions measured 0-1000 MHz and 1000-2000 MHz, respectively. These measurements are made with a ridge-horn antenna at 3m, with spectrum analyzer in peak hold mode and the receiver rotated in all orientations. The measurements up to 1000 MHz (Fig. 5.1) are used for initial evaluation only, but those above 1000 MHz (Fig. 5.2) are used in final assessment for compliance.

### 5.2 Open Site Radiated Emission Tests

The DUT was then moved to the 3 meter Open Field Test Site where measurements were repeated up to 1000 MHz using a small bicone, or dipoles when the measurement is near the limit. The DUT was exercised as described in Sec. 5.1 above. The measurements were made with a spectrum analyzer using 120 kHz IF bandwidth and peak detection mode, and, when appropriate, using Quasi-Peak or average detection (see 5.0). The test set-up photographs are in attachment (i.e., end of this report).

The emissions from digital circuitry were measured using a standard bicone. These results are also presented in Table 5.1.

### 5.3 Computations and Results for Radiated Emissions

To convert the dBm's measured on the spectrum analyzer to  $\text{dB}(\mu\text{V}/\text{m})$ , we use expression

$$E_3(\text{dB}\mu\text{V}/\text{m}) = 107 + P_R + K_A - K_G$$

where  $P_R$  = power recorded on spectrum analyzer, dB, measured at 3m  
 $K_A$  = antenna factor, dB/m  
 $K_G$  = pre-amplifier gain, including cable loss, dB

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limit by 8.8dB.

### 5.4 Conducted Emission Tests

These tests do not apply, since the DUT is powered from an automotive 12 VDC system.

## **6. Other Measurements**

### **6.1 Emission Spectrum Near Fundamental**

Near operating frequency the emission spectrum is measured typically over 50 MHz span with and without injection signal. These data are taken with the DUT close to antenna and hence amplitudes are relative. The plots are shown in Figure 6.1.

### **6.2 Effect of Supply Voltage Variation**

The DUT has been designed to operate from 12 VDC power. Using a spectrum analyzer, relative radiated emissions were recorded at the "fundamental" (318.7 MHz) as voltage was varied from 6.0 to 18.0 VDC. Figure 6.2 shows the emission variation.

### **6.3 Operating Voltage and Current**

V = 13.6 VDC  
I = 20.0 mADC

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, Michigan 48109-2122  
(734) 647-1792

**Table 5.1 Highest Emissions Measured**

Radiated Emission - RF											Motorola/Chry; FCC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBµV/m	E3lim* dBµV/m	Pass dB	Comments
1	316.8	Dip	H	-69.0	Pk	18.9	22.2	34.7	46.0	11.3	flat; Model AN
2	316.8	Dip	H	-68.5	Pk	18.9	22.2	35.2	46.0	10.8	side
3	316.8	Dip	H	-66.5	Pk	18.9	22.2	37.2	46.0	<b>8.8</b>	end
4	316.8	Dip	V	-71.3	Pk	18.9	22.2	32.4	46.0	13.6	flat
5	316.8	Dip	V	-68.8	Pk	18.9	22.2	34.9	46.0	11.1	side
6	316.8	Dip	V	-71.8	Pk	18.9	22.2	31.9	46.0	14.1	end
7	630.0	Dip	H/V	-89.7	Pk	26.1	18.9	24.5	46.0	21.5	max. of all, noise; 10 kHz BW
8	945.0	Dip	H/V	-88.7	Pk	29.5	16.5	31.4	46.0	14.6	max. of all, noise; 10 kHz BW
9	1280.0	Horn	H	-72.0	Pk	20.6	28.0	27.6	54.0	26.4	max. of all, noise
10	1470.0	Horn	H	-71.0	Pk	21.0	28.1	28.9	54.0	25.1	max. of all, noise
11	1520.0	Horn	H	-72.0	Pk	21.3	28.3	28.0	54.0	26.0	max. of all, noise
12	1610.0	Horn	H	-69.0	Pk	21.4	28.2	31.2	54.0	22.8	max. of all, noise
13	1780.0	Horn	H	-70.0	Pk	21.8	27.9	30.9	54.0	23.1	max. of all, noise
14	1850.0	Horn	H	-68.0	Pk	22.2	28.2	33.0	54.0	21.0	max. of all, noise
15	1950.0	Horn	H	-70.0	Pk	22.4	28.3	31.1	54.0	22.9	max. of all, noise
16											
17											
18	Depopulated version										
19	316.8	Dip	H	-69.3	Pk	18.9	22.2	34.4	46.0	<b>11.6</b>	end; Model DN
20											
21											
22	Digital emissions more than 20 dB below FCC/IC Class B Limit.										
23											
24											
25											
26											
27											

Conducted Emissions							
#	Freq. MHz	Line Side	Det. Used	Vtest dBµV	Vlim dBµV	Pass dB	Comments
	Not applicable						

Meas. 10/6/99; U of Mich.

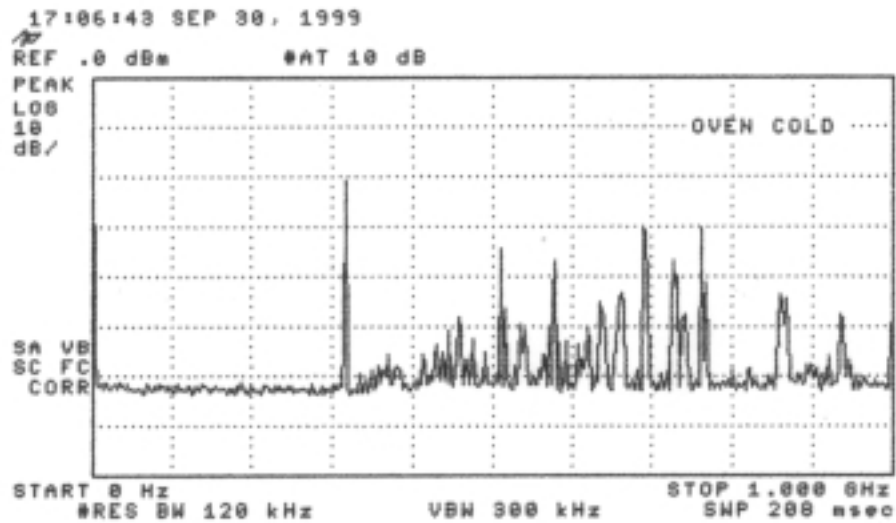
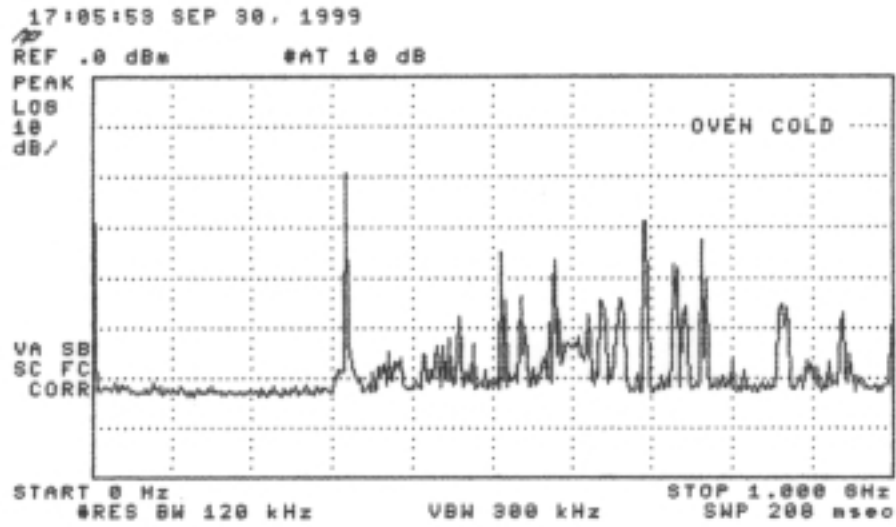


Figure 5.1. Emissions measured at 3 meters in anechoic chamber, 0-1000 MHz.  
 (top) Receiver plus ambient  
 (bottom) Ambient

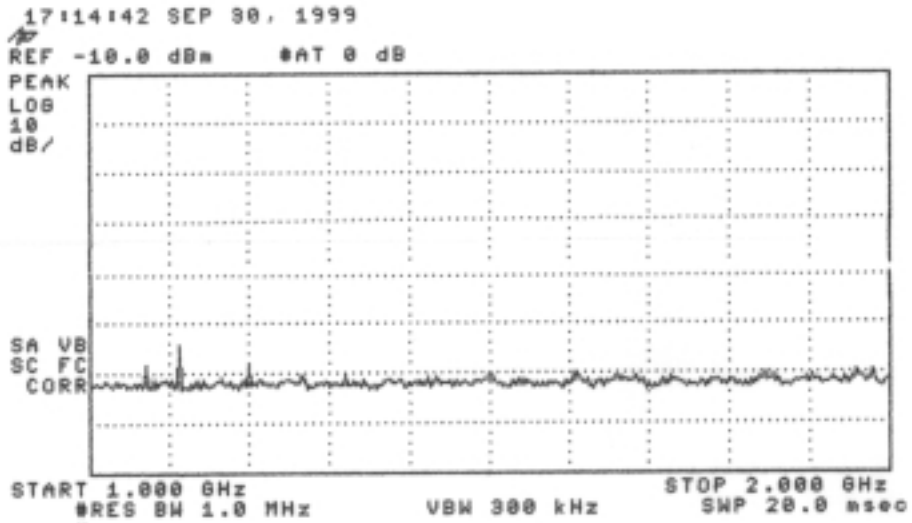
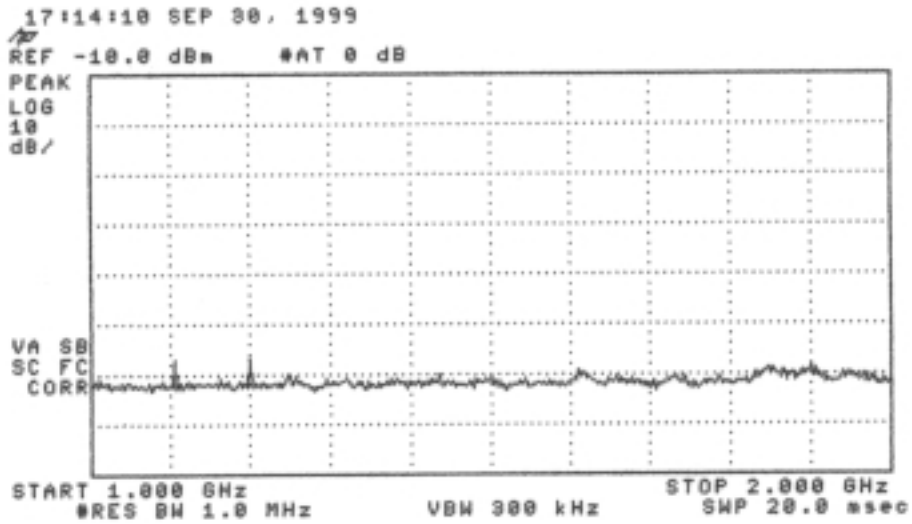


Figure 5.2. Emissions measured at 3 meters in anechoic chamber, 1000-2000 MHz.  
 (top) Receiver plus ambient  
 (bottom) Ambient



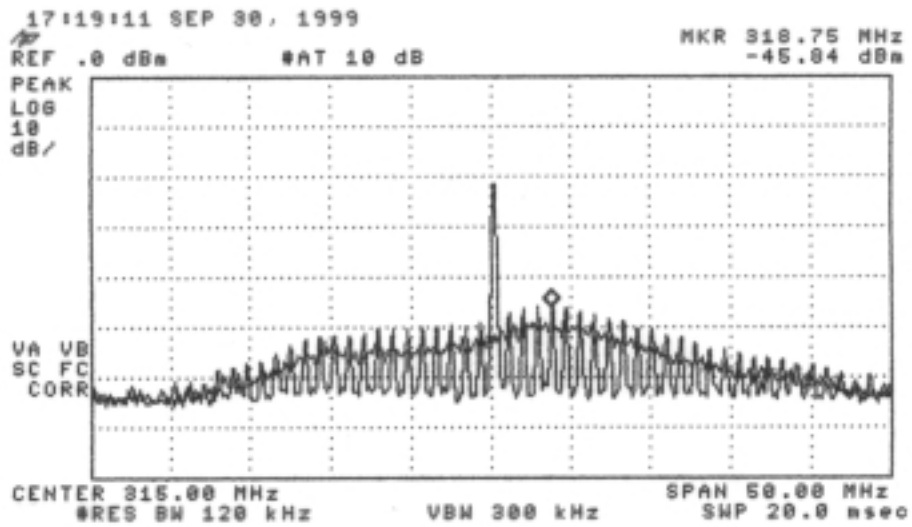


Figure 6.1. Relative receiver emissions in stand-by and "locked-in" modes. The final emission measurements were made with the receiver in "locked-in" mode.

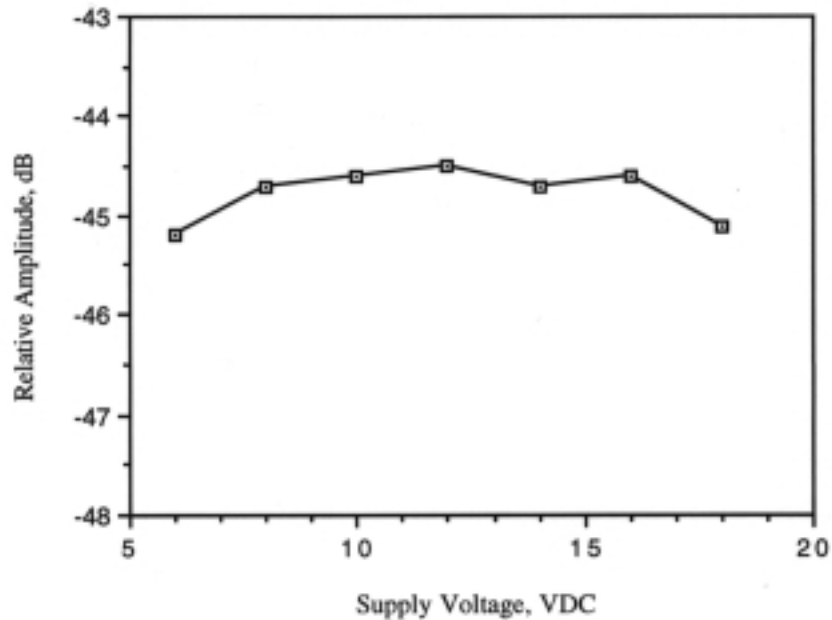


Figure 6.2. Relative emission at "fundamental" vs. supply voltage.