



802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

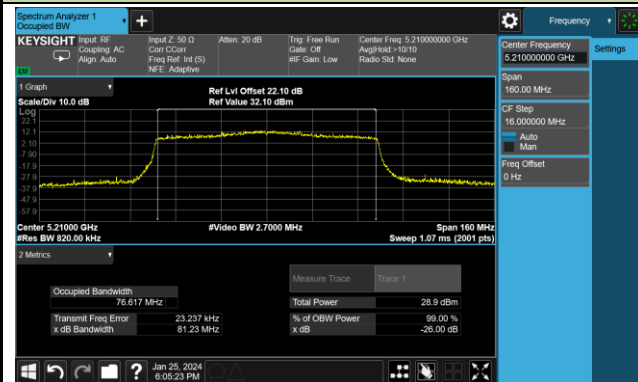


Channel 58 (5290MHz)

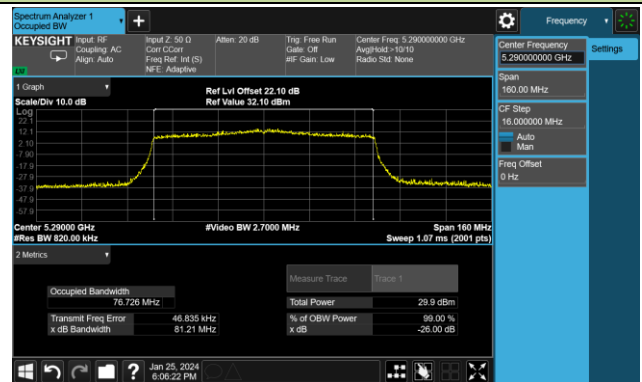


Channel 106 (5530MHz)

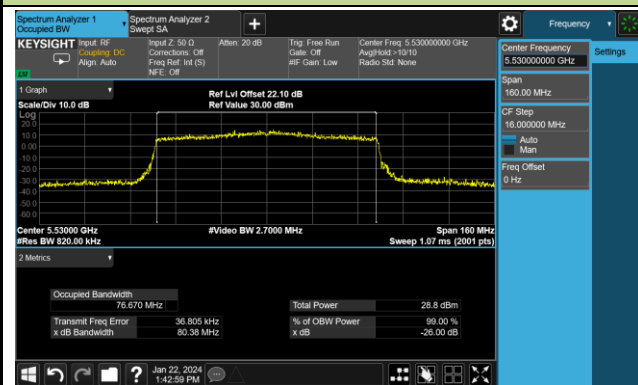


Channel 122 (5610MHz)

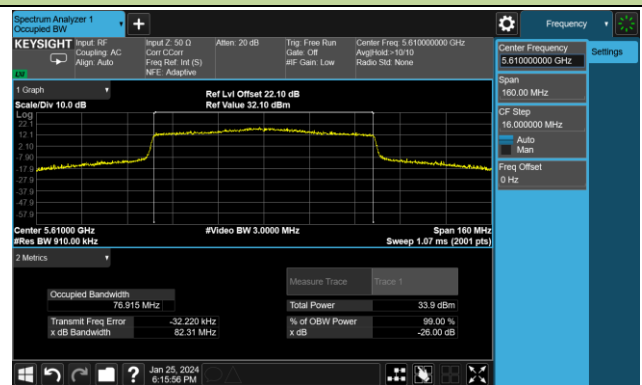


Channel 138 (5690MHz)

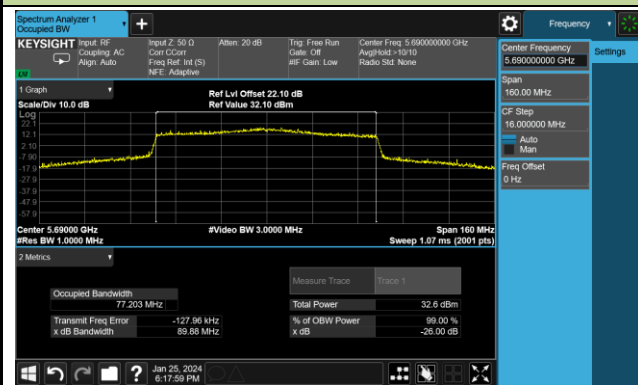

Channel 155 (5775MHz)

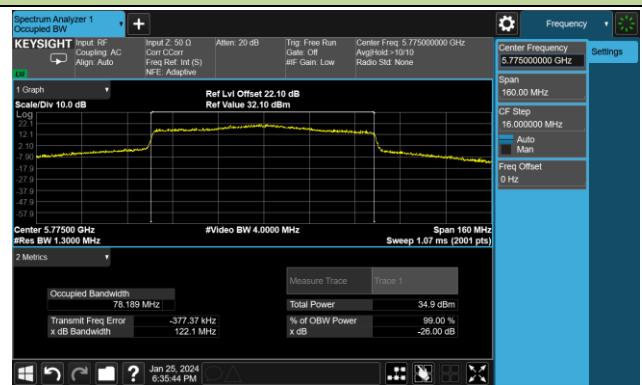

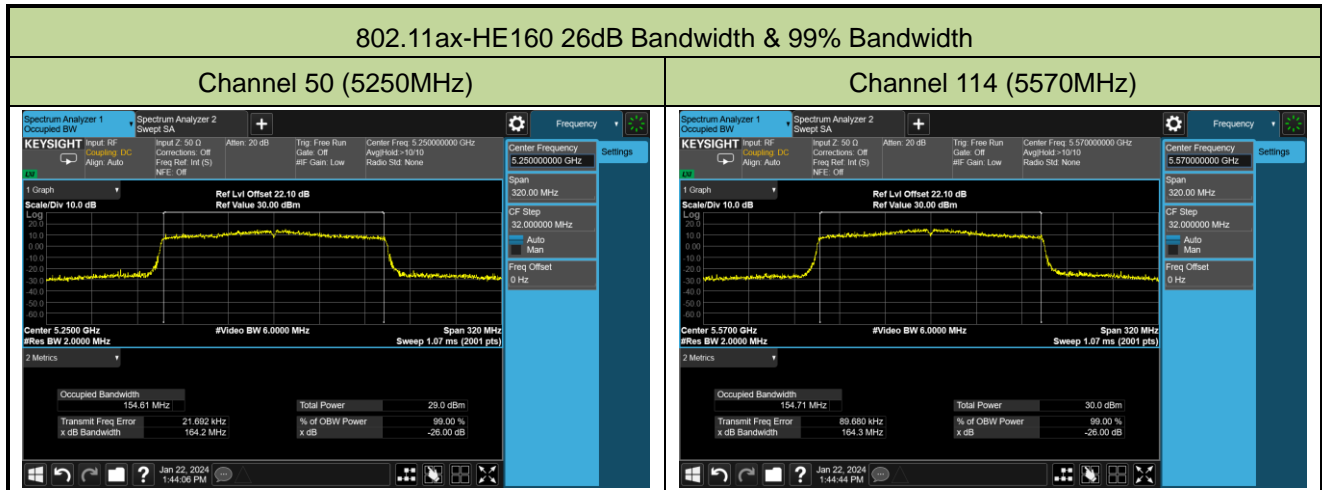


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-29		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	15.13	≥0.5
11a	6Mbps	157	5785	14.48	≥0.5
11a	6Mbps	165	5825	15.73	≥0.5
11ac-VHT20	MCS0	149	5745	16.93	≥0.5
11ac-VHT20	MCS0	157	5785	15.71	≥0.5
11ac-VHT20	MCS0	165	5825	16.92	≥0.5
11ac-VHT40	MCS0	151	5755	35.72	≥0.5
11ac-VHT40	MCS0	159	5795	34.94	≥0.5
11ac-VHT80	MCS0	155	5775	45.47	≥0.5
11ax-HE20	MCS0	149	5745	16.80	≥0.5
11ax-HE20	MCS0	157	5785	18.60	≥0.5
11ax-HE20	MCS0	165	5825	18.46	≥0.5
11ax-HE40	MCS0	151	5755	36.52	≥0.5
11ax-HE40	MCS0	159	5795	35.05	≥0.5
11ax-HE80	MCS0	155	5775	71.33	≥0.5

802.11a 6dB Bandwidth

Channel 149 (5745MHz)

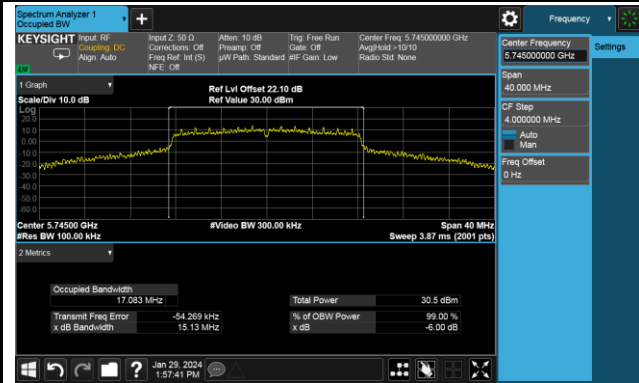

Channel 157 (5785MHz)

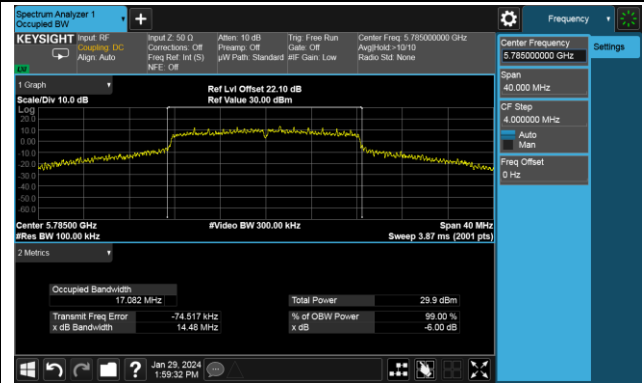


Channel 165 (5825MHz)




802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

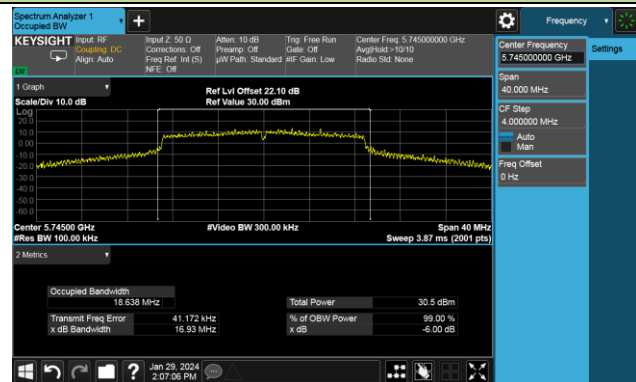

Channel 157 (5785MHz)

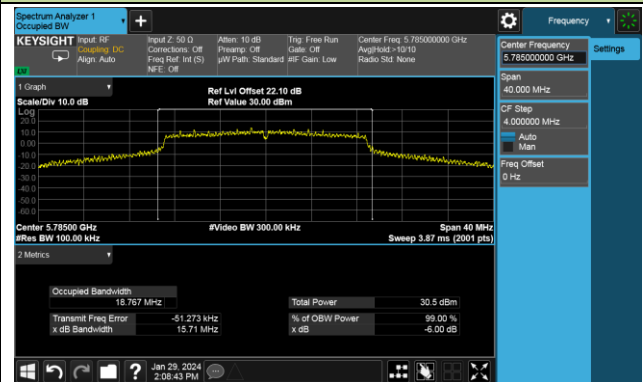


Channel 165 (5825MHz)

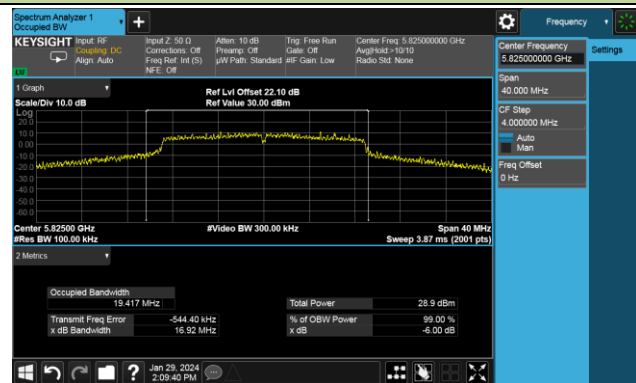



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

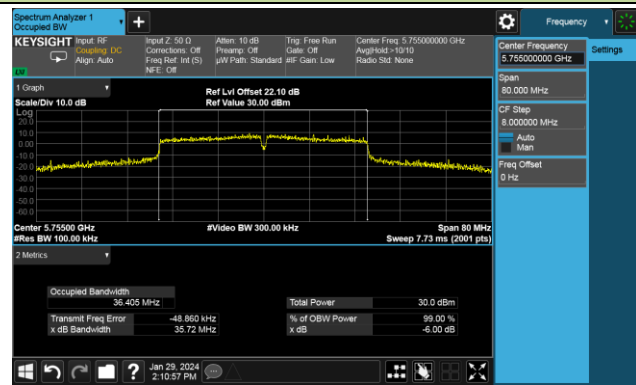


Channel 159 (5795MHz)

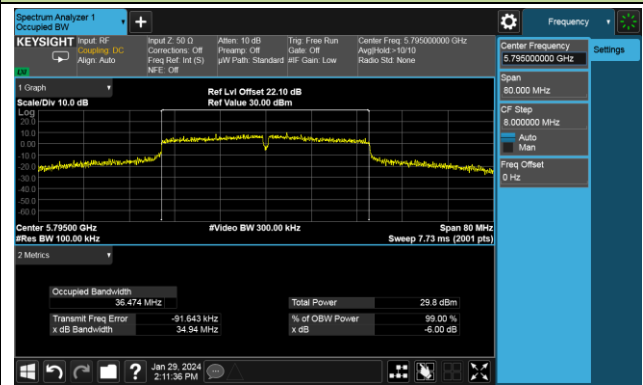

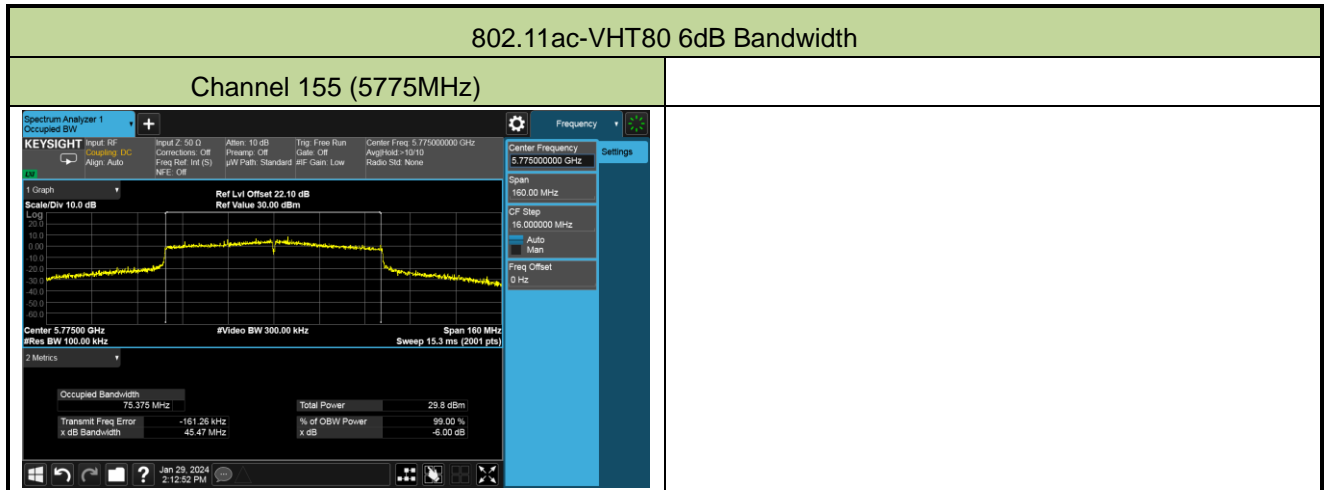


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

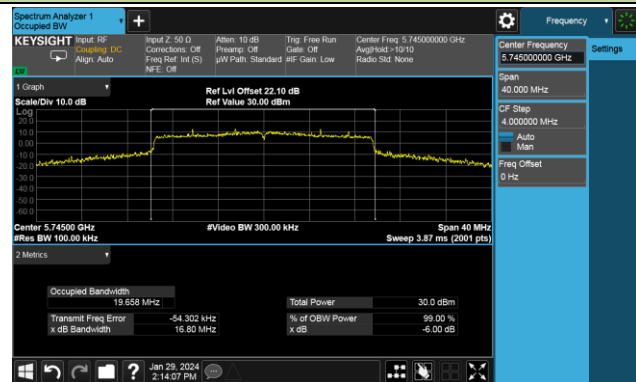

Channel 157 (5785MHz)

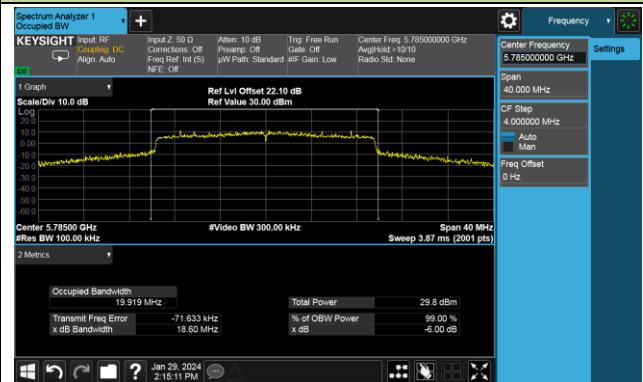


Channel 165 (5825MHz)

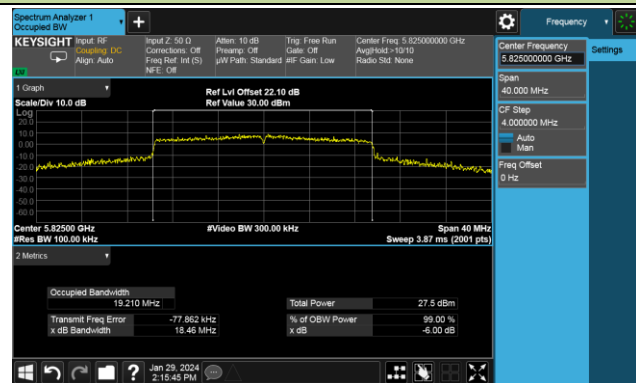



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

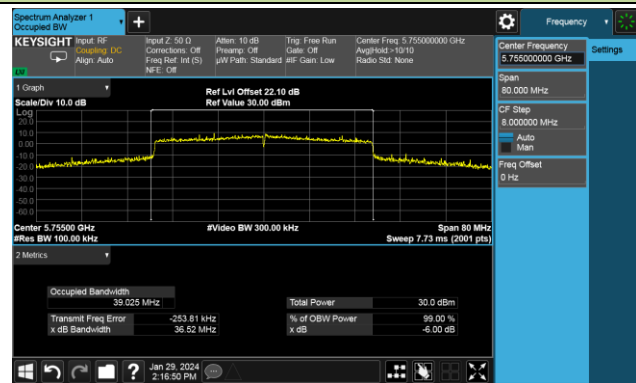

Channel 159 (5795MHz)

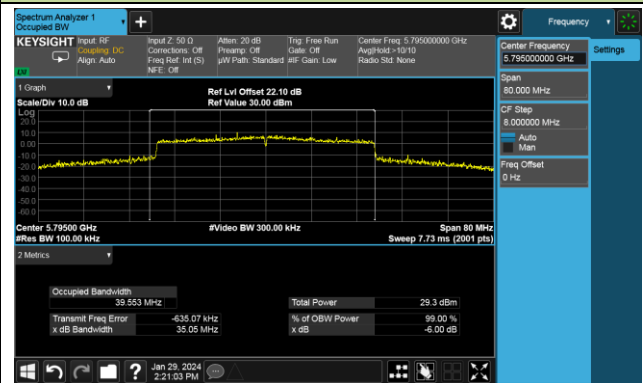

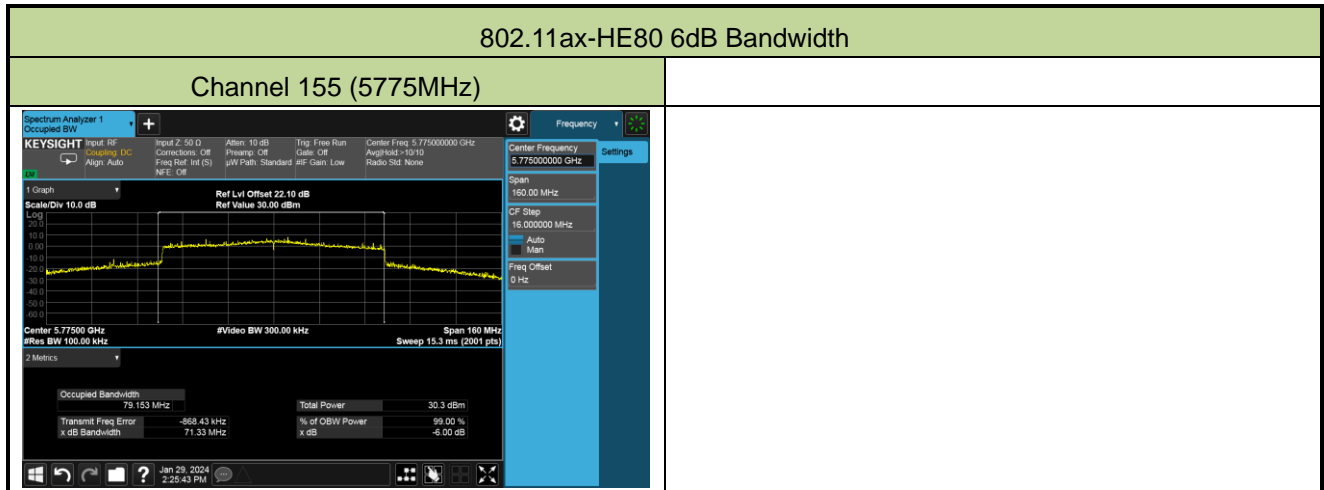

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-30		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11a	6Mbps	36	5180	20.23	20.79	23.53	≤ 30.00
11a	6Mbps	44	5220	23.08	23.49	26.30	≤ 30.00
11a	6Mbps	48	5240	23.62	23.86	26.75	≤ 30.00
11a	6Mbps	52	5260	17.93	18.14	21.05	≤ 23.74
11a	6Mbps	60	5300	17.82	18.39	21.12	≤ 23.74
11a	6Mbps	64	5320	17.48	17.85	20.68	≤ 23.74
11a	6Mbps	100	5500	17.66	18.23	20.96	≤ 23.74
11a	6Mbps	116	5580	17.80	17.63	20.73	≤ 23.74
11a	6Mbps	140	5700	17.75	18.36	21.08	≤ 23.74
11a	6Mbps	144	5720	17.82	17.89	20.87	≤ 22.65
11a	6Mbps	149	5745	21.97	21.98	24.99	≤ 30.00
11a	6Mbps	157	5785	22.55	22.90	25.74	≤ 30.00
11a	6Mbps	165	5825	21.51	21.05	24.30	≤ 30.00
11ac-VHT20	MCS0	36	5180	19.95	20.56	23.28	≤ 30.00
11ac-VHT20	MCS0	44	5220	23.69	23.95	26.83	≤ 30.00
11ac-VHT20	MCS0	48	5240	24.20	24.30	27.26	≤ 30.00
11ac-VHT20	MCS0	52	5260	18.45	18.55	21.51	≤ 23.98
11ac-VHT20	MCS0	60	5300	18.21	18.71	21.48	≤ 23.98
11ac-VHT20	MCS0	64	5320	18.38	19.09	21.76	≤ 23.98
11ac-VHT20	MCS0	100	5500	18.65	19.23	21.96	≤ 23.98
11ac-VHT20	MCS0	116	5580	18.56	18.73	21.66	≤ 23.98
11ac-VHT20	MCS0	140	5700	18.18	18.61	21.41	≤ 23.98
11ac-VHT20	MCS0	144	5720	18.58	18.82	21.71	≤ 22.81
11ac-VHT20	MCS0	149	5745	23.81	24.08	26.96	≤ 30.00
11ac-VHT20	MCS0	157	5785	23.61	24.10	26.87	≤ 30.00
11ac-VHT20	MCS0	165	5825	22.56	23.06	25.83	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS0	38	5190	18.81	19.46	22.16	≤ 30.00
11ac-VHT40	MCS0	46	5230	23.89	24.17	27.04	≤ 30.00
11ac-VHT40	MCS0	54	5270	20.31	20.51	23.42	≤ 23.98
11ac-VHT40	MCS0	62	5310	19.94	20.74	23.37	≤ 23.98
11ac-VHT40	MCS0	102	5510	20.56	21.13	23.86	≤ 23.98
11ac-VHT40	MCS0	110	5550	20.78	20.54	23.67	≤ 23.98
11ac-VHT40	MCS0	134	5670	20.60	21.15	23.89	≤ 23.98
11ac-VHT40	MCS0	142	5710	20.15	20.66	23.42	≤ 23.98
11ac-VHT40	MCS0	151	5755	23.14	23.38	26.27	≤ 30.00
11ac-VHT40	MCS0	159	5795	22.85	23.37	26.13	≤ 30.00
11ac-VHT80	MCS0	42	5210	19.35	19.95	22.67	≤ 30.00
11ac-VHT80	MCS0	58	5290	20.41	21.07	23.76	≤ 23.98
11ac-VHT80	MCS0	106	5530	20.33	20.78	23.57	≤ 23.98
11ac-VHT80	MCS0	122	5610	20.21	20.89	23.57	≤ 23.98
11ac-VHT80	MCS0	138	5690	20.11	20.70	23.43	≤ 23.98
11ac-VHT80	MCS0	155	5775	22.32	22.61	25.48	≤ 30.00
11ac-VHT160	MCS0	50	5250	19.20	18.82	22.02	≤ 23.98
11ac-VHT160	MCS0	114	5570	18.46	18.37	21.43	≤ 23.98
11ax-HE20	MCS0	36	5180	19.76	20.22	23.01	≤ 30.00
11ax-HE20	MCS0	44	5220	22.61	22.79	25.71	≤ 30.00
11ax-HE20	MCS0	48	5240	23.85	23.92	26.90	≤ 30.00
11ax-HE20	MCS0	52	5260	18.79	18.77	21.79	≤ 23.98
11ax-HE20	MCS0	60	5300	18.46	18.94	21.72	≤ 23.98
11ax-HE20	MCS0	64	5320	18.56	19.14	21.87	≤ 23.98
11ax-HE20	MCS0	100	5500	19.00	19.42	22.23	≤ 23.98
11ax-HE20	MCS0	116	5580	18.46	18.43	21.46	≤ 23.98
11ax-HE20	MCS0	140	5700	18.20	18.99	21.62	≤ 23.98
11ax-HE20	MCS0	144	5720	18.70	19.14	21.94	≤ 22.90
11ax-HE20	MCS0	149	5745	23.96	24.18	27.08	≤ 30.00
11ax-HE20	MCS0	157	5785	23.72	24.15	26.95	≤ 30.00
11ax-HE20	MCS0	165	5825	22.40	22.56	25.49	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS0	38	5190	18.75	19.33	22.06	≤ 30.00
11ax-HE40	MCS0	46	5230	23.94	24.16	27.06	≤ 30.00
11ax-HE40	MCS0	54	5270	20.21	20.56	23.40	≤ 23.98
11ax-HE40	MCS0	62	5310	20.36	21.24	23.83	≤ 23.98
11ax-HE40	MCS0	102	5510	20.02	20.50	23.28	≤ 23.98
11ax-HE40	MCS0	110	5550	20.73	20.65	23.70	≤ 23.98
11ax-HE40	MCS0	134	5670	20.54	21.04	23.81	≤ 23.98
11ax-HE40	MCS0	142	5710	20.00	20.65	23.35	≤ 23.98
11ax-HE40	MCS0	151	5755	23.69	24.08	26.90	≤ 30.00
11ax-HE40	MCS0	159	5795	23.33	24.19	26.79	≤ 30.00
11ax-HE80	MCS0	42	5210	19.40	20.00	22.72	≤ 30.00
11ax-HE80	MCS0	58	5290	19.89	20.43	23.18	≤ 23.98
11ax-HE80	MCS0	106	5530	20.31	20.72	23.53	≤ 23.98
11ax-HE80	MCS0	122	5610	20.18	20.90	23.57	≤ 23.98
11ax-HE80	MCS0	138	5690	20.58	21.16	23.89	≤ 23.98
11ax-HE80	MCS0	155	5775	23.54	24.05	26.81	≤ 30.00
11ax-HE160	MCS0	50	5250	18.94	18.62	21.79	≤ 23.98
11ax-HE160	MCS0	114	5570	18.68	18.75	21.73	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.81) = 23.74 < 23.98$ dBm.

802.11ac-VHT20: $11 + 10 \log_{10} (19.86) = 23.98$ dBm.

802.11ax-HE20: $11 + 10 \log_{10} (20.53) = 24.12 > 23.98$ dBm.

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: $11 + 10 \log_{10} B > 23.98$ dBm.

Note 3: For Band-Crossing channel, Average Power Limit = 23.98dBm or $11 + 10 \cdot \log_{10} EBW_{2C}$ which is less.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-18 ~ 2024-01-30		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	6Mbps	36	5180	9.74	10.46	98.84	13.18	≤ 16.70
11a	6Mbps	44	5220	12.41	12.95	98.84	15.75	≤ 16.70
11a	6Mbps	48	5240	13.29	13.58	98.84	16.50	≤ 16.70
11a	6Mbps	52	5260	7.07	7.45	98.84	10.33	≤ 10.70
11a	6Mbps	60	5300	7.10	7.36	98.84	10.29	≤ 10.70
11a	6Mbps	64	5320	6.93	7.09	98.84	10.07	≤ 10.70
11a	6Mbps	100	5500	7.32	7.44	98.84	10.44	≤ 10.70
11a	6Mbps	116	5580	7.71	7.15	98.84	10.50	≤ 10.70
11a	6Mbps	140	5700	7.41	7.64	98.84	10.59	≤ 10.70
11a	6Mbps	144	5720	7.36	7.23	98.84	10.36	≤ 10.70
11ac-VHT20	MCS0	36	5180	8.90	9.68	96.06	12.49	≤ 17.00
11ac-VHT20	MCS0	44	5220	12.15	12.53	96.06	15.53	≤ 17.00
11ac-VHT20	MCS0	48	5240	13.01	13.33	96.06	16.36	≤ 17.00
11ac-VHT20	MCS0	52	5260	7.43	7.41	96.06	10.60	≤ 11.00
11ac-VHT20	MCS0	60	5300	7.45	7.67	96.06	10.75	≤ 11.00
11ac-VHT20	MCS0	64	5320	7.45	7.87	96.06	10.85	≤ 11.00
11ac-VHT20	MCS0	100	5500	7.49	7.90	96.06	10.89	≤ 11.00
11ac-VHT20	MCS0	116	5580	7.61	7.62	96.06	10.80	≤ 11.00
11ac-VHT20	MCS0	140	5700	7.12	7.37	96.06	10.43	≤ 11.00
11ac-VHT20	MCS0	144	5720	7.41	7.45	96.06	10.62	≤ 11.00
11ac-VHT40	MCS0	38	5190	5.47	6.14	96.33	8.99	≤ 17.00
11ac-VHT40	MCS0	46	5230	10.62	10.78	96.33	13.87	≤ 17.00
11ac-VHT40	MCS0	54	5270	6.97	7.38	96.33	10.35	≤ 11.00
11ac-VHT40	MCS0	62	5310	6.92	7.58	96.33	10.44	≤ 11.00
11ac-VHT40	MCS0	102	5510	7.19	7.68	96.33	10.62	≤ 11.00
11ac-VHT40	MCS0	110	5550	7.51	7.45	96.33	10.65	≤ 11.00
11ac-VHT40	MCS0	134	5670	7.43	7.85	96.33	10.82	≤ 11.00
11ac-VHT40	MCS0	142	5710	6.99	7.40	96.33	10.37	≤ 11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	3.53	4.10	94.19	7.10	≤ 17.00
11ac-VHT80	MCS0	58	5290	4.70	5.18	94.19	8.22	≤ 11.00
11ac-VHT80	MCS0	106	5530	4.95	5.50	94.19	8.51	≤ 11.00
11ac-VHT80	MCS0	122	5610	4.31	5.10	94.19	8.00	≤ 11.00
11ac-VHT80	MCS0	138	5690	4.52	5.03	94.19	8.05	≤ 11.00
11ac-VHT160	MCS0	50	5250	0.91	0.84	93.77	4.16	≤ 11.00
11ac-VHT160	MCS0	114	5570	0.21	0.24	93.77	3.51	≤ 11.00
11ax-HE20	MCS0	36	5180	8.29	8.84	96.73	11.73	≤ 17.00
11ax-HE20	MCS0	44	5220	10.92	11.24	96.73	14.24	≤ 17.00
11ax-HE20	MCS0	48	5240	12.20	12.41	96.73	15.46	≤ 17.00
11ax-HE20	MCS0	52	5260	7.43	7.35	96.73	10.54	≤ 11.00
11ax-HE20	MCS0	60	5300	7.43	7.60	96.73	10.67	≤ 11.00
11ax-HE20	MCS0	64	5320	7.55	7.90	96.73	10.88	≤ 11.00
11ax-HE20	MCS0	100	5500	7.48	7.95	96.73	10.87	≤ 11.00
11ax-HE20	MCS0	116	5580	7.49	7.14	96.73	10.47	≤ 11.00
11ax-HE20	MCS0	140	5700	7.23	7.53	96.73	10.54	≤ 11.00
11ax-HE20	MCS0	144	5720	7.56	7.56	96.73	10.71	≤ 11.00
11ax-HE40	MCS0	38	5190	4.98	5.65	96.73	8.48	≤ 17.00
11ax-HE40	MCS0	46	5230	10.08	10.63	96.73	13.52	≤ 17.00
11ax-HE40	MCS0	54	5270	7.07	7.65	96.73	10.52	≤ 11.00
11ax-HE40	MCS0	62	5310	6.97	7.45	96.73	10.37	≤ 11.00
11ax-HE40	MCS0	102	5510	6.12	6.68	96.73	9.56	≤ 11.00
11ax-HE40	MCS0	110	5550	7.09	7.02	96.73	10.21	≤ 11.00
11ax-HE40	MCS0	134	5670	6.97	7.29	96.73	10.29	≤ 11.00
11ax-HE40	MCS0	142	5710	6.42	6.80	96.73	9.77	≤ 11.00
11ax-HE80	MCS0	42	5210	3.31	3.83	96.39	6.75	≤ 17.00
11ax-HE80	MCS0	58	5290	3.90	4.59	96.39	7.43	≤ 11.00
11ax-HE80	MCS0	106	5530	4.90	5.37	96.39	8.31	≤ 11.00
11ax-HE80	MCS0	122	5610	4.23	5.04	96.39	7.82	≤ 11.00
11ax-HE80	MCS0	138	5690	5.06	5.52	96.39	8.47	≤ 11.00
11ax-HE160	MCS0	50	5250	0.32	0.16	91.50	3.64	≤ 11.00
11ax-HE160	MCS0	114	5570	0.11	0.16	91.50	3.53	≤ 11.00

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} \}$
(dBm/MHz) + $10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle $\geq 98\%$, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVPSD}/10)}\}$ (dBm/MHz).

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-01-18 ~ 2024-01-30		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	6Mbps	149	5745	8.93	9.12	98.84	12.08	≤ 29.70
11a	6Mbps	157	5785	9.56	9.94	98.84	12.82	≤ 29.70
11a	6Mbps	165	5825	7.08	7.84	98.84	10.54	≤ 29.70
11ac-VHT20	MCS0	149	5745	10.06	10.25	96.06	13.34	≤ 30.00
11ac-VHT20	MCS0	157	5785	9.73	10.25	96.06	13.18	≤ 30.00
11ac-VHT20	MCS0	165	5825	8.68	8.97	96.06	12.01	≤ 30.00
11ac-VHT40	MCS0	151	5755	6.90	7.16	96.33	10.20	≤ 30.00
11ac-VHT40	MCS0	159	5795	6.67	7.37	96.33	10.20	≤ 30.00
11ac-VHT80	MCS0	155	5775	3.37	4.13	94.19	7.03	≤ 30.00
11ax-HE20	MCS0	149	5745	9.99	10.26	96.73	13.28	≤ 30.00
11ax-HE20	MCS0	157	5785	9.78	10.07	96.73	13.08	≤ 30.00
11ax-HE20	MCS0	165	5825	8.32	8.59	96.73	11.61	≤ 30.00
11ax-HE40	MCS0	151	5755	7.44	7.54	96.73	10.64	≤ 30.00
11ax-HE40	MCS0	159	5795	6.96	7.86	96.73	10.58	≤ 30.00
11ax-HE80	MCS0	155	5775	4.44	5.05	96.39	7.93	≤ 30.00


Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVPSD}/10)}\}$
(dBm/510kHz) + $10 \cdot \log (1/\text{Duty cycle})$.


When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVPSD}/10)}\}$
(dBm/510kHz).

802.11a Power Spectral Density- Ant 0

Channel 36 (5180MHz)

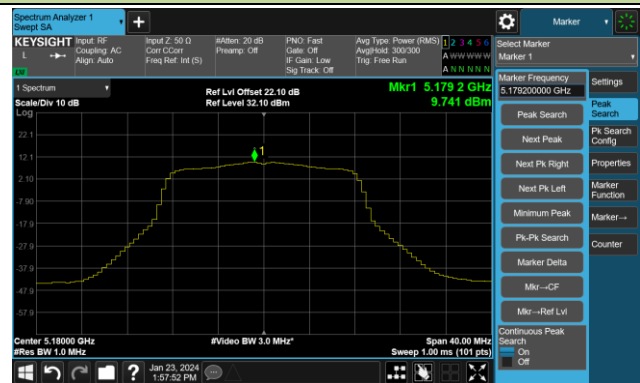


Channel 44 (5220MHz)

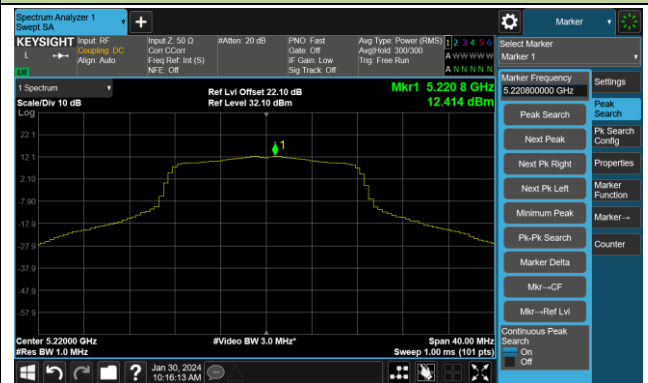


Channel 48 (5240MHz)



Channel 52 (5260MHz)

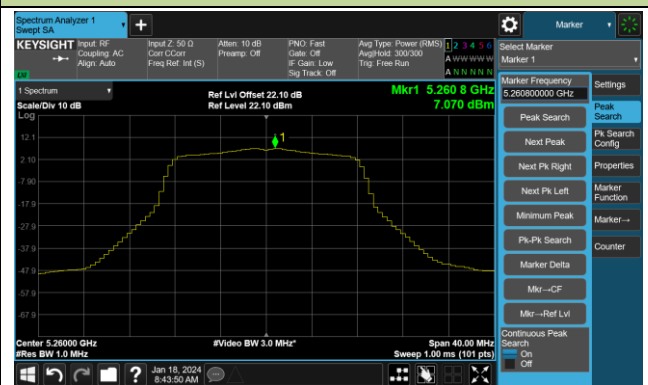


Channel 60 (5300MHz)

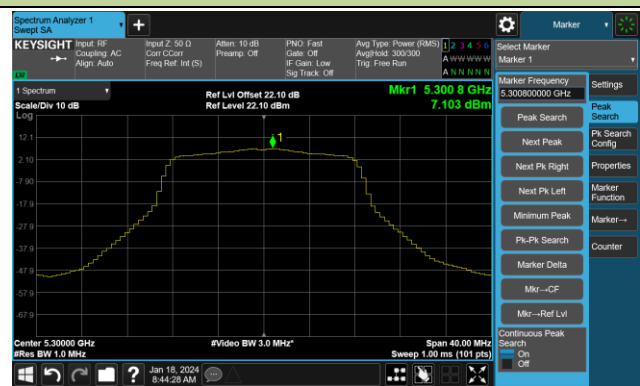


Channel 64 (5320MHz)



Channel 100 (5500MHz)

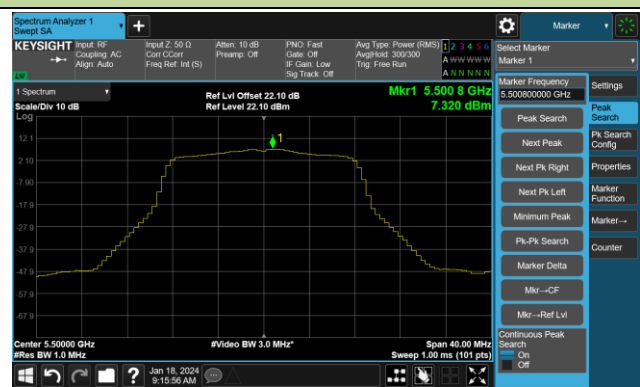


Channel 116 (5580MHz)

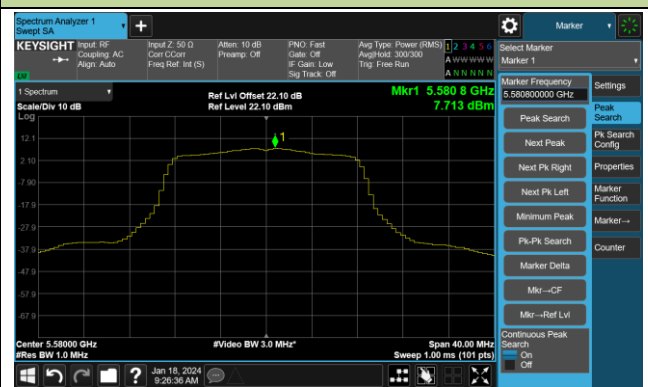

802.11a Power Spectral Density- Ant 0


Channel 140 (5700MHz)

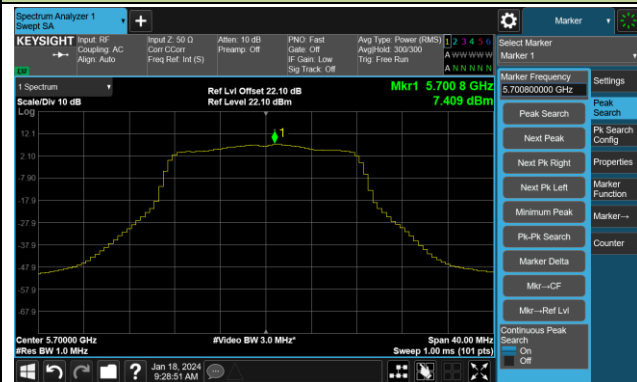


Channel 144(5720MHz)




Channel 149 (5745MHz)

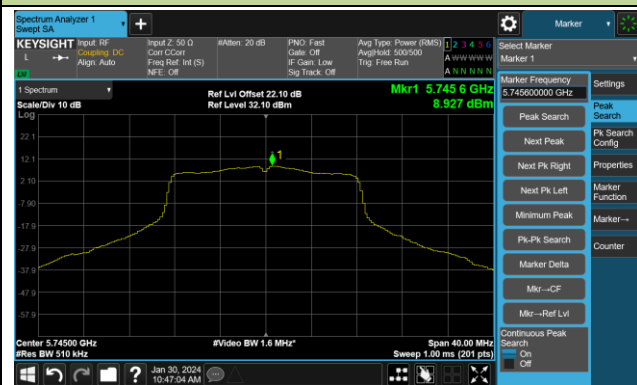

Channel 157 (5785MHz)

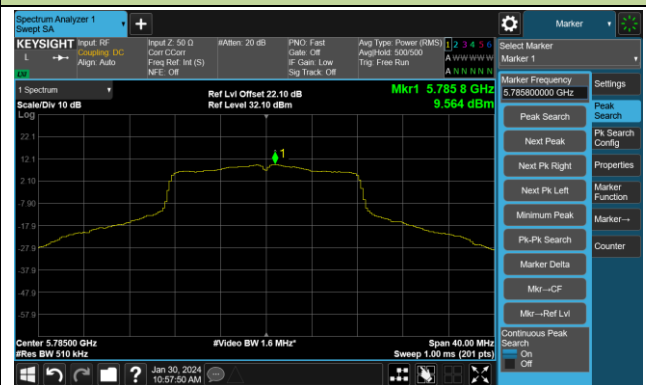


Channel 165 (5825MHz)

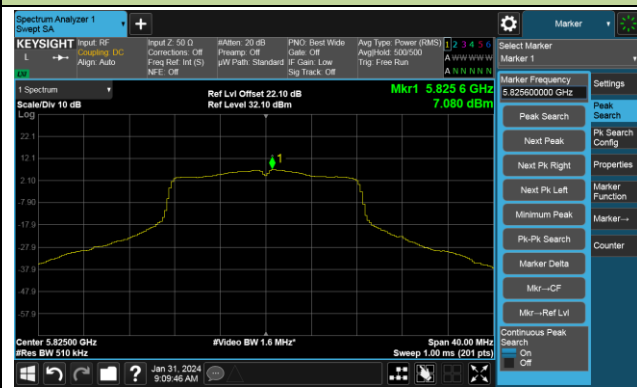


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

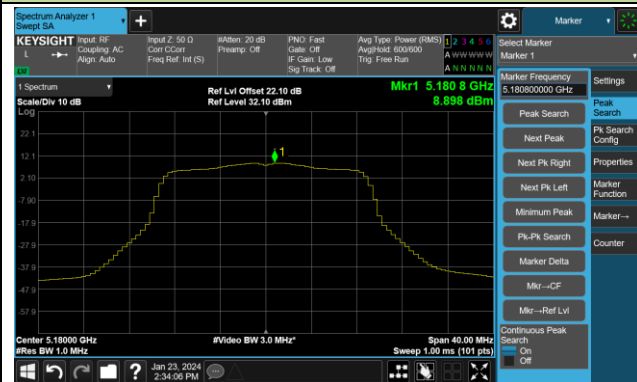


Channel 44 (5220MHz)

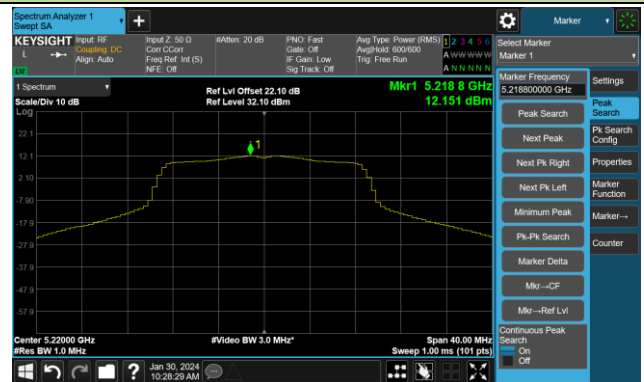

Channel 48 (5240MHz)

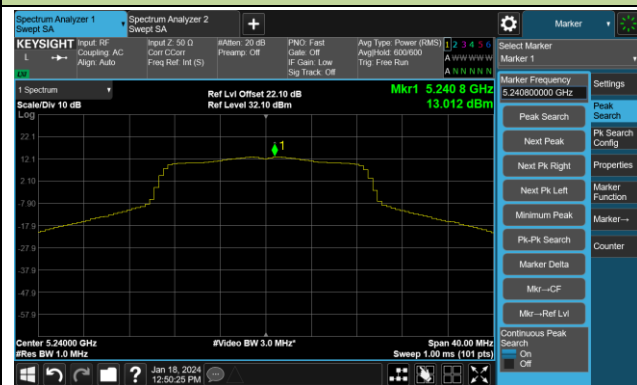


Channel 52 (5260MHz)

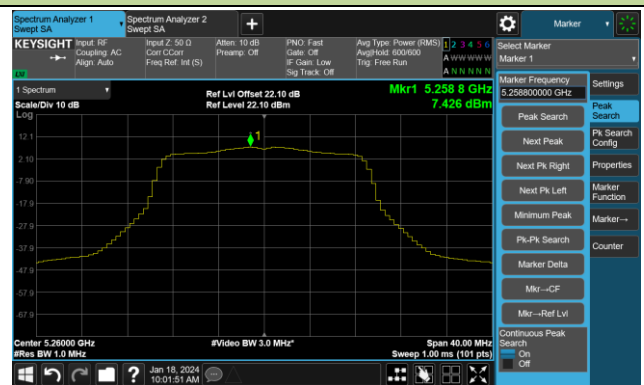


Channel 60 (5300MHz)




Channel 64 (5320MHz)

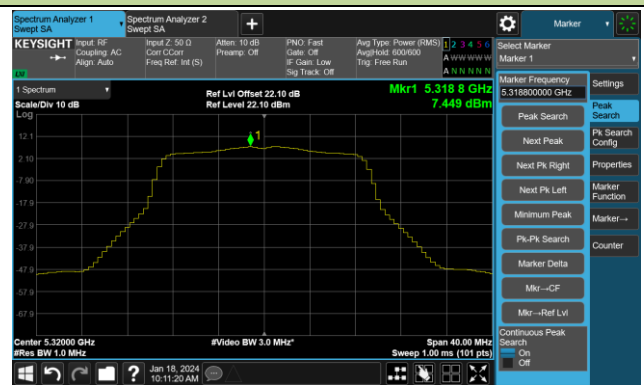

Channel 100 (5500MHz)

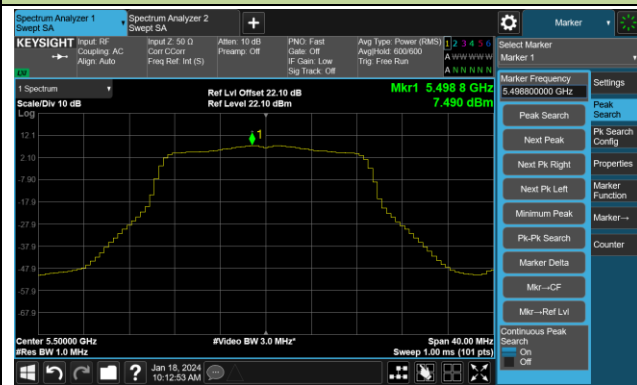


Channel 116 (5580MHz)

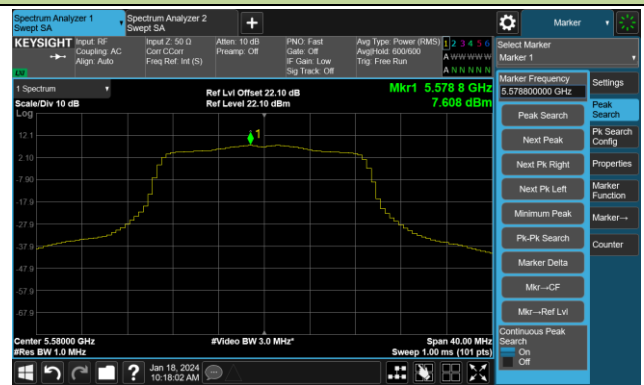


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

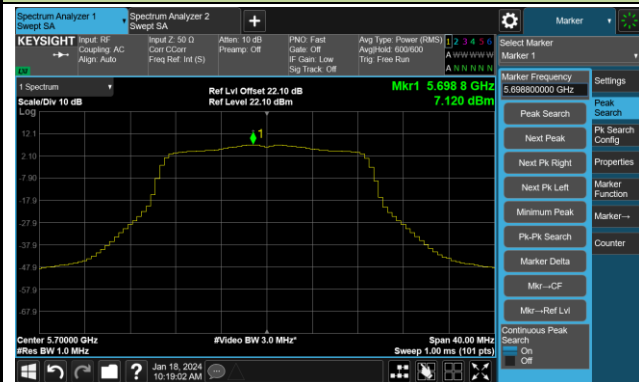


Channel 144(5720MHz)

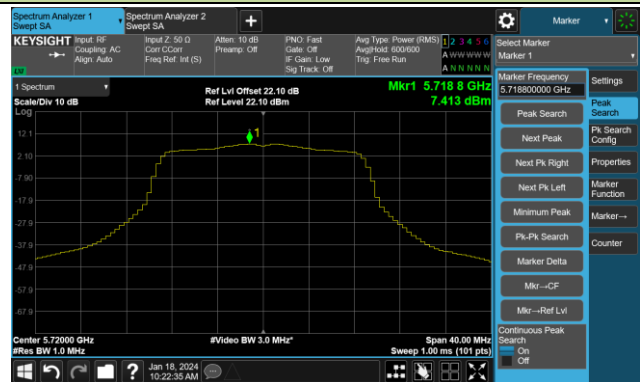


Channel 149 (5745MHz)

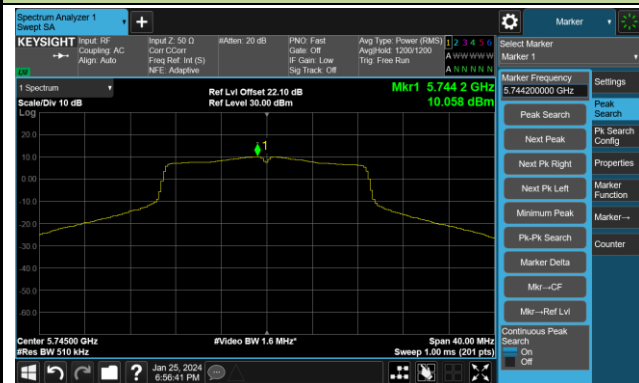

Channel 157 (5785MHz)

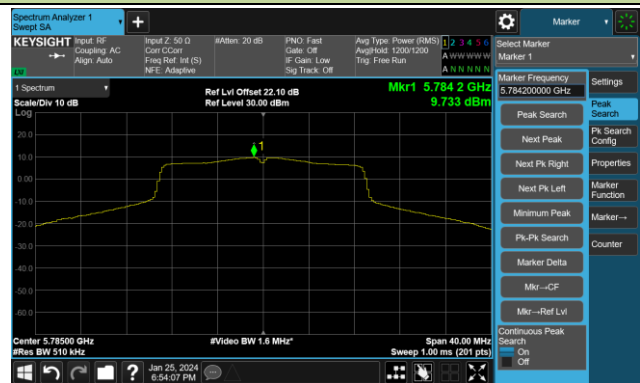

Channel 165 (5825MHz)

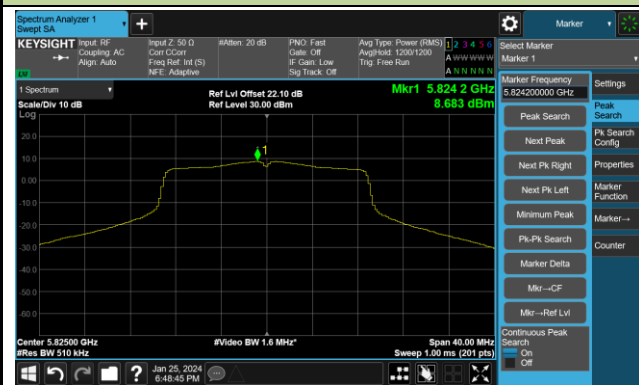

802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)




Channel 46 (5230MHz)



Channel 54 (5270MHz)

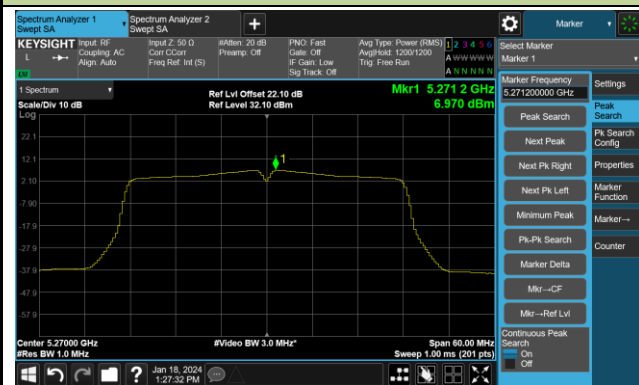


Channel 62 (5310MHz)

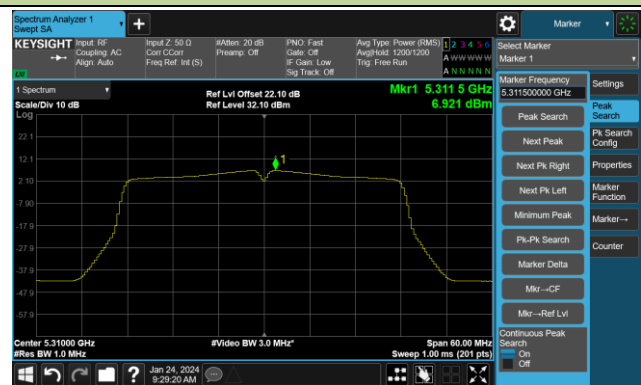

Channel 102 (5510MHz)



Channel 110 (5550MHz)

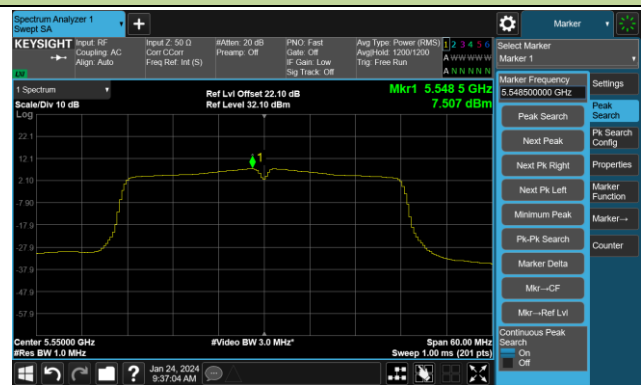

Channel 134 (5670MHz)



Channel 142(5710MHz)



802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)



Channel 58 (5290MHz)




Channel 106 (5530MHz)

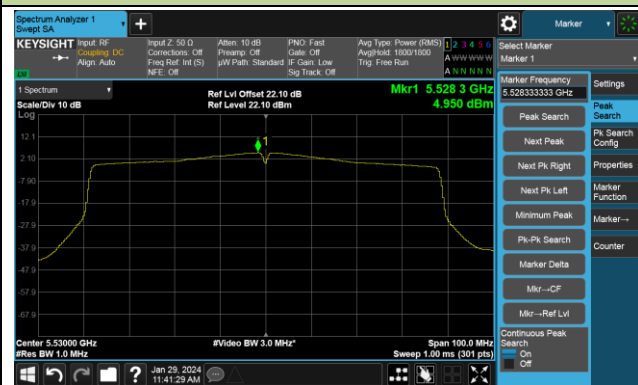


Channel 122 (5610MHz)



Channel 138 (5690MHz)

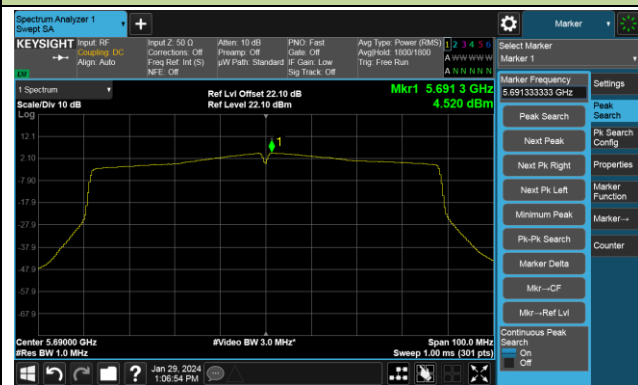

Channel 155 (5775MHz)

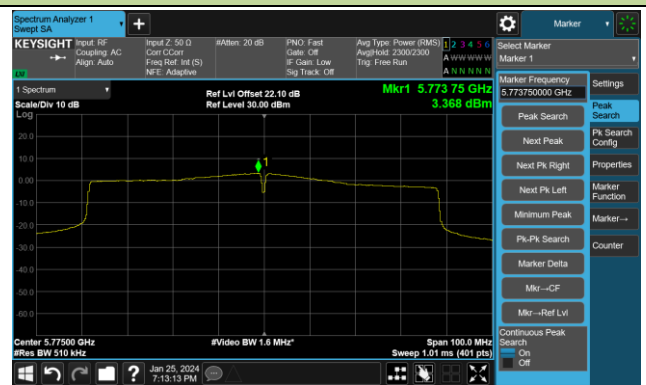

802.11ac-VHT160 Power Spectral Density- Ant 0


Channel 50 (5250MHz)

Channel 114 (5570MHz)



802.11ax-HE20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

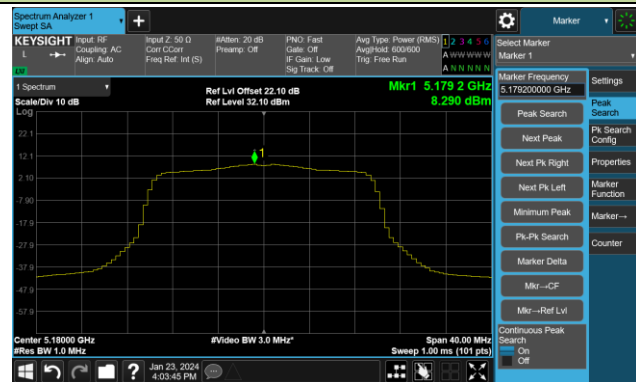


Channel 44 (5220MHz)



Channel 48 (5240MHz)

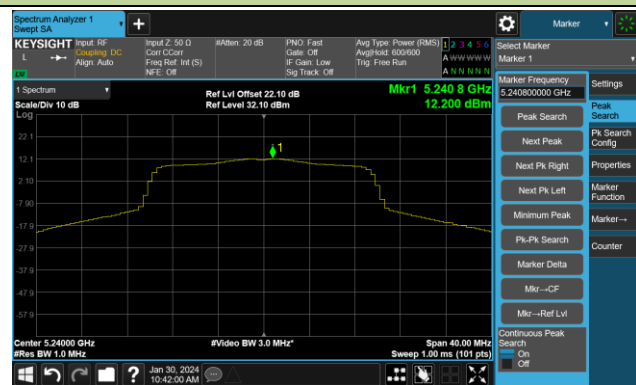

Channel 52 (5260MHz)

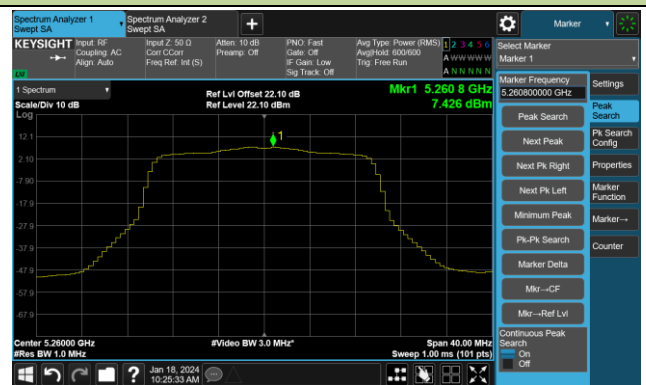

Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)




Channel 116 (5580MHz)




802.11ax-HE20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

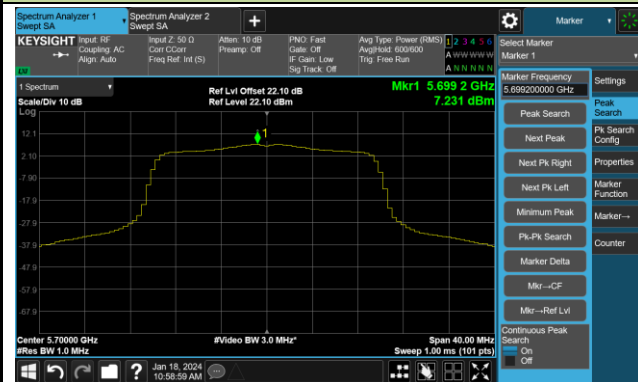


Channel 144(5720MHz)

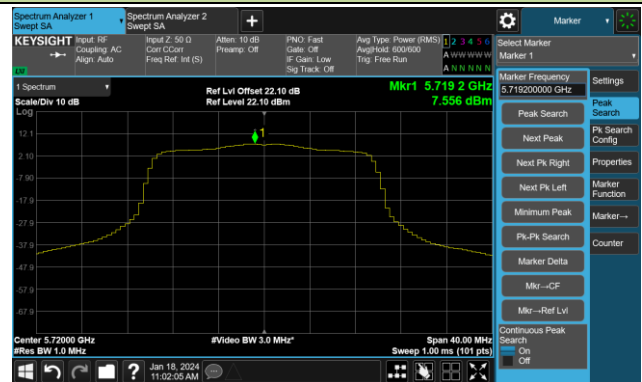

Channel 149 (5745MHz)

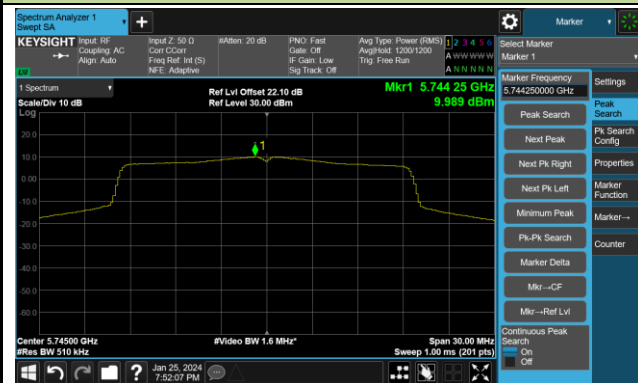

Channel 157 (5785MHz)

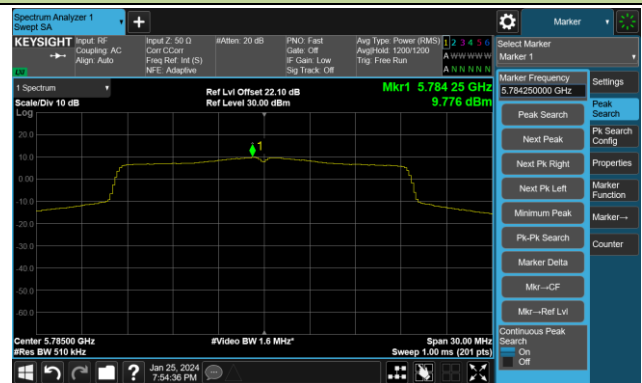

Channel 165 (5825MHz)

