



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

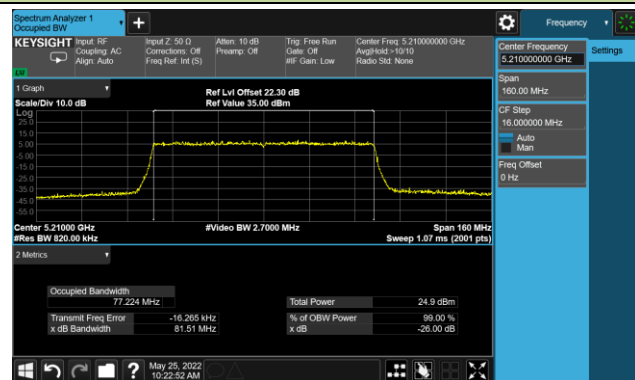


Channel 58 (5290MHz)

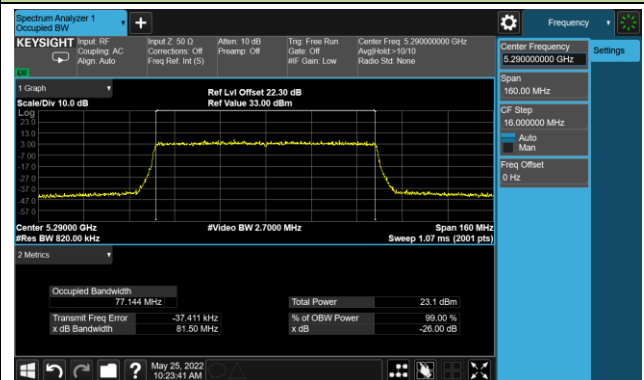


Channel 106 (5530MHz)

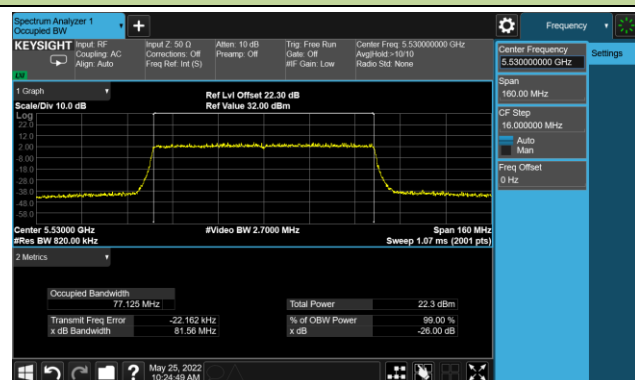


Channel 122 (5610MHz)

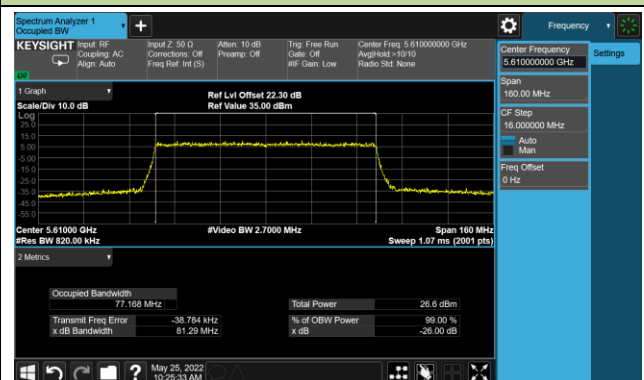

Channel 138 (5690MHz)

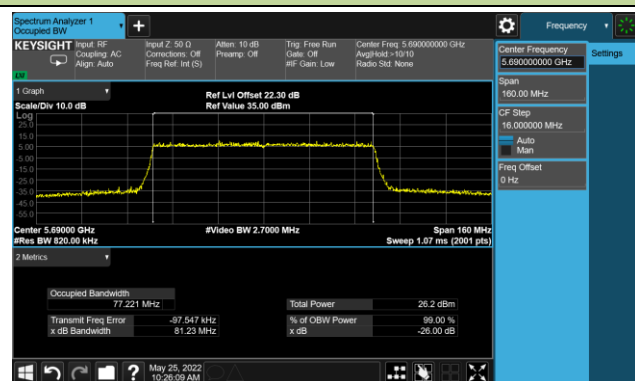


Channel 155 (5775MHz)

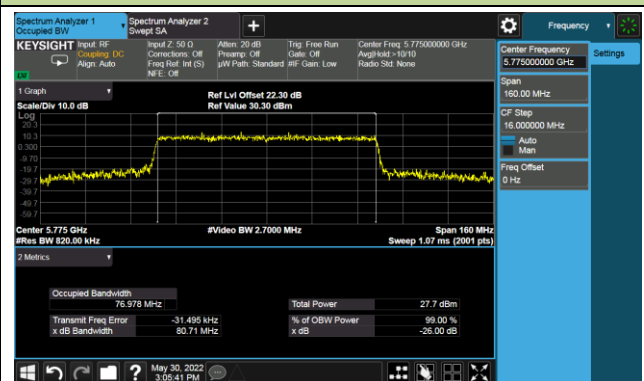


802.11ax-HE160 26dB Bandwidth

Channel 50 (5250MHz)

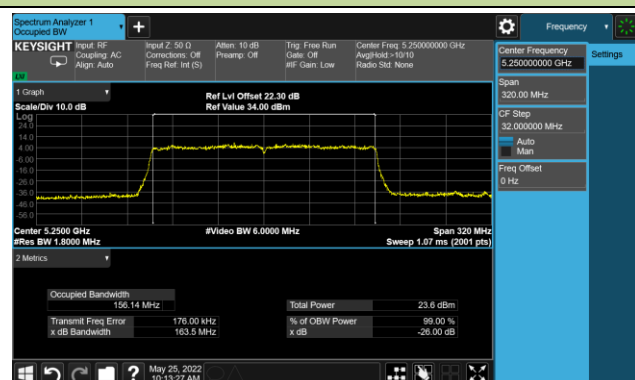

Channel 114 (5570MHz)

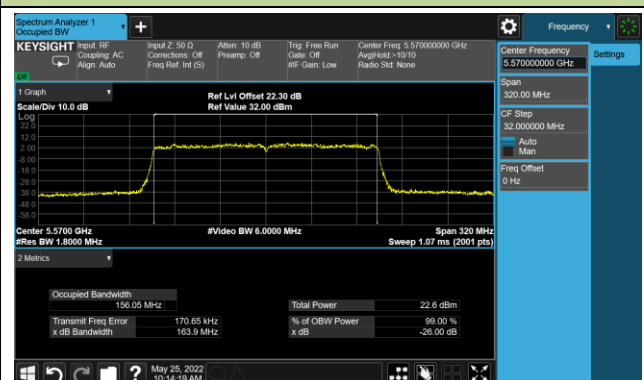


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/05/30		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.33	≥ 0.5
11a	6Mbps	157	5785	16.36	≥ 0.5
11a	6Mbps	165	5825	16.35	≥ 0.5
11ac-VHT20	MCS5	149	5745	17.58	≥ 0.5
11ac-VHT20	MCS5	157	5785	17.60	≥ 0.5
11ac-VHT20	MCS5	165	5825	17.65	≥ 0.5
11ac-VHT40	MCS0	151	5755	36.06	≥ 0.5
11ac-VHT40	MCS0	159	5795	35.76	≥ 0.5
11ac-VHT80	MCS0	155	5775	76.28	≥ 0.5
11ax-HE20	MCS6	149	5745	19.01	≥ 0.5
11ax-HE20	MCS6	157	5785	18.95	≥ 0.5
11ax-HE20	MCS6	165	5825	19.03	≥ 0.5
11ax-HE40	MCS0	151	5755	37.61	≥ 0.5
11ax-HE40	MCS0	159	5795	37.54	≥ 0.5
11ax-HE80	MCS0	155	5775	76.83	≥ 0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

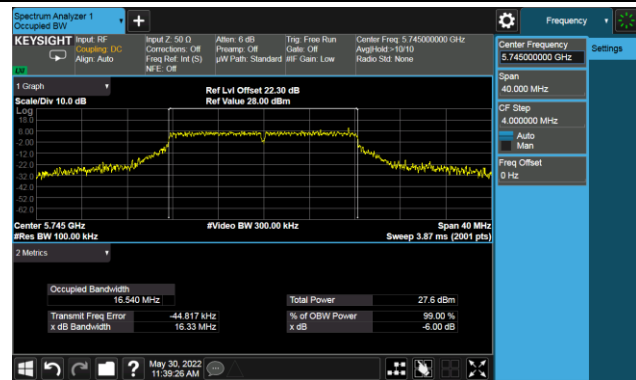

Channel 157 (5785MHz)

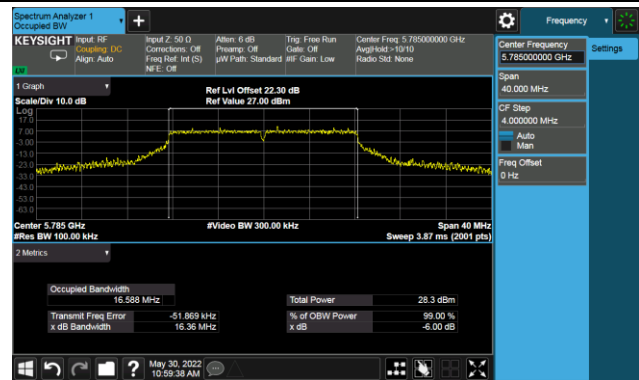


Channel 165 (5825MHz)

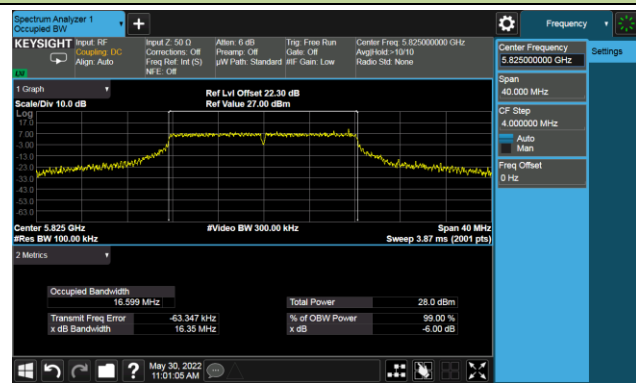


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

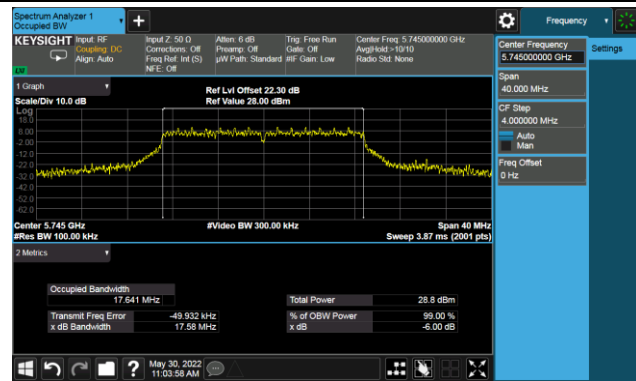


Channel 157 (5785MHz)

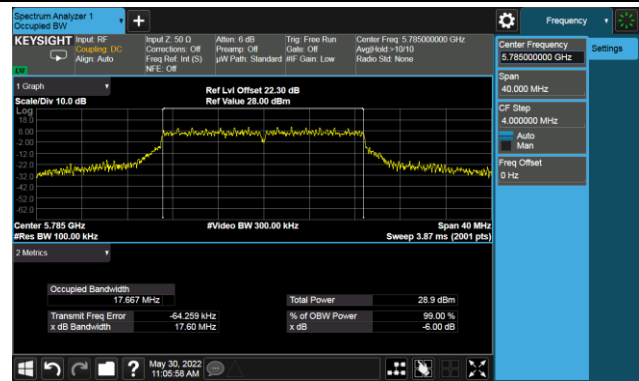


Channel 165 (5825MHz)

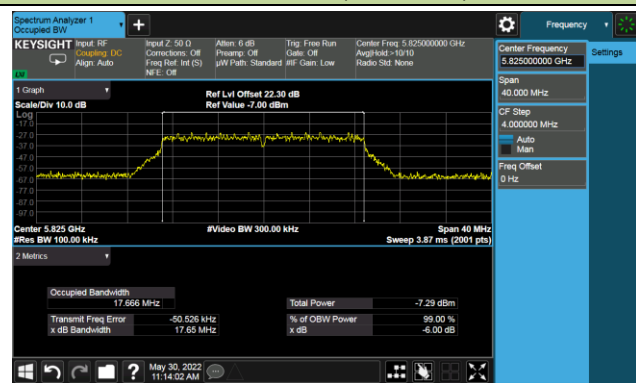

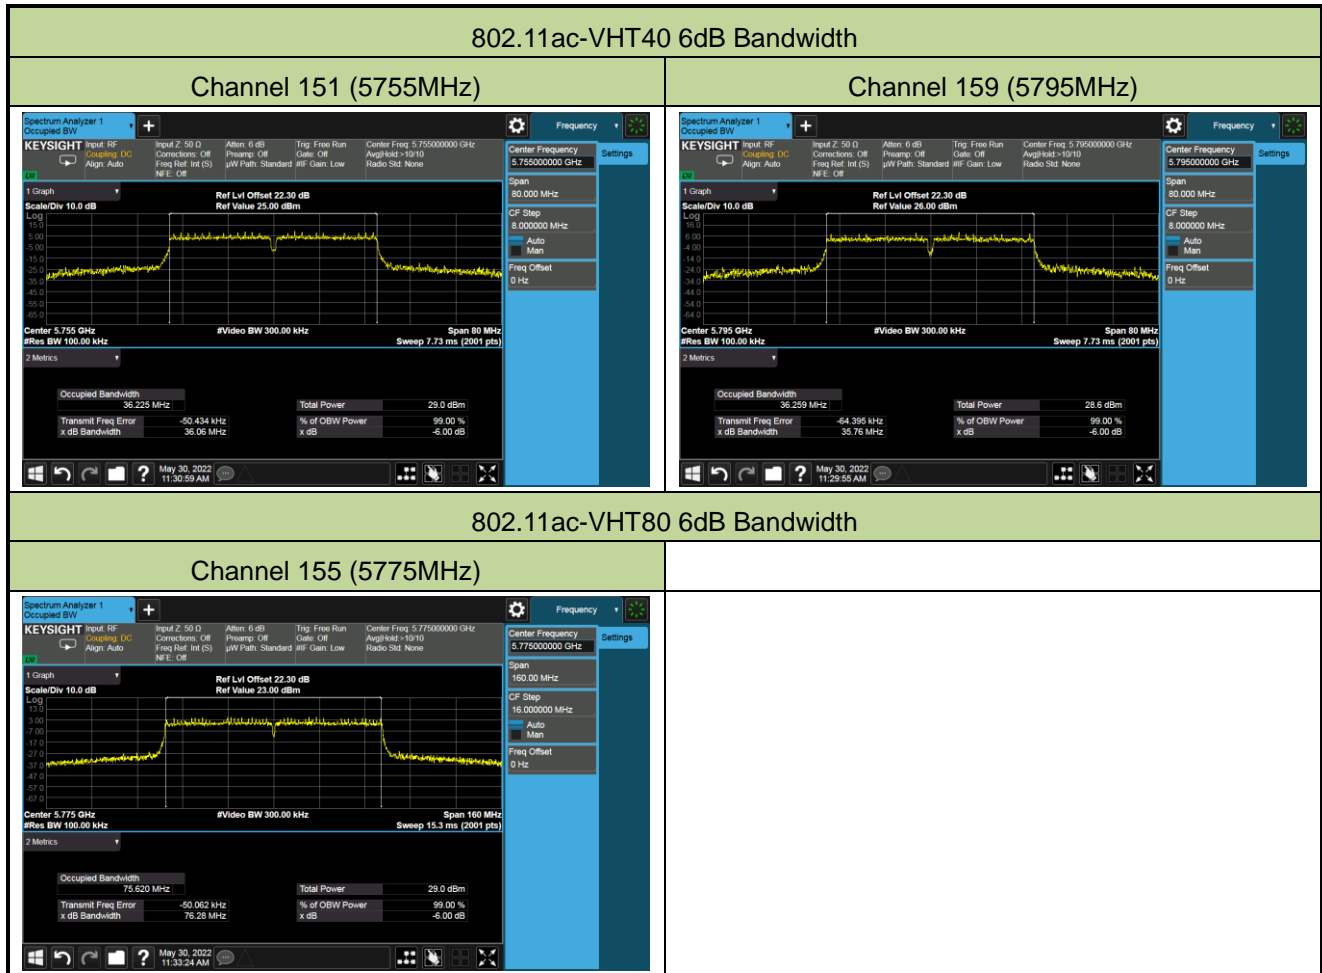


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

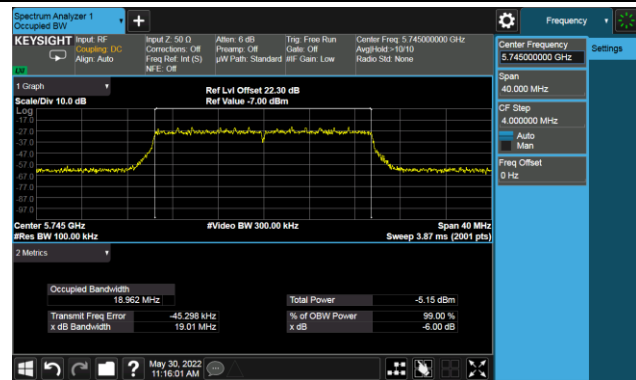

Channel 157 (5785MHz)

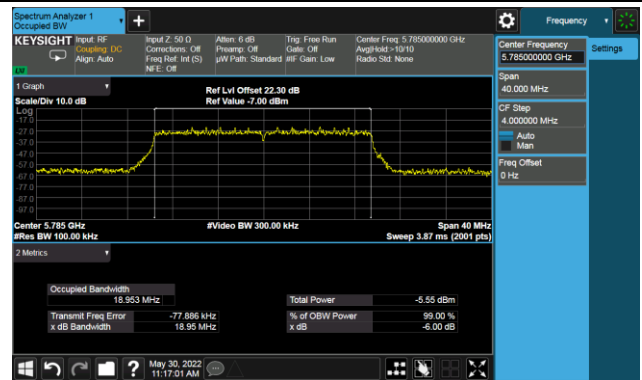


Channel 165 (5825MHz)

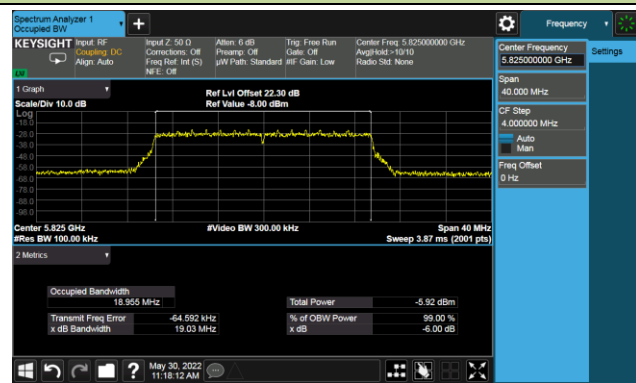



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

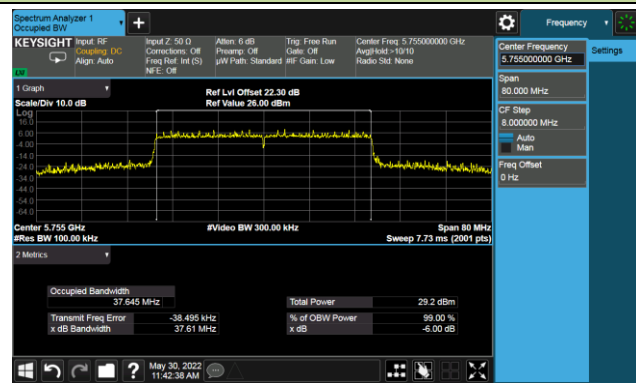

Channel 159 (5795MHz)

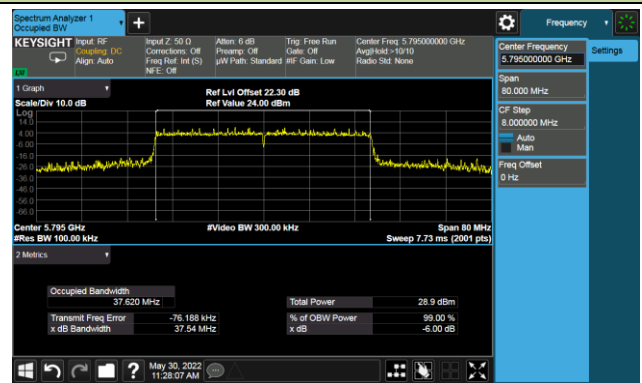

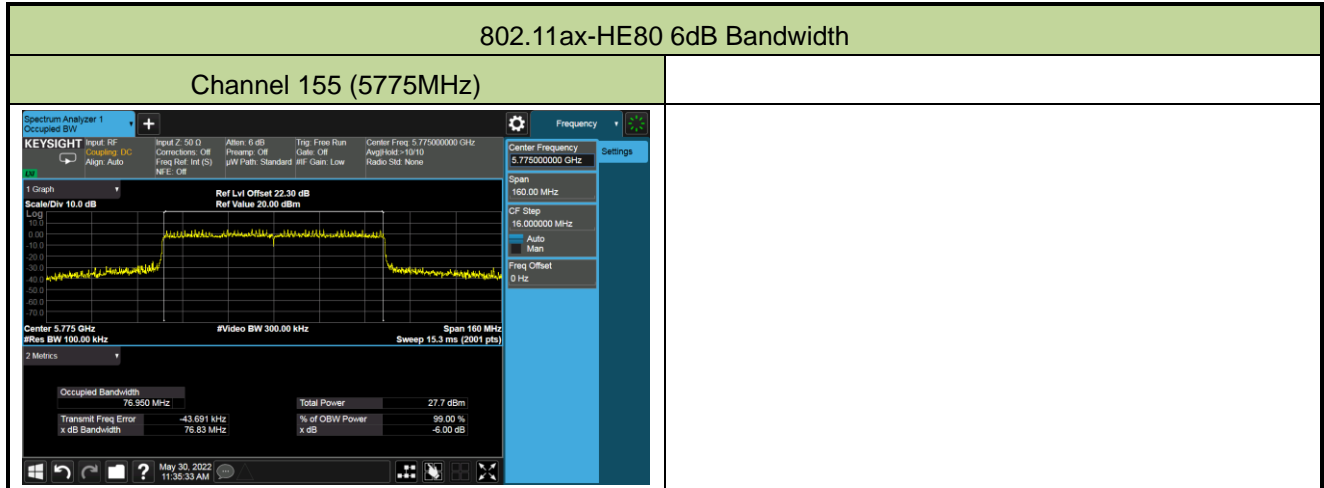

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/05/13~2022/05/19		

Test Mode	Data Rate MCS	Chan nel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11a	6Mbps	36	5180	22.11	22.03	22.43	22.01	28.17	≤ 30.00
11a	6Mbps	44	5220	22.13	22.44	22.82	22.63	28.53	≤ 30.00
11a	6Mbps	48	5240	21.79	21.93	22.24	21.95	28.00	≤ 30.00
11a	6Mbps	52	5260	15.89	16.04	16.01	15.73	21.94	≤ 23.98
11a	6Mbps	60	5300	15.65	15.91	16.02	16.08	21.94	≤ 23.98
11a	6Mbps	64	5320	15.56	15.71	15.78	15.42	21.64	≤ 23.98
11a	6Mbps	100	5500	16.01	16.33	15.82	16.29	22.14	≤ 23.98
11a	6Mbps	116	5580	16.17	16.08	15.75	15.99	22.02	≤ 23.98
11a	6Mbps	140	5700	16.11	16.05	16.09	16.27	22.15	≤ 23.98
11a	6Mbps	144	5720	16.30	16.03	15.87	16.24	22.13	≤ 22.95
11a	6Mbps	149	5745	23.34	22.91	23.18	23.12	29.16	≤ 30.00
11a	6Mbps	157	5785	22.75	22.72	22.93	23.08	28.89	≤ 30.00
11a	6Mbps	165	5825	22.74	22.69	23.10	23.01	28.91	≤ 30.00
11ac-VHT20	MCS5	36	5180	20.51	20.65	20.88	20.57	26.68	≤ 30.00
11ac-VHT20	MCS5	44	5220	22.47	22.63	23.06	22.61	28.72	≤ 30.00
11ac-VHT20	MCS5	48	5240	22.54	22.45	22.93	22.52	28.63	≤ 30.00
11ac-VHT20	MCS5	52	5260	15.01	15.46	15.38	15.12	21.27	≤ 23.98
11ac-VHT20	MCS5	60	5300	15.03	15.27	15.16	15.01	21.14	≤ 23.98
11ac-VHT20	MCS5	64	5320	14.98	15.33	15.25	15.08	21.18	≤ 23.98
11ac-VHT20	MCS5	100	5500	15.59	15.71	15.13	15.22	21.44	≤ 23.98
11ac-VHT20	MCS5	116	5580	15.26	15.20	15.06	15.37	21.24	≤ 23.98
11ac-VHT20	MCS5	140	5700	15.45	16.13	16.33	15.62	21.92	≤ 23.98
11ac-VHT20	MCS5	144	5720	16.11	16.09	15.09	15.67	21.78	≤ 22.94
11ac-VHT20	MCS5	149	5745	22.96	23.08	23.33	23.24	29.18	≤ 30.00
11ac-VHT20	MCS5	157	5785	22.83	22.79	23.14	23.31	29.04	≤ 30.00
11ac-VHT20	MCS5	165	5825	23.19	22.98	23.01	23.37	29.16	≤ 30.00

Test Mode	Data Rate MCS	Chan nel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11ac-VHT40	MCS0	38	5190	16.55	16.72	16.66	16.82	22.71	≤ 30.00
11ac-VHT40	MCS0	46	5230	22.85	23.27	23.07	23.13	29.10	≤ 30.00
11ac-VHT40	MCS0	54	5270	17.53	18.28	17.48	17.73	23.79	≤ 23.98
11ac-VHT40	MCS0	62	5310	15.22	15.85	15.64	16.17	21.75	≤ 23.98
11ac-VHT40	MCS0	102	5510	16.56	16.22	16.18	16.81	22.47	≤ 23.98
11ac-VHT40	MCS0	110	5550	17.28	17.45	17.21	17.95	23.50	≤ 23.98
11ac-VHT40	MCS0	134	5670	17.23	17.51	17.59	18.12	23.65	≤ 23.98
11ac-VHT40	MCS0	142	5710	17.21	17.49	17.52	18.10	23.61	≤ 23.98
11ac-VHT40	MCS0	151	5755	22.81	22.72	22.78	22.85	28.81	≤ 30.00
11ac-VHT40	MCS0	159	5795	22.71	23.11	22.81	22.78	28.88	≤ 30.00
11ac-VHT80	MCS0	42	5210	16.69	16.49	16.52	16.59	22.59	≤ 30.00
11ac-VHT80	MCS0	58	5290	16.57	16.54	16.38	16.74	22.58	≤ 23.98
11ac-VHT80	MCS0	106	5530	14.64	14.34	14.44	14.67	20.55	≤ 23.98
11ac-VHT80	MCS0	122	5610	17.64	17.56	17.52	17.97	23.70	≤ 23.98
11ac-VHT80	MCS0	138	5690	17.71	17.68	17.46	18.01	23.74	≤ 23.98
11ac-VHT80	MCS0	155	5775	21.77	21.84	21.92	22.11	27.93	≤ 30.00
11ac-VHT160	MCS0	50	5250	12.11	12.75	13.02	12.42	18.61	≤ 23.98
11ac-VHT160	MCS0	114	5570	11.93	11.74	11.83	12.21	17.95	≤ 23.98
11ax-HE20	MCS6	36	5180	21.06	21.04	21.28	21.15	27.15	≤ 30.00
11ax-HE20	MCS6	44	5220	23.01	23.09	23.44	23.04	29.17	≤ 30.00
11ax-HE20	MCS6	48	5240	22.83	23.02	23.32	23.12	29.10	≤ 30.00
11ax-HE20	MCS6	52	5260	16.71	17.23	16.98	16.75	22.94	≤ 23.98
11ax-HE20	MCS6	60	5300	16.58	16.95	17.08	16.88	22.90	≤ 23.98
11ax-HE20	MCS6	64	5320	16.62	16.89	16.84	16.47	22.73	≤ 23.98
11ax-HE20	MCS6	100	5500	17.09	17.54	16.98	17.49	23.30	≤ 23.98
11ax-HE20	MCS6	116	5580	17.21	17.29	16.93	17.13	23.16	≤ 23.98
11ax-HE20	MCS6	140	5700	17.13	17.33	17.08	17.43	23.27	≤ 23.98
11ax-HE20	MCS6	144	5720	16.89	16.82	16.71	16.85	22.84	≤ 22.98
11ax-HE20	MCS6	149	5745	22.81	22.94	23.24	23.37	29.12	≤ 30.00
11ax-HE20	MCS6	157	5785	22.85	22.75	22.96	23.13	28.95	≤ 30.00
11ax-HE20	MCS6	165	5825	22.96	22.85	23.21	23.25	29.09	≤ 30.00

Test Mode	Data Rate MCS	Chan nel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11ax-HE40	MCS0	38	5190	17.32	17.44	17.08	17.22	23.29	≤ 30.00
11ax-HE40	MCS0	46	5230	22.88	23.04	23.09	23.25	29.09	≤ 30.00
11ax-HE40	MCS0	54	5270	17.36	17.85	17.67	18.04	23.76	≤ 23.98
11ax-HE40	MCS0	62	5310	14.92	15.47	15.05	15.23	21.19	≤ 23.98
11ax-HE40	MCS0	102	5510	16.16	15.91	16.05	16.84	22.28	≤ 23.98
11ax-HE40	MCS0	110	5550	17.65	17.53	17.48	18.12	23.72	≤ 23.98
11ax-HE40	MCS0	134	5670	17.36	17.86	17.67	18.19	23.80	≤ 23.98
11ax-HE40	MCS0	142	5710	17.24	17.62	17.63	18.23	23.72	≤ 23.98
11ax-HE40	MCS0	151	5755	22.81	22.76	23.09	22.88	28.91	≤ 30.00
11ax-HE40	MCS0	159	5795	22.92	22.71	22.77	22.69	28.79	≤ 30.00
11ax-HE80	MCS0	42	5210	16.19	16.04	15.92	16.10	22.08	≤ 30.00
11ax-HE80	MCS0	58	5290	14.01	14.17	14.32	14.41	20.25	≤ 23.98
11ax-HE80	MCS0	106	5530	13.65	13.21	13.55	13.78	19.57	≤ 23.98
11ax-HE80	MCS0	122	5610	17.63	17.59	17.46	18.05	23.71	≤ 23.98
11ax-HE80	MCS0	138	5690	17.67	17.48	17.40	17.83	23.62	≤ 23.98
11ax-HE80	MCS0	155	5775	21.04	20.97	21.28	21.63	27.26	≤ 30.00
11ax-HE160	MCS0	50	5250	13.56	14.07	14.22	14.09	20.01	≤ 23.98
11ax-HE160	MCS0	114	5570	13.45	13.21	13.48	13.67	19.48	≤ 23.98

Note 1:

$$\text{Total Average Power (dBm)} = 10 \cdot \log \left\{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \right\}$$

Note 2: For 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + BW_{26dB} / 2)$.

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/05/19~2022/05/24		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Chan nel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/MH z)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	36	5180	10.059	9.656	9.914	9.650	94.70	16.080	16.31
11a	6Mbps	44	5220	9.707	9.831	10.177	10.103	94.70	16.216	16.31
11a	6Mbps	48	5240	9.851	9.532	10.114	9.679	94.70	16.057	16.31
11a	6Mbps	52	5260	4.010	3.831	3.746	3.350	94.70	9.998	10.31
11a	6Mbps	60	5300	3.289	3.828	3.622	3.686	94.70	9.868	10.31
11a	6Mbps	64	5320	3.668	3.708	3.639	3.453	94.70	9.875	10.31
11a	6Mbps	100	5500	3.664	3.762	3.699	3.711	94.70	9.966	10.31
11a	6Mbps	116	5580	4.015	3.831	3.383	3.718	94.70	10.000	10.31
11a	6Mbps	140	5700	3.568	3.838	3.492	4.138	94.70	10.024	10.31
11a	6Mbps	144	5720	4.012	3.807	3.547	3.589	94.70	10.000	10.31
11ac-VHT20	MCS5	36	5180	7.556	7.634	8.209	8.140	79.64	14.904	17.00
11ac-VHT20	MCS5	44	5220	9.341	9.787	9.453	9.526	79.64	16.539	17.00
11ac-VHT20	MCS5	48	5240	9.638	9.650	9.948	9.634	79.64	16.729	17.00
11ac-VHT20	MCS5	52	5260	3.295	3.778	3.696	3.726	79.64	10.637	11.00
11ac-VHT20	MCS5	60	5300	3.616	3.788	3.738	3.422	79.64	10.653	11.00
11ac-VHT20	MCS5	64	5320	3.267	3.836	3.686	3.522	79.64	10.592	11.00
11ac-VHT20	MCS5	100	5500	3.435	3.697	3.531	3.995	79.64	10.679	11.00
11ac-VHT20	MCS5	116	5580	3.904	3.821	3.392	3.287	79.64	10.618	11.00
11ac-VHT20	MCS5	140	5700	3.597	3.521	3.510	3.883	79.64	10.640	11.00
11ac-VHT20	MCS5	144	5720	3.886	3.439	3.427	3.520	79.64	10.581	11.00
11ac-VHT40	MCS0	38	5190	1.340	1.501	1.486	2.020	90.58	8.045	17.00
11ac-VHT40	MCS0	46	5230	7.932	7.812	7.802	8.034	90.58	14.346	17.00
11ac-VHT40	MCS0	54	5270	2.231	2.711	2.449	2.808	90.58	9.006	11.00
11ac-VHT40	MCS0	62	5310	0.419	0.554	0.332	0.797	90.58	6.979	11.00
11ac-VHT40	MCS0	102	5510	1.180	1.162	1.360	2.007	90.58	7.891	11.00
11ac-VHT40	MCS0	110	5550	2.440	2.173	2.059	2.558	90.58	8.762	11.00
11ac-VHT40	MCS0	134	5670	1.773	2.285	2.377	2.847	90.58	8.787	11.00
11ac-VHT40	MCS0	142	5710	2.024	2.232	2.270	2.412	90.58	8.687	11.00

Test Mode	Data Rate/ MCS	Chan nel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	Limit (dBm/M Hz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11ac-VHT80	MCS0	42	5210	-1.938	-2.005	-1.919	-1.119	84.85	5.004	17.00
11ac-VHT80	MCS0	58	5290	-3.821	-3.525	-3.579	-3.657	84.85	3.090	11.00
11ac-VHT80	MCS0	106	5530	-3.689	-3.958	-3.834	-3.411	84.85	3.016	11.00
11ac-VHT80	MCS0	122	5610	-0.412	-0.571	-0.686	-0.288	84.85	6.247	11.00
11ac-VHT80	MCS0	138	5690	-0.659	-0.637	-0.550	-0.580	84.85	6.128	11.00
11ac-VHT160	MCS0	50	5250	-8.701	-8.006	-7.930	-8.074	78.67	-1.105	11.00
11ac-VHT160	MCS0	114	5570	-8.781	-9.071	-9.031	-9.040	78.67	-1.917	11.00
11ax-HE20	MCS6	36	5180	7.826	8.055	8.494	8.580	84.47	15.003	17.00
11ax-HE20	MCS6	44	5220	9.488	9.618	10.119	9.950	84.47	16.555	17.00
11ax-HE20	MCS6	48	5240	9.822	9.702	10.206	10.054	84.47	16.704	17.00
11ax-HE20	MCS6	52	5260	3.748	3.909	4.228	3.560	84.47	10.622	11.00
11ax-HE20	MCS6	60	5300	4.026	3.986	3.885	3.484	84.47	10.604	11.00
11ax-HE20	MCS6	64	5320	3.628	3.919	3.832	3.617	84.47	10.505	11.00
11ax-HE20	MCS6	100	5500	3.948	4.083	3.858	3.917	84.47	10.706	11.00
11ax-HE20	MCS6	116	5580	4.131	4.057	3.945	3.776	84.47	10.733	11.00
11ax-HE20	MCS6	140	5700	3.933	4.098	3.841	4.359	84.47	10.816	11.00
11ax-HE20	MCS6	144	5720	4.203	4.250	4.071	4.051	84.47	10.898	11.00
11ax-HE40	MCS0	38	5190	1.539	1.745	1.566	2.162	89.53	8.261	17.00
11ax-HE40	MCS0	46	5230	7.587	7.738	7.567	7.652	89.53	14.137	17.00
11ax-HE40	MCS0	54	5270	2.139	2.782	2.449	2.977	89.53	9.099	11.00
11ax-HE40	MCS0	62	5310	-0.204	0.039	-0.249	0.103	89.53	6.426	11.00
11ax-HE40	MCS0	102	5510	0.734	0.522	0.565	1.395	89.53	7.319	11.00
11ax-HE40	MCS0	110	5550	2.664	2.305	2.290	2.570	89.53	8.961	11.00
11ax-HE40	MCS0	134	5670	1.834	2.056	2.004	2.629	89.53	8.642	11.00
11ax-HE40	MCS0	142	5710	1.977	2.252	1.968	2.158	89.53	8.591	11.00
11ax-HE80	MCS0	42	5210	-1.838	-2.140	-2.282	-1.627	84.62	4.782	17.00
11ax-HE80	MCS0	58	5290	-3.943	-3.872	-3.842	-3.774	84.62	2.889	11.00
11ax-HE80	MCS0	106	5530	-5.215	-5.215	-4.772	-4.713	84.62	1.774	11.00
11ax-HE80	MCS0	122	5610	-0.396	-0.524	-0.877	-0.580	84.62	6.155	11.00
11ax-HE80	MCS0	138	5690	-0.808	-1.027	-0.971	-0.492	84.62	5.926	11.00
11ax-HE160	MCS0	50	5250	-6.542	-6.578	-6.178	-6.640	84.62	0.265	11.00
11ax-HE160	MCS0	114	5570	-7.491	-7.587	-7.533	-7.213	84.62	-0.708	11.00

Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)} + 10^{(\text{Ant 3 AVPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.

Note 2:

For Band - NII-1 at 802.11a mode, the PSD limit (dBm/MHz) = $17 - (6.69-6) = 16.31 \text{ dBm/MHz}$

For Band - NII-2a / -2c at 802.11a mode, the PSD limit (dBm/MHz) = $11 - (6.69-6) = 10.31 \text{ dBm/MHz}$

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/05/27~2022/05/30		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Chan nel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)				Duty Cycle (%)	Total PSD (dBm/ 510KHz)	Limit (dBm/ 500KHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	149	5745	7.521	7.703	7.959	8.147	94.70	14.096	29.31
11a	6Mbps	157	5785	7.623	7.612	7.732	7.758	94.70	13.939	29.31
11a	6Mbps	165	5825	7.514	7.519	7.827	8.070	94.70	13.996	29.31
11ac-VHT20	MCS5	149	5745	7.673	7.577	8.012	7.983	79.64	14.825	30.00
11ac-VHT20	MCS5	157	5785	7.295	7.732	7.686	8.053	79.64	14.709	30.00
11ac-VHT20	MCS5	165	5825	7.622	7.670	7.783	8.024	79.64	14.787	30.00
11ac-VHT40	MCS0	151	5755	4.940	4.725	4.914	4.730	90.58	11.279	30.00
11ac-VHT40	MCS0	159	5795	4.737	4.866	4.988	4.964	90.58	11.340	30.00
11ac-VHT80	MCS0	155	5775	1.194	1.361	1.495	1.801	84.85	8.203	30.00
11ax-HE20	MCS6	149	5745	6.994	7.269	7.719	7.780	84.47	14.206	30.00
11ax-HE20	MCS6	157	5785	7.065	6.815	7.492	7.512	84.47	13.985	30.00
11ax-HE20	MCS6	165	5825	7.024	7.231	7.323	7.706	84.47	14.082	30.00
11ax-HE40	MCS0	151	5755	5.144	5.014	5.061	4.719	89.53	11.488	30.00
11ax-HE40	MCS0	159	5795	4.483	4.595	4.776	4.862	89.53	11.182	30.00
11ax-HE80	MCS0	155	5775	-0.063	-0.142	0.038	0.659	84.62	6.881	30.00

Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)} + 10^{(\text{Ant 3 AVPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.


When EUT duty cycle \geq 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)} + 10^{(\text{Ant 3 AVPSD}/10)}\}$.

Note 2:

For Band - NII-3 at 802.11a mode, the PSD limit (dBm/MHz) = $30 - (6.69-6) = 29.31\text{dBm/MHz}$

802.11a Power Spectral Density- Ant 0


Channel 36 (5180MHz)

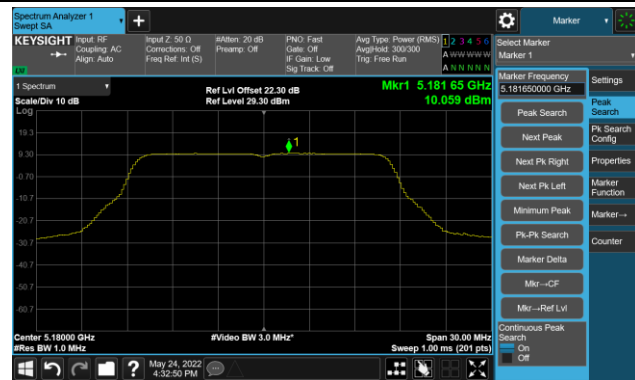

Channel 44 (5220MHz)




Channel 48 (5240MHz)

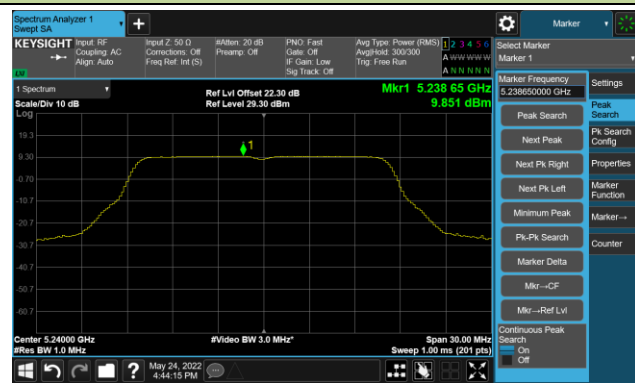

Channel 52 (5260MHz)




Channel 60 (5300MHz)

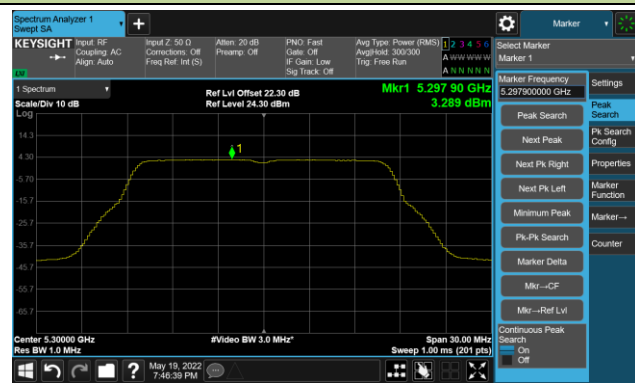

Channel 64 (5320MHz)



Channel 100 (5500MHz)

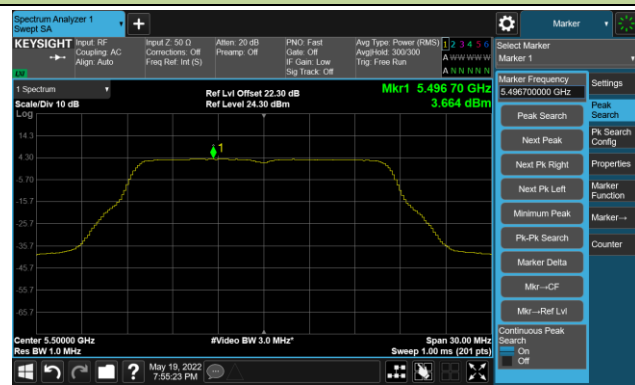


Channel 116 (5580MHz)



802.11a Power Spectral Density- Ant 0

Channel 140 (5700MHz)

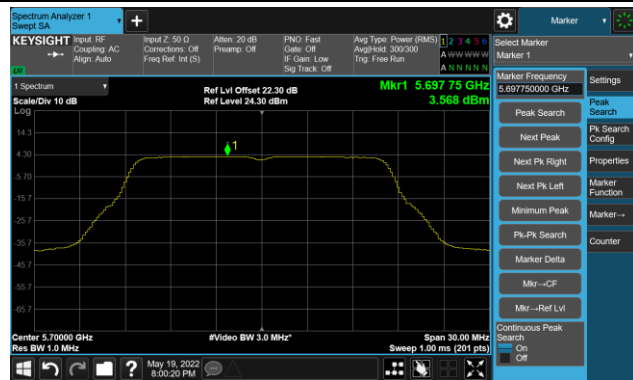

Channel 144(5720MHz)




Channel 149 (5745MHz)



Channel 157 (5785MHz)




Channel 165 (5825MHz)

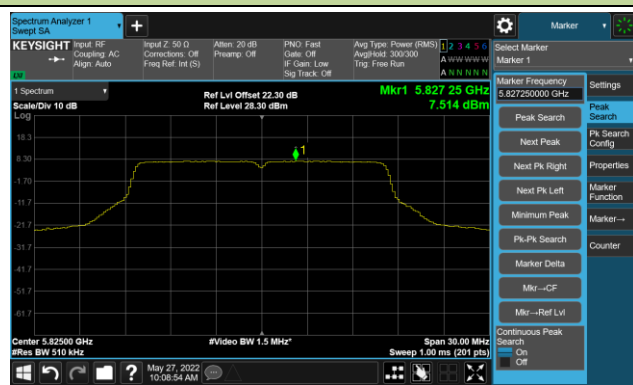

802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

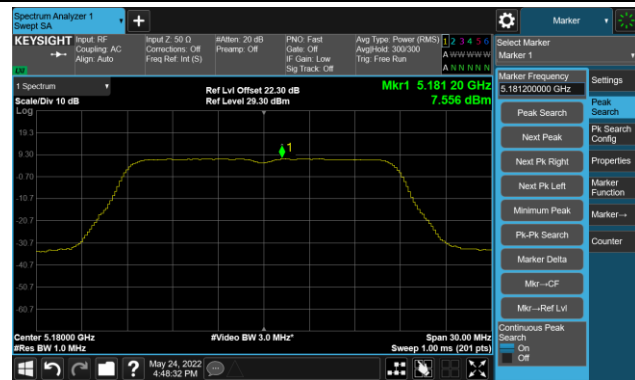


Channel 44 (5220MHz)



Channel 48 (5240MHz)

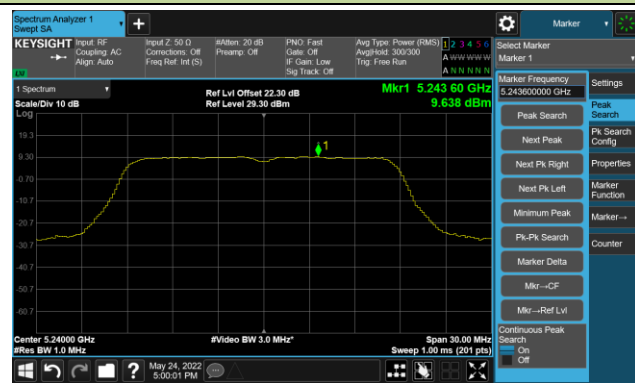

Channel 52 (5260MHz)

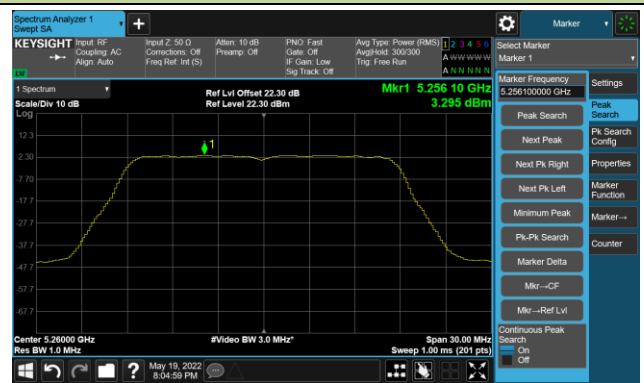


Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)

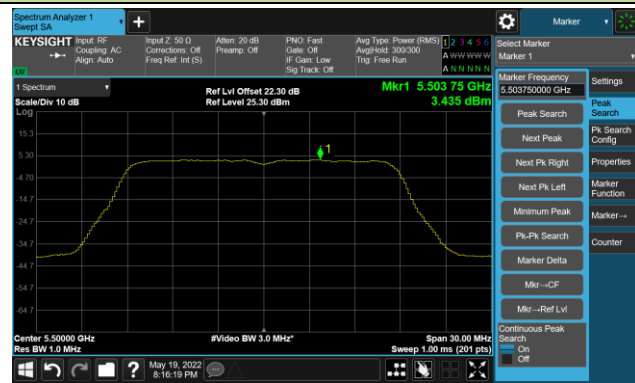


Channel 116 (5580MHz)



802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

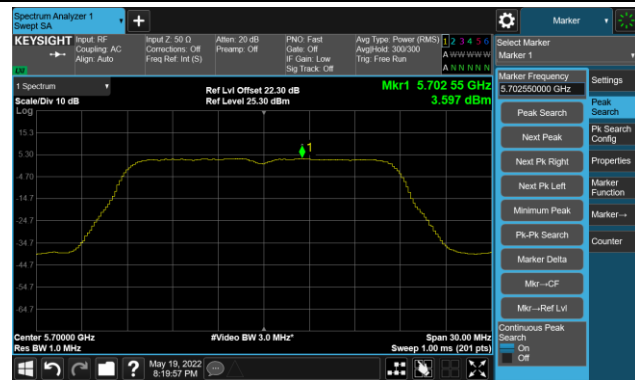

Channel 144(5720MHz)



Channel 149 (5745MHz)

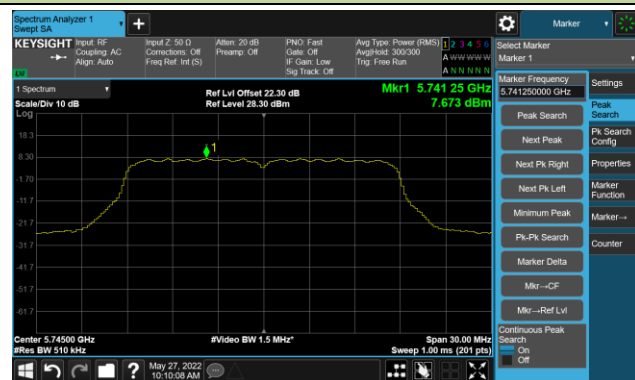

Channel 157 (5785MHz)




Channel 165 (5825MHz)




802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)

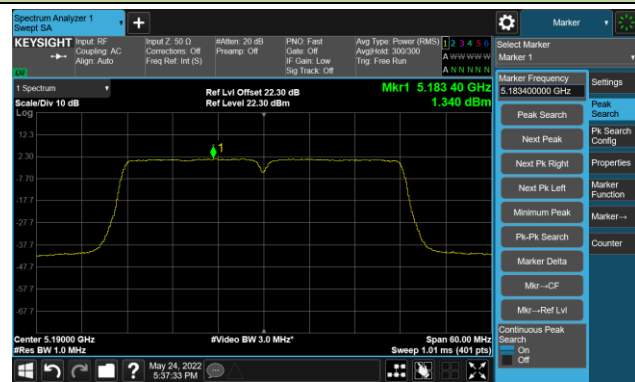

Channel 46 (5230MHz)

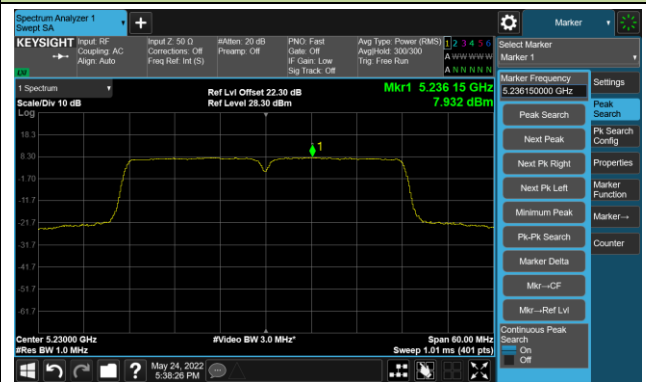


Channel 54 (5270MHz)

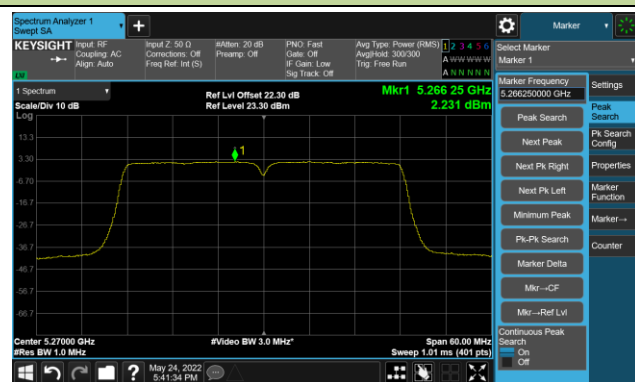

Channel 62 (5310MHz)




Channel 102 (5510MHz)

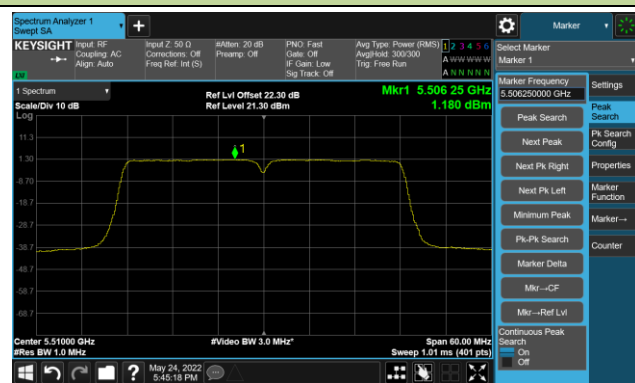

Channel 110 (5550MHz)



Channel 134 (5670MHz)

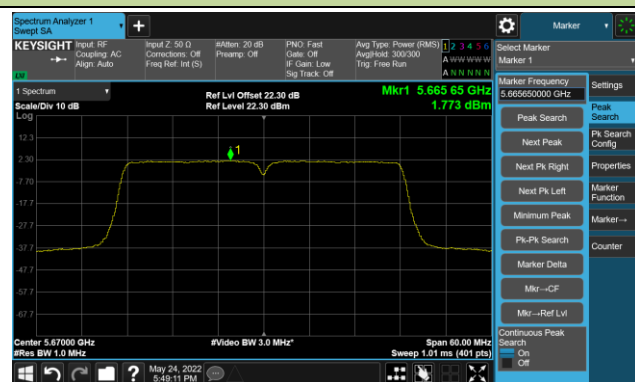


Channel 142(5710MHz)



802.11ac-VHT40 Power Spectral Density- Ant 0

Channel 151 (5755MHz)

Channel 159 (5795MHz)

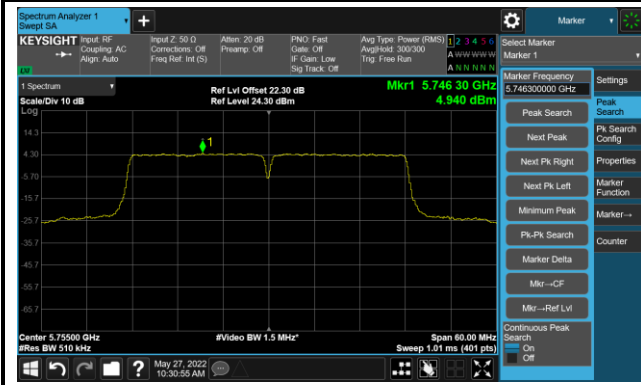

802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)



Channel 58 (5290MHz)




Channel 106 (5530MHz)

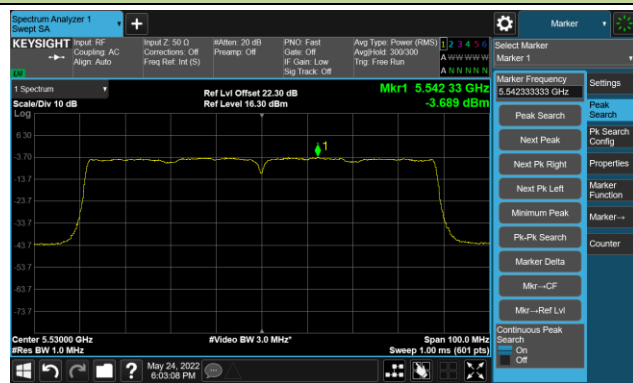

Channel 122 (5610MHz)



Channel 138 (5690MHz)

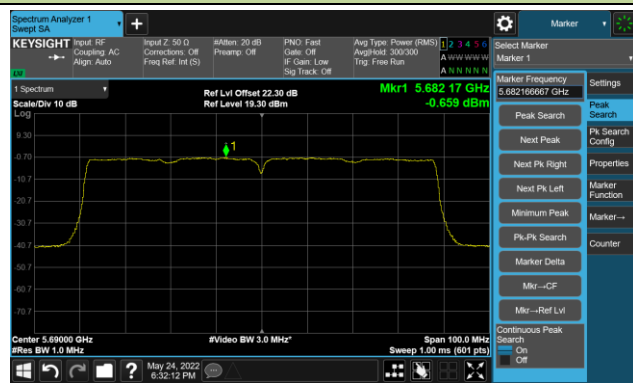


Channel 155 (5775MHz)




802.11ac-VHT160 Power Spectral Density- Ant 0

Channel 50 (5250MHz)

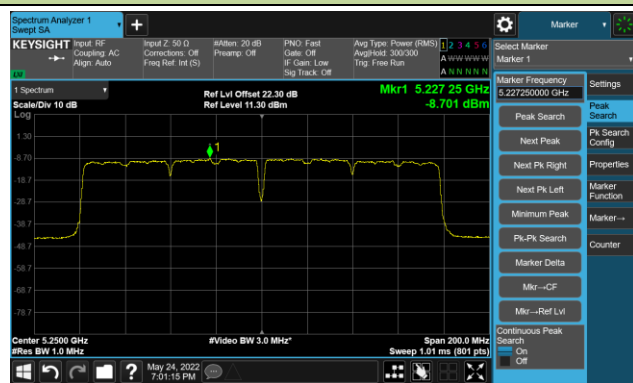

Channel 114 (5570MHz)

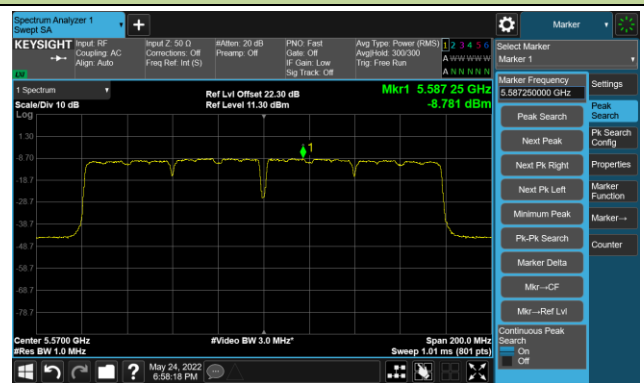

802.11ax-HE20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)

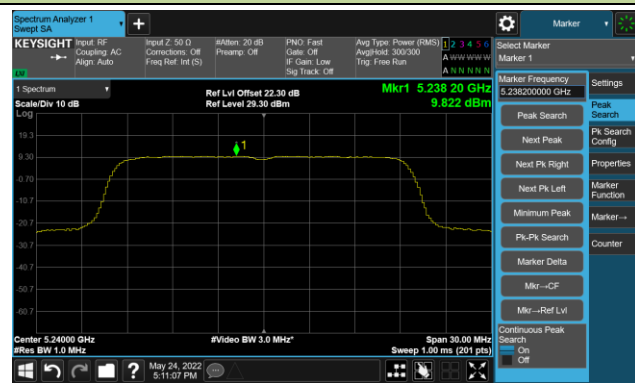


Channel 52 (5260MHz)



Channel 60 (5300MHz)

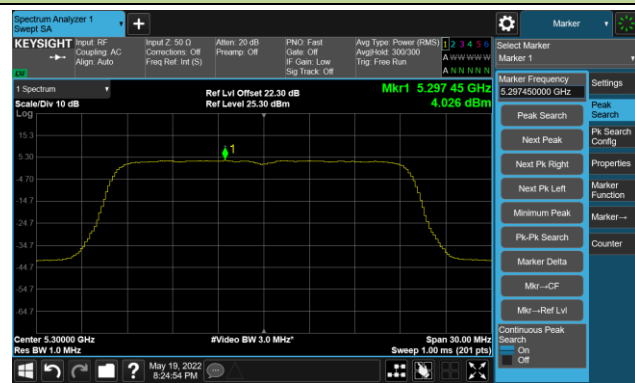

Channel 64 (5320MHz)

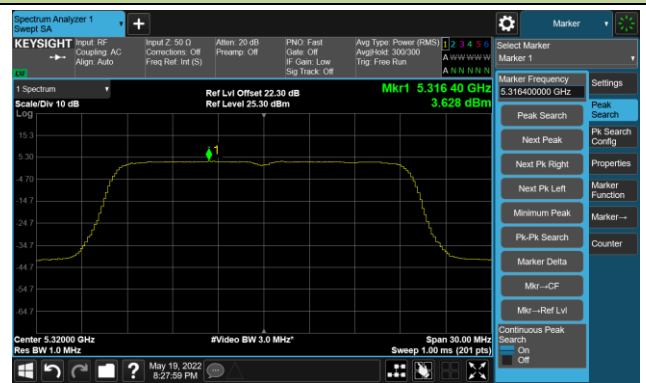

Channel 100 (5500MHz)




Channel 116 (5580MHz)



802.11ax-HE20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

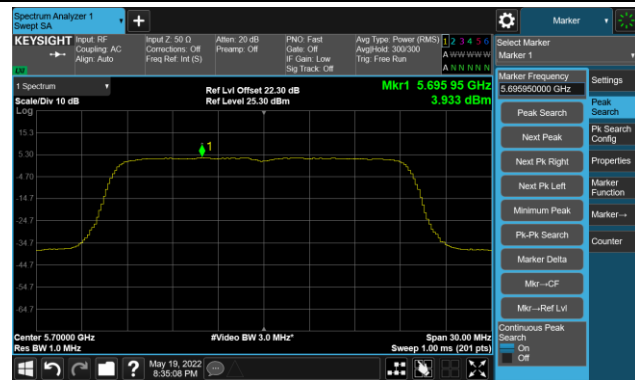

Channel 144(5720MHz)



Channel 149 (5745MHz)

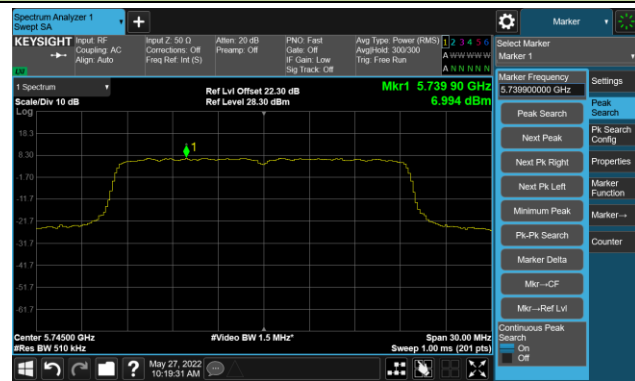

Channel 157 (5785MHz)



Channel 165 (5825MHz)

