



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

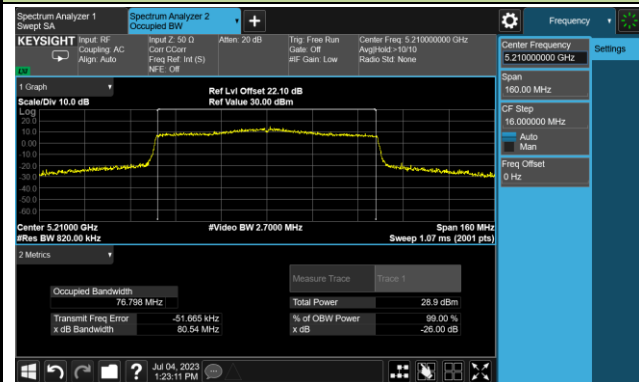


Channel 58 (5290MHz)

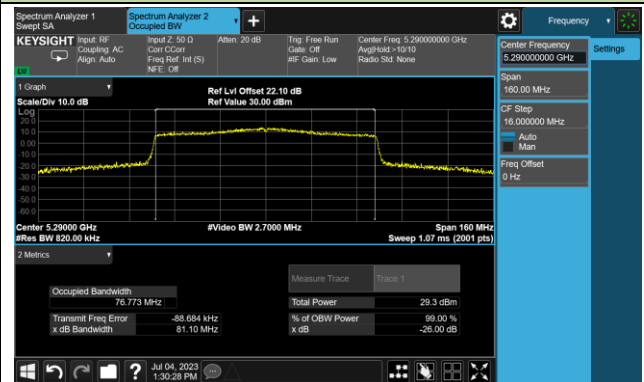


Channel 106 (5530MHz)

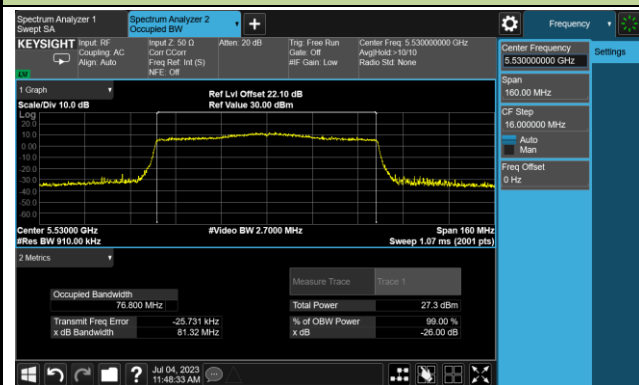


Channel 122 (5610MHz)

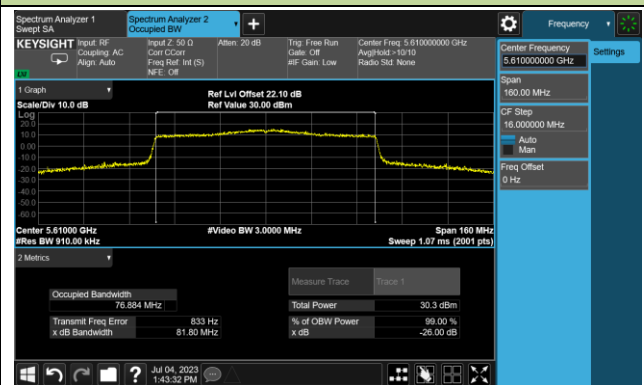


Channel 138 (5690MHz)

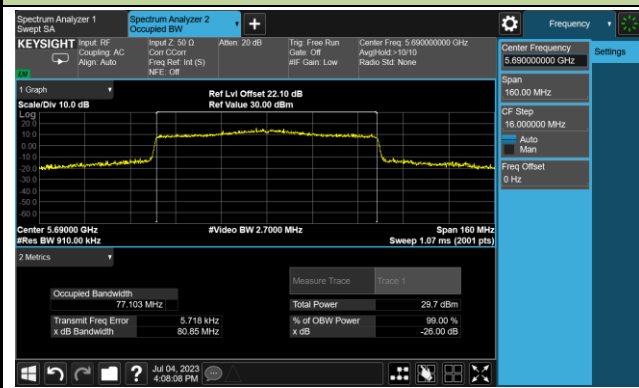

Channel 155 (5775MHz)

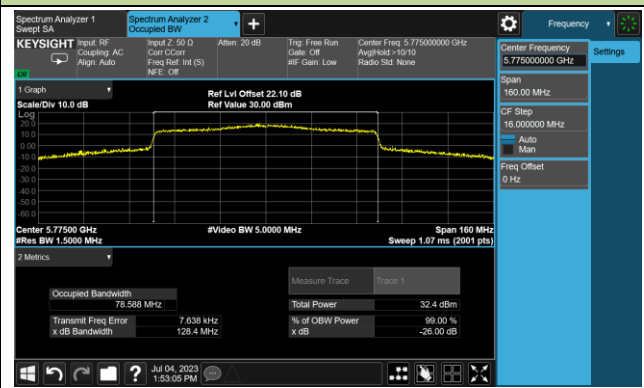

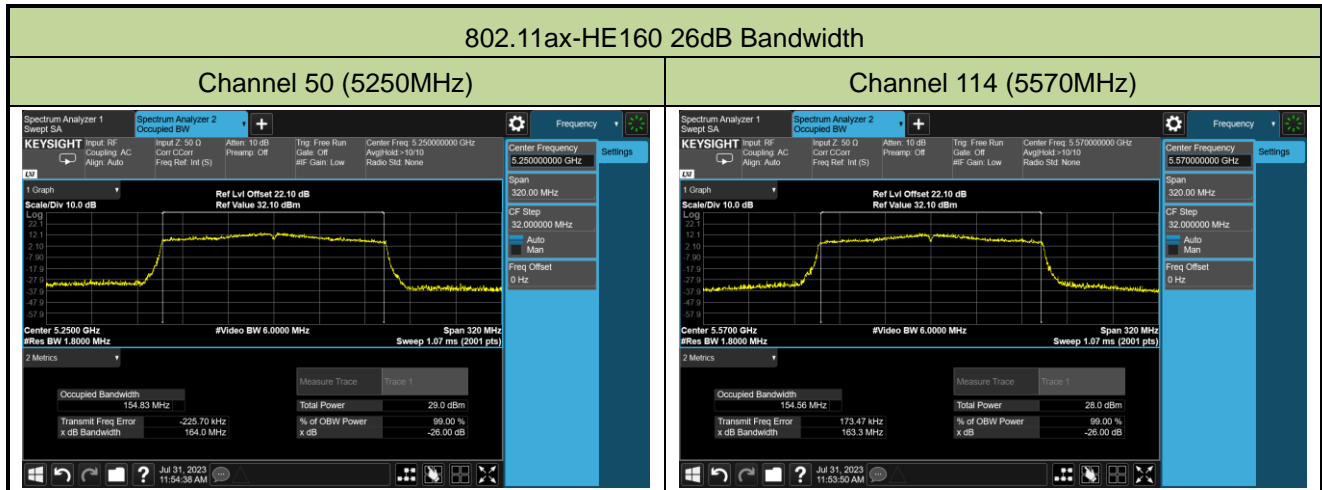


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-07-31		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	18Mbps	149	5745	15.14	≥ 0.5
11a	18Mbps	157	5785	15.10	≥ 0.5
11a	18Mbps	165	5825	15.09	≥ 0.5
11ac-VHT20	MCS2	149	5745	17.00	≥ 0.5
11ac-VHT20	MCS2	157	5785	14.74	≥ 0.5
11ac-VHT20	MCS2	165	5825	17.57	≥ 0.5
11ac-VHT40	MCS5	151	5755	35.11	≥ 0.5
11ac-VHT40	MCS5	159	5795	34.12	≥ 0.5
11ac-VHT80	MCS2	155	5775	76.55	≥ 0.5
11ax-HE20	MCS2	149	5745	12.85	≥ 0.5
11ax-HE20	MCS2	157	5785	16.52	≥ 0.5
11ax-HE20	MCS2	165	5825	18.33	≥ 0.5
11ax-HE40	MCS2	151	5755	33.26	≥ 0.5
11ax-HE40	MCS2	159	5795	34.65	≥ 0.5
11ax-HE80	MCS3	155	5775	77.57	≥ 0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

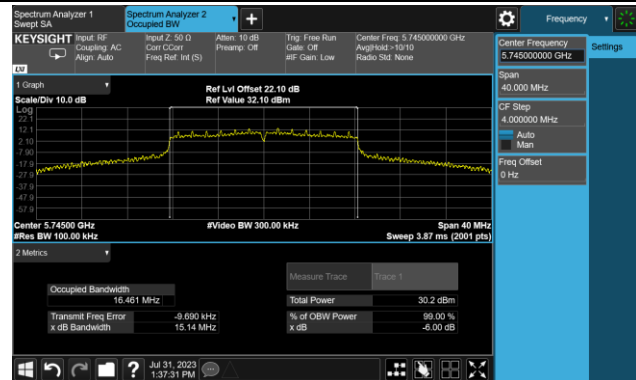

Channel 157 (5785MHz)

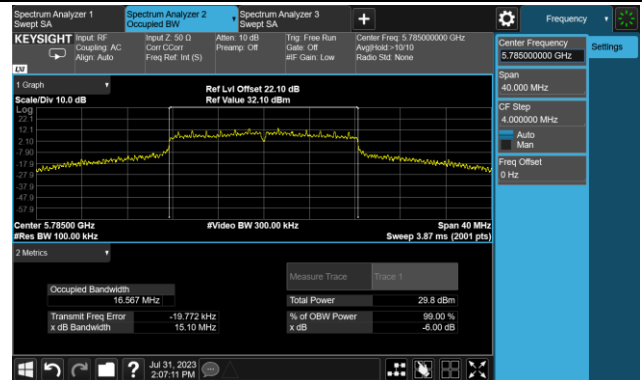


Channel 165 (5825MHz)

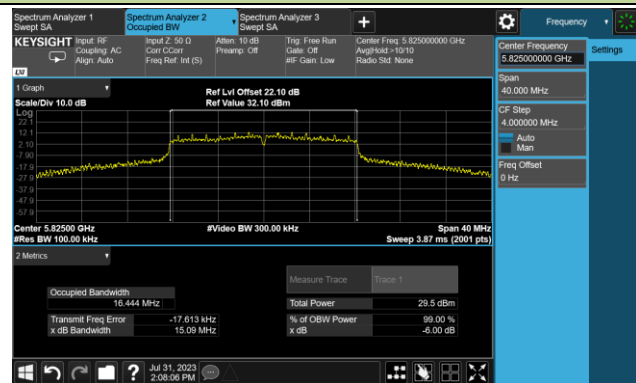


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

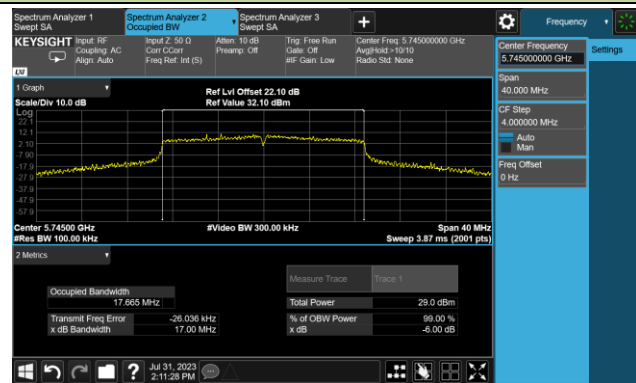

Channel 157 (5785MHz)

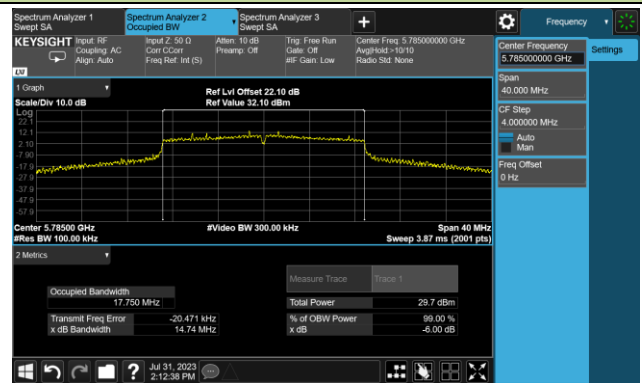


Channel 165 (5825MHz)

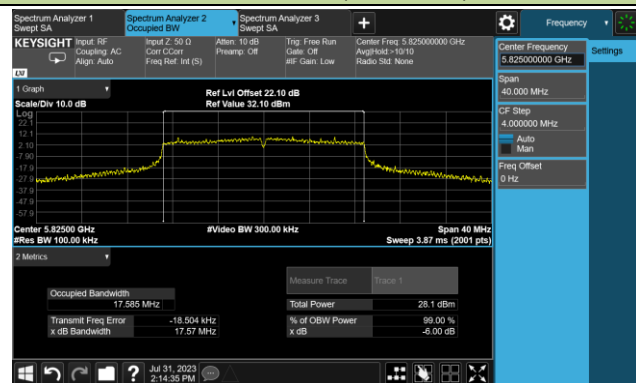


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

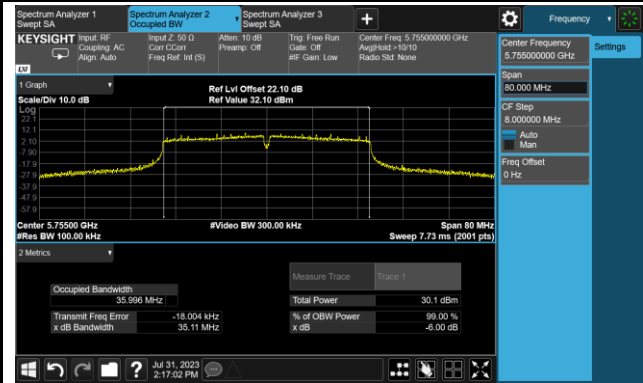


Channel 159 (5795MHz)

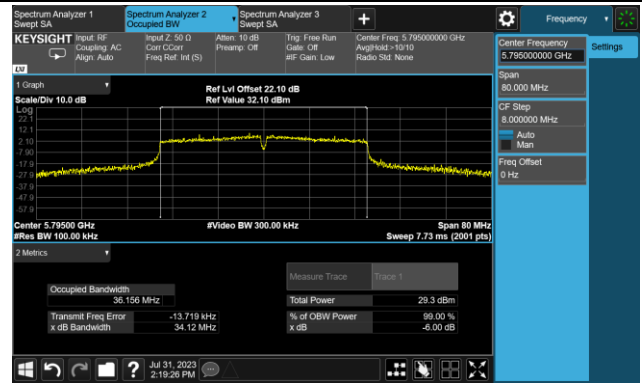


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

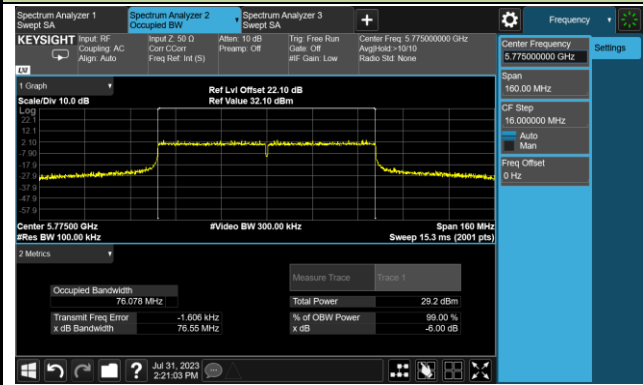


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

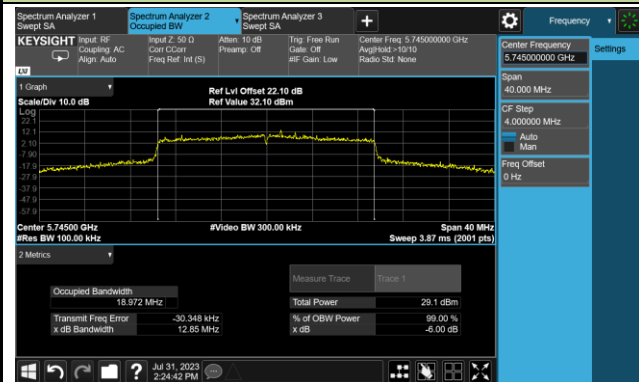

Channel 157 (5785MHz)

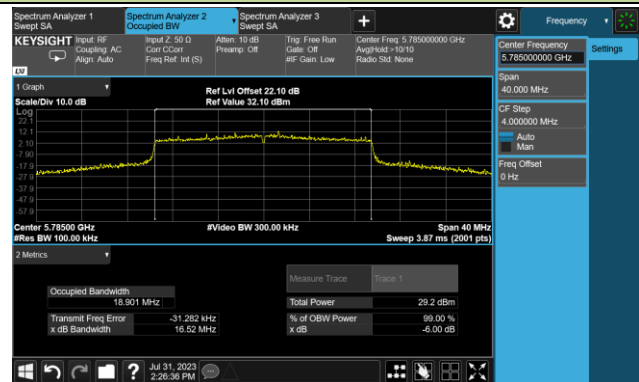


Channel 165 (5825MHz)

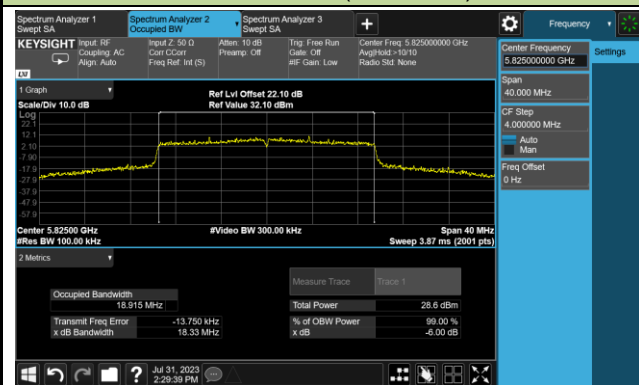



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

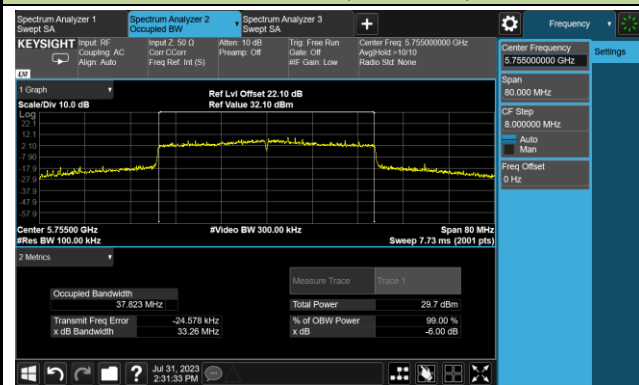

Channel 159 (5795MHz)

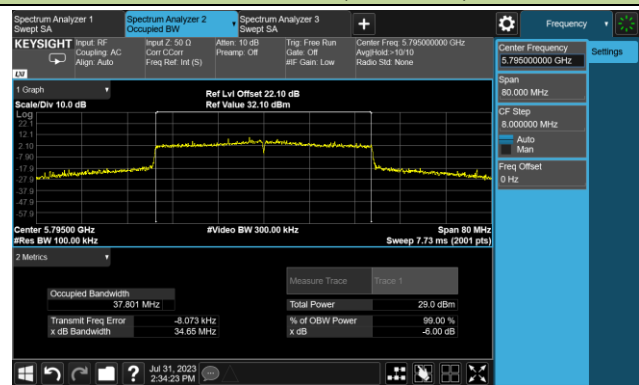

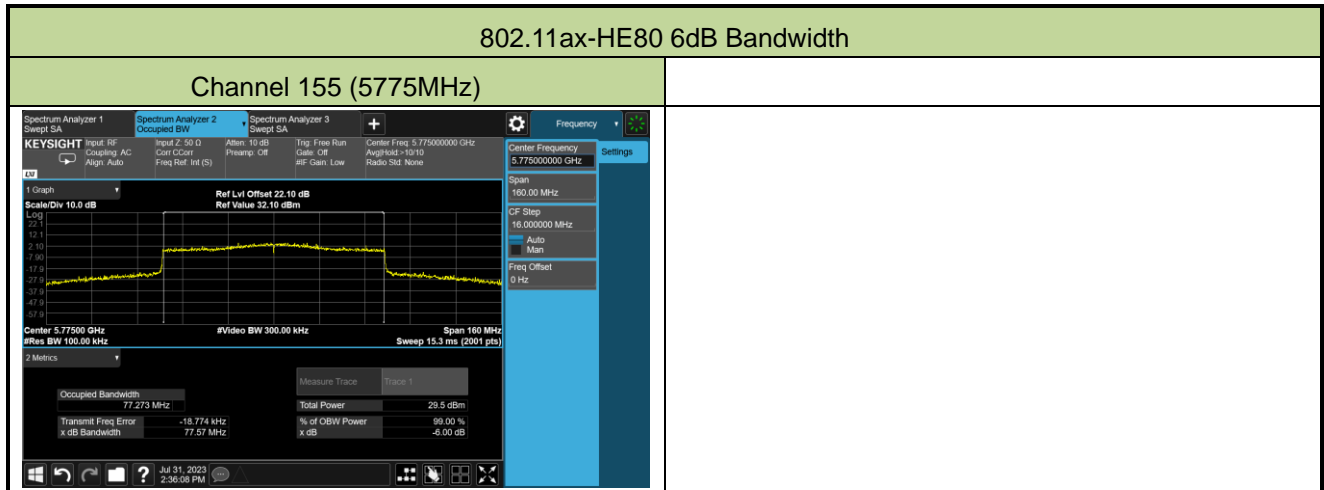

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-06-29~2023-07-15		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11a	18Mbps	36	5180	21.42	20.98	24.22	≤ 30.00
11a	18Mbps	44	5220	23.09	22.02	25.60	≤ 30.00
11a	18Mbps	48	5240	23.29	21.90	25.66	≤ 30.00
11a	18Mbps	52	5260	17.39	15.69	19.63	≤ 23.61
11a	18Mbps	60	5300	17.28	15.58	19.52	≤ 23.61
11a	18Mbps	64	5320	17.44	15.85	19.73	≤ 23.61
11a	18Mbps	100	5500	17.06	16.39	19.75	≤ 23.61
11a	18Mbps	116	5580	16.92	16.31	19.64	≤ 23.61
11a	18Mbps	140	5700	17.60	16.41	20.06	≤ 23.61
11a	18Mbps	144	5720	17.46	16.33	19.94	≤ 22.54
11a	18Mbps	149	5745	23.82	23.48	26.66	≤ 30.00
11a	18Mbps	157	5785	24.86	24.40	27.65	≤ 30.00
11a	18Mbps	165	5825	23.26	23.51	26.40	≤ 30.00
11ac-VHT20	MCS2	36	5180	22.75	21.91	25.36	≤ 30.00
11ac-VHT20	MCS2	44	5220	23.50	24.13	26.84	≤ 30.00
11ac-VHT20	MCS2	48	5240	23.30	23.53	26.43	≤ 30.00
11ac-VHT20	MCS2	52	5260	19.18	17.28	21.34	≤ 23.86
11ac-VHT20	MCS2	60	5300	18.86	17.29	21.16	≤ 23.86
11ac-VHT20	MCS2	64	5320	19.05	17.43	21.33	≤ 23.86
11ac-VHT20	MCS2	100	5500	18.76	18.17	21.49	≤ 23.86
11ac-VHT20	MCS2	116	5580	18.71	17.99	21.38	≤ 23.86
11ac-VHT20	MCS2	140	5700	18.80	17.58	21.24	≤ 23.86
11ac-VHT20	MCS2	144	5720	19.20	17.96	21.63	≤ 22.67
11ac-VHT20	MCS2	149	5745	23.10	22.71	25.92	≤ 30.00
11ac-VHT20	MCS2	157	5785	24.80	24.37	27.60	≤ 30.00
11ac-VHT20	MCS2	165	5825	22.65	22.69	25.68	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS5	38	5190	19.81	18.96	22.42	≤ 30.00
11ac-VHT40	MCS5	46	5230	23.31	21.83	25.64	≤ 30.00
11ac-VHT40	MCS5	54	5270	21.29	19.87	23.65	≤ 23.98
11ac-VHT40	MCS5	62	5310	21.06	19.45	23.34	≤ 23.98
11ac-VHT40	MCS5	102	5510	18.11	18.77	21.46	≤ 23.98
11ac-VHT40	MCS5	110	5550	20.69	20.78	23.75	≤ 23.98
11ac-VHT40	MCS5	134	5670	21.13	19.92	23.58	≤ 23.98
11ac-VHT40	MCS5	142	5710	21.12	20.20	23.69	≤ 23.98
11ac-VHT40	MCS5	151	5755	23.28	22.78	26.05	≤ 30.00
11ac-VHT40	MCS5	159	5795	24.05	23.76	26.92	≤ 30.00
11ac-VHT80	MCS2	42	5210	20.08	19.17	22.66	≤ 30.00
11ac-VHT80	MCS2	58	5290	20.08	19.11	22.63	≤ 23.98
11ac-VHT80	MCS2	106	5530	18.42	18.18	21.31	≤ 23.98
11ac-VHT80	MCS2	122	5610	20.76	20.43	23.61	≤ 23.98
11ac-VHT80	MCS2	138	5690	21.22	20.33	23.81	≤ 23.98
11ac-VHT80	MCS2	155	5775	21.48	20.91	24.21	≤ 30.00
11ac-VHT160	MCS0	50	5250	19.75	18.25	22.07	≤ 23.98
11ac-VHT160	MCS0	114	5570	18.54	18.25	21.41	≤ 23.98
11ax-HE20	MCS2	36	5180	21.66	21.02	24.36	≤ 30.00
11ax-HE20	MCS2	44	5220	23.28	23.62	26.46	≤ 30.00
11ax-HE20	MCS2	48	5240	23.21	23.46	26.35	≤ 30.00
11ax-HE20	MCS2	52	5260	19.38	17.55	21.57	≤ 23.98
11ax-HE20	MCS2	60	5300	19.09	17.49	21.37	≤ 23.98
11ax-HE20	MCS2	64	5320	18.80	17.17	21.07	≤ 23.98
11ax-HE20	MCS2	100	5500	18.59	17.72	21.19	≤ 23.98
11ax-HE20	MCS2	116	5580	18.93	18.25	21.61	≤ 23.98
11ax-HE20	MCS2	140	5700	19.01	17.75	21.44	≤ 23.98
11ax-HE20	MCS2	144	5720	18.80	17.72	21.30	≤ 22.86
11ax-HE20	MCS2	149	5745	22.77	22.48	25.64	≤ 30.00
11ax-HE20	MCS2	157	5785	22.74	22.67	25.72	≤ 30.00
11ax-HE20	MCS2	165	5825	22.74	22.87	25.82	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS2	38	5190	20.73	19.81	23.30	≤ 30.00
11ax-HE40	MCS2	46	5230	22.91	21.60	25.31	≤ 30.00
11ax-HE40	MCS2	54	5270	20.98	19.76	23.42	≤ 23.98
11ax-HE40	MCS2	62	5310	20.77	19.22	23.07	≤ 23.98
11ax-HE40	MCS2	102	5510	18.61	18.08	21.36	≤ 23.98
11ax-HE40	MCS2	110	5550	18.68	19.33	22.03	≤ 23.98
11ax-HE40	MCS2	134	5670	20.54	19.48	23.05	≤ 23.98
11ax-HE40	MCS2	142	5710	20.93	20.02	23.51	≤ 23.98
11ax-HE40	MCS2	151	5755	22.88	22.32	25.62	≤ 30.00
11ax-HE40	MCS2	159	5795	22.98	22.80	25.90	≤ 30.00
11ax-HE80	MCS3	42	5210	19.55	18.64	22.13	≤ 30.00
11ax-HE80	MCS3	58	5290	19.89	18.74	22.36	≤ 23.98
11ax-HE80	MCS3	106	5530	18.53	18.06	21.31	≤ 23.98
11ax-HE80	MCS3	122	5610	20.78	20.86	23.83	≤ 23.98
11ax-HE80	MCS3	138	5690	21.28	20.25	23.81	≤ 23.98
11ax-HE80	MCS3	155	5775	22.92	22.51	25.73	≤ 30.00
11ax-HE160	MCS0	50	5250	20.12	18.59	22.43	≤ 23.98
11ax-HE160	MCS0	114	5570	18.82	18.51	21.68	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2:

For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.22) = 23.61 < 23.98$ dBm

802.11ac-VHT20: $11 + 10 \log_{10} (19.31) = 23.86 < 23.98$ dBm

802.11ax-HE20: $11 + 10 \log_{10} (20.43) = 24.14 > 23.98$ dBm

802.11ac-VHT40/ac-VHT80/ac-VHT160/ax-HE40/ax-HE80/ax-HE160: $11 + 10 \log_{10} B > 23.98$ dBm

Note 3: For straddle channel, the conducted power limit is as below.

For 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + 26 \text{dBc} / 2)$.

802.11a CH144: $11 + 10 \log_{10} (B) = 22.54$ dBm, $B = 18.49 / 2 + 5 = 14.245$ MHz.

802.11ac-VHT20 CH144: $11 + 10 \log_{10} (B) = 22.67$ dBm, $B = 19.40 / 2 + 5 = 14.70$ MHz.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) = 22.86$ dBm, $B = 20.67 / 2 + 5 = 15.335$ MHz.

802.11ac-VHT40/ac-VHT80/ac-VHT160/ax-HE40/ax-HE80/ax-HE160: $11 + 10 \log_{10} B > 23.98$ dBm.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-06-29~2023-07-15		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	18Mbps	36	5180	11.275	10.472	98.75	13.902	15.86
11a	18Mbps	44	5220	12.814	11.841	98.75	15.365	15.86
11a	18Mbps	48	5240	12.705	11.434	98.75	15.126	15.86
11a	18Mbps	52	5260	7.097	5.820	98.75	9.516	9.86
11a	18Mbps	60	5300	7.095	5.411	98.75	9.344	9.86
11a	18Mbps	64	5320	7.195	5.766	98.75	9.549	9.86
11a	18Mbps	100	5500	6.320	5.952	98.75	9.150	9.67
11a	18Mbps	116	5580	6.569	6.187	98.75	9.392	9.67
11a	18Mbps	140	5700	6.850	6.103	98.75	9.503	9.67
11a	18Mbps	144	5720	6.747	5.995	98.75	9.398	9.67
11ac-VHT20	MCS2	36	5180	11.675	10.932	97.00	14.462	17.00
11ac-VHT20	MCS2	44	5220	12.419	11.449	97.00	15.104	17.00
11ac-VHT20	MCS2	48	5240	12.807	11.489	97.00	15.340	17.00
11ac-VHT20	MCS2	52	5260	8.206	6.675	97.00	10.650	11.00
11ac-VHT20	MCS2	60	5300	8.054	6.523	97.00	10.498	11.00
11ac-VHT20	MCS2	64	5320	8.118	6.716	97.00	10.616	11.00
11ac-VHT20	MCS2	100	5500	7.987	7.330	97.00	10.813	11.00
11ac-VHT20	MCS2	116	5580	7.468	7.174	97.00	10.466	11.00
11ac-VHT20	MCS2	140	5700	7.979	6.981	97.00	10.651	11.00
11ac-VHT20	MCS2	144	5720	8.001	7.048	97.00	10.693	11.00
11ac-VHT40	MCS0	38	5190	6.246	5.310	98.34	8.813	17.00
11ac-VHT40	MCS0	46	5230	9.912	8.359	98.34	12.215	17.00
11ac-VHT40	MCS0	54	5270	7.953	6.479	98.34	10.289	11.00
11ac-VHT40	MCS0	62	5310	7.698	6.180	98.34	10.015	11.00
11ac-VHT40	MCS0	102	5510	5.454	4.843	98.34	8.170	11.00
11ac-VHT40	MCS0	110	5550	7.077	7.029	98.34	10.063	11.00
11ac-VHT40	MCS0	134	5670	7.406	6.370	98.34	9.929	11.00
11ac-VHT40	MCS0	142	5710	7.452	6.558	98.34	10.038	11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS5	42	5210	1.801	0.587	94.06	4.513	17.00
11ac-VHT80	MCS5	58	5290	2.220	1.049	94.06	4.950	11.00
11ac-VHT80	MCS5	106	5530	0.131	0.118	94.06	3.401	11.00
11ac-VHT80	MCS5	122	5610	1.767	2.093	94.06	5.209	11.00
11ac-VHT80	MCS5	138	5690	2.701	2.199	94.06	5.733	11.00
11ac-VHT160	MCS0	50	5250	1.582	-0.206	95.12	4.007	11.00
11ac-VHT160	MCS0	114	5570	0.933	0.402	95.12	3.903	11.00
11ax-HE20	MCS2	36	5180	10.637	9.932	96.39	13.469	17.00
11ax-HE20	MCS2	44	5220	12.110	11.211	96.39	14.854	17.00
11ax-HE20	MCS2	48	5240	12.468	11.250	96.39	15.072	17.00
11ax-HE20	MCS2	52	5260	8.499	6.676	96.39	10.852	11.00
11ax-HE20	MCS2	60	5300	8.333	6.934	96.39	10.860	11.00
11ax-HE20	MCS2	64	5320	7.974	6.461	96.39	10.453	11.00
11ax-HE20	MCS2	100	5500	7.815	7.199	96.39	10.688	11.00
11ax-HE20	MCS2	116	5580	7.693	7.661	96.39	10.847	11.00
11ax-HE20	MCS2	140	5700	7.788	6.773	96.39	10.480	11.00
11ax-HE20	MCS2	144	5720	7.846	6.816	96.39	10.531	11.00
11ax-HE40	MCS2	38	5190	6.933	6.131	96.04	9.736	17.00
11ax-HE40	MCS2	46	5230	9.344	7.958	96.04	11.892	17.00
11ax-HE40	MCS2	54	5270	7.718	6.303	96.04	10.254	11.00
11ax-HE40	MCS2	62	5310	7.391	5.980	96.04	9.928	11.00
11ax-HE40	MCS2	102	5510	5.135	4.740	96.04	8.128	11.00
11ax-HE40	MCS2	110	5550	4.465	5.121	96.04	7.991	11.00
11ax-HE40	MCS2	134	5670	6.925	5.901	96.04	9.629	11.00
11ax-HE40	MCS2	142	5710	7.337	6.356	96.04	10.060	11.00
11ax-HE80	MCS3	42	5210	4.159	3.111	96.09	6.850	17.00
11ax-HE80	MCS3	58	5290	4.704	3.480	96.09	7.318	11.00
11ax-HE80	MCS3	106	5530	2.894	2.382	96.09	5.829	11.00
11ax-HE80	MCS3	122	5610	5.255	5.076	96.09	8.350	11.00
11ax-HE80	MCS3	138	5690	2.319	1.759	96.09	5.232	11.00
11ax-HE160	MCS0	50	5250	2.132	0.178	92.11	4.631	11.00
11ax-HE160	MCS0	114	5570	0.762	0.240	92.11	3.876	11.00

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle $\geq 98\%$, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant } 0 \text{ AVGPSD}/10)} + 10^{(\text{Ant } 1 \text{ AVGPSD}/10)}\}$.

Note 2: For 802.11a-NII-1 band, PSD Limit (dBm/MHz) = $17 - (7.14 - 6) = 15.86 \text{ dBm/MHz}$.

For 802.11a-NII-2a band, PSD Limit (dBm/MHz) = $11 - (7.14 - 6) = 9.86 \text{ dBm/MHz}$.

For 802.11a-NII-2c band, PSD Limit (dBm/MHz) = $11 - (7.33 - 6) = 9.67 \text{ dBm/MHz}$.

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2023-06-29~2023-07-04		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	18Mbps	149	5745	9.951	9.875	98.75	12.923	≤ 29.29
11a	18Mbps	157	5785	10.503	10.358	98.75	13.441	≤ 29.29
11a	18Mbps	165	5825	10.149	10.499	98.75	13.338	≤ 29.29
11ac-VHT20	MCS2	149	5745	9.625	9.318	97.00	12.617	≤ 30.00
11ac-VHT20	MCS2	157	5785	10.239	10.339	97.00	13.432	≤ 30.00
11ac-VHT20	MCS2	165	5825	9.038	9.298	97.00	12.313	≤ 30.00
11ac-VHT40	MCS0	151	5755	6.974	6.513	98.34	9.760	≤ 30.00
11ac-VHT40	MCS0	159	5795	7.897	7.656	98.34	10.788	≤ 30.00
11ac-VHT80	MCS5	155	5775	0.295	0.039	94.06	3.445	≤ 30.00
11ax-HE20	MCS2	149	5745	9.242	9.000	96.39	12.293	≤ 30.00
11ax-HE20	MCS2	157	5785	9.289	8.881	96.39	12.260	≤ 30.00
11ax-HE20	MCS2	165	5825	9.170	9.422	96.39	12.468	≤ 30.00
11ax-HE40	MCS2	151	5755	6.670	6.262	96.04	9.657	≤ 30.00
11ax-HE40	MCS2	159	5795	6.930	6.708	96.04	10.006	≤ 30.00
11ax-HE80	MCS3	155	5775	4.503	4.008	96.09	7.446	≤ 30.00


Note 1: When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10(\text{Ant 0 AVGPSD}/10) + 10(\text{Ant 1 AVGPSD}/10)\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10(\text{Ant 0 AVGPSD}/10) + 10(\text{Ant 1 AVGPSD}/10)\}$.


Note 2: For 802.11a-NII-3 band, PSD Limit (dBm/510kHz) = $30 - (6.71 - 6) = 29.29 \text{ dBm}/510 \text{ kHz}$.

802.11a Power Spectral Density- Ant 0


Channel 36 (5180MHz)

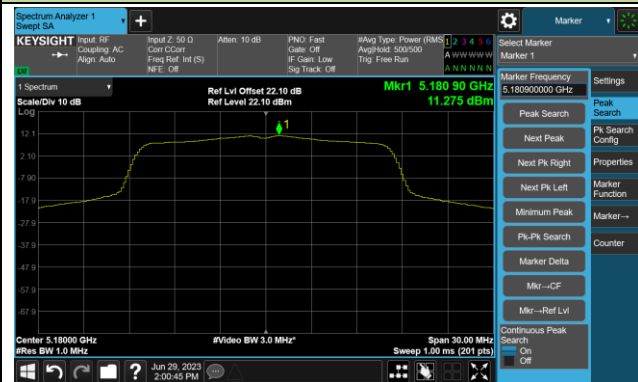

Channel 44 (5220MHz)

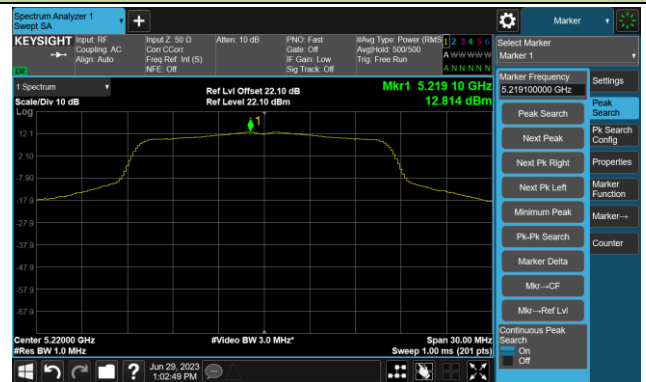


Channel 48 (5240MHz)

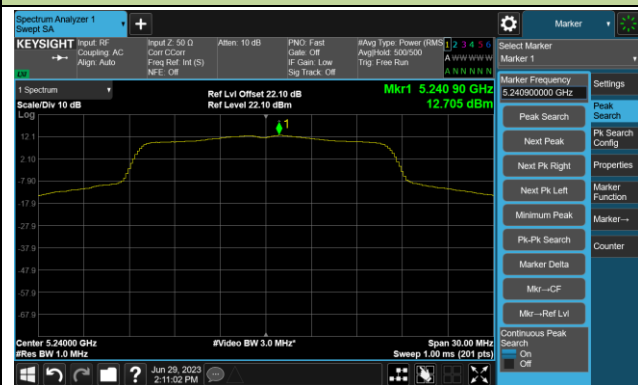

Channel 52 (5260MHz)




Channel 60 (5300MHz)

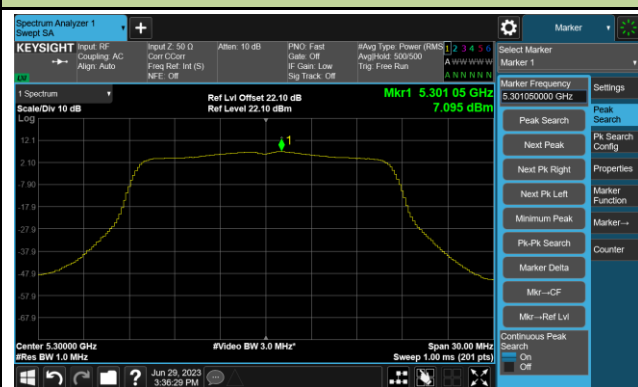


Channel 64 (5320MHz)



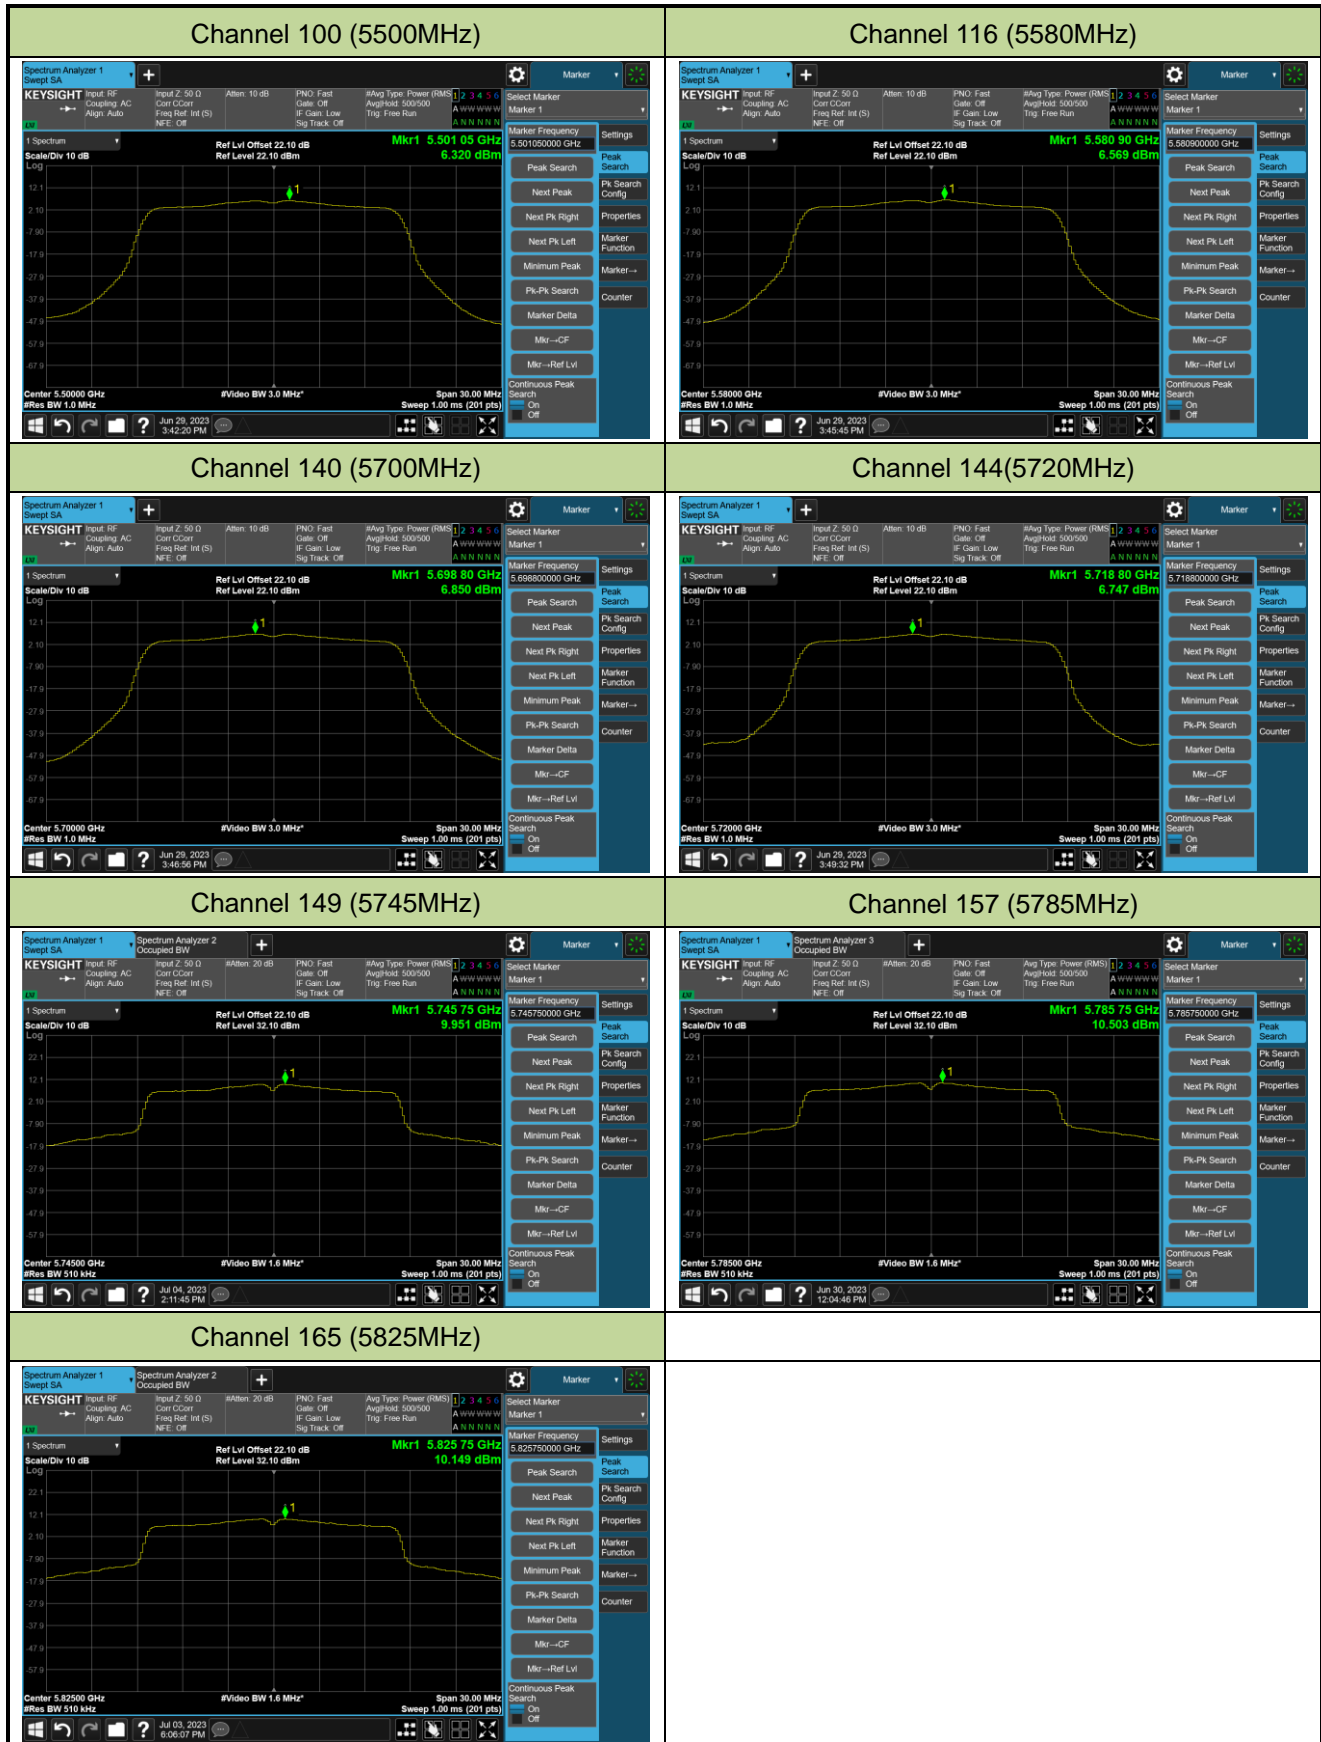


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)

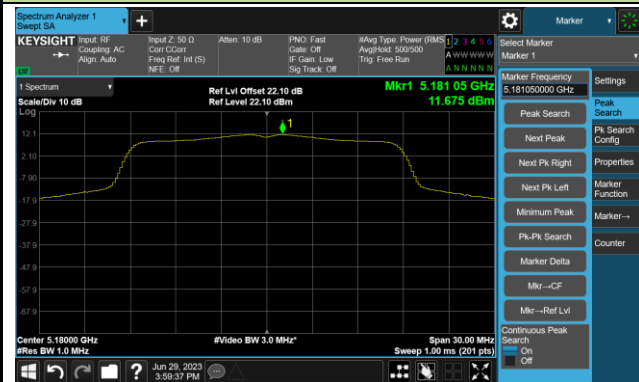


Channel 44 (5220MHz)

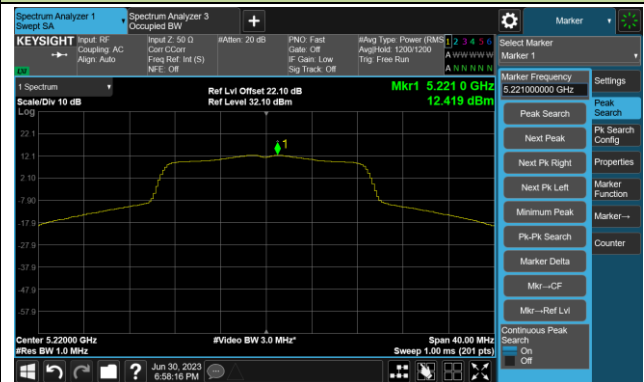


Channel 48 (5240MHz)

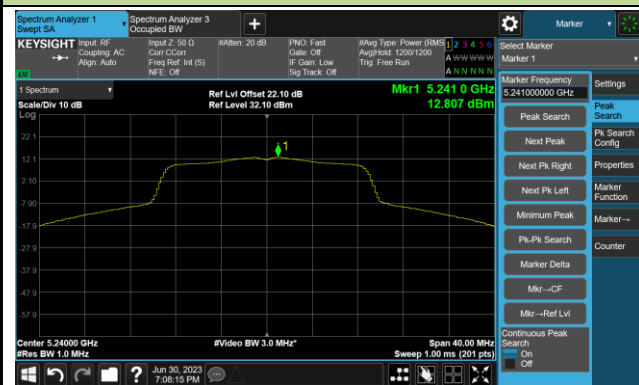


Channel 52 (5260MHz)

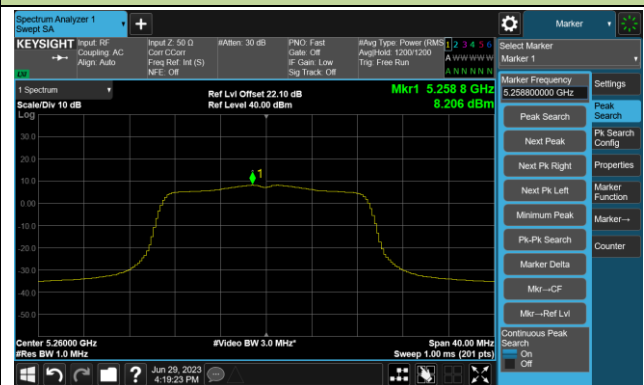

Channel 60 (5300MHz)

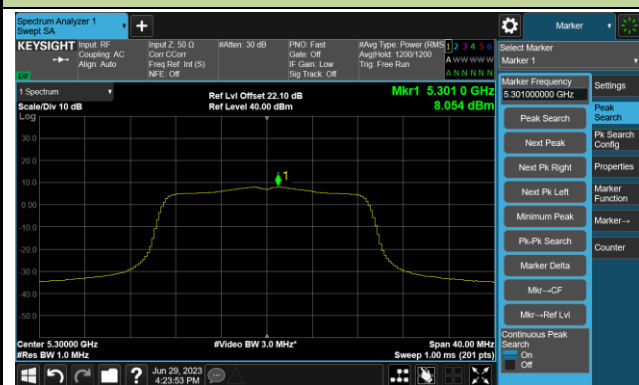


Channel 64 (5320MHz)

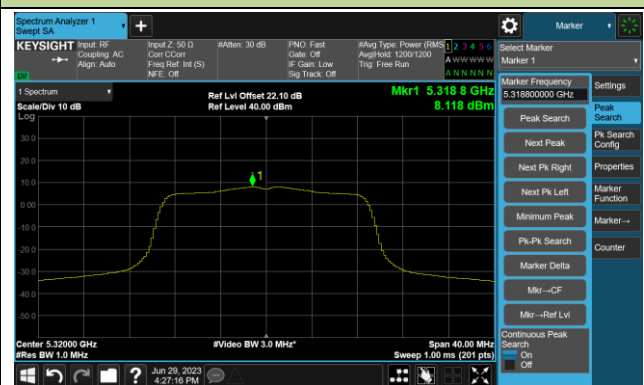


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 100 (5500MHz)

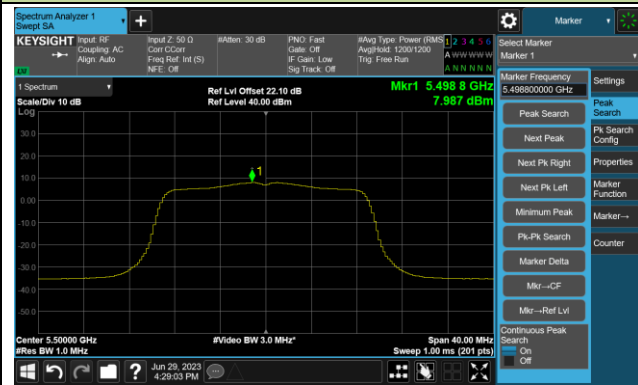


Channel 116 (5580MHz)

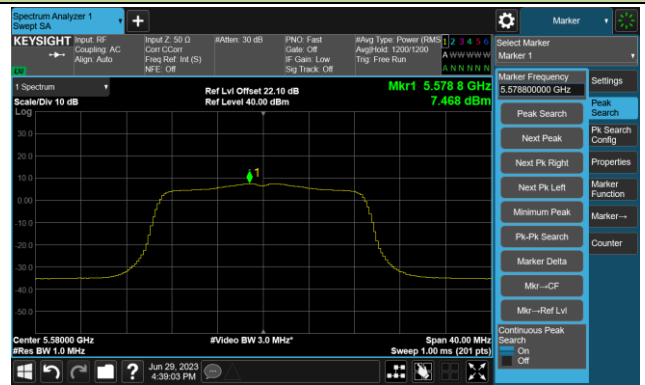


Channel 140 (5700MHz)

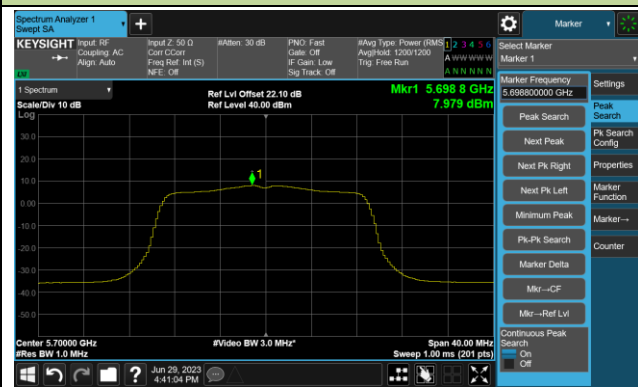


Channel 144(5720MHz)

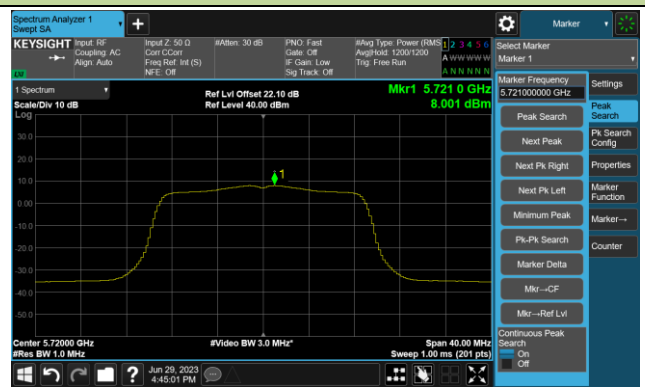


Channel 149 (5745MHz)

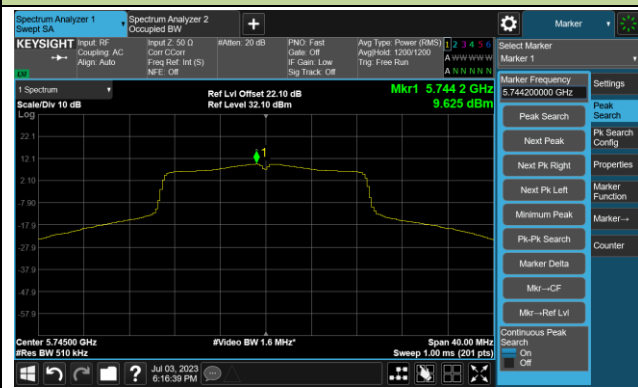

Channel 157 (5785MHz)

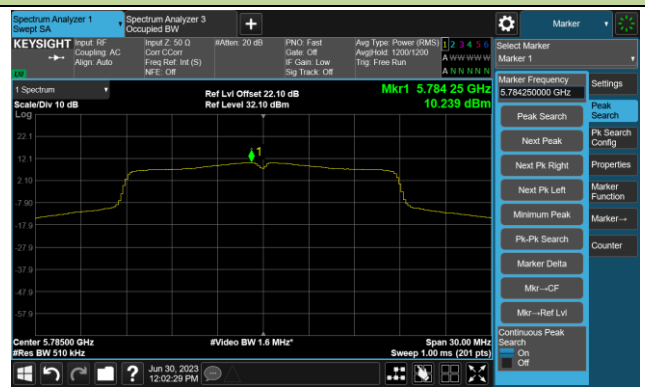

Channel 165 (5825MHz)

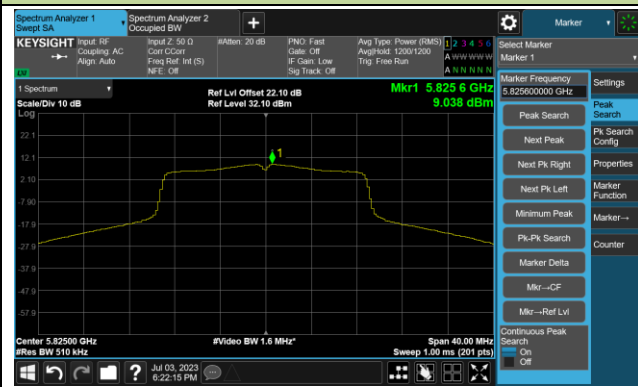


802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)




Channel 46 (5230MHz)

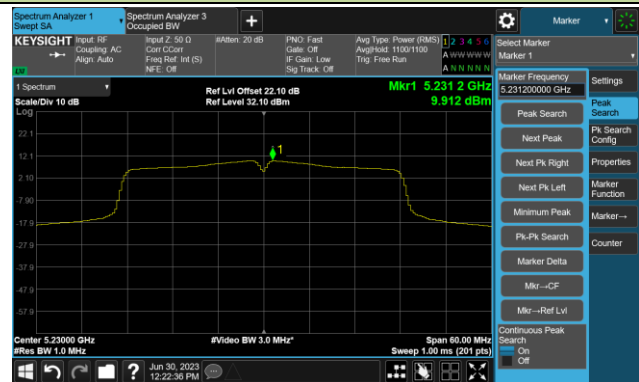


Channel 54 (5270MHz)

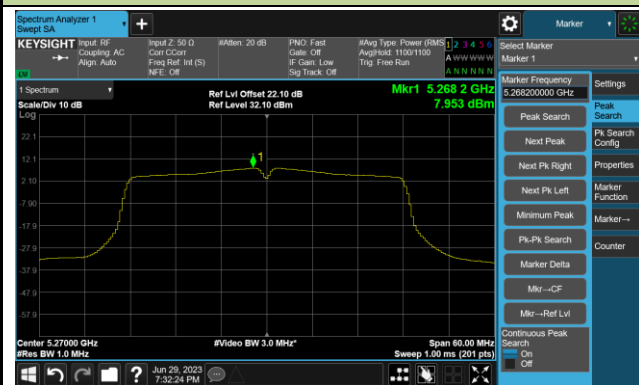


Channel 62 (5310MHz)

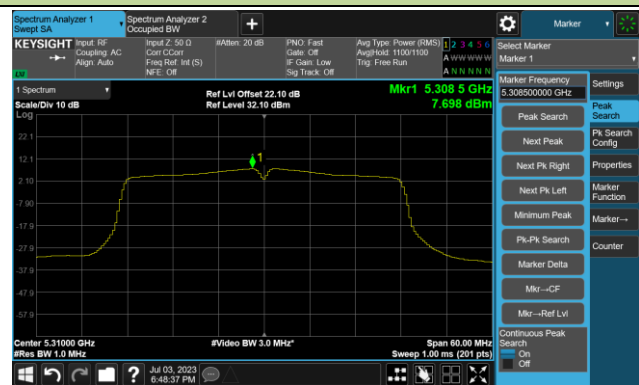

Channel 102 (5510MHz)

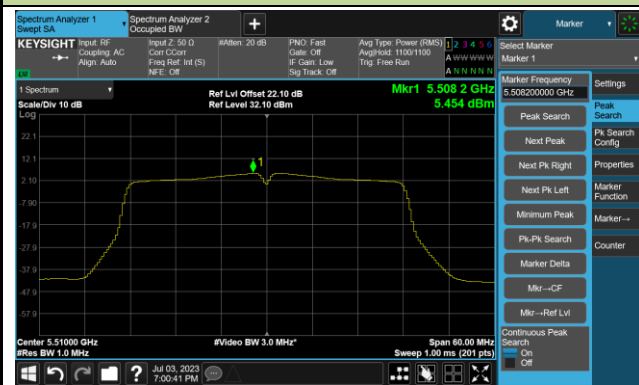


Channel 110 (5550MHz)

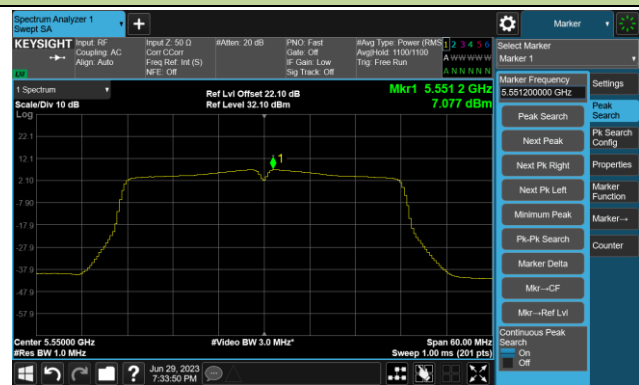


802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 134 (5670MHz)

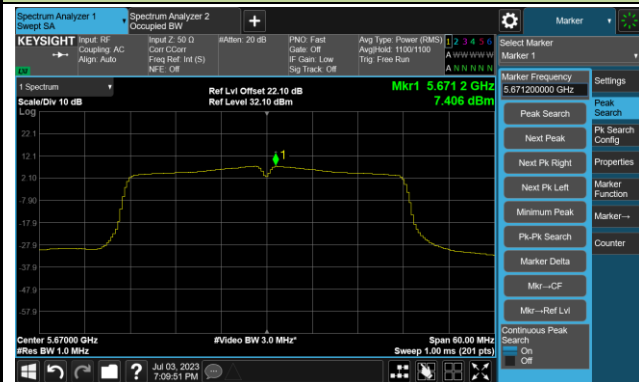


Channel 142(5710MHz)

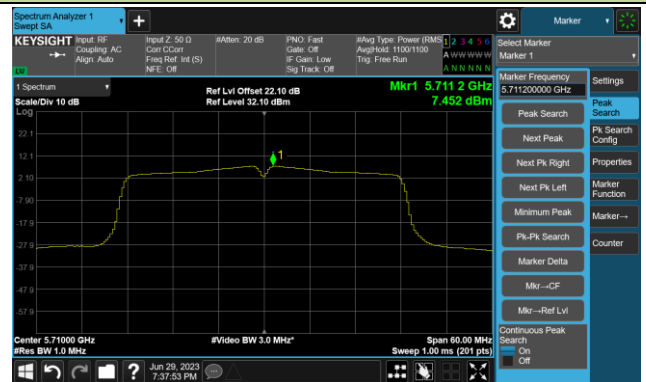

Channel 151 (5755MHz)

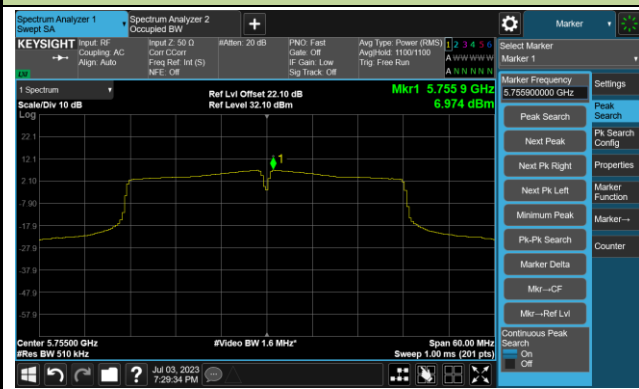


Channel 159 (5795MHz)

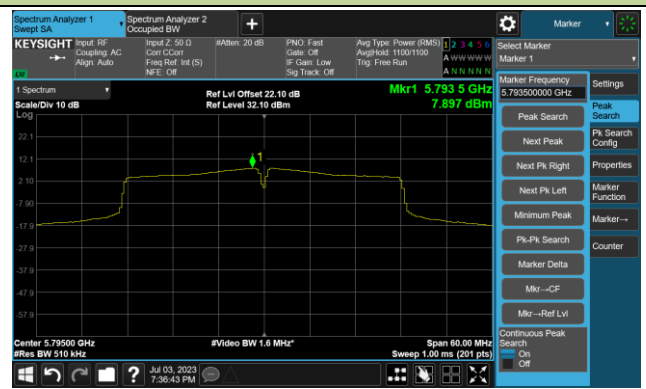


802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

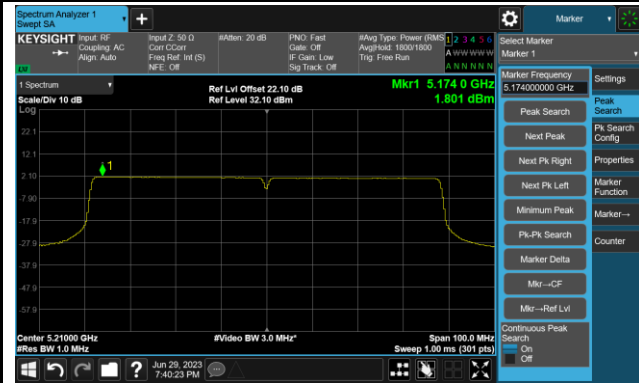


Channel 58 (5290MHz)

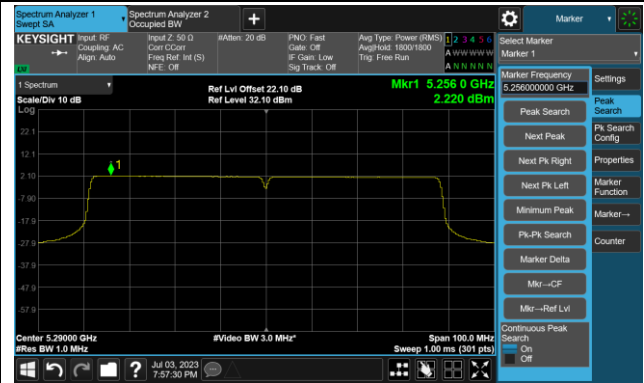


Channel 106 (5530MHz)

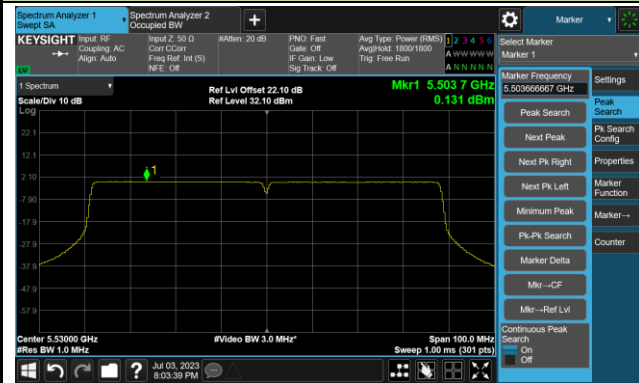


Channel 122 (5610MHz)

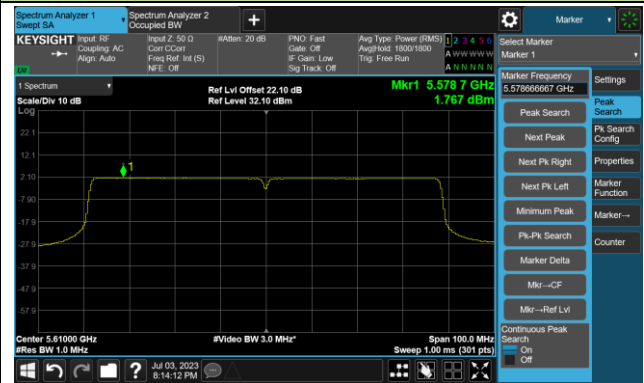

Channel 138 (5690MHz)

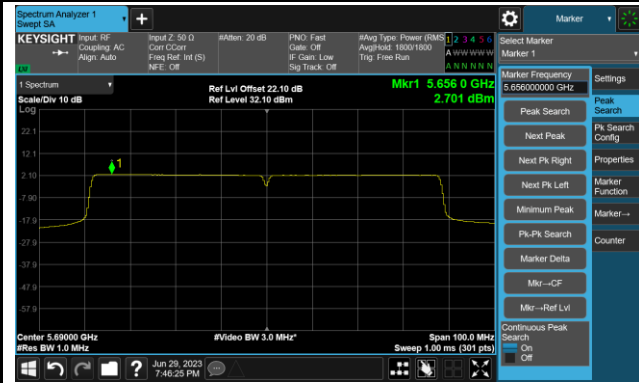


Channel 155 (5775MHz)

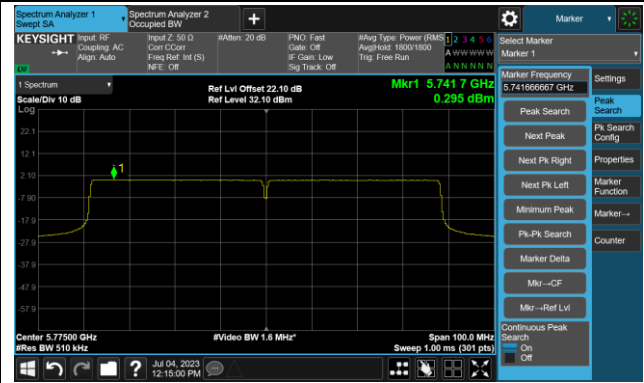

802.11ac-VHT160 Power Spectral Density- Ant 0

Channel 50 (5250MHz)

Channel 114 (5570MHz)

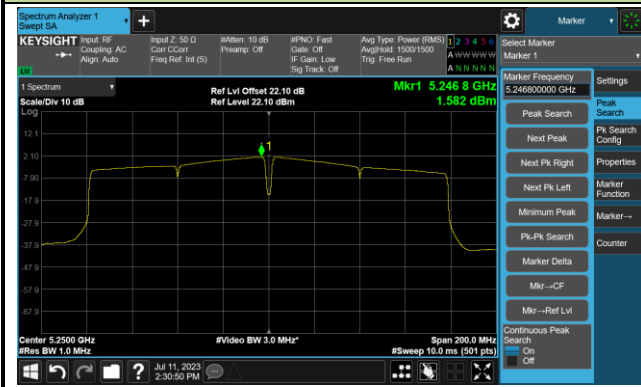


802.11ax-HE20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)




Channel 44 (5220MHz)

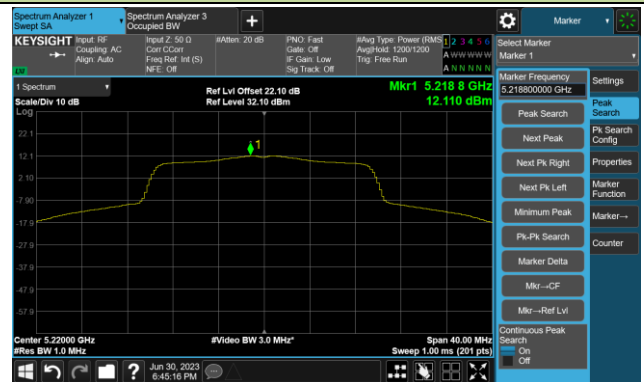


Channel 48 (5240MHz)

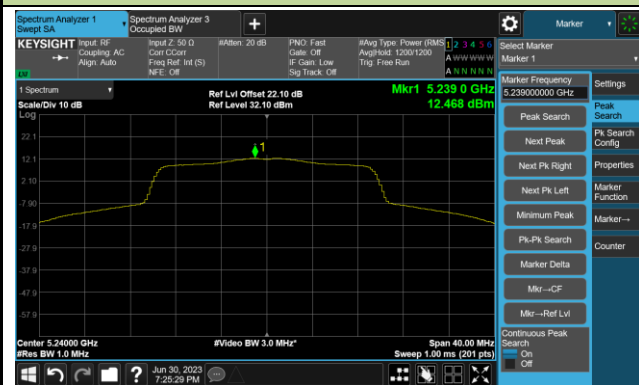


Channel 52 (5260MHz)

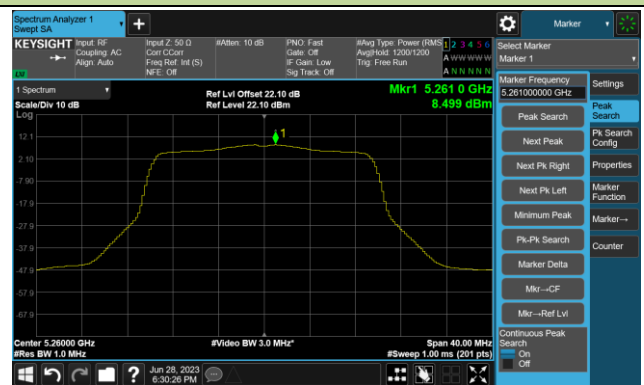

Channel 60 (5300MHz)

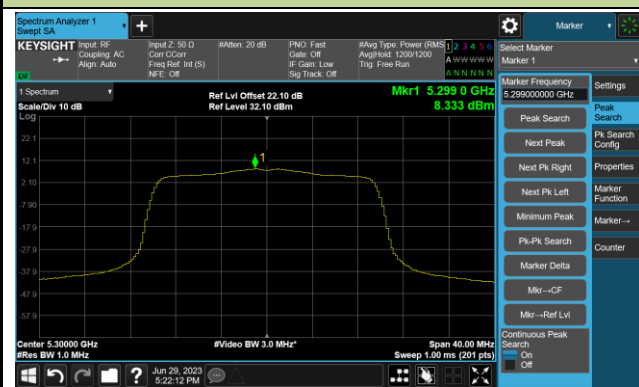


Channel 64 (5320MHz)

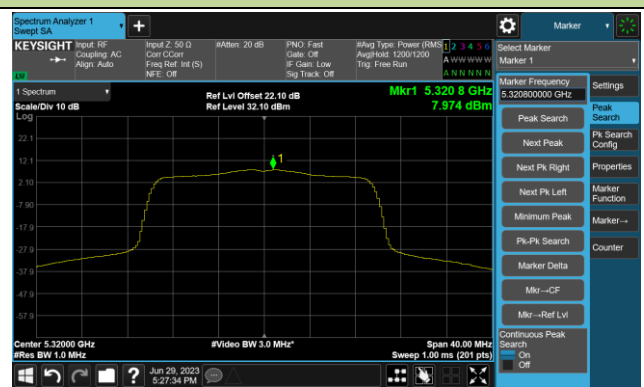


802.11ax-HE20 Power Spectral Density- Ant 0


Channel 100 (5500MHz)

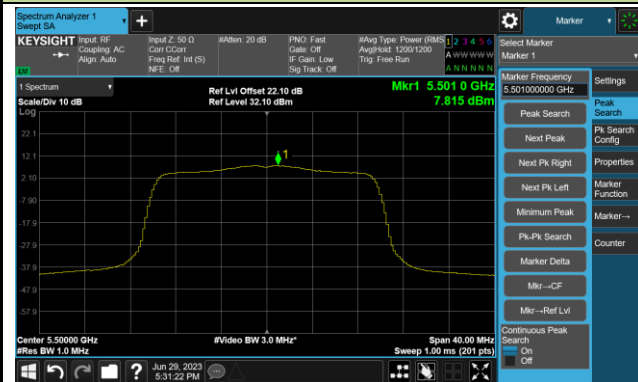


Channel 116 (5580MHz)

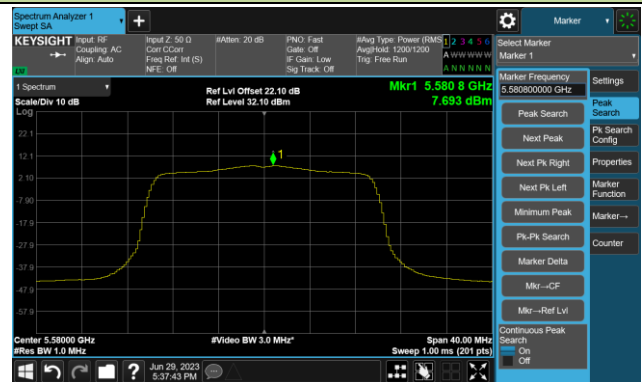

Channel 140 (5700MHz)

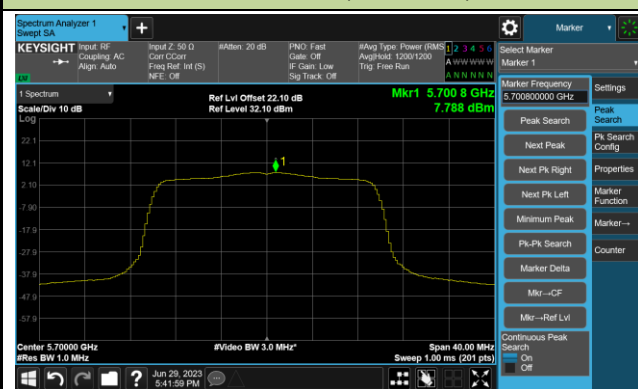


Channel 144 (5720MHz)

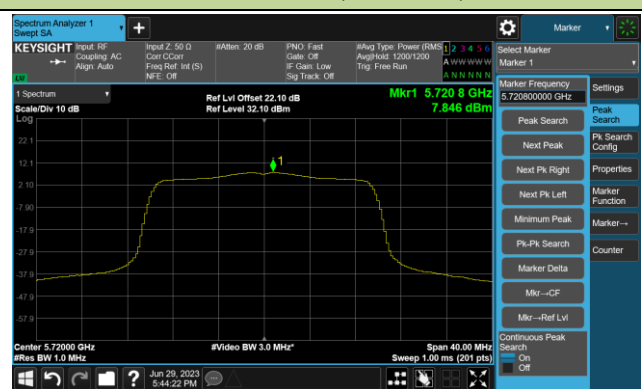

Channel 149 (5745MHz)



Channel 157 (5785MHz)

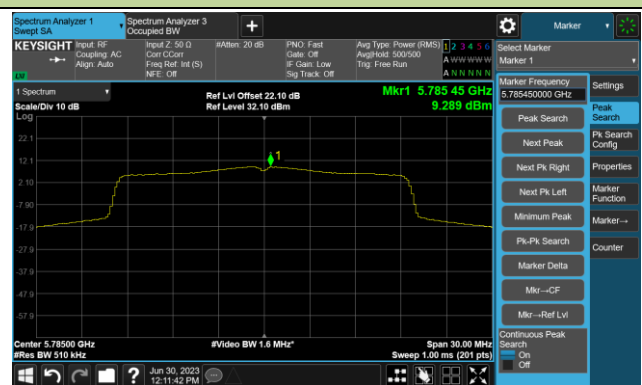

Channel 165 (5825MHz)

