



802.11ac-VHT20 6dB Bandwidth

Channel 149 (5745MHz)

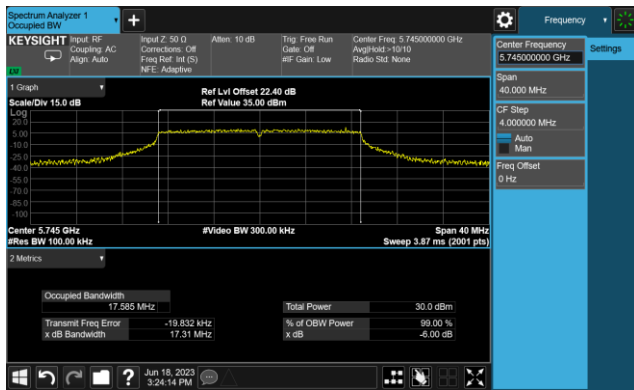

Channel 157 (5785MHz)

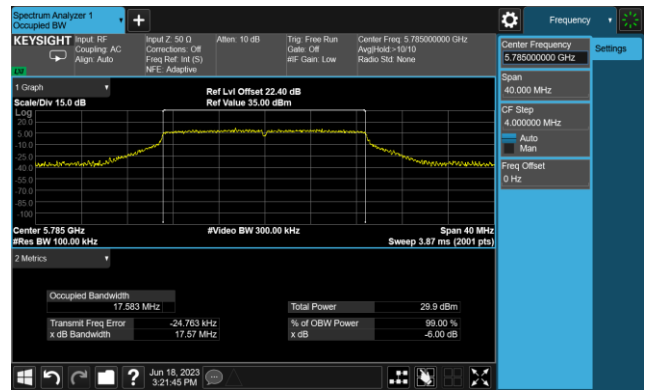


Channel 165 (5825MHz)





802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

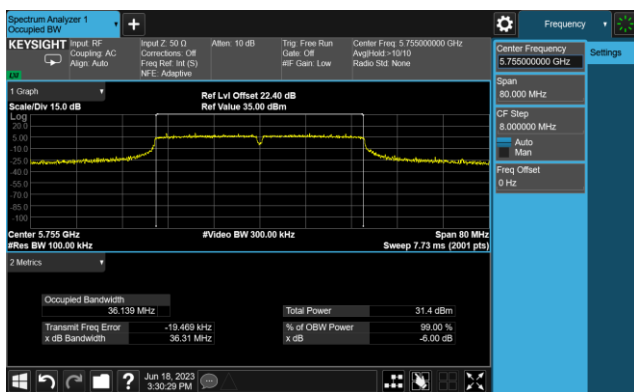


Channel 159 (5795MHz)

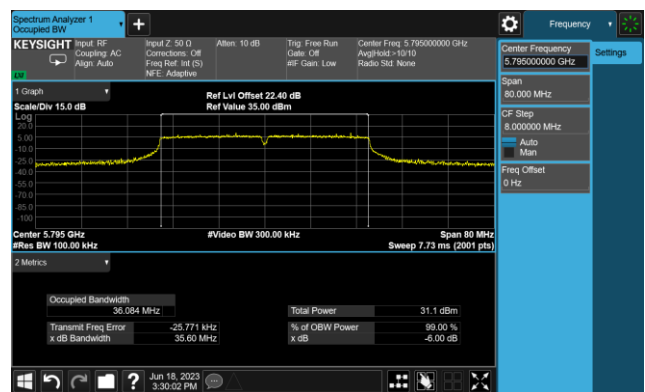

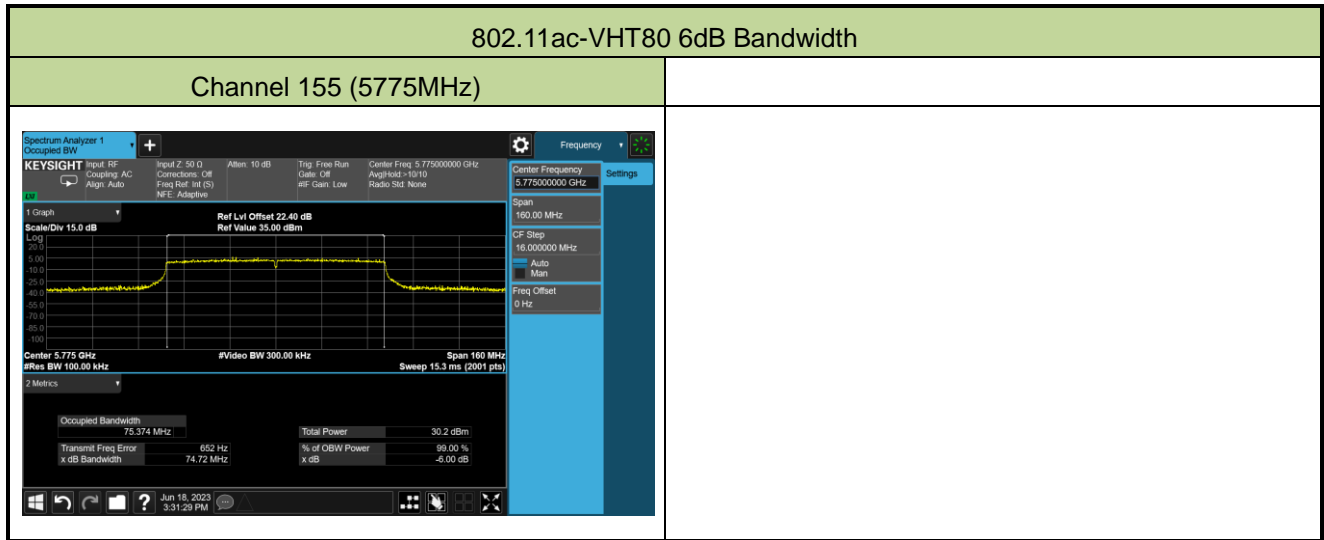


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

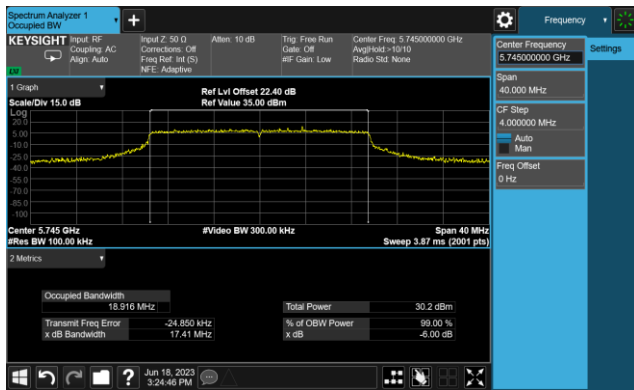

Channel 157 (5785MHz)

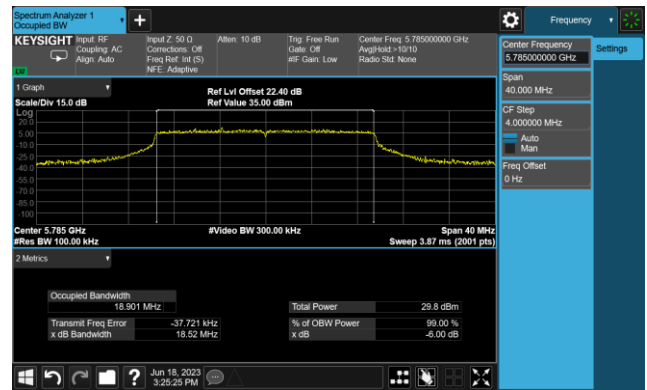


Channel 165 (5825MHz)

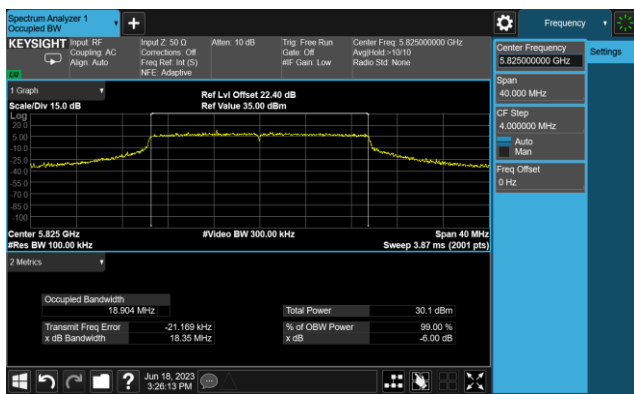



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

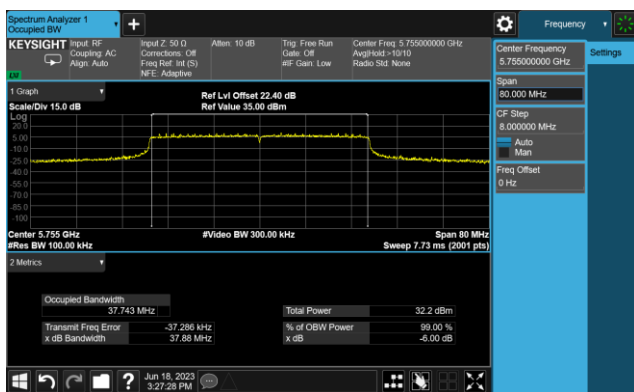

Channel 159 (5795MHz)

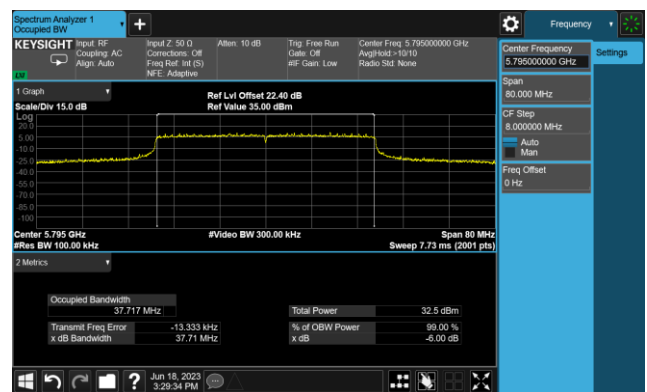

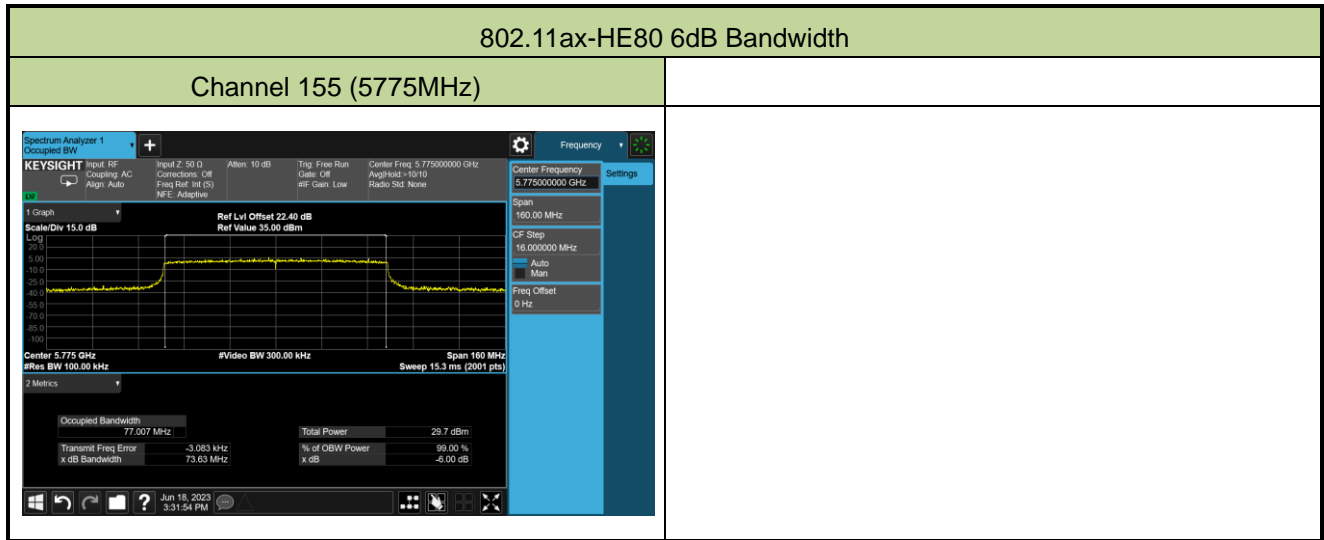

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2023-06-26 ~ 2023-07-05	Test Mode	UNII-1

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)	30 Degree EIRP (dBm)	EIRP Limit (dBm)	Result
				Ant 0	Ant 1					
11a	6Mbps	36	5180	10.90	9.77	13.38	≤ 27.69	20.45	≤ 21.00	Pass
11a	6Mbps	44	5220	10.82	10.15	13.51	≤ 27.69	20.58	≤ 21.00	Pass
11a	6Mbps	48	5240	10.71	10.27	13.51	≤ 27.69	20.58	≤ 21.00	Pass
11ac-VHT20	MCS0	36	5180	14.06	13.17	16.65	≤ 30.00	20.72	≤ 21.00	Pass
11ac-VHT20	MCS0	44	5220	13.66	13.05	16.38	≤ 30.00	20.45	≤ 21.00	Pass
11ac-VHT20	MCS0	48	5240	13.98	13.47	16.74	≤ 30.00	20.81	≤ 21.00	Pass
11ac-VHT40	MCS0	38	5190	13.81	12.98	16.43	≤ 30.00	20.50	≤ 21.00	Pass
11ac-VHT40	MCS0	46	5230	13.86	13.41	16.65	≤ 30.00	20.72	≤ 21.00	Pass
11ac-VHT80	MCS0	42	5210	13.97	13.17	16.60	≤ 30.00	20.67	≤ 21.00	Pass
11ax-HE20	MCS0	36	5180	13.87	13.13	16.53	≤ 30.00	20.60	≤ 21.00	Pass
11ax-HE20	MCS0	44	5220	13.96	13.44	16.72	≤ 30.00	20.79	≤ 21.00	Pass
11ax-HE20	MCS0	48	5240	13.82	13.32	16.59	≤ 30.00	20.66	≤ 21.00	Pass
11ax-HE40	MCS0	38	5190	13.86	12.88	16.41	≤ 30.00	20.48	≤ 21.00	Pass
11ax-HE40	MCS0	46	5230	13.94	13.47	16.72	≤ 30.00	20.79	≤ 21.00	Pass
11ax-HE80	MCS0	42	5210	13.88	12.91	16.43	≤ 30.00	20.50	≤ 21.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP Above 30 Degree Angle (dBm) = Total Average Power (dBm) + Directional Gain (Elevation angle above 30 degrees) (dBi)

Note 3: For 802.11a-NII-1 band, Power Limit (dBm) = $30 - (8.31 - 6) = 27.69\text{dBm}$

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2023-06-26 ~ 2023-06-30	Test Mode	UNII-2a & UNII-2c & UNII-3

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11a	6Mbps	52	5260	17.23	16.87	20.06	≤ 21.66
11a	6Mbps	60	5300	16.54	16.45	19.51	≤ 21.66
11a	6Mbps	64	5320	15.73	15.55	18.65	≤ 21.66
11a	6Mbps	100	5500	15.21	15.42	18.33	≤ 20.39
11a	6Mbps	116	5580	15.32	15.21	18.28	≤ 20.39
11a	6Mbps	140	5700	15.76	15.32	18.56	≤ 20.39
11a	6Mbps	144	5720	15.19	15.21	18.21	≤ 19.21
11a	6Mbps	149	5745	22.79	22.58	25.70	≤ 26.00
11a	6Mbps	157	5785	22.76	22.48	25.63	≤ 26.00
11a	6Mbps	165	5825	22.55	22.80	25.69	≤ 26.00
11ac-VHT20	MCS0	52	5260	20.16	20.03	23.11	≤ 23.98
11ac-VHT20	MCS0	60	5300	19.60	19.75	22.69	≤ 23.98
11ac-VHT20	MCS0	64	5320	19.23	19.47	22.36	≤ 23.98
11ac-VHT20	MCS0	100	5500	19.32	18.77	22.06	≤ 23.50
11ac-VHT20	MCS0	116	5580	19.27	19.55	22.42	≤ 23.50
11ac-VHT20	MCS0	140	5700	16.34	16.65	19.51	≤ 23.50
11ac-VHT20	MCS0	144	5720	19.23	19.62	22.44	≤ 22.47
11ac-VHT20	MCS0	149	5745	24.21	23.78	27.01	≤ 29.01
11ac-VHT20	MCS0	157	5785	24.02	24.12	27.08	≤ 29.01
11ac-VHT20	MCS0	165	5825	24.25	24.51	27.39	≤ 29.01
11ac-VHT40	MCS0	54	5270	20.88	20.67	23.79	≤ 23.98
11ac-VHT40	MCS0	62	5310	19.95	19.53	22.76	≤ 23.98
11ac-VHT40	MCS0	102	5510	20.33	20.23	23.29	≤ 23.50
11ac-VHT40	MCS0	110	5550	20.20	19.87	23.05	≤ 23.50
11ac-VHT40	MCS0	134	5670	18.32	18.71	21.53	≤ 23.50
11ac-VHT40	MCS0	142	5710	20.35	20.24	23.31	≤ 23.50
11ac-VHT40	MCS0	151	5755	24.18	24.17	27.19	≤ 29.01
11ac-VHT40	MCS0	159	5795	24.31	24.43	27.38	≤ 29.01

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT80	MCS0	58	5290	19.51	19.84	22.69	≤ 23.98
11ac-VHT80	MCS0	106	5530	20.43	20.44	23.45	≤ 23.50
11ac-VHT80	MCS0	122	5610	20.22	20.42	23.33	≤ 23.50
11ac-VHT80	MCS0	138	5690	20.43	20.46	23.46	≤ 23.50
11ac-VHT80	MCS0	155	5775	23.28	23.18	26.24	≤ 29.01
11ax-HE20	MCS0	52	5260	20.14	19.95	23.06	≤ 23.98
11ax-HE20	MCS0	60	5300	19.82	20.12	22.98	≤ 23.98
11ax-HE20	MCS0	64	5320	20.31	19.94	23.14	≤ 23.98
11ax-HE20	MCS0	100	5500	16.53	16.61	19.58	≤ 23.50
11ax-HE20	MCS0	116	5580	19.67	19.17	22.44	≤ 23.50
11ax-HE20	MCS0	140	5700	16.54	16.61	19.59	≤ 23.50
11ax-HE20	MCS0	144	5720	19.41	19.19	22.31	≤ 22.94
11ax-HE20	MCS0	149	5745	24.18	24.05	27.13	≤ 29.01
11ax-HE20	MCS0	157	5785	24.44	23.79	27.14	≤ 29.01
11ax-HE20	MCS0	165	5825	23.69	24.21	26.97	≤ 29.01
11ax-HE40	MCS0	54	5270	20.49	20.57	23.54	≤ 23.98
11ax-HE40	MCS0	62	5310	20.31	19.85	23.10	≤ 23.98
11ax-HE40	MCS0	102	5510	20.50	20.33	23.43	≤ 23.98
11ax-HE40	MCS0	110	5550	20.35	20.22	23.30	≤ 23.50
11ax-HE40	MCS0	134	5670	19.45	19.44	22.46	≤ 23.50
11ax-HE40	MCS0	142	5710	20.44	20.32	23.39	≤ 23.50
11ax-HE40	MCS0	151	5755	24.22	23.95	27.10	≤ 29.01
11ax-HE40	MCS0	159	5795	24.43	24.37	27.41	≤ 29.01
11ax-HE80	MCS0	58	5290	19.09	19.43	22.27	≤ 23.98
11ax-HE80	MCS0	106	5530	18.79	19.01	21.91	≤ 23.50
11ax-HE80	MCS0	122	5610	20.37	20.38	23.39	≤ 23.50
11ax-HE80	MCS0	138	5690	20.34	20.54	23.45	≤ 23.50
11ax-HE80	MCS0	155	5775	23.21	23.24	26.24	≤ 29.01

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 802.11a-NII-2a band, Power Limit (dBm) = $11 + 10 \cdot \log(19.82) - (8.31 - 6) = 21.66 \text{ dBm}$

For 802.11a-NII-2c band, Power Limit (dBm) = $11 + 10 \cdot \log(19.41) - (9.49 - 6) = 20.39 \text{ dBm}$

For 802.11a-5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + 19.61/2) - (9.49 - 6) = 19.21 \text{ dBm}$.

For 802.11a-NII-3 band, Power Limit (dBm) = $30 - (10 - 6) = 26 \text{ dBm}$

For other NII-2a band, Power Limit (dBm) = $11 + 10 \cdot \log(26 \text{ dBc}) \text{ dBm}$

For other NII-2c band, Power Limit (dBm) = $11 + 10 \cdot \log(26 \text{ dBc}) - (6.48 - 6) \text{ dBm}$

For other 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + 26 \text{dBc}/2) - (6.48 - 6) = 19.21 \text{dBm}$.

For other NII-3 band, Power Limit (dBm) = $30 - (6.99 - 6) = 29.01 \text{dBm}$

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2023-06-15~2023-07-13		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	6Mbps	36	5180	-1.411	-2.547	91.82	1.439	14.69
11a	6Mbps	44	5220	-1.478	-1.966	91.82	1.666	14.69
11a	6Mbps	48	5240	-1.466	-1.686	91.82	1.806	14.69
11a	6Mbps	52	5260	5.344	4.897	91.82	8.507	8.69
11a	6Mbps	60	5300	4.885	4.819	91.82	8.233	8.69
11a	6Mbps	64	5320	4.860	4.804	91.82	8.213	8.69
11a	6Mbps	100	5500	4.146	3.695	91.82	7.307	7.51
11a	6Mbps	116	5580	4.062	3.880	91.82	7.353	7.51
11a	6Mbps	140	5700	3.703	3.913	91.82	7.190	7.51
11a	6Mbps	144	5720	3.623	3.693	91.82	7.039	7.51
11ac-VHT20	MCS0	36	5180	1.186	0.641	94.50	4.178	17.00
11ac-VHT20	MCS0	44	5220	0.938	0.518	94.50	3.989	17.00
11ac-VHT20	MCS0	48	5240	1.187	0.896	94.50	4.300	17.00
11ac-VHT20	MCS0	52	5260	7.797	7.268	94.50	10.797	11.00
11ac-VHT20	MCS0	60	5300	7.156	7.389	94.50	10.530	11.00
11ac-VHT20	MCS0	64	5320	7.239	7.352	94.50	10.552	11.00
11ac-VHT20	MCS0	100	5500	7.175	6.560	94.50	10.134	10.52
11ac-VHT20	MCS0	116	5580	7.167	6.693	94.50	10.192	10.52
11ac-VHT20	MCS0	140	5700	4.151	4.190	94.50	7.427	10.52
11ac-VHT20	MCS0	144	5720	6.879	7.093	94.50	10.243	10.52
11ac-VHT40	MCS0	38	5190	-1.465	-2.193	95.36	1.403	17.00
11ac-VHT40	MCS0	46	5230	-1.807	-2.098	95.36	1.267	17.00
11ac-VHT40	MCS0	54	5270	6.253	6.358	95.36	9.522	11.00
11ac-VHT40	MCS0	62	5310	5.127	5.211	95.36	8.386	11.00
11ac-VHT40	MCS0	102	5510	6.404	6.036	95.36	9.441	10.52
11ac-VHT40	MCS0	110	5550	5.835	5.814	95.36	9.041	10.52
11ac-VHT40	MCS0	134	5670	3.867	4.239	95.36	7.274	10.52
11ac-VHT40	MCS0	142	5710	6.337	6.366	95.36	9.568	10.52

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	-4.583	-5.268	92.62	-1.569	17.00
11ac-VHT80	MCS0	58	5290	1.591	1.599	92.62	4.938	11.00
11ac-VHT80	MCS0	106	5530	2.363	2.546	92.62	5.799	10.52
11ac-VHT80	MCS0	122	5610	2.469	2.332	92.62	5.744	10.52
11ac-VHT80	MCS0	138	5690	2.653	3.047	92.62	6.198	10.52
11ax-HE20	MCS0	36	5180	1.298	0.580	94.27	4.220	17.00
11ax-HE20	MCS0	44	5220	1.063	0.642	94.27	4.124	17.00
11ax-HE20	MCS0	48	5240	0.732	0.552	94.27	3.909	17.00
11ax-HE20	MCS0	52	5260	7.230	7.255	94.27	10.509	11.00
11ax-HE20	MCS0	60	5300	7.339	7.311	94.27	10.592	11.00
11ax-HE20	MCS0	64	5320	7.649	7.503	94.27	10.843	11.00
11ax-HE20	MCS0	100	5500	4.260	3.909	94.27	7.355	10.52
11ax-HE20	MCS0	116	5580	7.136	6.870	94.27	10.272	10.52
11ax-HE20	MCS0	140	5700	3.995	3.932	94.27	7.230	10.52
11ax-HE20	MCS0	144	5720	6.842	7.234	94.27	10.309	10.52
11ax-HE40	MCS0	38	5190	-1.705	-2.286	93.78	1.303	17.00
11ax-HE40	MCS0	46	5230	-1.768	-2.209	93.78	1.306	17.00
11ax-HE40	MCS0	54	5270	5.630	5.576	93.78	8.892	11.00
11ax-HE40	MCS0	62	5310	5.025	5.100	93.78	8.352	11.00
11ax-HE40	MCS0	102	5510	5.785	5.299	93.78	8.838	10.52
11ax-HE40	MCS0	110	5550	5.733	5.539	93.78	8.926	10.52
11ax-HE40	MCS0	134	5670	3.968	4.229	93.78	7.390	10.52
11ax-HE40	MCS0	142	5710	5.695	5.887	93.78	9.081	10.52
11ax-HE80	MCS0	42	5210	-4.856	-5.628	93.80	-1.937	17.00
11ax-HE80	MCS0	58	5290	1.073	1.456	93.80	4.557	11.00
11ax-HE80	MCS0	106	5530	0.845	0.825	93.80	4.123	10.52
11ax-HE80	MCS0	122	5610	2.106	2.287	93.80	5.486	10.52
11ax-HE80	MCS0	138	5690	1.854	2.022	93.80	5.227	10.52

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle \geq 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.

Note 2: For 802.11a-NII-1 band, PSD Limit (dBm/MHz) = $17 - (8.31 - 6) = 14.69 \text{ dBm/MHz}$.

For 802.11a-NII-2a band, PSD Limit (dBm/MHz) = $11 - (8.31 - 6) = 8.69 \text{ dBm/MHz}$.

For 802.11a-NII-2c band, PSD Limit (dBm/MHz) = $11 - (9.49 - 6) = 7.51 \text{ dBm/MHz}$.

For other NII-2c band, PSD Limit (dBm/MHz) = $11 - (6.48 - 6) = 10.52 \text{ dBm/MHz}$.

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2023-06-26		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	6Mbps	149	5745	8.649	8.376	91.82	11.896	≤ 26.00
11a	6Mbps	157	5785	8.381	8.523	91.82	11.834	≤ 26.00
11a	6Mbps	165	5825	8.304	8.772	91.82	11.925	≤ 26.00
11ac-VHT20	MCS0	149	5745	8.715	9.144	94.50	12.191	≤ 29.01
11ac-VHT20	MCS0	157	5785	8.479	8.885	94.50	11.943	≤ 29.01
11ac-VHT20	MCS0	165	5825	8.906	9.697	94.50	12.575	≤ 29.01
11ac-VHT40	MCS0	151	5755	6.383	6.345	95.36	9.581	≤ 29.01
11ac-VHT40	MCS0	159	5795	6.754	7.036	95.36	10.114	≤ 29.01
11ac-VHT80	MCS0	155	5775	2.287	2.271	92.62	5.622	≤ 29.01
11ax-HE20	MCS0	149	5745	8.569	8.477	94.27	11.790	≤ 29.01
11ax-HE20	MCS0	157	5785	8.816	8.972	94.27	12.161	≤ 29.01
11ax-HE20	MCS0	165	5825	8.473	9.334	94.27	12.191	≤ 29.01
11ax-HE40	MCS0	151	5755	6.135	6.196	93.78	9.455	≤ 29.01
11ax-HE40	MCS0	159	5795	6.433	6.404	93.78	9.708	≤ 29.01
11ax-HE80	MCS0	155	5775	1.798	2.154	93.80	5.268	≤ 29.01

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\}$.

Note 2: For 802.11a-NII-3 band, PSD Limit (dBm/510kHz) = $30 - (10 - 6) = 26 \text{ dBm}/510 \text{ kHz}$.

For other NII-3 band, PSD Limit (dBm/510kHz) = $30 - (6.99 - 6) = 29.01 \text{ dBm}/510 \text{ kHz}$.

802.11a Power Spectral Density- Ant 0


Channel 36 (5180MHz)




Channel 44 (5220MHz)




Channel 48 (5240MHz)

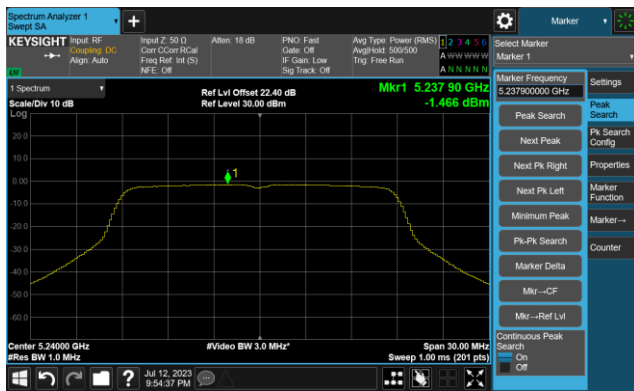


Channel 52 (5260MHz)

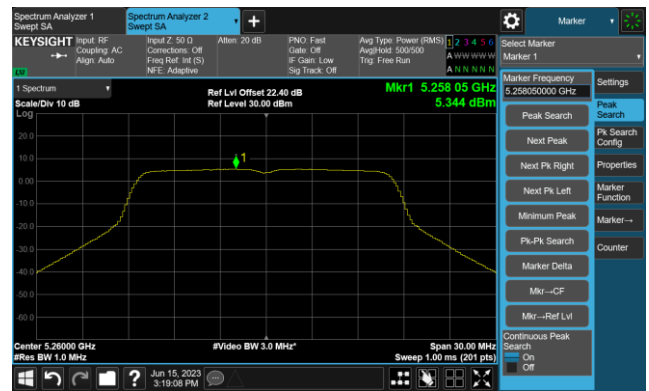

Channel 60 (5300MHz)

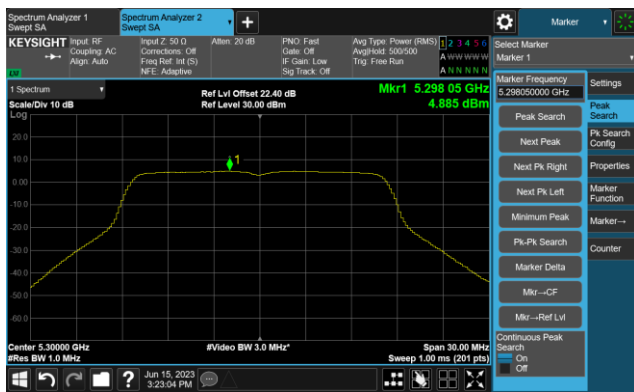


Channel 64 (5320MHz)

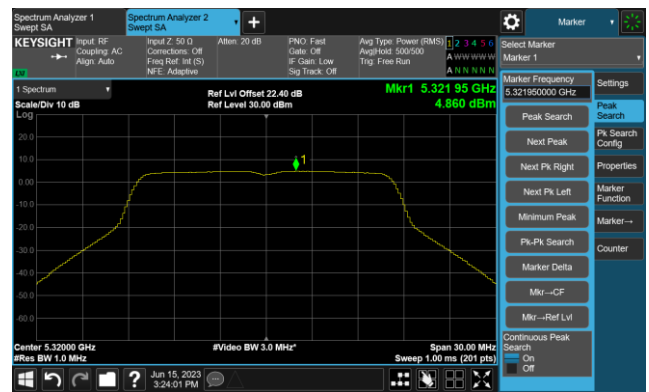


802.11a Power Spectral Density- Ant 0


Channel 100 (5500MHz)

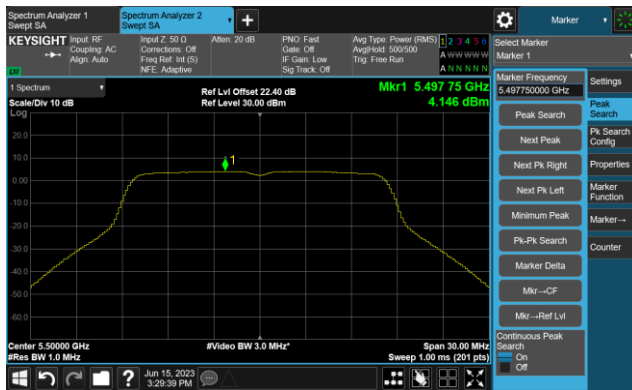


Channel 116 (5580MHz)

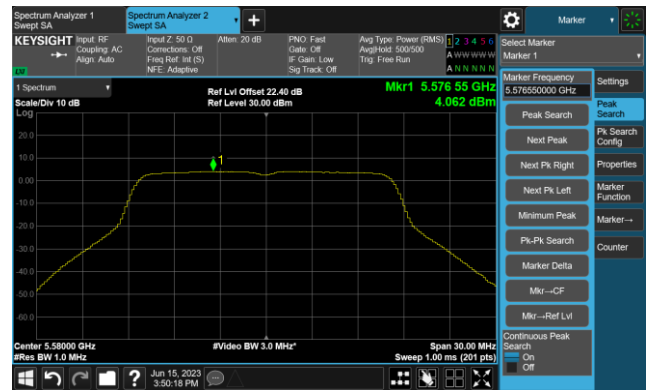


Channel 140 (5700MHz)

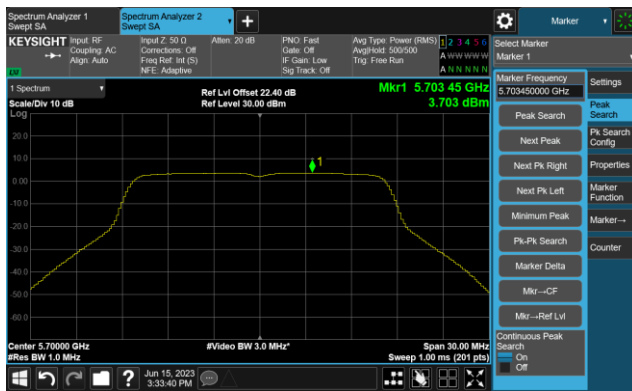


Channel 144(5720MHz)

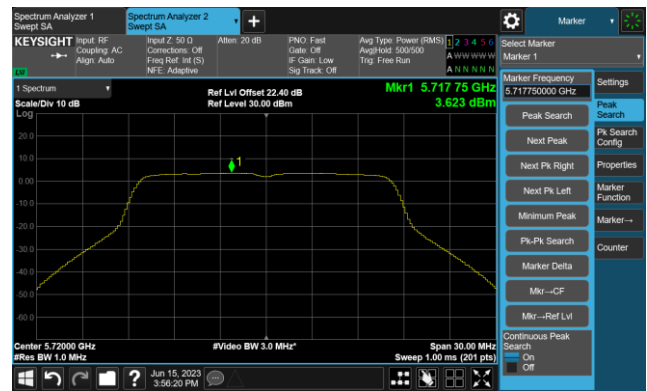

Channel 149 (5745MHz)

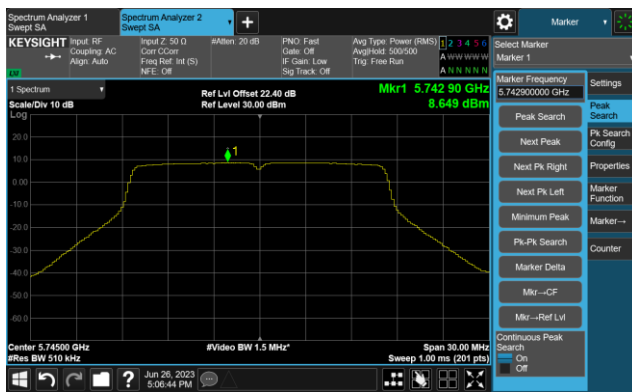


Channel 157 (5785MHz)

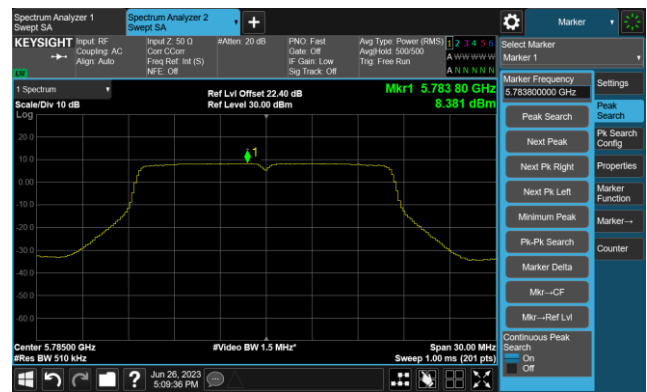

802.11a Power Spectral Density- Ant 0

Channel 165 (5825MHz)

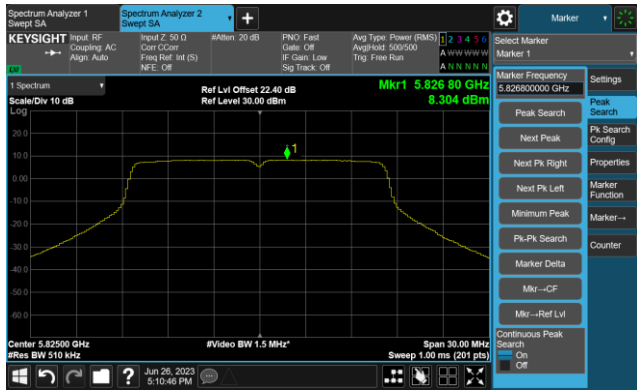


802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 36 (5180MHz)



Channel 44 (5220MHz)

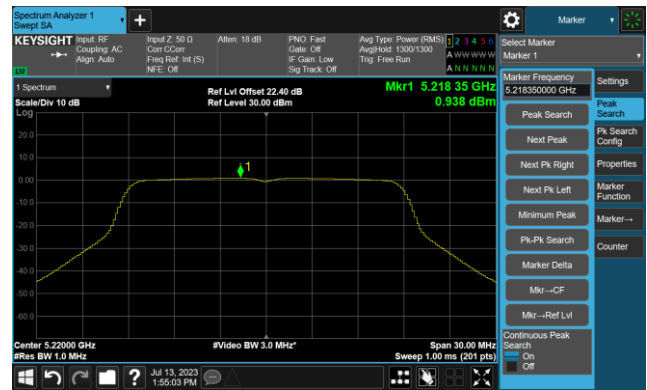

Channel 48 (5240MHz)

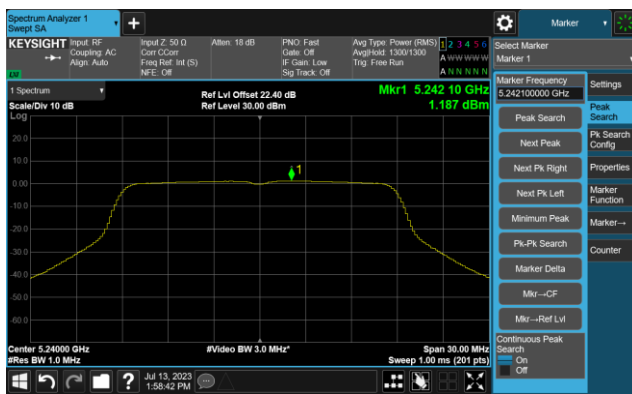

Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 100 (5500MHz)




Channel 116 (5580MHz)




Channel 140 (5700MHz)

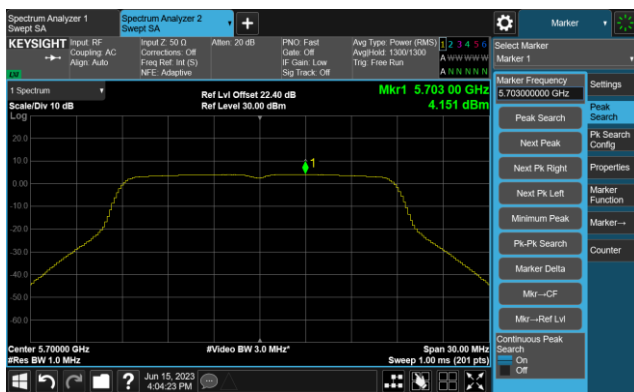


Channel 144(5720MHz)

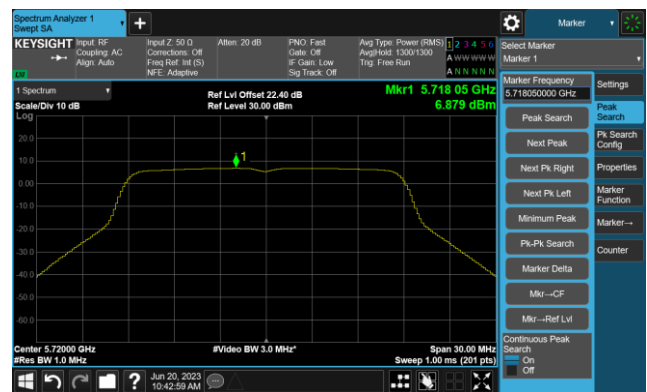

Channel 149 (5745MHz)

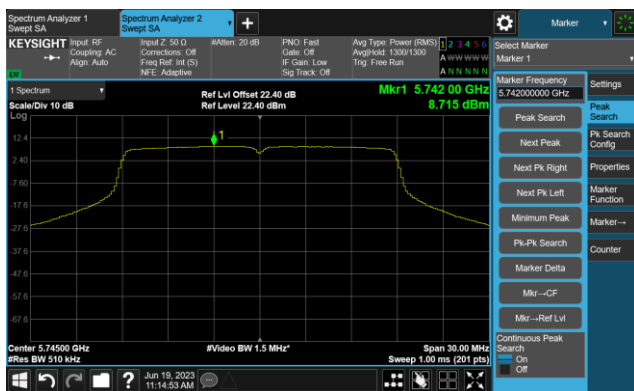


Channel 157 (5785MHz)

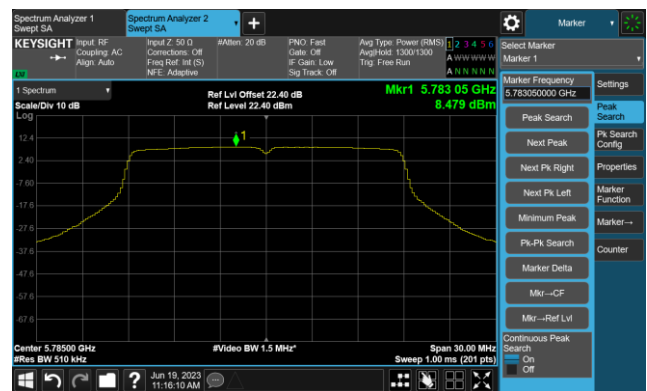

802.11ac-VHT20 Power Spectral Density- Ant 0

Channel 165 (5825MHz)

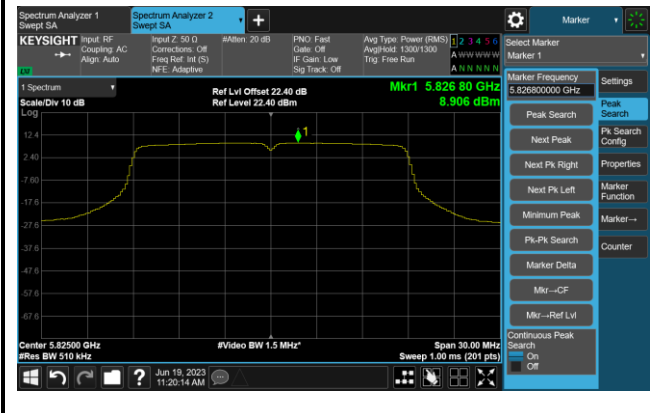


802.11ac-VHT40 Power Spectral Density- Ant 0

Channel 38 (5190MHz)




Channel 46 (5230MHz)

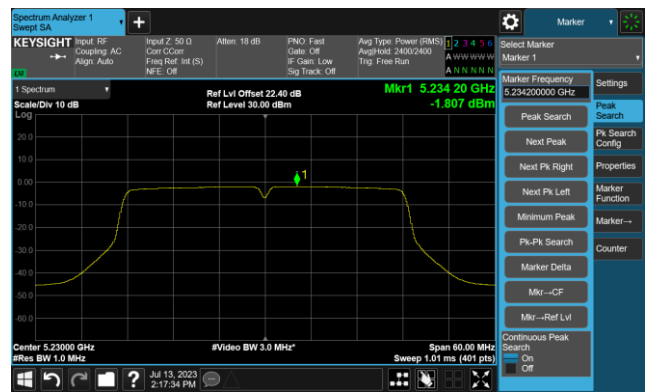

Channel 54 (5270MHz)




Channel 62 (5310MHz)

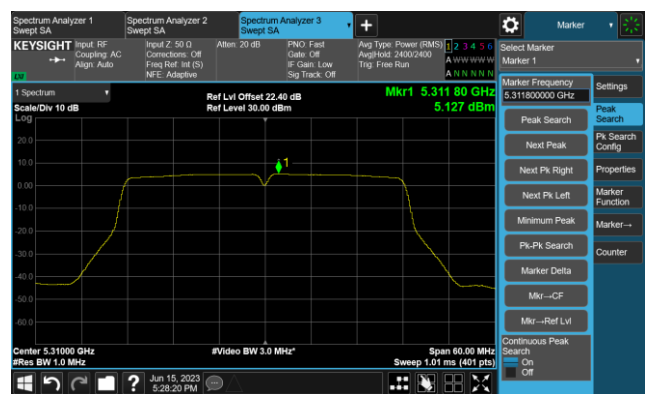

Channel 102 (5510MHz)



Channel 110 (5550MHz)

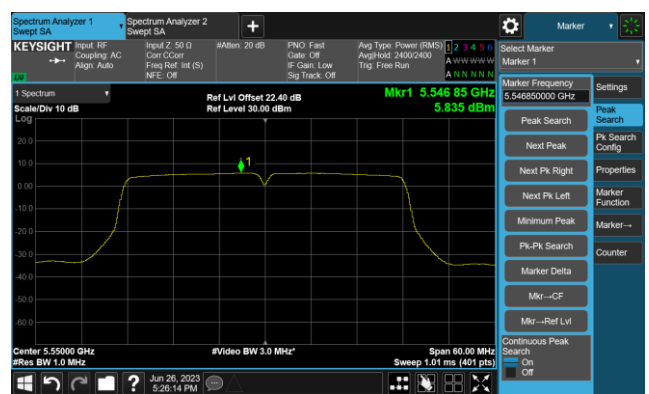


802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 134 (5670MHz)




Channel 142(5710MHz)

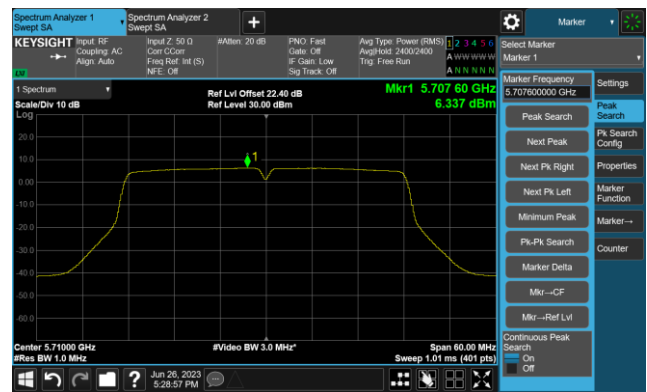

Channel 151 (5755MHz)

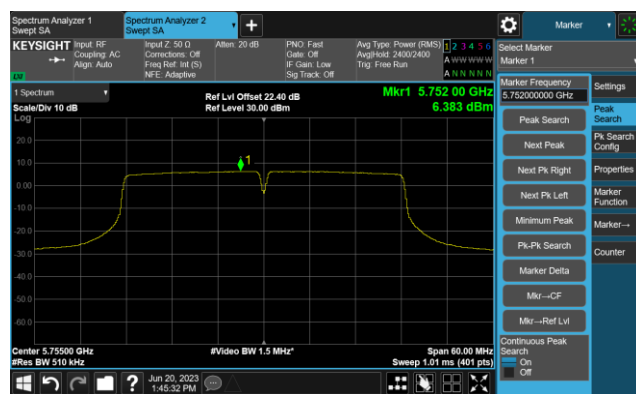


Channel 159 (5795MHz)

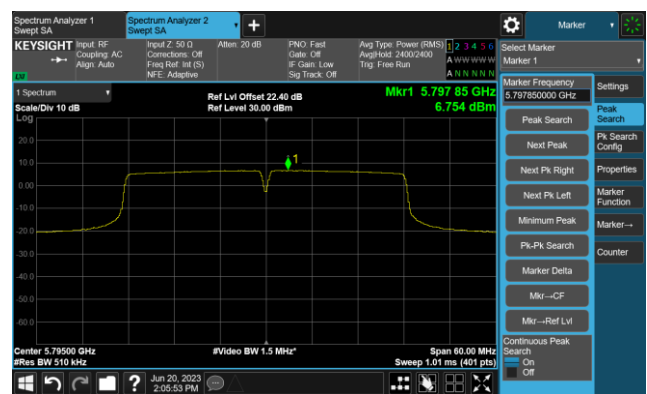


802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

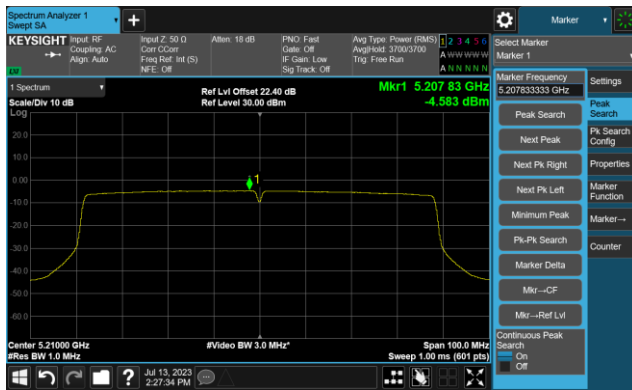


Channel 58 (5290MHz)

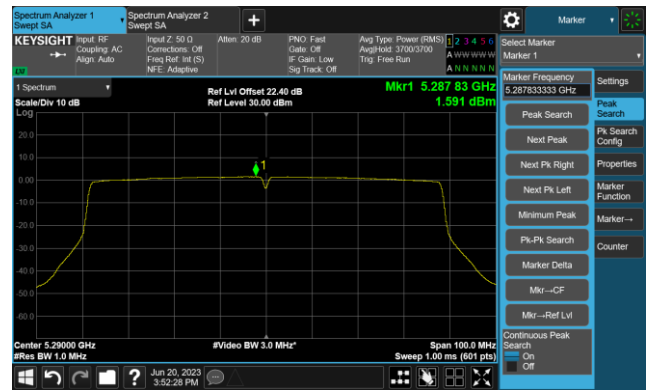

Channel 106 (5530MHz)

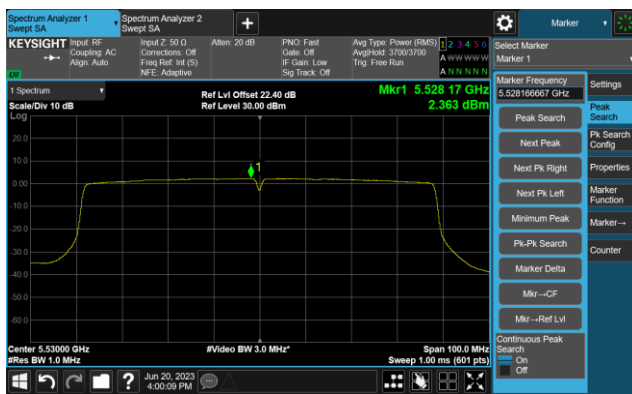


Channel 122 (5610MHz)

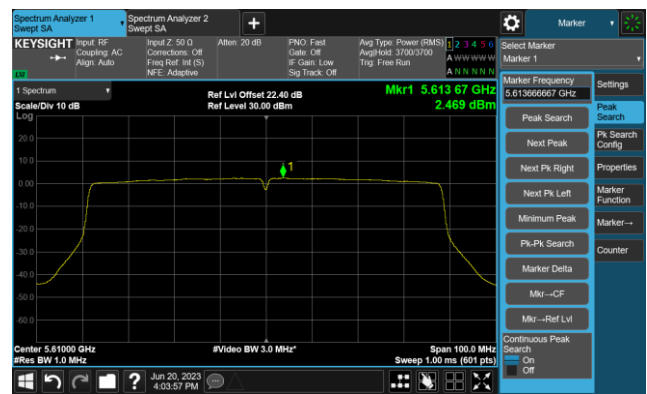

Channel 138 (5690MHz)



Channel 155 (5775MHz)

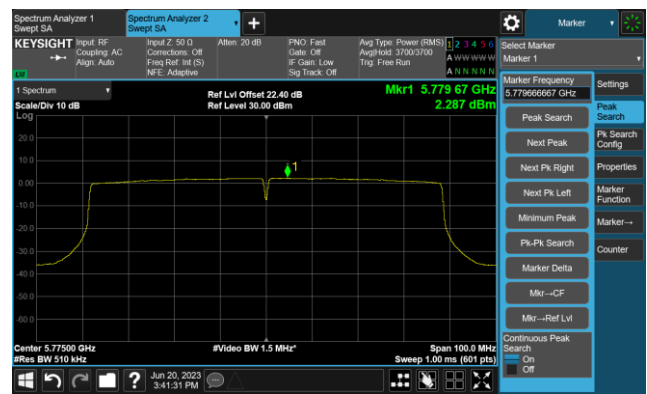

802.11ax-HE20 Power Spectral Density- Ant 0

Channel 36 (5180MHz)




Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)

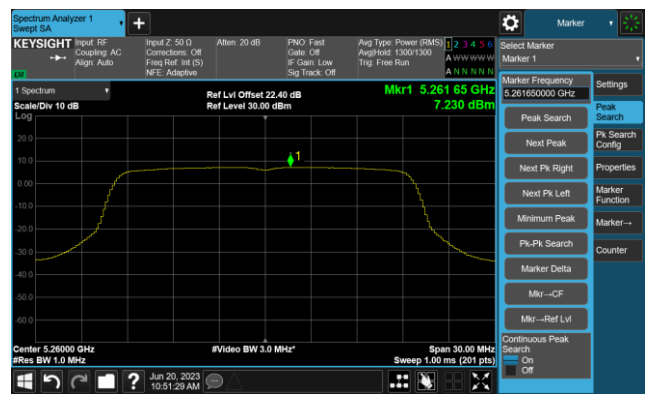

Channel 60 (5300MHz)




Channel 64 (5320MHz)



802.11ax-HE20 Power Spectral Density- Ant 0


Channel 100 (5500MHz)

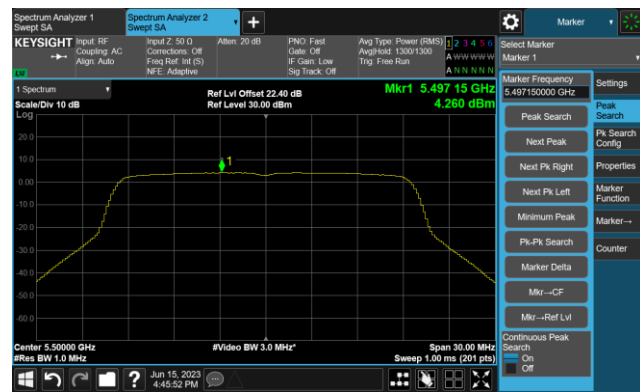

Channel 116 (5580MHz)




Channel 140 (5700MHz)

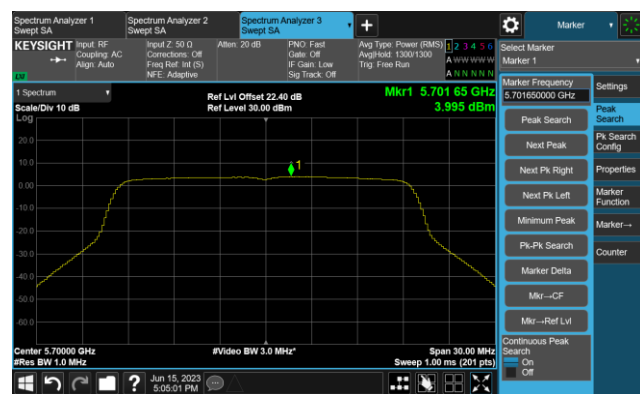


Channel 144(5720MHz)



Channel 149 (5745MHz)

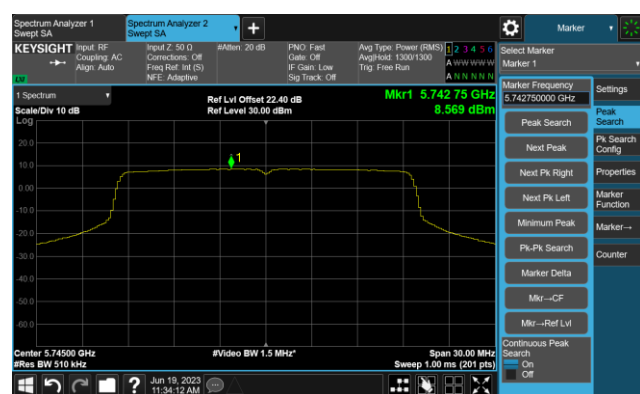


Channel 157 (5785MHz)

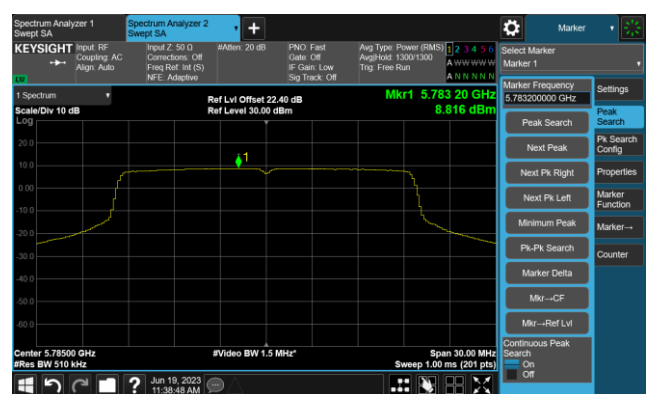


802.11ax-HE20 Power Spectral Density- Ant 0

Channel 165 (5825MHz)

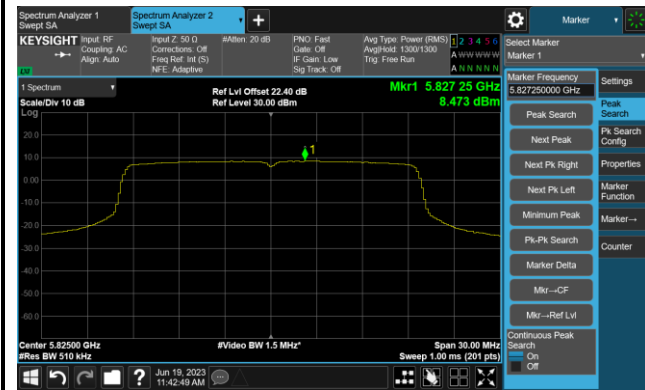


802.11ax-HE40 Power Spectral Density- Ant 0

Channel 38 (5190MHz)

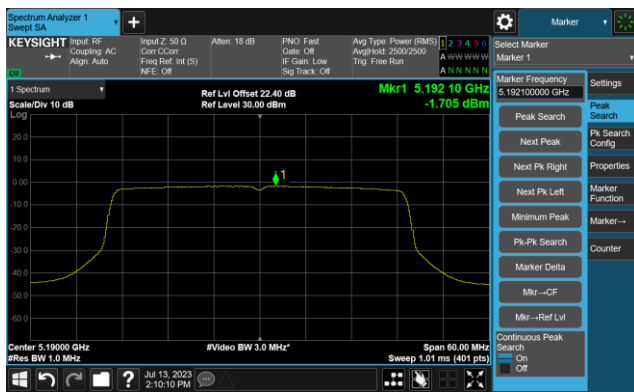


Channel 46 (5230MHz)

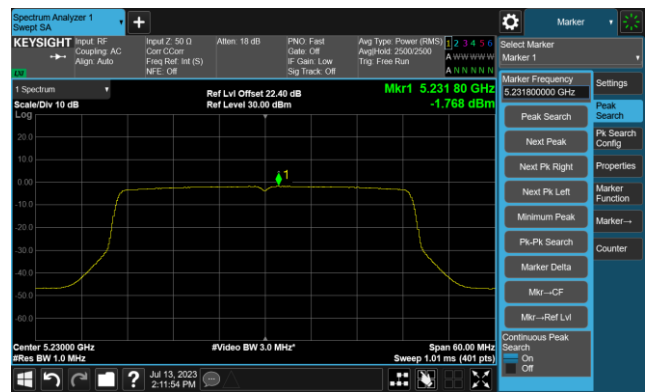

Channel 54 (5270MHz)




Channel 62 (5310MHz)

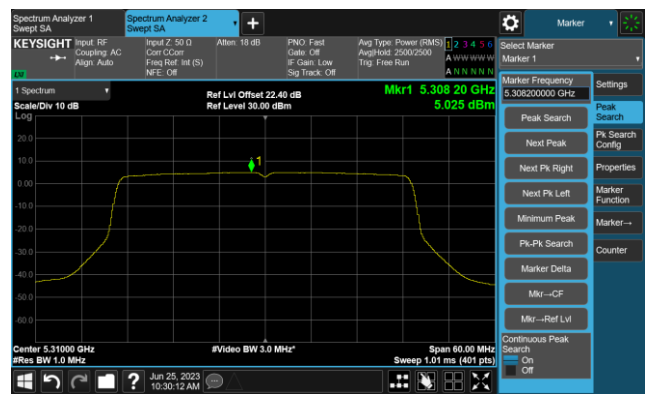

Channel 102 (5510MHz)




Channel 110 (5550MHz)

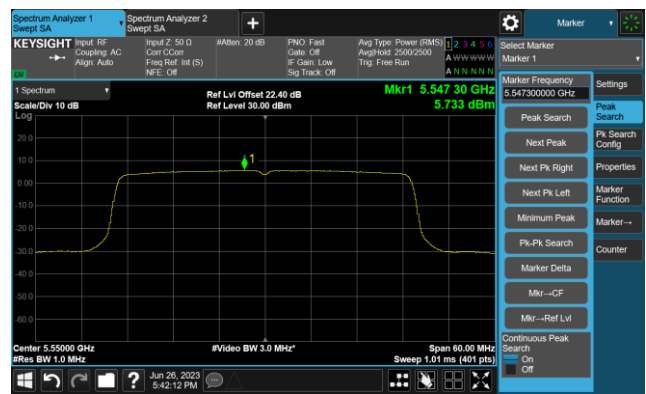

802.11ax-HE40 Power Spectral Density- Ant 0


Channel 134 (5670MHz)

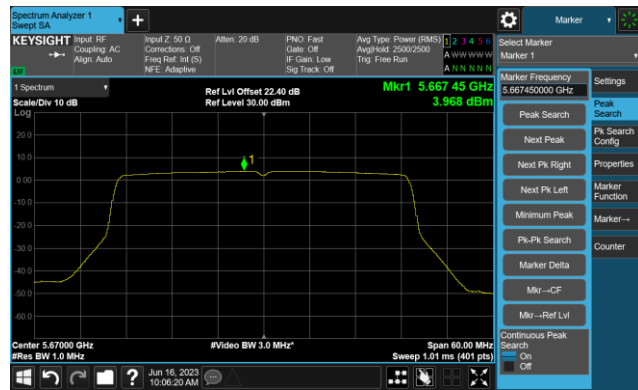

Channel 142(5710MHz)



Channel 151 (5755MHz)

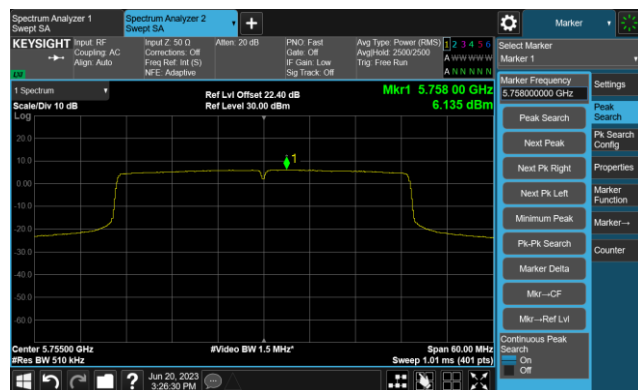

Channel 159 (5795MHz)

