


6.8 Hopping Channel Number

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.8.1 Limit

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

6.8.2 Test setup

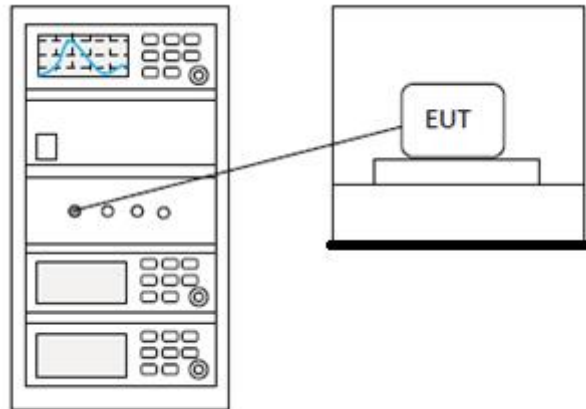

6.8.3 Test data

Pass: Please refer to appendix A for details


6.9 Dwell Time

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.9.1 Limit

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period

6.9.2 Test setup

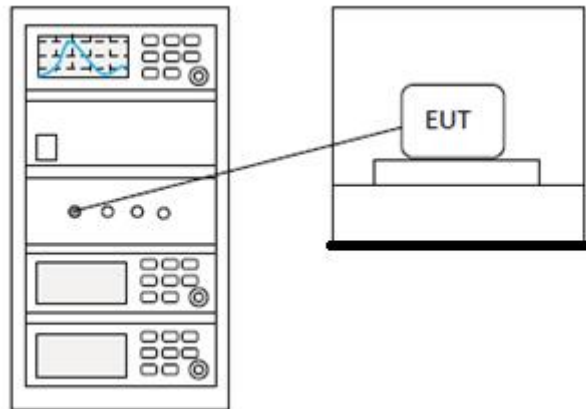

6.9.3 Test data

Pass: Please refer to appendix A for details

6.10 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.10.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.10.2 Test setup


Below 1GHz:

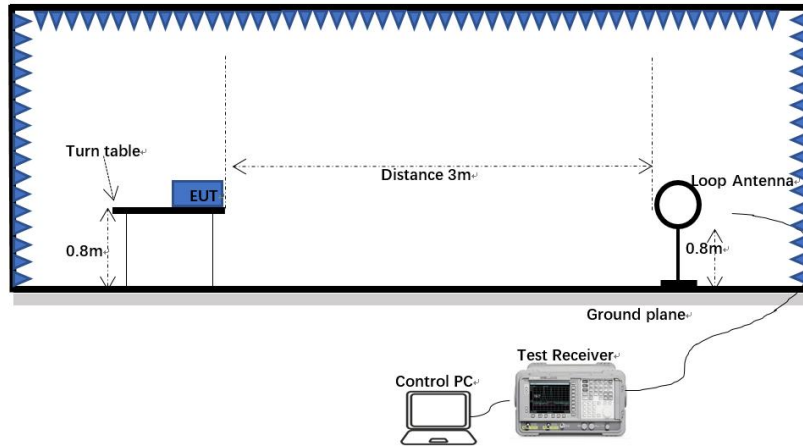

30MHz-1GHz:

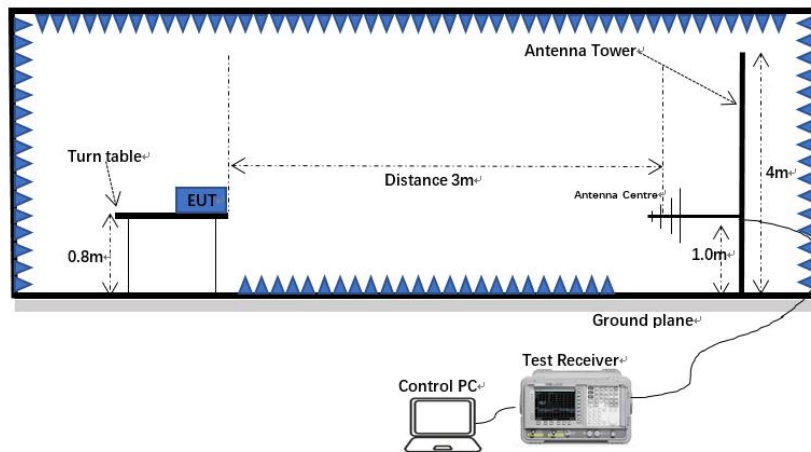

Above 1GHz:

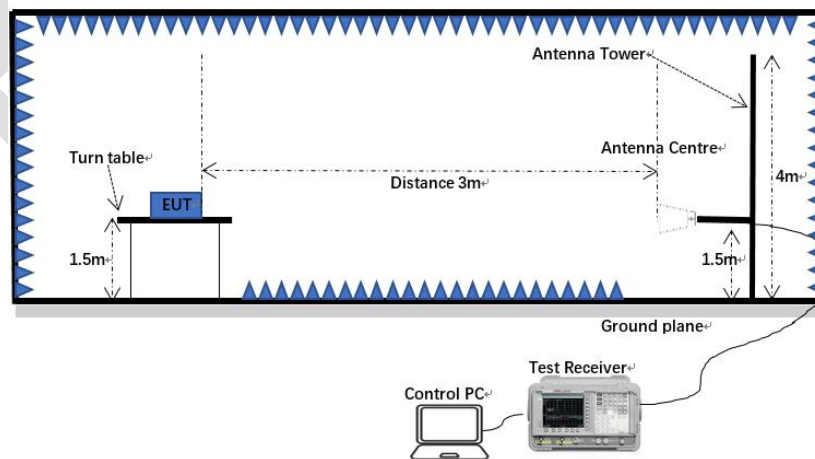

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data

Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

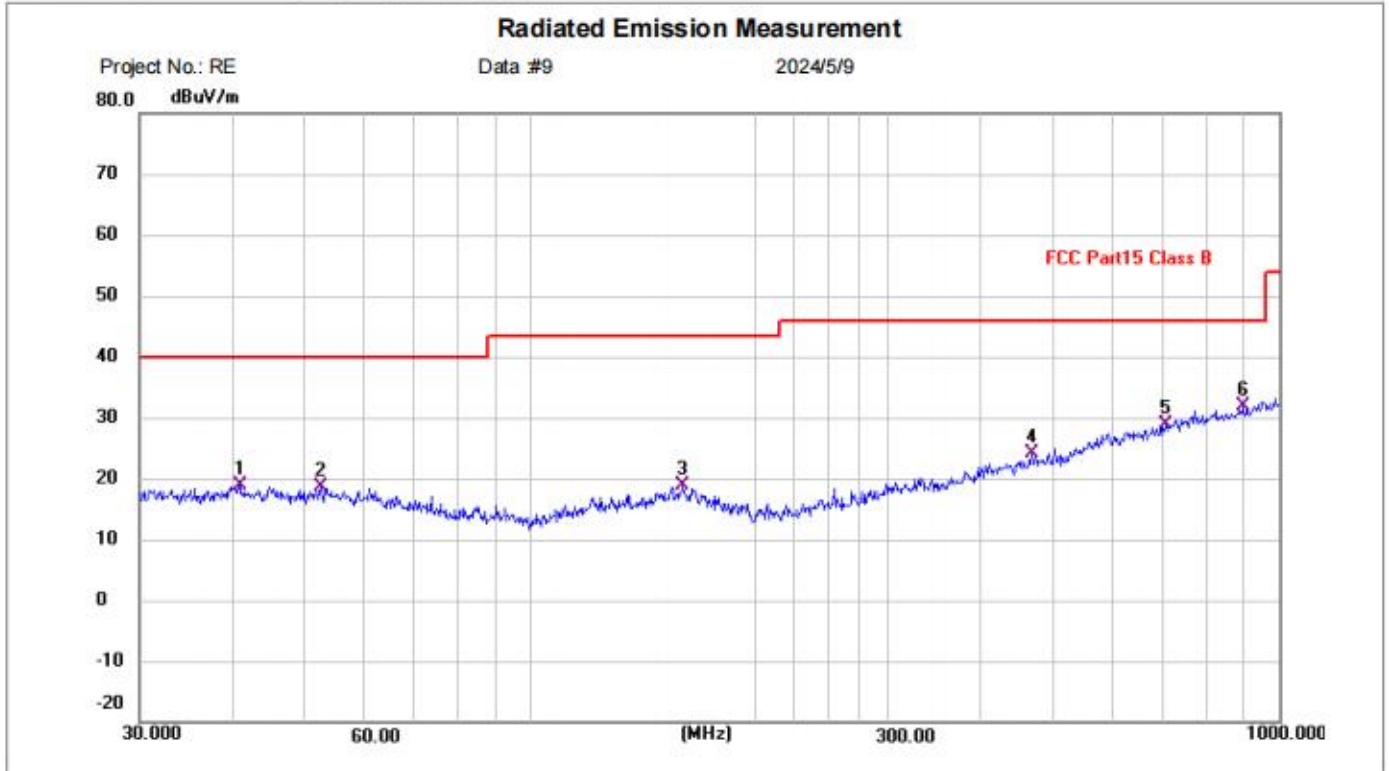


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 Class B	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX		
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	40.8446	-0.79	19.77	18.98	40.00	-21.02	QP	P	
2	52.3912	-0.61	19.21	18.60	40.00	-21.40	QP	P	
3	159.7844	-0.70	19.47	18.77	43.50	-24.73	QP	P	
4	467.2349	0.59	23.63	24.22	46.00	-21.78	QP	P	
5	706.6999	0.78	28.09	28.87	46.00	-17.13	QP	P	
6 *	893.8567	1.11	30.74	31.85	46.00	-14.15	QP	P	

Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

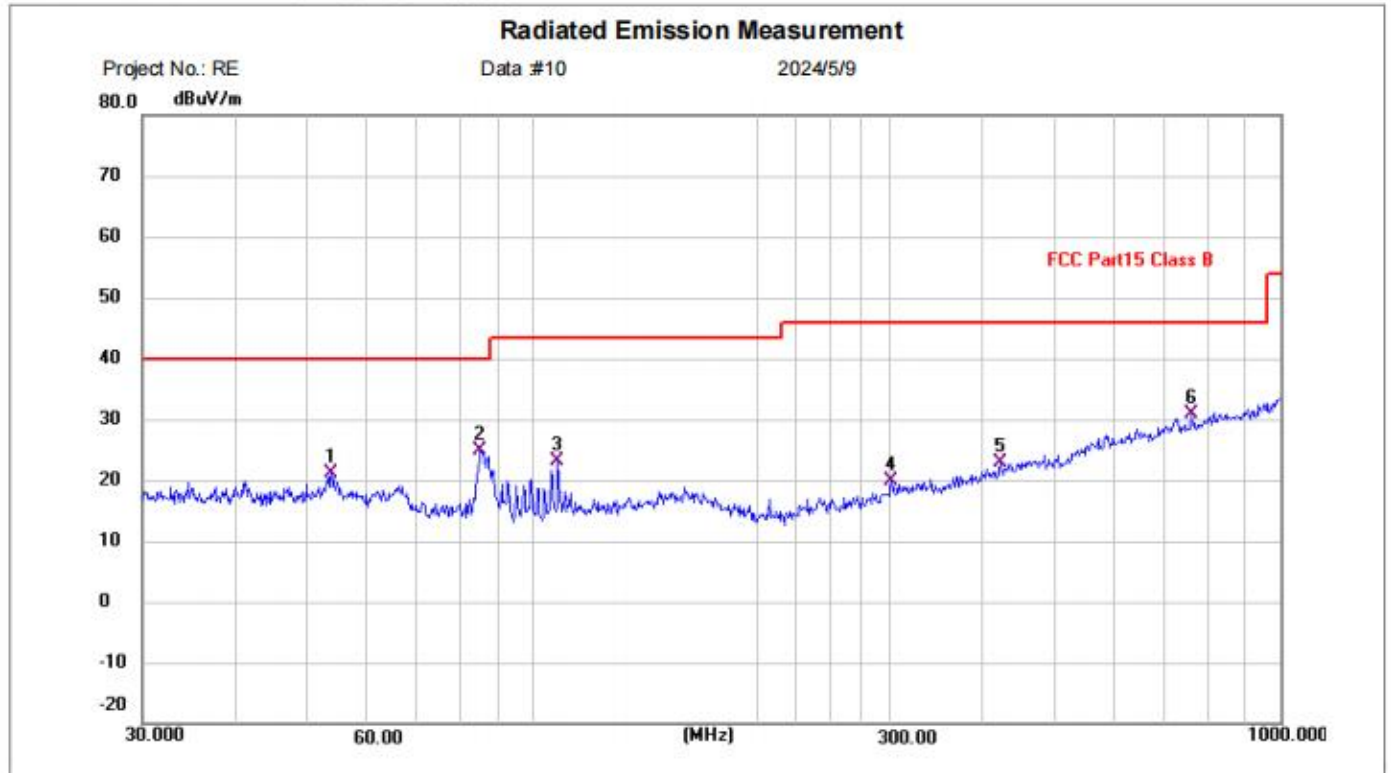


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 Class B	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX		
Note:		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	53.6932	1.97	19.06	21.03	40.00	-18.97	QP	P	
2	84.9995	10.06	14.80	24.86	40.00	-15.14	QP	P	
3	107.8877	7.24	15.82	23.06	43.50	-20.44	QP	P	
4	301.4224	0.52	19.44	19.96	46.00	-26.04	QP	P	
5	422.0577	0.25	22.55	22.80	46.00	-23.20	QP	P	
6 *	760.7036	1.45	29.49	30.94	46.00	-15.06	QP	P	

Test Result: Pass

Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]

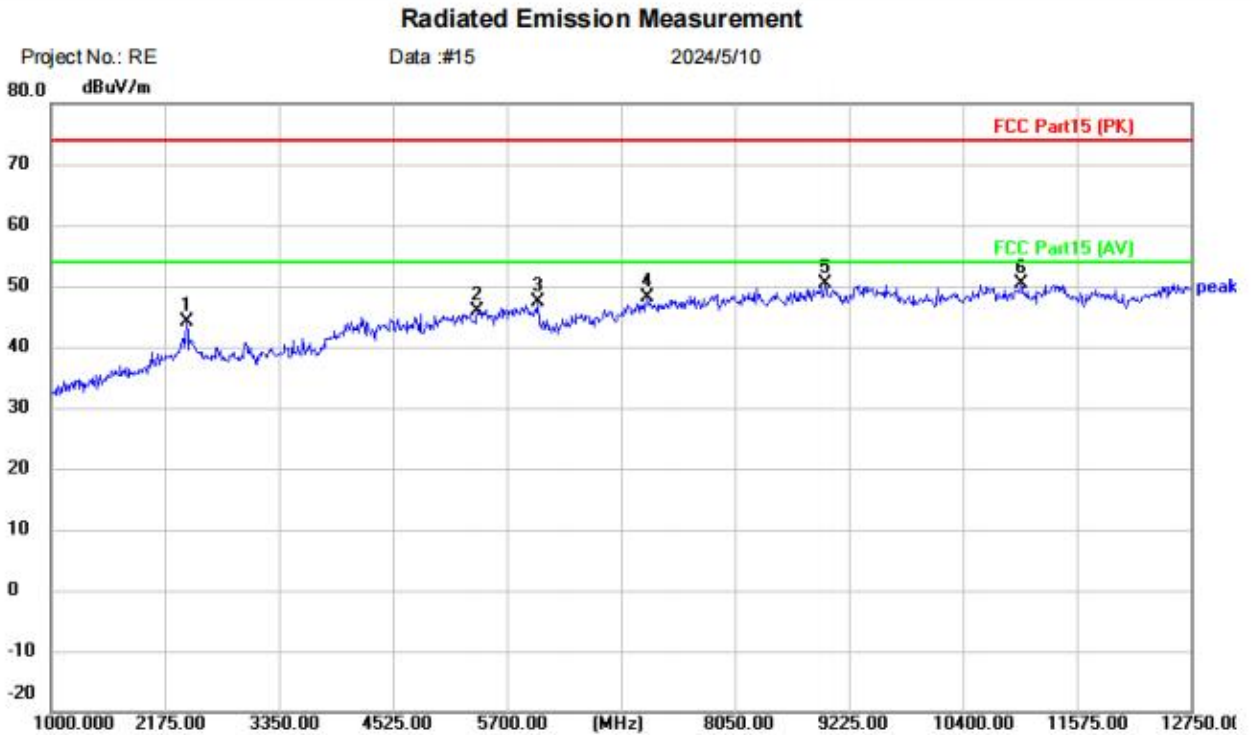


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT:
 M/N:
 Mode: BT TX 2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2398.250	44.10	-0.04	44.06	74.00	-29.94	peak	
2		5394.500	38.41	7.36	45.77	74.00	-28.23	peak	
3		6017.250	41.75	5.63	47.38	74.00	-26.62	peak	
4		7145.250	38.84	9.32	48.16	74.00	-25.84	peak	
5	*	8978.250	37.93	12.37	50.30	74.00	-23.70	peak	
6		10999.25	36.80	13.48	50.28	74.00	-23.72	peak	

Test Result: Pass

[Test mode: TX low channel]; [Polarity: Vertical]

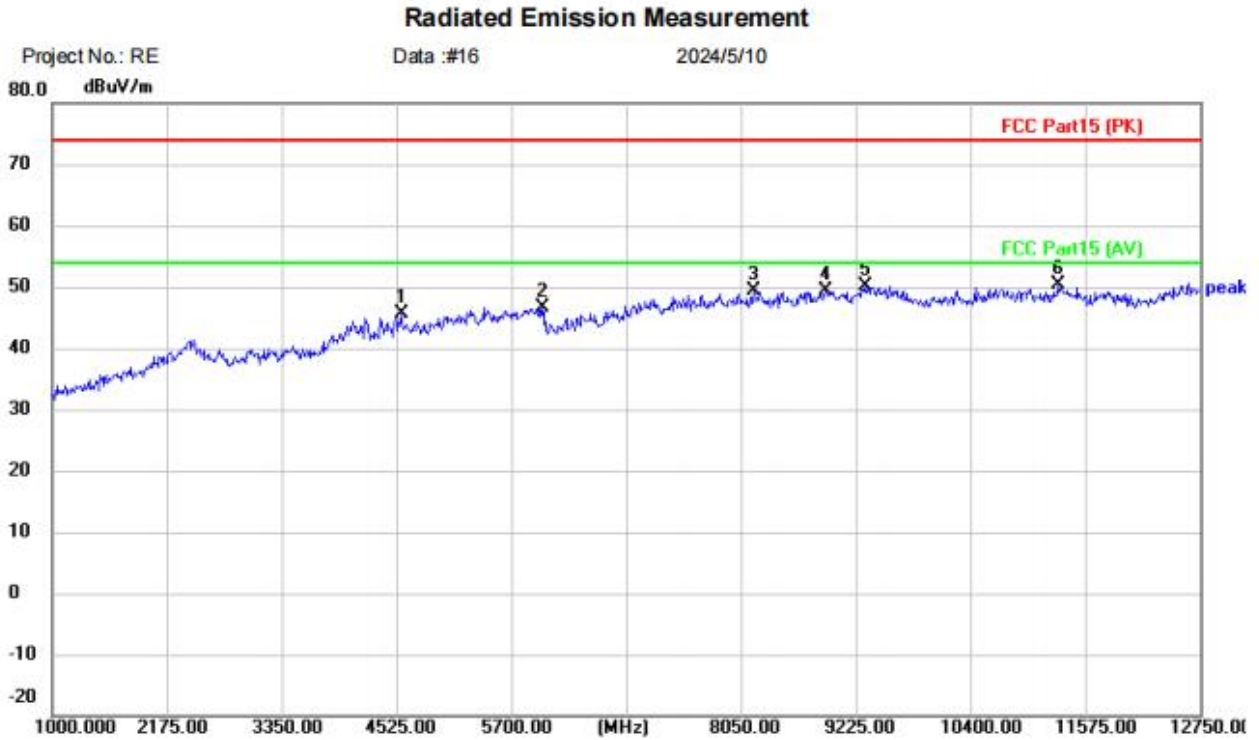


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT:
 M/N:
 Mode: BT TX 2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4572.000	40.52	5.11	45.63	74.00	-28.37	peak	
2		6017.250	41.09	5.63	46.72	74.00	-27.28	peak	
3		8179.250	39.50	9.87	49.37	74.00	-24.63	peak	
4		8919.500	37.30	12.14	49.44	74.00	-24.56	peak	
5		9319.000	37.48	12.63	50.11	74.00	-23.89	peak	
6	*	11293.00	37.60	12.70	50.30	74.00	-23.70	peak	

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]

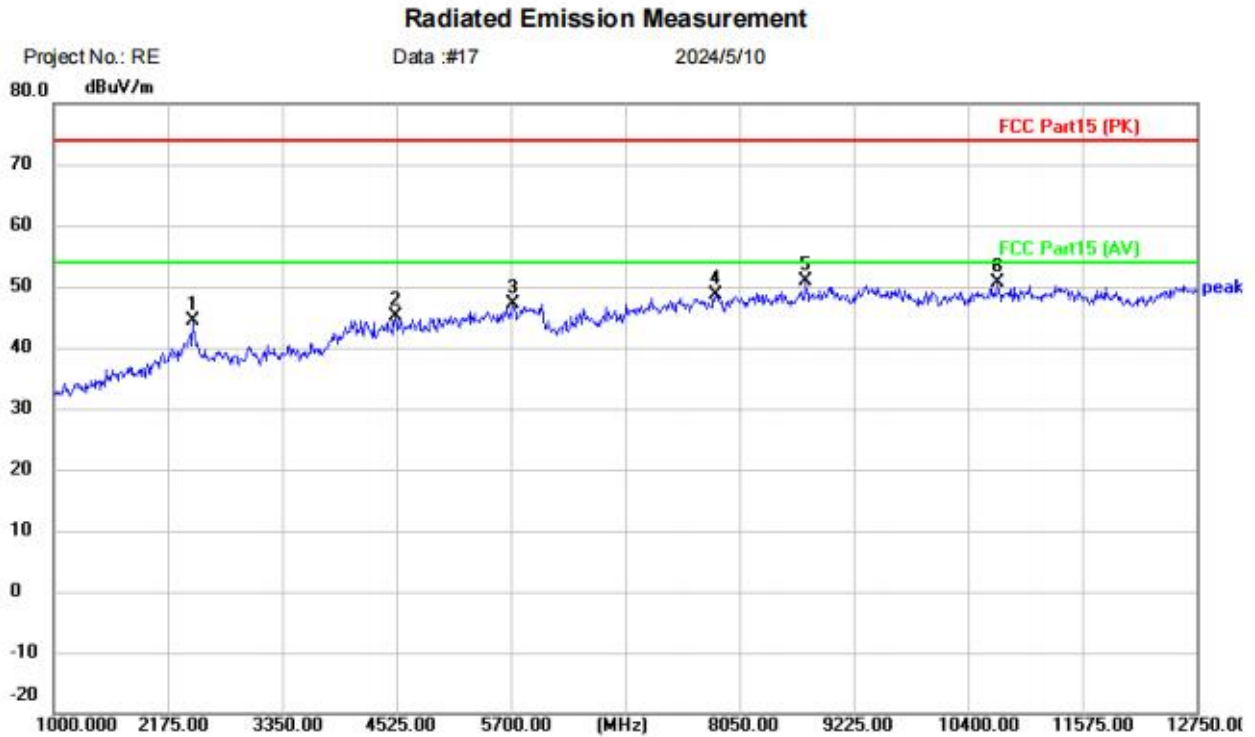


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX 2441		
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2433.500	44.65	-0.38	44.27	74.00	-29.73	peak	
2	4513.250	40.17	4.84	45.01	74.00	-28.99	peak	
3	5723.500	39.01	8.08	47.09	74.00	-26.91	peak	
4	7803.250	39.30	9.45	48.75	74.00	-25.25	peak	
5 *	8731.500	39.35	11.56	50.91	74.00	-23.09	peak	
6	10705.50	37.50	13.12	50.62	74.00	-23.38	peak	

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

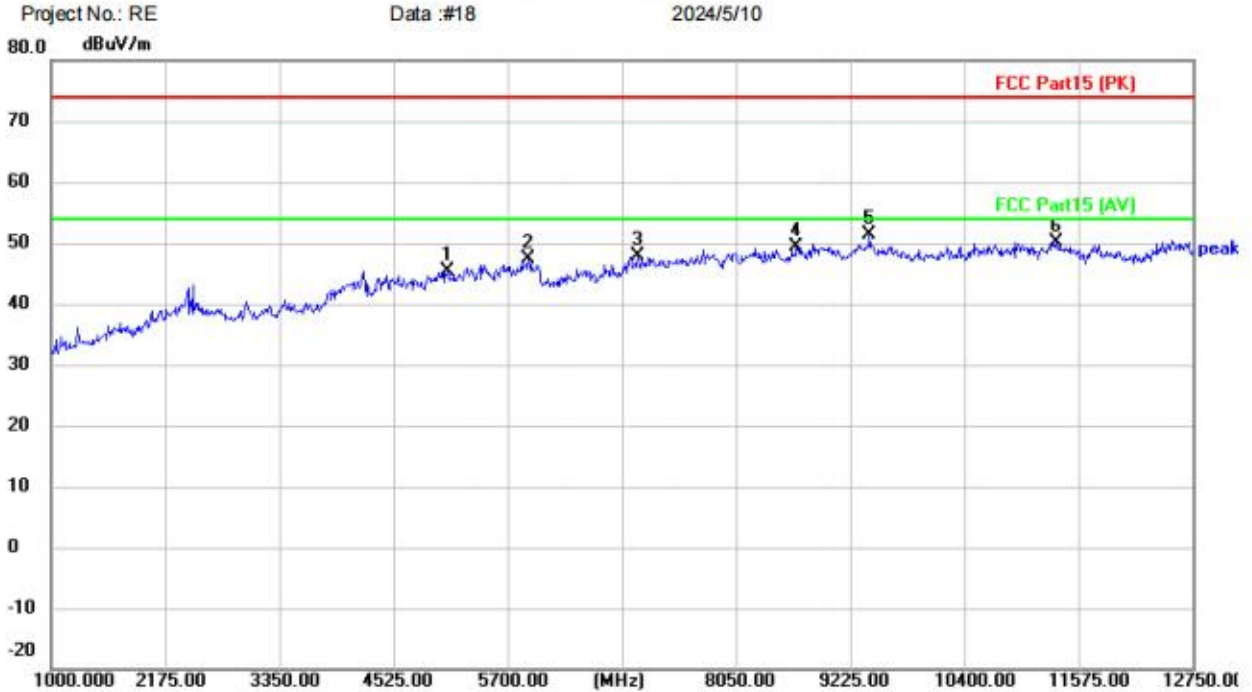
Radiated Emission Measurement


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT:
 M/N:
 Mode: BT TX 2441
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5077.250	38.64	6.85	45.49	74.00	-28.51	peak	
2		5911.500	38.64	8.68	47.32	74.00	-26.68	peak	
3		7039.500	38.83	9.05	47.88	74.00	-26.12	peak	
4		8672.750	37.97	11.40	49.37	74.00	-24.63	peak	
5	*	9424.750	38.83	12.48	51.31	74.00	-22.69	peak	
6		11340.00	37.52	12.67	50.19	74.00	-23.81	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

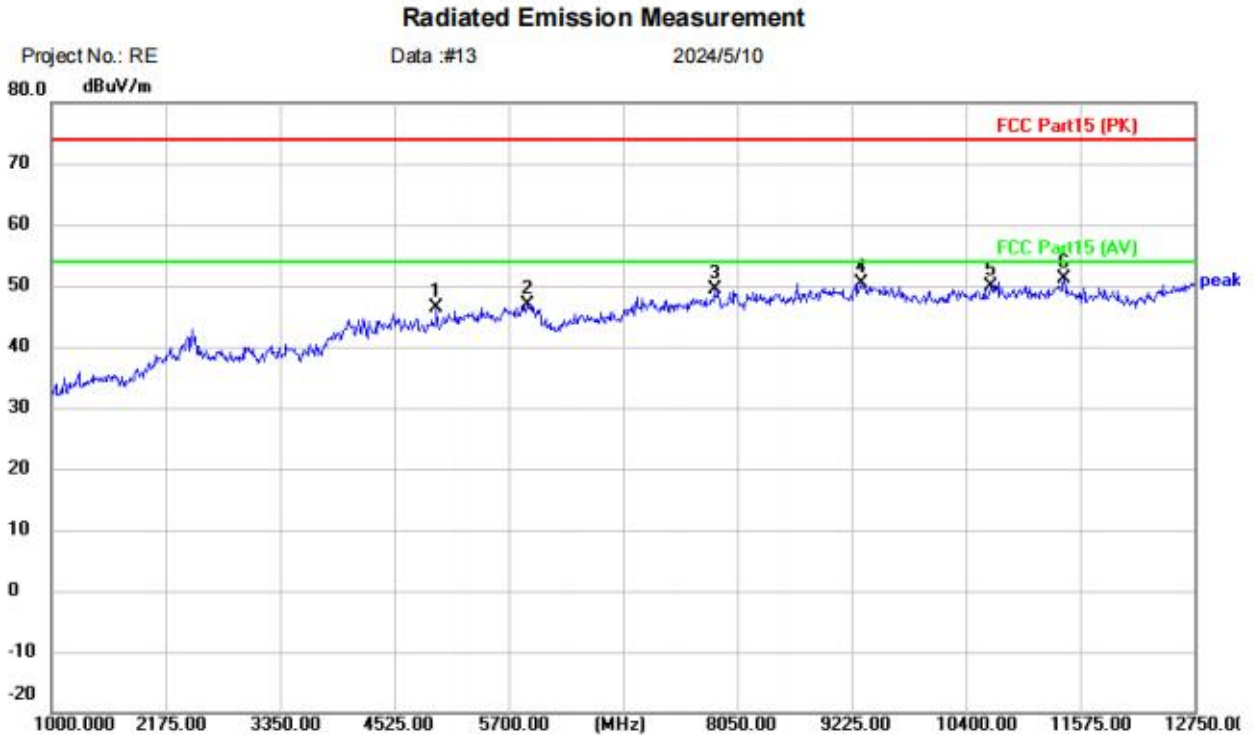


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4959.750	39.75	6.60	46.35	74.00	-27.65	peak	
2		5899.750	38.12	8.66	46.78	74.00	-27.22	peak	
3		7815.000	39.73	9.59	49.32	74.00	-24.68	peak	
4		9319.000	37.78	12.63	50.41	74.00	-23.59	peak	
5		10658.50	36.96	12.93	49.89	74.00	-24.11	peak	
6	*	11410.50	38.55	12.61	51.16	74.00	-22.84	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

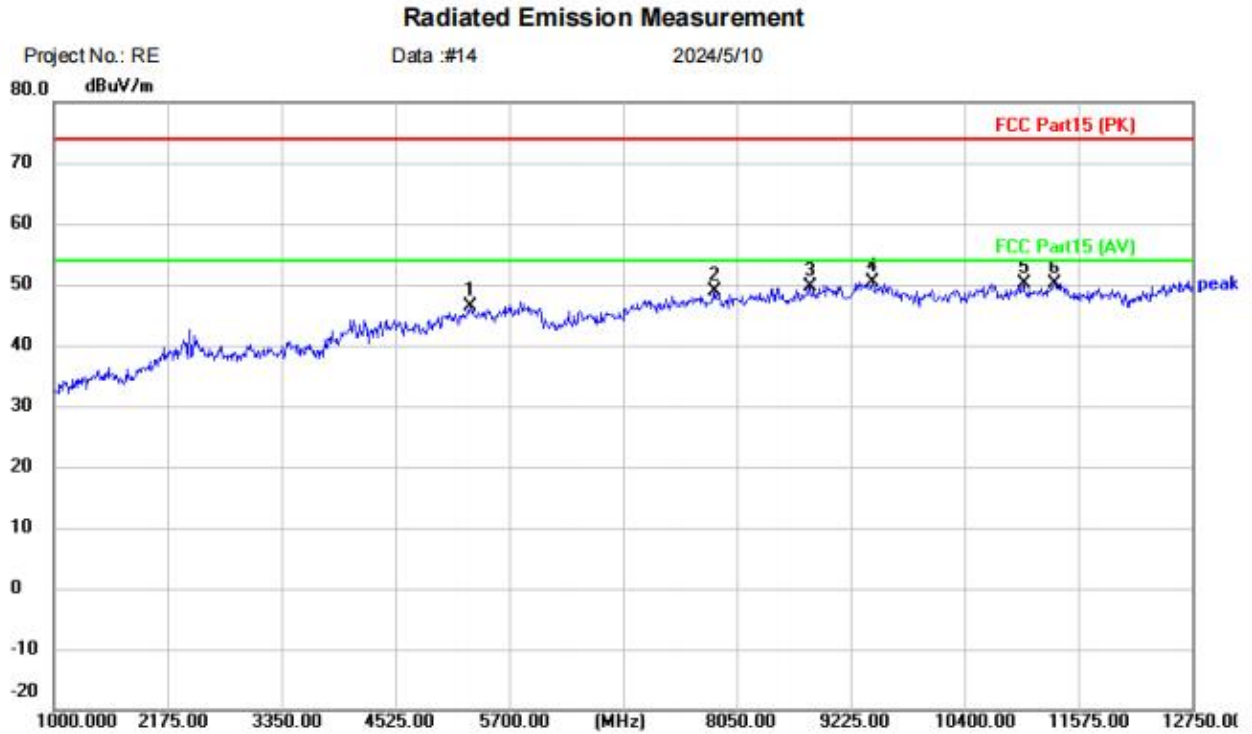

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5300.500	39.37	7.07	46.44	74.00	-27.56	peak	
2		7815.000	39.39	9.59	48.98	74.00	-25.02	peak	
3		8802.000	38.07	11.68	49.75	74.00	-24.25	peak	
4	*	9448.250	38.06	12.37	50.43	74.00	-23.57	peak	
5		11011.00	36.78	13.40	50.18	74.00	-23.82	peak	
6		11328.25	37.56	12.67	50.23	74.00	-23.77	peak	

Test Result: Pass

DH1,DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK, modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

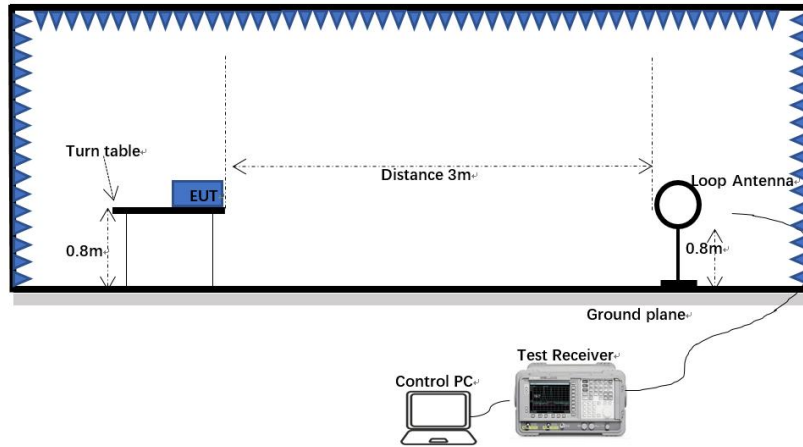

30MHz-1GHz:

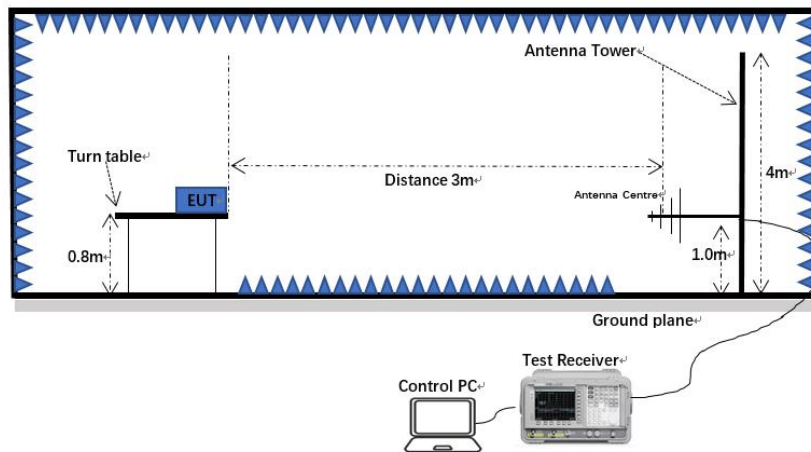

Above 1GHz:

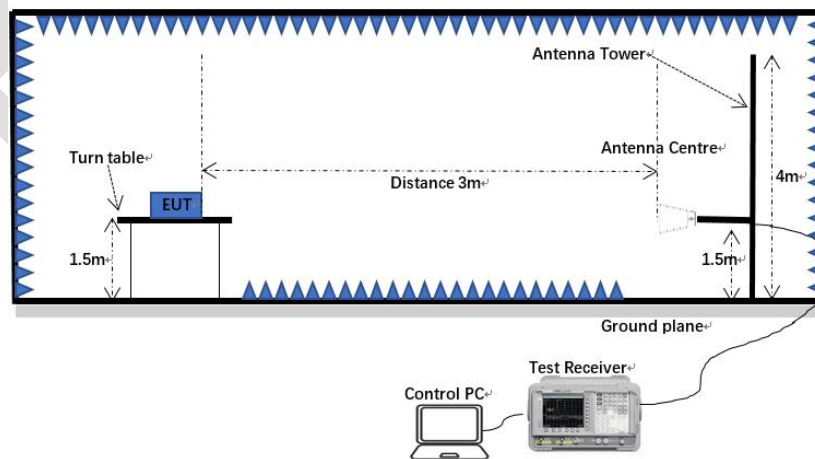

6.11.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

[Test mode: TX low channel]; [Polarity: Horizontal]

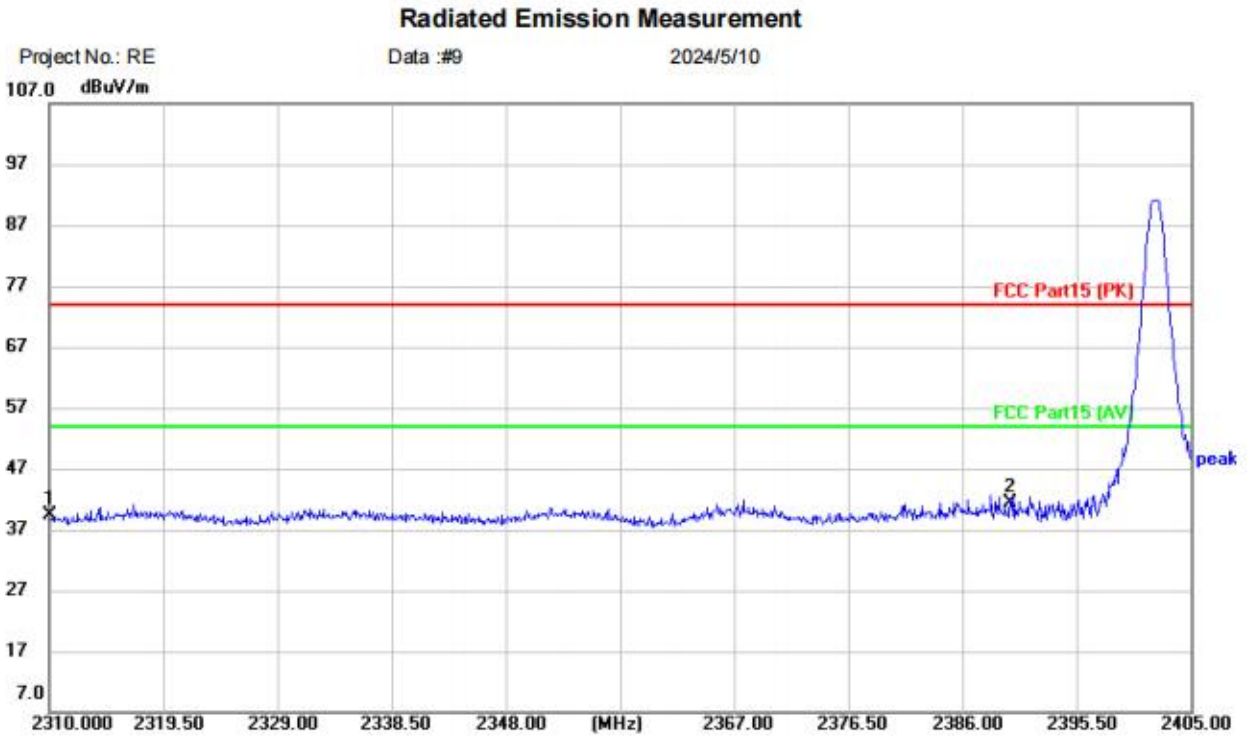


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX 2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	42.38	-2.89	39.49	74.00	-34.51	peak	
2	*	2390.000	44.01	-2.70	41.31	74.00	-32.69	peak	

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

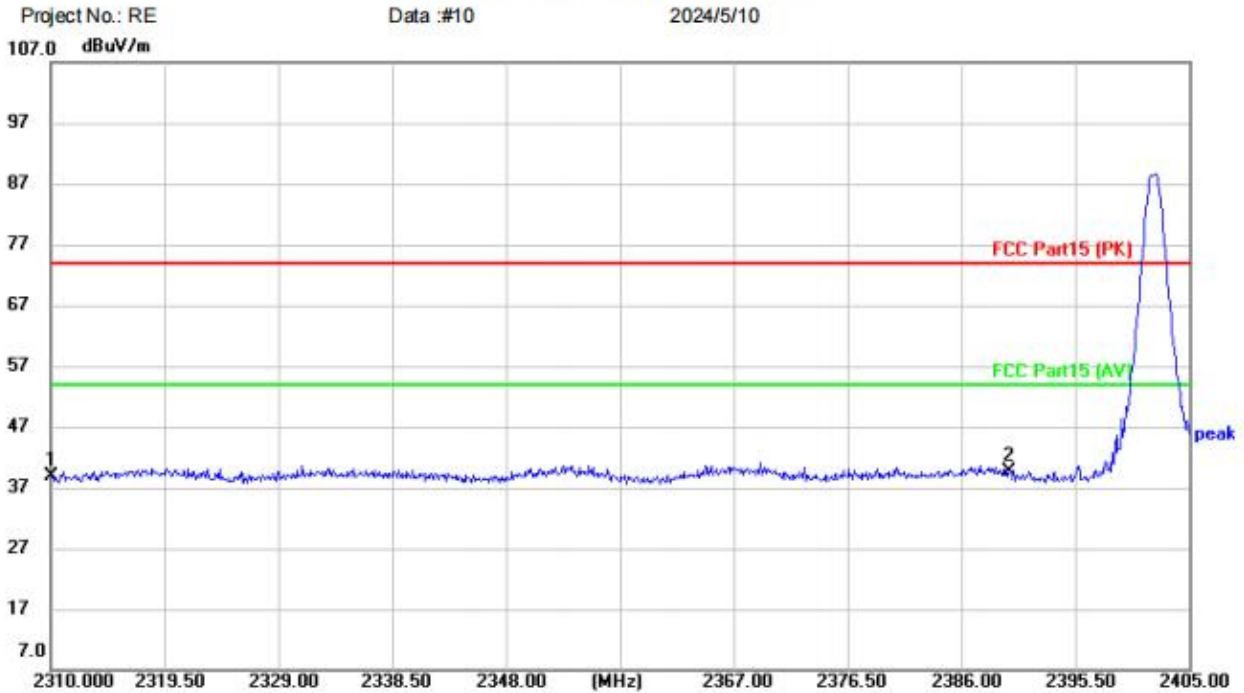

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT:
 MN:
 Mode: BT TX 2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.71	-2.89	38.82	74.00	-35.18	peak	
2	*	2390.000	42.32	-2.70	39.62	74.00	-34.38	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]


Radiated Emission Measurement

Project No.: RE

Data :#11

2024/5/10

107.0 dBuV/m

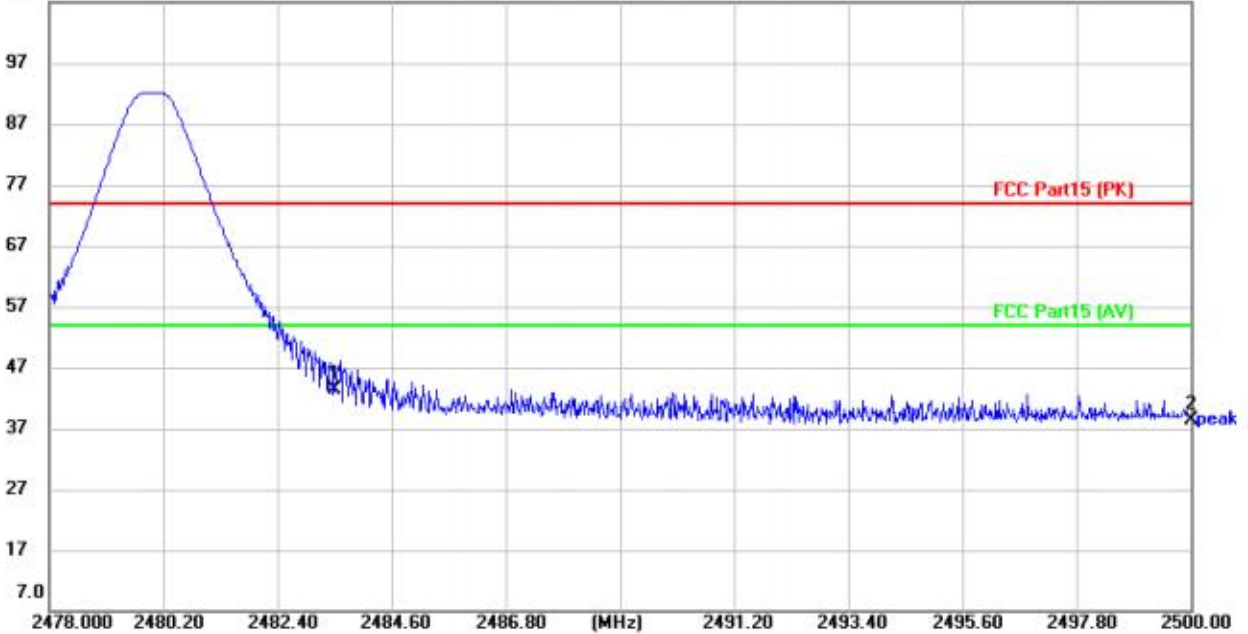


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT:		
M/N:		
Mode: BT TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	46.37	-2.91	43.46	74.00	-30.54	peak	
2		2500.000	41.47	-3.00	38.47	74.00	-35.53	peak	

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

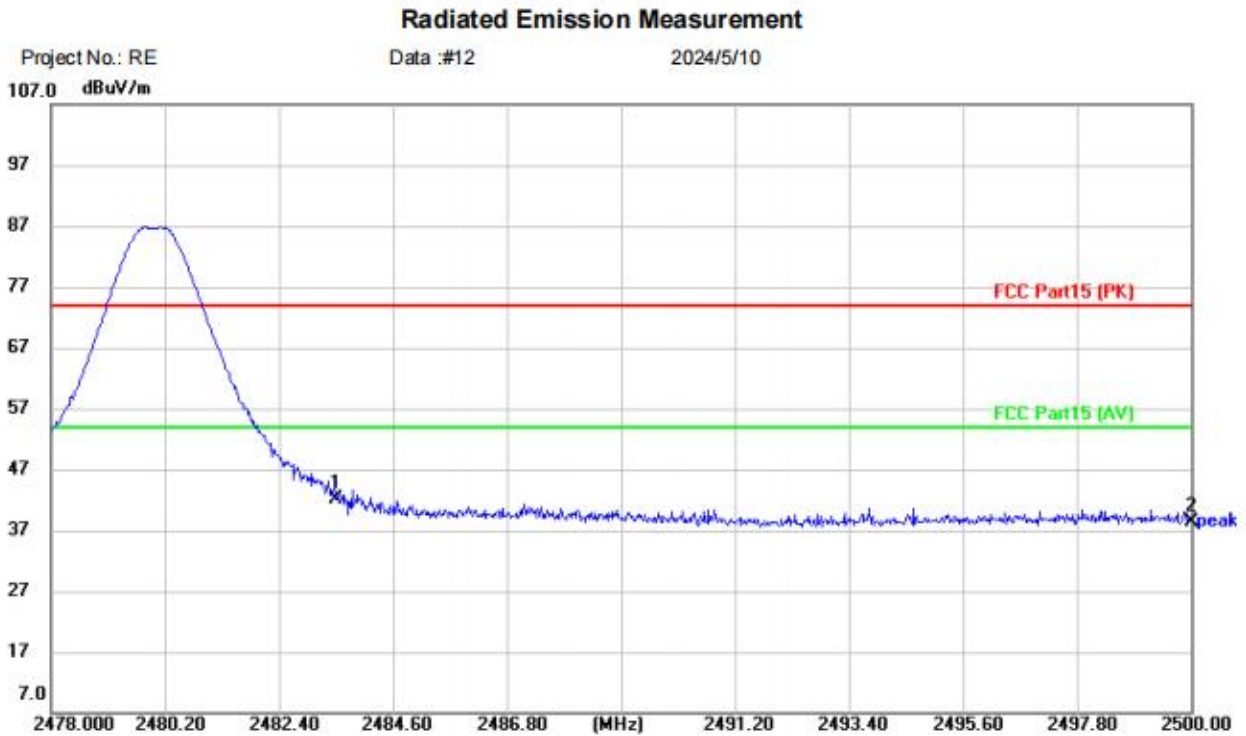

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT:

M/N:

Mode: BT TX 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	44.95	-2.91	42.04	74.00	-31.96	peak	
2		2500.000	41.36	-3.00	38.36	74.00	-35.64	peak	

Test Result: Pass

DH1,DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK,modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.