

**Application for Type Acceptance
for an RF Power Amplifier**

**EMR Corp.
22402 N. 19th Ave.
Phoenix, AZ**

RF Power Amplifier:

Part # HUHF 800-80

FCC ID: M7G-HUHF 800-80

Report # RA054501/80144

This report was prepared in accordance with the requirements of FCC rules and regulations Part 2, Subpart J, 2.981 thru 2.1005, Part 22, Part 90, and other applicable sections of the rules as indicated herein.

Prepared By:

Jake Tynes

**DNB ENGINEERING, INC.
3535 W. Commonwealth Ave.
Fullerton, Ca 92833**

26 May 1998

Table of Contents

Section	Title	Page #
1.0	ADMINISTRATIVE DATA	1
1.1	Certifications and Qualifications	1
1.2	Measurements Repeatability Information	1
Paragraph numbers in this report follow the application section numbers found in the FEDERAL COMMUNICATIONS COMMISSION Rules and Regulations, Part 2, Subpart J for Type Acceptance of electronic equipment.		
2.983(a)	Request for Type Acceptance	2
2.983(b)	Equipment Identification	2
2.983(c)	Anticipated Production	2
2.983(d)	Technical Description	3
2.983(d)(1)	Type or Types of Emissions	3
2.983(d)(2)	Frequency Range	3
2.983(d)(3)	Operating Power level	3
2.983(d)(4)	Maximum Power Allowed in Applicable part(s) of The Rules	4
2.983(d)(5)	Final RF Amplifier Input Power	4
2.983(d)(6)	Function of all Active Circuit Devices	4
2.983(d)(7)	Circuit Diagram	5
2.983(d)(8)	Instruction Book	5
2.983(d)(9)	Tune Up Procedure	5
	Figure 1. Circuit Diagrams	6
	Figure 2..Block Diagram (I/O Tests)	7
2.983(e)	Test Data	8
2.983(e)(1)	Measurement of RF Power Output Per 2.985 ..	8
2.983(e)(2)	Measurement of Modulation Characteristics Per 2.987(a)(1)	9
2.983(e)(3)	Measurement of Occupied Bandwidth Per 2.989	10
	Figure 3. Occupied Bandwidth (I/O Tests) ..	11
	Plots	12-14

Table of Contents

(Continued)

Section	Title	Page #
2.983 (e) (4)	Measurement of Antenna Conducted Spurious Emission Per 2.991	15
	Plots Spurious Emissions	16-17
2.983 (e) (5)	Measurement of Radiated Spurious Per 2.993	18
	Figure 4. Block Diagram Surious Emissions	19
	Table I	20-21
2.983 (e) (6)	Measurement of Frequency Stability Per 2.995	22
2.983 (e) (7)	Frequency Spectrum to be Investigated Per 2.997	22
2.983 (f)	FCC ID: Label	23
2.983 (g)	Photographs and/or Drawings Showing Equipment Construction Technique	24-32
2.983 (h)	Description and Test Data for Encoding Device(s)	33
2.983 (i)	Type Acceptance Data for an External power Amplifier used in the Amateur Radio Service Part 97	33
APPENDIX A	<i>Test Equipment</i>	A1
APPENDIX B	<i>Service/Operating Manual</i>	B1

1.0 **ADMINISTRATIVE DATA**

1.1 **Certifications and Qualifications**

I certify that the tests performed in order to obtain the technical data presented in this application were performed by **DNB ENGINEERING, INC.** Also, based on the results of the enclosed data, I have concluded that the equipment tested meets or exceeds the requirements of the Rules and Regulations governing this application.

1.2 **Measurement Repeatability Information**

The test data presented in this report has been acquired using the guidelines set forth in FCC Pt. 2.981 through 2.1005 and Pt. 90. The test results presented in this document are valid only for the equipment identified herein under the test conditions described. Repeatability of these test results will only be achieved with identical measurement conditions. These conditions include the same test distance, EUT height, measurement site characteristics, and the same EUT and system components. The system must have the same interconnecting cables arranged in identical placement to that shown in the setup photos, with the system and/or EUT functioning in the identical mode of operation (i.e. software and so on) as on the date of the test. Any deviation from the test conditions and environment on the date of test may result in measurement repeatability difficulties.

All changes made to the EUT during the course of testing as identified in this report must be incorporated in the EUT or identical models to ensure compliance with the FCC regulations.


Bryan Broaddus Par. 1.1
Manager, Test Department
DNB ENGINEERING, INC.
Phone # (714) 870-7781

2.983(a) **Request For Type Acceptance**

Name of Applicant: EMR Corp.
22402 N. 19th Ave.
Phoenix, AZ 92714-5610

Applicant is: ☒ Manufacturer
☐ Vendor
☐ Licensee
☐ Prospective Licensee
☐ Other

Name of Manufacturer: EMR Corp.

2.983(b) **Equipment Description**

The EUT is an RF Power Amplifier (See Owner's Manual in Appendix B for more detail).

Part Number: HUHF 800-80

FCC ID: M7G-HUHF 800-80

2.983(c) **Anticipated Production Quantity**

☐ One Unit
☒ Multiple Units

2.983(d) **Technical Description**

See Pages 2 and 3 of the Service Manual Included
in Appendix B herein for the complete description.

2.983(d)(1) **Type(s) of Emissions**

F3E

2.983(d)(2) **Frequency Range**

850 - 870 MHz

2.983(d)(3) **Operating Power Level**

85 Watts

2.983(d)(4) **Maximum Power Allowed in Applicable Part(s) of the Rules**

<u>Rules Part</u>	<u>Maximum Power (Watts)</u>
Part 90.75	500 Watts

2.983(d)(5) **Final RF Amplifier Input Power**

Voltage	<u>13.6</u>	VDC
Current	<u>8.82</u>	Amps
Power	<u>120</u>	mWatts

2.983(d)(6) **Function of all Active Circuit Devices**

Please refer to Appendix B.

2.983(d)(7) **Circuit Diagram**

Refer to Figure in Appendix B.

2.983(d)(8) **Instruction Book(s)**

See Appendix B

2.983(d)(9) **Tune-Up Procedure**

Refer to Appendix B.

Circuit Diagram
2.983(d)(7)

SEE FIGURE IN APPENDIX B

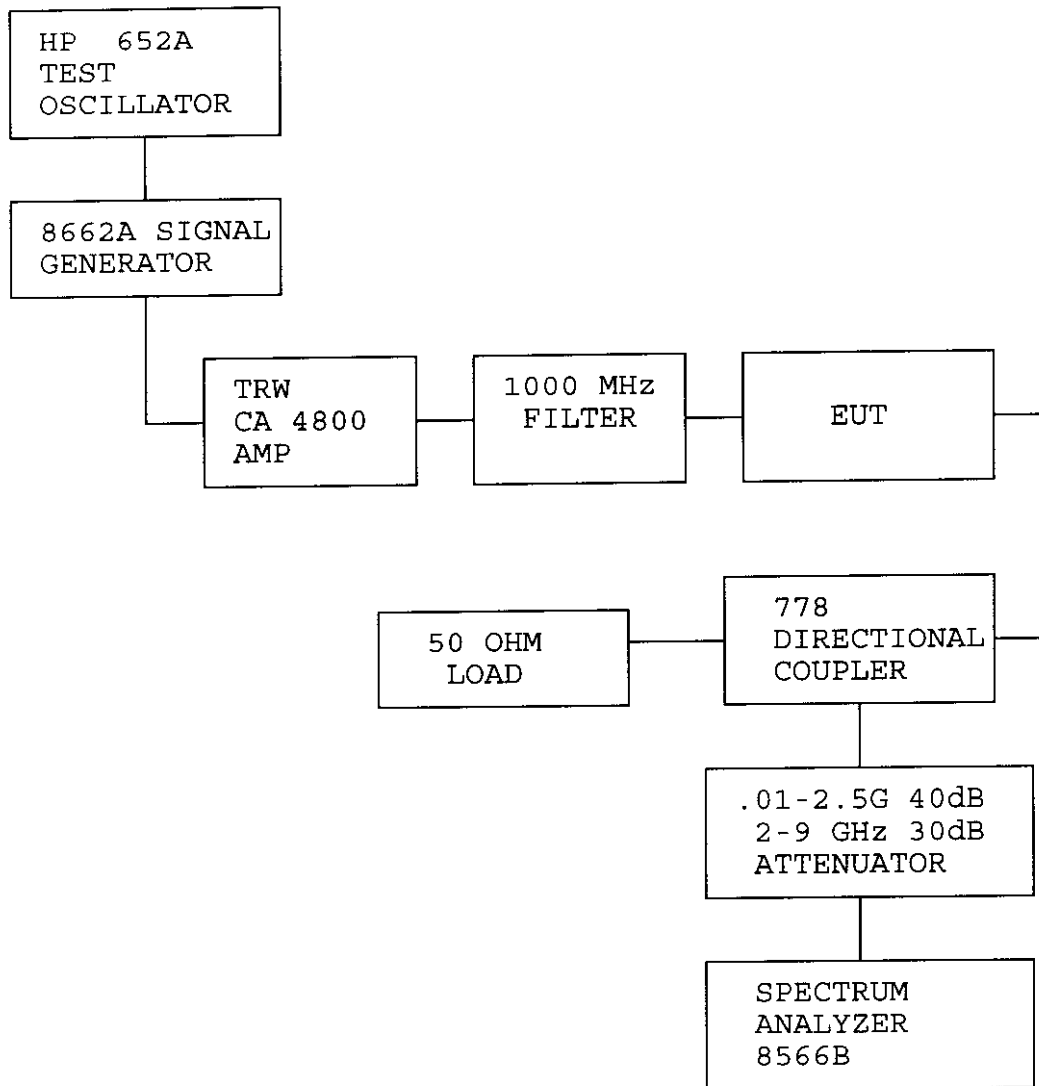


FIGURE 2. BLOCK DIAGRAM.
(POWER INPUT/OUTPUT TESTS)

2.983(e) **Test Data**

Refer to 2.983(e)(1) through 2.983(e)(7)

2.983(e)(1) **Measurement of RF Power Output per 2.985**

Definition: For RF Power Amplifiers.

Test Method: See Figure 2.

Output power is measured across a precision 50 ohm load with a wide-band sampling RF voltmeter.

Test Results:

Frequency	POWER OUTPUT		
	Nominal Voltage 13.6 VDC	85% Voltage 11.56 VDC	115% Voltage 15.64 VDC
821 MHz	80.0 W	46.0 W	100.0 W
849 MHz	80.0 W	46.0 W	100.0 W
862 MHz	80.0 W	46.0 W	100.0 W

2.983(e)(2) **Measurement of Modulation Characteristics per
2.987(b)(1)**

This EUT is a power amplifier and contains no circuitry to modify the RF signal provided by the driver except to raise the power level.

2.983(e) (3) **Measurement of Occupied Bandwidth per 2.989**

Definition: Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean power radiated by a given emission.

Test Method: Connect the equipment per Figure 3.

Measurements were made with the modulating signal at 2.5 kHz with 5 kHz of FM deviation.

Test Results: See Plots following Figure 3.

The center frequency of the signal did not shift with modulation. The spectrum bandwidth was well within the limits specified in the FCC regulations

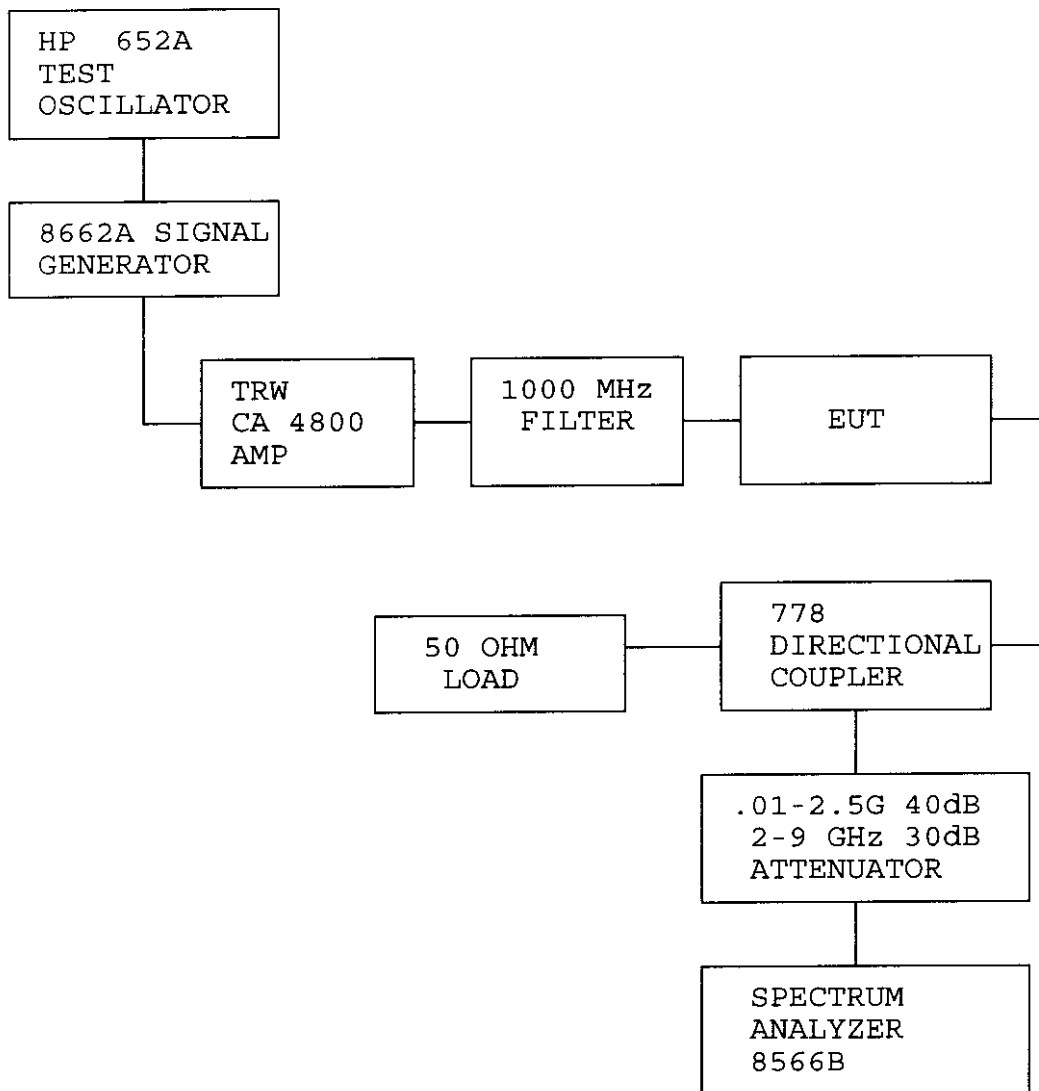


FIGURE 3. BLOCK DIAGRAM.
(OCCUPIED BANDWIDTH)

80WATTS


HUHF800-80LR1
UNMODULATED CARRIER

MKR 862.000 0 MHz
49.00 dBm

HP REF 61.0 dBm ATTEN 10 dB
10 dB/
POS PK
OFFSET
61.0
dB
DL
49.0
dBm

12

CENTER 862.000 MHz RES BW 300 Hz VBW 1 kHz SPAN 100 kHz SWP 3.00 sec

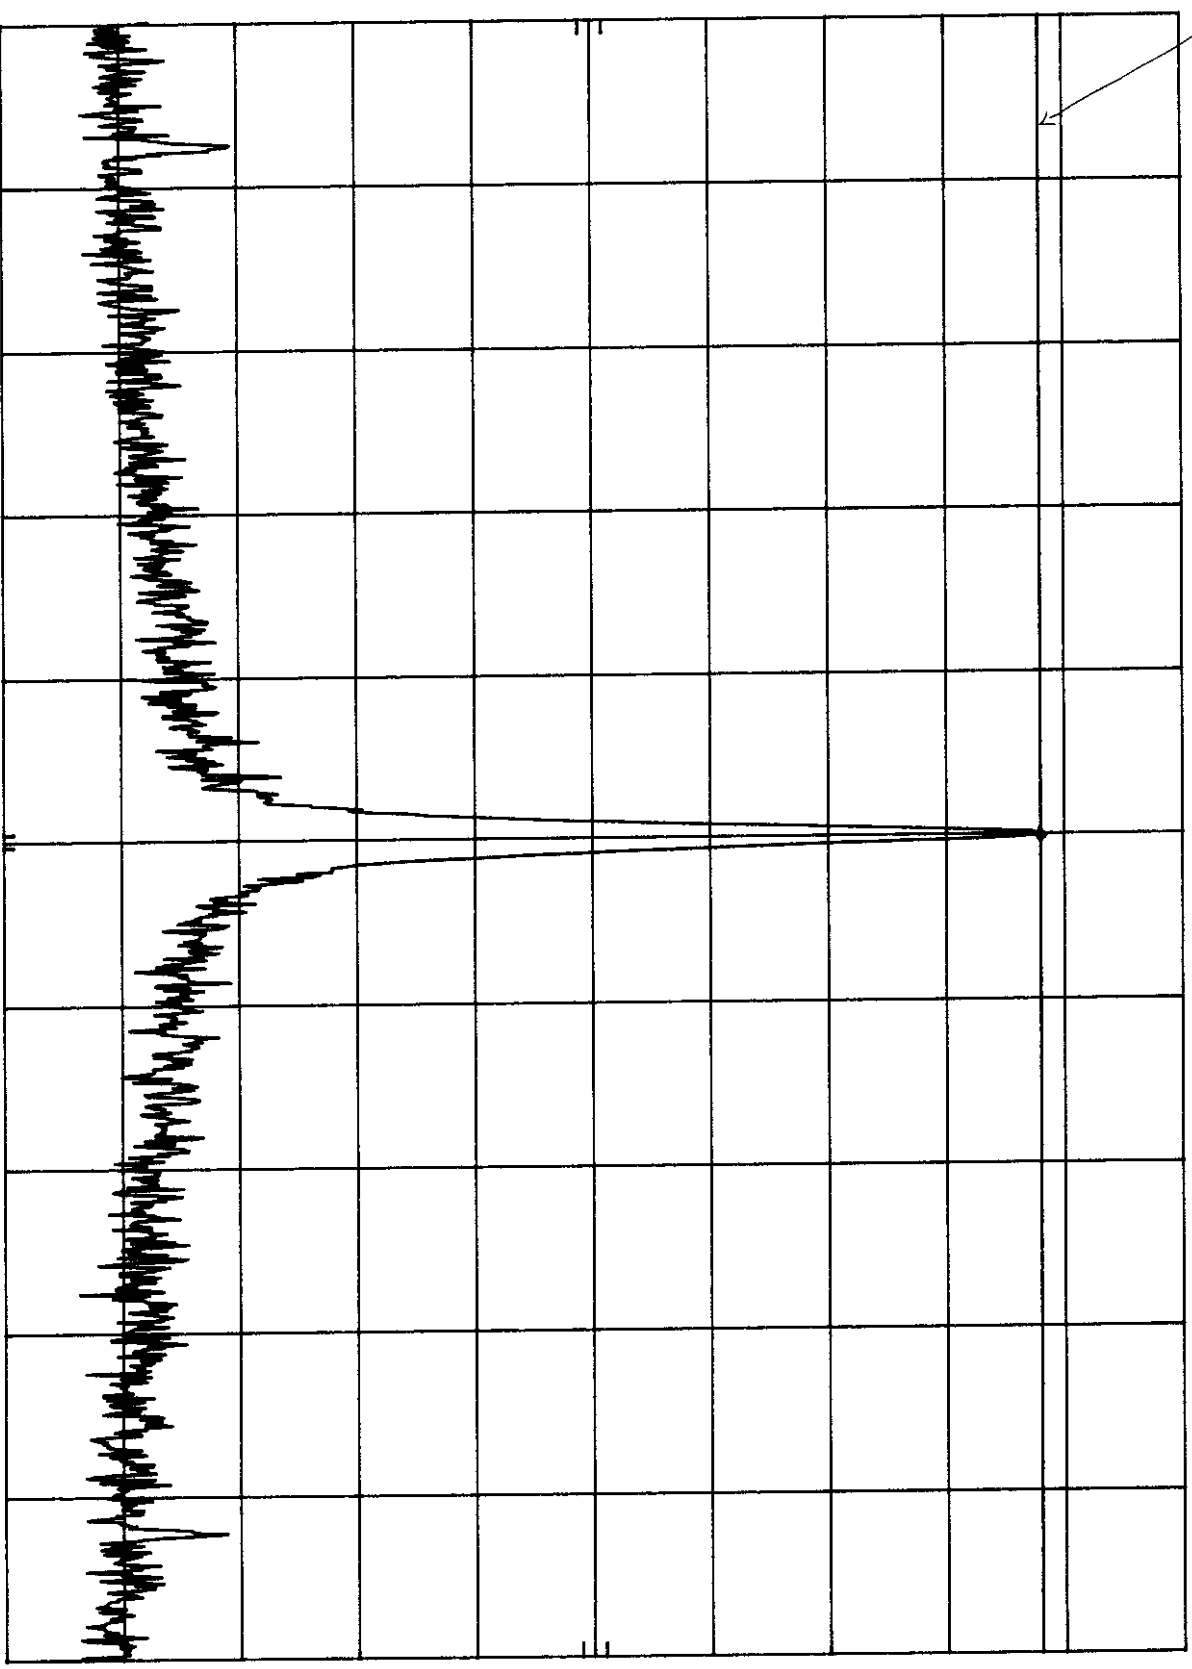

80 WATTS

HUHF800-80LR1
OCCUPIED BANDWIDTH PART 90

MKR 862.000 0 MHz
37.20 dBm

HP

REF 61.0 dBm

ATTEN 10 dB

10 dB/

POS PK

OFFSET

61.0

dB


DL

49.0

dBm

14

FCC LIMIT

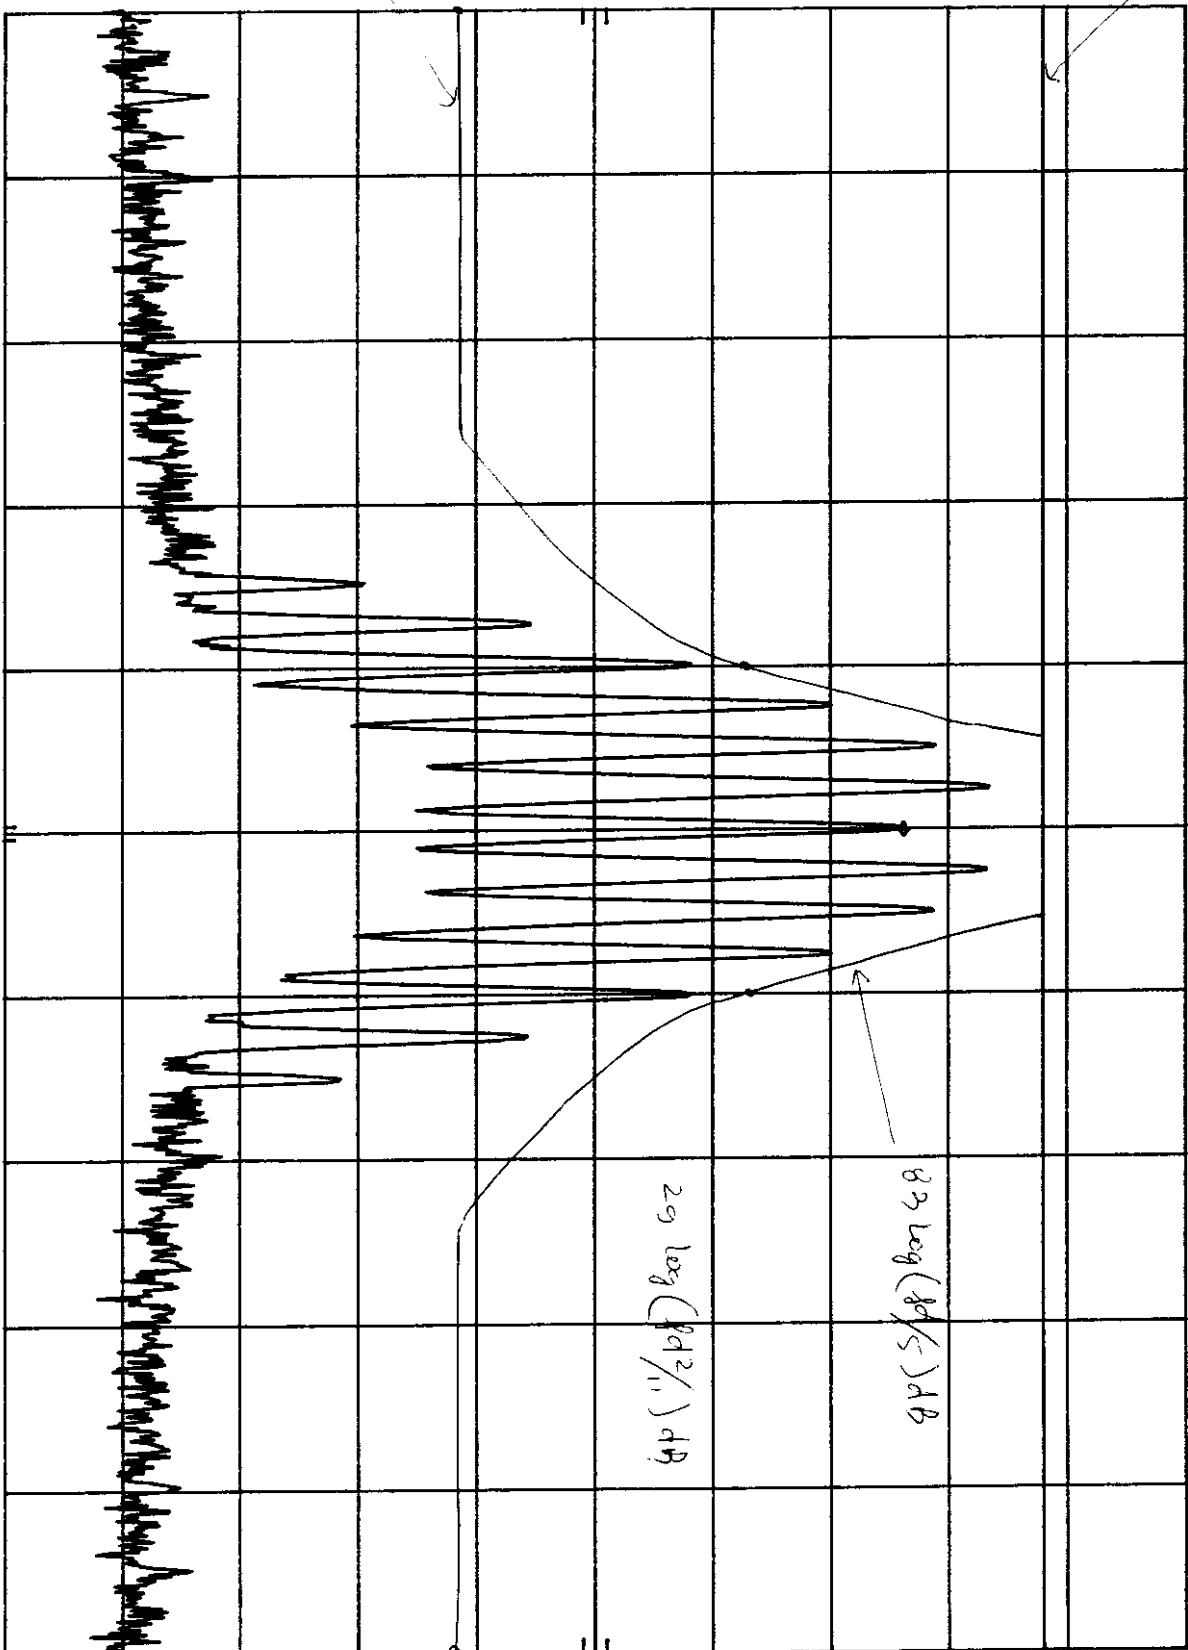

CENTER 862.000 MHz

RES BW 300

Hz

VBW 1 KHz

SPAN 100 KHz

SWP 3.00 sec

80 WATTS

HUHF 800-80 LR 1
OCCUPIED BANDWIDTH PART 22

MKR 862.000 0 MHz

HP REF 61.0 dBm ATTEN 10 dB

37.20 dBm

10 dB/


POS PK

OFFSET
61.0
dB

DL
49.0
dBm

13

FCC LIMIT

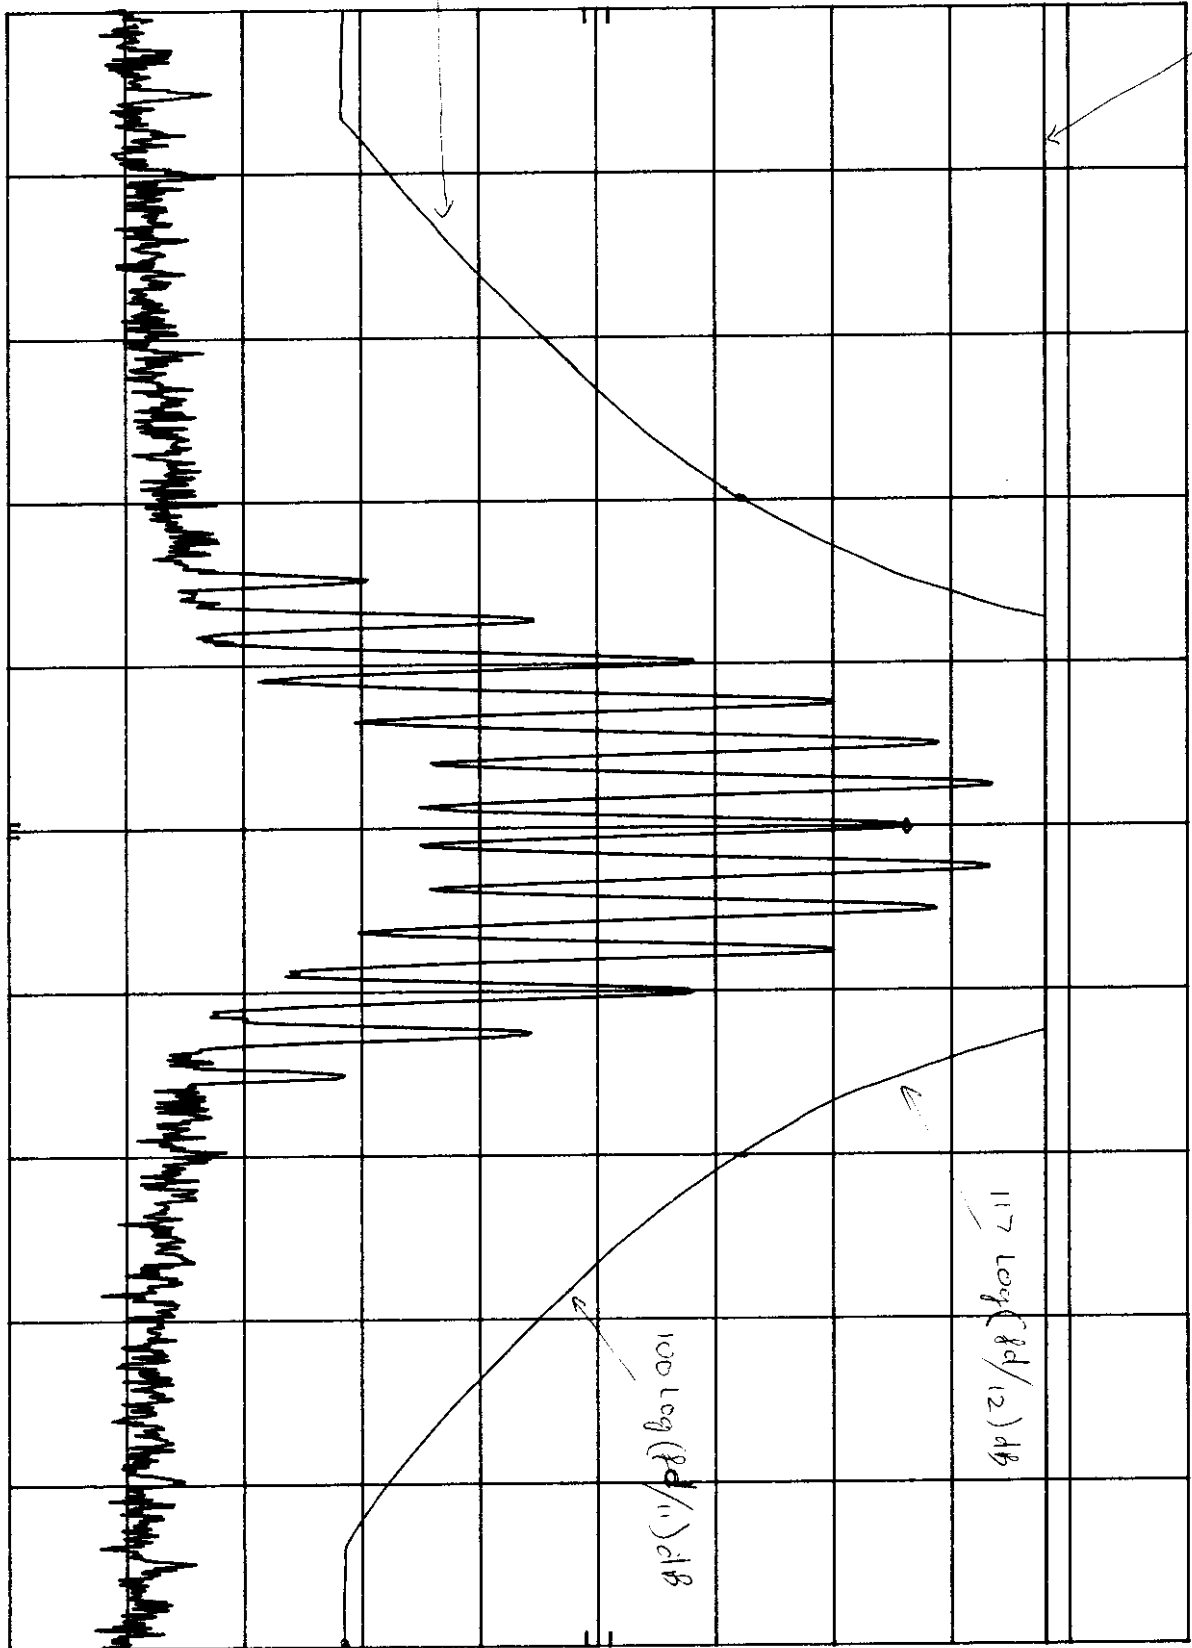

2.983(e)(4) **Measurement of Antenna Conducted Spurious
Emissions Per 2.991**

Definition: Conducted Spurious Emissions are emissions at the antenna terminals on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

Conducted spurious emissions shall be attenuated below the maximum level of the carrier frequency in accordance with the following formula:

$$\text{Spurious attenuation in dB} = 43 + 10 \log_{10} P_o$$

Where P_o = output in watts

$$= 43 + 10 \log_{10} (85)$$

$$= 62.0 \text{ dB}$$

Test Method: Per EIA RS 152-B, Paragraph 4.

Connect the equipment as shown in FIGURE 4.

Adjust the audio oscillator so that the frequency deviation of the transmitter is 5 kHz at a modulation frequency of 2.5 kHz. Adjust the spectrum analyzer to display the modulated carrier.

Scan the frequency spectrum from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency.

Test Results: See Plots Following Figure 4.

All spurious antenna conducted emissions are below the FCC specifications.

HUHF800-80LR1
ANTENNA CONDUCTED SPURIOUS

MKR 2.583 GHz
-32.20 dBm

h_p REF 41.0 dBm ATTEN 10 dB

10 dB/

POS PK

OFFSET

41.0

dB

DL

-13.0

dBm


17

62 dBc

FC LIMIT

32 dB

HARMONIC

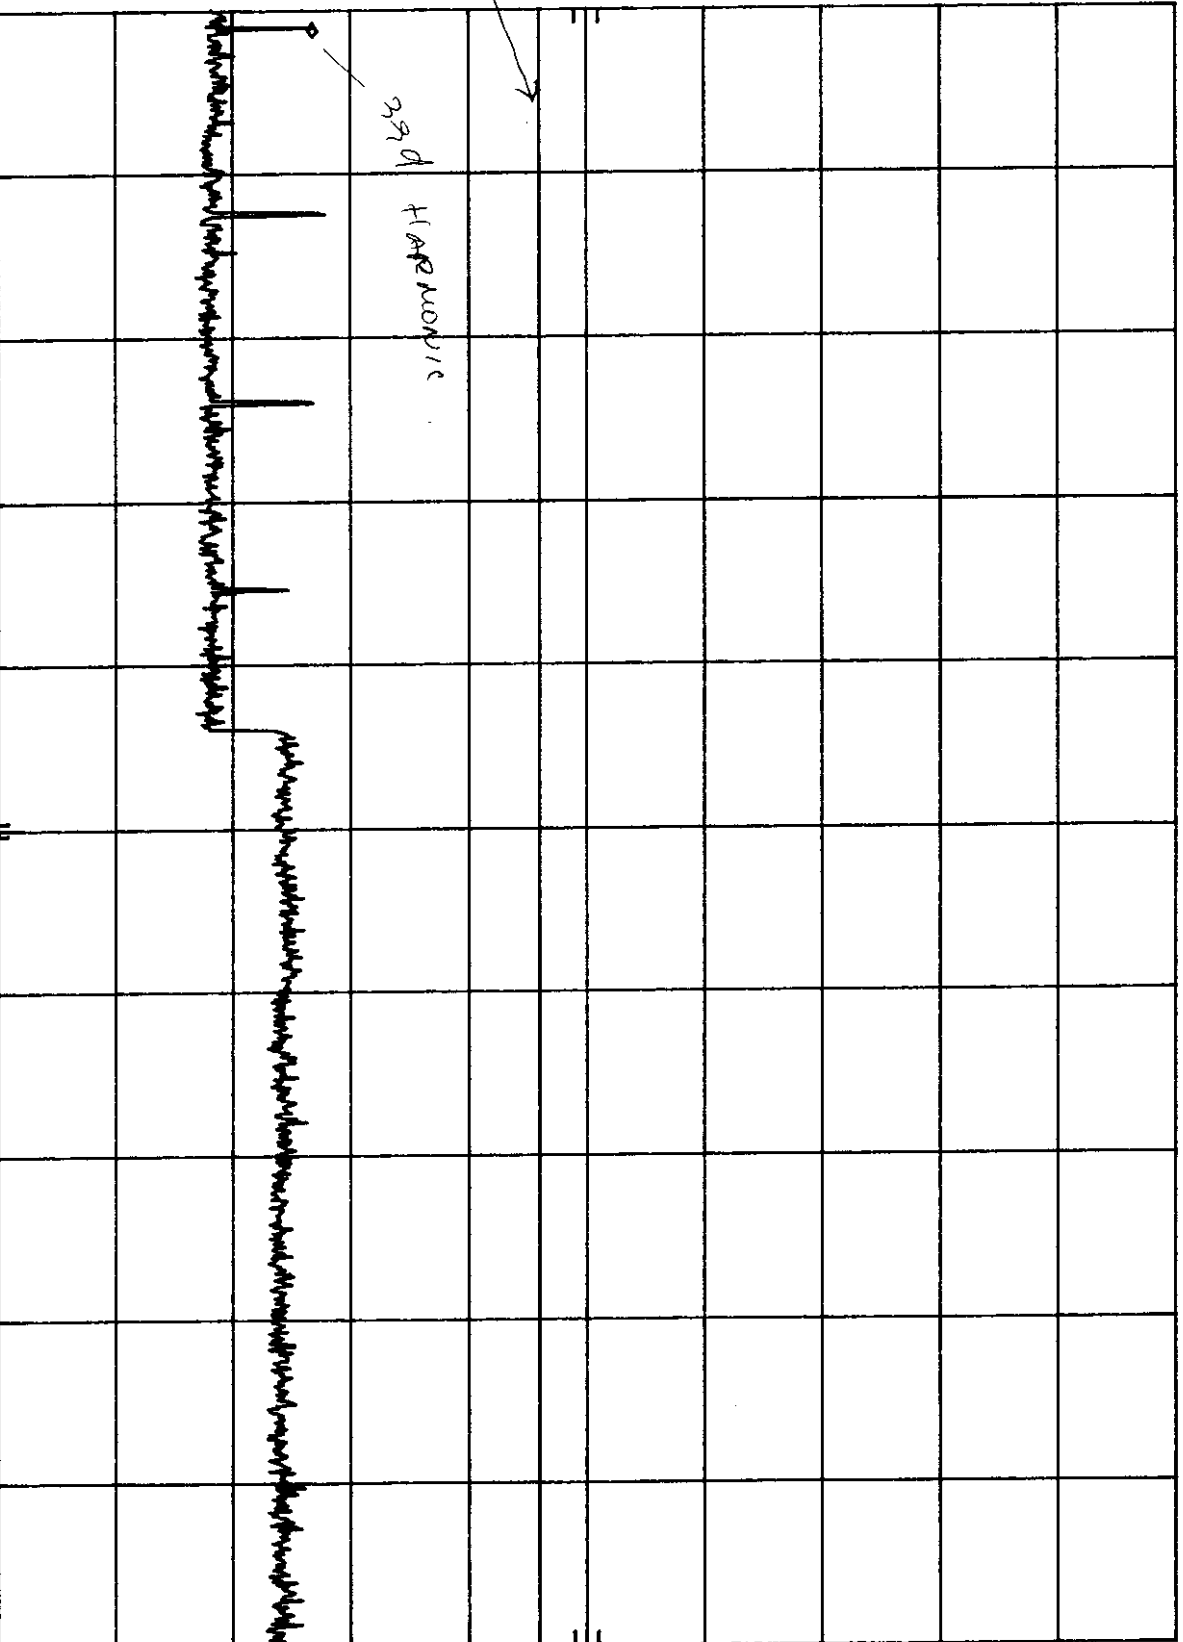

START 2.50 GHz

RES BW 30 kHz

VBW 100 kHz

STOP 10.00 GHz

SWP 22.5 sec

FROM 800-800 MHz
ANTENNA CONDUCTED SPURIOUS

MKR Δ 862 MHz
-13.50 dB

hp REF 41.0 dBm ATTEN 10 dB

10 dB/

POS PK

OFFSET

41.0

dB

DL

-13.0

dBm

16

62 dBc

FCC LIMIT

2nd harmonic

START 800 MHz STOP 2.50 GHz
RES BW 30 kHz SWP 5.10 sec
VBW 100 kHz

2.983(e) (5) **Measurement of Radiated Spurious Emissions Per 2.993**

Definition: Emissions from the equipment when connected into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired. The reduction in the level of these spurious emissions will not effect the quality of the information being transmitted.

Test Method: Per EIA RS 152-B.

Connect the equipment and follow the procedure described in paragraph 2.2.1.1 and paragraph 5.0. Measure the amplitude of each spurious radiated signal through the 10th harmonic. The level in dBuV/m is calculated on the following page. The spurious signals are then measured on the 3 meter range.

$$\text{Spurious attenuation dB} = 10 \log \frac{\text{Po Watts}}{\text{Calc spurious pwr}}$$

Test Results: See TABLE I.

All Radiated spuirious emissions are below the FCC specifications.

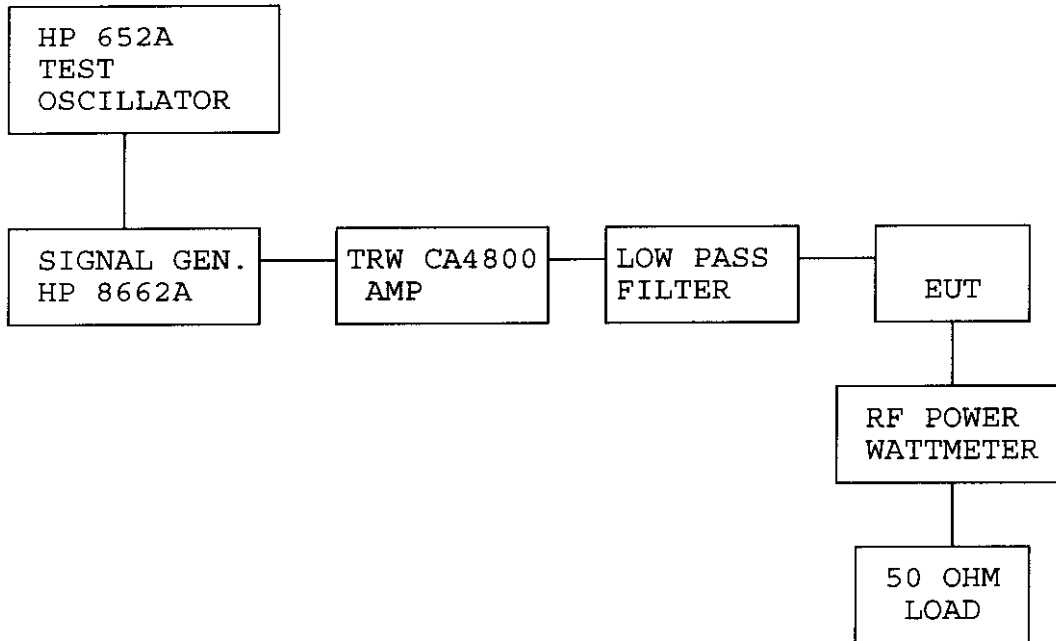


FIGURE 4. BLOCK DIAGRAM.
(SPURIOUS EMISSIONS TEST)

SPURIOUS RADIATED SIGNAL MEASUREMENTS

(Ref: Part 2, Subpart J, 2.991 & 2.993)

Date <u>5-19-98</u>	Pass <u>X</u> Fail <u> </u> (at Freq. <u> </u>)
UT <u>RF Power Amplifier</u>	Operating Power <u>Saturated</u>
Part No. <u>HUHF 800-80</u>	Operating Mode <u> </u>
Serial No. <u> </u>	Test Engineer <u>Bryan Broadus</u>

FREQUENCY TUNED TO 862 MHz

ANT POL	FREQ MHz	SPECTRUM ANALYZER (dBμV)	ANT. FACTOR (dB)	CABLE LOSS (dB)	AMP GAIN (dB)	dBμV/m	FUND FIELD STRENGTH dBμV/m	SPUR BELOW CARR- IER (dBc)
✓	1724	76.6	27.5	3.5	30.5	77.1	146.7	69.6
✓	2580	72.4	29.5	4.2	30.5	75.6	}	71.7
✓	3448	63.7	32.1	4.9	30.5	70.2		76.5
✓	4310	61.3	33.5	5.1	30.5	69.4		77.3
✓	5172	73.7	34.0	5.8	42	71.5		75.2
✓	6034	68.1	35.3	6.5	42	67.9		78.8
✓	6896	63.6	36.7	7.3	42	65.6		81.1
✓	7558	58.5	37.0	7.9	42	61.4		85.3
✓	8620	57.6	38.0	8.4	42	62.0		84.7

$$\text{Fundamental Field Strength (V/m)} = 1/3 (R_o \times P_o)^{1/2} = 1/3 (50 \times 85)^{1/2} = 21.7 \text{ V/m}$$

R_o = Amplifier Output Impedance (Ohms)

P_o = Amplifier Output Power (Watts)

Conversion From μV/m to dBμV/m = (μV/m)^{log} x 20

$$21,700,000 \mu\text{V/m}^{\log} \cdot 20 = 146.7 \text{ dB}\mu\text{V/m}$$

$$\text{FCC Limit} = 62.2 \text{ dBc}$$

SPURIOUS RADIATED SIGNAL MEASUREMENTS

(Ref: Part 2, Subpart J, 2.991 & 2.993)

Date <u>5-19-98</u>	Pass <u>X</u> Fail <u> </u> (at Freq. <u> </u>)
UT <u>RF Power Amplifier</u>	Operating Power <u>Saturated</u>
Part No. <u>H0HF 800-80</u>	Operating Mode <u> </u>
Serial No. <u> </u>	Test Engineer <u>Bryan Broadus</u>

FREQUENCY TUNED TO 862 MHz

ANT POL	FREQ MHZ	SPECTRUM ANALYZER (dBμV)	ANT. FACTOR (dB)	CABLE LOSS (dB)	AMP GAIN (dB)	dBμV/m	FUND FIELD STRENGTH dBμV/m	SPUR BELOW CARR- IER (dBc)
H	1724	77.9	27.5	3.5	30.5	78.4	146.7	68.3
H	2580	73.3	29.5	4.2	30.5	76.5	{	70.2
H	3448	61.5	32.1	4.9	30.5	68.0		78.7
H	4310	59.0	33.5	5.1	30.5	67.1		79.6
H	5172	71.6	34.0	5.8	42	69.4		77.3
H	6034	65.8	35.3	6.5	42	65.6		81.1
H	6896	60.6	36.7	7.3	42	62.6		84.1
H	7558	62.2	37.0	7.9	42	65.1		81.6
H	8620	56.4	38.0	8.4	42	60.8		85.9

Fundamental Field Strength (V/m) = $1/3 (R_o \times P_o)^{1/2}$

R_o = Amplifier Output Impedance (Ohms)

P_o = Amplifier Output Power (Watts)

Conversion From μV/m to dBμV/m = $(\mu V/m)^{\log} \times 20$

FCC Limit = 62.2 dBc

2.983(e)(6) **Measurement of Frequency Stability Per 2.995**

The EUT is a power amplifier and contains no circuitry for generating or stabilizing the RF signal. The driver will be responsible for this task.

2.983(e)(7) **Frequency Spectrum to be Investigated per 2.997**

The frequency was searched from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency.

2.983(h) **Description and Test Data For Encoding Device(s)**

This section does not apply.

2.983(i) **Type acceptance Data For an External Power
Amplifier Used In Amateur Radio Service - Part 97**

This section does not apply

APPENDIX A
TEST EQUIPMENT

DNB ENGINEERING, INC.

EMC TEST EQUIPMENT

<u>MANUFACTURER</u>	<u>DESCRIPTION</u>	<u>MODEL</u>
Hewlett Packard	Spectrum Analyzer	8566B
Hewlett Packard	Spectrum Analyzer	8568B
Hewlett Packard	Quasi Peak Adapter	85650A
Hewlett Packard	Computer/Controller	9825T
Hewlett Packard	Frequency Counter	5245L
Hewlett Packard	Printer	9876A
Hewlett Packard	Counter Plug-in	5253B
Hewlett Packard	Plotter	9872C
Hewlett Packard	Plotter	7470A
Hewlett Packard	Frequency Synthesizer	9662A
Hewlett Packard	Sweep Main Frame	8620C
Hewlett Packard	Plug-in 2-22 GHz	26290B
Polarad	Signal Generator 3.7 to 8.4 GHz	1107E
Telonics	Sweep Generator	4053A
Wiltron	Sweep Generator	6653A
Hewlett Packard	Signal Generator	614A
Hewlett Packard	Signal Generator	616B
Hewlett Packard	Signal Generator	618B
Hewlett Packard	Signal Generator	620B
Hewlett Packard	Signal Generator	626A
Hewlett Packard	Signal Generator	628A
Hewlett Packard	Signal Generator	8654A

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Hewlett Packard	Signal Generator	8662A
Hewlett Packard	RF Voltmeter	3406A
Solar	Pulse Generator	8282-1
Solar (2)	Clamp on Probe	6747-1
Electro-Metrics	Clamp on Probe	PCL-10
Electro-Metrics	Clamp on Probe	PCL-25
Electro-Metrics	Loop Sensor	ELS-10
Electro-Metrics	Electro-Static Field Probe	EFP-25
Electro-Metrics	LISN	FCC-5-2
Solar	LISN	8012-50-r-24 BNC
Solar	Audio Isolation Transformer	6220-1A
Solar	Isolation Transformer	7032-1
Solar (14)	10 mfd Capacitors	6212-106R
Schaffner EMC, Inc.	Absorbing Clamp	MDS 21
Solar	100 W Audio Amplifier	6552-1A
Solar (2)	LISN	8018-50-TS-24 BNC
Stoddart	FIM	NM-12T
Krohn-Hite	Audio Oscillator	4400
Stoddart	FIM	URM-6
IFI	Field Strength Meter	EFS-1
Solar	Precision Resistor	7144-1.0
Solar	Precision Resistor	7144-10.0
Solar	Coupling Network	7835-891

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Solar	Coupling Network	7835-896
Solar	LISN (5 μ h)	6338-5
Solar	LISN (50 μ h)	6338-57
Solar	High Pass Filter	7205-.35
Solar	High Pass Filter	7205-2.4
Mini Circuits	Amplifier Wide Band	ZHL42
Mini Circuits	Amplifier Wide Band	ZHL-1042J
Mini Circuits	Amplifier Wide Band	ZHL32A
Mini Circuits	Amplifier Wide Band	ZHL-1A
Mini Circuits	Amplifier Wide Band	ZHL2-8
ENI	Amplifier	510L
ENI	Amplifier	350L
Hewlett Packard	Preamplifier	11975A
Hewlett Packard	Preamplifier	8349A
IFI	1 kHz - 200 MHz Amplifier (15 Watt)	5300L
Narda	400 W 50 Ω Load	376NM
Eaton	WBA 500 - 1000 MHz	15100B
ENI	WBA 250 KHz - 150 MHz	3100LA
ENI	WBA 1.5 - 500 MHz	5501
Avantek	Low Noise Amplifier 6-12.4 GHz	AFT12635
Hewlett Packard	500 MHz Digitizing Oscilloscope	54111D
Tenney	Temperature Chamber	THjr

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

Hewlett Packard	5 Hz - 200 MHz Network Analyzer	3577A
Hewlett Packard	Frequency Doubler	11721A
Hewlett Packard	Harmonic Mixers	11970A
Hewlett Packard	Harmonic Mixers	11970K
Hewlett Packard	Computer/Controller	9836
Hewlett Packard	Computer/Controller	9826
Avantest	Spectrum Analyzer	TR4131E
Hewlett Packard	Spectrum Analyzer	8558B
Hewlett Packard	Spectrum Analyzer	8554L
Hewlett Packard	Pulse Generator	212A
Hewlett Packard	Pulse Generator	214A
Hewlett Packard	Pulse Generator	215A
Tektronix	Oscilloscope	453A
John Fluke	High Voltage power Supply	408A
LeCroy	Digital Storage Scope (125 MHz)	9400
Biddle	Micro Ohm Meter	247800
Hewlett Packard	Pulse Modulator	11720A
Topaz	Ultra Isolation Transformer (2.5 kVA)	0211T21SR
ENI	Ultra Isolation Transformer (2.5 kVA)	91002-22
Singer (5)	Current Probe	91550-2
Stoddart (4)	Current Probe	91550-1

DNB ENGINEERING, INC.

EMC TEST EQUIPMENT

Hewlett Packard	Dual Directional Coupler	778D
Narda	Dual Directional Coupler	3022
Narda	Directional Coupler	3045C-20
Narda	Directional Coupler	3003-20
Narda	Directional Coupler	3002-10
Narda	Directional Coupler	23964
Narda (2)	Directional Coupler	22355
Narda	Power Divider	4326-2
Narda	Power Divider	4035C
Narda	Power Divider	4033C
Englemann	Power Divider	PSK-210
Bird	50Ω Load 10 W 50's	80-53
Stoddart	50Ω Load	90514
Micro Lab	50Ω Load	TB-5MN
Tekscan	50Ω Attenuator Kit	FP-50
Tenuline	50Ω 100 W 20 dB Attenuator	8343-200
Micro Lab	50Ω 40 dB Attenuator	AD-40N
Hughes	20 Watt TWT L Band	1277H04
Hughes	20 Watt TWT C Band	1277H04
Hughes	10 Watt TWT S Band	1177H
Hughes	10 X/Ku Band	1177H
IFI	2kW cw 1 kHz - 200 MHz Wide Band Power Amp	410ULP
DNB Engineering	EMP Pin/Wire Test Set	844

DNB ENGINEERING, INC. EMC TEST EQUIPMENT

ANTENNAS

<u>MANUFACTURER</u>	<u>DESCRIPTION</u>	<u>MODEL</u>
AIL (3)	Dipole	DM105A-T1, T2, & T3
EMCO	Biconical	3109
EMCO	Log Periodic	3146
EMCO	Parallel Element	3107
Eaton	Vertical Rod	74607-1
Eaton (2)	Vertical Rod	75492-1
Ailtech	Loop	94608-1
Singer	Loop	LP-105 ASC
Electro-Metrics (2)	Biconical	BIA-25
Electro-Metrics (2)	Conical Log Spiral	LCA-25
Electro-Metrics (2)	Loop	ALP-10
Electro-Metrics (2)	Loop	ARL-25
Electro-Metrics (2)	Broadband Dipole	DBA-25
Electro-Metrics (3)	Turnable Dipole	TA-25, 25-1, & 25-2
EMCO	Double Ridge Guide	311525
Electro-Metrics (2)	Vertical Rod	RVR-25
Alpha	Standard Gain Horn	K861
Alpha	Standard Gain Horn	A861
Alpha	Standard Gain Horn	KV861
Solar	Loop Antenna	7429-1
Electro-Metrics	E Field SensorHorn	EFP-25

APPENDIX B
OPERATING/SERVICE/INSTRUCTION MANUAL