



**Intertek Testing Services**  
ETL SEMKO

***FCC Parts 22 and 24 Test Report***

Performed on the

**TDMA/AMPS Cellular and PCS Telephone**  
**Model: TCD588**

For

**Philips Consumer Communications**  
**FCC ID: M7VTCD588**

Date of Test: March 7-9, 2000

Report #: J20004218

**Total No. of Pages Contained in this Report: 20 + data pages**

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples.  
Any implied performance of other samples on this report is dependent on the representative of the samples tested.



FCC Parts 22, 24 Certification, Ver 7/98



**Intertek Testing Services NA Inc.**  
1365 Adams Court, Menlo Park, CA 94025  
Telephone 650-463-2900 Fax 650-463-2910 Home Page [www.etlsemko.com](http://www.etlsemko.com)



**Table of Contents**

<b>1.0</b>	<b>Introduction</b> .....	1
1.1	Test Summary .....	1
1.2	Product Description.....	2
1.3	Related Submittal(s) Grants.....	2
<b>2.0</b>	<b>RF Power Output</b> .....	3
2.1	Test Procedure.....	3
2.2	Test Equipment.....	3
2.3	Test Results .....	3
<b>3.0</b>	<b>Effective Radiated Power</b> .....	4
3.1	Test Procedure.....	4
3.2	Test Equipment.....	4
3.3	Test Results .....	4
<b>4.0</b>	<b>Modulation Deviation Limiting</b> .....	5
4.1	Test Procedure.....	5
4.2	Test Equipment.....	5
4.3	Test Results .....	5
<b>5.0</b>	<b>Audio Filter Characteristics</b> .....	8
5.1	Test Procedure.....	8
5.2	Test Equipment.....	9
5.3	Test Results .....	9
<b>6.0</b>	<b>Emission Limitations, Occupied Bandwidth</b> .....	11
6.1	Test Procedure.....	11
6.2	Test Equipment.....	12
6.3	Test Results .....	12
<b>Out of Band Emissions at Antenna Terminals</b> .....		13
7.1	Test Procedure.....	13
7.2	Test Equipment.....	13
7.3	Test Results .....	13
<b>8.0</b>	<b>Field Strength of Spurious Radiation</b> .....	14
8.1	Test Procedure.....	14
8.2	Test Equipment.....	14
8.3	Test Results .....	14

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

9.0 **Line Conducted Emissions**.....17  
    9.1 Test Procedure.....17  
    9.2 Test Results .....17

10.0 **Frequency Stability vs Temperature**.....18  
    10.1 Test Procedure.....18  
    10.2 Test Equipment.....18  
    10.3 Test Results .....18

11.0 **Frequency Stability vs Voltage**.....19  
    11.1 Test Procedure.....19  
    11.2 Test Equipment.....19  
    11.3 Test Results .....19

12.0 **Lists of Exhibits**.....20

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

## 1.0 Introduction

## 1.1 Test Summary

FCC RULE	DESCRIPTION OF TEST	RESULT	PAGE
2.1046	RF Power Output	Pass	3
22.913, 24.232	ERP, EIRP	Pass	4
2.1047	Modulation Requirements	Pass	5
22.915(d)(1)	Audio Filter Characteristics	Pass	8
2.1049 22.917(b)(d)	Emission Limitation, Occupied Bandwidth	Pass	11
2.1051, 22.917(e) 22.917(f), 24.238(a)	Out of Band Emissions at Antenna Terminals Mobile Emissions In Base Frequency Range	Pass	13
2.1053	Field Strength of Spurious Radiation	Pass	14
15.107	Line Conducted Emissions	Pass	15
2.1055	Frequency Stability vs. Temperature	Pass	16
2.1055	Frequency Stability vs. Voltage	Pass	17
2.1091, 2.1093	Specific Absorption Rate	Pass	18

Tested By: \_\_\_\_\_  
Ollie Moyrong

Date \_\_\_\_\_

Approved By: \_\_\_\_\_  
David Chernomordik

Date \_\_\_\_\_

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

## 1.2 Product Description

The Philips Consumer Communications Model TCD 588 is a dual mode, dual band TDMA and AMPS cellular radio telephone.

For more information, please refer to the attached product description.

Use of Product	Portable Cellular and PCS Phone
Whether quantity (> 1) production is planned	<input checked="" type="checkbox"/> Yes, <input type="checkbox"/> No
Cellular Phone standards	<input type="checkbox"/> AMPS <input checked="" type="checkbox"/> TDMA
Type(s) of Emission	40K0F8W, 40K0F1D, 30K0G7D
Allowed Deviation	12± 10% (AMPS mode)
Range of RF Output	27.1 dBm
Frequency Range	824 - 849 (AMPS & TDMA), 1850 - 1910 (TDMA)
Antenna(e) & Gain	0 dBi
Detachable antenna ?	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Receiver L.O. frequency	
External input	<input checked="" type="checkbox"/> Audio <input type="checkbox"/> Digital Data

## 1.3 Related Submittal(s) Grants

None

DOC for computer section, a separate DOC is prepared.

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTC588

Date of Test: March 7-9, 2000

## 2.0 RF Power Output, FCC §2.1046

### 2.1 Test Procedure

The transmitter output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the spectrum analyzer reading. An HP power meter was also used to measure the RF power.

Tests were performed at three frequencies (low, middle, and high channels) and on all power levels which can be setup on the transmitters.

### 2.2 Test Equipment

Hewlett Packard 8481A Power Sensor, 435B Power Meter  
 Hewlett Packard HP8566B Spectrum Analyzer, 100 Hz - 22 GHz  
 Tektronix 2784 Spectrum Analyzer, 100 Hz - 40 GHz

### 2.3 Test Results

Frequency (MHz)	Measured Power (dBm)
824	27.1
836.5	26.8
849	25.8
1850	26.8
1880	23.6
1909.9	23.7

For more details refer to the attached plots:


AMPS Mode	
Plot Number	Description
2.3.a	Low Channel
2.3.b	Middle Channel
2.3.c	High Channel
TDMA Mode	
Plot Number	Description
2.3.d	Low Channel
2.3.e	Middle Channel
2.3.f	High Channel

LOW CHANNEL MKR 824.036 8 MHz  
REF 30.3 dBm ATTEN 40 dB  
27.10 dBm

10 dB/

OFFSET  
0.3  
dB

CORR'D

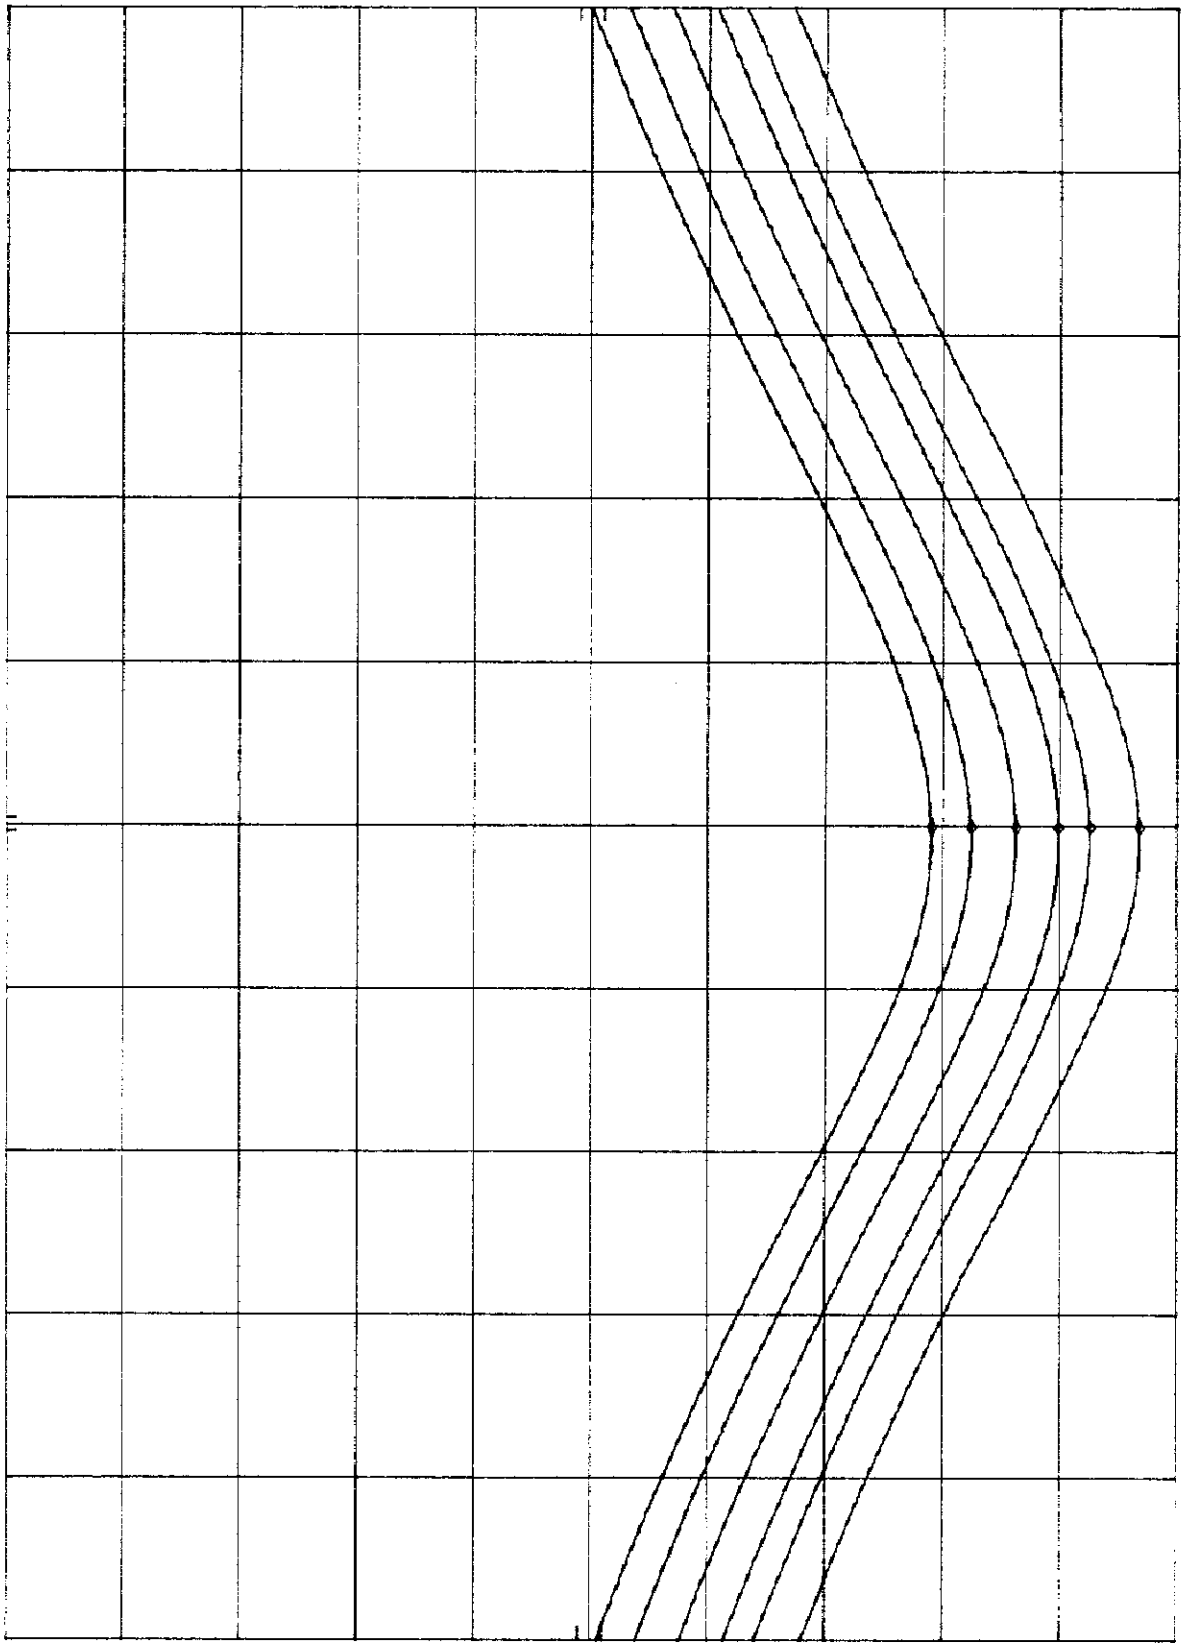

CENTER 824.036 MHz SPAN 500 kHz  
RES BW 100 kHz VBW 100 kHz SWP 20.0 msec  
Plot 2.3.a

hp

MID CHANNEL  
REF 30.3 dBm


ATTEN 40 DB

MKR 836.515 0 MHz  
26.80 dBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

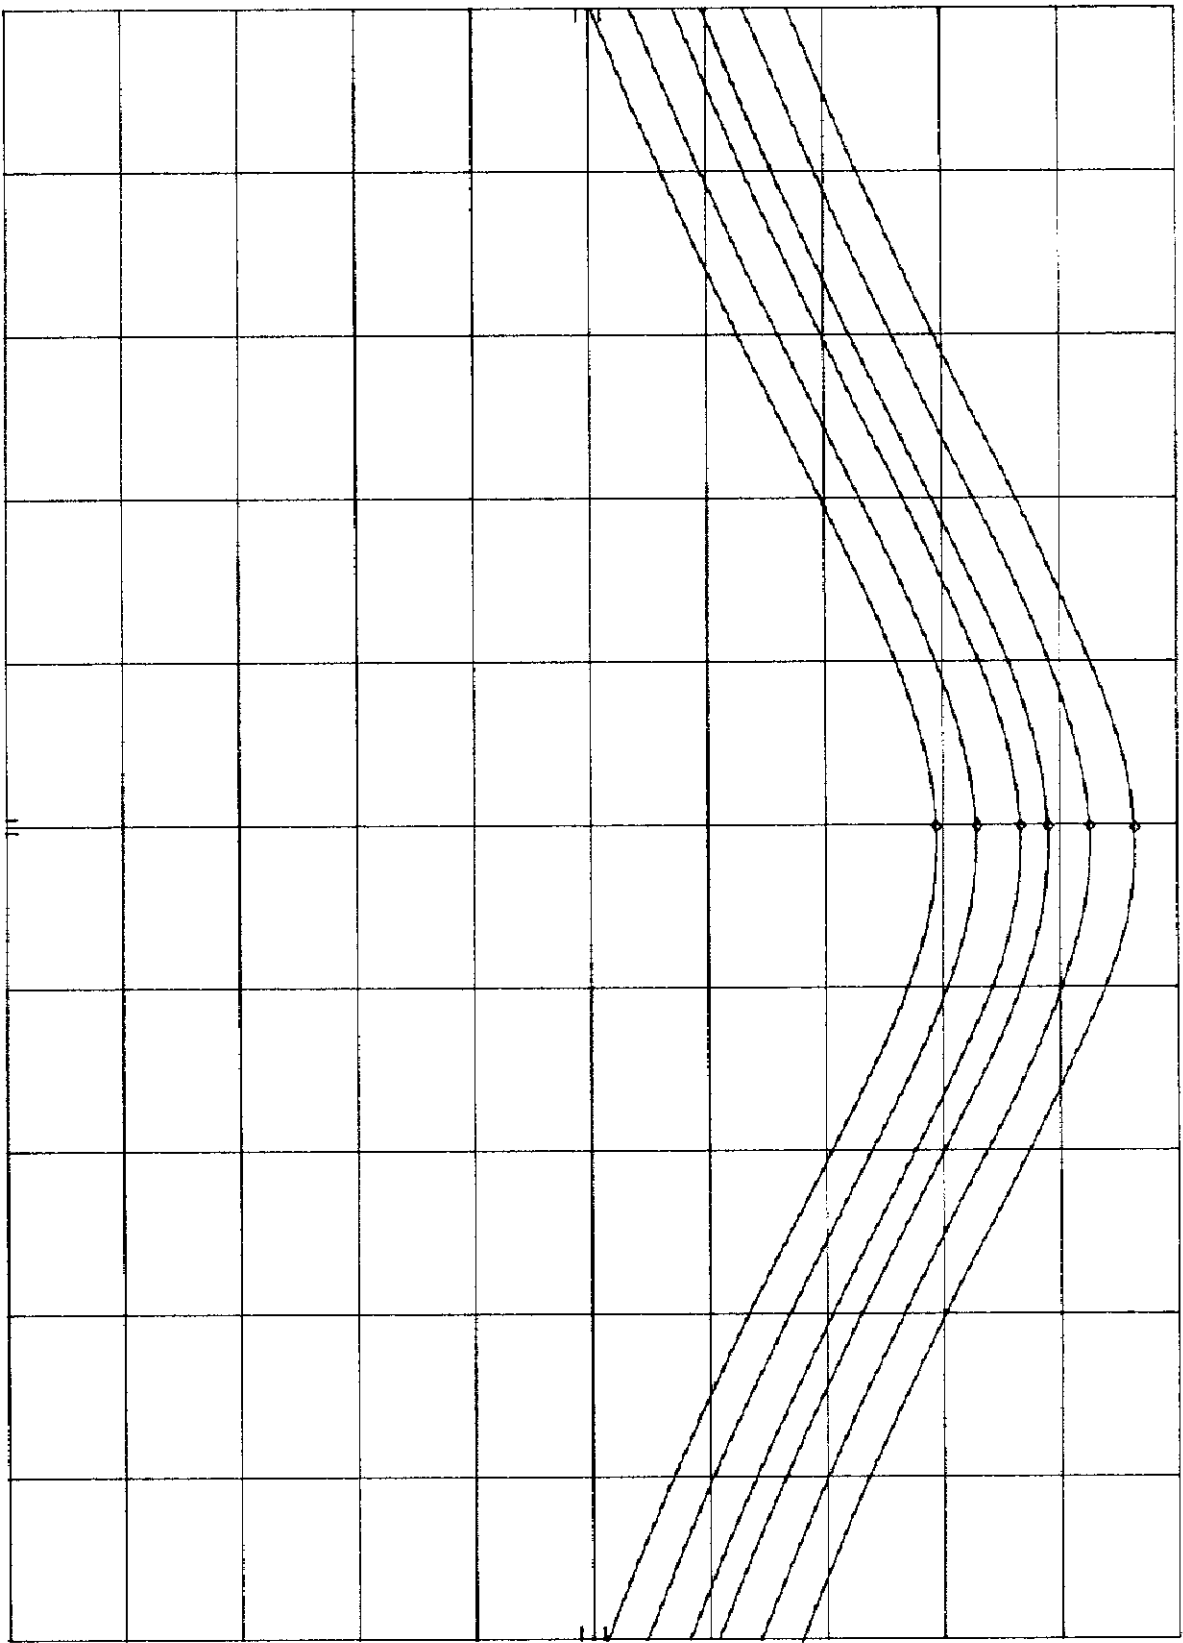

CENTER 836.515 MHz  
RES BW 100 KHz  
VBW 100 KHz  
SPAN 498 KHz  
SMP 20.0 msec  
Plex 2.3.0




HIGH CHANNEL  
REF 30.3 DBm  
ATTEN 40 DB  
MKR 848.969 0 MHZ  
25.80 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

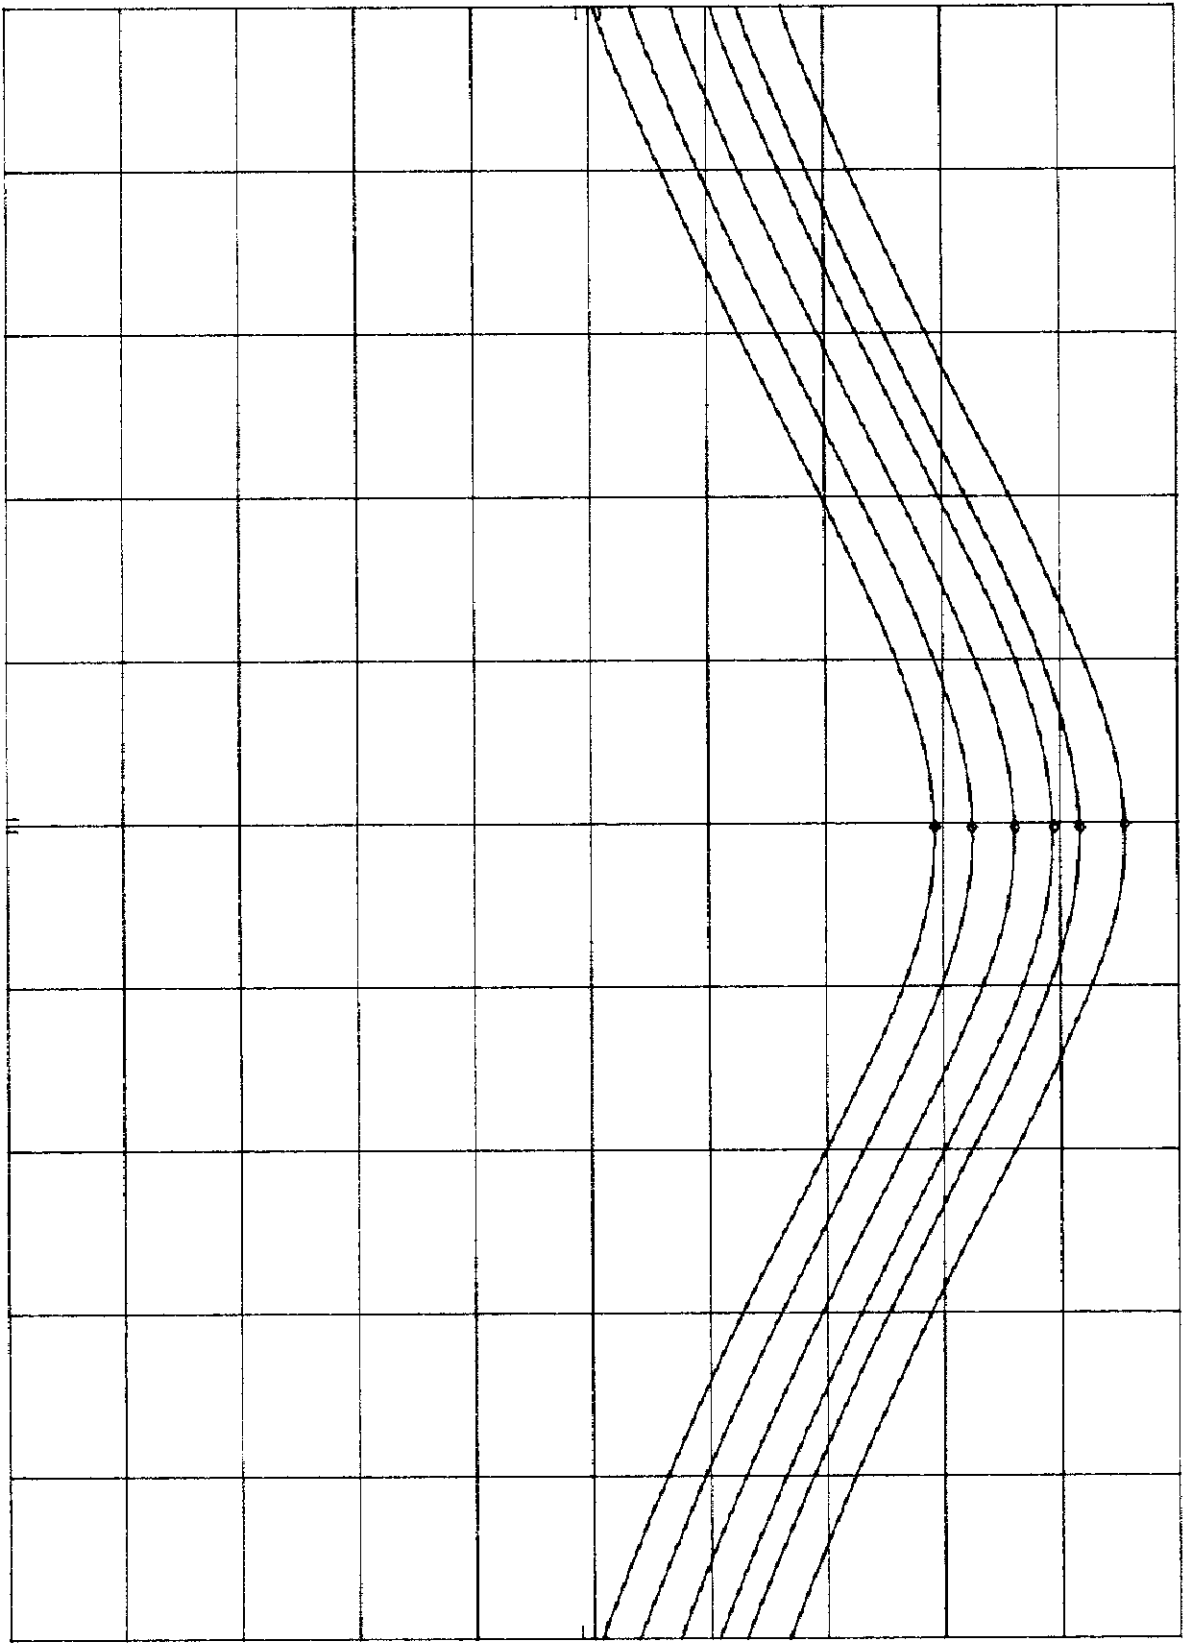

CENTER 848.969 MHZ  
RES BW 100 KHZ  
VBW 100 KHZ  
SPAN 500 KHZ  
SMP 20.0 msec  
Plot 2.3.C

hp

LOW CHANNEL  
REF 30.0 DBm


ATTEN 40 DB

MKR 1.849 98 GHZ  
26.80 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

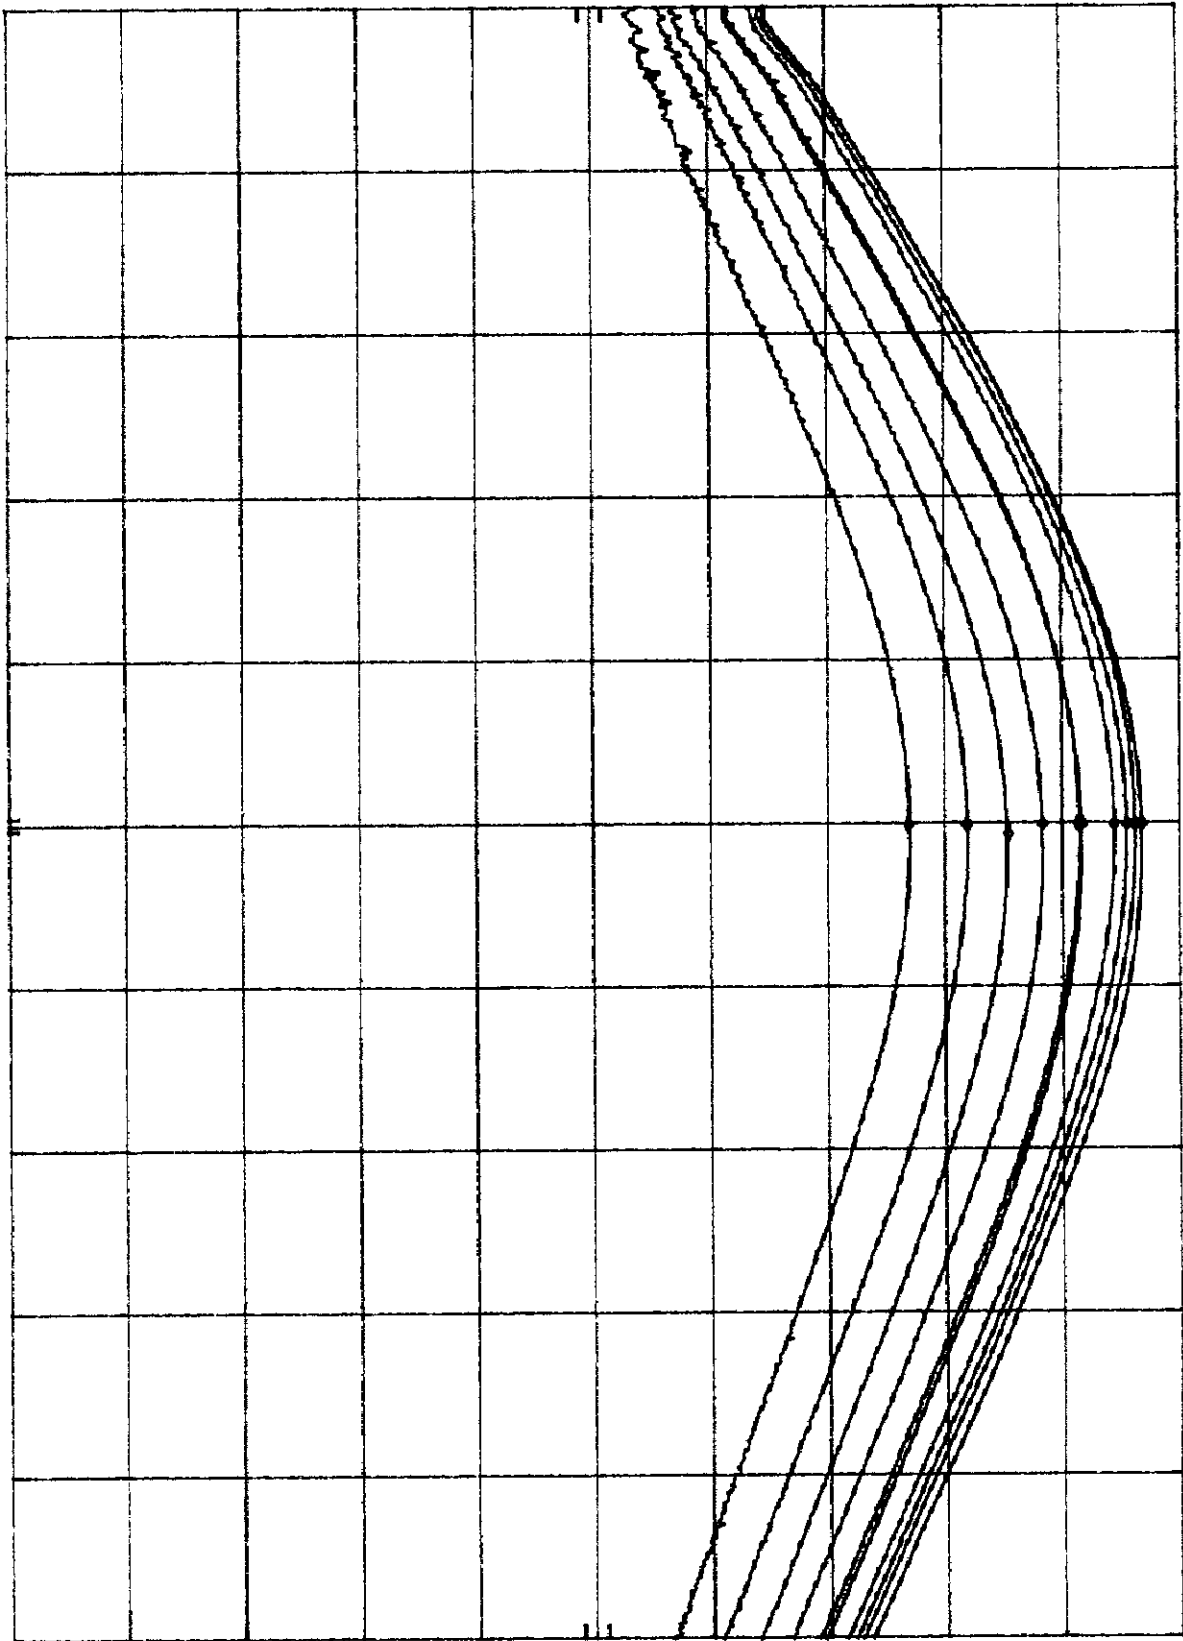

CENTER 1.849 9 GHZ  
RES BW 3 MHz  
VBW 3 MHz  
SPAN 10.0 MHz  
SWP 20.0 msec  
Plot 2.3.d

HP

MID CHANNEL  
REF 30.0 DBm


ATTEN 40 DB

MKR 1.880 08 CHZ  
23.60 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

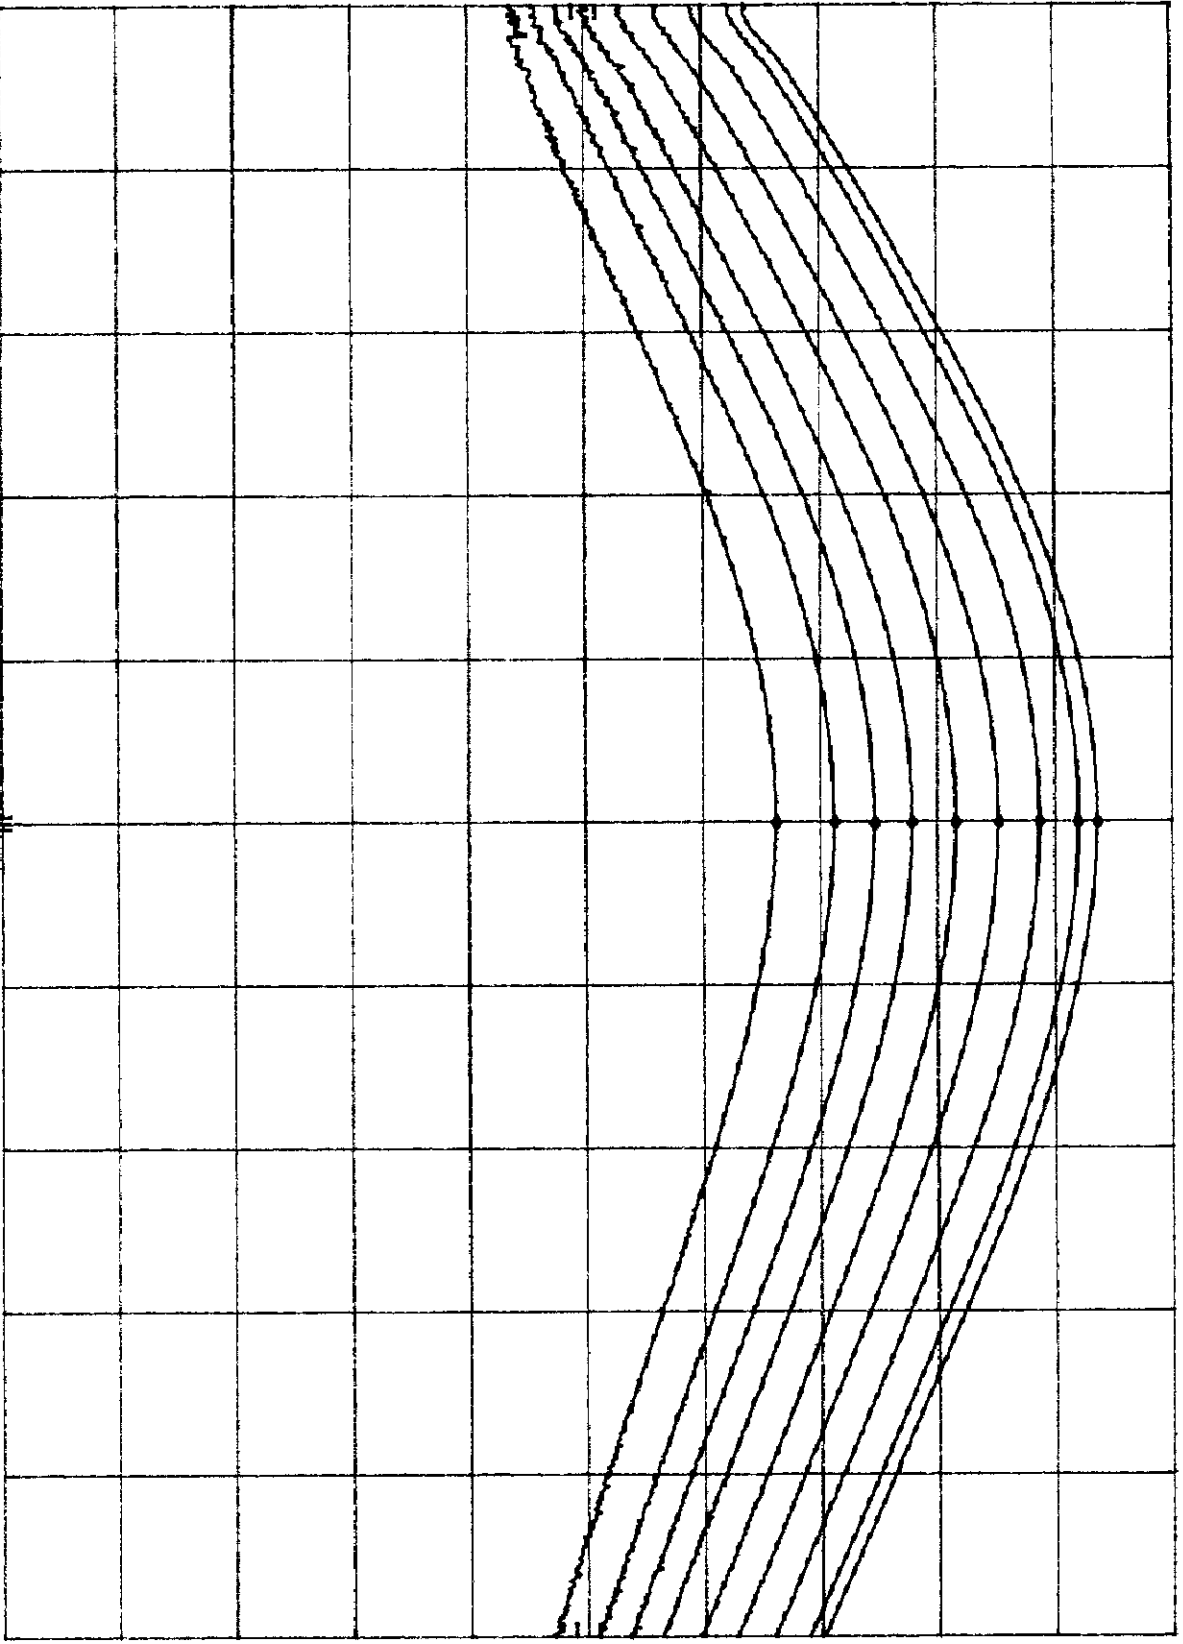

CENTER 1.880 0 CHZ  
RES BW 3 MHZ

VBW 3 MHZ

SPAN 10.0 MHZ  
SWP 20.0 msec

Plot 2.3.e.

*hp*

HIGH CHANNEL  
REF 30.0 DBm


ATTEN 40 DB

MKR 1.909 92 GHz  
23.70 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

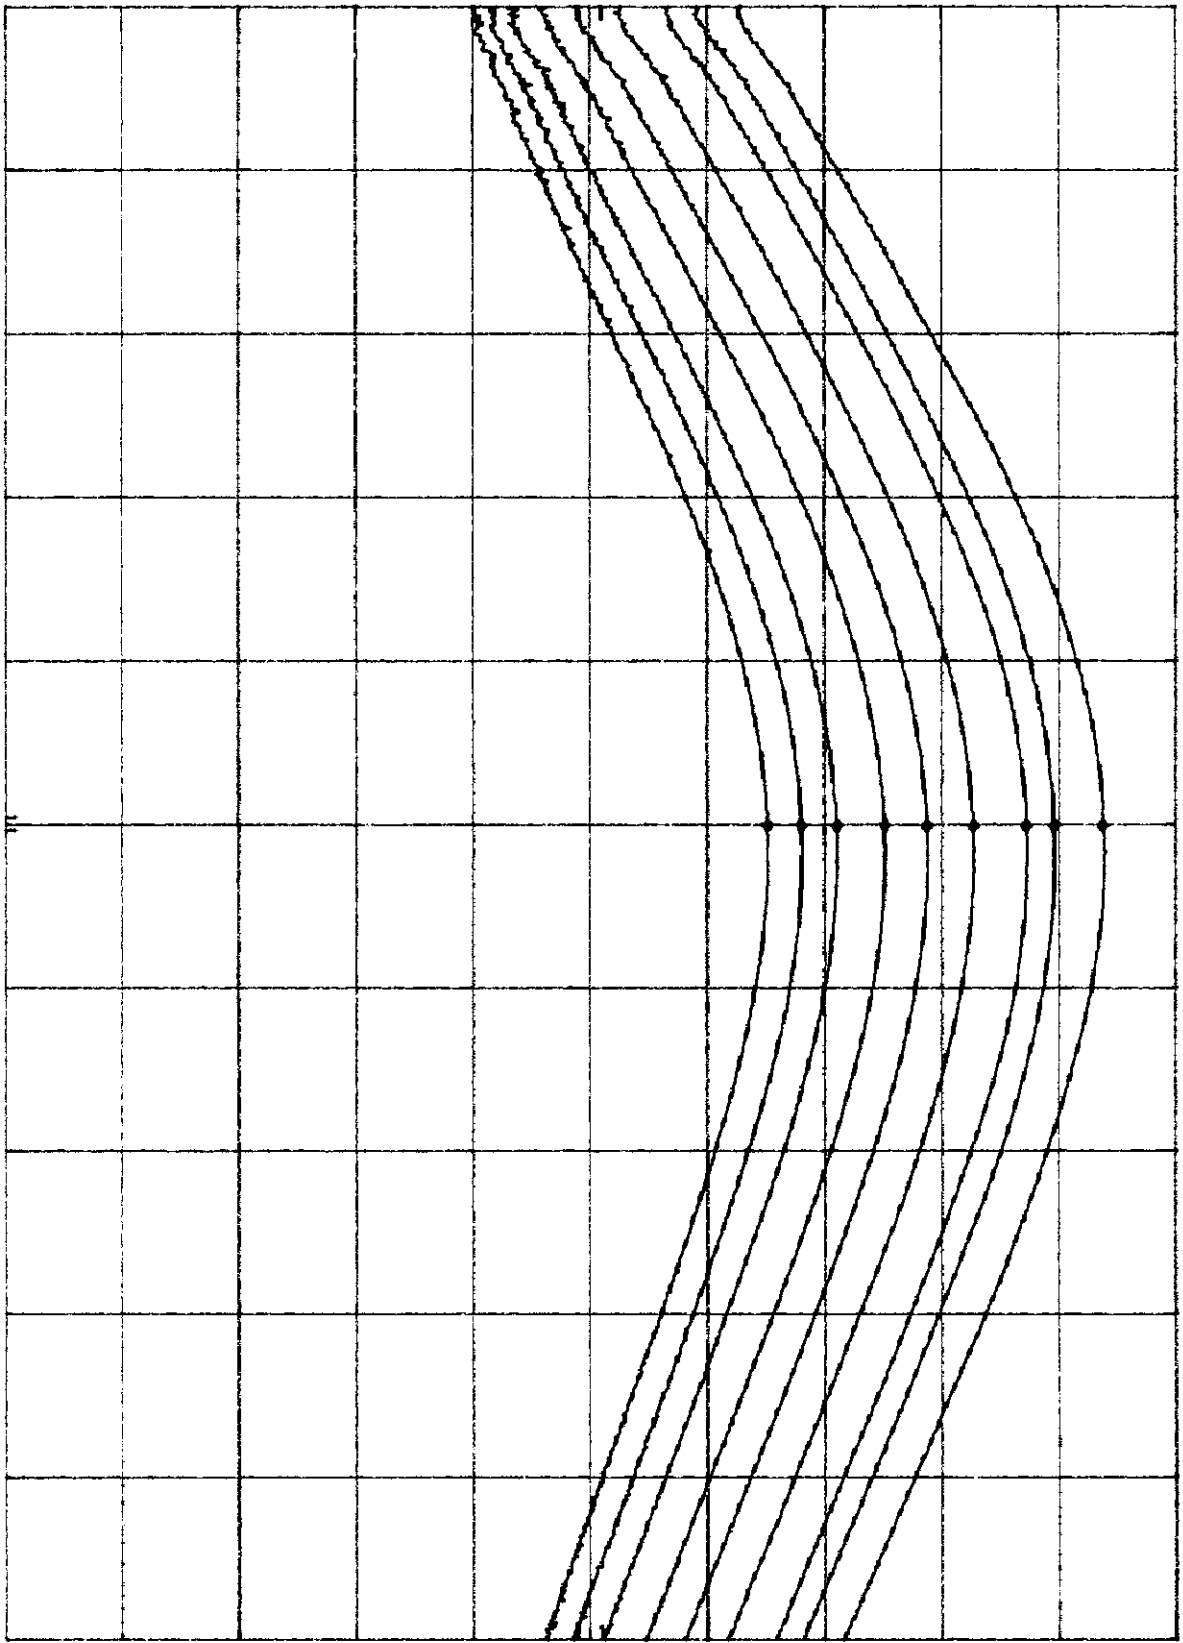

CENTER 1.909 9 GHz

RES BW 3 MHz

VBW 3 MHz

SPAN 10.0 MHz  
SWP 20.0 msec

*Chx 2.3.4*

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

### 3.0 Radiated Power

#### FCC § 22.913

The Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

#### FCC § 24.232

The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

### 3.1 Test Procedure

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane on an open test site.

The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer. During the measurement, the resolution and video bandwidths of the spectrum analyzer were set to 100 kHz (for frequencies below 1 GHz) and 1 MHz (for frequencies above 1 GHz).

Worst case emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The spectrum analyzer reading was recorded and the field strength (E in dBuV/m) was calculated. ERP & EIRP in dBm were calculated as follows:

$$\text{ERP} = E - 97.4; \quad \text{EIRP} = E - 95.3$$

In addition, ERP in frequency band 824-849 MHz was measured using a substitution method. The EUT was replaced by half-wave dipole connected to a signal generator. The spectrum analyzer reading was recorded and ERP was calculated as follows:

$$\text{ERP} = R_1 - R_2 + V_g,$$

where  $R_1$  &  $R_2$  are spectrum analyzer readings in dBuV when measured field strength from EUT & generator accordingly;  $V_g$  is the generator output in dBm

### 3.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer  
EMCO 3148 Log Periodic Antenna  
EMCO 3115 Horn Antenna  
CDI Robert's Antenna  
Rohde & Schwarz SMH 44 signal generator

### 3.3 Test Results

<b>Passes</b>	Refer to the attached data sheets.
---------------	------------------------------------

**ITS** Intertek Testing Services

Job No.: J20004218  
Company: Philips  
Model: OZEO  
Test Mode: Tx @ 824.04 MHz, 836.5 MHz, and 848.97 MHz  
Engineer: Ollie Moyrong  
Date: March\_6\_2000

## Radiated Power

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	ERP (dBm)
824.0	3.0	V	100.7	23.3	0.0	0.0	2.0	126.0	28.6
836.5	3.0	V	100.8	23.4	0.0	0.0	2.0	126.2	28.8
849.0	3.0	V	101.3	23.4	0.0	0.0	2.0	126.7	29.3

Job No.: J20004218  
Company: Philips  
Model: OZEO  
Test Mode: Tx @ 824.04 MHz, 836.5 MHz, and 848.97 MHz  
Date : March 6, 2000

**Radiated Power (Substitution Method)**

Freq. (MHz)	Antenna Polarizatio n (H/V)	Spectrum Analyzer Reading (dBuV)	Spectrum Analyzer Reading Signal Gen. + Tuned Dipole db(uV)	Signal Generator Power dBm	ERP (dBm)
824.0	V	100.7	92.5	17.0	25.2
836.5	V	100.8	91.3	17.0	26.5
849.0	V	101.3	90.7	17.0	27.6

# **ITS** Intertek Testing Services

Job No.: J20004218  
Company: Philips  
Model: OZEO  
Test Mode: Tx @ 1850 MHz, 1879.9 MHz, and 1909.9 MHz  
Engineer: Ollie Moyrong  
Date: March\_6\_2000

## Radiated Power

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	EIRP (dBm)
1850.0	3.0	V	88.6	30.1	0.0	0.0	3.1	121.8	26.5
1879.9	3.0	V	83.6	30.1	0.0	0.0	3.1	116.8	21.5
1909.9	3.0	V	82.9	30.1	0.0	0.0	3.1	116.1	20.8



Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

#### 4.0 Modulation Deviation Limiting, FCC § 2.1047, § 22.915(b)(c)

##### 4.1 Test Procedure

The RF output of the transceiver was connected to the input of an FM deviation meter through sufficient attenuation so as not to overload the meter or distort the readings. An audio signal generator with a variable attenuator on the output was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed and the generator output was connected to the microphone wires by clip leads.

At three different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded (Table 4.1a).

In addition, the audio signal was adjusted to obtain 8 kHz deviation at 1 kHz modulation frequency. Then the input signal was increased in 1 step by 20 dB and the peak deviation and steady state deviation were recorded. This test was performed at modulation frequencies from 300 Hz to 3 kHz.

##### 4.2 Test Equipment

Marconi 2955A Radio Communication Test Set  
Leader LFG-1300S Function Generator  
LMV-182 AC Millivoltmeter

##### 4.3 Test Results

The deviation is not to exceed 12 kHz. The EUT passed the test. See test data in table 4.1a.

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

Table 4.1a: Modulation Deviation Limiting			
Output Level (mV)	FM Deviation in kHz at Indicated Modulating Frequency		
	3000 Hz	1000 Hz	300 Hz
0.1	2.1	1.2	.8
0.2	2.7	1.4	.8
.3	3.2	1.6	.8
.5	4.1	2.0	.8
1.0	5.7	2.7	.9
2.0	8.0	3.7	1.1
3.0	9.7	4.5	1.3
5.0	10.7	5.9	1.6
7.0	10.7	6.9	1.8
10.0	10.8	8.2	2.2
15.0	11.2	10.1	2.7
20.0	11.3	11.4	3.0
30.0	11.4	10.7	3.7
40.0	11.4	10.7	4.2
50.0	11.4	10.6	5.1
60.0	11.4	10.7	6.9
70.0	11.4	10.7	7.3
80.0	11.4	10.8	7.3
90.0	11.4	10.8	7.1
100.0	11.4	10.8	7.0
110.0	11.4	10.8	6.9
150.0	11.4	10.8	7.5
160.0	11.4	10.8	7.7
170.0	11.4	10.8	7.9
180.0	11.4	10.8	8.1
190.0	11.4	10.8	8.2
200	11.4	10.8	8.3
250	11.4	10.8	8.5
300	11.4	10.8	8.6
400	11.4	10.8	8.6
450	11.4	10.8	8.6
500	11.4	10.8	8.6
600	11.4	10.8	8.6
650	11.4	10.8	8.6
700	11.4	10.8	8.6
800	11.3	10.8	8.6
900	11.3	10.8	8.7
1000	11.3	10.8	8.7

Middle Channel: 836.52 MHz

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

Frequency kHz	Initial Deviation	Peak Deviation	Steady State Deviation
0.3	1.9	8.1	7.3
0.5	3.9	8.7	8.5
0.7	5.5	11.2	11.1
0.9	7.2	11.3	11.2
1.0	8.1	10.8	10.7
1.2	9.4	11.9	11.8
1.4	10.6	11.5	11.4
1.6	10.8	11.2	11.1
1.8	10.8	11.3	11.2
2.0	11.2	11.3	11.2
2.4	11.4	11.4	11.3
2.8	11.1	11.4	11.3
3.0	10.8	11.4	11.3

**Test Conditions:**

$V_{mp} = 9.6$  mV  
Deviation = 8 kHz at 1 kHz modulation frequency  
Middle Channel = 836.52 MHz

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTC588

Date of Test: March 7-9, 2000

### 5.0 Audio Filter Characteristics, FCC § 22.915(d)

For mobile stations, these signals must be attenuated, relative to the level at 1 kHz, as follows:


- (i) In the frequency ranges of 3.0 to 5.9 kHz and 6.1 to 15.0 kHz, signals must be attenuated by at least  $40 \log (f/3)$  dB, where  $f$  is the frequency of the signal in kHz.
- (ii) In the frequency range of 5.9 to 6.1 kHz, signals must be attenuated at least 35 dB.
- (iii) In the frequency range above 15 kHz, signals must be attenuated at least 28 dB.

### 5.1 Test Procedure

The RF output of the transceiver was connected to the input of an FM deviation meter through sufficient attenuation so as not to overload the meter or distort the readings. An audio signal generator with a variable attenuator on the output was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed and the generator output was connected to the microphone wires by clip leads.

The audio signal at the transceiver audio input was adjusted to obtain 8-9 kHz deviation at the more sensitive modulation frequency (approximately 2.7 kHz). The audio frequency was varied from 300 Hz to 30 kHz and the deviation was measured while maintaining a constant input level. Using the level measured at 1 kHz as a reference (0 dB), the audio filter response was calculated (See Table 5-1).

In addition, the test was performed according to the block diagram shown below.

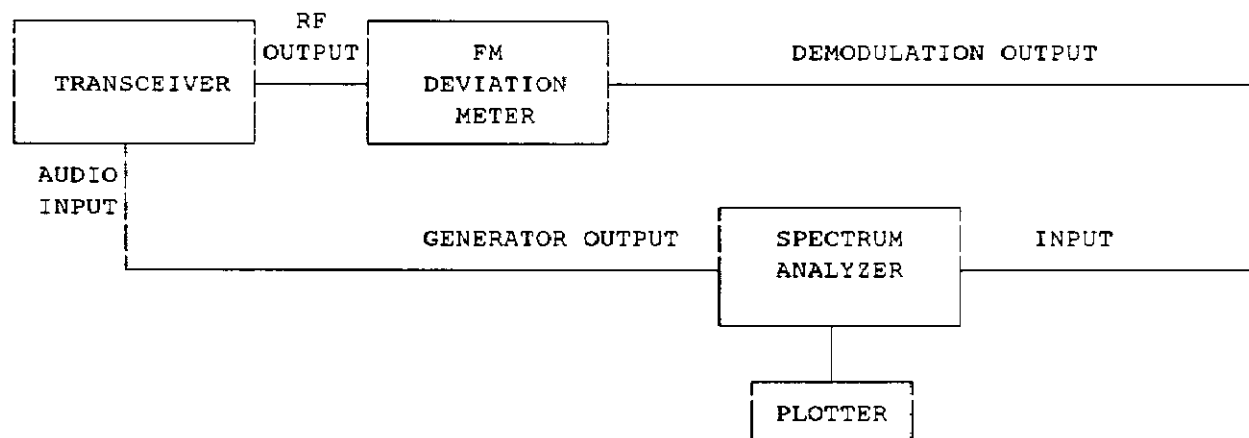

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

On that block diagram, the HP 3885A spectrum analyzer having the tracing generator, and the Marconi 2955A Radio Communication Test Set having an output of a demodulator, are used. After the calibration was made (the -20 dBm reading of the spectrum analyzer corresponds to the 9 kHz deviation) the spectrum analyzer was set to scan the frequency from 300 Hz to 30 kHz, with the same audio input level as described above, and with compressor OFF and expander OFF.

The audio filter response was plotted directly from the spectrum analyzer (Refer to Plots # 5.1.a, 5.1.b.

## 5.2 Test Equipment

Marconi Instruments 2955A Radio Communications Test Set  
HP 3588A Spectrum Analyzer  
HP 7470A Plotter  
Leader LFG-1300S Function Generator  
LMV-182 AC Millivoltmeter

## 5.3 Test Results

Passed, refer to the attached plots.

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

Table 5.1 Audio Filter Characteristics		
Modulation Frequency kHz	Relative Level dBm	Attenuation
0.3	-42.3	9.7
0.4	-43.1	10.5
0.5	-39.4	6.8
0.6	-37.2	4.6
0.7	-35.2	2.6
0.8	-33.6	1.0
0.9	-32.6	0.0
1.0	-32.6	0.0
1.2	-29.8	-2.8
1.4	-28.9	-3.7
1.6	-27.5	-5.1
1.8	-26.5	-5.1
2.0	-26.0	-6.6
2.2	-25.3	-7.2
2.5	-24.8	-7.8
3.0	-24.1	-8.5
3.5	-26.7	-5.9
4.0	-47.8	15.2
4.5	-72.3	39.7
5.0	-74.7	42.1
5.5	-75.9	43.3
5.9	-76.8	44.2
6.0	-76.7	44.1
6.1	-74.6	42.0
8.0	-75.9	43.3
10.0	-75.0	42.4
15.0	-79.8	47.2
20.0	-90.5	57.9
30.0	-96.2	63.6

Range: -10 dBm

Res BW: 150 Hz

A: SWEPT SPECTRUM

VBW: OFF

Mkr

2 762 Hz

-24.23 dBm

28-Feb-1999 20:25


Swp Time: 1.43 Sec

-10  
dBm

LogMag

10 dB  
/div

-110

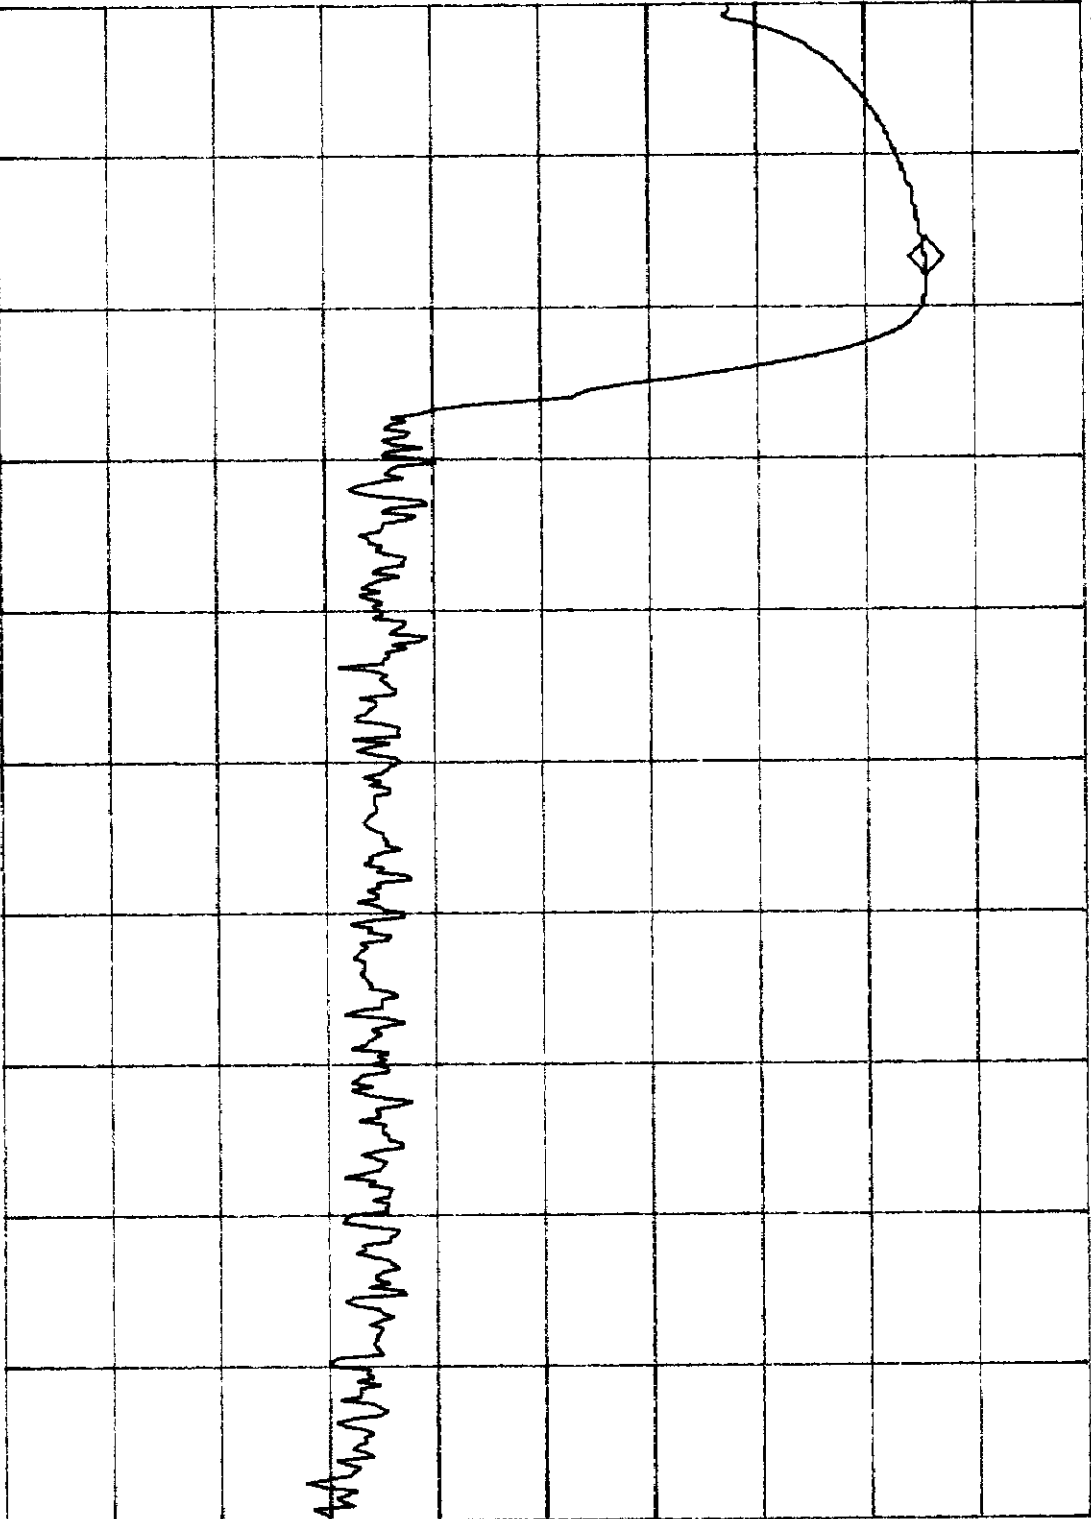

Start: 300 Hz

Stop: 15 000 Hz

WAITING FOR ARM

Plot 5.1.a

Range: -10 dBm

Ras BW: 150 Hz

A: SWEPT SPECTRUM

28-Feb-1999 20:37

VBW: Off

MKR

Swp Time: 1.43 Sec


15 712 Hz -78.29 dBm

-10 dBm

LogMag

10 dB /div

-110

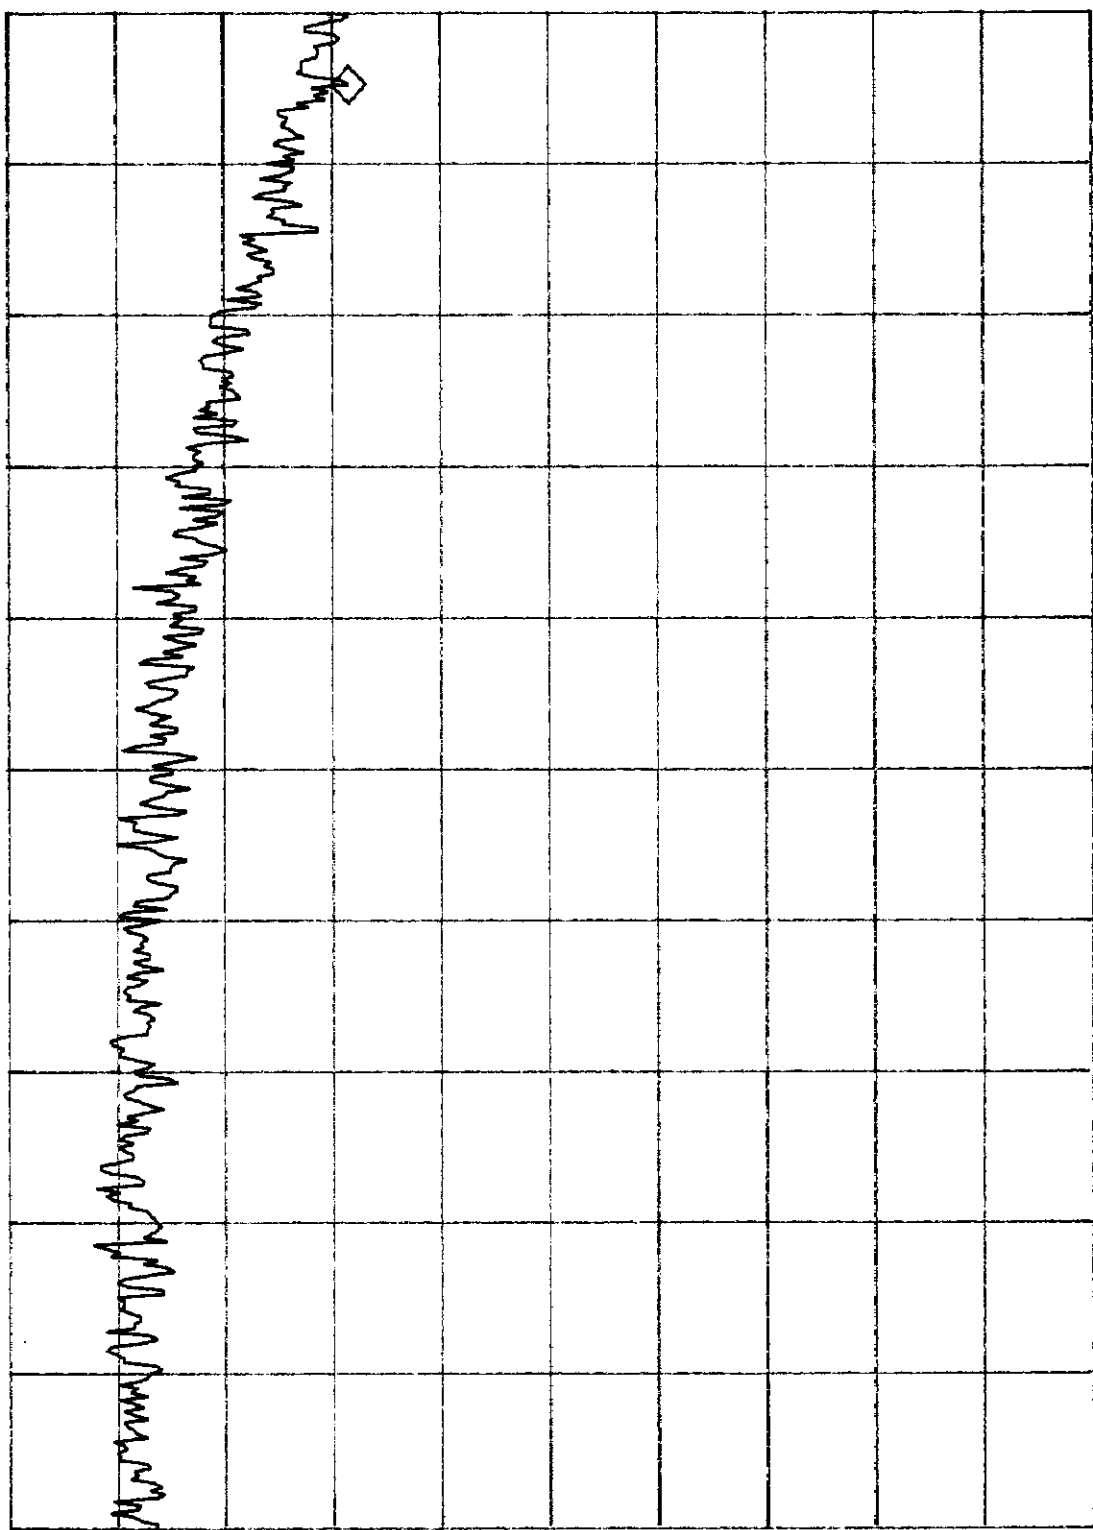

Start: 15 000 Hz

Stop: 30 000 Hz

WAITING FOR ARM

Plot 5.1.5



Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

## 6.0 Emission Limitations, Occupied Bandwidth, FCC § 2.1049, 22.917(b)(d)

For F3E/F3D emission mask uses with audio filter, the mean power of emissions must be attenuated below the mean power of the unmodulated carrier wave (P) as follows:

- (1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz: at least 26 dB;
- (2) On any frequency removed from the carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency: at least 60 dB or  $43 + 10 \log P$  dB, whichever is the lesser attenuation.

For F1D emission mask, the mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (1) On any frequency removed from the carrier frequency by more than 20 kHz but no more than 45 kHz: at least 26 dB;
- (2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz: at least 45 dB;
- (2) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency: at least 60 dB or  $43 + 10 \log P$  dB, whichever is the lesser attenuation.

## 6.1 Test Procedure

The RF output of the transceiver was connected to the input of the spectrum analyzer through sufficient attenuation. The audio generator was connected to the audio input of the transceiver.

The spectrum with no modulation was recorded. The audio input signal was adjusted to obtain the frequencies deviation equal 6 kHz at the audio frequency of maximum response which was determined measuring deviation versus frequency from 300 Hz to 3.5 kHz and was found 2.8 kHz. The audio input level was increased by 16 dB. The audio frequency was set to the frequency 2.5 kHz.

The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the frequency band  $\pm 50$  kHz and  $\pm 100$  kHz from the carrier frequency. The same plots has been done for wideband emissions, SAT, ST, DTMF9, Voice, some of the combinations of these modulating signals and in TDMA mode.

Note: Some of the plots were only done in the frequency band of  $\pm 50$  kHz since it was clear from these plots, that the levels of emissions were well below the limits.

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

6.2 Test Equipment

HP 8566B Spectrum Analyzer  
Leader LFG-1300S Function Generator  
Leader LMV-182 AC Millivoltmeter  
Marconi 2955A Radio Communication Test Set  
HP 7470A Plotter

6.3 Test Results

<b>Passes</b> Refer to the attached plots.
--

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTC588

Date of Test: March 7-9, 2000

Plot Number	Description
6.3.a	Carrier frequency, no modulation, scan 100 kHz
6.3.b	Carrier frequency, no modulation, scan 200 kHz
6.3.c	Wideband emissions (0, 1, 0, 1), scan 100 kHz
6.3.d	Wideband emissions (0, 1, 0, 1), scan 200 kHz
6.3.e	DTMF "9"
6.3.f	SAT (6 kHz, 2 kHz deviation)
6.3.g	ST (10 kHz, 8 kHz deviation), scan 100 kHz
6.3.h	ST & SAT (6 kHz & 10 kHz), scan 100 kHz
6.3.i	ST & SAT (6 kHz & 10 kHz), scan 200 kHz
6.3.j	DTMF & SAT, scan 100 kHz
6.3.k	Voice (2.5 kHz), scan 100 kHz
6.3.l	Voice (2.5 kHz) & SAT (6 kHz), scan 100 kHz
6.3.m	Voice (2.5 kHz) & SAT (6 kHz), low power
6.3.n	TDMA mode, scan 100 kHz
6.3.o	TDMA mode, $\pi/4$ QPSK, 200 kHz
6.3.p	TDMA mode, scan 200 kHz

h<sub>p</sub>


REF 26.5 dBm ATTEN 40 DB

MKR 836.520 3 MHz  
26.50 dBm

10 DB/

DL  
0.5  
dBm

CORR'D

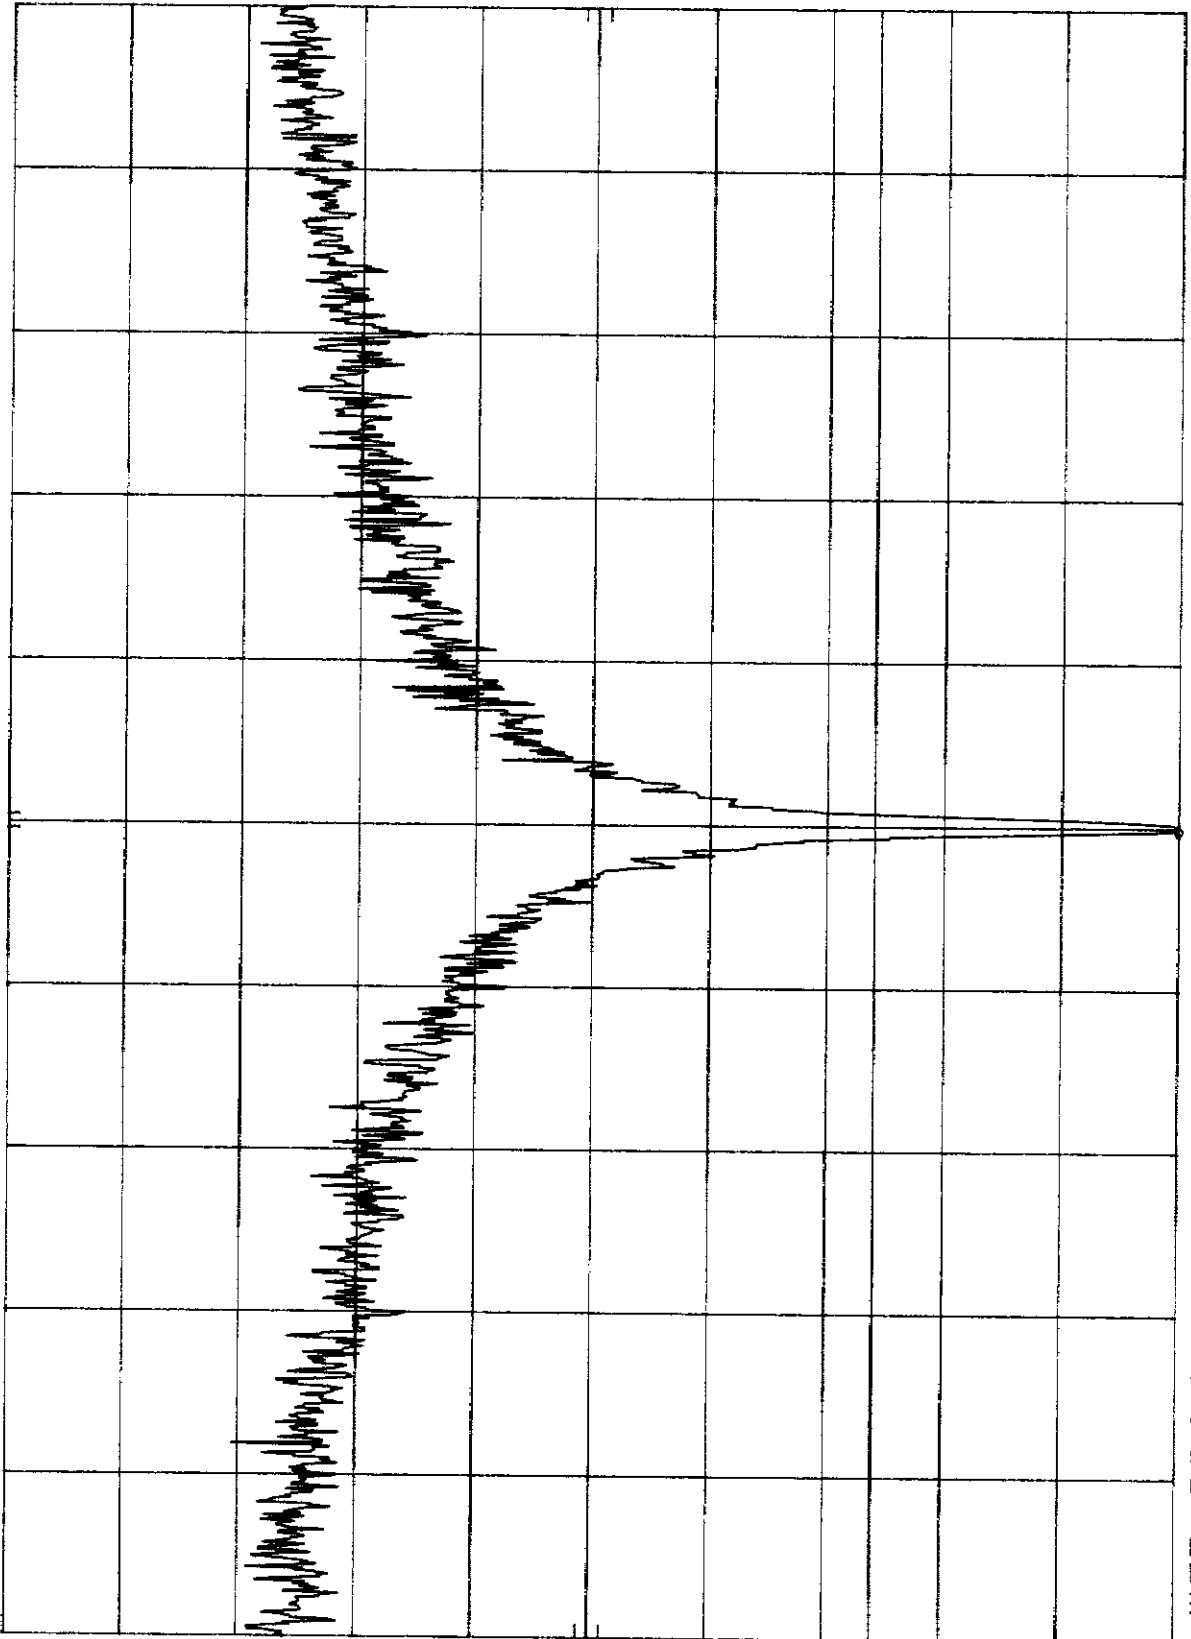

CENTER 836.520 MHz  
RES BW 300 Hz  
Q10x 6.3.9

VBW 300 Hz

SPAN 100 kHz  
SWP 3.00 sec


MKR  $\Delta$  20.0 KHZ  
-64.00 dB

HP REF 26.5 dBm ATTEN 40 DB

10 DB/

DL  
0.5  
dBm

CORR'D

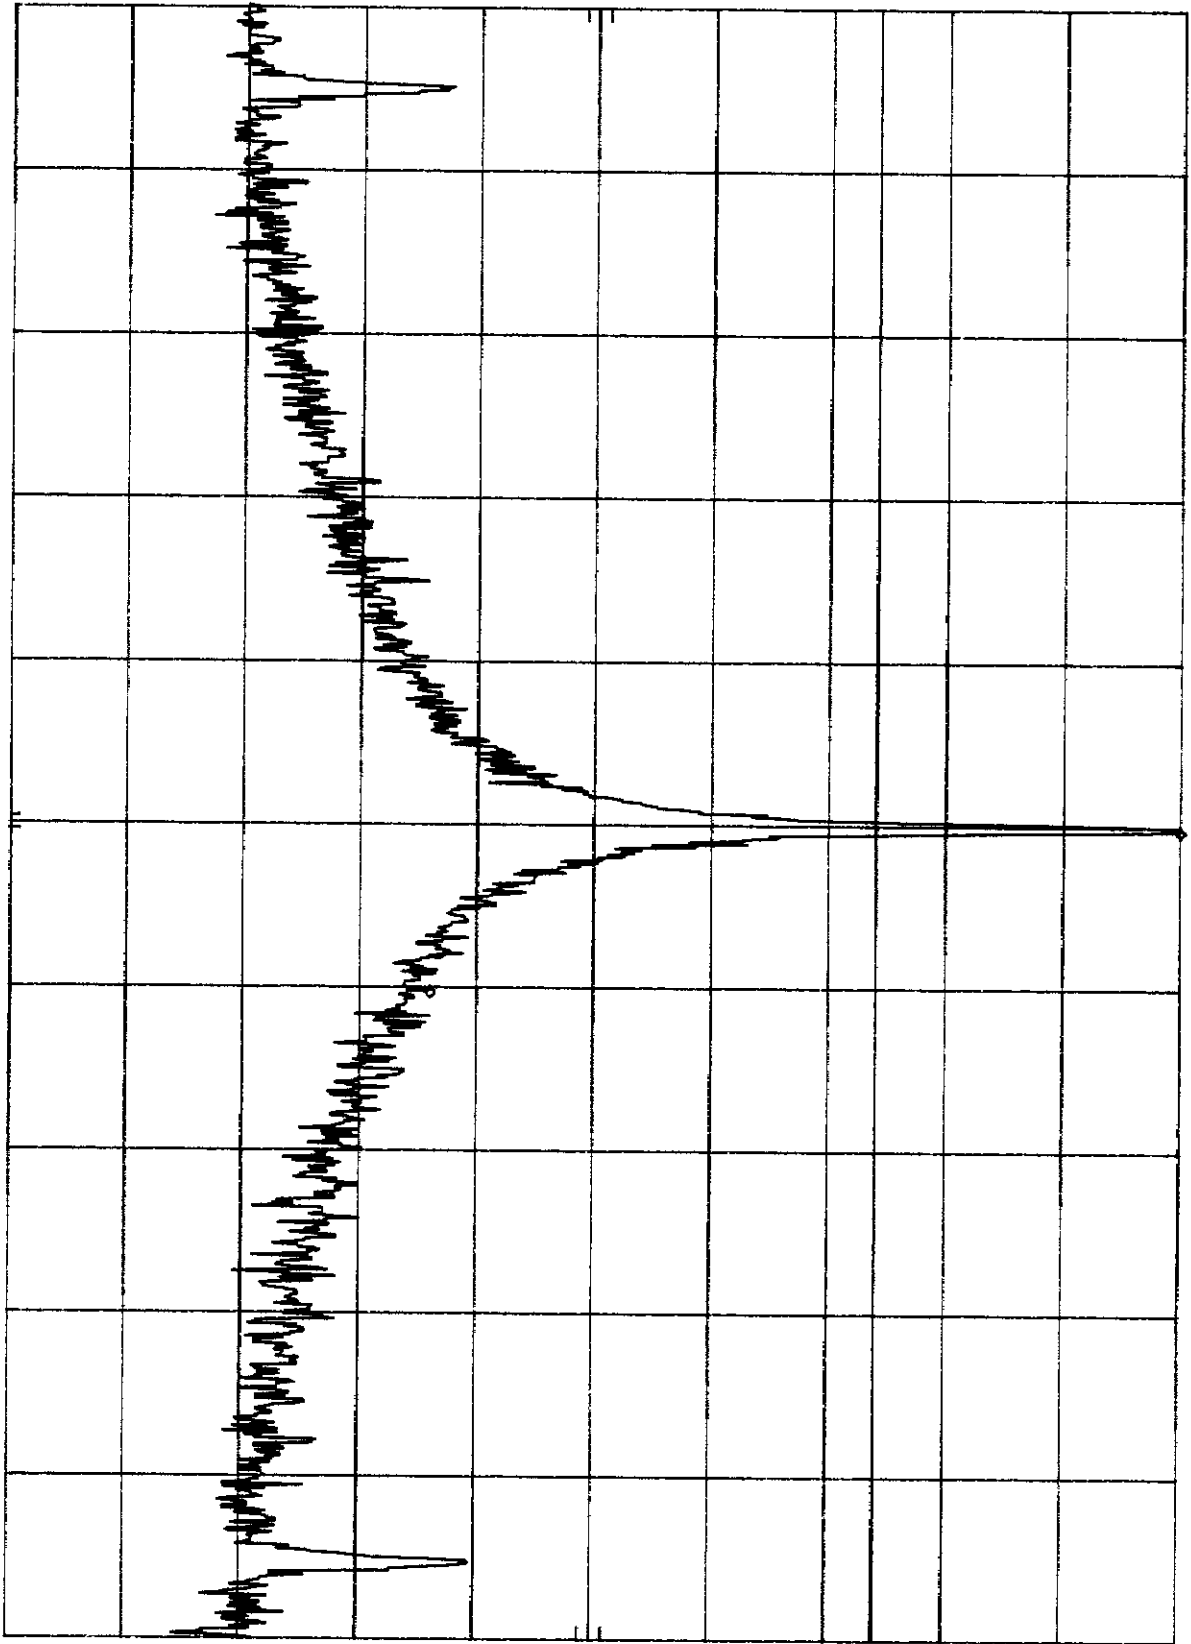

CENTER 836.520 MHZ  
RES BW 300 HZ  
Plot 6.3.6  
VBW 300 HZ  
SPAN 200 KHZ  
SWP 6.00 sec

h<sub>0</sub>


REF 26.5 dBm ATTEN 40 dB

MKR Δ 20.0 KHZ  
-29.90 dB

10 dB/

DL  
0.5  
dBm

CORR'D

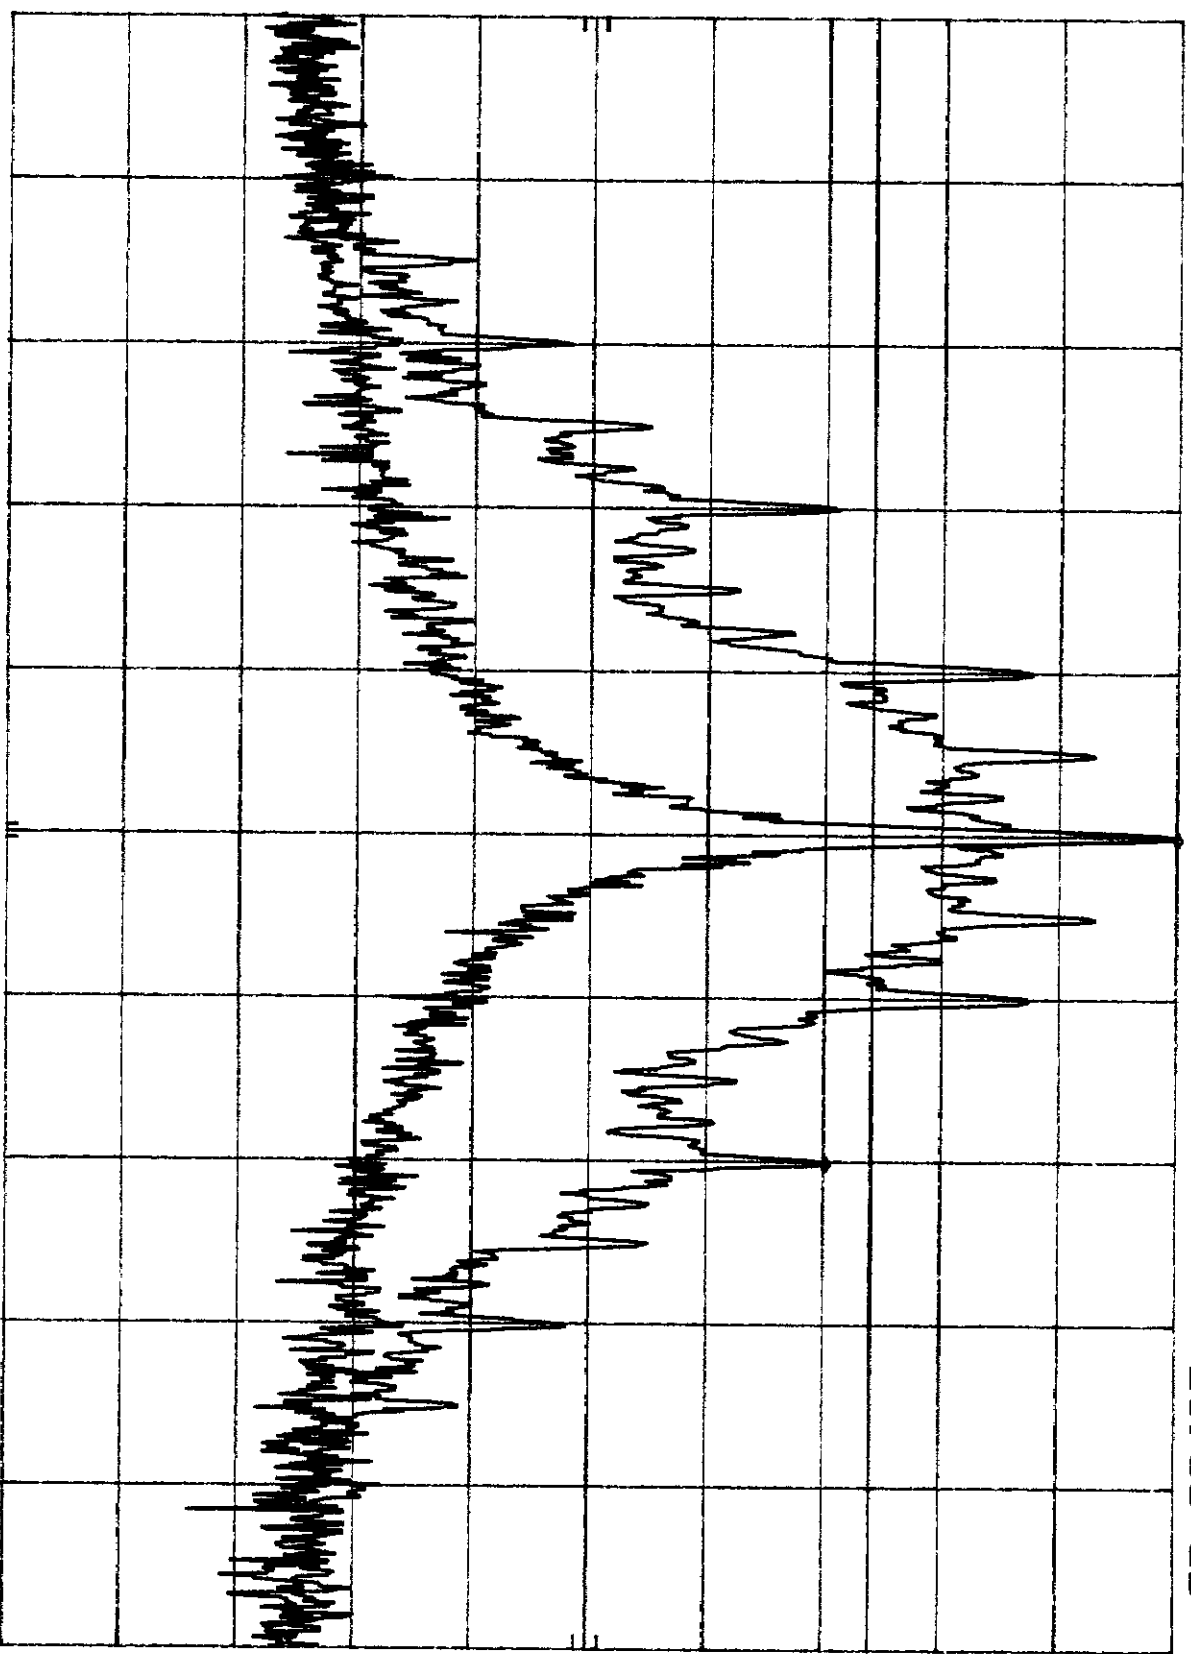

CENTER 836.520 MHZ  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 100 KHZ  
SWP 3.00 sec  
Plot 6.3.C

hpd

REF 26.5 dBm


ATTEN 40 dB

MKR Δ-20.0 KHZ  
-29.80 dB

10 dB/

DL  
0.5  
dBm

CORR'D

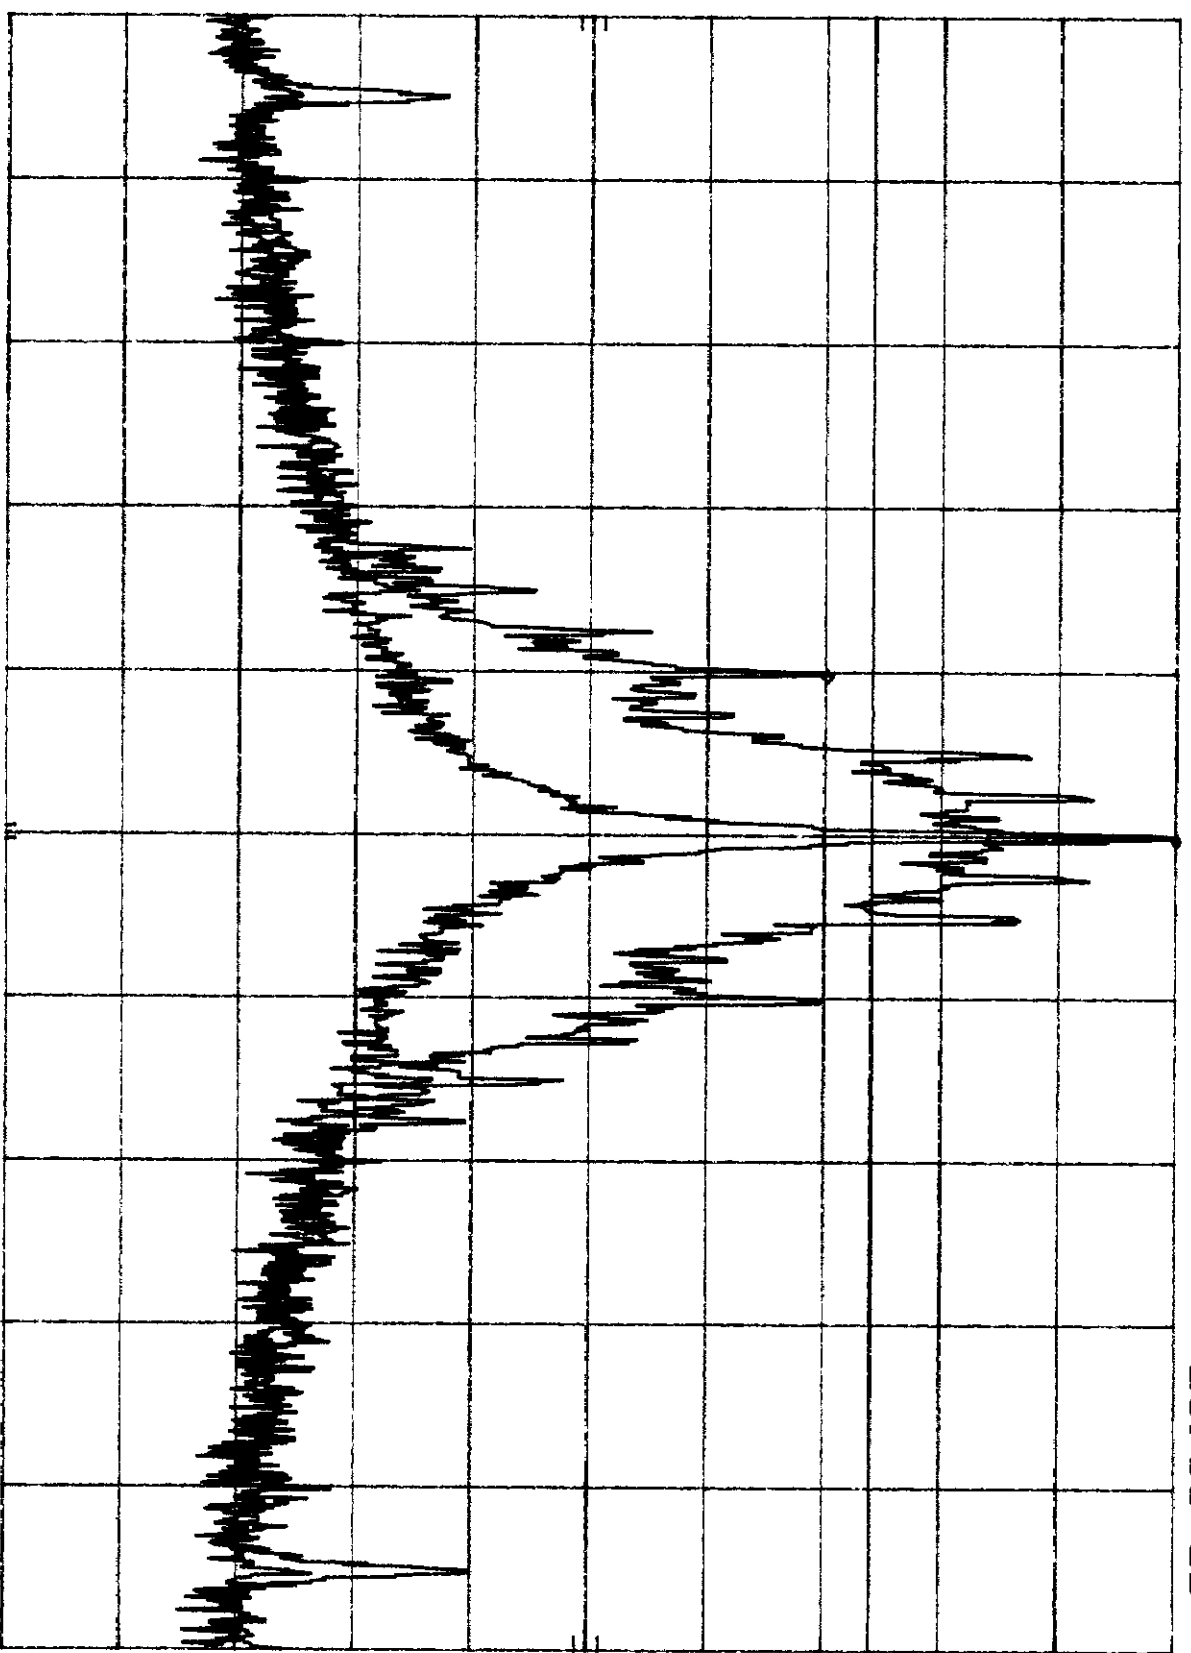

CENTER 836.520 MHz

RES BW 300 Hz

VBW 300 Hz

SWP 200 KHZ

SWP 6.00 sec

Plot 6.3.8


MKR  $\Delta$  19.8 KHZ  
-64.50 DB

HP REF 26.5 DBm ATTEN 40 DB

10 DB/

DL  
0.5  
dBm

CORR'D

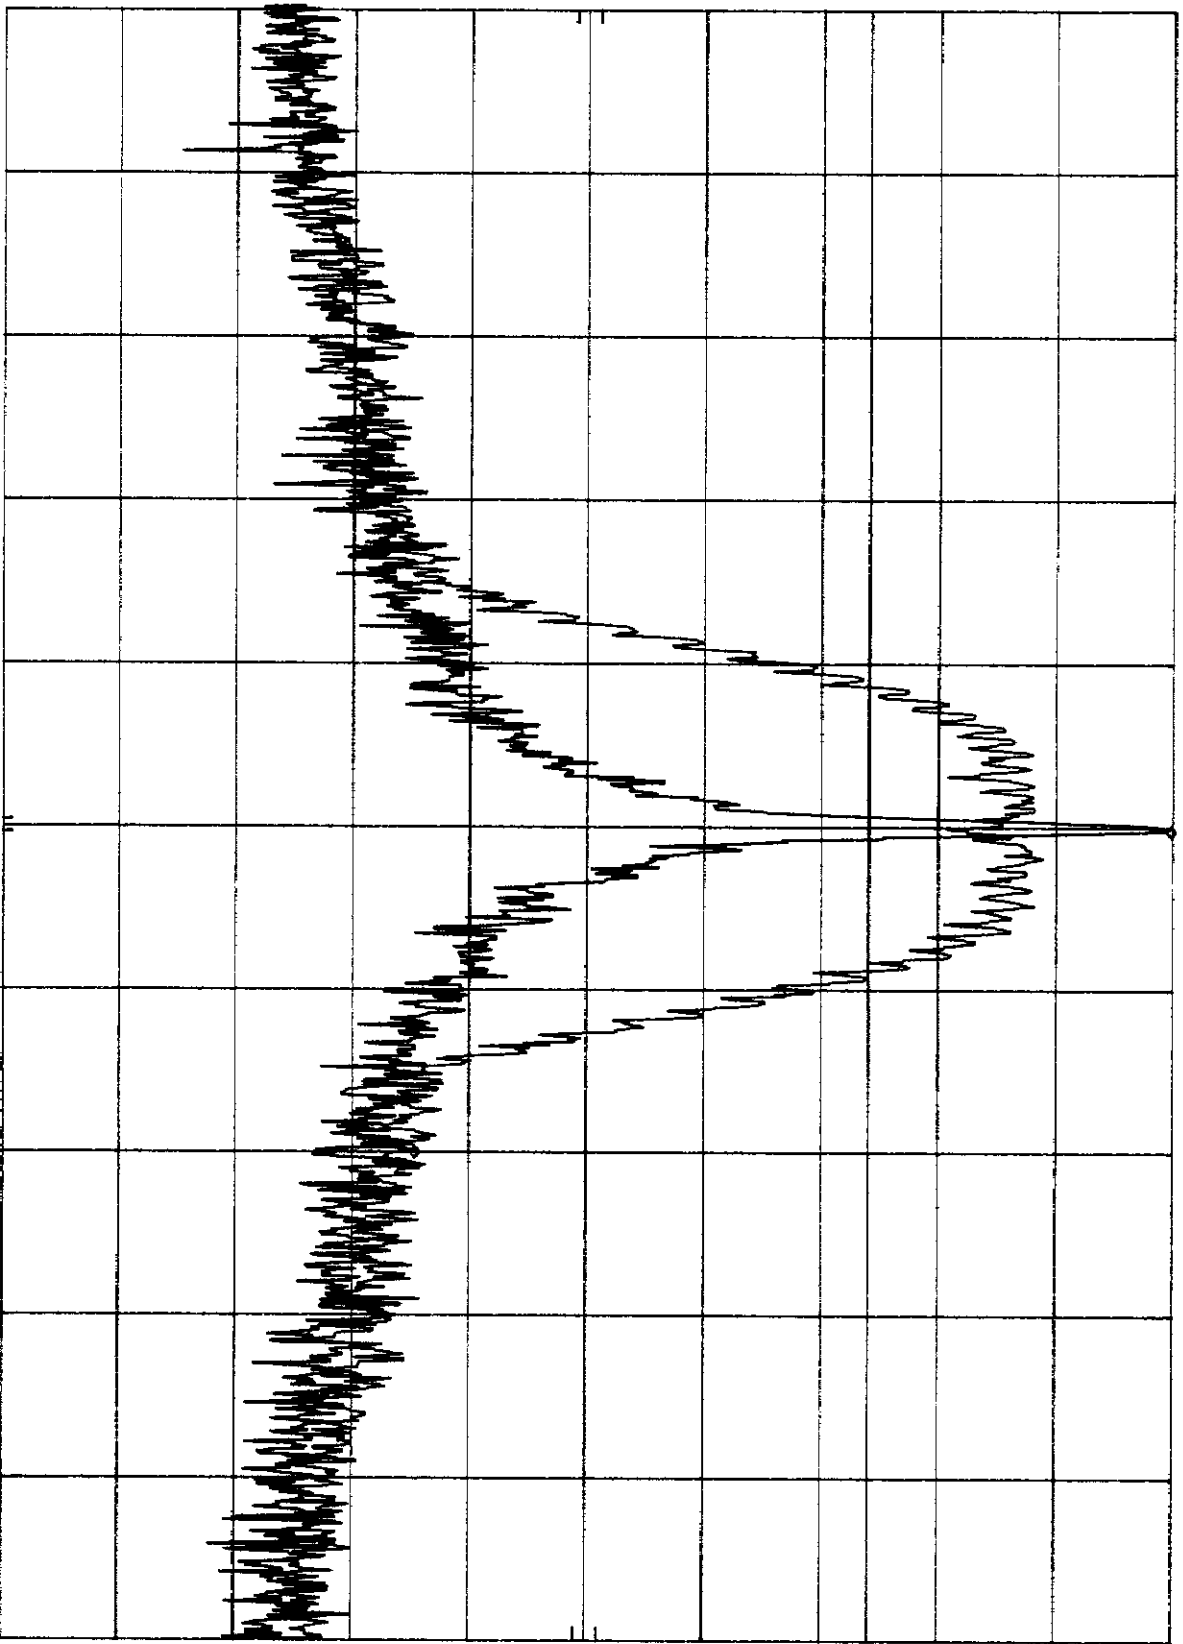

CENTER 836.520 MHZ  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 100 KHZ  
SWP 3.00 sec  
Plot G.3.e




MKR  $\Delta$  20.0 KHZ  
-69.10 DB

HP REF 26.5 DBm ATTEN 40 DB

10 DB/

DL  
0.5  
DBm

CORR'D

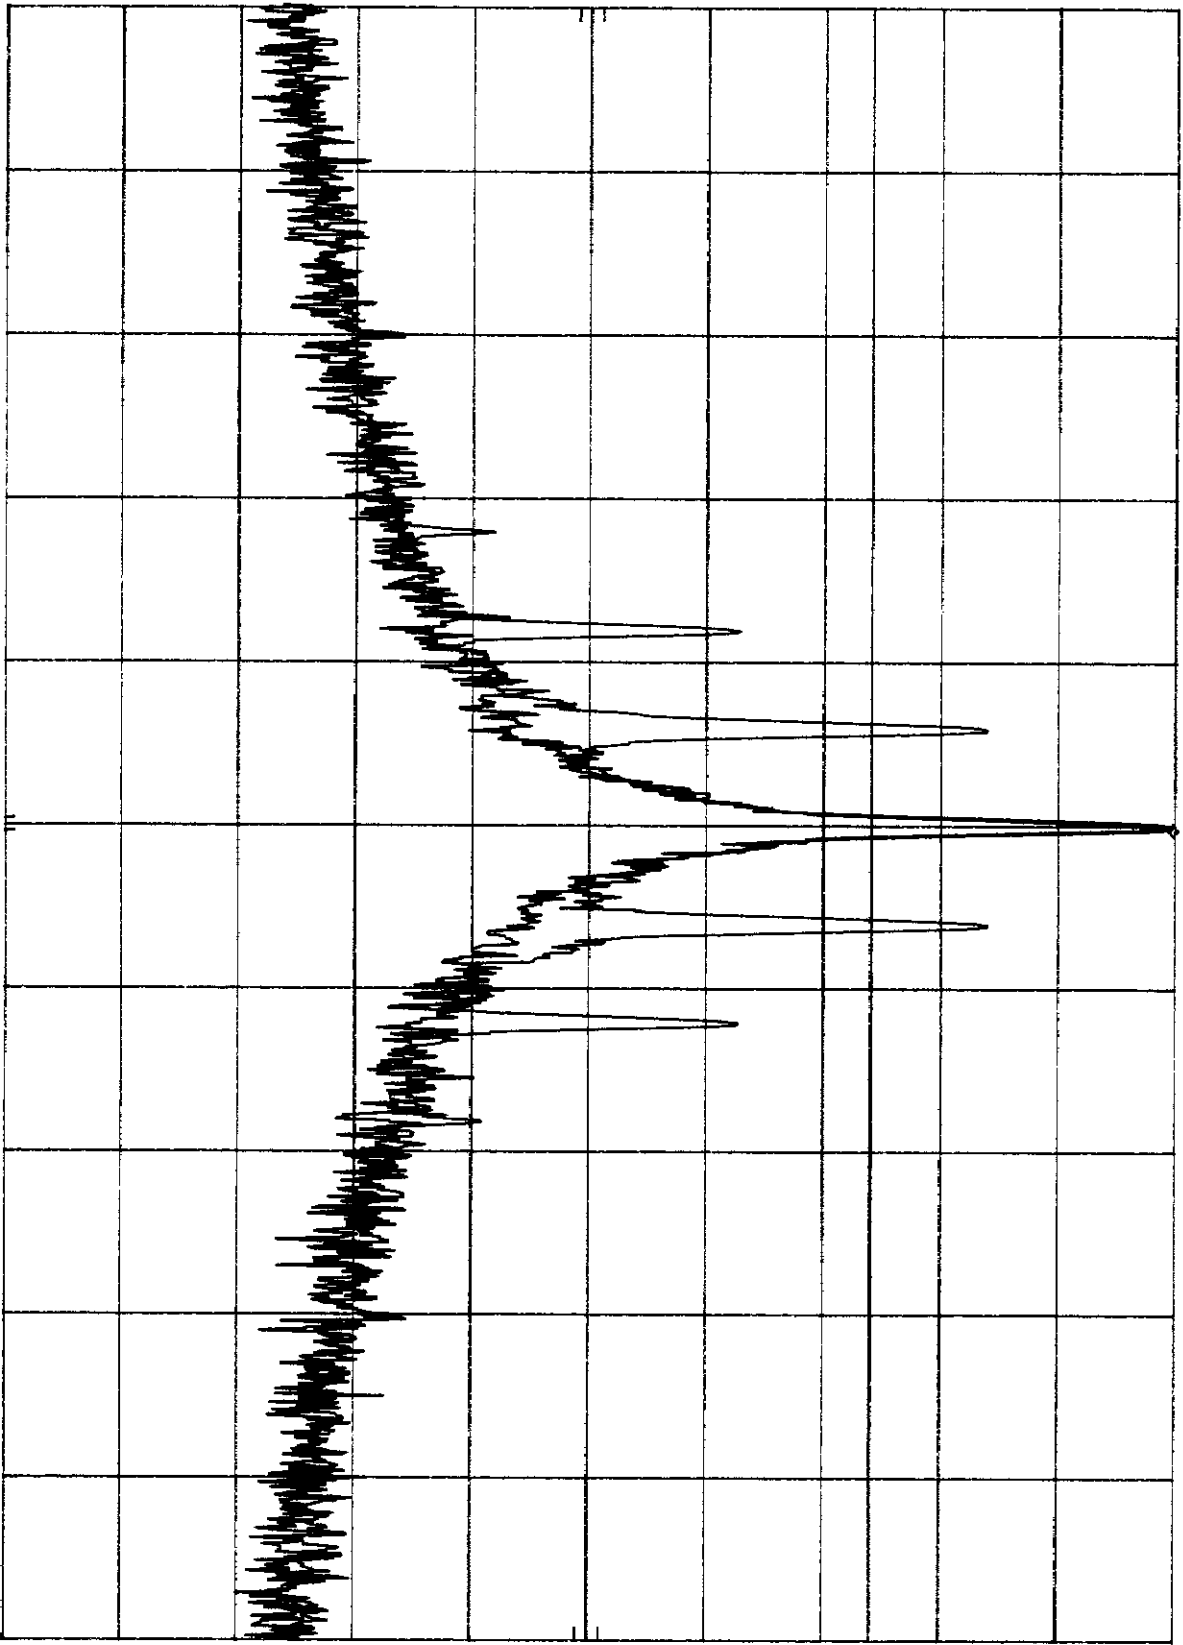

CENTER 836.520 MHZ  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 100 KHZ  
SWP 3.00 sec  
910x 6.3.8

hpa

REF 26.5 dBm


ATTEN 40 dB

MKR  $\Delta$  20.0 KHZ  
-25.30 dB

10 dB/

DL  
0.5  
dBm

CORR'D

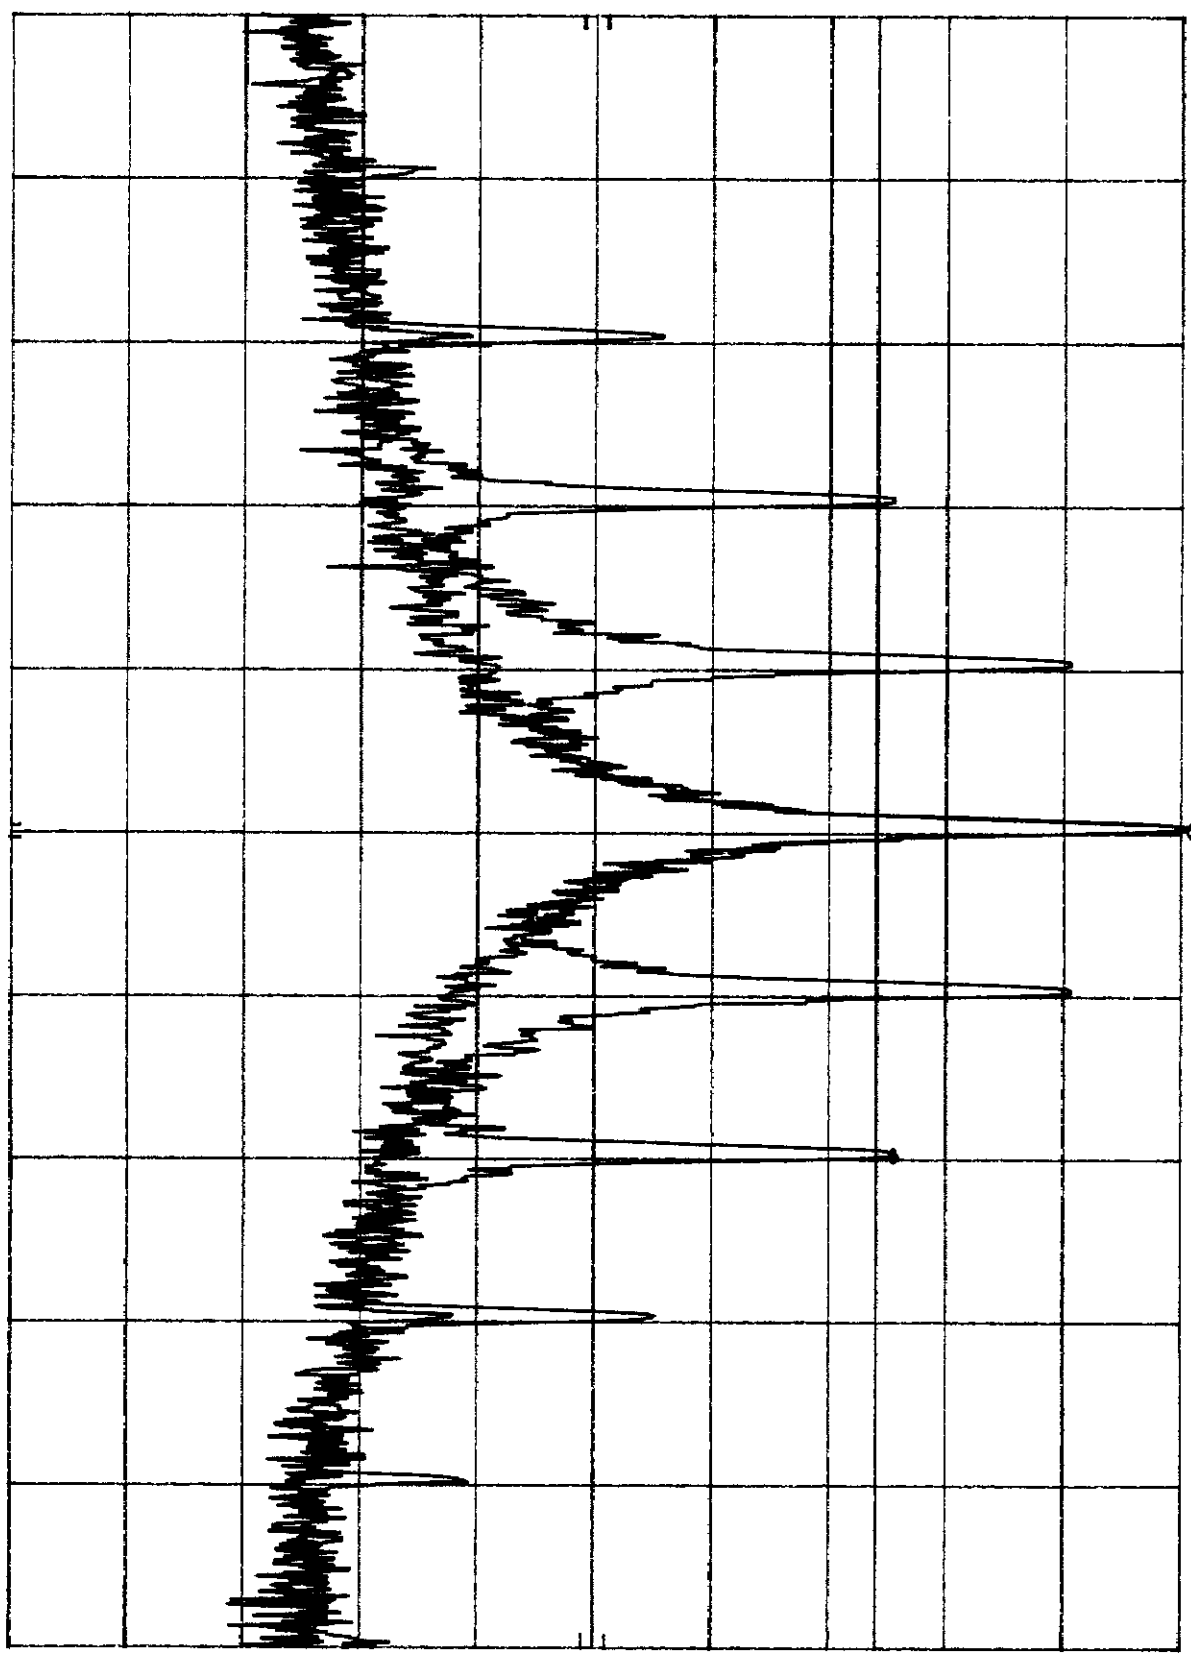

CENTER 836.520 MHz

RES BW 300

Hz

VBW 300

Hz

SWP 3.00

sec

Plot 6.3.9

hp


REF 26.5 dBm ATTEN 40 dB

MKR  $\Delta$  20.2 KHz  
-23.50 dB

10 dB/

DL  
0.5  
dBm

CORR'D

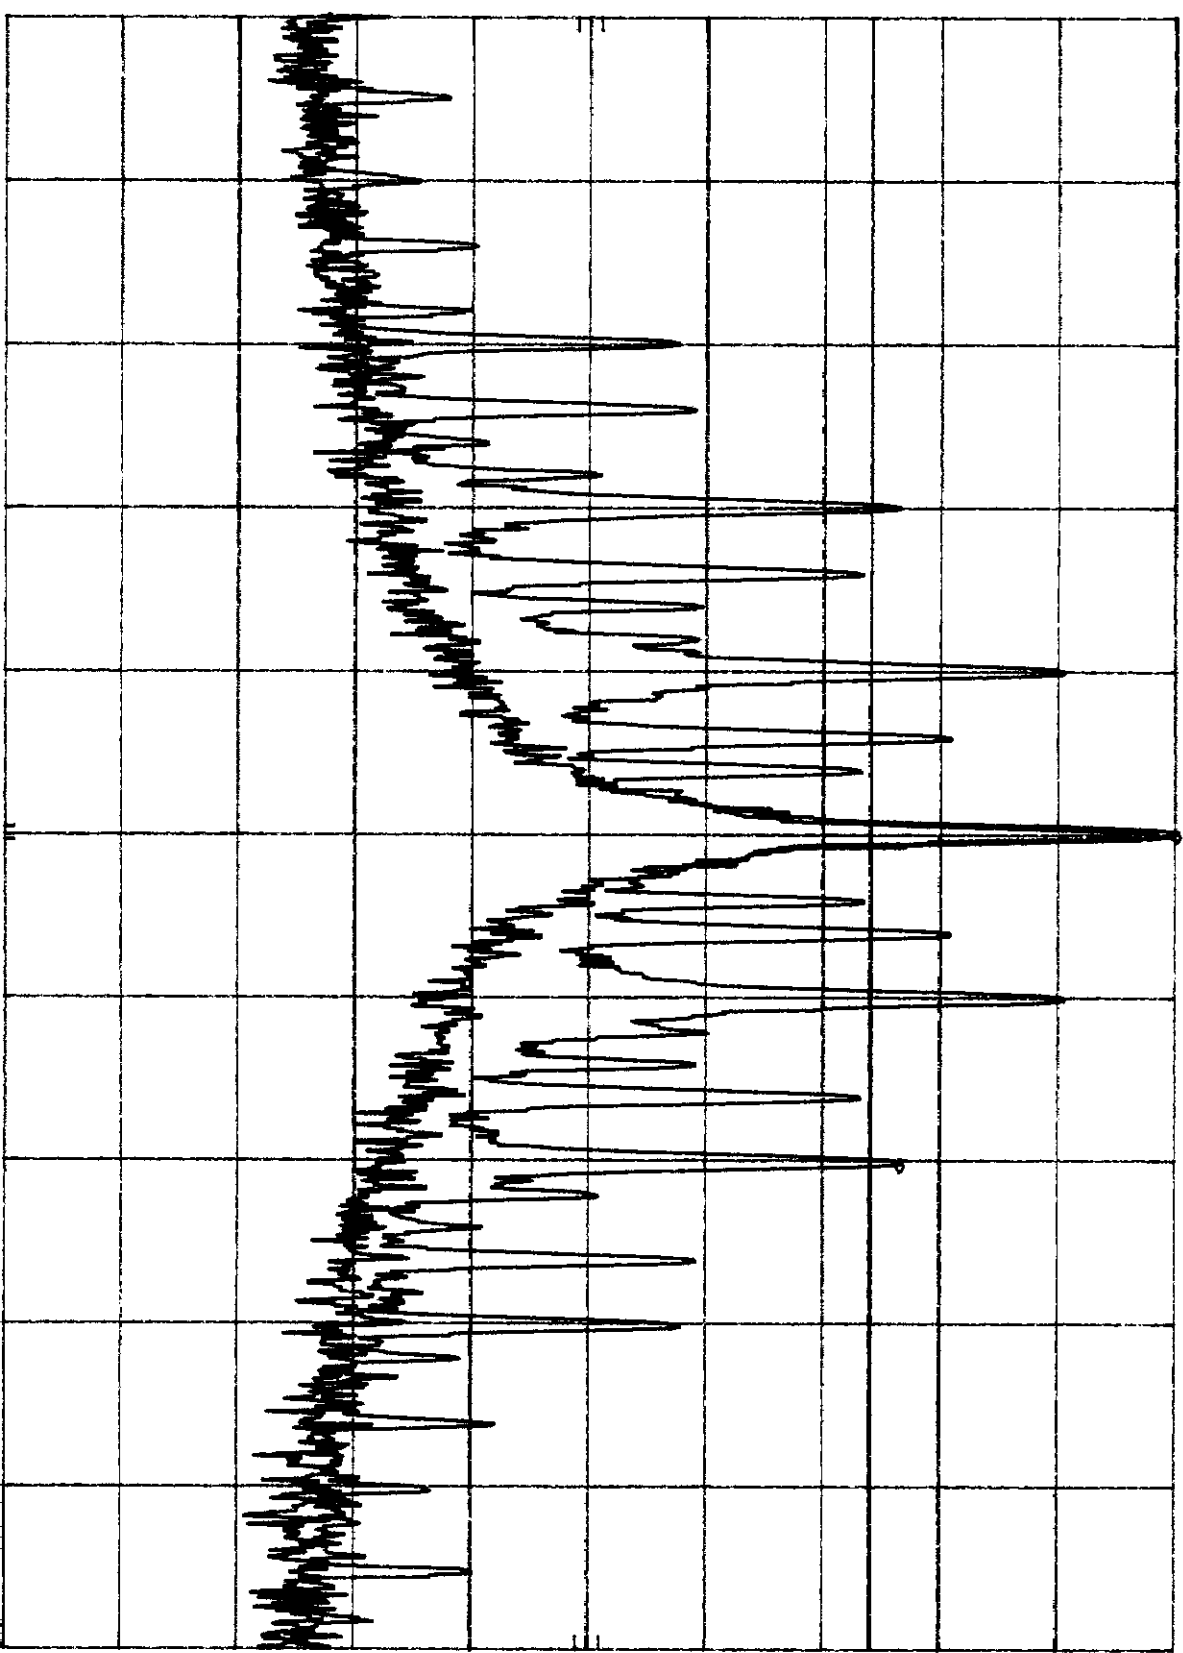

CENTER 836.520 MHz

RES BW 300

Hz

VBW 300

Hz

SPAN 100 KHz

SWP 3.00 sec

Plot 6.3.h

HP

REF 26.5 dBm


ATTEN 40 DB

MKR Δ 20.0 KHZ  
-23.60 DB

10 DB/

DL  
0.5  
dBm

CORR'D

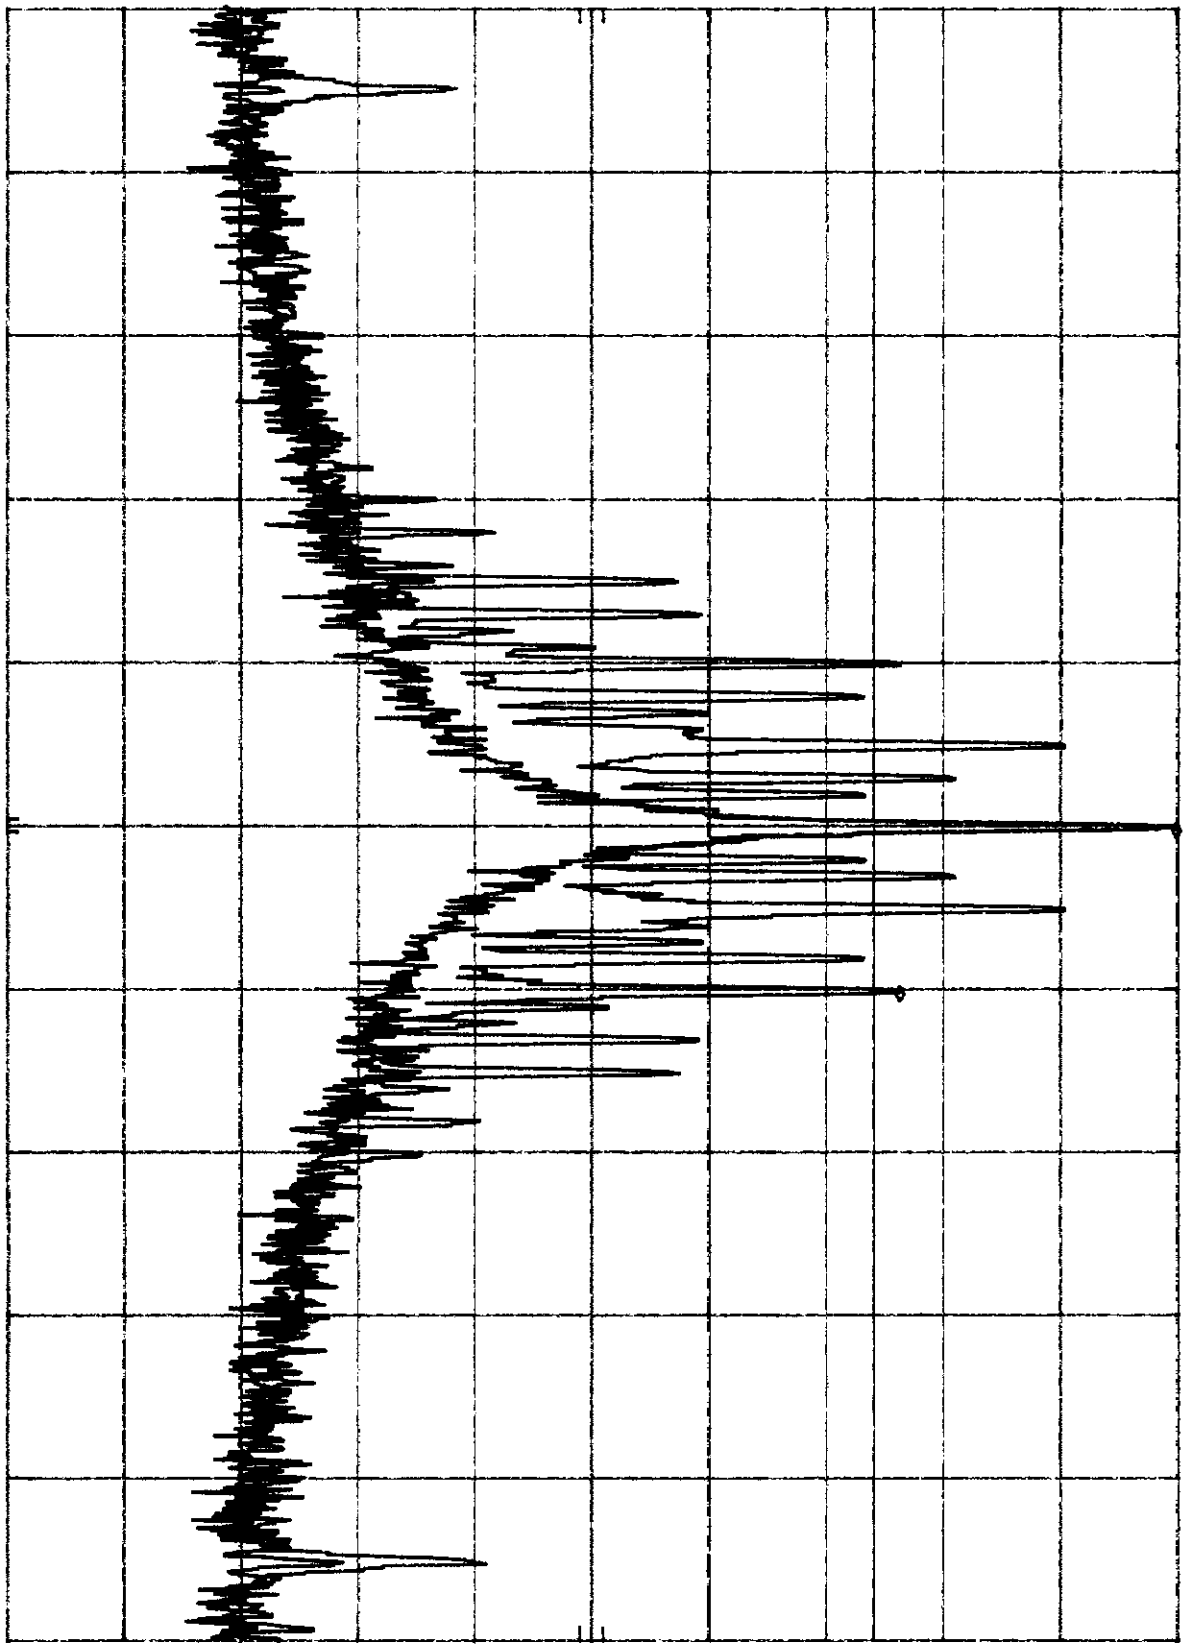

CENTER 836.520 MHZ

RES BW 300

HZ

VBW 300

HZ

SPAN 200 KHZ

SWP 6.00 sec

Plot 6.3.1

HP

REF 26.5 dBm


ATTEN 40 dB

MKR Δ 20.0 KHZ  
-64.50 dB

10 dB/

DL  
0.5  
dBm

CORR'D

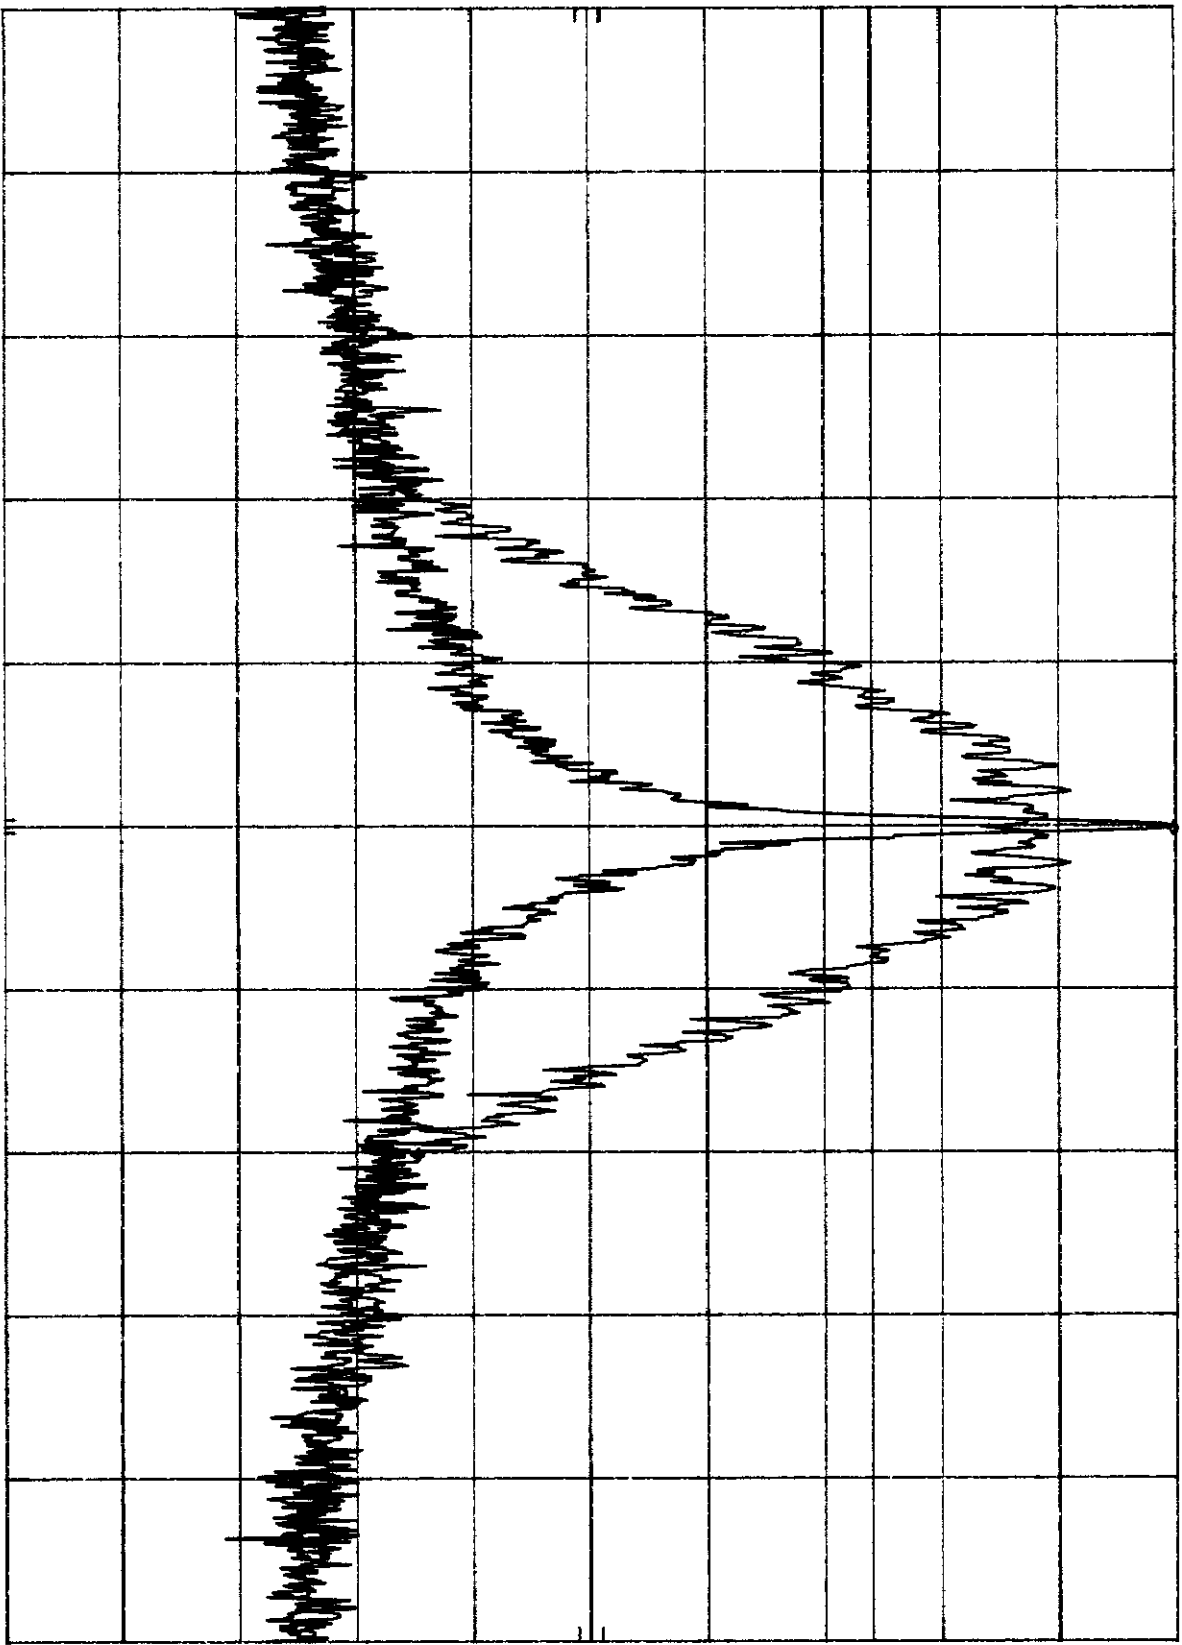

CENTER 836.520 MHz  
RES BW 300 Hz  
VBW 300 Hz  
SPAN 100 KHZ  
SWP 3.00 sec  
Plot 6.3.15

HP

REF 26.5 dBm


ATTEN 40 dB

MKR  $\Delta$  20.0 KHz  
-61.70 dB

10 dB/

DL  
0.5  
dBm

CORR'D

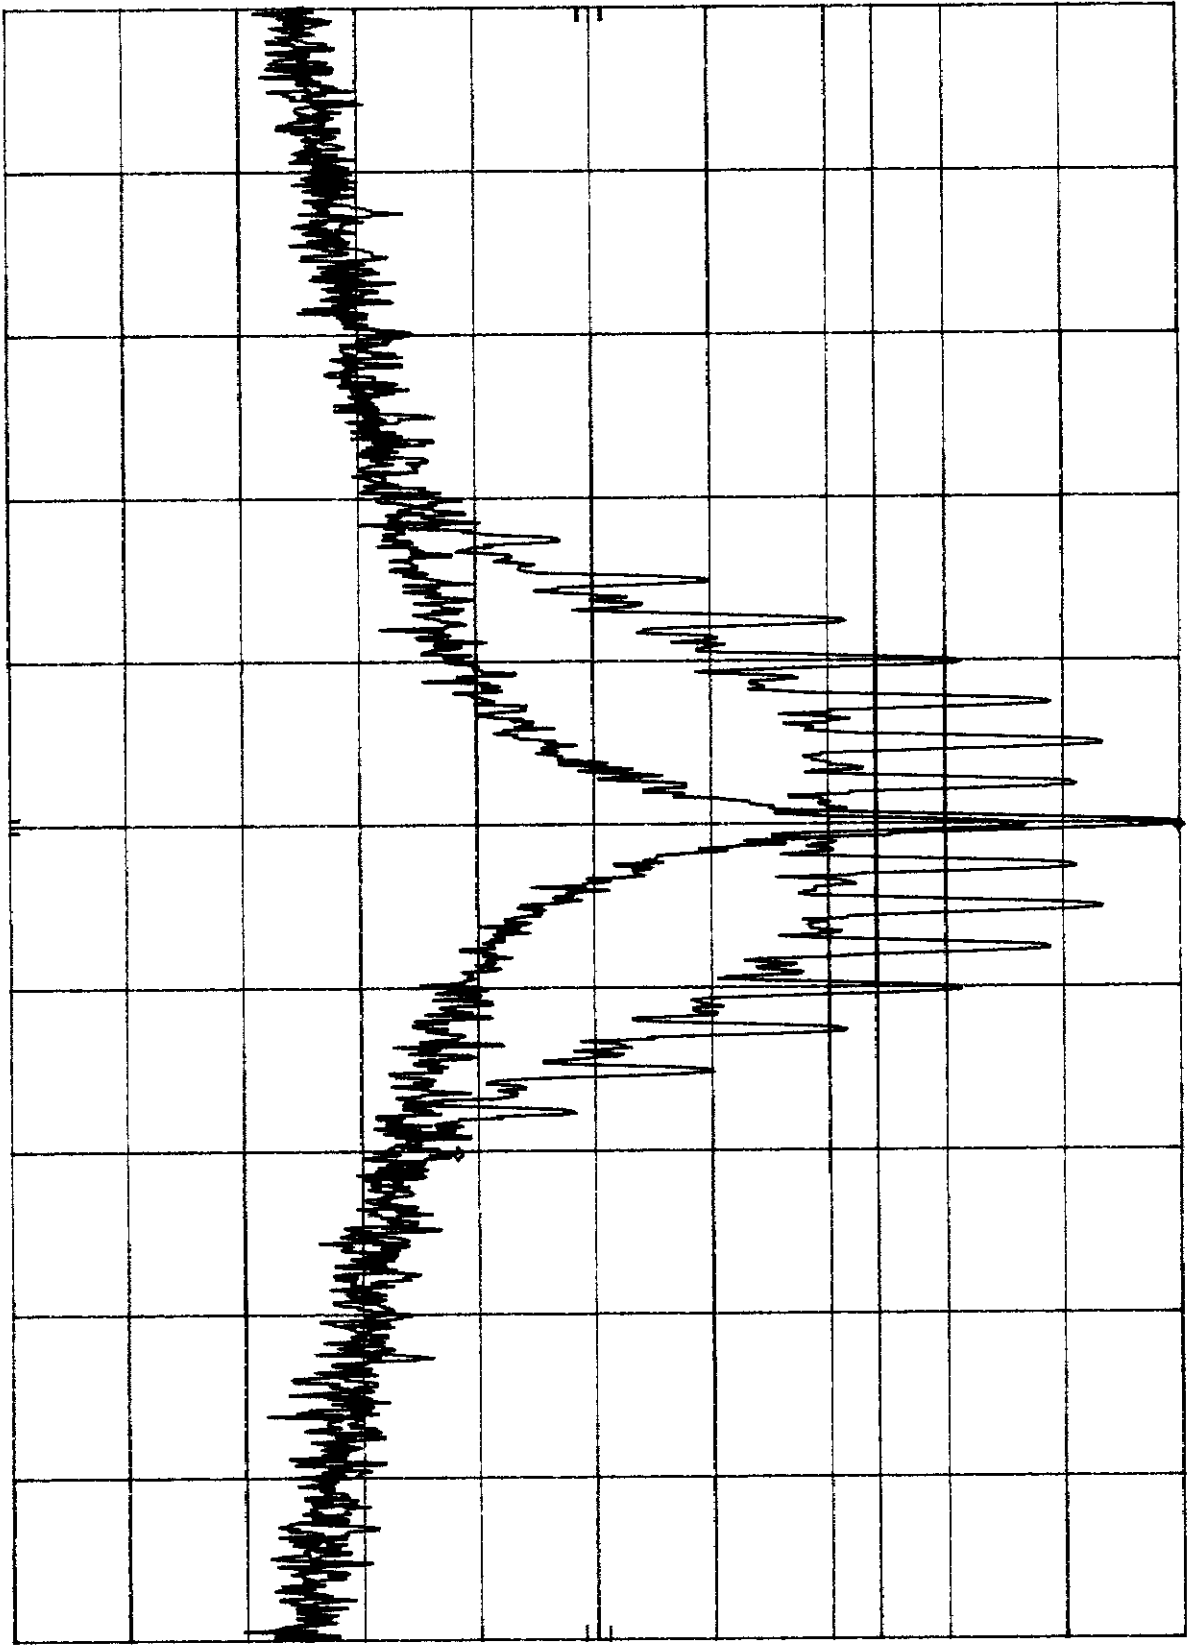

CENTER 836.520 MHz  
RES BW 300 Hz  
VBW 300 Hz  
SPAN 100 kHz  
SWP 3.00 sec  
Plot 6.3.K


HP REF 26.5 dBm  
10 dB/

ATTEN 40 DB

MKR Δ 20.0 KHZ  
-61.10 DB

DL  
0.5  
dBm

CORR'D

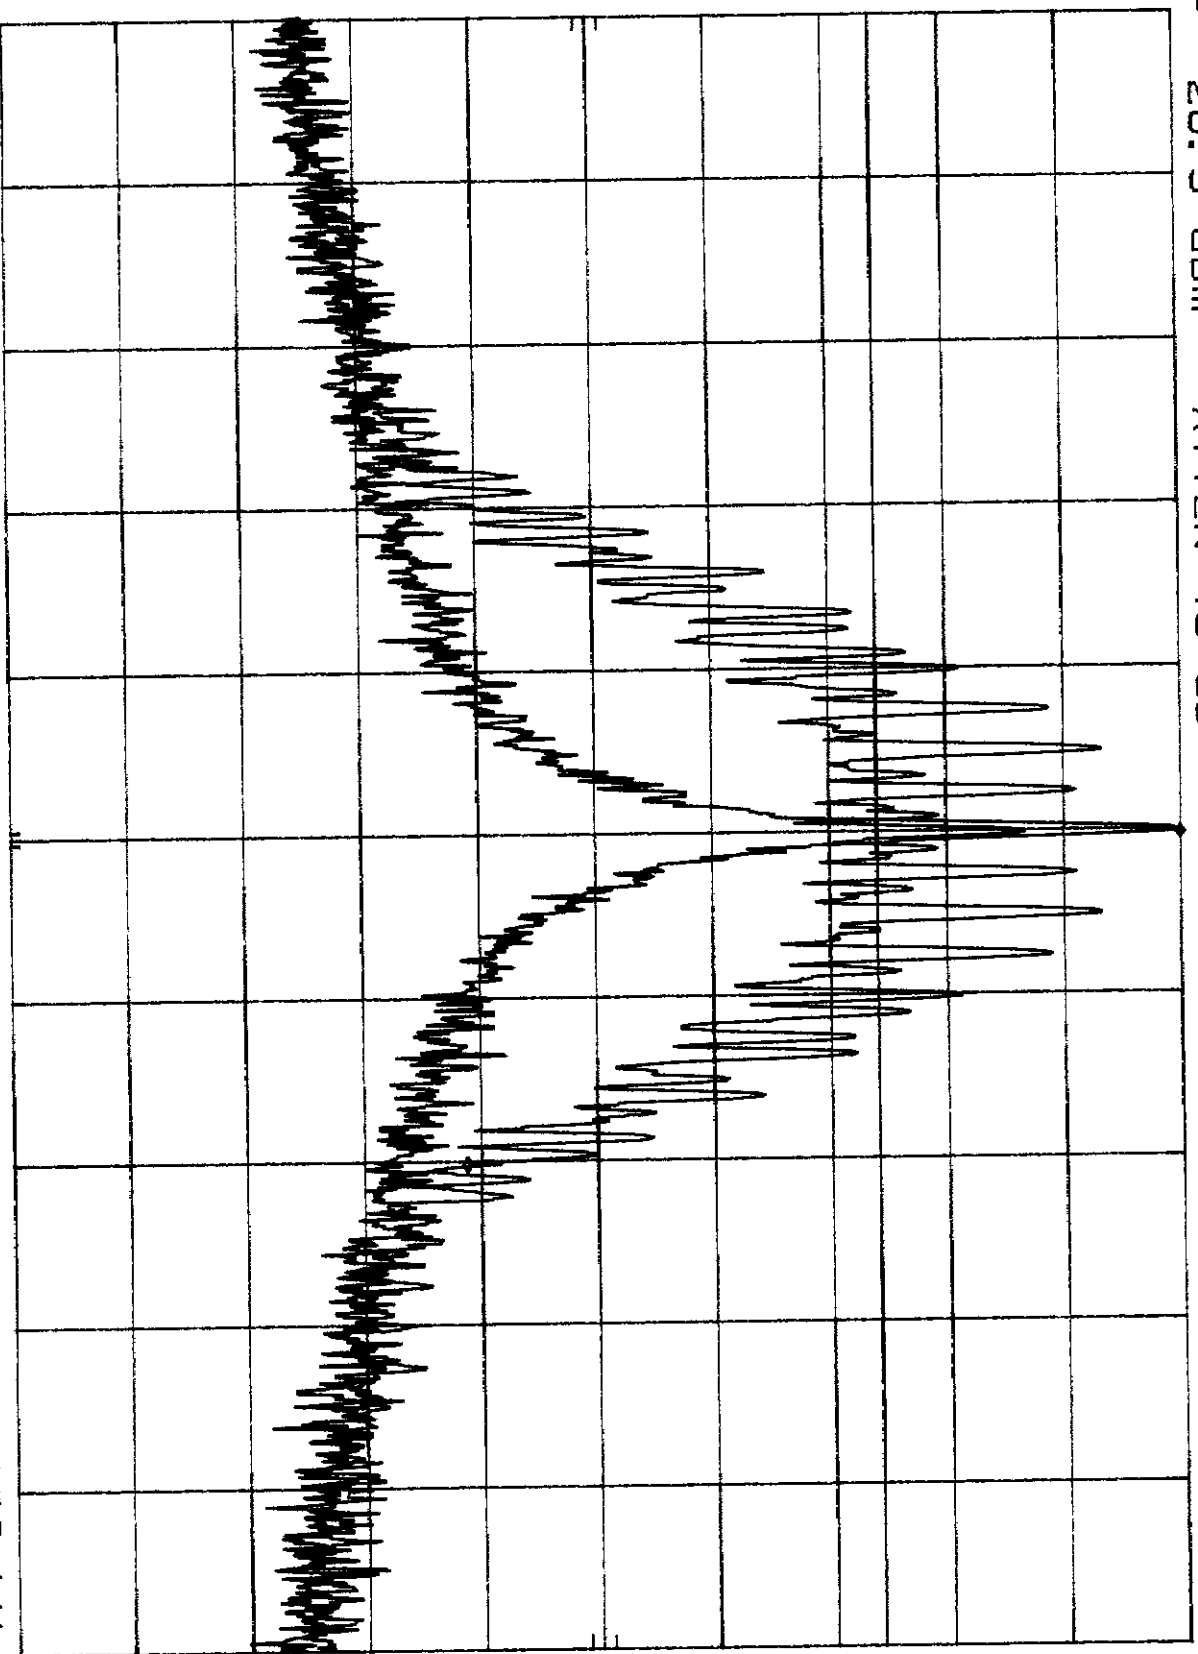


CENTER 836.520 MHZ  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 100 KHZ  
SWP 3.00 sec  
Plot 6.3.1

HP REF 26.5 DBm ATTEN 40 DB  
10 DB/

MKR Δ 20.0 KHZ  
-59.40 DB

DL  
-16.1  
dBm

CORR'D

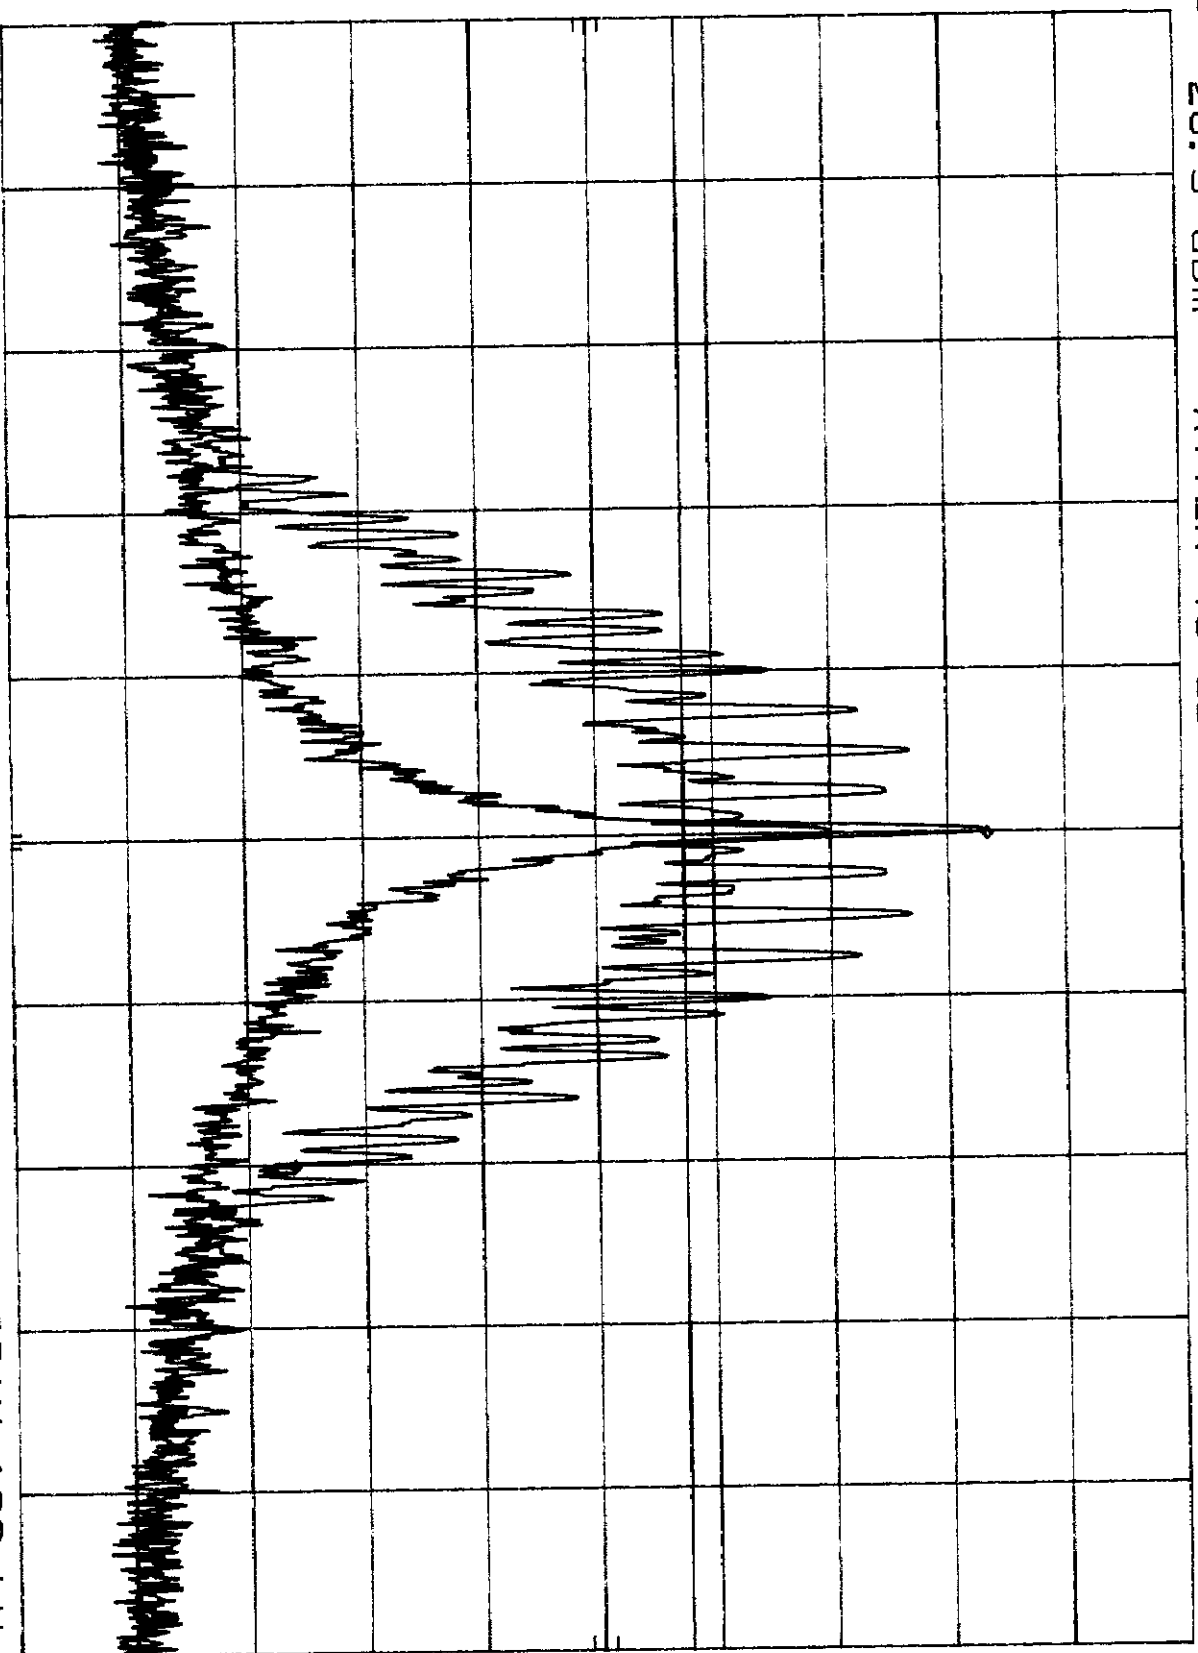

CENTER 836.520 MHZ  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 100 KHZ  
SWP 3.00 sec  
Plot 4.3 PM





HP

REF 26.5 dBm


ATTEN 40 DB

MKR Δ 20.0 KHZ  
-35.20 DB

10 DB/

DL  
0.5  
dBm

CORR'D

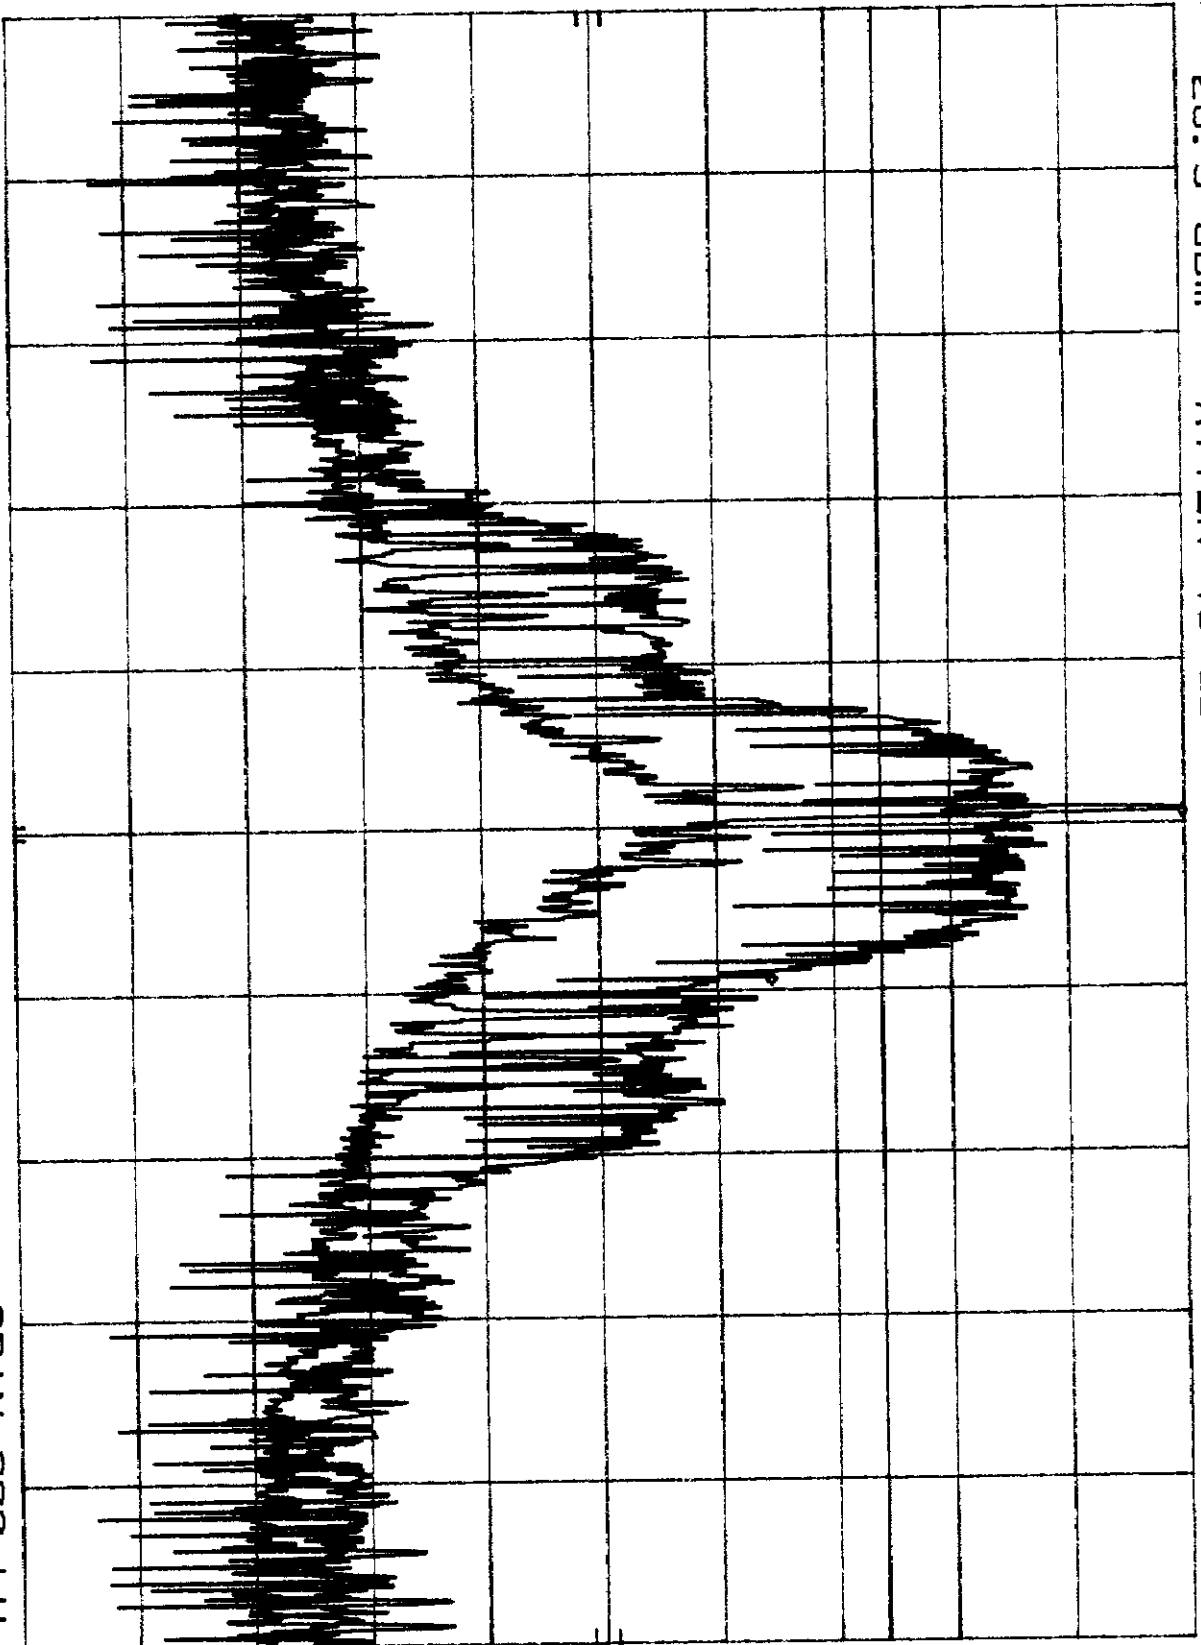

CENTER 836.520 MHz

RES BW 300

Hz

VBW 300

Hz

SPAN 200 KHZ  
SWP 6.00 sec

Plot 6.3.0

HP

REF 1.4 dBm


ATTEN 20 DB

MKR Δ 20.0 KHZ  
-48.00 DB

10 DB/

DL  
-24.6  
dBm

CORR'D

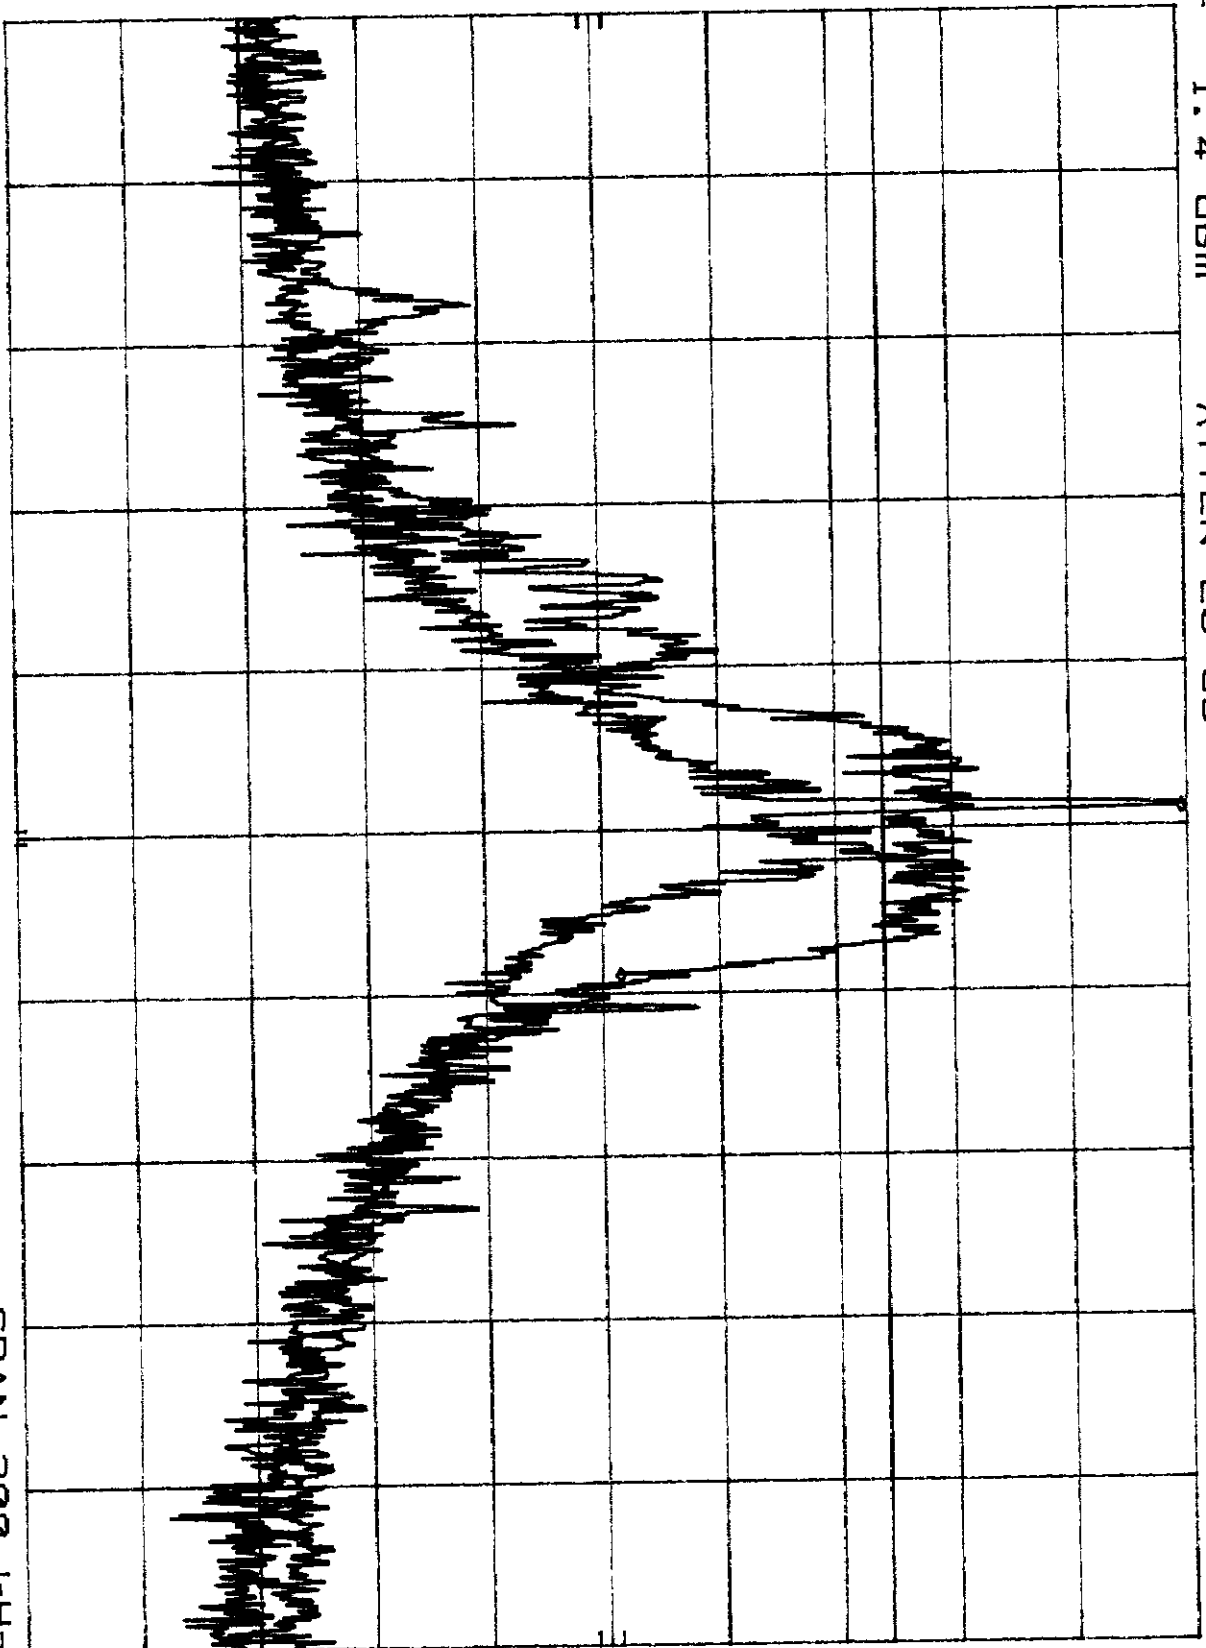

CENTER 1.879 945 GHz  
RES BW 300 HZ  
VBW 300 HZ  
SPAN 200 KHZ  
SWP 6.00 sec  
Plot 6.3.8

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

**7.0 Out of Band Emissions at Antenna Terminals , FCC § 22.917(e), 22.917(f),  
24.238(a)**Out of Band Emissions:

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least  $43 + 10 \log P$  dB.

Mobile Emissions in Base Frequency Range:

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80 dBm at the transmit antenna connector.

**7.1 Test Procedure**

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 30 kHz. The audio modulating signal was adjusted like it is described in Section 6.1 of this report. Sufficient scans were taken to show the outband emissions if any up to 10th harmonic.

**7.2 Test Equipment**

HP 8566B Spectrum Analyzer  
Leader LFG-1300S Function Generator  
Leader LMV-182 AC Millivoltmeter

**7.3 Test Results**

<b>Passed</b> Refer to the attached plots.
--

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

<b>AMPS Mode</b>	
<b>Plot Number</b>	<b>Description</b>
7.3.1.a - 7.3.1.d	Low Channel
7.3.2.a - 7.3.2.d	Middle Channel
7.3.3.a - 7.3.3.d	High Channel

<b>TDMA Mode</b>	
<b>Plot Number</b>	<b>Description</b>
7.3.4.a - 7.3.4.d	Low Channel
7.3.5.a - 7.3.5.d	Middle Channel
7.3.6.a - 7.3.6.d	High Channel


LOW CHANNEL  
REF 27.1 DBm  
ATTEN 40 DB

MKR  $\Delta$  16 MHZ  
-54.00 DB

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

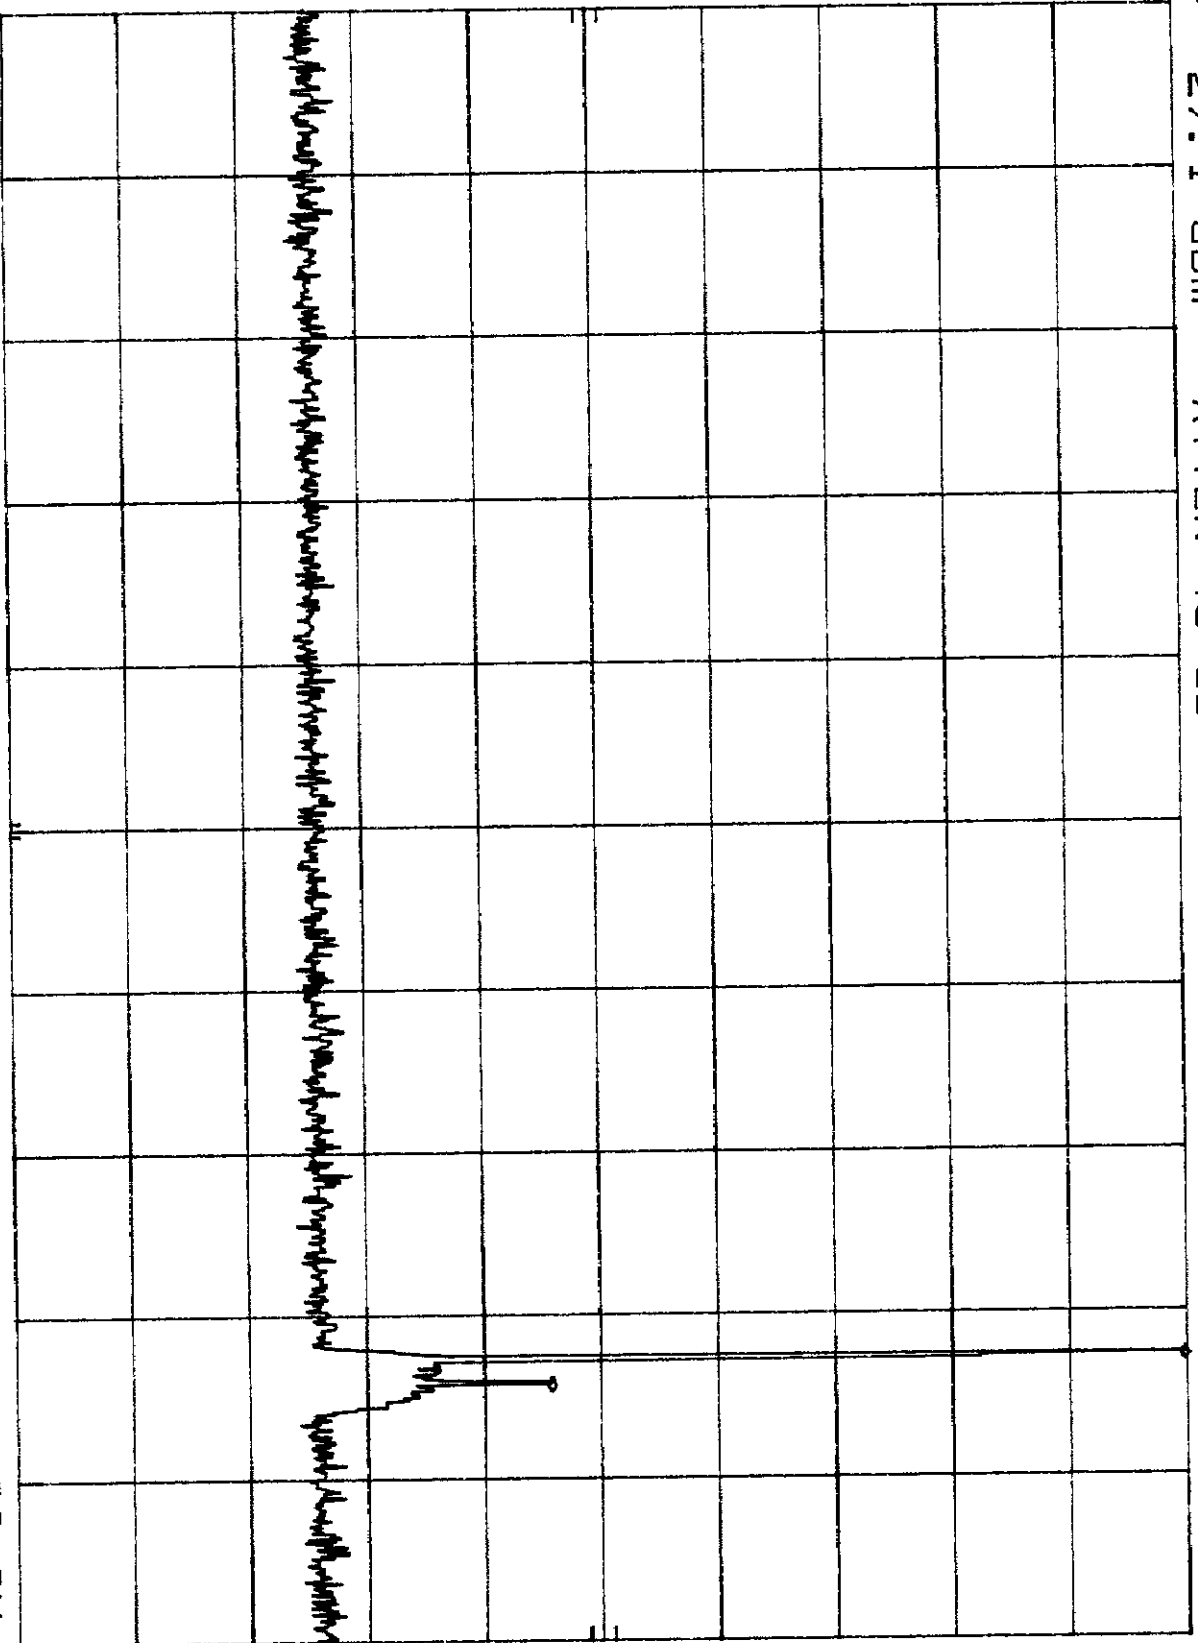

START 1 MHZ  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 1.00 GHZ  
SWP 300 msec  
Plot 7.3.1.a

LOW CHANNEL  
REF 27.1 DBm


ATTEN 40 DB

MKR 2.475 GHZ  
-33.10 DBm

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

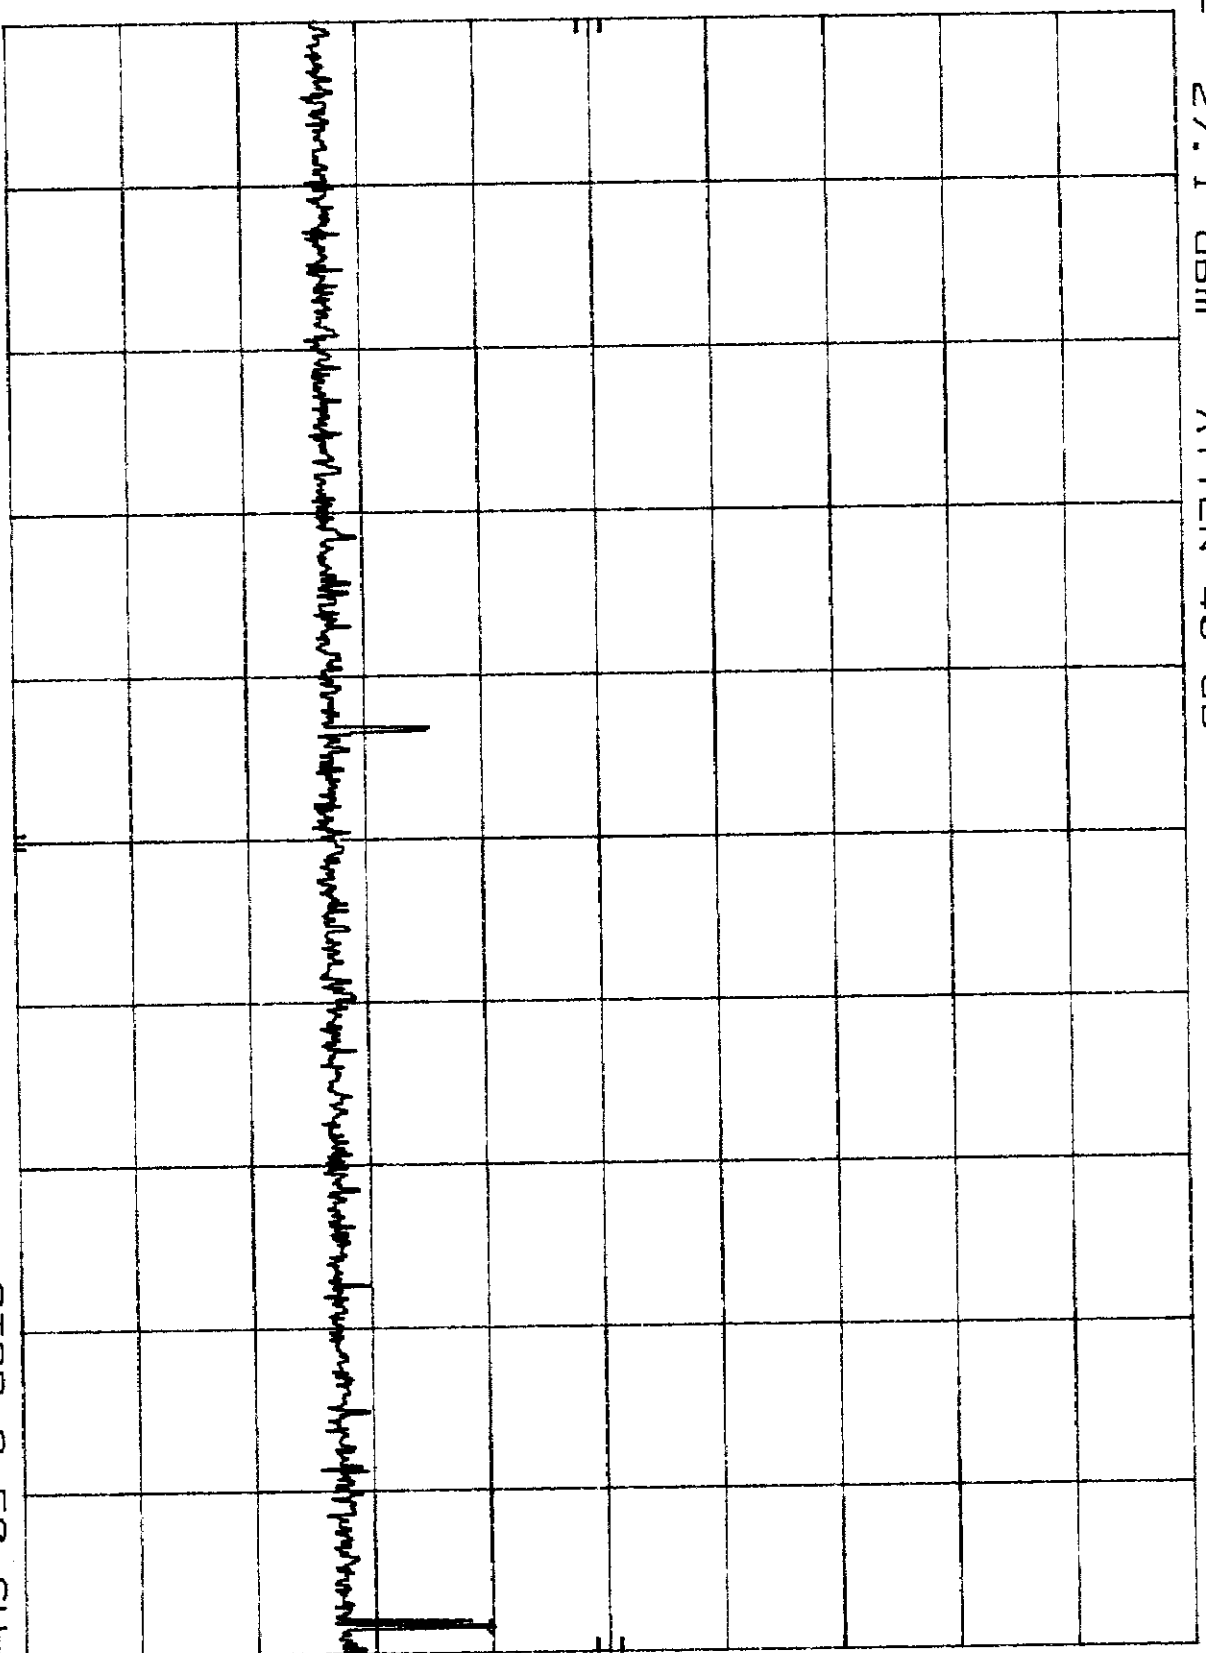

START 1.00 GHZ  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 2.50 GHZ  
SMP 450 msec  
Chan 7.3.1.b


LOW CHANNEL  
REF 27.1 DBm  
ATTEN 40 DB

MKR 9.858 GHZ  
-38.70 DBm

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

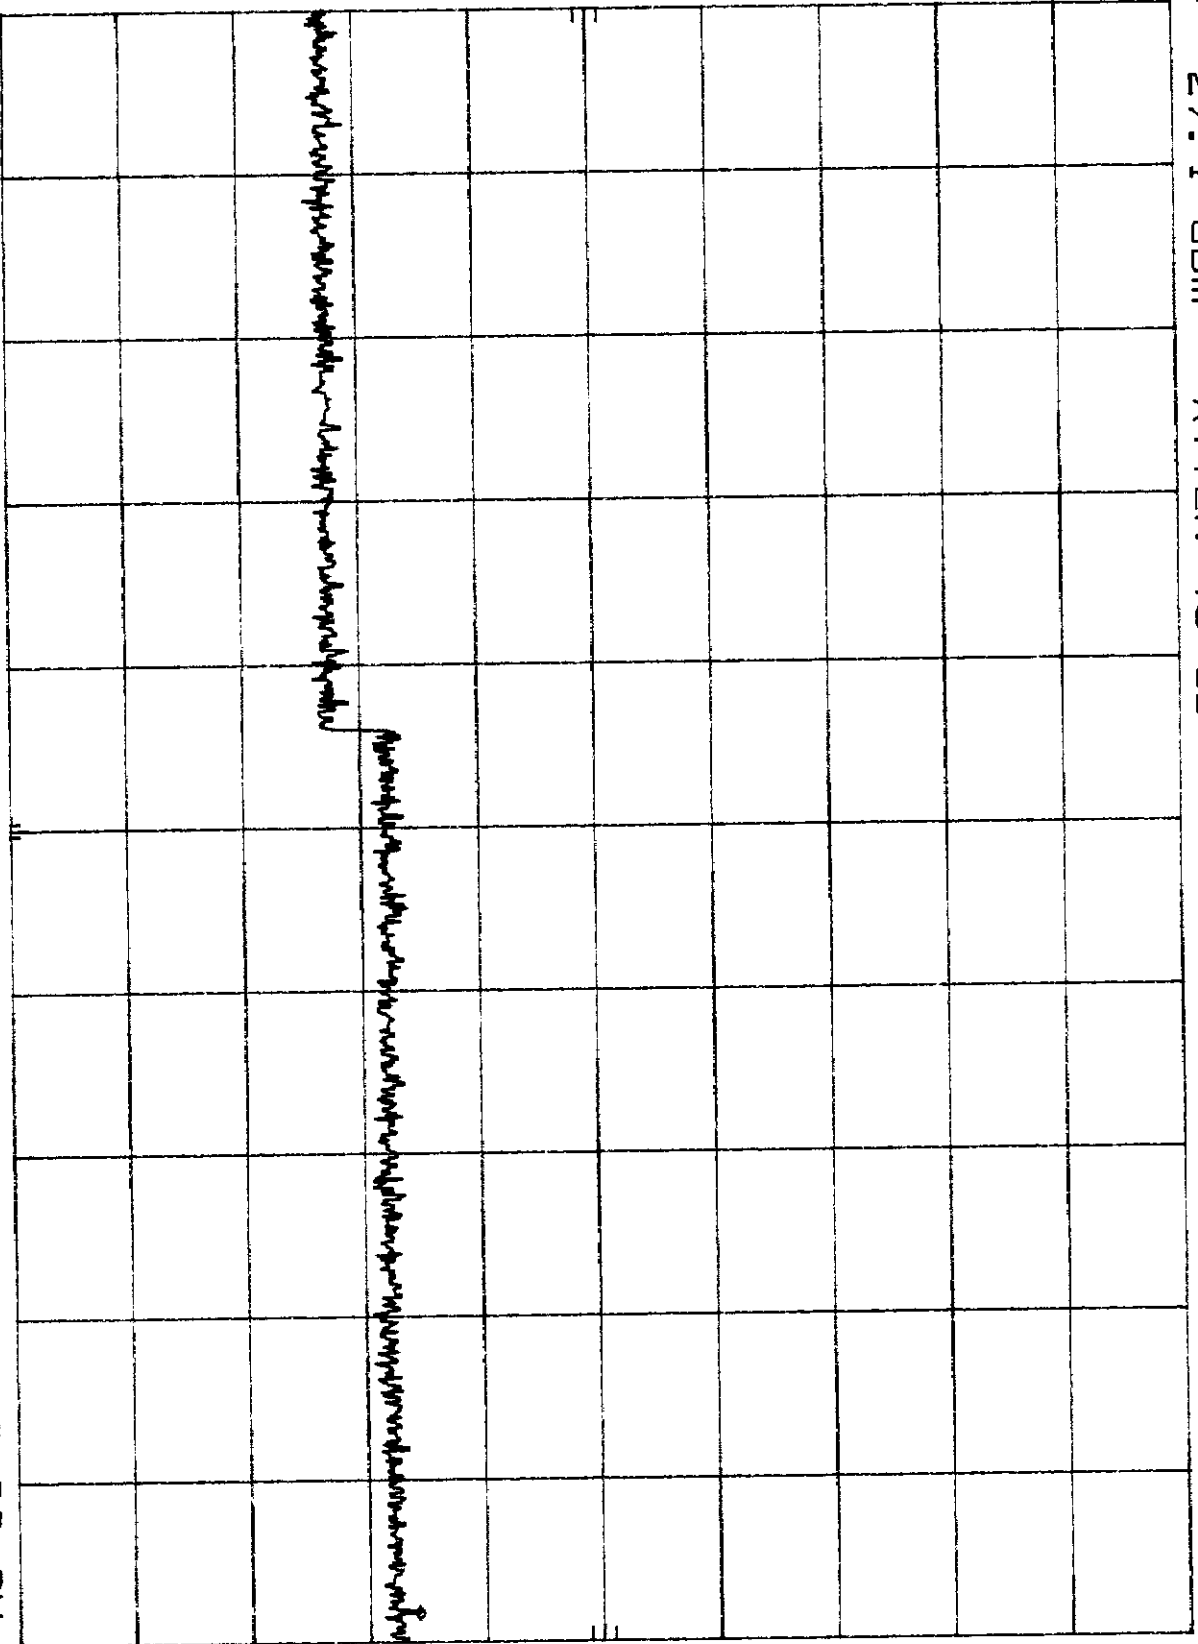

START 2.50 GHZ  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 10.00 GHZ  
SWP 2.25 sec  
Plot 7.3.1.c



HP

LOW CHANNEL  
REF 0.0 DBm

ATTEN 10 DB


MKR 883.90 MHz  
-80.90 DBm

10 DB/

OFFSET

0.3  
DB

CORR'D

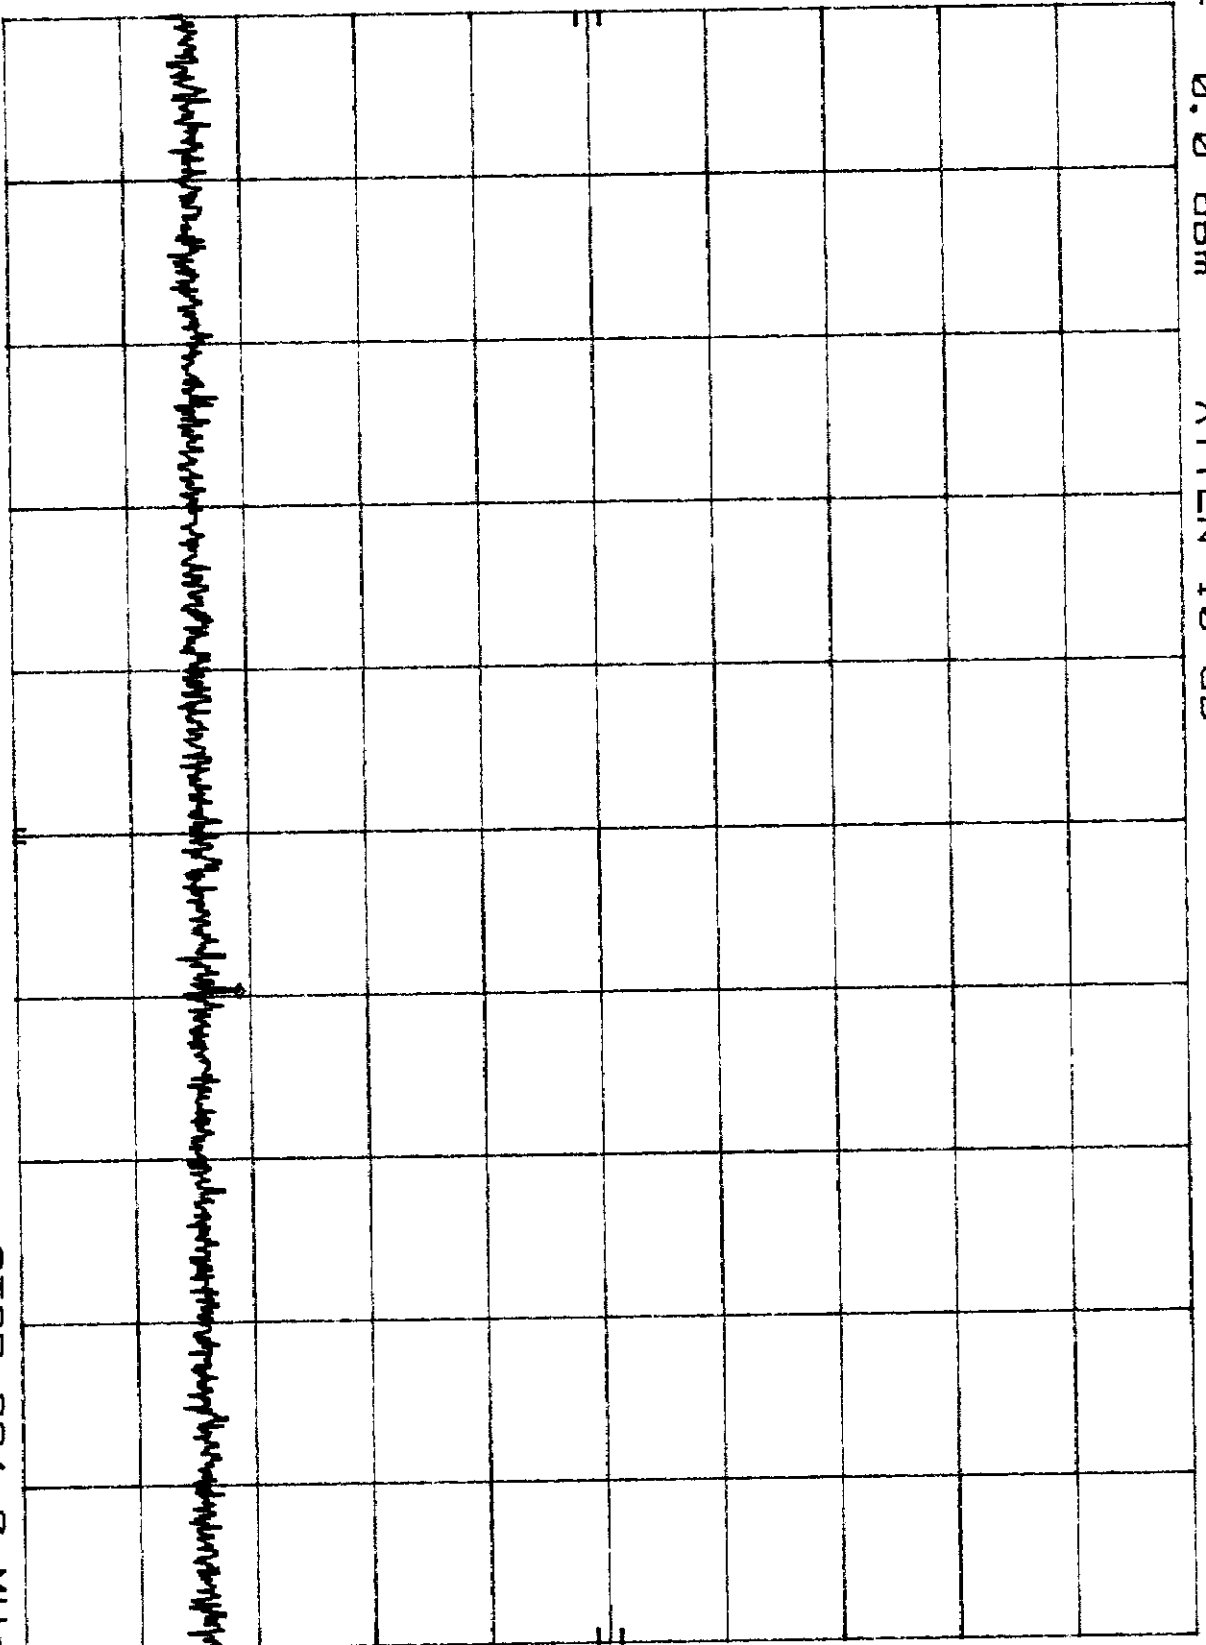

START 869.0 MHz

RES BW 30 KHz

VBW 30 KHz

STOP 894.0 MHz  
SWP 75.0 msec

Plot 7.3.1.d

MID CHANNEL REF 27.1 DBm ATTEN 40 DB

HP


10 DB/

OFFSET 0.3 DB

CORR'D

START 1 MHZ RES BW 100 KHZ VBW 300 KHZ STOP 1.00 GHZ SWP 300 msec

Plot 7.3.2.a

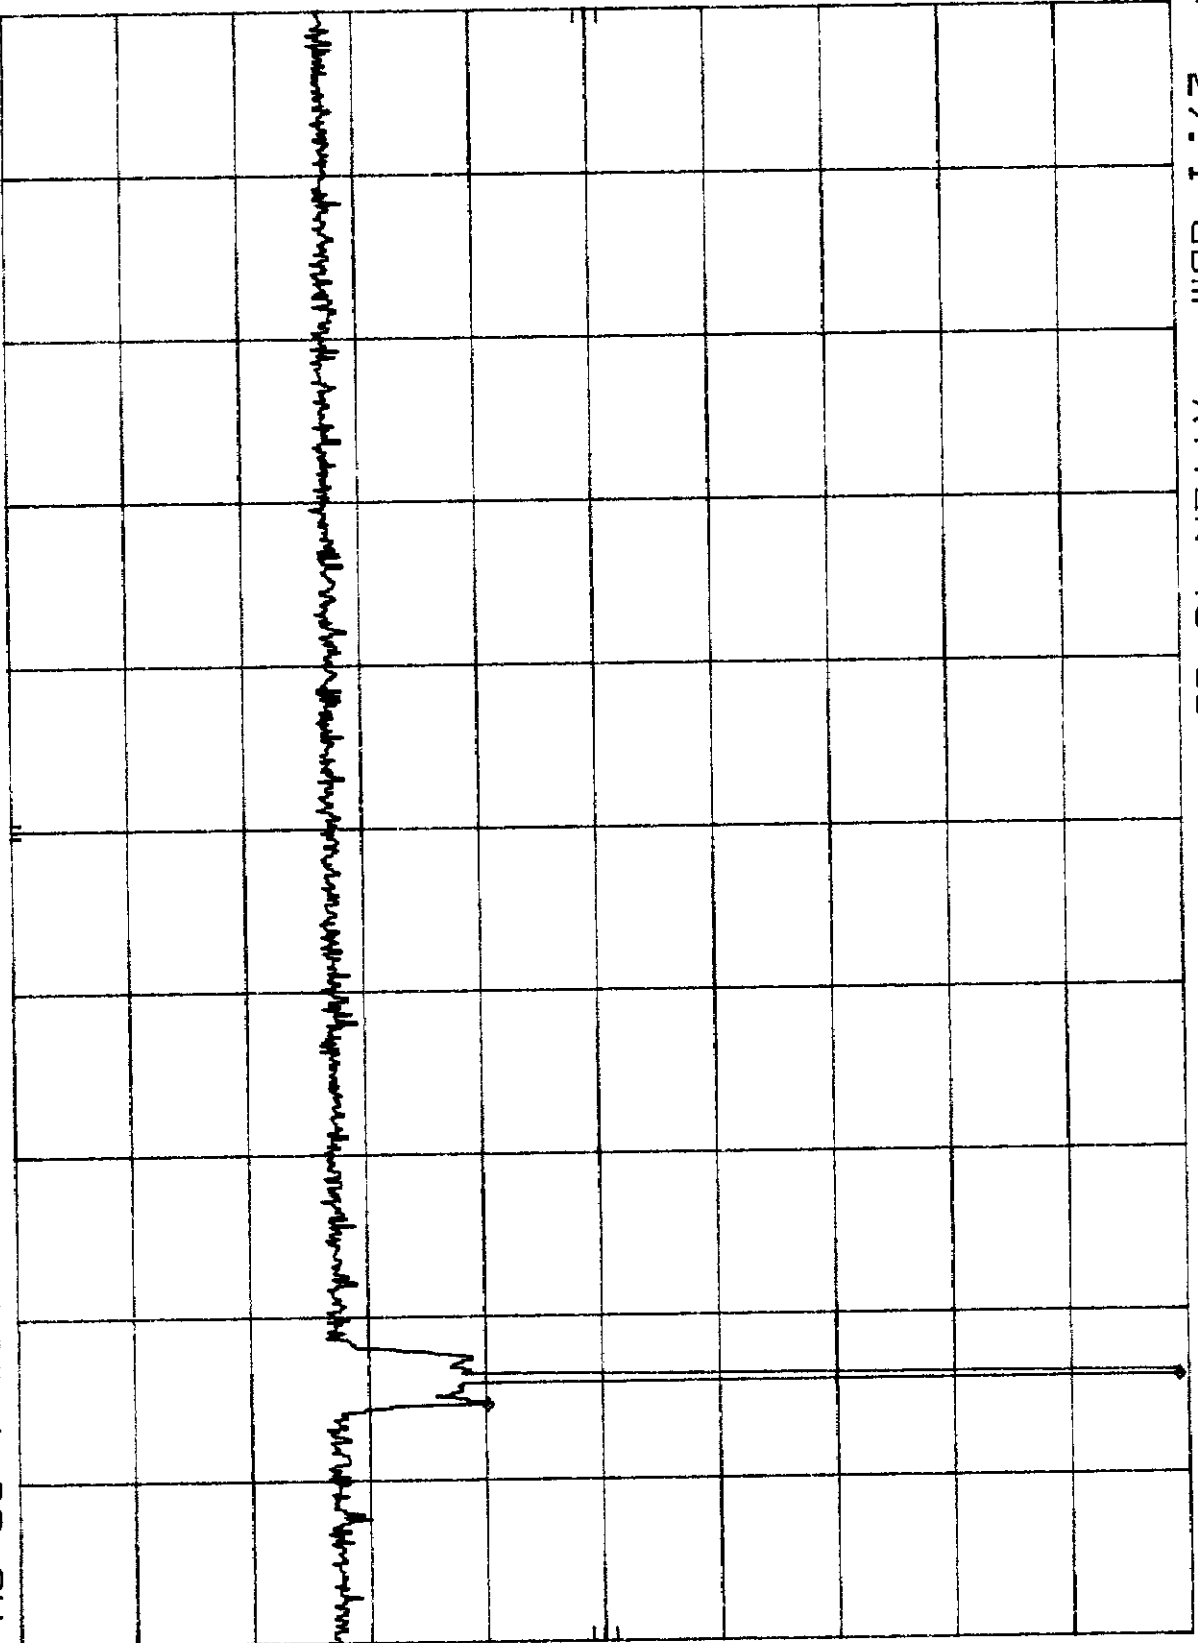

MKR Δ 14 MHZ -59.00 DB

MID CHANNEL  
REF 27.1 DBm

ATTEN 40 DB

MKR 1.674 GHz  
-38.70 DBm


HP

10 DB/

OFFSET  
0.3

DB

CORR'D

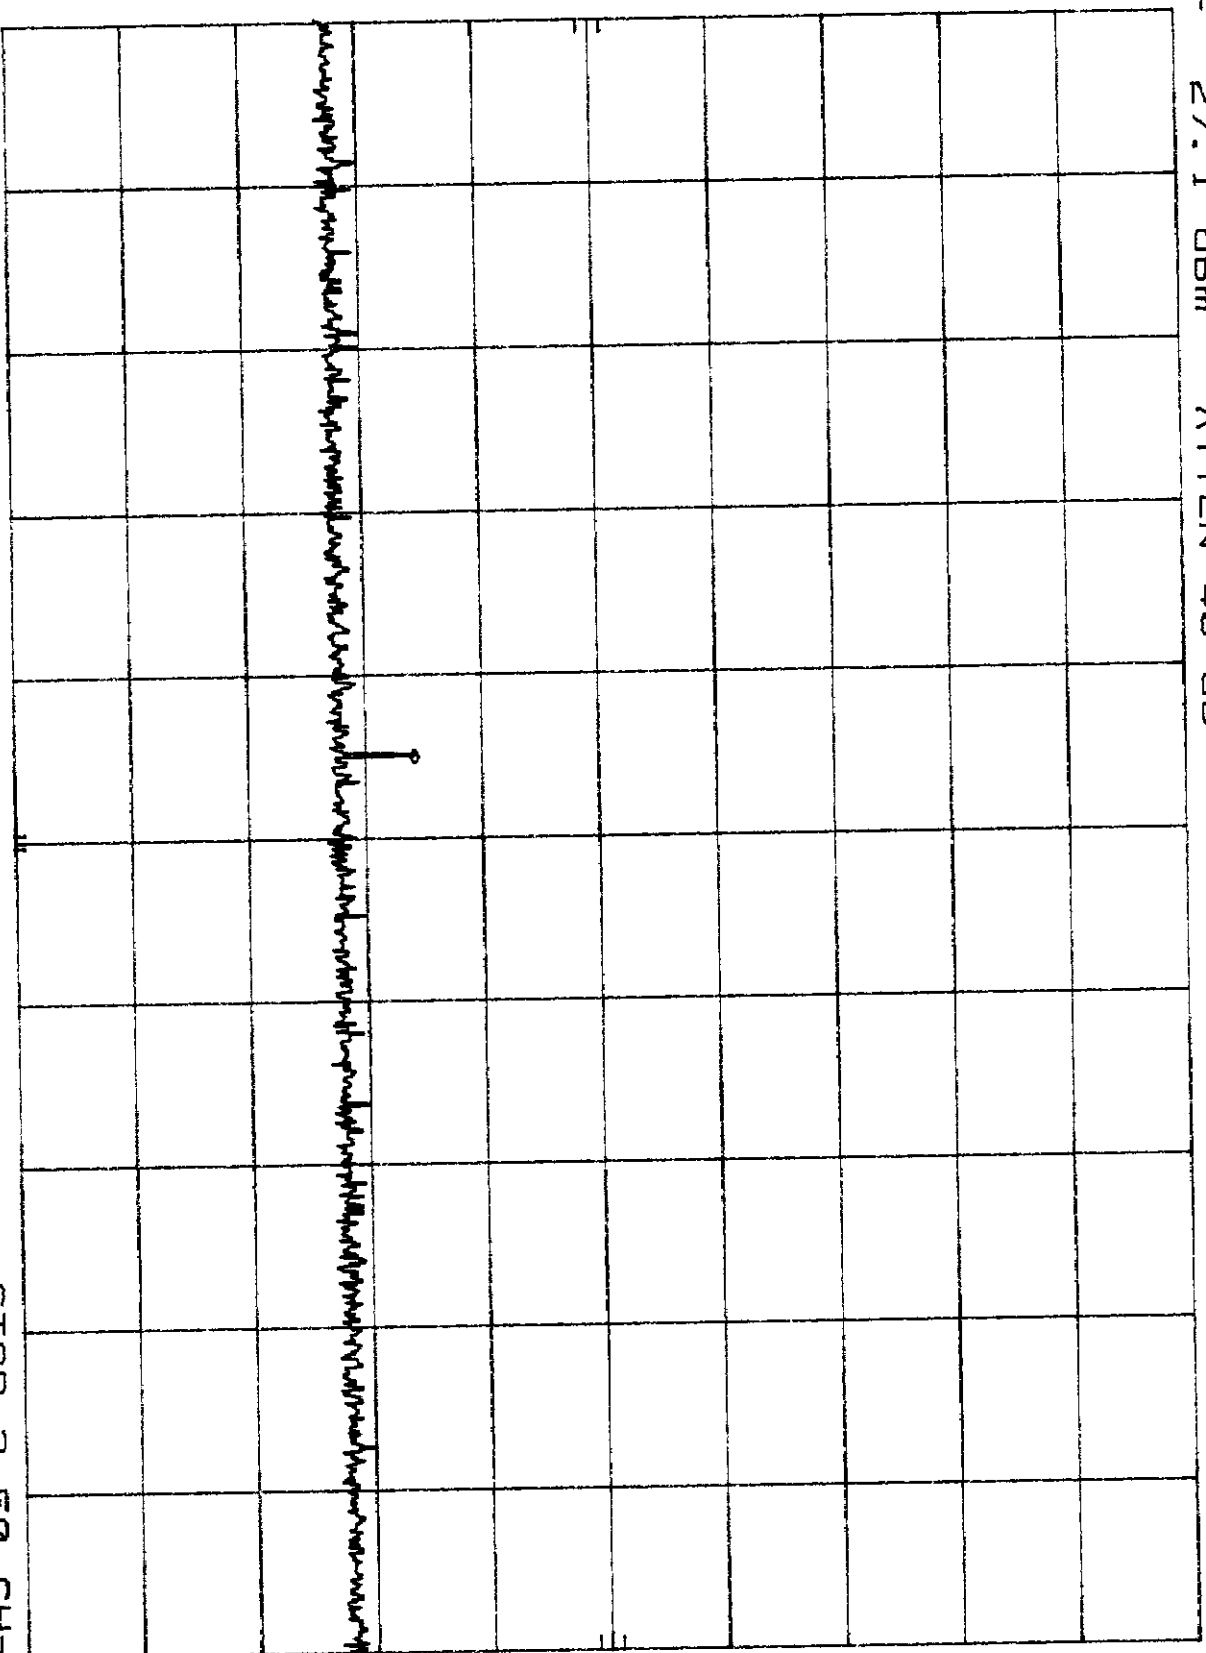

START 1.00 GHz

RES BW 100 KHZ

VBW 300 KHZ

STOP 2.50 GHz  
SWP 450 msec

PLA 7.3.2.0

MID CHANNEL  
REF 27.1 dBm  
ATTEN 40 DB


MKR 9.850 GHz  
-37.50 dBm

HP

10 DB/

OFFSET  
0.3  
DB

CORR'D

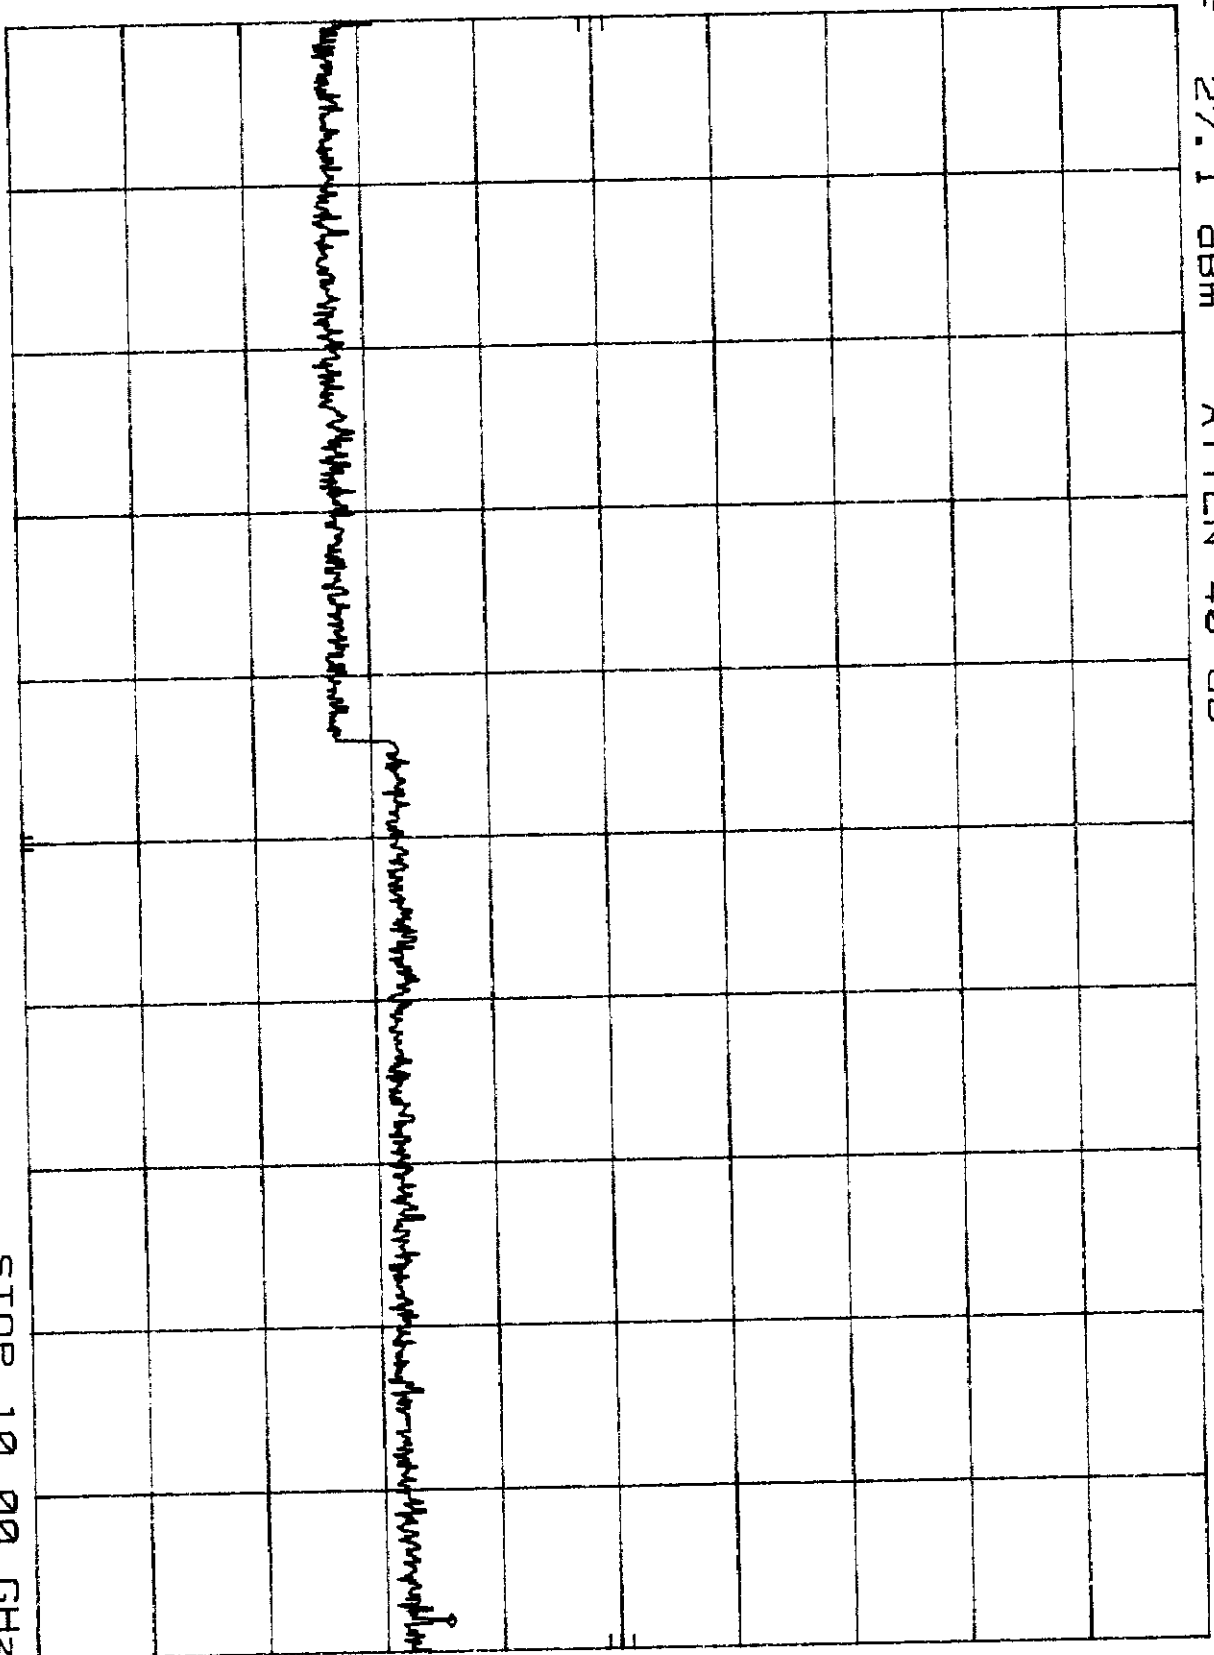


START 2.50 GHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 10.00 GHz  
SWP 2.25 sec  
RBW 7.32 C

MID CHANNEL  
REF 0.0 dBm  
ATTEN 10 dB  
MKR 880.35 MHz  
-81.60 dBm

10 dB/

OFFSET  
0.3  
dB

CORR'D

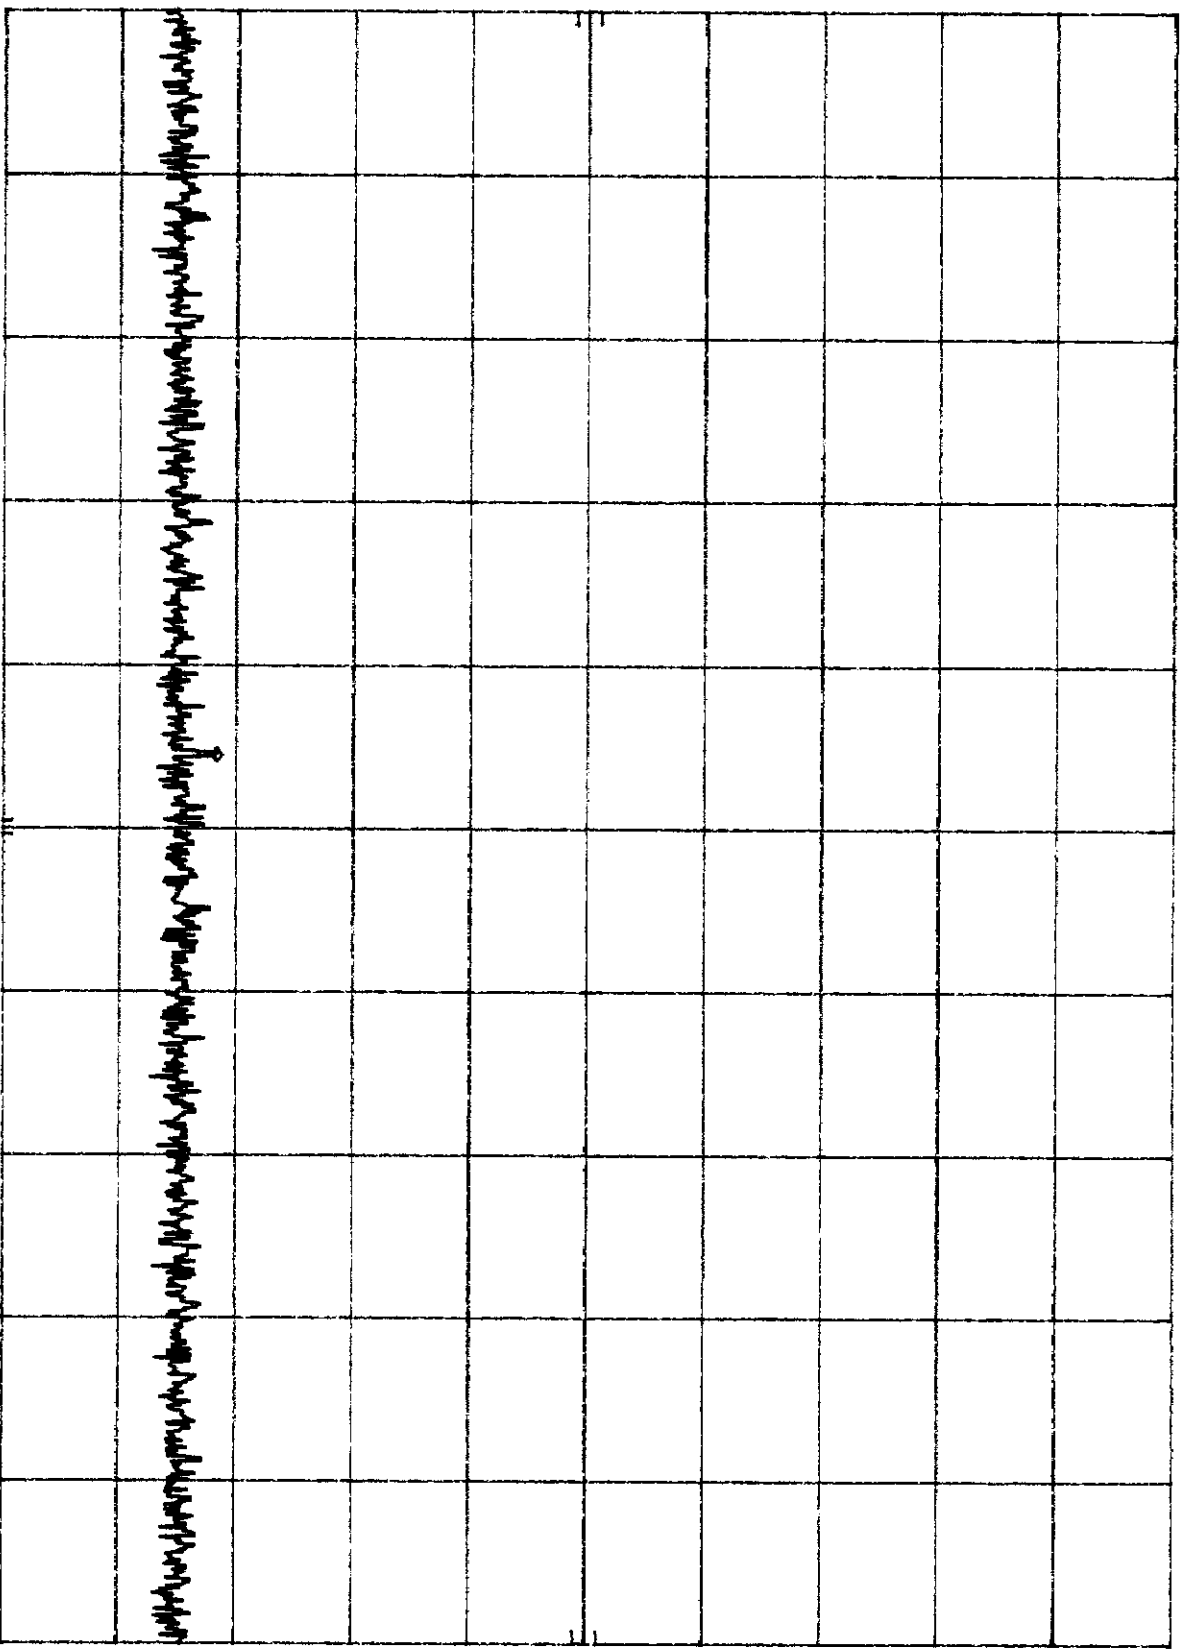


START 869.0 MHz  
RES BW 30 kHz  
VBW 30 kHz  
STOP 894.0 MHz  
SWP 75.0 msec  
Plot 7.3.2.d

HIGH CHANNEL  
REF 27.1 dBm  
ATTEN 40 dB  
MKR 1.696 GHz  
-39.70 dBm

10 dB/

OFFSET  
0.3  
dB

CORR'D

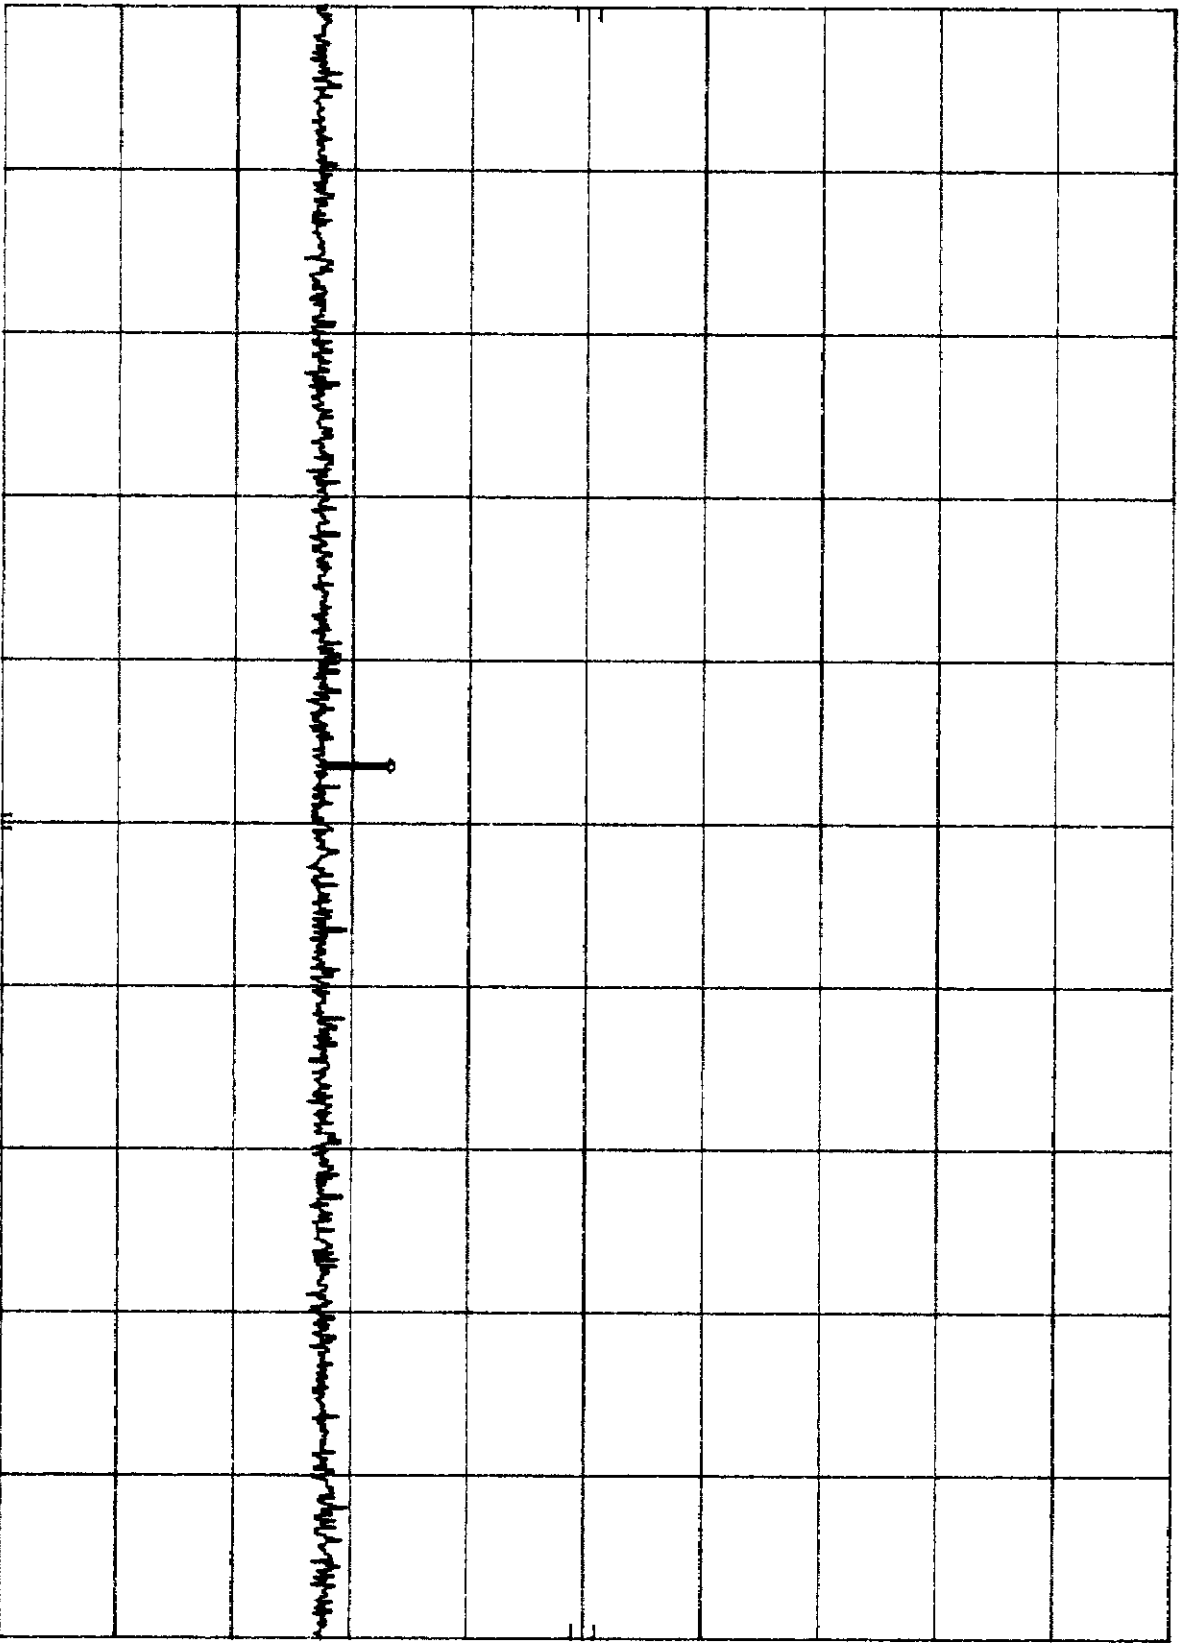


START 1.00 GHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 2.50 GHz  
SWP 450 msec  
Plot 7.3.3.a

HIGH CHANNEL  
REF 27.1 dBm  
ATTEN 40 DB  
MKR Δ-13 MHz  
-54.00 DB

10 DB/

OFFSET  
0.3  
DB

CORR'D

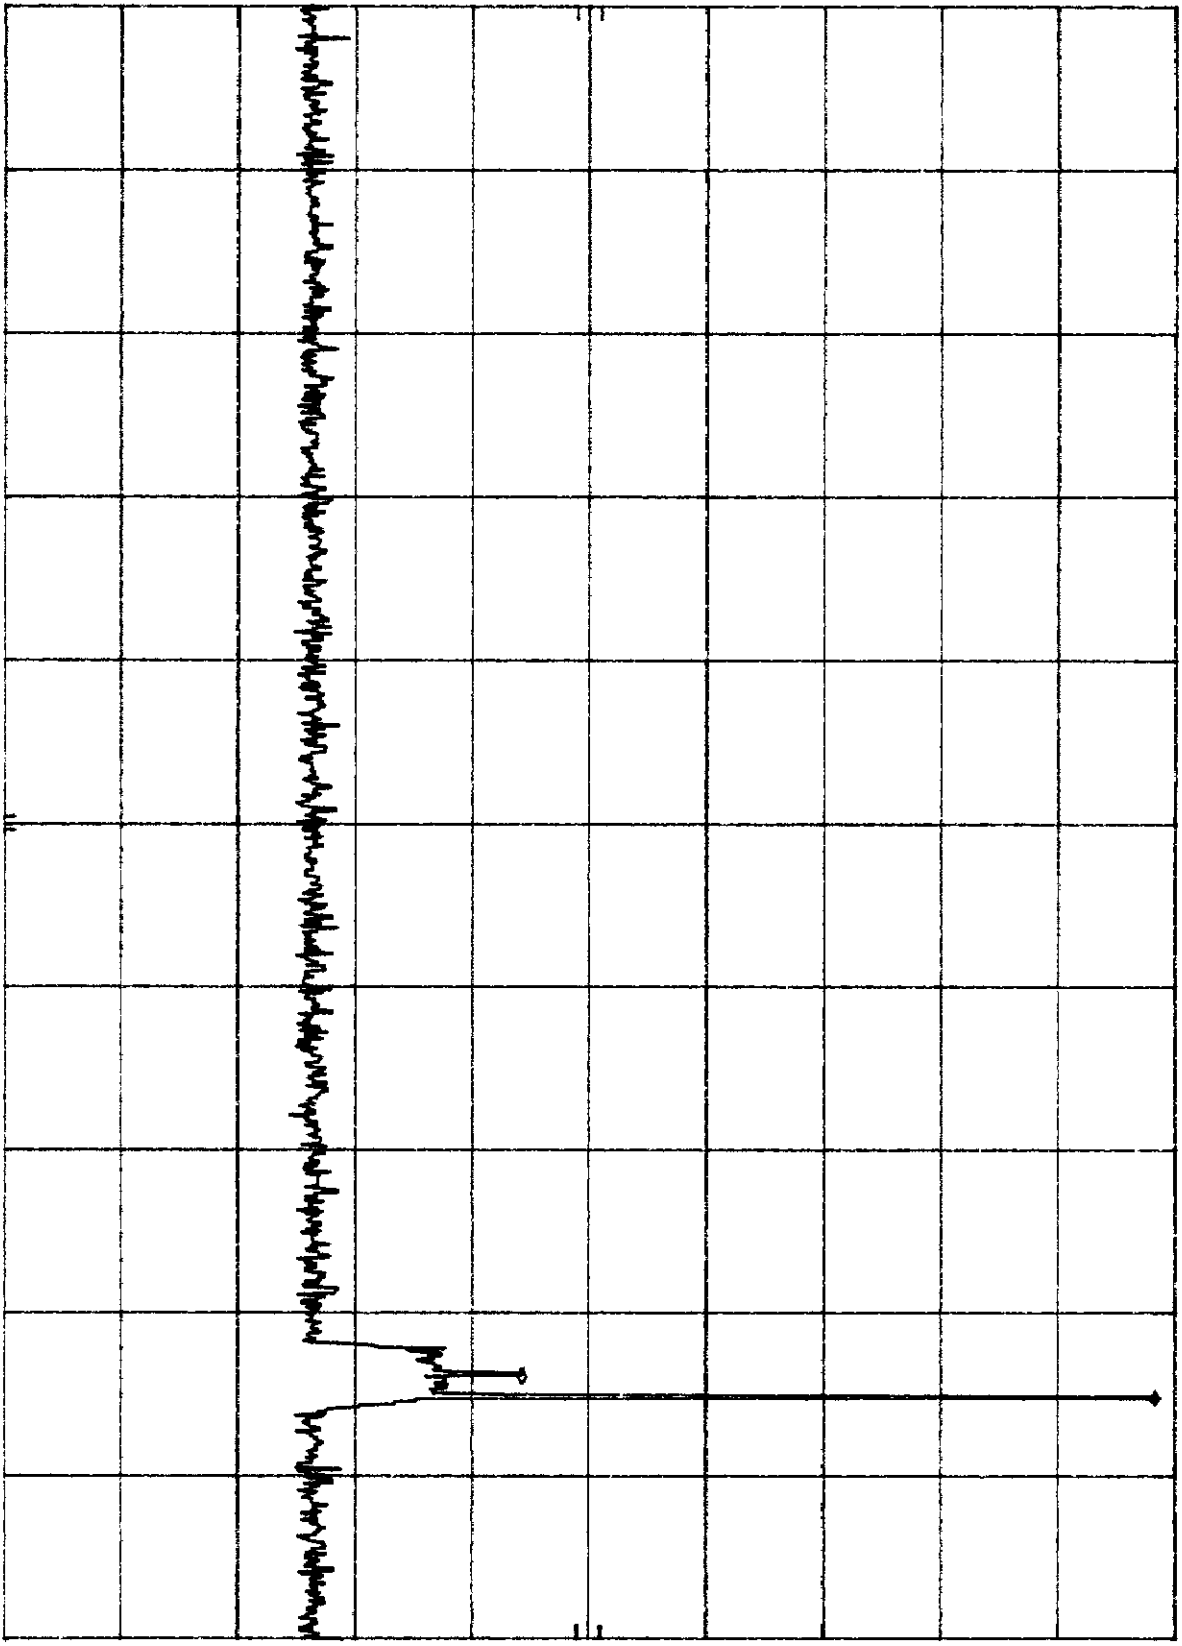

START 1 MHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 1.00 GHZ  
SWP 300 msec  
Plot 7.3.3b

HIGH CHANNEL  
REF 27.1 dBm


ATTEN 40 DB

MKR 8.155 GHz  
-38.80 dBm

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

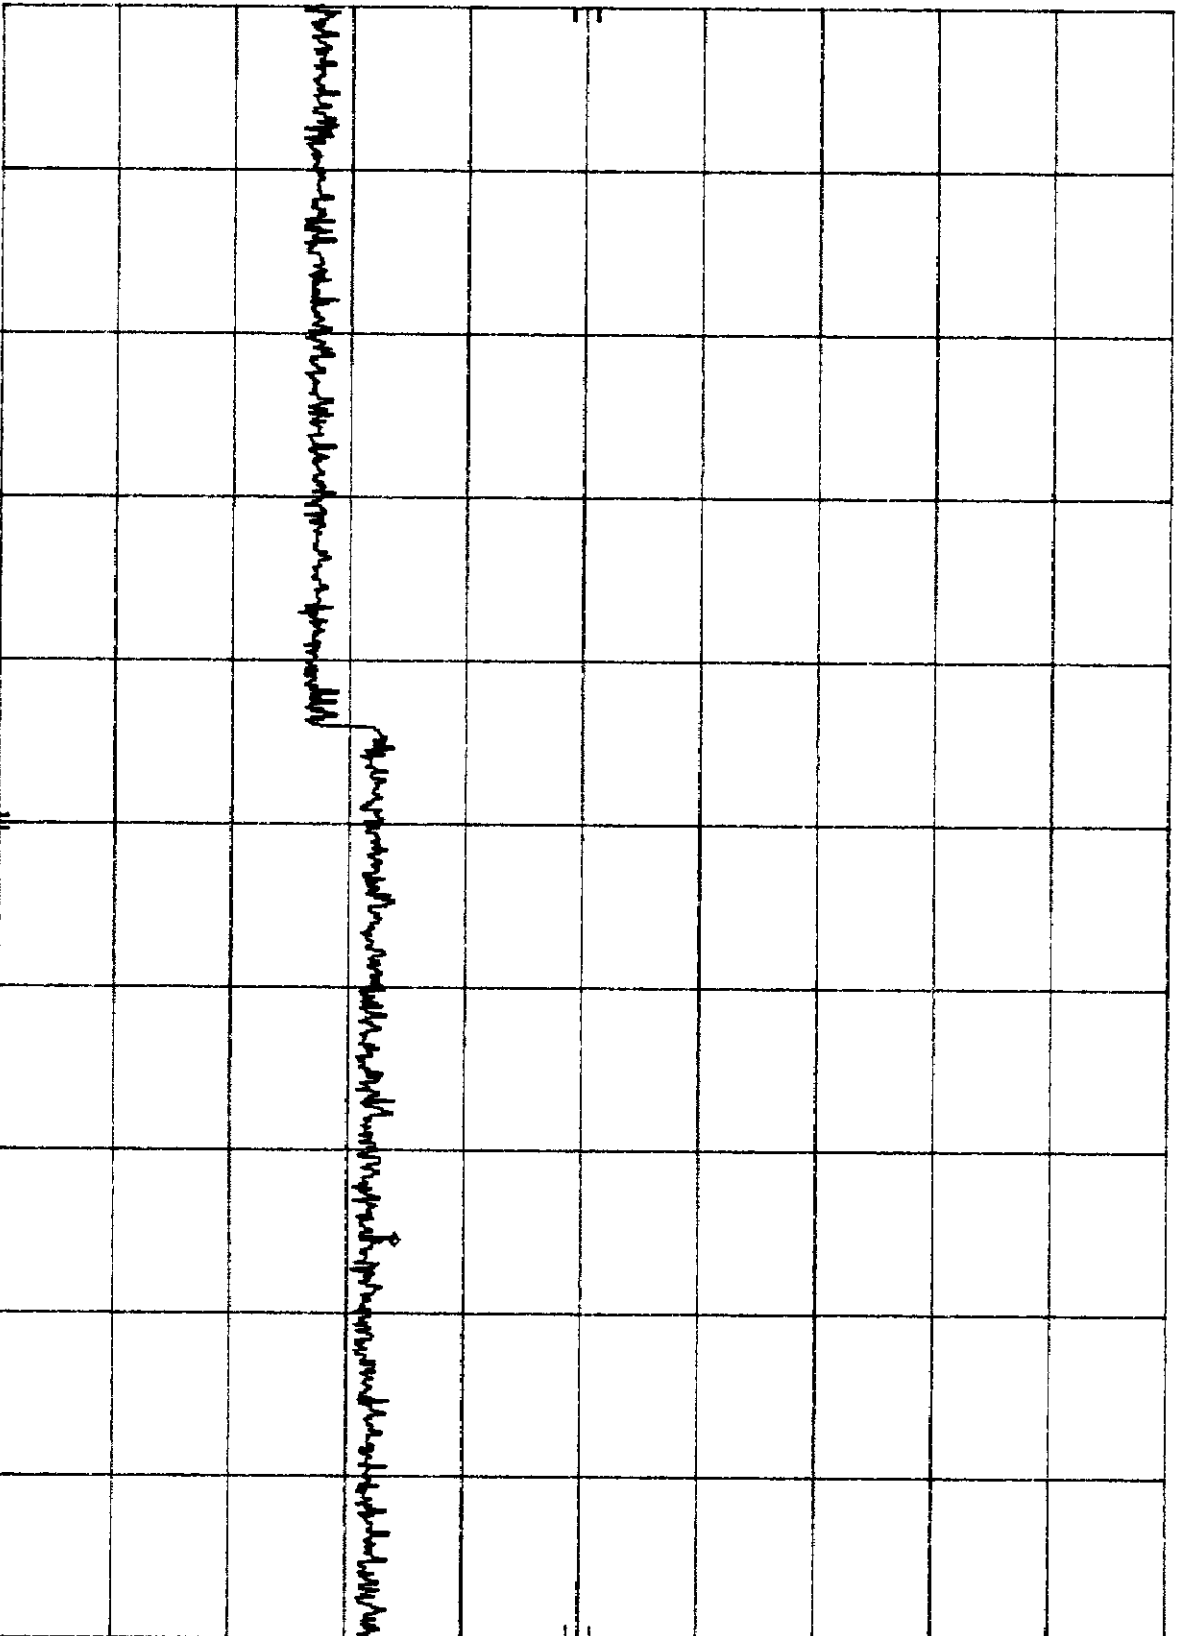

START 2.50 GHz  
RES BW 100 KHZ  
Plot 7.3.3.C

VBW 300 KHZ

STOP 10.00 GHz  
SWP 2.25 sec



HIGH CHANNEL  
REF 0.0 DBM


ATTEN 10 DB

MKR 876.00 MHZ  
-82.10 DBM

10 DB/

OFFSET  
0.3  
DB

CORR'D

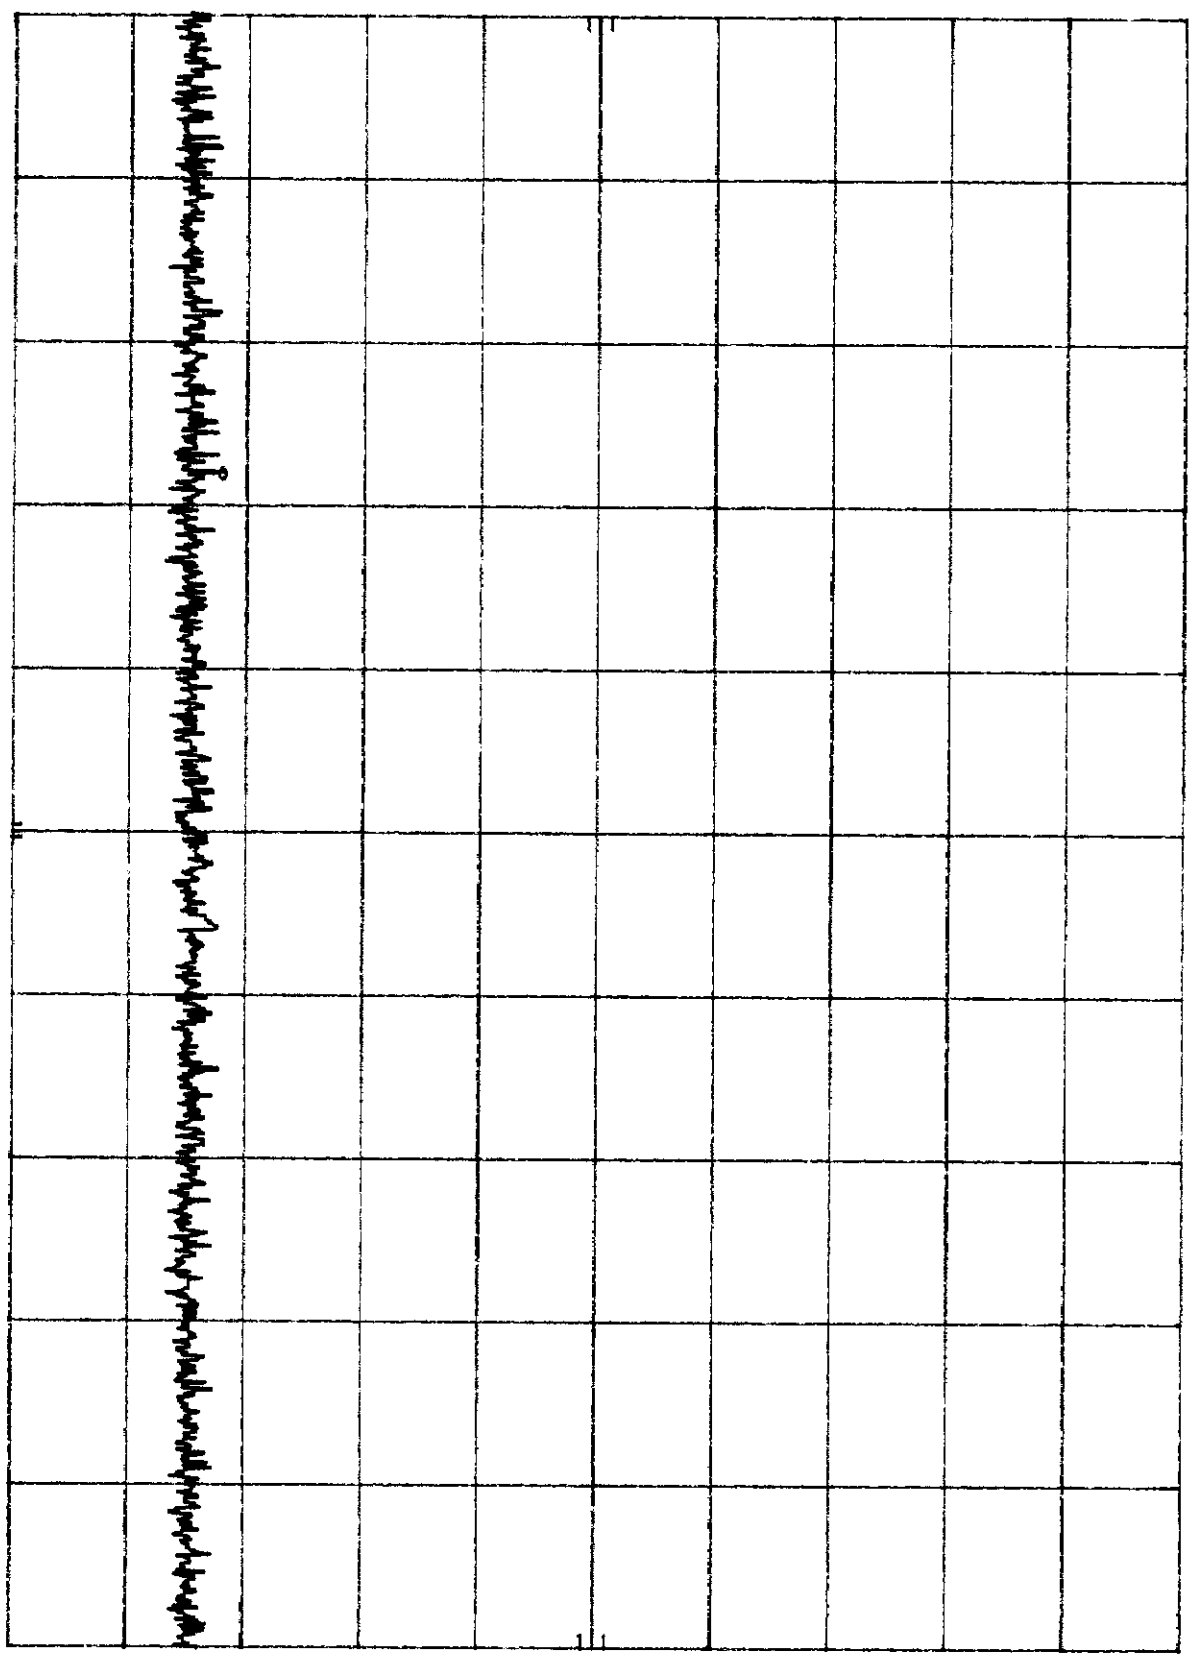

START 869.0 MHZ

RES BW 30 KHZ

VBW 30 KHZ

STOP 894.0 MHZ  
SWP 75.0 msec


Plot 7.3.3.d

LOW CHANNEL MKR 38 MHz  
REF 26.6 dBm ATTN 40 dB -38.40 dBm

10 dB/

OFFSET  
0.3  
dB

CORR'D

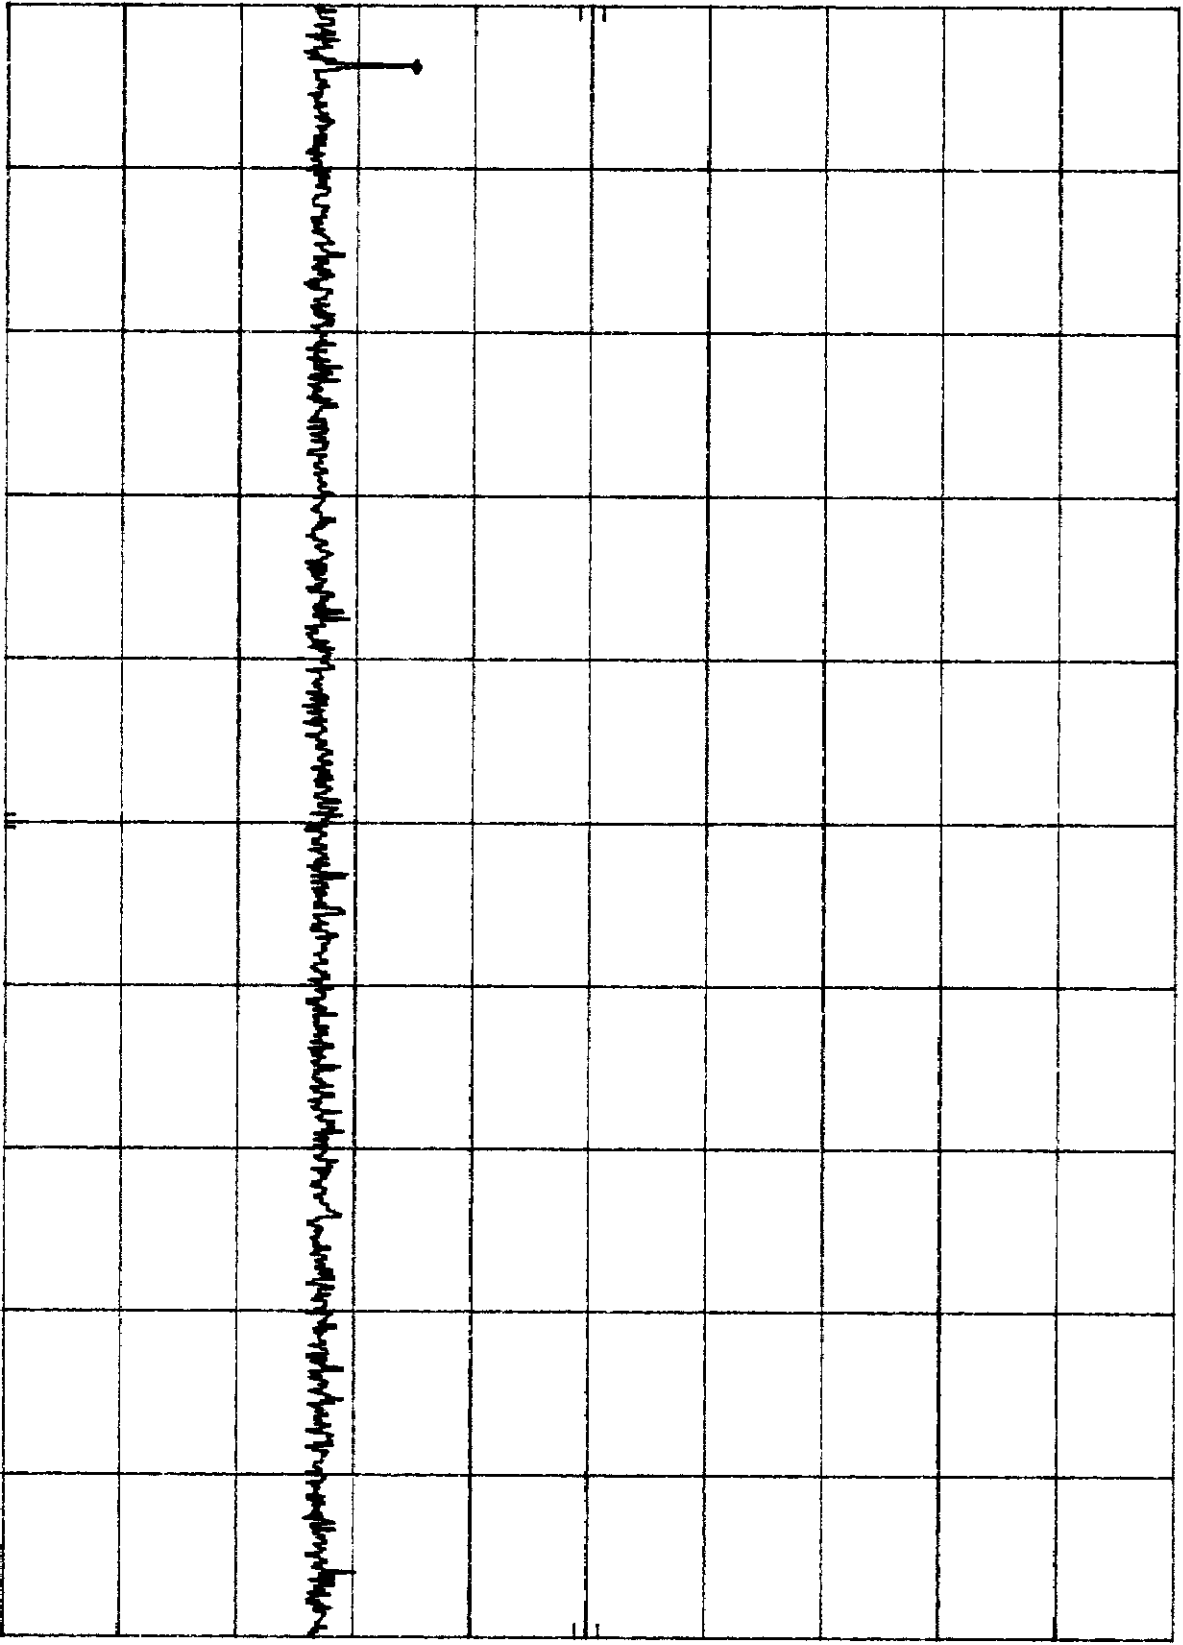

START 1 MHz STOP 1.00 GHz  
RES BW 100 KHZ SWP 300 msec  
VBW 300 KHZ  
Plot 7.3.4.a

LOW CHANNEL  
HP REF 26.6 dBm


ATTEN 40 DB

MKR Δ-15 MHz  
-59.90 DB

10 DB/

OFFSET  
0.3  
DB

CORR'D

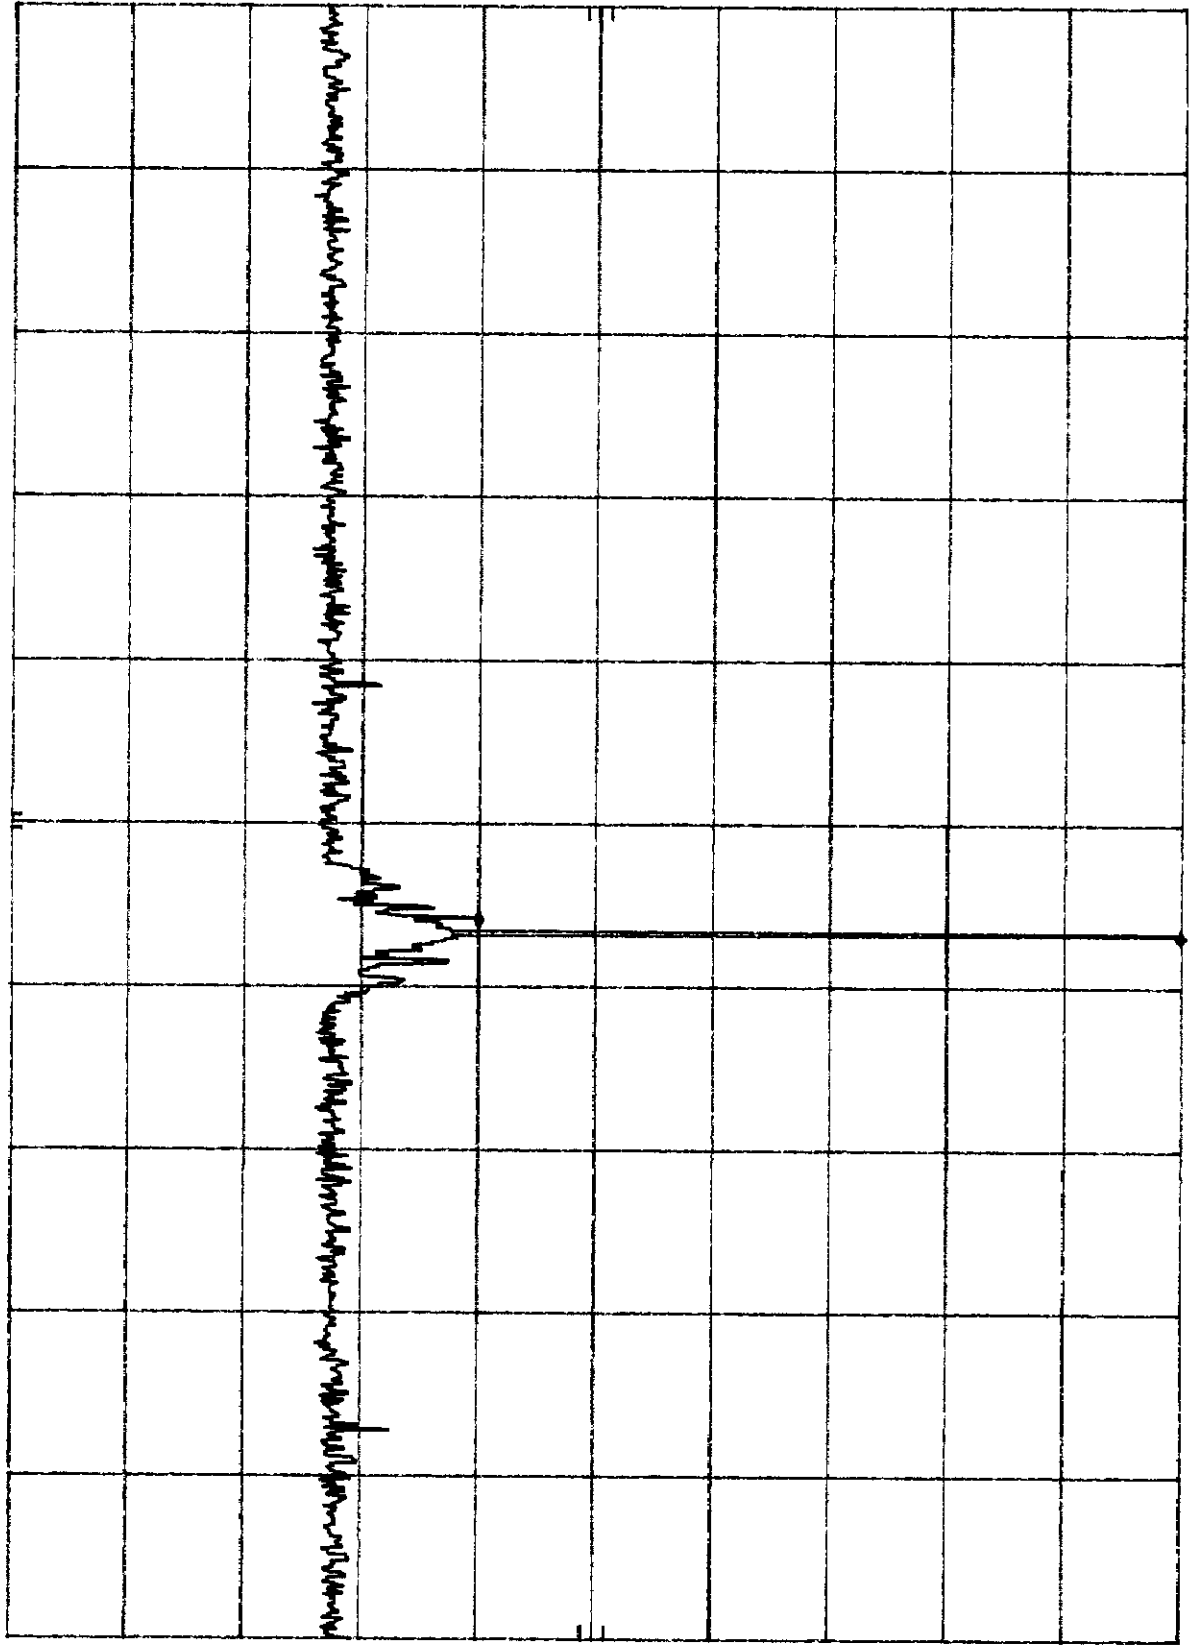


START 1.00 GHz  
RES BW 100 KHz  
VBW 300 KHz  
STOP 2.50 GHz  
SWP 450 msec  
Plot 7.3.4.b

LOW CHANNEL  
REF 26.6 dBm ATTEN 40 DB  
MKR 3.685 GHz  
-21.20 dBm

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

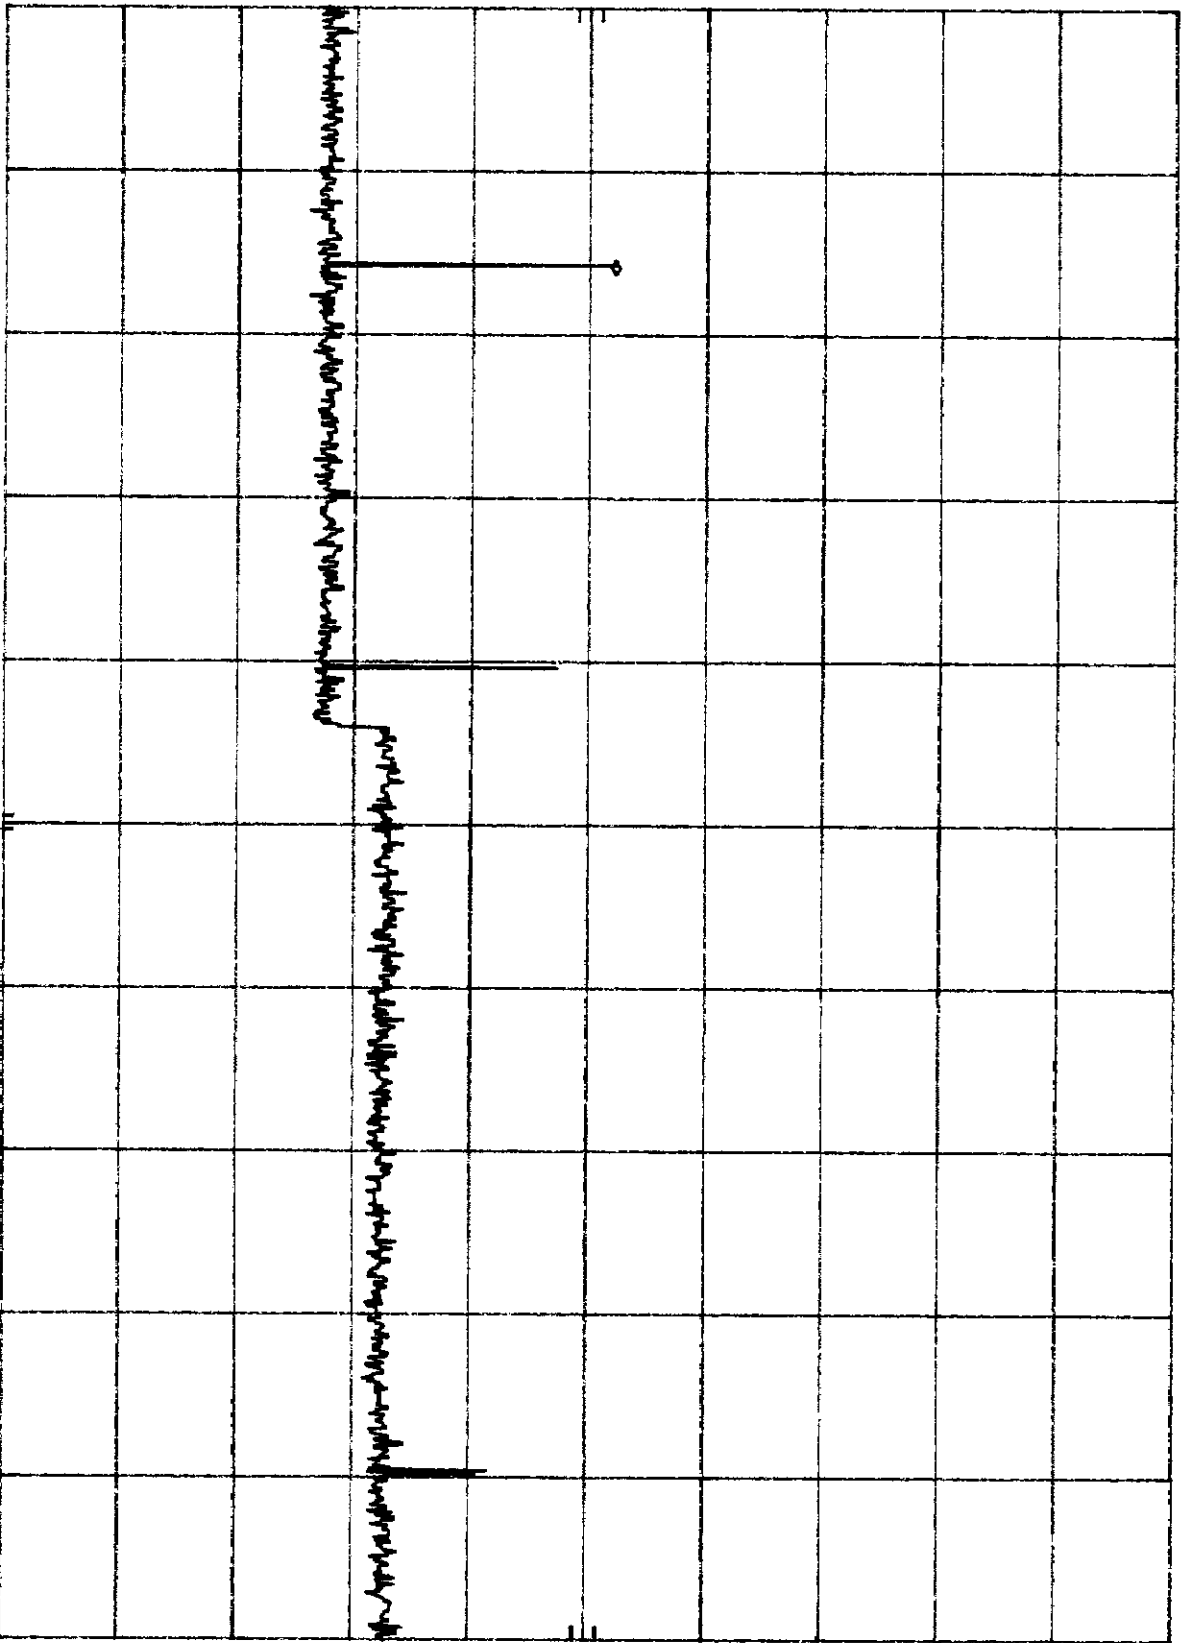


START 2.50 GHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 10.00 GHz  
SWP 2.25 sec  
P137 7.3.9.c

LOW CHANNEL  
HP REF 26.6 DBm ATTEN 40 DB MKR 19.90 GHZ  
-27.10 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

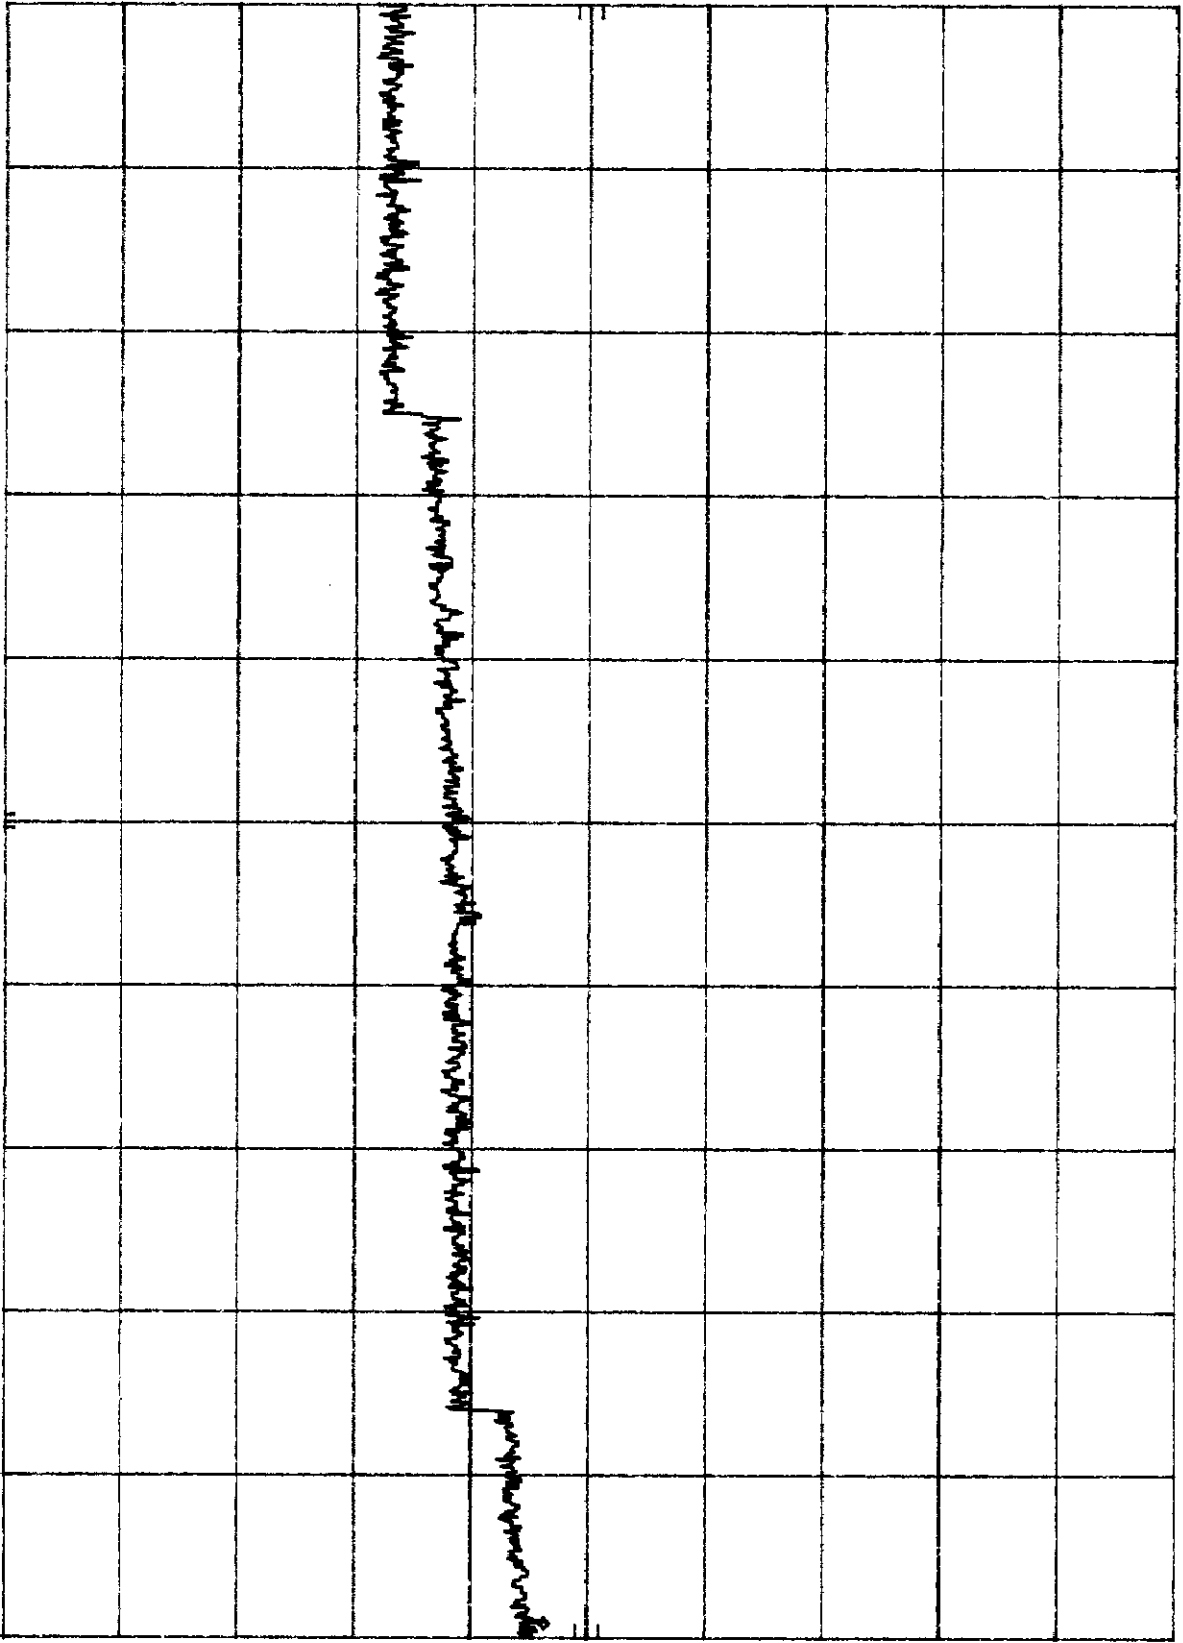

START 10.0 GHZ STOP 20.0 GHZ  
RES BW 100 KHZ SWP 3.00 sec  
VBW 300 KHZ  
Plot 7.3.4.d

MID CHANNEL  
REF 26.6 dBm


ATTEN 40 DB

MKR 69 MHz  
-42.80 dBm

HP  
10 DB/

OFFSET  
0.3  
DB

CORR'D

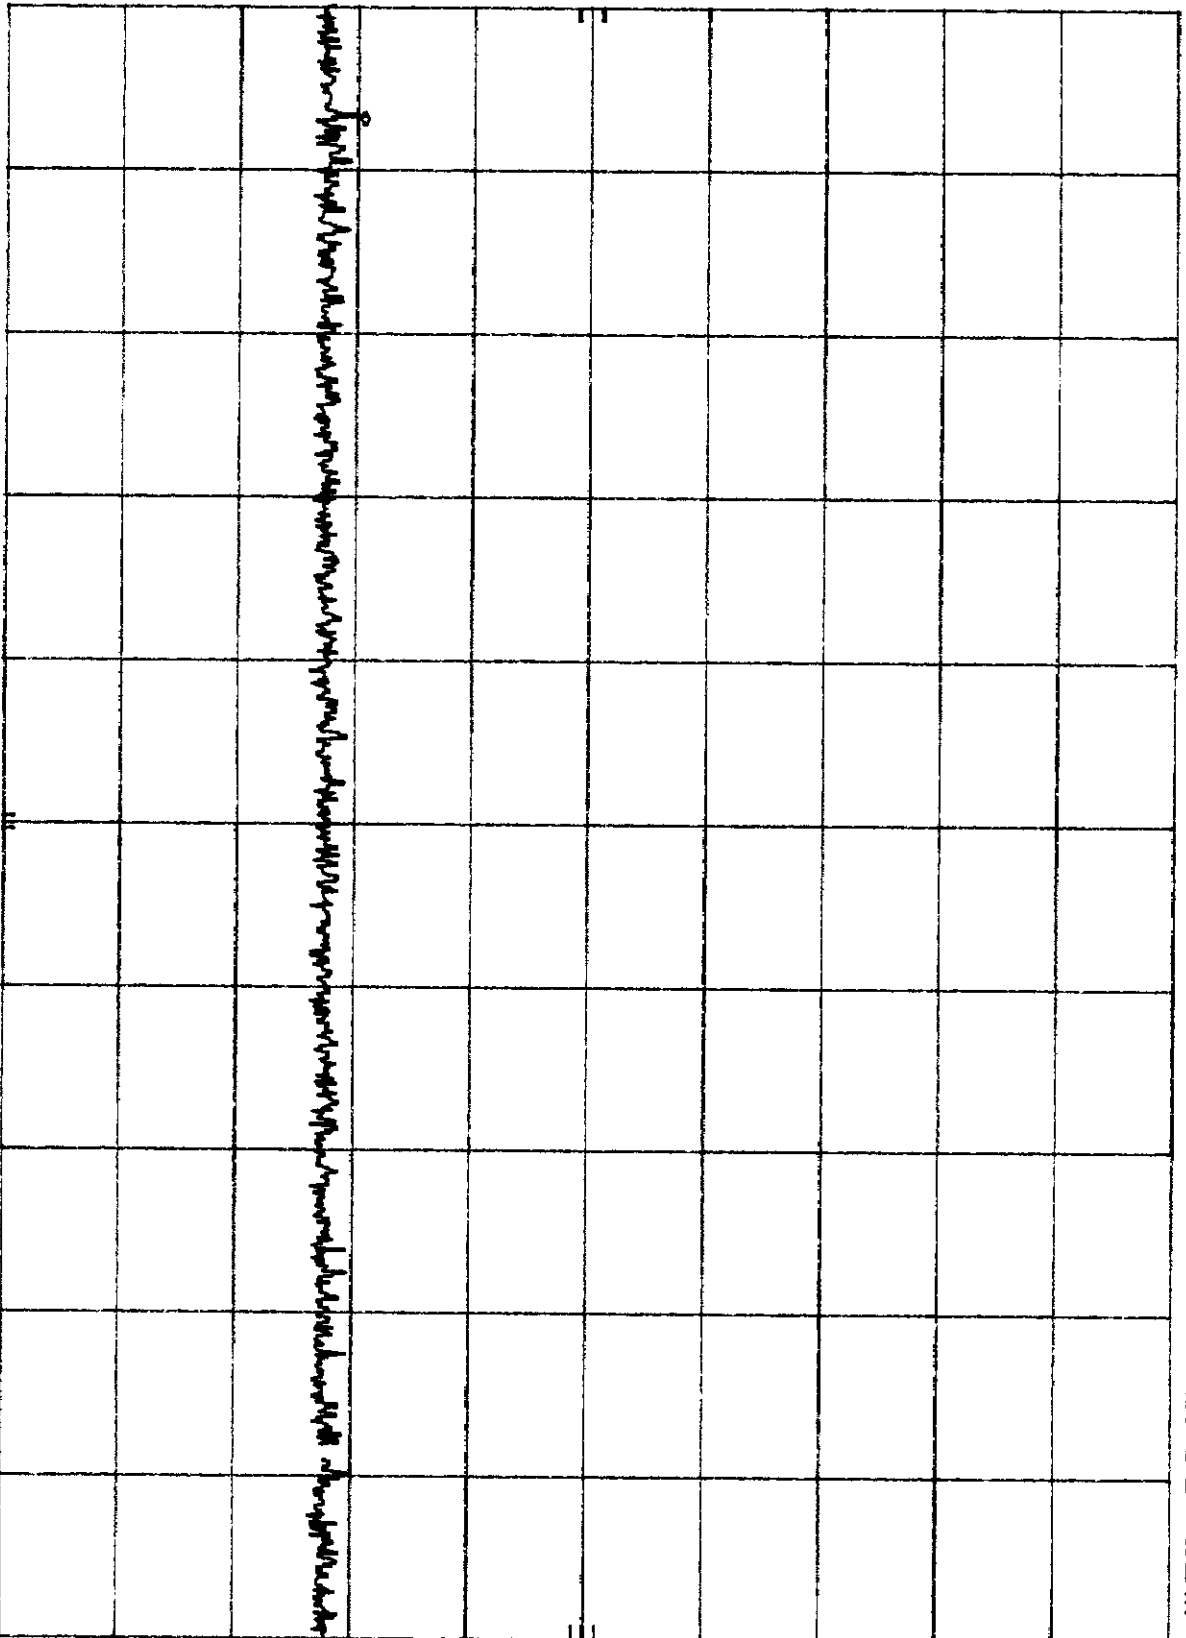

START 1 MHz  
RES BW 100 KHZ  
Plot 7.35.9  
VBW 300 KHZ  
STOP 1.00 GHz  
SWP 300 msec

MID CHANNEL  
REF 26.6 dBm


ATTEN 40 DB

MKR  $\Delta$  14 MHz  
-48.60 DB

10 DB/

OFFSET  
0.3  
DB

CORR'D

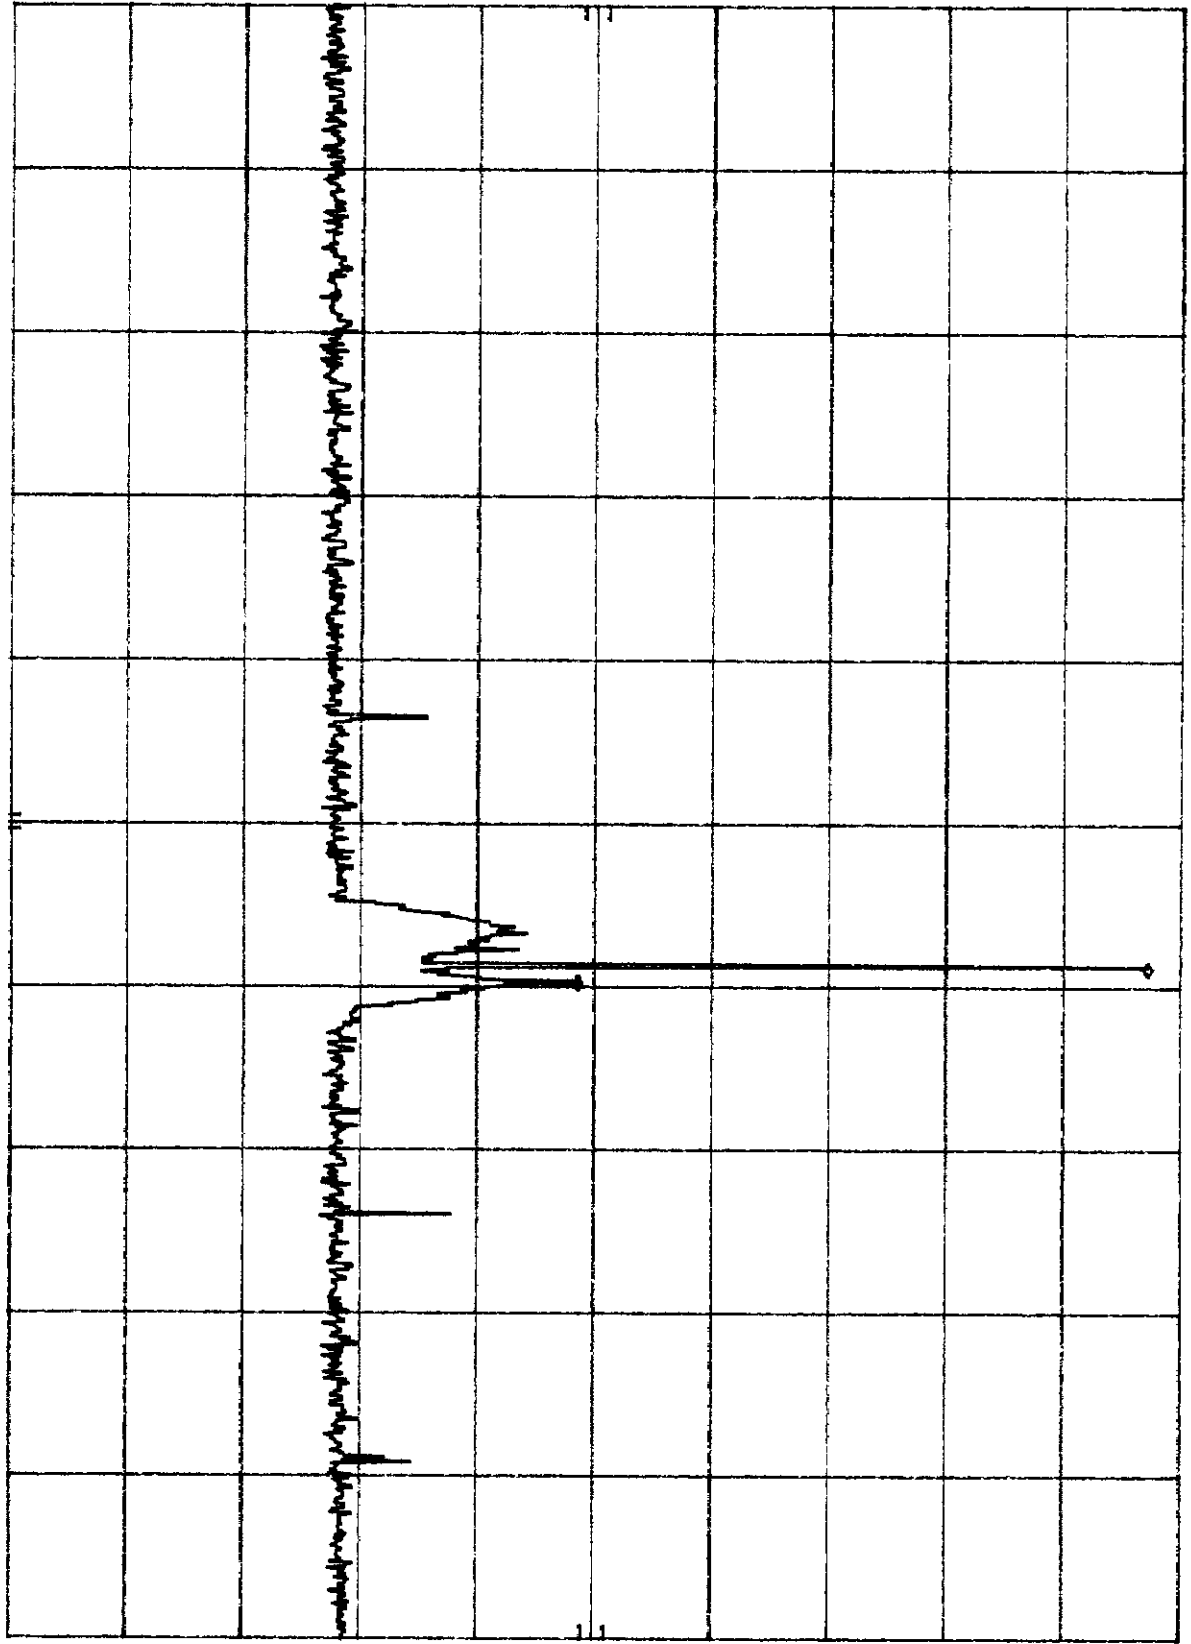


START 1.00 GHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 2.50 GHz  
SWP 450 msec  
Plot 7.3.51b

MID CHANNEL REF 26.6 DBm ATTEN 40 DB MKR 3.745 GHZ  
-28.30 DBm

40  
10 DB/

OFFSET  
0.3  
DB

CORR'D

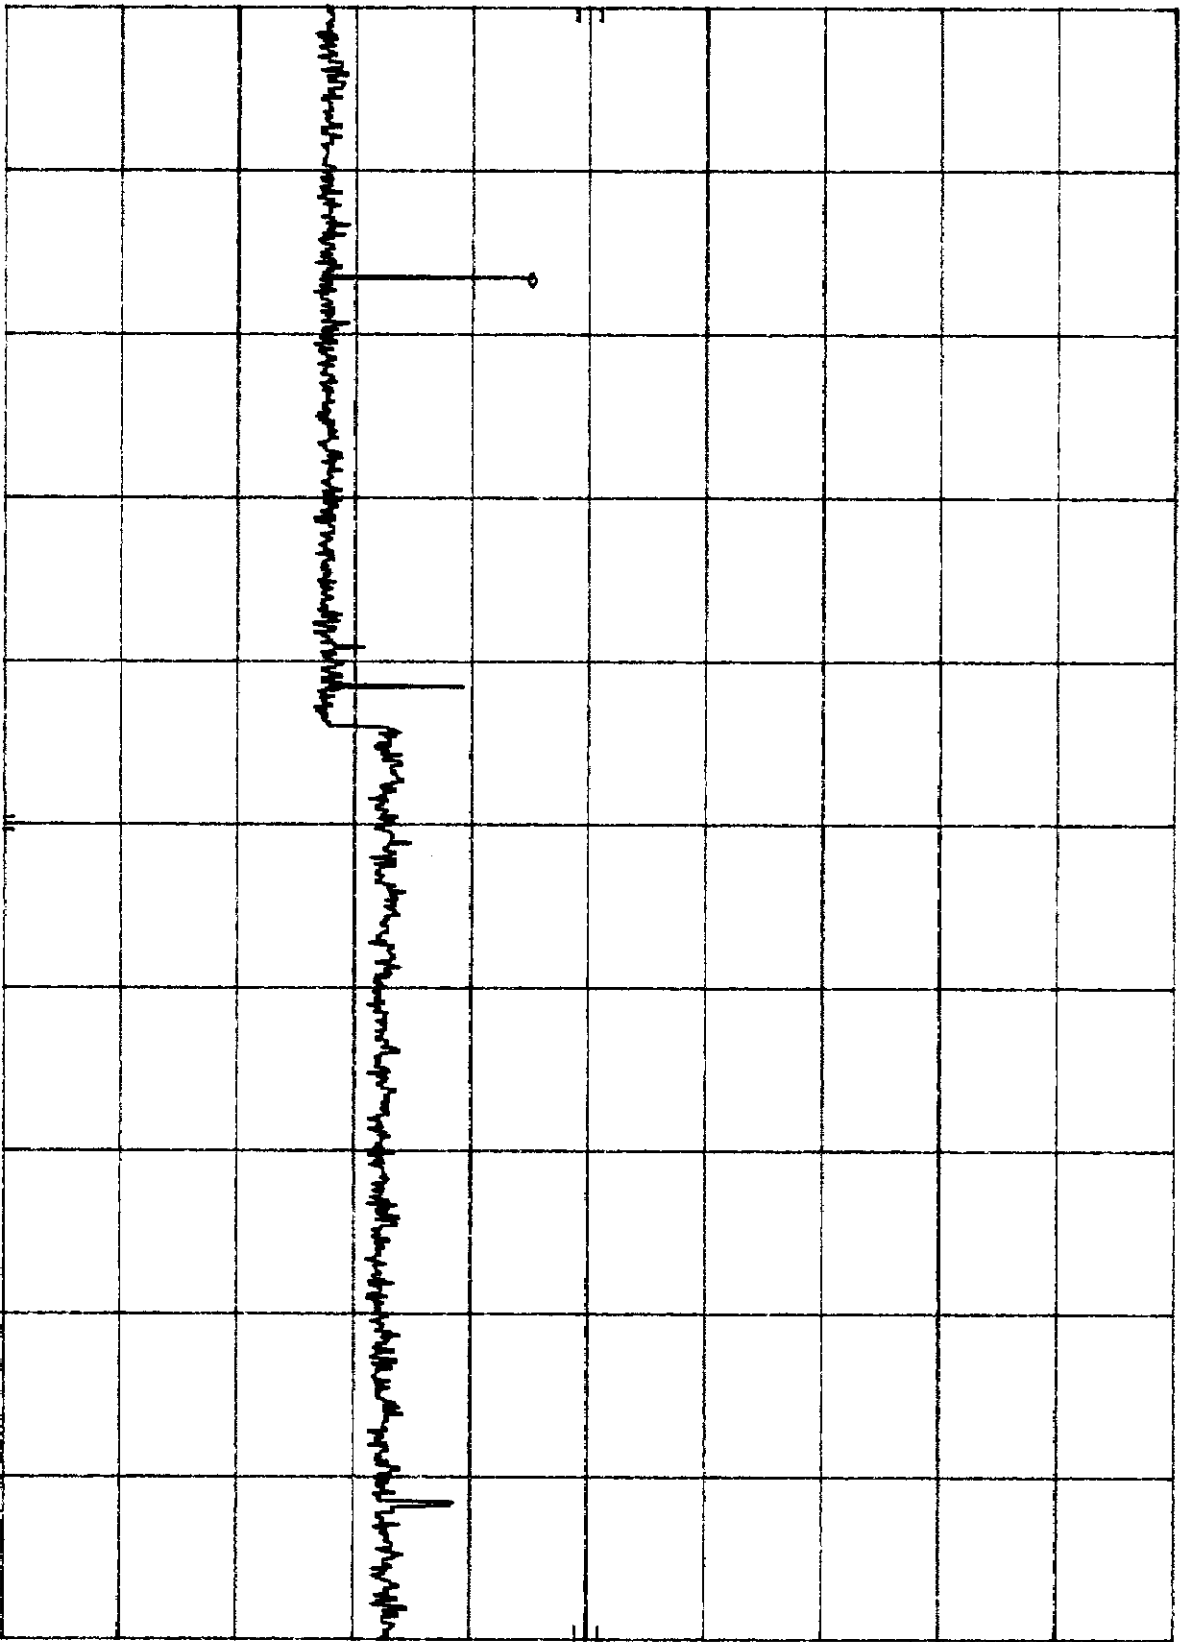

START 2.50 GHZ STOP 10.00 GHZ  
RES BW 100 KHZ VBW 300 KHZ SWP 2.25 sec  
Plot 7.3 S.C



HP

MID CHANNEL  
REF 26.6 DBm


ATTEN 40 DB

MKR 19.02 GHZ  
-28.00 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

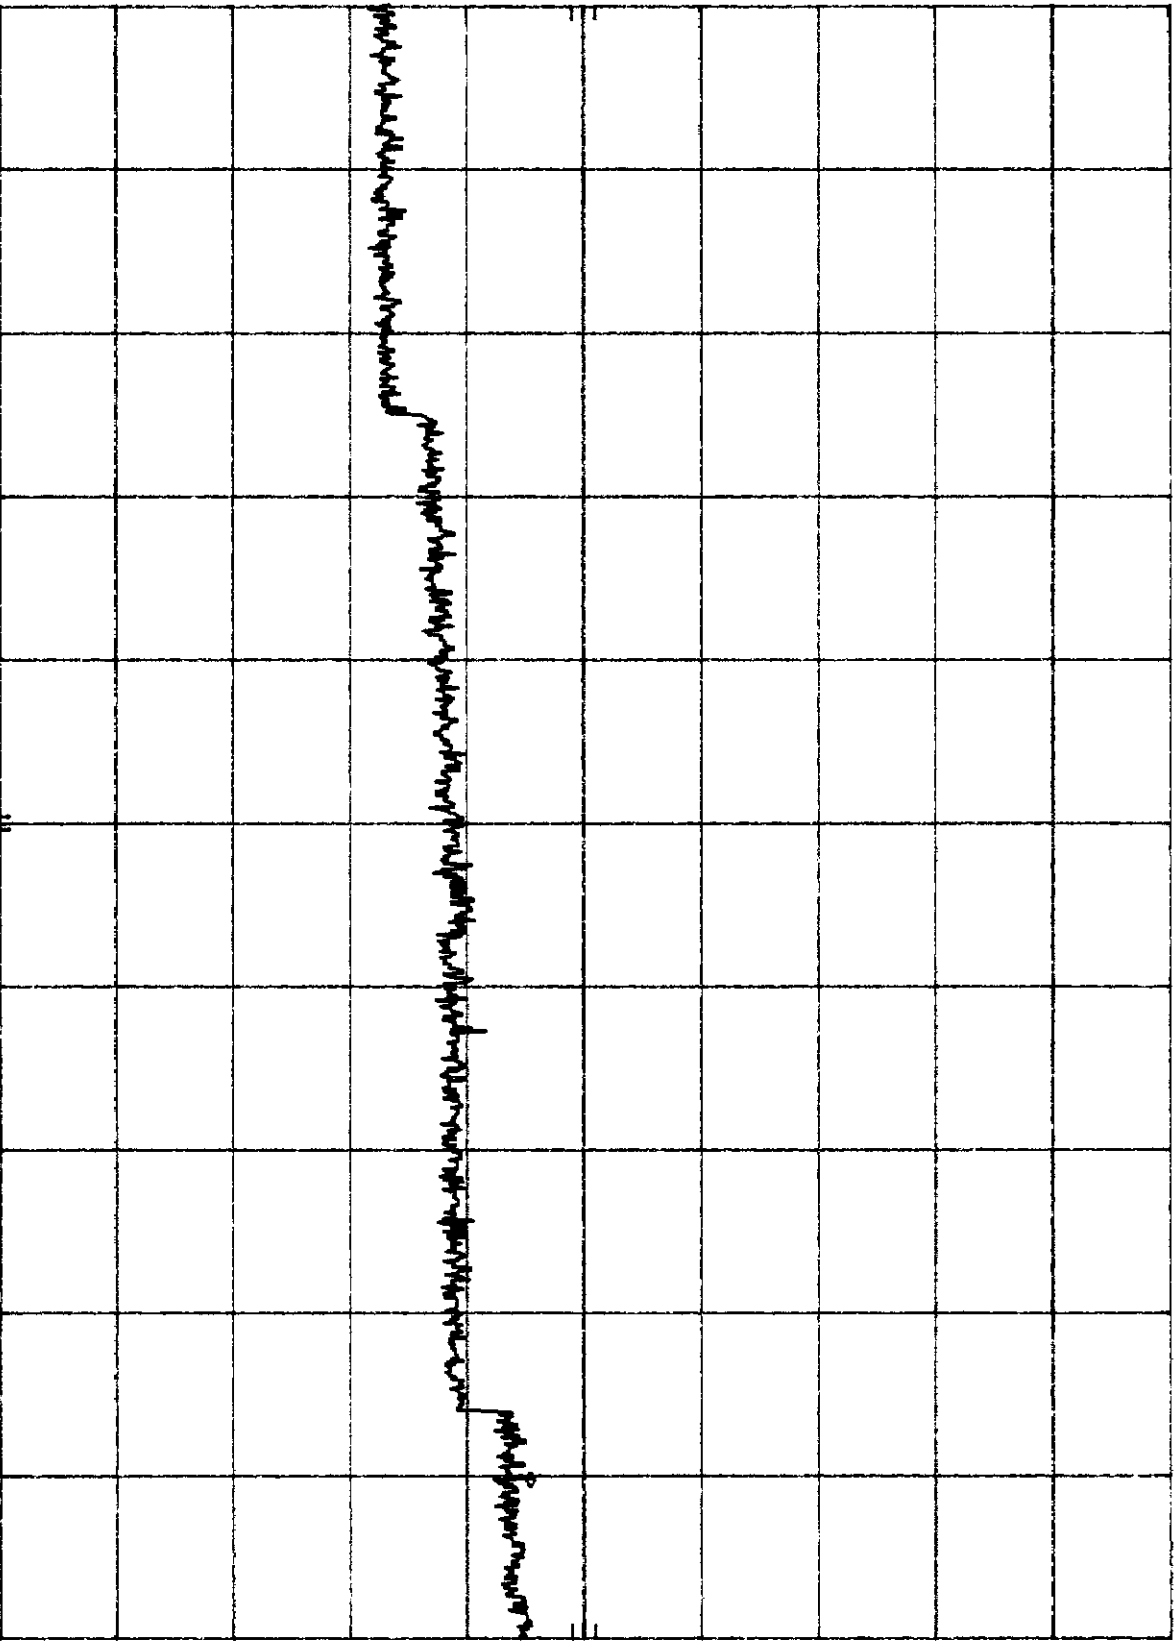

START 10.0 GHZ

STOP 20.0 GHZ

RES BW 100 KHZ  
810x 7.3.5.8.

VBW 300 KHZ

SWP 3.00 sec

HIGH CHANNEL  
HP REF 26.6 DBm


ATTEN 40 DB

MKR 99 MHZ  
-42.20 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

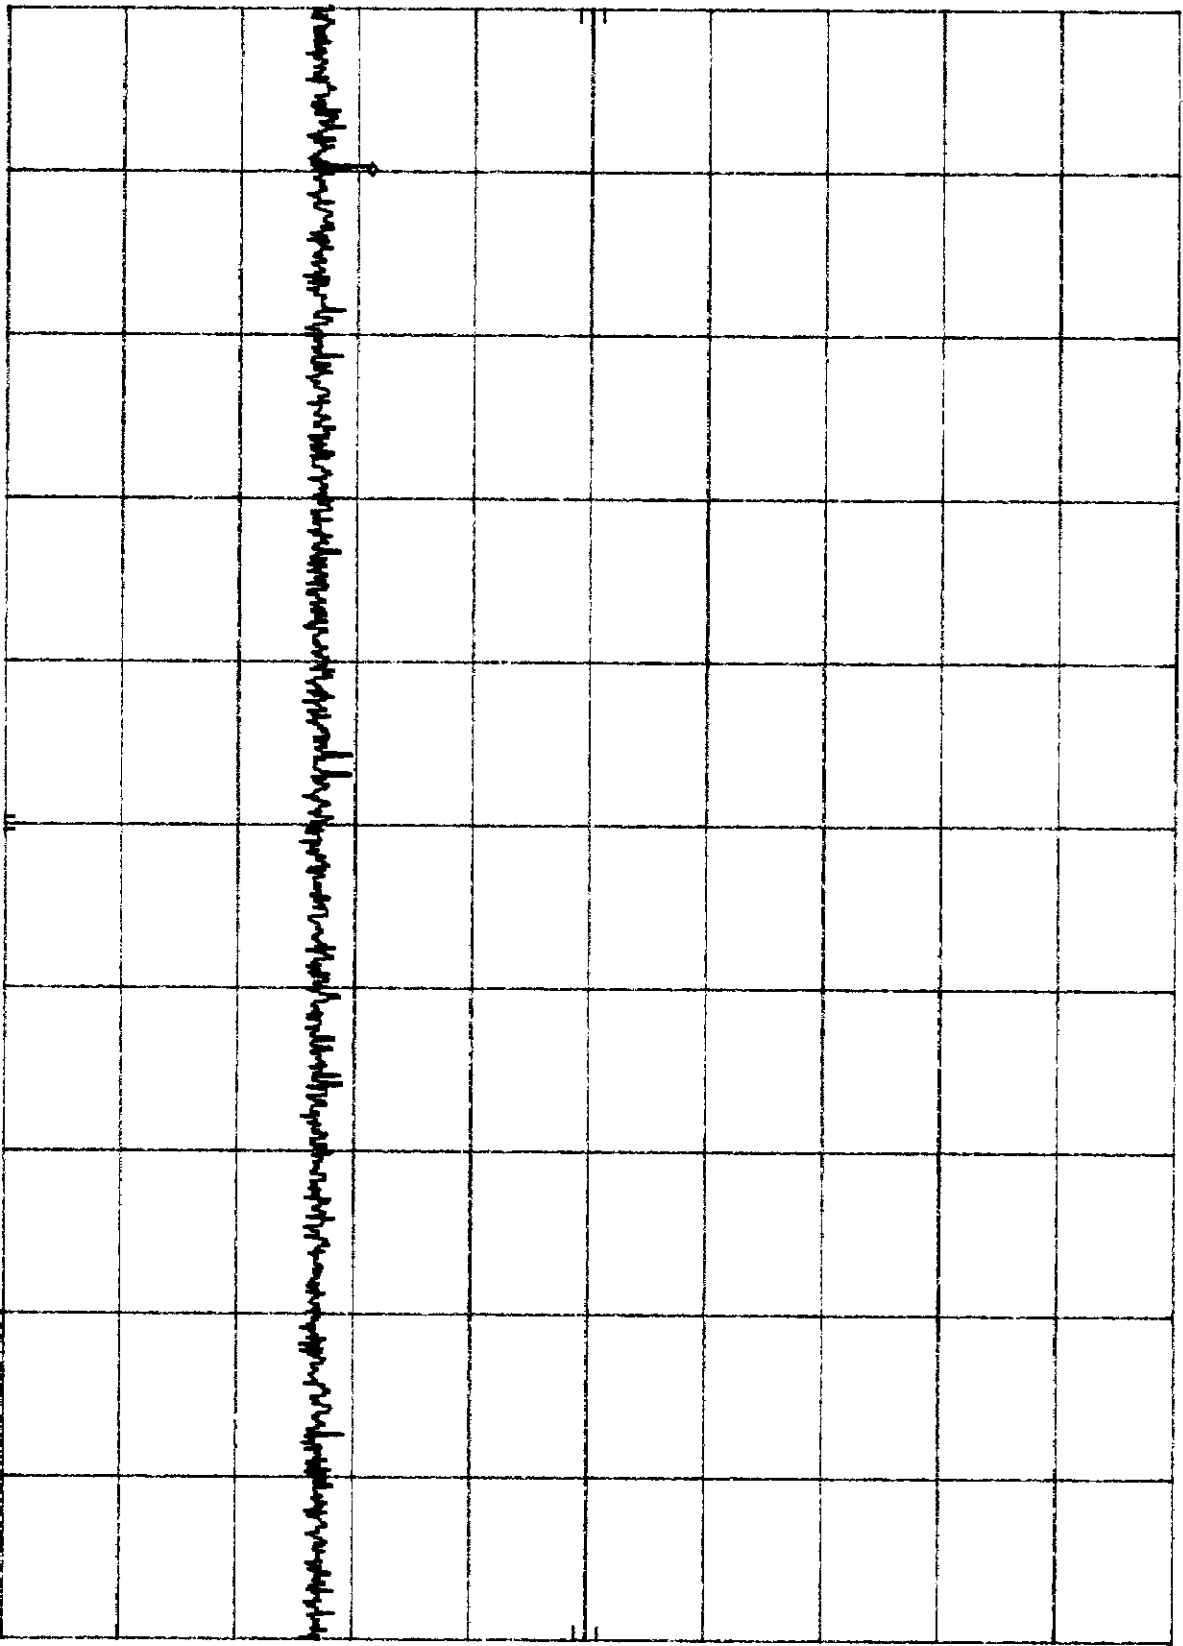

START 1 MHZ  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 1.00 GHZ  
SWP 300 msec  
Plot 7.3.6.9

HIGH CHANNEL  
REF 26.6 dBm


ATTEN 40 DB

MKR Δ-15 MHZ  
-52.40 DB

10 DB/

OFFSET  
0.3  
DB

CORR'D

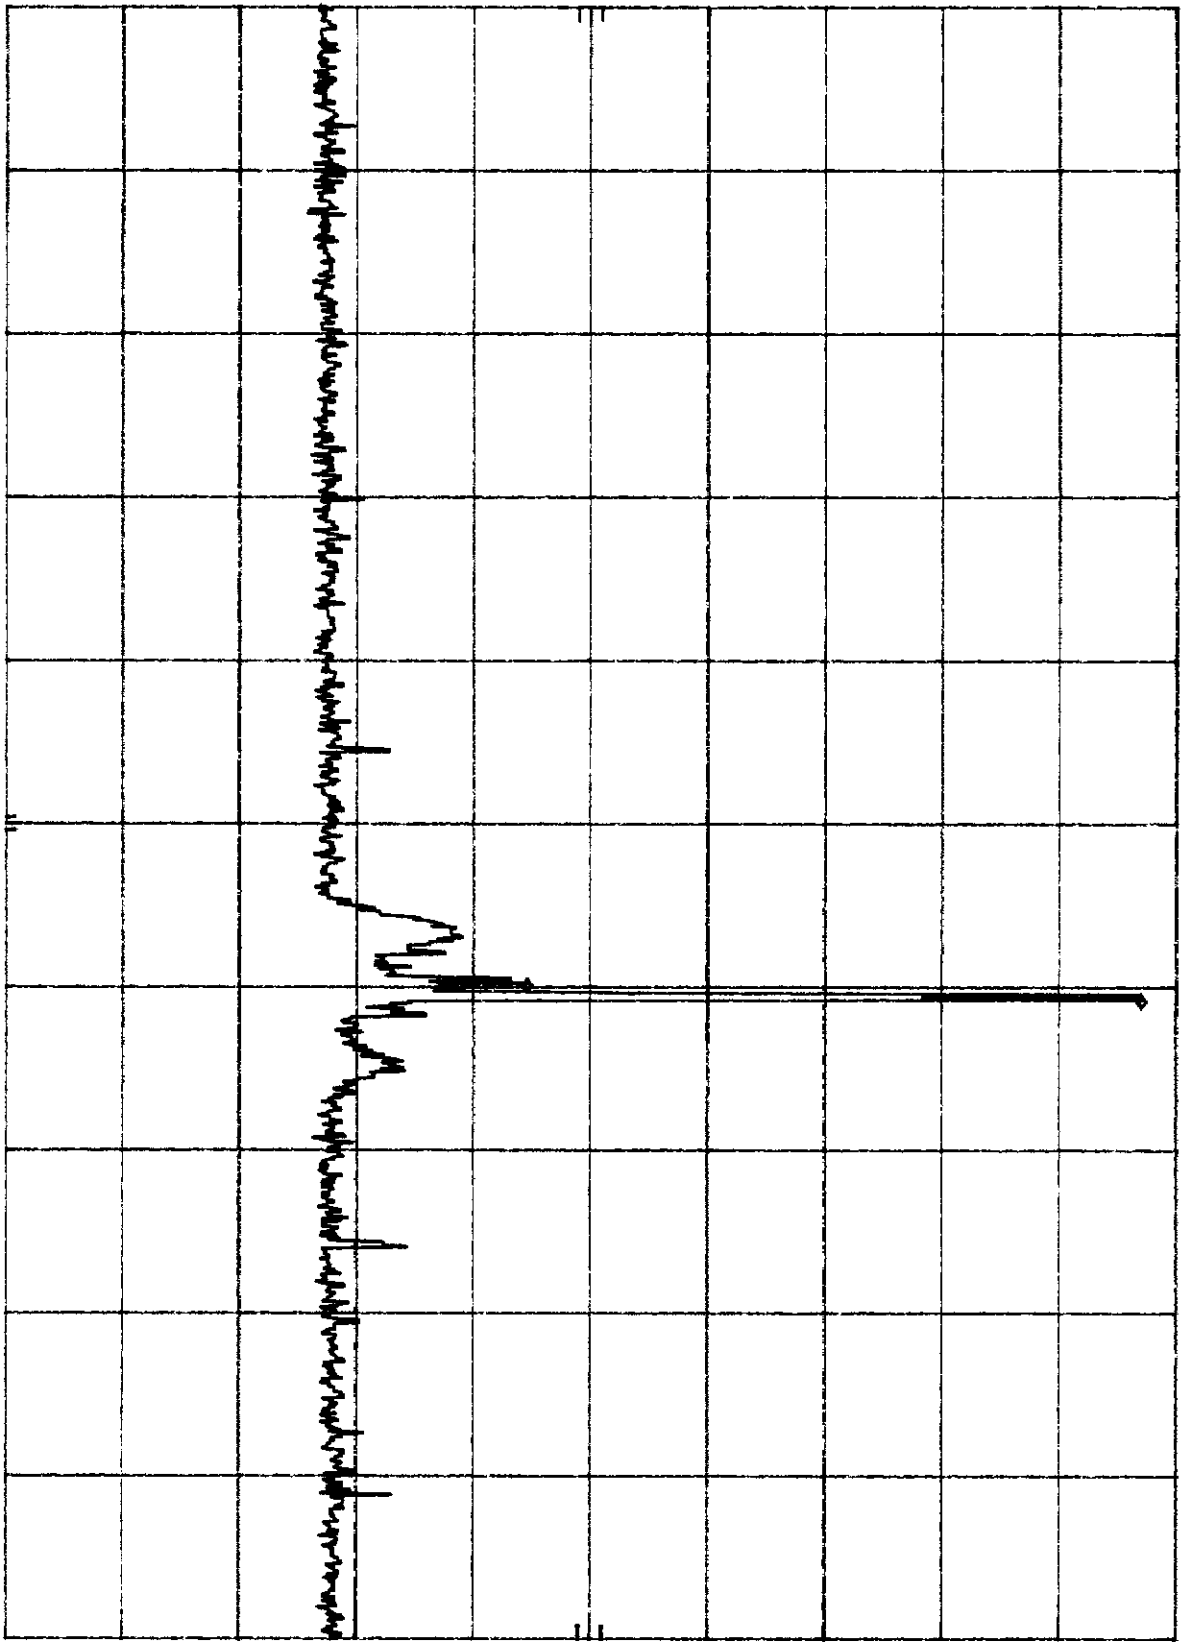

START 1.00 GHz  
RES BW 100 KHZ  
VBW 300 KHZ  
STOP 2.50 GHz  
SWP 450 msec  
Plot 736.9

HIGH CHANNEL

REF 26.6 DBm


ATTEN 40 DB

MKR 3.805 GHz  
-26.20 DBm

10 DB/

OFFSET  
0.3  
DB

CORR'D

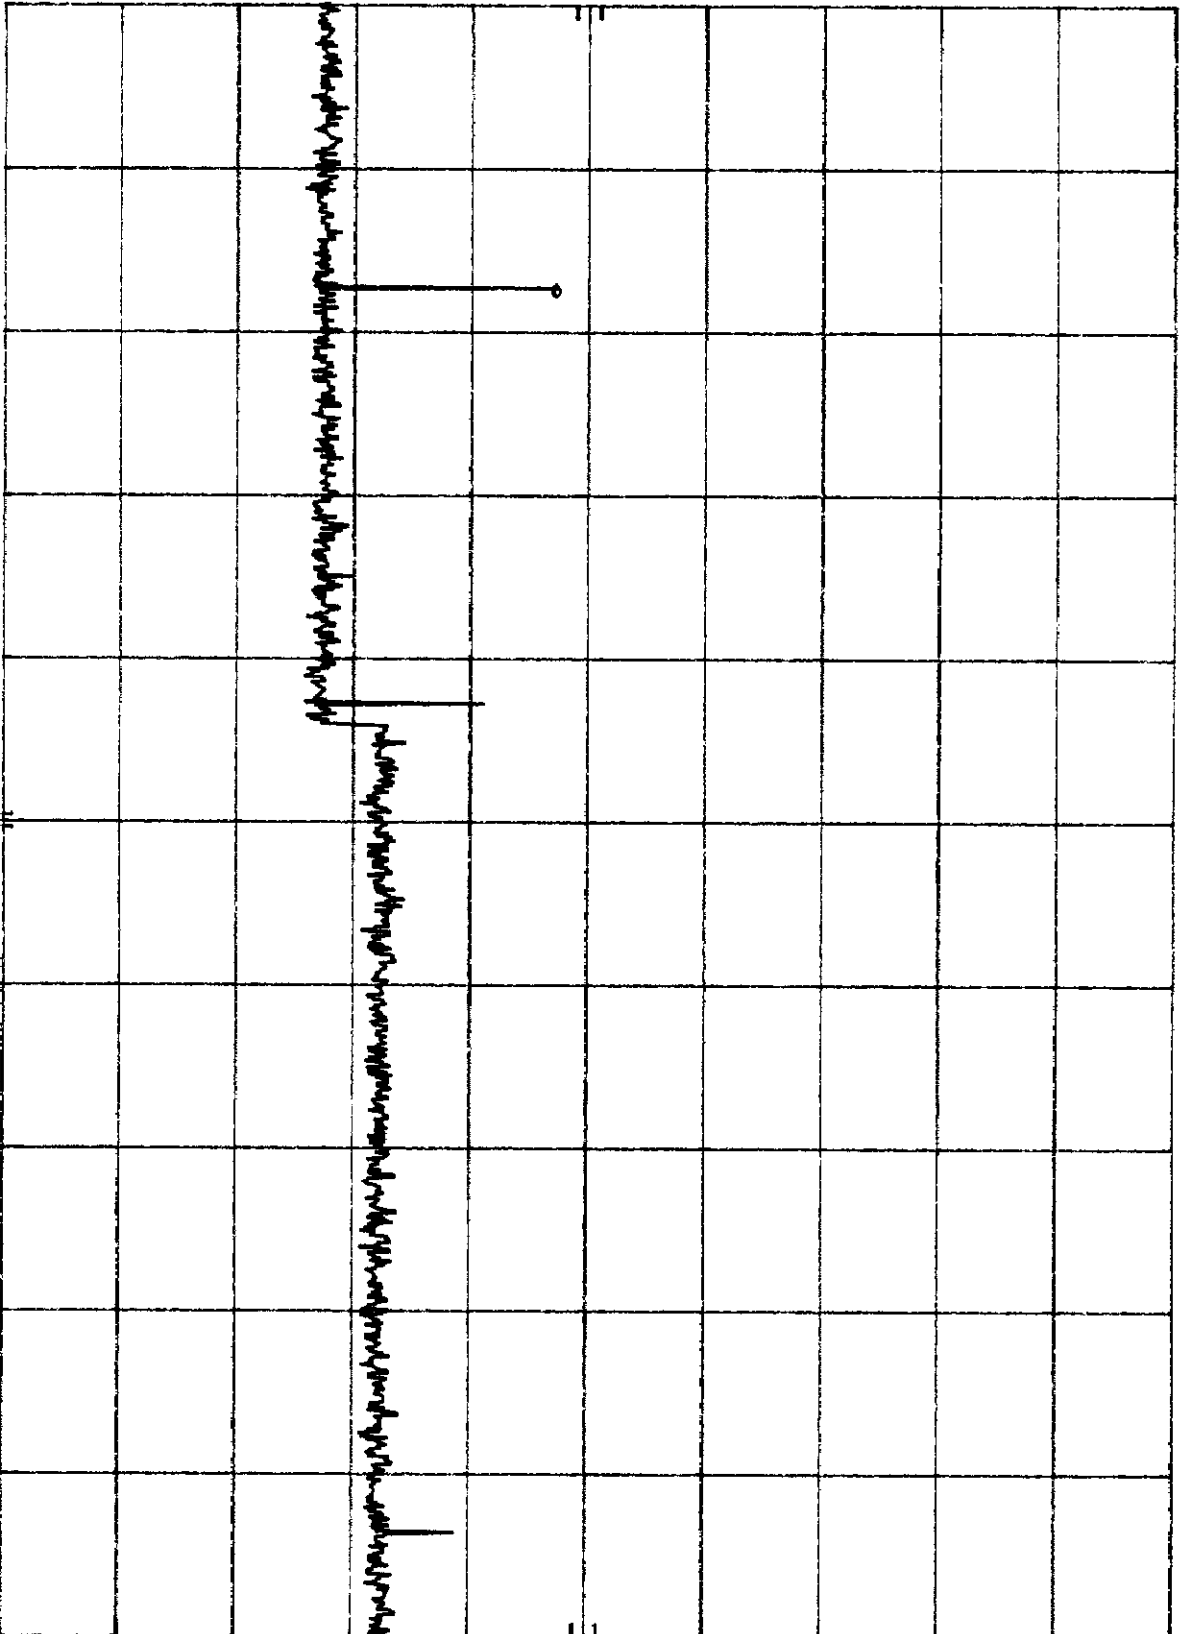

START 2.50 GHz

RES BW 100 KHz

VBW 300 KHz

STOP 10.00 GHz  
SWP 2.25 sec


Plot 7.3.6.c

HIGH CHANNEL  
hp REF 26.6 dBm ATTEN 40 dB MKR 19.89 GHz  
-27.30 dBm

10 dB/

OFFSET  
0.3  
dB

CORR'D

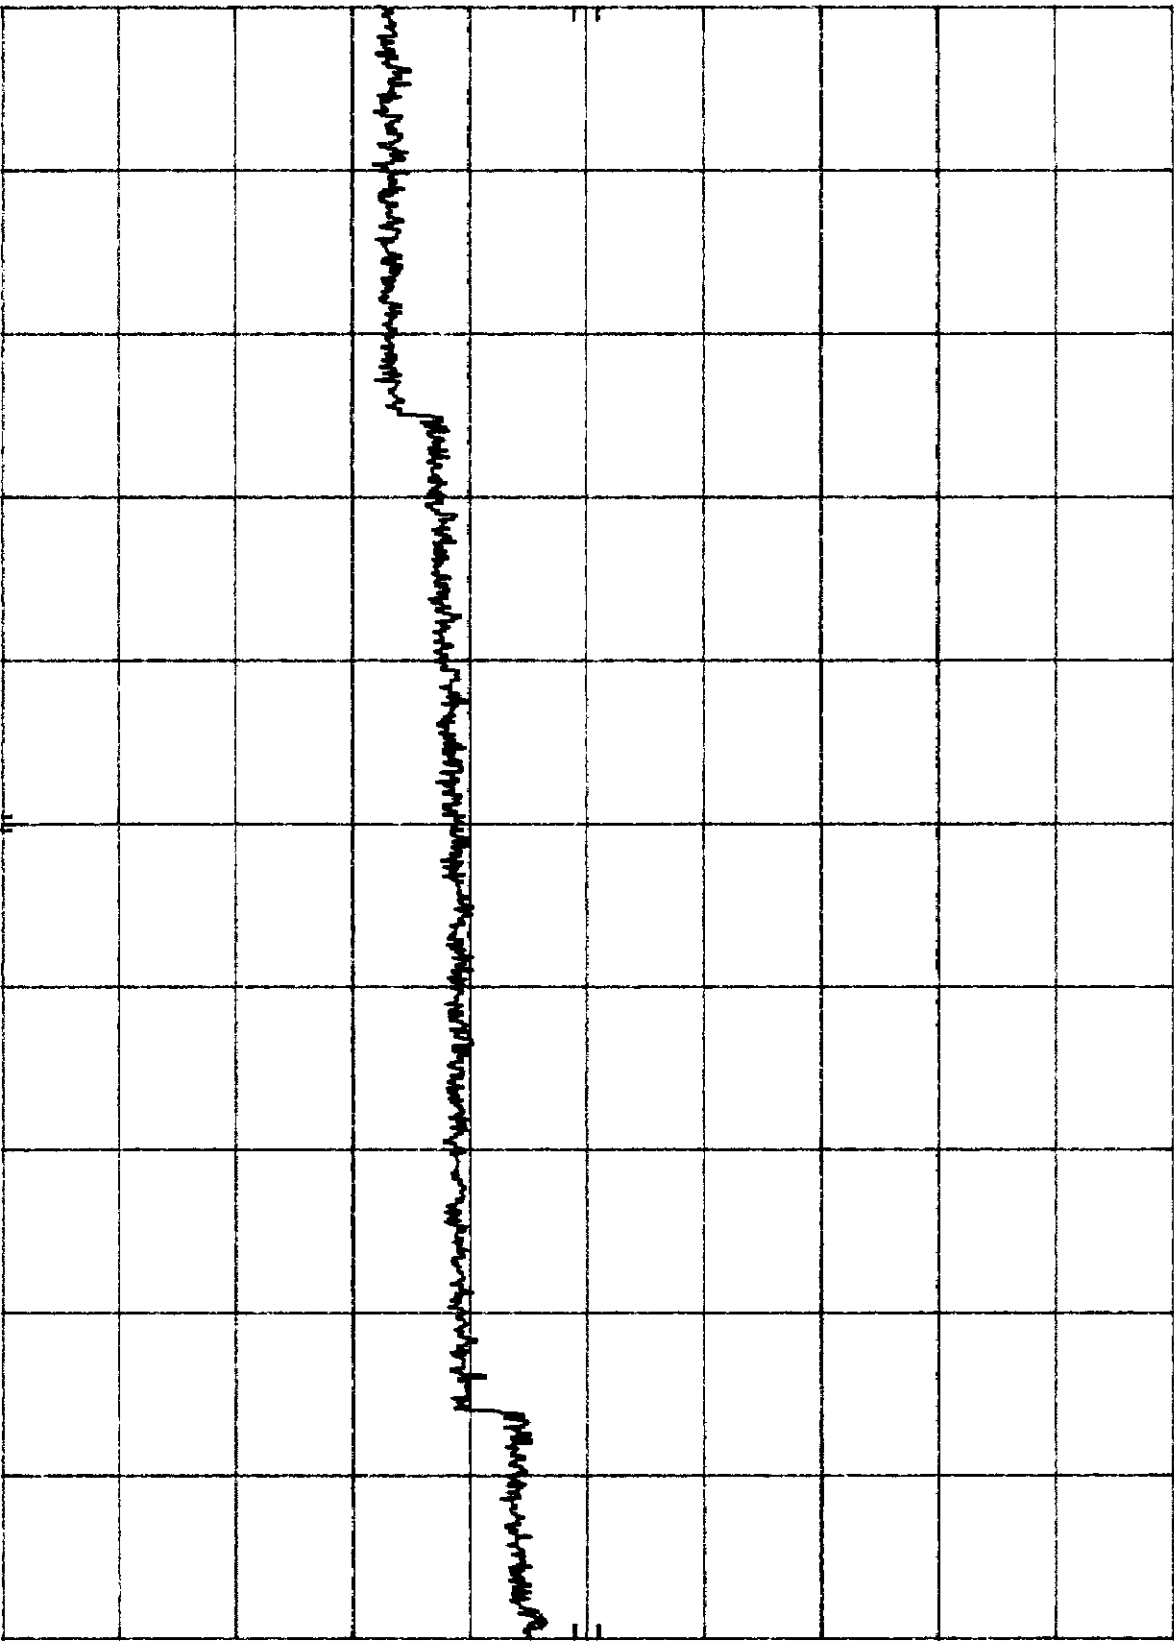

START 10.0 GHz STOP 20.0 GHz  
RES BW 100 KHZ SWP 3.00 sec  
VBW 300 KHZ  
Plot 7.36.d

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

## 8.0 Field Strength of Spurious Radiation, FCC § 2.1053

### 8.1 Test Procedure

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of each of the three fundamental frequency (low, middle, and high channels) was investigated.

The spurious emissions attenuation was calculated as the difference between Field strength in dBuV/m at the fundamental frequency (See Section 3) and at the spurious emissions frequency.

### 8.2 Test Equipment

EMCO 3115 Horn Antenna  
HP 8566B Spectrum Analyzer  
Tektronix 2782 Spectrum Analyzer  
Low Pass Filter  
Preamplifier

### 8.3 Test Results

Test Result:	Passed, refer to the attached
--------------	-------------------------------

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx @ Low Channel: 824.04 MHz  
 Engineer: Ollie Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
824.0	3.0	V	100.7	23.3	0.0	0.0	2.0	126.0	N/A	N/A
1648.1	3.0	V	30.5	26.6	0.0	0.0	3.0	60.1	65.9	-25.8
2472.2	3.0	V	42.6	30.4	0.0	0.0	2.3	75.3	50.7	-10.6
3296.2	3.0	V	19.0	32.5	0.0	0.0	2.7	54.2	71.8	-31.7
4120.2	3.0	H	26.9	34.5	-27.9	0.0	2.9	36.4	89.6	-49.5
4944.3	3.0	H	27.5	34.3	-28.3	0.0	3.5	37.0	89.0	-48.9
5768.3	3.0	H	35.8	36.4	-28.3	0.0	3.9	47.8	78.2	-38.1
6592.4	3.0	H	27.5	36.7	-28.0	0.0	4.3	40.5	85.5	-45.4
7416.4	3.0	H	27.4	38.5	-27.8	0.0	4.6	42.7	83.3	-43.2
8240.4	3.0	H	26.9	38.8	-27.1	0.0	4.7	43.3	82.7	-42.6

Measured conducted power = 27.1 dBm  
 Spurious emission attenuation limit = 40.1 dB

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx @ Mid Channel: 836.5 MHz  
 Engineer: Ollie Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
836.5	3.0	V	100.8	23.4	0.0	0.0	2.0	126.2	N/A	N/A
1673.1	3.0	V	37.3	26.6	0.0	0.0	3.0	66.9	59.3	-19.5
2509.6	3.0	V	40.7	30.4	0.0	0.0	2.3	73.4	52.8	-13.0
3346.1	3.0	V	18.9	32.5	0.0	0.0	2.7	54.1	72.1	-32.3
4182.6	3.0	H	25.0	34.5	-27.9	0.0	2.9	34.5	91.7	-51.9
5019.1	3.0	H	32.5	34.3	-28.3	0.0	3.5	42.0	84.2	-44.4
5855.7	3.0	H	36.9	36.4	-28.3	0.0	3.9	48.9	77.3	-37.5
6692.2	3.0	V	28.2	36.4	-28.0	0.0	4.3	40.9	85.3	-45.5
7528.7	3.0	H	29.0	38.5	-27.8	0.0	4.6	44.3	81.9	-42.1
8365.2	3.0	V	27.6	40.3	-27.1	0.0	4.7	45.5	80.7	-40.9

Measured conducted power = 26.8 dBm

Spurious emission attenuation limit = 39.8 dB



Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx (@ High Channel: 848.97 MHz  
 Engineer: Ollic Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamplifier (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
849.0	3.0	V	101.3	23.4	0.0	0.0	2.0	126.7	N/A	N/A
1698.0	3.0	V	40.3	26.6	0.0	0.0	3.0	69.9	56.8	-18.0
2547.0	3.0	V	42.0	30.4	0.0	0.0	2.3	74.7	52.0	-13.2
3396.0	3.0	V	19.0	32.5	0.0	0.0	2.7	54.2	72.5	-33.7
4244.9	3.0	H	23.0	34.5	-27.9	0.0	2.9	32.5	94.2	-55.4
5093.9	3.0	H	34.2	34.3	-28.3	0.0	3.5	43.7	83.0	-44.2
5942.8	3.0	H	30.9	36.4	-28.3	0.0	3.9	42.9	83.8	-45.0
6791.8	3.0	H	30.4	37.8	-28.0	0.0	4.3	44.5	82.2	-43.4
7640.8	3.0	H	25.0	38.5	-27.8	0.0	4.6	40.3	86.4	-47.6
8489.8	3.0	H	25.0	38.8	-27.1	0.0	4.7	41.4	85.3	-46.5

Measured conducted power = 25.8 dBm  
 Spurious emission attenuation limit = 38.8 dB

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx @ Low Channel: 1850.0 MHz  
 Engineer: Ollie Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamplifier (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
1850.0	3.0	V	88.6	30.1	0.0	0.0	3.1	121.8	N/A	N/A
3700.0	3.0	H	32.2	32.1	0.0	0.0	2.8	67.1	54.7	-14.9
5550.0	3.0	H	53.6	36.2	-28.3	0.0	3.7	65.2	56.6	-16.8
7400.0	3.0	H	40.2	38.4	-27.2	0.0	4.6	56.0	65.8	-26.0
9250.0	3.0	H	54.2	39.0	-27.3	0.0	5.0	70.9	50.9	-11.1
11100.0	3.0	H	48.6	40.7	-33.0	0.0	5.8	62.1	59.7	-19.9
12950.0	3.0	H	33.7	40.0	-33.0	0.0	6.2	46.9	74.9	-35.1
14800.0	3.0	H	31.7	41.7	-33.0	0.0	6.9	47.3	74.5	-34.7 *
16550.0	3.0	H	31.5	41.3	-33.0	0.0	7.5	47.3	74.5	-34.7 *
18500.0	3.0	H	32.4	44.0	-33.0	0.0	7.7	51.1	70.7	-30.9 *

Measured conducted power = 26.8 dBm

Spurious emission attenuation limit = 39.8 dB

\*: Noise floor

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx @ Mid Channel: 1879.9 MHz  
 Engineer: Ollie Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamplifier (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
1879.9	3.0	V	83.6	30.1	0.0	0.0	3.1	116.8	N/A	N/A
3759.9	3.0	H	28.0	34.5	0.0	0.0	2.9	65.4	51.4	-14.8
5639.9	3.0	H	39.5	36.2	-28.3	0.0	3.7	51.1	65.7	-29.1
7519.9	3.0	H	45.2	38.4	-27.2	0.0	4.6	61.0	55.8	-19.2
9399.9	3.0	H	42.8	39.0	-27.3	0.0	5.0	59.5	57.3	-20.7
11279.7	3.0	H	38.5	41.9	-33.0	0.0	5.8	53.2	63.6	-27.0
13159.7	3.0	H	32.6	40.0	-33.0	0.0	6.2	45.8	71.0	-34.4
15039.7	3.0	H	32.7	41.7	-33.0	0.0	6.9	48.3	68.5	-31.9 *
16919.6	3.0	H	32.0	43.0	-33.0	0.0	7.5	49.5	67.3	-30.7 *
18799.6	3.0	H	36.0	44.0	-33.0	0.0	7.7	54.7	62.1	-25.5 *

Measured conducted power = 23.6 dBm

Spurious emission attenuation limit = 36.6 dB

\*: Noise floor

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Tx @ High Channel: 1909.9 MHz  
 Engineer: Ollie Moyrong  
 Date: March\_6\_2000

**Spurious Harmonic Attenuation**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Spurious Attenuation (dB)	Margin (dB)
1909.9	3.0	V	82.9	30.1	0.0	0.0	3.1	116.1	N/A	N/A
3819.9	3.0	H	24.8	34.5	0.0	0.0	2.9	62.2	53.9	-17.2
5729.9	3.0	H	50.4	36.2	-28.3	0.0	3.7	62.0	54.1	-17.4
7639.8	3.0	H	44.5	38.4	-27.2	0.0	4.6	60.3	55.8	-19.1
9549.7	3.0	H	46.4	39.0	-27.3	0.0	5.0	63.1	53.0	-16.3
11459.8	3.0	H	37.6	41.9	-33.0	0.0	5.8	52.3	63.8	-27.1
13369.5	3.0	H	33.5	40.5	-33.0	0.0	6.2	47.2	68.9	-32.2
15279.4	3.0	H	32.6	42.2	-33.0	0.0	6.9	48.7	67.4	-30.7 *
17189.3	3.0	H	33.5	43.0	-33.0	0.0	7.5	51.0	65.1	-28.4 *
19099.1	3.0	H	36.6	44.0	-33.0	0.0	7.7	55.3	60.8	-24.1 *

Measured conducted power = 23.7 dBm

Spurious emission attenuation limit = 36.7 dB

\*: Noise floor

Job No.: J20004218  
 Company: Philips  
 Model: OZEO  
 Test Mode: Rx  
 Engineer: Ollie Moyrong  
 Date: March\_9\_2000

**FCC Part 15.109 Class B Radiated Emissions**

Frequency (MHz)	Antenna Location (m)	Antenna Polariz. (H/V)	Reading (dBuV)	Antenna Factor (dB/m)	Preamp (dB)	Correction Factor (dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	Limit At 3 m (dBuV/m)	Margin (dB)
37.33	3.0	H	7.5	10.6	0.0	0.0	1.0	19.1	40.0	-21.0
41.48	3.0	H	9.6	10.6	0.0	0.0	1.0	21.2	40.0	-18.8
62.22	3.0	H	16.5	5.2	0.0	0.0	1.1	22.8	40.0	-17.2
70.52	3.0	H	13.1	7.2	0.0	0.0	1.2	21.5	40.0	-18.5
87.10	3.0	H	9.7	8.1	0.0	0.0	1.3	19.1	40.0	-20.9
124.43	3.0	H	10.5	7.2	0.0	0.0	1.4	19.1	43.5	-24.4
174.20	3.0	H	8.9	9.1	0.0	0.0	1.7	19.7	43.5	-23.8
236.42	3.0	H	5.9	11.5	0.0	0.0	2.0	19.4	46.0	-26.6

Notes: Negative signs (-) in the Margin column signify levels below the limit.  
 Readings followed by a '\*' are Quasi-peak measurements. All other readings are peak measurements.  
 All other emissions not reported are at least 10 dB below the applicable limits.  
 Frequency range of investigation is 30 MHz - 1 GHz.

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

9.0 **Line Conducted Emissions, FCC § 15.107**

9.1 **Test Procedure**



Test procedure described in the ANSI C63.4 Standard was employed.

The EUT was connected to the DC power supply (Topward Electric Instrument, Model No.: TPS 4000), that was connected to the AC line through the LISNs.

Both HOT and NEUTRAL leads were tested.

9.2 **Test Results - Line Conducted Emissions**

Refer to the attached test data.

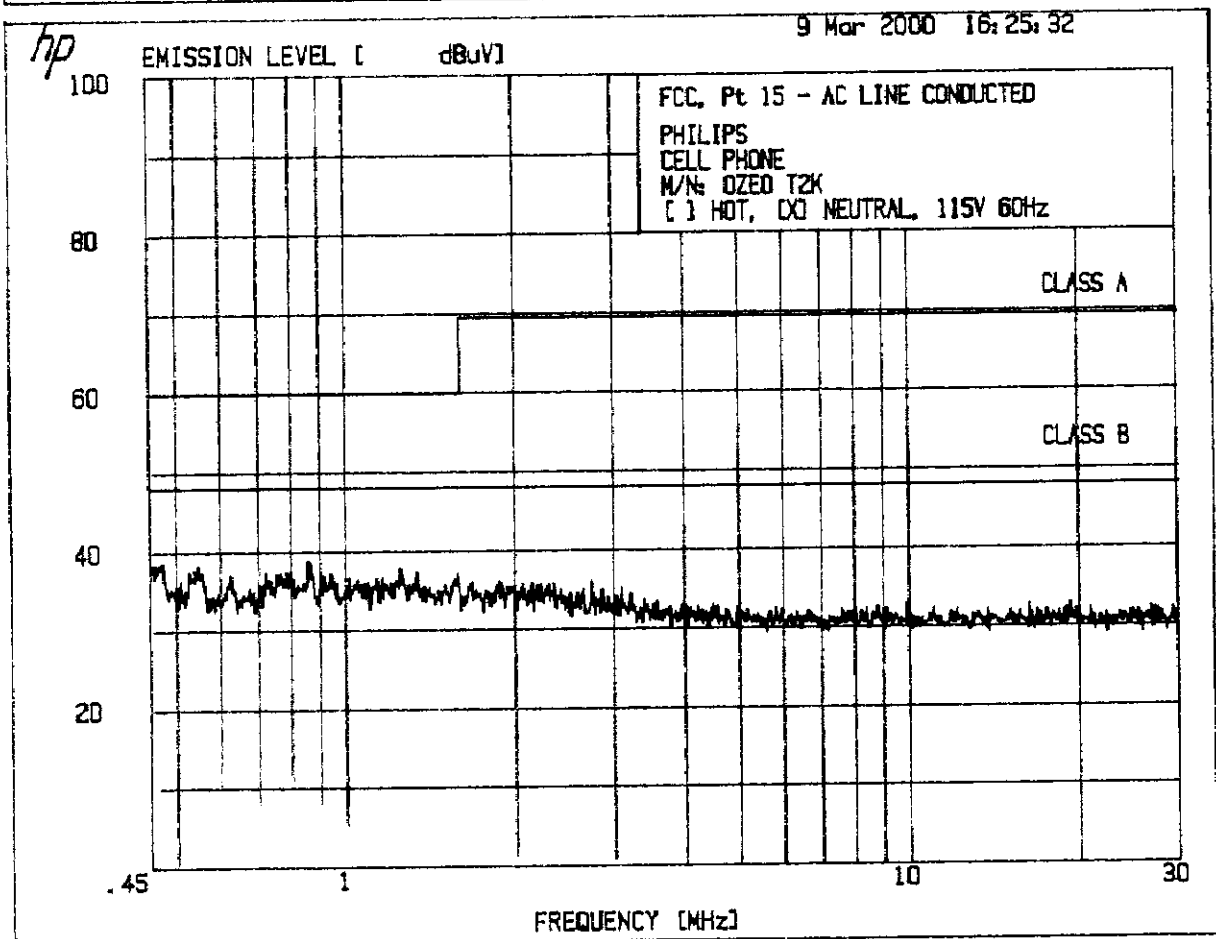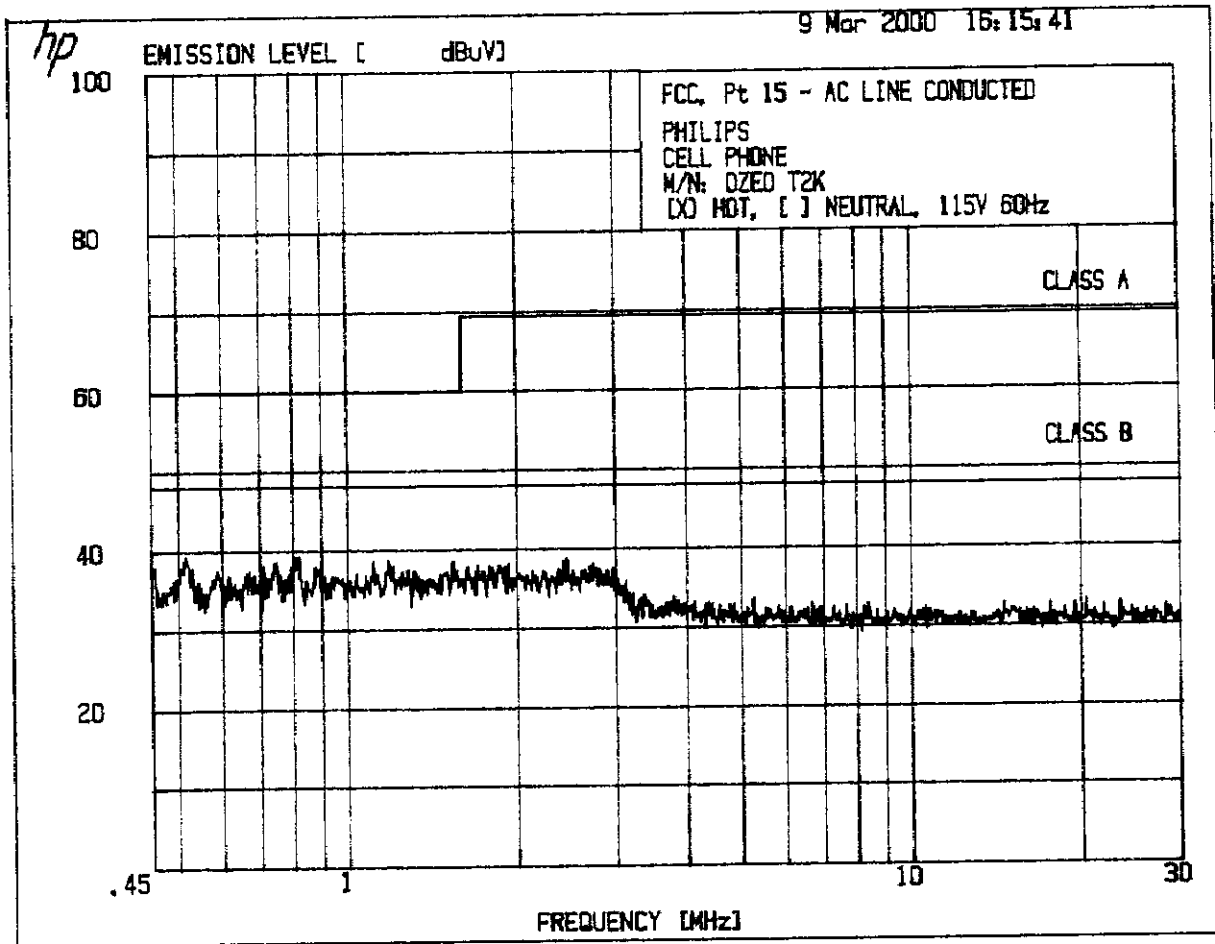

8 Mar 2008 15:25:32

3. FCC CFR 47, Pt 15  
3.1 FCC, Pt 15 - AC LINE CONDUCTED

PHILIPS  
CELL PHONE  
M/N: 0ZEO T2K  
[ ] HOT, [X] NEUTRAL, 115V 60Hz

PEAKS FOUND ABOVE 37 dBuV

PEAK#	FREQ (MHz)	AMPL (dBuV)
1	.5527	38.2
2	.7290	37.3
3	.8063	37.5
4	.9550	38.8
5	.9106	37.2
6	1.263	37.7
7	1.351	37.2
8	1.598	37.0



=====

9 Mar 2020 16:13:41

=====

3. FCC CFR 47, Pt 15  
3.1 FCC, Pt 15 - AC LINE CONDUCTED

=====

PHILIPS  
CELL PHONE  
M/N: 02ED T2K  
[X] HOT, [ ] NEUTRAL, 115V 50Hz

PEAKS FOUND ABOVE 38 dBuV

PEAK#	FREQ (MHz)	AMPL(dBuV)
1	.5212	39.2
2	.7169	38.1
3	.7509	38.9
4	.8268	39.2
5	1.119	38.6
6	1.191	38.6
7	1.551	38.9
8	1.946	38.0
9	2.472	38.9
10	2.74E	38.1

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTCDS588

Date of Test: March 7-9, 2000

## 10.0 Frequency Stability vs Temperature, FCC § 2.1055, § 22.355

Frequency Tolerance:  $\pm 2.5$  ppm

### 10.1 Test Procedure

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber. The DC leads, RF output cable, and external PTT cable exited the chamber through an opening made for that purpose.

After the temperature stabilized for approximately 20 minutes, the external PTT switch was activated, and the frequency output was recorded from the counter.

### 10.2 Test Equipment

Temperature Chamber, -50C to +100C  
 Hewlett Packard 5383A Frequency Counter  
 Goldstar DC Power Supply, GR303  
 Rohde & Schwarz ESVP Test Receiver

### 10.3 Test Results

Test Result:	Passed
--------------	--------

Frequency: 836.52 MHz			
Temperature, C	Frequency (MHz)	Difference (Hz)	Output Power, (dBm)
60	836.519013	-987	26.8
50	836.519588	-412	26.8
40	836.519838	-162	26.8
30	836.519763	-237	26.9
20	836.519700	-300	26.7
10	836.519813	-187	26.7
0	836.519688	-312	26.5
-10	836.519775	-225	26.5
-20	836.519900	-100	26.4
-30	836.519625	-375	26.4

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
 FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

11.0 **Frequency Stability vs Voltage, FCC § 2.1055, § 22.355**  
 Frequency Tolerance:  $\pm 2.5$  ppm

11.1 **Test Procedure**

An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminates; i.e., the battery end point. The output frequency was recorded for each battery voltage.

11.2 **Test Equipment**

Hewlett Packard 5383A Frequency Counter  
 DC Power Supply  
 Rohde & Schwarz ESVP Test Receiver

11.3 **Test Results.**

Test Result:	Passed
--------------	--------

Frequency; 836.52 MHz (Middle Channel)		
D.C. Volts	Frequency (MHz)	Difference (Hz)
4.3	836.520515	515
3.7	836.520510	510
3.1	836.520525	525
2.9	836.520545	545

Philips Consumer Communications, TDMA/AMPS Cellular Phone  
FCC ID: M7VTCD588

Date of Test: March 7-9, 2000

12.0 Miscellaneous Comments

None.