

**FCC 47 CFR PART 15 SUBPART E
TEST REPORT**

For

Model : MIT-W101 ; MIT-W101XXXXXXXXXXXXXXXXXX ;
(where "X" may be any alphanumeric character , "-" or blank)

Trade Name : ADVANTECH

Issued for

Advantech Co. Ltd.

**No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan,
R.O.C.**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**No.989-1, Wenshan Rd., Shangshan Village,
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)**

TEL: +886-3-5921698

FAX: +886-3-5921108

<http://www.ccsrf.com>

E-Mail : service@ccsrf.com

Issued Date: April 21, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	11/23/2015	Initial Issue	All Page 26	Michelle Chiu
01	12/03/2015	Added one adapter	Page 6-7	Michelle Chiu
02	04/21/2016	Revised DFS Rules	P.5, P.12-14	Gloria Chang

TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	8
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATION	9
5.1 FACILITIES	9
5.2 ACCREDITATIONS	9
5.3 MEASUREMENT UNCERTAINTY	10
6. SETUP OF EQUIPMENT UNDER TEST	11
7. DYNAMIC FREQUENCY SELECTION (DFS)	12
APPENDIX SETUP PHOTOS	27

1. TEST REPORT CERTIFICATION

Applicant : Advantech Co. Ltd.
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
 Taipei 114, Taiwan, R.O.C.
Equipment Under Test : Computer
Model : MIT-W101; MIT-W101XXXXXXXXXXXXXXXXXX
 (where "X" may be any alphanumeric character , "-" or blank)
Trade Name : ADVANTECH
Tested Date : July 23 ~ November 09, 2015

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart E	PASS

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

Approved by:



Sb. Lu
 Sr. Engineer

Reviewed by:



Gundam Lin
 Sr. Engineer

2. EUT DESCRIPTION

Product Name	Computer
Model Number	MIT-W101; MIT-W101XXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character , "-" or blank)
Identify Number	T150723L02
Received Date	July 23, 2015
Frequency Range	<p>UNII Band 1: IEEE 802.11a, 802.11an HT20 : 5180MHz ~ 5240MHz IEEE 802.11an HT40 : 5190MHz ~ 5230MH</p> <p>UNII Band 2A: IEEE 802.11a, 802.11an HT20 : 5260MHz ~ 5320MHz IEEE 802.11an HT40 : 5270MHz ~ 5310MHz</p> <p>UNII Band 2C: IEEE 802.11a, 802.11an HT20 : 5500MHz ~ 5700MHz IEEE 802.11an HT40 : 5510MHz ~ 5670MHz (Exclude 5600MHz ~ 5650MHz)</p> <p>UNII Band 3: IEEE 802.11a, 802.11an HT20 : 5745MHz ~ 5825MHz IEEE 802.11an HT40 : 5755MHz ~ 5795MHz</p>
Transmit Power	<p>UNII Band 1: IEEE 802.11a : 16.16dBm (0.0413W) IEEE 802.11an HT20 : 16.38dBm (0.0435W) IEEE 802.11an HT40 : 16.30dBm (0.0427W)</p> <p>UNII Band 2A: IEEE 802.11a : 16.26dBm (0.0423W) IEEE 802.11an HT20 : 16.28dBm (0.0425W) IEEE 802.11an HT40 : 15.99dBm (0.0397W)</p> <p>UNII Band 2C: IEEE 802.11a : 16.14dBm (0.0411W) IEEE 802.11an HT20 : 16.03dBm (0.0401W) IEEE 802.11an HT40 : 16.13dBm (0.0410 W)</p> <p>UNII Band 3: IEEE 802.11a : 16.27dBm (0.0424W) IEEE 802.11an HT20 : 15.36dBm (0.0344W) IEEE 802.11an HT40 : 15.66dBm (0.0368W)</p>
Channel Spacing	<p>IEEE 802.11a, 802.11an HT20 : 20MHz IEEE 802.11an HT40 : 40MHz</p>

Channel Number	<p>IEEE 802.11a, 802.11an HT20 :</p> <p style="padding-left: 40px;">5150MHz ~ 5250MHz : 4 Channels</p> <p style="padding-left: 40px;">5250MHz ~ 5350MHz : 4 Channels</p> <p style="padding-left: 40px;">5470MHz ~ 5725MHz : 8 Channels</p> <p style="padding-left: 40px;">5725MHz ~ 5850MHz : 5 Channels</p> <p>IEEE 802.11an HT40 : 5150MHz ~ 5250MHz : 2 Channels</p> <p style="padding-left: 40px;">5250MHz ~ 5350MHz : 2 Channels</p> <p style="padding-left: 40px;">5470MHz ~ 5725MHz : 3 Channels</p> <p style="padding-left: 40px;">5725MHz ~ 5850MHz : 2 Channels</p>
Transmit Data Rate	<p>IEEE 802.11a : up to 54 Mbps</p> <p>IEEE 802.11an (HT20,800ns GI) : up to 130.00 Mbps</p> <p>IEEE 802.11an (HT20,400ns GI) : up to 144.40 Mbps</p> <p>IEEE 802.11an (HT40,800ns GI) : up to 270.00 Mbps</p> <p>IEEE 802.11an (HT40,400ns GI) : up to 300.00 Mbps</p>
Type of Modulation	<p>IEEE 802.11a : OFDM (64QAM, 16QAM, QPSK, BPSK)</p> <p>IEEE 802.11an HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)</p>
Antenna Type	<p>PIFA Antenna × 2 :</p> <p>Antenna 1(Main) / Chain 0, Antenna Gain: 4.26dBi</p> <p>Antenna 2(Aux) / Chain 1, Antenna Gain : 5.19dBi</p>
Power Rating	<p>11.1Vdc, 2860mAh, 31.75WH (For Battery)</p> <p>19Vdc (For Charging)</p>
Test Voltage	120Vac, 60Hz
AC Power Cord Type	Non-shielded cable, 1.8m (Detachable) (For Power Adapter 1, 2)
DC Power Cable Type	Non-shielded cable, 1.5m (Non-detachable), with a ferrite core (For Power Adapter 1, 2)
I/O Port	Micro HDMI Port × 1, USB Port × 2, Audio Port × 1, Power Port × 1, Docking Connector × 1, Connected pin for expansion module × 1

The difference of the series model :

Model Number	Difference
MIT-W101	1. For marketing purpose only. 2. where "X" may be any alphanumeric character , “-” or blank
MIT-W101XXXXXXXXXXXXXXXXXXXX	

Power Adapter:

No.	Manufacturer	Model No.	Power Input	Power Output
1	FSP	FSP065-REBN2	100-240Vac, 1.5A, 50-60Hz	19Vdc, 3.42A
2	SINPRO	HPU63A-107	100-240Vac, 1.62-0.72A, 47-63Hz	18Vdc, 3.5A max

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. The model MIT-W101 was considered the main model for testing.
4. This submittal(s) (test report) is intended for FCC ID: M82-MITW101 filing to comply with Section 15.207, 15.209 and 15.407 of the FCC Part 15, Subpart E Rules.

3. DESCRIPTION OF TEST MODES

The EUT (MIT-W101) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

IEEE 802.11an HT20 :

Channel 60 (5300MHz)

Channel 100 (5500MHz)

IEEE 802.11an HT40 :

Channel 62 (5310MHz)

Channel 102 (5510MHz)

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 905462 D02v02 and the DFS portions of FCC CFR 47 Part 15.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.989-1, Wenshan Rd., Shangshan Village,
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.10:2013 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

Remark: FCC Designation Number TW1027.

5.3 MEASUREMENT UNCERTAINTY

The interpretation of the results for the measurements described in the present document shall be as follows:

- (1) The measured value related to the corresponding limit will be used to decide whether an equipment meets the requirements of the present document.
- (2) The measurement uncertainty value for the measurement of each parameter shall be recorded.
- (3) The recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures under the table.

PARAMETER	UNCERTAINTY
RF frequency	$\pm 1 \times 10^{-5}$
RF power conducted	$\pm 1,5$ dB
RF power radiated	± 6 dB
Spurious emissions, conducted	± 3 dB
Spurious emissions, radiated	± 6 dB
Humidity	± 5 %
Temperature	$\pm 1^{\circ}\text{C}$
Time	± 10 %

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028-1 [2] and shall correspond to an expansion factor (coverage factor) $k = 1.96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	Notebook PC	DELL	PP19L	CN-0MG532-70166-71G-03 EC
2	Notebook PC	TOSHIBA	M840	9C104267C
3	Wireless AC1750 Dual Band Gigabit Cloud Router r	D-Link	DIR-868L	R3WE1E1001943

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Enter the web configuration:
 - ⇒ **Data Rate :**
 - 13Mbps Bandwidth 20 (IEEE 802.11an HT20 mode)
 - 27Mbps Bandwidth 40 (IEEE 802.11an HT40 mode)
 - ⇒ **Select channel :**
 - IEEE 802.11an HT20 Channel 60 (5300MHz)
 - IEEE 802.11an HT20 Channel 100 (5500MHz)
 - IEEE 802.11an HT40 Channel 62 (5310MHz)
 - IEEE 802.11an HT40 Channel 102 (5510MHz)
4. All of the functions are under run.
5. Start testing

7. DYNAMIC FREQUENCY SELECTION (DFS)

Interference Threshold values, Master or Client incorporating In-Service

Maximum Transmit Power	Value (see note)
≥ 200 mW	-64 dBm
< 200 mW	-62 dBm

Note: 1. This is the level at the input of the receiver assuming a 0 dBi receive antenna.

2. Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
U-NII Detection Bandwidth	Minimum 80% of the 99% transmission power bandwidth.

Note 1. The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3. During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Radar Test Waveforms Minimum Step

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radars Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \times \left(\frac{19 \times 10^6}{PRI_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radars Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing tests.

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Test A & B.

Table 5a – Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (µsec)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Long Pulse Radar Test Waveform

Radar Waveform	Pulse Width (µsec)	Chirp Width (µsec)	PRI (µsec)	Pulses per Burst	Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Pulses Per Hop	Hopping Rate (kHz)	Burst Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.33	300	70%	30


Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
Non-Occupancy Period	Yes	Yes	Yes
DFS Detection Threshold	Yes	Not Required	Yes
Channel Availability Check Time	Yes	Not Required	Not Required
Uniform Spreading	Yes	Not Required	Not Required
U-NII Detection Bandwidth	Yes	Not Required	Yes

Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not Required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not Required	Yes

CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

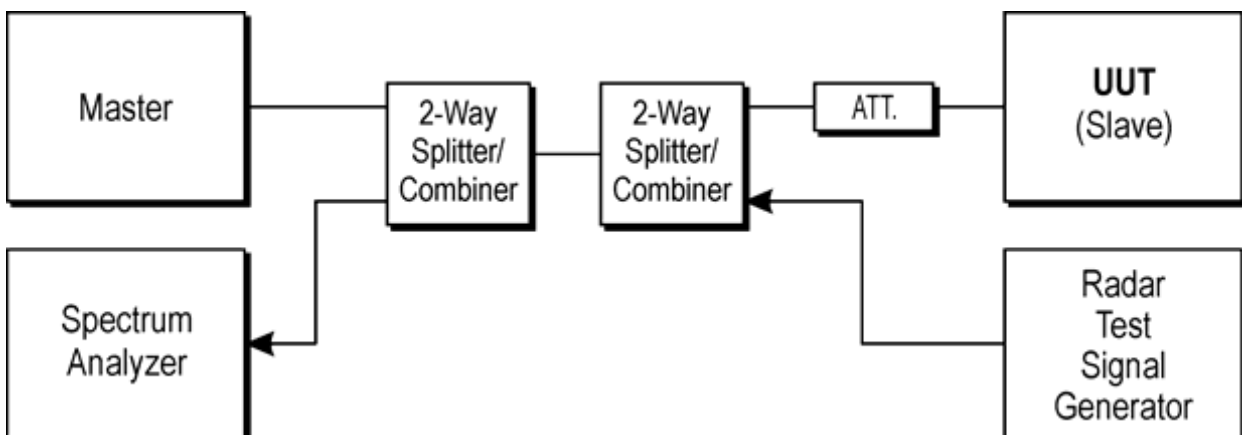

DESCRIPTION OF EUT**Overview Of EUT With Requirements**

The firmware installed in the EUT during testing was:

Firmware Rev: 10.0.0.285


The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Client without radar detection.



TEST CHANNELS AND METHOD

All tests were performed at a channel center frequency of 5300MHz / 5310MHz / 5500MHz / 5510MHz.


Measurements were performed using conducted test methods.

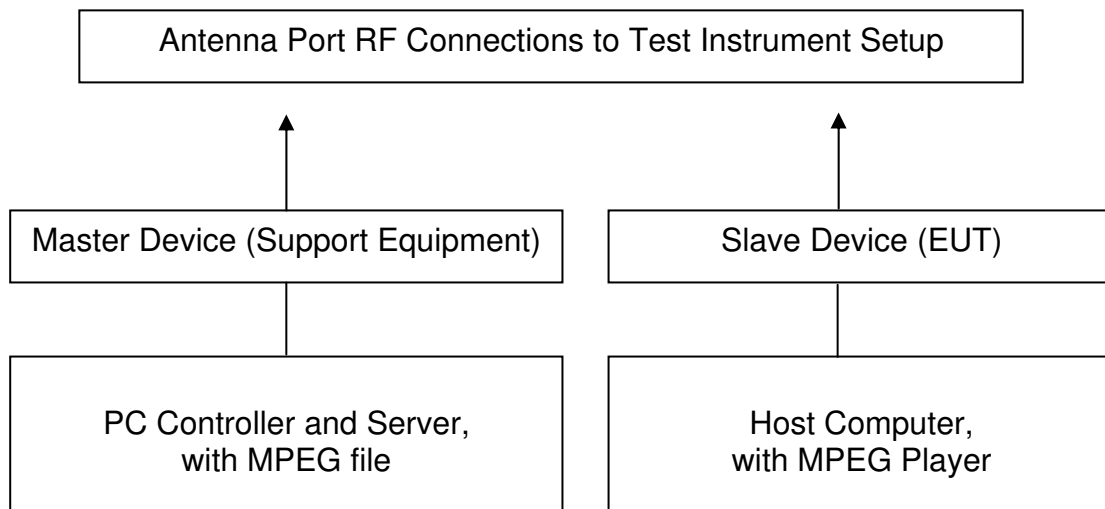TEST SETUP

Radar Waveform calibration Plot

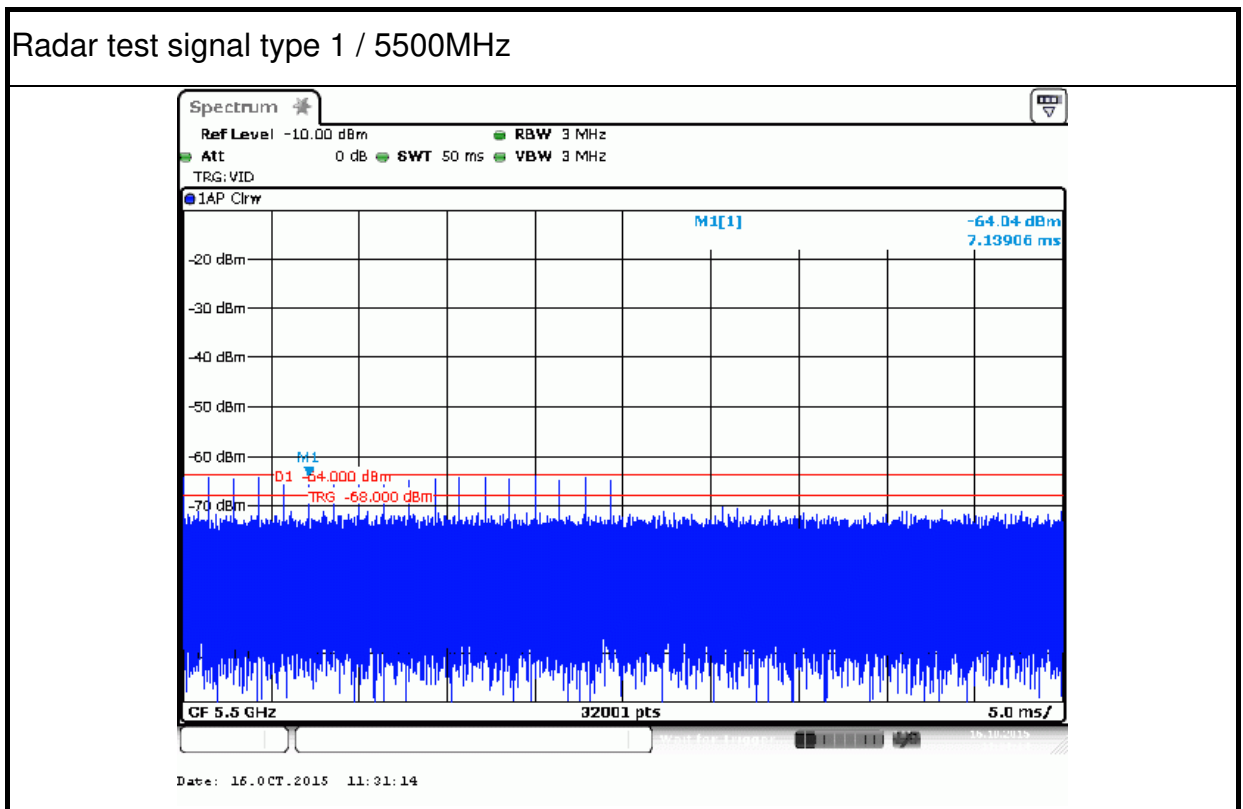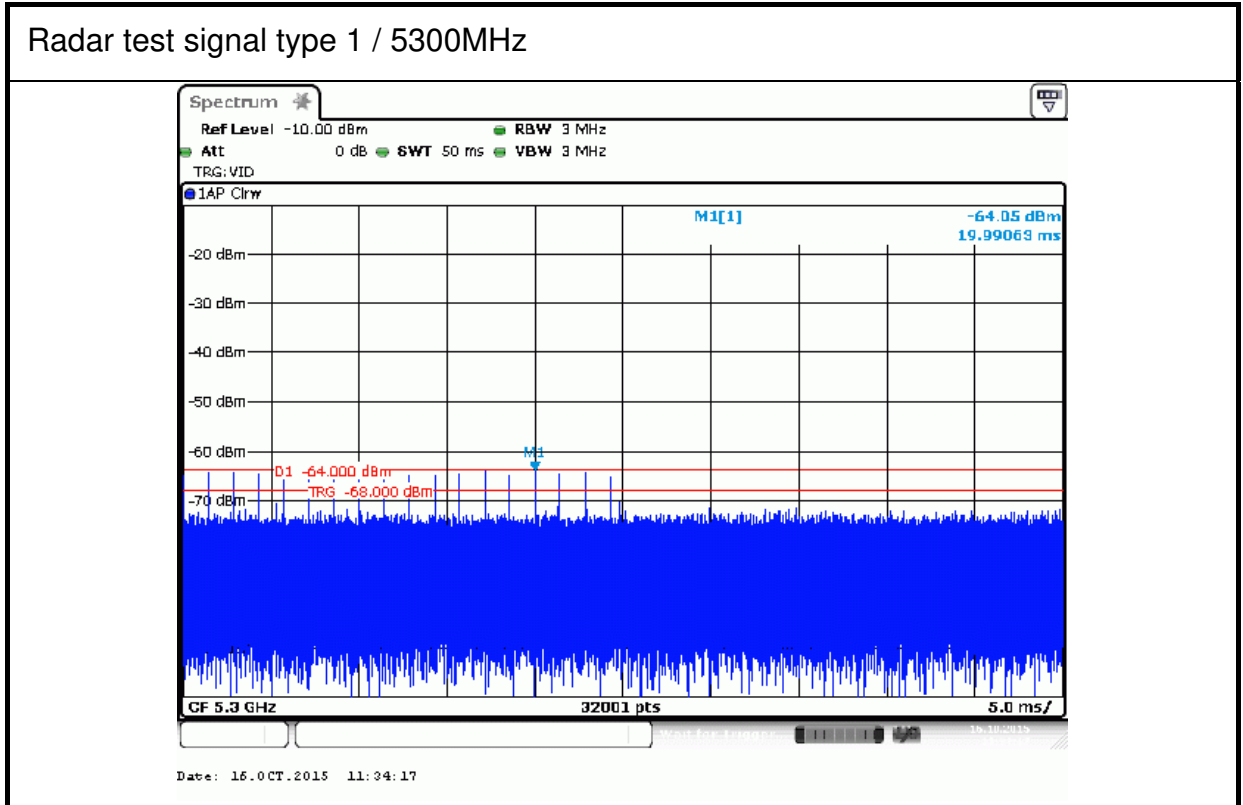


Radar test signal type 1 / 5310MHz

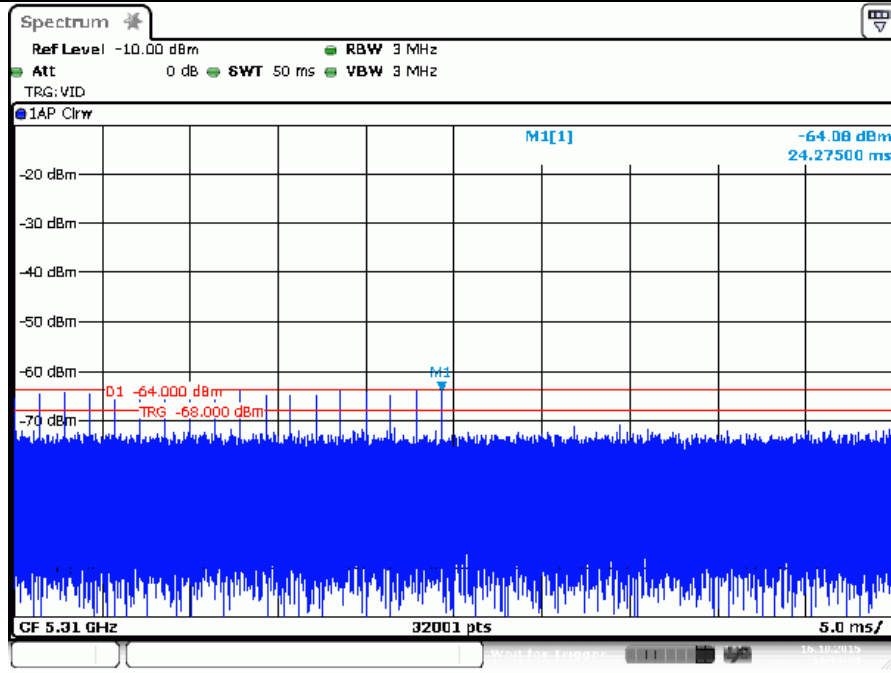



Date: 16.OCT.2015 11:39:38



Radar test signal type 1 / 5510MHz

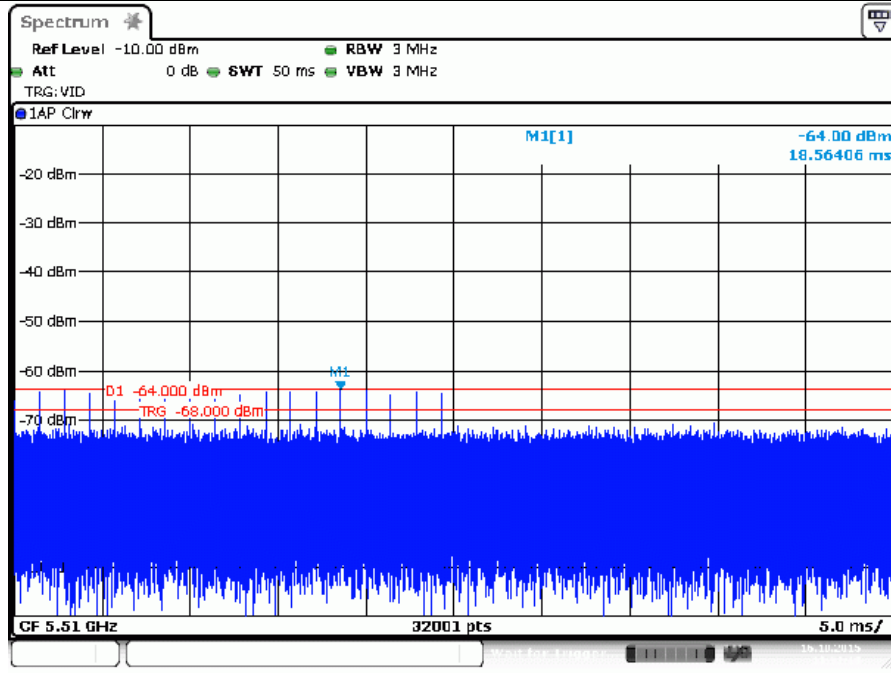



Date: 16.OCT.2015 11:32:18



Test Result of Duty Plots

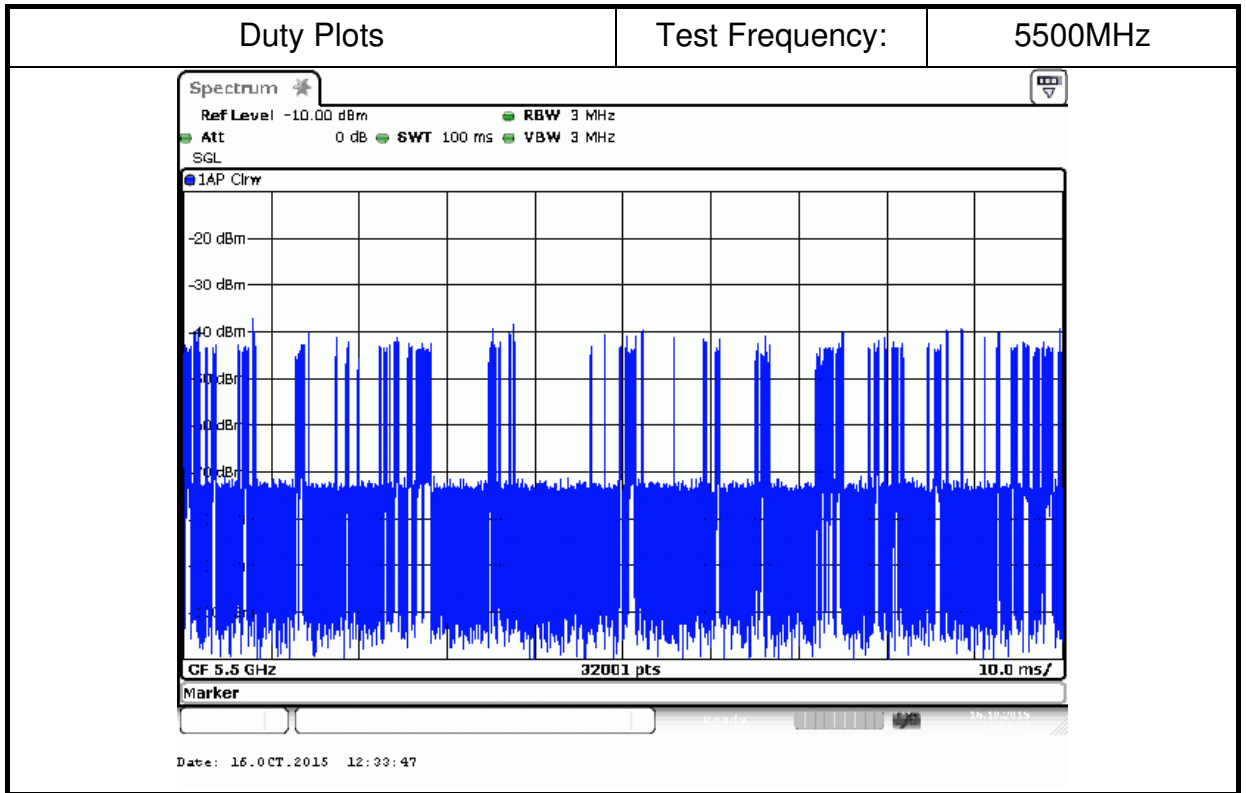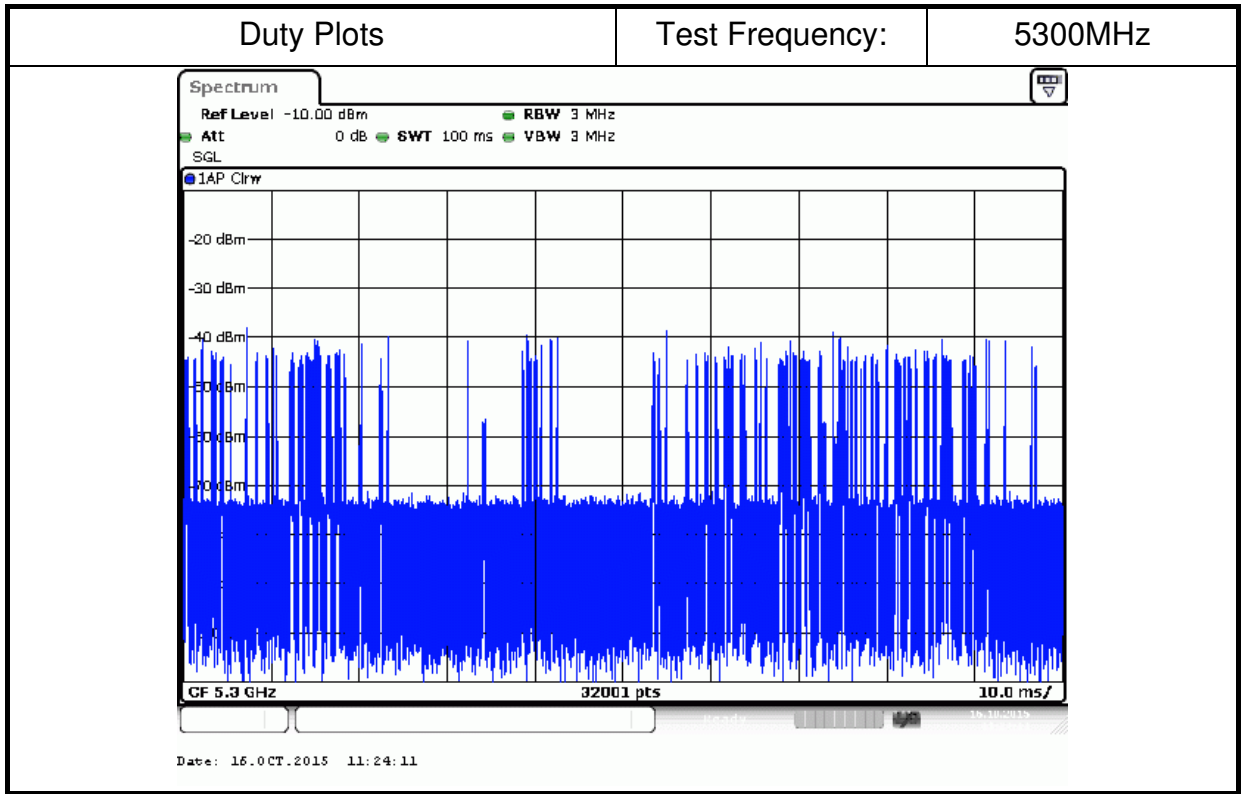

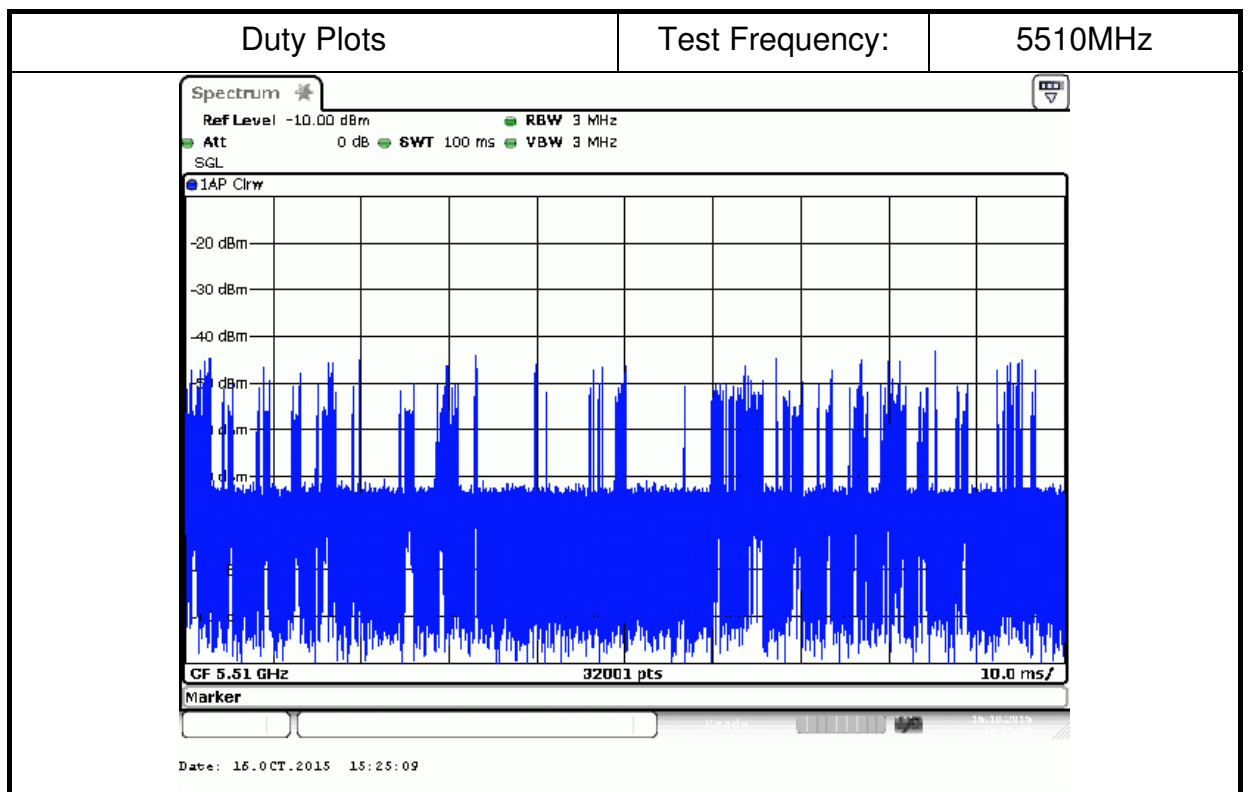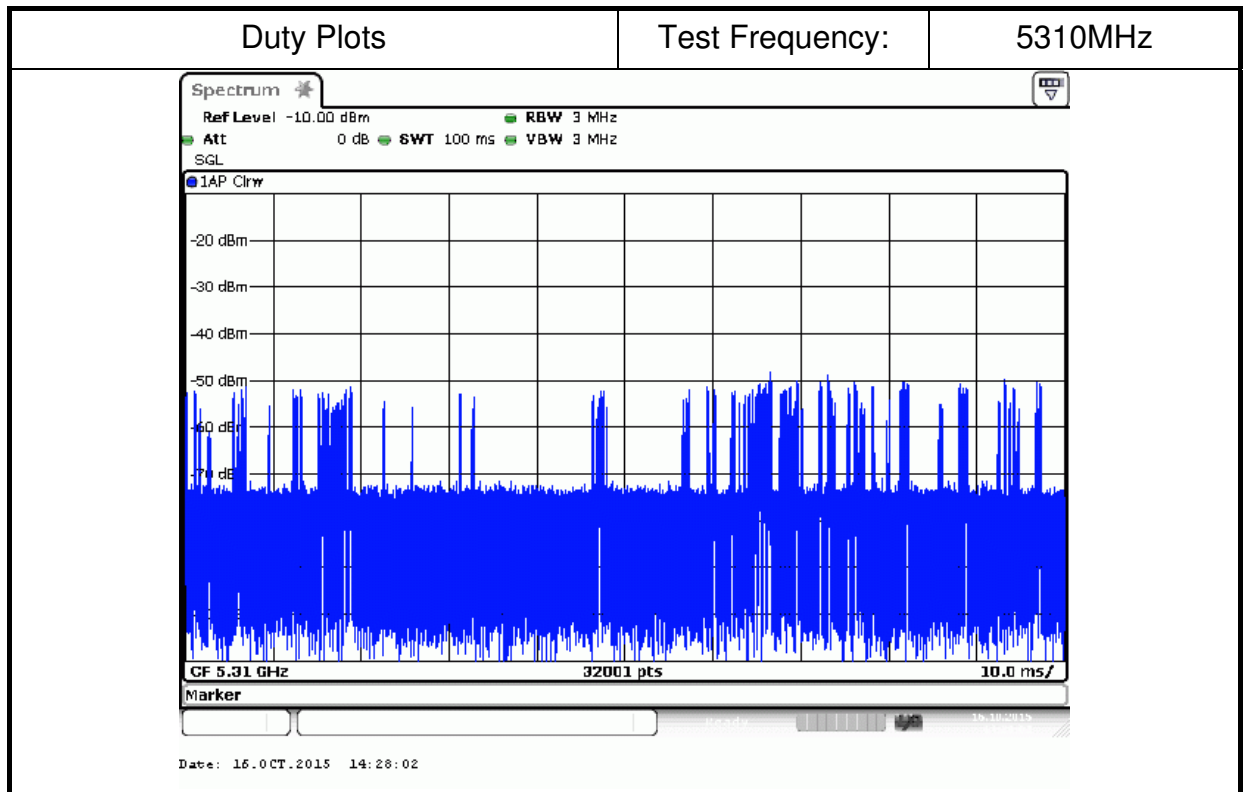


Test Result of Channel Shutdown Time Plots

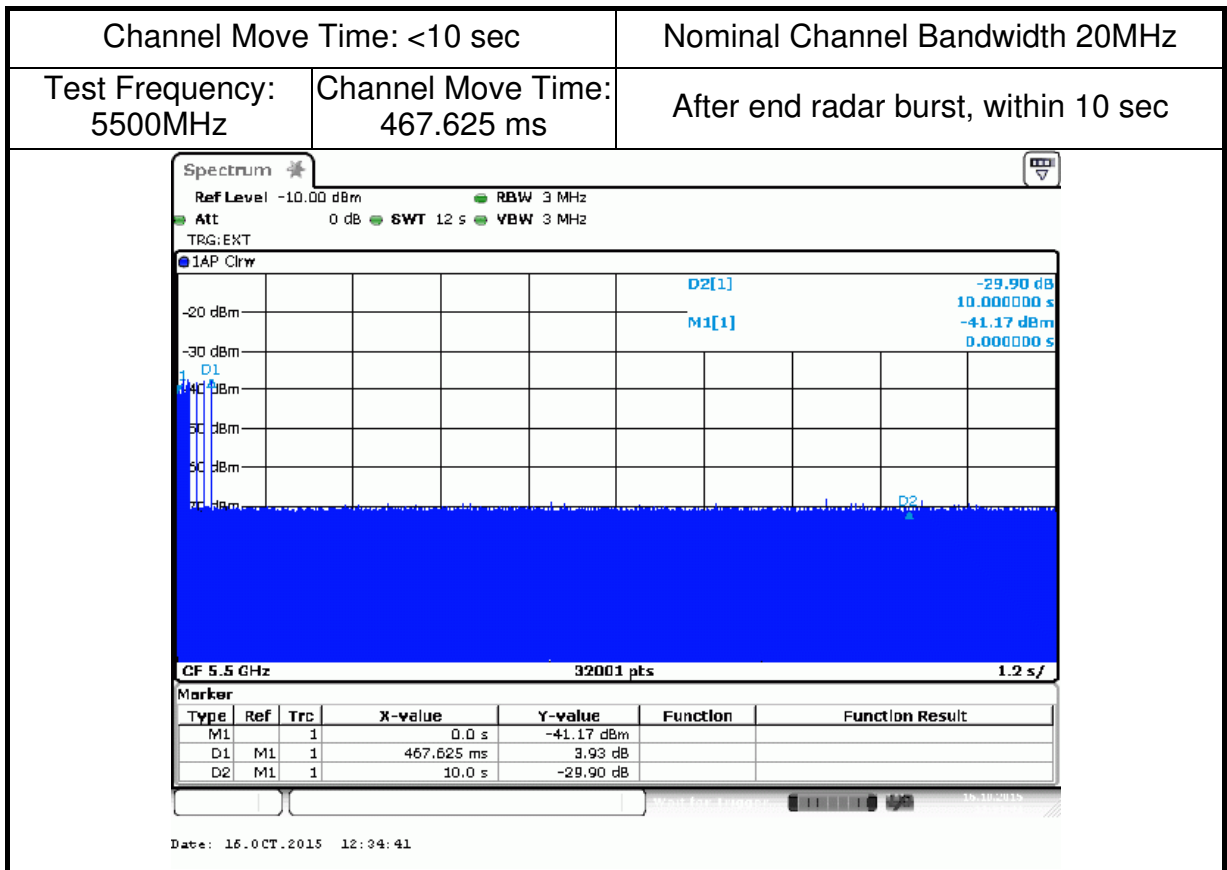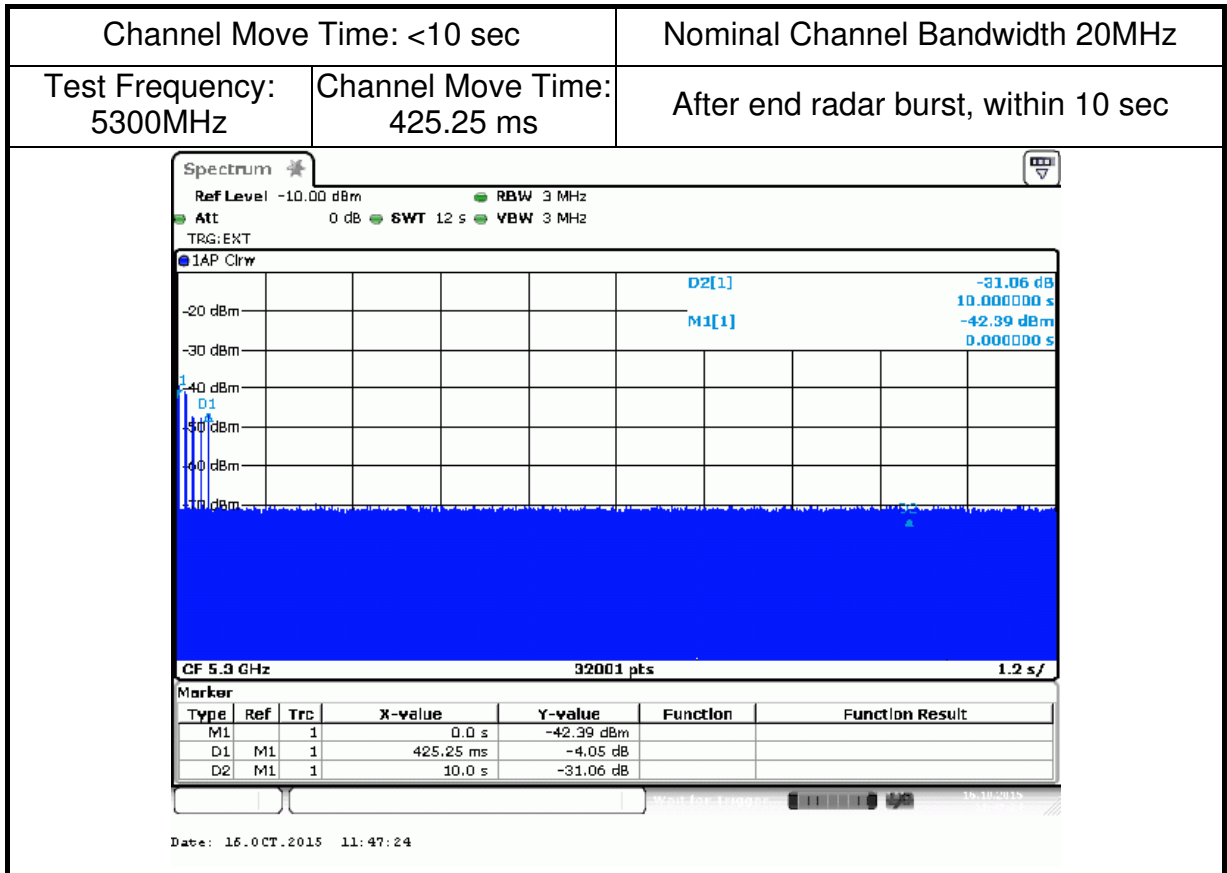


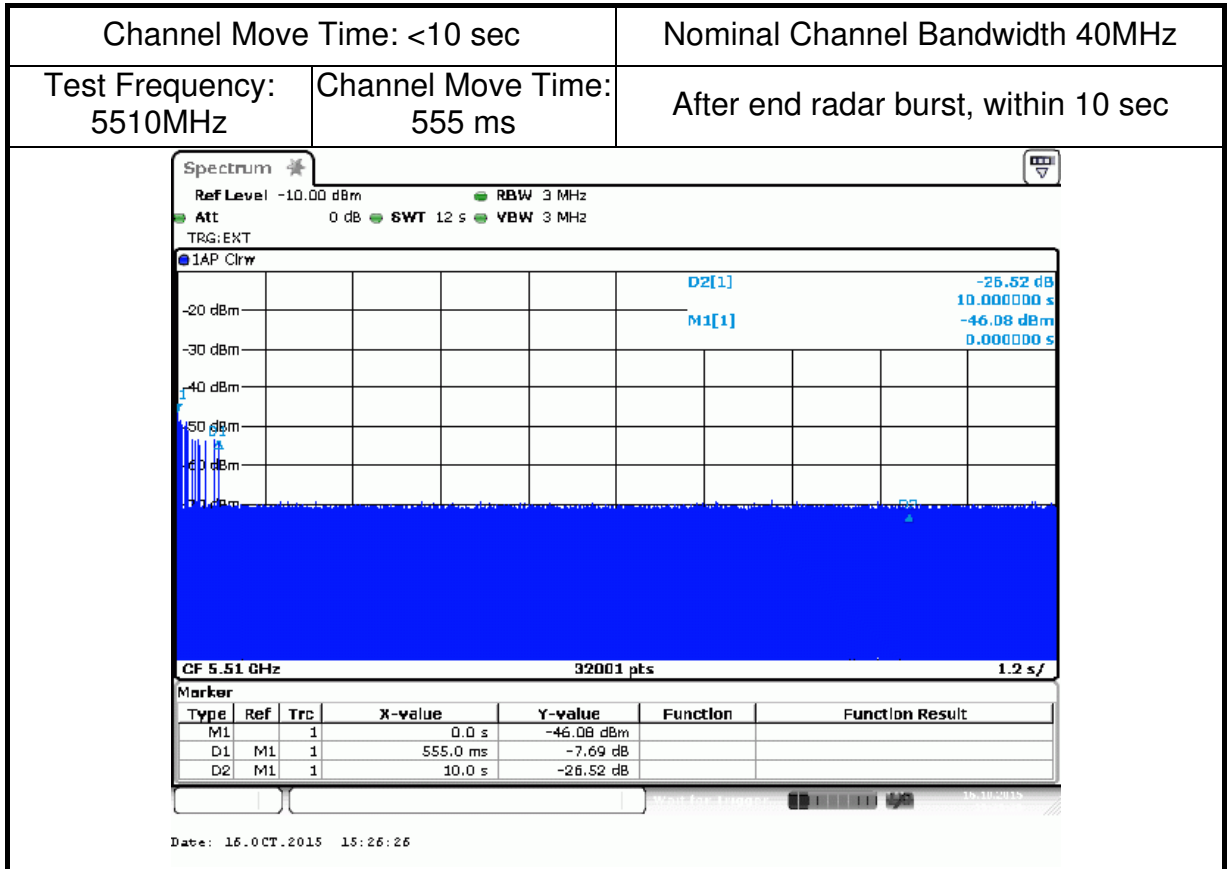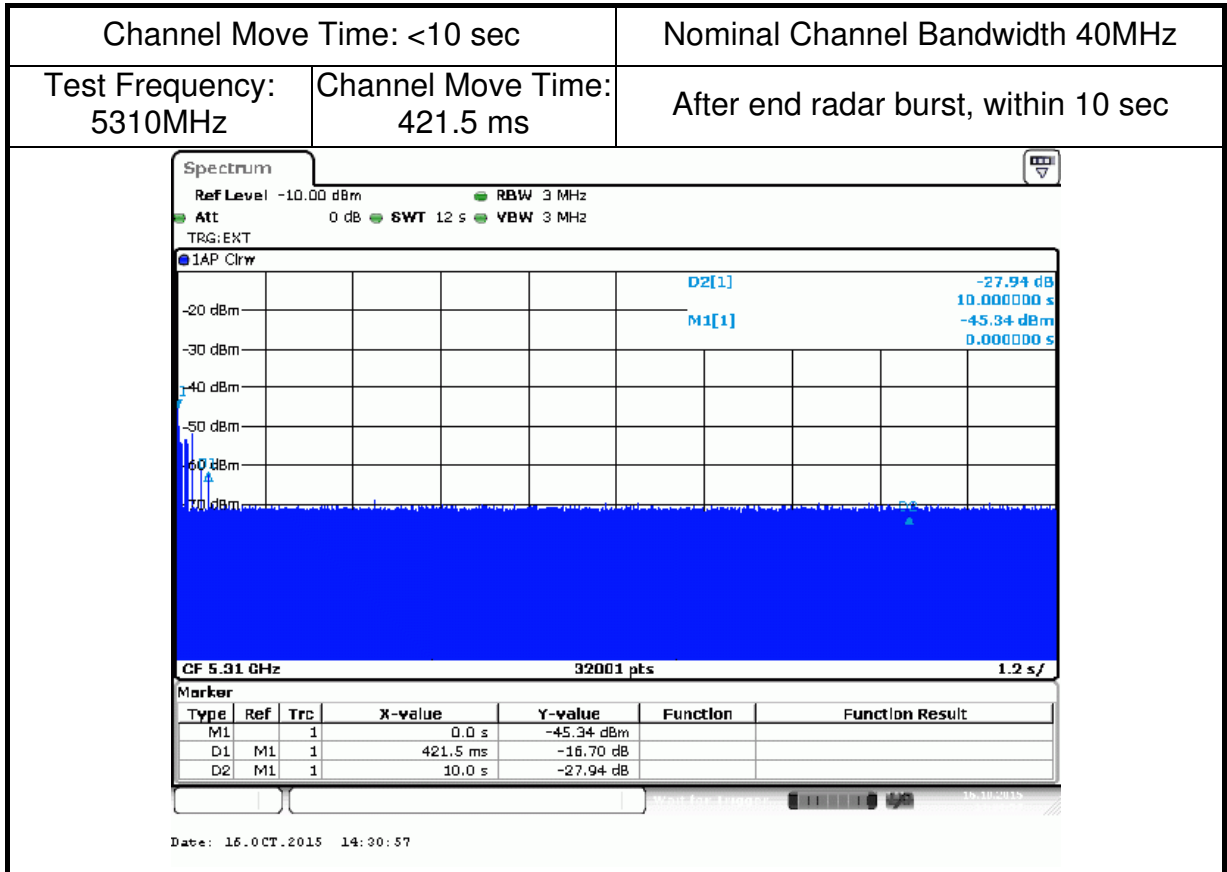

Channel Closing Transmission Time: <60ms		Nominal Channel Bandwidth 20MHz
Test Frequency: 5300MHz	Channel Closing Transmission Time: 0.6564 ms	Number of Sampling Bins (N1): 3

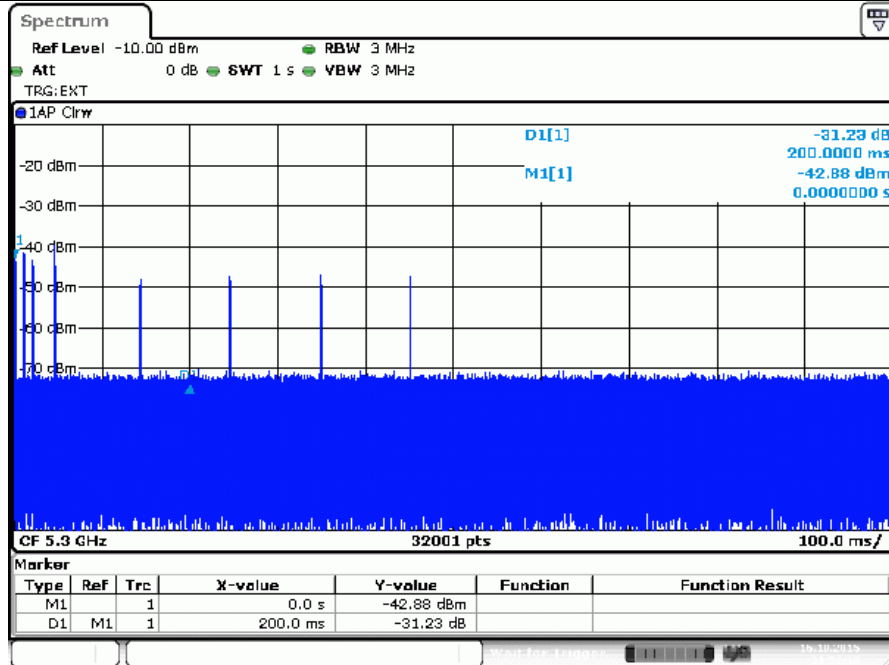


Date: 16.OCT.2015 11:52:18

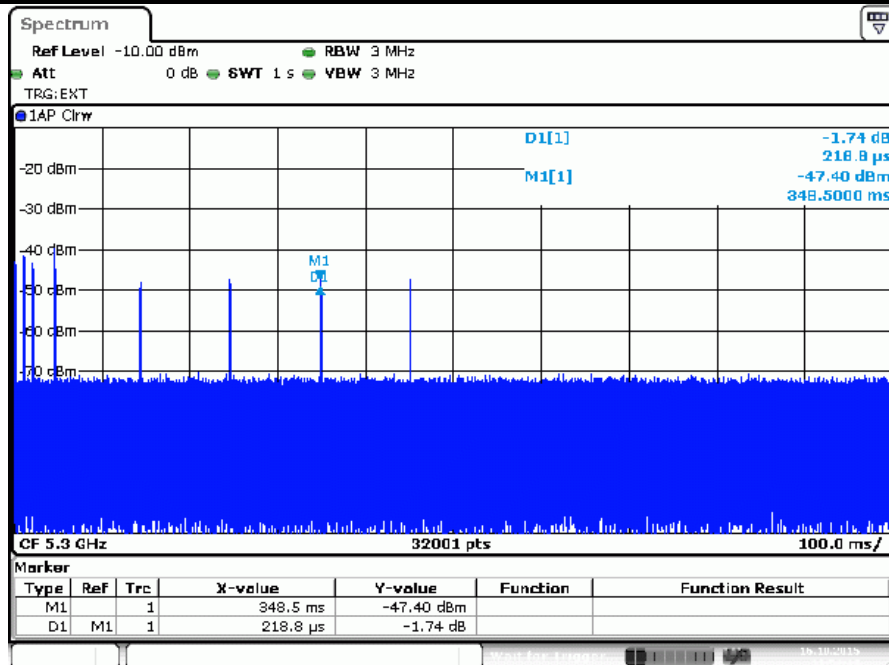


Date: 16.OCT.2015 11:53:13

Note1: $5300 = N1 \times Dwell1 = 0.2188\mu s \times 3 = 0.6564ms$

Channel Closing Transmission Time: <60ms		Nominal Channel Bandwidth 20MHz
Test Frequency: 5500MHz	Channel Closing Transmission Time: 1.0314 ms	Number of Sampling Bins (N1): 3

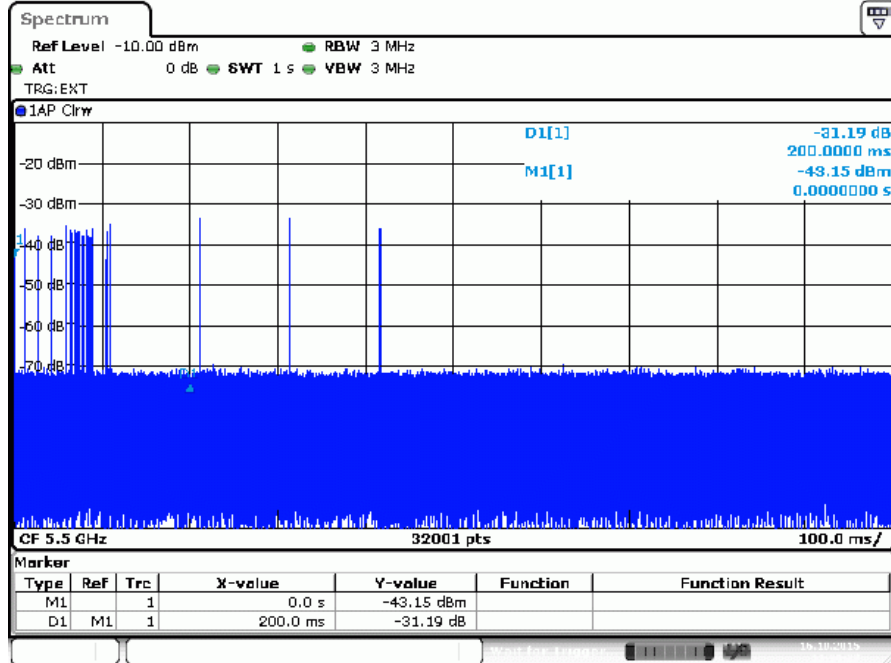


Date: 16.OCT.2015 12:39:27

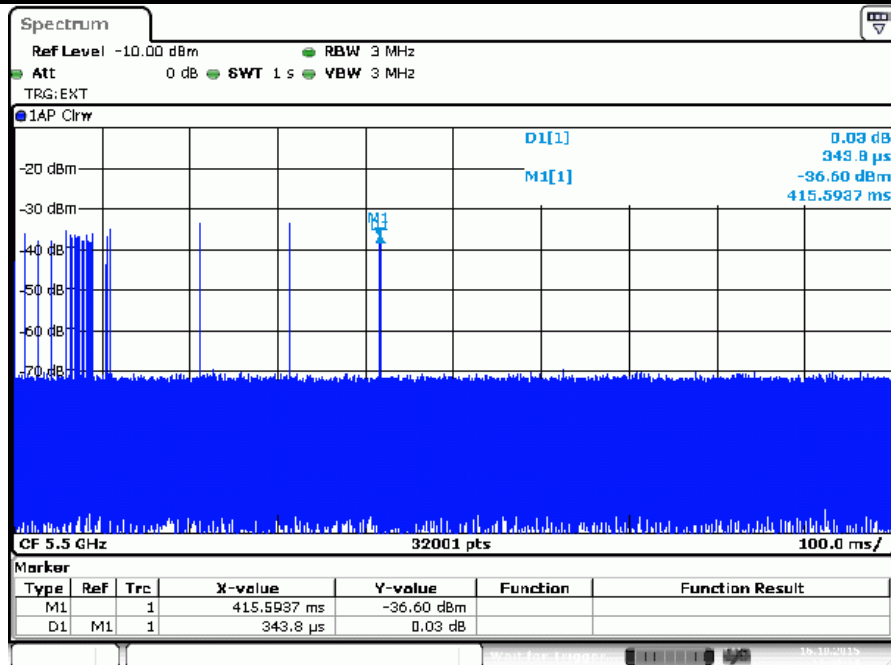


Date: 16.OCT.2015 12:40:13

Note1: $5500 = N1 \times Dwell1 = 0.3438\mu s \times 3 = 1.0314ms$

Channel Closing Transmission Time: <60ms		Nominal Channel Bandwidth 40MHz
Test Frequency: 5310MHz	Channel Closing Transmission Time: 1.5309 ms	Number of Sampling Bins (N1): 7

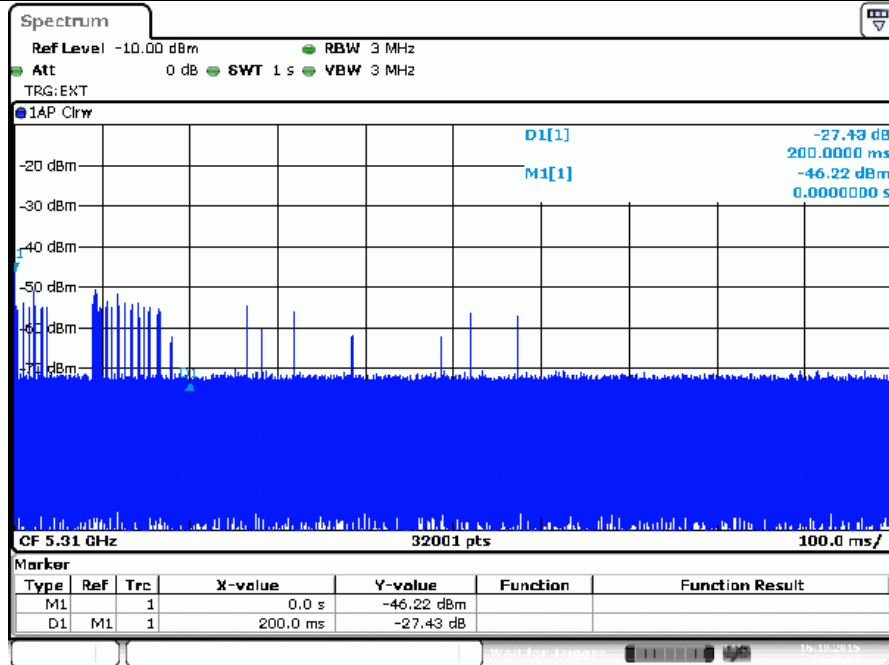


Date: 16.OCT.2015 14:40:34

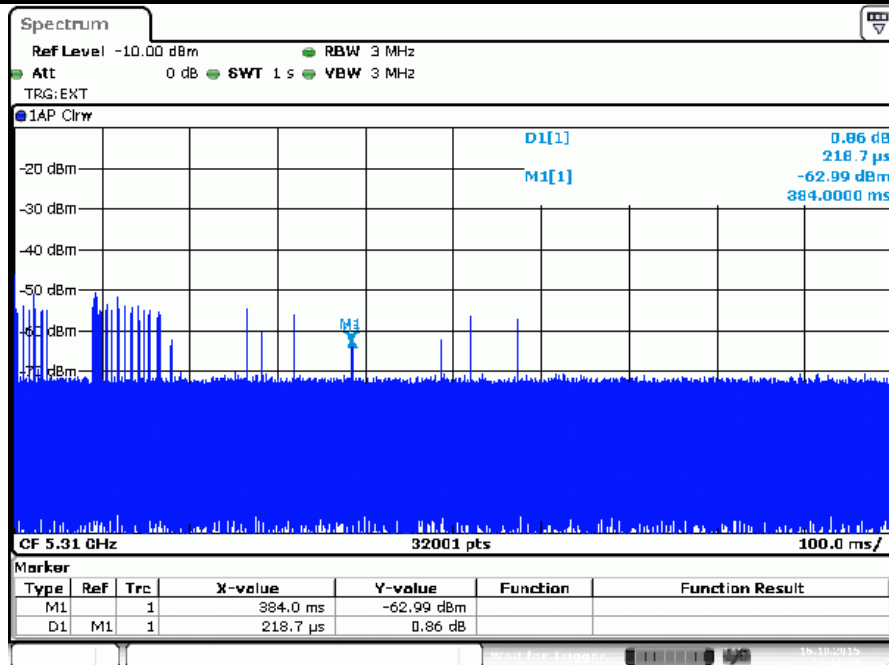


Date: 16.OCT.2015 14:41:29

Note1: $5310 = N1 \times Dwell1 = 0.2187\mu s \times 7 = 1.5309ms$

Channel Closing Transmission Time: <60ms		Nominal Channel Bandwidth 40MHz
Test Frequency: 5510MHz	Channel Closing Transmission Time: 1.0311 ms	Number of Sampling Bins (N1): 3

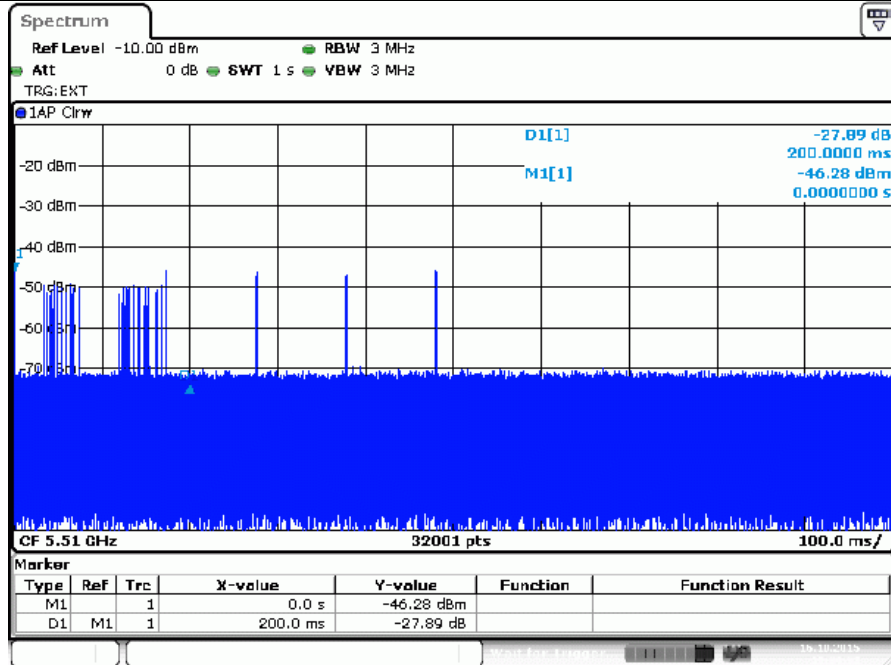

Date: 16.OCT.2015 15:30:32

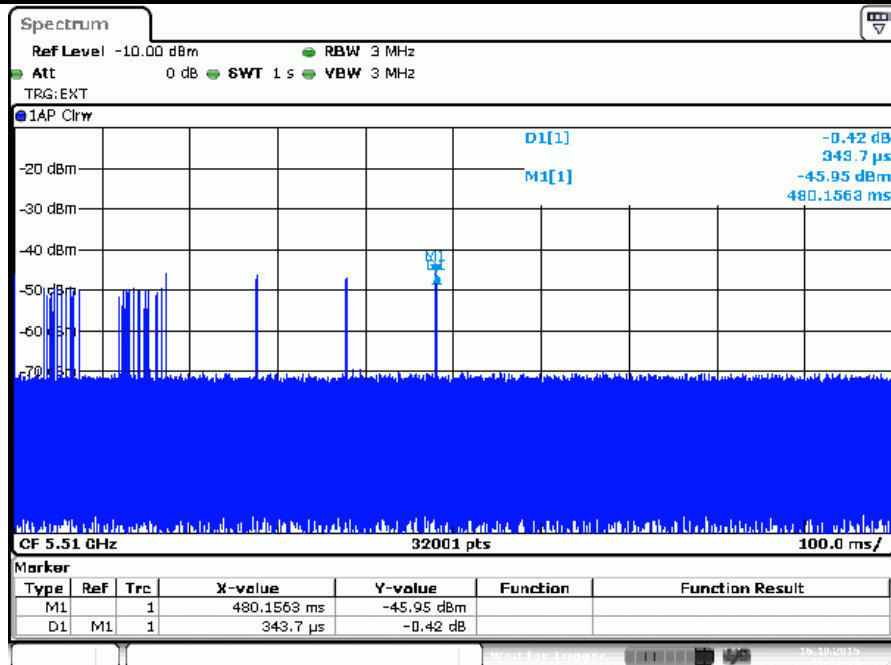

Date: 16.OCT.2015 15:31:15

Note1: $5510 = N1 \times Dwell1 = 0.3437\mu s \times 3 = 1.0311ms$