


Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

120 dBuV/m

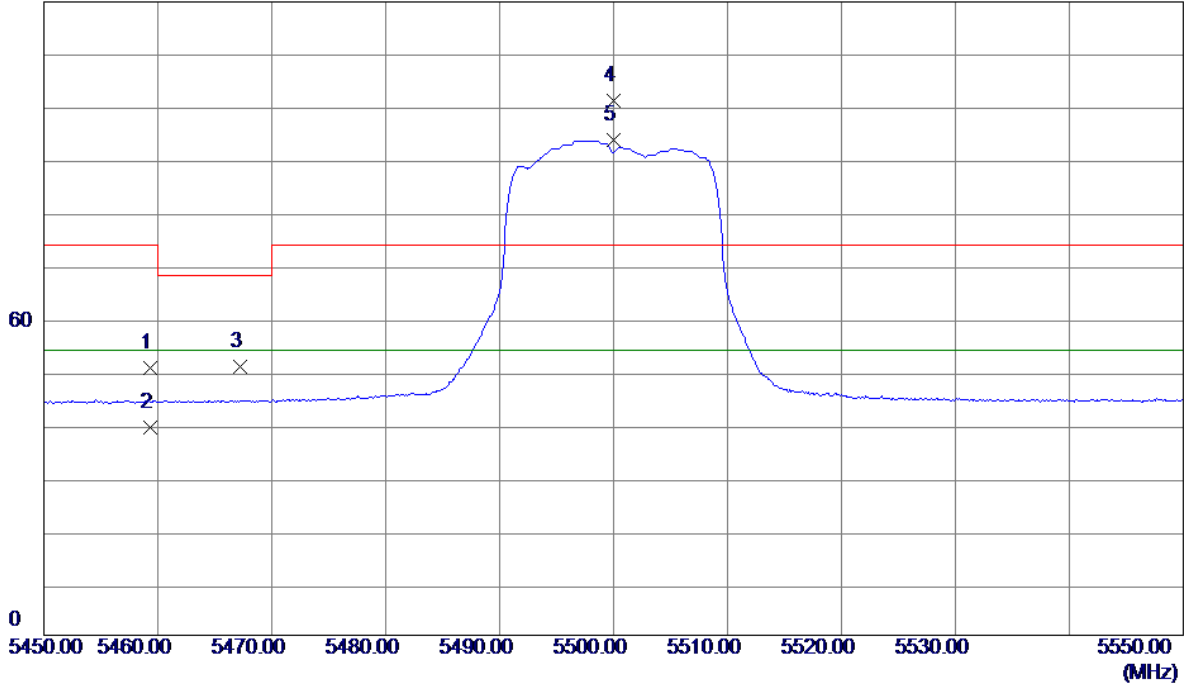


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.3400	12.71	37.88	50.59	74.00	-23.41	Peak	
2	5459.3400	1.57	37.88	39.45	54.00	-14.55	AVG	
3	5467.2700	13.09	37.88	50.97	68.20	-17.23	Peak	
4	5500.0000	63.38	37.92	101.30	74.00	27.30	Peak	No Limit
5 *	5500.0000	55.80	37.92	93.72	54.00	39.72	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical


120 dBuV/m

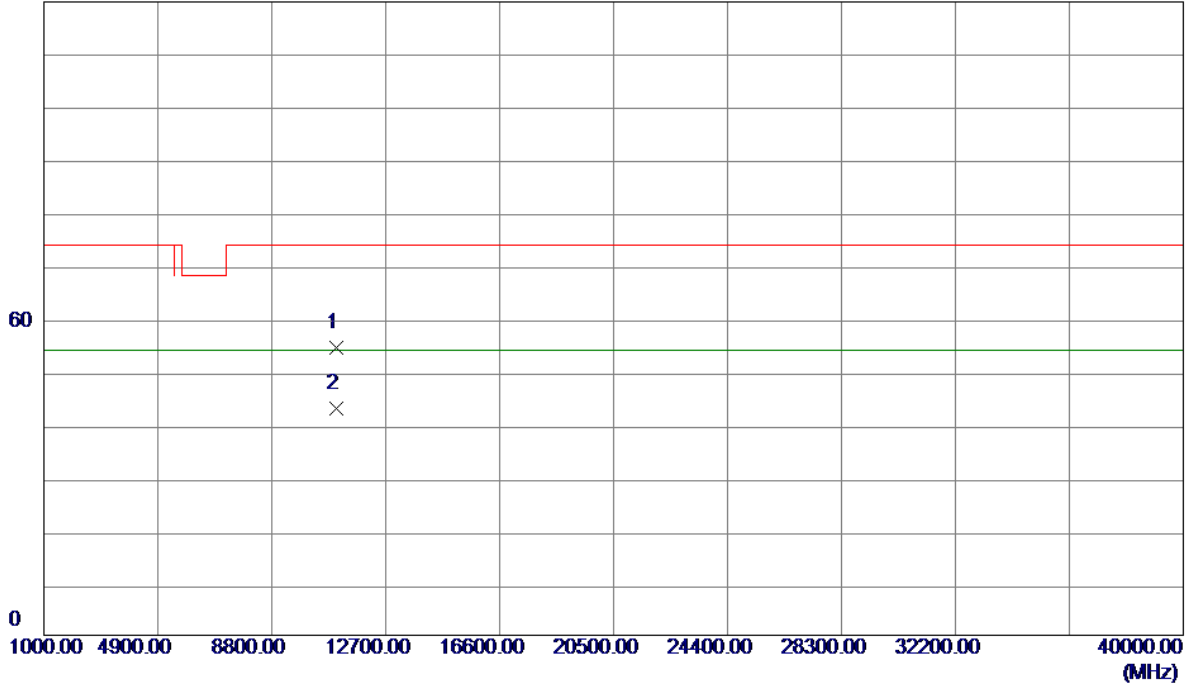

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	51.58	2.85	54.43	74.00	-19.57	Peak	
2 *	11000.0000	40.14	2.85	42.99	54.00	-11.01	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

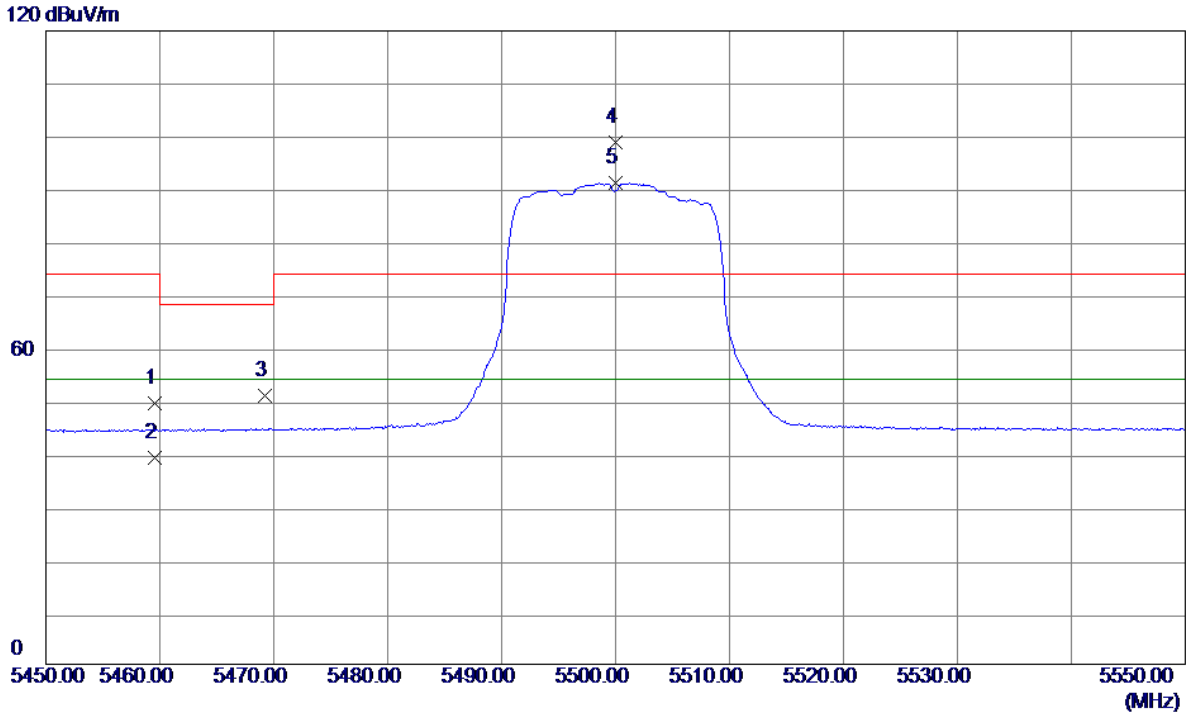

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.5299	11.53	37.88	49.41	74.00	-24.59	Peak	
2	5459.5299	1.30	37.88	39.18	54.00	-14.82	AVG	
3	5469.2700	13.00	37.89	50.89	68.20	-17.31	Peak	
4	5500.0000	60.96	37.92	98.88	74.00	24.88	Peak	No Limit
5 *	5500.0000	53.20	37.92	91.12	54.00	37.12	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

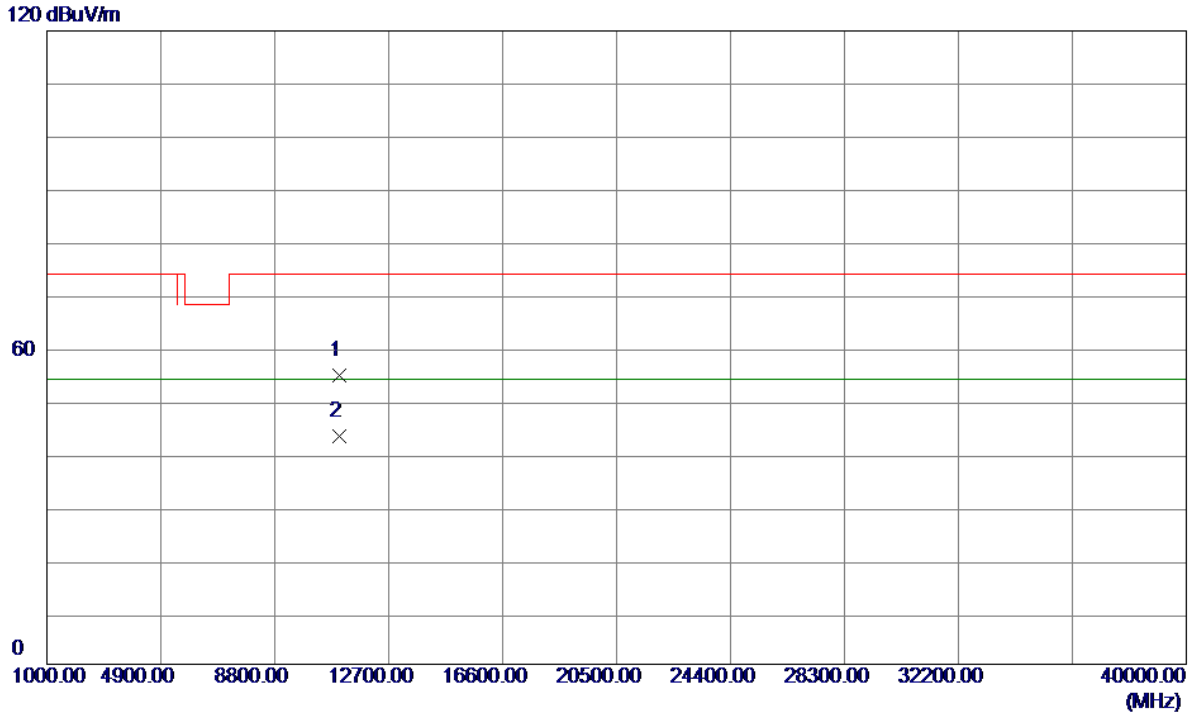


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	51.96	2.85	54.81	74.00	-19.19	Peak	
2 *	11000.0000	40.41	2.85	43.26	54.00	-10.74	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz

Vertical

120 dBuV/m

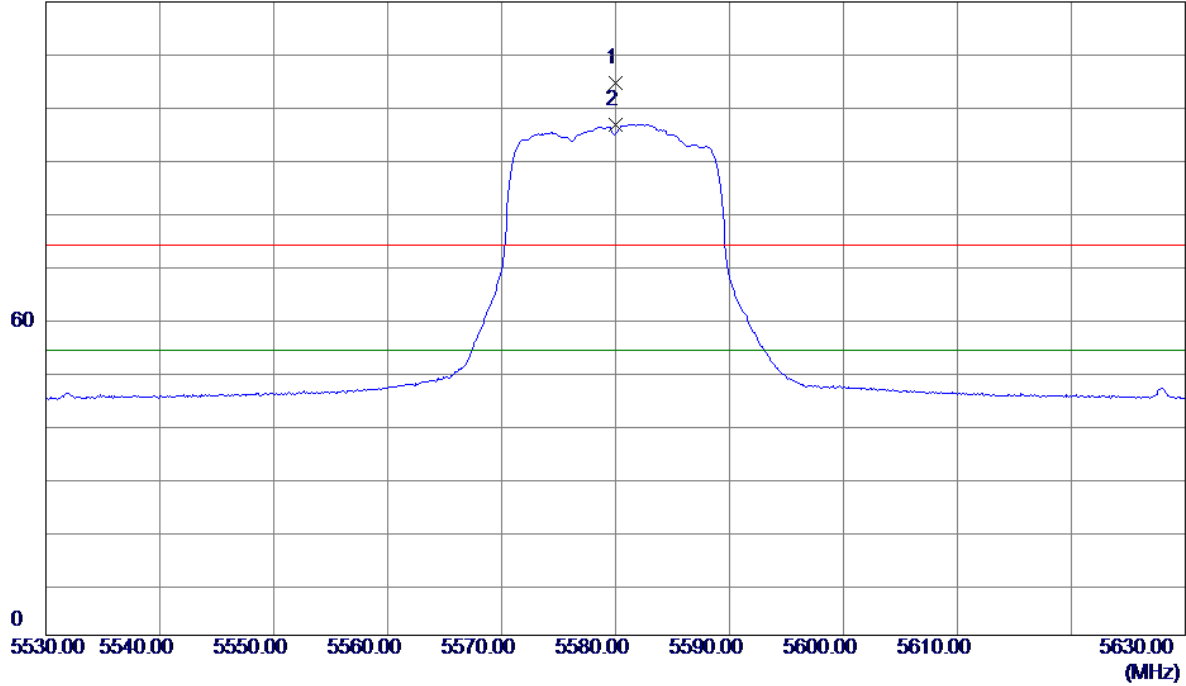


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	66.59	38.14	104.73	74.00	30.73	Peak	No Limit
2 *	5580.0000	58.66	38.14	96.80	54.00	42.80	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz

Vertical

120 dBuV/m

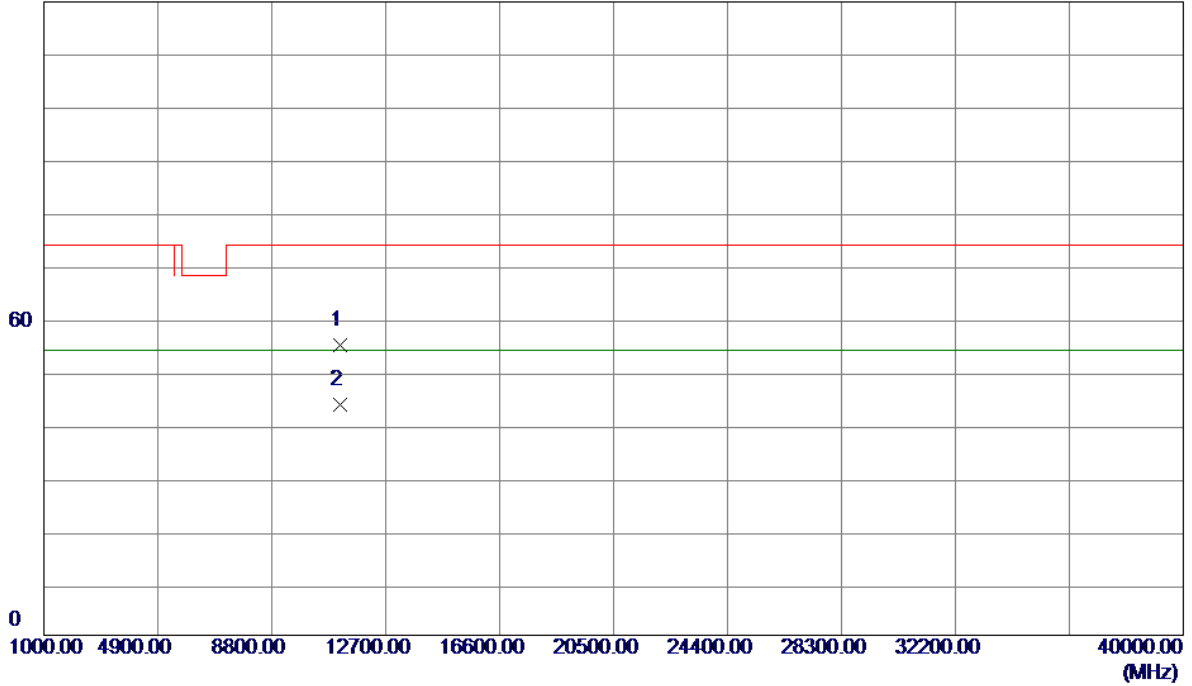


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	51.96	3.03	54.99	74.00	-19.01	Peak	
2 *	11160.0000	40.73	3.03	43.76	54.00	-10.24	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz

Horizontal


120 dBuV/m

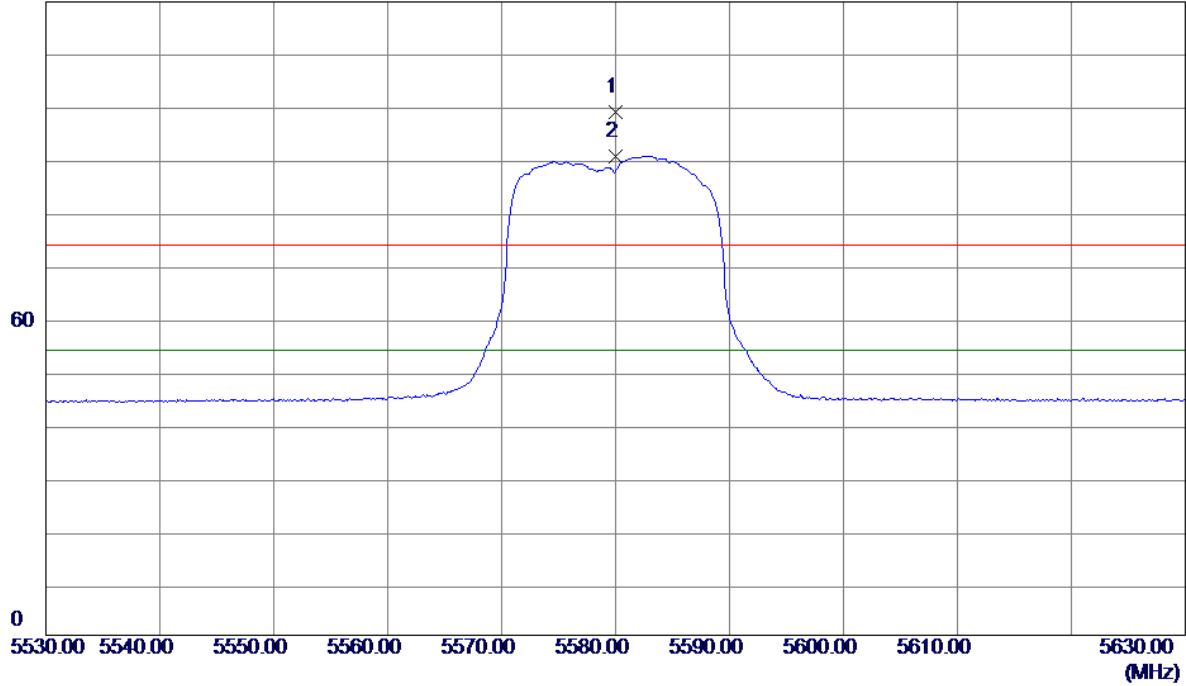

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.0000	60.95	38.14	99.09	74.00	25.09	Peak	No Limit
2 *	5580.0000	52.64	38.14	90.78	54.00	36.78	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

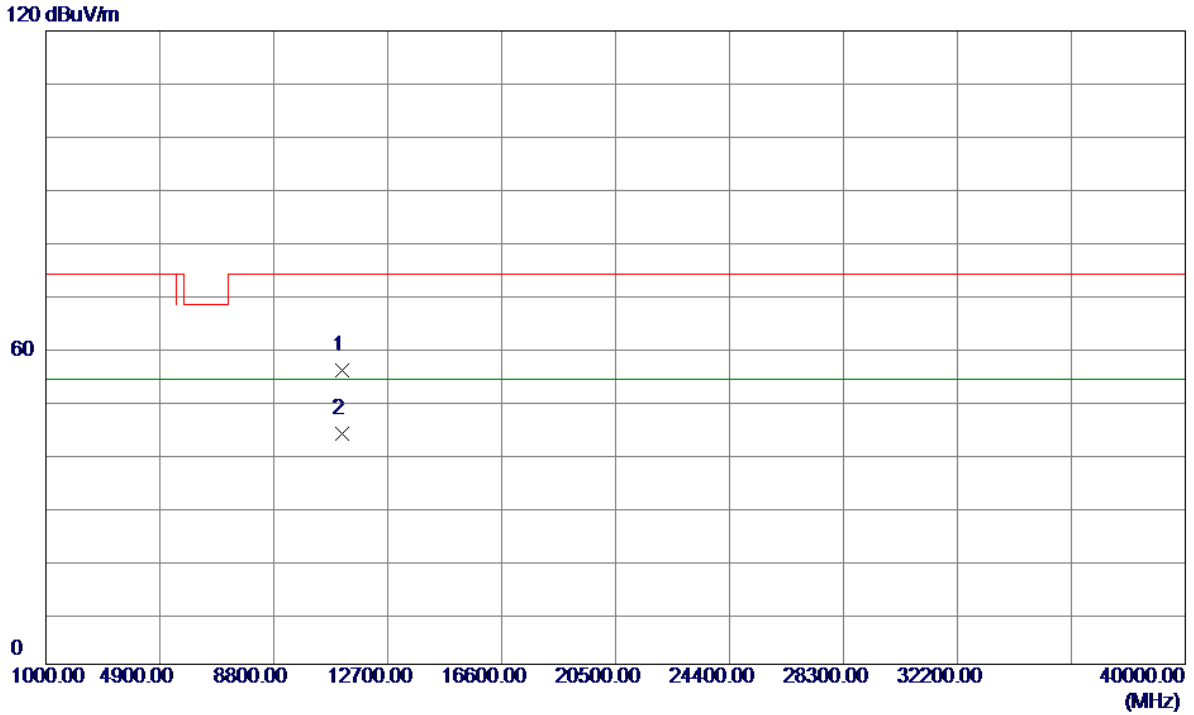

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	52.71	3.03	55.74	74.00	-18.26	Peak	
2 *	11160.0000	40.65	3.03	43.68	54.00	-10.32	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

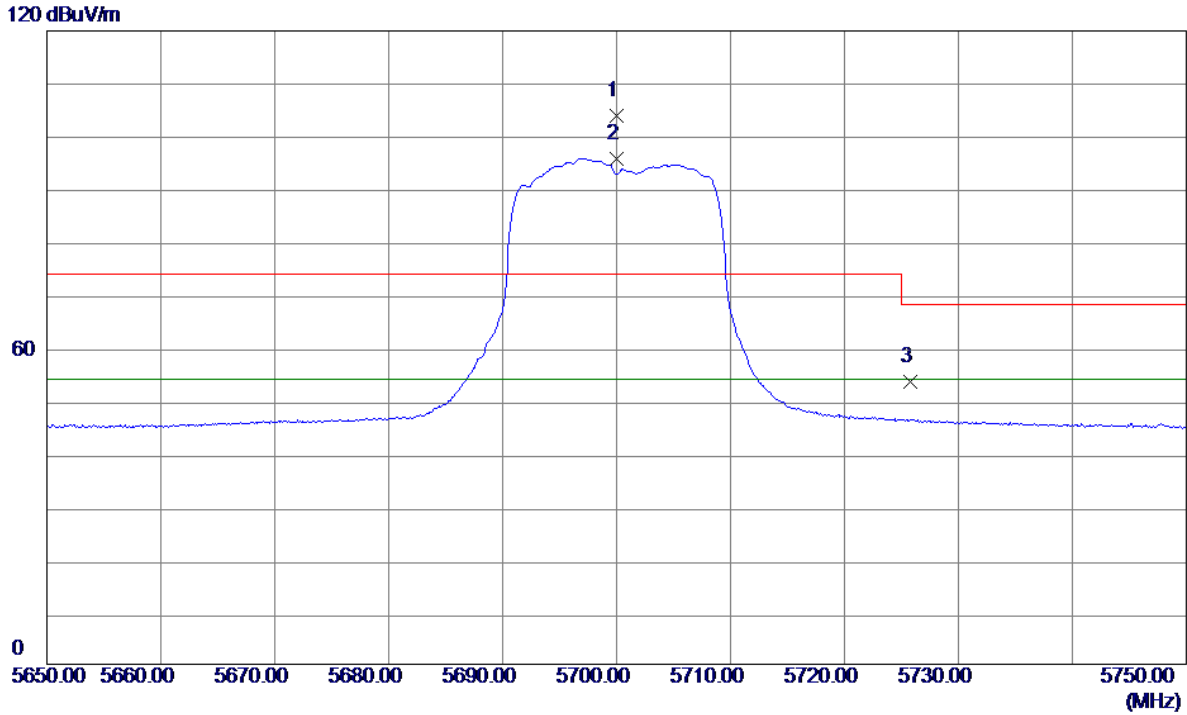


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	65.41	38.46	103.87	74.00	29.87	Peak	No Limit
2 *	5700.0000	57.25	38.46	95.71	54.00	41.71	AVG	No Limit
3	5725.7250	15.00	38.53	53.53	68.20	-14.67	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical


120 dBuV/m

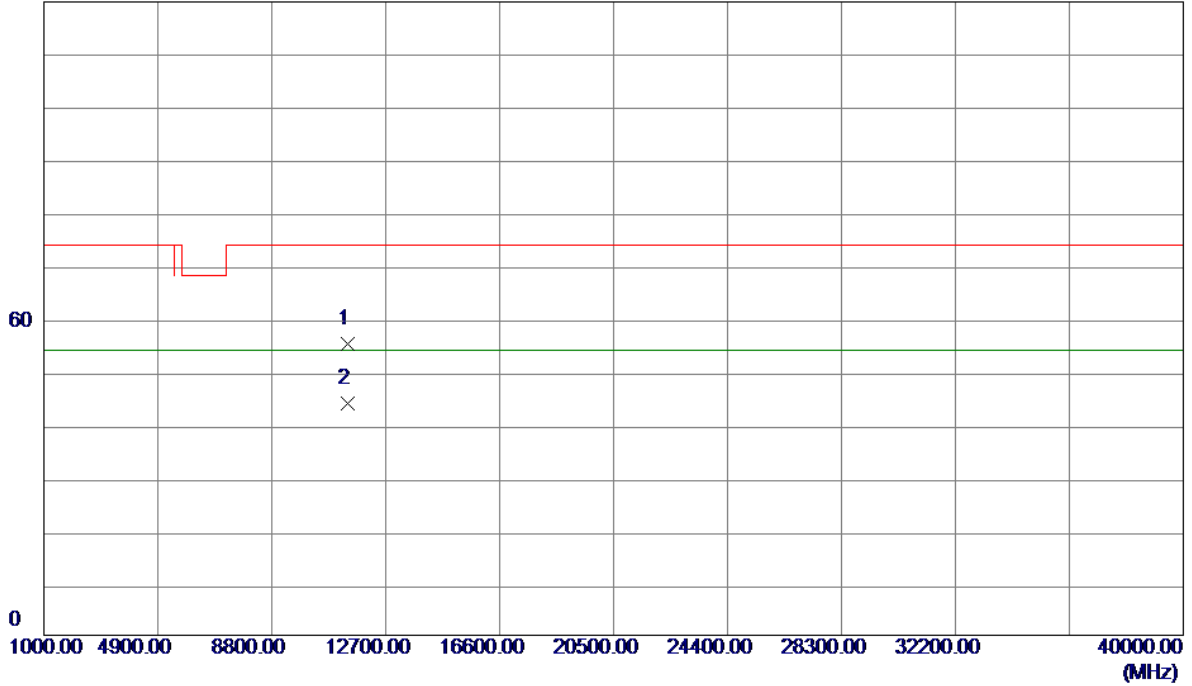

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	51.91	3.31	55.22	74.00	-18.78	Peak	
2 *	11400.0000	40.59	3.31	43.90	54.00	-10.10	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

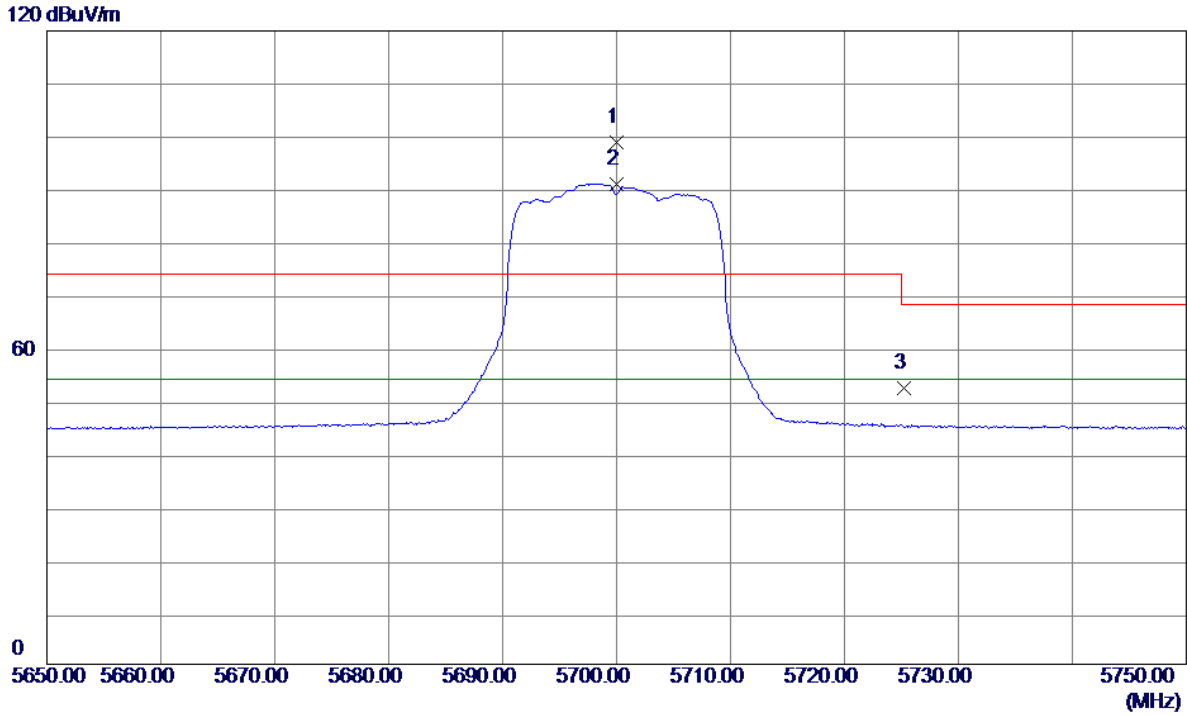

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5700.0000	60.31	38.46	98.77	74.00	24.77	Peak	No Limit
2 *	5700.0000	52.58	38.46	91.04	54.00	37.04	AVG	No Limit
3	5725.2750	13.68	38.53	52.21	68.20	-15.99	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

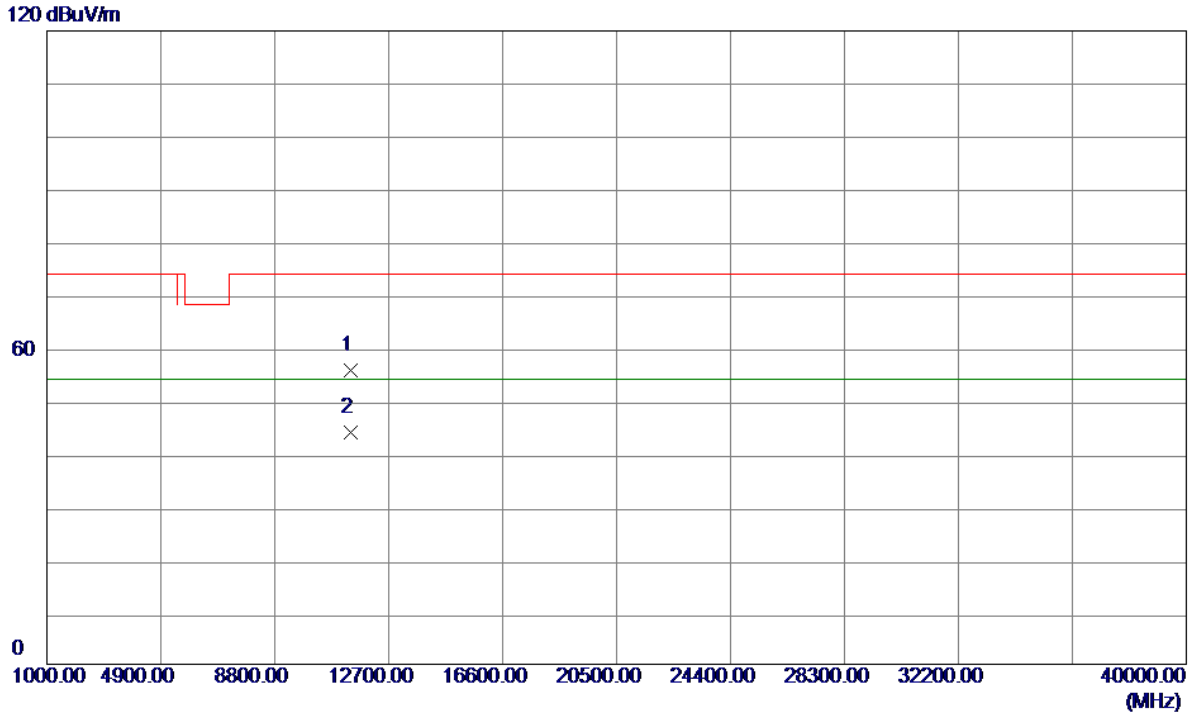


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	52.38	3.31	55.69	74.00	-18.31	Peak	
2 *	11400.0000	40.54	3.31	43.85	54.00	-10.15	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

120 dBuV/m

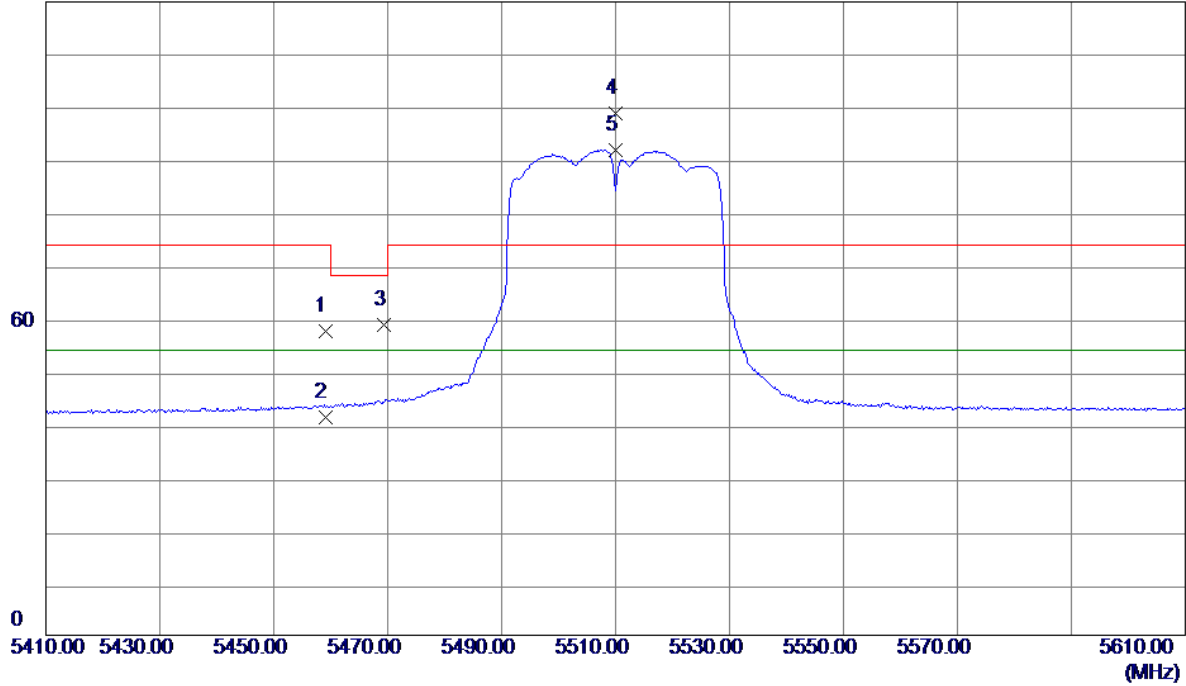


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.0000	19.64	37.88	57.52	74.00	-16.48	Peak	
2	5459.0000	3.36	37.88	41.24	54.00	-12.76	AVG	
3	5469.3700	21.02	37.89	58.91	68.20	-9.29	Peak	
4	5510.0000	60.96	37.95	98.91	74.00	24.91	Peak	No Limit
5 *	5510.0000	53.96	37.95	91.91	54.00	37.91	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

120 dBuV/m

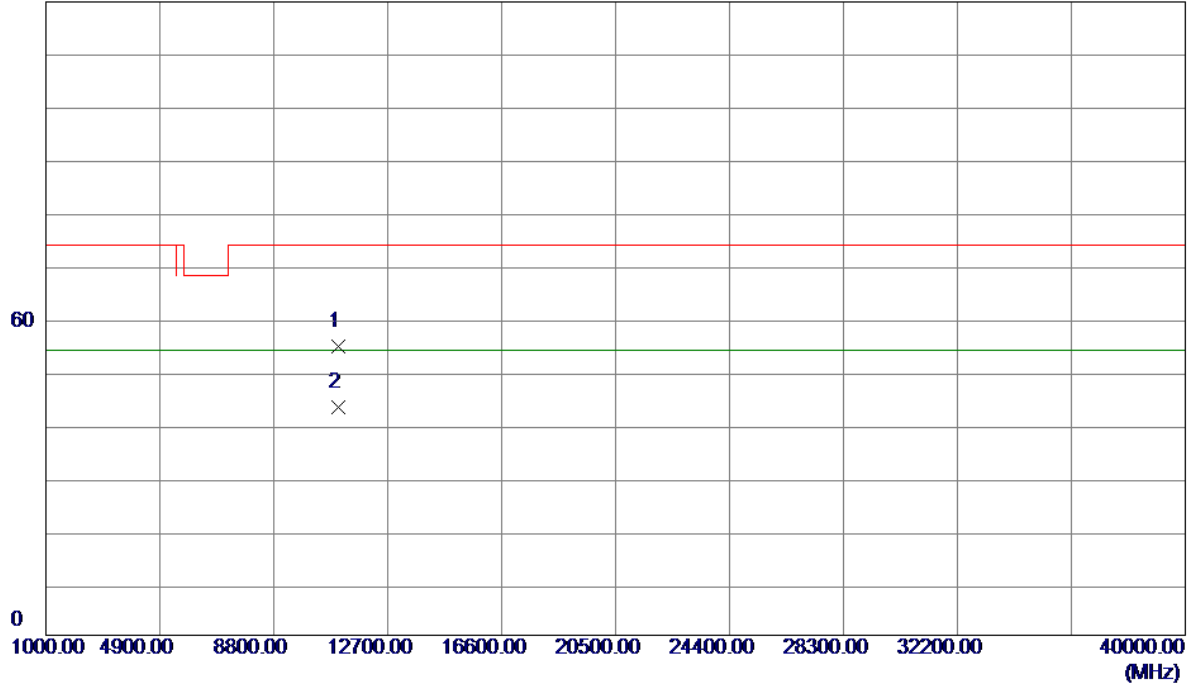


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	51.78	2.87	54.65	74.00	-19.35	Peak	
2 *	11020.0000	40.40	2.87	43.27	54.00	-10.73	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal


120 dBuV/m

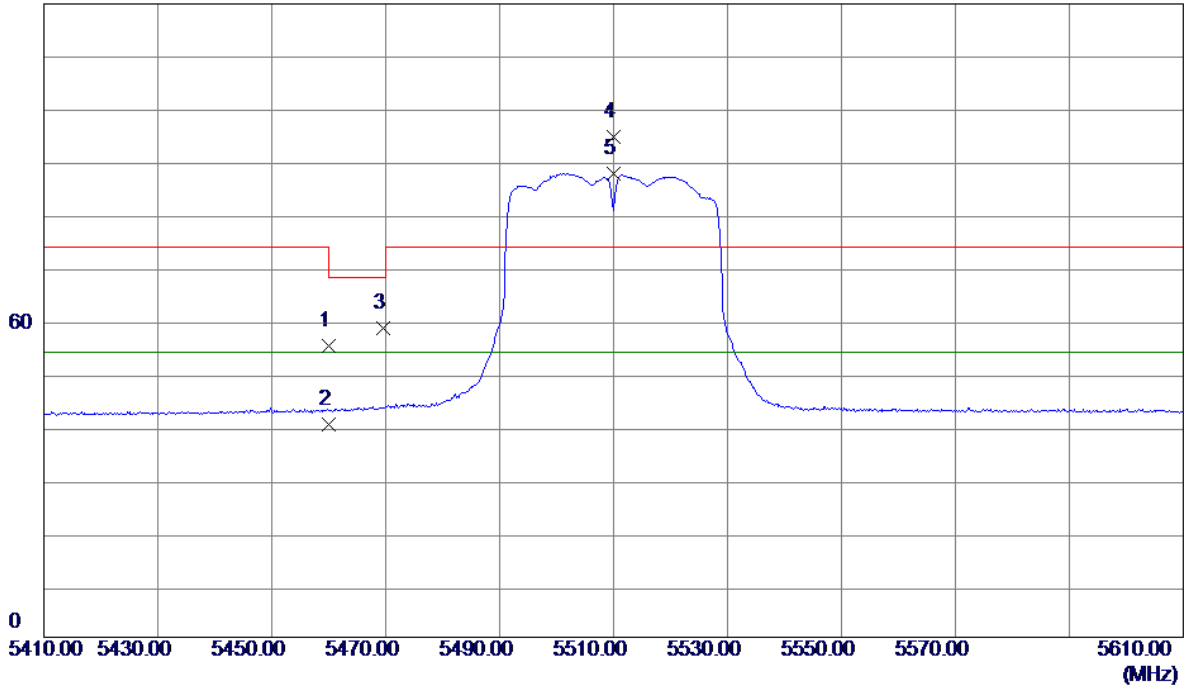

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	17.40	37.88	55.28	74.00	-18.72	Peak	
2	5460.0000	2.41	37.88	40.29	54.00	-13.71	AVG	
3	5469.4500	20.69	37.89	58.58	68.20	-9.62	Peak	
4	5510.0000	56.96	37.95	94.91	74.00	20.91	Peak	No Limit
5 *	5510.0000	49.89	37.95	87.84	54.00	33.84	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

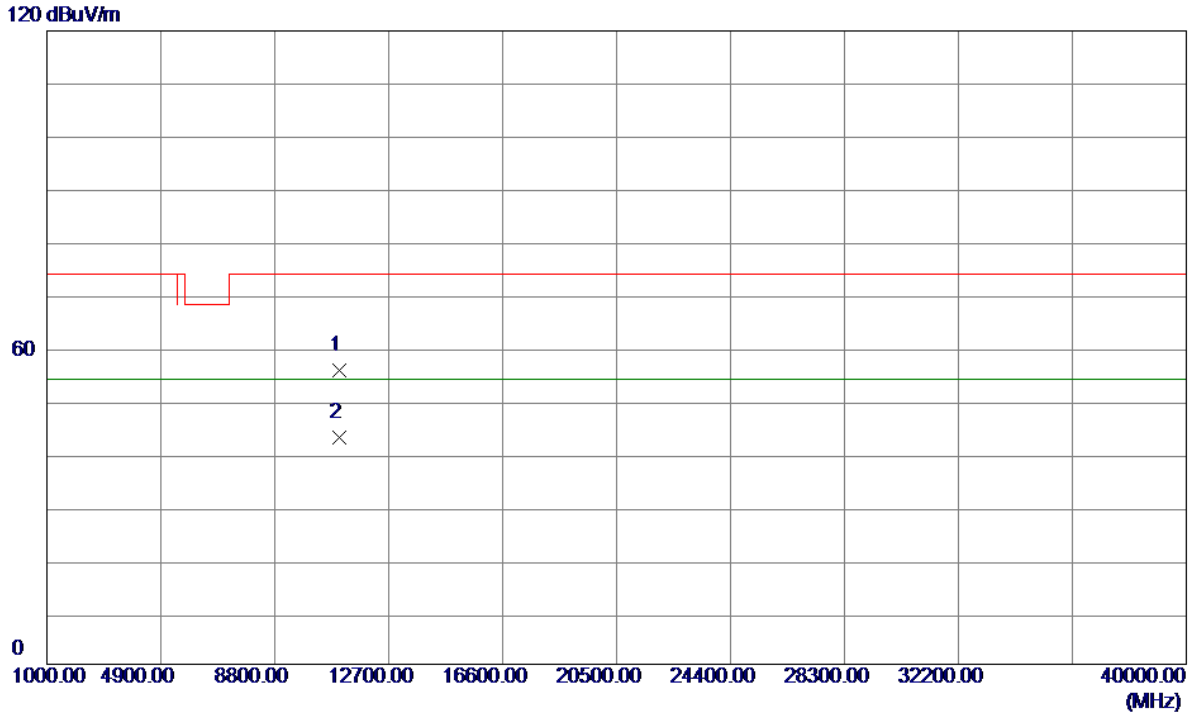


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	52.83	2.87	55.70	74.00	-18.30	Peak	
2 *	11020.0000	40.20	2.87	43.07	54.00	-10.93	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz

Vertical

120 dBuV/m

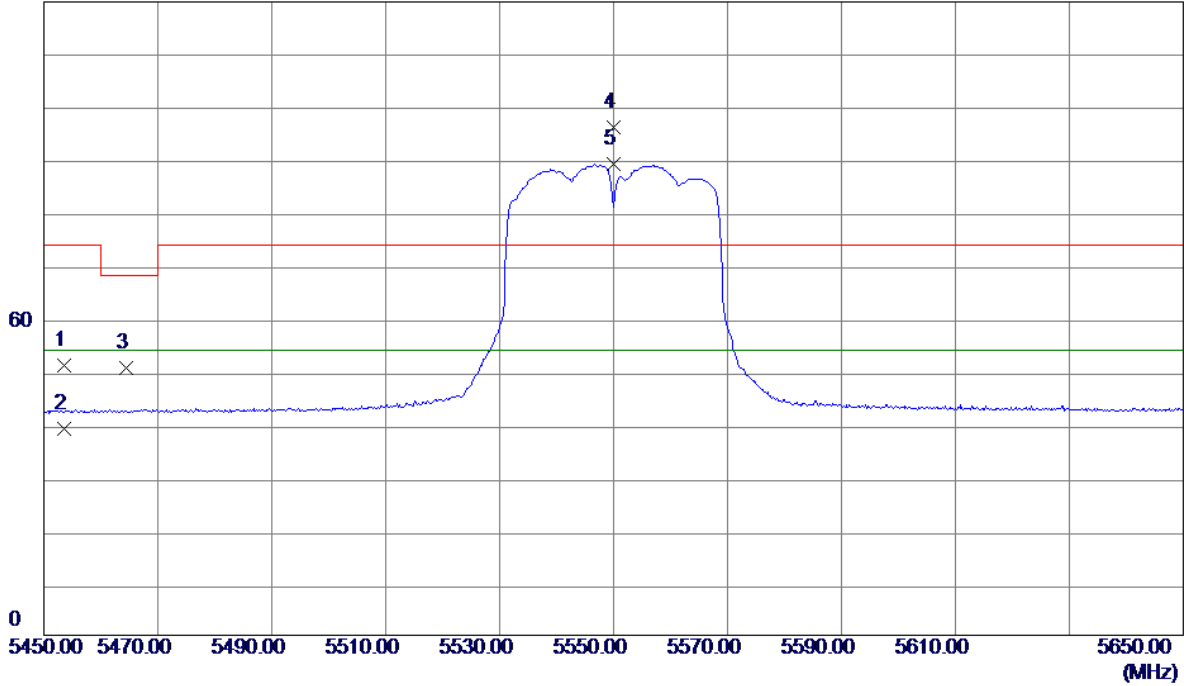


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.4800	13.19	37.87	51.06	74.00	-22.94	Peak	
2	5453.4800	1.23	37.87	39.10	54.00	-14.90	AVG	
3	5464.3400	12.74	37.88	50.62	68.20	-17.58	Peak	
4	5550.0000	58.08	38.06	96.14	74.00	22.14	Peak	No Limit
5 *	5550.0000	51.12	38.06	89.18	54.00	35.18	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz

Vertical

120 dBuV/m

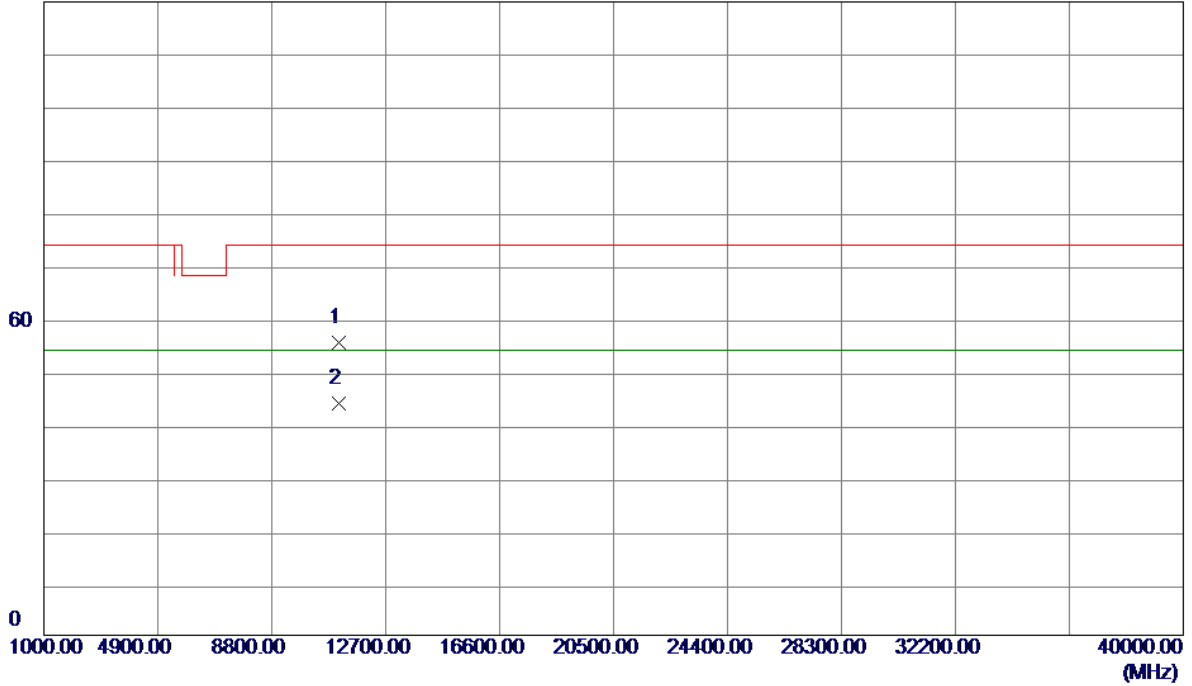


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	52.49	2.96	55.45	74.00	-18.55	Peak	
2 *	11100.0000	41.00	2.96	43.96	54.00	-10.04	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz

Horizontal

120 dBuV/m

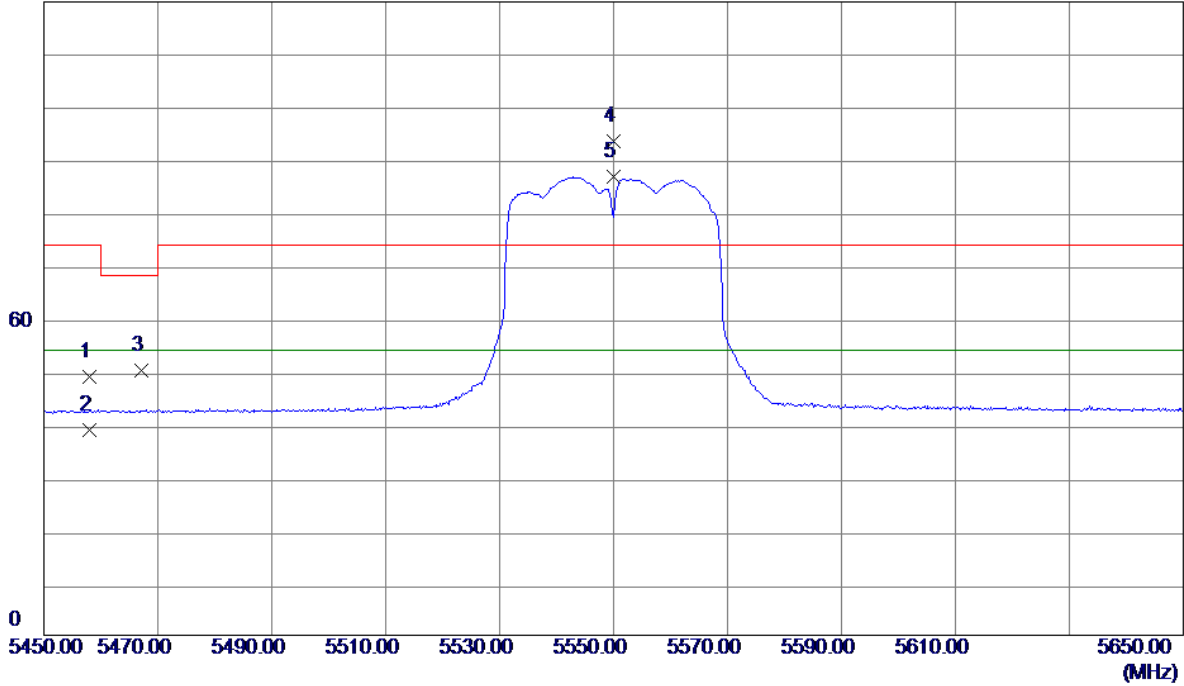


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.9900	11.12	37.87	48.99	74.00	-25.01	Peak	
2	5457.9900	0.94	37.87	38.81	54.00	-15.19	AVG	
3	5467.0200	12.29	37.88	50.17	68.20	-18.03	Peak	
4	5550.0000	55.65	38.06	93.71	74.00	19.71	Peak	No Limit
5 *	5550.0000	48.71	38.06	86.77	54.00	32.77	AVG	No Limit

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz

Horizontal


120 dBuV/m

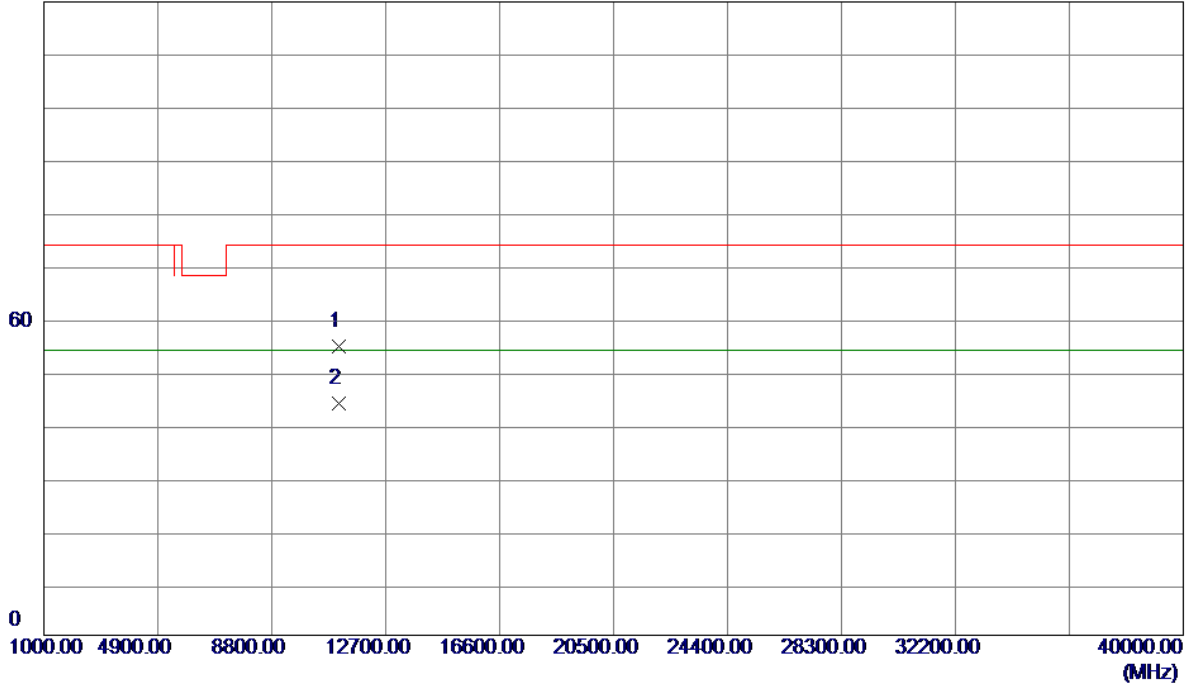

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	51.75	2.96	54.71	74.00	-19.29	Peak	
2 *	11100.0000	41.02	2.96	43.98	54.00	-10.02	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

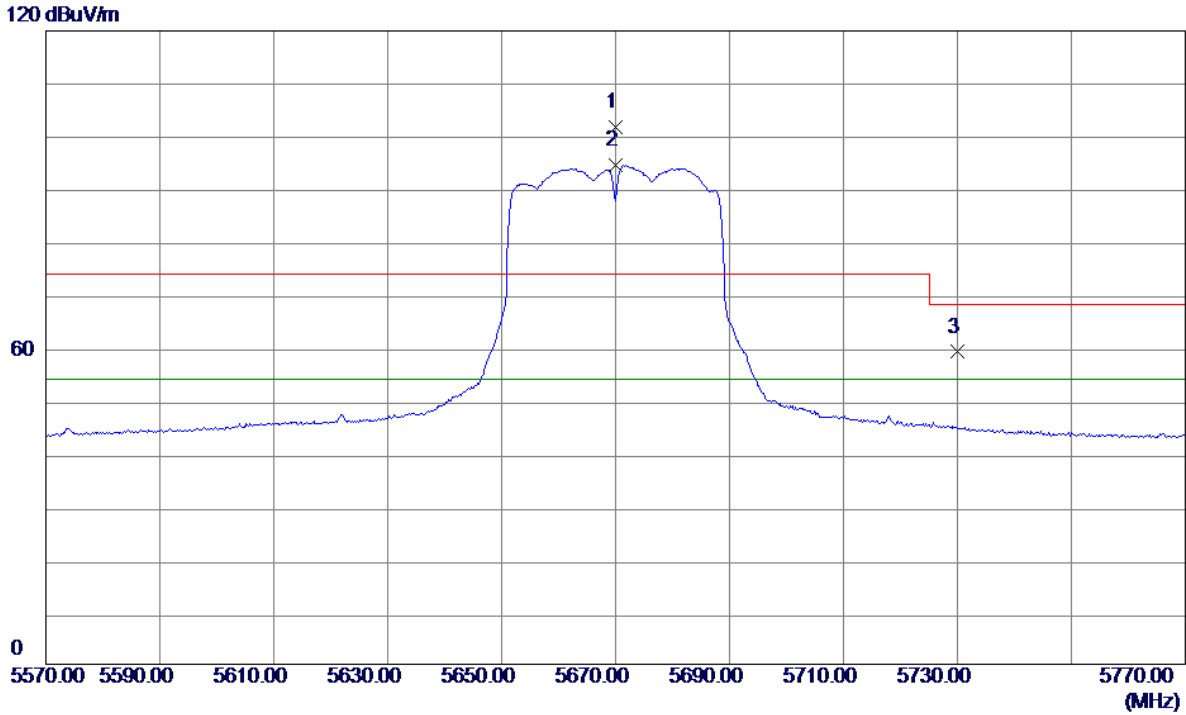


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5670.0000	63.37	38.38	101.75	74.00	27.75	Peak	No Limit
2 *	5670.0000	56.08	38.38	94.46	54.00	40.46	AVG	No Limit
3	5730.0850	20.61	38.55	59.16	68.20	-9.04	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical


120 dBuV/m

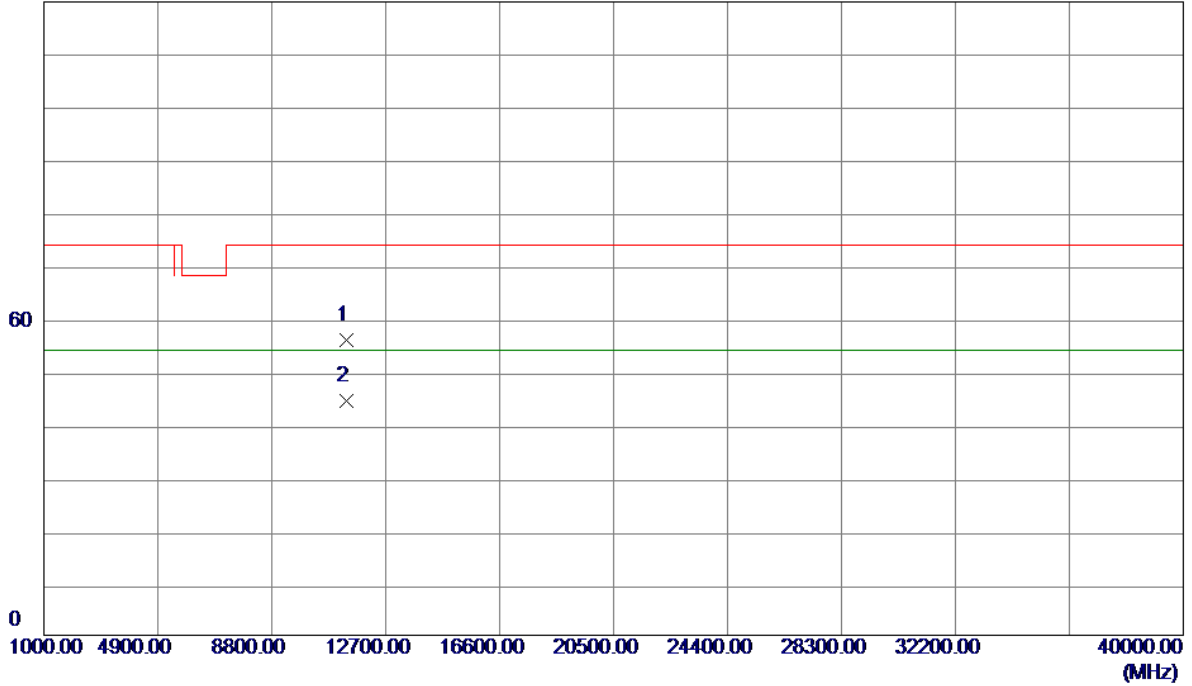

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	52.64	3.24	55.88	74.00	-18.12	Peak	
2 *	11340.0000	41.13	3.24	44.37	54.00	-9.63	AVG	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

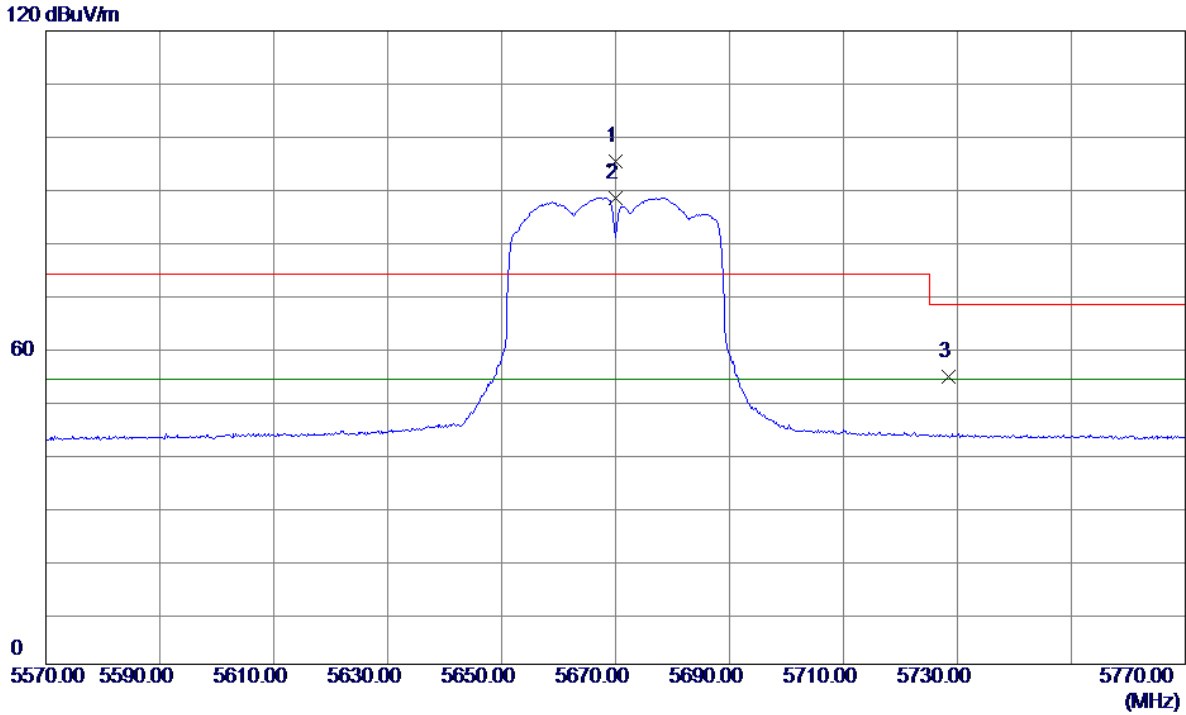


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5670.0000	56.87	38.38	95.25	74.00	21.25	Peak	No Limit
2 *	5670.0000	49.92	38.38	88.30	54.00	34.30	AVG	No Limit
3	5728.4650	15.91	38.54	54.45	68.20	-13.75	Peak	

Orthogonal Axis :	Z
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal


120 dBuV/m

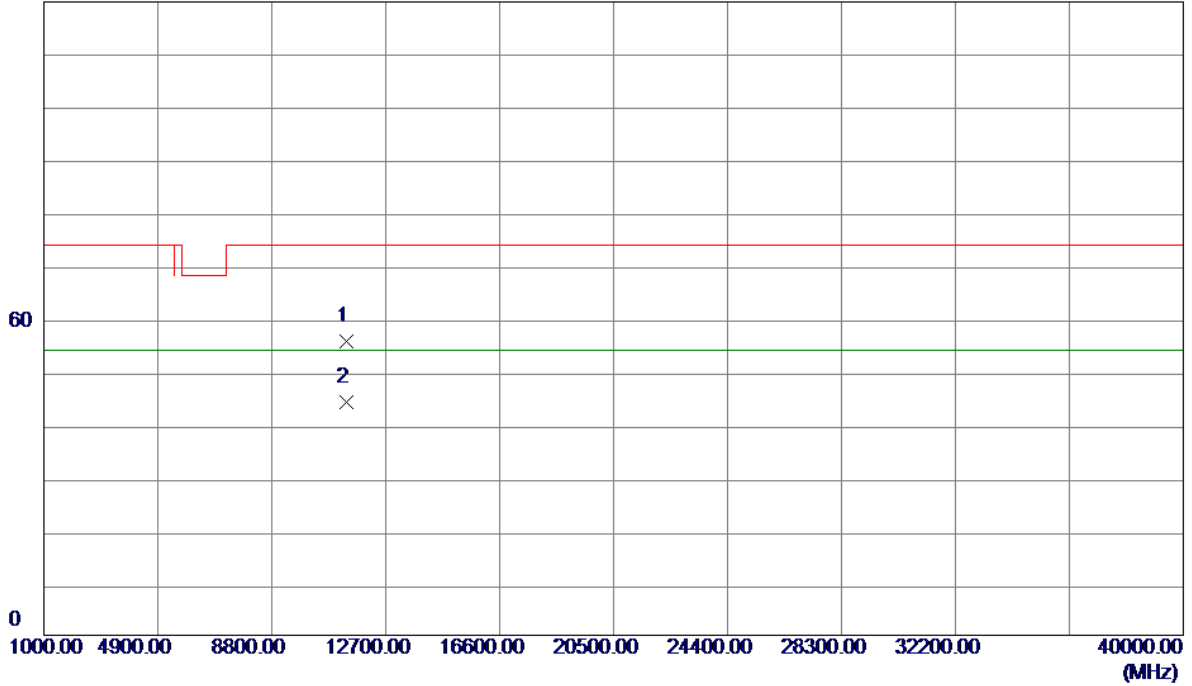

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	52.33	3.24	55.57	74.00	-18.43	Peak	
2 *	11340.0000	40.81	3.24	44.05	54.00	-9.95	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

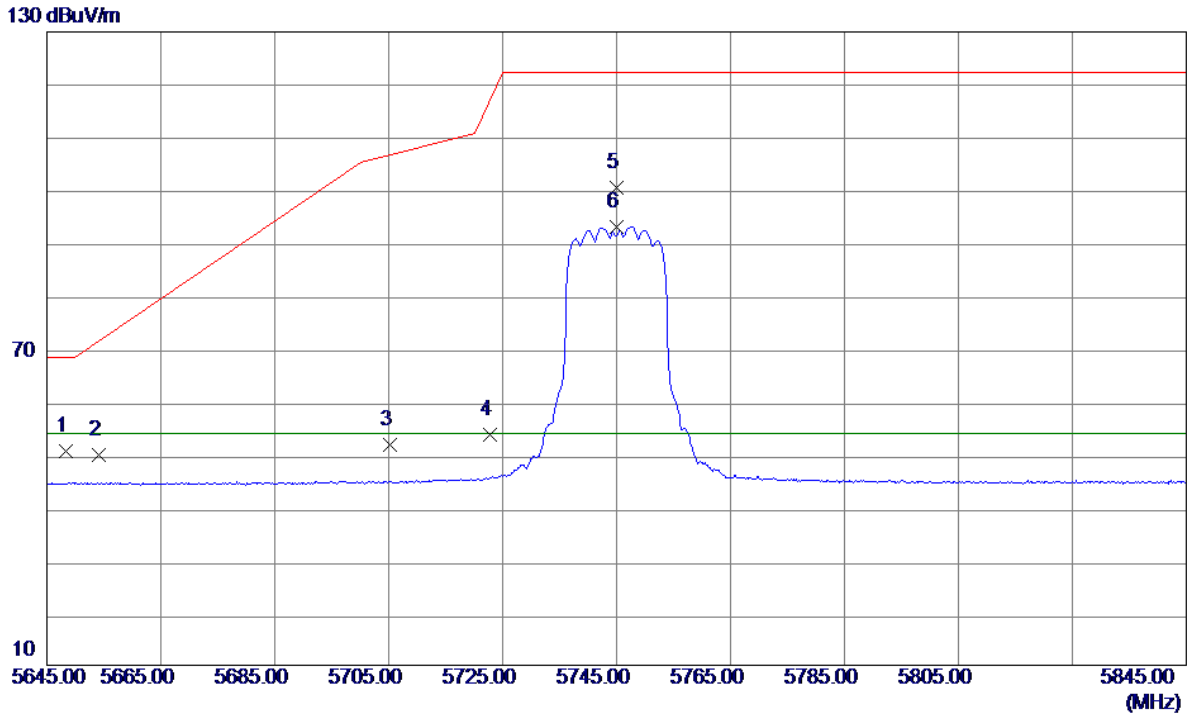

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.3750	12.27	38.32	50.59	68.20	-17.61	Peak	
2	5654.0500	11.48	38.34	49.82	71.20	-21.38	Peak	
3	5705.1800	13.26	38.48	51.74	106.65	-54.91	Peak	
4	5722.7300	15.25	38.53	53.78	117.02	-63.24	Peak	
5	5745.0000	61.88	38.59	100.47	122.20	-21.73	Peak	No Limit
6 *	5745.0000	54.44	38.59	93.03	54.00	39.03	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

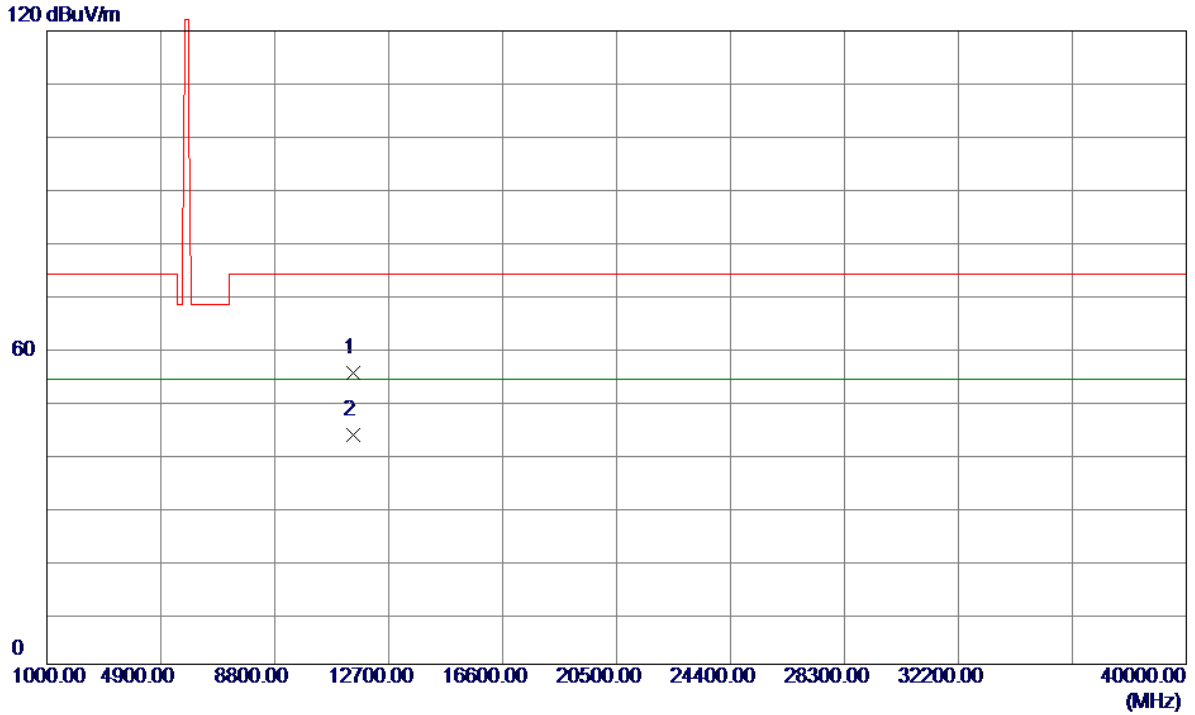


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	51.90	3.41	55.31	74.00	-18.69	Peak	
2 *	11490.0000	39.97	3.41	43.38	54.00	-10.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal


130 dBuV/m

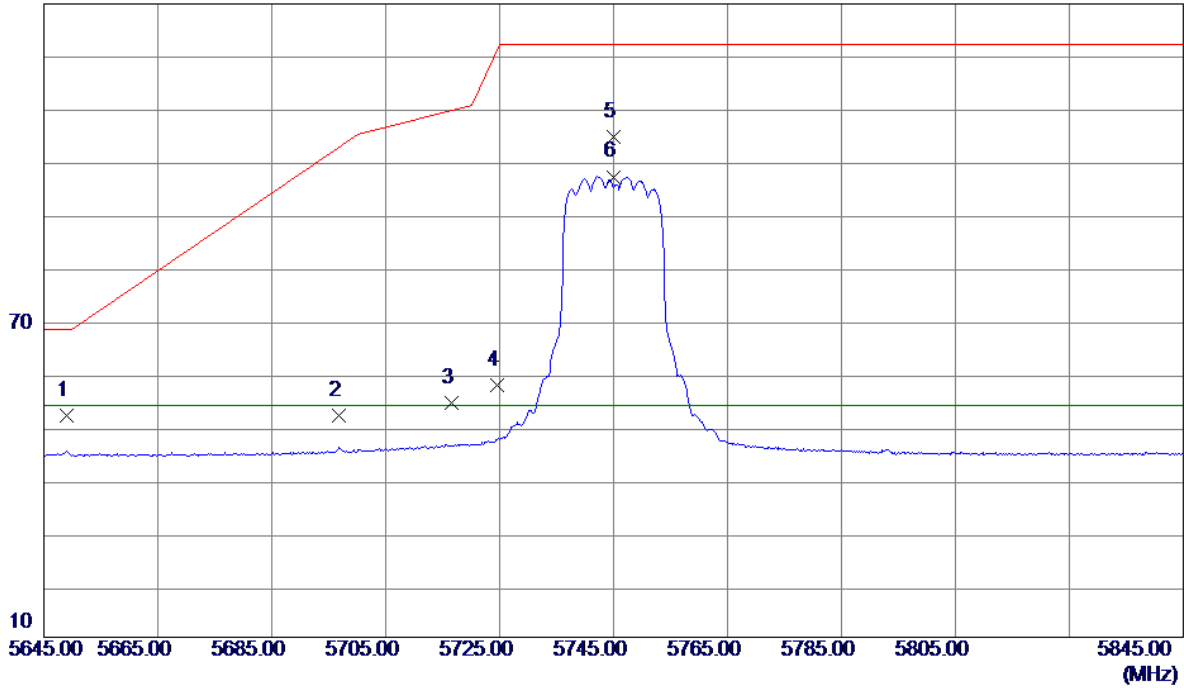

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.9550	13.67	38.33	52.00	68.20	-16.20	Peak	
2	5696.8000	13.43	38.46	51.89	102.83	-50.94	Peak	
3	5716.6400	15.82	38.51	54.33	109.86	-55.53	Peak	
4	5724.6500	19.12	38.53	57.65	121.40	-63.75	Peak	
5	5745.0000	66.16	38.59	104.75	122.20	-17.45	Peak	No Limit
6 *	5745.0000	58.65	38.59	97.24	54.00	43.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

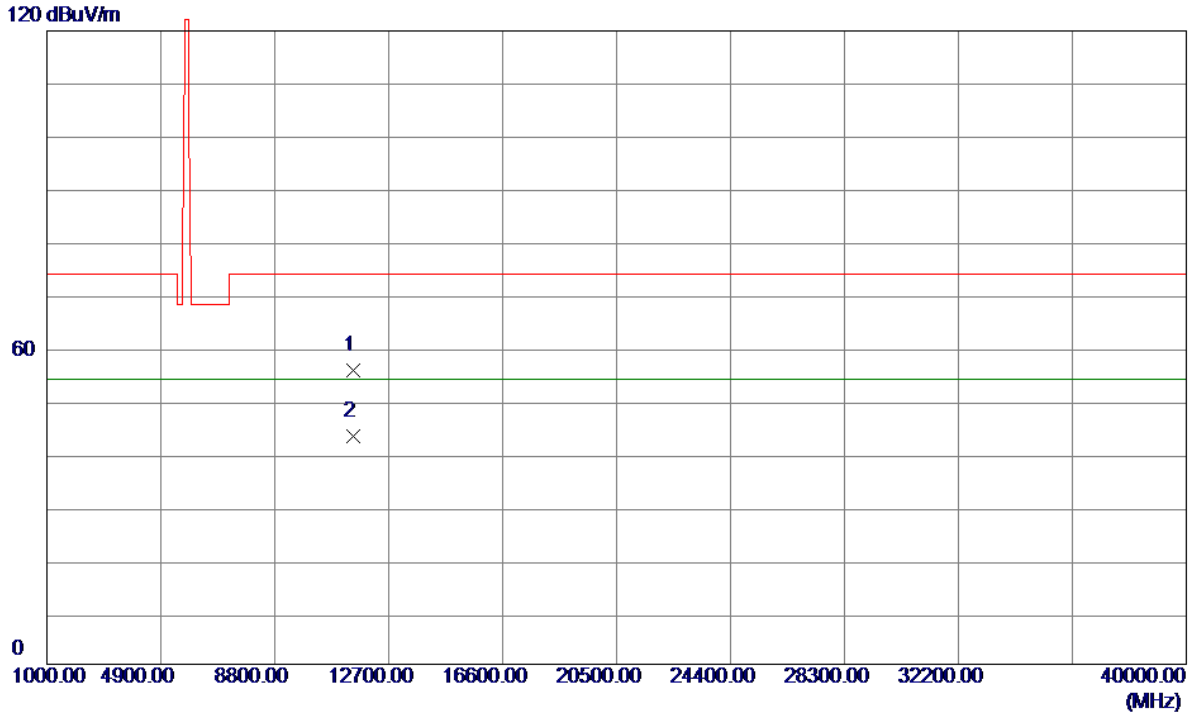

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	52.22	3.41	55.63	74.00	-18.37	Peak	
2 *	11490.0000	39.89	3.41	43.30	54.00	-10.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

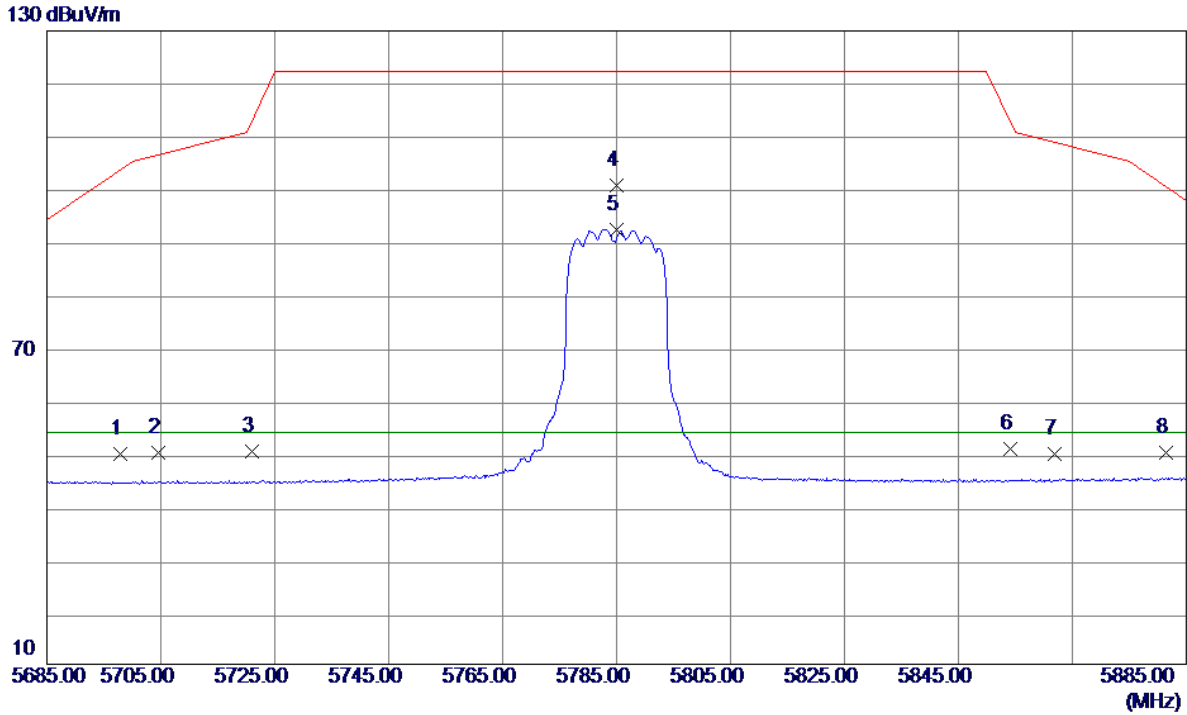

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.9750	11.28	38.46	49.74	103.70	-53.96	Peak	
2	5704.6200	11.64	38.48	50.12	106.49	-56.37	Peak	
3	5721.0600	11.87	38.52	50.39	113.22	-62.83	Peak	
4	5785.0000	61.98	38.70	100.68	122.20	-21.52	Peak	No Limit
5 *	5785.0000	53.72	38.70	92.42	54.00	38.42	AVG	No Limit
6	5854.0250	11.96	38.88	50.84	113.02	-62.18	Peak	
7	5861.7799	10.98	38.90	49.88	108.90	-59.02	Peak	
8	5881.4000	11.09	38.96	50.05	100.46	-50.41	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

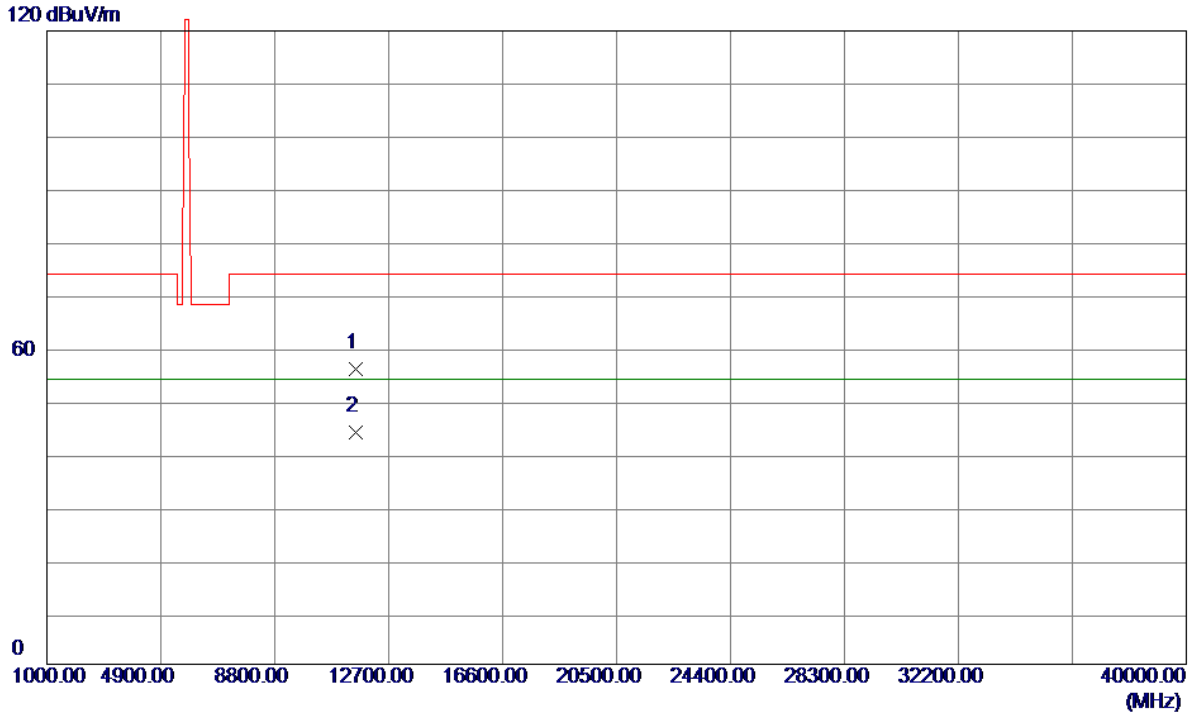

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	52.76	3.28	56.04	74.00	-17.96	Peak	
2 *	11570.0000	40.76	3.28	44.04	54.00	-9.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

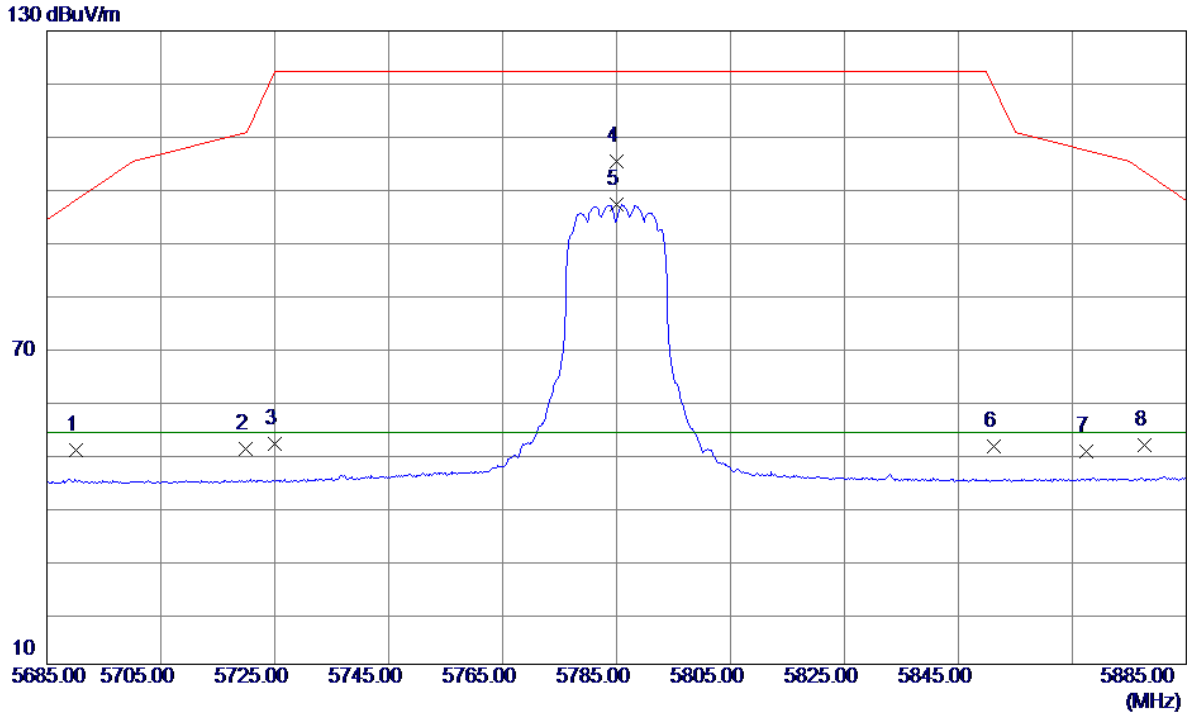

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5690.2050	12.23	38.44	50.67	97.95	-47.28	Peak	
2	5719.9800	12.29	38.52	50.81	110.79	-59.98	Peak	
3	5724.9750	13.14	38.53	51.67	122.14	-70.47	Peak	
4	5785.0000	66.48	38.70	105.18	122.20	-17.02	Peak	No Limit
5 *	5785.0000	58.38	38.70	97.08	54.00	43.08	AVG	No Limit
6	5851.2350	12.33	38.88	51.21	119.38	-68.17	Peak	
7	5867.4600	11.51	38.92	50.43	107.31	-56.88	Peak	
8	5877.6900	12.49	38.95	51.44	103.21	-51.77	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

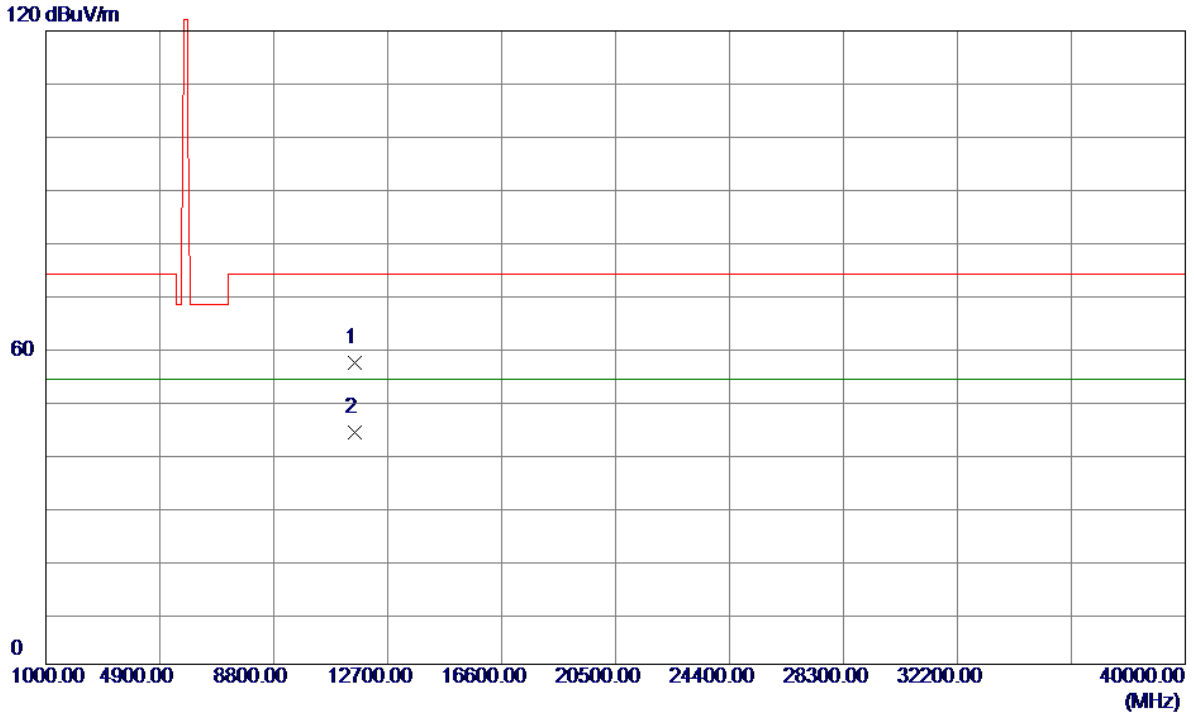

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	53.84	3.28	57.12	74.00	-16.88	Peak	
2 *	11570.0000	40.61	3.28	43.89	54.00	-10.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

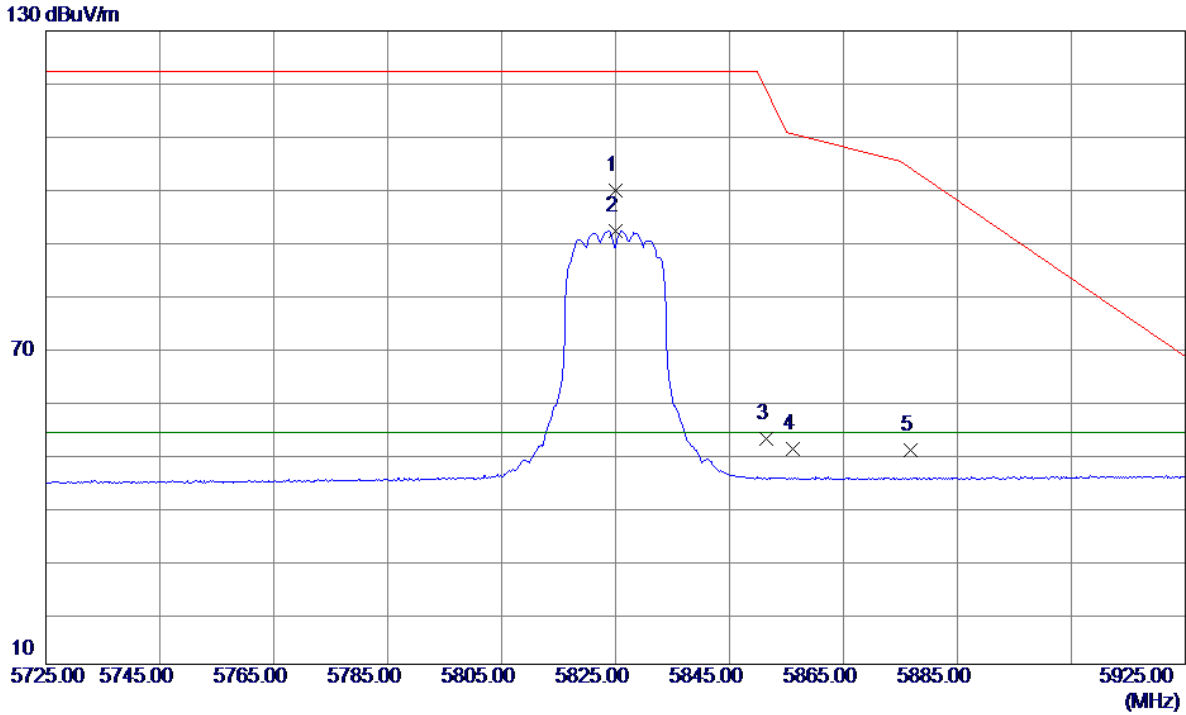

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	60.99	38.80	99.79	122.20	-22.41	Peak	No Limit
2 *	5825.0000	53.24	38.80	92.04	54.00	38.04	AVG	No Limit
3	5851.5099	13.77	38.88	52.65	118.76	-66.11	Peak	
4	5856.1400	12.01	38.89	50.90	110.48	-59.58	Peak	
5	5876.8100	11.65	38.94	50.59	103.86	-53.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

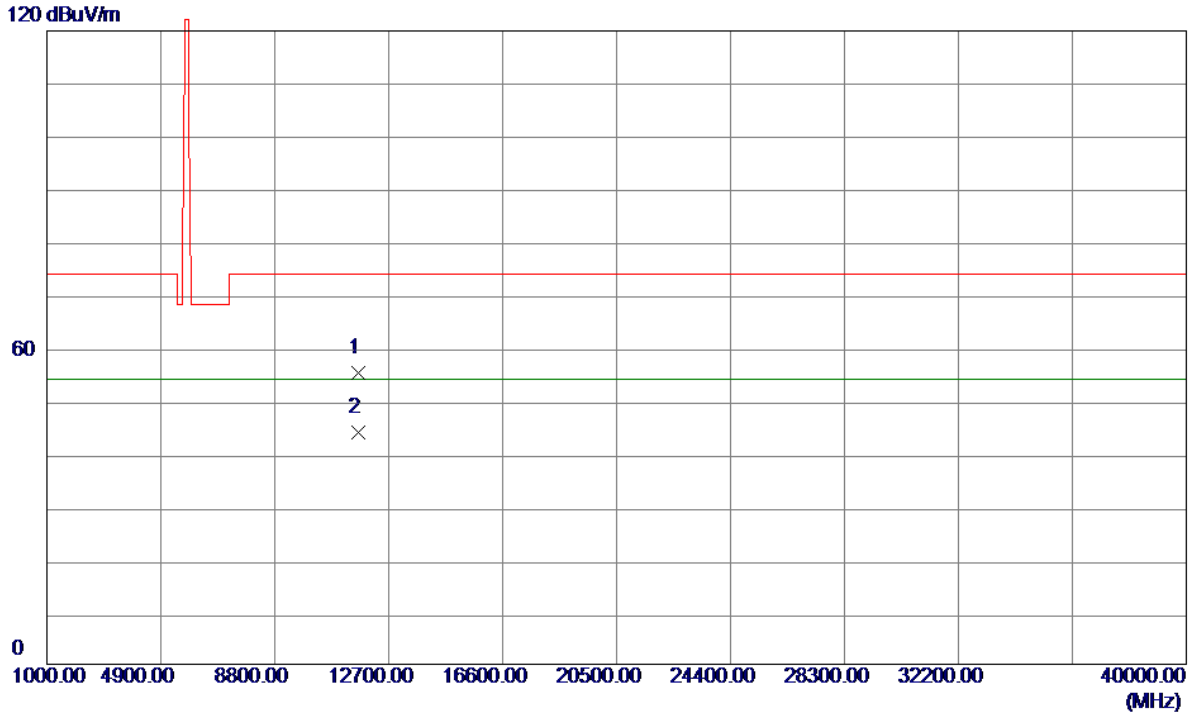

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	52.18	3.13	55.31	74.00	-18.69	Peak	
2 *	11650.0000	40.84	3.13	43.97	54.00	-10.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

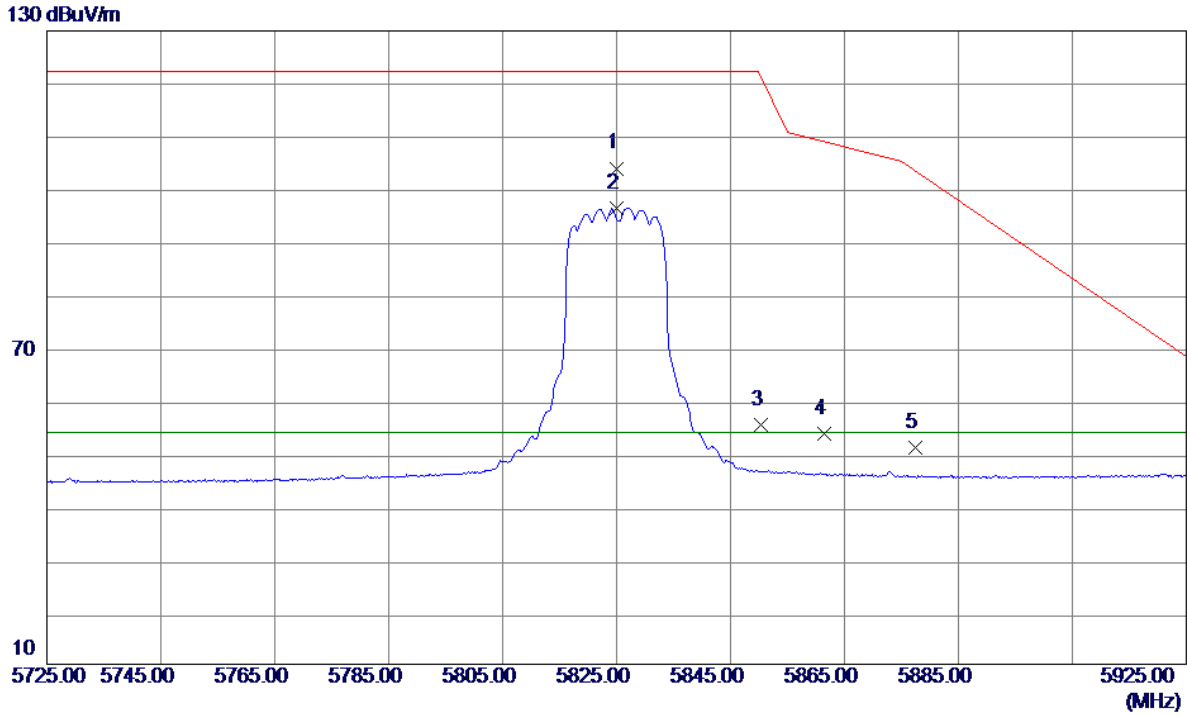

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	65.16	38.80	103.96	122.20	-18.24	Peak	No Limit
2 *	5825.0000	57.66	38.80	96.46	54.00	42.46	AVG	No Limit
3	5850.2700	16.55	38.87	55.42	121.58	-66.16	Peak	
4	5861.5200	14.87	38.90	53.77	108.97	-55.20	Peak	
5	5877.4500	12.06	38.95	51.01	103.39	-52.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

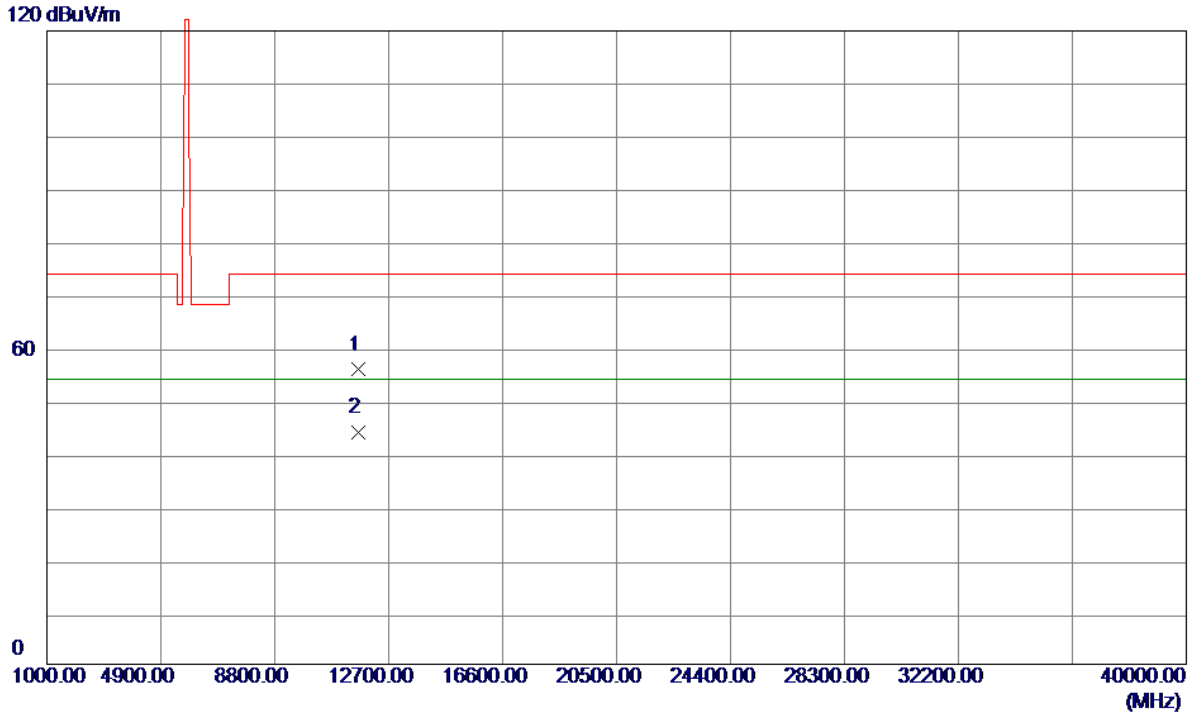


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	52.67	3.13	55.80	74.00	-18.20	Peak	
2 *	11650.0000	40.88	3.13	44.01	54.00	-9.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


130 dBuV/m

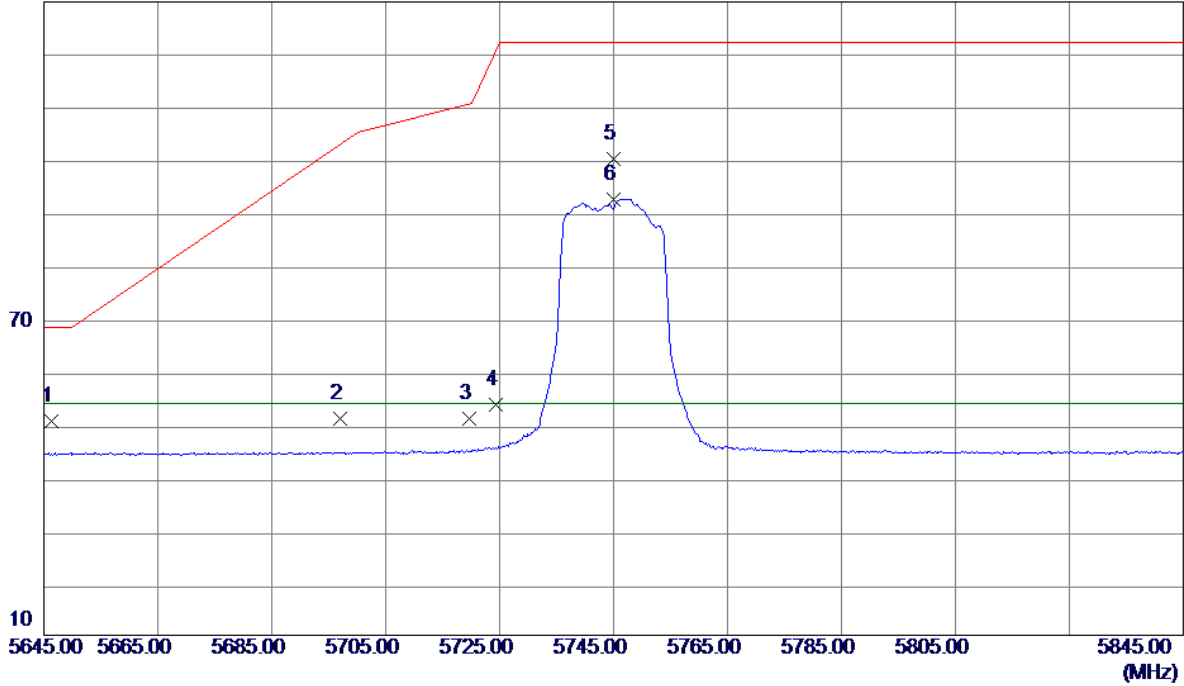

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.2500	12.30	38.32	50.62	68.20	-17.58	Peak	
2	5696.9000	12.62	38.46	51.08	102.91	-51.83	Peak	
3	5719.6400	12.52	38.52	51.04	110.70	-59.66	Peak	
4	5724.3700	15.22	38.53	53.75	120.76	-67.01	Peak	
5	5745.0000	61.53	38.59	100.12	122.20	-22.08	Peak	No Limit
6 *	5745.0000	53.96	38.59	92.55	54.00	38.55	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

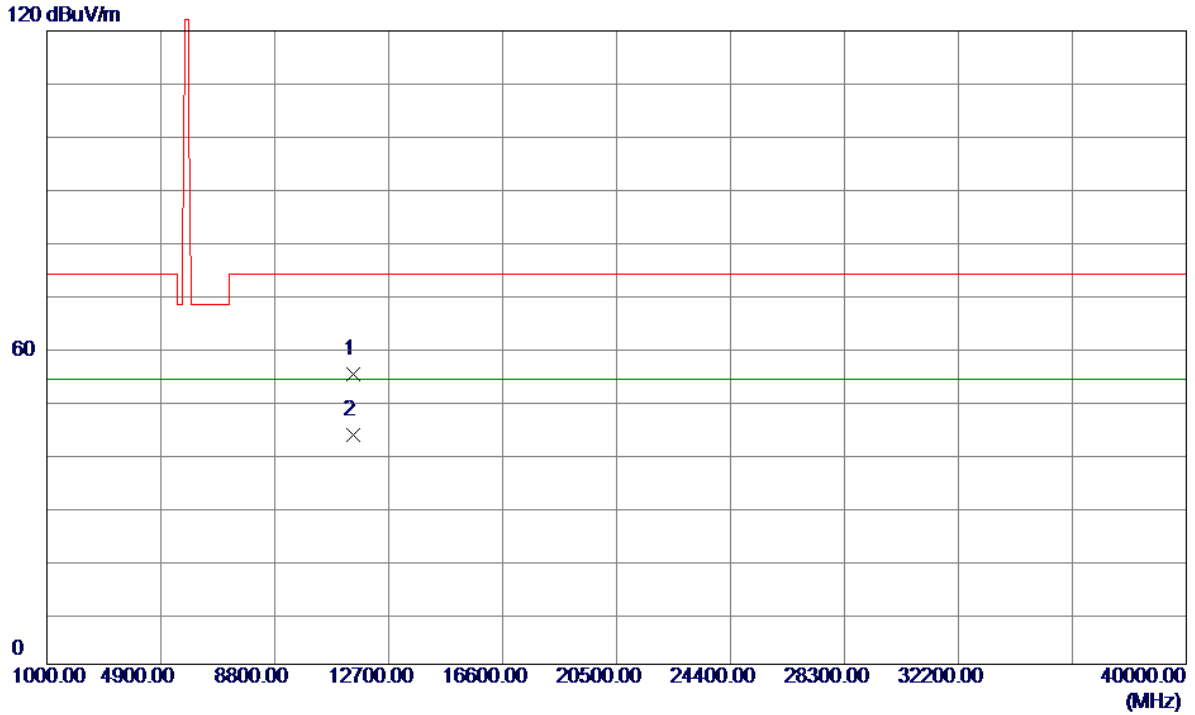


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	51.56	3.41	54.97	74.00	-19.03	Peak	
2 *	11490.0000	39.98	3.41	43.39	54.00	-10.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal


130 dBuV/m

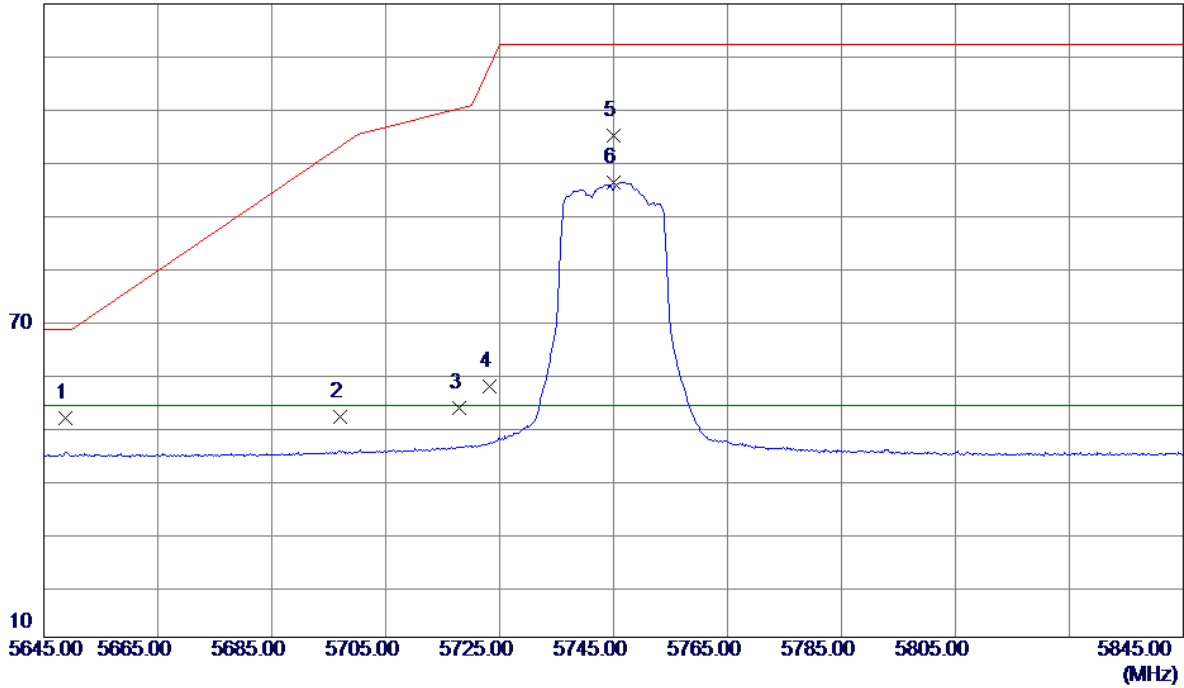

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.8650	13.24	38.32	51.56	68.20	-16.64	Peak	
2	5696.9000	13.21	38.46	51.67	102.91	-51.24	Peak	
3	5717.9000	14.97	38.51	53.48	110.21	-56.73	Peak	
4	5723.1450	18.90	38.53	57.43	117.97	-60.54	Peak	
5	5745.0000	66.37	38.59	104.96	122.20	-17.24	Peak	No Limit
6 *	5745.0000	57.59	38.59	96.18	54.00	42.18	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

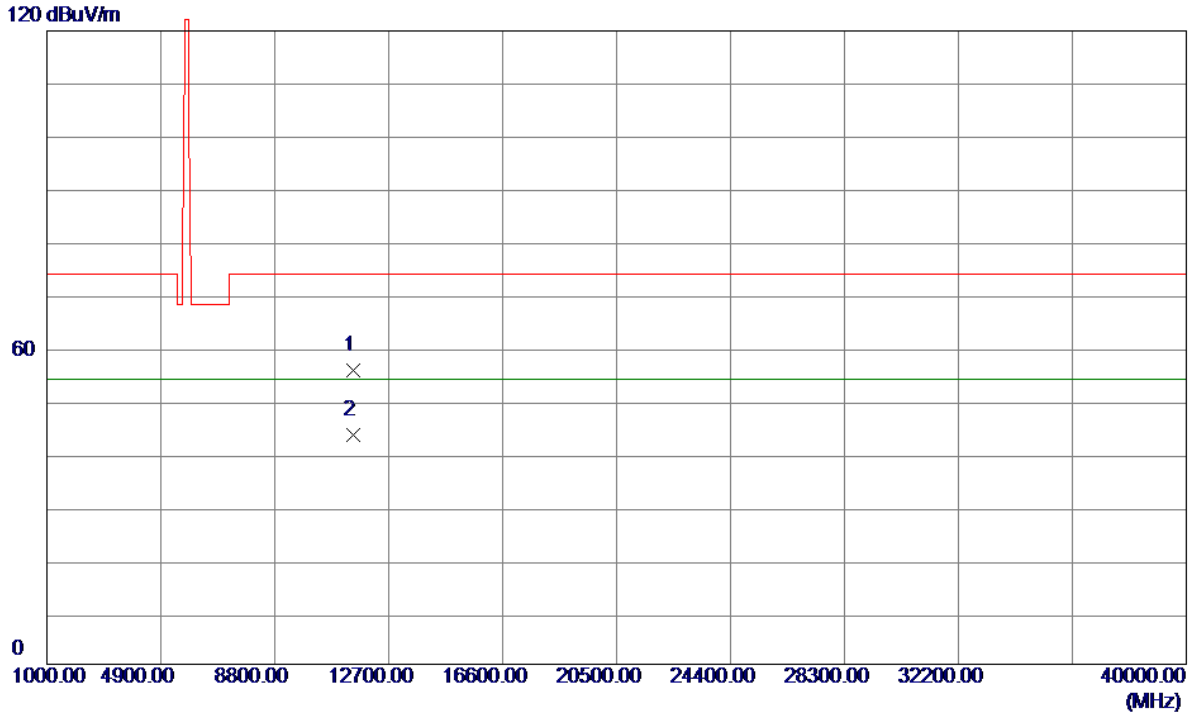

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	52.38	3.41	55.79	74.00	-18.21	Peak	
2 *	11490.0000	40.14	3.41	43.55	54.00	-10.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

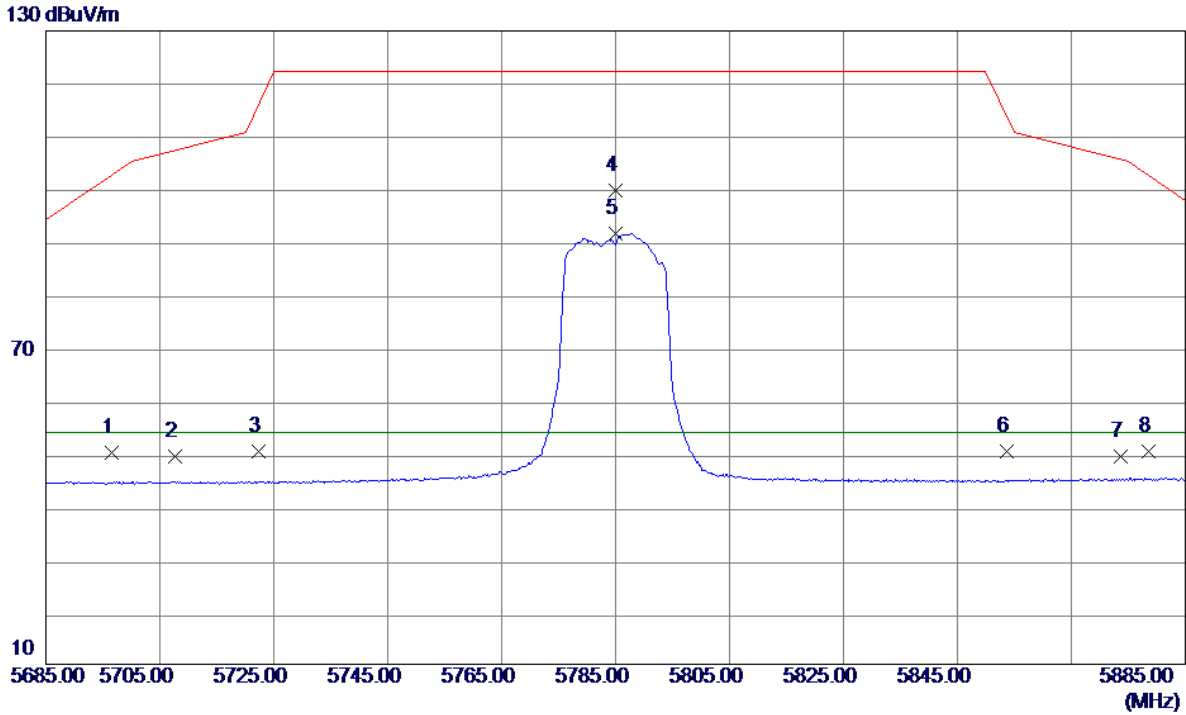

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5696.4750	11.57	38.45	50.02	102.59	-52.57	Peak	
2	5707.6600	10.80	38.48	49.28	107.34	-58.06	Peak	
3	5722.2500	11.86	38.52	50.38	115.93	-65.55	Peak	
4	5785.0000	61.11	38.70	99.81	122.20	-22.39	Peak	No Limit
5 *	5785.0000	52.91	38.70	91.61	54.00	37.61	AVG	No Limit
6	5853.7100	11.52	38.88	50.40	113.74	-63.34	Peak	
7	5873.6400	10.53	38.94	49.47	105.58	-56.11	Peak	
8	5878.4700	11.39	38.95	50.34	102.63	-52.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

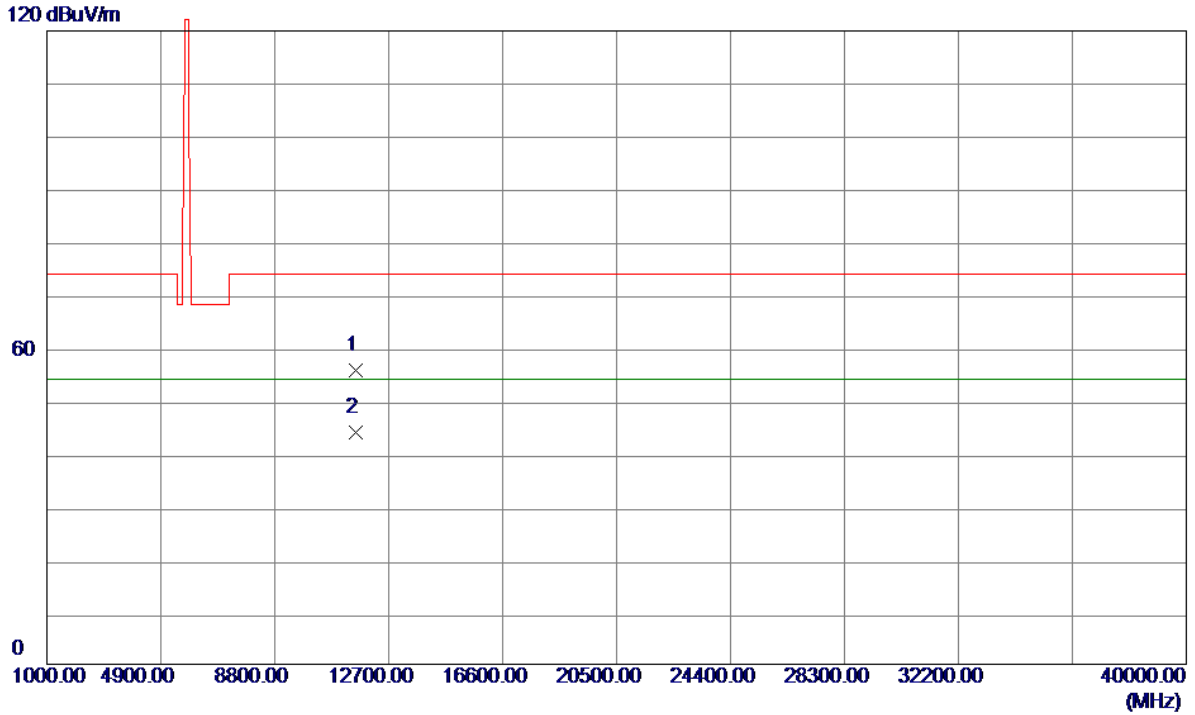

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	52.49	3.28	55.77	74.00	-18.23	Peak	
2 *	11570.0000	40.67	3.28	43.95	54.00	-10.05	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

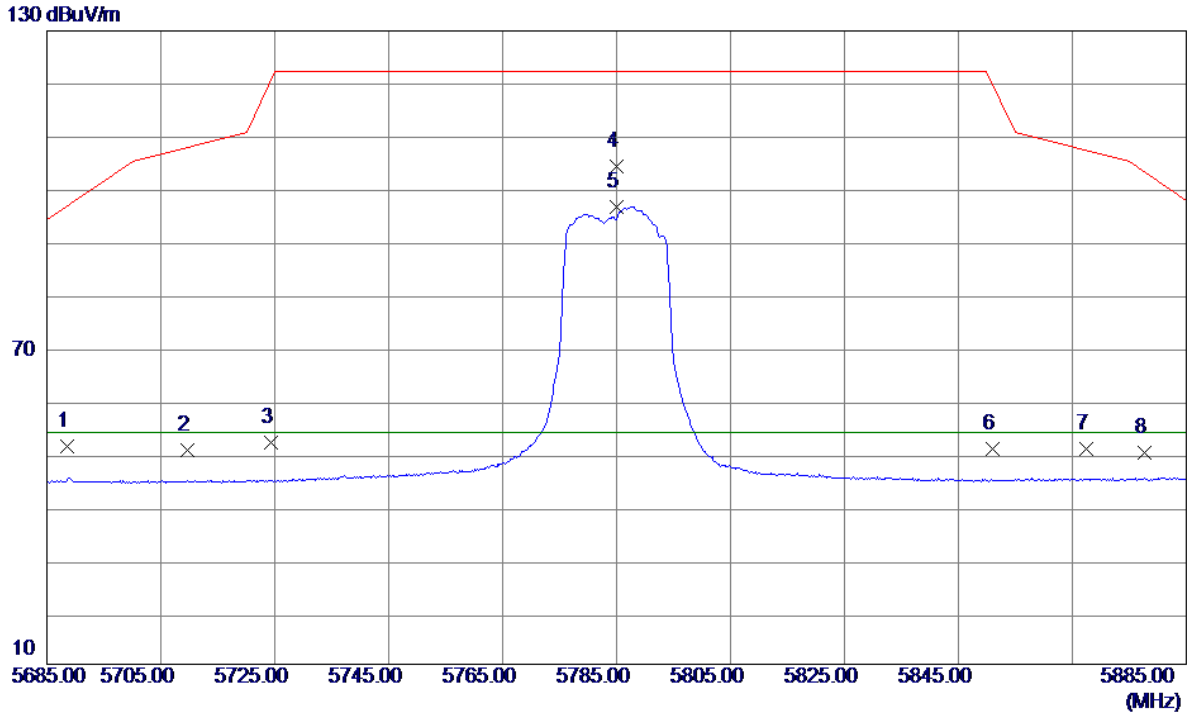

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5688.5099	12.80	38.43	51.23	96.70	-45.47	Peak	
2	5709.5600	12.07	38.49	50.56	107.88	-57.32	Peak	
3	5724.3250	13.58	38.53	52.11	120.66	-68.55	Peak	
4	5785.0000	65.50	38.70	104.20	122.20	-18.00	Peak	No Limit
5 *	5785.0000	57.95	38.70	96.65	54.00	42.65	AVG	No Limit
6	5851.0200	12.00	38.87	50.87	119.87	-69.00	Peak	
7	5867.4400	11.90	38.92	50.82	107.32	-56.50	Peak	
8	5877.7500	11.16	38.95	50.11	103.16	-53.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

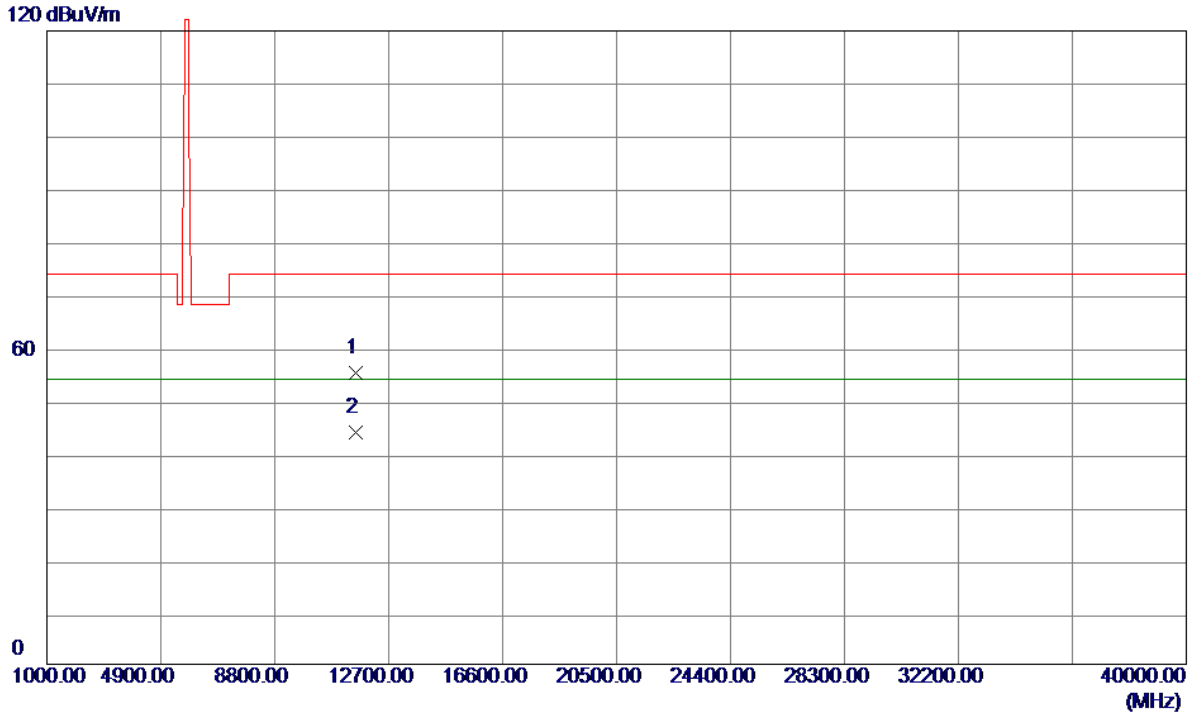

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	51.87	3.28	55.15	74.00	-18.85	Peak	
2 *	11570.0000	40.59	3.28	43.87	54.00	-10.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

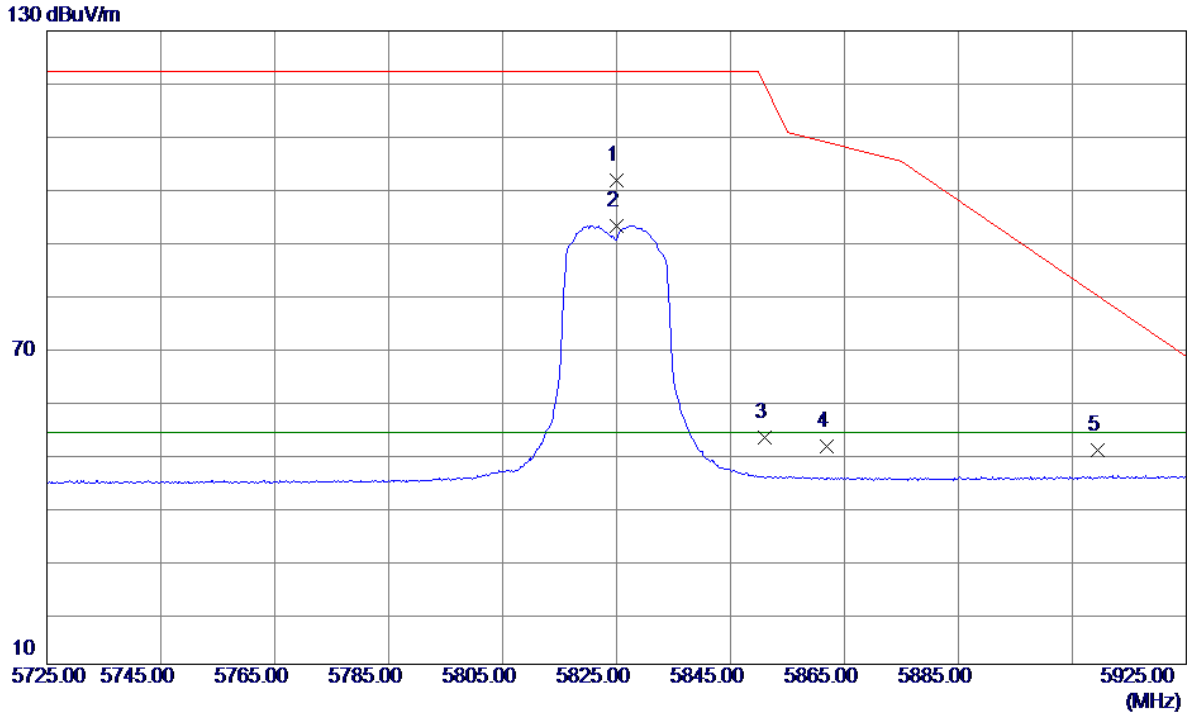

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	62.78	38.80	101.58	122.20	-20.62	Peak	No Limit
2 *	5825.0000	54.30	38.80	93.10	54.00	39.10	AVG	No Limit
3	5850.9650	14.02	38.87	52.89	120.00	-67.11	Peak	
4	5861.8000	12.30	38.90	51.20	108.90	-57.70	Peak	
5	5909.4500	11.44	39.03	50.47	79.71	-29.24	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

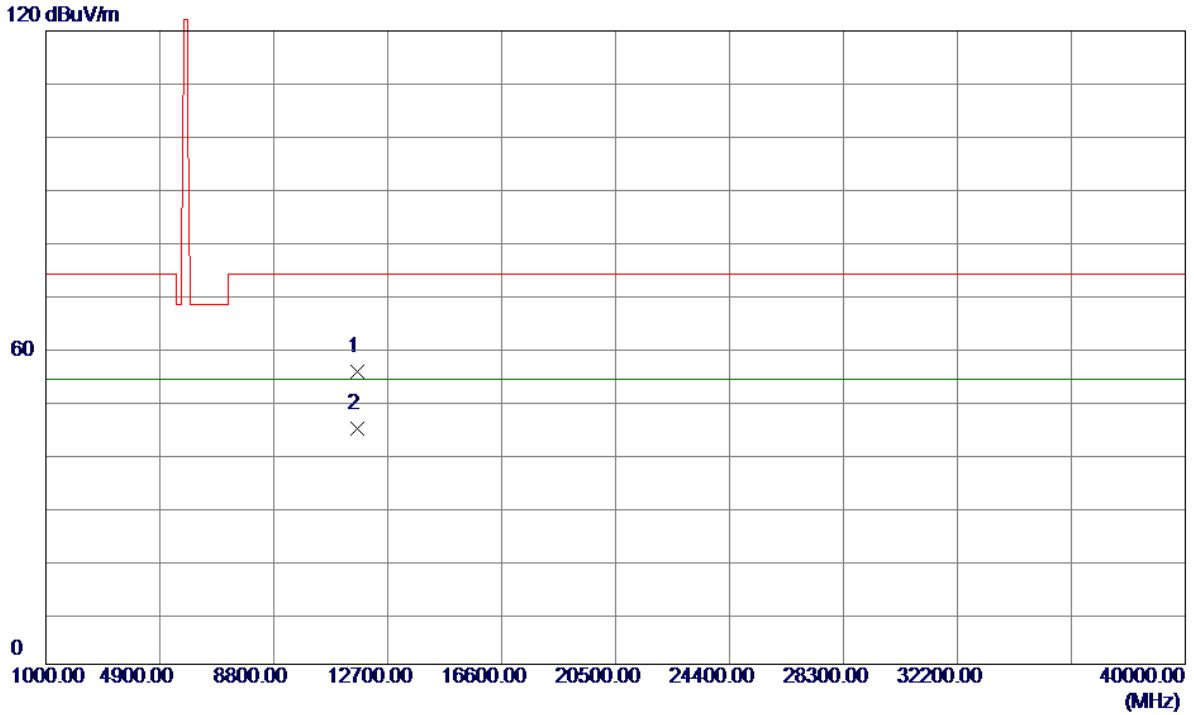

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	52.29	3.13	55.42	74.00	-18.58	Peak	
2 *	11650.0000	41.40	3.13	44.53	54.00	-9.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

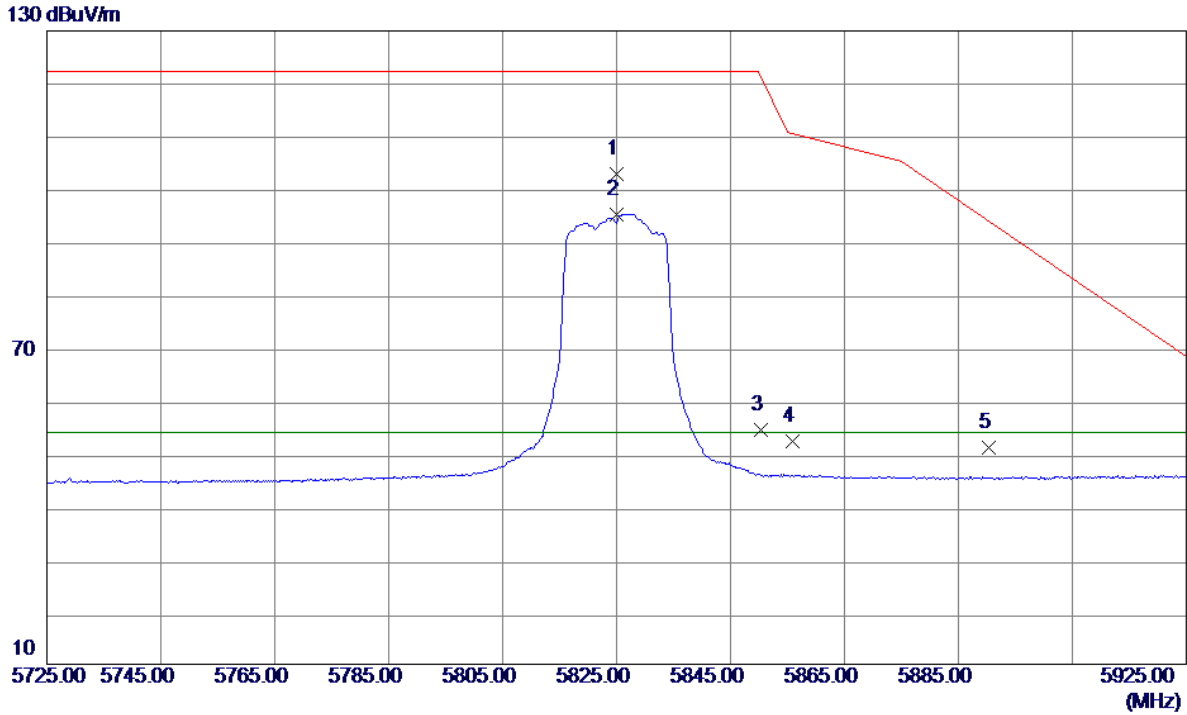

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.0000	64.04	38.80	102.84	122.20	-19.36	Peak	No Limit
2 *	5825.0000	56.51	38.80	95.31	54.00	41.31	AVG	No Limit
3	5850.2850	15.50	38.87	54.37	121.55	-67.18	Peak	
4	5855.9200	13.45	38.89	52.34	110.54	-58.20	Peak	
5	5890.2500	12.00	38.98	50.98	93.92	-42.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

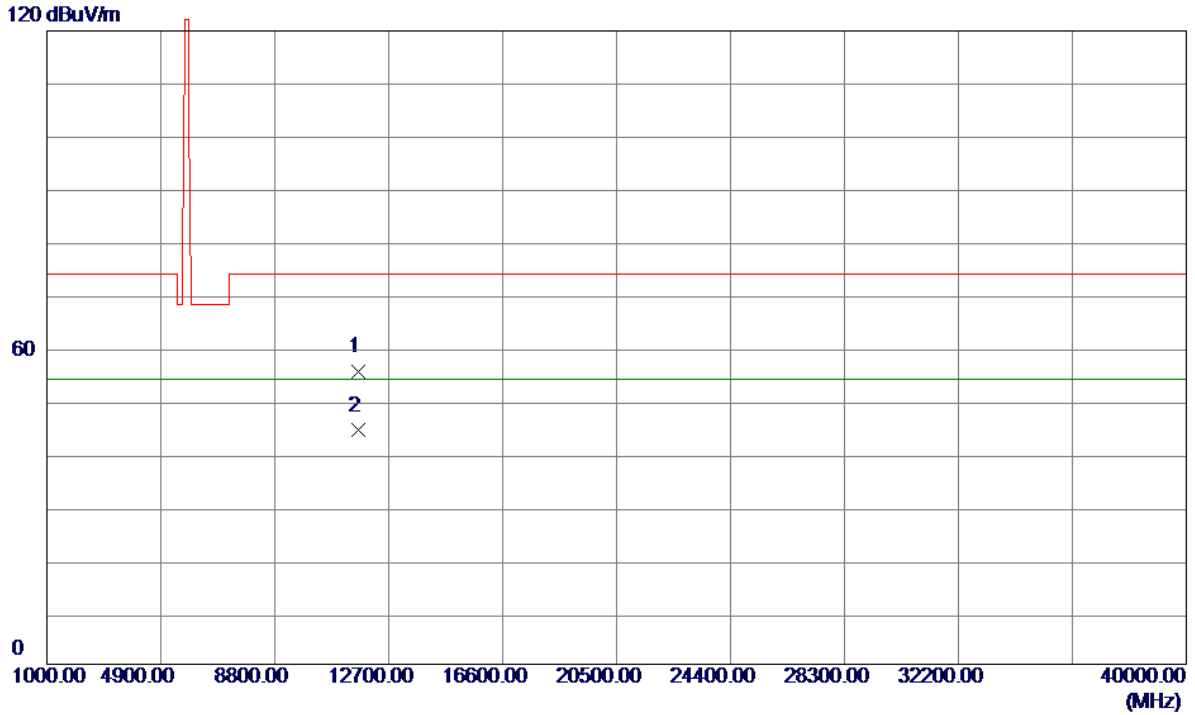

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	52.25	3.13	55.38	74.00	-18.62	Peak	
2 *	11650.0000	41.15	3.13	44.28	54.00	-9.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

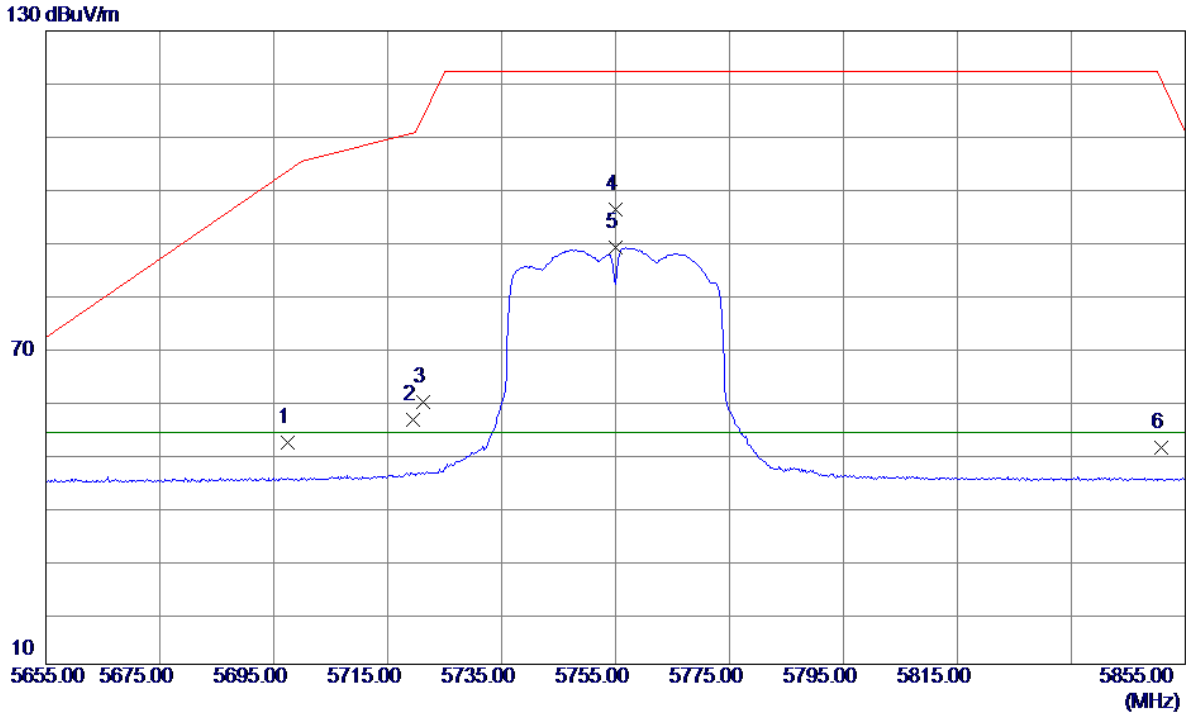

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.3900	13.52	38.46	51.98	103.27	-51.29	Peak	
2	5719.3600	17.88	38.52	56.40	110.62	-54.22	Peak	
3	5721.1400	21.13	38.52	59.65	113.40	-53.75	Peak	
4	5755.0000	57.53	38.61	96.14	122.20	-26.06	Peak	No Limit
5 *	5755.0000	50.30	38.61	88.91	54.00	34.91	AVG	No Limit
6	5850.8750	12.28	38.87	51.15	120.20	-69.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

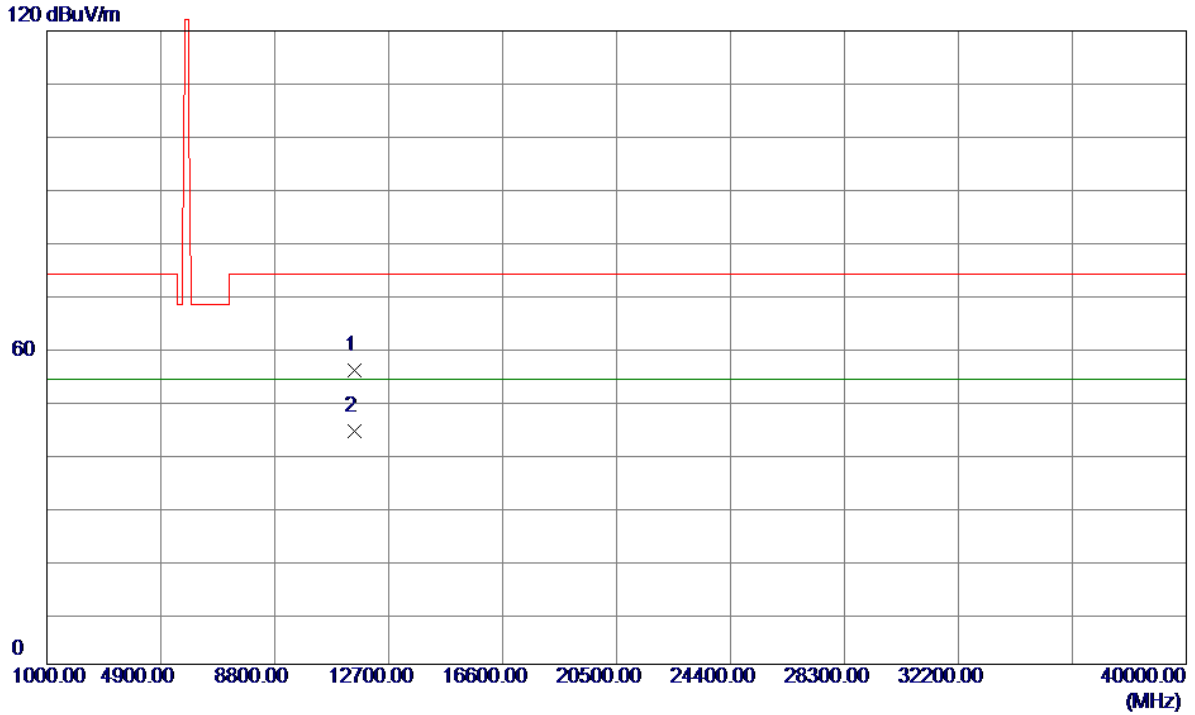

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	52.24	3.40	55.64	74.00	-18.36	Peak	
2 *	11510.0000	40.80	3.40	44.20	54.00	-9.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

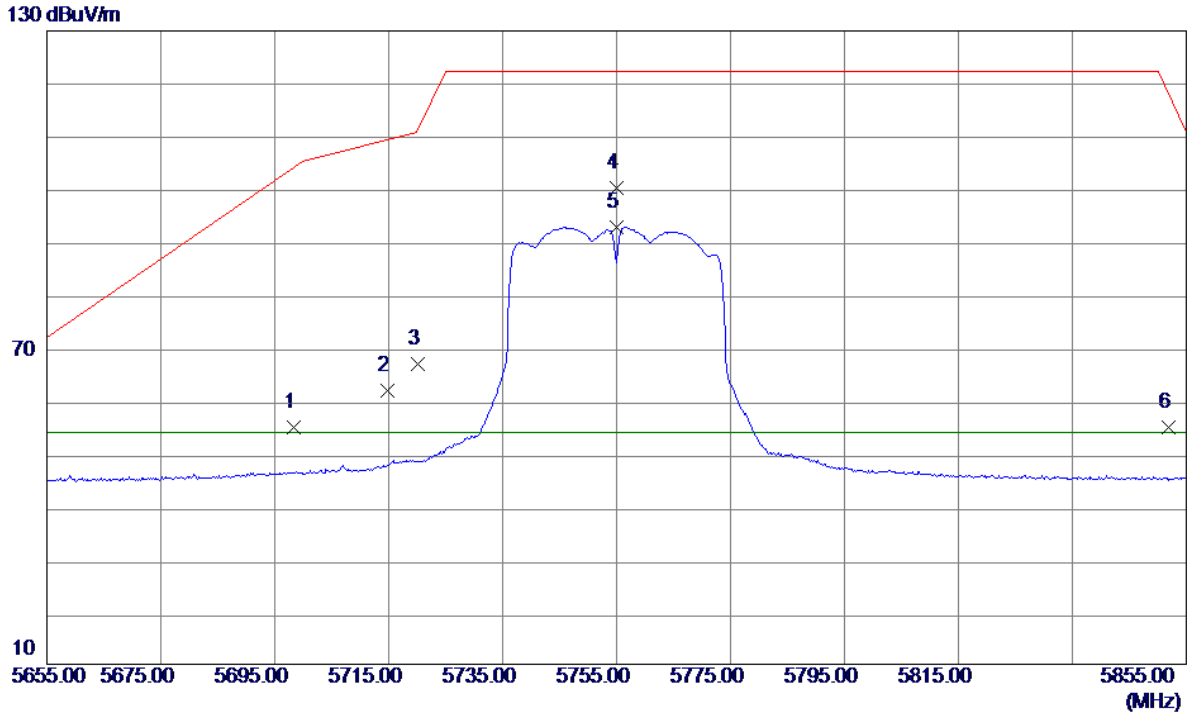

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.3350	16.35	38.46	54.81	103.97	-49.16	Peak	
2	5714.7400	23.45	38.50	61.95	109.33	-47.38	Peak	
3	5720.0600	28.43	38.52	66.95	110.94	-43.99	Peak	
4	5755.0000	61.53	38.61	100.14	122.20	-22.06	Peak	No Limit
5 *	5755.0000	54.13	38.61	92.74	54.00	38.74	AVG	No Limit
6	5851.9300	15.96	38.88	54.84	117.80	-62.96	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

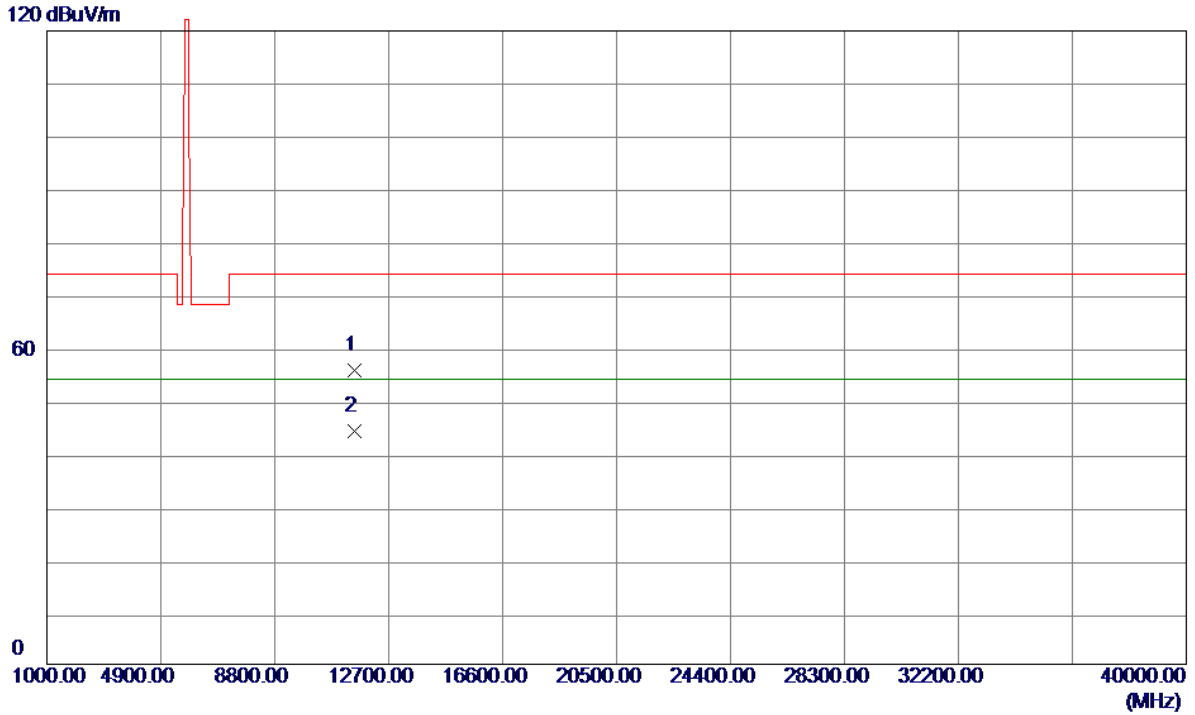

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	52.36	3.40	55.76	74.00	-18.24	Peak	
2 *	11510.0000	40.69	3.40	44.09	54.00	-9.91	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

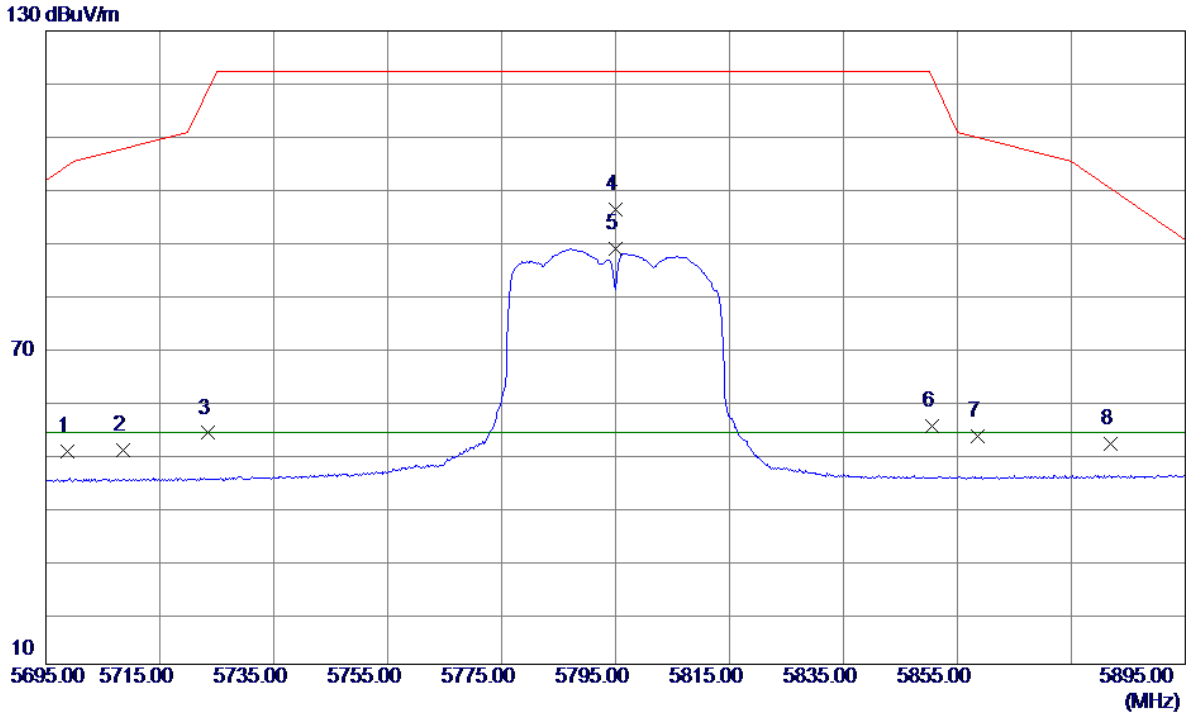

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.8050	11.94	38.46	50.40	104.32	-53.92	Peak	
2	5708.5800	11.99	38.49	50.48	107.60	-57.12	Peak	
3	5723.5550	15.27	38.53	53.80	118.91	-65.11	Peak	
4	5795.0000	57.54	38.72	96.26	122.20	-25.94	Peak	No Limit
5 *	5795.0000	49.93	38.72	88.65	54.00	34.65	AVG	No Limit
6	5850.6050	16.30	38.87	55.17	120.82	-65.65	Peak	
7	5858.6600	14.37	38.90	53.27	109.78	-56.51	Peak	
8	5881.8100	12.72	38.96	51.68	100.16	-48.48	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

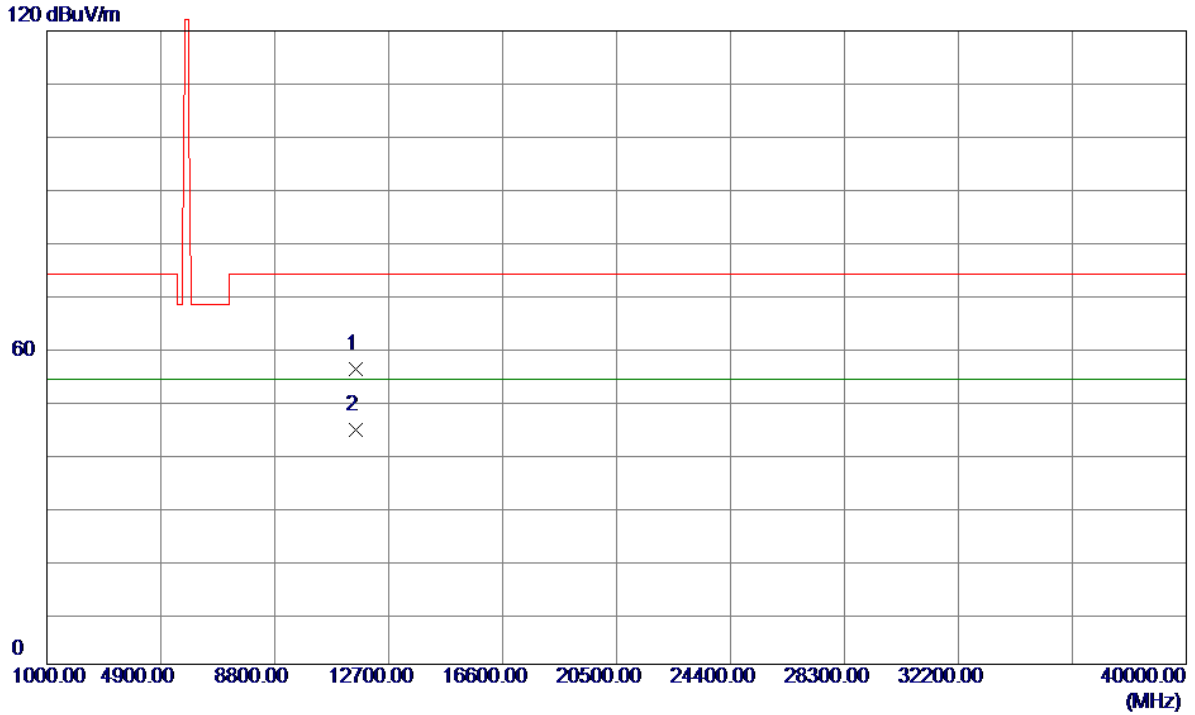

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	52.60	3.24	55.84	74.00	-18.16	Peak	
2 *	11590.0000	41.18	3.24	44.42	54.00	-9.58	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

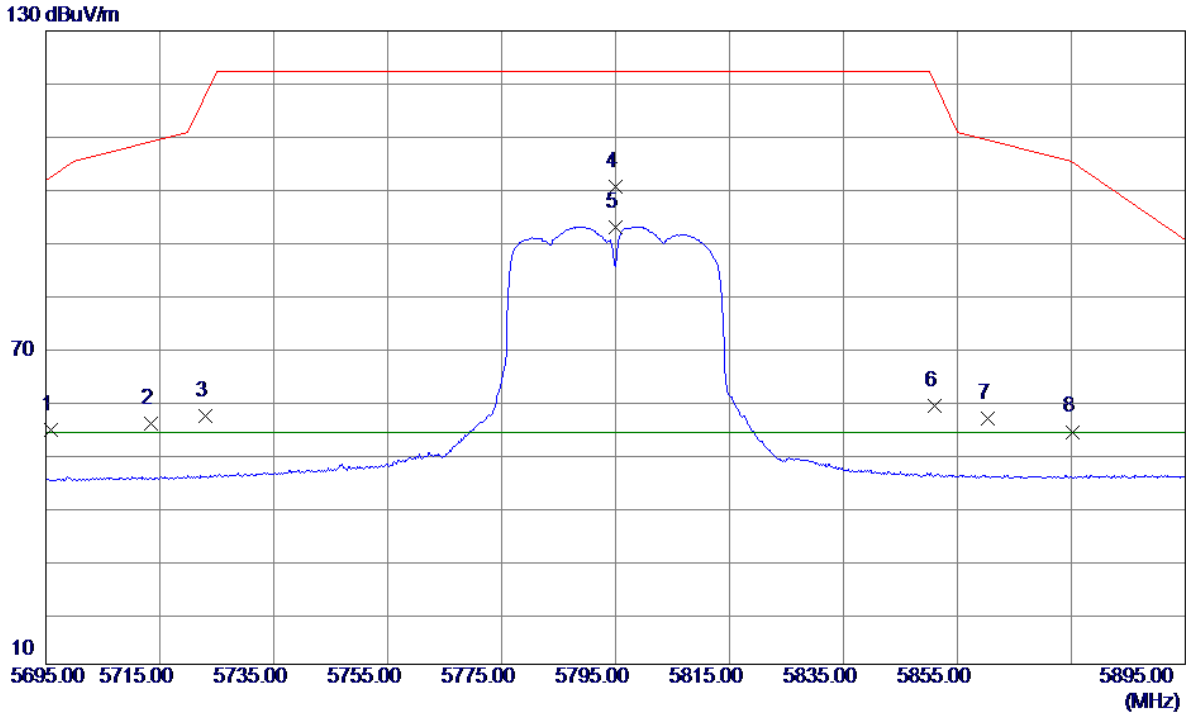

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5695.8200	15.98	38.45	54.43	102.11	-47.68	Peak	
2	5713.4200	17.00	38.50	55.50	108.96	-53.46	Peak	
3	5723.0500	18.61	38.53	57.14	117.75	-60.61	Peak	
4	5795.0000	61.86	38.72	100.58	122.20	-21.62	Peak	No Limit
5 *	5795.0000	54.19	38.72	92.91	54.00	38.91	AVG	No Limit
6	5851.0550	20.04	38.87	58.91	119.79	-60.88	Peak	
7	5860.4000	17.70	38.90	56.60	109.29	-52.69	Peak	
8	5875.1600	15.10	38.94	54.04	105.08	-51.04	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

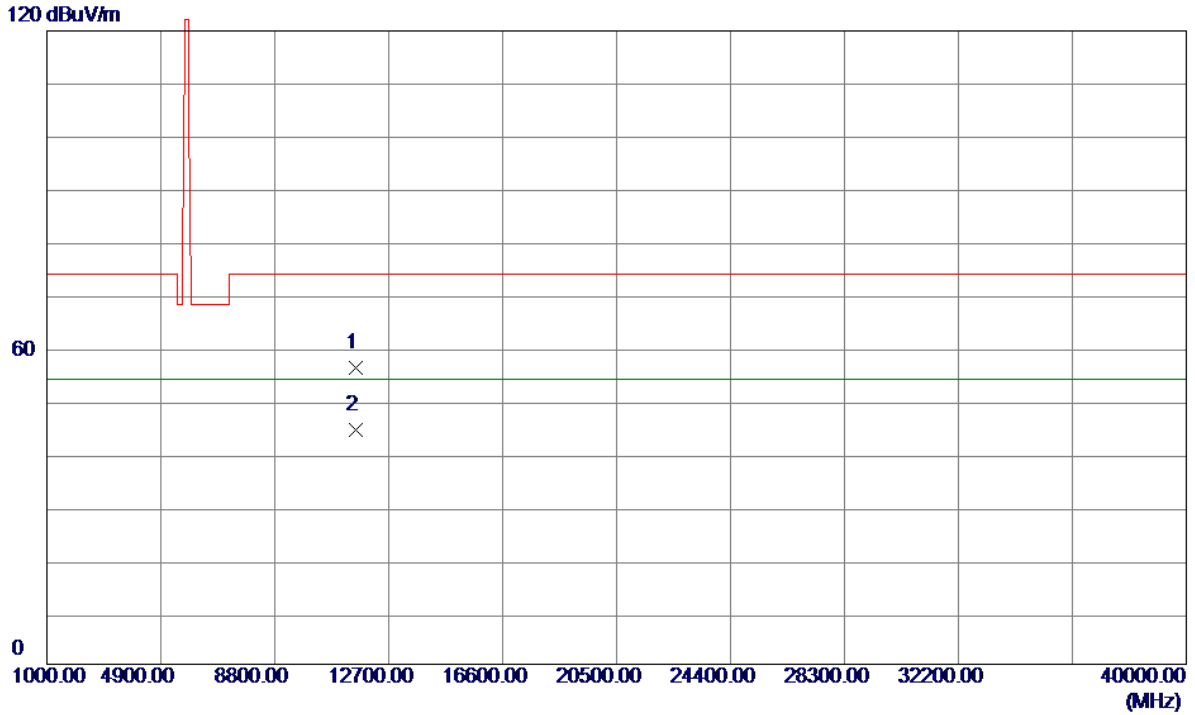

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	52.98	3.24	56.22	74.00	-17.78	Peak	
2 *	11590.0000	41.26	3.24	44.50	54.00	-9.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

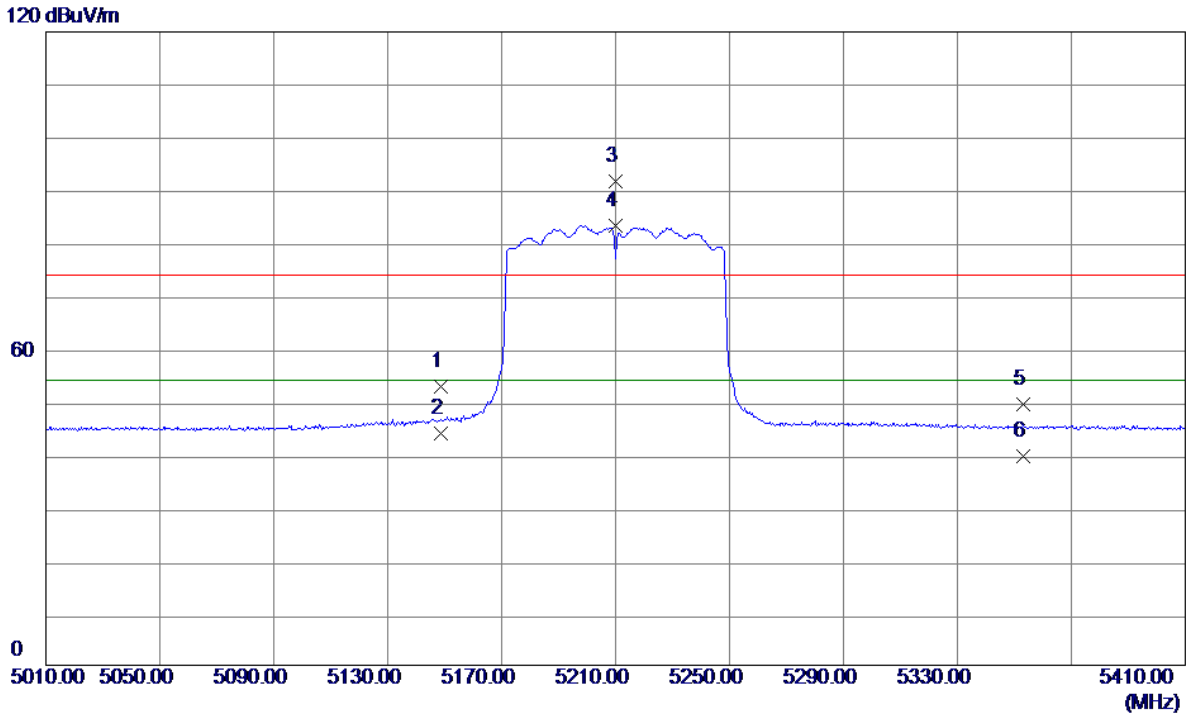

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.8800	15.37	37.54	52.91	74.00	-21.09	Peak	
2	5148.8800	6.30	37.54	43.84	54.00	-10.16	AVG	
3	5210.0000	54.12	37.61	91.73	74.00	17.73	Peak	No Limit
4 *	5210.0000	45.65	37.61	83.26	54.00	29.26	AVG	No Limit
5	5353.3000	11.65	37.76	49.41	74.00	-24.59	Peak	
6	5353.3000	1.88	37.76	39.64	54.00	-14.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

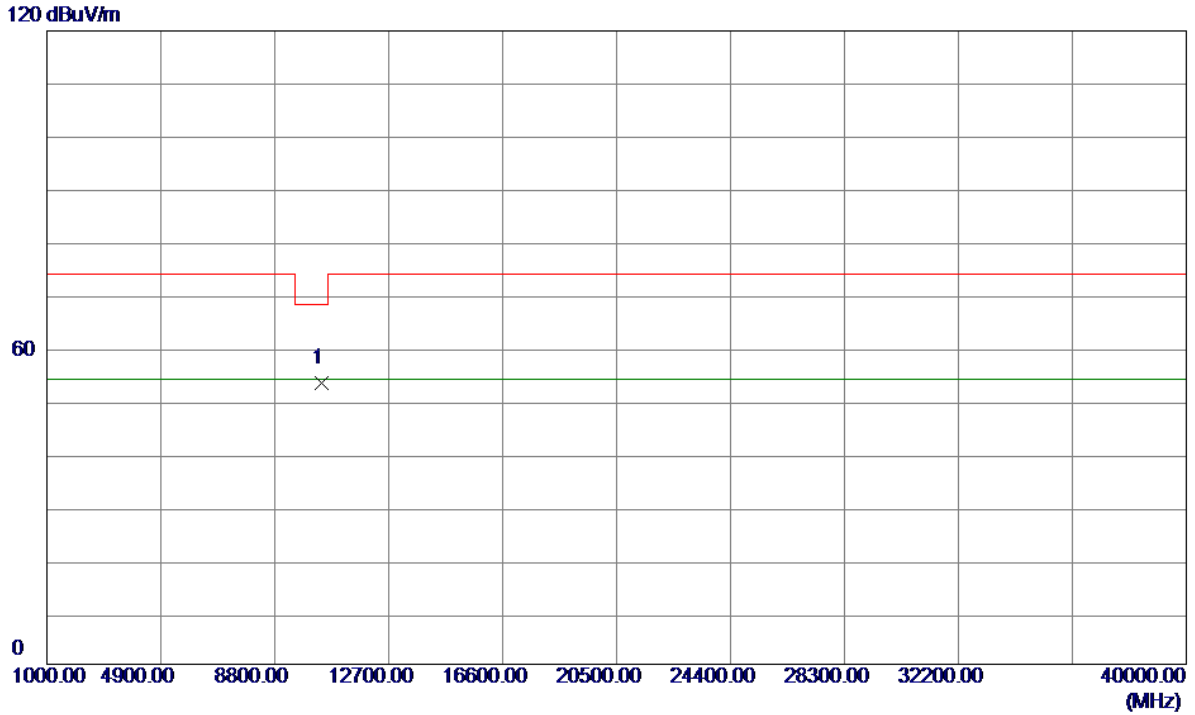


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	51.25	1.95	53.20	68.20	-15.00	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


120 dBuV/m

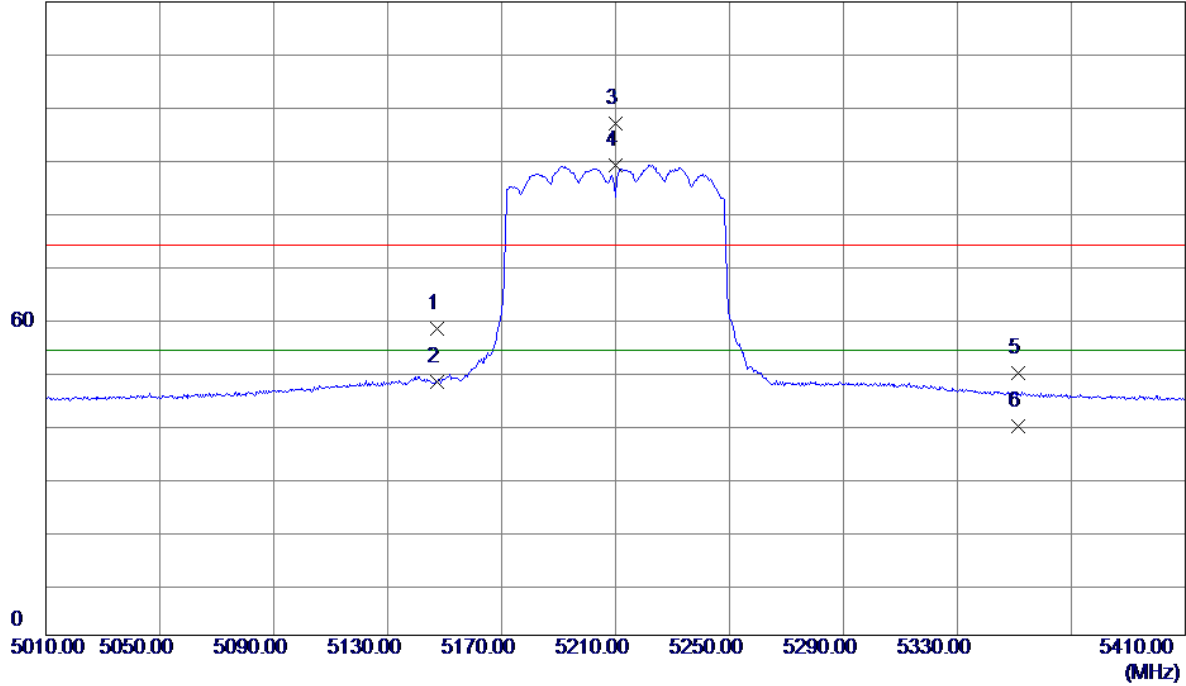

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	20.44	37.54	57.98	74.00	-16.02	Peak	
2	5147.2000	10.48	37.54	48.02	54.00	-5.98	AVG	
3	5210.0000	59.28	37.61	96.89	74.00	22.89	Peak	No Limit
4 *	5210.0000	51.54	37.61	89.15	54.00	35.15	AVG	No Limit
5	5351.2000	11.86	37.76	49.62	74.00	-24.38	Peak	
6	5351.2000	1.76	37.76	39.52	54.00	-14.48	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

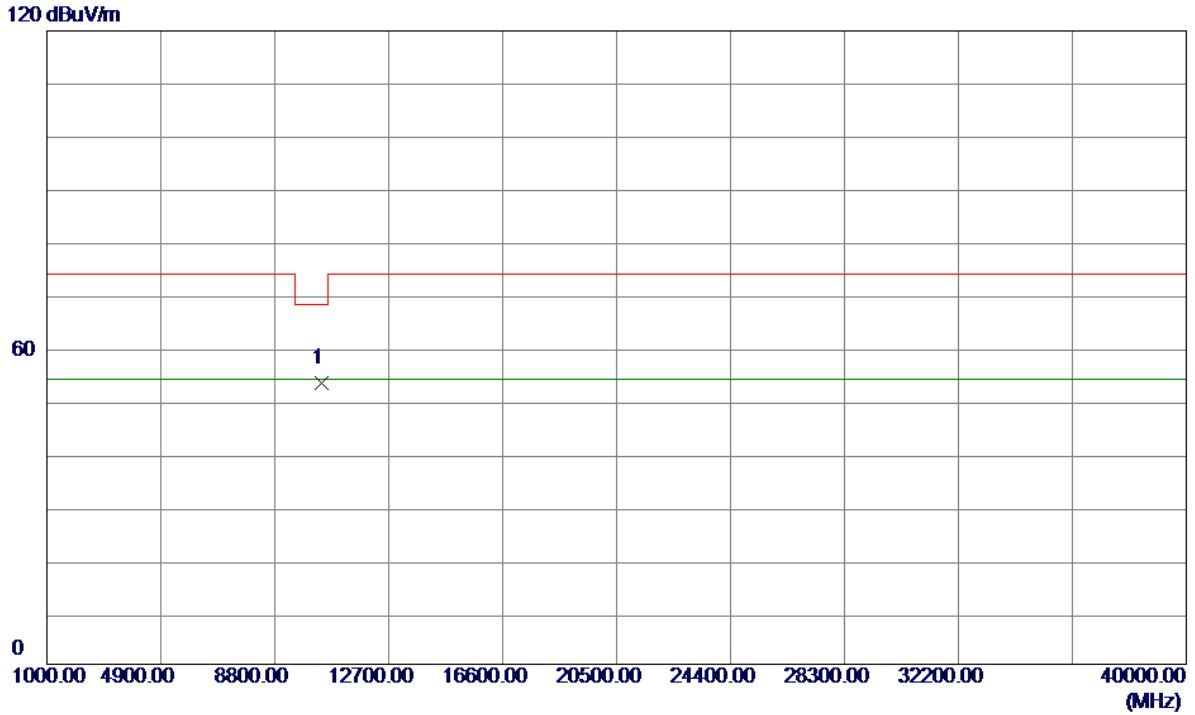


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	51.31	1.95	53.26	68.20	-14.94	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


120 dBuV/m

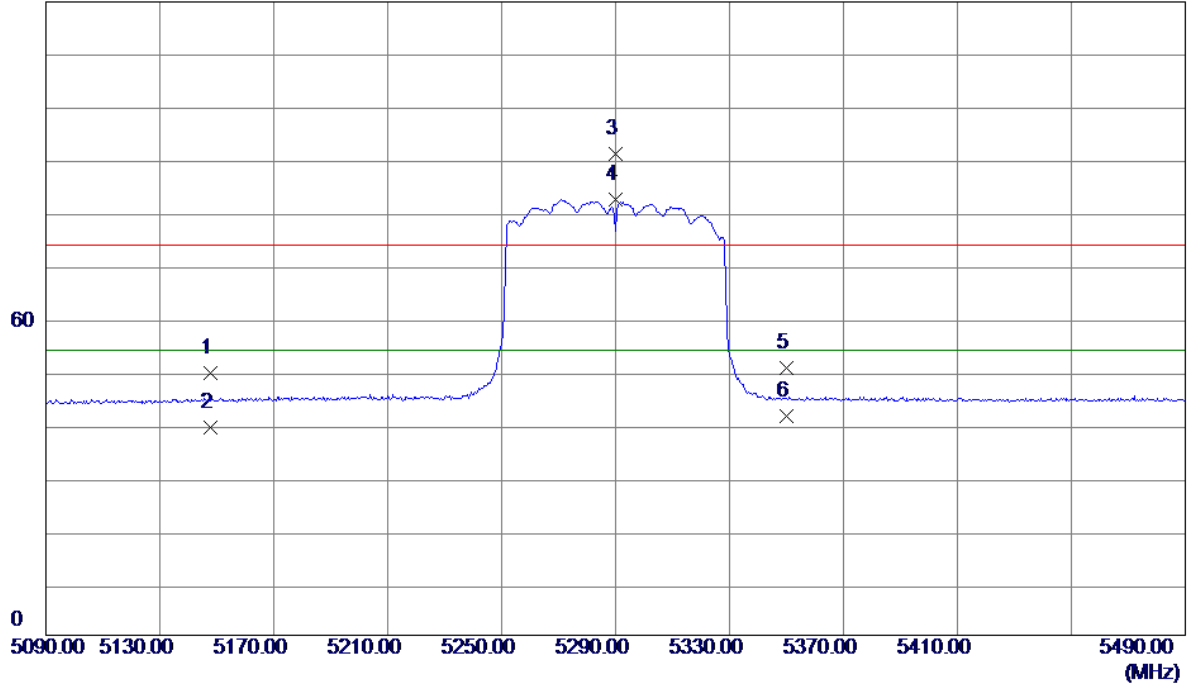

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.8400	12.18	37.54	49.72	74.00	-24.28	Peak	
2	5147.8400	1.87	37.54	39.41	54.00	-14.59	AVG	
3	5290.0000	53.55	37.69	91.24	74.00	17.24	Peak	No Limit
4 *	5290.0000	44.78	37.69	82.47	54.00	28.47	AVG	No Limit
5	5350.1100	12.77	37.76	50.53	74.00	-23.47	Peak	
6	5350.1100	3.86	37.76	41.62	54.00	-12.38	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

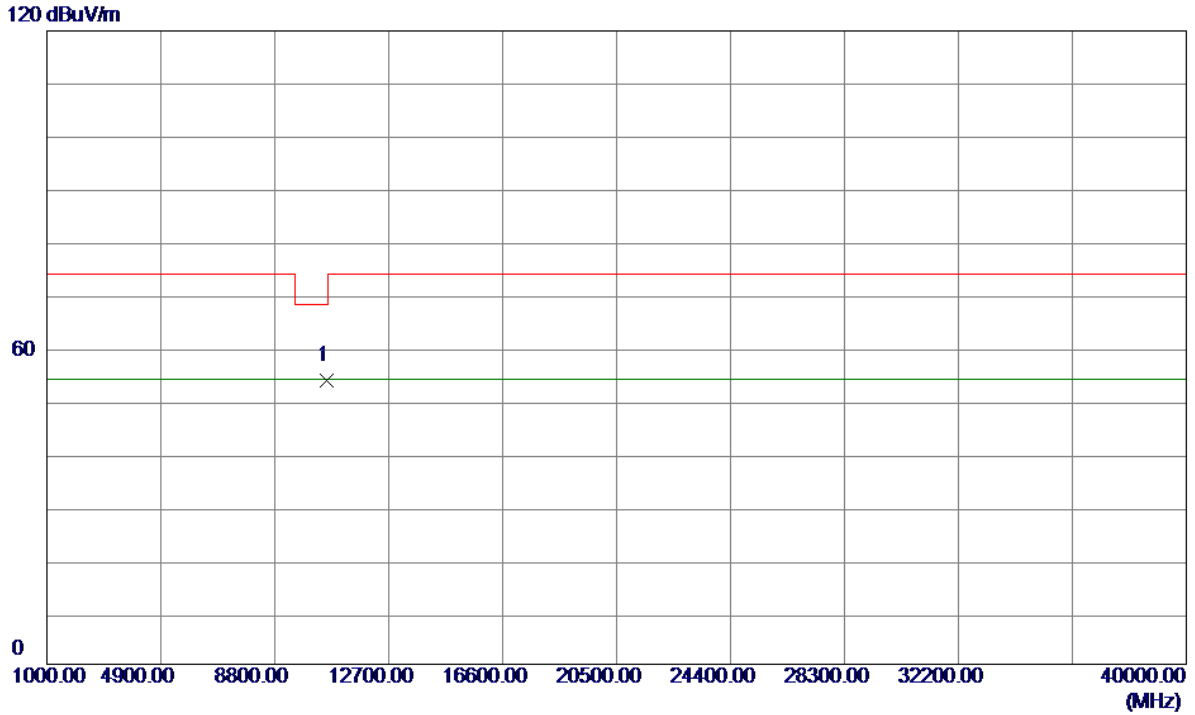


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	51.66	2.11	53.77	68.20	-14.43	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal


120 dBuV/m

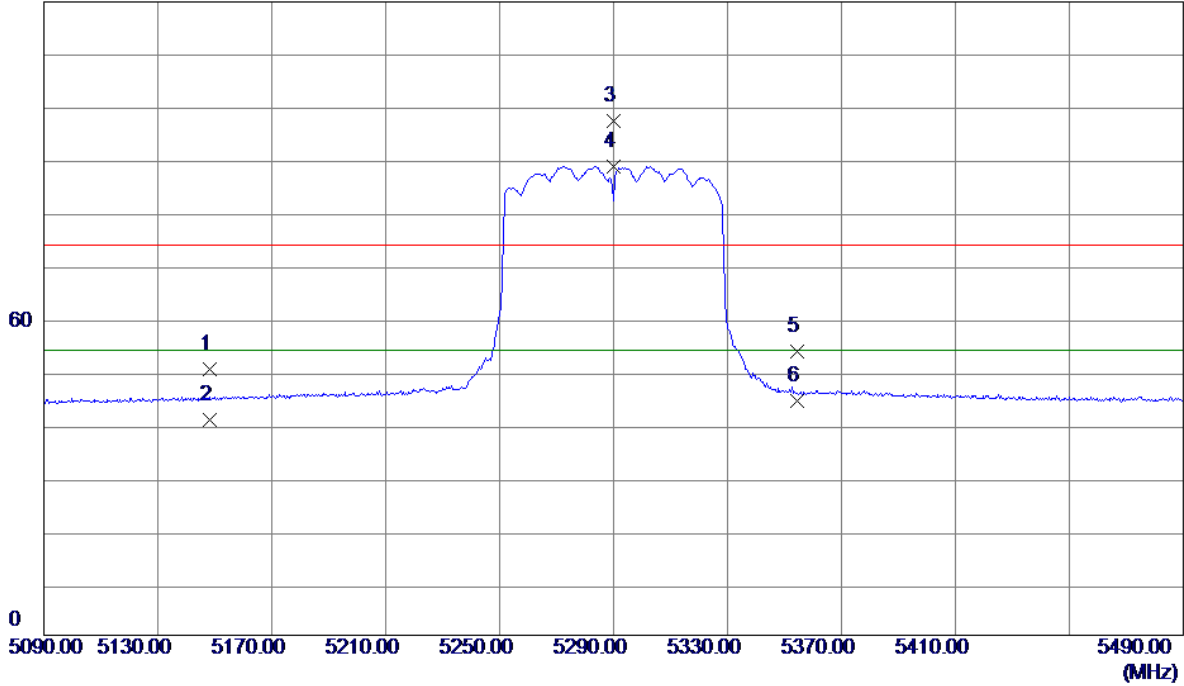

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4400	12.85	37.54	50.39	74.00	-23.61	Peak	
2	5148.4400	3.18	37.54	40.72	54.00	-13.28	AVG	
3	5290.0000	59.68	37.69	97.37	74.00	23.37	Peak	No Limit
4 *	5290.0000	51.17	37.69	88.86	54.00	34.86	AVG	No Limit
5	5354.2900	15.89	37.76	53.65	74.00	-20.35	Peak	
6	5354.2900	6.58	37.76	44.34	54.00	-9.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

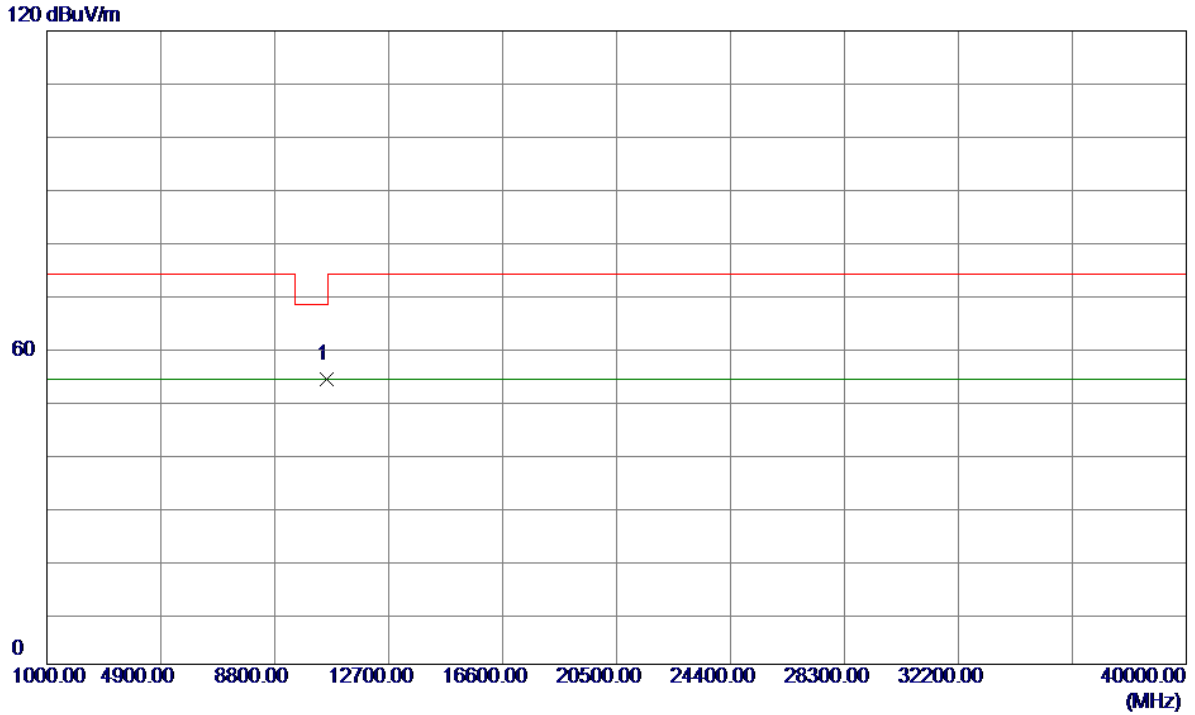


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	51.97	2.11	54.08	68.20	-14.12	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

120 dBuV/m

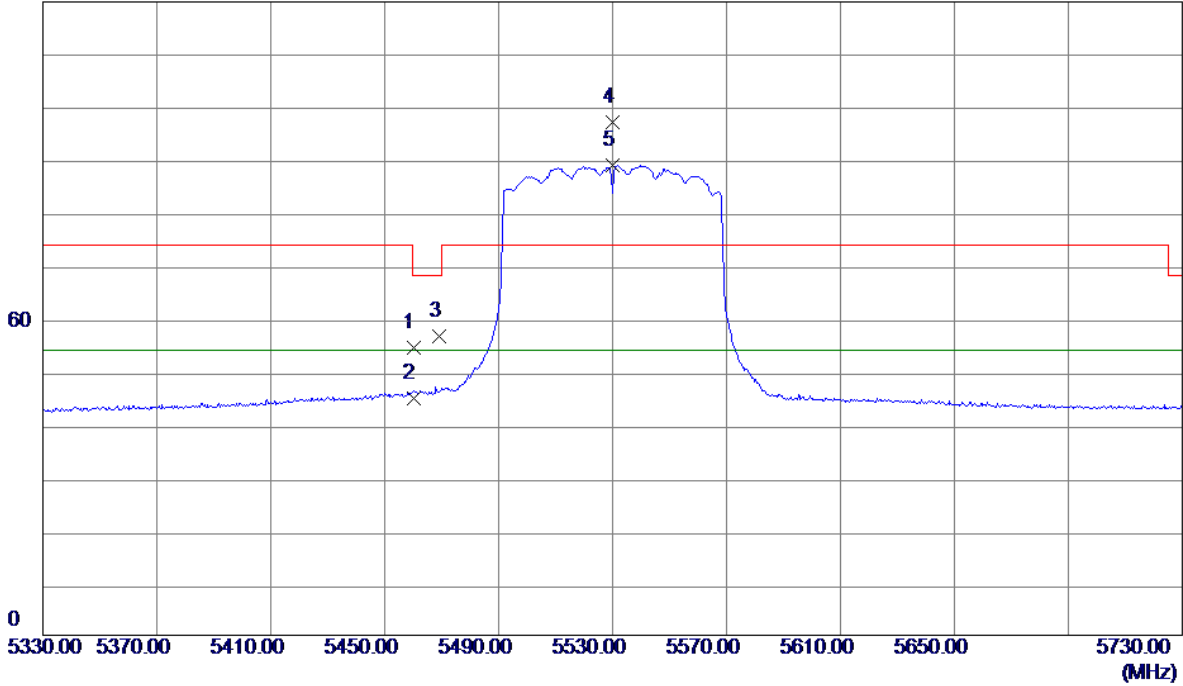


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	16.50	37.88	54.38	74.00	-19.62	Peak	
2	5460.0000	6.91	37.88	44.79	54.00	-9.21	AVG	
3	5468.9900	18.66	37.89	56.55	68.20	-11.65	Peak	
4	5530.0000	59.23	38.00	97.23	74.00	23.23	Peak	No Limit
5 *	5530.0000	51.08	38.00	89.08	54.00	35.08	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

120 dBuV/m

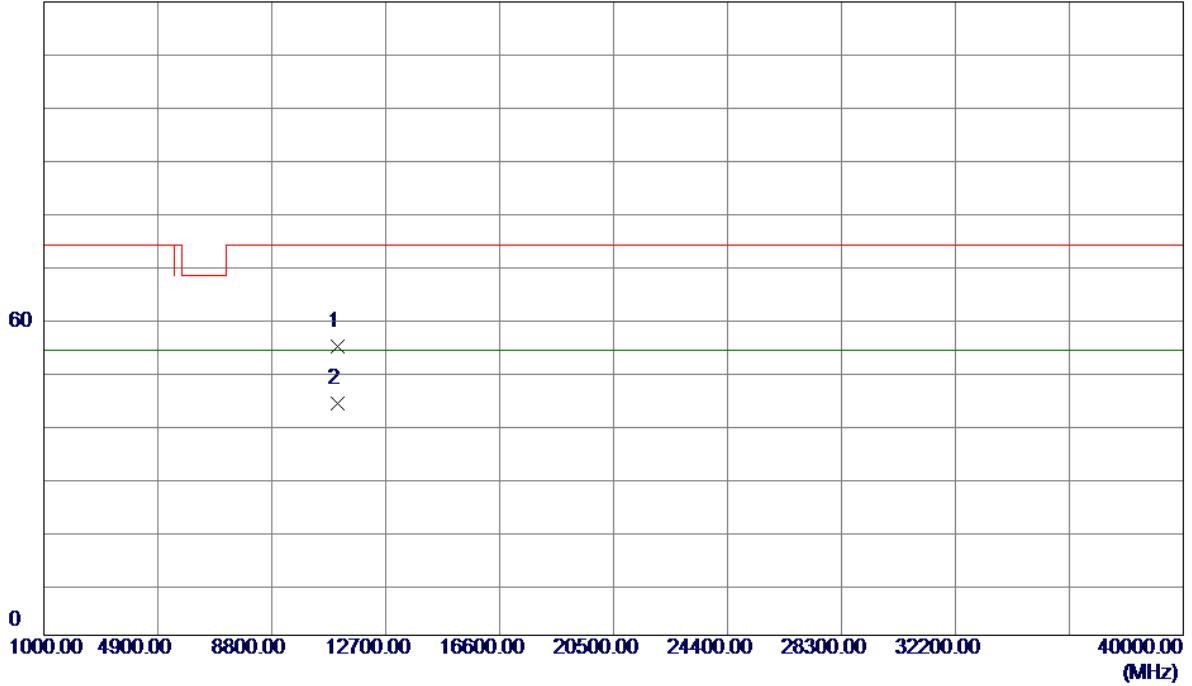


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	51.86	2.92	54.78	74.00	-19.22	Peak	
2 *	11060.0000	41.06	2.92	43.98	54.00	-10.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

120 dBuV/m

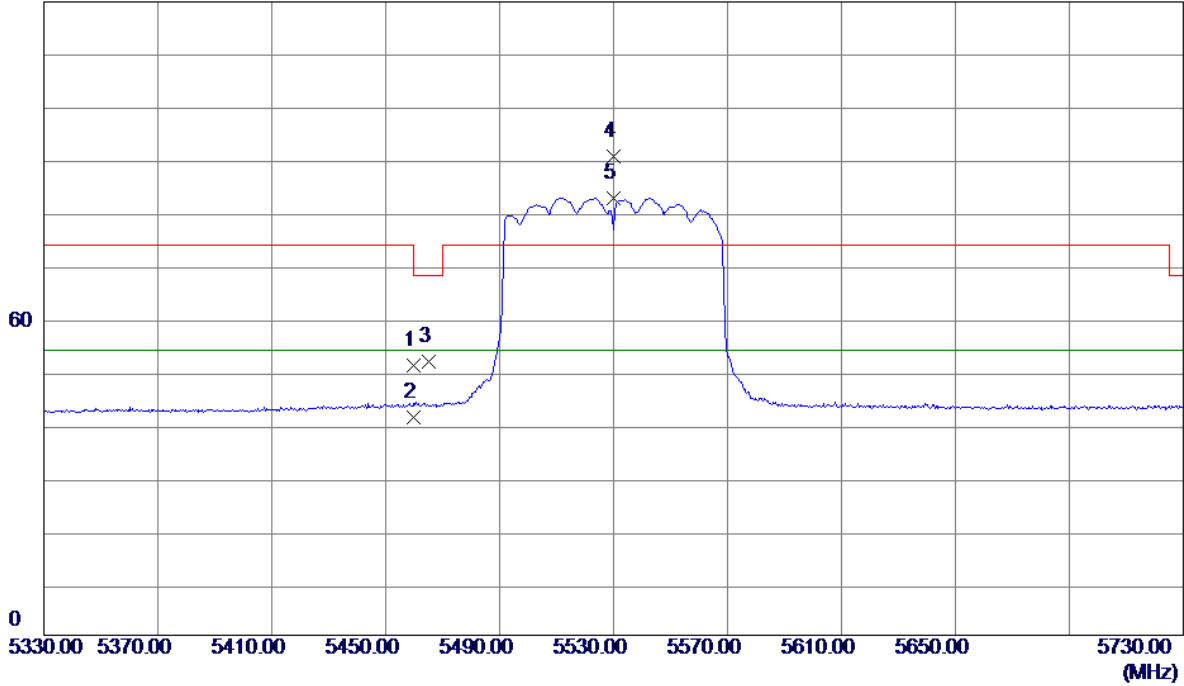


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.8700	13.34	37.88	51.22	74.00	-22.78	Peak	
2	5459.8700	3.42	37.88	41.30	54.00	-12.70	AVG	
3	5465.3300	13.90	37.88	51.78	68.20	-16.42	Peak	
4	5530.0000	52.66	38.00	90.66	74.00	16.66	Peak	No Limit
5 *	5530.0000	44.86	38.00	82.86	54.00	28.86	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


120 dBuV/m

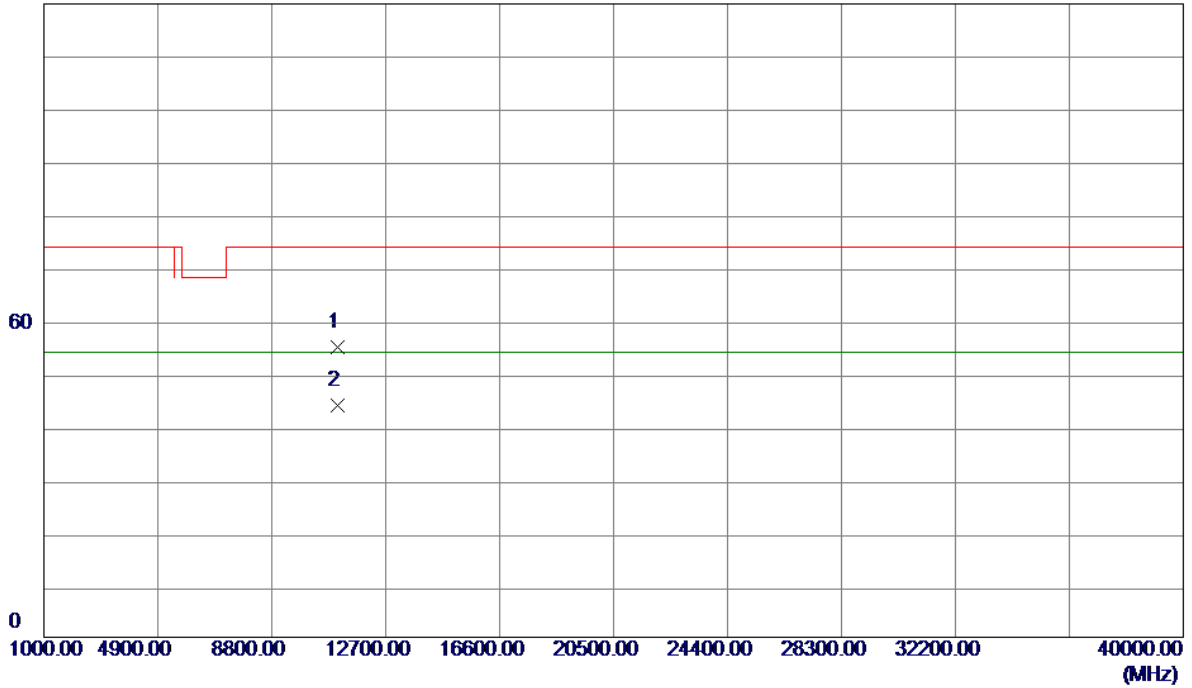

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.0000	52.04	2.92	54.96	74.00	-19.04	Peak	
2 *	11060.0000	40.93	2.92	43.85	54.00	-10.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

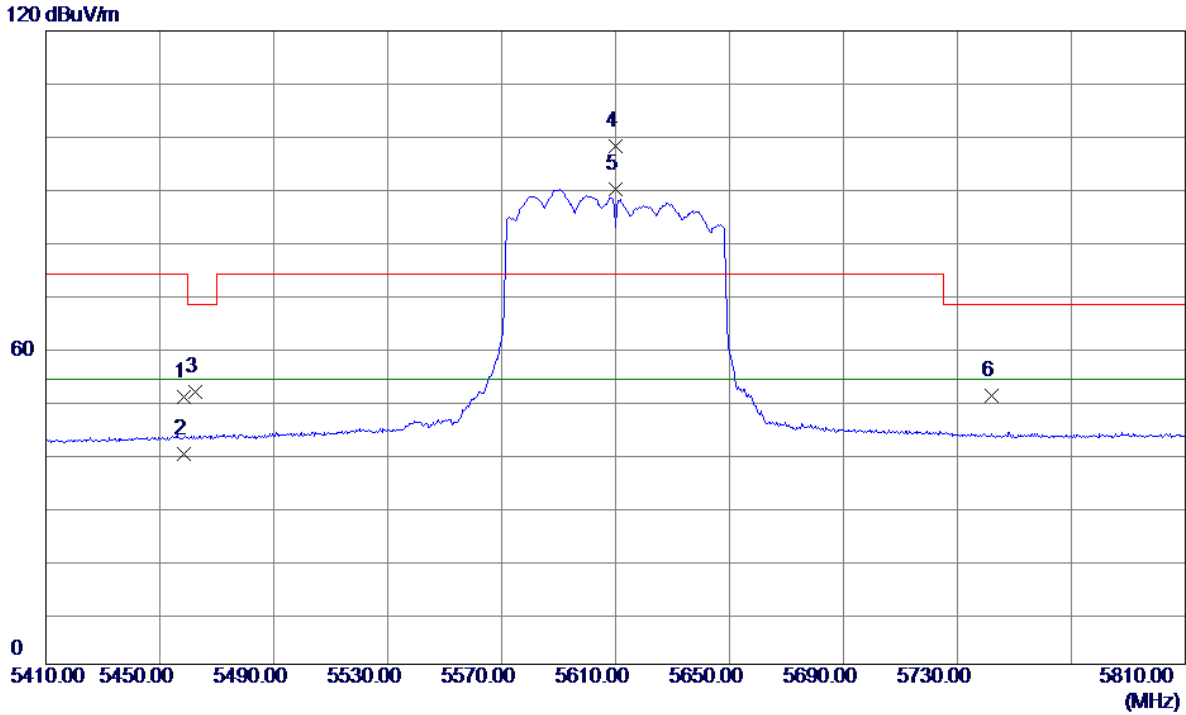


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.2500	12.69	37.87	50.56	74.00	-23.44	Peak	
2	5458.2500	2.08	37.87	39.95	54.00	-14.05	AVG	
3	5462.4100	13.82	37.88	51.70	68.20	-16.50	Peak	
4	5610.0000	59.85	38.22	98.07	74.00	24.07	Peak	No Limit
5 *	5610.0000	51.70	38.22	89.92	54.00	35.92	AVG	No Limit
6	5741.8300	12.39	38.58	50.97	68.20	-17.23	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

120 dBuV/m

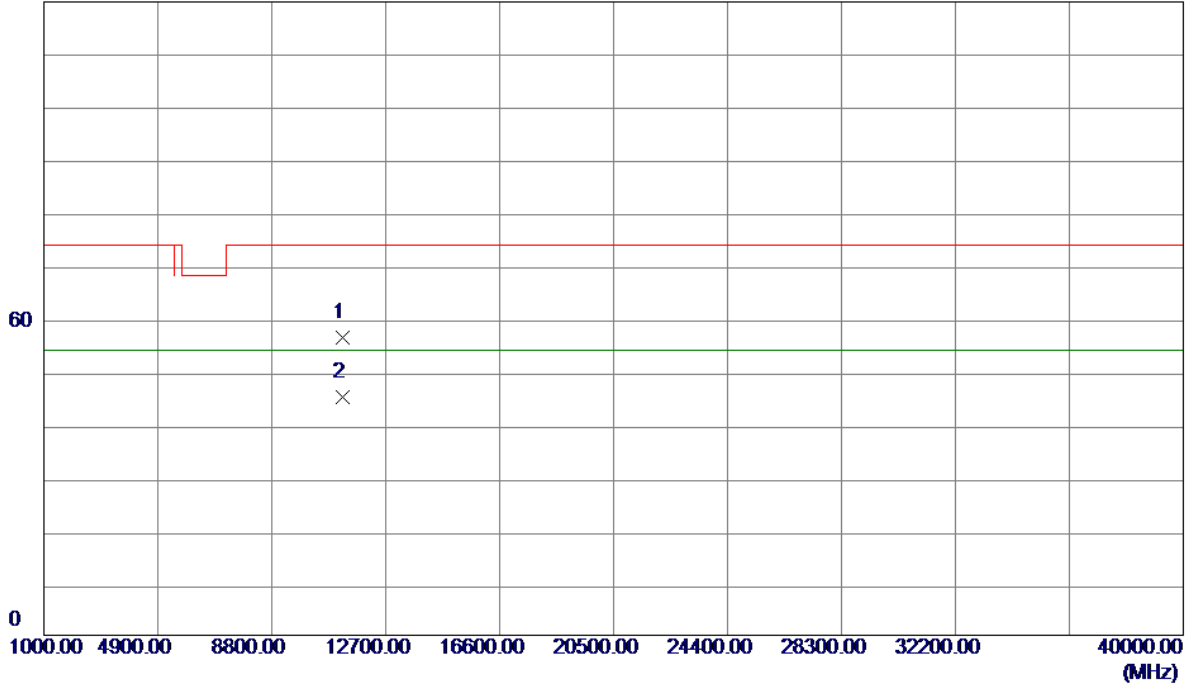


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	53.35	3.10	56.45	74.00	-17.55	Peak	
2 *	11220.0000	41.94	3.10	45.04	54.00	-8.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

120 dBuV/m

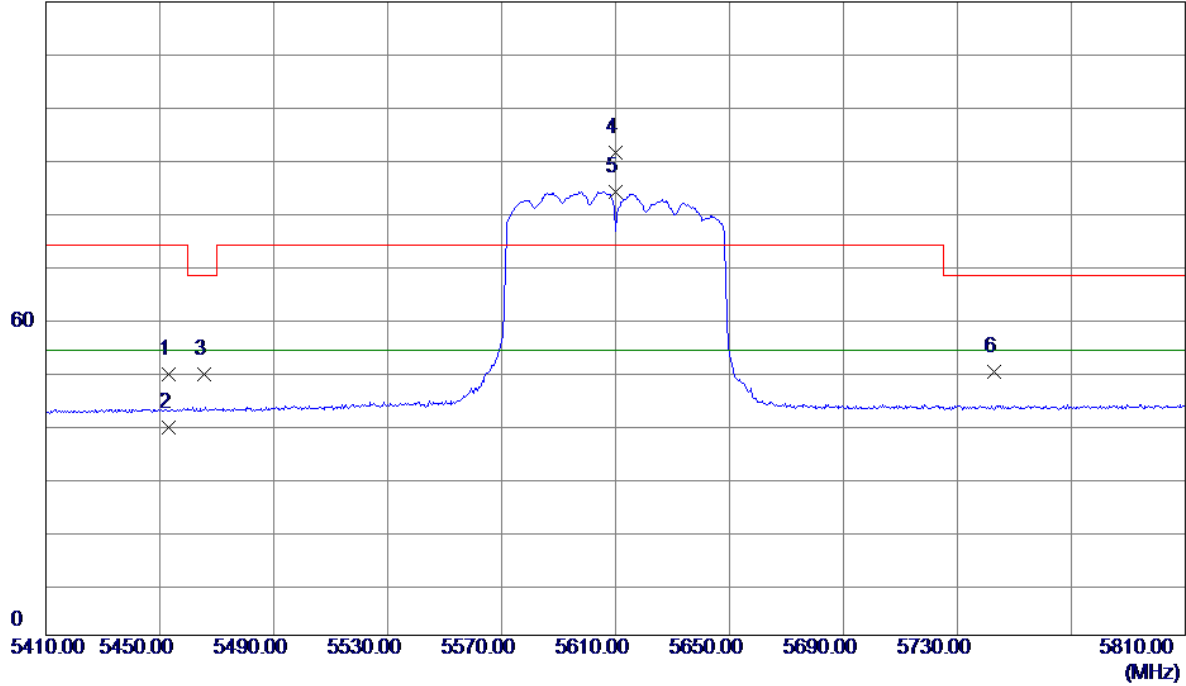


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.2000	11.46	37.87	49.33	74.00	-24.67	Peak	
2	5453.2000	1.52	37.87	39.39	54.00	-14.61	AVG	
3	5465.6400	11.57	37.88	49.45	68.20	-18.75	Peak	
4	5610.0000	53.30	38.22	91.52	74.00	17.52	Peak	No Limit
5 *	5610.0000	45.81	38.22	84.03	54.00	30.03	AVG	No Limit
6	5743.0200	11.23	38.58	49.81	68.20	-18.39	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


120 dBuV/m

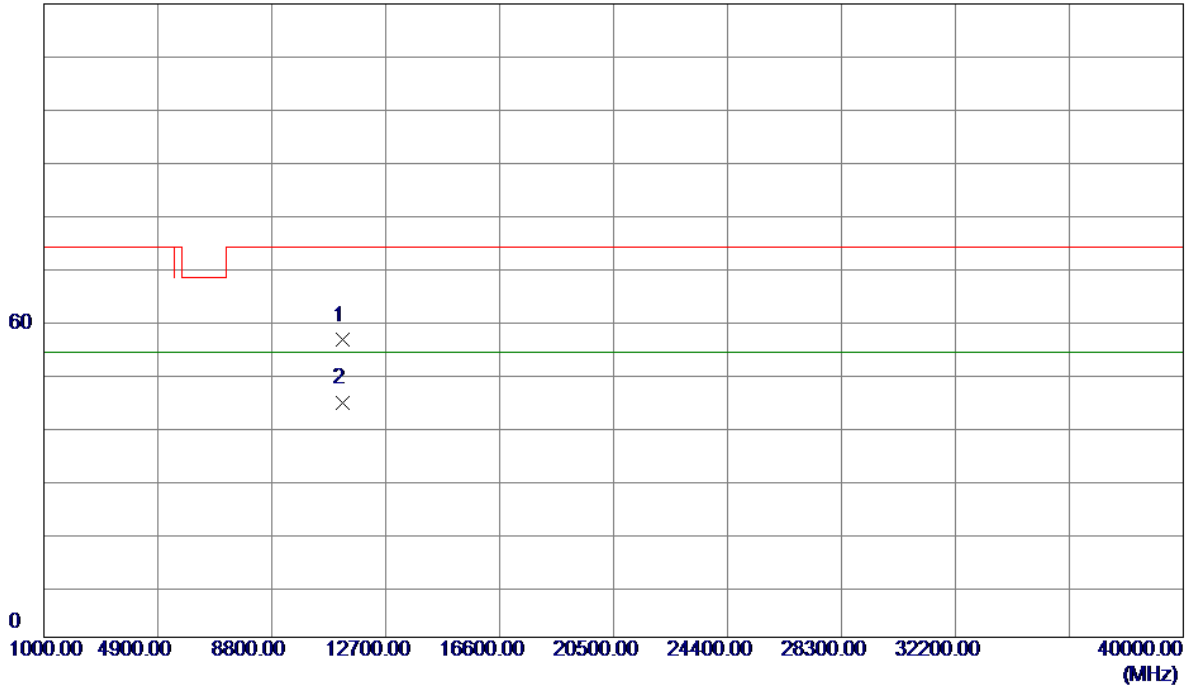

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	53.18	3.10	56.28	74.00	-17.72	Peak	
2 *	11220.0000	41.34	3.10	44.44	54.00	-9.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

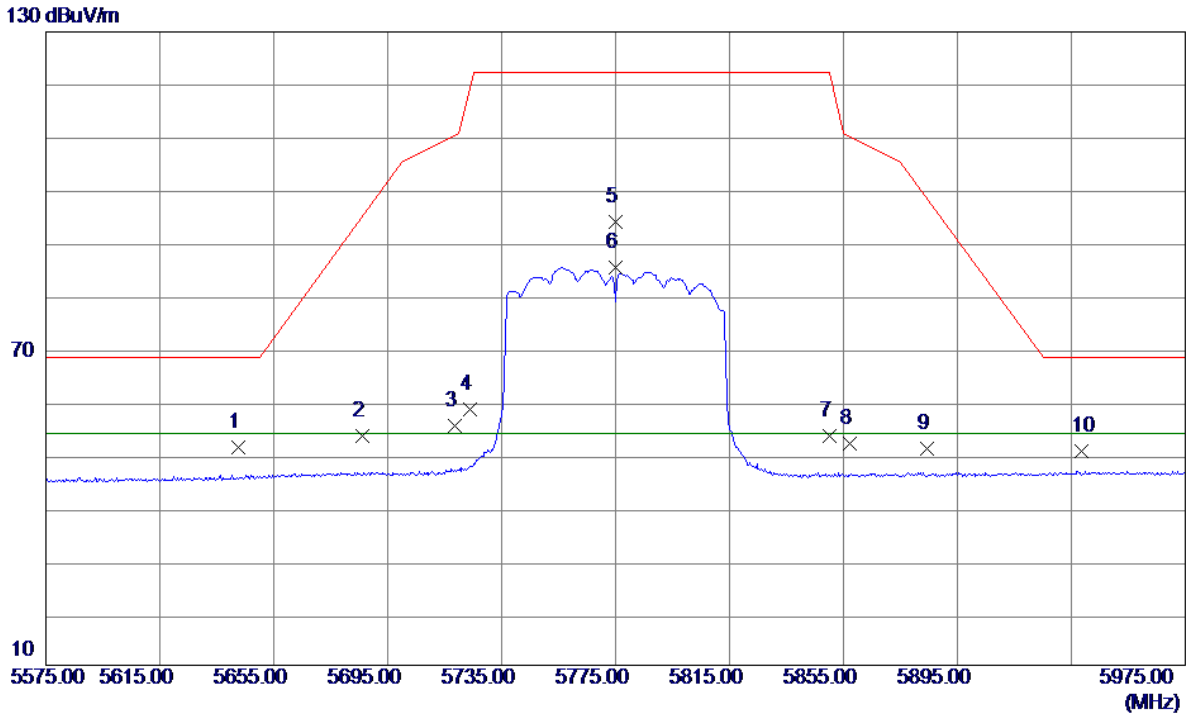

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5642.5750	12.99	38.31	51.30	68.20	-16.90	Peak	
2	5686.2000	14.98	38.43	53.41	94.99	-41.58	Peak	
3	5718.5800	16.85	38.51	55.36	110.40	-55.04	Peak	
4	5723.9049	19.93	38.53	58.46	119.70	-61.24	Peak	
5	5775.0000	55.27	38.67	93.94	122.20	-28.26	Peak	No Limit
6 *	5775.0000	46.79	38.67	85.46	54.00	31.46	AVG	No Limit
7	5850.0800	14.54	38.87	53.41	122.02	-68.61	Peak	
8	5857.1000	13.04	38.89	51.93	110.21	-58.28	Peak	
9	5884.2500	11.97	38.97	50.94	98.36	-47.42	Peak	
10	5938.7750	11.50	39.11	50.61	68.20	-17.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

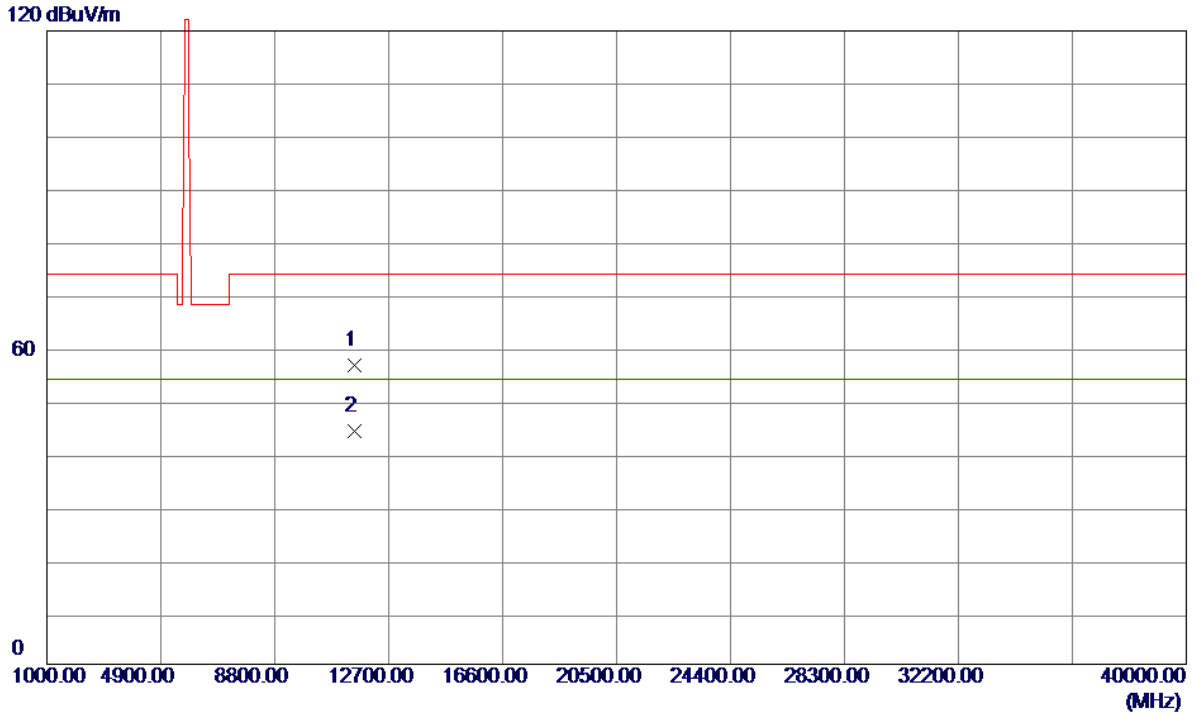

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	53.29	3.32	56.61	74.00	-17.39	Peak	
2 *	11550.0000	40.83	3.32	44.15	54.00	-9.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

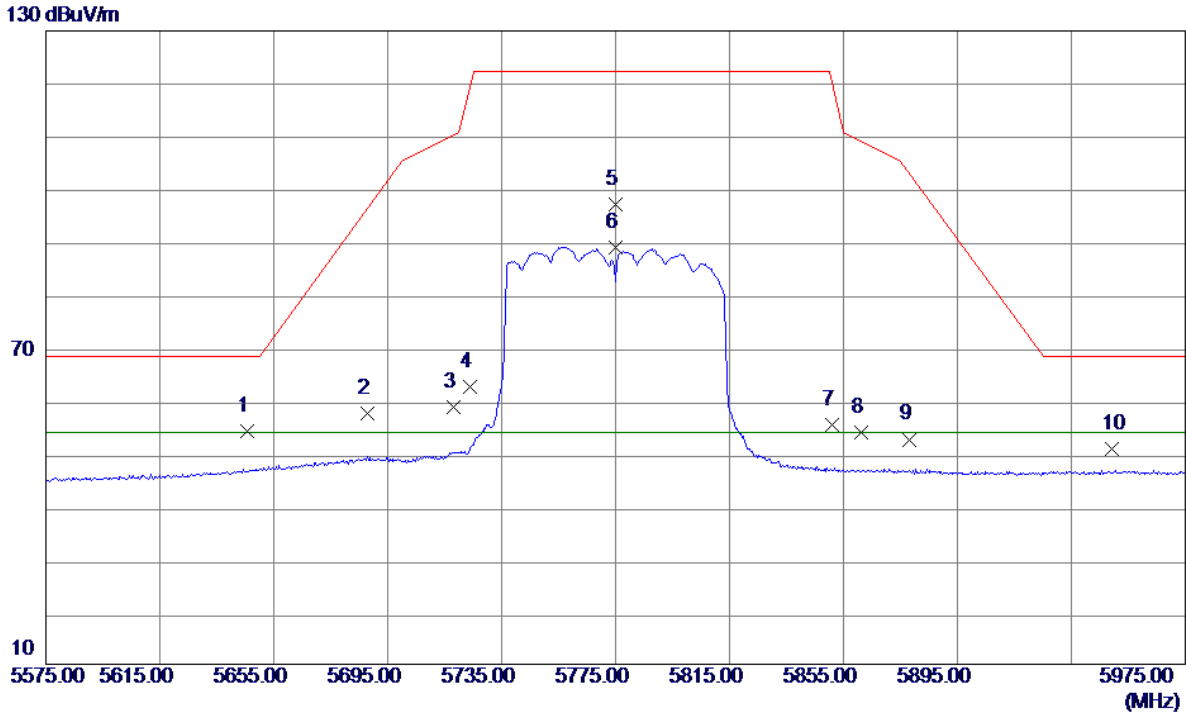

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.5000	15.92	38.32	54.24	68.20	-13.96	Peak	
2	5688.1000	19.01	38.43	57.44	96.39	-38.95	Peak	
3	5718.1800	20.14	38.51	58.65	110.29	-51.64	Peak	
4	5724.0350	24.09	38.53	62.62	120.00	-57.38	Peak	
5	5775.0000	58.44	38.67	97.11	122.20	-25.09	Peak	No Limit
6 *	5775.0000	50.40	38.67	89.07	54.00	35.07	AVG	No Limit
7	5850.9350	16.41	38.87	55.28	120.07	-64.79	Peak	
8	5861.0800	14.95	38.90	53.85	109.10	-55.25	Peak	
9	5878.1000	13.65	38.95	52.60	102.91	-50.31	Peak	
10	5949.4000	11.75	39.14	50.89	68.20	-17.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

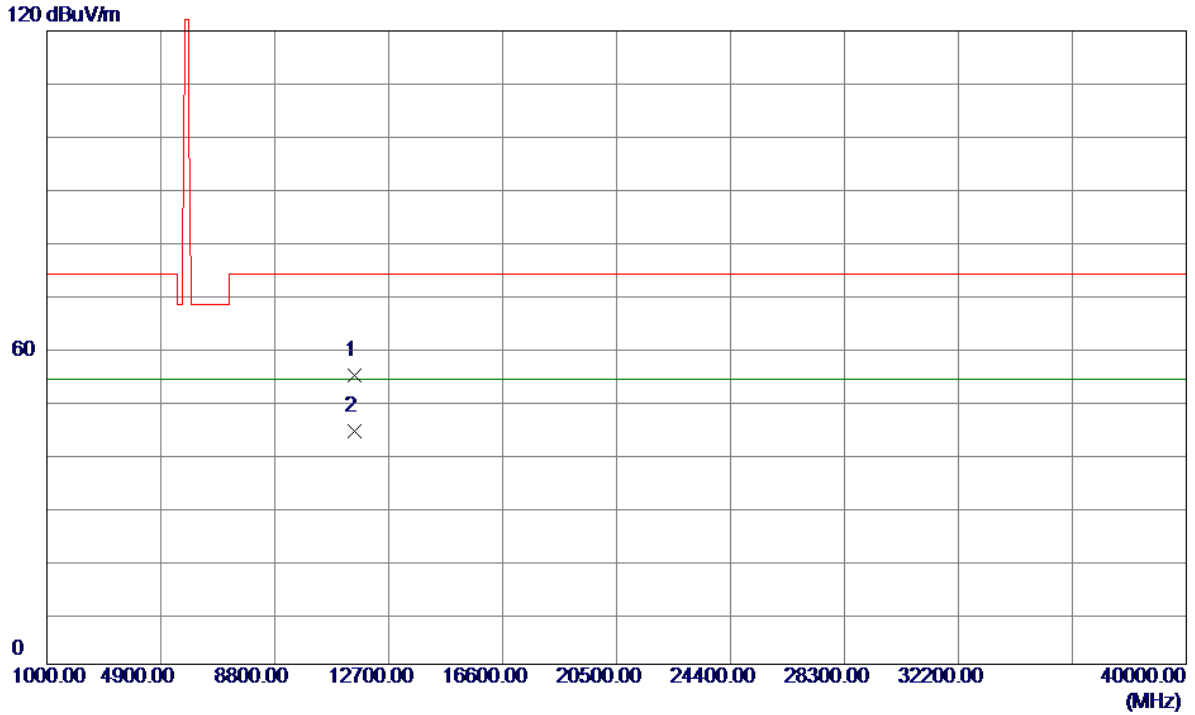

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	51.39	3.32	54.71	74.00	-19.29	Peak	
2 *	11550.0000	40.75	3.32	44.07	54.00	-9.93	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.06 msec

T_{Total} : 2.17 msec

Duty cycle: 94.93%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.23

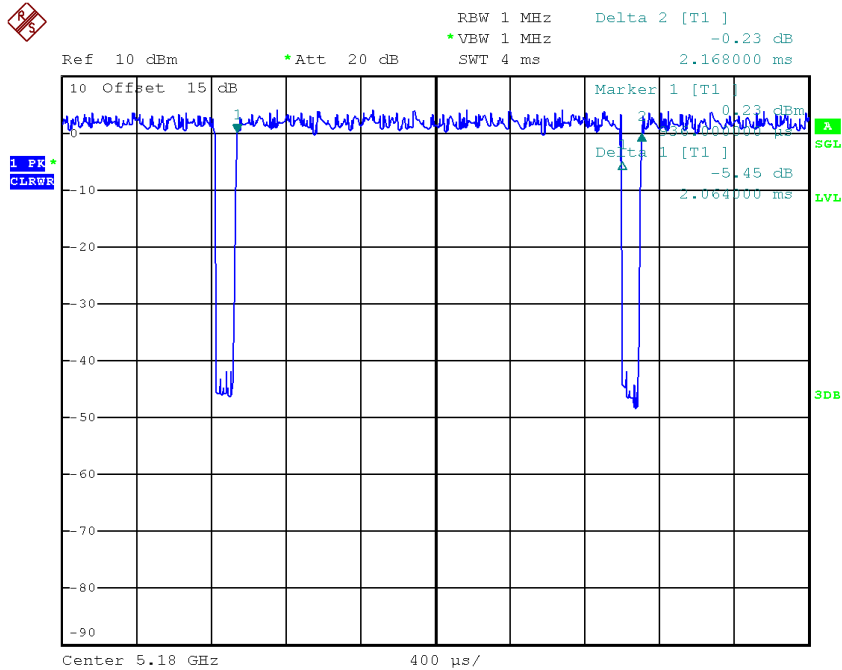

Date: 23.AUG.2017 18:29:48

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.92 msec

T_{Total} : 2.02 msec

Duty cycle: 95.05%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.22

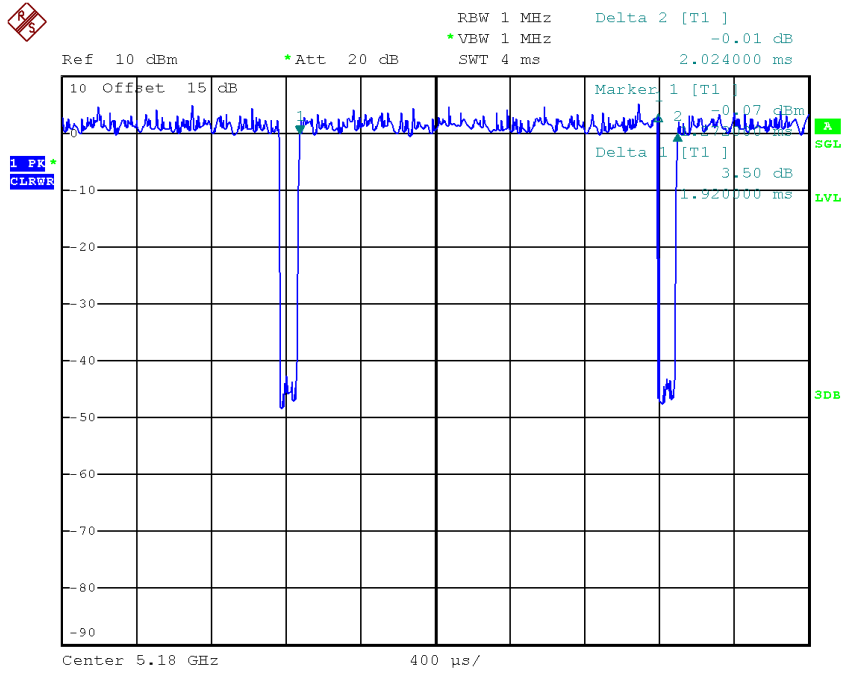

Date: 23.AUG.2017 18:29:29

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.94 msec

T_{Total} : 1.06 msec

Duty cycle: 88.68%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.52

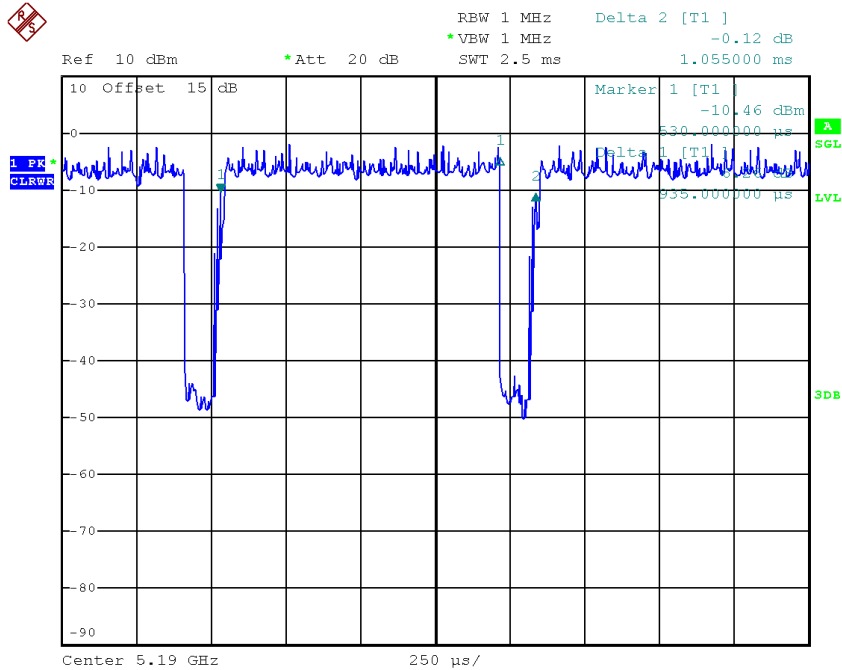

Date: 23.AUG.2017 18:28:45

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.44 msec

T_{Total} : 0.56 msec

Duty cycle: 78.57%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 1.05

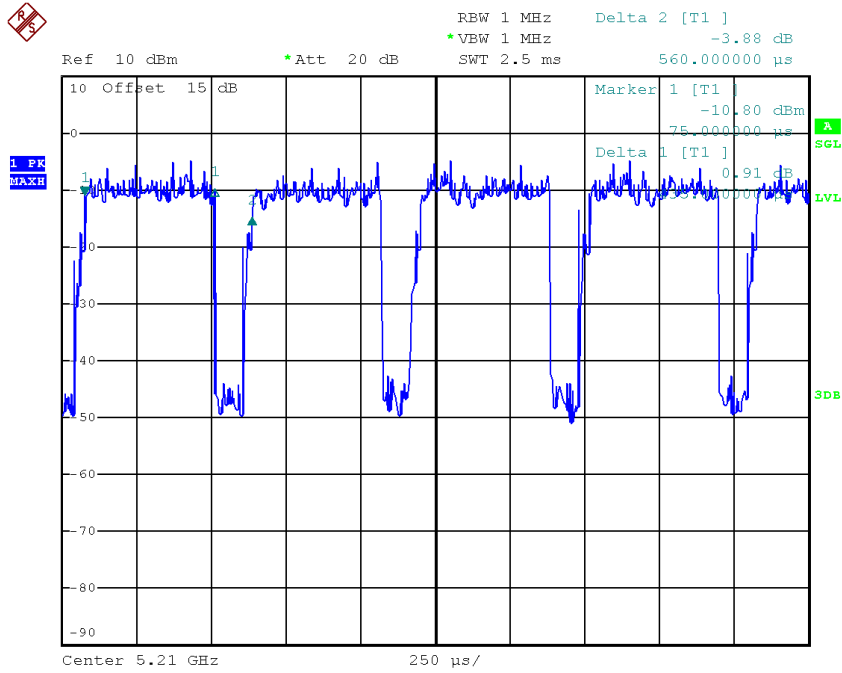

Date: 23.AUG.2017 18:27:36


Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.00	16.40
CH40	5200	19.99	16.40
CH48	5240	19.59	16.40

TX CH36

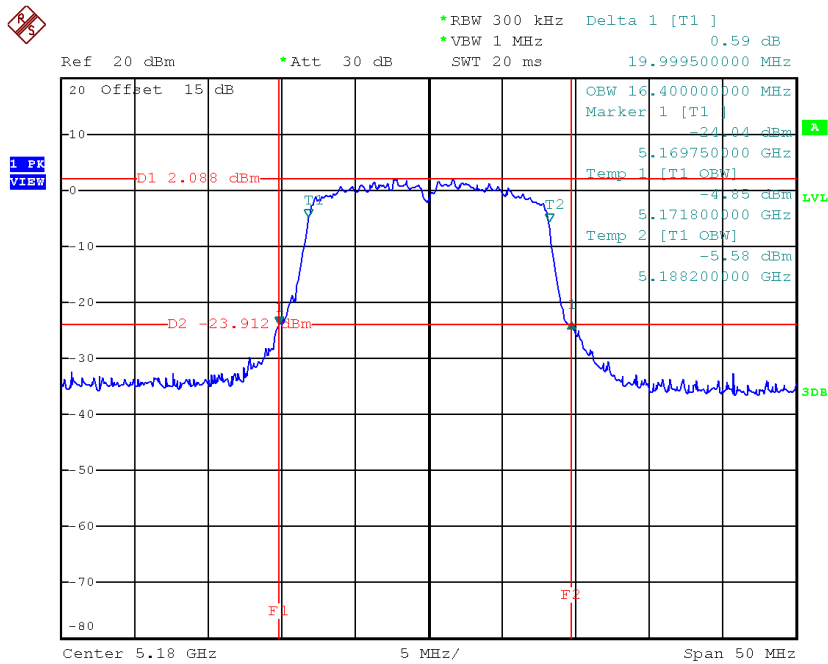


Date: 23.AUG.2017 12:21:38

TX CH40

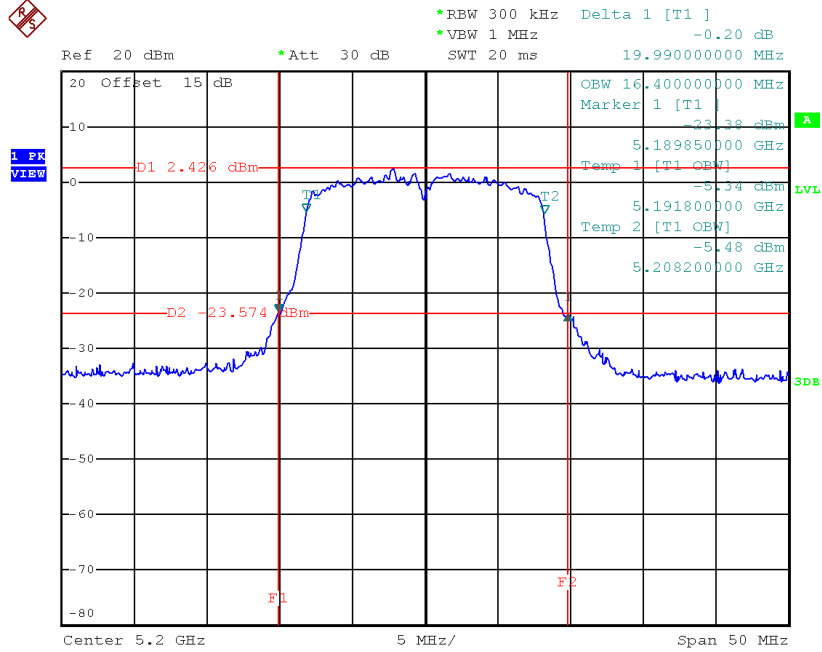

Date: 23.AUG.2017 12:24:35

TX CH48

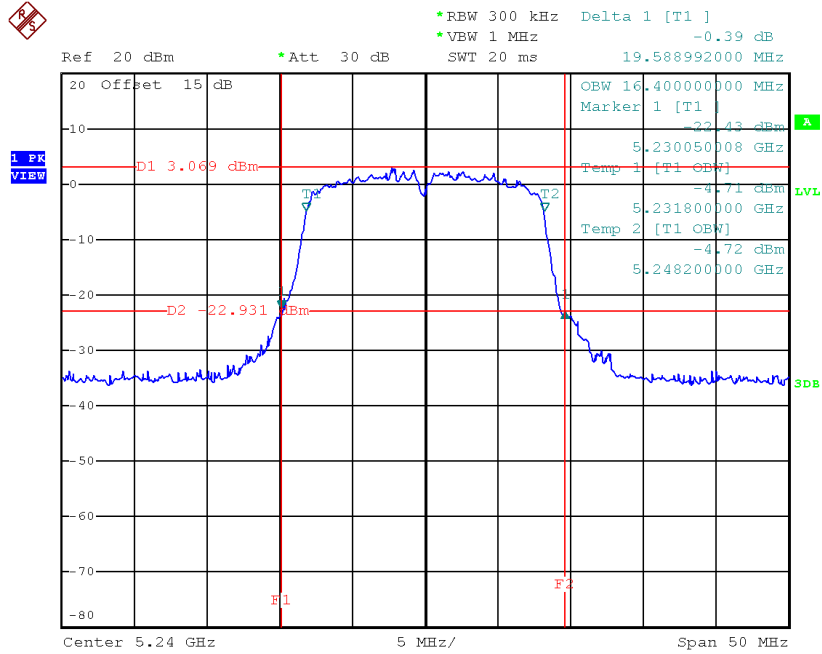


Date: 23.AUG.2017 12:26:10

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.90	17.50
CH40	5200	20.65	17.50
CH48	5240	20.60	17.50

TX CH36

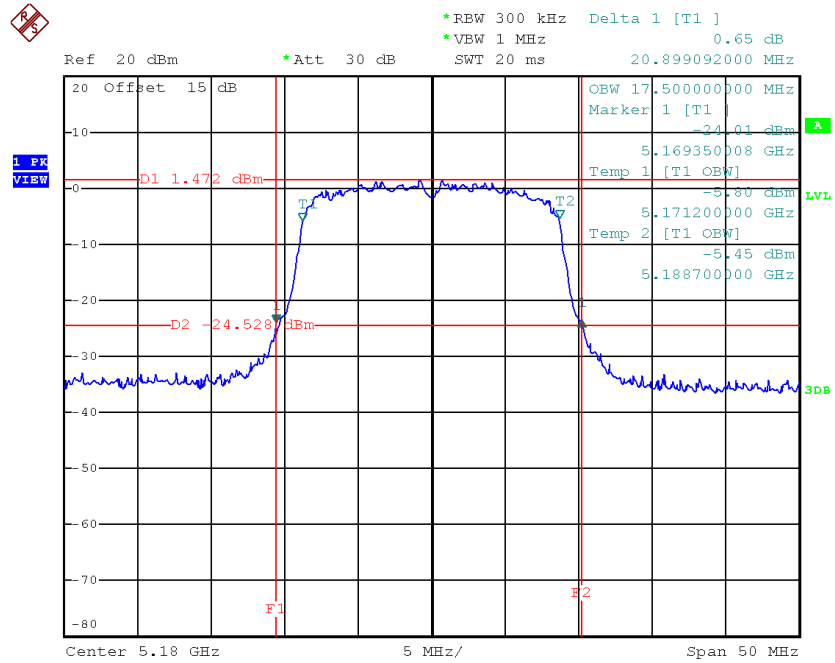


Date: 23.AUG.2017 13:01:43

TX CH40

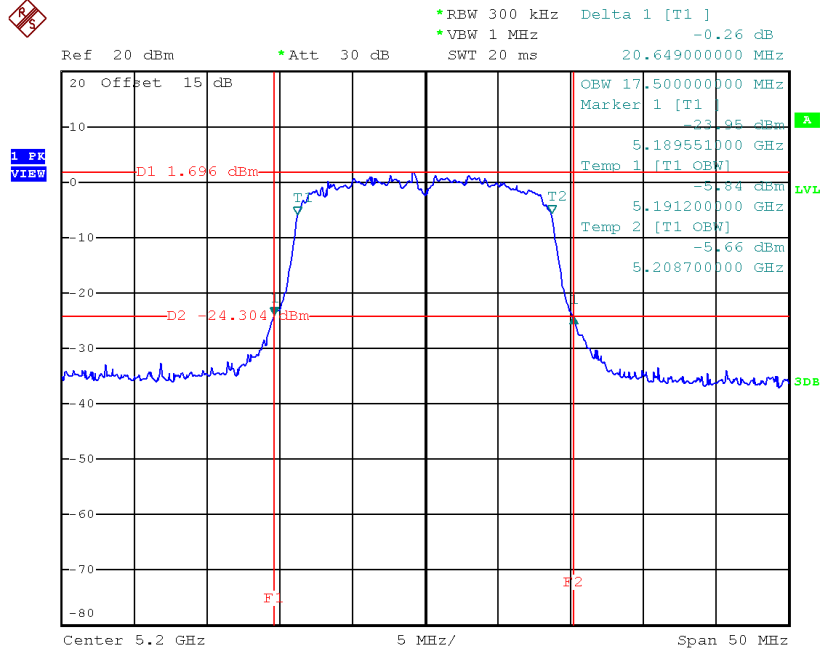

Date: 23.AUG.2017 13:02:39

TX CH48

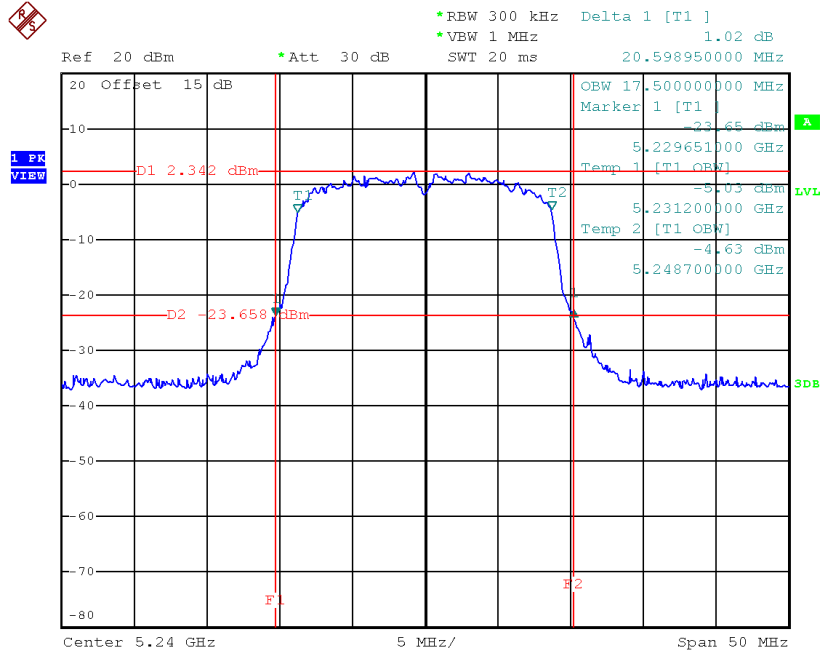


Date: 23.AUG.2017 13:03:37

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	41.80	36.40
CH46	5230	42.20	36.40

TX CH38

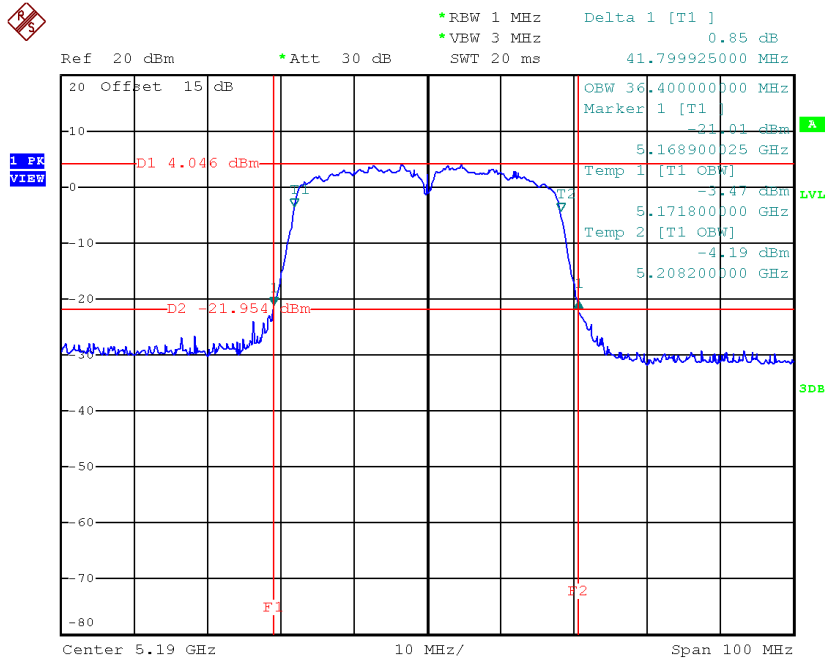

Date: 23.AUG.2017 17:24:49


TX CH46

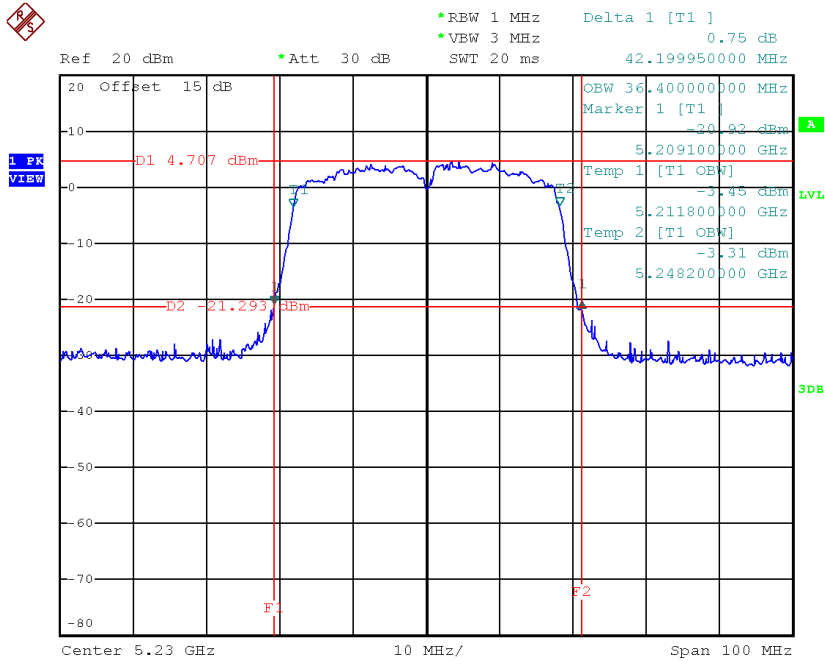

Date: 23.AUG.2017 17:27:54


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.40	16.40
CH60	5300	19.69	16.40
CH64	5320	19.55	16.40

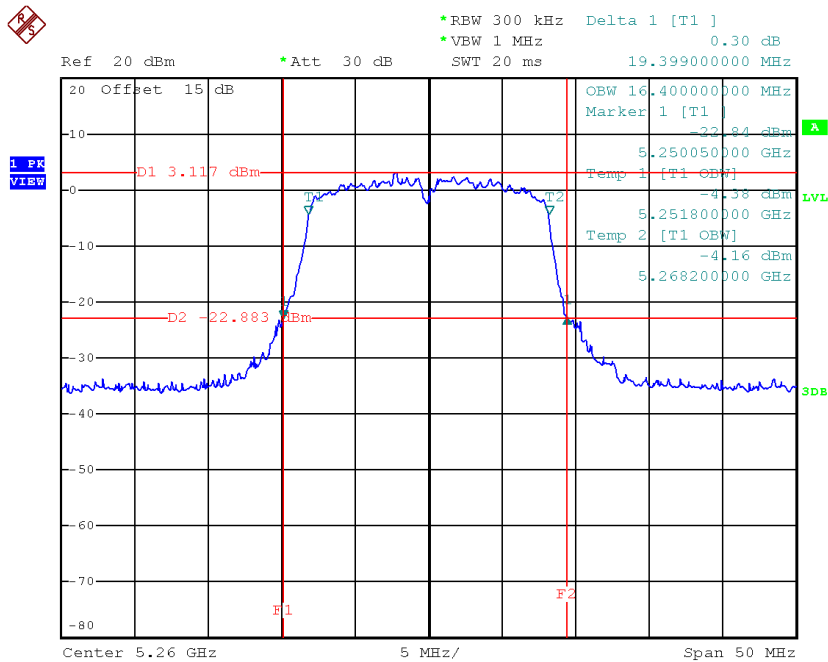TX CH52


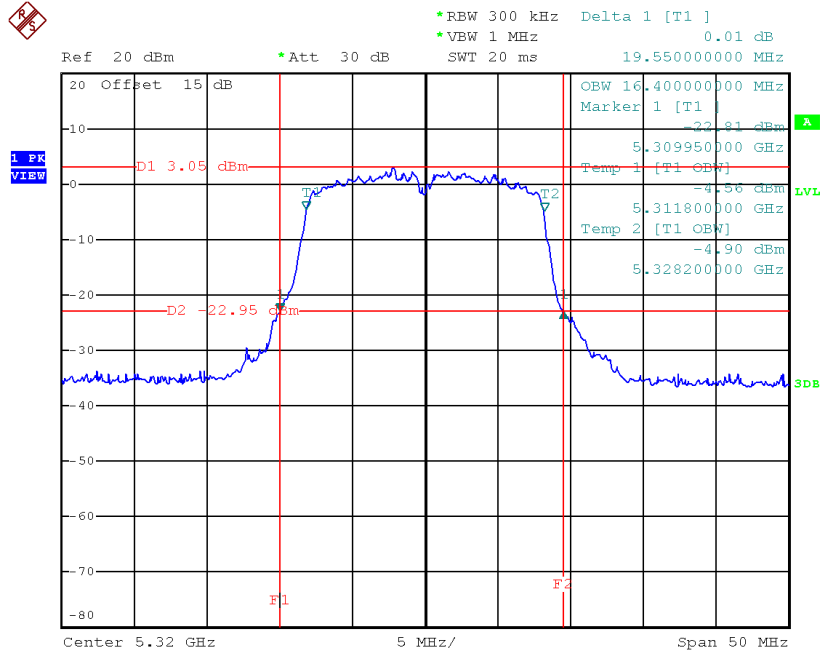
Date: 23.AUG.2017 12:27:20

TX CH60

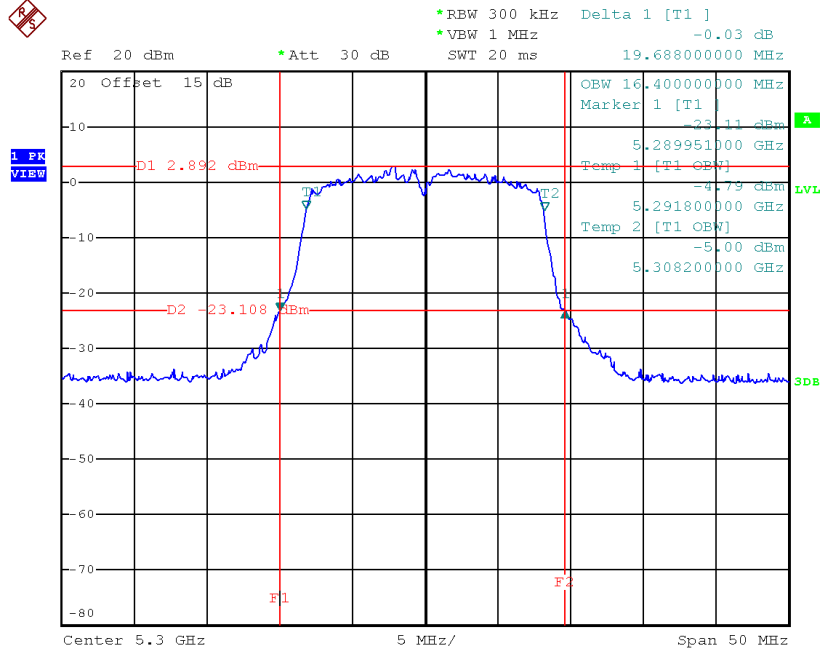

Date: 23.AUG.2017 12:29:02

TX CH64




Date: 23.AUG.2017 12:30:08

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.61	17.50
CH60	5300	20.69	17.50
CH64	5320	20.65	17.50

TX CH52

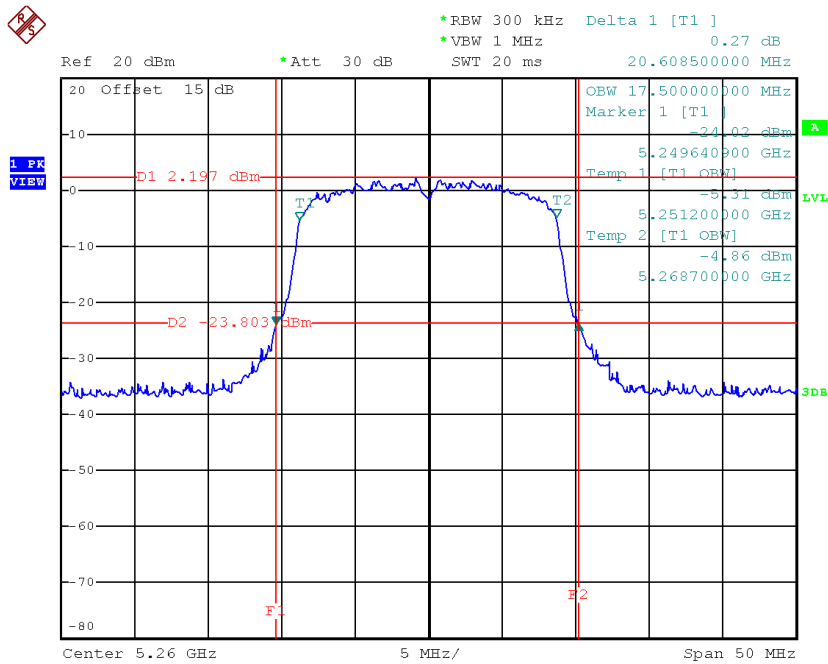


Date: 23.AUG.2017 13:04:31

TX CH60

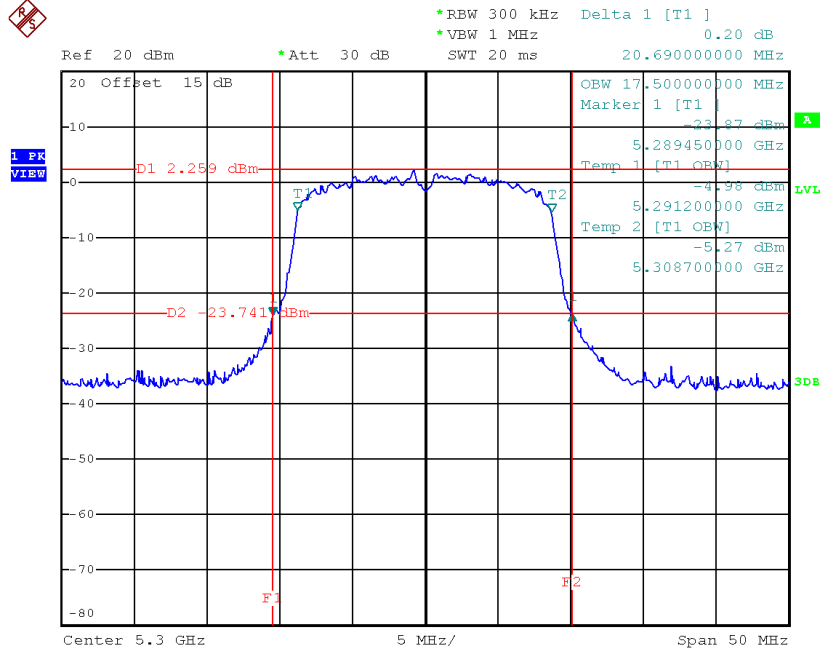

Date: 23.AUG.2017 13:05:27

TX CH64

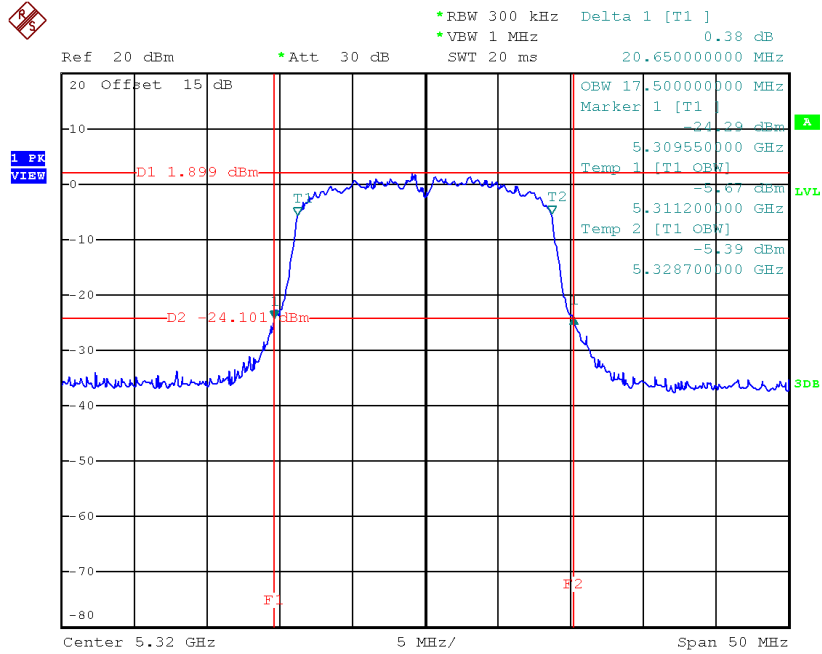


Date: 23.AUG.2017 14:28:52

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	41.99	36.40
CH62	5310	42.21	36.40

TX CH54

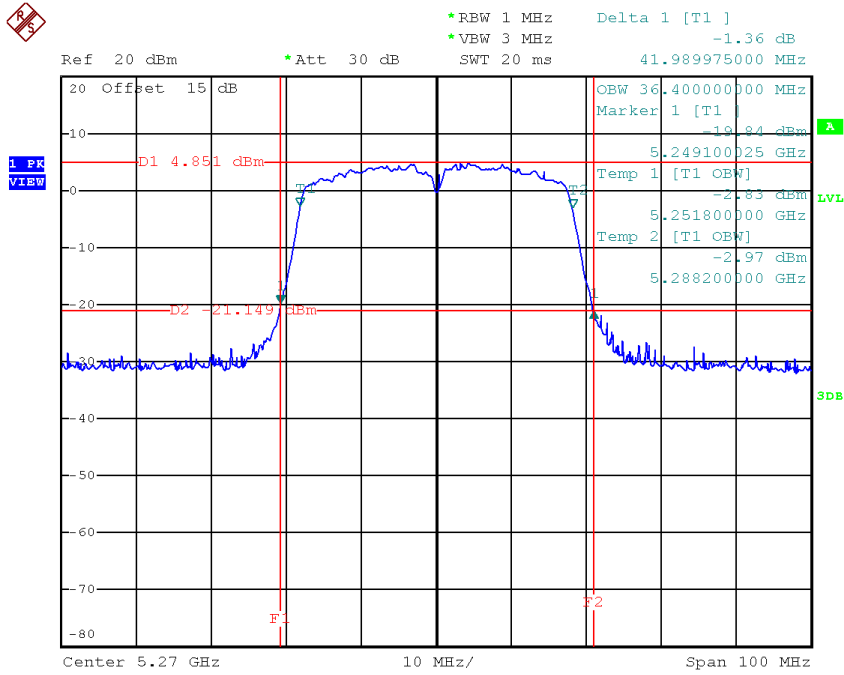

Date: 23.AUG.2017 17:30:00


TX CH62

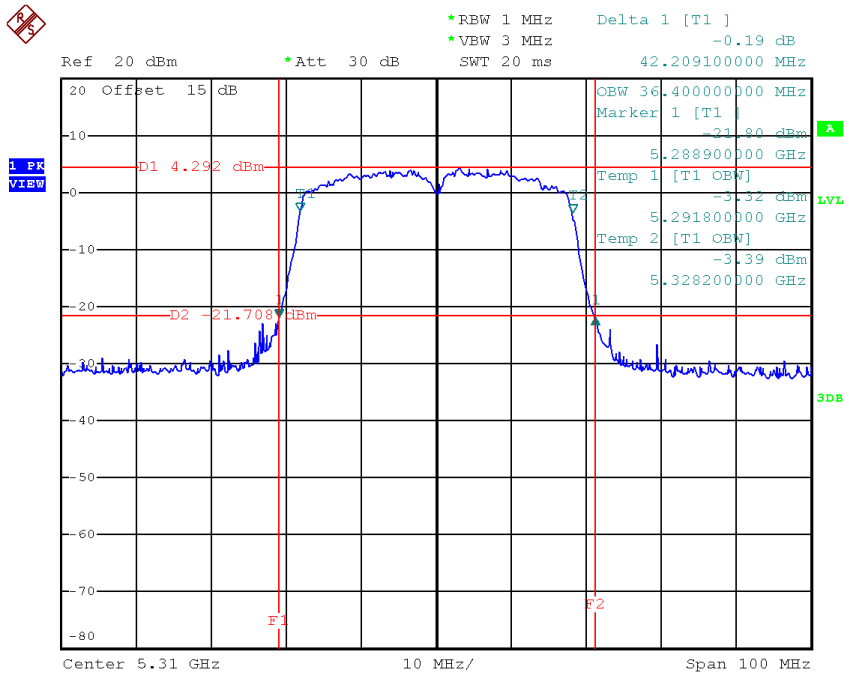

Date: 23.AUG.2017 17:32:05


Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	19.70	16.30
CH116	5580	19.69	16.40
CH140	5700	20.10	16.50

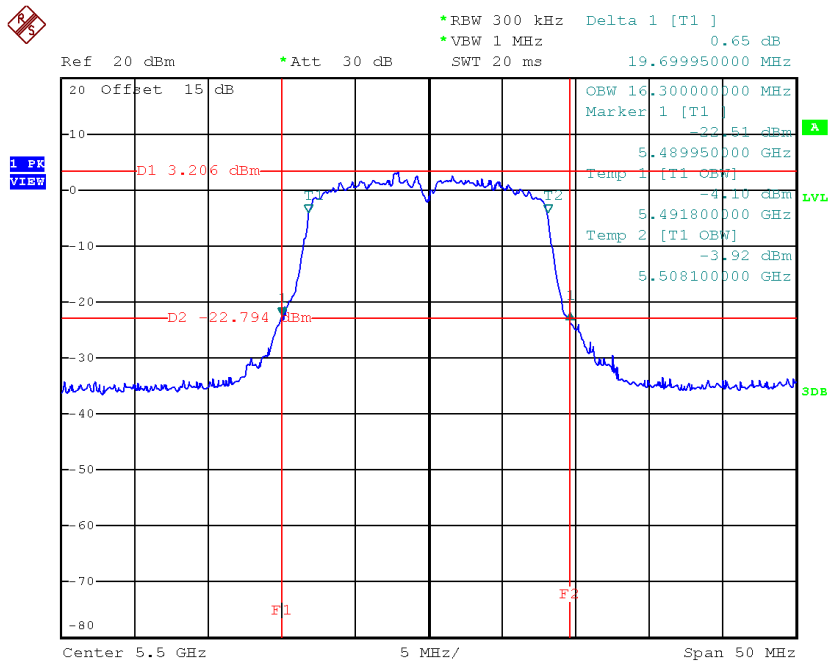TX CH100


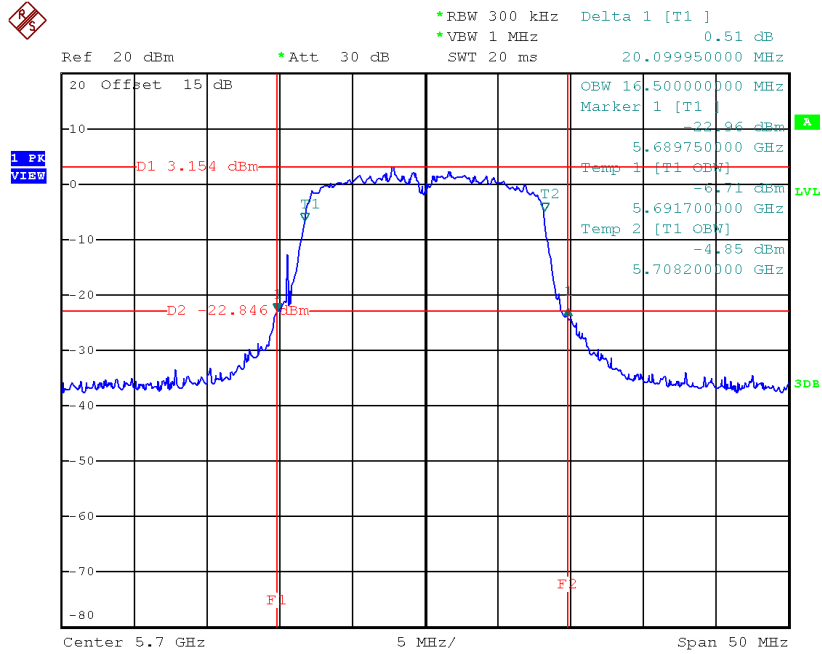
Date: 23.AUG.2017 12:31:30

TX CH116

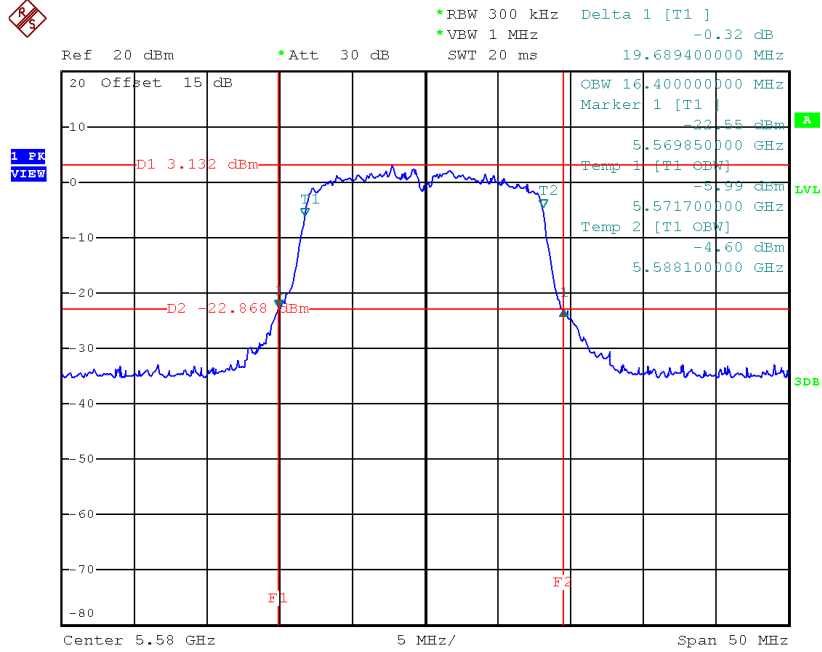

Date: 23.AUG.2017 12:32:45


TX CH140



Date: 23.AUG.2017 12:34:26


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.65	17.50
CH116	5580	20.46	17.50
CH140	5700	20.51	17.50

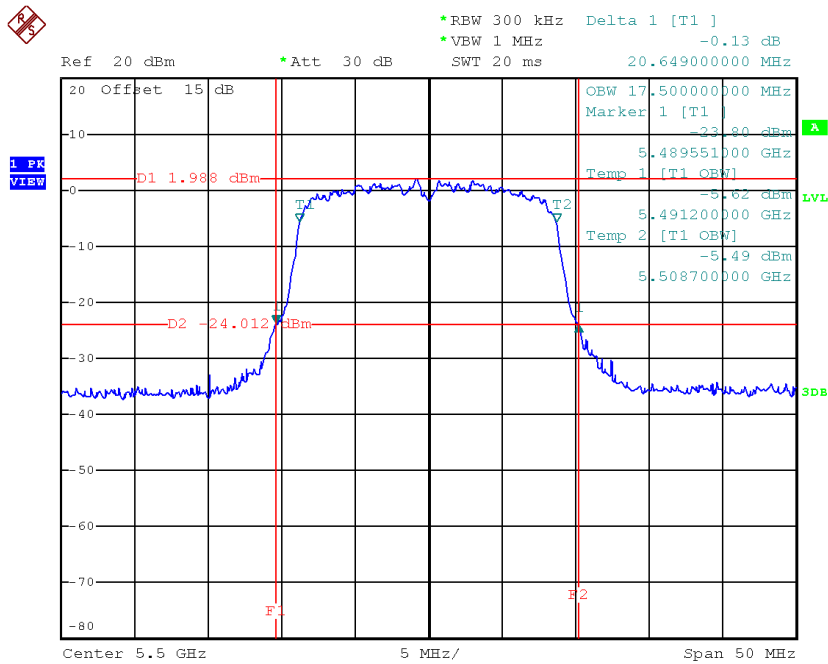TX CH100


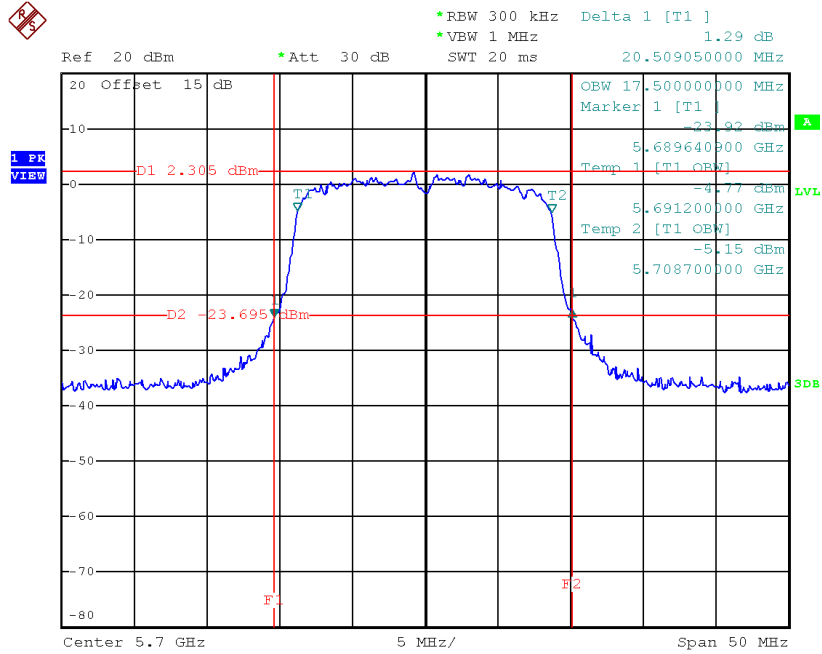
Date: 23.AUG.2017 14:31:03

TX CH116

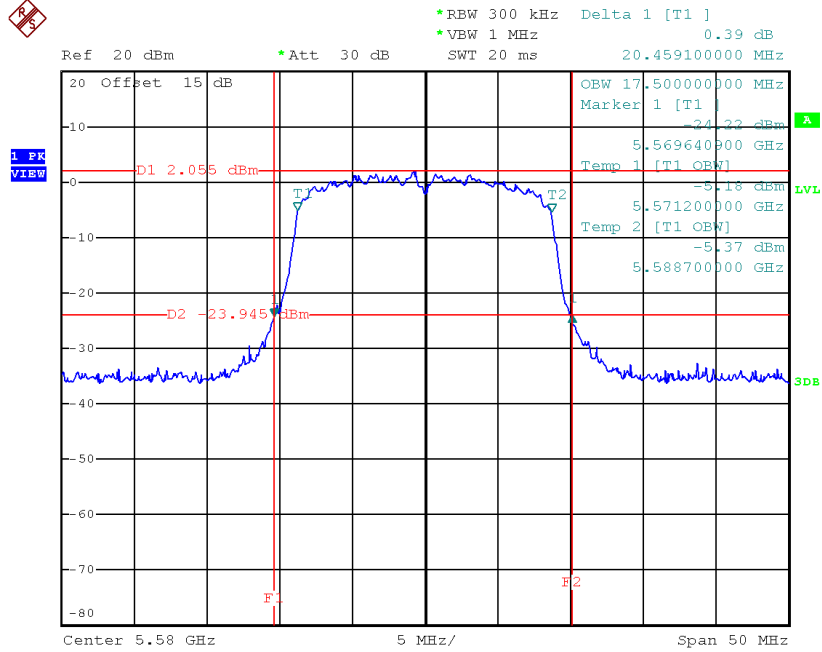

Date: 23.AUG.2017 14:33:20


TX CH140



Date: 23.AUG.2017 14:34:52


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.10	36.40
CH110	5550	42.01	36.20
CH134	5670	42.20	36.40

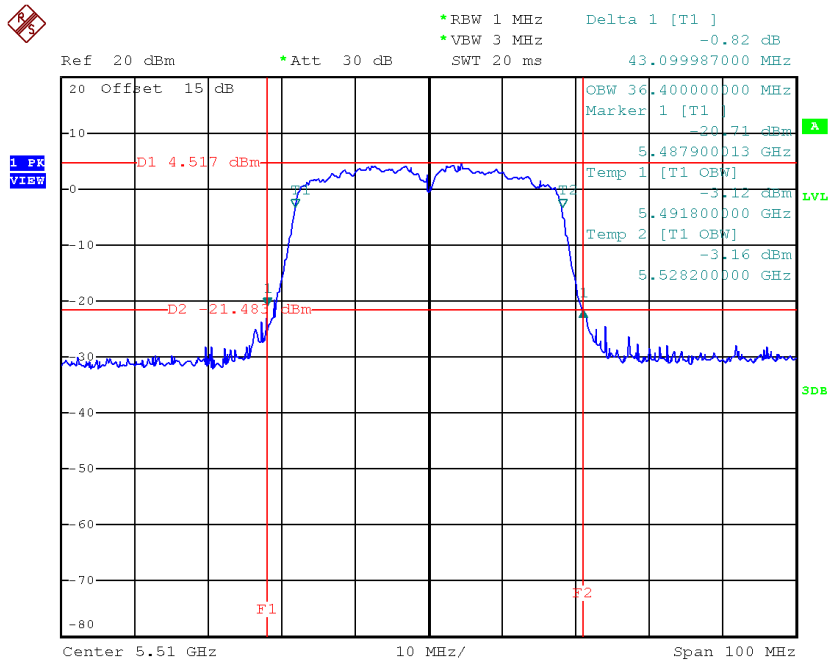TX CH102


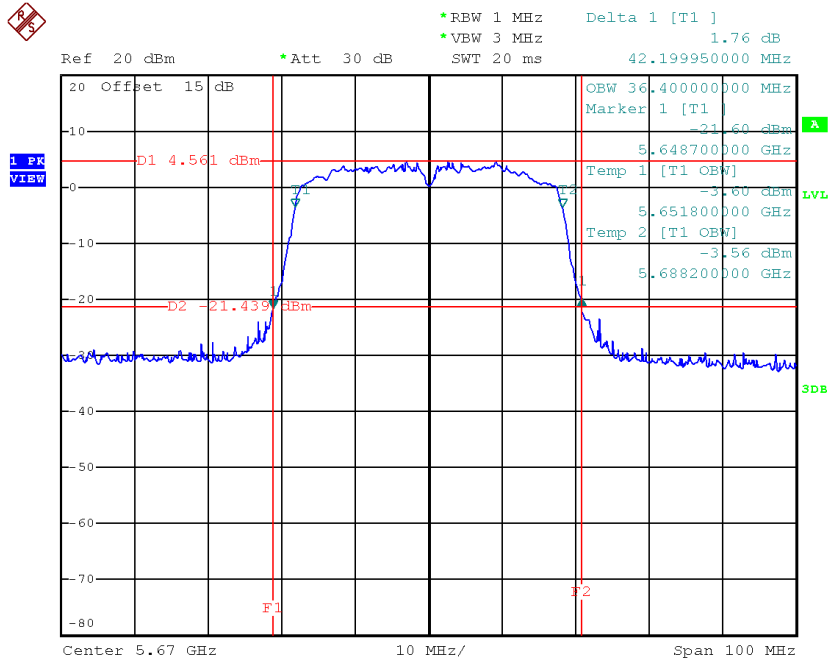
Date: 23.AUG.2017 17:34:28

TX CH110

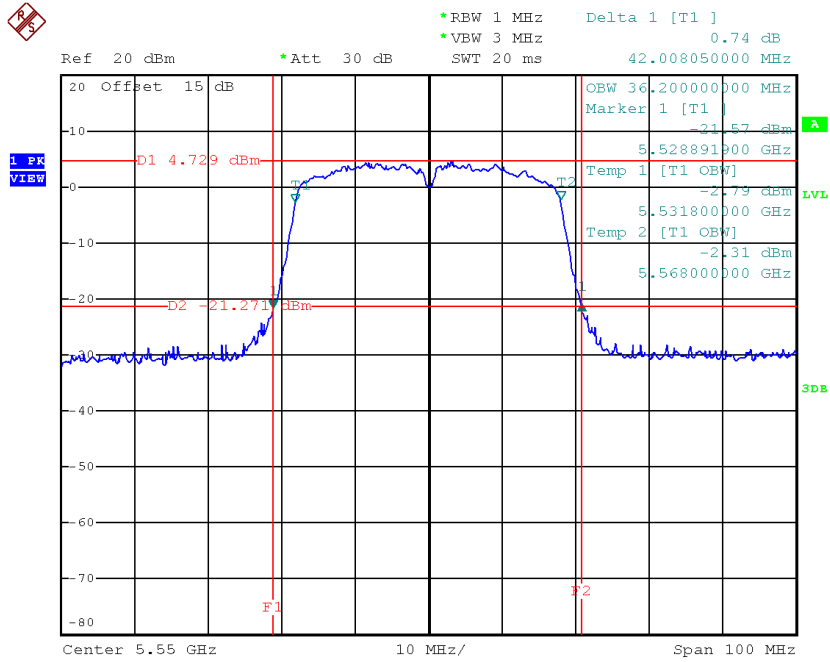

Date: 23.AUG.2017 17:35:47


TX CH134



Date: 23.AUG.2017 17:37:08


Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	15.39	16.30	>=500
CH157	5785	15.40	16.40	>=500
CH165	5825	15.19	16.30	>=500

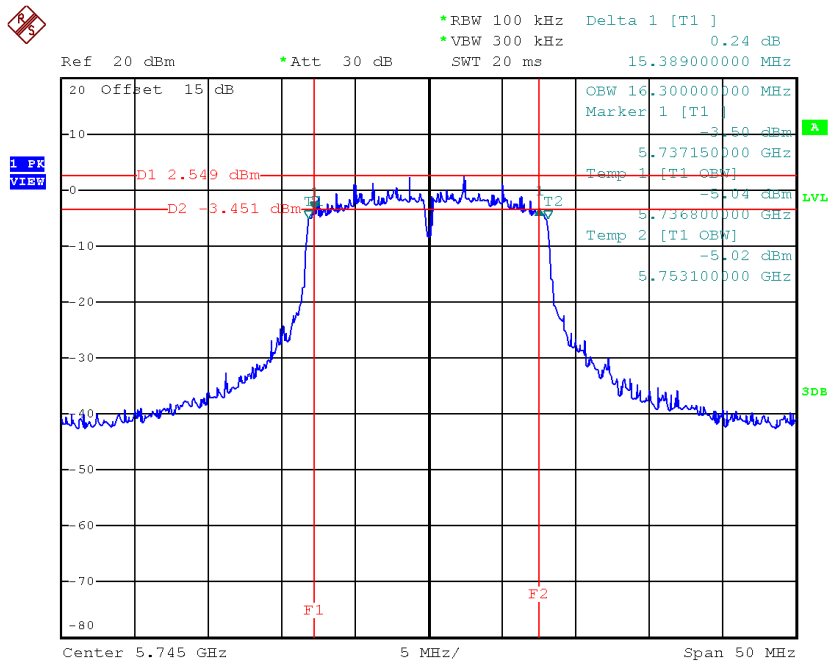TX CH 149


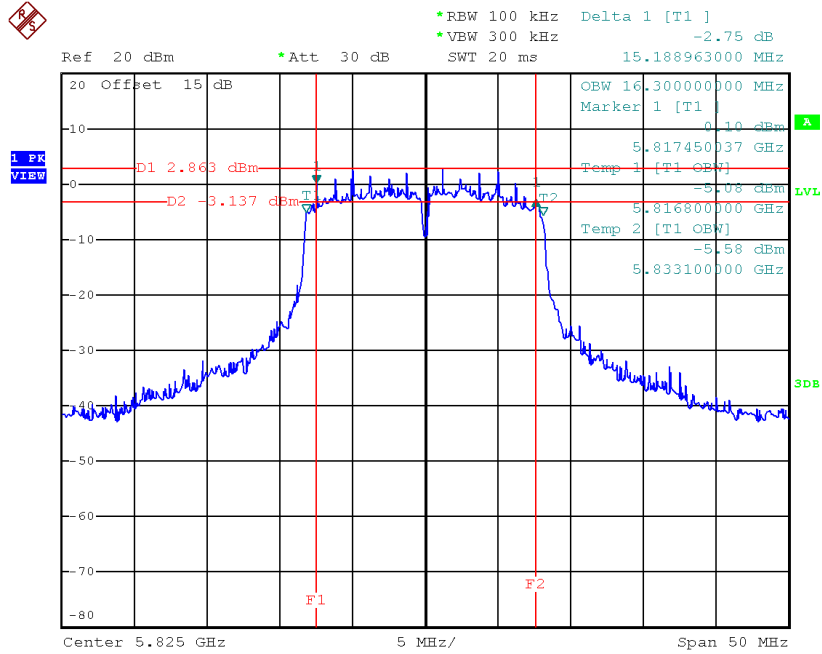
Date: 23.AUG.2017 12:35:48

TX CH 157

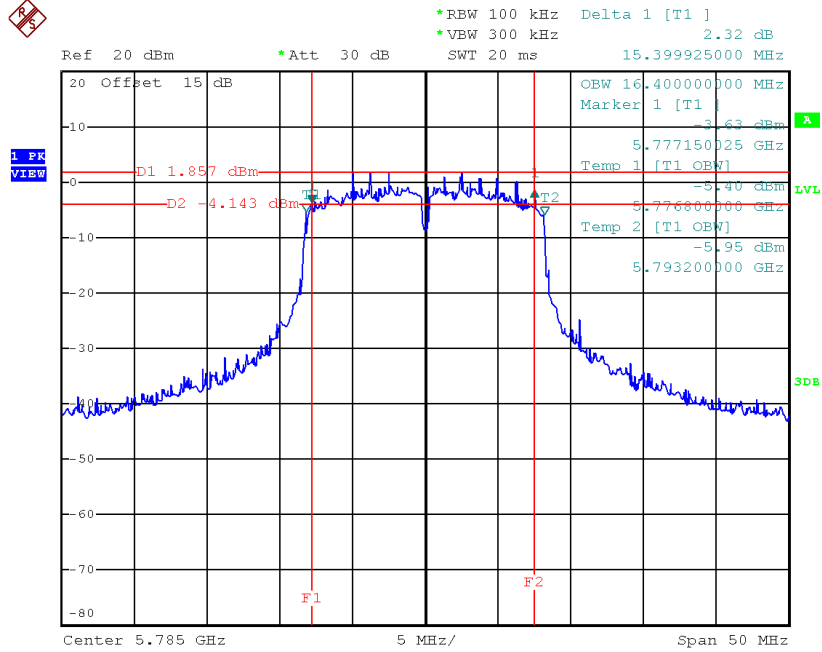

Date: 23.AUG.2017 12:36:58

TX CH 165




Date: 23.AUG.2017 12:38:00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	15.29	17.50	>=500
CH157	5785	15.20	17.50	>=500
CH165	5825	15.09	17.50	>=500

TX CH 149

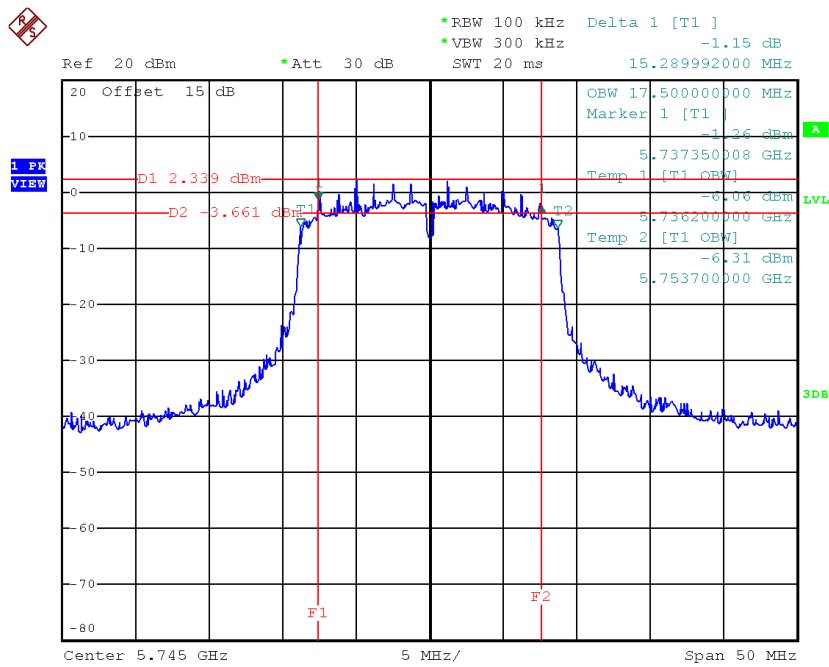


Date: 23.AUG.2017 14:38:14

TX CH 157

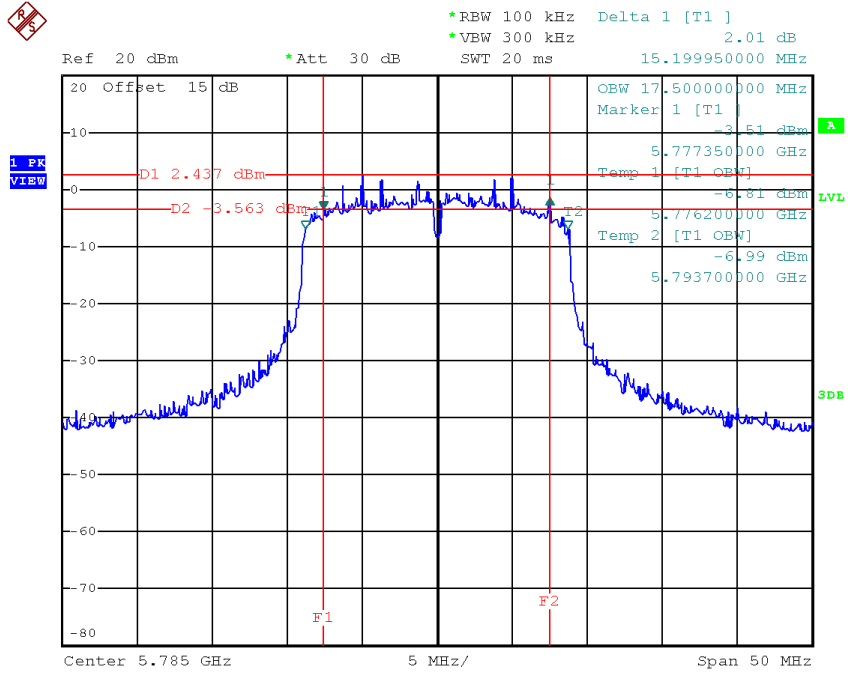

Date: 23.AUG.2017 14:40:32

TX CH 165

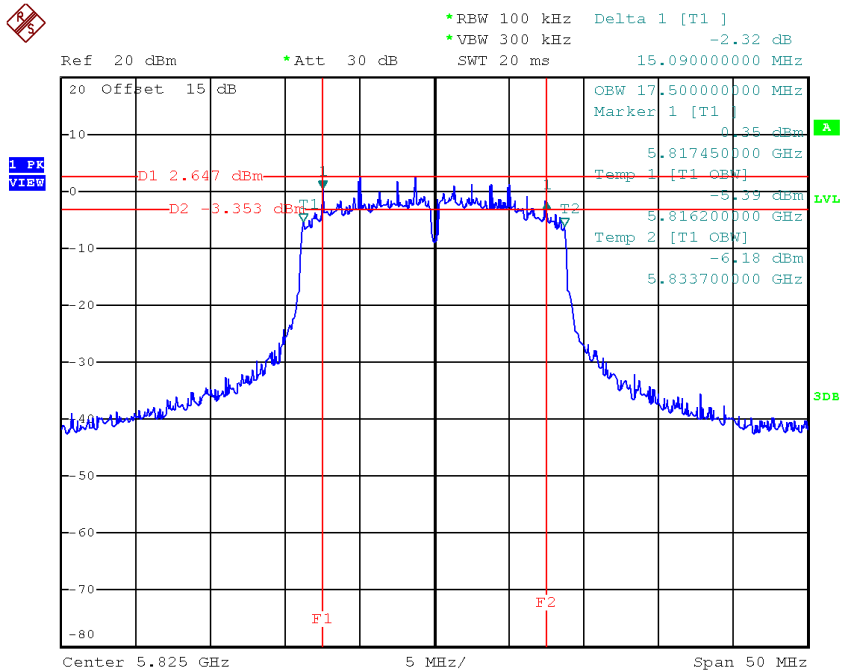


Date: 23.AUG.2017 14:41:49

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	34.10	36.00	>=500
CH159	5795	35.30	36.00	>=500

TX CH 151

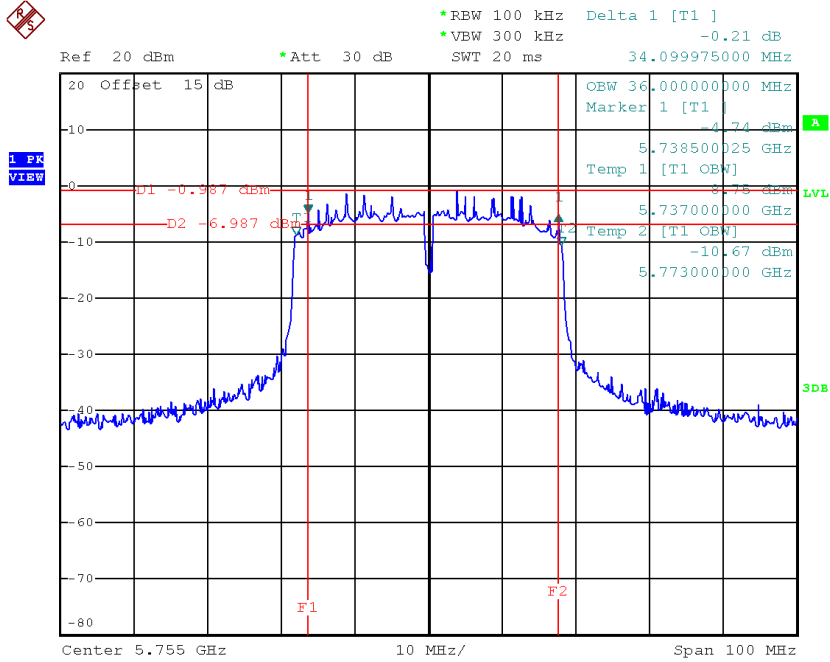

Date: 23.AUG.2017 17:39:25

TX CH 159

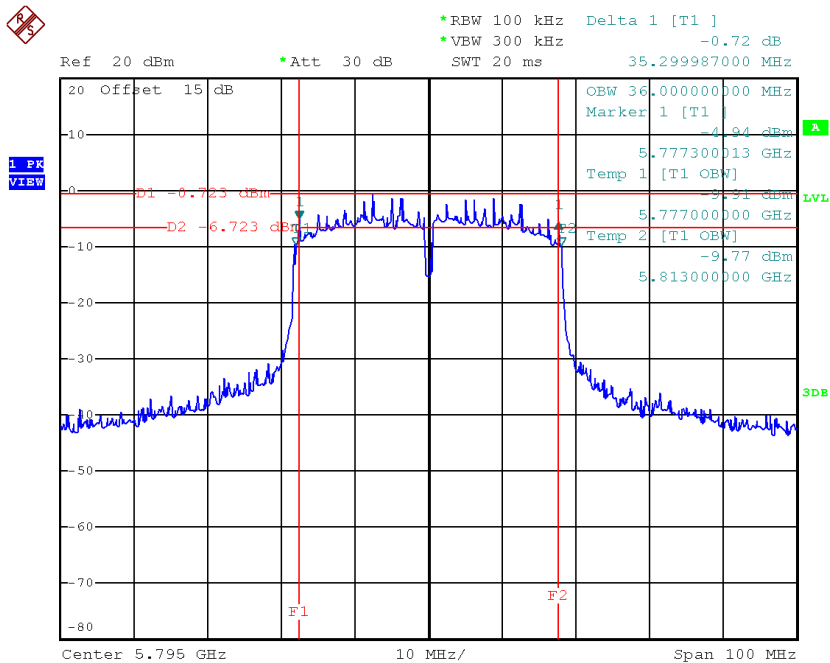


Date: 23.AUG.2017 17:41:28

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	86.40	76.00

TX CH42

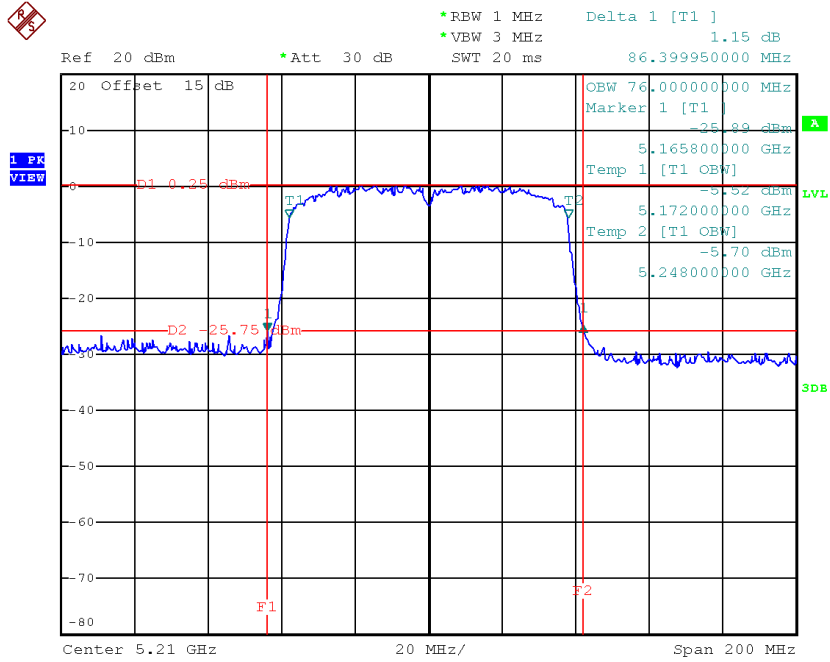


Date: 23.AUG.2017 18:17:17

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	84.40	75.20

TX CH58

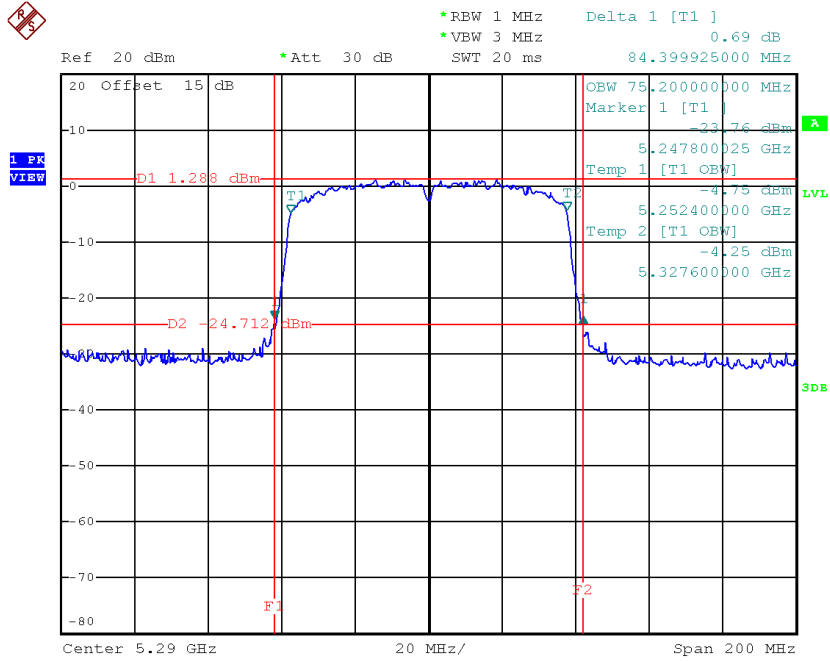


Date: 23.AUG.2017 18:19:05

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	83.99	75.60
CH122	5610	85.99	75.60

TX CH106

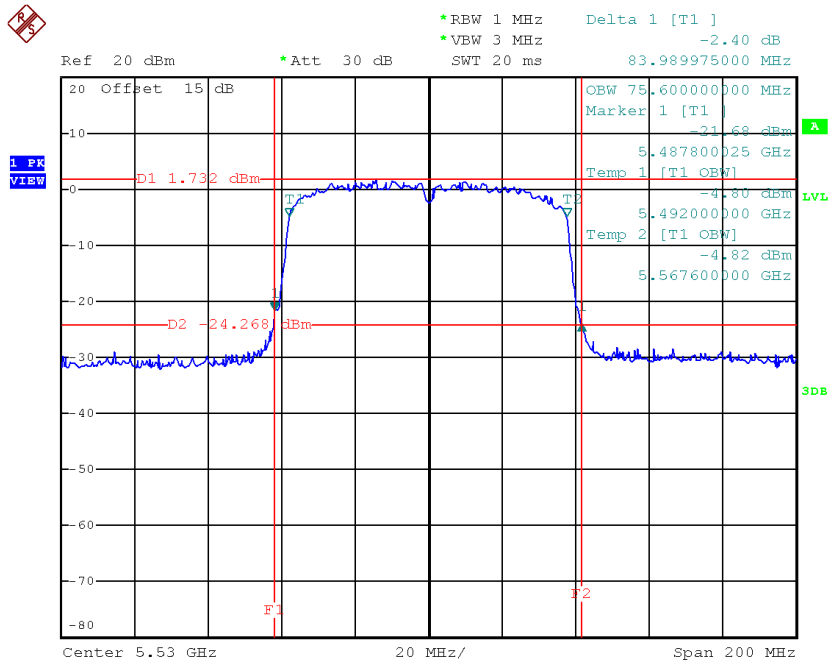

Date: 23.AUG.2017 18:20:32


TX CH122

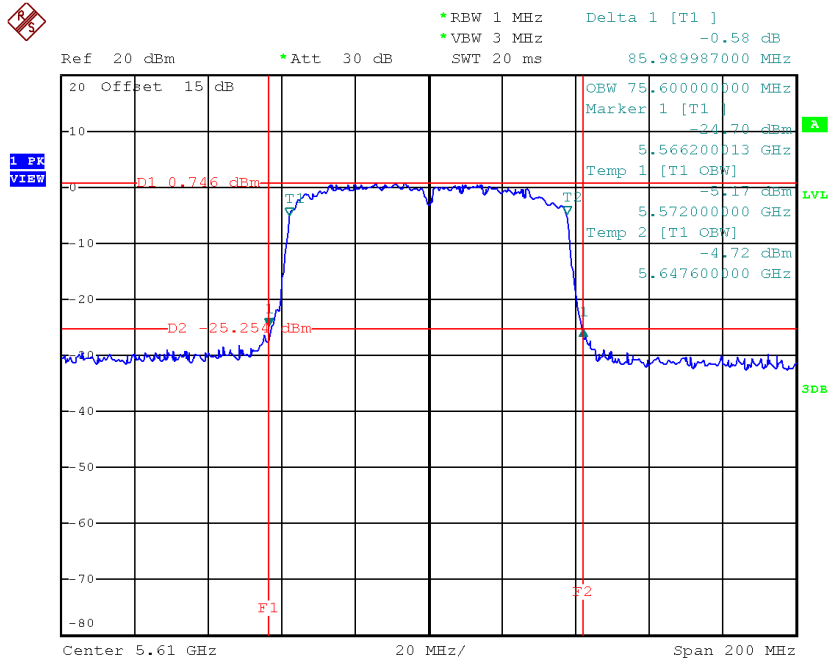

Date: 23.AUG.2017 18:22:05

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	73.19	75.60	>=500

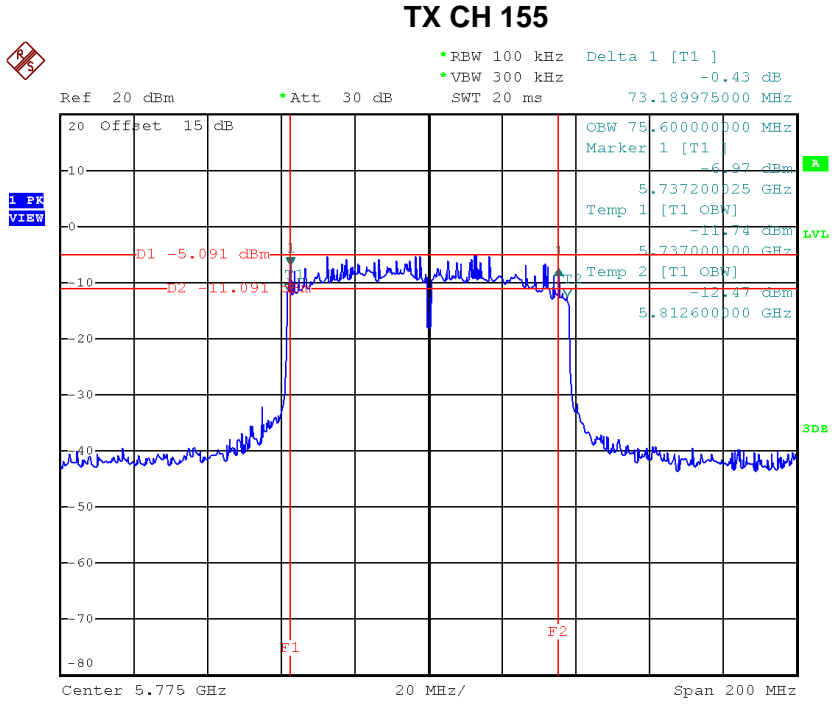

Date: 23.AUG.2017 18:24:39

APPENDIX F - MAXIMUM OUTPUT POWER

For 2TX

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.52	30.00	1.00
CH40	5200	11.30	30.00	1.00
CH48	5240	11.38	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.57	30.00	1.00
CH40	5200	11.72	30.00	1.00
CH48	5240	11.77	30.00	1.00

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.79	30.00	1.00
CH40	5200	14.76	30.00	1.00
CH48	5240	14.82	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.19	30.00	1.00
CH40	5200	11.17	30.00	1.00
CH48	5240	11.17	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	11.46	30.00	1.00
CH40	5200	11.54	30.00	1.00
CH48	5240	11.65	30.00	1.00

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.56	30.00	1.00
CH40	5200	14.59	30.00	1.00
CH48	5240	14.65	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.22	30.00	1.00
CH46	5230	11.18	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.52	30.00	1.00
CH46	5230	11.49	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.90	30.00	1.00
CH46	5230	14.87	30.00	1.00

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.77	24.00	0.25
CH60	5300	11.51	24.00	0.25
CH64	5320	11.47	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.92	24.00	0.25
CH60	5300	11.78	24.00	0.25
CH64	5320	12.18	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.09	24.00	0.25
CH60	5300	14.89	24.00	0.25
CH64	5320	15.08	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.76	24.00	0.25
CH60	5300	11.31	24.00	0.25
CH64	5320	11.35	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.90	24.00	0.25
CH60	5300	11.62	24.00	0.25
CH64	5320	12.03	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.06	24.00	0.25
CH60	5300	14.70	24.00	0.25
CH64	5320	14.93	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.57	30.00	1.00
CH62	5310	11.32	30.00	1.00

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	11.66	30.00	1.00
CH62	5310	11.86	30.00	1.00

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.15	30.00	1.00
CH62	5310	15.13	30.00	1.00

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.81	24.00	0.25
CH116	5580	10.67	24.00	0.25
CH140	5700	11.35	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.86	24.00	0.25
CH116	5580	12.24	24.00	0.25
CH140	5700	11.56	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.61	24.00	0.25
CH116	5580	14.77	24.00	0.25
CH140	5700	14.70	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.74	24.00	0.25
CH116	5580	10.78	24.00	0.25
CH140	5700	11.25	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.74	24.00	0.25
CH116	5580	10.78	24.00	0.25
CH140	5700	11.25	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.59	24.00	0.25
CH116	5580	14.69	24.00	0.25
CH140	5700	14.62	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	10.53	24.00	0.25
CH110	5550	10.41	24.00	0.25
CH134	5670	11.24	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	11.74	24.00	0.25
CH110	5550	11.78	24.00	0.25
CH134	5670	11.46	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.71	24.00	0.25
CH110	5550	14.68	24.00	0.25
CH134	5670	14.88	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.23	30.00	1.00
CH157	5785	14.30	30.00	1.00
CH165	5825	14.50	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.44	30.00	1.00
CH157	5785	13.46	30.00	1.00
CH165	5825	13.15	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.09	30.00	1.00
CH157	5785	17.14	30.00	1.00
CH165	5825	17.12	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.29	30.00	1.00
CH157	5785	14.36	30.00	1.00
CH165	5825	14.50	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.49	30.00	1.00
CH157	5785	13.51	30.00	1.00
CH165	5825	13.11	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.14	30.00	1.00
CH157	5785	17.19	30.00	1.00
CH165	5825	17.09	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.13	30.00	1.00
CH159	5795	14.41	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.77	30.00	1.00
CH159	5795	13.15	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.48	30.00	1.00
CH159	5795	17.36	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	10.89	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	11.58	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.31	30.00	1.00

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.53	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	11.91	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.78	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	10.82	24.00	0.25
CH122	5610	10.76	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	11.96	24.00	0.25
CH122	5610	11.94	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.49	24.00	0.25
CH122	5610	15.45	24.00	0.25

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	12.98	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	12.90	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	17.00	30.00	1.00

APPENDIX H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.90	0.23	-1.67	17.00
CH40	5200	-2.16	0.23	-1.93	17.00
CH48	5240	-2.13	0.23	-1.90	17.00

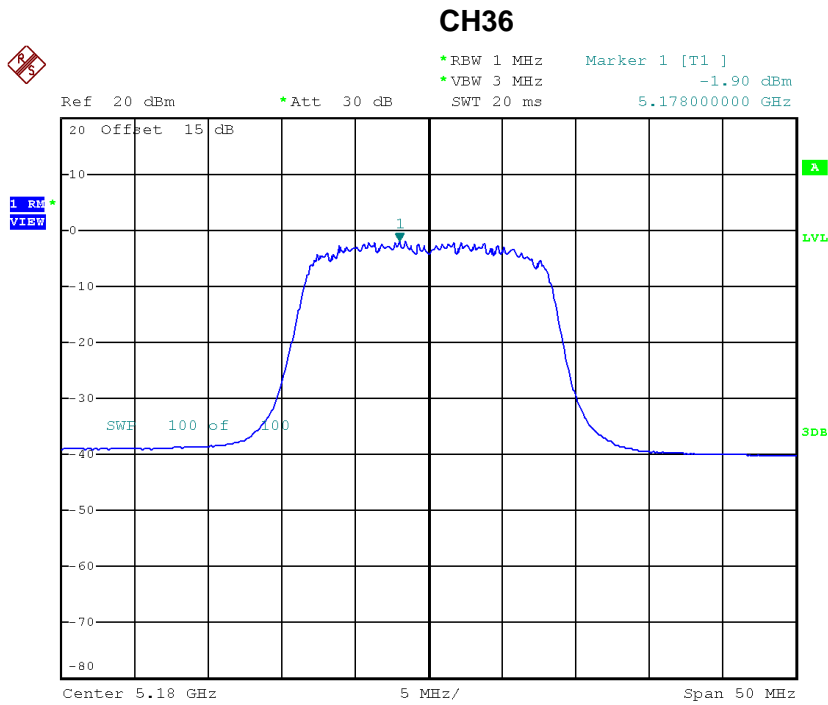


Date: 23.AUG.2017 12:21:47

CH40

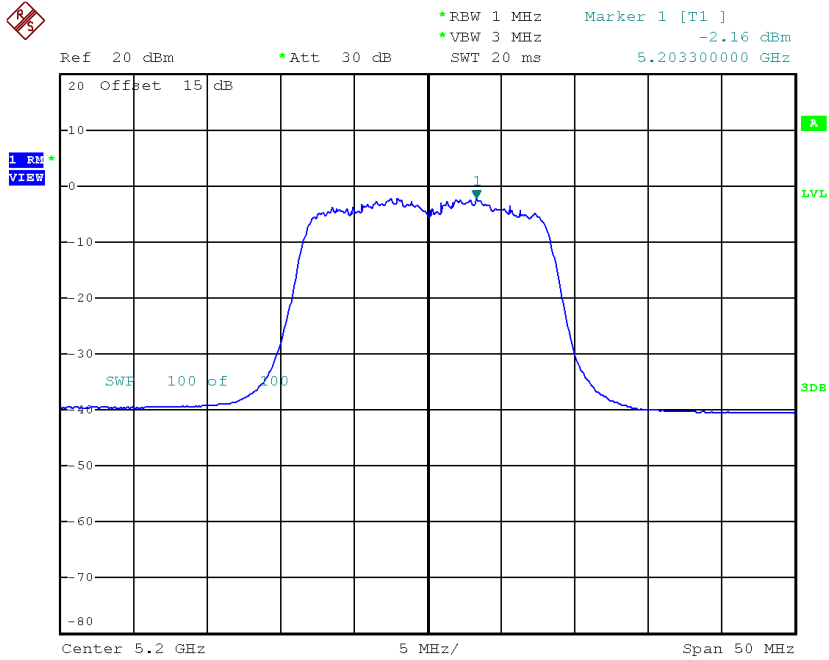

Date: 23.AUG.2017 12:24:44


CH48

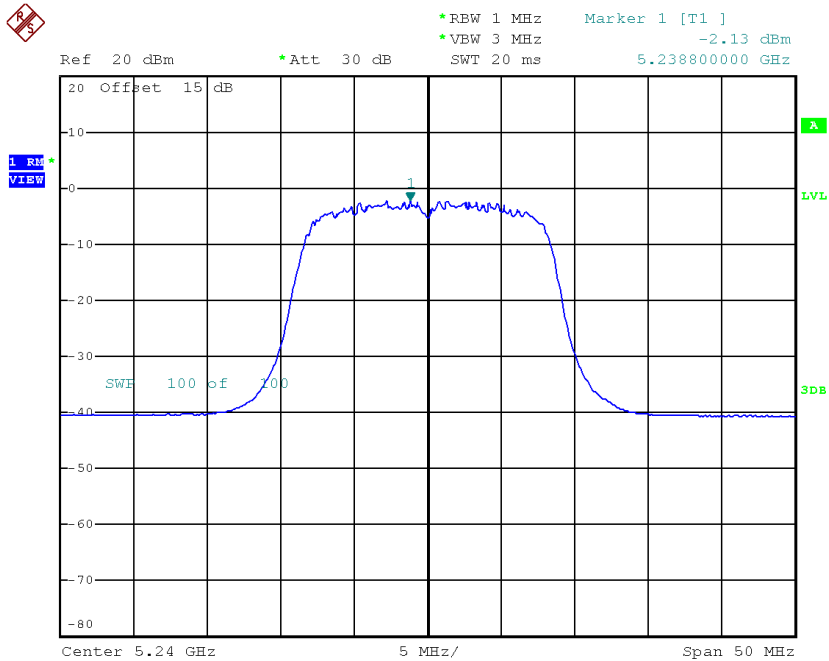

Date: 23.AUG.2017 12:26:18


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-2.09	0.23	-1.86	17.00
CH40	5200	-1.93	0.23	-1.70	17.00
CH48	5240	-1.94	0.23	-1.71	17.00

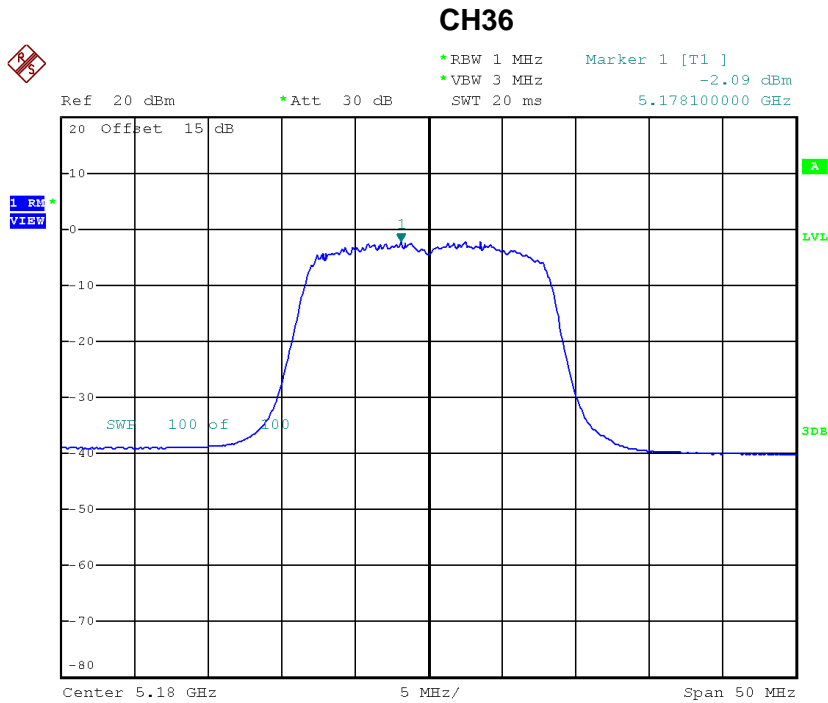


Date: 23.AUG.2017 12:22:28

CH40

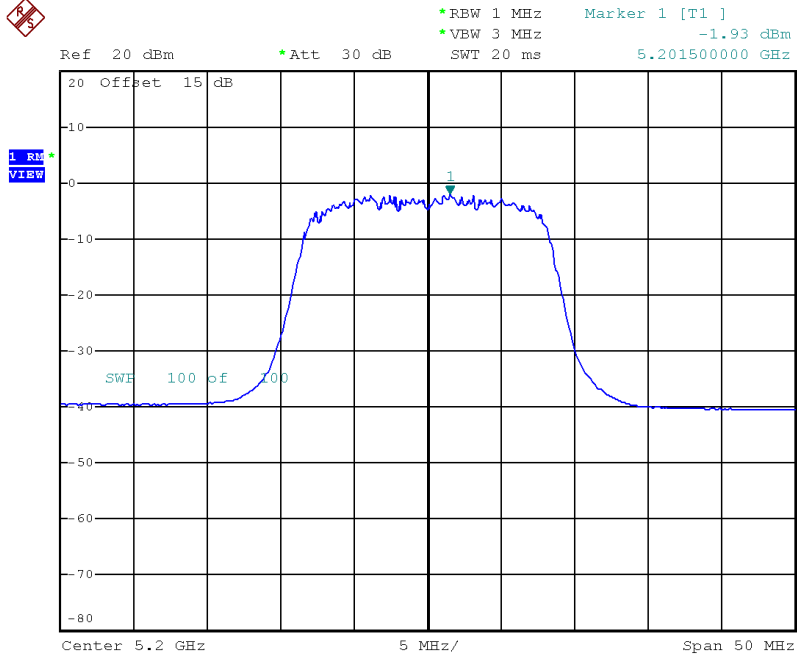

Date: 23.AUG.2017 12:40:32

CH48

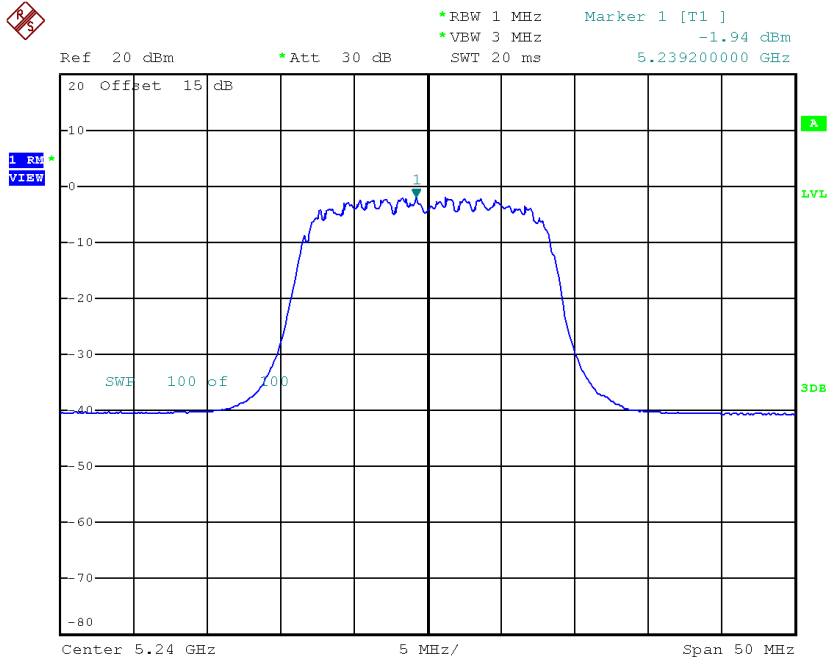


Date: 23.AUG.2017 12:41:42

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.25	17.00
CH40	5200	1.20	17.00
CH48	5240	1.21	17.00


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-2.53	0.22	-2.31	17.00
CH40	5200	-2.67	0.22	-2.45	17.00
CH48	5240	-2.27	0.22	-2.05	17.00

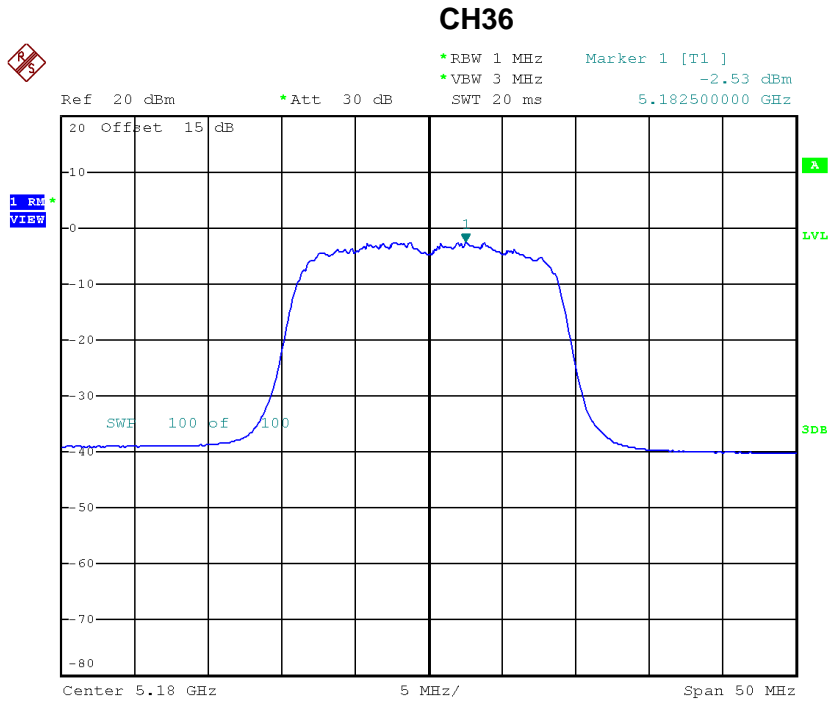


Date: 23.AUG.2017 13:01:52

CH40

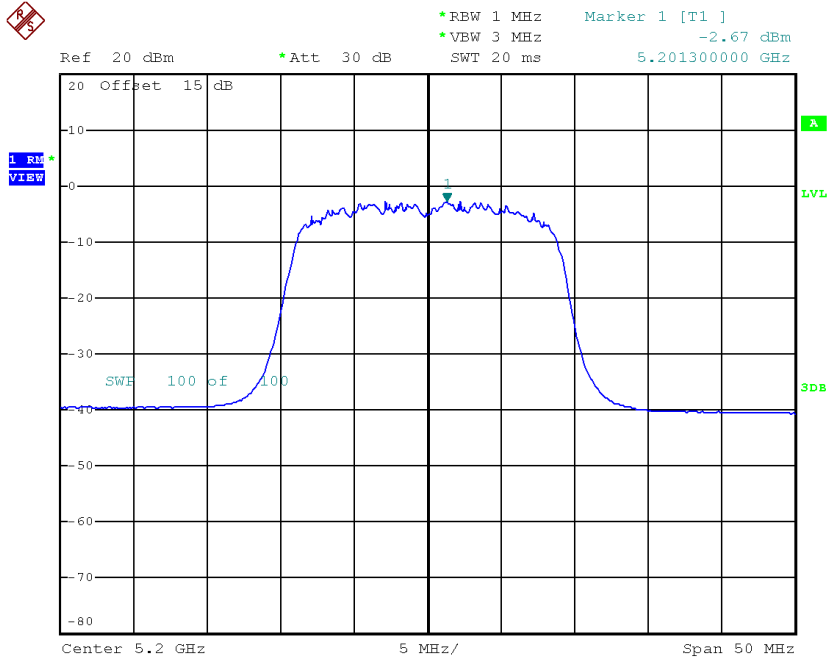

Date: 23.AUG.2017 13:02:48


CH48

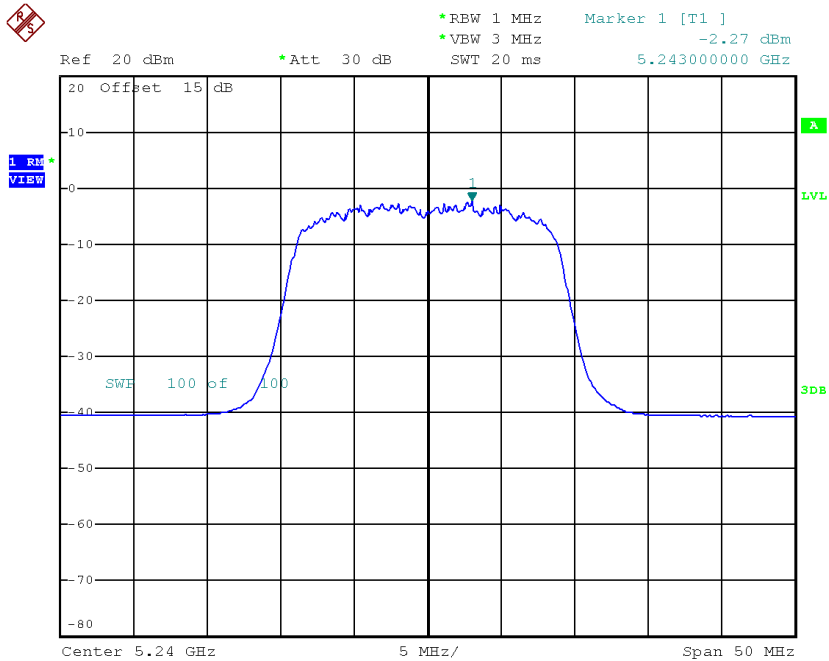

Date: 23.AUG.2017 13:03:46


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-2.46	0.22	-2.24	17.00
CH40	5200	-2.93	0.22	-2.71	17.00
CH48	5240	-2.34	0.22	-2.12	17.00

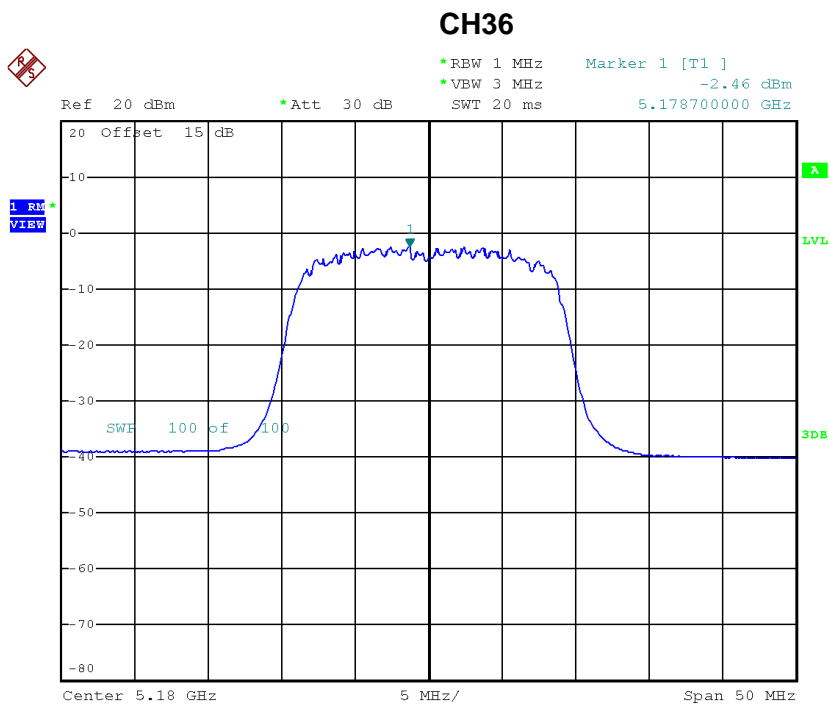


Date: 23.AUG.2017 14:43:11

CH40

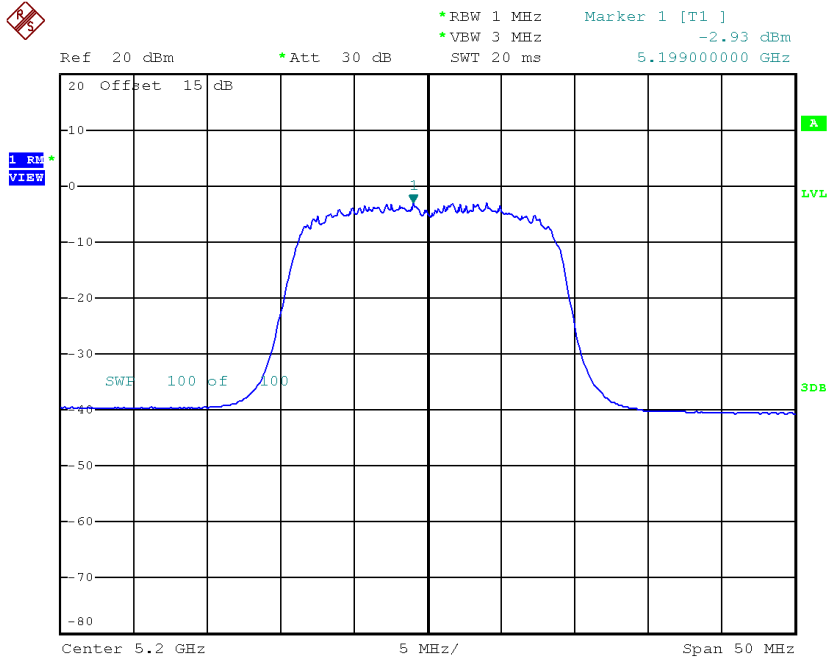

Date: 23.AUG.2017 15:25:16

CH48

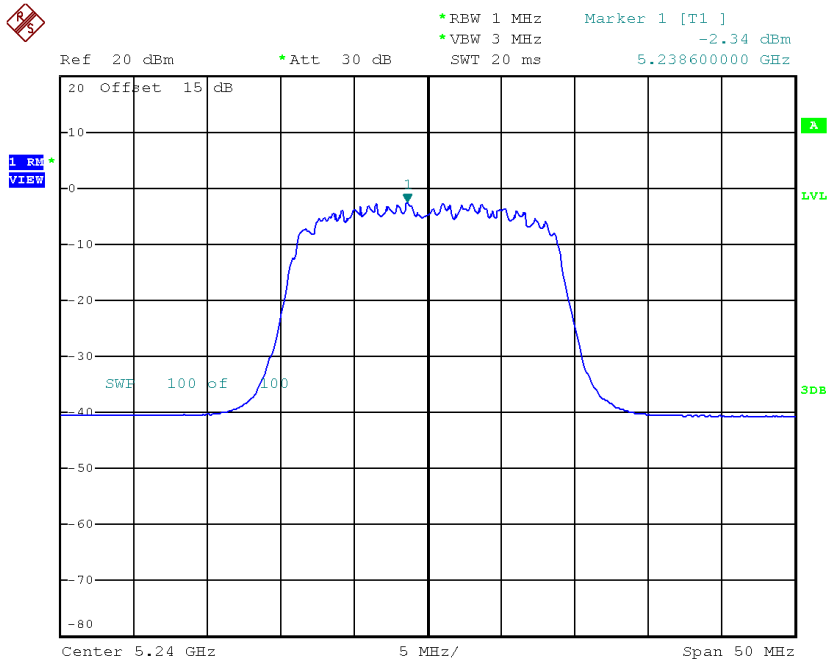

Date: 23.AUG.2017 15:28:08


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	0.74	17.00
CH40	5200	0.43	17.00
CH48	5240	0.93	17.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-6.61	0.52	-6.09	17.00
CH46	5230	-6.00	0.52	-5.48	17.00

CH38

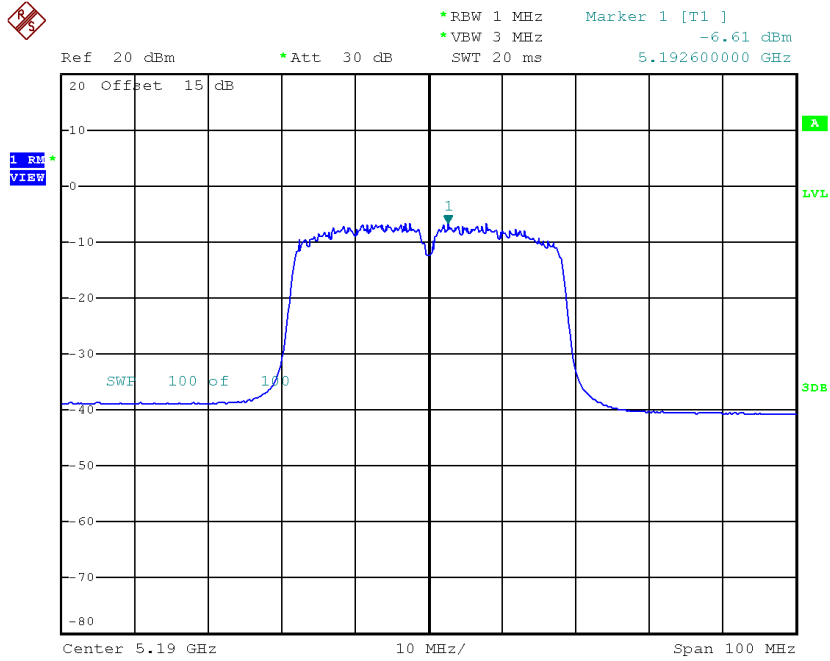

Date: 23.AUG.2017 17:25:01

CH46

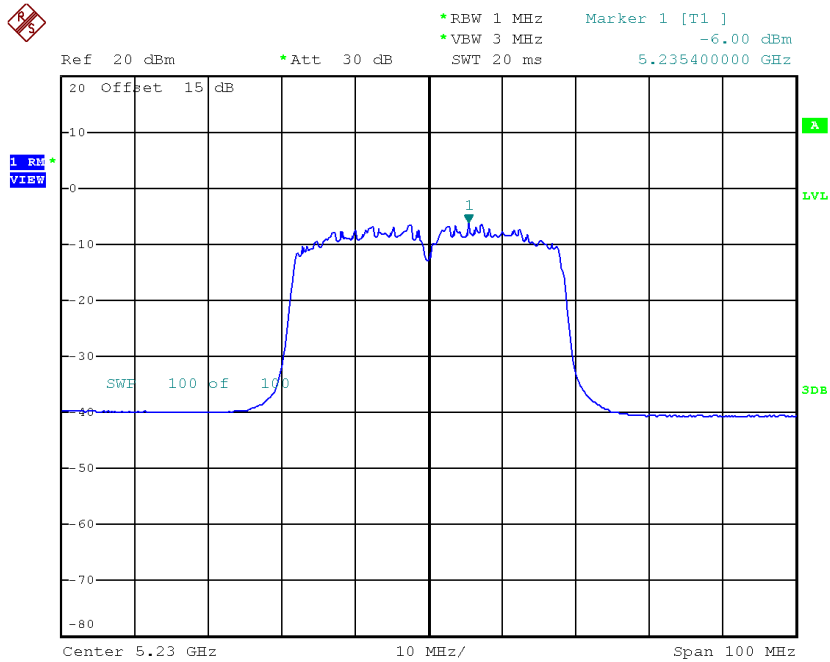


Date: 23.AUG.2017 17:28:06

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-6.38	0.52	-5.86	17.00
CH46	5230	-5.48	0.52	-4.96	17.00

CH38

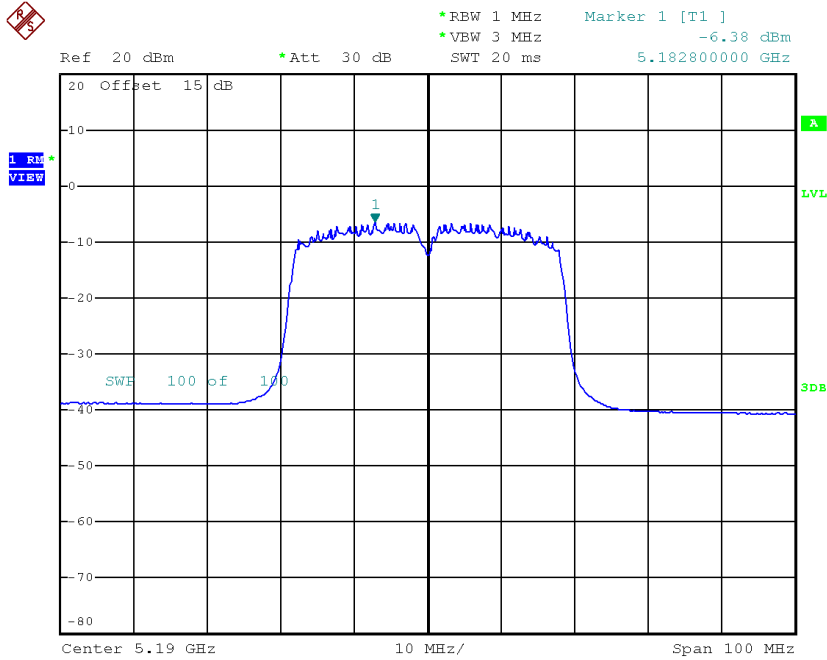

Date: 23.AUG.2017 17:46:45

CH46

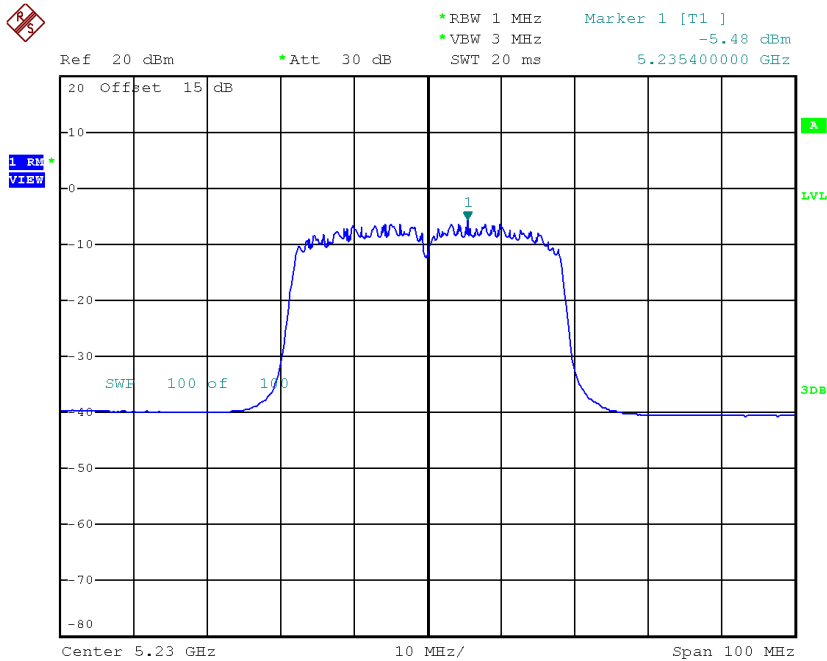


Date: 23.AUG.2017 17:48:03

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-2.96	17.00
CH46	5230	-2.20	17.00


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.44	0.23	-1.21	11.00
CH60	5300	-1.93	0.23	-1.70	11.00
CH64	5320	-2.21	0.23	-1.98	11.00

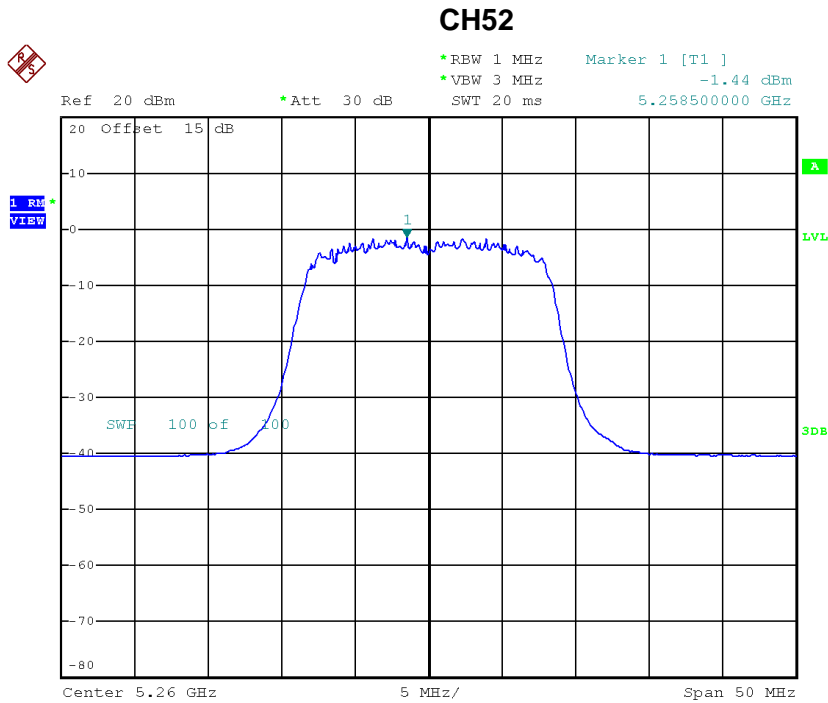


Date: 23.AUG.2017 12:27:29

CH60

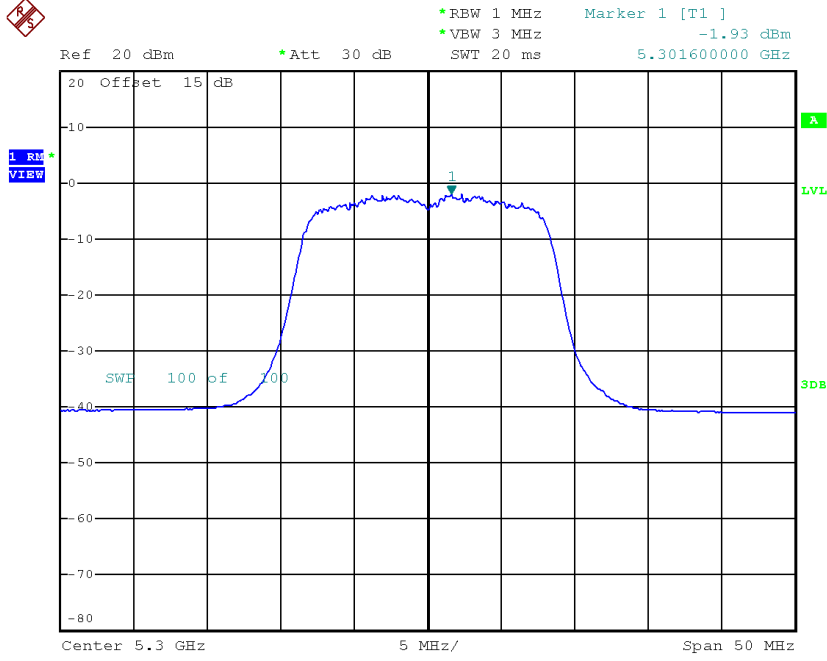

Date: 23.AUG.2017 12:29:11


CH64

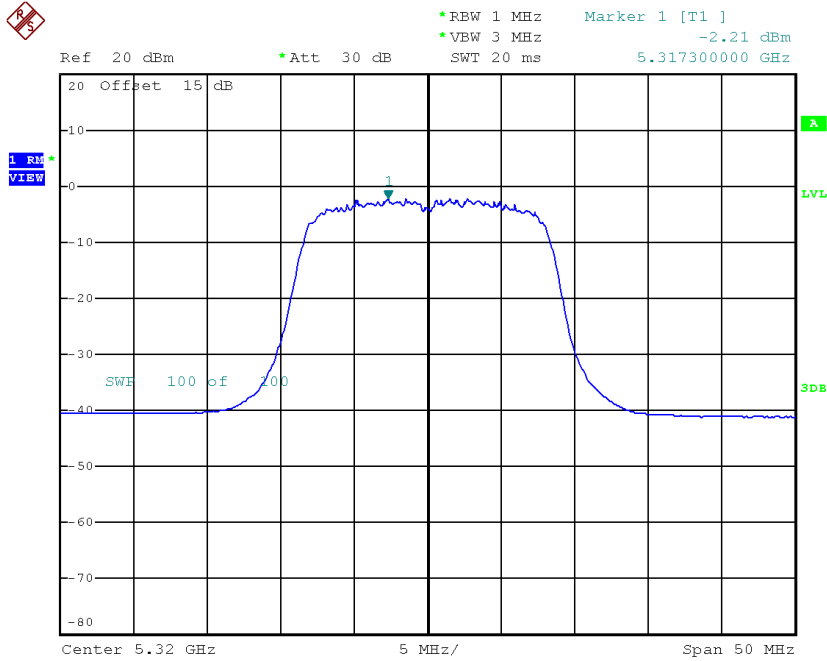

Date: 23.AUG.2017 12:30:17


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.81	0.23	-1.58	11.00
CH60	5300	-2.02	0.23	-1.79	11.00
CH64	5320	-1.55	0.23	-1.32	11.00

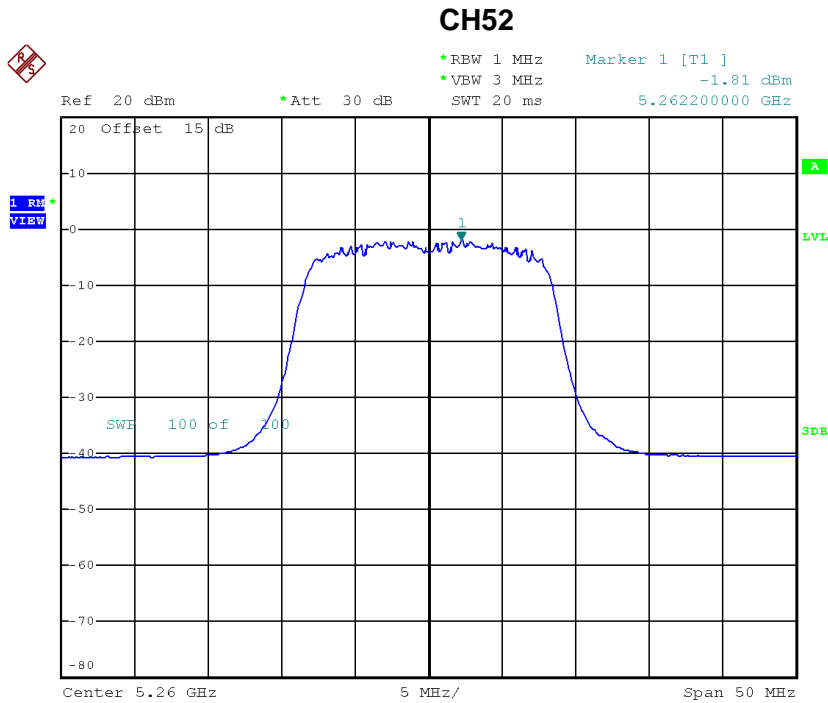


Date: 23.AUG.2017 12:43:47

CH60

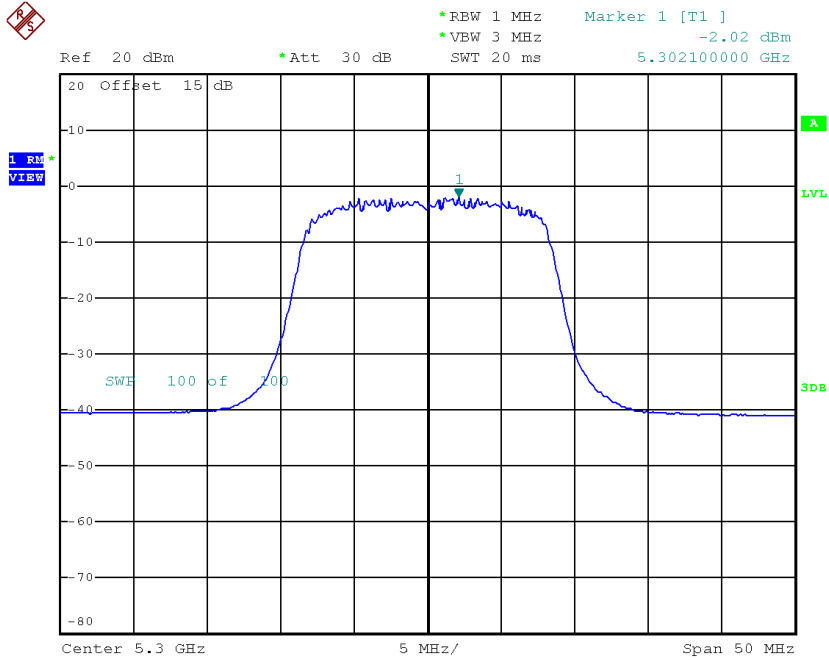

Date: 23.AUG.2017 12:45:06

CH64

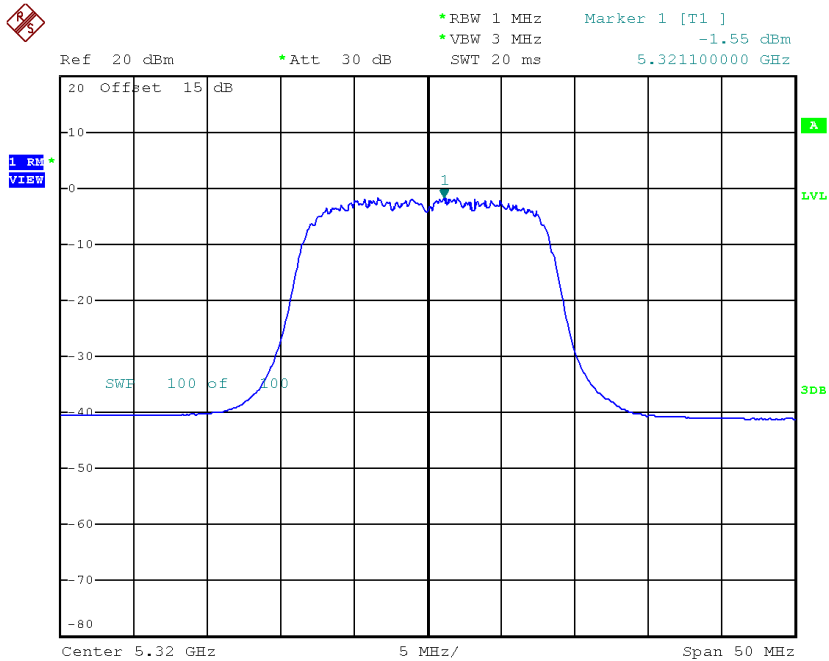


Date: 23.AUG.2017 12:46:18

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.62	11.00
CH60	5300	1.27	11.00
CH64	5320	1.37	11.00


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.83	0.22	-1.61	11.00
CH60	5300	-2.61	0.22	-2.39	11.00
CH64	5320	-2.46	0.22	-2.24	11.00

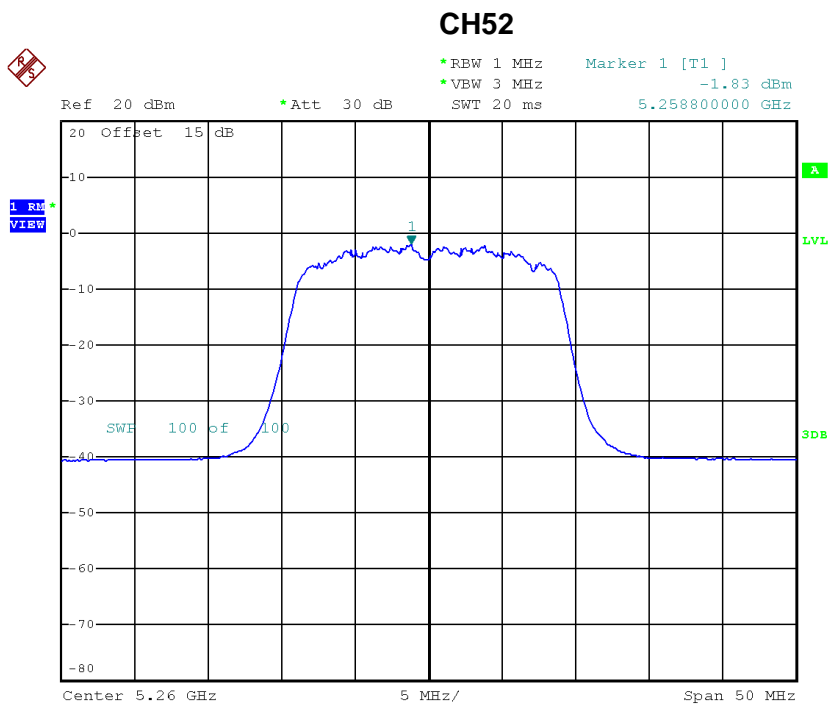


Date: 23.AUG.2017 13:04:40

CH60

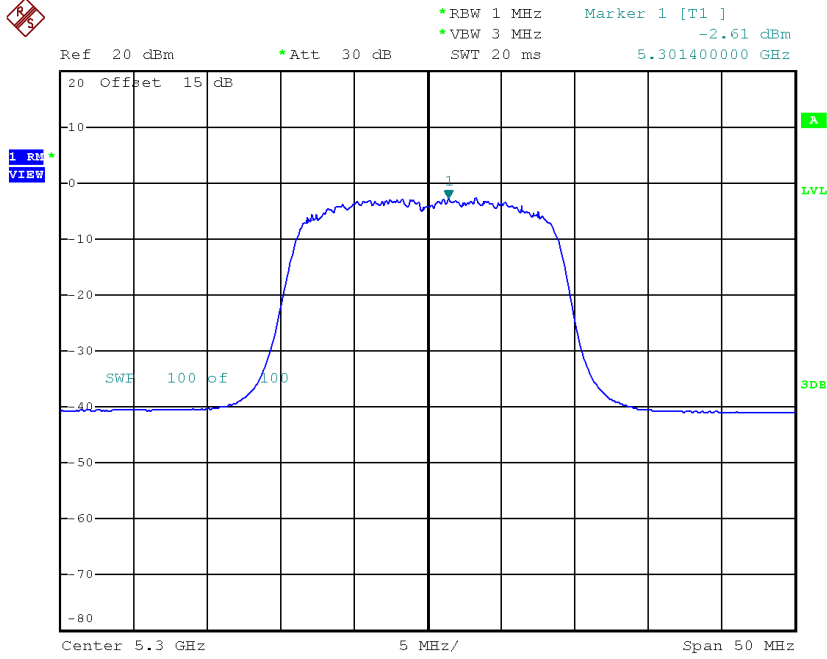

Date: 23.AUG.2017 13:05:36


CH64

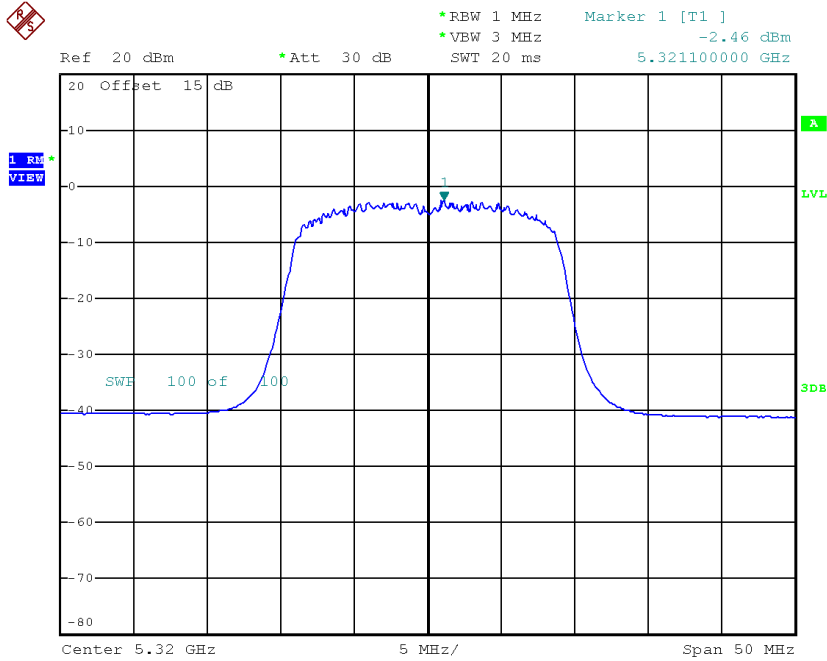

Date: 23.AUG.2017 14:29:03


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.59	0.22	-2.37	11.00
CH60	5300	-2.87	0.22	-2.65	11.00
CH64	5320	-2.01	0.22	-1.79	11.00

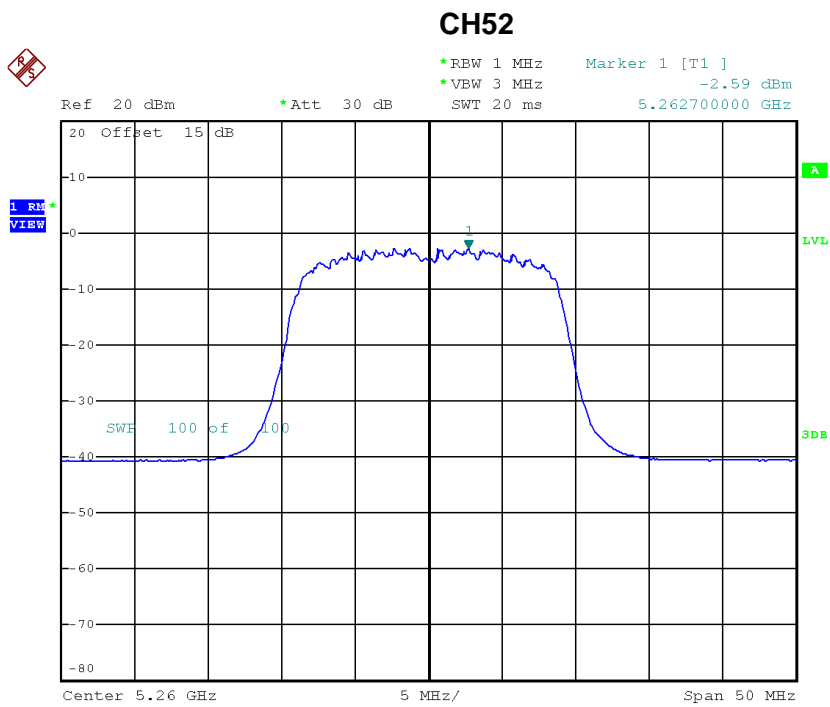


Date: 23.AUG.2017 16:16:51

CH60

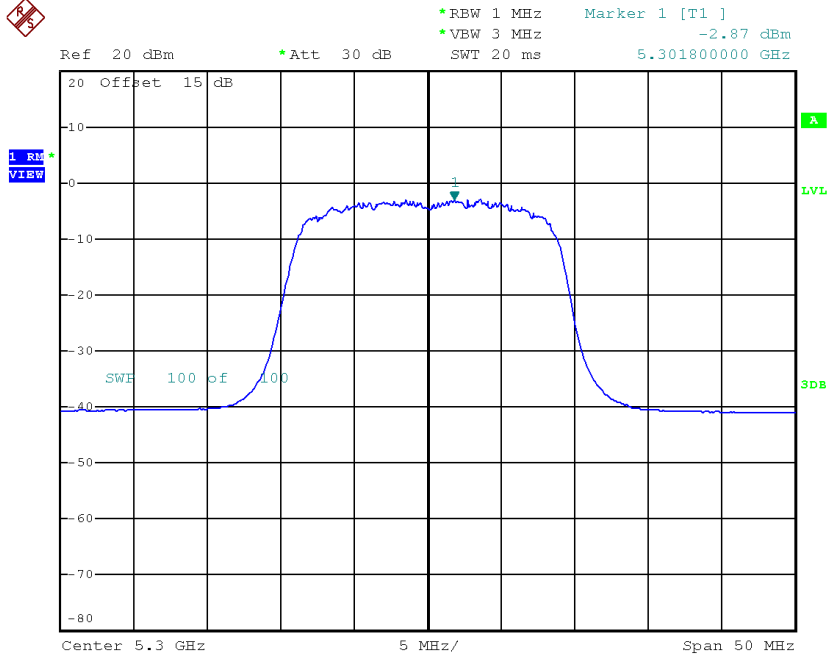

Date: 23.AUG.2017 16:22:53

CH64

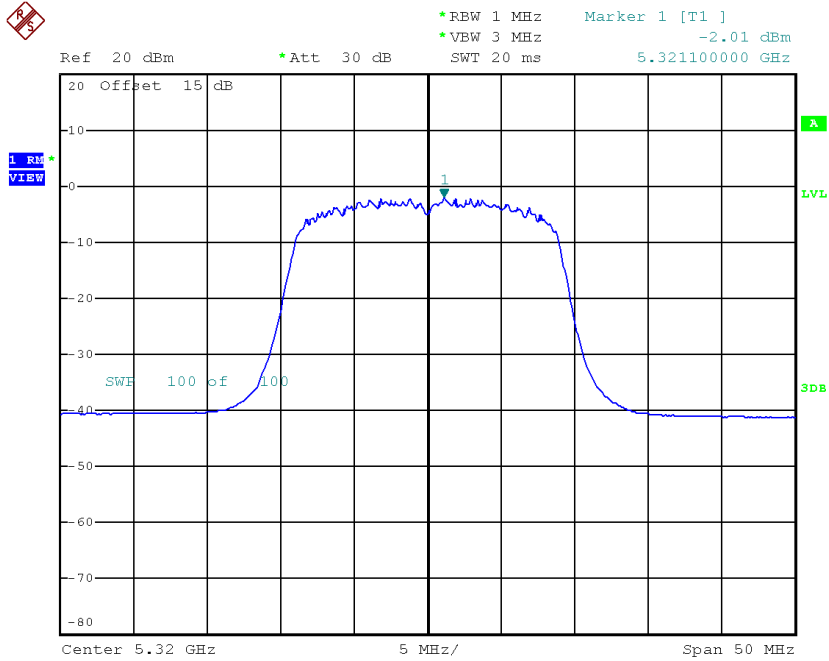

Date: 23.AUG.2017 16:26:28


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.04	11.00
CH60	5300	0.49	11.00
CH64	5320	1.00	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.20	0.52	-4.68	11.00
CH62	5310	-6.28	0.52	-5.76	11.00

CH54

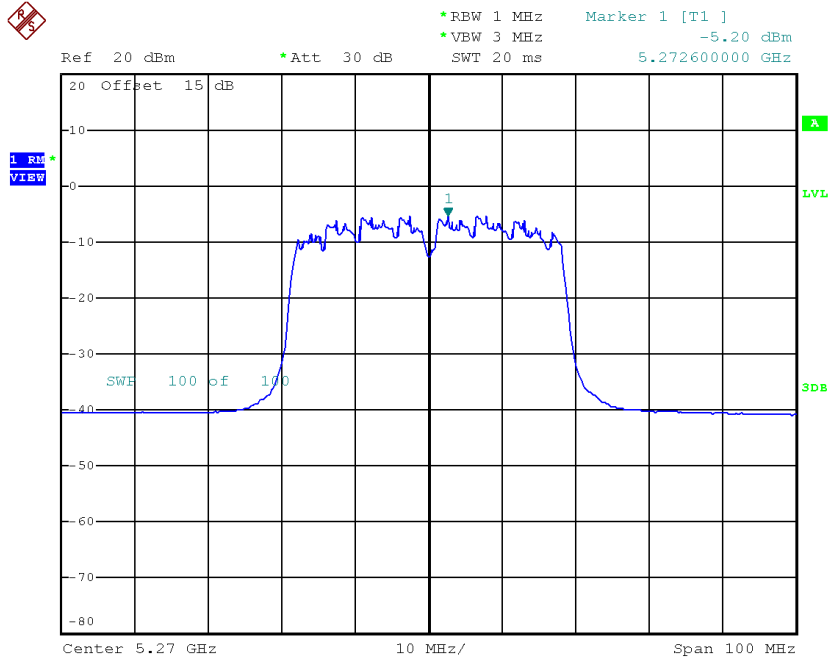

Date: 23.AUG.2017 17:30:12

CH62

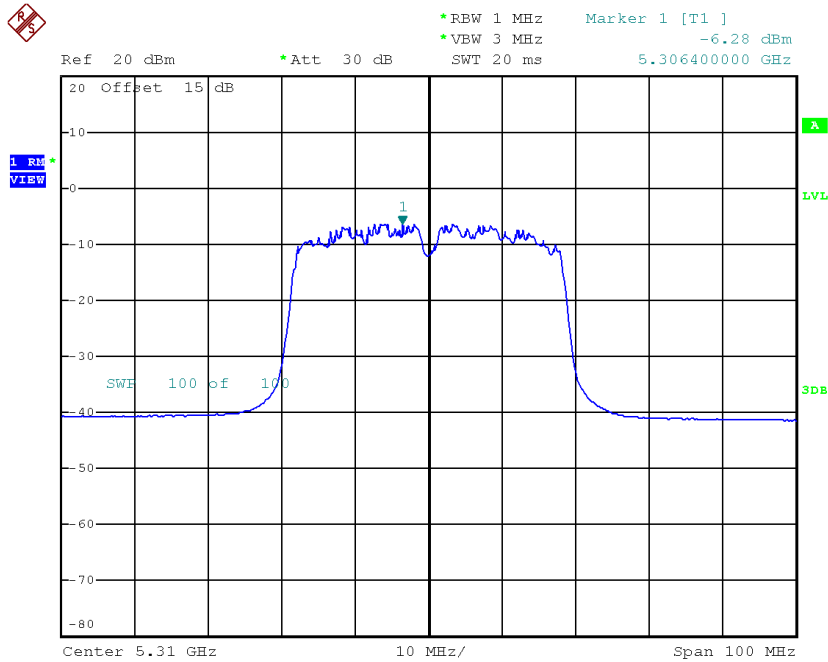


Date: 23.AUG.2017 17:32:17

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.04	0.52	-4.52	11.00
CH62	5310	-5.41	0.52	-4.89	11.00

CH54

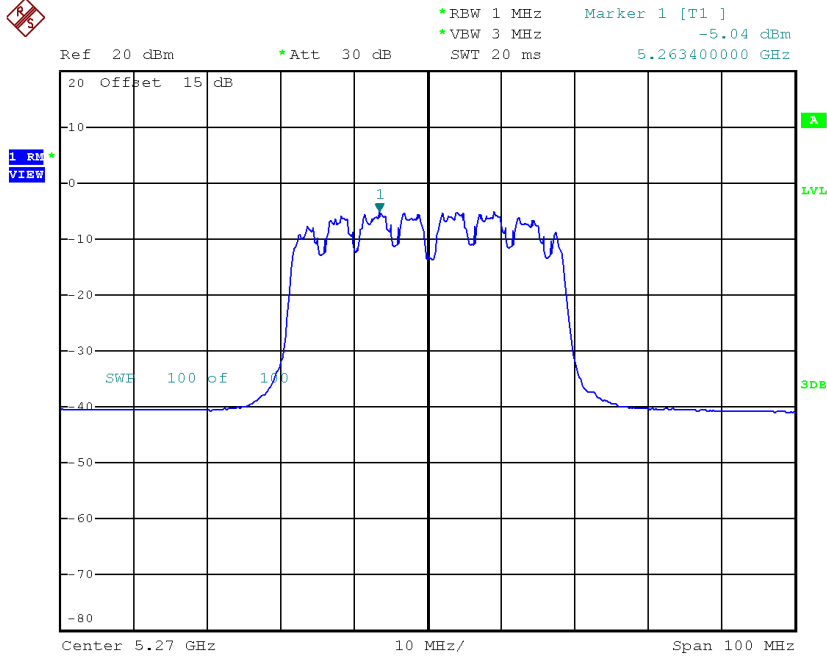

Date: 23.AUG.2017 17:49:25

CH62

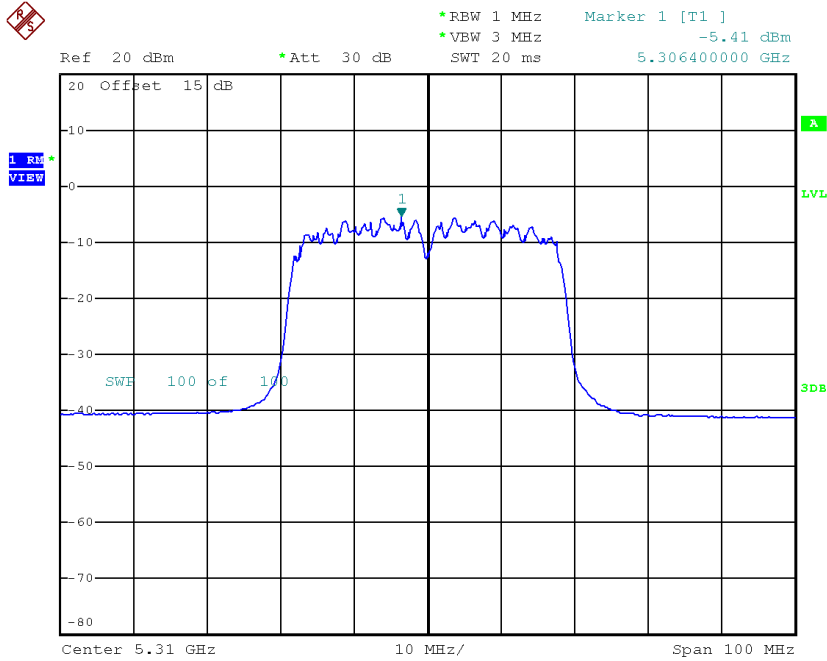


Date: 23.AUG.2017 17:50:55

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.59	11.00
CH62	5310	-2.29	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.87	0.23	-1.64	10.87
CH116	5580	-1.93	0.23	-1.70	10.87
CH140	5700	-1.98	0.23	-1.75	10.87

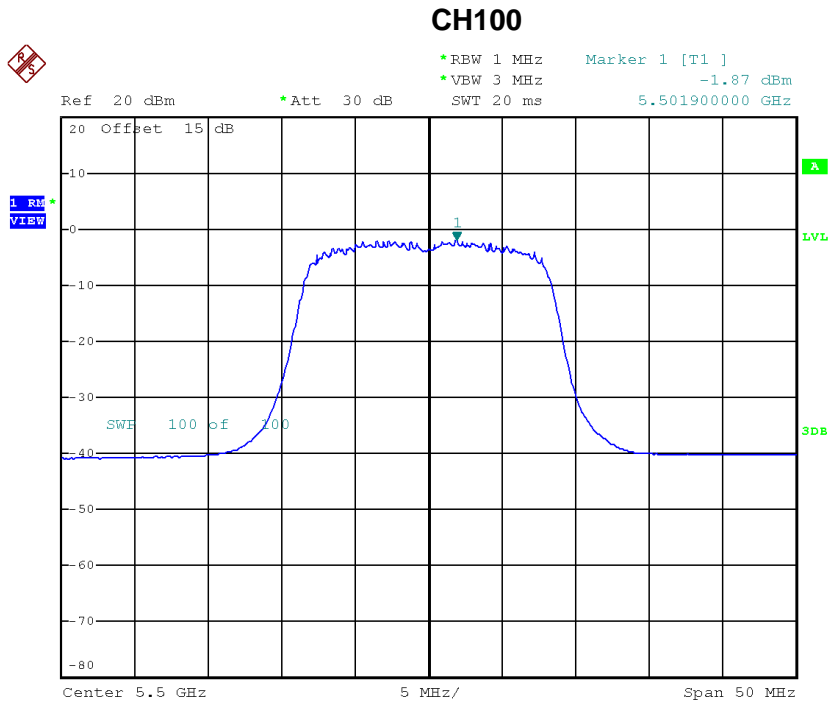


Date: 23.AUG.2017 12:31:38

CH116

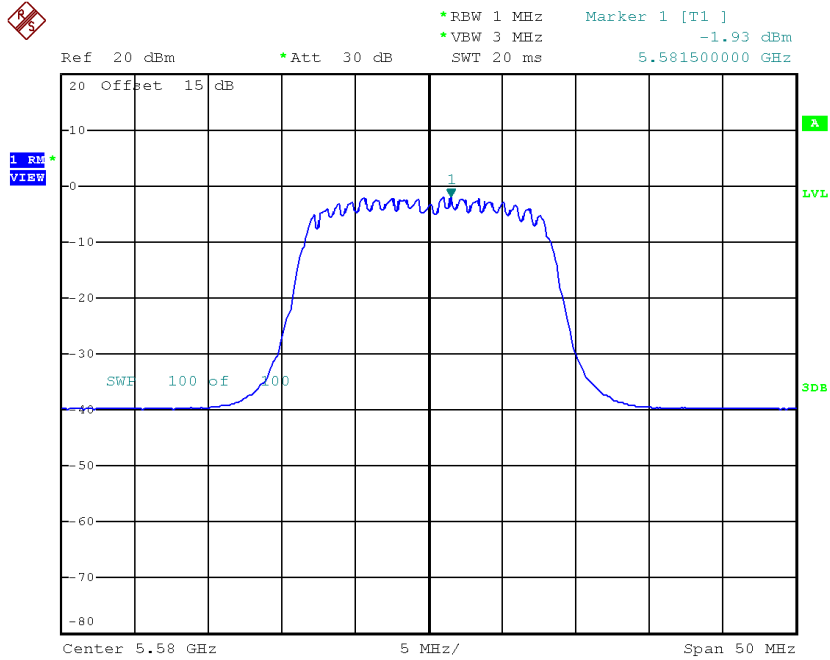

Date: 23.AUG.2017 12:32:54


CH140

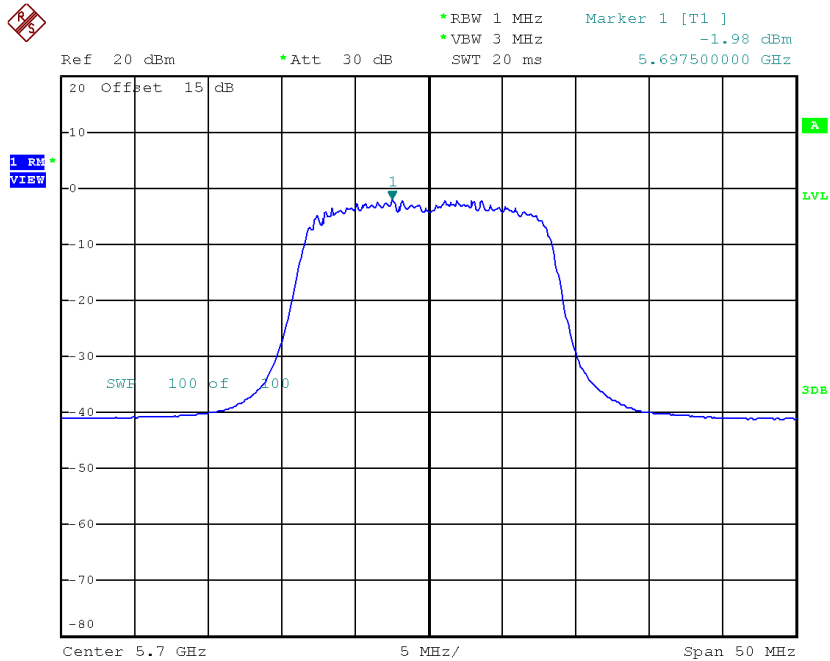

Date: 23.AUG.2017 12:34:35


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.18	0.23	-0.95	10.87
CH116	5580	-0.48	0.23	-0.25	10.87
CH140	5700	-41.04	0.23	-40.81	10.87

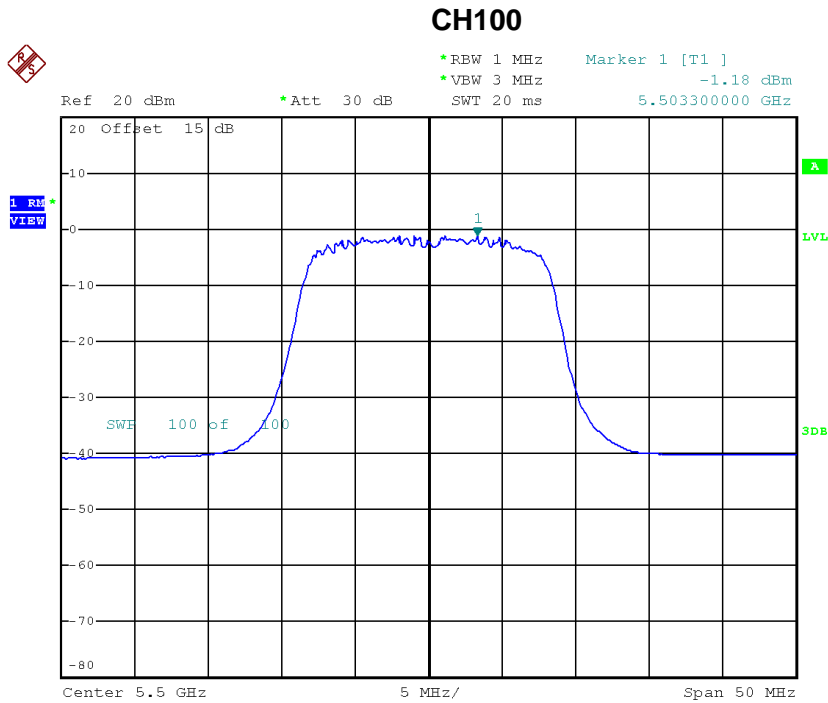


Date: 23.AUG.2017 12:47:18

CH116

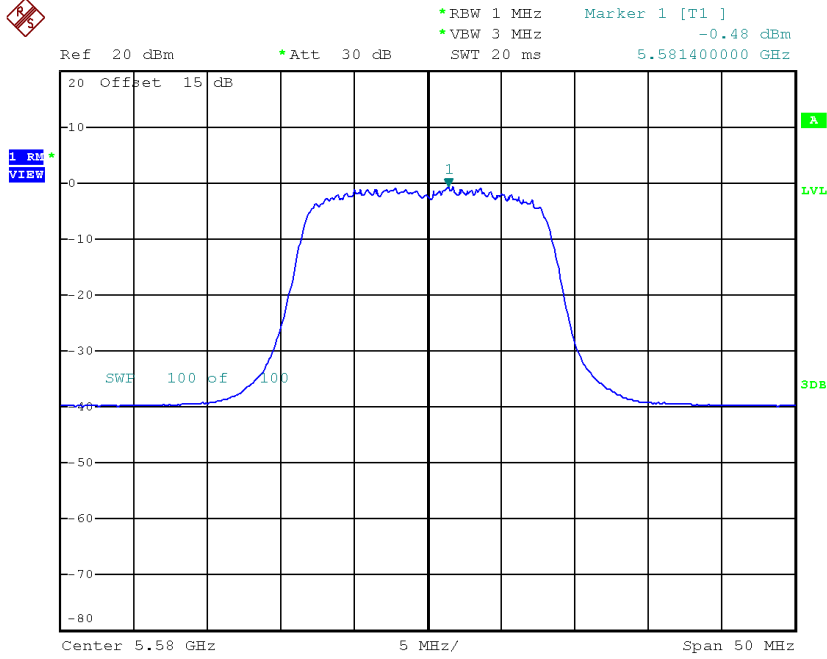

Date: 23.AUG.2017 12:49:31

CH140

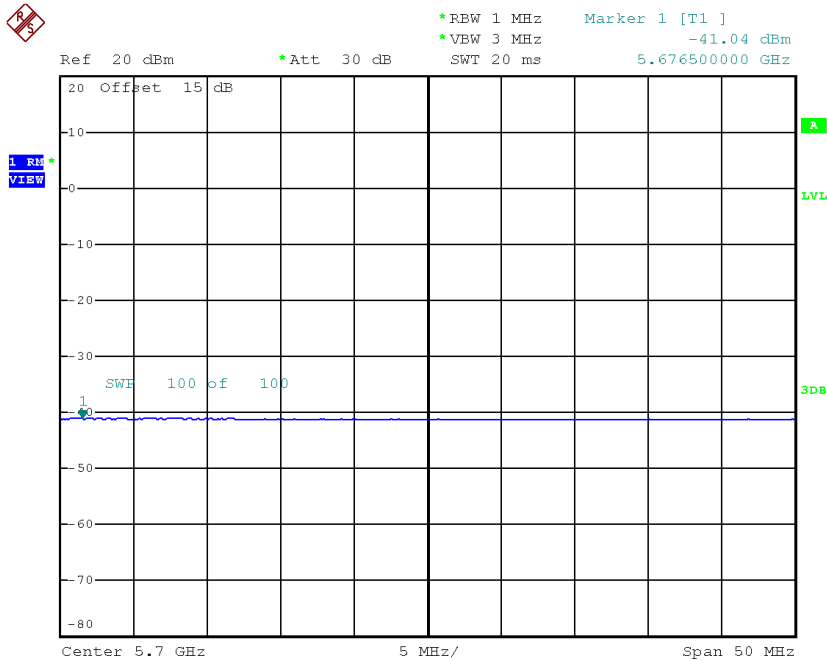


Date: 23.AUG.2017 12:50:15

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	1.73	10.87
CH116	5580	2.10	10.87
CH140	5700	-1.75	10.87


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-2.48	0.22	-2.26	10.87
CH116	5580	-2.65	0.22	-2.43	10.87
CH140	5700	-2.56	0.22	-2.34	10.87

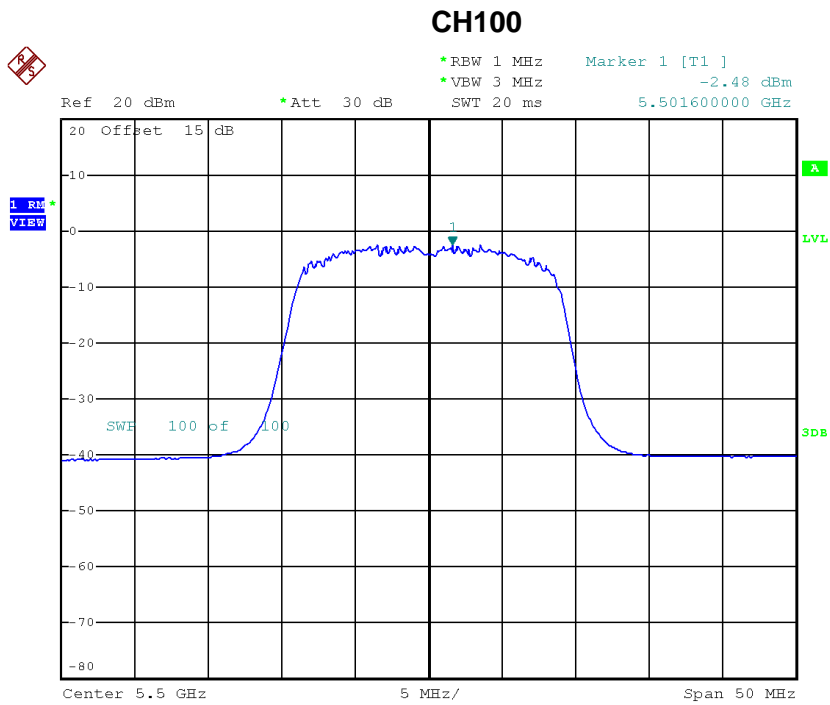


Date: 23.AUG.2017 14:31:12

CH116

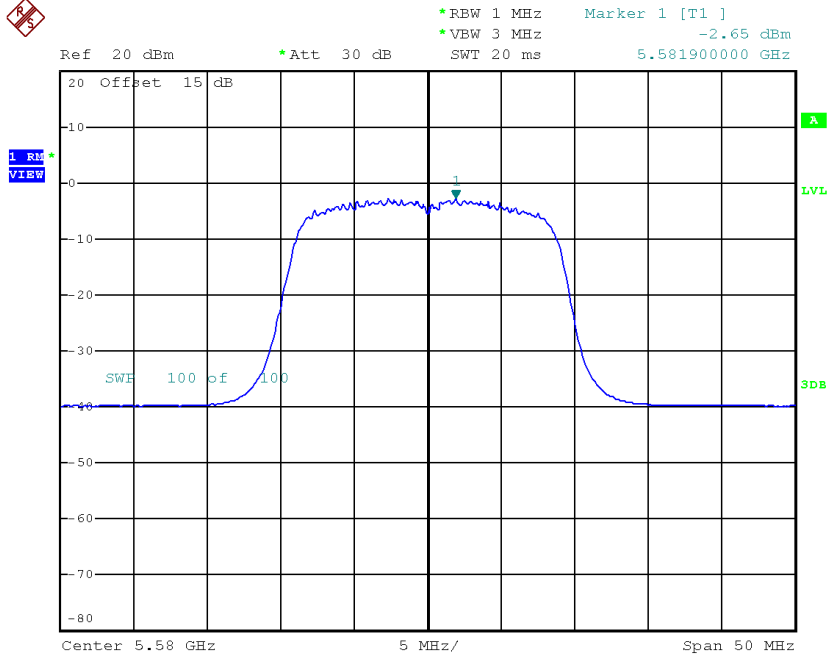

Date: 23.AUG.2017 14:33:29


CH140

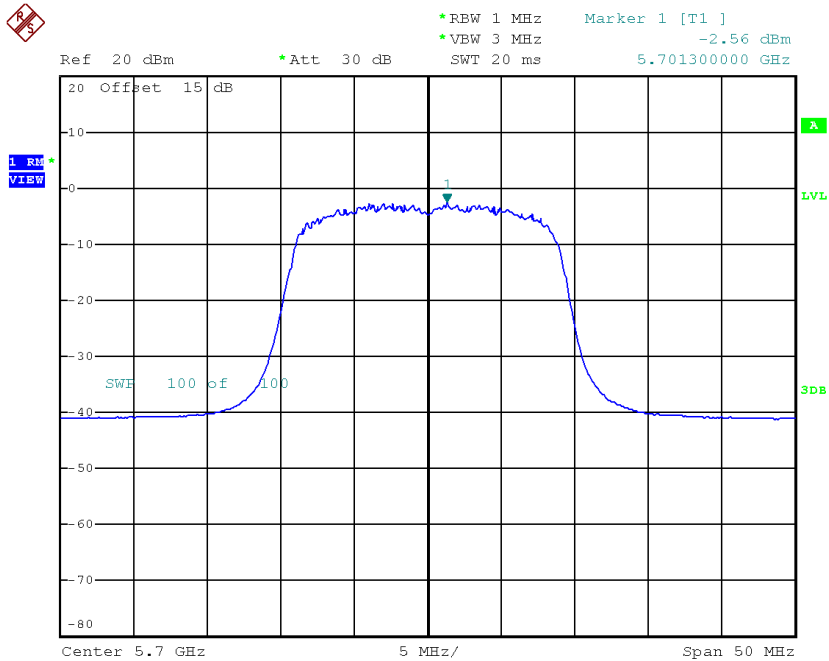

Date: 23.AUG.2017 14:35:01


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.39	0.22	-1.17	10.87
CH116	5580	-0.91	0.22	-0.69	10.87
CH140	5700	-3.14	0.22	-2.92	10.87

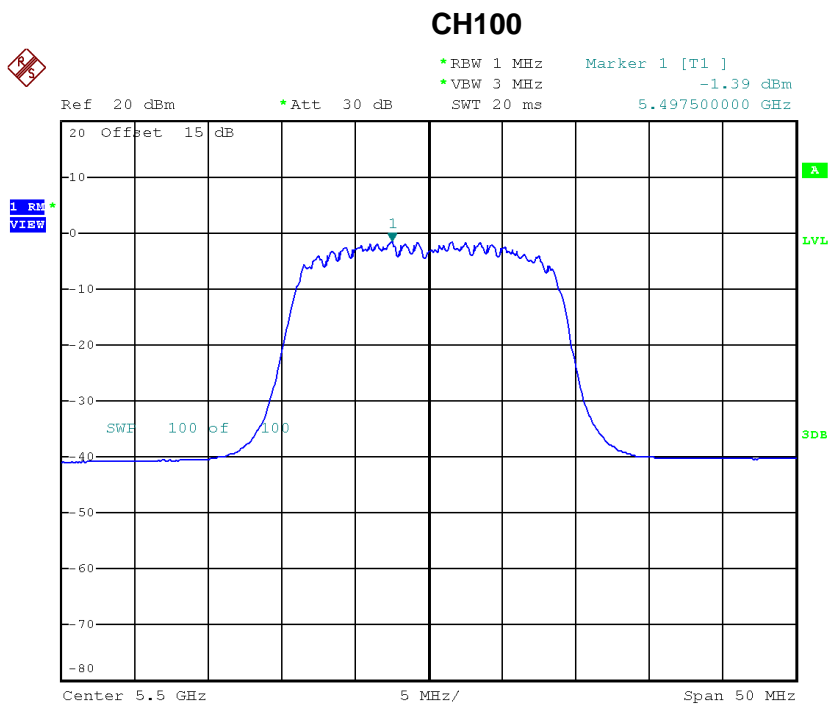


Date: 23.AUG.2017 16:40:08

CH116

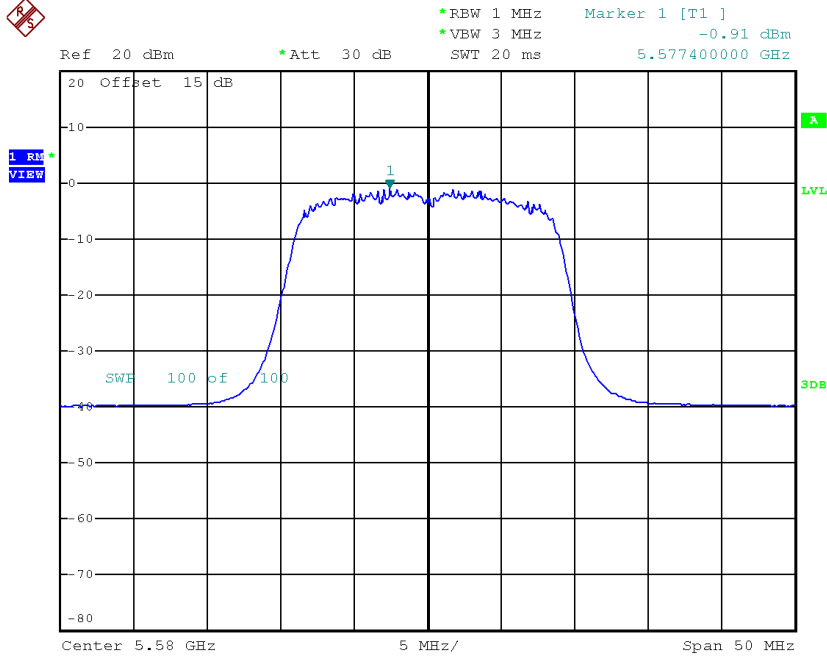

Date: 23.AUG.2017 16:43:03

CH140

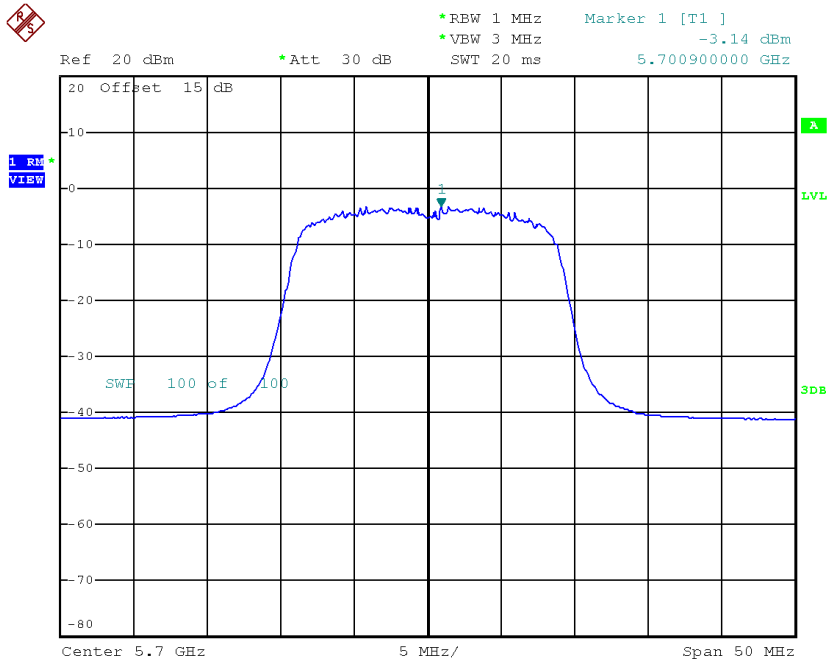


Date: 23.AUG.2017 16:44:05

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	1.33	10.87
CH116	5580	1.54	10.87
CH140	5700	0.39	10.87


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.55	0.52	-5.03	10.87
CH110	5550	-5.99	0.52	-5.47	10.87
CH134	5670	-6.61	0.52	-6.09	10.87

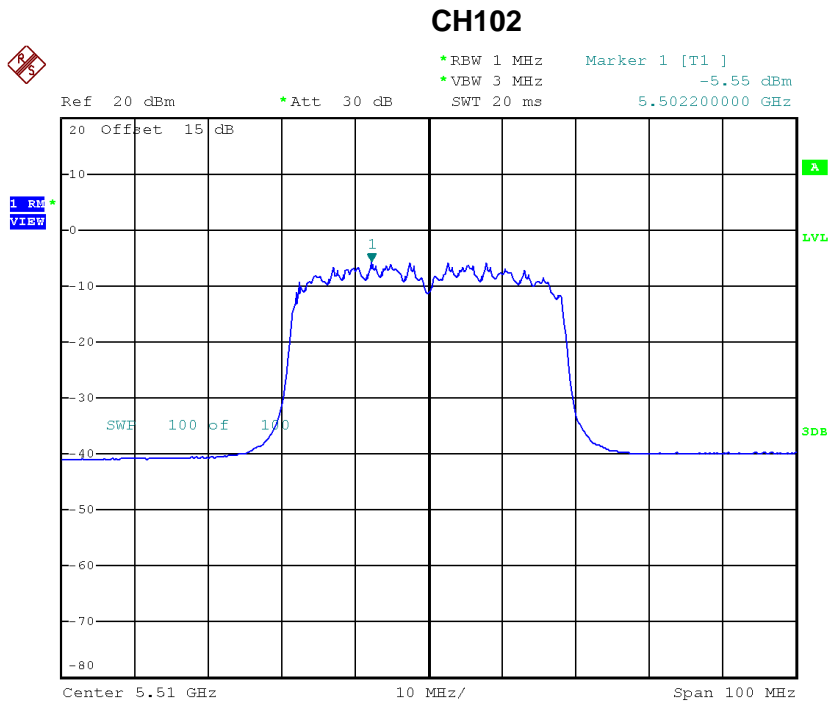


Date: 23.AUG.2017 17:34:41

CH110

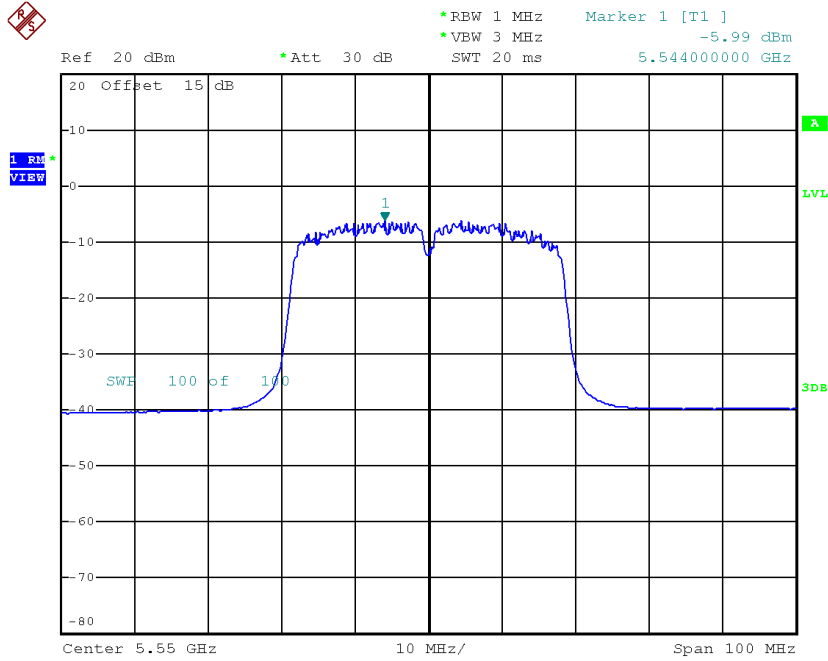

Date: 23.AUG.2017 17:35:59


CH134

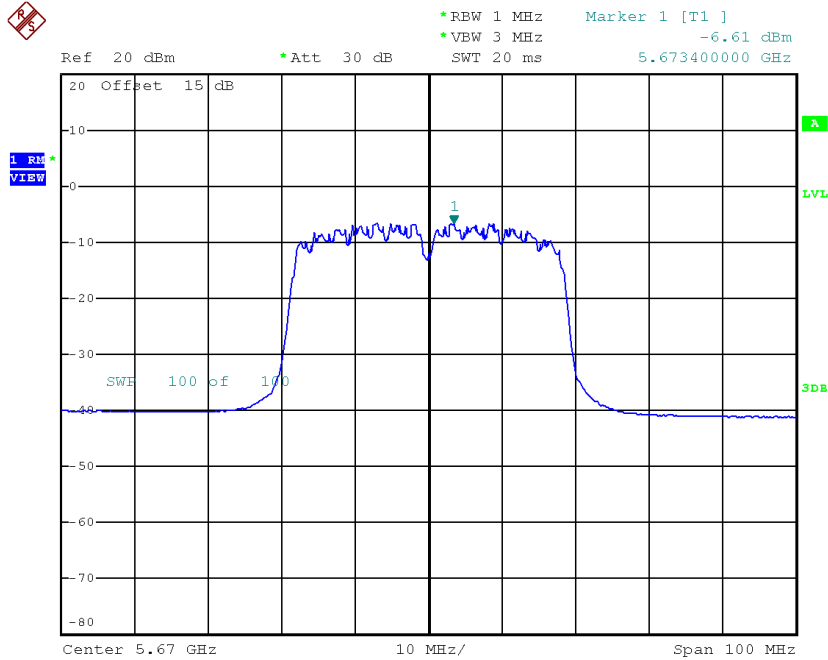

Date: 23.AUG.2017 17:37:20


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-4.92	0.52	-4.40	10.87
CH110	5550	-4.84	0.52	-4.32	10.87
CH134	5670	-6.47	0.52	-5.95	10.87

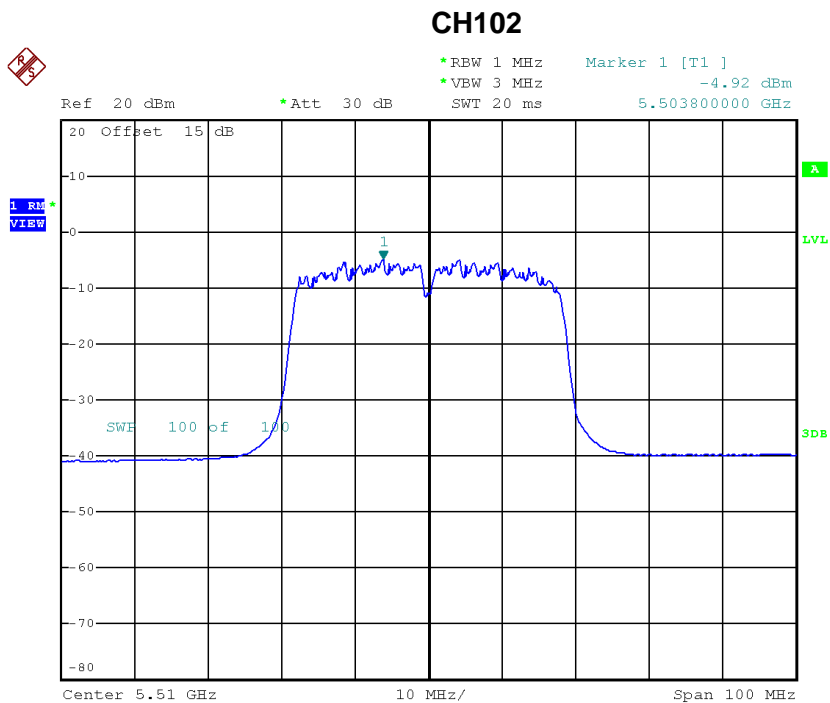


Date: 23.AUG.2017 17:52:54

CH110

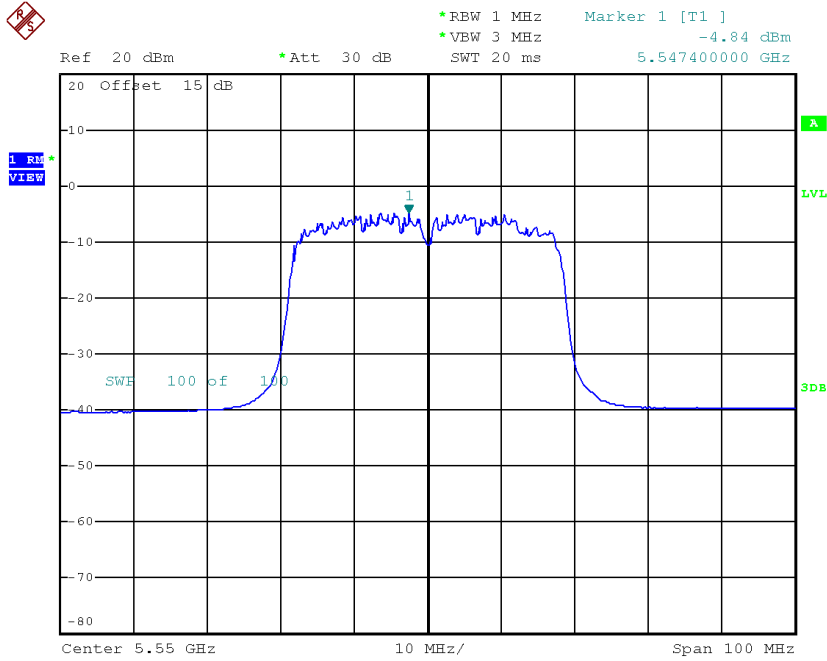

Date: 23.AUG.2017 17:54:14

CH134

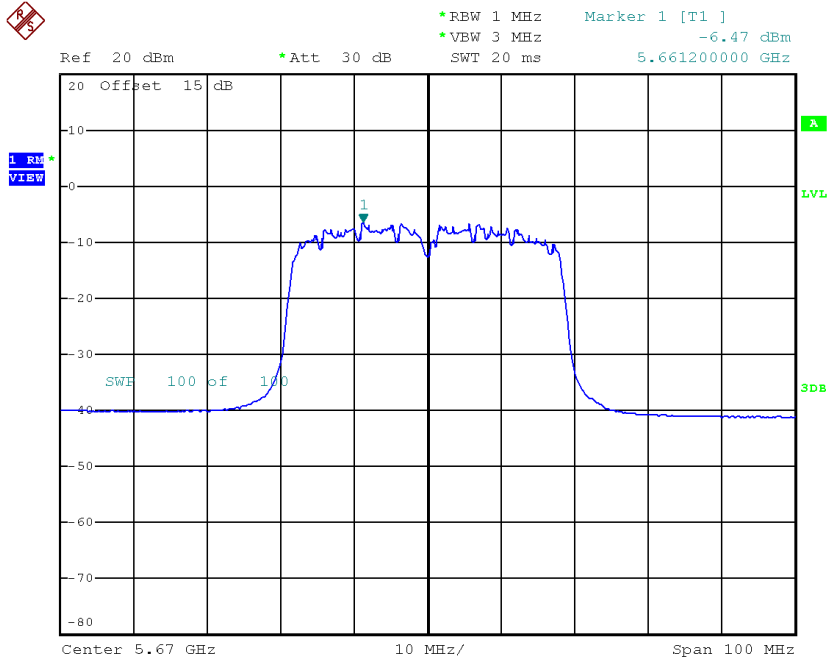


Date: 23.AUG.2017 17:57:16

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-1.69	10.87
CH110	5550	-1.85	10.87
CH134	5670	-3.01	10.87

TX CH157

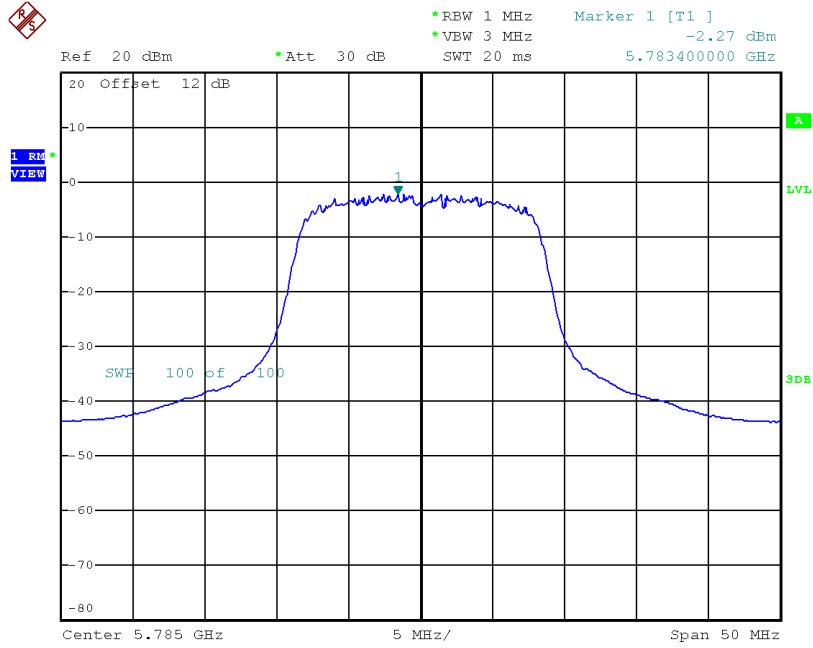


Date: 23.AUG.2017 12:37:06

TX CH165

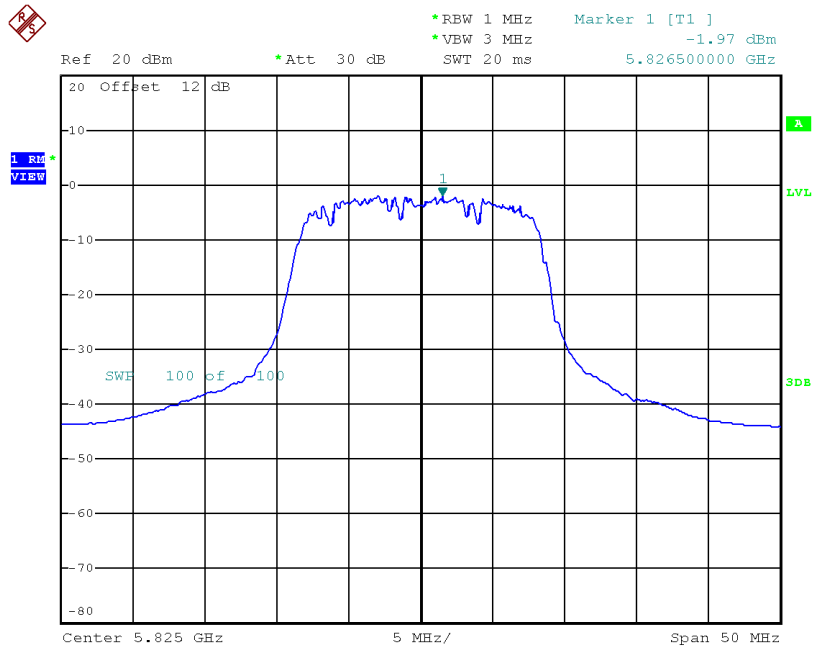


Date: 23.AUG.2017 12:38:09

TX CH157

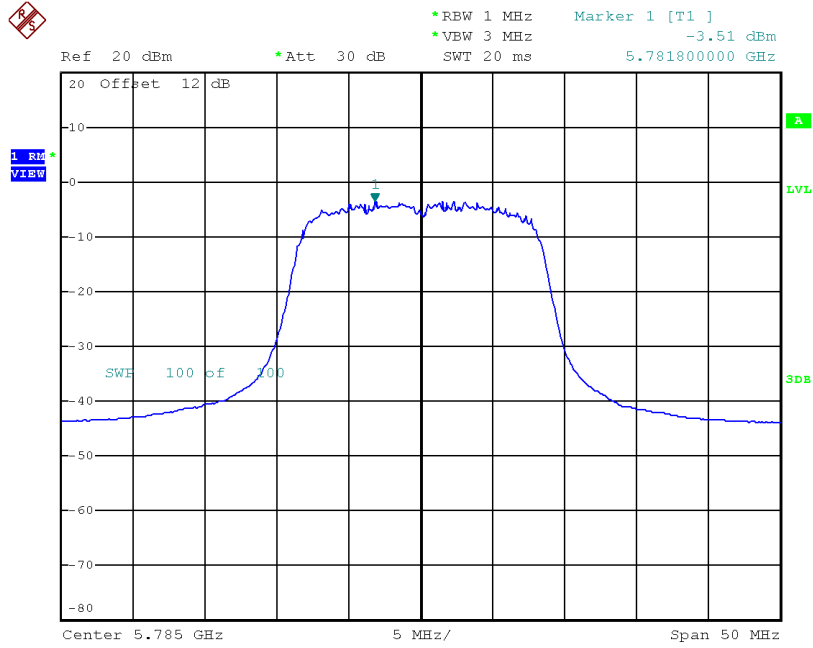

Date: 23.AUG.2017 12:53:10

TX CH165

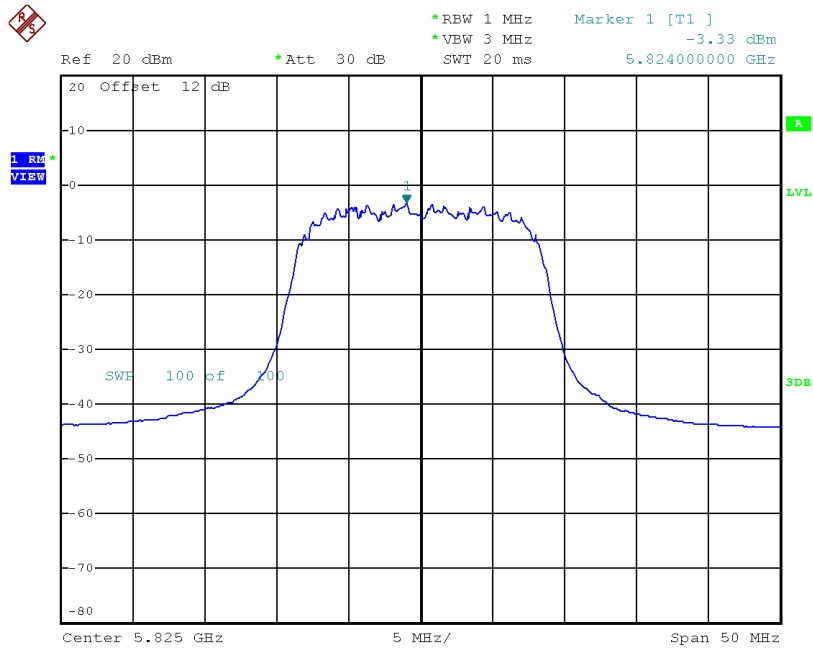

Date: 23.AUG.2017 12:54:22


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	1.00	29.2
CH157	5785	0.39	29.2
CH165	5825	0.64	29.2

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-2.40	0.22	-2.18	29.2
CH157	5785	-2.24	0.22	-2.02	29.2
CH165	5825	-2.18	0.22	-1.96	29.2

TX CH149

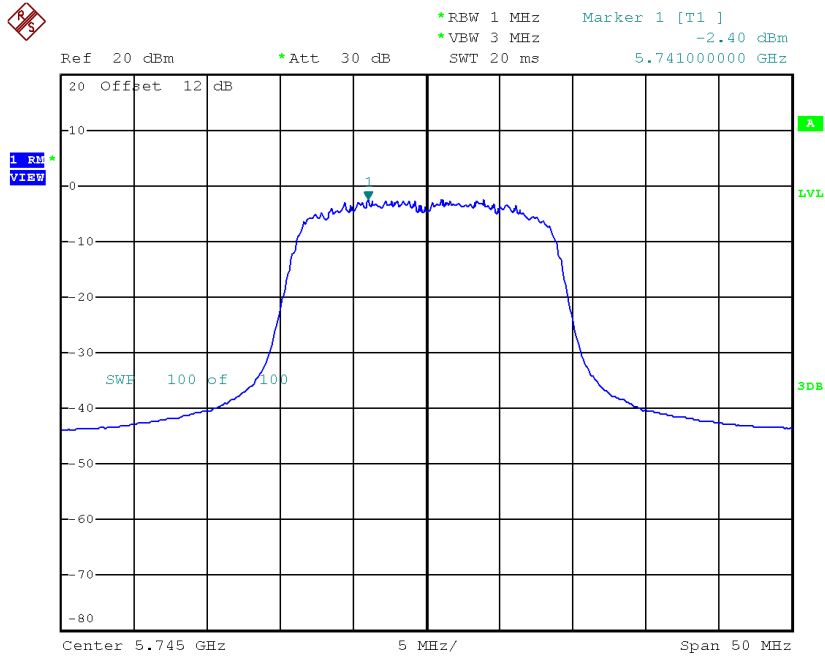


Date: 23.AUG.2017 14:38:23

TX CH157

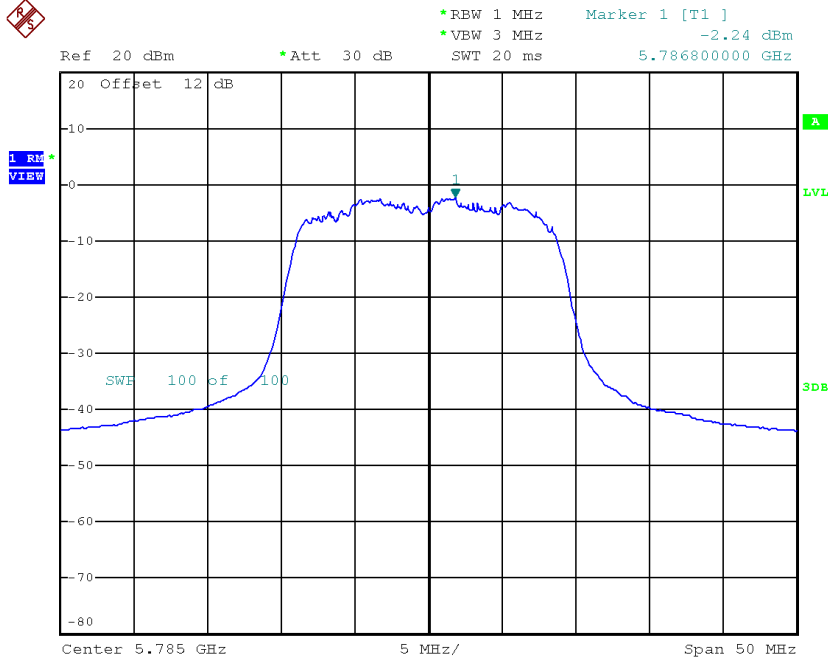

Date: 23.AUG.2017 14:40:41


TX CH165

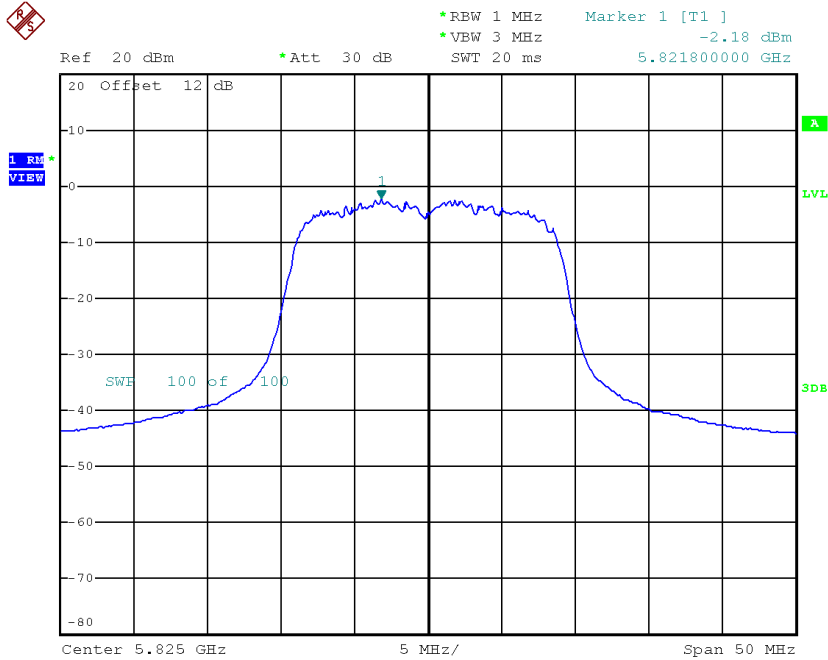

Date: 23.AUG.2017 14:41:57


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.61	0.22	-3.39	29.2
CH157	5785	-4.07	0.22	-3.85	29.2
CH165	5825	-4.09	0.22	-3.87	29.2

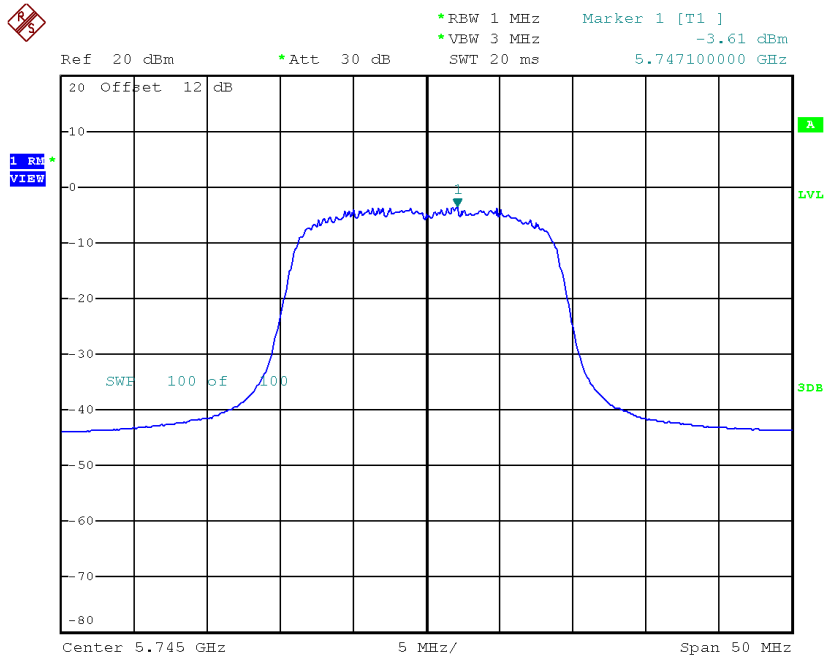TX CH149


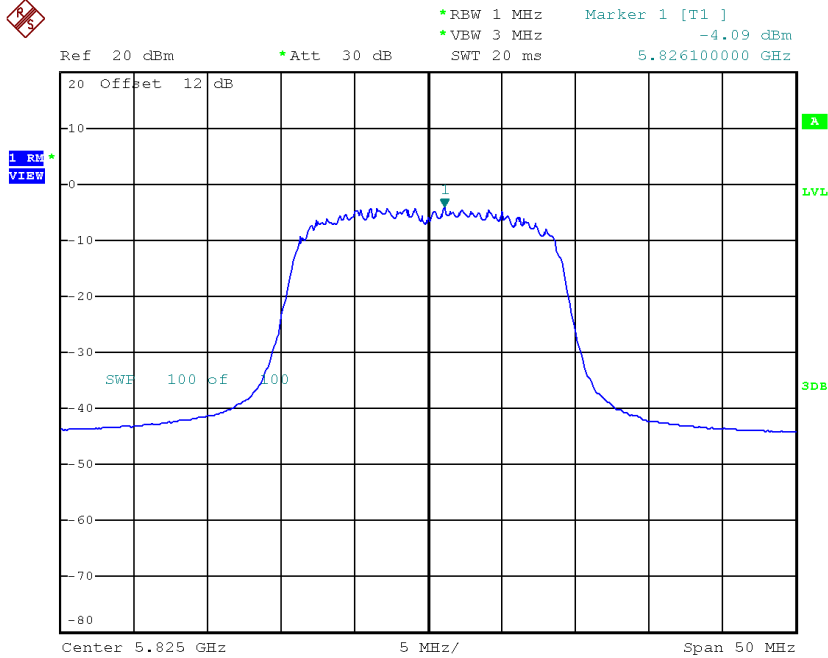
Date: 23.AUG.2017 16:45:51

TX CH157

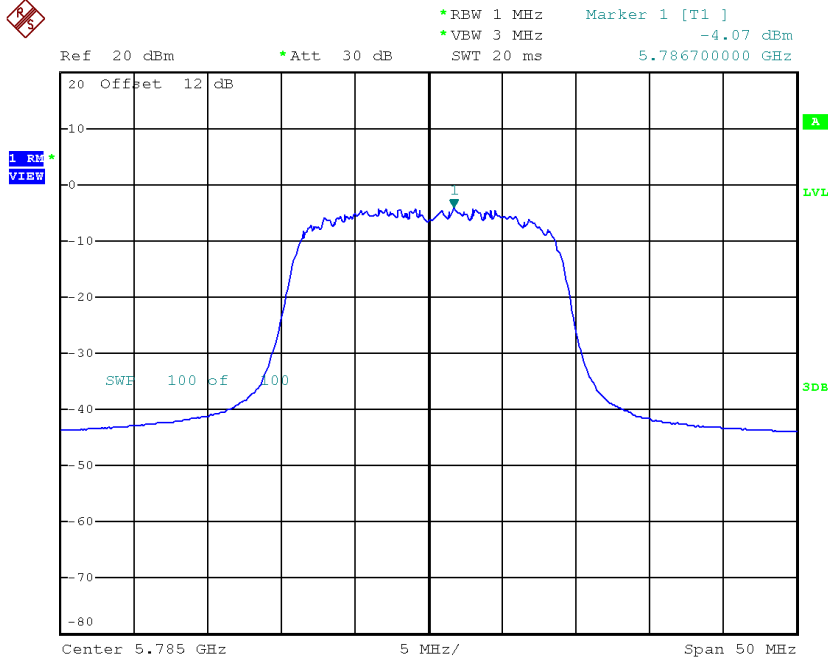

Date: 23.AUG.2017 16:47:03

TX CH165



Date: 23.AUG.2017 16:48:03


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.27	29.2
CH157	5785	0.17	29.2
CH165	5825	0.20	29.2

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.11	0.52	-5.59	29.2
CH159	5795	-6.13	0.52	-5.61	29.2

TX CH151

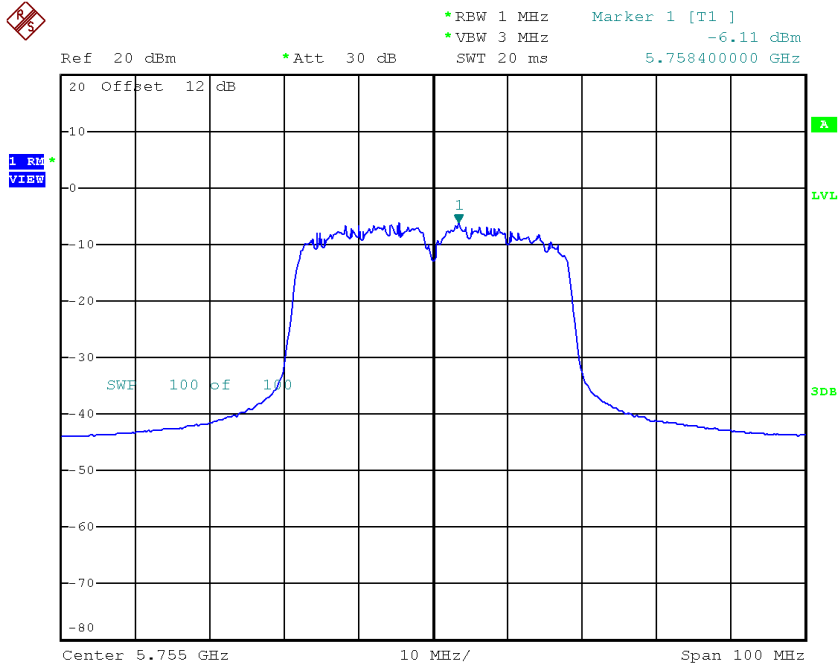

Date: 23.AUG.2017 17:39:37

TX CH159

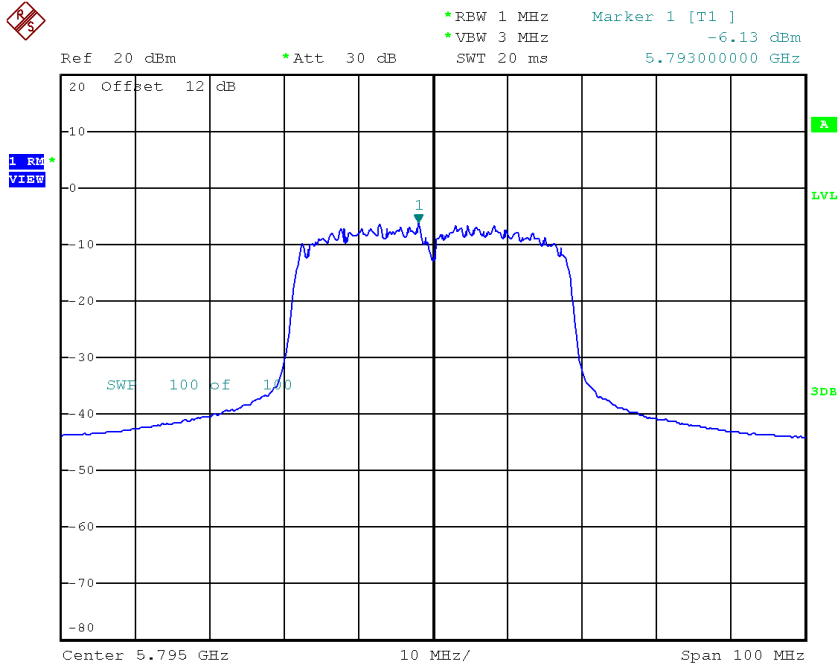


Date: 23.AUG.2017 17:41:40

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.26	0.52	-5.74	29.2
CH159	5795	-7.43	0.52	-6.91	29.2

TX CH151

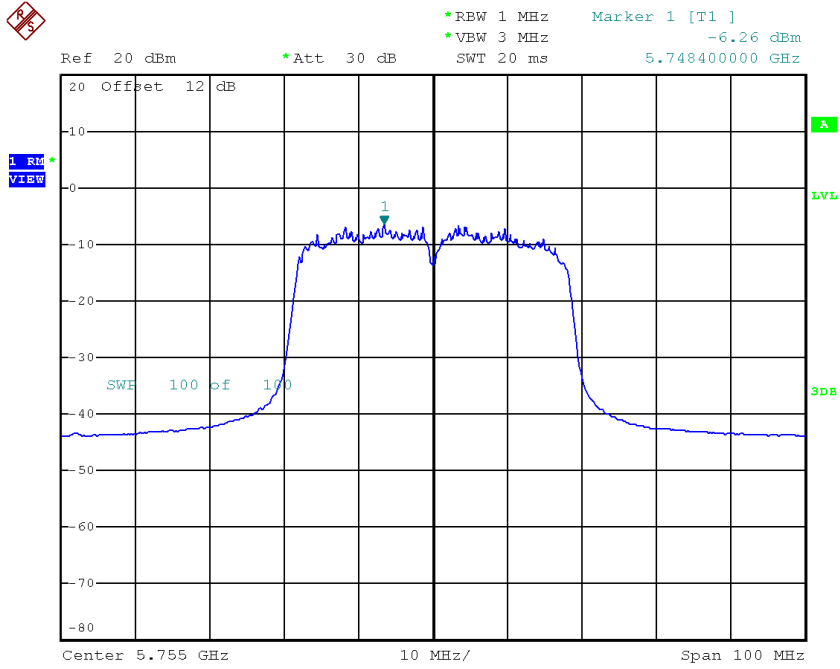

Date: 23.AUG.2017 17:59:25

TX CH159

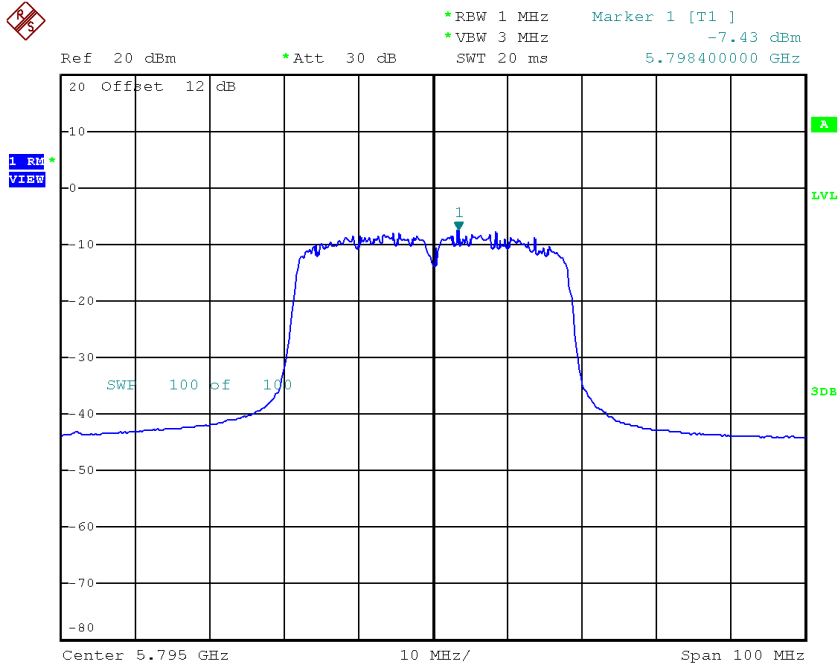


Date: 23.AUG.2017 18:02:23

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-2.65	29.2
CH159	5795	-3.20	29.2

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-11.18	1.05	-10.13	17.00

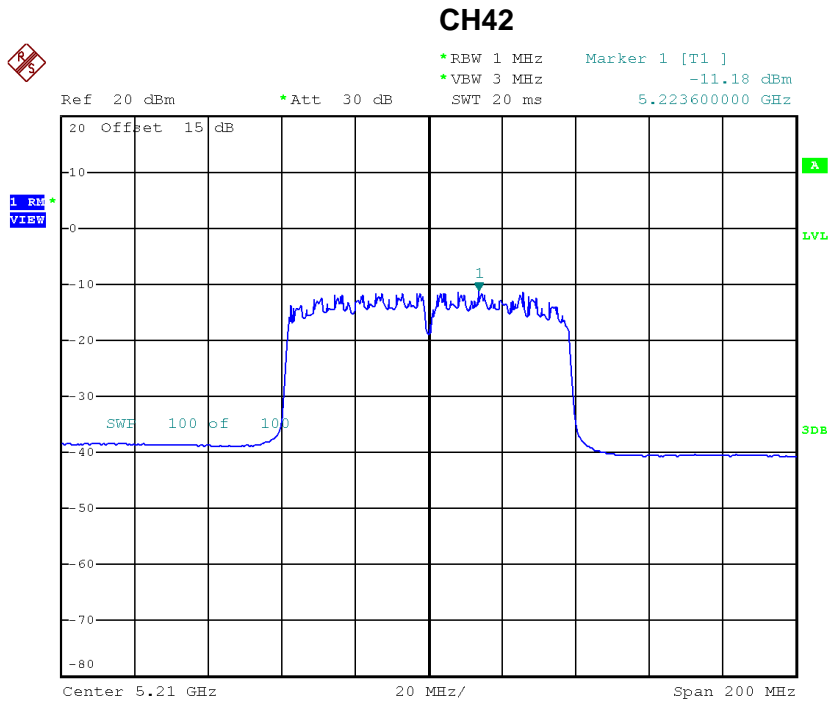

Date: 23.AUG.2017 18:17:29

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-10.80	1.05	-9.75	17.00

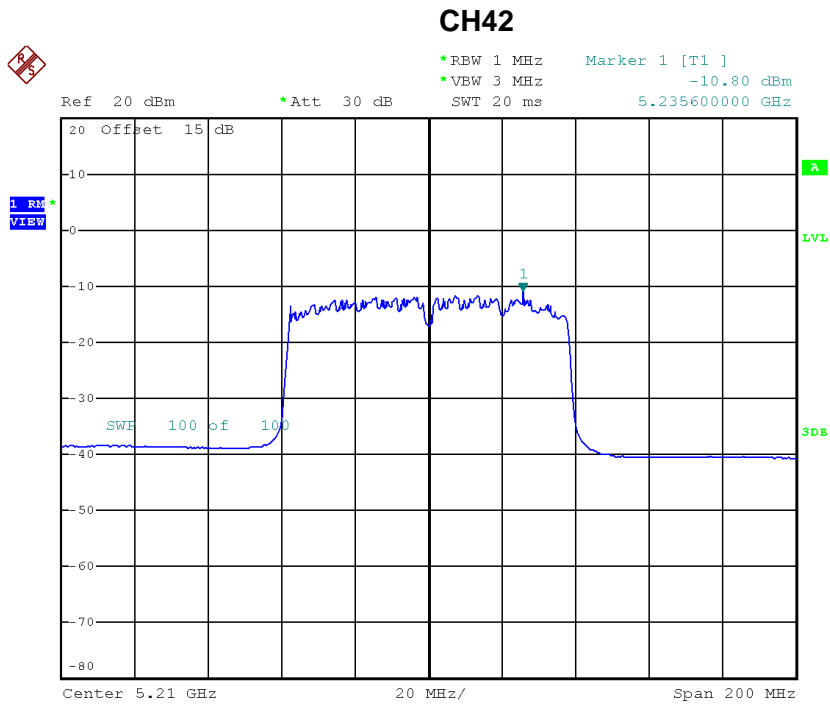


Date: 23.AUG.2017 18:07:25

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.93	17.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.68	1.05	-8.63	11.00

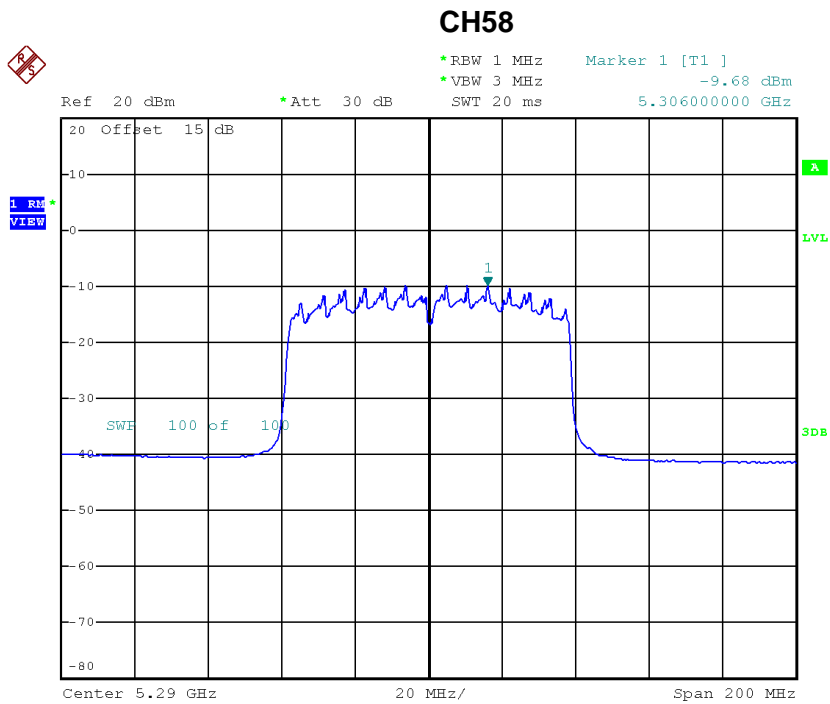

Date: 23.AUG.2017 18:19:17

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.11	1.05	-8.06	11.00

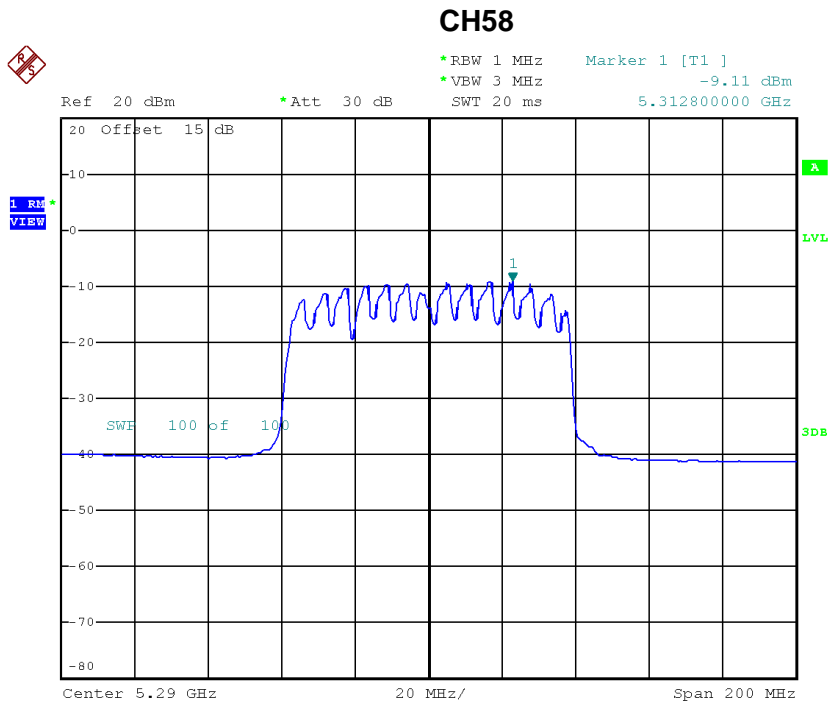

Date: 23.AUG.2017 18:08:39


Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-5.33	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-10.96	1.05	-9.91	10.87
CH122	5610	-10.66	1.05	-9.61	10.87

CH106

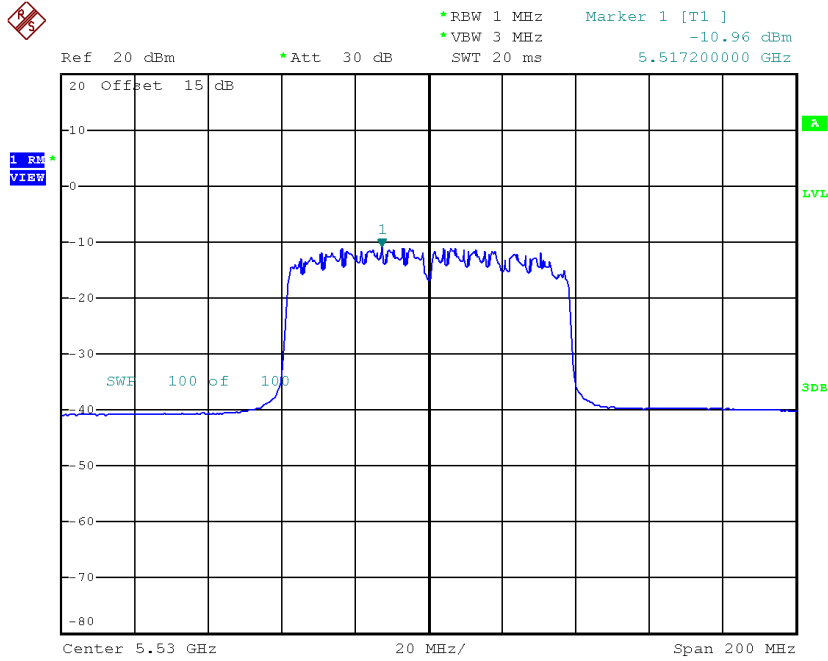

Date: 23.AUG.2017 18:20:44

CH122

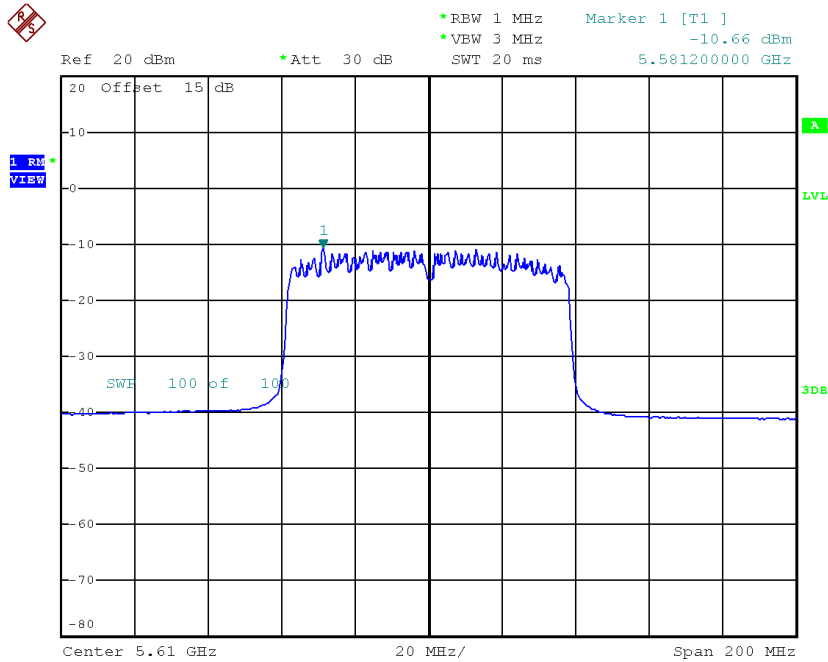


Date: 23.AUG.2017 18:22:17

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-9.52	1.05	-8.47	10.87
CH122	5610	-9.44	1.05	-8.39	10.87

CH106

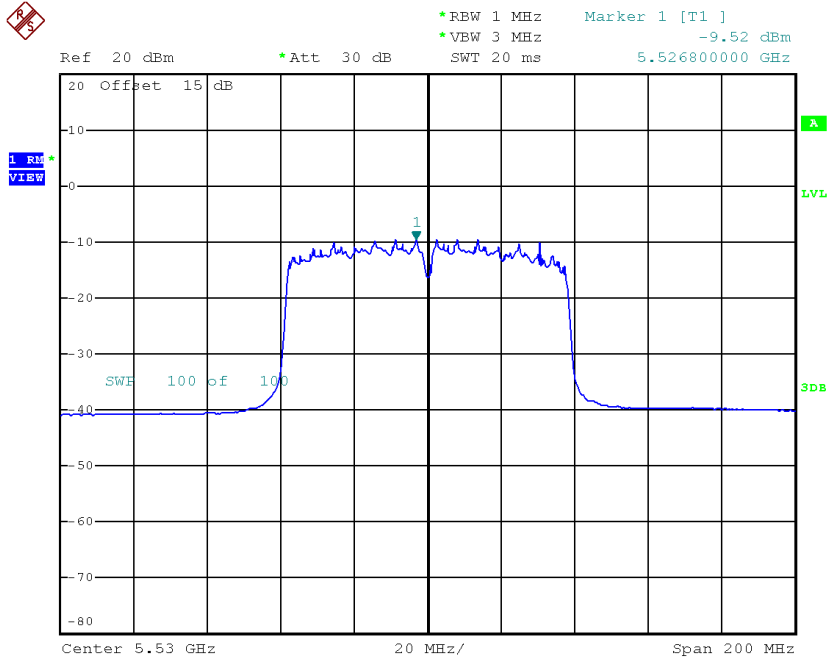

Date: 23.AUG.2017 18:10:09

CH122

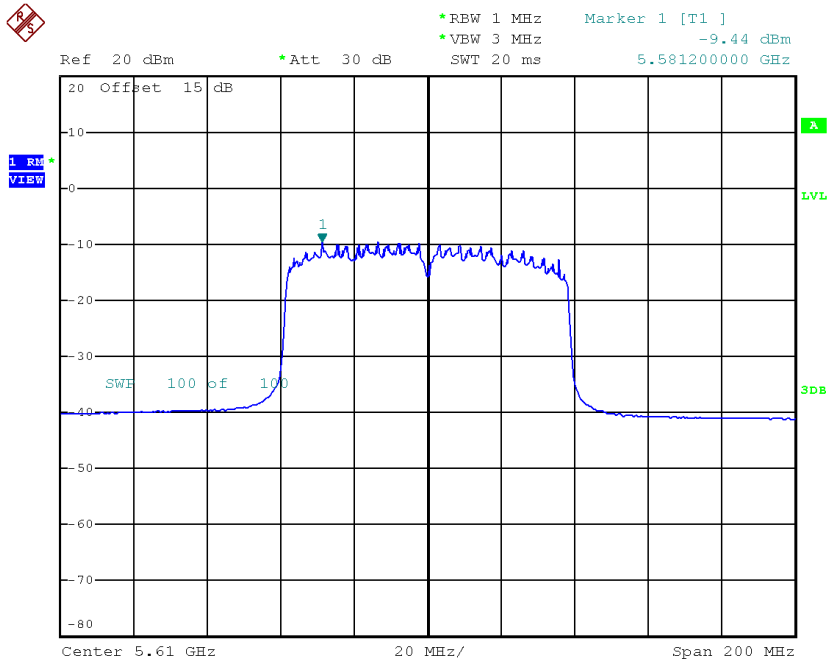

Date: 23.AUG.2017 18:12:19


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.12	10.87
CH122	5610	-5.95	10.87

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-9.93	1.05	-8.88	29.2

TX CH155

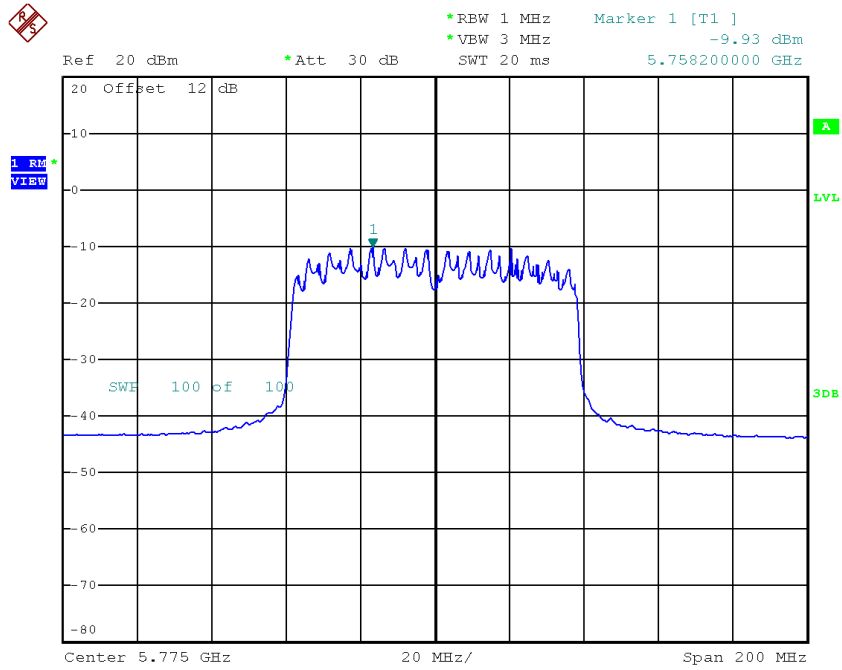


Date: 23.AUG.2017 18:24:52

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-11.13	1.05	-10.08	29.2

TX CH155

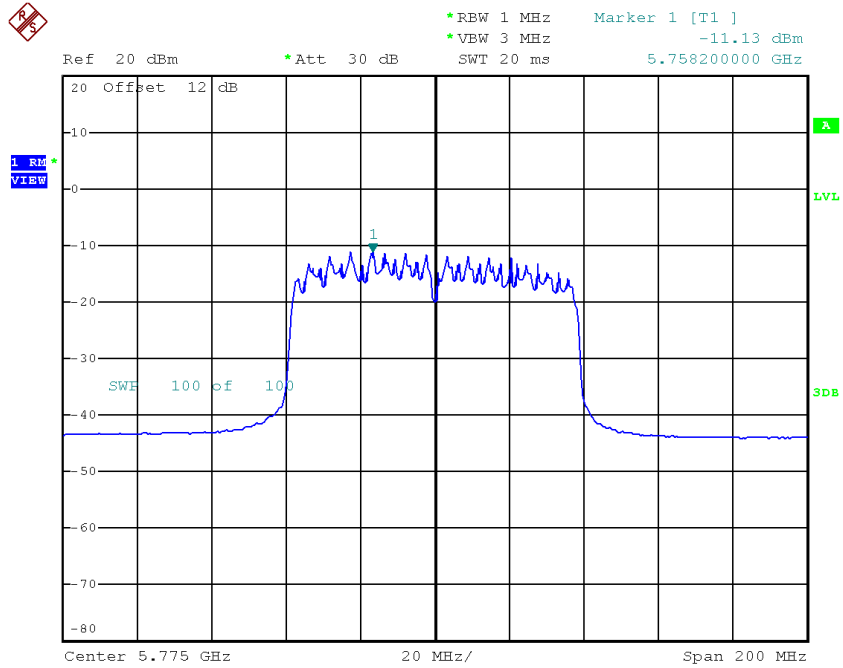

Date: 23.AUG.2017 18:14:28

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-6.43	29.2

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-1
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5179.9904
120	5179.9908
108	5179.9912
Max. Deviation (MHz)	0.0096
Max. Deviation (ppm)	1.8533

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
-20	5179.9920
-10	5179.9924
0	5179.9924
10	5179.9928
20	5179.9932
30	5179.9932
40	5179.9936
50	5179.9936
Max. Deviation (MHz)	0.0080
Max. Deviation (ppm)	1.5444

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5259.9872
120	5259.9884
108	5259.9892
Max. Deviation (MHz)	0.0128
Max. Deviation (ppm)	2.4335

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-20	5259.9896
-10	5259.9896
0	5259.9896
10	5259.9896
20	5259.9900
30	5259.9900
40	5259.9900
50	5259.9904
Max. Deviation (MHz)	0.0104
Max. Deviation (ppm)	1.9772

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5499.9868
120	5499.9952
108	5499.9976
Max. Deviation (MHz)	0.0132
Max. Deviation (ppm)	2.4000

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-20	5499.9980
-10	5499.9988
0	5500.0000
10	5500.0000
20	5500.0000
30	5500.0004
40	5500.0004
50	5500.0004
Max. Deviation (MHz)	0.0020
Max. Deviation (ppm)	0.3636

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5744.9872
120	5744.9916
108	5744.9936
Max. Deviation (MHz)	0.0128
Max. Deviation (ppm)	2.2280

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-20	5744.9940
-10	5744.9944
0	5744.9944
10	5744.9948
20	5744.9948
30	5744.9948
40	5744.9948
50	5744.9948
Max. Deviation (MHz)	0.0060
Max. Deviation (ppm)	1.0444