

Model: PLUTV63BTA


Product specification

Quick Reference Date

	Antenna module on the system board	
Antenna type	PCB	
Frequency	2400–2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr ?loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	-2dBi	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

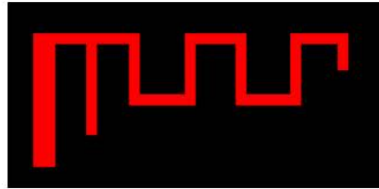

Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board		-0.5		-3.8		-3.0	58.5%

Return Loss




The Environment of Antenna Radiation Pattern





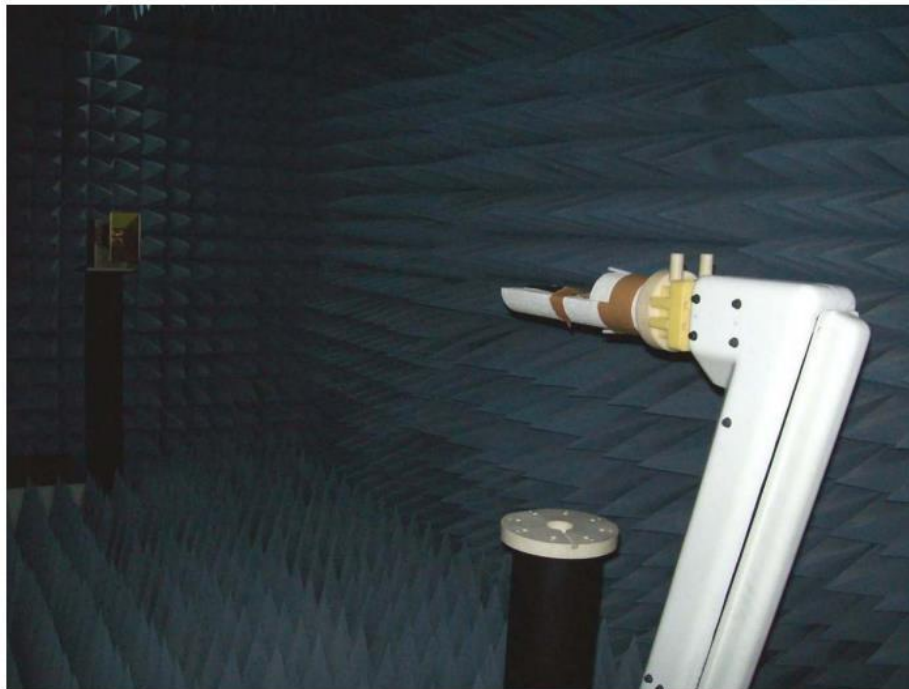
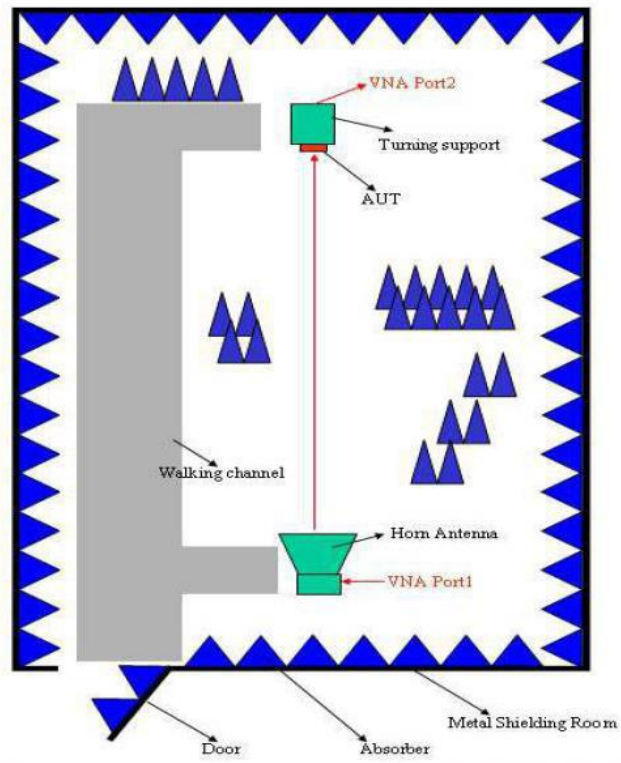


Max Antenna gain dBi	
2400 MHz	-4.95
2400MHz	-2.00
2500MHz	-3.16







ZY-Plane Total

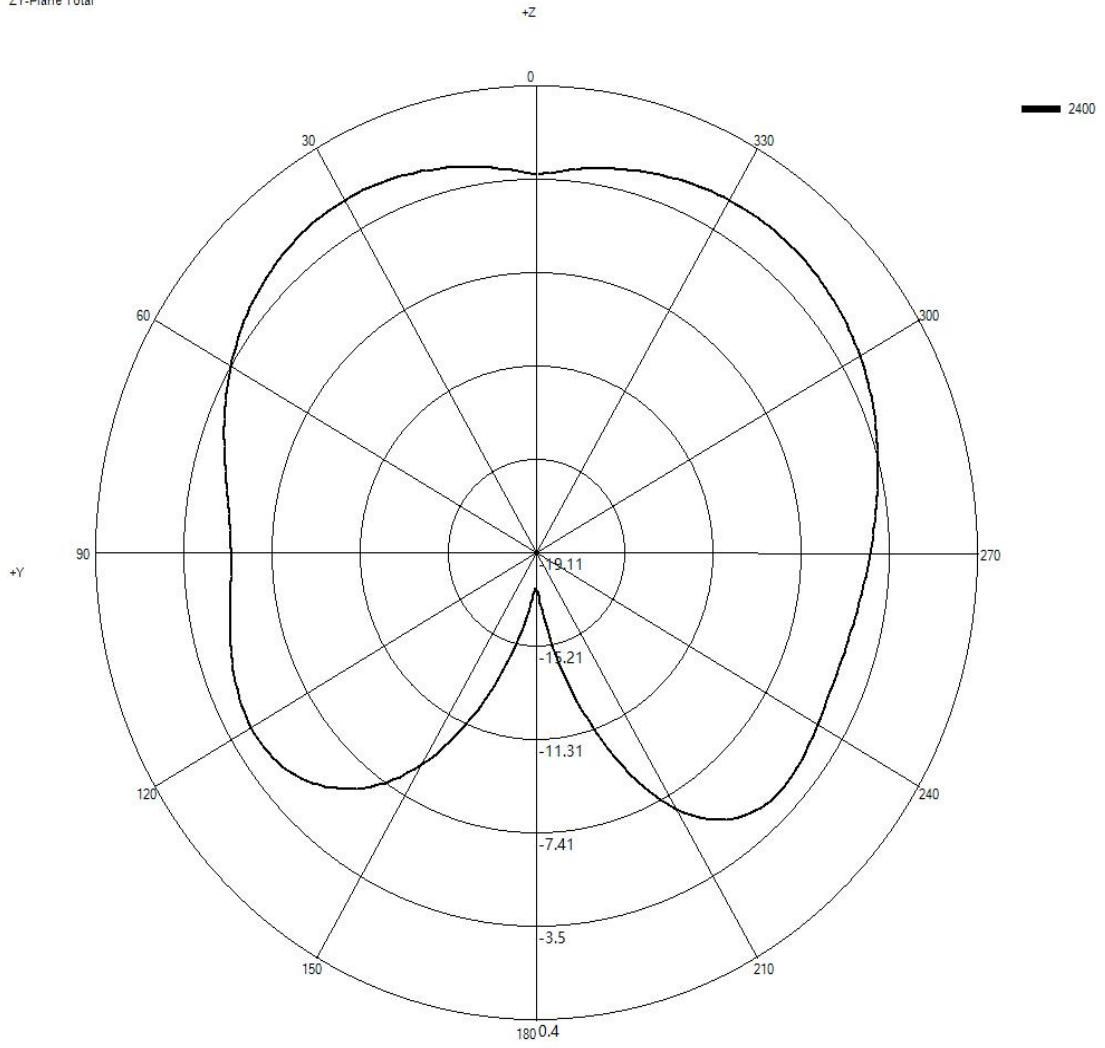

Channel (MHz) 2400 X+

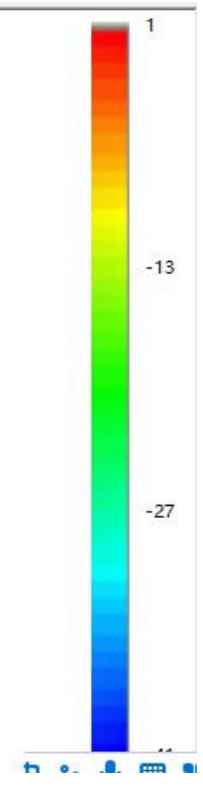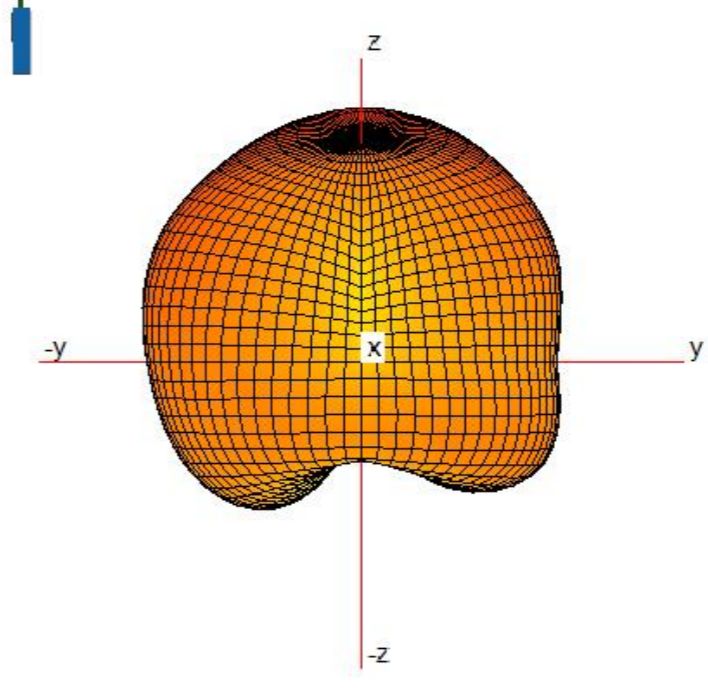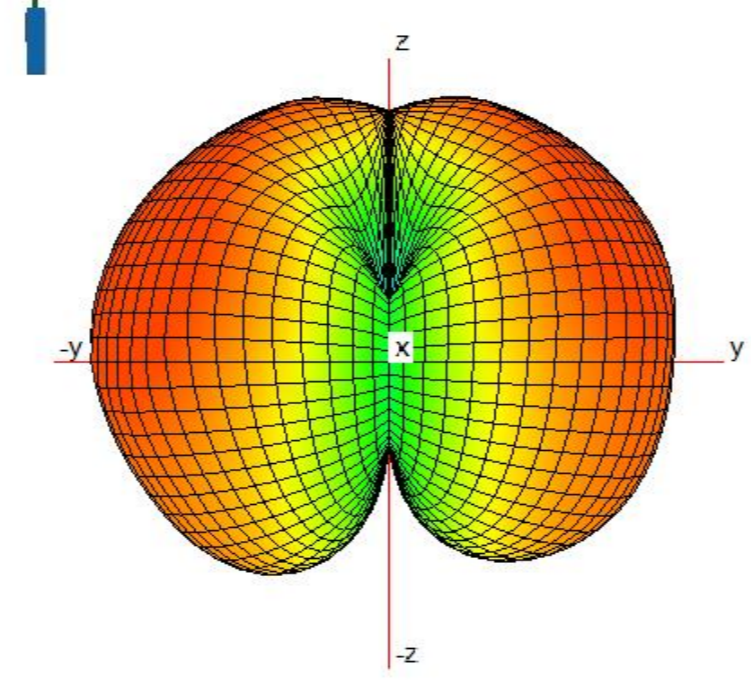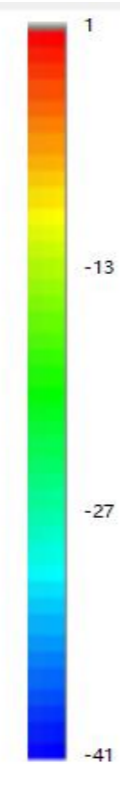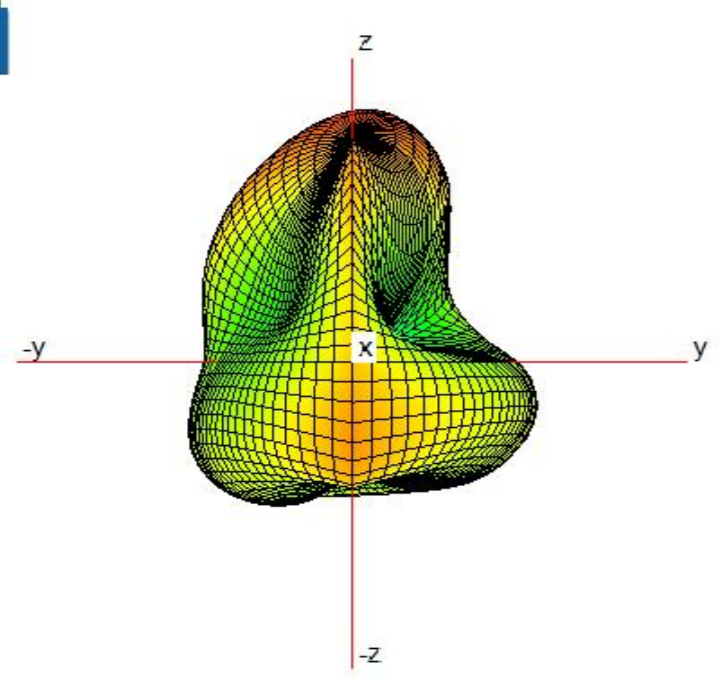

Channel (MHz) 2400 Y+

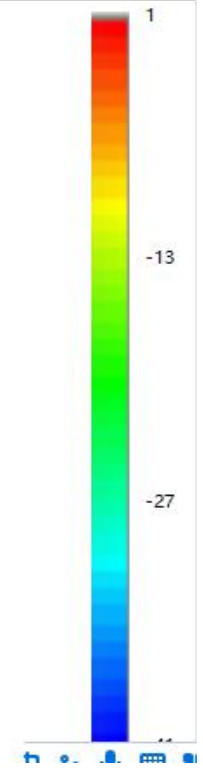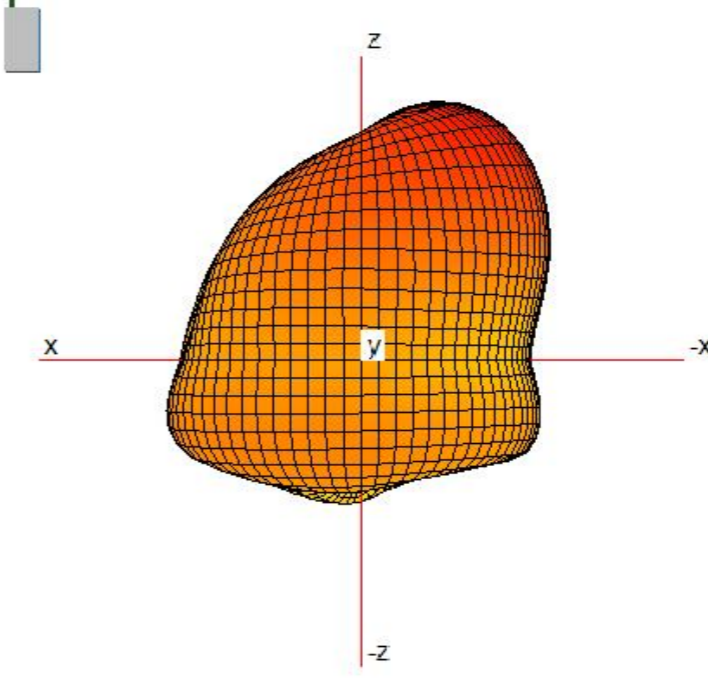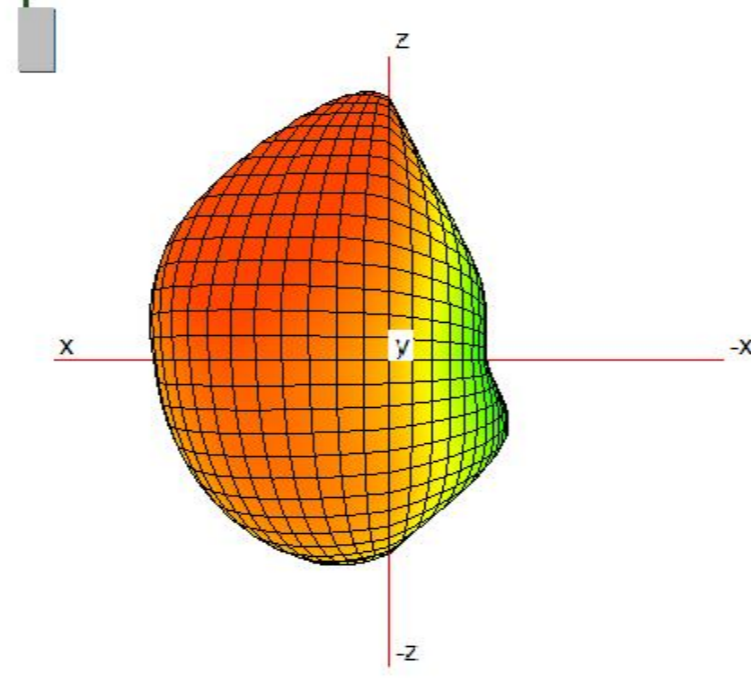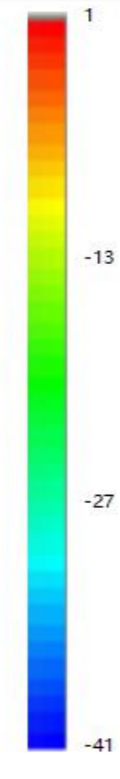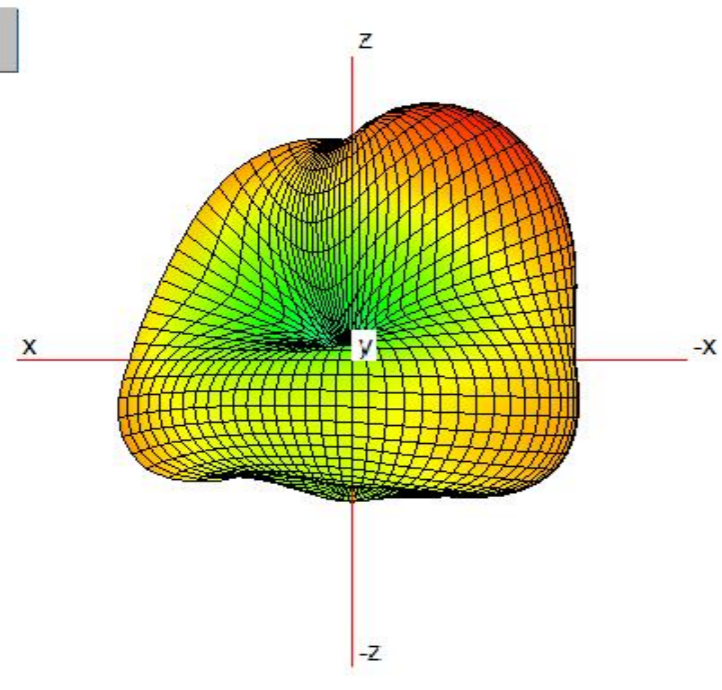

Channel (MHz) 2400 Z+

