

Electromagnetic Compatibility Test Report

Tests Performed on an rf IDeas, Inc.

Dual Frequency RFID Reader

Models RDR-30031EKU & RDR-30531EKU

Radiometrics Document RP-9712A



Product Detail:

FCC ID: M9MW30200 IC: 6571A-W30200

Equipment type: Dual Frequency Card Reader

Test Standards:

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2022

Canada ISED; RSS-GEN, Issue 5: 2021 Canada ISED; RSS-210, Issue 10: 2019

This report concerns: Original Equipment

FCC Parts 15.209 and 15.225

| Tests Performed For: | Test Facility: |
|---------------------------------|----------------------------------|
| rf IDEAS, Inc. | Radiometrics Midwest Corporation |
| 425 Martindale Road, Suite 1680 | 12 East Devonwood Avenue |
| Schaumburg, IL 60148 | Romeoville, IL 60446 |
| Test Completion Date | |

Test Completion Date

September 29, 2022

Document RP-9600 Revisions:

| 2004.11 | 2004 HOLLETT COOCTION COOCTION | | |
|---------|--------------------------------|-------------------|--|
| Rev. | Issue Date | Revised By | |
| 0 | October 26, 2022 | | |
| 1 | November 1, 2022 | Joseph Strzelecki | |
| | | | |
| | | | |

Radiomet.com Page 1 of 27

Table of Contents

| 1.0 ADMINISTRATIVE DATA | 3 |
|--|----|
| 2.0 TEST SUMMARY AND RESULTS | 3 |
| 2.1 RF Exposure Compliance Requirements | 4 |
| 3.0 EQUIPMENT UNDER TEST (EUT) DETAILS | |
| 3.1 EUT Description | 4 |
| 3.2 Product Family | 4 |
| 3.2.1 FCC Section 15.203 & RSS-GEN Antenna Requirements | 5 |
| 3.3 Related Submittals | |
| 4.0 TESTED SYSTEM DETAILS | 5 |
| 4.1 Tested System Configuration | |
| 4.2 Special Accessories | |
| 4.3 Equipment Modifications | |
| 5.0 TEST SPECIFICATIONS | |
| 6.0 TEST PROCEDURE DOCUMENTS | |
| 7.0 RADIOMETRICS' TEST FACILITIES | |
| 8.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS | |
| 9.0 CERTIFICATION | |
| 10.0 TEST EQUIPMENT TABLE | |
| 11.0 TEST SECTIONS | |
| 11.1 AC Conducted Emissions | |
| 11.2 Radiated RF Emissions | |
| 11.2.1 Field Strength Calculation | |
| 11.2.2 Radiated Emissions Test Results | |
| 11.3 Magnetic Field Measurements and Decay Factor Calculations | |
| 11.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz) | |
| 11.4 Occupied Bandwidth Data | |
| 12.0 MEASUREMENT INSTRUMENTATION UNCERTAINTY | |
| 13.0 REVISION HISTORY | 27 |

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

1.0 ADMINISTRATIVE DATA

| Equipment Under Test: | | | | |
|--|--|--|--|--|
| An rf IDeas, Inc., Dual Frequency RFID Reader | | | | |
| Model: RDR-30031EKU; Serial Number: WBIE000028 | | | | |
| Model: RDR-30531EKU; Serial Number: WBE000 | 00031 | | | |
| This will be referred to as the EUT in this Report | | | | |
| Date EUT Received at Radiometrics: | Test Date(s): | | | |
| September 21, 2022 | September 21 to September 29, 2022 | | | |
| Test Report Written and Authorized By: | Test Witnessed By: | | | |
| Joseph Strzelecki | The tests were partially witnessed by | | | |
| Senior EMC Engineer | Shiung Lo | | | |
| | rf IDeas, Inc. | | | |
| Radiometrics' Personnel Responsible for Test: | EUT Checked By: | | | |
| Joseph Strzelecki 10/26/2022 | Joseph Strzelecki Radiometrics | | | |
| 10/26/2022 | | | | |
| | The above personnel certifies: (1) The EUT had no | | | |
| Date | loss of performance beyond the manufacture's | | | |
| Joseph Strzelecki | performance level during the immunity tests. (2) A | | | |
| Senior EMC Engineer | functional test was performed on the EUT after the | | | |
| NARTE EMC-000877-NE | immunity tests and no damage was sustained. | | | |
| Chris Dalessio | | | | |
| EMC Technician | | | | |

2.0 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Dual Frequency RFID, Models RDR-30531EKU and RDR-30031EKU, manufactured by rf IDeas, Inc. The detailed test results are presented in a separate section. The following is a summary of the test results.

Emissions Tests Results

| Environmental Phenomena | Frequency Range | Basic Standard | Test Result |
|---------------------------------------|--------------------------|--------------------------|-------------|
| RF Radiated Emissions | 30-1000 MHz | RSS-210 & FCC Part 15 | Pass |
| Conducted Emissions, AC Mains | 0.15 - 30 MHz | RSS-210 & FCC Part 15 | Pass |
| RF Radiated Emissions H-Field | 0.009 – 30 MHz | RSS-210 & FCC Part 15 | Pass |
| Occupied Bandwidth | 125 kHz and 13.56 MHz | RSS-210 & FCC Part 15 | Pass |
| Frequency Stability vs Temp & Voltage | 13.56 MHz | RSS-210 & FCC Part 15 | Pass |

B

Radiometrics Midwest Corporation

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

2.1 RF Exposure Compliance Requirements

Since the effective power output is less than 1 mW, the EUT meets the FCC requirement for RF exposure and is exempt from RSS-102. There are no power level adjustments, and the antenna is permanently attached. The detailed calculations for RF Exposure are presented in a separate document.

3.0 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a dual frequency RFID reader, Models RDR-30031EKU & RDR-30531EKU, manufactured by RF IDeas, Inc. The difference between the two model numbers being that the RDR-30031EKU has an RS-232 interface and the model RDR-30532DKU has a USB interface. Both products have the same PCB, with either the USB or the serial port populated. The EUT was in good working condition during the tests, with no known defects.

Product information

| Model Number | RDR-30531EKU |
|------------------|-------------------------------|
| Firmware Version | WNC010300UBP700.H / LNB020000 |
| Software Version | 5.3.3 |

| Model Number | RDR-30031EKU |
|------------------|-------------------------------|
| Firmware Version | WNC010300UBP700.H / LNB020000 |
| Software Version | 5.3.3 |

3.2 Product Family

The following table is the product family list of the readers that use the same electronics and PCB as the ones tested in this report.

The untested model numbers listed below are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as those tested, therefore the tests on the model numbers below are representative for the tested models.

| Model Number | Firmware Version | Description |
|-------------------|---------------------|--|
| | WNC010300UBP700.H / | WAVE ID Mobile Mini V3 Keystroke Black USB reader |
| RDR-30531EKU | LNB020000 | Tested Sample |
| | WNC010300UBP700.H / | |
| RDR-30531EKU-NT20 | LNB020000 | WAVE ID Mobile Mini V3 Keystroke Black USB reader |
| | WNC010300UBP700.H / | WAVE ID Mobile Mini V3 Keystroke Safetrust Black USB |
| RDR-30531EKU-SFT | LNB020000 | reader |
| | WNC010303UBP700.H / | |
| RDR-30532EKU | LNB020000 | WAVE ID Mobile Mini V3 SDK Black USB reader |
| | WNC010300UBP700.H / | WAVE ID Mobile Mini w/ HID Omnikey SE V3 Keystroke |
| RDR-30031EKU-SFT | LNB020000 | Safetrust Black USB Reader |
| | WNC010300UBP700.H / | WAVE ID Mobile Mini w/ HID Omnikey SE V3 Keystroke |
| RDR-30031EKU | LNB020000 | Black USB Reader Tested Sample |
| | WNC010303UBP700.H / | WAVE ID Mobile Mini w/iCLASS SE & Seos V3 SDK Black |
| RDR-30032EKU | LNB020000 | USB Reader |



Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

| Model Number | Firmware Version | Description |
|-------------------|---------------------|---|
| | WNC010300UBP700.H / | WAVE ID Mobile Mini w/ MIFARE Secure V3 Keystroke |
| RDR-30M31EKU | LNB020000 | Black USB Reader |
| | WNC010300UBP700.H / | WAVE ID Mobile Mini w/ MIFARE Secure V3 Keystroke |
| RDR-30M31EKU-TSLA | LNB020000 | TSLA Black USB Reader |
| OEM-30MN11KU-V3- | WNC010300UBP700.H / | WAVE ID Mobile OEM V3 MIFARE Secure Keystroke |
| TSLA | LNB020000 | Expandable TSLA module USB Reader |
| | WNC010300UBP700.H / | WAVE ID Mobile OEM V3 MIFARE Secure Keystroke |
| OEM-30MN11KU-V3-S | LNB020000 | Expandable module USB Reader |

The Antenna PCB is a part number PCB-1098-09 and is the same for all versions of the product. The Main PCB is a part number PCB-1125-04 and is the same for all versions of the product.

3.2.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the PCB. The antenna is internal to the EUT, and it is not readily available to be modified by the end user.

3.3 Related Submittals

RF IDeas, Inc. is not submitting any other products simultaneously for equipment authorization related to the EUT.

4.0 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. The wiring was consistent with the manufacturer's recommendations. Power was supplied at 115 VAC, 60 Hz single-phase to the host computer. The EUT was powered from the USB port.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

| | · · · · · · · · · · · · · · · · · · · | | | | |
|------|--|----|--------------|--------------|---------------|
| Item | Description Typ | e* | Manufacturer | Model Number | Serial Number |
| 1 | Dual Frequency RFID Reader: USB version | Е | rf IDeas | RDR-30031EKU | WBIE000028 |
| 2 | 2 Dual Frequency RFID Reader: USB version | | rf IDeas | RDR-30531EKU | WBE0000031 |
| 3 | Latitude Laptop PC | Н | HP | Elite x2 | 5CG545482P |
| 4 | Laptop AC-DC power supply | Р | HP | 854055-002 | A000133 |

^{*} Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

List of Cables

| QTY | Length (m) | Cable Description | Shielded? |
|-----|------------|--|-----------|
| 1 | 1.8 | USB Cable from Reader to Host computer | Yes |
| 1 | 1.2 | AC Cord to AC-DC power supply to host computer | No |
| 1 | 1.5 | DC Cord to Computer | No |

B

Radiometrics Midwest Corporation

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made at Radiometrics in order to meet the requirements listed in this report.

5.0 TEST SPECIFICATIONS

| Document | Date | Title |
|------------------------|------|---|
| FCC CFR Title 47 | 2020 | Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices |
| IC RSS-210 Issue 10 | 2019 | Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment |
| IC RSS-Gen Issue 5 | 2019 | General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen) |

6.0 TEST PROCEDURE DOCUMENTS

The tests were performed using the procedures from the following specifications:

| Document | Date | Title |
|---------------------|------|---|
| ANSI C63.4-2014 | 2014 | Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | 2013 | American National Standard for Testing Unlicensed Wireless Devices |

7.0 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2017 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom-made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorbers. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6-inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

B

Radiometrics Midwest Corporation

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC8727A-1.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance with ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

8.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

9.0 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

10.0 TEST EQUIPMENT TABLE

| | | | | | Frequency | Cal | |
|--------|----------------|-------------------|---------------|--------------|------------------|--------|----------|
| RMC ID | Manufacturer | Description | Model No. | Serial No. | Range | Period | Cal Date |
| ANT-53 | EMCO | Loop Antenna | 6507 | 1453 | 1 kHz-30 MHz | 24 Mo | 03/10/22 |
| ANT-66 | ETS-Lindgren | Horn Antenna | 3115 | 62580 | 1.0-18GHz | 24 Mo. | 03/11/21 |
| ANT-68 | EMCO | Log-Periodic Ant. | 93146 | 9604-4456 | 200-1000MHz | 24 Mo. | 02/07/22 |
| ANT-80 | AH Systems | Bicon Antenna | SAS-540 | 294 | 20-330MHz | 24 Mo. | 01/05/21 |
| HPF-01 | Solar | High Pass Filter | 7930-100 | HPF-1 | 0.15-30MHz | 24 Mo. | 03/07/22 |
| LSN-01 | Electrometrics | 50 uH LISN | FCC/VDE 50/2 | 1001 | 0.01-30MHz | 24 Mo. | 08/23/21 |
| | | | | 33330A00135 | | | |
| REC-20 | HP / Agilent | Spectrum Analyzer | 85460A/84562A | 3410A00178 | 30Hz-6GHz | 24 Mo. | 08/18/21 |
| REC-21 | Agilent | Spectrum Analyzer | E7405A | MY45118341 | 9kHz-26.5GHz | 24 Mo. | 02/24/22 |
| | GS Blue M | Temperature | | | | | |
| TC-01 | Electric | Chamber | ETC-04S-E | 0003-ETC-201 | -40 to 100 Deg C | 24 Mo. | 10/16/20 |
| TMP-01 | Fluke | Temperature meter | 80T-150UA | 38280311 | N/A | 24 Mo. | 06/07/21 |

Note: All calibrated equipment is subject to periodic checks.

| Software Company | Test Software Name | Version | Applicable Tests |
|------------------|--------------------|----------|--|
| Radiometrics | EN550XX0 | 07.16.19 | RF Conducted Emissions (FCC Part 15 & EN 55011/22) |
| Radiometrics | REREC11D | 07.16.19 | RF Radiated Emissions (FCC Part 15 & EN 55011/22) |
| Agilent | PSA/ESA-E/L/EMC | 2.4.0.42 | Bandwidth and screen shots |

11.0 TEST SECTIONS

11.1 AC Conducted Emissions

The tests and limits are in accordance with FCC section 15.207 and RSS Gen section 8.8.

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on a semi-log graph generated by the computer. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.



Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

FCC/IC Limits of Conducted Emissions at the AC Mains Ports

| Frequency Range | Class B Limits (dBuV) | | | | | | | | |
|---|-----------------------|---------|--|--|--|--|--|--|--|
| (MHz) | Quasi-Peak | Average | | | | | | | |
| 0.150 - 0.50* | 66 - 56 | 56 - 46 | | | | | | | |
| 0.5 - 5.0 | 56 | 46 | | | | | | | |
| 5.0 - 30 | 60 | 50 | | | | | | | |
| * The limit decreases linearly with the logarithm of the frequency in this range. | | | | | | | | | |

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the host computer (with the EUT connected) power cord, after testing all modes of operation.

In accordance with the FCC rules regarding transmitters below 30 MHz.


Test Date : September 21, 2022

QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

The Limit shown above is RSS-GEN Table 3.


RP-9712A Rev. 1 Radiomet.com Page 8 of 27

Model: RDR-30531EKU

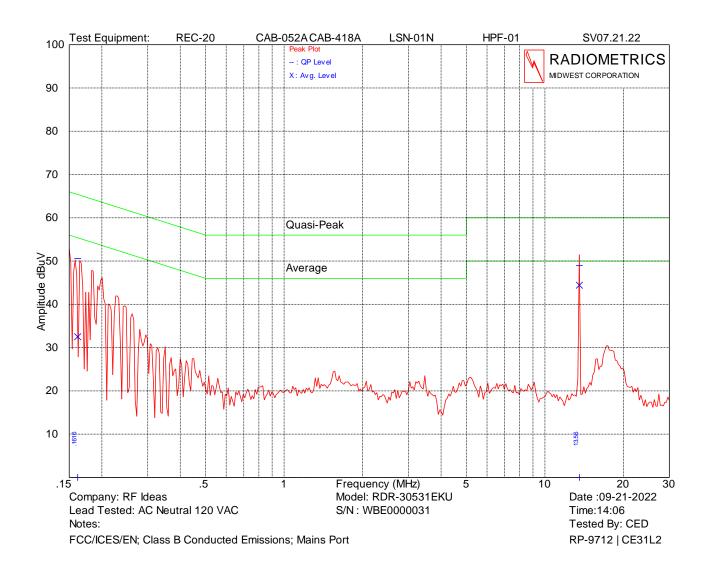

| Frequency (MHz) | QP Amplitude (dBuV) | QP Limit (dBuV) | Average Amplitude (dBuV) | Average Limit (dBuV) | Margin (dB) |
|--------------------|---------------------------|-----------------------|--------------------------------|----------------------------|----------------|
| 0.162 | 50.6 | 65.4 | 32.5 | 55.4 | 14.8 |
| 13.560 | 48.9 | 60.0 | 44.4 | 50.0 | 5.6 |


Model: RDR-30531EKU

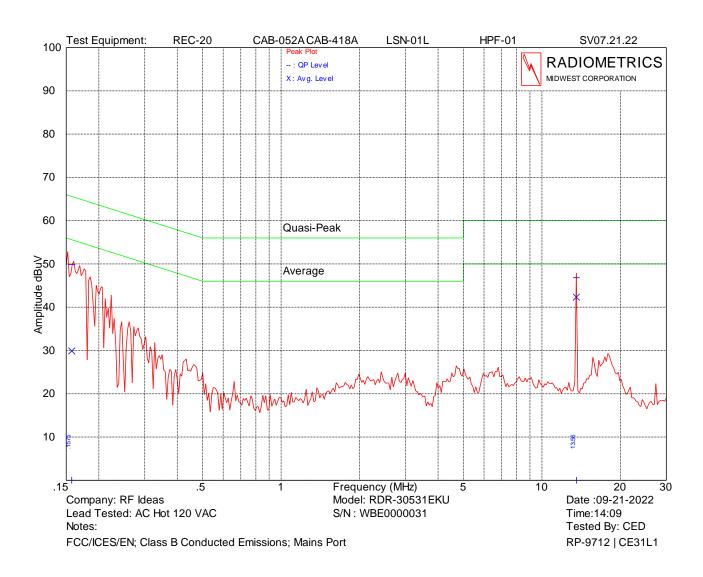

| Frequency (MHz) | QP Amplitude (dBuV) | QP Limit (dBuV) | Average Amplitude (dBuV) | Average Limit (dBuV) | Margin (dB) |
|--------------------|---------------------------|-----------------------|--------------------------------|----------------------------|----------------|
| 0.158 | 49.9 | 65.6 | 29.9 | 55.6 | 15.7 |
| 13.562 | 46.8 | 60.0 | 42.3 | 50.0 | 7.7 |


RP-9712A Rev. 1 Radiomet.com Page 10 of 27

Model: RDR-30031EKU

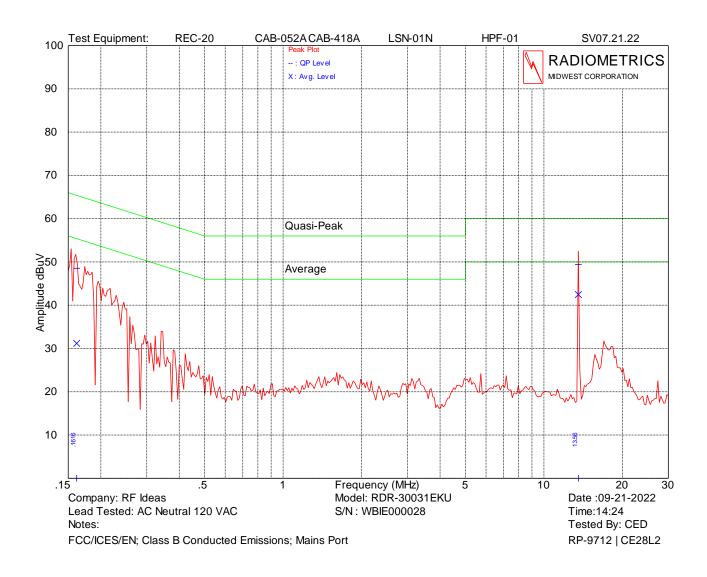

| Frequency (MHz) | QP Amplitude (dBuV) | QP Limit (dBuV) | Average Amplitude (dBuV) | Average Limit (dBuV) | Margin (dB) |
|--------------------|---------------------------|-----------------------|--------------------------------|----------------------------|----------------|
| 0.162 | 48.5 | 65.4 | 31.2 | 55.4 | 16.8 |
| 13.561 | 49.4 | 60.0 | 42.5 | 50.0 | 7.5 |

Model: RDR-30031EKU

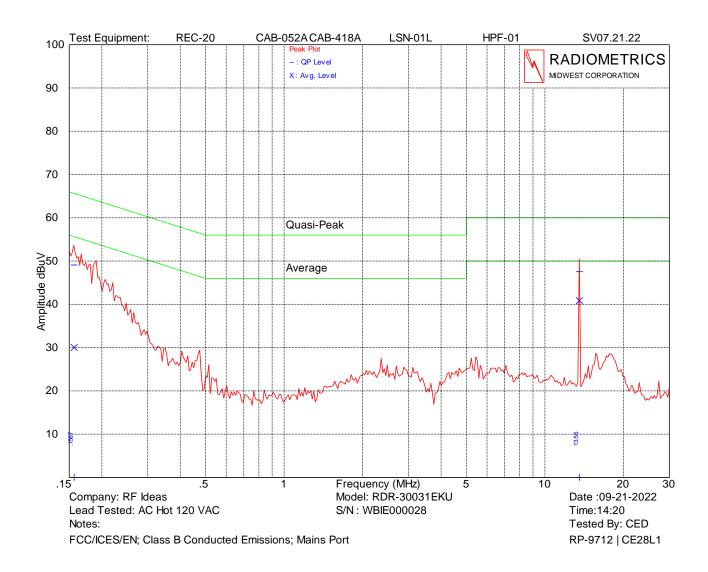

| Frequency (MHz) | QP Amplitude (dBuV) | QP Limit (dBuV) | Average Amplitude (dBuV) | Average Limit (dBuV) | Margin (dB) |
|--------------------|---------------------------|-----------------------|--------------------------------|----------------------------|----------------|
| 0.157 | 49.1 | 65.6 | 30.0 | 55.6 | 16.5 |
| 13.561 | 47.5 | 60.0 | 40.9 | 50.0 | 9.1 |

Judgment: Passed by at least 6 dB.

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

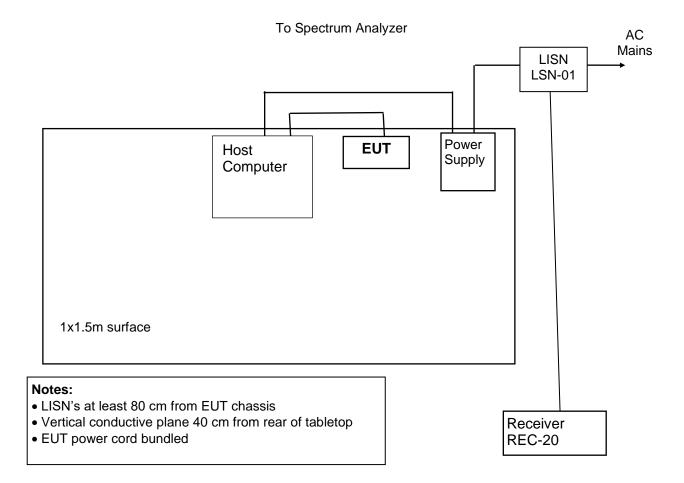


Figure 1. Conducted Emissions Test Setup

11.2 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 kHz and the bandwidth from 30 MHz to 1000 MHz is 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 1000 MHz was slowly scanned with particular attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

RP-9712A Rev. 1 Radiomet.com Page 13 of 27



Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

Radiated Emissions Field Strength Limits

| Frequency | Test Distance | Class B Limits | | | | |
|-------------|---------------|----------------|-------------------|--|--|--|
| Range (MHz) | (meters) | uV/m | dB(uV/m) | | | |
| 0.009-0.490 | 300 | 2400/F(kHz) | 20*LOG(2400/kHz) | | | |
| 0.490-1.705 | 30 | 24000/F(kHz) | 20*LOG(24000/kHz) | | | |
| 1.705-30.0 | 30 | 30 | 29.5 | | | |
| 30 - 88 | 3 | 100 | 40.0 | | | |
| 88 - 216 | 3 | 150 | 43.5 | | | |
| 216 - 960 | 3 | 200 | 46.0 | | | |
| Above 960 | 3 | 500 | 54.0 | | | |

The emission limits shown in the above table are based on measurements using a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz, and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

11.2.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Attenuation Factor, and by subtracting the Amplifier Gain from the measured reading. Each antenna, cable and amplifier has individual factors across its usable frequency range. The antenna factor converts the voltage reading in dBuV to field strength in dBuV/meter. The equation is as follows:

FS = RA + AF + CF - AG

Where: FS = Field Strength in dBuV/m

RA = Receiver Amplitude in dBuV

AF = Antenna Factor in dB/m

CF = Cable Attenuation Factor in dB

AG = Amplifier Gain in dB

11.2.2 Radiated Emissions Test Results

| Test Date | 09/21/2022 |
|---------------|---|
| Test Distance | 3 Meters |
| Specification | FCC Part 15 Subpart C & RSS-210 |
| Notes | The actual FCC limits are in uV/m. The data in the table below coverted the limit to dBuV/m |
| | The QP data is the final measure of Compliance |
| Abbreviations | P = peak; Q = QP Pol = Antenna Polarization; V = Vertical; H = Horizontal |

| EUT | EUT RDR-30531EKU; S/N WBE0000031 | | | | | | | | | | |
|-------|----------------------------------|-------|------|--------|---------|-------|--------|--------|----------|--|--|
| | Meter | | | Ant | Cable | Dist. | | | Margin | | |
| Freq. | Reading | | Ant. | Factor | Factors | Fact | EUT | Limit | Under | | |
| MHz | dBuV | Dect. | Pol. | dB/m | dB | dB | dBuV/m | dBuV/m | Limit dB | | |
| 33.8 | 13.5 | Р | Н | 12.8 | 0.6 | 0.0 | 26.9 | 40.0 | 13.1 | | |
| 54.3 | 13.4 | Р | Н | 9.4 | 0.8 | 0.0 | 23.6 | 40.0 | 16.4 | | |
| 63.8 | 10.9 | Р | Н | 9.2 | 0.8 | 0.0 | 20.9 | 40.0 | 19.1 | | |
| 75.1 | 10.7 | Р | Н | 9.3 | 0.9 | 0.0 | 20.9 | 40.0 | 19.1 | | |
| 86.0 | 9.2 | Р | Н | 9.5 | 1.0 | 0.0 | 19.7 | 40.0 | 20.3 | | |
| 95.9 | 10.4 | Р | Н | 10.1 | 1.1 | 0.0 | 21.6 | 43.5 | 21.9 | | |
| 108.5 | 16.4 | Р | Н | 10.9 | 1.1 | 0.0 | 28.4 | 43.5 | 15.1 | | |



Radiometrics Midwest Corporation
Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

| EUT | | RDR-30 |)531EI | KU; S/N | WBE0000 | 031 | | | |
|-------|---------|--------|--------|---------|---------|-------|--------|--------|----------|
| | Meter | | | Ant | Cable | Dist. | | | Margin |
| Freq. | Reading | | Ant. | Factor | Factors | Fact | EUT | Limit | Under |
| MHz | dBuV | Dect. | Pol. | dB/m | dB | dB | dBuV/m | dBuV/m | Limit dB |
| 123.4 | 10.2 | P | Н | 11.8 | 1.2 | 0.0 | 23.2 | 43.5 | 20.3 |
| 135.1 | 10.1 | P | Н | 12.4 | 1.3 | 0.0 | 23.8 | 43.5 | 19.7 |
| 145.3 | 10.3 | P | Н | 12.7 | 1.3 | 0.0 | 24.3 | 43.5 | 19.2 |
| 162.7 | 18.0 | P | H | 13.0 | 1.4 | 0.0 | 32.4 | 43.5 | 11.1 |
| 176.9 | 14.5 | P | H | 13.5 | 1.5 | 0.0 | 29.5 | 43.5 | 14.0 |
| 193.7 | 10.8 | P | H | 14.1 | 1.5 | 0.0 | 26.4 | 43.5 | 17.1 |
| 208.1 | 10.8 | P | Н | 14.1 | 1.6 | 0.0 | 26.9 | 43.5 | 16.6 |
| | | P | | | | | | | |
| 222.7 | 10.8 | | Н | 14.9 | 1.6 | 0.0 | 27.3 | 46.0 | 18.7 |
| 229.1 | 13.6 | Р | Η: | 15.0 | 1.7 | 0.0 | 30.3 | 46.0 | 15.7 |
| 239.5 | 11.4 | Р | Η: | 15.2 | 1.7 | 0.0 | 28.3 | 46.0 | 17.7 |
| 252.8 | 12.6 | Р | Н | 12.0 | 1.7 | 0.0 | 26.3 | 46.0 | 19.7 |
| 275.5 | 14.2 | Р | Η | 12.9 | 1.8 | 0.0 | 28.9 | 46.0 | 17.1 |
| 309.0 | 16.2 | Р | Η | 14.9 | 1.9 | 0.0 | 33.0 | 46.0 | 13.0 |
| 338.8 | 16.1 | Р | Н | 14.3 | 2.0 | 0.0 | 32.4 | 46.0 | 13.6 |
| 352.7 | 14.3 | Р | Н | 14.4 | 2.1 | 0.0 | 30.8 | 46.0 | 15.2 |
| 379.7 | 14.8 | Р | Н | 14.8 | 2.1 | 0.0 | 31.7 | 46.0 | 14.3 |
| 406.9 | 18.2 | Р | Н | 15.5 | 2.2 | 0.0 | 35.9 | 46.0 | 10.1 |
| 433.9 | 19.7 | Р | Н | 16.0 | 2.3 | 0.0 | 38.0 | 46.0 | 8.0 |
| 461.1 | 19.6 | Р | Н | 16.8 | 2.4 | 0.0 | 38.8 | 46.0 | 7.2 |
| 488.1 | 17.3 | Р | Н | 17.0 | 2.5 | 0.0 | 36.8 | 46.0 | 9.2 |
| 515.5 | 11.8 | P | Н | 18.7 | 2.6 | 0.0 | 33.1 | 46.0 | 12.9 |
| 581.1 | 11.7 | P | Н | 18.6 | 2.7 | 0.0 | 33.0 | 46.0 | 13.0 |
| 596.6 | 12.1 | P | Н | 18.7 | 2.7 | 0.0 | 33.5 | 46.0 | 12.5 |
| 786.3 | 10.5 | P | H | 21.0 | 3.2 | 0.0 | 34.7 | 46.0 | 11.3 |
| 871.9 | 8.7 | P | H | 22.7 | 3.3 | 0.0 | 34.7 | 46.0 | 11.3 |
| 966.0 | 8.1 | P | H | 23.5 | 3.5 | 0.0 | 35.1 | 54.0 | 18.9 |
| 34.2 | 18.6 | P | V | 12.7 | 0.6 | 0.0 | 31.9 | 40.0 | 8.1 |
| | | P | V | | 0.6 | | | | |
| 40.8 | 21.4 | | V | 11.0 | | 0.0 | 33.1 | 40.0 | 6.9 |
| 54.3 | 19.9 | Р | | 9.4 | 0.8 | 0.0 | 30.1 | 40.0 | 9.9 |
| 67.8 | 16.6 | Р | V | 9.2 | 0.9 | 0.0 | 26.7 | 40.0 | 13.3 |
| 78.2 | 15.7 | Р | V | 9.3 | 1.0 | 0.0 | 26.0 | 40.0 | 14.0 |
| 91.3 | 19.4 | Р | V | 9.8 | 1.0 | 0.0 | 30.2 | 43.5 | 13.3 |
| 92.2 | 22.3 | Р | V | 9.9 | 1.0 | 0.0 | 33.2 | 43.5 | 10.3 |
| 108.5 | 17.7 | Р | V | 10.9 | 1.1 | 0.0 | 29.7 | 43.5 | 13.8 |
| 126.7 | 11.4 | Р | V | 12.0 | 1.2 | 0.0 | 24.6 | 43.5 | 18.9 |
| 139.3 | 10.3 | Р | V | 12.5 | 1.3 | 0.0 | 24.1 | 43.5 | 19.4 |
| 153.4 | 11.6 | Р | V | 12.8 | 1.3 | 0.0 | 25.7 | 43.5 | 17.8 |
| 163.8 | 12.3 | Р | V | 13.0 | 1.4 | 0.0 | 26.7 | 43.5 | 16.8 |
| 176.2 | 14.1 | Р | V | 13.5 | 1.5 | 0.0 | 29.1 | 43.5 | 14.4 |
| 202.1 | 11.3 | Р | V | 14.4 | 1.6 | 0.0 | 27.3 | 43.5 | 16.2 |
| 224.2 | 12.3 | Р | V | 14.9 | 1.6 | 0.0 | 28.8 | 46.0 | 17.2 |
| 241.0 | 11.2 | P | V | 15.2 | 1.7 | 0.0 | 28.1 | 46.0 | 17.9 |
| 258.6 | 11.7 | P | V | 12.2 | 1.8 | 0.0 | 25.7 | 46.0 | 20.3 |
| 269.4 | 11.1 | P | V | 12.6 | 1.8 | 0.0 | 25.5 | 46.0 | 20.5 |
| 318.1 | 10.6 | P | V | 14.6 | 2.0 | 0.0 | 27.2 | 46.0 | 18.8 |
| 352.7 | 13.0 | P | V | 14.4 | 2.1 | 0.0 | 29.5 | 46.0 | 16.5 |
| 379.7 | 12.9 | P | V | 14.4 | 2.1 | 0.0 | 29.5 | | |
| | | | V | | | | | 46.0 | 16.2 |
| 406.9 | 15.3 | Р | | 15.5 | 2.2 | 0.0 | 33.0 | 46.0 | 13.0 |
| 433.9 | 15.0 | P | V | 16.0 | 2.3 | 0.0 | 33.3 | 46.0 | 12.7 |
| 461.1 | 14.8 | Р | V | 16.8 | 2.4 | 0.0 | 34.0 | 46.0 | 12.0 |
| 488.1 | 16.3 | Р | V | 17.0 | 2.5 | 0.0 | 35.8 | 46.0 | 10.2 |
| 515.5 | 10.6 | Р | V | 18.7 | 2.6 | 0.0 | 31.9 | 46.0 | 14.1 |



Radiometrics Midwest Corporation
Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

| EUT | | RDR-30531EKU; S/N WBE0000031 | | | | | | | |
|-------|---------|------------------------------|------|--------|---------|-------|--------|--------|----------|
| | Meter | | | Ant | Cable | Dist. | | | Margin |
| Freq. | Reading | | Ant. | Factor | Factors | Fact | EUT | Limit | Under |
| MHz | dBuV | Dect. | Pol. | dB/m | dB | dB | dBuV/m | dBuV/m | Limit dB |
| 569.6 | 12.4 | Р | V | 18.4 | 2.7 | 0.0 | 33.5 | 46.0 | 12.5 |
| 662.7 | 8.6 | Р | V | 20.4 | 2.9 | 0.0 | 31.9 | 46.0 | 14.1 |
| 749.2 | 8.5 | Р | V | 20.9 | 3.1 | 0.0 | 32.5 | 46.0 | 13.5 |
| 864.9 | 8.7 | Р | V | 22.6 | 3.3 | 0.0 | 34.6 | 46.0 | 11.4 |
| 965.0 | 8.9 | Р | V | 23.5 | 3.5 | 0.0 | 35.9 | 54.0 | 18.1 |

| EUT | | RDR-30 | 031EI | KU; S/N | WBEI0000 |)28 | | | |
|-------|---------|--------|-------|---------|----------|-------|--------|--------|----------|
| | Meter | | | Ant | Cable | Dist. | | | Margin |
| Freq. | Reading | | Ant. | Factor | Factors | Fact | EUT | Limit | Under |
| MHz | dBuV | Dect. | Pol. | dB/m | dB | dB | dBuV/m | dBuV/m | Limit dB |
| 33.3 | 12.5 | Р | Н | 12.9 | 0.6 | 0.0 | 26.0 | 40.0 | 14.0 |
| 46.4 | 11.1 | Р | Н | 10.1 | 0.7 | 0.0 | 21.9 | 40.0 | 18.1 |
| 55.9 | 12.2 | Р | Н | 9.3 | 0.8 | 0.0 | 22.3 | 40.0 | 17.7 |
| 73.1 | 10.0 | Р | Н | 9.3 | 0.9 | 0.0 | 20.2 | 40.0 | 19.8 |
| 81.1 | 9.1 | Р | Н | 9.3 | 1.0 | 0.0 | 19.4 | 40.0 | 20.6 |
| 89.3 | 10.7 | Р | Н | 9.7 | 1.0 | 0.0 | 21.4 | 43.5 | 22.1 |
| 95.9 | 10.5 | Р | Н | 10.1 | 1.1 | 0.0 | 21.7 | 43.5 | 21.8 |
| 102.1 | 10.5 | Р | Н | 10.4 | 1.1 | 0.0 | 22.0 | 43.5 | 21.5 |
| 108.5 | 14.4 | Р | Н | 10.9 | 1.1 | 0.0 | 26.4 | 43.5 | 17.1 |
| 116.5 | 11.0 | Р | Н | 11.4 | 1.2 | 0.0 | 23.6 | 43.5 | 19.9 |
| 128.4 | 11.3 | Р | Н | 12.1 | 1.2 | 0.0 | 24.6 | 43.5 | 18.9 |
| 139.5 | 15.5 | Р | Н | 12.5 | 1.3 | 0.0 | 29.3 | 43.5 | 14.2 |
| 162.7 | 20.6 | Р | Н | 13.0 | 1.4 | 0.0 | 35.0 | 43.5 | 8.5 |
| 162.7 | 14.5 | Q | Н | 13.0 | 1.4 | 0.0 | 28.9 | 43.5 | 14.6 |
| 174.0 | 15.3 | Р | Н | 13.4 | 1.4 | 0.0 | 30.1 | 43.5 | 13.4 |
| 189.9 | 14.6 | Р | Ι | 13.9 | 1.5 | 0.0 | 30.0 | 43.5 | 13.5 |
| 205.2 | 11.1 | Р | Ι | 14.5 | 1.6 | 0.0 | 27.2 | 43.5 | 16.3 |
| 220.9 | 11.5 | Р | Ι | 14.9 | 1.6 | 0.0 | 28.0 | 46.0 | 18.0 |
| 232.0 | 11.3 | Р | Н | 15.0 | 1.7 | 0.0 | 28.0 | 46.0 | 18.0 |
| 249.0 | 16.0 | Р | Н | 15.4 | 1.7 | 0.0 | 33.1 | 46.0 | 12.9 |
| 264.4 | 15.9 | Р | Н | 12.4 | 1.8 | 0.0 | 30.1 | 46.0 | 15.9 |
| 289.9 | 16.6 | Р | Н | 13.6 | 1.9 | 0.0 | 32.1 | 46.0 | 13.9 |
| 325.4 | 18.6 | Р | Н | 14.2 | 2.0 | 0.0 | 34.8 | 46.0 | 11.2 |
| 352.7 | 16.7 | Р | Н | 14.4 | 2.1 | 0.0 | 33.2 | 46.0 | 12.8 |
| 379.7 | 16.2 | Р | Н | 14.8 | 2.1 | 0.0 | 33.1 | 46.0 | 12.9 |
| 406.9 | 18.8 | Р | Н | 15.5 | 2.2 | 0.0 | 36.5 | 46.0 | 9.5 |
| 433.9 | 20.3 | Р | Н | 16.0 | 2.3 | 0.0 | 38.6 | 46.0 | 7.4 |
| 461.1 | 18.3 | Р | Н | 16.8 | 2.4 | 0.0 | 37.5 | 46.0 | 8.5 |
| 488.1 | 18.1 | Р | Н | 17.0 | 2.5 | 0.0 | 37.6 | 46.0 | 8.4 |
| 515.5 | 11.0 | Р | Н | 18.7 | 2.6 | 0.0 | 32.3 | 46.0 | 13.7 |
| 569.6 | 11.7 | Р | Н | 18.4 | 2.7 | 0.0 | 32.8 | 46.0 | 13.2 |
| 581.1 | 18.1 | Р | Н | 18.6 | 2.7 | 0.0 | 39.4 | 46.0 | 6.6 |
| 596.6 | 14.0 | Р | Н | 18.7 | 2.7 | 0.0 | 35.4 | 46.0 | 10.6 |
| 643.6 | 8.9 | Р | Н | 19.4 | 2.8 | 0.0 | 31.1 | 46.0 | 14.9 |
| 689.2 | 8.8 | P | Н | 21.1 | 2.9 | 0.0 | 32.8 | 46.0 | 13.2 |
| 733.2 | 8.5 | P | Н | 21.0 | 3.1 | 0.0 | 32.6 | 46.0 | 13.4 |
| 787.3 | 9.3 | P | Н | 21.0 | 3.2 | 0.0 | 33.5 | 46.0 | 12.5 |
| 841.3 | 9.3 | P | Н | 22.1 | 3.3 | 0.0 | 34.7 | 46.0 | 11.3 |
| 888.4 | 8.8 | P | H | 22.7 | 3.4 | 0.0 | 34.9 | 46.0 | 11.1 |
| 937.4 | 8.5 | P | Н | 23.1 | 3.5 | 0.0 | 35.1 | 46.0 | 10.9 |
| 36.4 | 19.2 | P | V | 12.0 | 0.6 | 0.0 | 31.8 | 40.0 | 8.2 |



Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers


| EUT | | RDR-30 | 031EI | KU; S/N | WBEI0000 |)28 | | | |
|-------|---------|--------|-------|---------|----------|-------|--------|--------|----------|
| | Meter | | | Ant | Cable | Dist. | | | Margin |
| Freq. | Reading | | Ant. | Factor | Factors | Fact | EUT | Limit | Under |
| MHz | dBuV | Dect. | Pol. | dB/m | dB | dB | dBuV/m | dBuV/m | Limit dB |
| 40.6 | 20.6 | Р | ٧ | 11.1 | 0.7 | 0.0 | 32.4 | 40.0 | 7.6 |
| 54.3 | 18.7 | Р | ٧ | 9.4 | 0.8 | 0.0 | 28.9 | 40.0 | 11.1 |
| 67.8 | 16.6 | Р | ٧ | 9.2 | 0.9 | 0.0 | 26.7 | 40.0 | 13.3 |
| 78.7 | 15.7 | Р | ٧ | 9.4 | 1.0 | 0.0 | 26.1 | 40.0 | 13.9 |
| 87.7 | 16.9 | Р | V | 9.6 | 1.0 | 0.0 | 27.5 | 40.0 | 12.5 |
| 93.9 | 18.8 | Р | V | 9.9 | 1.0 | 0.0 | 29.7 | 43.5 | 13.8 |
| 108.5 | 16.9 | Р | V | 10.9 | 1.1 | 0.0 | 28.9 | 43.5 | 14.6 |
| 114.7 | 14.3 | Р | V | 11.3 | 1.1 | 0.0 | 26.7 | 43.5 | 16.8 |
| 125.3 | 11.9 | Р | V | 11.9 | 1.2 | 0.0 | 25.0 | 43.5 | 18.5 |
| 135.3 | 10.9 | Р | V | 12.4 | 1.3 | 0.0 | 24.6 | 43.5 | 18.9 |
| 146.8 | 11.4 | Р | V | 12.7 | 1.3 | 0.0 | 25.4 | 43.5 | 18.1 |
| 162.1 | 12.7 | Р | V | 13.0 | 1.4 | 0.0 | 27.1 | 43.5 | 16.4 |
| 174.0 | 14.1 | Р | V | 13.4 | 1.4 | 0.0 | 28.9 | 43.5 | 14.6 |
| 189.9 | 13.2 | Р | V | 13.9 | 1.5 | 0.0 | 28.6 | 43.5 | 14.9 |
| 212.1 | 10.7 | Р | V | 14.7 | 1.6 | 0.0 | 27.0 | 43.5 | 16.5 |
| 232.6 | 11.8 | Р | V | 15.0 | 1.7 | 0.0 | 28.5 | 46.0 | 17.5 |
| 262.9 | 12.3 | Р | V | 12.4 | 1.8 | 0.0 | 26.5 | 46.0 | 19.5 |
| 325.4 | 12.3 | Р | V | 14.2 | 2.0 | 0.0 | 28.5 | 46.0 | 17.5 |
| 352.7 | 13.7 | Р | V | 14.4 | 2.1 | 0.0 | 30.2 | 46.0 | 15.8 |
| 379.7 | 14.7 | Р | V | 14.8 | 2.1 | 0.0 | 31.6 | 46.0 | 14.4 |
| 406.9 | 16.7 | Р | V | 15.5 | 2.2 | 0.0 | 34.4 | 46.0 | 11.6 |
| 433.9 | 16.1 | Р | V | 16.0 | 2.3 | 0.0 | 34.4 | 46.0 | 11.6 |
| 461.1 | 14.9 | Р | V | 16.8 | 2.4 | 0.0 | 34.1 | 46.0 | 11.9 |
| 488.1 | 15.8 | Р | V | 17.0 | 2.5 | 0.0 | 35.3 | 46.0 | 10.7 |
| 515.5 | 12.1 | Р | V | 18.7 | 2.6 | 0.0 | 33.4 | 46.0 | 12.6 |
| 542.5 | 12.9 | Р | V | 18.0 | 2.6 | 0.0 | 33.5 | 46.0 | 12.5 |
| 569.6 | 15.2 | Р | V | 18.4 | 2.7 | 0.0 | 36.3 | 46.0 | 9.7 |
| 596.6 | 14.5 | Р | V | 18.7 | 2.7 | 0.0 | 35.9 | 46.0 | 10.1 |
| 693.2 | 10.4 | Р | V | 21.2 | 2.9 | 0.0 | 34.5 | 46.0 | 11.5 |
| 772.8 | 8.4 | Р | V | 21.0 | 3.1 | 0.0 | 32.5 | 46.0 | 13.5 |
| 836.3 | 8.5 | Р | V | 21.9 | 3.3 | 0.0 | 33.7 | 46.0 | 12.3 |
| 907.4 | 8.9 | Р | V | 22.9 | 3.4 | 0.0 | 35.2 | 46.0 | 10.8 |
| 968.5 | 8.3 | Р | V | 23.5 | 3.5 | 0.0 | 35.3 | 54.0 | 18.7 |

Where there is both peak and quasi peak data, the quasi-peak is the final determination of compliance.


Judgment: Passed by 6.6 dB

Radiated emissions in a graphical format. The following charts have the same data as the previous tables.

RDR-30031EKU

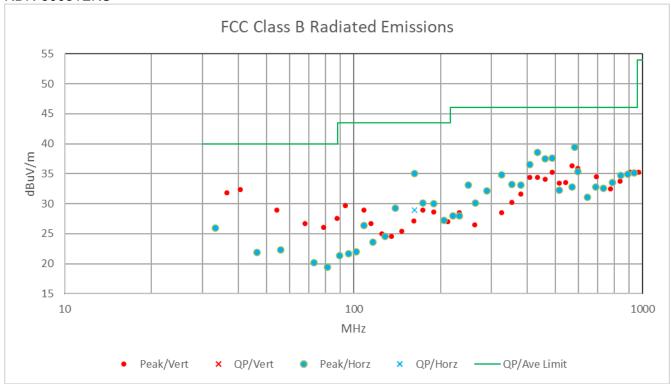

RDR-30531EKU

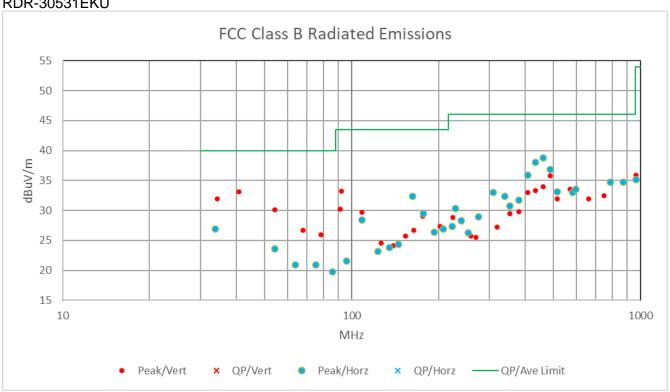


RP-9712A Rev. 1 Radiomet.com Page 18 of 27

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

Figure 2. Drawing of Radiated Emissions Test Setup


Chamber E, anechoic

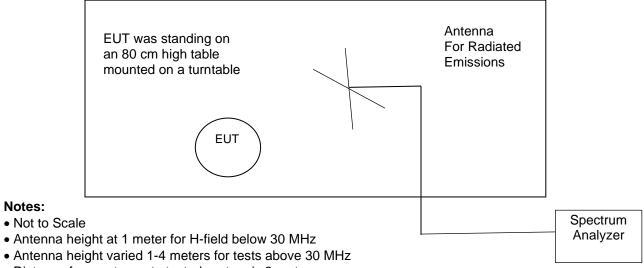

- Distance from antenna to tested system is 3 meters
- AC cords not shown. They are connected to AC outlet with lowpass filter on turntable


| | Receive | | Spectrum |
|-----------------|---------|------------------|----------|
| Frequency Range | Antenna | Pre-Amplifier | Analyzer |
| 0.01 to 30 MHz | ANT-53 | None; Active ANT | REC-21 |
| 30 to 200 MHz | ANT-80 | Internal | REC-21 |
| 200 to 1000 MHz | ANT-68 | Internal | REC-21 |

Figure 3. Radiated Emissions Test Setup for Frequencies Below 30MHz

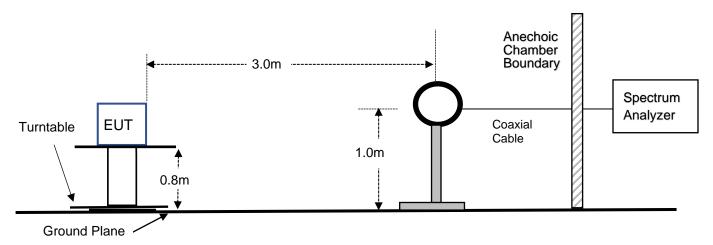

RP-9712A Rev. 1 Radiomet.com Page 19 of 27

Figure 4. Radiated Emissions Test Setup for Frequencies from 30MHz to 1000MHz

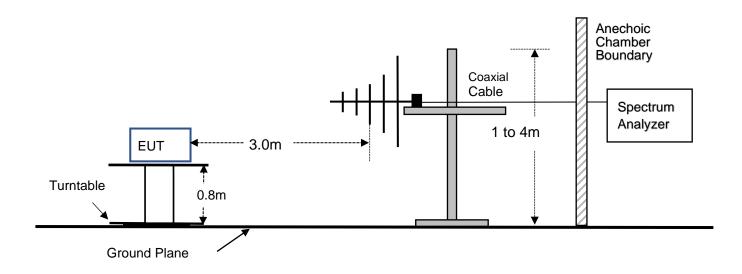

11.3 Magnetic Field Measurements and Decay Factor Calculations

Radiated emission measurements are performed with an EMCO shielded loop antenna. The antenna and the EUT were rotated in order to find the maximize readings.

The distance correction factor is calculated as follows:

The distance factor in (dB) = DE*20*Log(TD/SD)

Where: DE = Decay Exponent (2.0 is used for this)

TD = Test distance in meters. This is 3 meters

SD = Specification Distance in meters

From 9 to 490 kHz, the SD = 300m, therefore the distance factor is 2*20*LOG(300/3) = 80 dB.

From 0.49 to 30 MHz, the SD = 30m, therefore the distance factor is 2*20*LOG(30/3) = 40 dB.

11.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)

| Test Date | 9/21/2022 |
|---------------|---|
| Test Distance | 3 Meters |
| Specification | FCC 15 & RSS-GEN |
| Products | Model: RDR-30031EKU; S/N WBIE000028; #1 |
| | Model: RDR-30531EKU; S/N WBE0000031; #2 |

| | | Loop | | | | | | RSS & | | |
|-------|---------|--------|-------|-------|-------|-----------|----------|--------|--------|--------|
| | Peak | Ant | Test | | Cable | FCC | Field | FCC | Margin | |
| Freq | reading | Factor | Dist. | Decay | Loss | Distance | Strength | Limit | under | |
| (kHz) | dBuV | dB/m | (m) | exp | dB | factor dB | dBuV/m | dBuV/m | limit | Notes |
| 125.0 | 58.7 | 18.9 | 3.0 | 2.0 | 0.1 | -80.0 | -2.3 | 25.7 | 28.0 | EUT #1 |
| 250.0 | 36.9 | 18.6 | 3.0 | 2.0 | 0.1 | -80.0 | -24.4 | 19.6 | 44.0 | EUT #1 |
| 375.0 | 34.5 | 18.4 | 3.0 | 2.0 | 0.1 | -80.0 | -27.0 | 16.1 | 43.1 | EUT #1 |
| 500.0 | 30.6 | 18.3 | 3.0 | 2.0 | 0.1 | -40.0 | 9.0 | 33.6 | 24.6 | EUT #1 |
| 13560 | 52.4 | 16.0 | 3.0 | 2.0 | 0.4 | -40.0 | 28.8 | 40.5 | 11.7 | EUT #1 |
| 27120 | 19.9 | 15.3 | 3.0 | 2.0 | 0.5 | -40.0 | -4.3 | 29.5 | 33.8 | EUT #1 |
| | | | | | | | | | | |

B

Radiometrics Midwest Corporation

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

| | Peak | Loop Ant | Test | | Cable | FCC | Field | RSS & FCC | Margin | |
|-------|----------------|-------------|-------|-------|-------|-----------|----------|--------------|--------|--------|
| Freq | reading | Factor | Dist. | Decay | Loss | Distance | Strength | Limit | under | |
| (kHz) | dBuV | dB/m | (m) | exp | dB | factor dB | dBuV/m | dBuV/m | limit | Notes |
| 125.0 | 59.1 | 18.9 | 3.0 | 2.0 | 0.1 | -80.0 | -1.9 | 25.7 | 27.6 | EUT #2 |
| 250.0 | 36.4 | 18.6 | 3.0 | 2.0 | 0.1 | -80.0 | -24.9 | 19.6 | 44.5 | EUT #2 |
| 375.0 | 34.2 | 18.4 | 3.0 | 2.0 | 0.1 | -80.0 | -27.3 | 16.1 | 43.4 | EUT #2 |
| 500.0 | 30.9 | 18.3 | 3.0 | 2.0 | 0.1 | -40.0 | 9.3 | 33.6 | 24.3 | EUT #2 |
| 13560 | 51.8 | 16.0 | 3.0 | 2.0 | 0.4 | -40.0 | 28.2 | 40.5 | 12.3 | EUT #2 |
| 27120 | 20.3 | 15.3 | 3.0 | 2.0 | 0.5 | -40.0 | -3.9 | 29.5 | 33.4 | EUT #2 |
| | Column numbers | | | | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |

Notes on Columns:

Column #1. Frequency of Tested Emission.

Column #2. Uncorrected readings from the spectrum analyzer (Peak)

Column #3. Antenna factor converts dBuV to dBuV/m

Column #4. Test Distance in meters

Column #5. Decay Exponent

Column #6. Cable Loss

Column #7. Distance factor (dB) = (Decay Exponent)*20*Log(Test Distance/Specification Distance)

Column #8. Total field strength. This = Columns 2 + 3 + 6 + 7

Column #9. FCC and Canada Limit in dBuV/m

Column #10. This is the margin under the limit for that row.

Column #11. The EUT (Equipment Under Test) is the product tested.

The limit from 13.553-13.567 MHz at 30 meters is 15,848 uV/m which = 84 dBuV/m in accordance with FCC 15.225 (c) and RSS-210 section B.6 (a).

The limit drops to 334uV/m from 13.410-13.553 MHz and 13.567-13.710 MHz, and 106uV/m = 40.5 dBuV/m from the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Therefore, it met all limits since the general limits are lower than the FCC 15.225 and the RSS-210 section B.6 (a) limits.


The emissions were scanned from 10 kHz to 30 MHz, including 13.11 and 14.01 MHz. No other emissions were detected from 10 kHz to 30 MHz within 10 dB of the 15.209 or the RSS-GEN limits.

Judgement: Passed by at least 10 dB.

B

Radiometrics Midwest Corporation

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

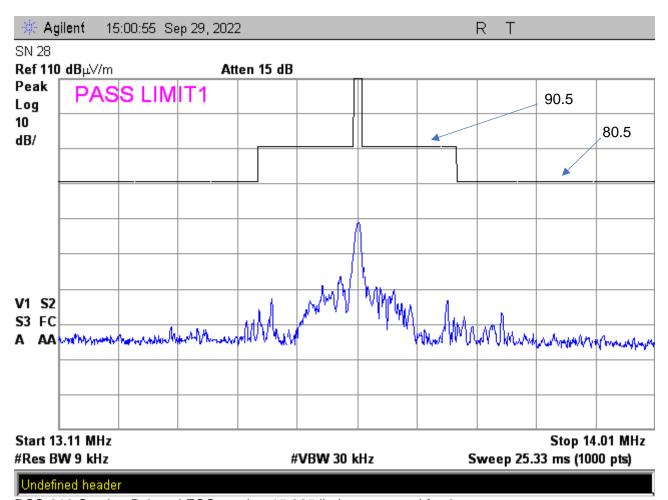


RSS-210 Section B.6 and FCC section 15.225 limits, corrected for 3 meters.

Notes:

- 1. The top limit of 124 dBuv/m is off scale, above the plot.
- 2. 40 dB is added to the limits to convert from 30 to 3 meters.

RP-9712A Rev. 1 Radiomet.com Page 22 of 27

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

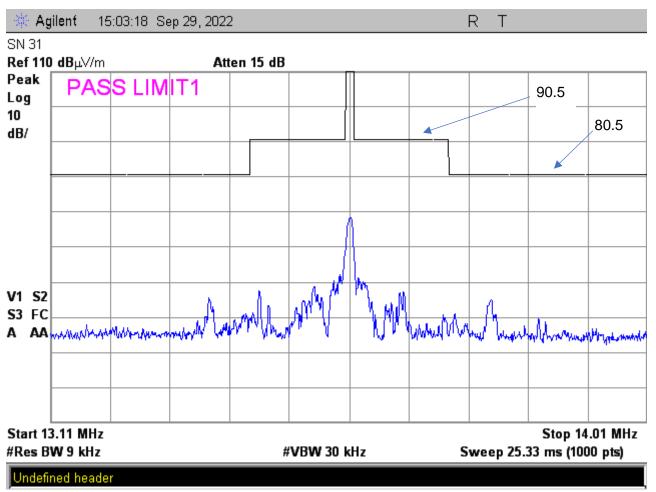

RSS-210 Section B.6 and FCC section 15.225 limits, corrected for 3 meters.

Notes:

- 1. The top limit of 124 dBuv/m is off scale, above the plot.
- 2. 40 dB is added to the limits to convert from 30 to 3 meters.

11.4 Occupied Bandwidth Data

The occupied bandwidth of the RF output was measured using a spectrum analyzer. A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. The plots of the occupied bandwidth for the EUT are supplied on the following page.

| Products | Model: RDR-30031EKU; S/N WBIE000028; #1 |
|----------|---|
| | Model: RDR-30531EKU; S/N WBE000031; #2 |

| | 99% OBW | | | | | |
|---------|----------------|------------------|--|--|--|--|
| Product | 125 kHz signal | 13.56 MHz Signal | | | | |
| #1 | 1.4360 | 2.1412 | | | | |
| #2 | 1.2545 | 2.6752 | | | | |

Judgement: Pass


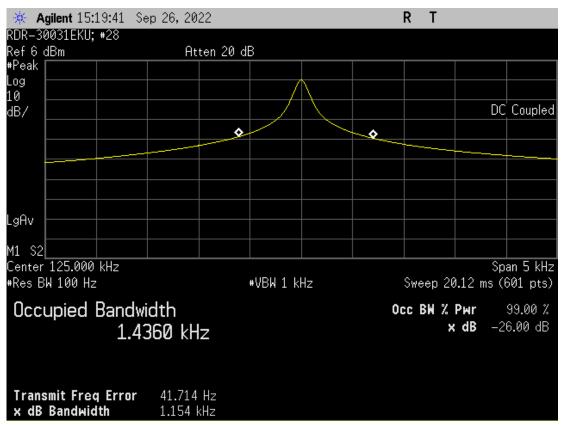


Figure 5. Occupied Bandwidth Plots 125 kHz

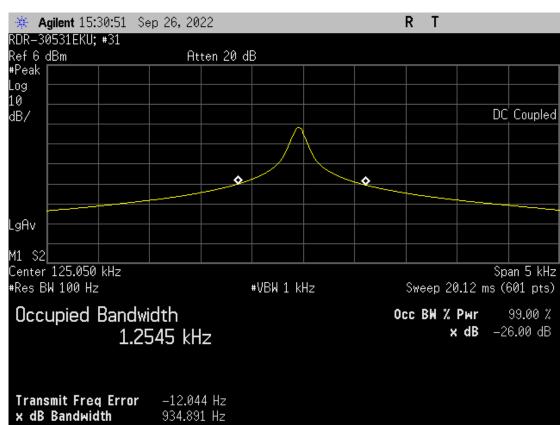

RP-9712A Rev. 1 Radiomet.com Page 24 of 27


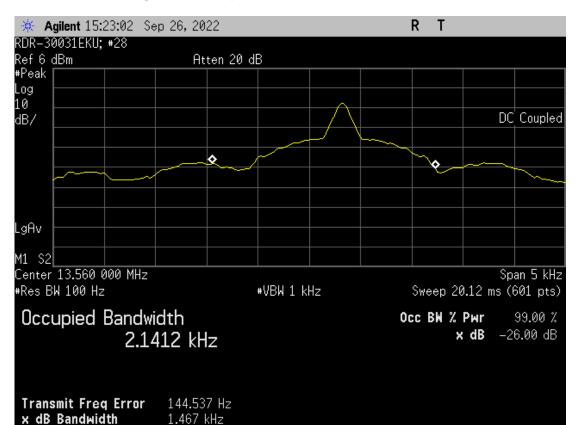


Figure 6. Occupied Bandwidth Plots 13.56 MHz

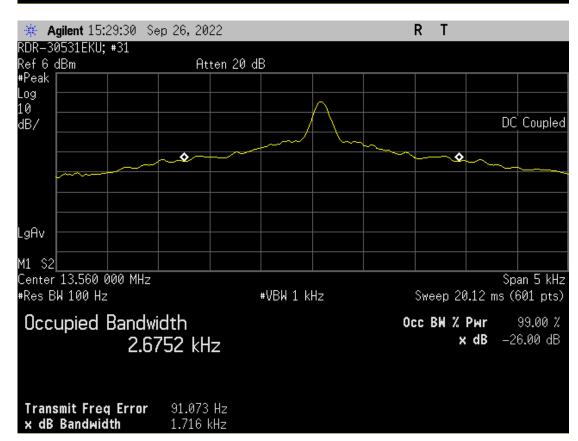

RP-9712A Rev. 1 Radiomet.com Page 25 of 27

Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

11.5 Frequency Stability

The tests were in accordance with FCC 15.225 and RSS-210 Section A2.6. Since the product is USB powered, a desktop PC was used to power the device. The input power to the desktop PC was varied by 15%, using a variable AC supply.

11.5.1 Test Results for Frequency Stability

| Model | RDR-30531EKU | Specification | FCC Part 15.225 | | | | |
|----------------------------------|---|------------------|----------------------|--|--|--|--|
| | | | RSS-210 Section A2.6 | | | | |
| Serial Number | WBE0000031 | Test Date | 09/27/2022 | | | | |
| Test Personnel Joseph Strzelecki | | Test Location | Chamber B | | | | |
| Test Equipment | Spectrum Analyzer (REC-21); Ter | nperature Chambe | er TC-01 | | | | |
| Notes | Notes 10 minutes at each Temperature; 1 min at each voltage | | | | | | |
| Nominal Frequence | Nominal Frequency 13.560250 MHz | | | | | | |

| Volts VAC | Freq. (MHz) | Deviation % | PPM |
|--------------|-------------|-------------|------|
| 102.0 | 13.560255 | 0.000037 | 0.37 |
| 120.0 | 13.560250 | 0.000000 | 0.00 |
| 138.0 | 13.560258 | 0.000059 | 0.59 |

| | Freq. | Freq. | Freq. | Freq. | | | | |
|-------|-----------|-----------|-----------|-----------|----------|---------------------|----------|-----------|
| Temp. | (@0min.) | (@2min.) | (@5min.) | (@10min.) | | Change from Nominal | | |
| Deg C | (MHz) | (MHz) | (MHz) | (MHz) | % 0 min. | % 2 min. | % 5 min | % 10 min. |
| 50 | 13.560211 | 13.560210 | 13.560115 | 13.560015 | -0.00029 | -0.00029 | -0.00100 | -0.00173 |
| 40 | 13.560222 | 13.560213 | 13.560211 | 13.560212 | -0.00021 | -0.00027 | -0.00029 | -0.00028 |
| 30 | 13.560128 | 13.560242 | 13.560223 | 13.560223 | -0.00090 | -0.00006 | -0.00020 | -0.00020 |
| 20 | 13.560267 | 13.560256 | 13.560246 | 13.560238 | 0.00013 | 0.00004 | -0.00003 | -0.00009 |
| 10 | 13.560262 | 13.560250 | 13.560267 | 13.560268 | 0.00009 | 0.00000 | 0.00013 | 0.00013 |
| 0 | 13.560150 | 13.560151 | 13.560368 | 13.560305 | -0.00074 | -0.00073 | 0.00087 | 0.00041 |
| -10 | 13.560300 | 13.560306 | 13.560040 | 13.560307 | 0.00037 | 0.00041 | -0.00155 | 0.00042 |
| -20 | 13.560294 | 13.560301 | 13.560292 | 13.560268 | 0.00032 | 0.00038 | 0.00031 | 0.00013 |

Max deviation is 17.3 ppm

Test Requirements: Limit is 100 ppm or 0.01% deviation.

Judgement: Pass

Only one sample was tested, since all models use the same frequency determining circuitry.

RP-9712A Rev. 1 Radiomet.com Page 26 of 27



Testing of rf IDeas, Models RDR-30031EKU & RDR-30531EKU, Dual Frequency RFID Readers

12.0 MEASUREMENT INSTRUMENTATION UNCERTAINTY

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2 in accordance with CISPR 16-4-2.

| Measurement | Uncertainty |
|--|----------------------|
| Conducted Emissions, LISN method, 150 kHz to 30 MHz | 2.7 dB |
| Radiated Emissions, H-field, 3 meters, 9 kHz to 30 MHz | 2.7 dB |
| Radiated Emissions, E-field, 3 meters, 30 to 200 MHz | 3.3 dB |
| Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz | 4.9 dB |
| 99% Occupied Bandwidth | 1% of frequency span |
| Temperature THM-03 | 0.6 Deg C |

13.0 REVISION HISTORY

| RP-9712A Revisions: | | | |
|---------------------|---------------------------------|--|------------------------|
| Rev. | Affected Sections | Description | Rationale |
| 1 | Cover, 1.0, 2.0, 3.1, 4.1 | Changed "card reader" to "RFID reader" | Clarification purposes |
| 1 | 3.2 | Added firmware numbers to product family table | Clarification purposes |
| | | | |

RP-9712A Rev. 1 Radiomet.com Page 27 of 27