

FCC Radio Test Report

FCC ID: MCLCS-E340W

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1308C100E
Equipment : Cisco Edge 340
Model Name : CS-E340W
Applicant : HON HAI Precision Ind. Co., Ltd.
Address : 5F-1, 5, Hsin-An Road, Hsinchu Science-Based
Industrial Park, Hsinchu, Taiwan

Date of Receipt : Apr. 08, 2016
Date of Test : Apr. 08, 2016 ~ Jul. 19, 2016
Issued Date : Jul. 20, 2016
Tested by : BTL Inc.

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9K TO 30MHz)	19
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	19
5 . 26dB SPECTRUM BANDWIDTH	20
5.1 APPLIED PROCEDURES / LIMIT	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	21
5.1.6 TEST RESULTS	21
6 . MAXIMUM CONDUCTED OUTPUT POWER	22

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	23
6.1.3 TEST SETUP	23
6.1.4 EUT OPERATION CONDITIONS	23
6.1.5 EUT TEST CONDITIONS	23
6.1.6 TEST RESULTS	23
7 . POWER SPECTRAL DENSITY TEST	24
7.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
7.1.1 DEVIATION FROM STANDARD	25
7.1.2 TEST SETUP	25
7.1.3 EUT OPERATION CONDITIONS	25
7.1.4 EUT TEST CONDITIONS	25
7.1.5 TEST RESULTS	25
8 . FREQUENCY STABILITY MEASUREMENT	26
8.1 APPLIED PROCEDURES / LIMIT	26
8.1.1 TEST PROCEDURE	26
8.1.2 DEVIATION FROM STANDARD	26
8.1.3 TEST SETUP	27
8.1.4 EUT OPERATION CONDITIONS	27
8.1.5 EUT TEST CONDITIONS	27
8.1.6 TEST RESULTS	27
9 . MEASUREMENT INSTRUMENTS LIST	28
10 . EUT TEST PHOTOS	30
ATTACHMENT A - CONDUCTED EMISSION	38
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	43
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	52
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	57
ATTACHMENT E - BANDWIDTH	125
ATTACHMENT F - MAXIMUM OUTPUT POWER	138
ATTACHMENT G - POWER SPECTRAL DENSITY	142
ATTACHMENT H - FREQUENCY STABILITY	158

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-3-1308C100	Original Report.	Sep. 12, 2013
BTL-FCCP-2-1308C100E	Compared with the previous report (NEI-FICP-3-1308C100), the standards are updated to the latest and the adapter model has changed, all items have been re-evaluated and recorded in the test report.	Jul. 20, 2016

1. CERTIFICATION

Equipment : Cisco Edge 340
Brand Name : Cisco
Model Name : CS-E340W
Applicant : HON HAI Precision Ind. Co., Ltd.
Manufacturer : Hon Hai Precision Ind Co., Ltd
Address : Hsinchu Science Park Branch Office 5F-1 5, Hsin-an Rd Hsinchu Science Based Industrial Park Hsinchu, Taiwan
Factory : HONG FU JIN PRECISION INDUSTRY (SHEN ZHEN) CO LTD
Address : Bldg D10, F21, No 2, 2 nd DONGGUAN RD, 10 th YOUSONG INDUSTRIAL DISTRICT, LONGHUA TOWN, BAOAN, SHENZHEN, GUANGDONG, CHINA.
Date of Test : Apr. 08, 2016 ~ Jul. 19, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

This test report consists of 159 pages in total.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1308C100E) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the 5G Band 4 WiFi part.

Testing Engineer : Rush Kao
(Rush Kao)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:949005; FCC DN:TW1082)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB11: (VCCI RN: R-4260; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB11: (VCCI RN: G-868; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 kHz ~ 30MHz	2.04

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
CB11 (3m)	CISPR	9kHz ~ 150kHz	4.00
		150kHz ~ 30MHz	4.00

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB11 (3m)	CISPR	30 MHz ~ 200 MHz	V	3.06
		30 MHz ~ 200 MHz	H	2.58
		200 MHz ~ 1, 000 MHz	V	3.50
		200 MHz ~ 1, 000 MHz	H	3.10
		1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Test Site	Method	Measurement Frequency Range	U, (dB)
CB11 (3m)	CISPR	18 ~ 26.5 GHz	4.66
		26.5 ~ 40 GHz	4.74

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Cisco Edge 340	
Brand Name	Cisco	
Model Name	CS-E340W	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-3: 5725-5850MHz
	Modulation Type	802.11a/n:OFDM
	Bit Rate of Transmitter	300Mbps
Power Source	DC voltage supplied from AC/DC adapter #1 Brand /Model name: LITEON /PA-1660-2SA1 #2 Brand /Model name: DELTA /ADP-66CR B #3 PoE	
Power Rating	#1 I/P 100-240V~50-60Hz 2A O/P 12V 5.5A #2 I/P 100-240V~50-60Hz 2A O/P 12V 5.5A #3 DC 48V	
Output Power	Output Power (Max.)	802.11a: 12.39dBm 802.11n (20M): 12.00dBm 802.11n (40M): 14.39dBm
Connecting I/O Port(s)	USB port*4 IR Extension port Console port RS232 port Audio out port Audio in port HDMI port VGA port Gigabit Ethernet port Power SD card 802.11a/b/g/n Bluetooth	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Channel List:

UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

3. Antenna Specification:

Group 1

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	FOXCONN	FX01G64-0G-EF	Integral	N/A	3.2
2	FOXCONN	FX01G65-0G-EF	Integral	N/A	3.6

Group 2

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
3	FOXCONN	FX01G67-0G-EF	Dipole	N/A	2.82
4	FOXCONN	FX01G67-0G-EF	Dipole	N/A	2.82

Note: The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R), all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}**, that is Directional gain=2.82 for Dipole antenna and Directional gain=3.6 for Integral Antenna.

This external dipole antenna can be connected to the EUT either directly or by a external cable, after assessing it is the worst case when the antenna is connected to the EUT by the external cable.

4.

Operating Mode	2TX
TX Mode	
802.11a	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)
802.11n(20MHz)	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)
802.11n(40MHz)	V (ANT 1 & ANT 2 or ANT 3 & ANT 4)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 2	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 3	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 4	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted emissionTest	
Final Test Mode	Description
Mode 4	TX Mode

For Radiated emissionTest	
Final Test Mode	Description
Mode 1	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 2	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 3	TX N40 Mode / CH151,CH159 (UNII-3)

Note:

- (1) For radiated emission below 1GHz test, the 802.11a mode is found to be the worst case and recorded.
- (2) For Conducted emission test, the Dipole antenna with external cable is found to be the worst case and recorded.


3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-3 for Integral Antenna			
Test Software Version	RT5x9x_V1.0.8.0_AP		
Frequency (MHz)	5745	5785	5825
A Mode	0E	0E	0E
Frequency (MHz)	5745	5785	5825
N20 Mode	0F	0E	0F
Frequency (MHz)	5755	5795	
N40 Mode	1B	12	

Note: For Conducted test, the Integral Antenna is found to be the worst case and recorded.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	Power Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

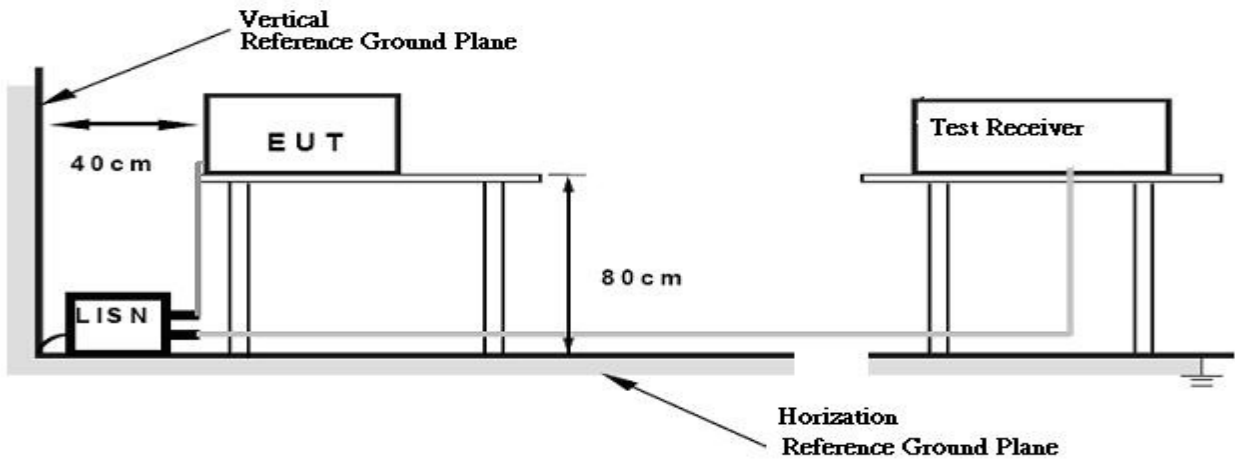

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000 \cdot \sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)
2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.2.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A)Radiated Emission Test Set-Up Frequency Below 1GHz

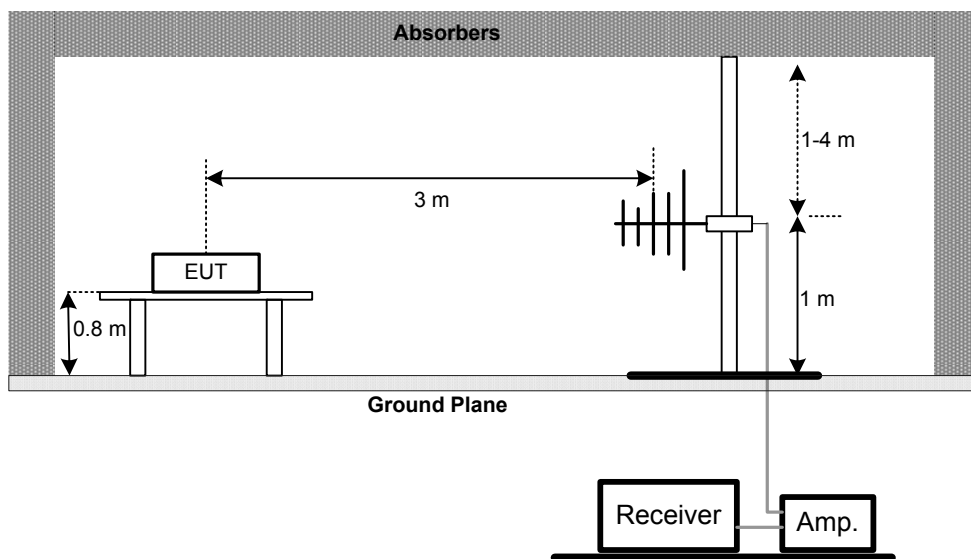

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

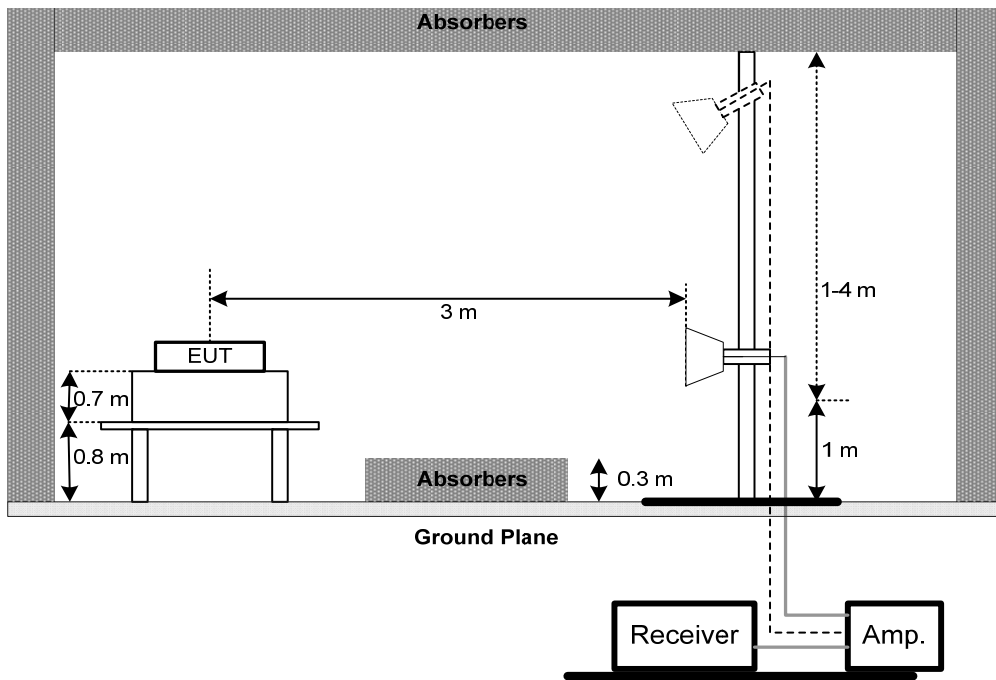

(C) Radiated emissions below 30MHz

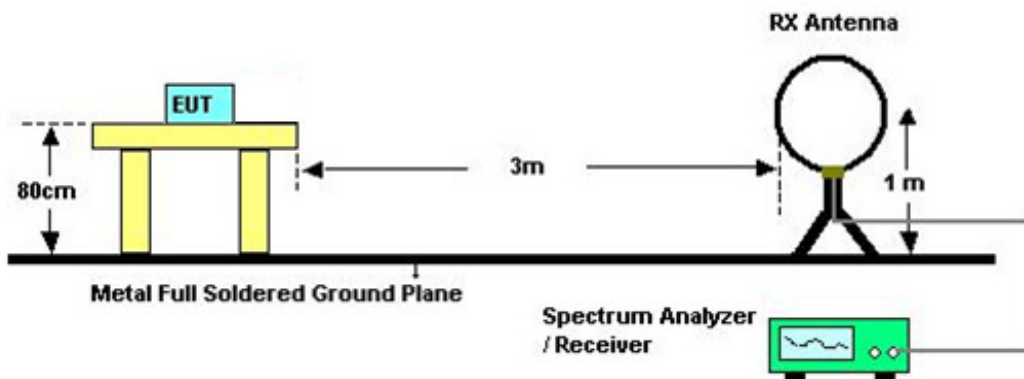

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120kHz ; SPA setting in RBW=120kHz, VBW =120kHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting: 30MHz – 1000MHz , RBW= 100kHz, VBW=100kHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (8) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	1 Watt (30dBm)	5725-5850	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	\geq 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

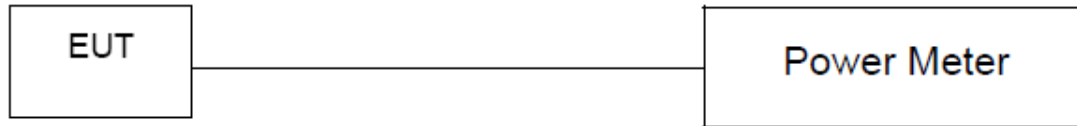

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. $\text{offset} = \text{compensation factor} + \text{cable loss} + \text{max antenna gain}$

c.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1MHz.
VBW	$\geq 3\text{MHz}$.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01r02, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.1 DEVIATION FROM STANDARD

No deviation.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment G.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is -5°C~50°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

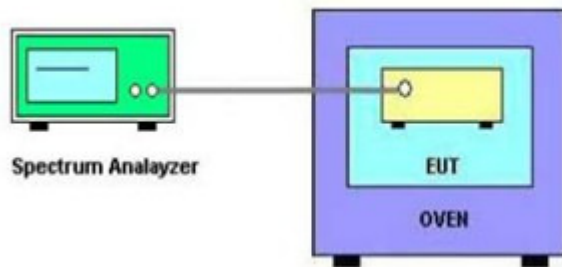

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2017
2	Test Cable	TIMES	CFD300-NL	C05	Jun. 13, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2016
4	Measurement Software	Farad	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168-352	9168-352	Feb. 04, 2017
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-546	Nov. 05, 2017
3	Pre-Amplifier	HP	8447D	2944A08891	Mar. 09, 2017
4	Pre-Amplifier	Agilent	8449B	3008A02331	Jan. 24, 2017
5	Test Cable	EMCI	EMC8D-NM-NM -8000	150301	Mar. 09, 2017
6	Test Cable	EMCI	EMC104-SM-S M-2500	150303	Mar. 09, 2017
7	Test Cable	EMCI	EMC104-NM-S M-1000	150304	Mar. 09, 2017
8	Test Cable	EMCI	EMC104-SM-S M-5000	150302	Mar. 29, 2017
9	Test Cable	EMCI	EMC104-SM-S M-800	150305	Mar. 29, 2017
10	EXA Spectrum Analyzer	Agilent	N9010A	MY52220990	Feb. 24, 2017
11	EMI Test Receiver	Agilent	N9038A	MY51210215	Jan. 08, 2017
12	Loop Antenna	EMCO	6502	00042960	Nov. 07, 2016

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 18, 2017

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	May 18, 2017
2	Power Meter Sensor	Anritsu	MA2491A	034138	May 18, 2017


Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 18, 2017

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 18, 2017


Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

10. EUT TEST PHOTOS

**Conducted Measurement Photos
Dipole Antenna**

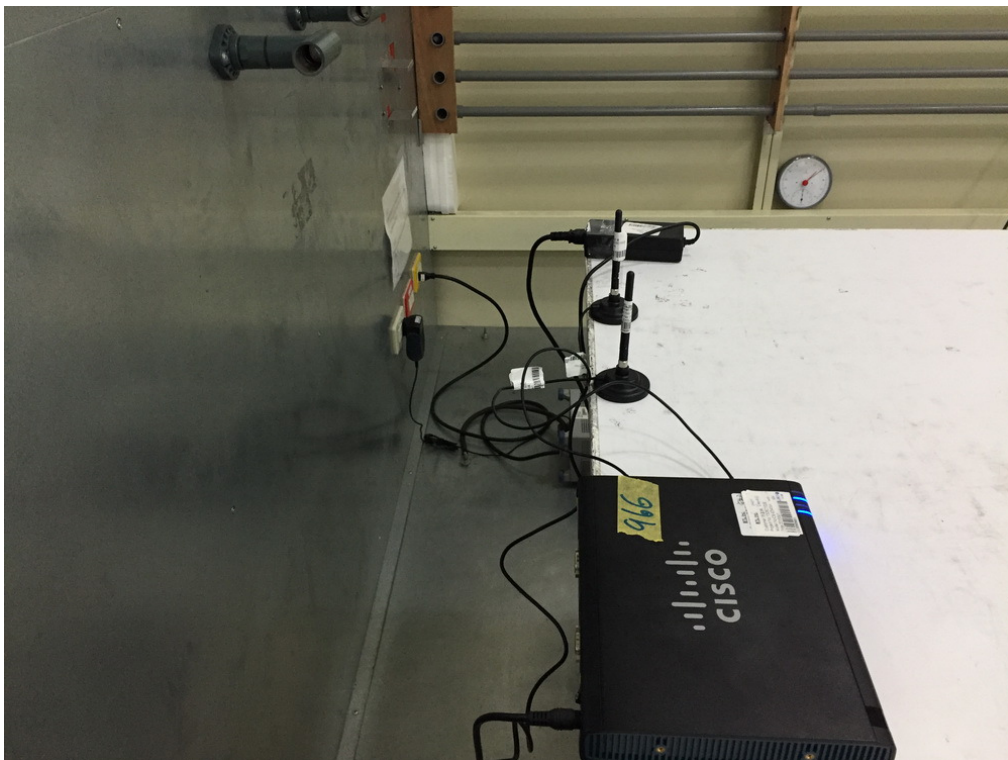


**Conducted Measurement Photos
Integral Antenna**

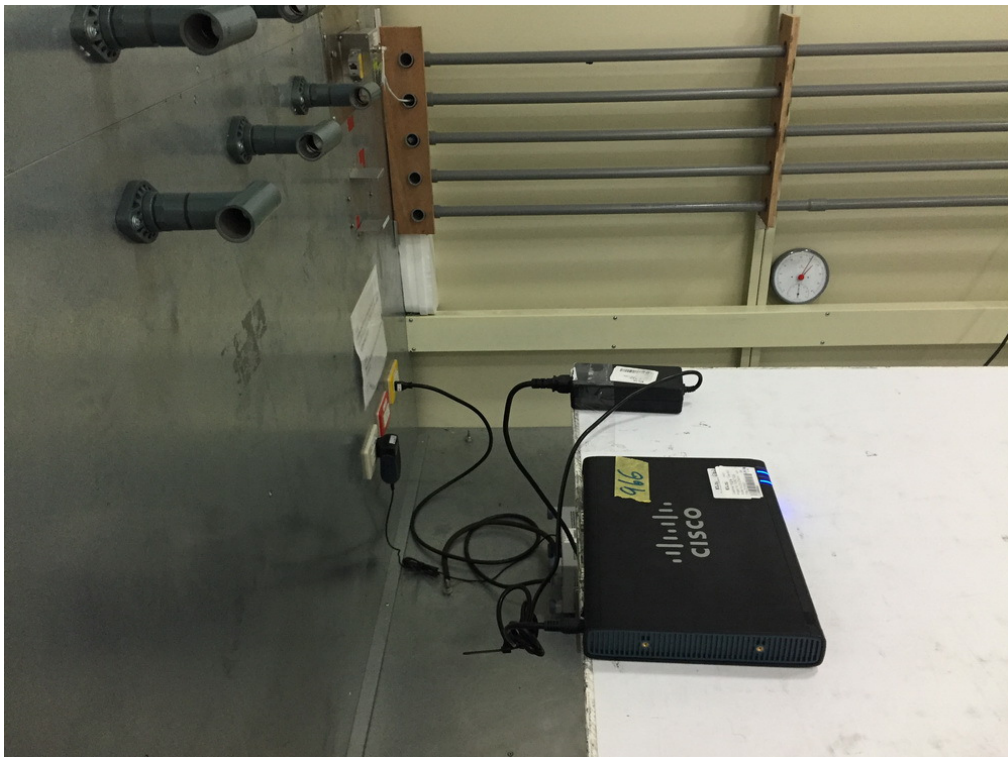



Radiated Measurement Photos

9KHz to 30MHz Dipole Antenna

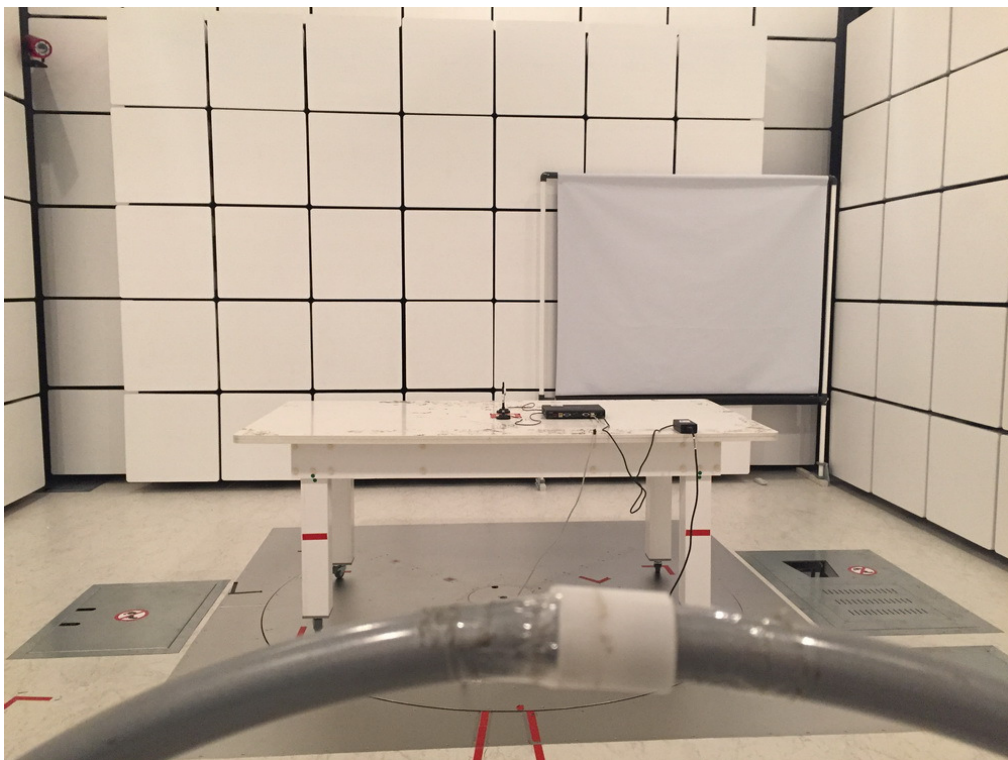

Radiated Measurement Photos

30MHz to 1000MHz Dipole Antenna

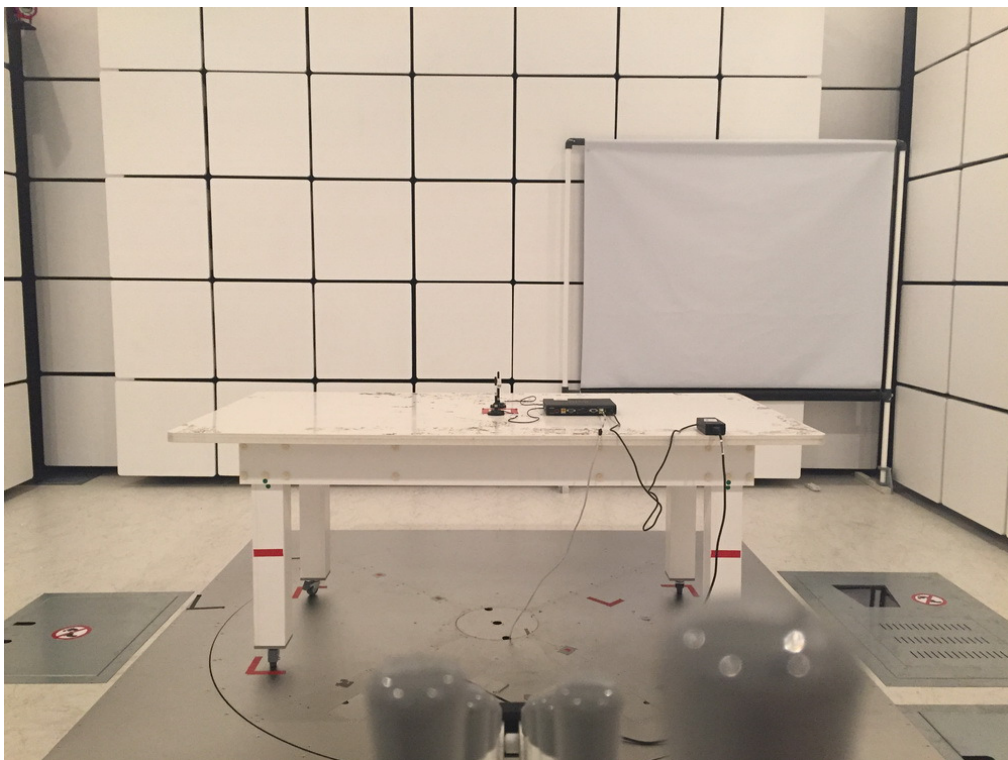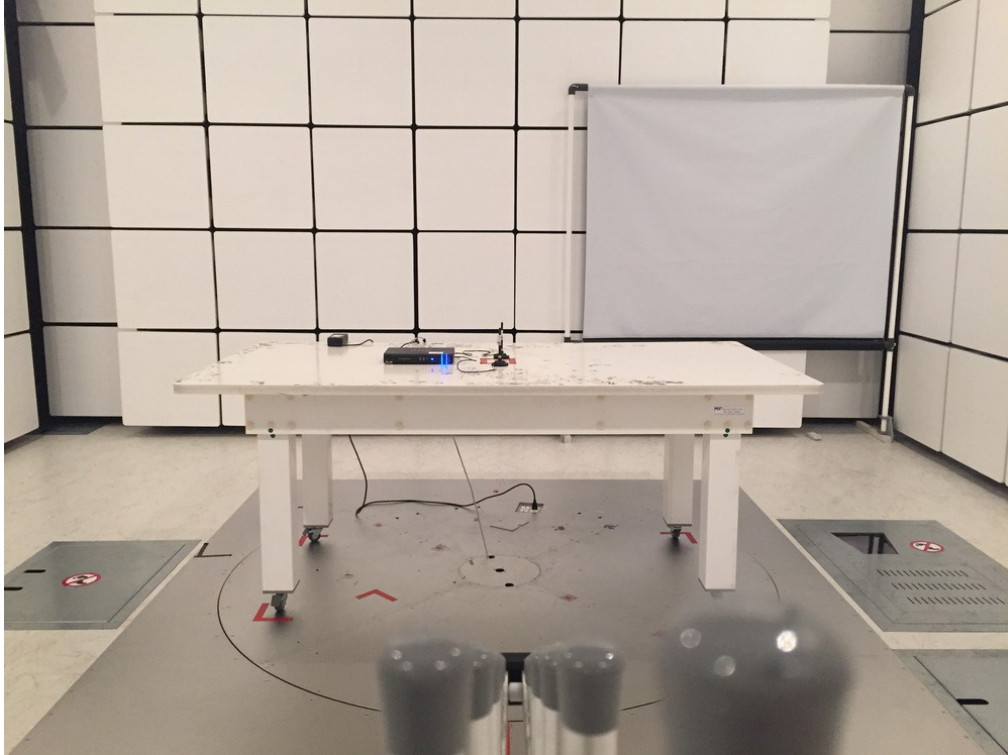



Radiated Measurement Photos

Above 1000MHz Dipole Antenna





Radiated Measurement Photos

9KHz to 30MHz Integral Antenna

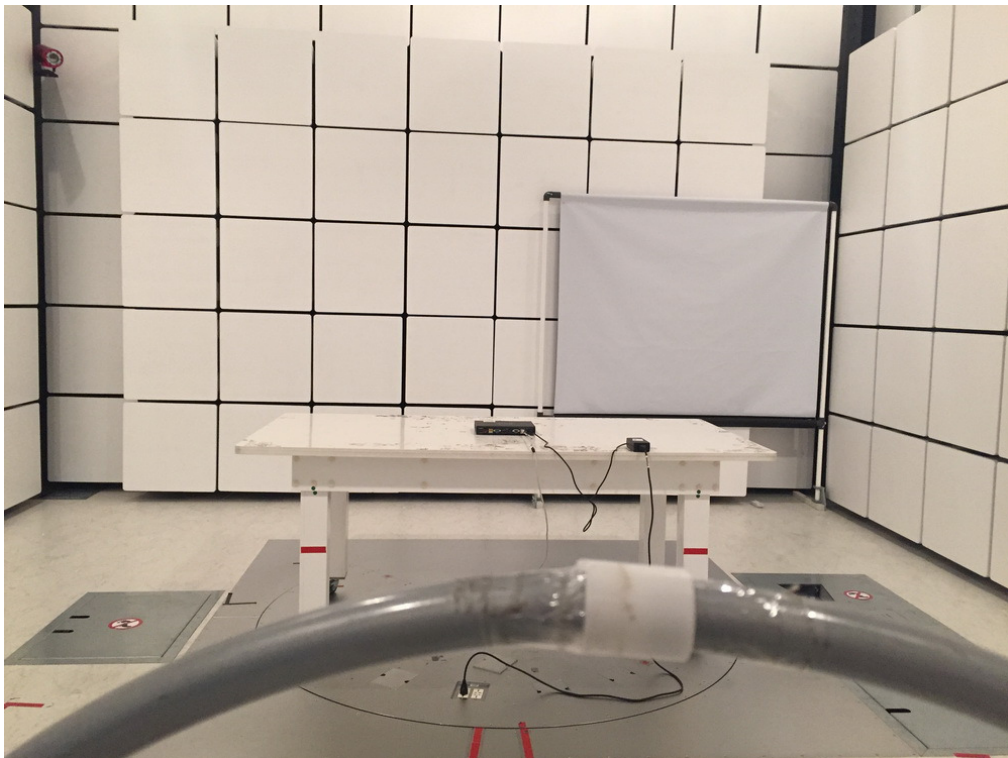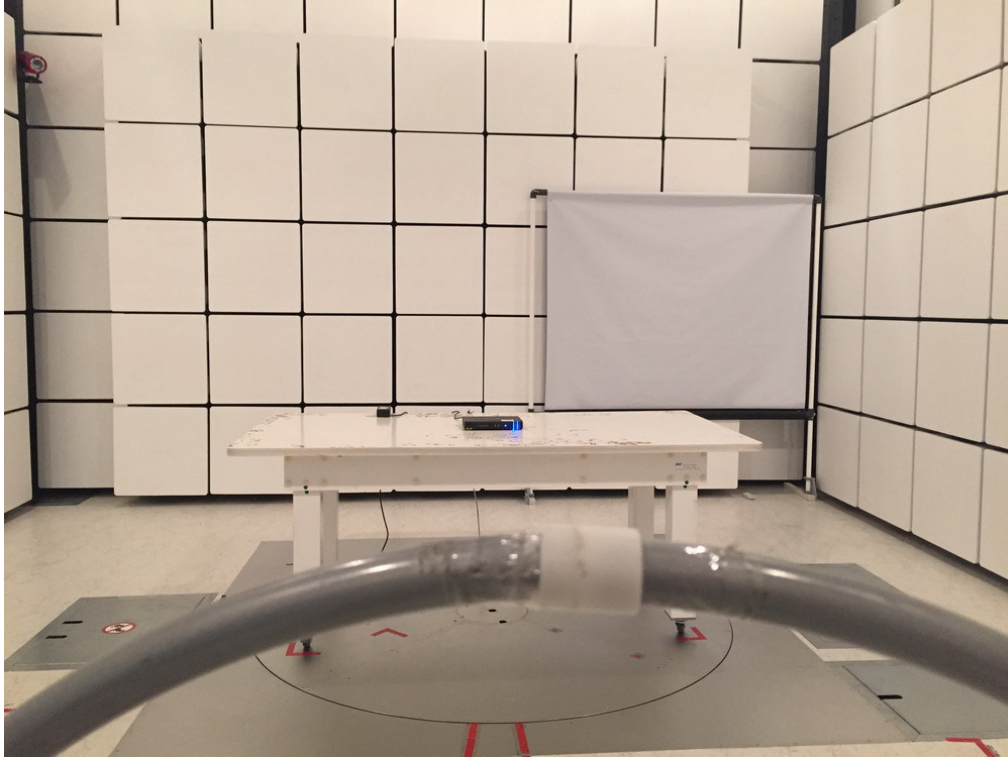

Radiated Measurement Photos

30MHz to 1000MHz Integral Antenna

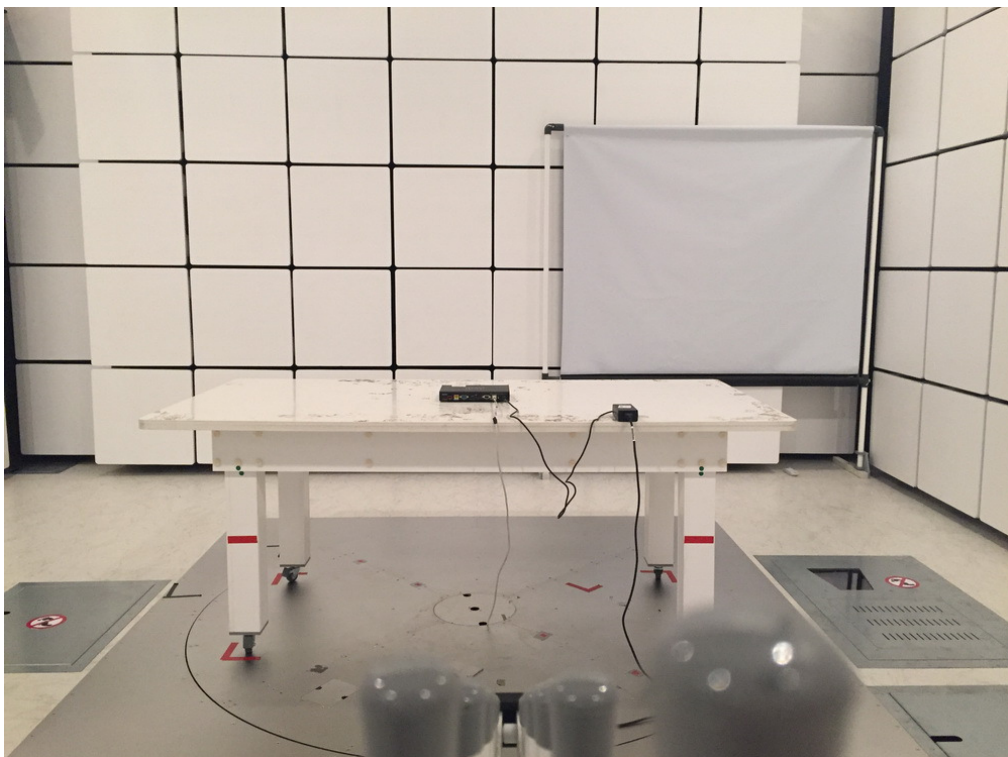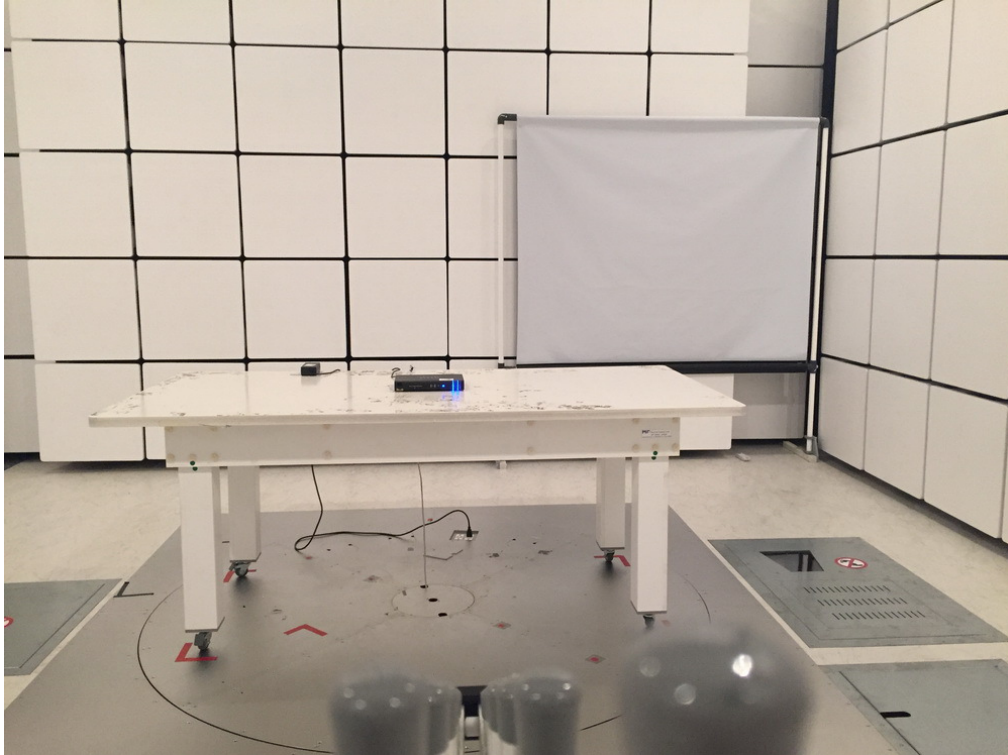

Radiated Measurement Photos


Above 1000MHz Integral Antenna



ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode_ Dipole Antenna

Line

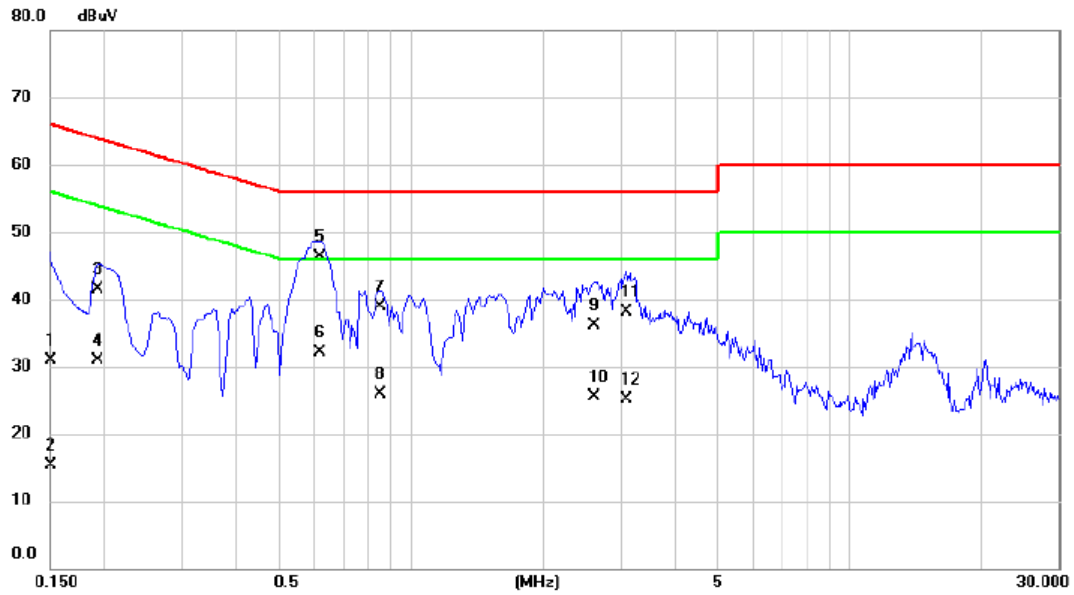


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	21.30	9.66	30.96	66.00	-35.04	QP	
2	0.1500	5.70	9.66	15.36	56.00	-40.64	AVG	
3	0.1934	31.80	9.66	41.46	63.89	-22.43	QP	
4	0.1934	21.30	9.66	30.96	53.89	-22.93	AVG	
5 *	0.6170	36.60	9.67	46.27	56.00	-9.73	QP	
6	0.6170	22.50	9.67	32.17	46.00	-13.83	AVG	
7	0.8510	29.20	9.67	38.87	56.00	-17.13	QP	
8	0.8510	16.30	9.67	25.97	46.00	-20.03	AVG	
9	2.6150	26.40	9.75	36.15	56.00	-19.85	QP	
10	2.6150	15.80	9.75	25.55	46.00	-20.45	AVG	
11	3.1010	28.40	9.76	38.16	56.00	-17.84	QP	
12	3.1010	15.40	9.76	25.16	46.00	-20.84	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode_ Dipole Antenna

Neutral

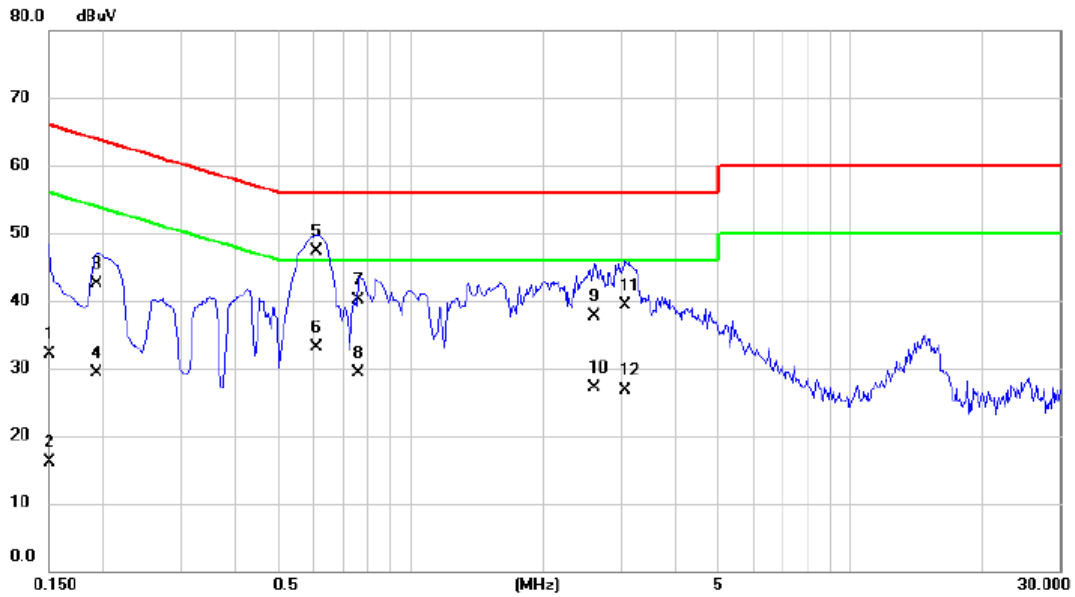

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	22.40	9.67	32.07	66.00	-33.93	QP	
2		0.1500	6.40	9.67	16.07	56.00	-39.93	AVG	
3		0.1934	32.90	9.66	42.56	63.89	-21.33	QP	
4		0.1934	19.70	9.66	29.36	53.89	-24.53	AVG	
5	*	0.6080	37.60	9.67	47.27	56.00	-8.73	QP	
6		0.6080	23.50	9.67	33.17	46.00	-12.83	AVG	
7		0.7610	30.50	9.68	40.18	56.00	-15.82	QP	
8		0.7610	19.70	9.68	29.38	46.00	-16.62	AVG	
9		2.6150	28.00	9.75	37.75	56.00	-18.25	QP	
10		2.6150	17.40	9.75	27.15	46.00	-18.85	AVG	
11		3.0830	29.60	9.77	39.37	56.00	-16.63	QP	
12		3.0830	17.00	9.77	26.77	46.00	-19.23	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode_ Integral Antenna

Line




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	21.30	9.66	30.96	66.00	-35.04	QP	
2		0.1500	5.50	9.66	15.16	56.00	-40.84	AVG	
3		0.1948	31.90	9.66	41.56	63.83	-22.27	QP	
4		0.1948	20.50	9.66	30.16	53.83	-23.67	AVG	
5	*	0.6080	36.50	9.67	46.17	56.00	-9.83	QP	
6		0.6080	22.30	9.67	31.97	46.00	-14.03	AVG	
7		0.8510	29.10	9.67	38.77	56.00	-17.23	QP	
8		0.8510	17.10	9.67	26.77	46.00	-19.23	AVG	
9		2.4170	24.20	9.74	33.94	56.00	-22.06	QP	
10		2.4170	11.50	9.74	21.24	46.00	-24.76	AVG	
11		3.1460	27.60	9.76	37.36	56.00	-18.64	QP	
12		3.1460	15.90	9.76	25.66	46.00	-20.34	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode_ Integral Antenna

Neutral

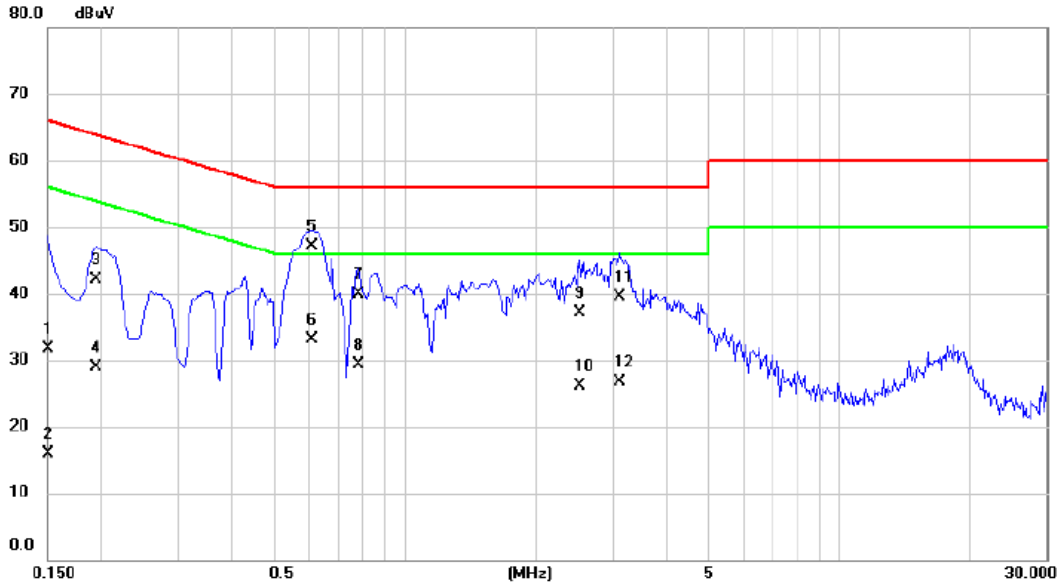


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	22.10	9.67	31.77	66.00	-34.23	QP	
2	0.1500	6.20	9.67	15.87	56.00	-40.13	AVG	
3	0.1948	32.50	9.66	42.16	63.83	-21.67	QP	
4	0.1948	19.20	9.66	28.86	53.83	-24.97	AVG	
5 *	0.6080	37.50	9.67	47.17	56.00	-8.83	QP	
6	0.6080	23.50	9.67	33.17	46.00	-12.83	AVG	
7	0.7790	30.20	9.68	39.88	56.00	-16.12	QP	
8	0.7790	19.60	9.68	29.28	46.00	-16.72	AVG	
9	2.5250	27.30	9.75	37.05	56.00	-18.95	QP	
10	2.5250	16.40	9.75	26.15	46.00	-19.85	AVG	
11	3.1190	29.70	9.77	39.47	56.00	-16.53	QP	
12	3.1190	17.00	9.77	26.77	46.00	-19.23	AVG	

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode_ Dipole Antenna


Open

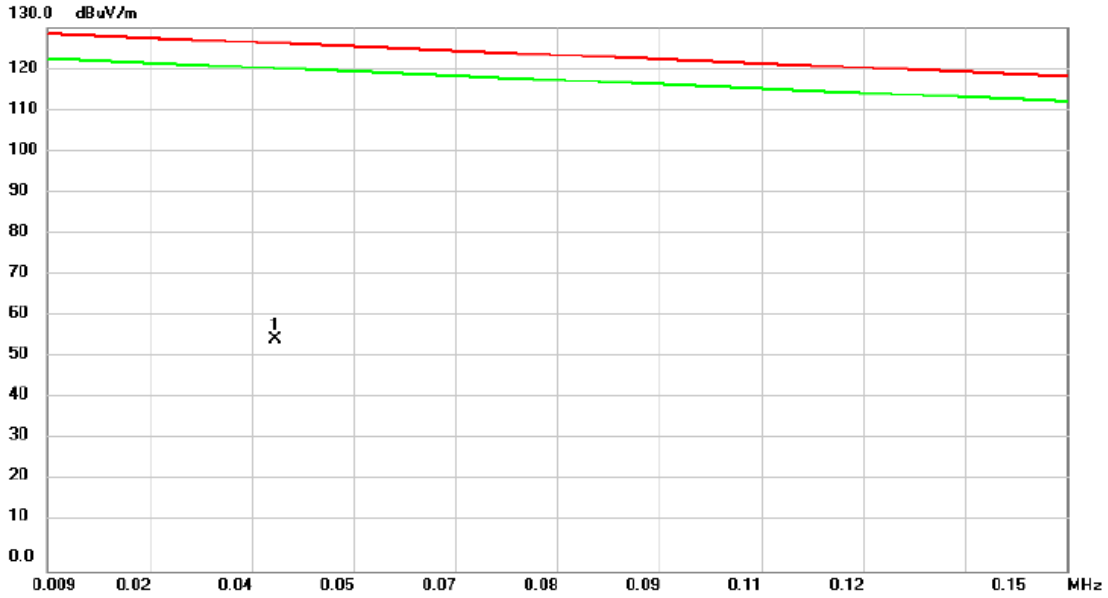

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0405	41.50	13.95	55.45	126.25	-70.80	peak	

Test Mode: TX Mode_ Dipole Antenna


Open

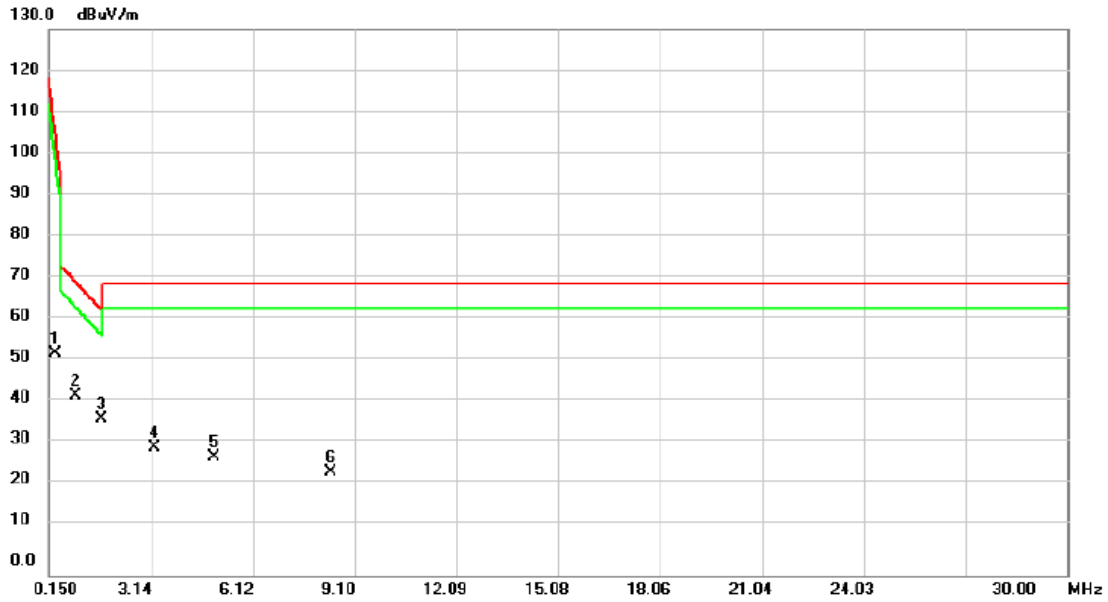

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3291	40.93	11.80	52.73	105.41	-52.68	peak	
2		0.9261	30.79	11.97	42.76	69.91	-27.15	peak	
3	*	1.7020	25.41	11.68	37.09	63.00	-25.91	peak	
4		3.2244	19.31	11.13	30.44	69.54	-39.10	peak	
5		4.9855	16.62	11.40	28.02	69.54	-41.52	peak	
6		8.4184	13.23	11.33	24.56	69.54	-44.98	peak	

Test Mode: TX Mode_ Dipole Antenna


Close

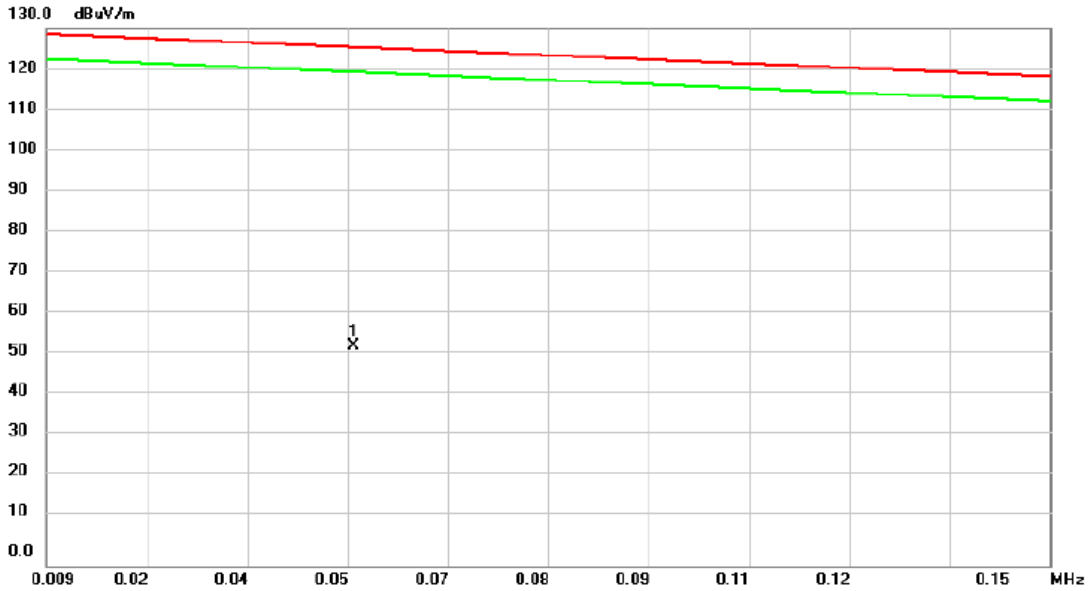

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0522	40.30	12.96	53.26	125.40	-72.14	peak	

Test Mode: TX Mode_ Dipole Antenna


Close

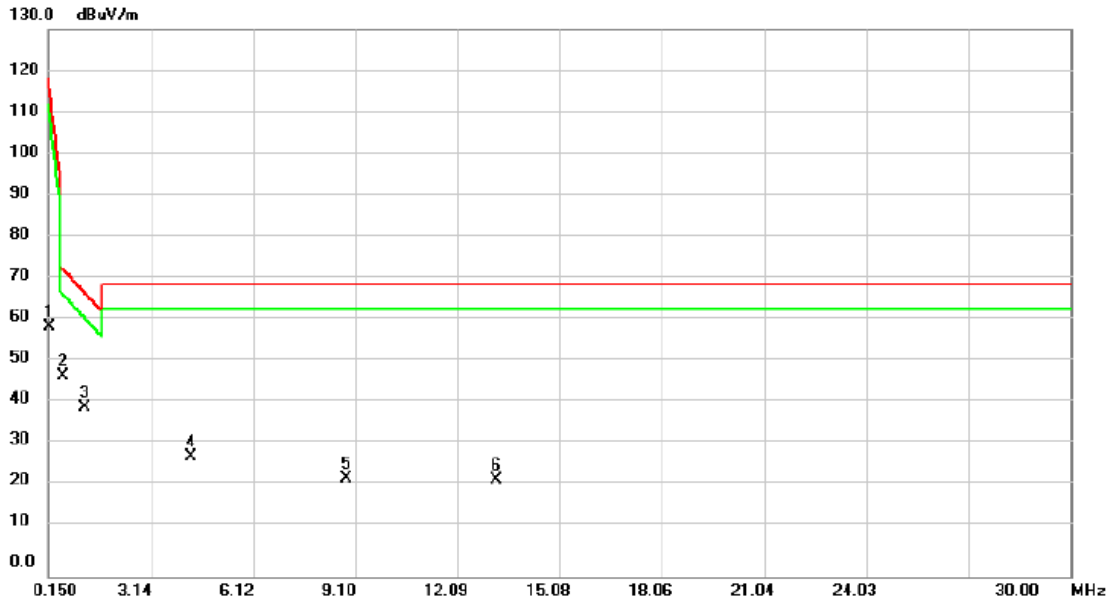

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1500	47.16	12.03	59.19	118.34	-59.15	peak	
2	*	0.5675	35.78	11.83	47.61	73.11	-25.50	peak	
3		1.2242	28.18	11.90	40.08	67.26	-27.18	peak	
4		4.2991	17.28	11.29	28.57	69.54	-40.97	peak	
5		8.8361	12.04	11.32	23.36	69.54	-46.18	peak	
6		13.2240	11.57	11.20	22.77	69.54	-46.77	peak	

Test Mode: TX Mode_ Integral Antenna


Open

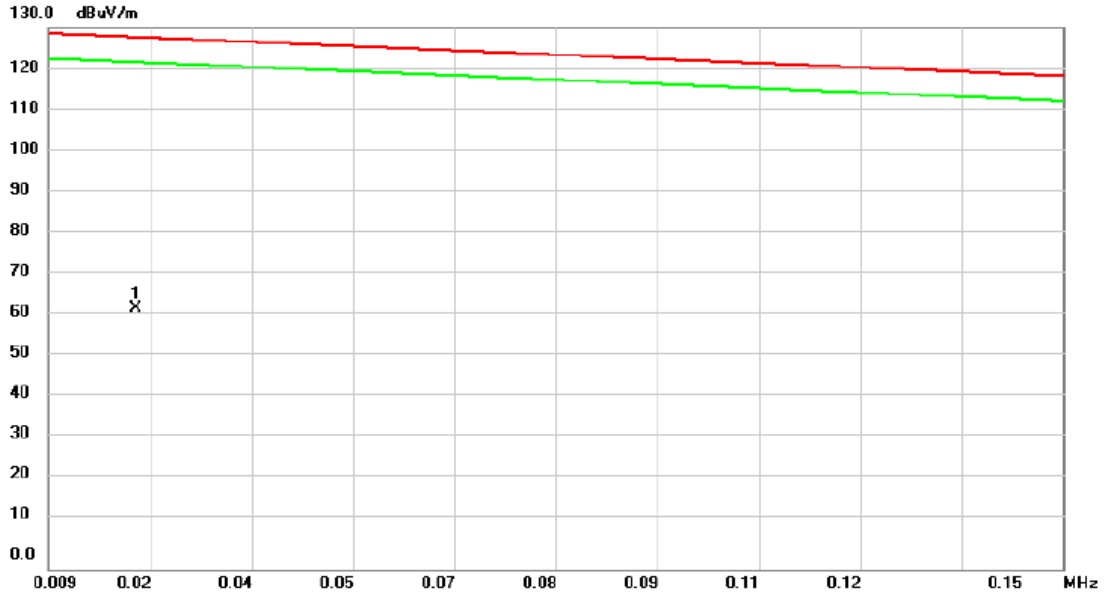

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0212	45.16	17.42	62.58	127.64	-65.06	peak	

Test Mode: TX Mode_ Integral Antenna


Open

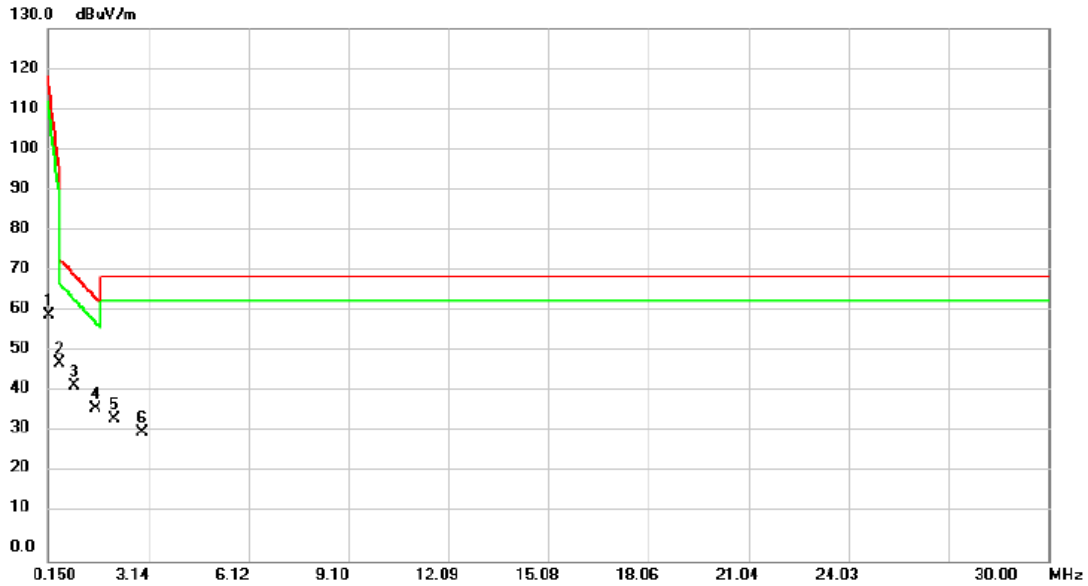

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	118.34	-58.38	peak	
2	*	0.5080	36.55	11.80	48.35	73.64	-25.29	peak	
3		0.9261	30.79	11.97	42.76	69.91	-27.15	peak	
4		1.5530	25.58	11.75	37.33	64.32	-26.99	peak	
5		2.1200	23.06	11.50	34.56	69.54	-34.98	peak	
6		2.9560	20.15	11.12	31.27	69.54	-38.27	peak	

Test Mode: TX Mode_ Integral Antenna


Close

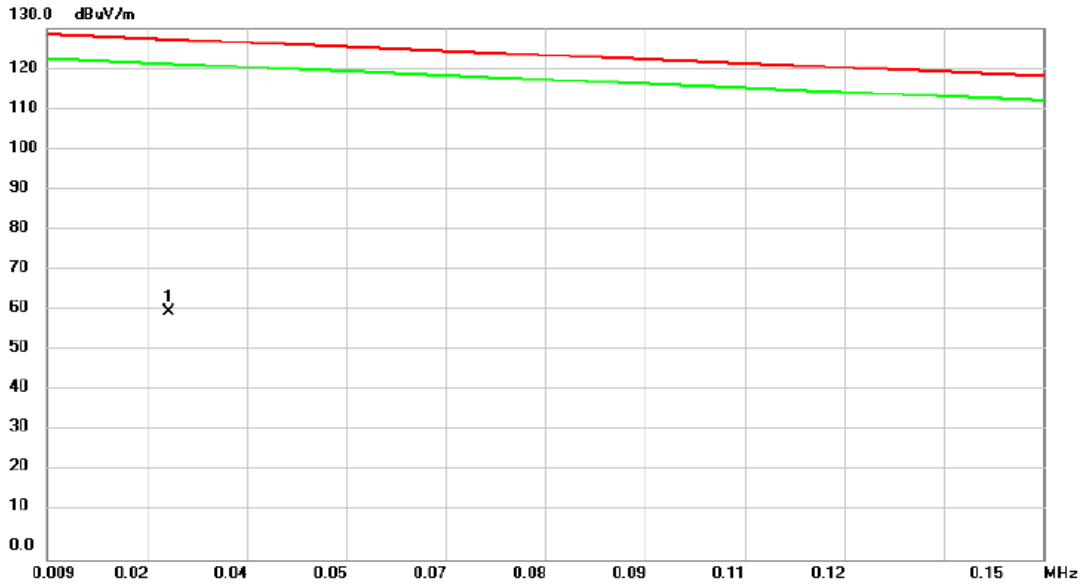

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0262	44.44	16.04	60.48	127.28	-66.80	peak	

Test Mode: TX Mode_ Integral Antenna

Close

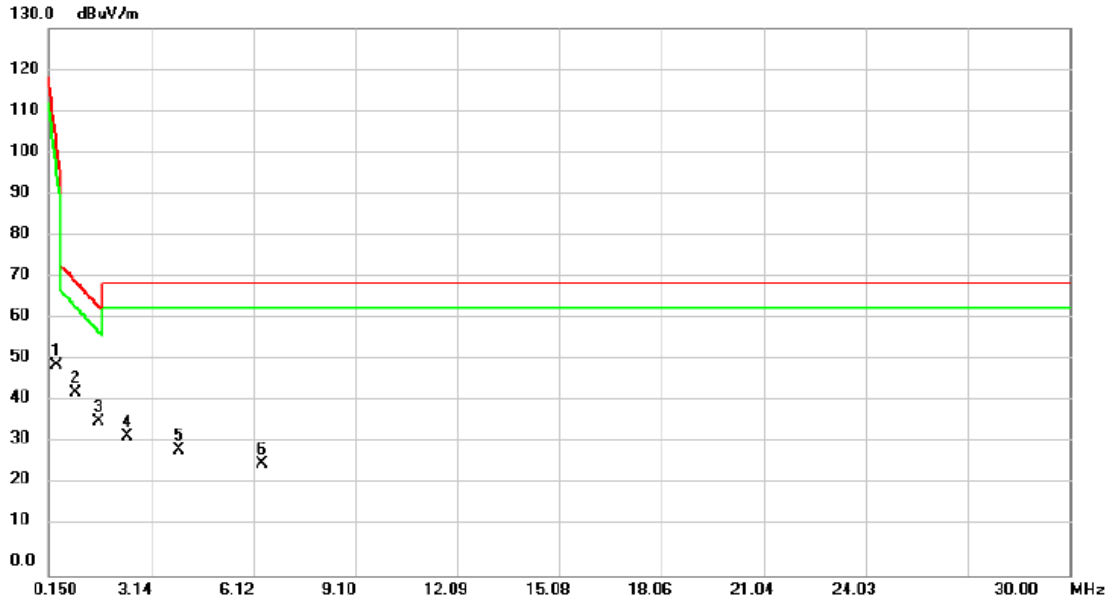


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3886	38.05	11.80	49.85	101.12	-51.27	peak	
2	*	0.9261	31.48	11.97	43.45	69.91	-26.46	peak	
3		1.6126	24.88	11.72	36.60	63.79	-27.19	peak	
4		2.4483	21.67	11.35	33.02	69.54	-36.52	peak	
5		3.9410	18.34	11.24	29.58	69.54	-39.96	peak	
6		6.3887	15.28	11.37	26.65	69.54	-42.89	peak	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-3/TX A Mode 5745MHz_Dipole Antenna


Vertical

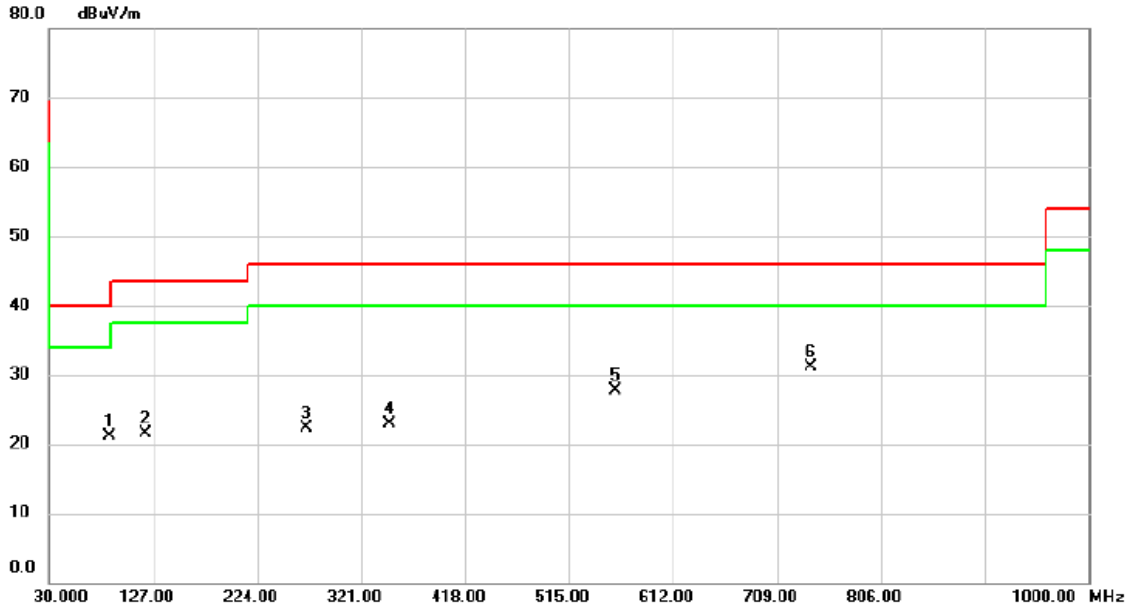

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		86.2600	34.11	-13.03	21.08	40.00	-18.92	peak	
2		120.2100	31.87	-10.45	21.42	43.50	-22.08	peak	
3		269.5900	30.72	-8.39	22.33	46.00	-23.67	peak	
4		347.1900	28.95	-6.08	22.87	46.00	-23.13	peak	
5		558.6500	29.04	-1.30	27.74	46.00	-18.26	peak	
6	*	741.0100	28.91	2.15	31.06	46.00	-14.94	peak	

Test Mode: UNII-3/TX A Mode 5745MHz _Dipole Antenna


Horizontal

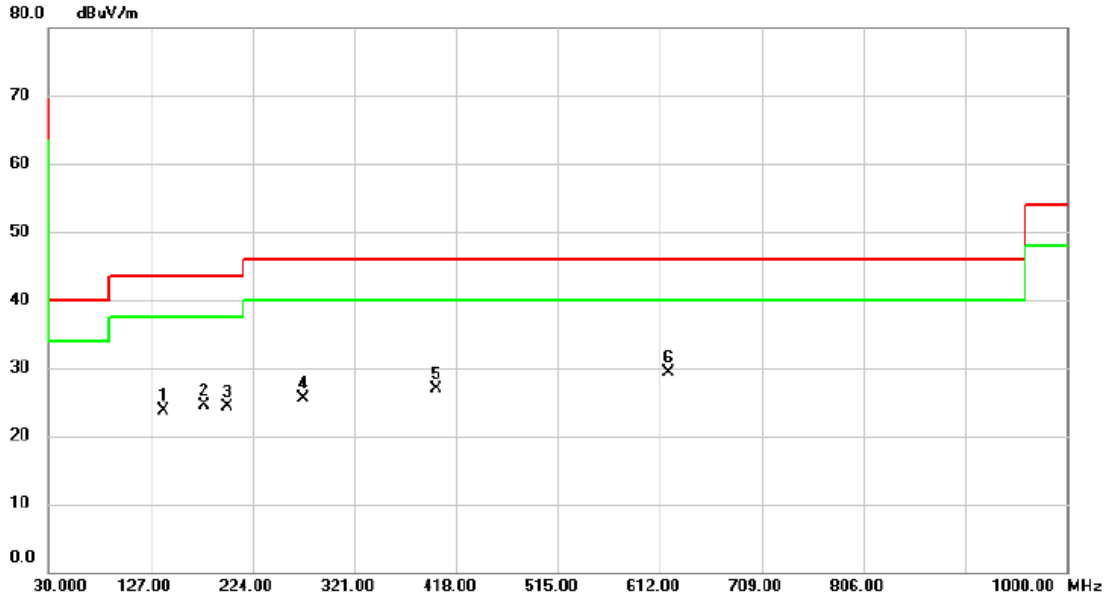

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		139.6100	32.36	-8.69	23.67	43.50	-19.83	peak	
2		177.4400	34.19	-9.63	24.56	43.50	-18.94	peak	
3		199.7500	35.10	-10.80	24.30	43.50	-19.20	peak	
4		272.5000	33.67	-8.26	25.41	46.00	-20.59	peak	
5		399.5700	31.75	-4.92	26.83	46.00	-19.17	peak	
6	*	619.7600	29.46	-0.06	29.40	46.00	-16.60	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Integral Antenna


Vertical

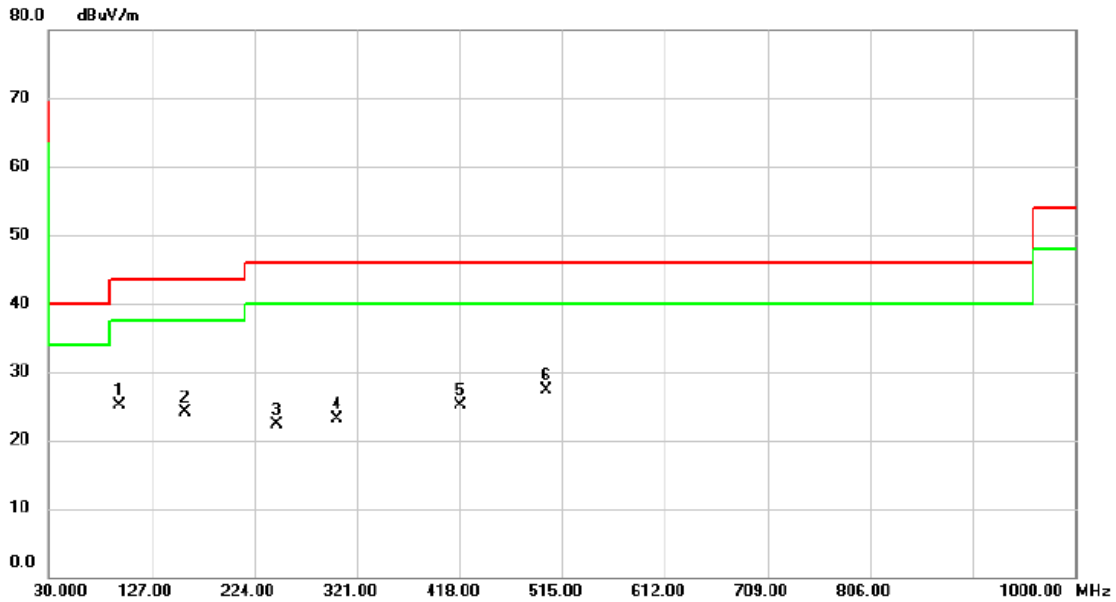

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	96.9300	38.01	-12.95	25.06	43.50	-18.44	peak	
2		158.0400	32.68	-8.59	24.09	43.50	-19.41	peak	
3		245.3400	31.65	-9.31	22.34	46.00	-23.66	peak	
4		302.5700	30.62	-7.42	23.20	46.00	-22.80	peak	
5		418.9700	29.39	-4.37	25.02	46.00	-20.98	peak	
6		500.4500	30.04	-2.64	27.40	46.00	-18.60	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Integral Antenna

Horizontal

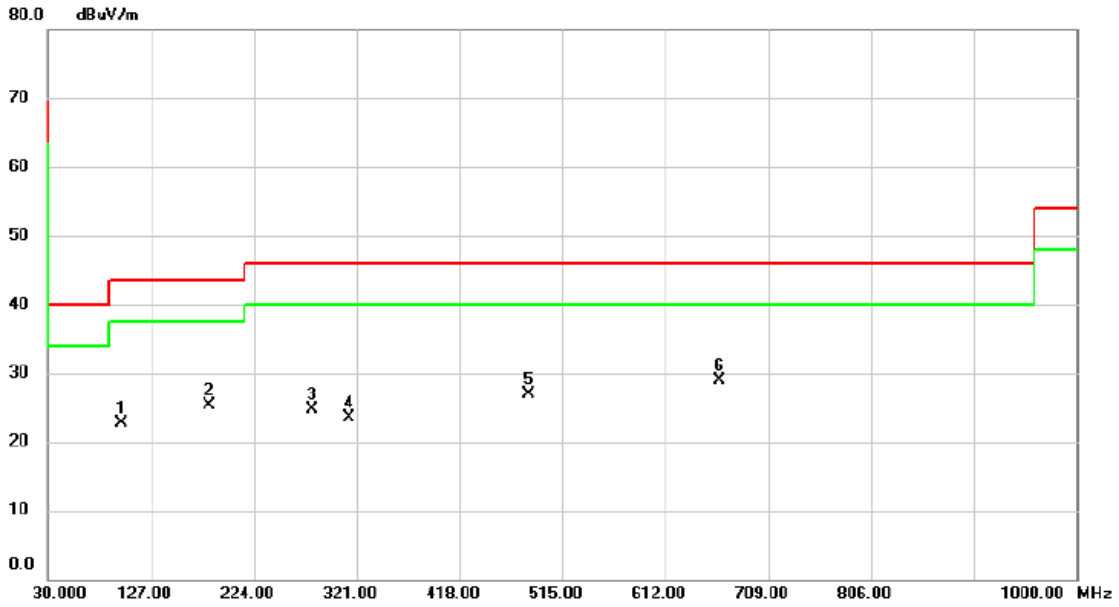


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		98.8700	35.50	-12.78	22.72	43.50	-20.78	peak	
2		181.3200	35.31	-9.98	25.33	43.50	-18.17	peak	
3		278.3200	32.69	-8.02	24.67	46.00	-21.33	peak	
4		313.2400	30.64	-7.10	23.54	46.00	-22.46	peak	
5		482.9900	29.75	-2.93	26.82	46.00	-19.18	peak	
6	*	662.4400	28.51	0.45	28.96	46.00	-17.04	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Dipole Antenna


Vertical

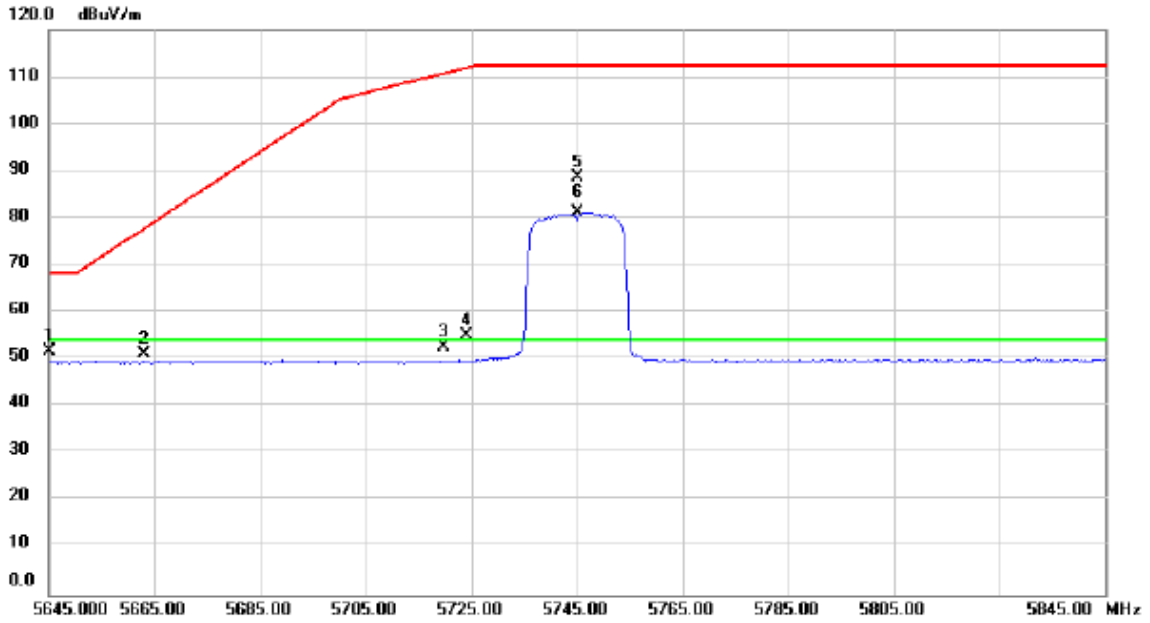

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5645.055	12.40	39.29	51.69	68.20	-16.51	peak	
2		5663.100	11.71	39.34	51.05	77.89	-26.84	peak	
3		5719.920	13.15	39.51	52.66	110.78	-58.12	peak	
4		5724.105	15.63	39.52	55.15	111.95	-56.80	peak	
5		5745.000	49.03	39.58	88.61	112.20	-23.59	peak	
6	*	5745.000	41.61	39.58	81.19	54.00	27.19	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Dipole Antenna


Vertical

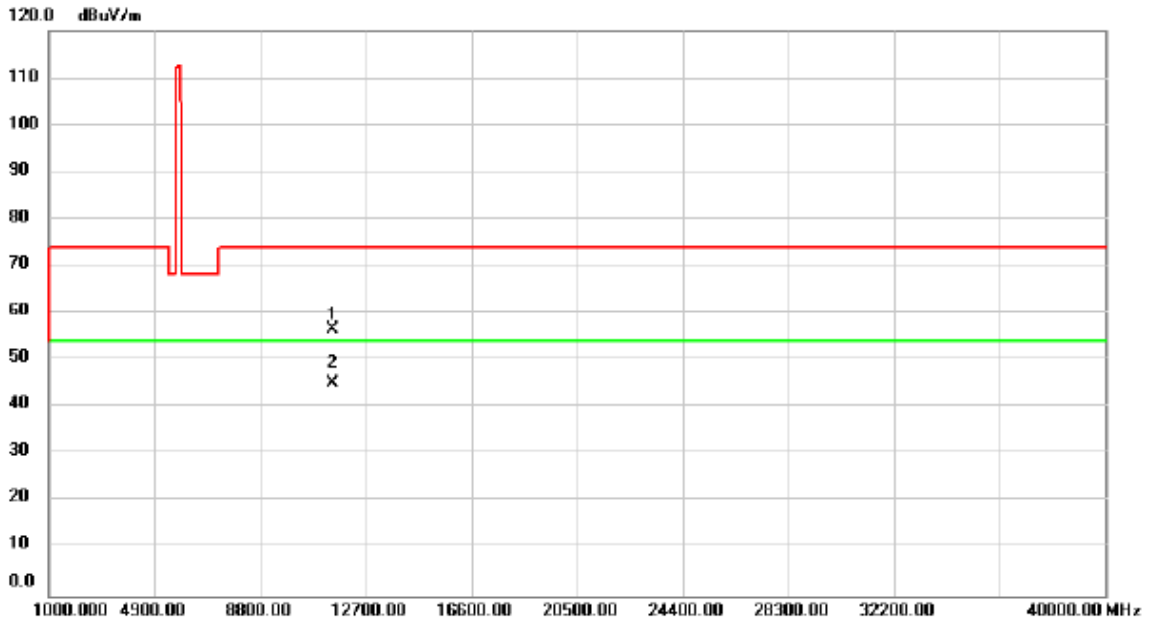

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.22	5.23	56.45	74.00	-17.55	peak	
2	*	11490.00	39.94	5.23	45.17	54.00	-8.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Dipole Antenna


Horizontal

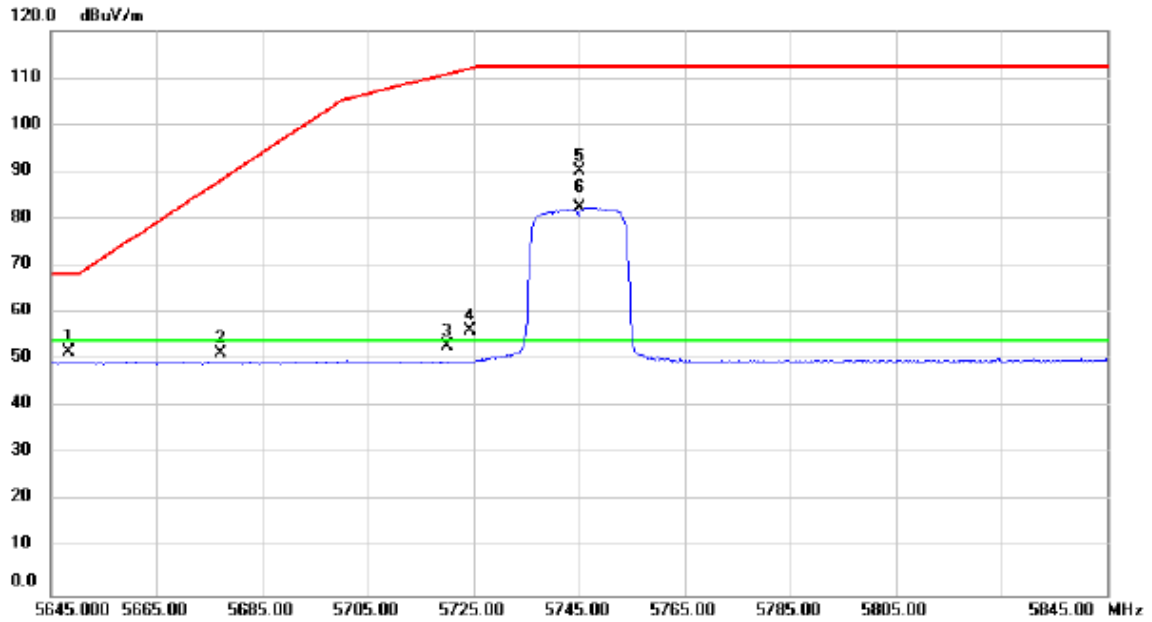

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.440	12.34	39.30	51.64	68.20	-16.56	peak	
2		5677.150	11.98	39.39	51.37	88.29	-36.92	peak	
3		5719.980	13.55	39.51	53.06	110.79	-57.73	peak	
4		5724.260	16.61	39.52	56.13	111.99	-55.86	peak	
5		5745.000	50.66	39.58	90.24	112.20	-21.96	peak	
6	*	5745.000	42.82	39.58	82.40	54.00	28.40	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Dipole Antenna


Horizontal

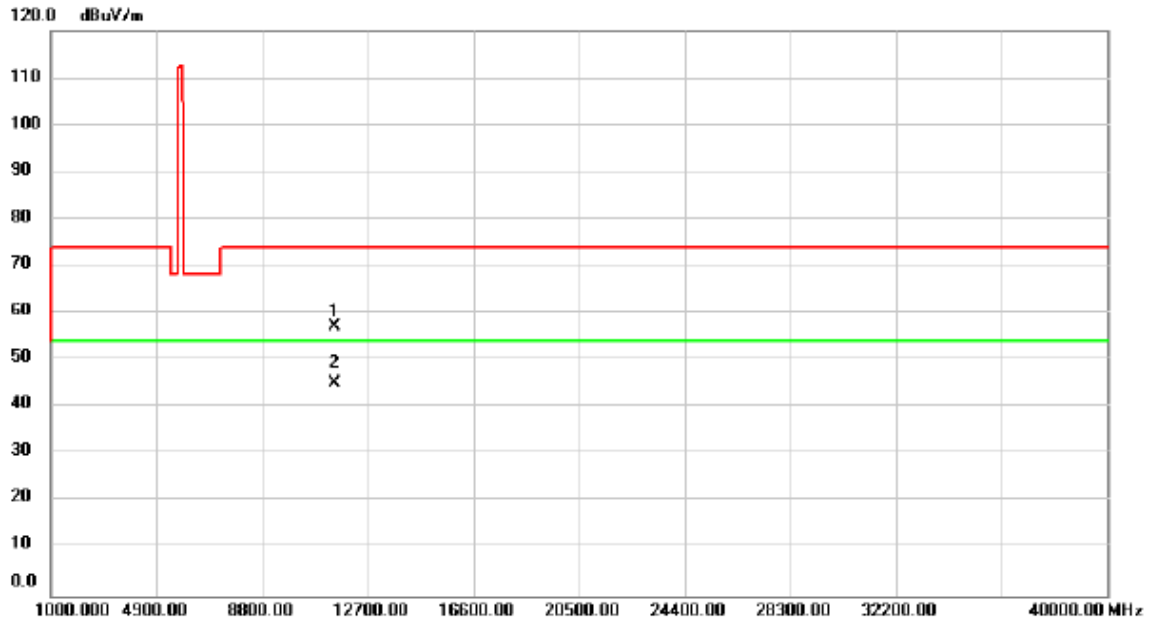

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.90	5.23	57.13	74.00	-16.87	peak	
2	*	11490.00	39.91	5.23	45.14	54.00	-8.86	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz _Dipole Antenna


Vertical

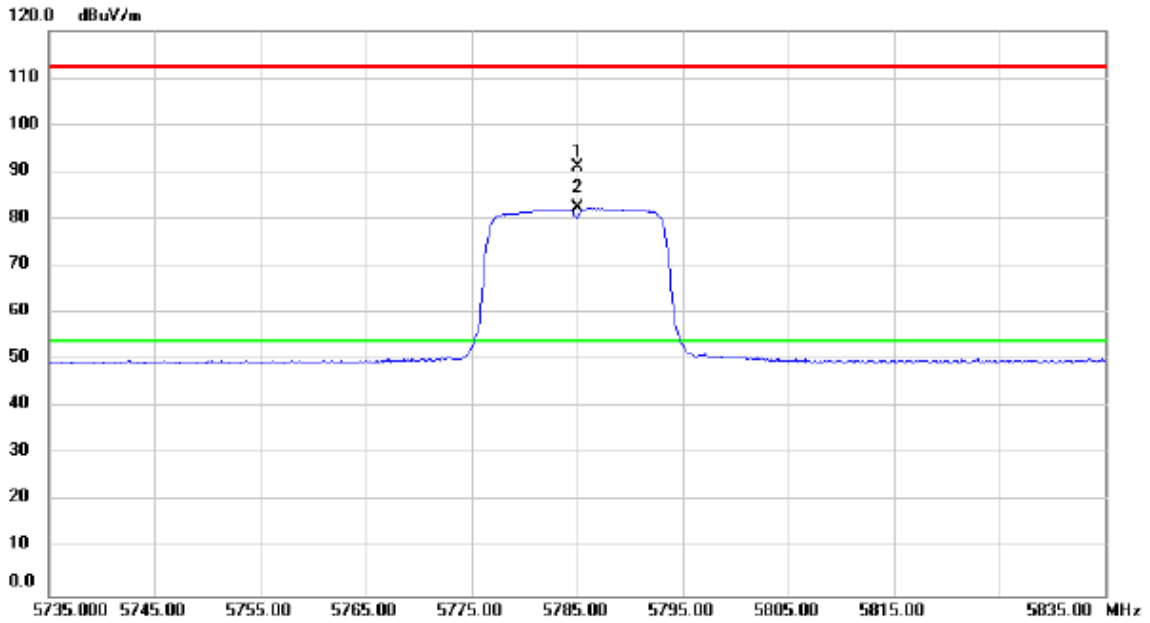

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	51.31	39.70	91.01	112.20	-21.19	peak	
2	*	5785.000	42.61	39.70	82.31	54.00	28.31	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz_Dipole Antenna


Vertical

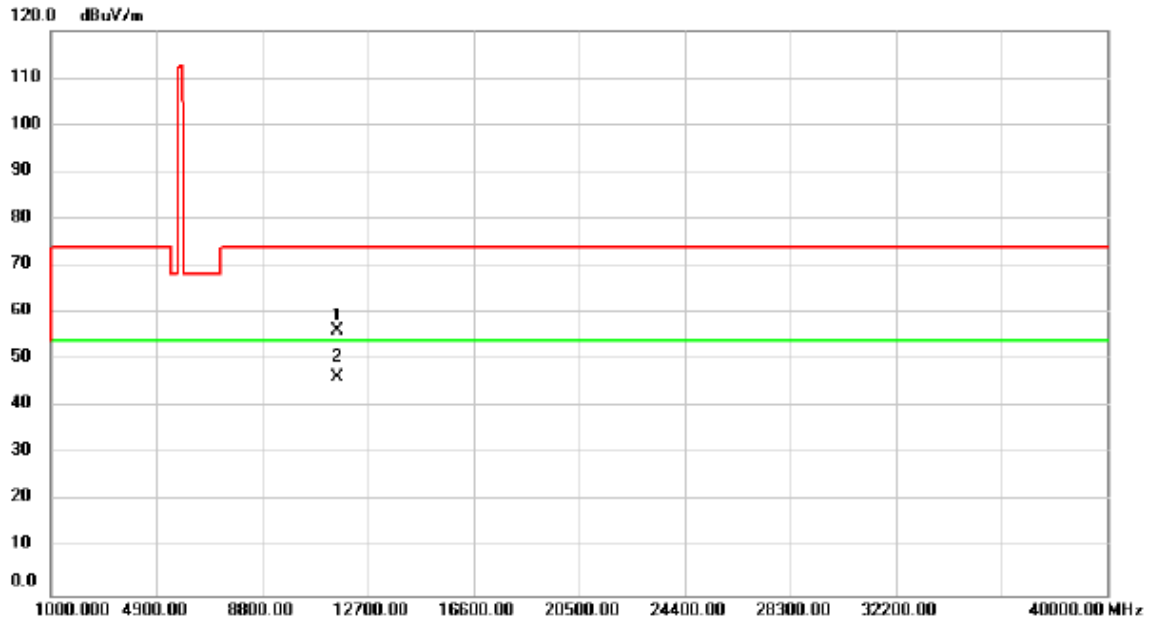

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	51.27	5.13	56.40	74.00	-17.60	peak	
2	*	11570.00	41.10	5.13	46.23	54.00	-7.77	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz _Dipole Antenna


Horizontal

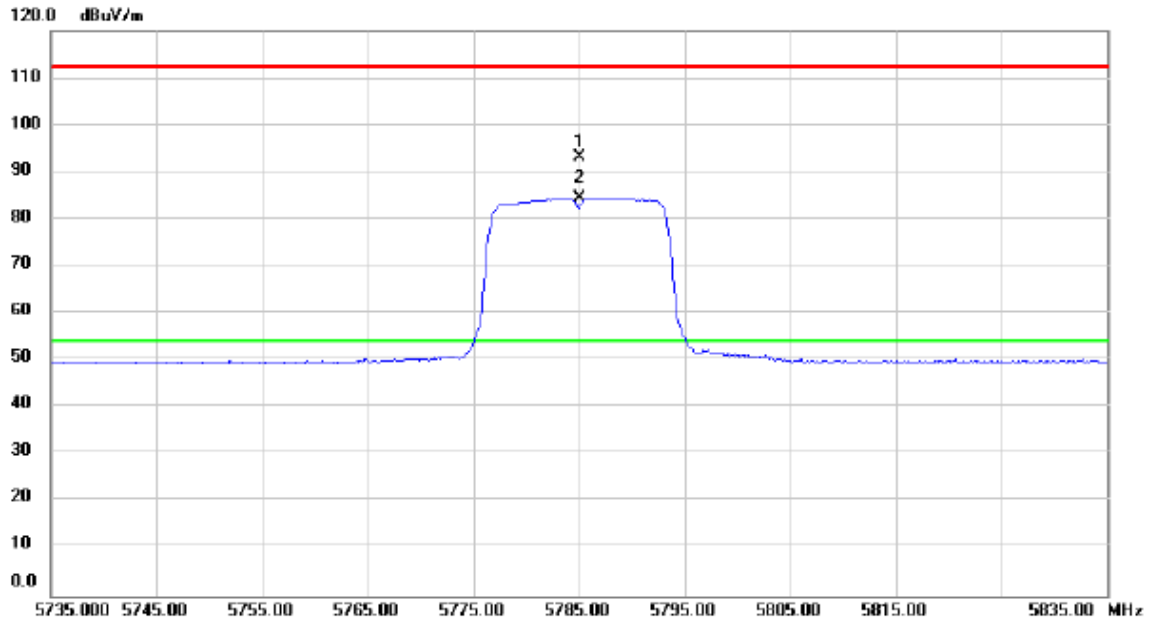

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	53.31	39.70	93.01	112.20	-19.19	peak	
2	*	5785.000	44.77	39.70	84.47	54.00	30.47	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz_Dipole Antenna


Horizontal

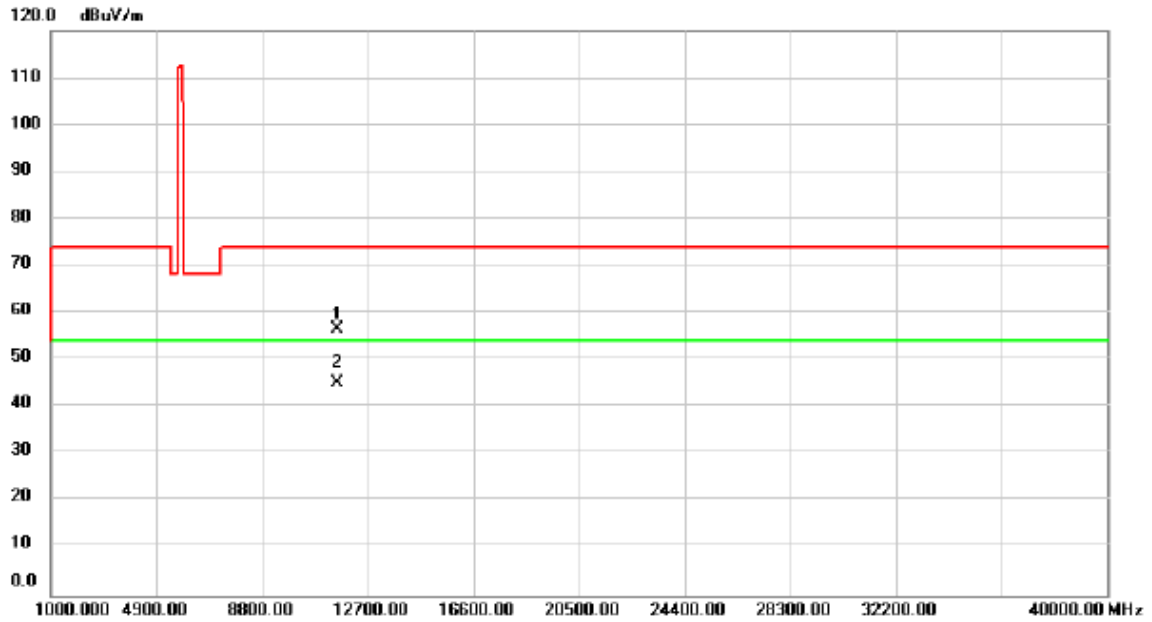

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	51.33	5.13	56.46	74.00	-17.54	peak	
2	*	11570.00	40.12	5.13	45.25	54.00	-8.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Dipole Antenna


Vertical

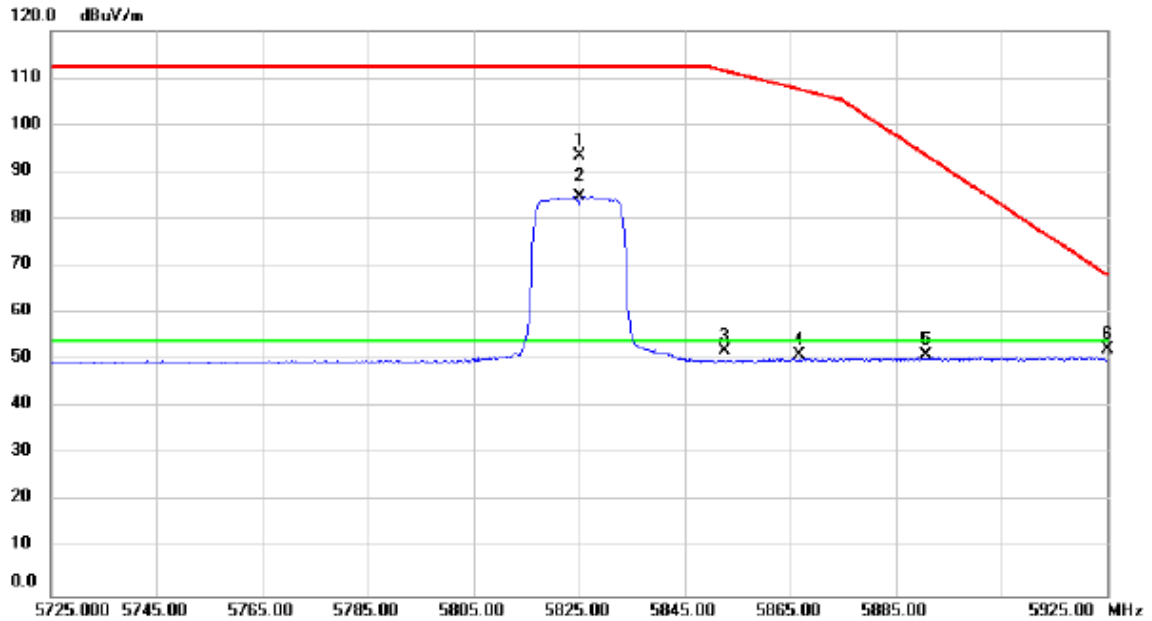

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	53.52	39.82	93.34	112.20	-18.86	peak	
2	*	5825.000	44.88	39.82	84.70	54.00	30.70	AVG	No Limit
3		5852.625	12.06	39.89	51.95	111.47	-59.52	peak	
4		5866.800	11.21	39.93	51.14	107.50	-56.36	peak	
5		5890.800	11.23	40.01	51.24	93.51	-42.27	peak	
6		5925.000	12.27	40.11	52.38	68.20	-15.82	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Dipole Antenna


Vertical

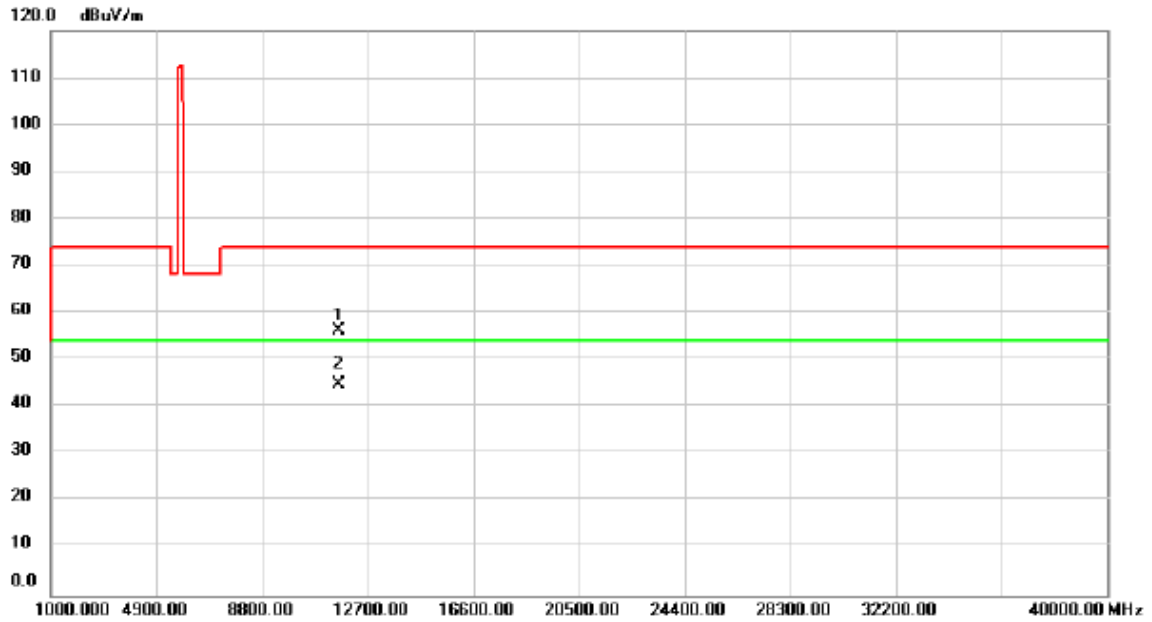

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	51.35	4.99	56.34	74.00	-17.66	peak	
2	*	11650.00	39.77	4.99	44.76	54.00	-9.24	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Dipole Antenna


Horizontal

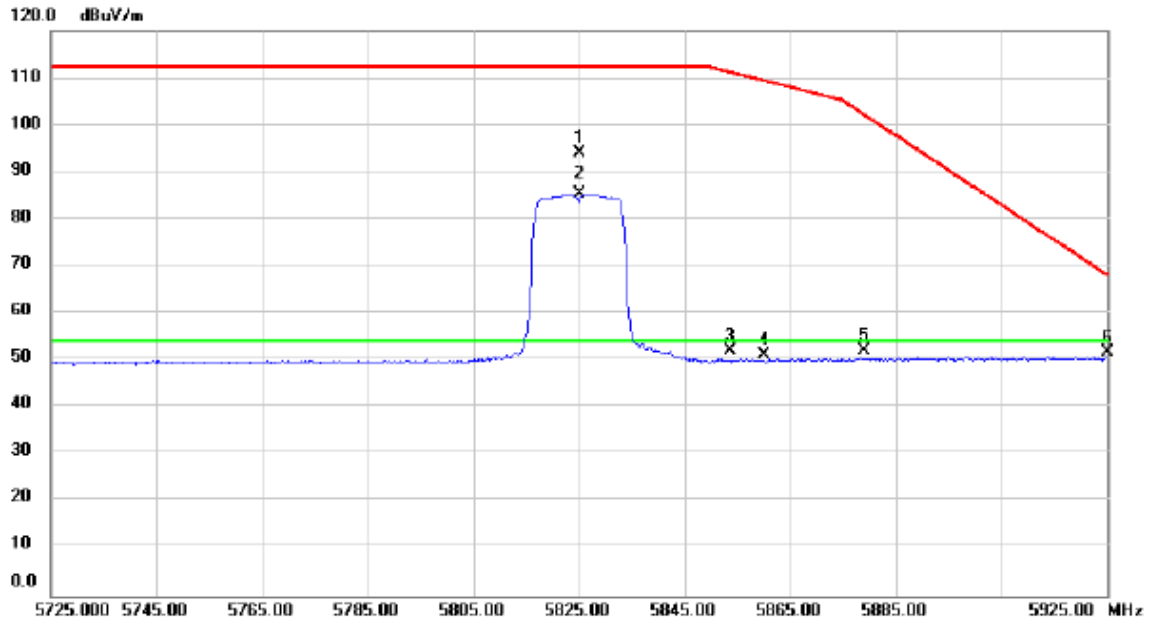

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	54.08	39.82	93.90	112.20	-18.30	peak	
2	*	5825.000	45.45	39.82	85.27	54.00	31.27	AVG	No Limit
3		5853.760	12.26	39.90	52.16	111.15	-58.99	peak	
4		5860.140	11.19	39.91	51.10	109.36	-58.26	peak	
5		5878.950	12.14	39.97	52.11	102.28	-50.17	peak	
6		5925.000	11.79	40.11	51.90	68.20	-16.30	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Dipole Antenna


Horizontal

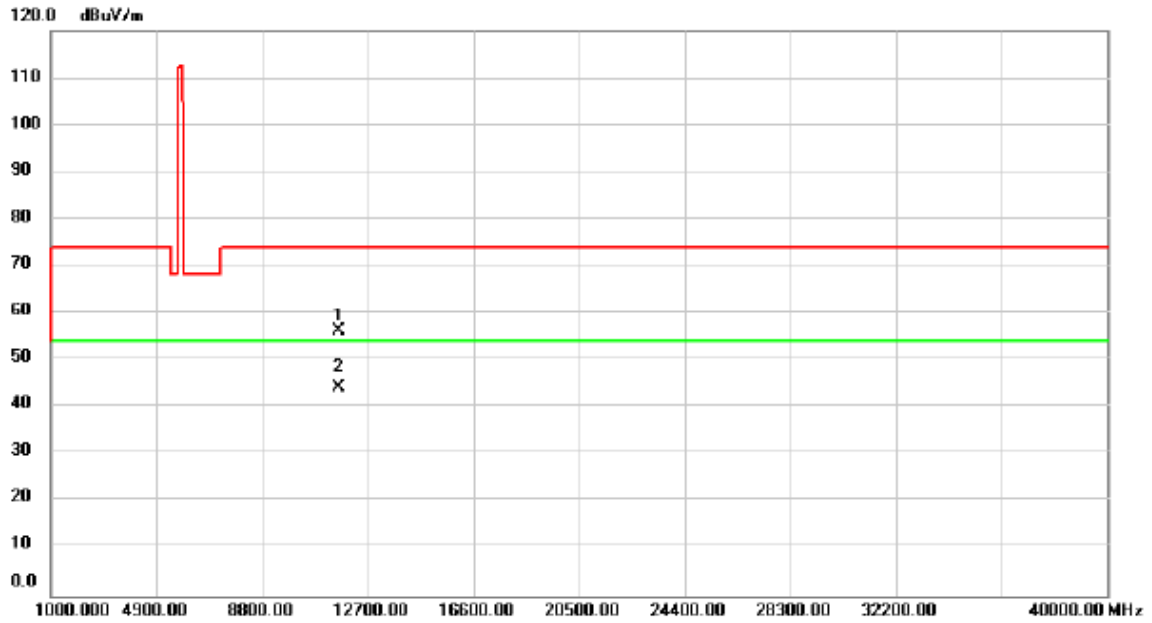

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	51.35	4.99	56.34	74.00	-17.66	peak	
2	*	11650.00	39.36	4.99	44.35	54.00	-9.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Dipole Antenna


Vertical

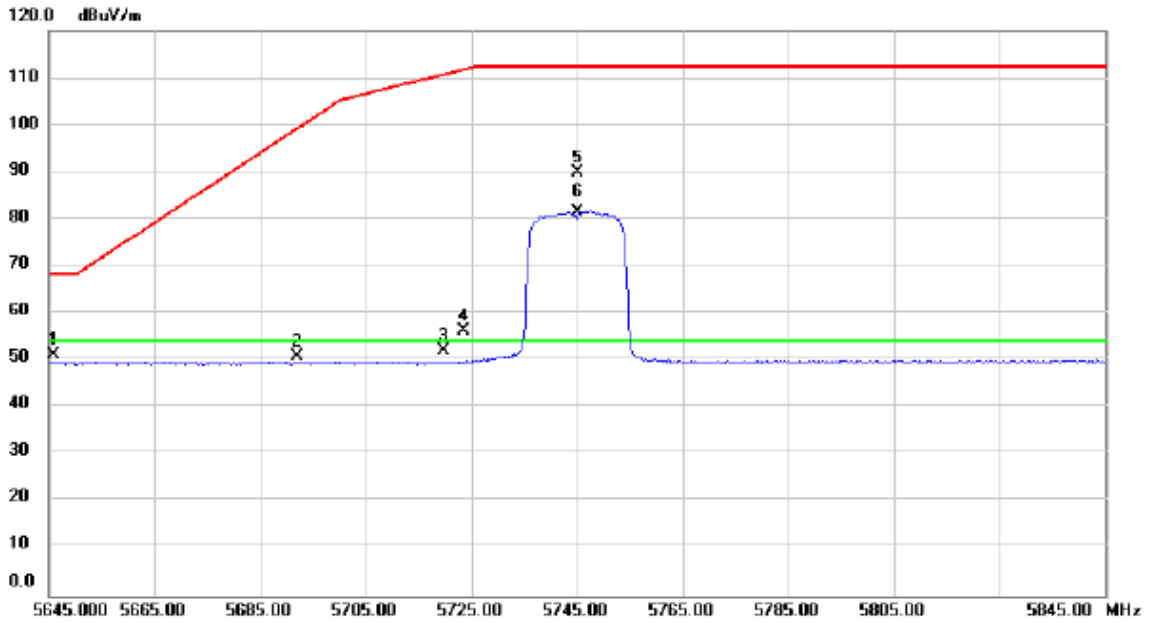

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5646.030	11.75	39.29	51.04	68.20	-17.16	peak	
2		5692.000	11.38	39.43	50.81	99.28	-48.47	peak	
3		5719.820	12.63	39.51	52.14	110.75	-58.61	peak	
4		5723.550	16.60	39.52	56.12	111.79	-55.67	peak	
5		5745.000	50.19	39.58	89.77	112.20	-22.43	peak	
6	*	5745.000	42.02	39.58	81.60	54.00	27.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Dipole Antenna


Vertical

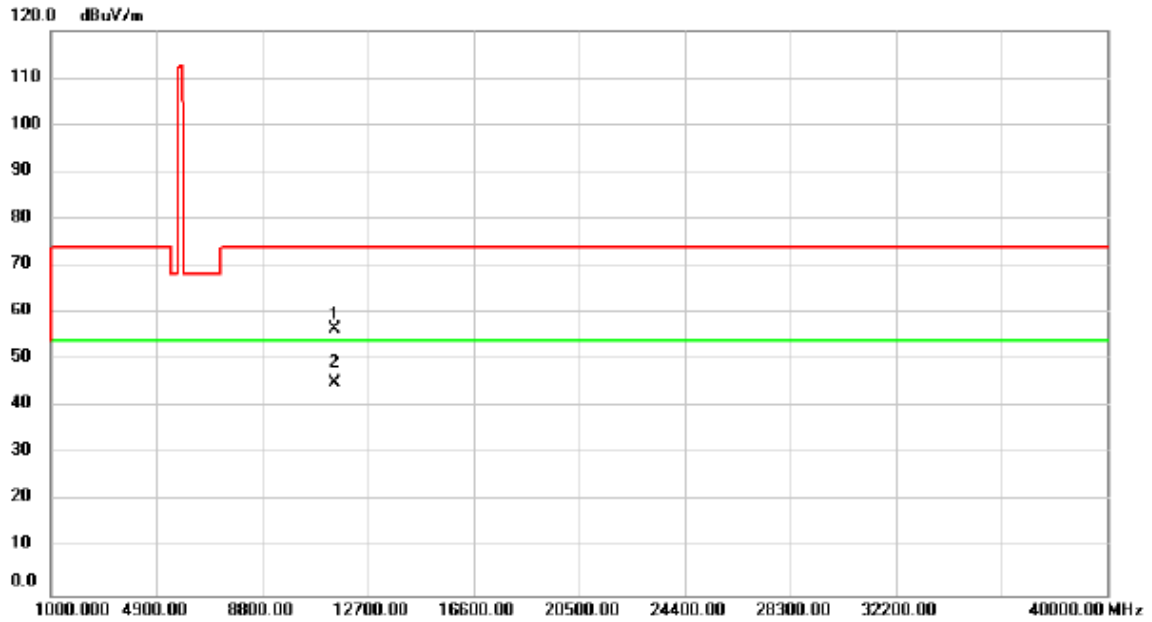

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.46	5.23	56.69	74.00	-17.31	peak	
2	*	11490.00	39.95	5.23	45.18	54.00	-8.82	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Dipole Antenna


Horizontal

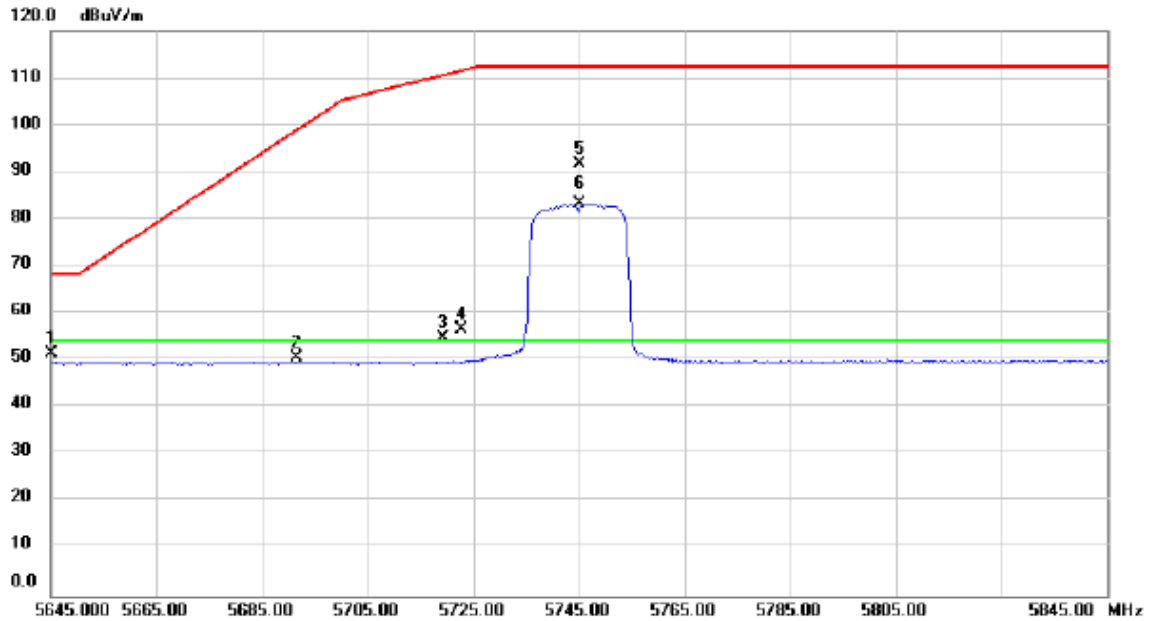

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5645.095	12.19	39.29	51.48	68.20	-16.72	peak	
2		5691.500	11.01	39.43	50.44	98.91	-48.47	peak	
3		5719.400	15.22	39.51	54.73	110.63	-55.90	peak	
4		5722.715	17.01	39.51	56.52	111.56	-55.04	peak	
5		5745.000	52.06	39.58	91.64	112.20	-20.56	peak	
6	*	5745.000	43.59	39.58	83.17	54.00	29.17	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Dipole Antenna


Horizontal

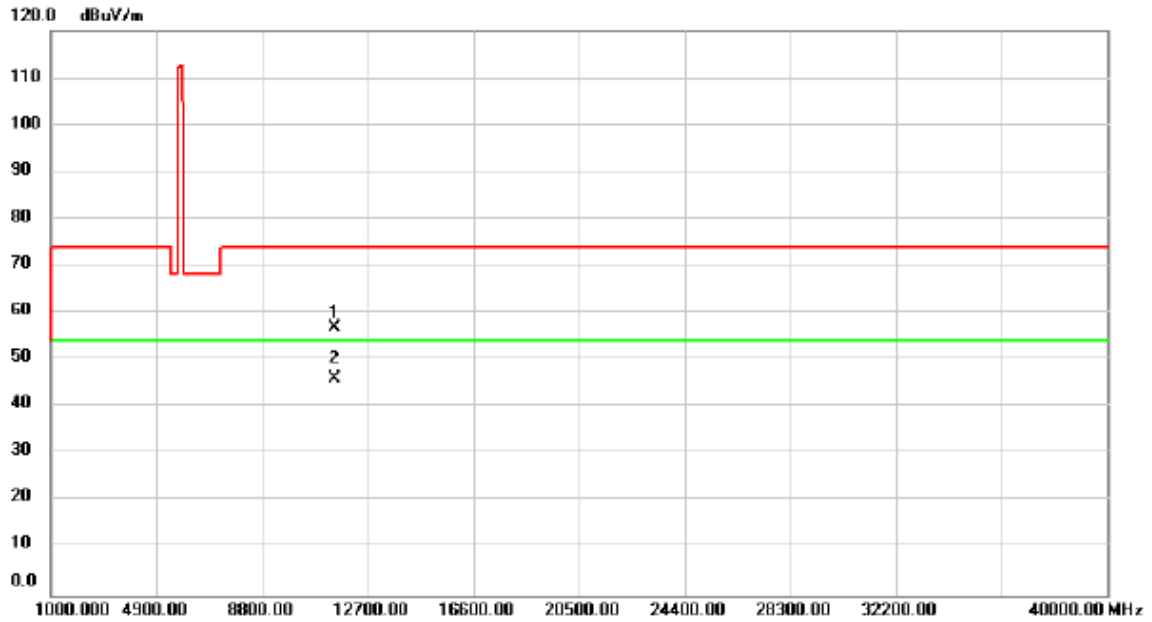

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.73	5.23	56.96	74.00	-17.04	peak	
2	*	11490.00	40.96	5.23	46.19	54.00	-7.81	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz _Dipole Antenna


Vertical

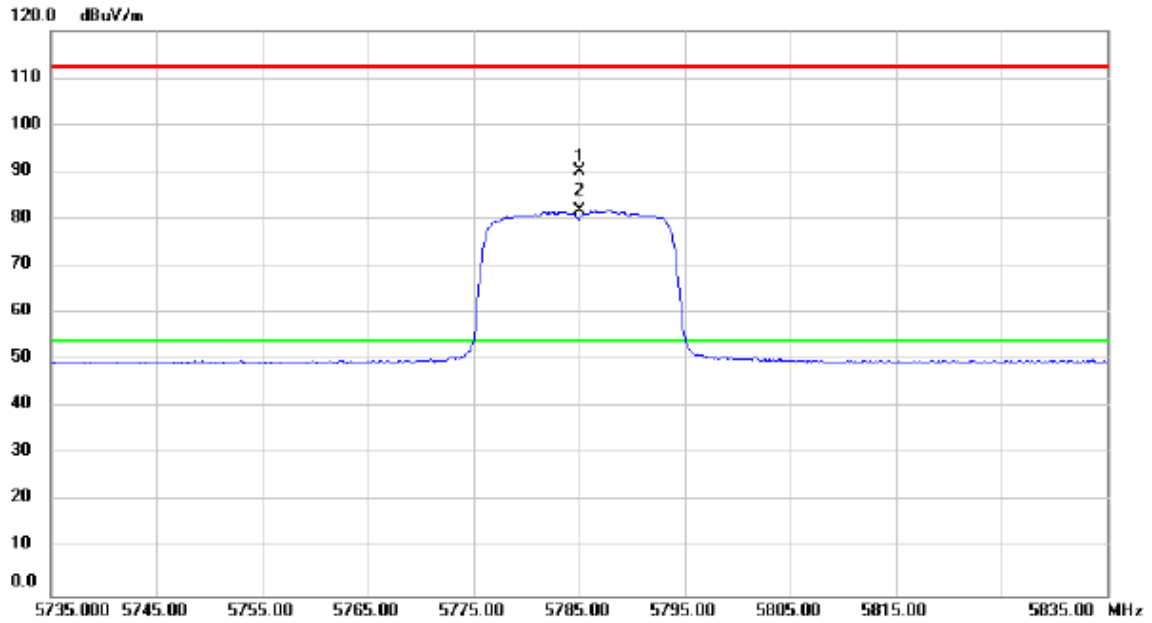

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	50.60	39.70	90.30	112.20	-21.90	peak	
2	*	5785.000	42.04	39.70	81.74	54.00	27.74	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz _Dipole Antenna


Vertical

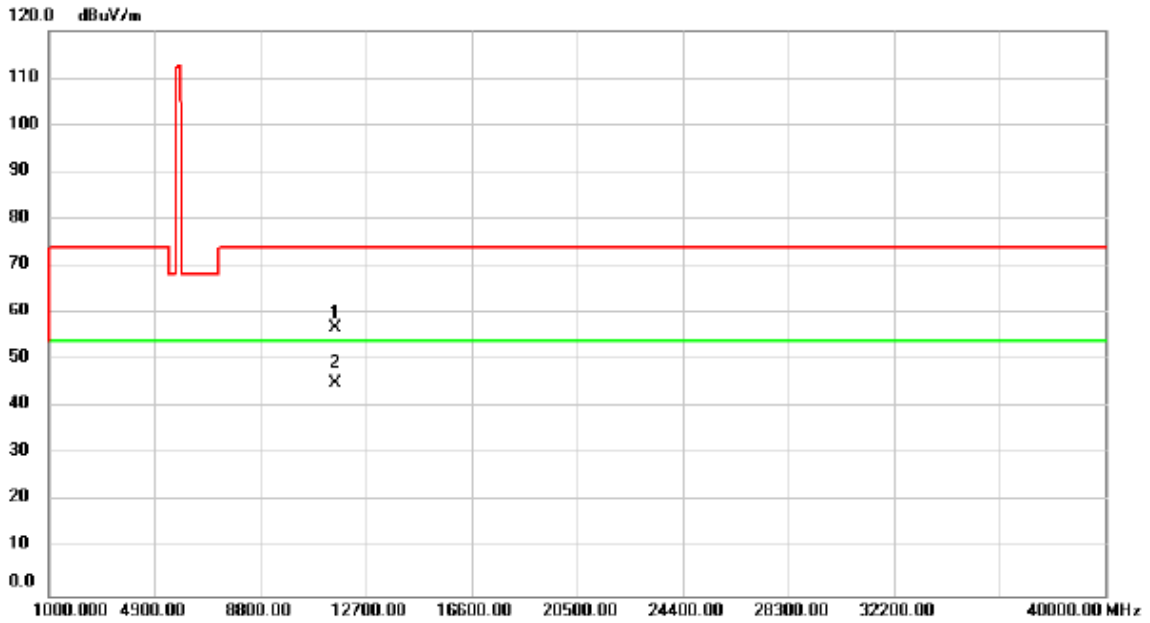

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	51.78	5.13	56.91	74.00	-17.09	peak	
2	*	11570.00	40.16	5.13	45.29	54.00	-8.71	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz _Dipole Antenna


Horizontal

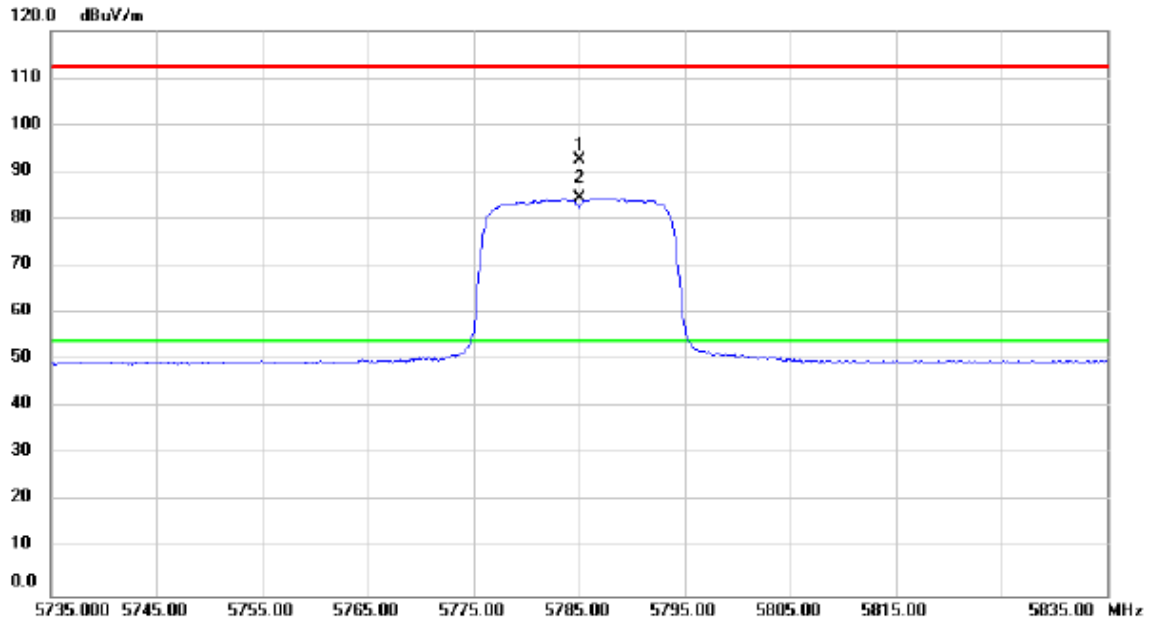

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	52.89	39.70	92.59	112.20	-19.61	peak	
2	*	5785.000	44.66	39.70	84.36	54.00	30.36	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz _Dipole Antenna


Horizontal

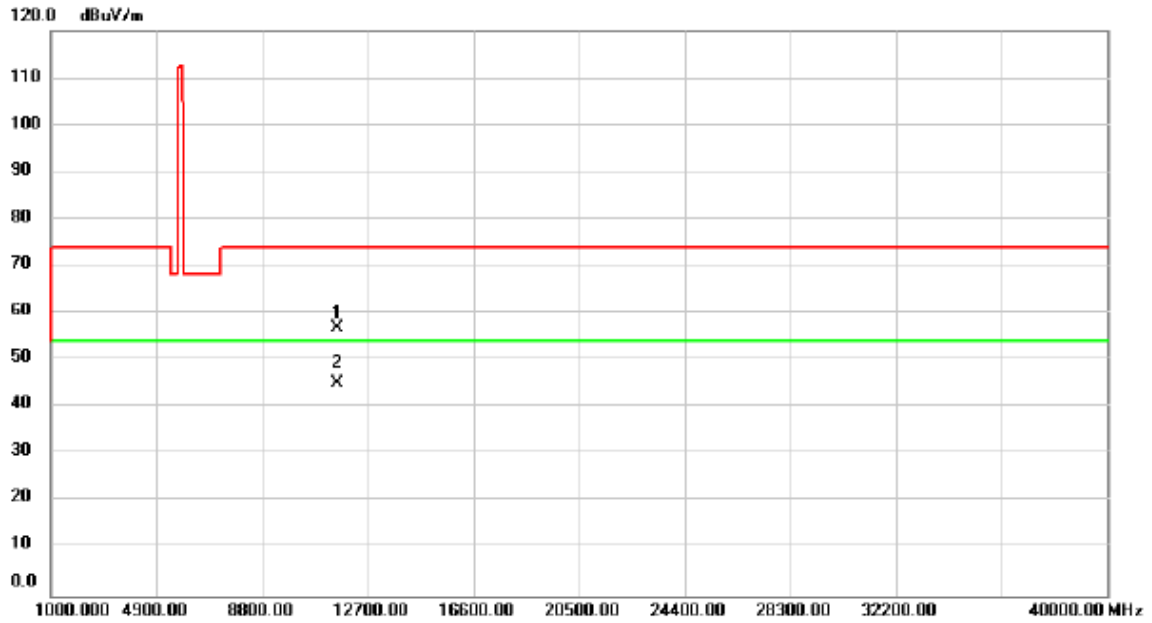

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	51.66	5.13	56.79	74.00	-17.21	peak	
2	*	11570.00	40.10	5.13	45.23	54.00	-8.77	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Dipole Antenna


Vertical

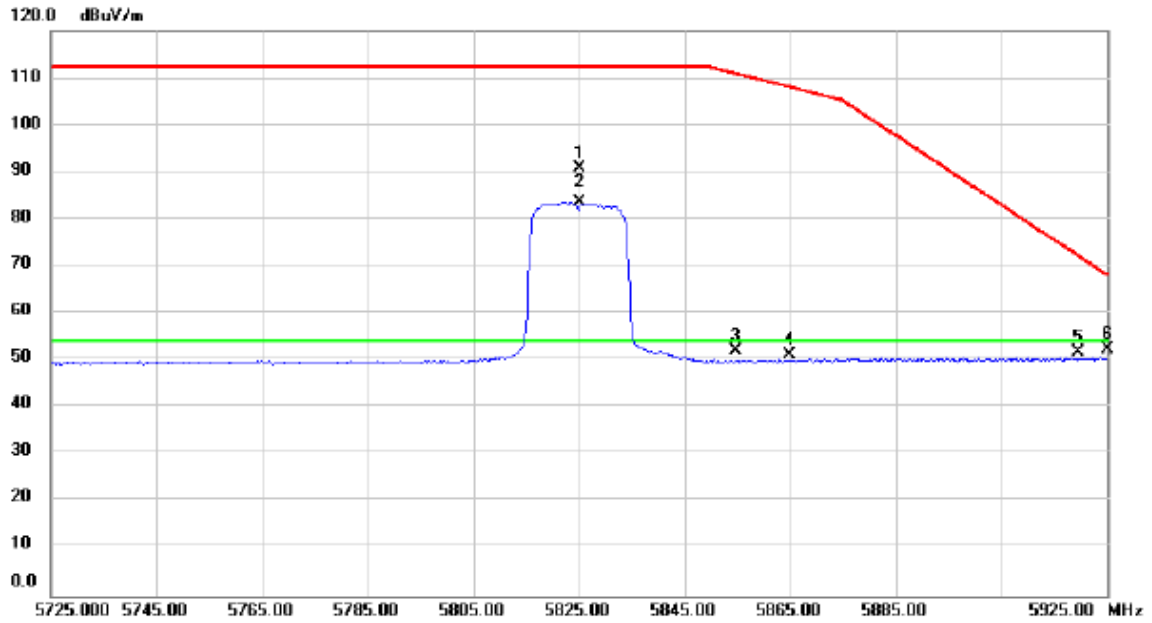

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	51.01	39.82	90.83	112.20	-21.37	peak	
2	*	5825.000	43.66	39.82	83.48	54.00	29.48	AVG	No Limit
3		5854.665	12.17	39.90	52.07	110.89	-58.82	peak	
4		5864.900	11.19	39.93	51.12	108.03	-56.91	peak	
5		5919.450	11.52	40.09	51.61	72.31	-20.70	peak	
6		5925.000	12.22	40.11	52.33	68.20	-15.87	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Dipole Antenna


Vertical

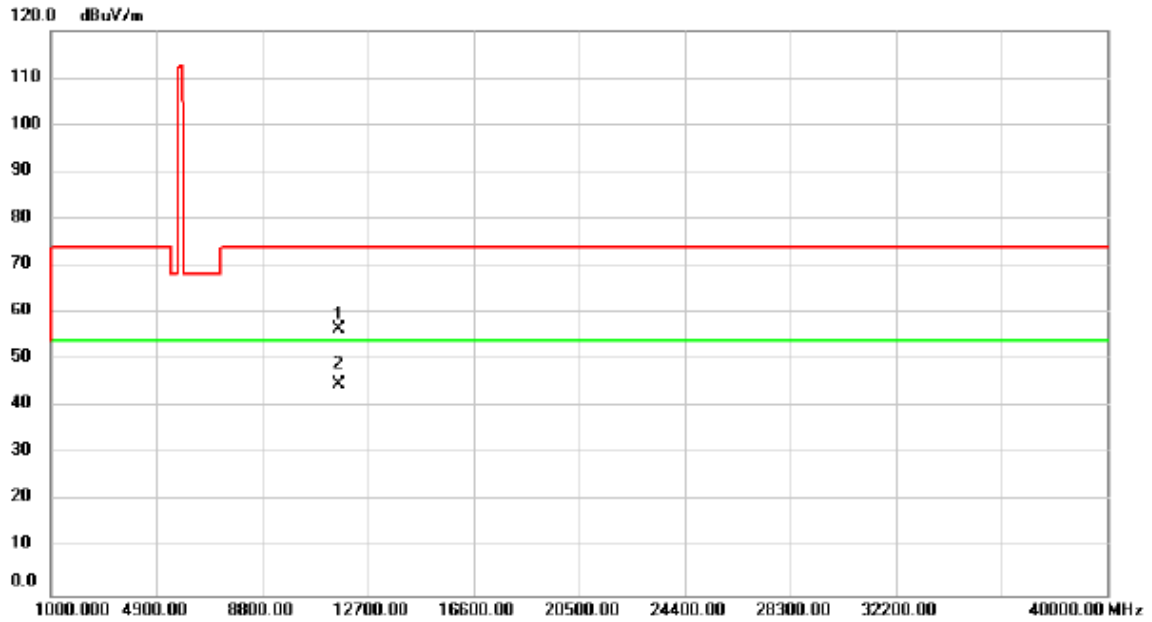

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	51.51	4.99	56.50	74.00	-17.50	peak	
2	*	11650.00	39.81	4.99	44.80	54.00	-9.20	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Dipole Antenna


Horizontal

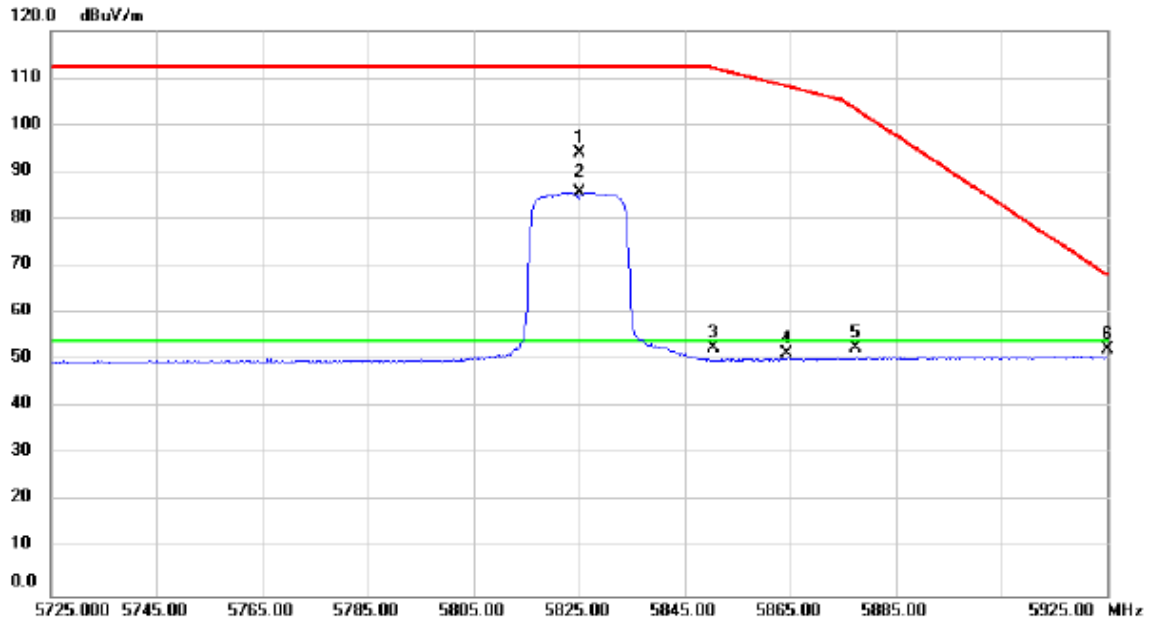

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	54.30	39.82	94.12	112.20	-18.08	peak	
2	*	5825.000	45.93	39.82	85.75	54.00	31.75	AVG	No Limit
3		5850.365	12.91	39.89	52.80	112.10	-59.30	peak	
4		5864.400	11.43	39.93	51.36	108.17	-56.81	peak	
5		5877.500	12.58	39.97	52.55	103.35	-50.80	peak	
6		5925.000	12.31	40.11	52.42	68.20	-15.78	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Dipole Antenna

Horizontal

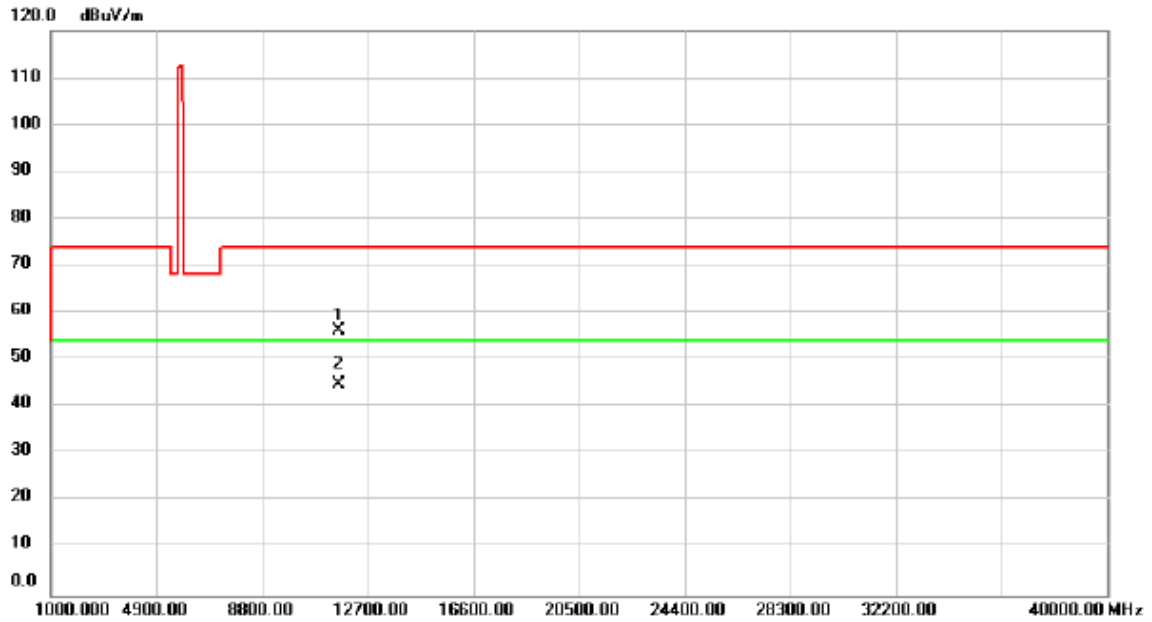

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	51.14	4.99	56.13	74.00	-17.87	peak	
2	*	11650.00	39.82	4.99	44.81	54.00	-9.19	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz _Dipole Antenna

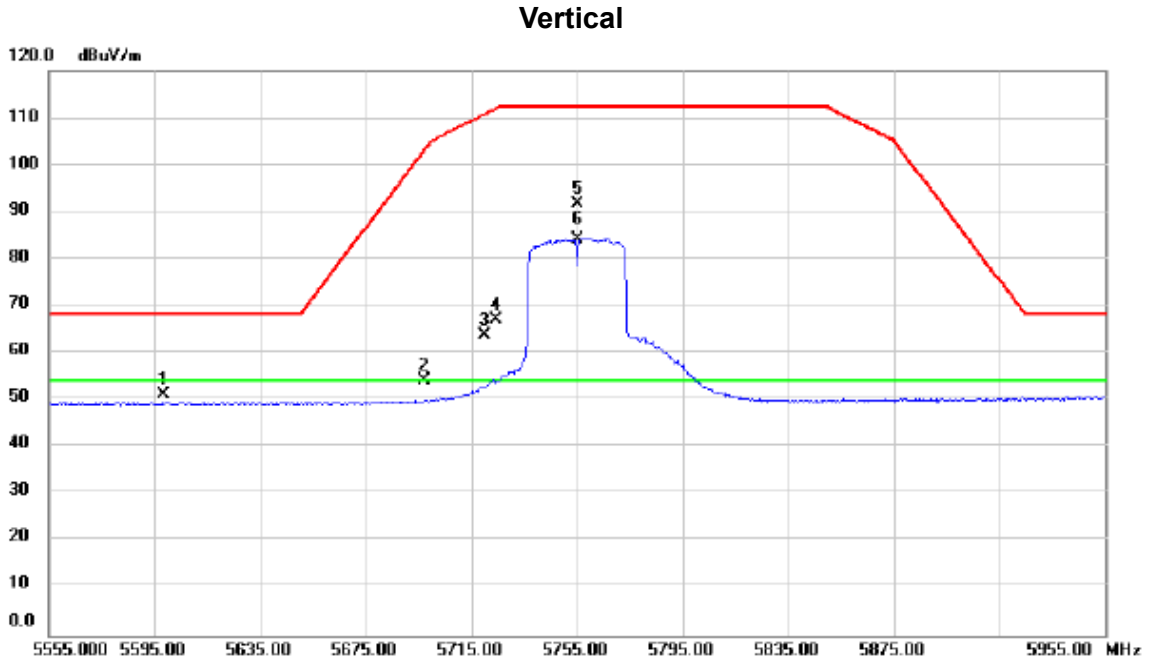

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5598.415	11.90	39.16	51.06	68.20	-17.14	peak	
2		5696.950	14.64	39.45	54.09	102.94	-48.85	peak	
3		5719.920	24.17	39.51	63.68	110.78	-47.10	peak	
4		5724.115	27.66	39.52	67.18	111.95	-44.77	peak	
5		5755.000	52.06	39.61	91.67	112.20	-20.53	peak	
6	*	5755.000	44.67	39.61	84.28	54.00	30.28	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Dipole Antenna


Vertical

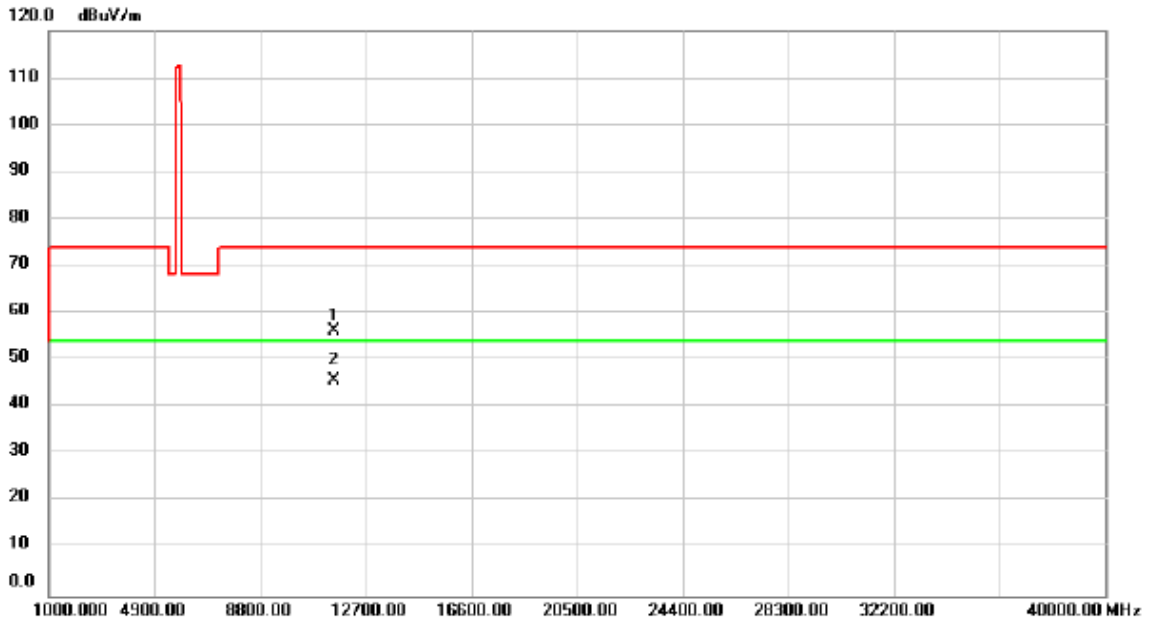

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	50.97	5.23	56.20	74.00	-17.80	peak	
2	*	11510.00	40.40	5.23	45.63	54.00	-8.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Dipole Antenna


Horizontal

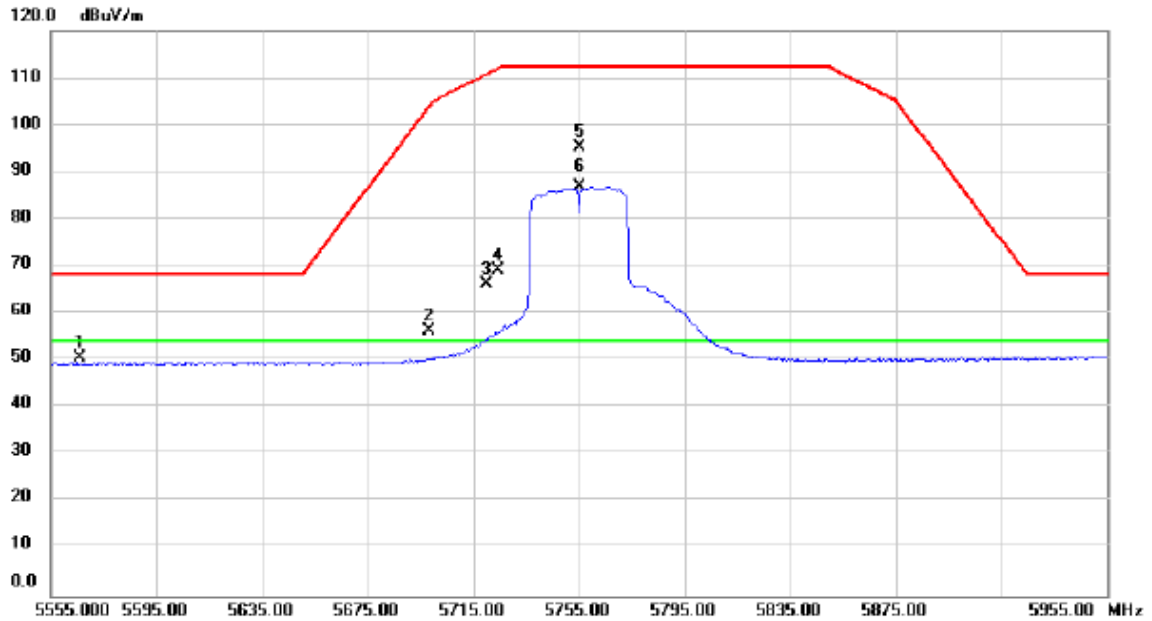

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5565.925	11.44	39.06	50.50	68.20	-17.70	peak	
2		5698.400	16.68	39.45	56.13	104.02	-47.89	peak	
3		5719.960	26.65	39.51	66.16	110.79	-44.63	peak	
4		5724.350	29.66	39.52	69.18	112.02	-42.84	peak	
5		5755.000	55.51	39.61	95.12	112.20	-17.08	peak	
6	*	5755.000	47.21	39.61	86.82	54.00	32.82	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Dipole Antenna


Horizontal

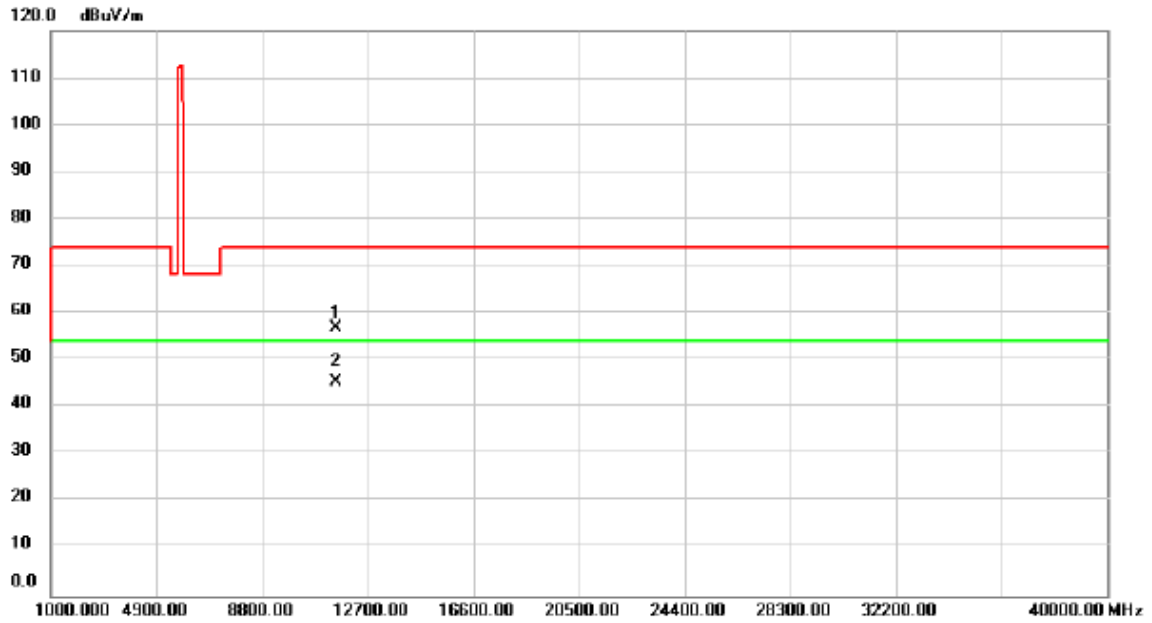

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	51.58	5.23	56.81	74.00	-17.19	peak	
2	*	11510.00	40.12	5.23	45.35	54.00	-8.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Dipole Antenna


Vertical

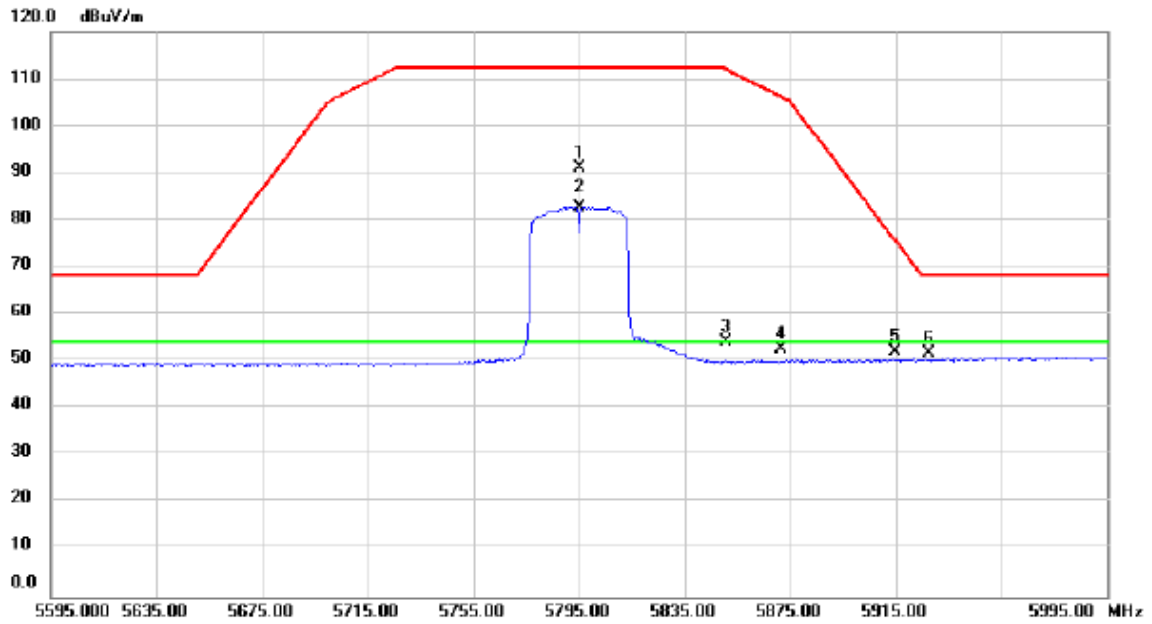

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5795.000	51.26	39.72	90.98	112.20	-21.22	peak	
2	*	5795.000	43.04	39.72	82.76	54.00	28.76	AVG	No Limit
3		5850.915	14.15	39.89	54.04	111.94	-57.90	peak	
4		5871.360	12.80	39.95	52.75	106.22	-53.47	peak	
5		5914.600	11.87	40.07	51.94	75.90	-23.96	peak	
6		5927.375	11.76	40.11	51.87	68.20	-16.33	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Dipole Antenna


Vertical

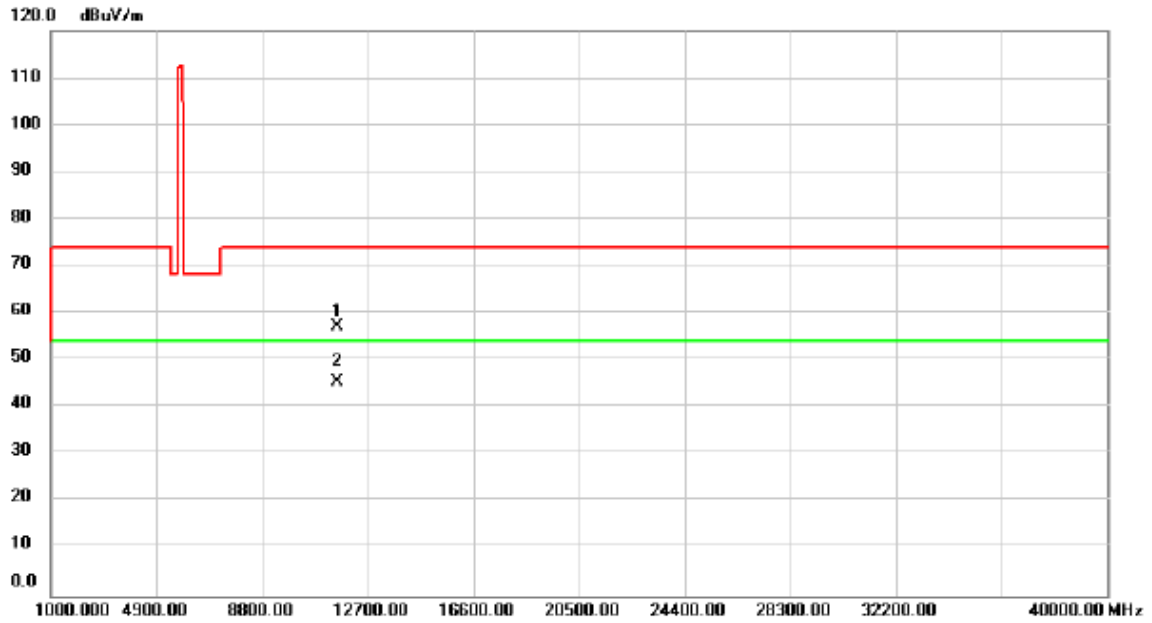

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	52.18	5.10	57.28	74.00	-16.72	peak	
2	*	11590.00	40.31	5.10	45.41	54.00	-8.59	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Dipole Antenna


Horizontal

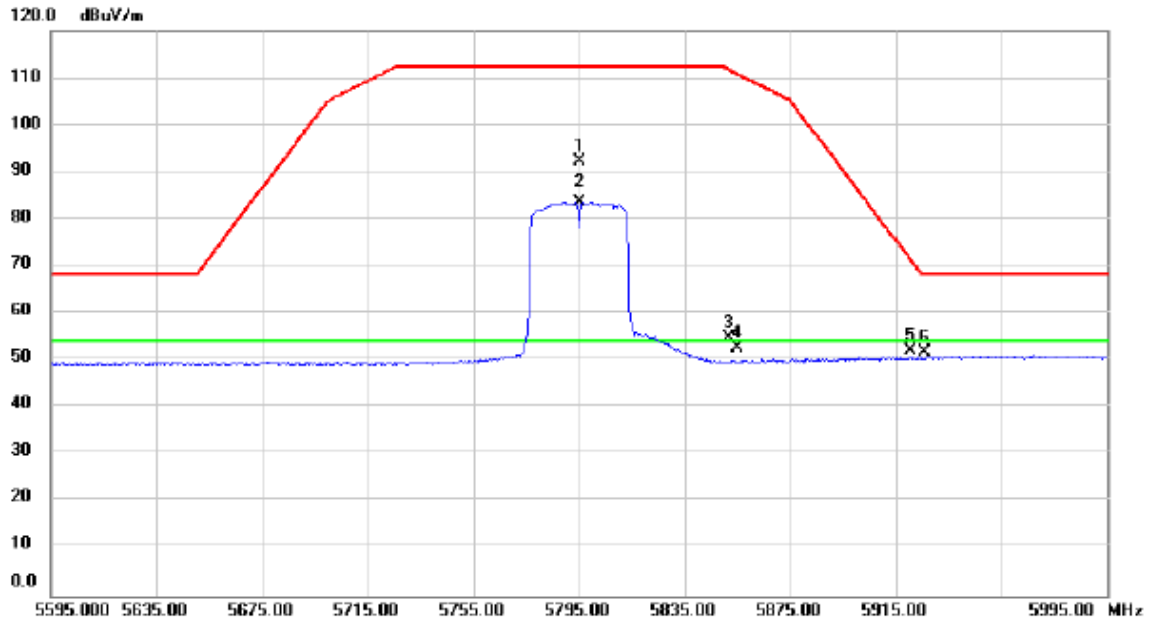

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5795.000	52.54	39.72	92.26	112.20	-19.94	peak	
2	*	5795.000	43.77	39.72	83.49	54.00	29.49	AVG	No Limit
3		5851.870	14.79	39.89	54.68	111.68	-57.00	peak	
4		5855.040	12.62	39.90	52.52	110.79	-58.27	peak	
5		5920.600	12.08	40.09	52.17	71.46	-19.29	peak	
6		5925.800	11.70	40.11	51.81	68.20	-16.39	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Dipole Antenna


Horizontal

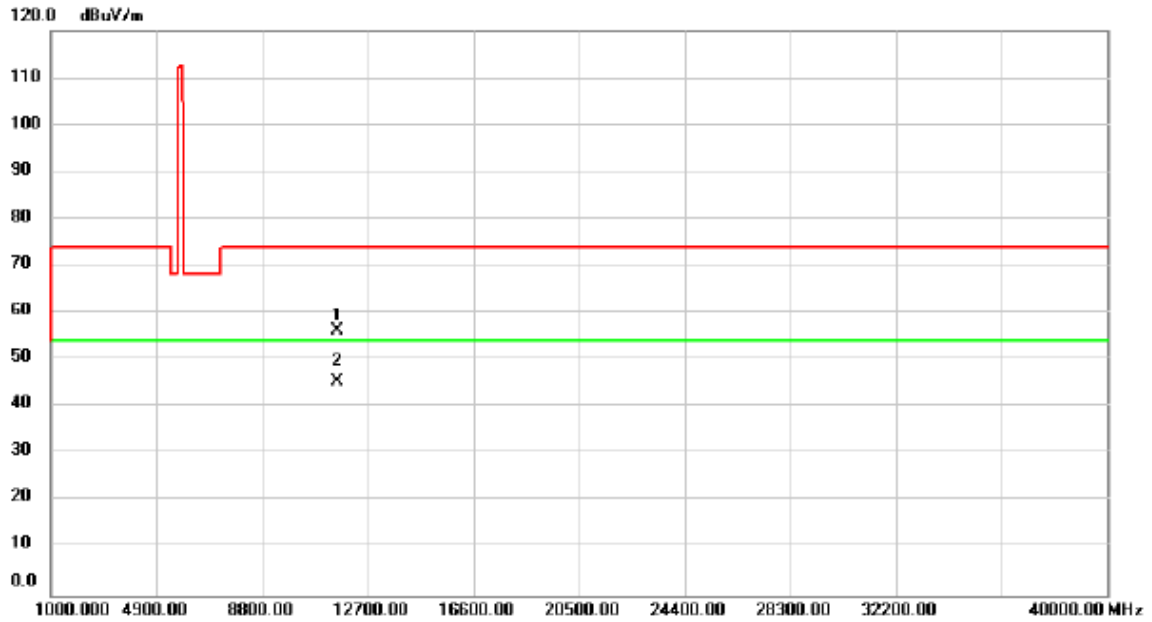

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	51.26	5.10	56.36	74.00	-17.64	peak	
2	*	11590.00	40.21	5.10	45.31	54.00	-8.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Integral Antenna


Vertical

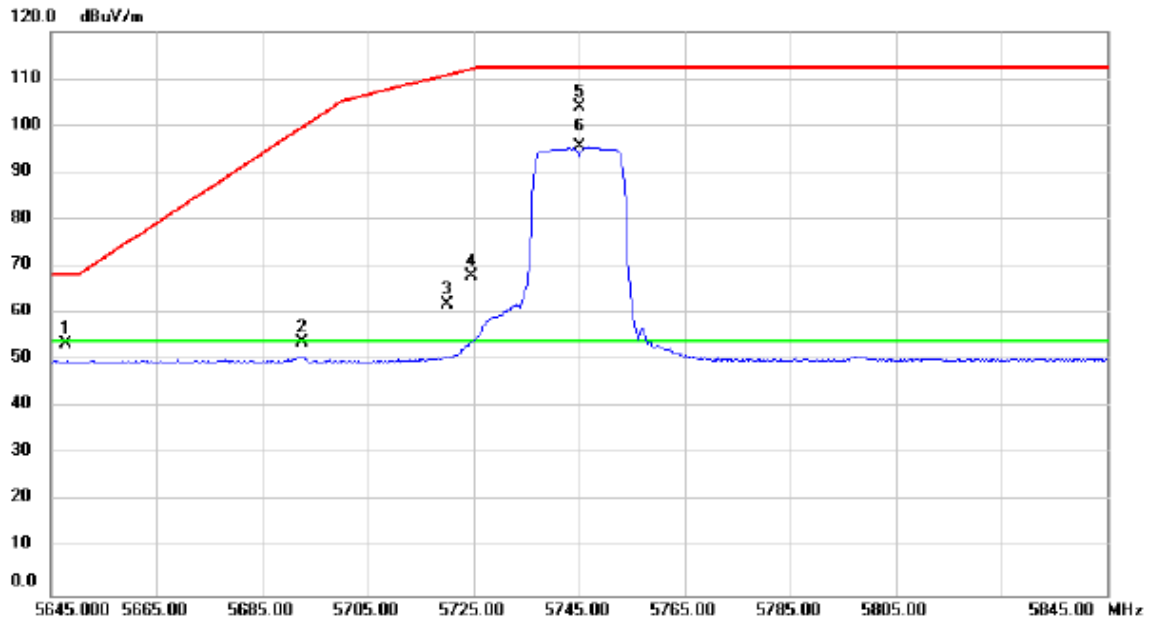

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.885	14.25	39.30	53.55	68.20	-14.65	peak	
2		5692.650	14.31	39.43	53.74	99.76	-46.02	peak	
3		5719.980	22.34	39.51	61.85	110.79	-48.94	peak	
4		5724.630	28.52	39.52	68.04	112.10	-44.06	peak	
5		5745.000	64.43	39.58	104.01	112.20	-8.19	peak	
6	*	5745.000	55.83	39.58	95.41	54.00	41.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Integral Antenna


Vertical

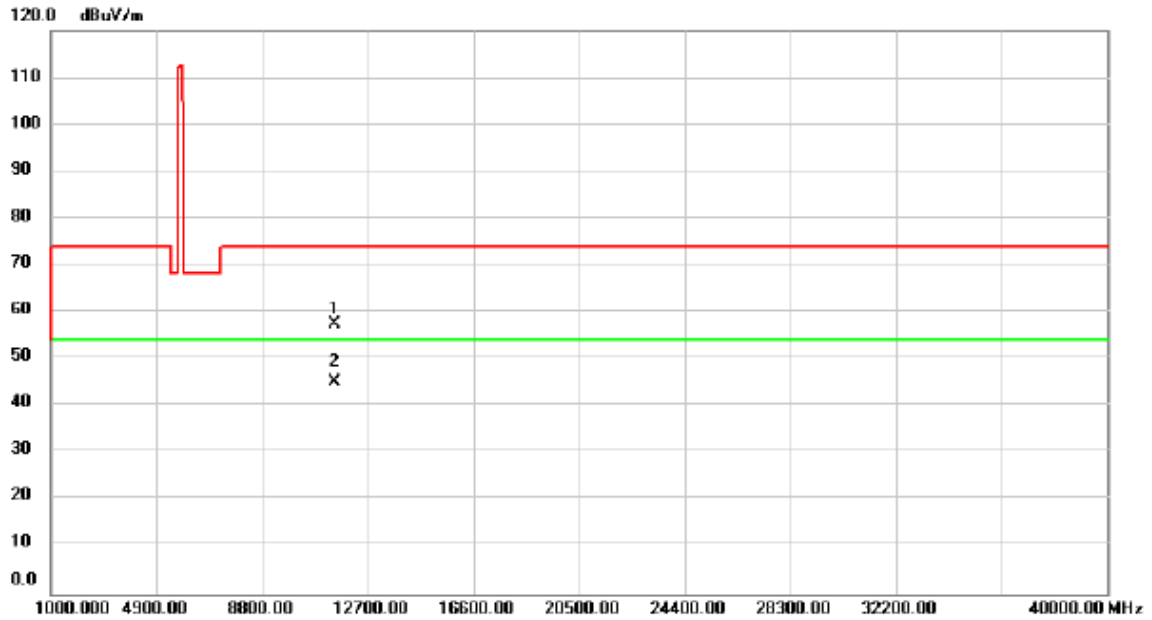

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.33	5.23	57.56	74.00	-16.44	peak	
2	*	11490.00	40.02	5.23	45.25	54.00	-8.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Integral Antenna


Horizontal

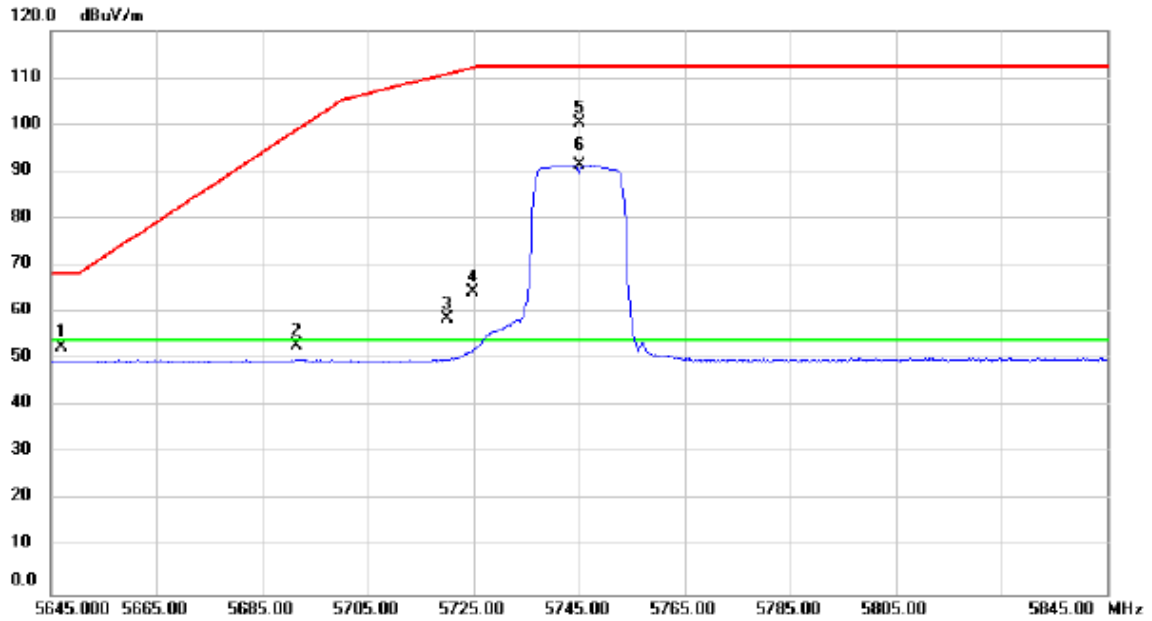

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5646.910	13.46	39.30	52.76	68.20	-15.44	peak	
2		5691.500	13.50	39.43	52.93	98.91	-45.98	peak	
3		5720.000	19.12	39.51	58.63	110.80	-52.17	peak	
4		5724.890	24.68	39.52	64.20	112.17	-47.97	peak	
5		5745.000	60.83	39.58	100.41	112.20	-11.79	peak	
6	*	5745.000	51.80	39.58	91.38	54.00	37.38	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz_Integral Antenna


Horizontal

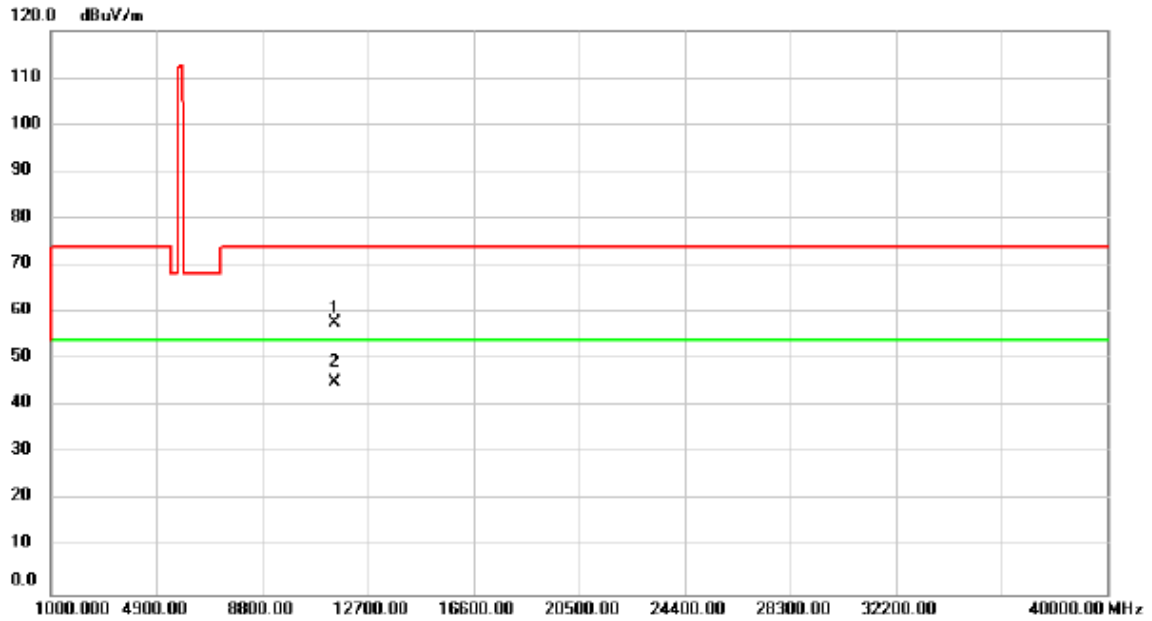

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.51	5.23	57.74	74.00	-16.26	peak	
2	*	11490.00	39.93	5.23	45.16	54.00	-8.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz _Integral Antenna


Vertical

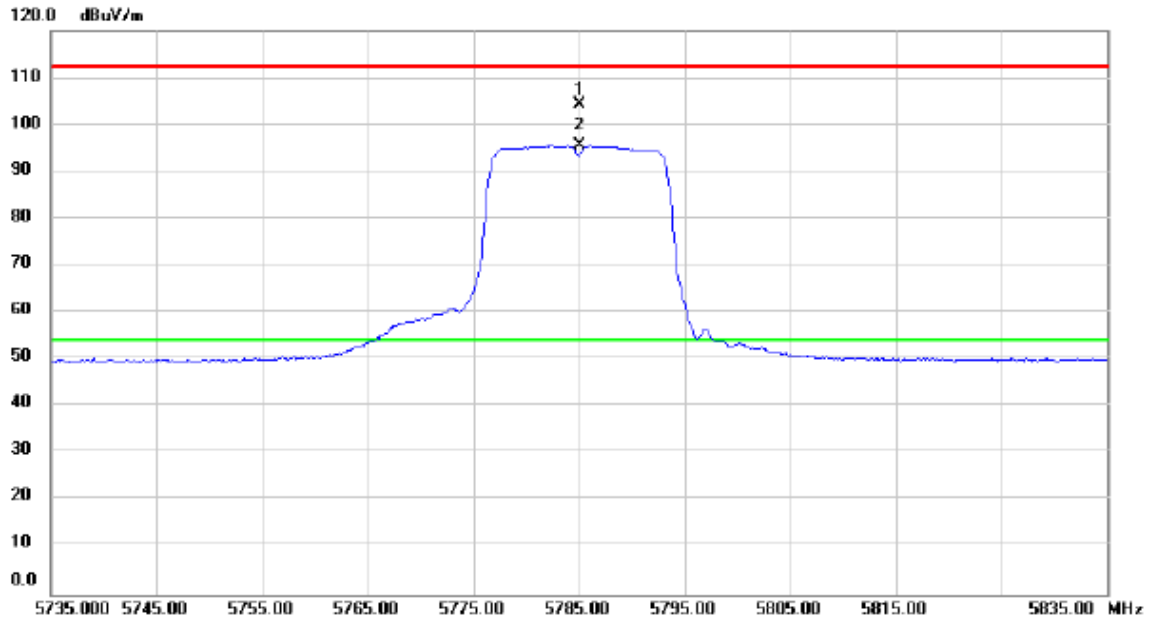

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5785.000	64.58	39.70	104.28	112.20	-7.92	peak	
2	*	5785.000	55.82	39.70	95.52	54.00	41.52	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz_Integral Antenna


Vertical

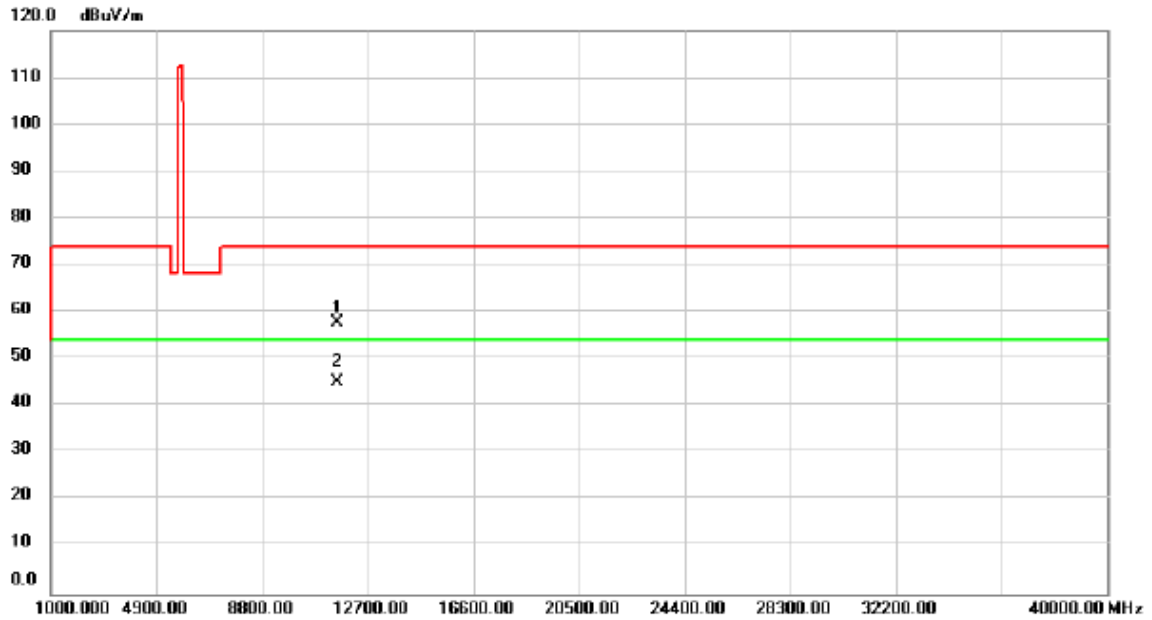

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	52.72	5.13	57.85	74.00	-16.15	peak	
2	*	11570.00	40.04	5.13	45.17	54.00	-8.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz_Integral Antenna


Horizontal

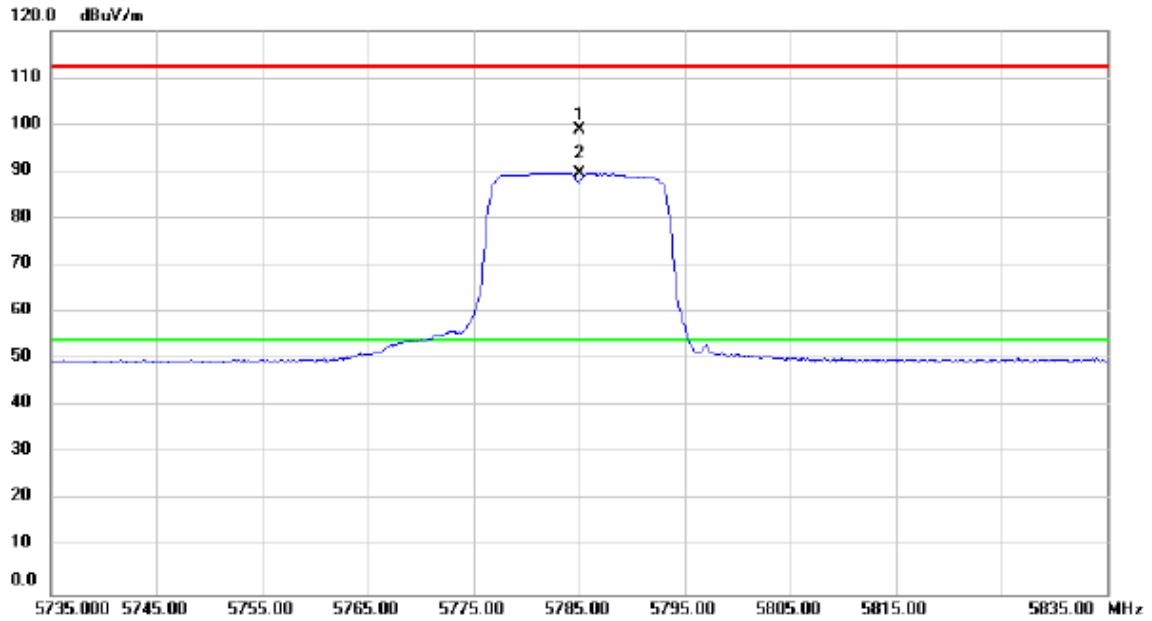

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	59.15	39.70	98.85	112.20	-13.35	peak	
2	*	5785.000	49.99	39.70	89.69	54.00	35.69	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz_Integral Antenna


Horizontal

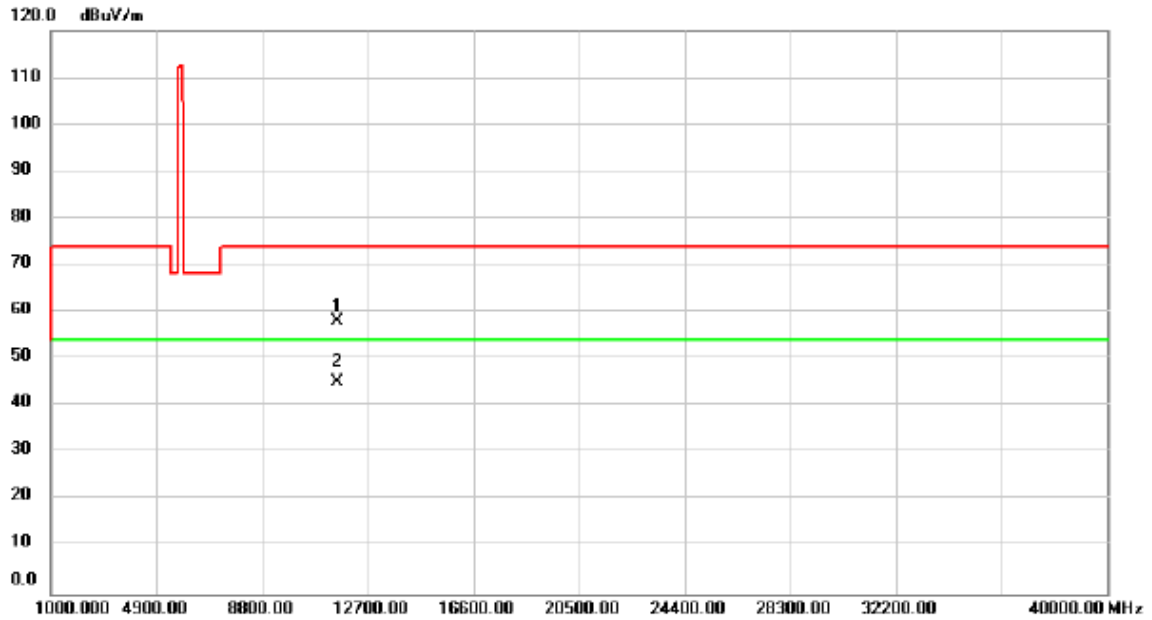

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	52.82	5.13	57.95	74.00	-16.05	peak	
2	*	11570.00	39.96	5.13	45.09	54.00	-8.91	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Integral Antenna


Vertical

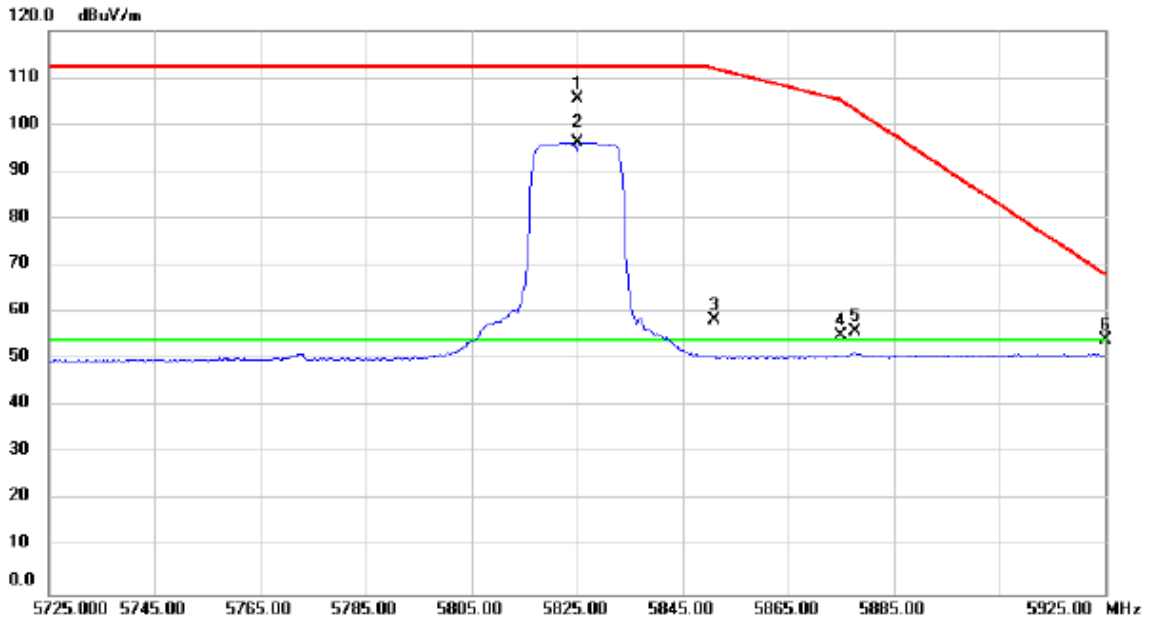

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5825.000	65.66	39.82	105.48	112.20	-6.72	peak	
2	*	5825.000	56.38	39.82	96.20	54.00	42.20	AVG	No Limit
3		5851.125	18.43	39.89	58.32	111.89	-53.57	peak	
4		5874.980	15.24	39.95	55.19	105.21	-50.02	peak	
5		5877.650	15.96	39.97	55.93	103.24	-47.31	peak	
6		5925.000	13.98	40.11	54.09	68.20	-14.11	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Integral Antenna


Vertical

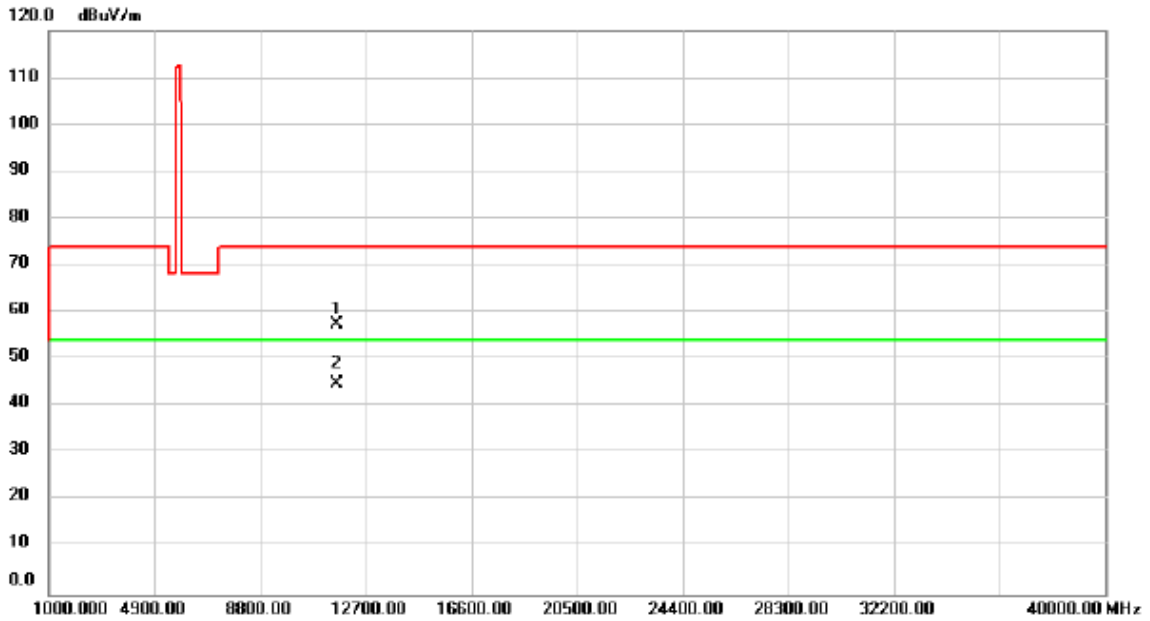

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	52.55	4.99	57.54	74.00	-16.46	peak	
2	*	11650.00	39.80	4.99	44.79	54.00	-9.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz _Integral Antenna


Horizontal

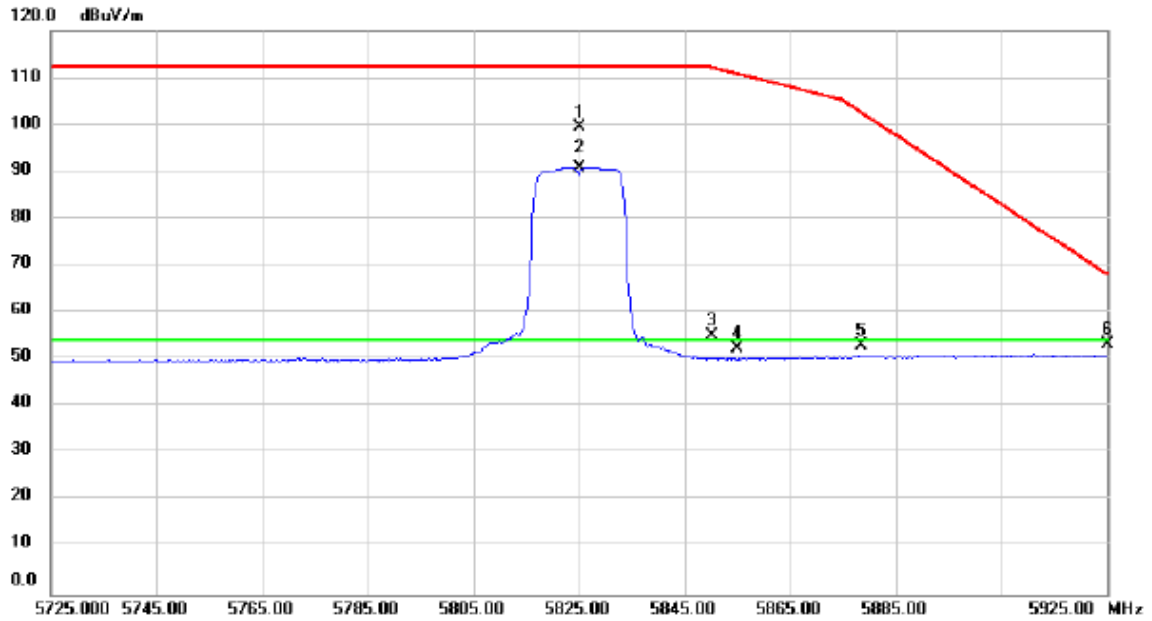

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	59.68	39.82	99.50	112.20	-12.70	peak	
2	*	5825.000	51.05	39.82	90.87	54.00	36.87	AVG	No Limit
3		5850.130	15.16	39.89	55.05	112.16	-57.11	peak	
4		5855.060	12.53	39.90	52.43	110.78	-58.35	peak	
5		5878.550	12.99	39.97	52.96	102.57	-49.61	peak	
6		5925.000	13.19	40.11	53.30	68.20	-14.90	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz_Integral Antenna

Horizontal

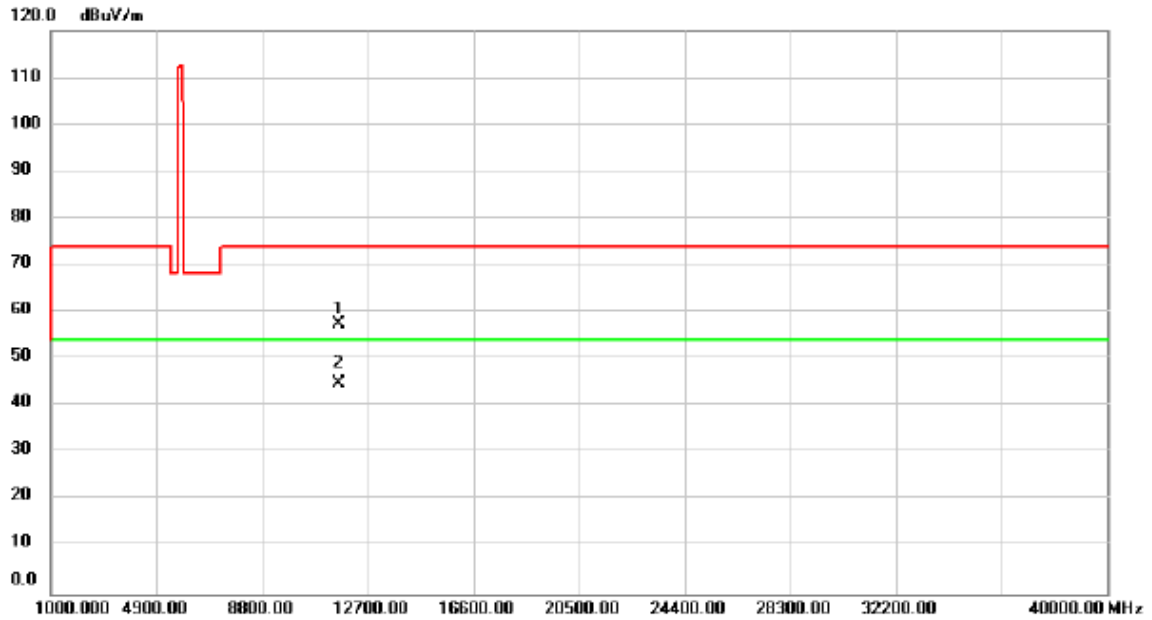

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	52.37	4.99	57.36	74.00	-16.64	peak	
2	*	11650.00	39.75	4.99	44.74	54.00	-9.26	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Integral Antenna

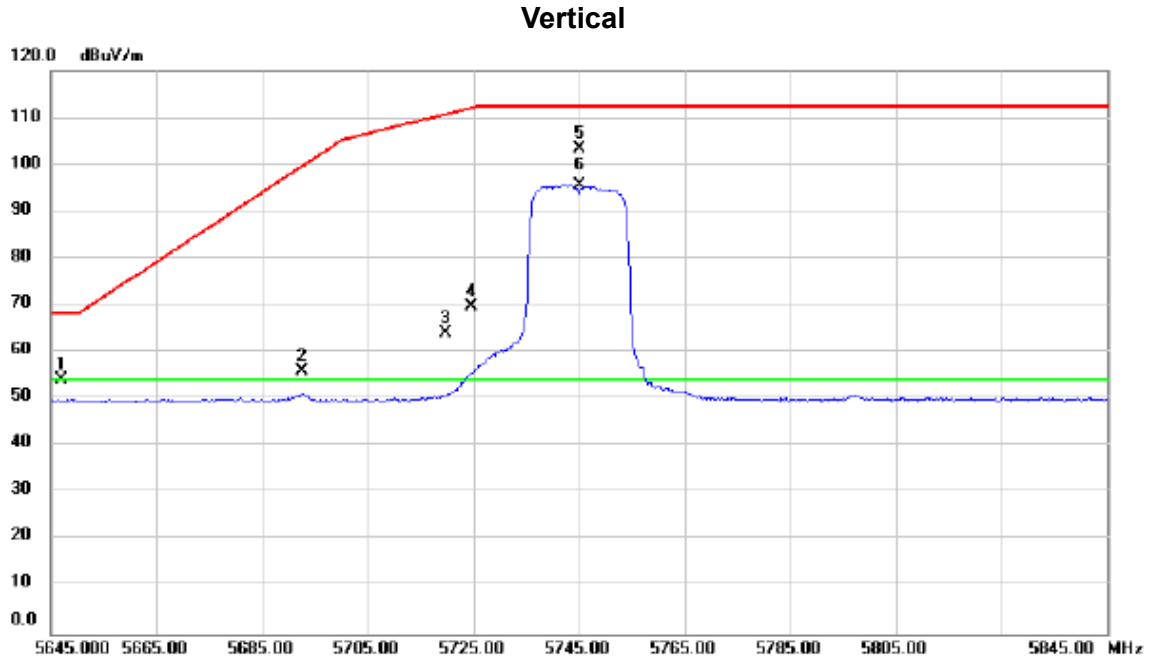

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.025	14.84	39.30	54.14	68.20	-14.06	peak	
2		5692.650	16.44	39.43	55.87	99.76	-43.89	peak	
3		5719.740	24.57	39.51	64.08	110.73	-46.65	peak	
4		5724.710	30.19	39.52	69.71	112.12	-42.41	peak	
5		5745.000	63.86	39.58	103.44	112.20	-8.76	peak	
6	*	5745.000	55.97	39.58	95.55	54.00	41.55	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Integral Antenna


Vertical

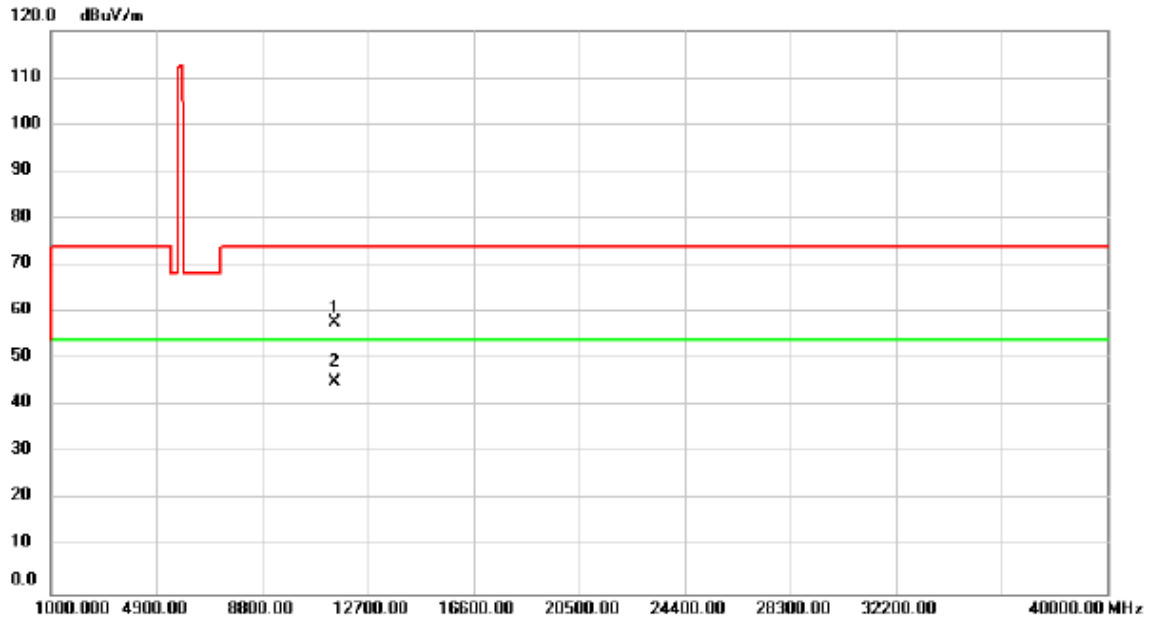

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.60	5.23	57.83	74.00	-16.17	peak	
2	*	11490.00	40.00	5.23	45.23	54.00	-8.77	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Integral Antenna


Horizontal

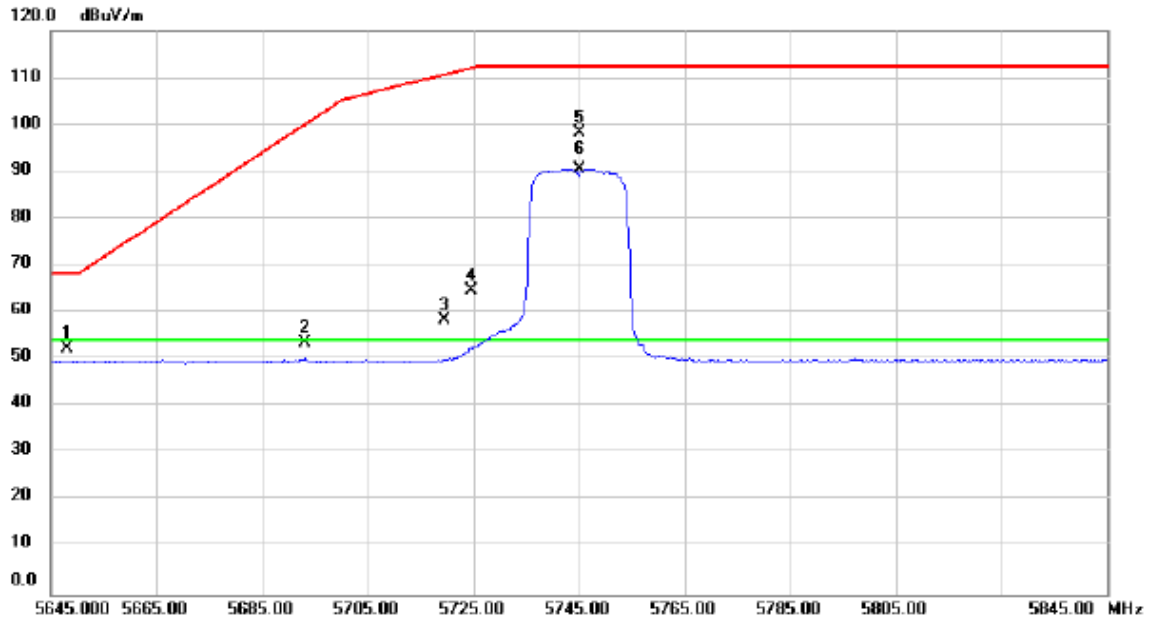

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.985	13.18	39.30	52.48	68.20	-15.72	peak	
2		5693.100	14.12	39.43	53.55	100.09	-46.54	peak	
3		5719.580	18.79	39.51	58.30	110.68	-52.38	peak	
4		5724.690	25.28	39.52	64.80	112.11	-47.31	peak	
5		5745.000	58.77	39.58	98.35	112.20	-13.85	peak	
6	*	5745.000	50.94	39.58	90.52	54.00	36.52	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz_Integral Antenna

Horizontal

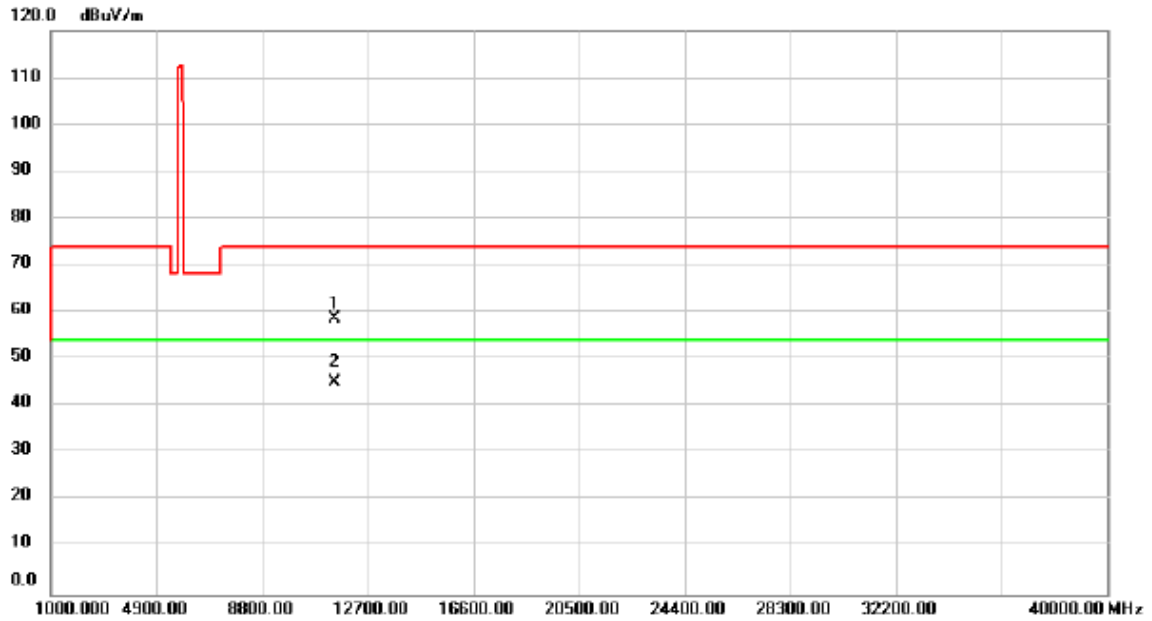

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	53.54	5.23	58.77	74.00	-15.23	peak	
2	*	11490.00	39.88	5.23	45.11	54.00	-8.89	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Integral Antenna

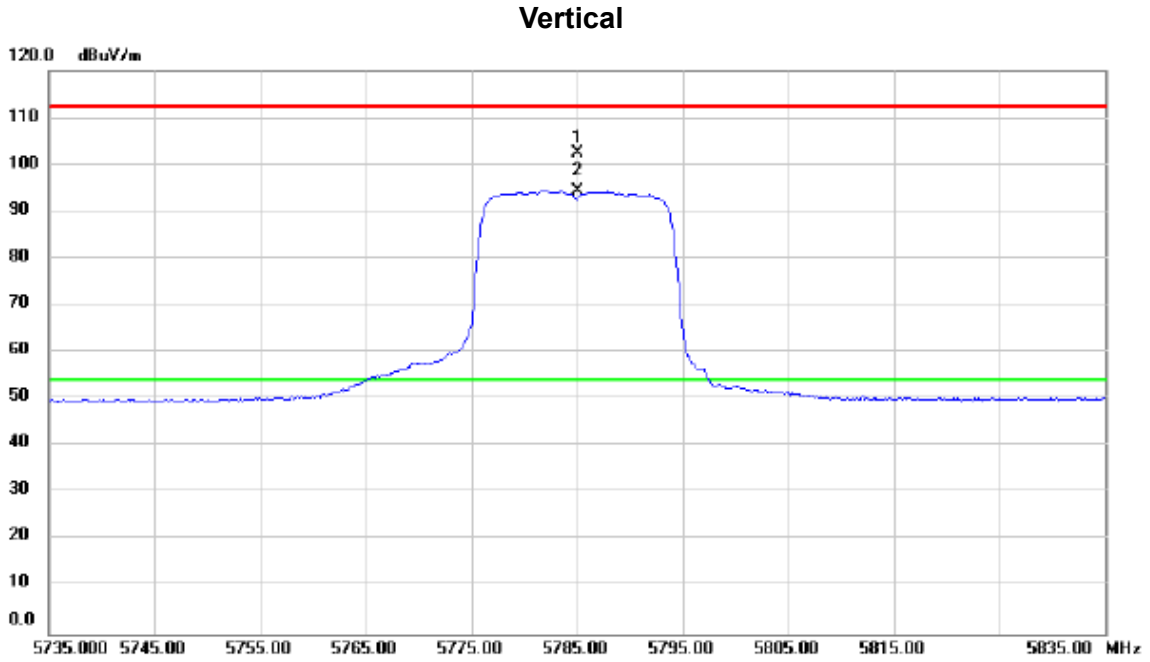

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	62.78	39.70	102.48	112.20	-9.72	peak	
2	*	5785.000	54.62	39.70	94.32	54.00	40.32	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Integral Antenna


Vertical

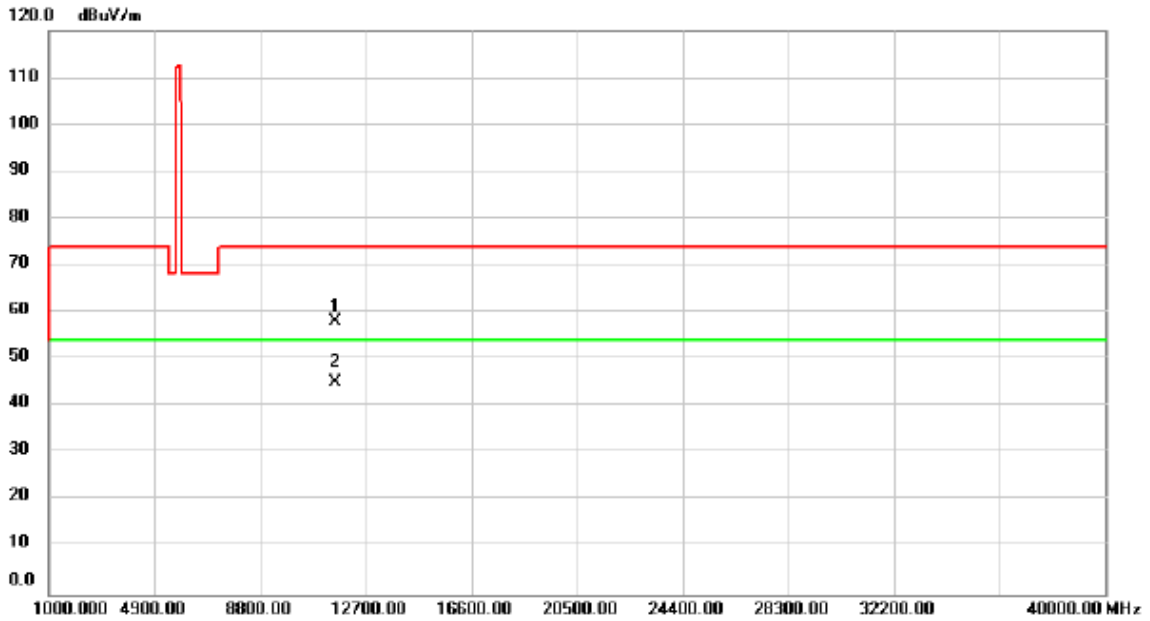

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.06	5.13	58.19	74.00	-15.81	peak	
2	*	11570.00	40.00	5.13	45.13	54.00	-8.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz _Integral Antenna


Horizontal

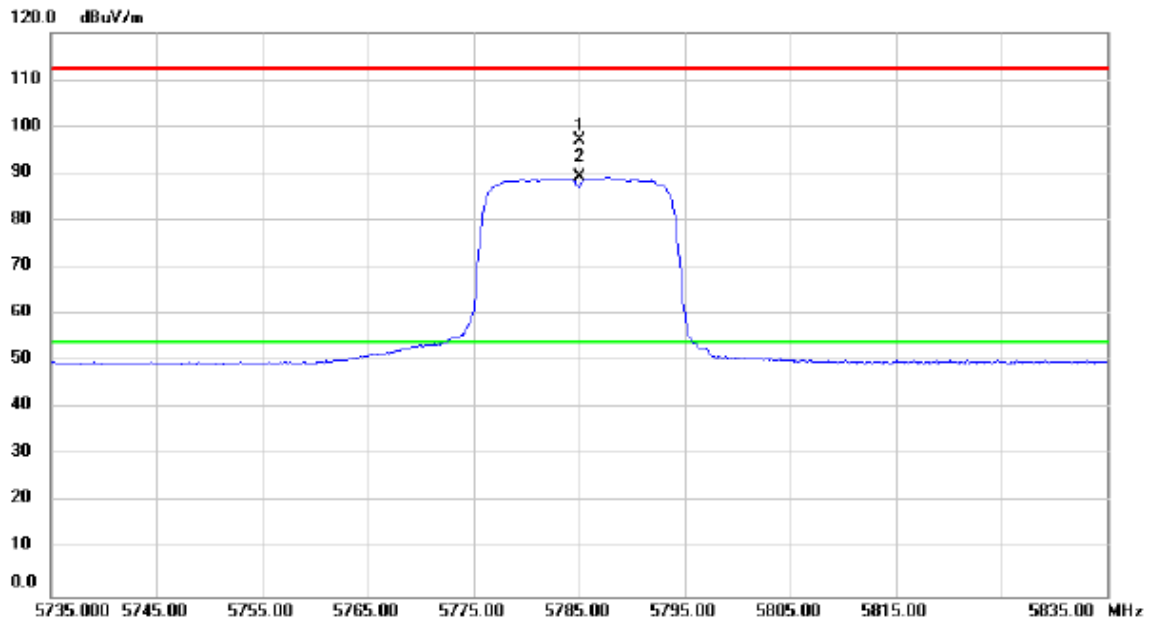

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5785.000	57.33	39.70	97.03	112.20	-15.17	peak	
2	*	5785.000	49.47	39.70	89.17	54.00	35.17	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz_Integral Antenna


Horizontal

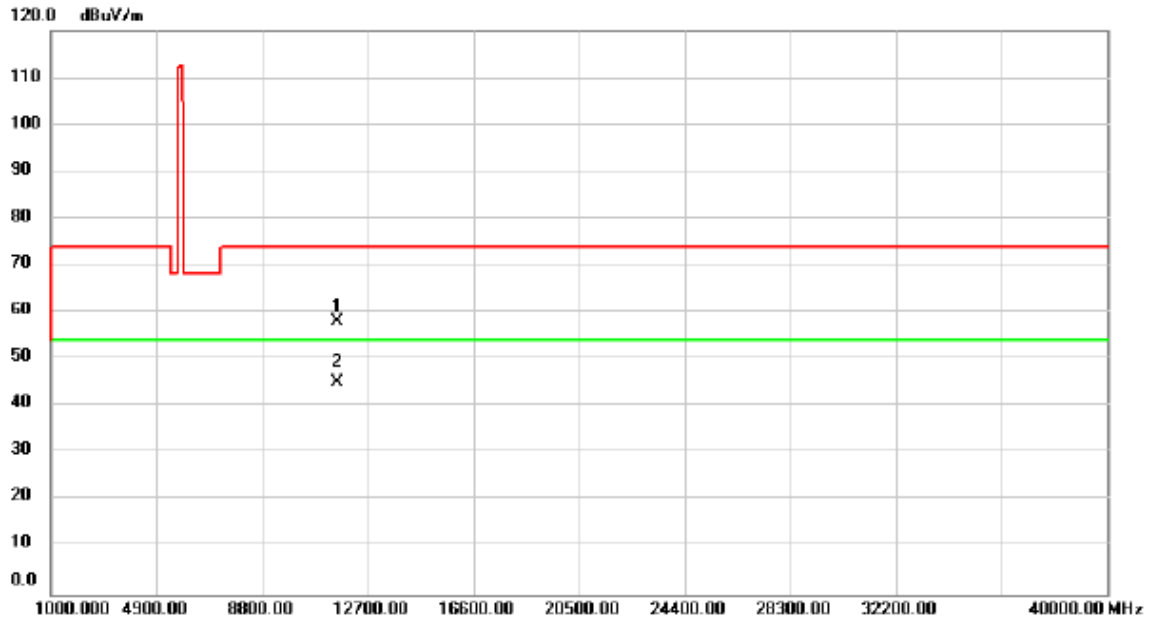

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.06	5.13	58.19	74.00	-15.81	peak	
2	*	11570.00	39.96	5.13	45.09	54.00	-8.91	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Integral Antenna


Vertical

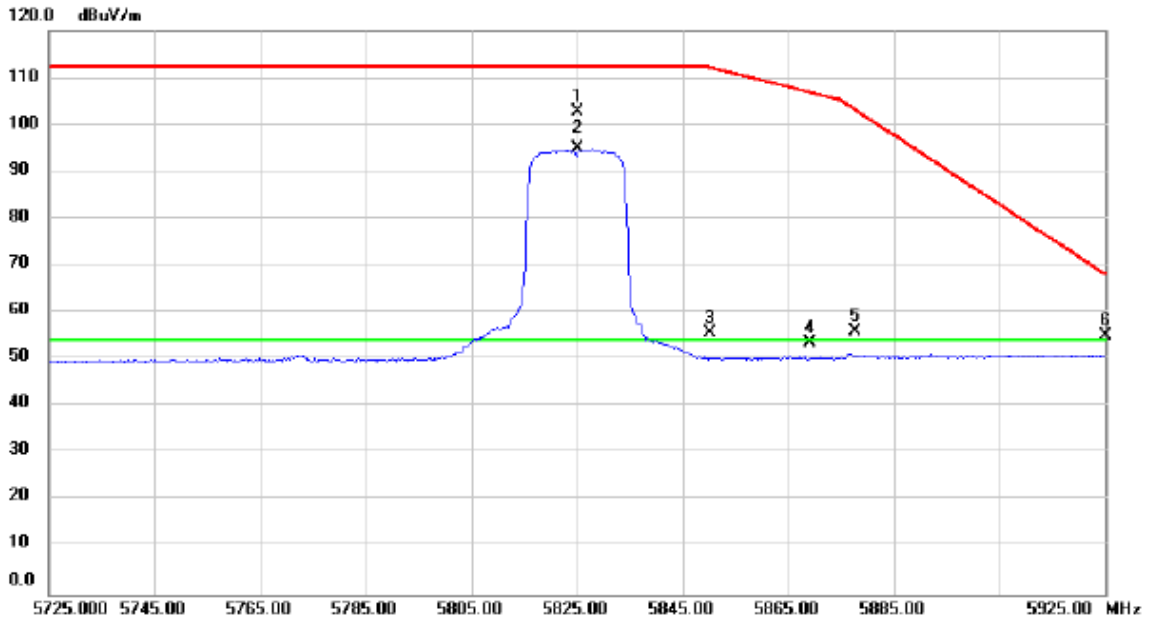

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	62.98	39.82	102.80	112.20	-9.40	peak	
2	*	5825.000	54.99	39.82	94.81	54.00	40.81	AVG	No Limit
3		5850.085	15.85	39.89	55.74	112.18	-56.44	peak	
4		5869.080	13.64	39.94	53.58	106.86	-53.28	peak	
5		5877.650	15.98	39.97	55.95	103.24	-47.29	peak	
6		5925.000	14.89	40.11	55.00	68.20	-13.20	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz_Integral Antenna


Vertical

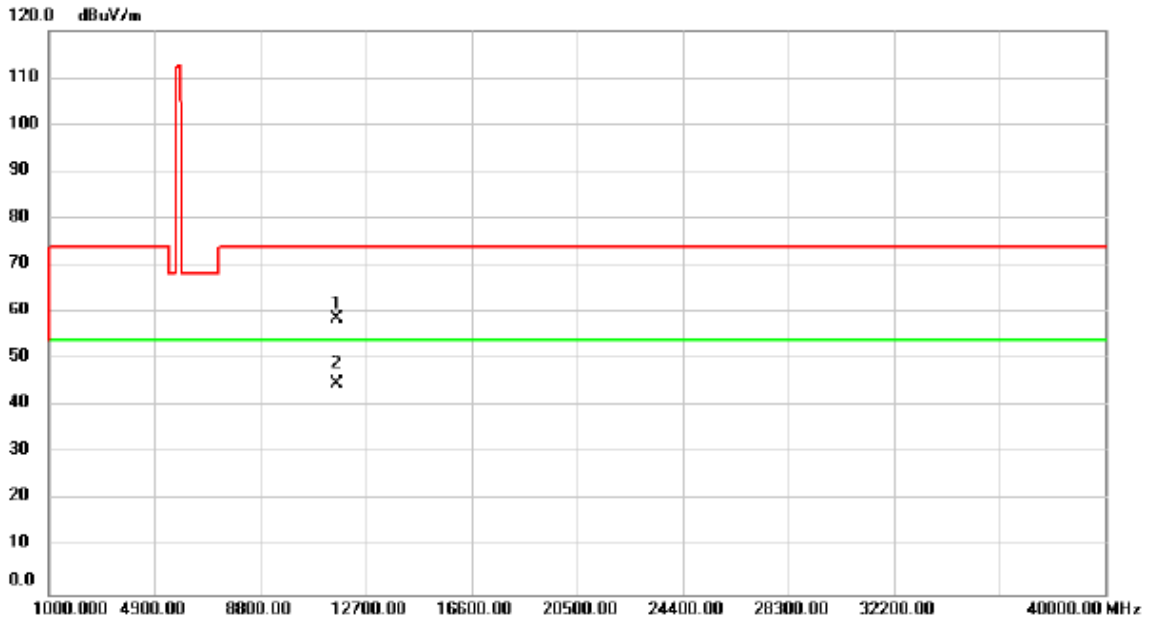

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.72	4.99	58.71	74.00	-15.29	peak	
2	*	11650.00	39.81	4.99	44.80	54.00	-9.20	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Integral Antenna


Horizontal

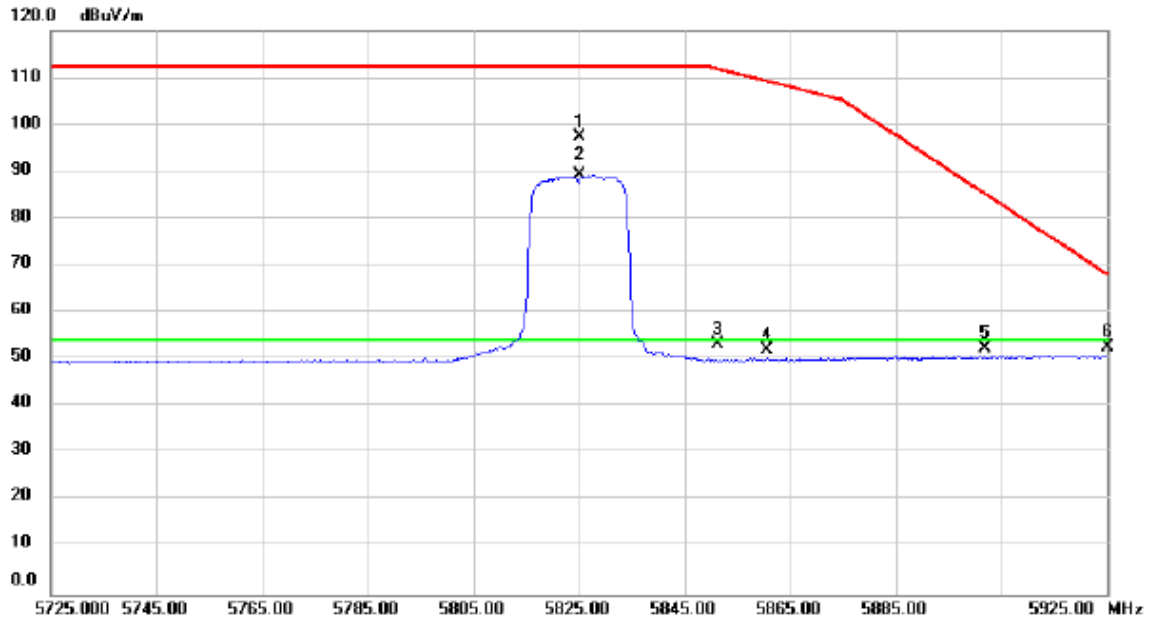

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	57.62	39.82	97.44	112.20	-14.76	peak	
2	*	5825.000	49.34	39.82	89.16	54.00	35.16	AVG	No Limit
3		5851.190	13.31	39.89	53.20	111.87	-58.67	peak	
4		5860.700	12.28	39.91	52.19	109.20	-57.01	peak	
5		5901.850	12.28	40.03	52.31	85.33	-33.02	peak	
6		5925.000	12.65	40.11	52.76	68.20	-15.44	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz _Integral Antenna


Horizontal

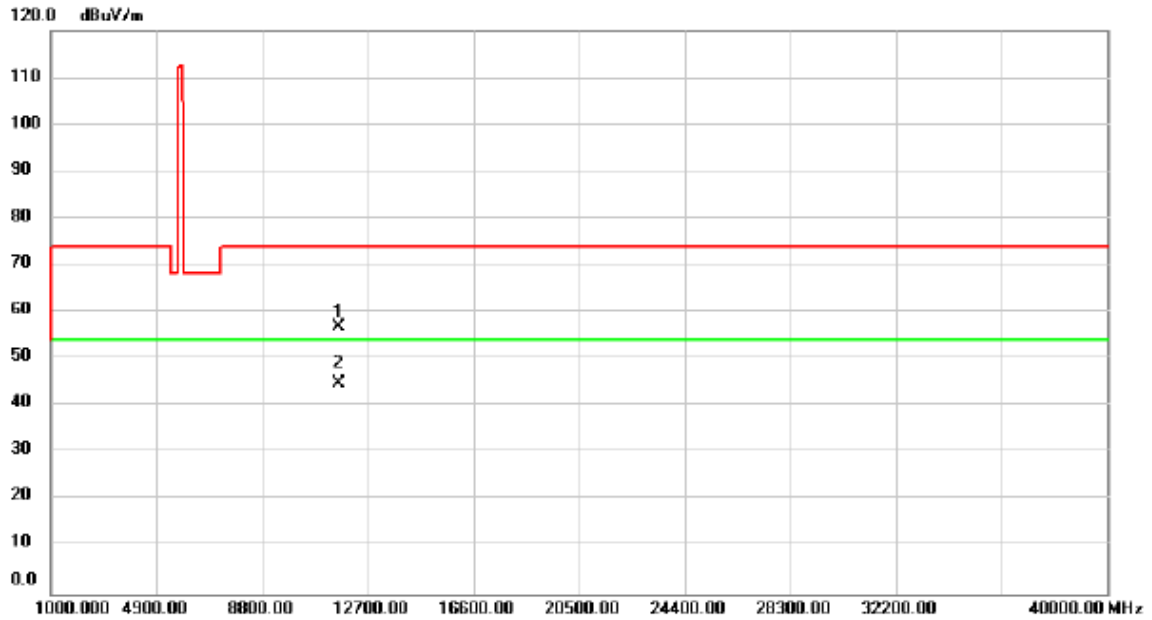

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	51.91	4.99	56.90	74.00	-17.10	peak	
2	*	11650.00	39.76	4.99	44.75	54.00	-9.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Integral Antenna


Vertical

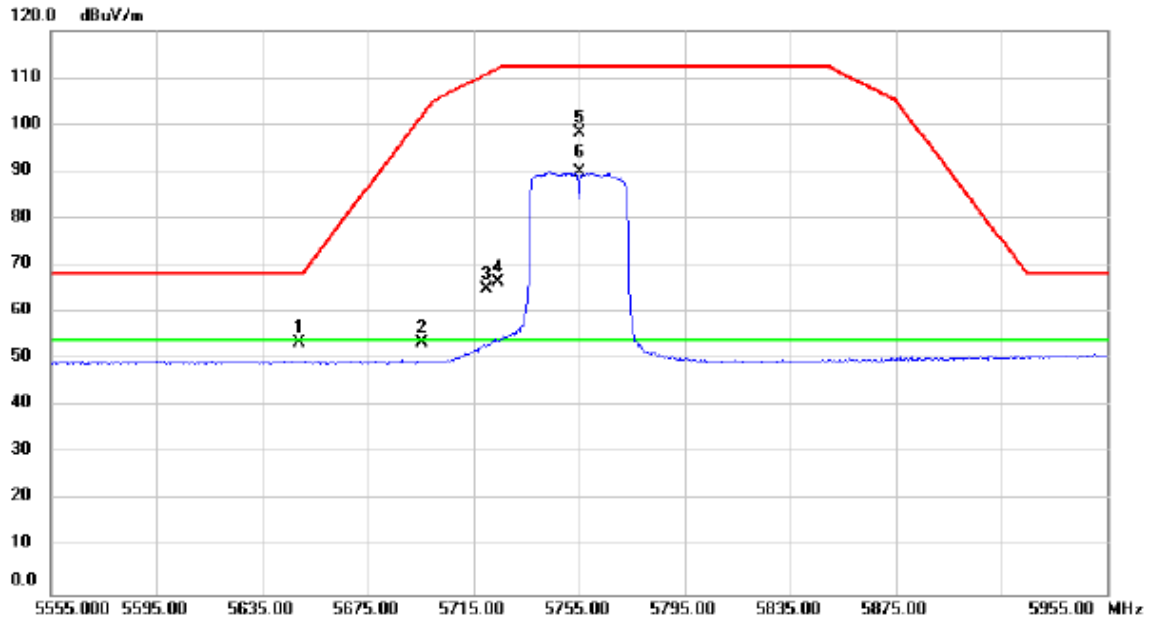

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5649.335	14.15	39.30	53.45	68.20	-14.75	peak	
2		5695.600	13.99	39.43	53.42	101.94	-48.52	peak	
3		5720.000	25.51	39.51	65.02	110.80	-45.78	peak	
4		5724.240	27.01	39.52	66.53	111.99	-45.46	peak	
5		5755.000	58.64	39.61	98.25	112.20	-13.95	peak	
6	*	5755.000	50.20	39.61	89.81	54.00	35.81	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Integral Antenna


Vertical

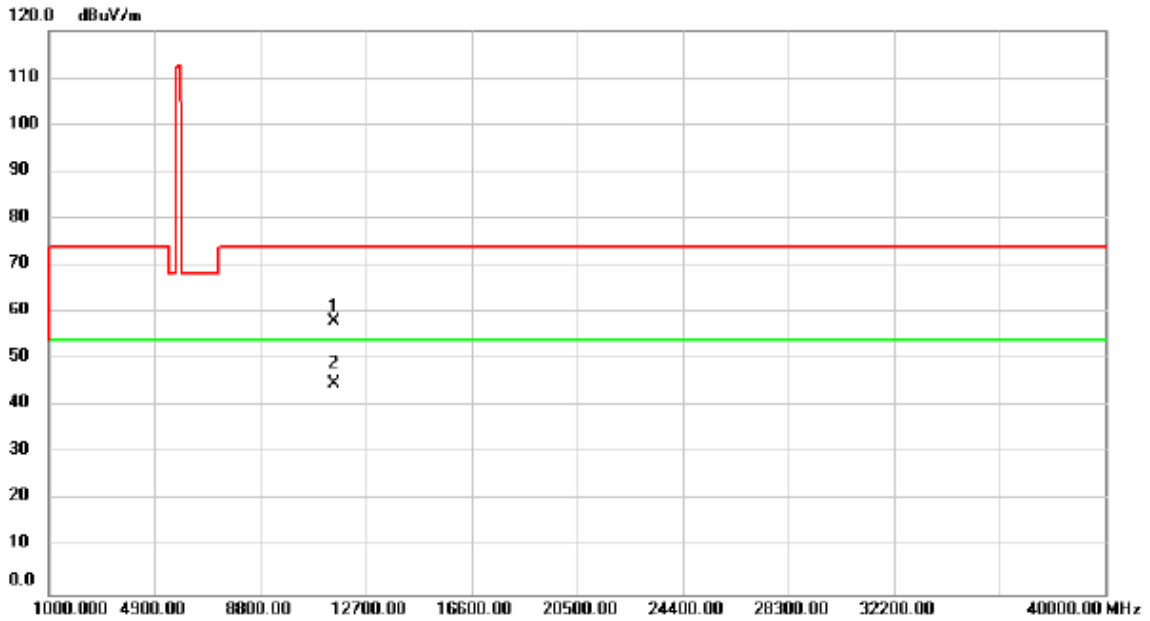

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	52.90	5.23	58.13	74.00	-15.87	peak	
2	*	11510.00	39.66	5.23	44.89	54.00	-9.11	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Integral Antenna


Horizontal

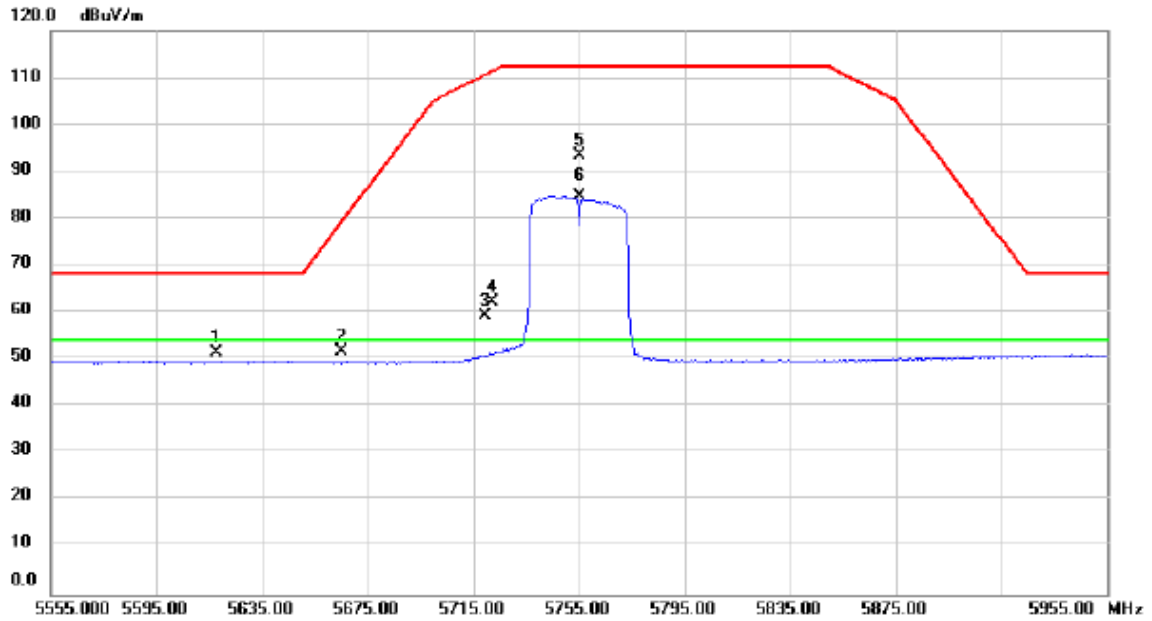

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5617.415	12.35	39.21	51.56	68.20	-16.64	peak	
2		5665.215	12.33	39.35	51.68	79.46	-27.78	peak	
3		5719.440	19.84	39.51	59.35	110.64	-51.29	peak	
4		5722.460	22.73	39.51	62.24	111.49	-49.25	peak	
5		5755.000	53.74	39.61	93.35	112.20	-18.85	peak	
6	*	5755.000	45.20	39.61	84.81	54.00	30.81	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz_Integral Antenna


Horizontal

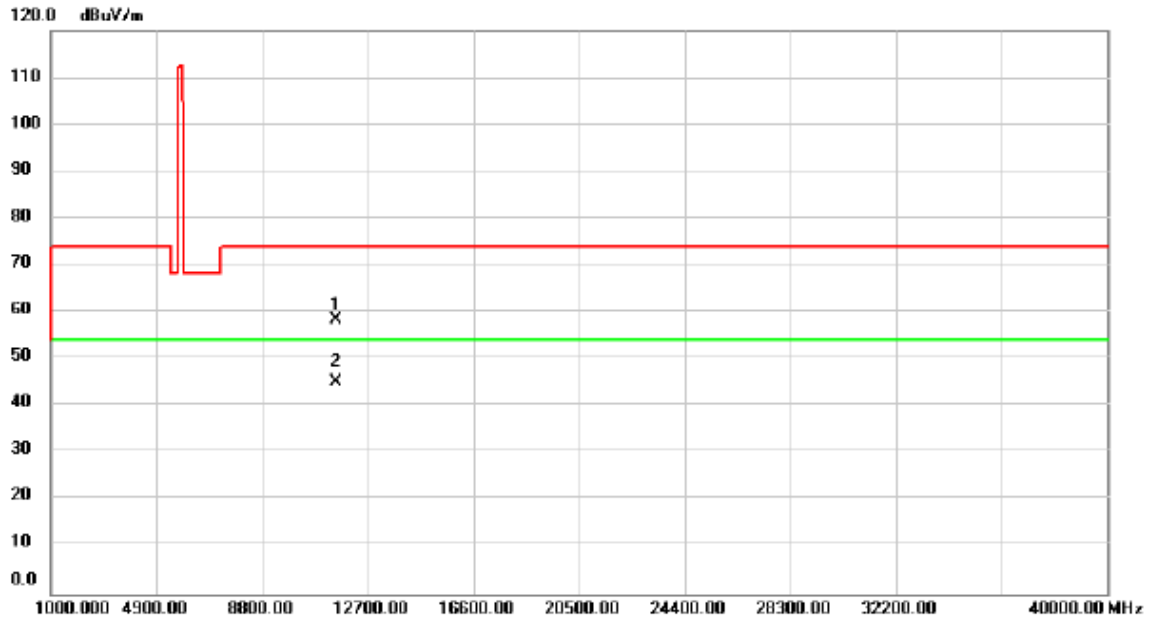

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	53.19	5.23	58.42	74.00	-15.58	peak	
2	*	11510.00	40.01	5.23	45.24	54.00	-8.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_ Integral Antenna


Vertical

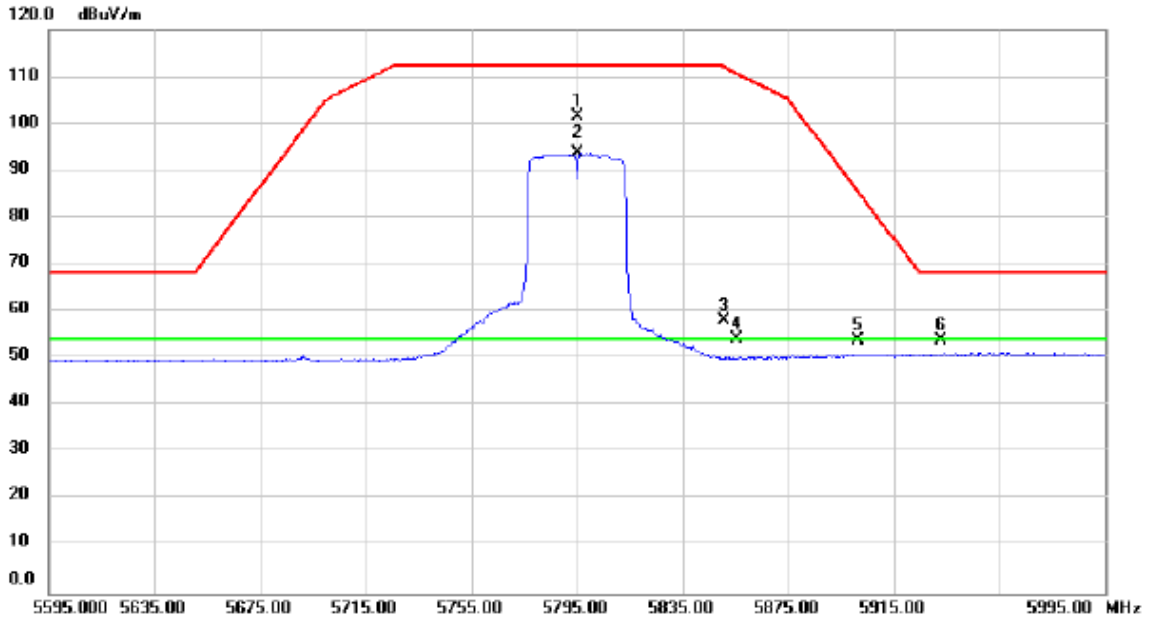

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5795.000	61.84	39.72	101.56	112.20	-10.64	peak	
2	*	5795.000	53.97	39.72	93.69	54.00	39.69	AVG	No Limit
3		5850.995	18.13	39.89	58.02	111.92	-53.90	peak	
4		5855.560	14.37	39.90	54.27	110.64	-56.37	peak	
5		5901.350	13.70	40.03	53.73	85.70	-31.97	peak	
6		5932.950	13.73	40.13	53.86	68.20	-14.34	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Integral Antenna


Vertical

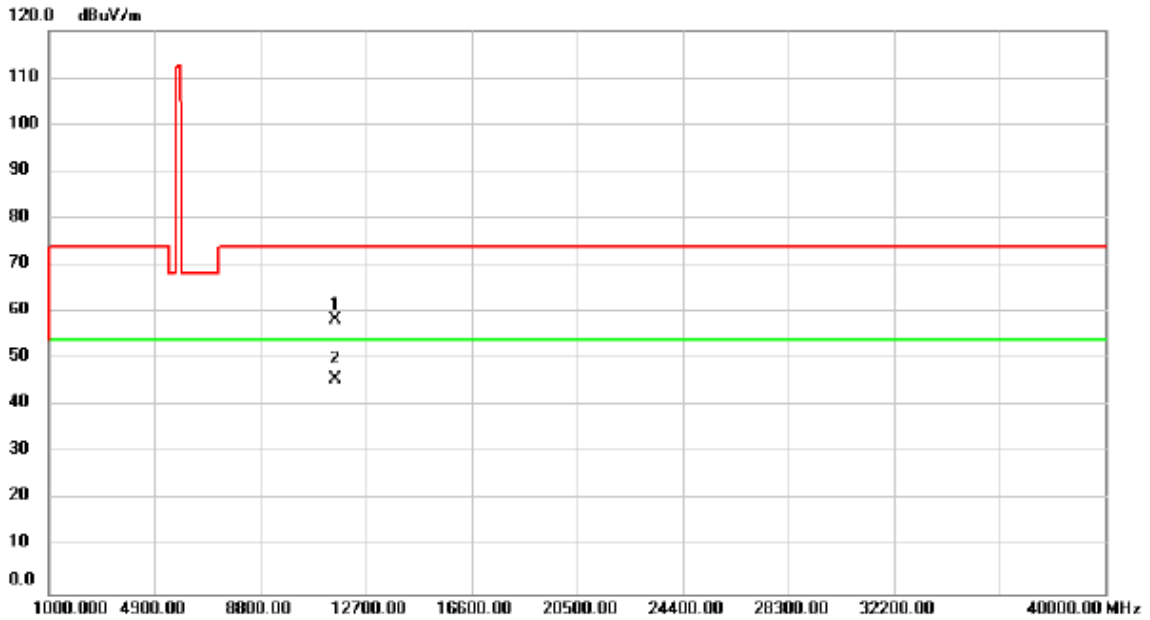

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	53.23	5.10	58.33	74.00	-15.67	peak	
2	*	11590.00	40.68	5.10	45.78	54.00	-8.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Integral Antenna


Horizontal

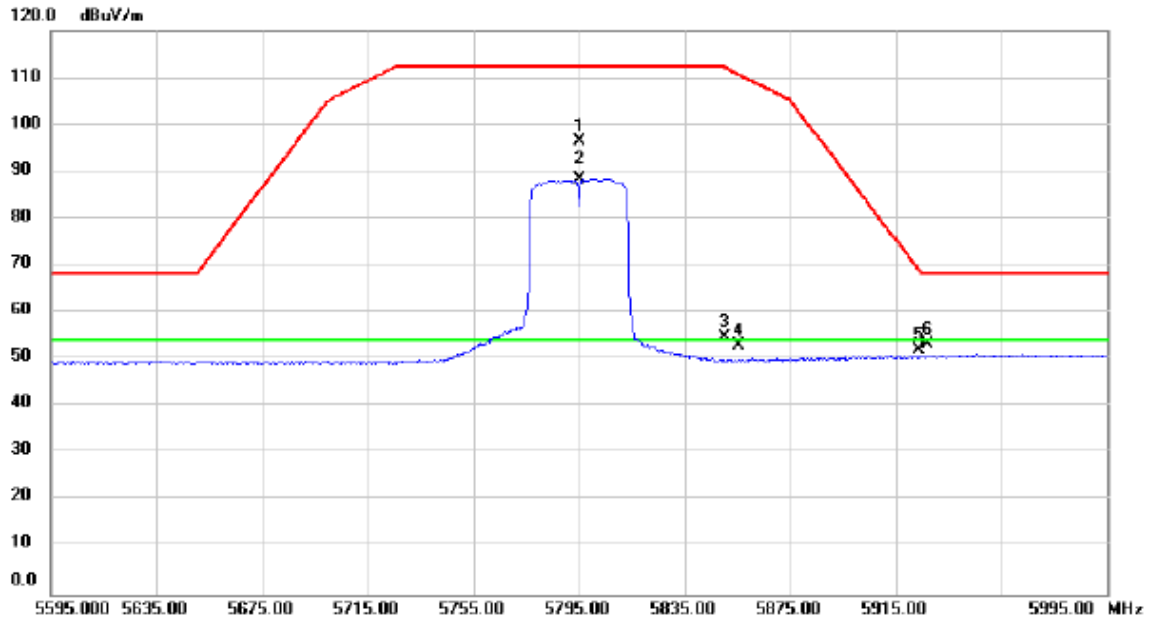

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5795.000	56.76	39.72	96.48	112.20	-15.72	peak	
2	*	5795.000	48.78	39.72	88.50	54.00	34.50	AVG	No Limit
3		5850.385	14.90	39.89	54.79	112.09	-57.30	peak	
4		5855.420	13.02	39.90	52.92	110.68	-57.76	peak	
5		5923.950	12.05	40.10	52.15	68.98	-16.83	peak	
6		5926.750	13.08	40.11	53.19	68.20	-15.01	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz_Integral Antenna

Horizontal

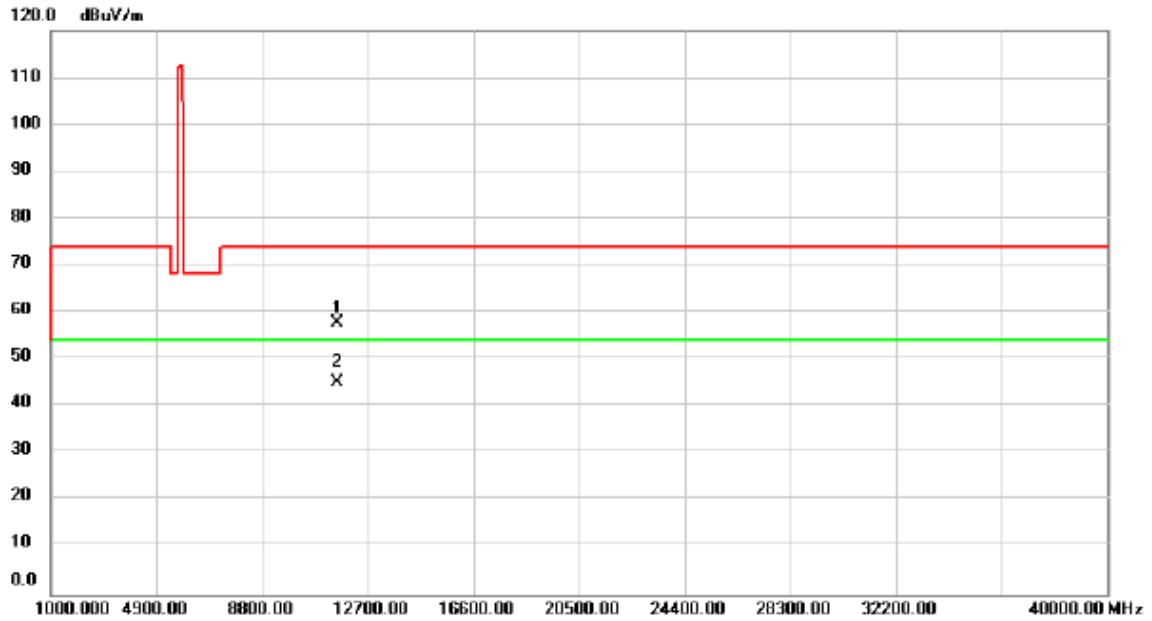

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	52.74	5.10	57.84	74.00	-16.16	peak	
2	*	11590.00	40.11	5.10	45.21	54.00	-8.79	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} :2.44msec

T_{Total} :2.648 msec

Duty cycle: 92.15%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.36

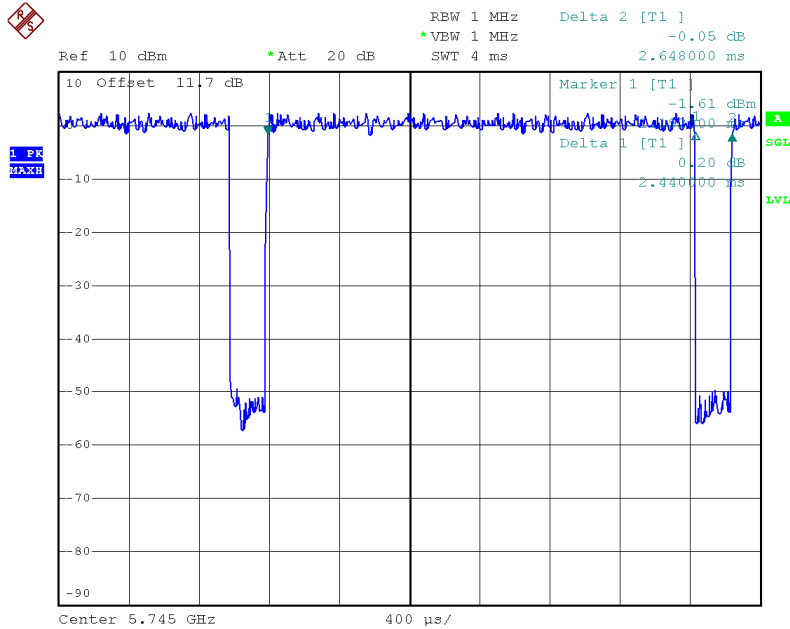

Date: 15.JUL.2016 16:05:40

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducusy factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 1 msec

T_{Total} : 1 msec

Duty cycle: 100%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0

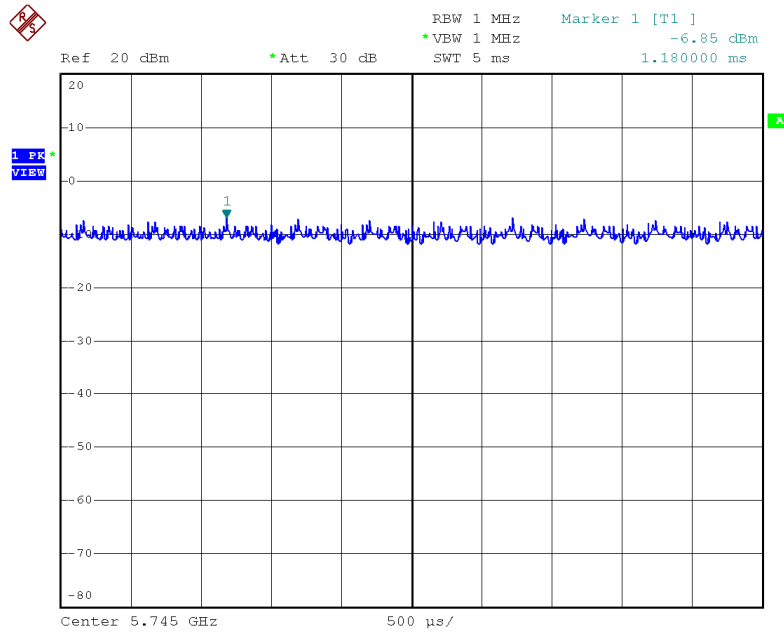

Date: 19.JUL.2016 19:01:31

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1 msec

T_{Total} : 1 msec

Duty cycle: 100%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0

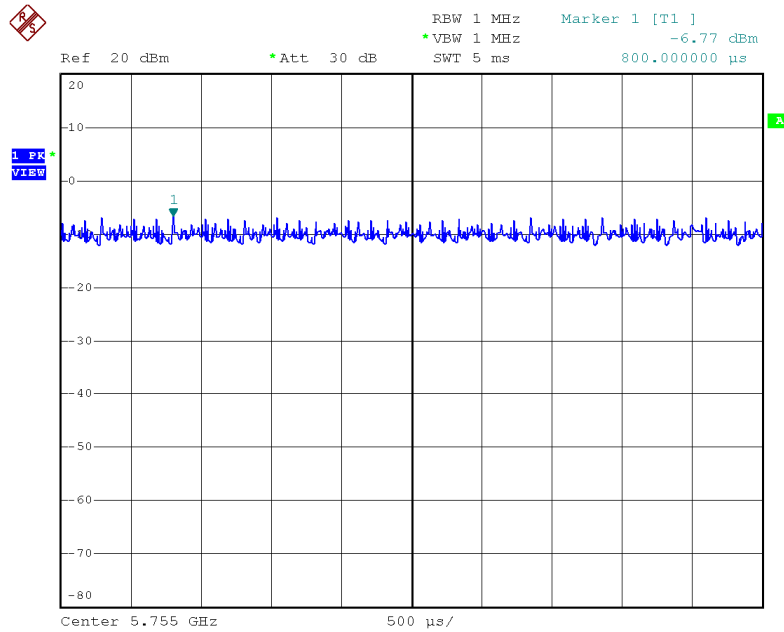


Date: 19.JUL.2016 19:02:55

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH


Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_Ant 1

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.40	>=500
CH157	5785	16.55	16.40	>=500
CH165	5825	16.55	16.50	>=500

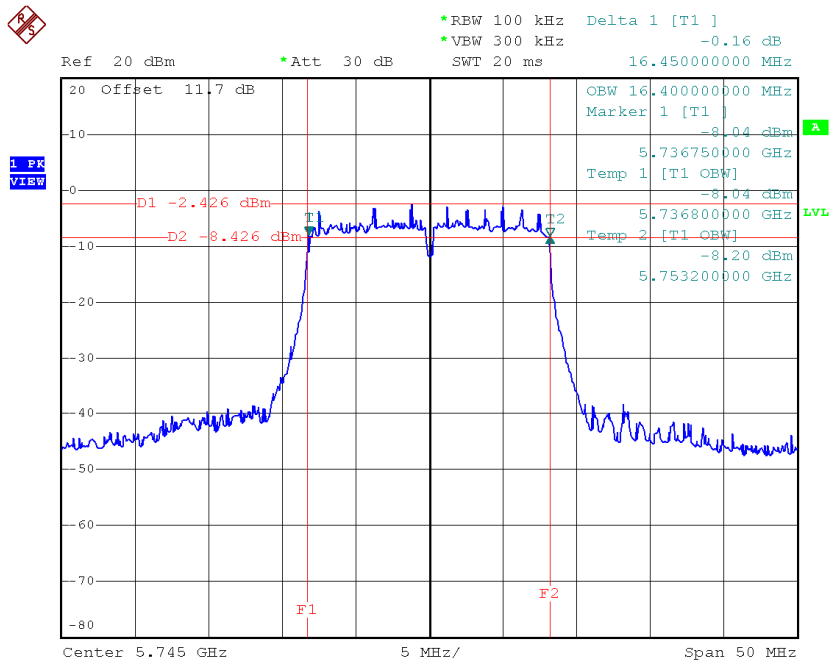TX CH 149


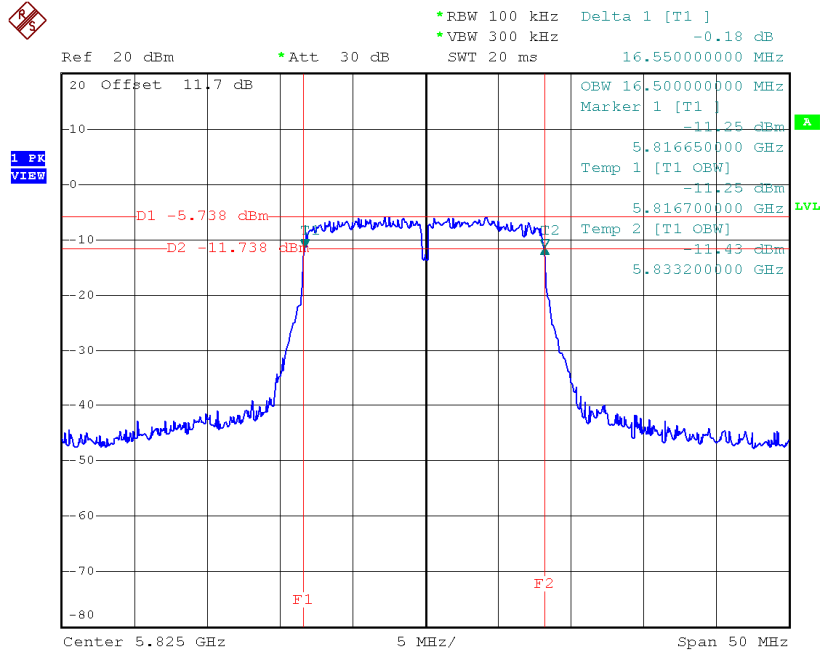
Date: 15.JUL.2016 16:05:12

TX CH 157

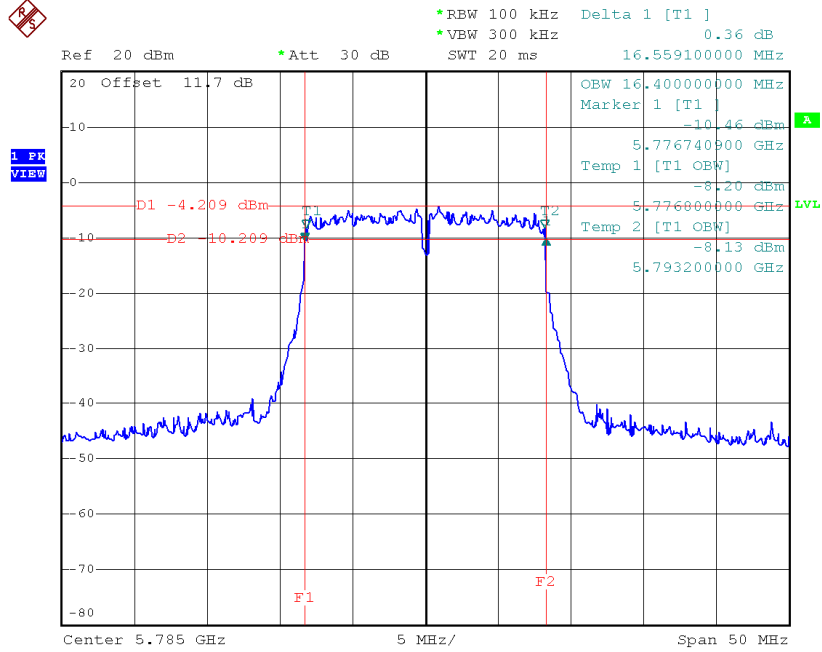

Date: 15.JUL.2016 16:06:56

TX CH 165




Date: 15.JUL.2016 16:11:11

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165_Ant 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.59	16.50	>=500
CH157	5785	16.59	16.50	>=500
CH165	5825	16.55	16.50	>=500

TX CH 149

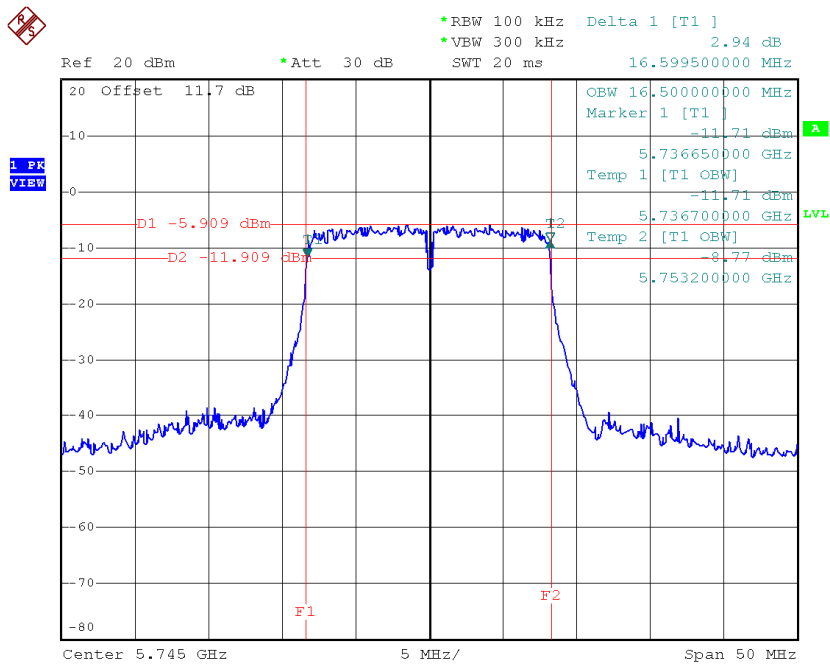


Date: 15.JUL.2016 17:07:01

TX CH 157

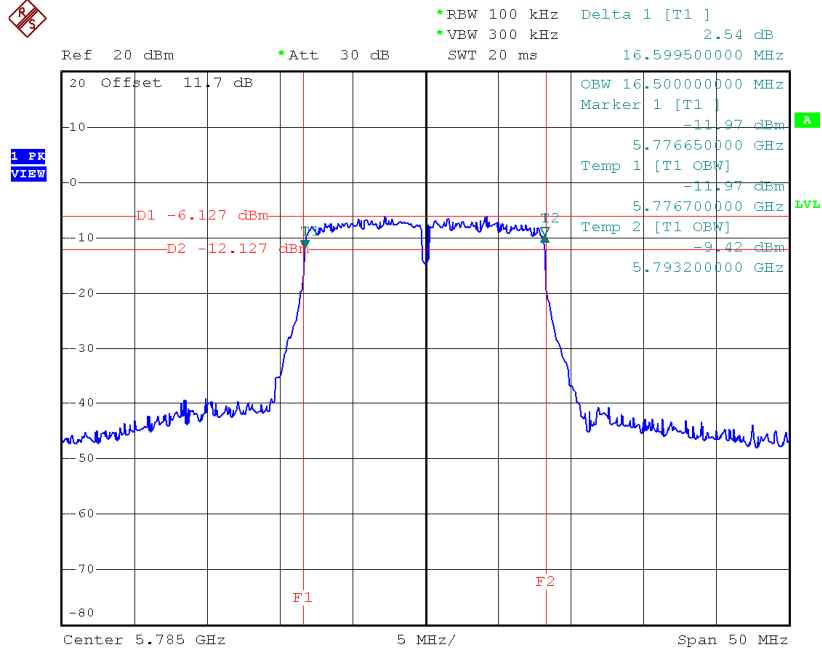

Date: 15.JUL.2016 17:09:20

TX CH 165

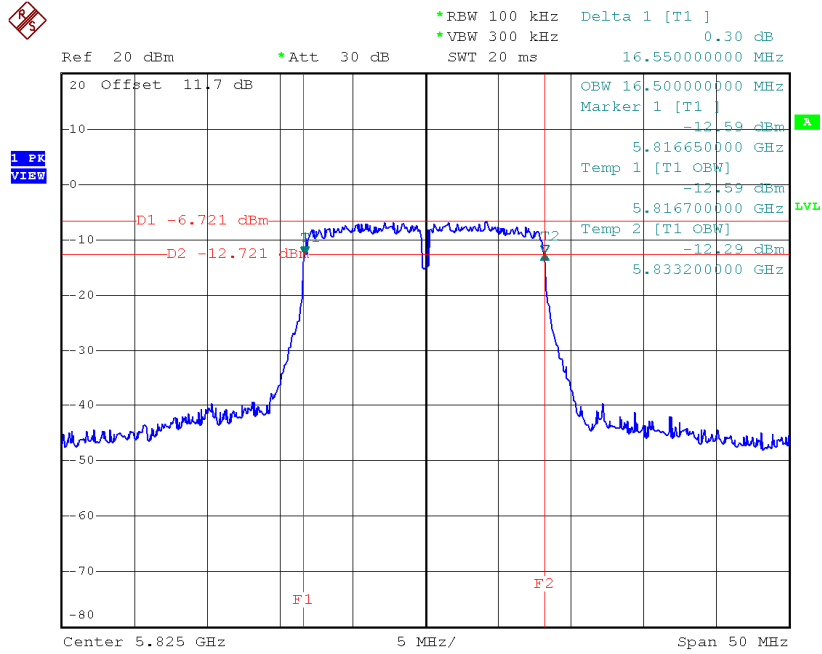


Date: 15.JUL.2016 17:10:50

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Ant 1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.50	>=500
CH157	5785	17.65	17.40	>=500
CH165	5825	17.58	17.60	>=500

TX CH 149

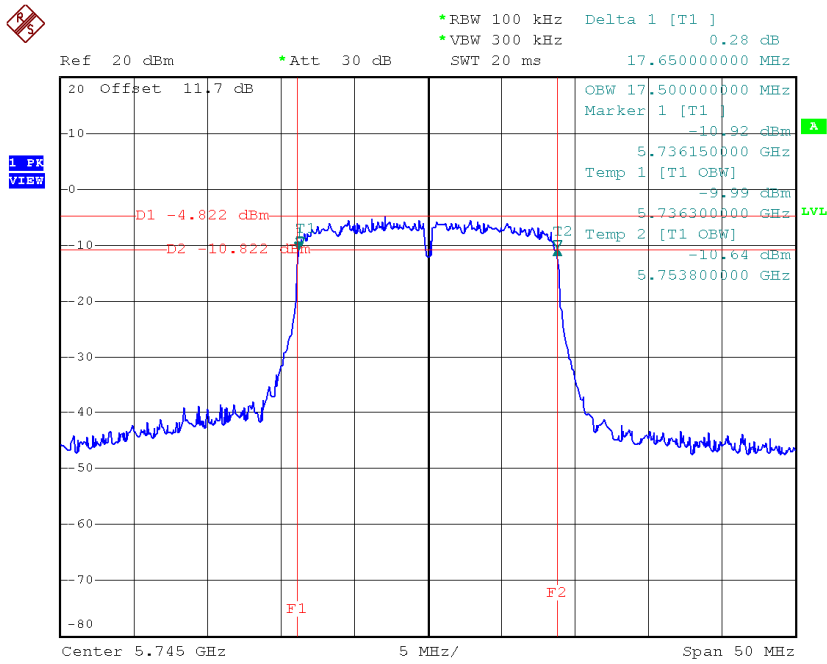


Date: 15.JUL.2016 16:13:39

TX CH 157

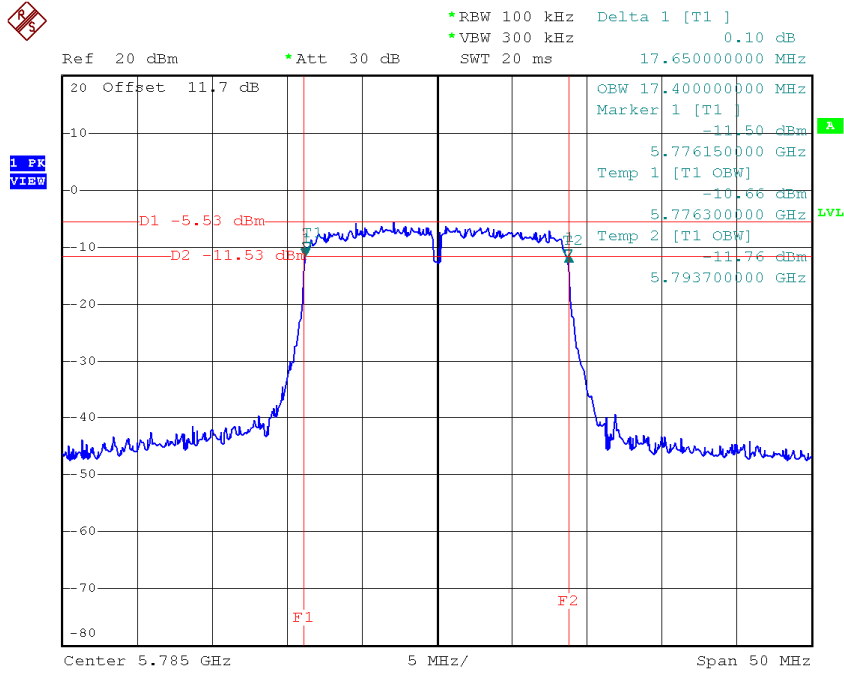

Date: 15.JUL.2016 16:17:01


TX CH 165

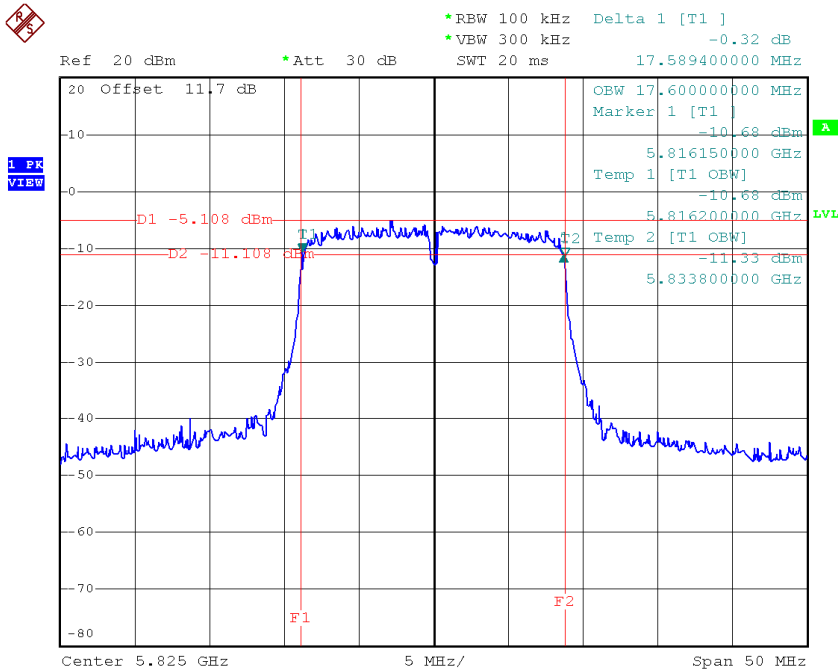

Date: 15.JUL.2016 16:43:38


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Ant 2

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.69	17.50	>=500
CH157	5785	17.65	17.50	>=500
CH165	5825	17.58	17.50	>=500

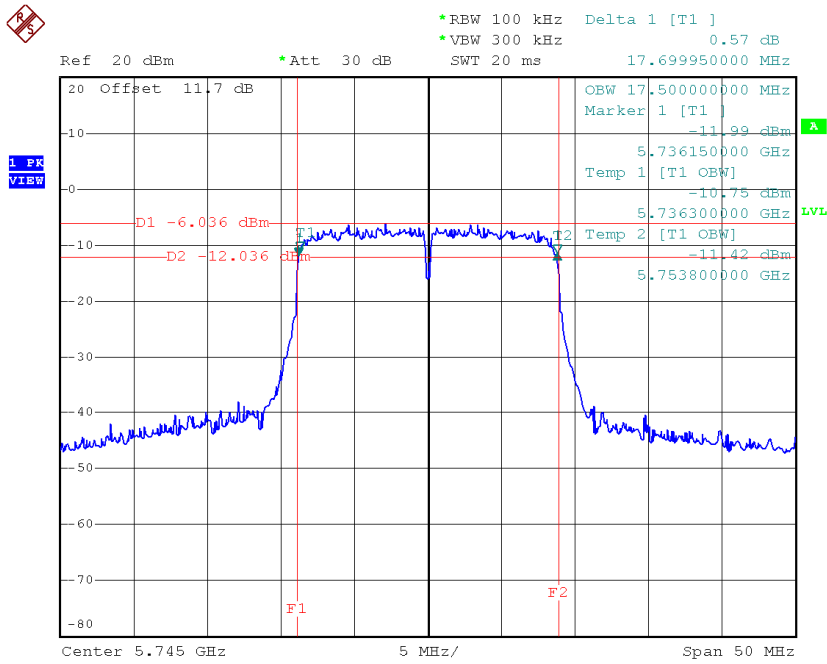TX CH 149


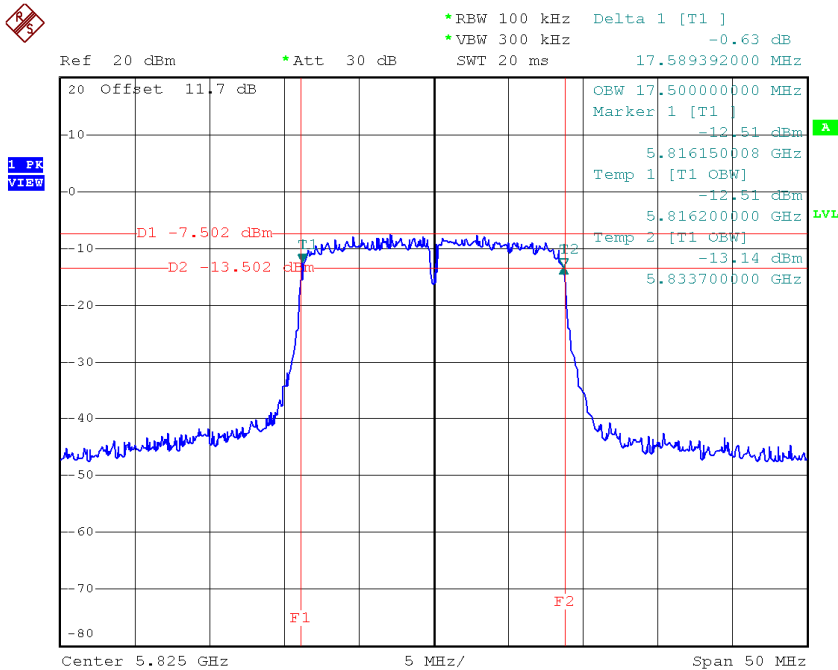
Date: 15.JUL.2016 17:13:24

TX CH 157

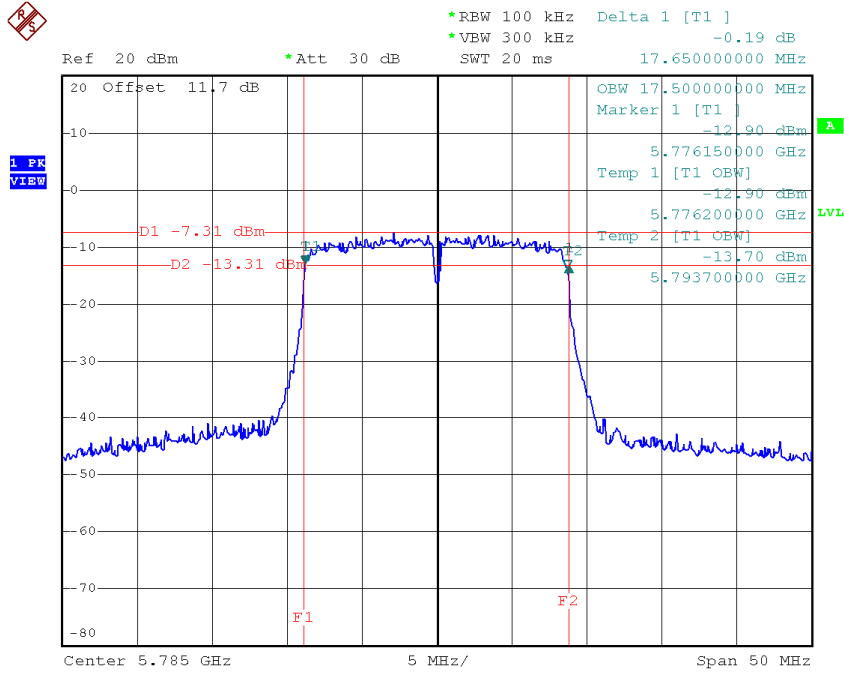

Date: 15.JUL.2016 17:15:52

TX CH 165




Date: 15.JUL.2016 17:18:14

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Ant 1


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.58	36.00	>=500
CH159	5795	36.49	36.00.	>=500

TX CH 151

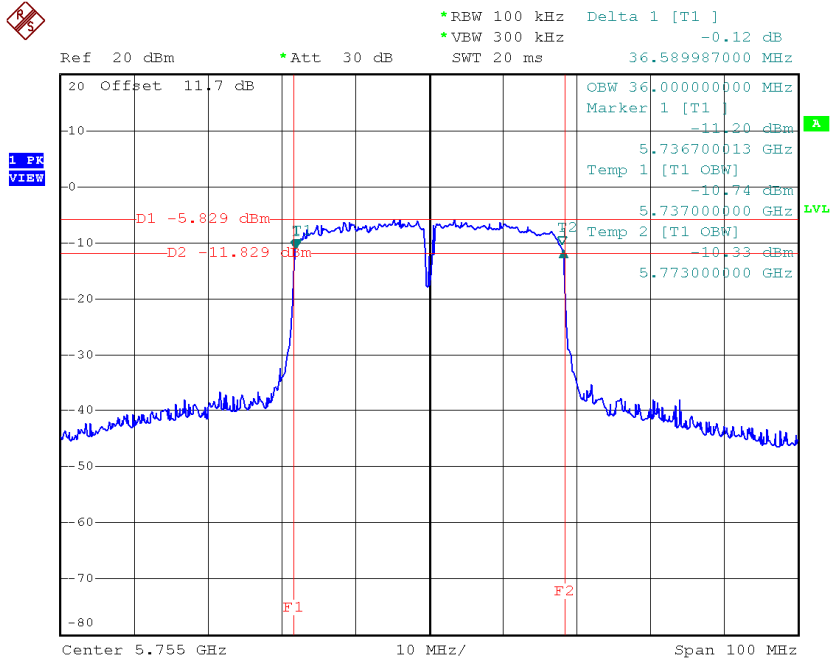

Date: 15.JUL.2016 16:49:49

TX CH 159

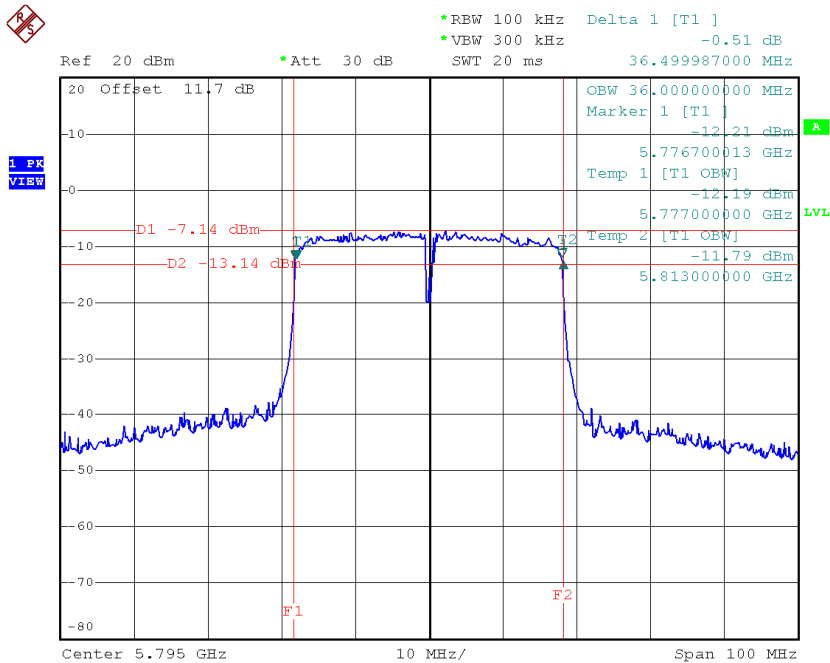


Date: 15.JUL.2016 16:51:42

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Ant 2


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.58	36.20	>=500
CH159	5795	36.49	36.00	>=500

TX CH 151

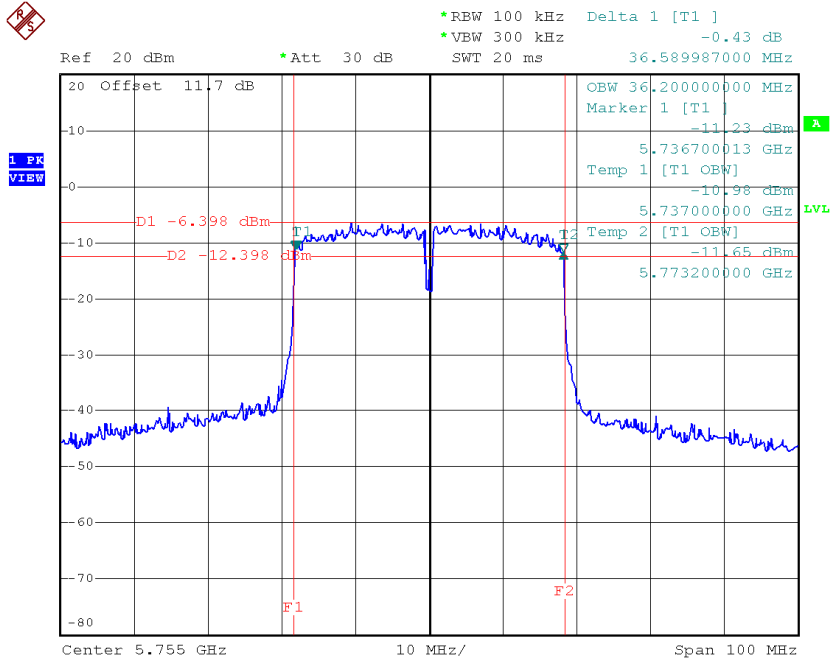

Date: 15.JUL.2016 17:20:46

TX CH 159

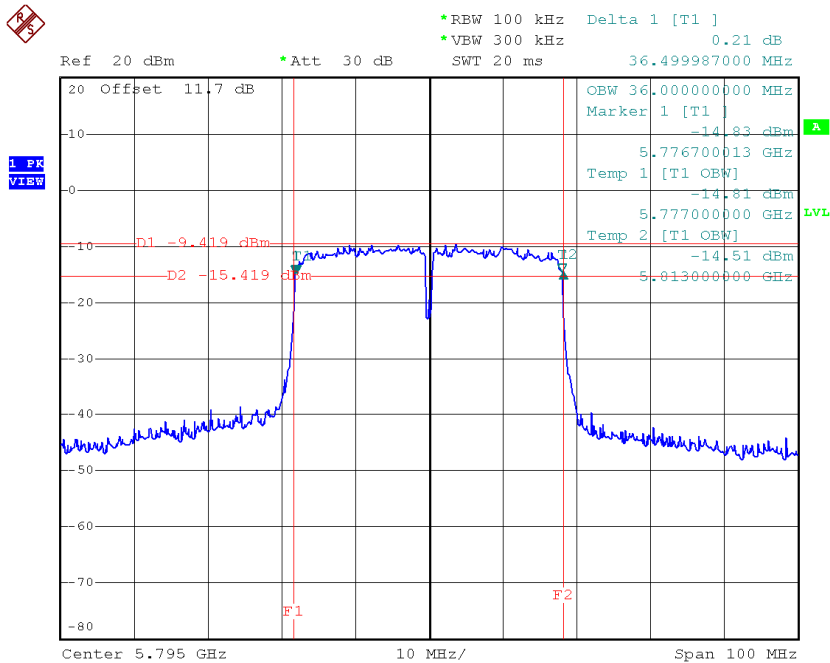

Date: 15.JUL.2016 17:23:47

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-3/ TX A Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.90	0.36	9.26	30.00	1.00
CH157	5785	8.57	0.36	8.93	30.00	1.00
CH165	5825	8.06	0.36	8.42	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.14	0.36	9.50	30.00	1.00
CH157	5785	8.94	0.36	9.30	30.00	1.00
CH165	5825	8.46	0.36	8.82	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.39	30.00	1.00
CH157	5785	12.13	30.00	1.00
CH165	5825	11.63	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	8.88	0	8.88	30.00	1.00
CH157	5785	8.28	0	8.28	30.00	1.00
CH165	5825	8.01	0	8.01	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	9.09	0	9.09	30.00	1.00
CH157	5785	8.56	0	8.56	30.00	1.00
CH165	5825	8.34	0	8.34	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.00	30.00	1.00
CH157	5785	11.43	30.00	1.00
CH165	5825	11.19	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.41	0	11.41	30.00	1.00
CH159	5795	10.25	0	10.25	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.34	0	11.34	30.00	1.00
CH159	5795	10.83	0	10.83	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.39	30.00	1.00
CH159	5795	13.56	30.00	1.00

ATTACHMENT G - POWER SPECTRAL DENSITY

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Ant 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-6.83	0.36	-6.47	30.00
CH157	5785	-6.49	0.36	-6.13	30.00
CH165	5825	-6.41	0.36	-6.05	30.00

TX CH149

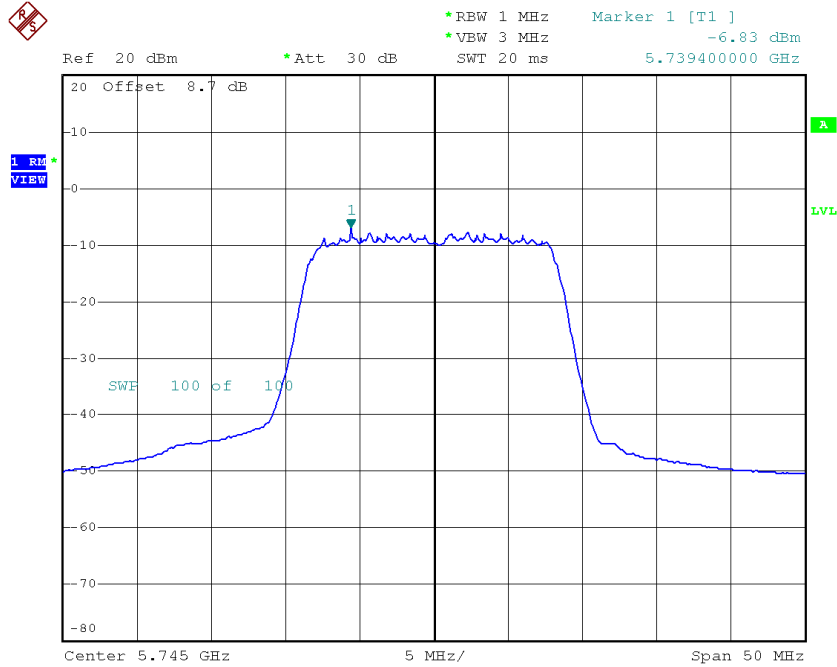


Date: 15.JUL.2016 16:04:35

TX CH157

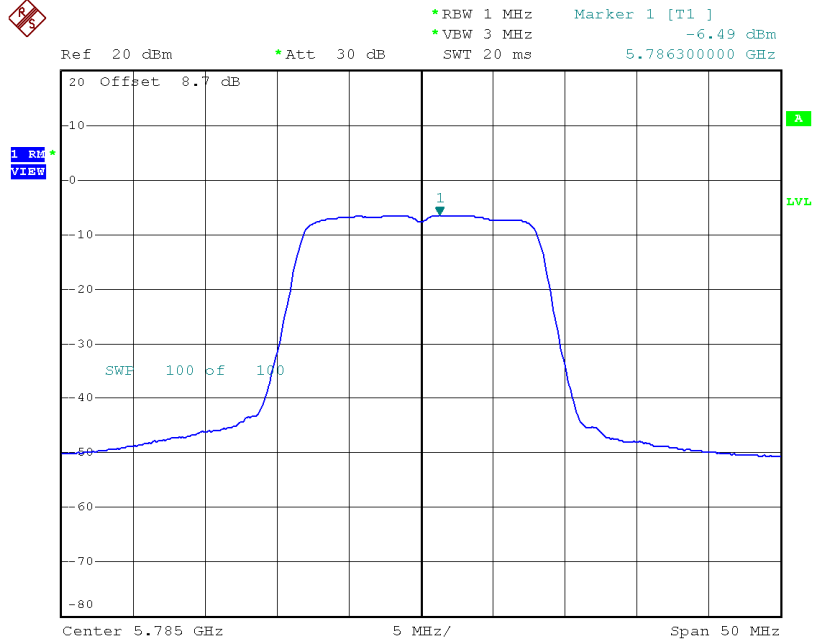

Date: 15.JUL.2016 16:07:04

TX CH165

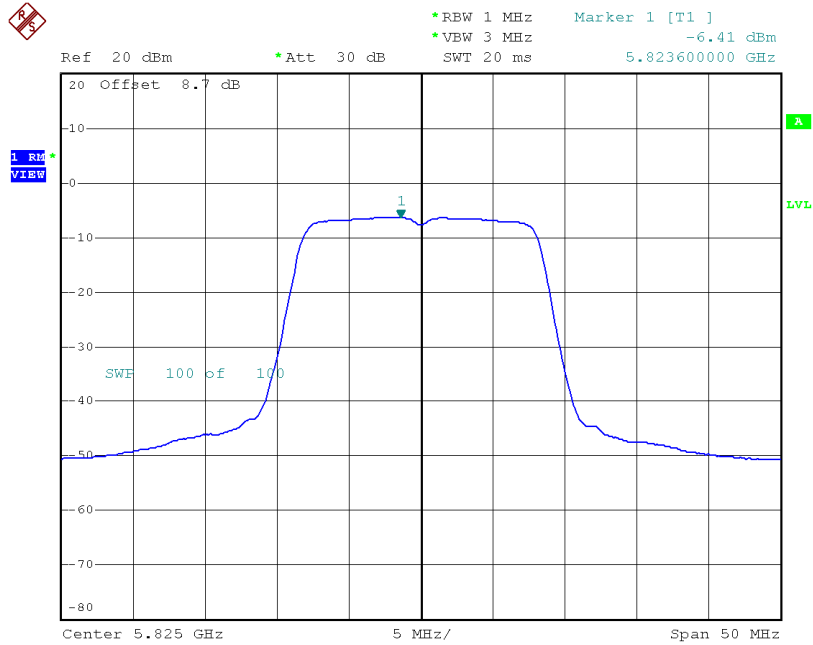


Date: 15.JUL.2016 16:11:20

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Ant 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-6.29	0.36	-5.93	30.00
CH157	5785	-7.05	0.36	-6.69	30.00
CH165	5825	-7.41	0.36	-7.05	30.00

TX CH149

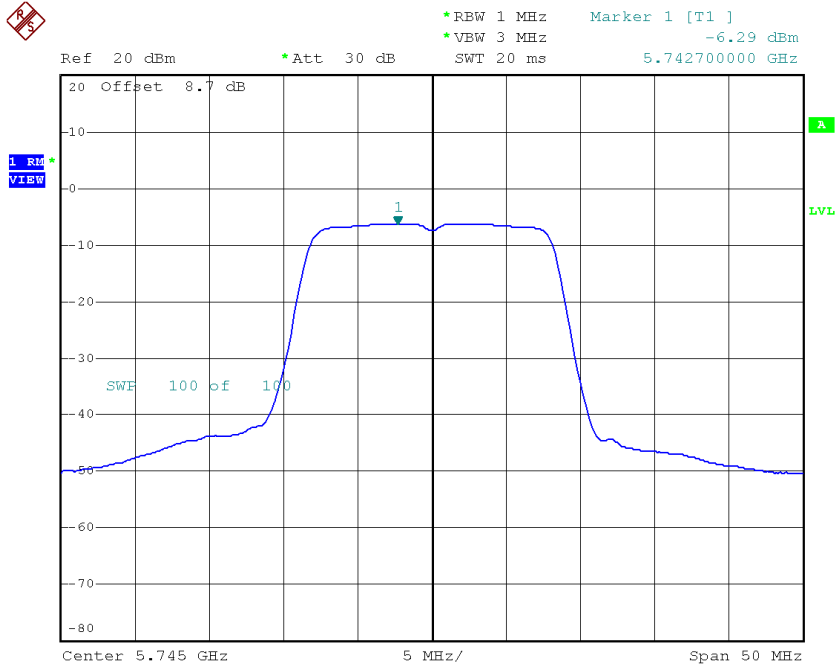


Date: 15.JUL.2016 17:06:25

TX CH157

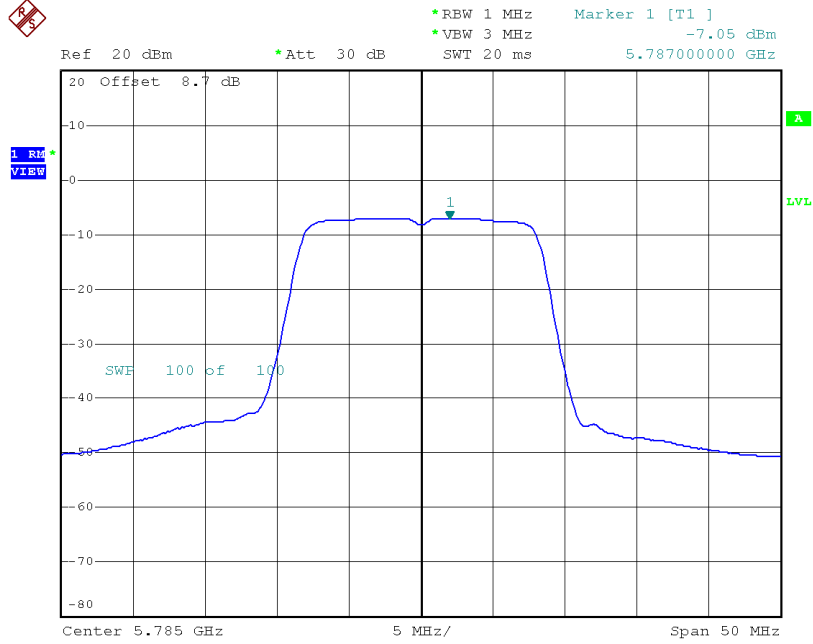

Date: 15.JUL.2016 17:09:29

TX CH165

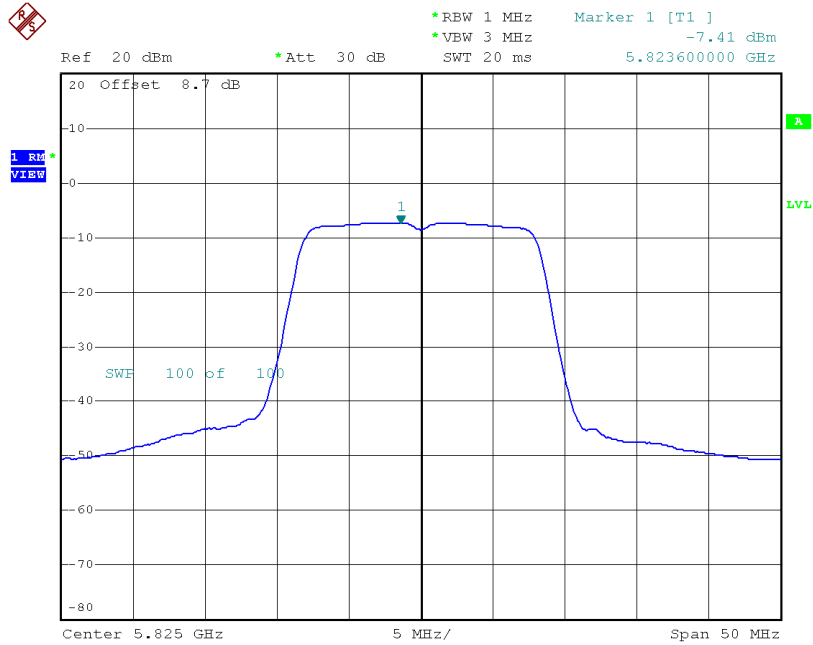

Date: 15.JUL.2016 17:10:59


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.18	30.00
CH157	5785	-3.39	30.00
CH165	5825	-3.51	30.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Ant 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-6.16	0	-6.16	30.00
CH157	5785	-6.86	0	-6.86	30.00
CH165	5825	-6.60	0	-6.60	30.00

TX CH149

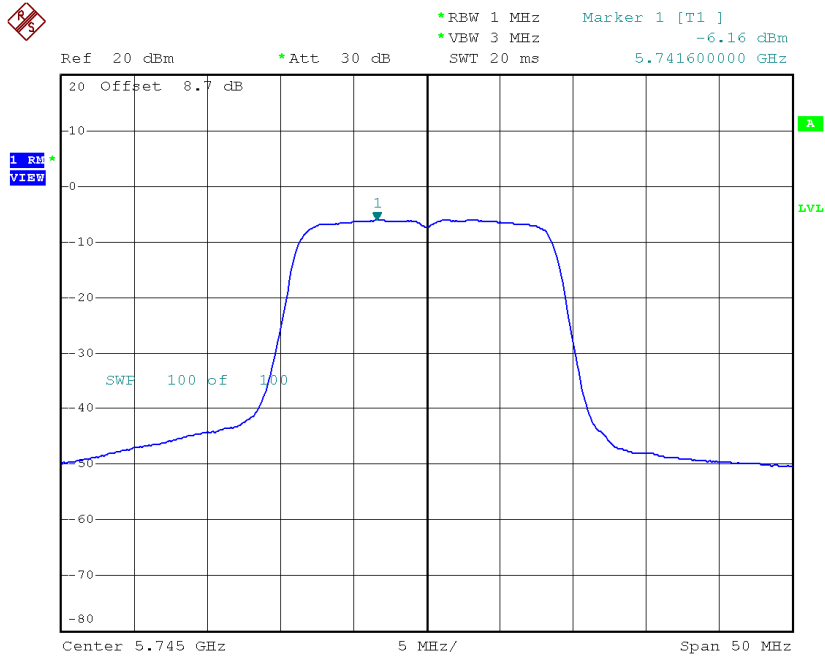


Date: 15.JUL.2016 16:13:47

TX CH157

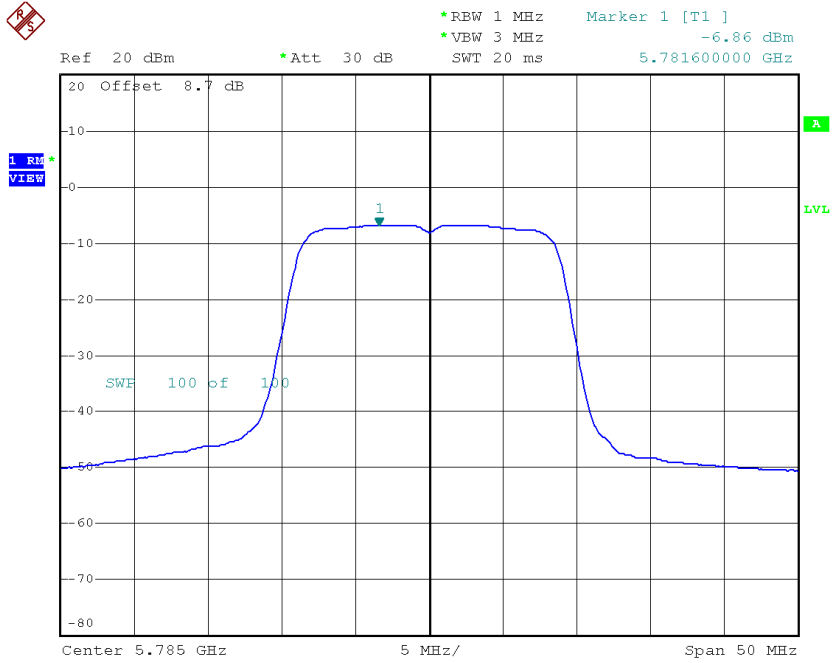

Date: 15.JUL.2016 16:17:09

TX CH165

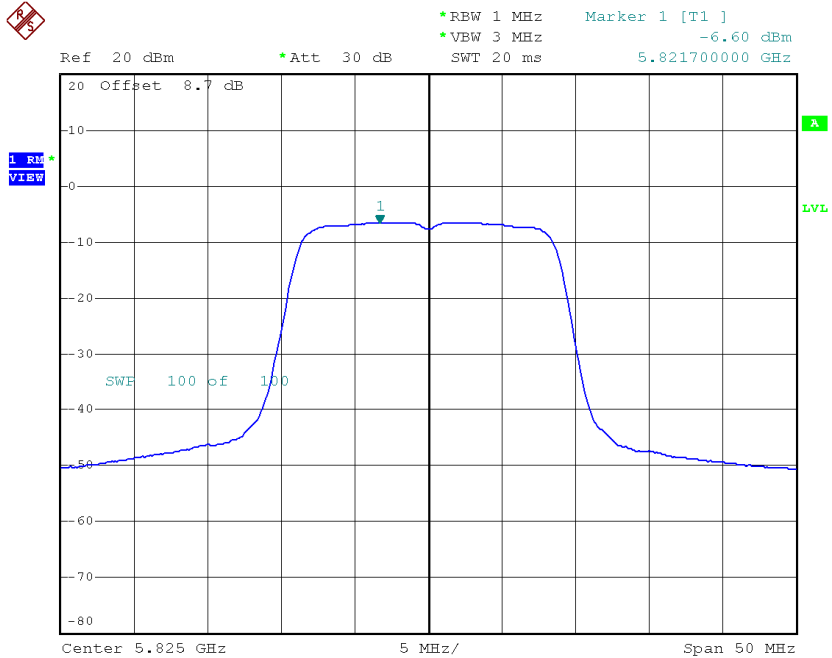


Date: 15.JUL.2016 16:43:46

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Ant 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-7.46	0	-7.46	30.00
CH157	5785	-8.77	0	-8.77	30.00
CH165	5825	-8.81	0	-8.81	30.00

TX CH149

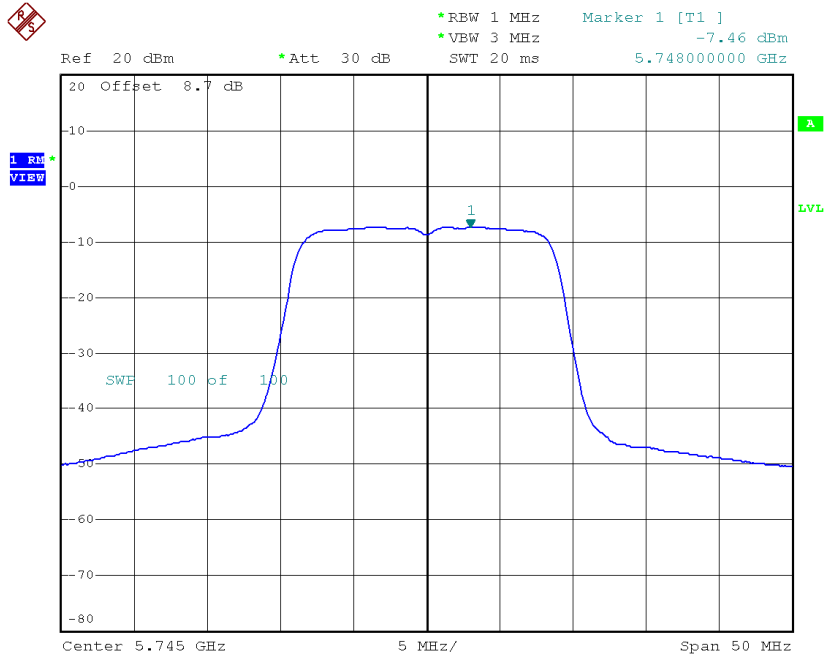


Date: 15.JUL.2016 17:13:32

TX CH157

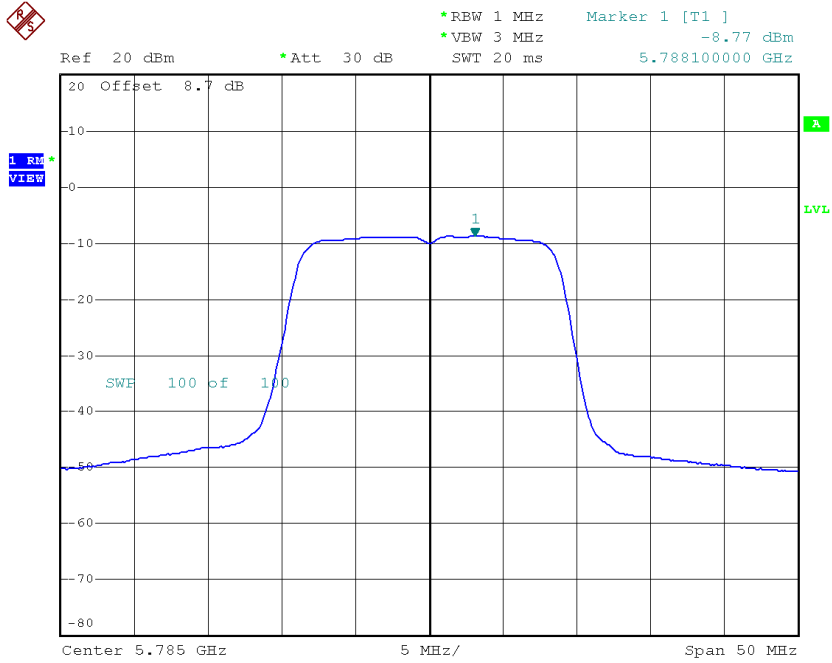

Date: 15.JUL.2016 17:16:01

TX CH165

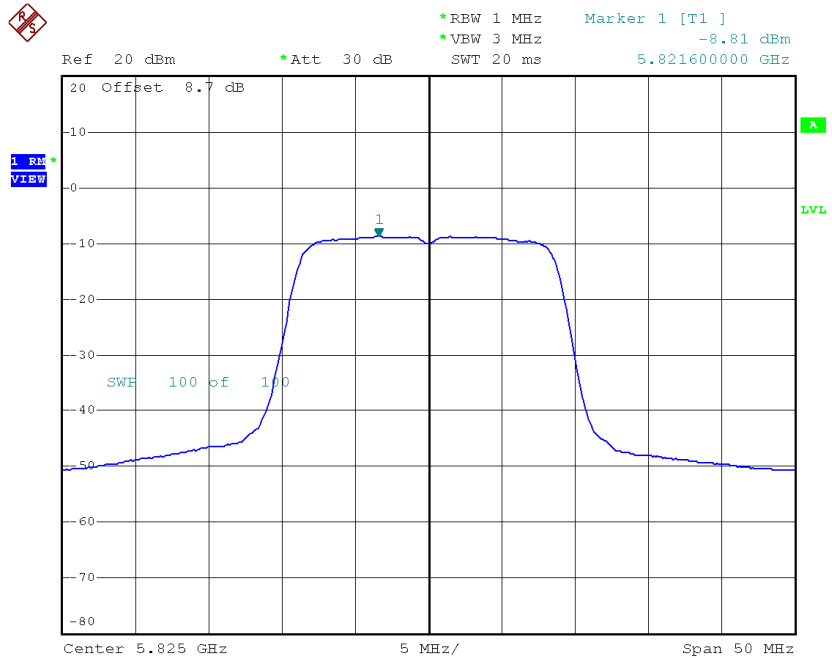

Date: 15.JUL.2016 17:18:22


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.75	30.00
CH157	5785	-4.70	30.00
CH165	5825	-4.56	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Ant 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.64	0	-6.64	30.00
CH159	5795	-7.91	0	-7.91	30.00

TX CH151

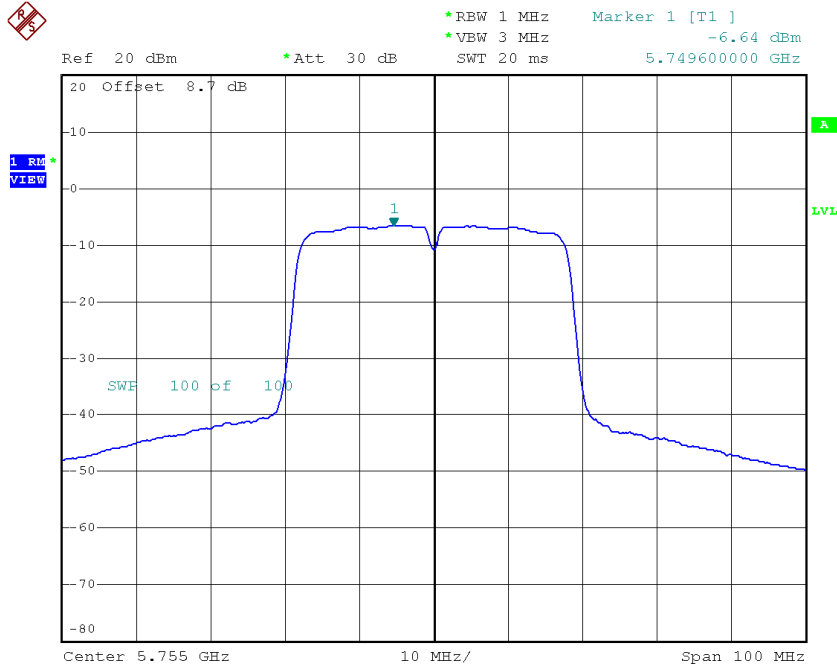

Date: 15.JUL.2016 16:49:57

TX CH159

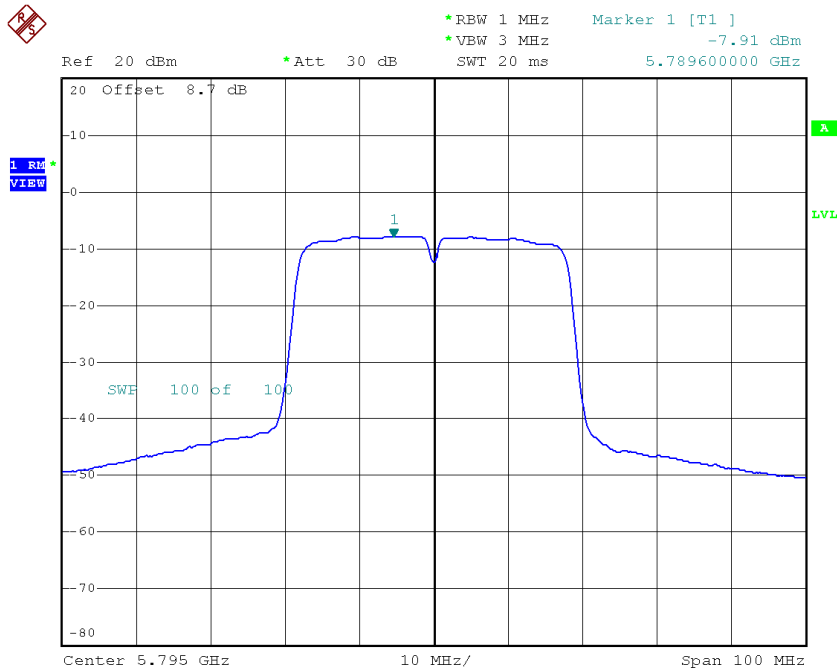


Date: 15.JUL.2016 16:51:50

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Ant 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-8.51	0	-8.51	30.00
CH159	5795	-10.22	0	-10.22	30.00

TX CH151

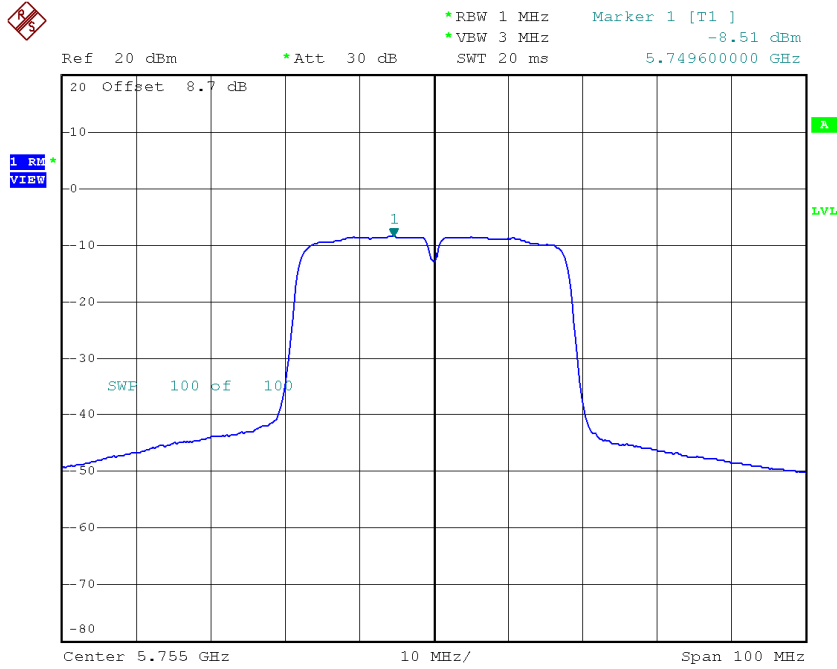

Date: 15.JUL.2016 17:20:55

TX CH159

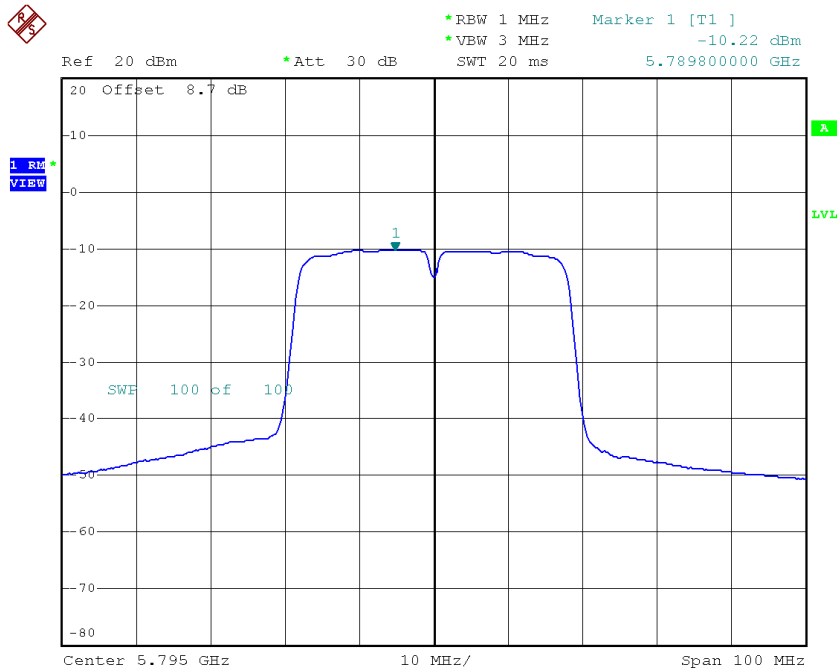

Date: 15.JUL.2016 17:23:55

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-4.46	30.00
CH159	5795	-5.90	30.00

ATTACHMENT H - FREQUENCY STABILITY

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5744.9560
120	5744.9564
108	5744.9564
Max. Deviation (MHz)	0.0440
Max. Deviation (ppm)	7.6588

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-5	5744.9564
5	5744.9564
15	5744.9568
25	6744.9564
35	5744.9564
45	5744.9564
50	5744.9564
Max. Deviation (MHz)	0.0436
Max. Deviation (ppm)	7.5892